


ENGINEERING TEST REPORT



MonnitLink USB Wireless Gateway

Model No.: GCM-USB

FCC ID: ZTL-RFUSB1

Applicant:

Monnit Corporation

450 South Simmons Way, Suite 670,
Kaysville, UT 84037
USA

In Accordance With

Federal Communications Commission (FCC)

Part 15, Subpart C, Section 15.247

Digital Modulation Systems (DTS) Operating in 902 – 928 MHz Band

UltraTech's File No.: MONN-004QF15C247

This Test report is Issued under the Authority of
Tri M. Luu, BASc
Vice President of Engineering
UltraTech Group of Labs

Date: July 29, 2011

Report Prepared by: Steven Lu

Tested by: Mr. Hung Trinh

Issued Date: July 29, 2011

Test Dates: March 30 ~ July 12, 2011

*The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



46390-2049



NvLap Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S)	1
1.3. NORMATIVE REFERENCES	1
EXHIBIT 2. PERFORMANCE ASSESSMENT	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	2
2.3. EUT'S TECHNICAL SPECIFICATIONS	3
2.4. LIST OF EUT'S PORTS	3
2.5. LIST OF ACCESSORIES	3
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	4
3.1. CLIMATE TEST CONDITIONS	4
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	4
EXHIBIT 4. SUMMARY OF TEST RESULTS	5
4.1. LOCATION OF TESTS	5
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	5
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	5
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	6
5.1. TEST PROCEDURES.....	6
5.2. MEASUREMENT UNCERTAINTIES	6
5.3. MEASUREMENT EQUIPMENT USED	6
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....	6
5.5. POWER LINE CONDUCTED EMISSIONS [§15.207(A)]	7
5.6. OCCUPIED BANDWIDTH [§ 15.247(A)(2)].....	12
5.7. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(B)(3)].....	19
5.8. TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(D)].....	24
5.9. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(D), 15.209 & 15.205]	30
5.10. POWER SPECTRAL DENSITY [§ 15.247(E)]	39
5.11. RF EXPOSURE REQUIRMENTS [§§ 15.247(E)(I), 1.1310 & 2.1091]	43
EXHIBIT 6. TEST EQUIPMENT LIST	45
EXHIBIT 7. MEASUREMENT UNCERTAINTY.....	46
7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY	46
7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY	46

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.247
Title:	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15
Purpose of Test:	Equipment Certification for Digital Modulation Systems (DTS) Transmitter Operating in the Frequency Band 2400-2483.5 MHz.
Test Procedures:	<ul style="list-style-type: none">ANSI C63.4-2003FCC, KDB Publication No. 558074
Environmental Classification:	<ul style="list-style-type: none">[x] Commercial, industrial or business environment[x] Residential environment

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2010	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2003 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
FCC, KDB Publication No. 558074	2005	Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Monnit Corporation
Address:	450 South Simmons Way, Suite 670, Kaysville, UT 84037 USA
Contact Person:	Mr. Kelly S. Lewis Phone #: +1 (801) 561-5555 Fax #: +1 (801) 561-5575 Email Address: kellyl@monnit.com

MANUFACTURER	
Name:	Monnit Corporation
Address:	450 South Simmons Way, Suite 670, Kaysville, UT 84037 USA
Contact Person:	Mr. Kelly S. Lewis Phone #: +1 (801) 561-5555 Fax #: +1 (801) 561-5575 Email Address: kellyl@monnit.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Monnit Corporation
Product Name:	MonnitLink USB Wireless Gateway
Model Name or Number:	GCM-USB
Serial Number:	Test Sample
Type of Equipment:	Digital Transmission System (DTS)
Input Power Supply Type:	External Regulated DC Sources
Primary User Functions of EUT:	Access Point for WIT Wireless Sensors

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	<ul style="list-style-type: none">• Portable• Mobile• Base Station (fixed use)
Intended Operating Environment:	Commercial, industrial or business
Power Supply Requirement:	4.5 – 5.5 VDC
RF Output Power Rating:	+8 dBm MAX
Operating Frequency Range:	902 - 928 MHz
RF Output Impedance:	N/A
Channel Size:	1MHz
Number of Channels:	25
Modulation Type:	2-FSK
Antenna Connector Types:	Wire Antenna soldered directly to PCB
Antenna Description:	Manufacturer: Specialized Manufacturing Type: Wire Antenna Model No.: MC-ANT-20/4.0C Freq. Range: 902 - 928 MHz Gain: Less than 2.1 dBi)

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	USB and power	1	USB-A Male	USB 2.0 Standard

2.5. LIST OF ACCESSORIES

Index Number	Parts Description	Parts Number/ Model Number	Serial Number
1	HP Computer	xw4300 Workstation	2UA6210WN6
2	Dell LCD Panel	2408WFPb	MX-OJU436-74262-85F-29PS

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21 to 23 °C
Humidity:	45 to 58%
Pressure:	102 kPa
Power Input Source:	4.5 – 5.5 VDC

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements.
Special Test Software:	Special software and hardware provided by the Applicant to operate the EUT at each channel frequency continuously. For example, the transmitter will be operated at each of the lowest, middle and highest frequencies individually continuously during testing.
Special Hardware Used:	Dell Computer
Transmitter Test Antenna:	The EUT tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

Transmitter Test Signals	
Frequency Band(s):	902 - 928 MHz
Frequency(ies) Tested: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	903, 915 and 927 MHz
RF Power Output: (measured maximum output power at antenna terminals)	7.84 dBm (6.08 mW) Peak
Normal Test Modulation:	2 - FSK
Modulating Signal Source:	Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	Yes*
15.207(a)	Power Line Conducted Emissions	Yes
15.247(a)(2)	6 dB Bandwidth	Yes
15.247(b)(3)	Peak Conducted Output Power - DTS	Yes
15.247(d)	Band-Edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(d), 15.209 & 15.205	Transmitter Spurious Radiated Emissions	Yes
15.247(e)	Power Spectral Density	Yes
15.247(i) 1.1307, 1.1310 & 2.1091	RF Exposure	Yes

* The EUT complies with the requirement; it employs a permanently mounted integral antenna.

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4-2003 and FCC KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The MonnitLink USB Wireless Gateway acts as Access Point for WIT Wireless Sensors.

5.5. POWER LINE CONDUCTED EMISSIONS [§15.207(a)]

5.5.1. Limit(s)

The equipment shall meet the limits of the following table:


Frequency of emission (MHz)	Conducted Limits (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases linearly with the logarithm of the frequency

5.5.2. Method of Measurements

ANSI C63.4-2003

5.5.3. Test Arrangement

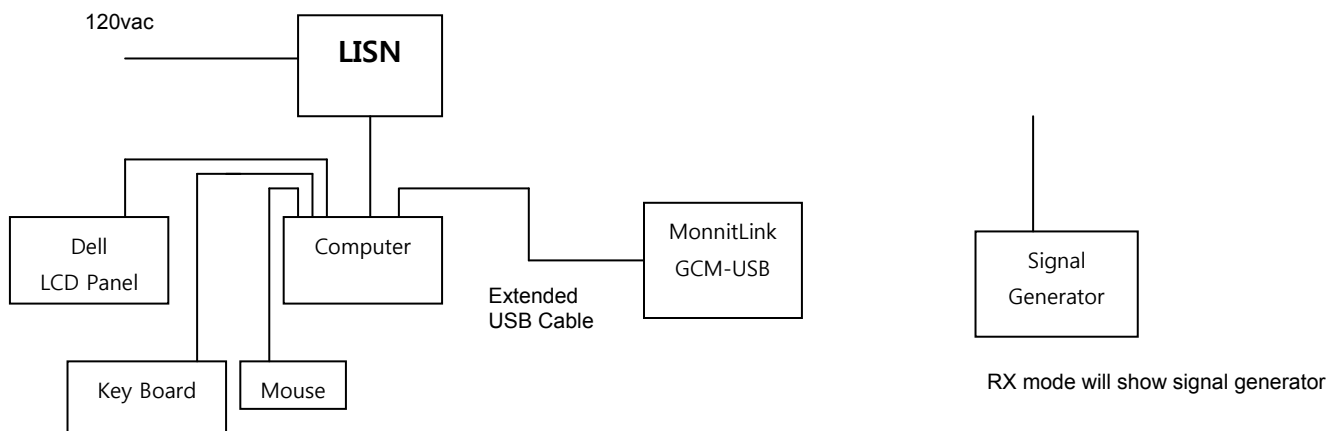


HP xw4300 Workstation, s/n: 2UA6210WN6

Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS

5.5.4. Test Data

Plot 5.5.4.1. Power Line Conducted Emissions (Tx Mode)
Line Voltage: 120 V AC
Line Tested: Positive

Current Graph

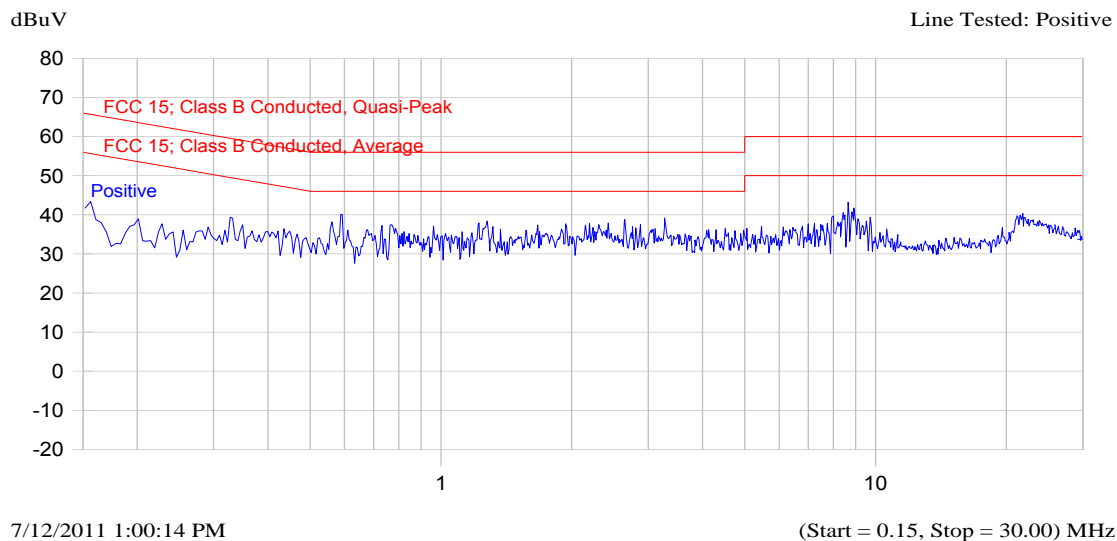


Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta dB	QP-QP Limit	Avg dBuV	Delta dB	Avg-Avg Limit	Trace Name
0.156	45.8	41.5	-24.4		32.2	-23.7		Positive
0.327	39.2	32.3	-28.5		24.9	-26.0		Positive
0.586	42.3	37.6	-18.4		30.2	-15.8		Positive
3.277	37.8	32.1	-23.9		22.7	-23.3		Positive
8.645	41.2	34.8	-25.2		20.7	-29.3		Positive
21.796	38.9	32.3	-27.7		25.1	-24.9		Positive

Plot 5.5.4.2. Power Line Conducted Emissions (Tx Mode)
Line Voltage: 120 V AC
Line Tested: Negative

Current Graph

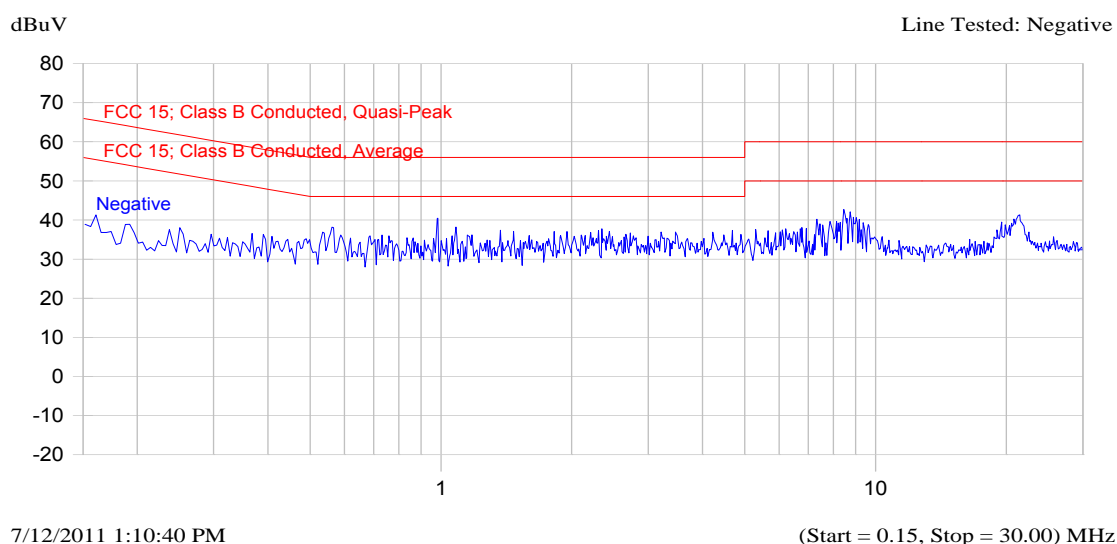

Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Trace Name
0.154	46.7	41.7	-24.1	32.1	-23.8	Negative
0.978	42.0	36.2	-19.8	29.3	-16.7	Negative
8.440	40.8	33.8	-26.2	20.7	-29.3	Negative
21.282	41.5	36.2	-23.8	29.2	-20.8	Negative

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.5.4.3. Power Line Conducted Emissions (Rx Mode)
Line Voltage: 120 V AC
Line Tested: Positive

Current Graph

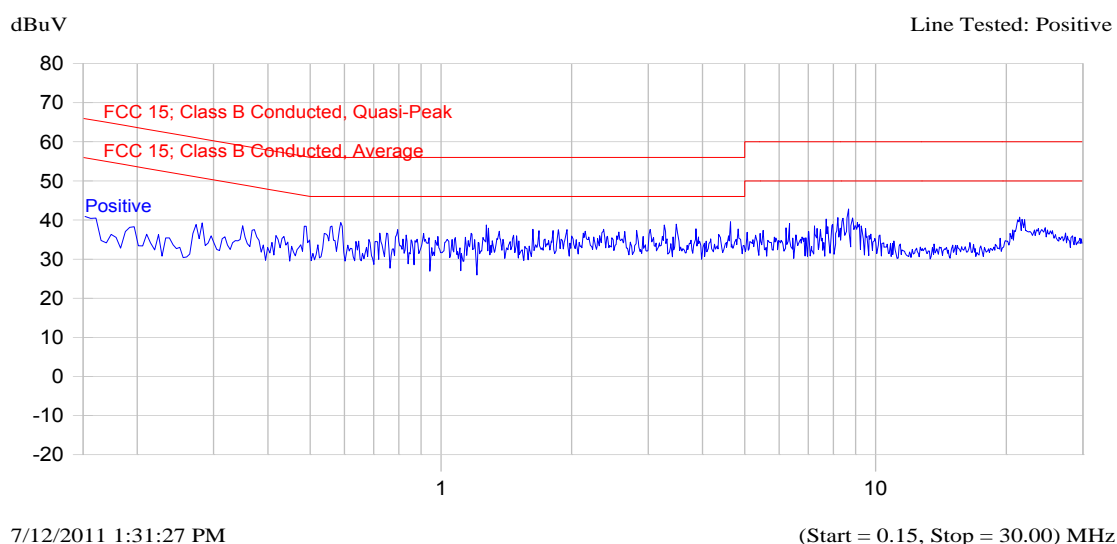

Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Trace Name
0.292	39.4	35.4	-26.5	28.0	-23.9	Positive
0.588	41.4	35.6	-20.4	28.1	-17.9	Positive
8.668	41.5	35.1	-24.9	27.7	-22.3	Positive
21.736	40.4	35.8	-24.2	29.1	-20.9	Positive

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.5.4.4. Power Line Conducted Emissions (Rx Mode)
Line Voltage: 120 V AC
Line Tested: Negative

Current Graph

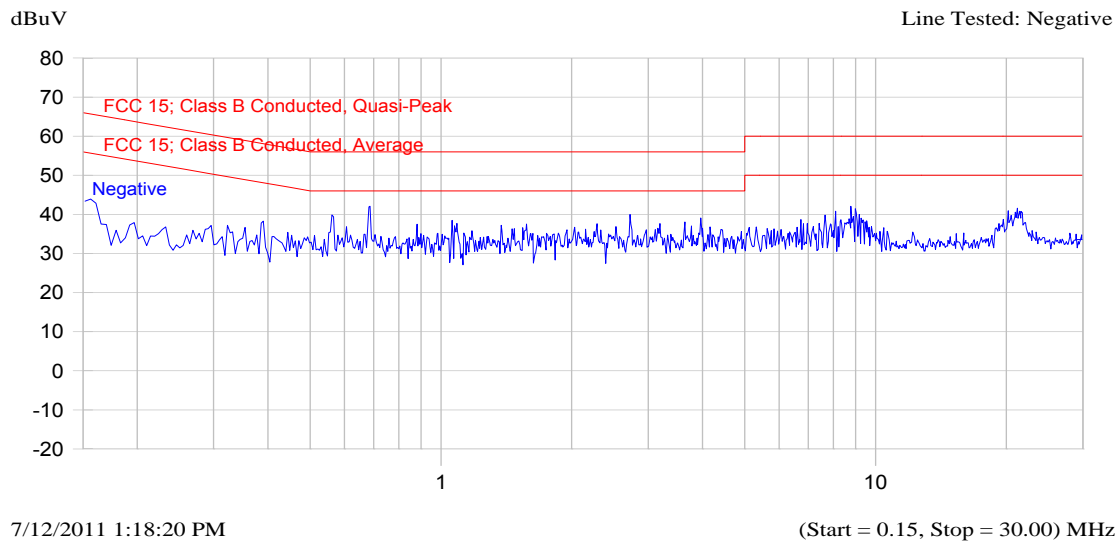

Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Trace Name
0.681	41.0	37.6	-18.4	31.0	-15.0	Negative
2.712	39.6	34.1	-21.9	25.3	-20.7	Negative
8.776	43.1	39.0	-21.0	34.8	-15.2	Negative
21.590	41.8	37.0	-23.0	30.2	-19.8	Negative

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6. OCCUPIED BANDWIDTH [§ 15.247(a)(2)]


5.6.1. Limit(s)

For a Digital Modulation System, the minimum 6 dB bandwidth shall be at least 500 KHz.

5.6.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247) and ANSI C63.4-2003.

5.6.3. Test Arrangement

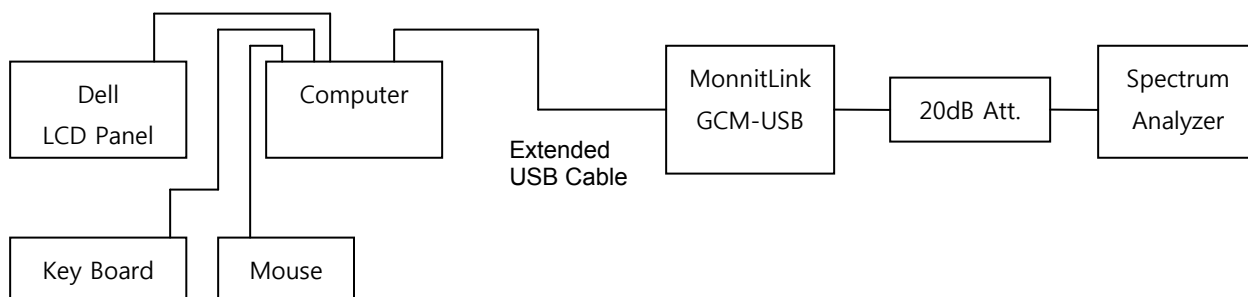

HP xw4300 Workstation, s/n: 2UA6210WN6


Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS

5.6.4. Test Data

Frequency (MHz)	Modulation	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
903	2-FSK	0.580	0.527
915	2-FSK	0.580	0.512
927	2-FSK	0.577	0.510

See the following plots for detailed measurements.

Plot 5.6.4.1. 6 dB Bandwidth, 2-FSK
Test Frequency: 903 MHz

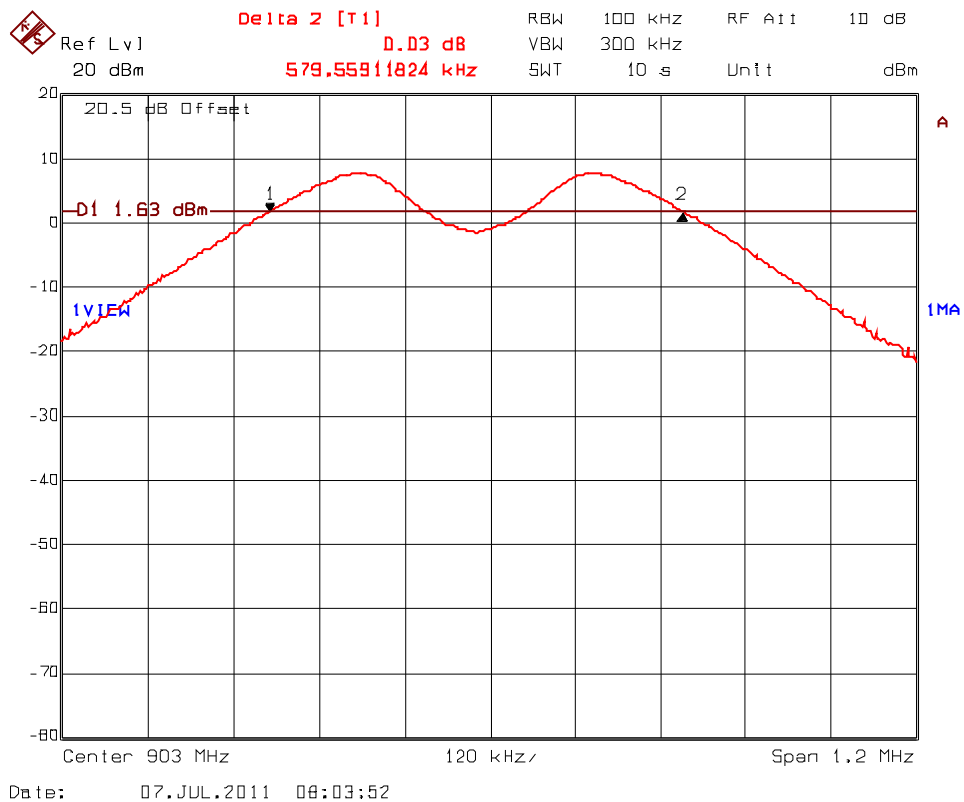

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.6.4.2. 6 dB Bandwidth, 2-FSK modulation
Test Frequency: 915 MHz

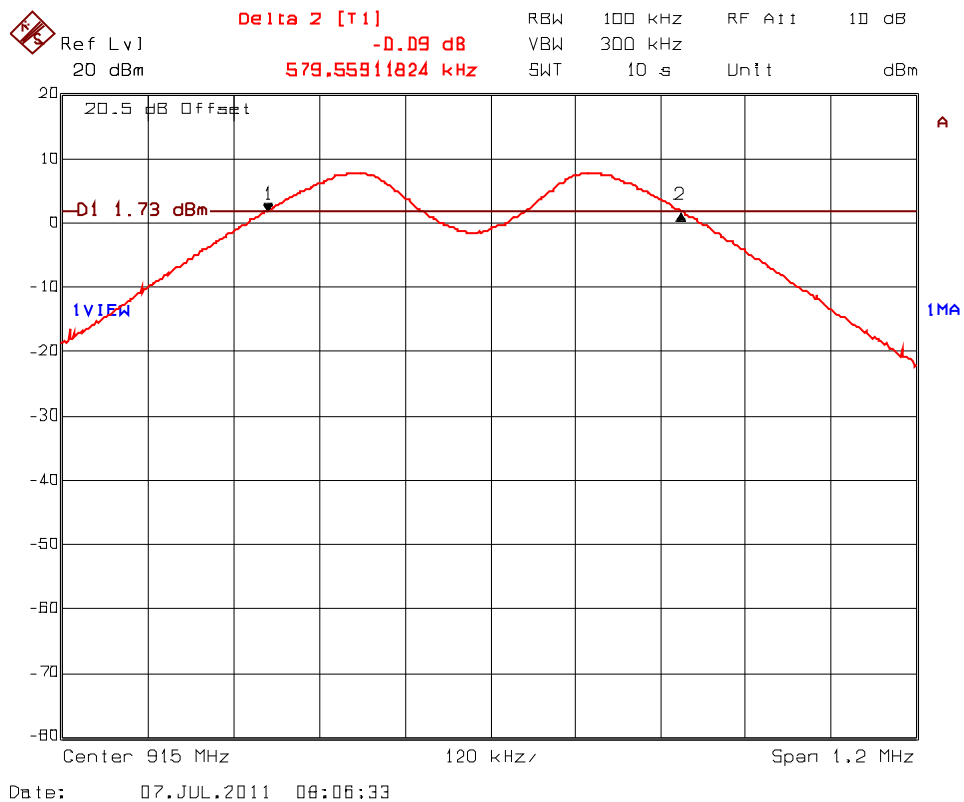

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.6.4.3. 6 dB Bandwidth, 2-FSK modulation
Test Frequency: 927 MHz

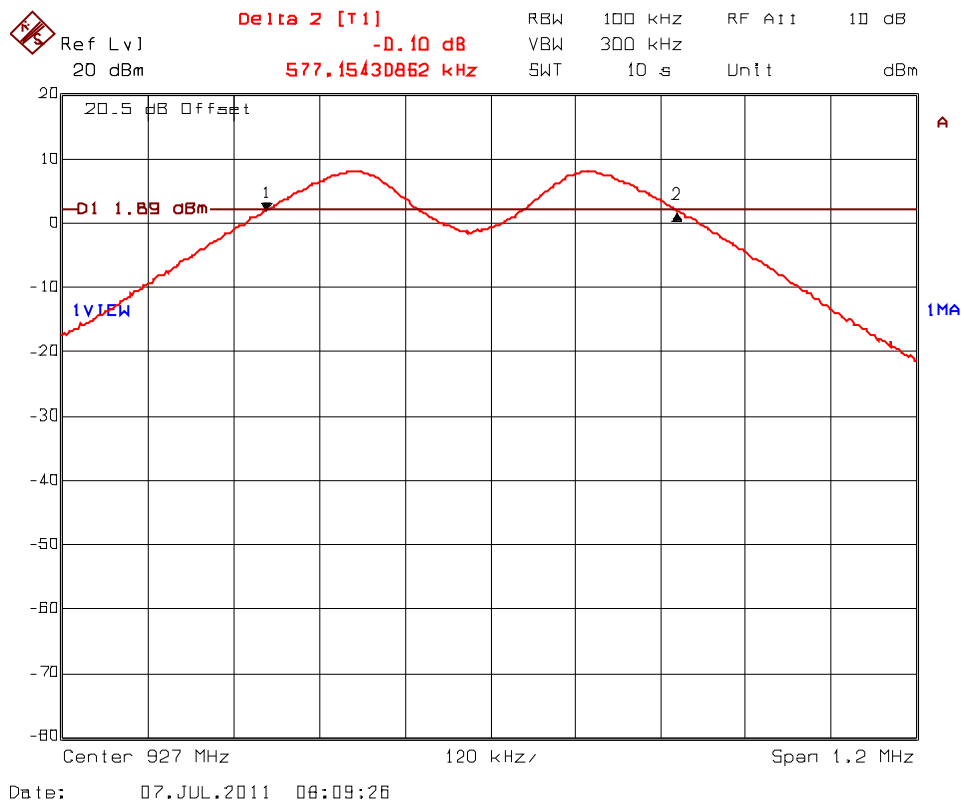

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.6.4.4. 99% Occupied Bandwidth, 2-FSK modulation
Test Frequency: 903 MHz

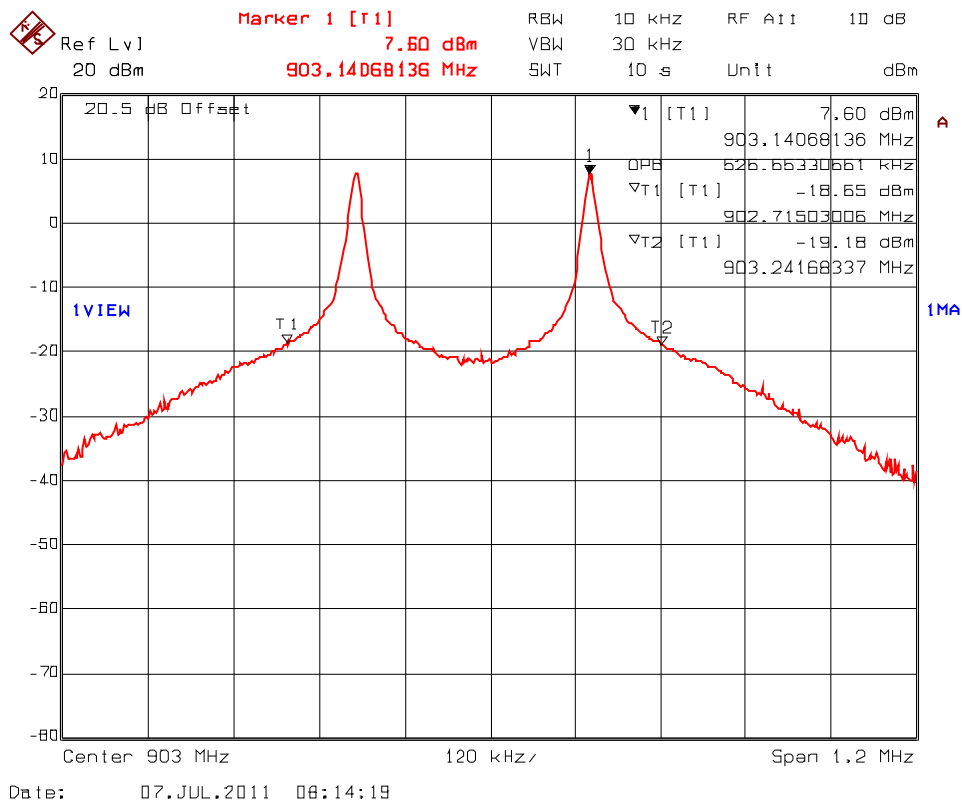

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.6.4.5. 99% Occupied Bandwidth, 2-FSK modulation
Test Frequency: 915 MHz

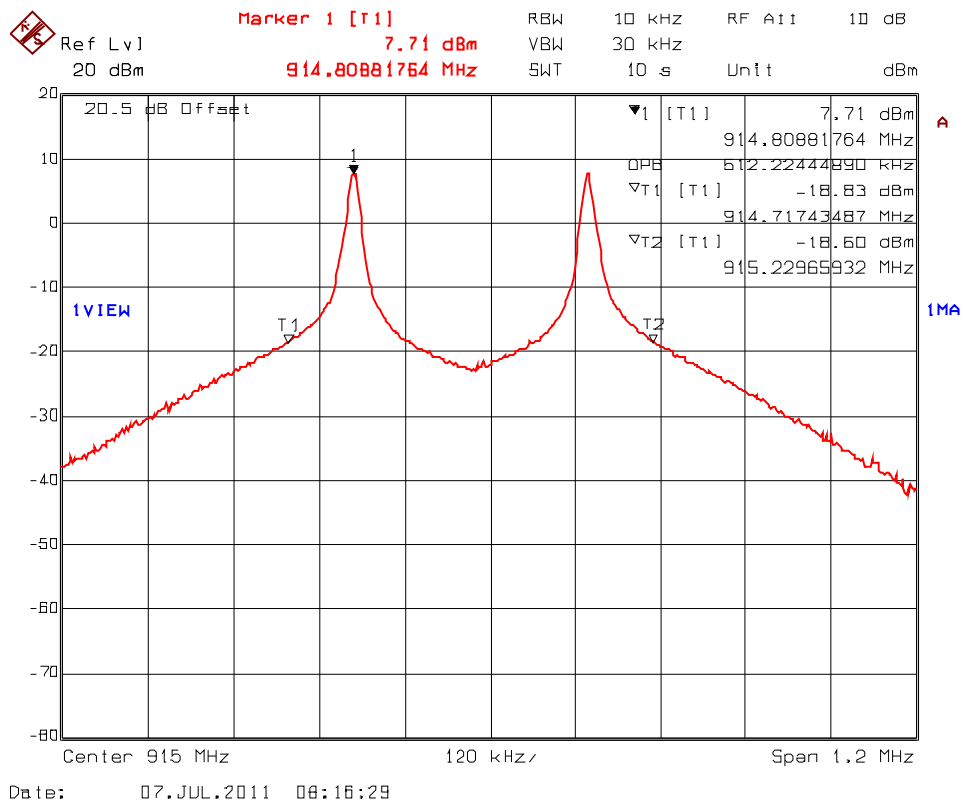

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.6.4.6. 99% Occupied Bandwidth, 2-FSK modulation
Test Frequency: 927 MHz

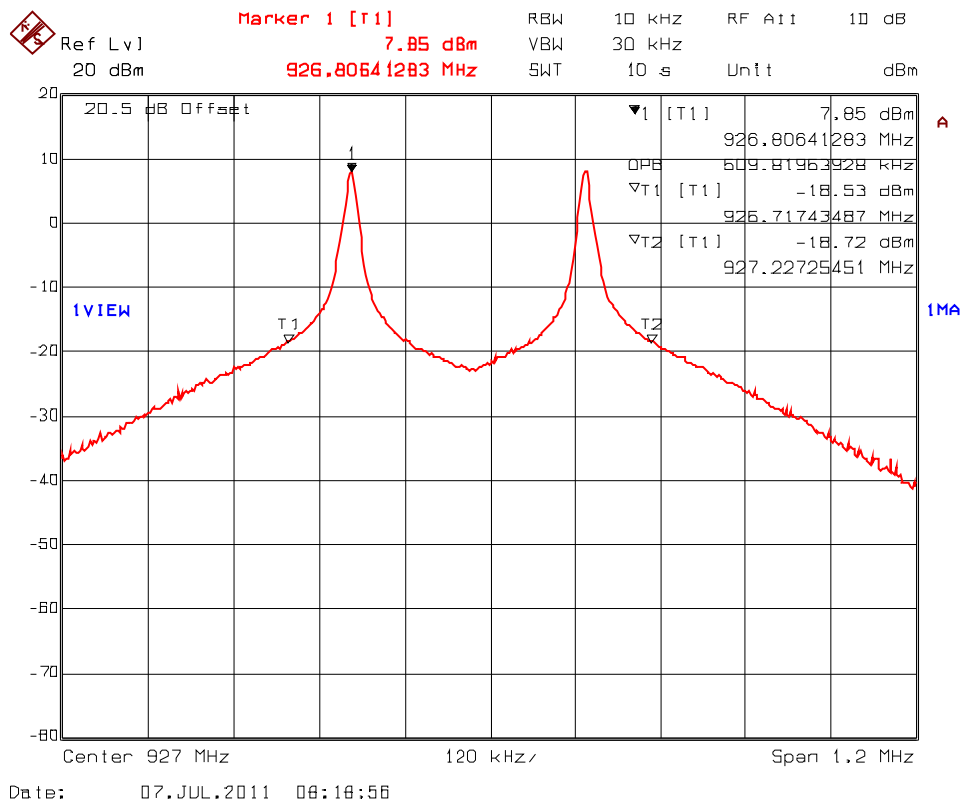

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)]

5.7.1. Limit(s)


§ 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

§15.247(b)(4): The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Method of Measurements & Test Arrangement

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

5.7.3. Test Arrangement

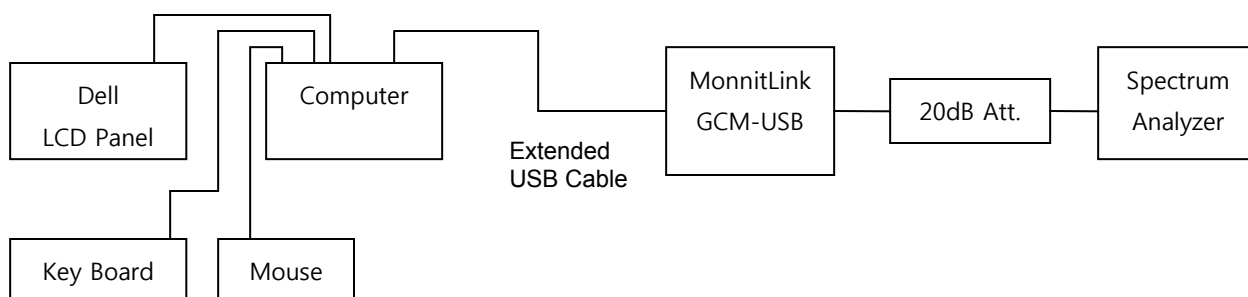

HP xw4300 Workstation, s/n: 2UA6210WN6

Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS


5.7.4. Test Data

Remark(s): Test method used: Power output option 1, peak measurement.					
Frequency (MHz)	Modulation	Peak Conducted Power (dBm)	Peak EIRP ^(Note 1, 2) (dBm)	Peak Conducted Power Limit (dBm)	EIRP Limit (dBm)
903	2-FSK	7.69	9.79	30	36
915	2-FSK	7.69	9.79	30	36
927	2-FSK	7.84	9.94	30	36

Note 1: The Peak EIRP is calculated as the sum of Peak Conducted Power in dBm and antenna assembly gain of EUT in dBi (antenna gain – cable loss).

Note 2: The maximum assembly antenna gain: 2.1 dBi

See the following plots for details.

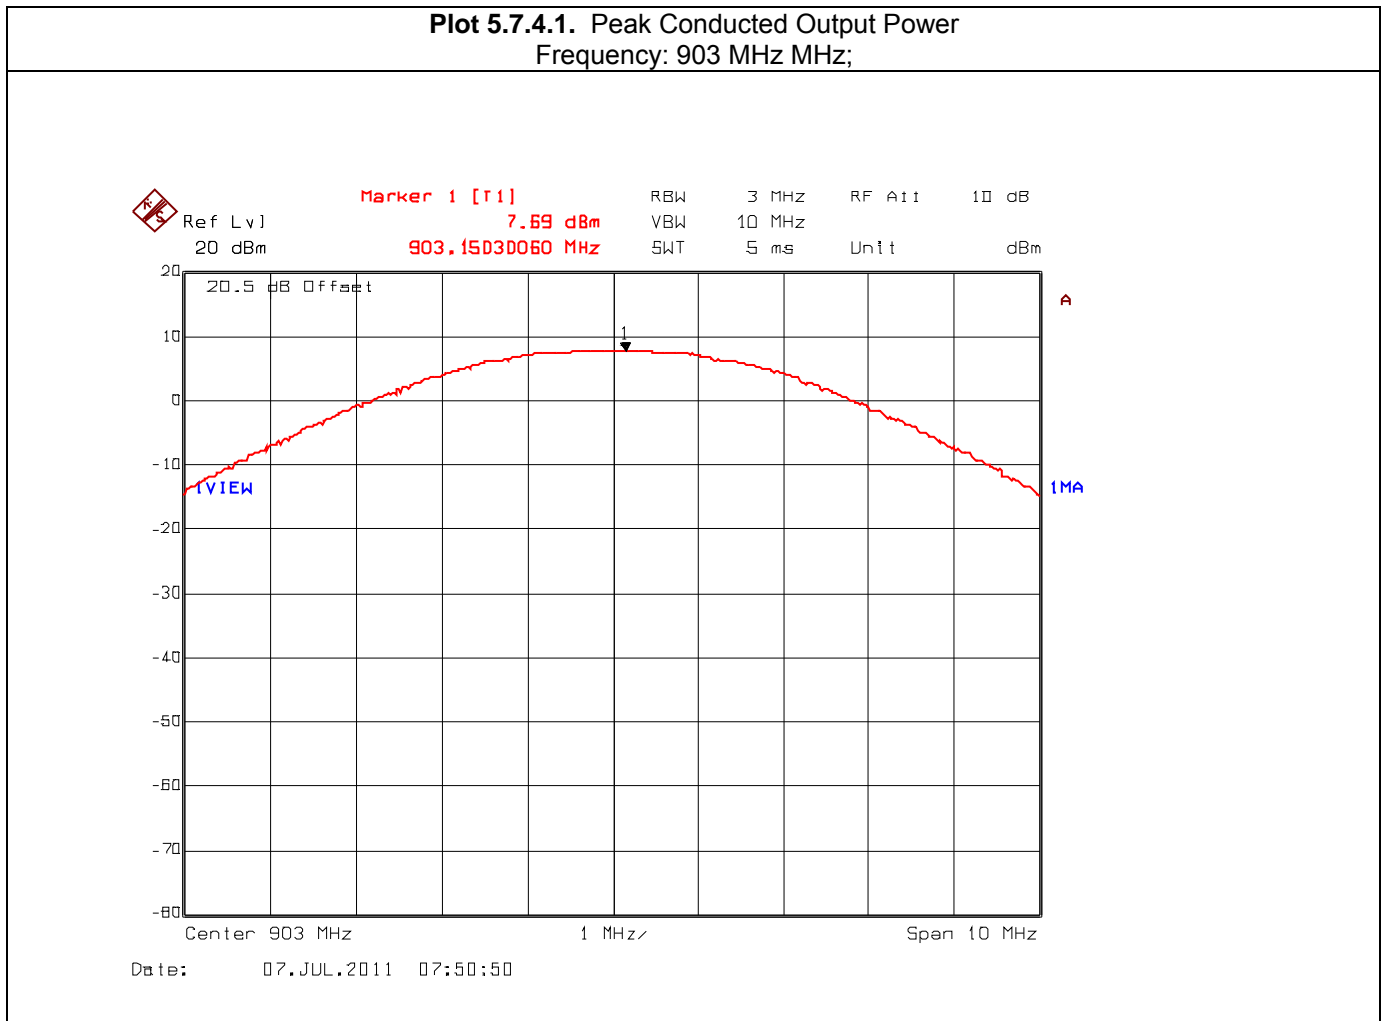

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.7.4.2. Peak Conducted Output Power
Frequency: 915 MHz MHz;

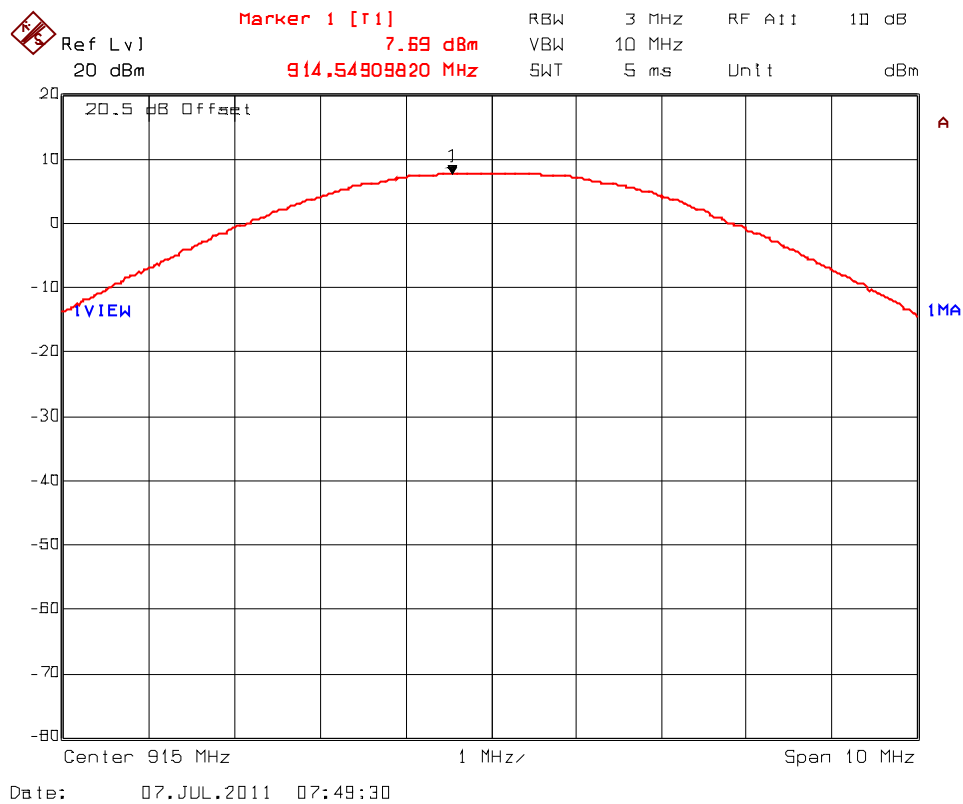


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.7.4.3. Peak Conducted Output Power
Frequency: 927 MHz MHz;

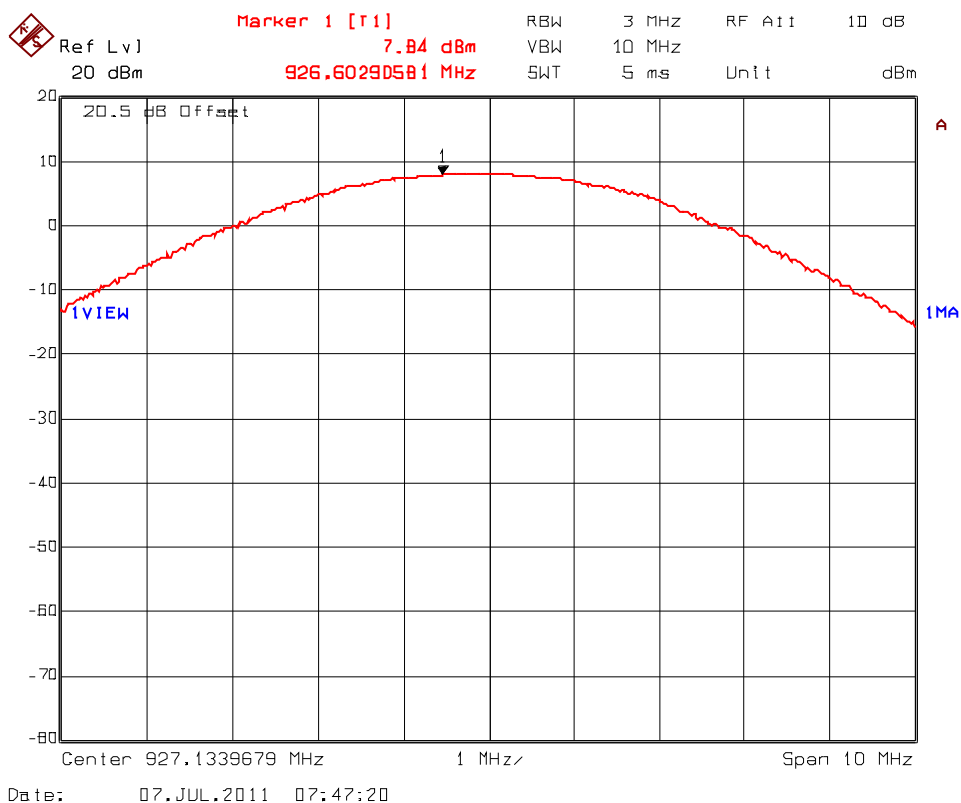

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(d)]


5.8.1. Limit(s)

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.8.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

5.8.3. Test Arrangement

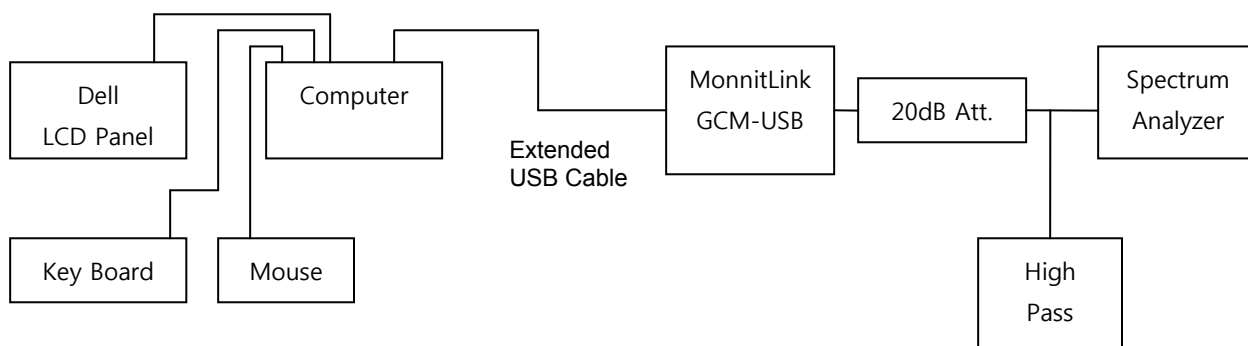


HP xw4300 Workstation, s/n: 2UA6210WN6

Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS

5.8.4. Test Data

5.8.4.1. Band-Edge RF Conducted Emissions

Plot 5.8.4.1.1. Band-Edge RF Conducted Emissions, 2-FSK modulation
Low End of Frequency Band (903 MHz)

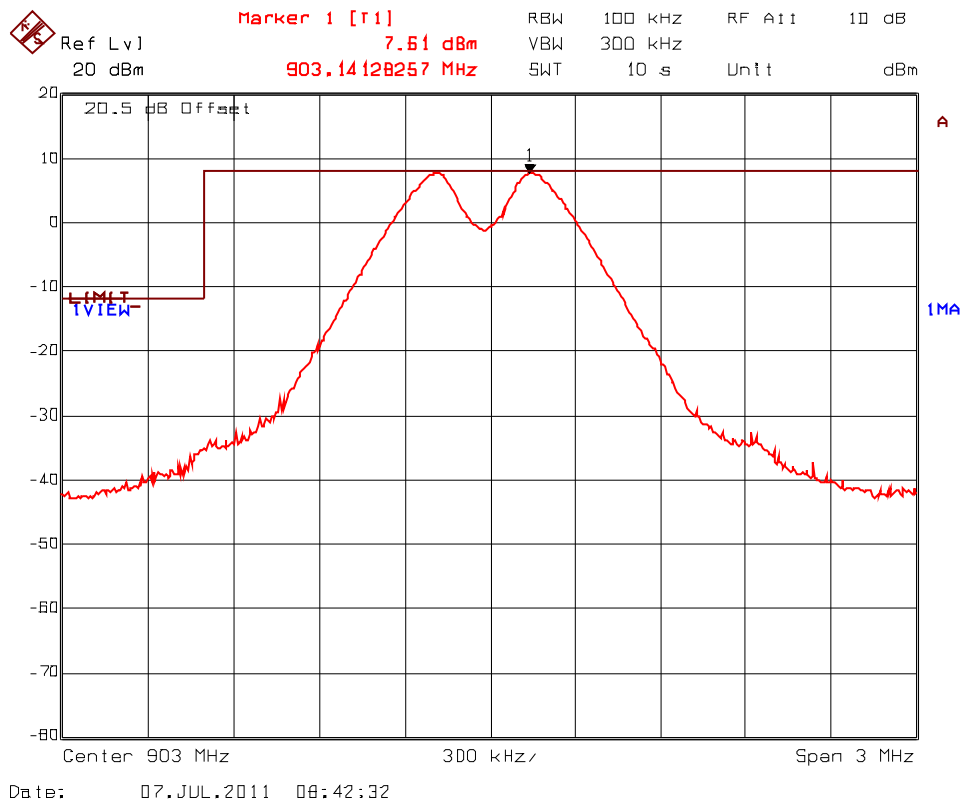

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.8.4.1.2. Band-Edge RF Conducted Emissions, 2-FSK modulation
High End of Frequency Band (927 MHz)

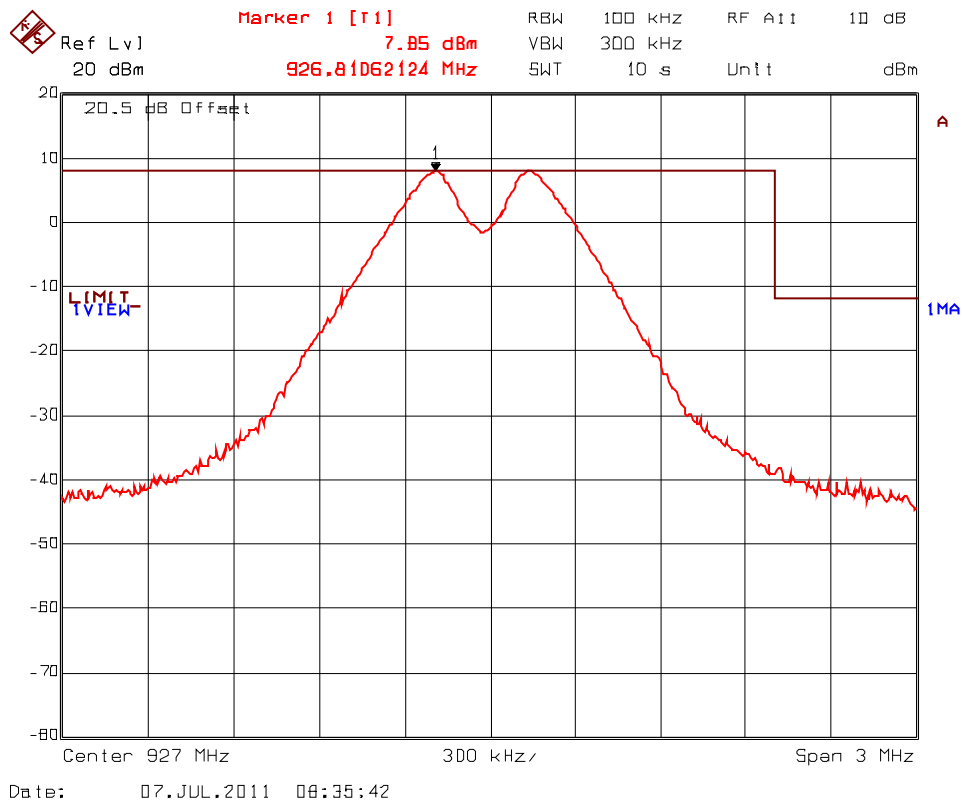

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: MONN-004QF15C247

July 29, 2011


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.4.2. Spurious RF Conducted Emissions

Plot 5.8.4.2.1. Spurious RF Conducted Emissions, 2-FSK modulation, 10MHz - 1 GHz
Transmitter Frequency: 903 MHz

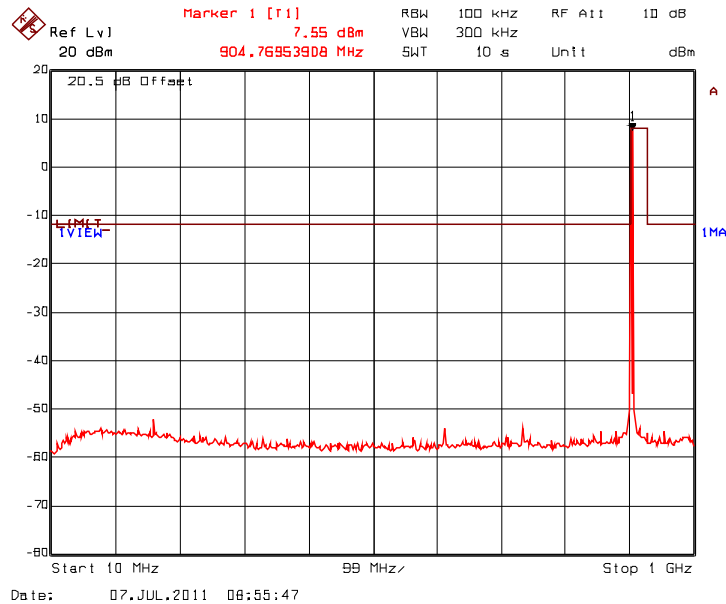

Plot 5.8.4.2.2. Spurious RF Conducted Emissions, 2-FSK modulation, 1GHz - 10 GHz
Transmitter Frequency: 903 MHz

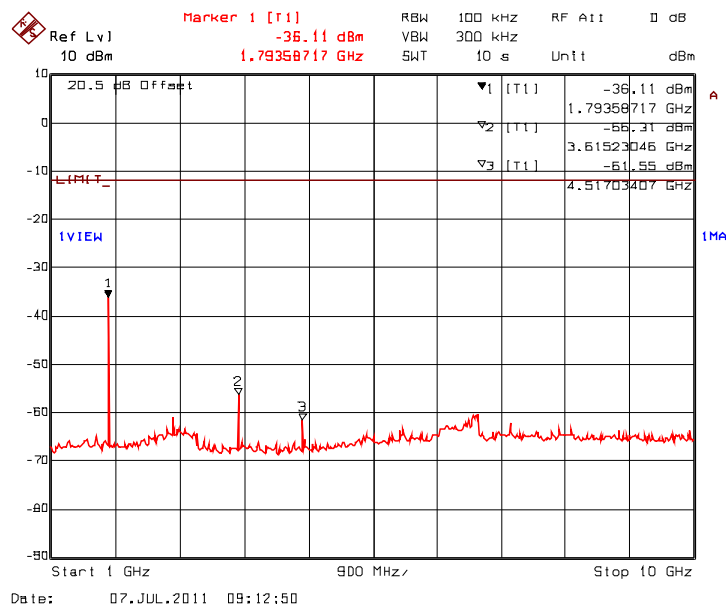


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


Plot 5.8.4.2.3. Spurious RF Conducted Emissions, 2-FSK modulation, 10MHz - 1 GHz
Transmitter Frequency: 915 MHz

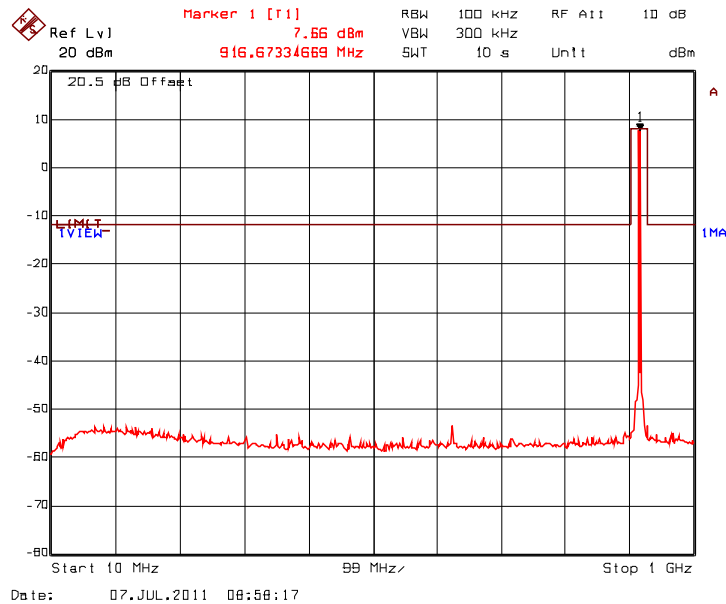


Plot 5.8.4.2.4. Spurious RF Conducted Emissions, 2-FSK modulation, 1GHz - 10 GHz
Transmitter Frequency: 915 MHz

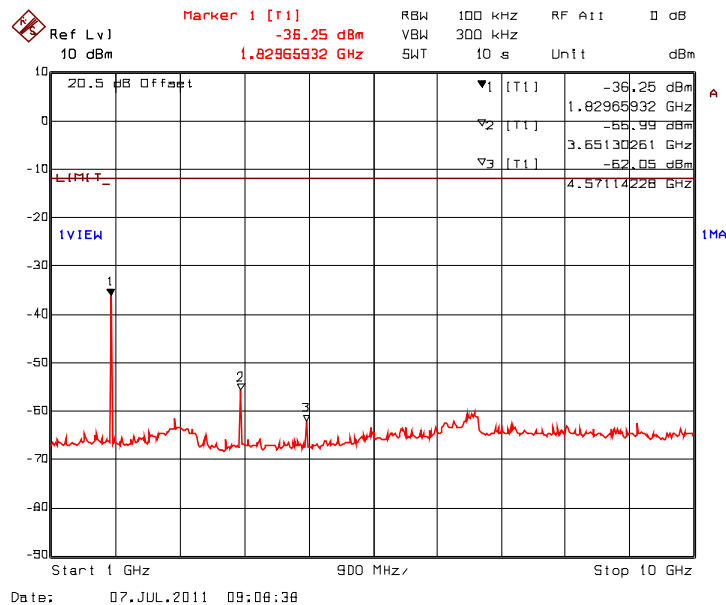

Plot 5.8.4.2.5. Spurious RF Conducted Emissions, 2-FSK modulation, 10MHz - 1 GHz
Transmitter Frequency: 927 MHz

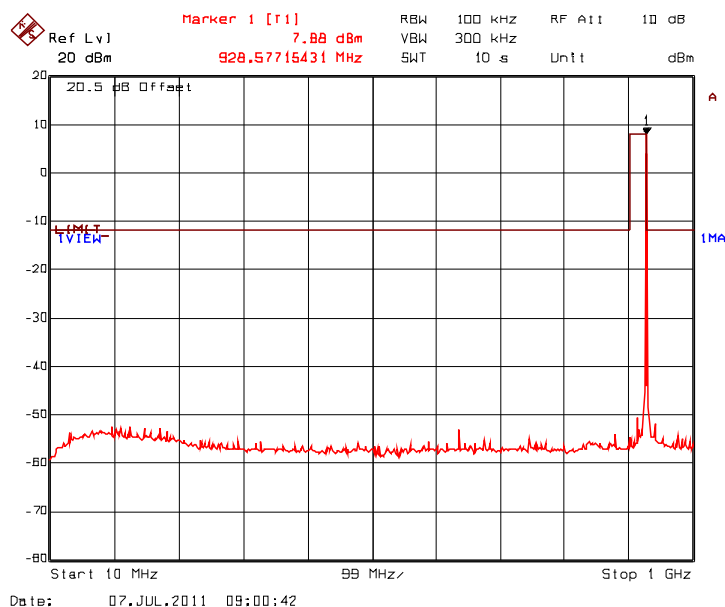

Plot 5.8.4.2.6. Spurious RF Conducted Emissions, 2-FSK modulation, 1GHz - 10 GHz
Transmitter Frequency: 927 MHz

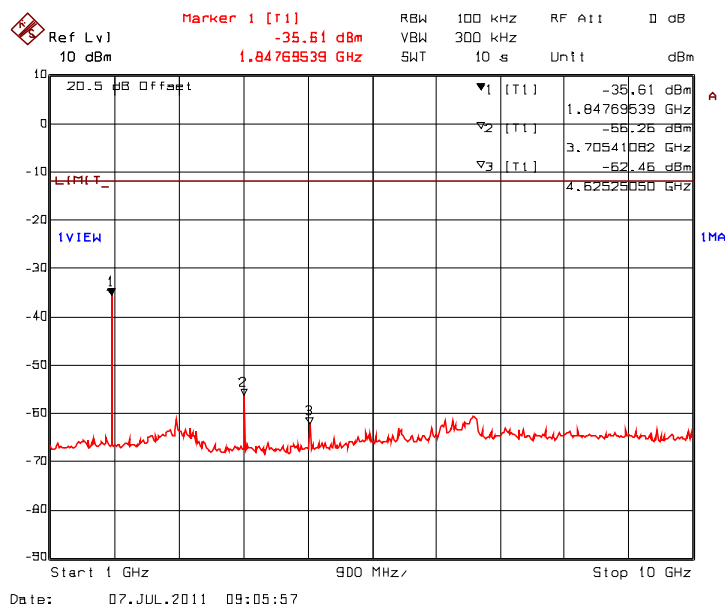

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205]

5.9.1. Limit(s)

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Section 15.205(a) - Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41.			

¹ Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

² Above 38.6

Section 15.209(a) -- Field Strength Limits within Restricted Frequency Bands --

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247


July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247) and ANSI C63.4-2003.

5.9.3. Test Arrangement

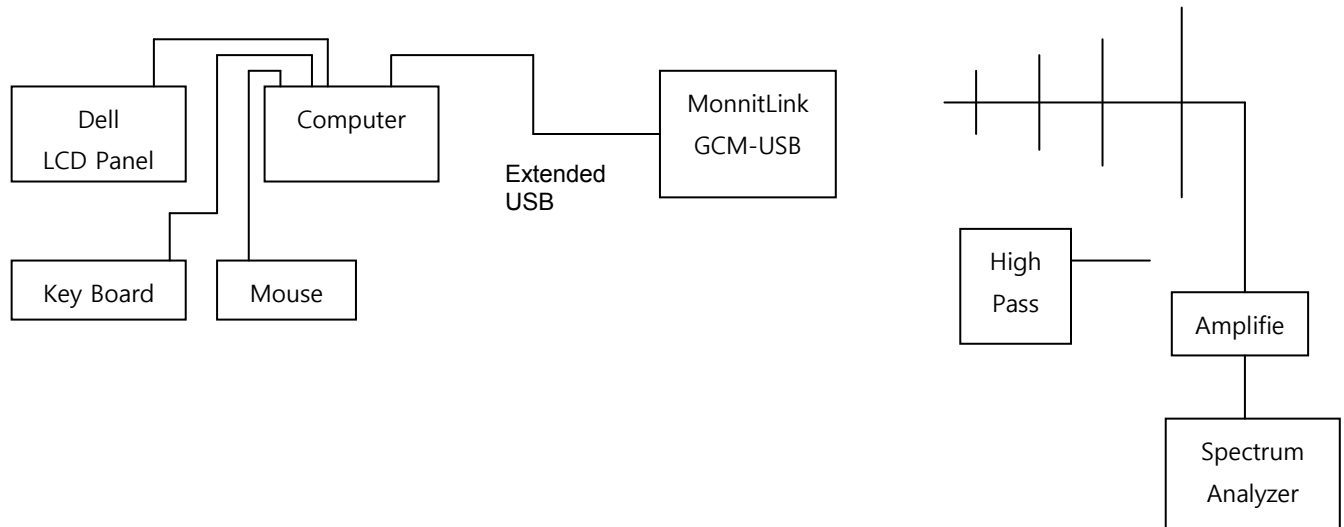

HP xw4300 Workstation, s/n: 2UA6210WN6



Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS

5.9.4. Test Data

Remarks:

- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT shall be tested in three orthogonal positions.
- The RF Average level above 1GHz is corrected by the duty cycle factor (-3.83dB) shown below:

Duty Cycle Factor: $20 \cdot \log(64.32 \text{ ms} / 100 \text{ ms}) = -3.83 \text{ dB}$

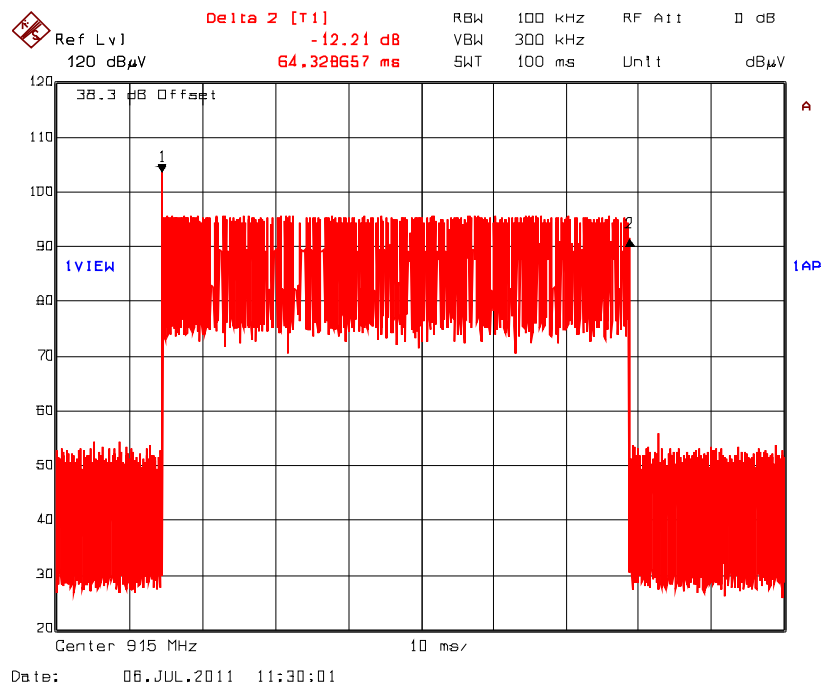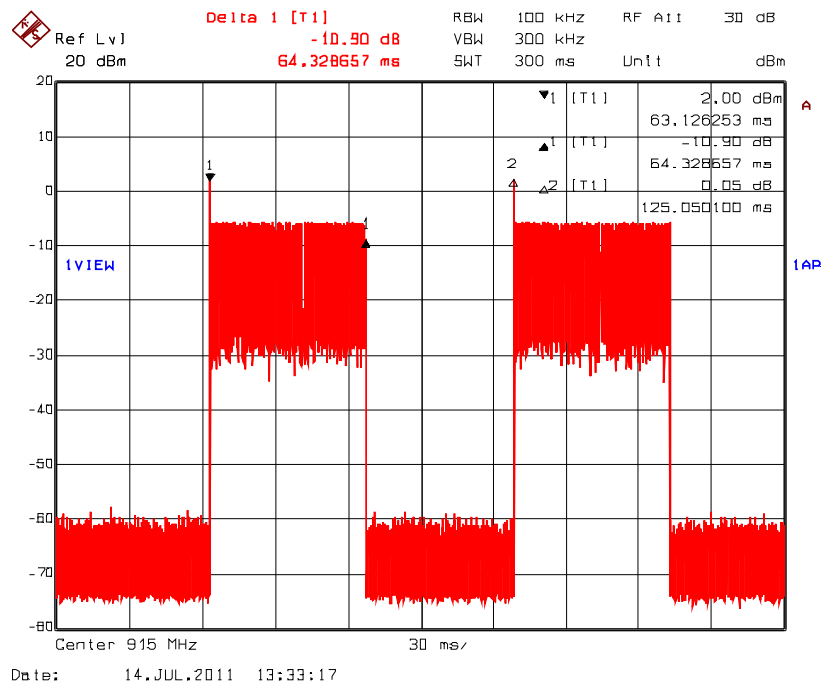

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.4.1. EUT with Wire Antenna

Fundamental Frequency:		903 MHz					
Test Frequency Range:		30 MHz – 10 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit Table 5 (dBµV/m)	Limit Section A8.5 (dBµV/m)	Margin (dB)	Pass/Fail
903	105.42	--	V	--	--	--	--
903	103.87	--	H	--	--	--	--
2709	56.99	48.98	V	54.0	88.2	-5.02	Pass*
2709	59.19	51.51	H	54.0	88.2	-2.49	Pass*
3612	53.47	40.21	V	54.0	88.2	-13.79	Pass*
3612	52.05	39.73	H	54.0	88.2	-14.27	Pass*
4515	55.95	43.10	V	54.0	88.2	-10.90	Pass*
4515	55.69	42.31	H	54.0	88.2	-11.69	Pass*

*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

Fundamental Frequency:		915 MHz					
Test Frequency Range:		30 MHz – 10 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit Table 5 (dBµV/m)	Limit Section A8.5 (dBµV/m)	Margin (dB)	Pass/Fail
915	104.84	--	V	--	--	--	--
915	104.49	--	H	--	--	--	--
2745	56.41	48.17	V	54.0	86.9	-5.83	Pass*
2745	61.26	53.49	H	54.0	86.9	-0.51	Pass*
3660	52.55	40.45	V	54.0	86.9	-13.55	Pass*
3660	54.41	42.67	H	54.0	86.9	-11.33	Pass*
4575	58.40	45.53	V	54.0	86.9	-8.47	Pass*
4575	53.92	38.65	H	54.0	86.9	-15.35	Pass*

*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 927 MHz							
Test Frequency Range: 30 MHz – 10 GHz							
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit Table 5 (dBµV/m)	Limit Section A8.5 (dBµV/m)	Margin (dB)	Pass/Fail
927	105.17	--	V	--	--	--	--
927	104.89	--	H	--	--	--	--
2781	55.98	47.61	V	54.0	88.7	-6.39	Pass*
2781	58.77	50.90	H	54.0	88.7	-3.10	Pass*
3708	52.89	41.23	V	54.0	88.7	-12.77	Pass*
3708	51.72	38.91	H	54.0	88.7	-15.09	Pass*
4635	55.76	42.69	V	54.0	88.7	-11.31	Pass*
4635	55.76	42.07	H	54.0	88.7	-11.93	Pass*

*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

See the following test data plots for band-edge emissions.

Plot 5.9.4.1.1. Band-Edge RF Radiated Emissions @ 3 m, 2-FSK modulation, Wire Antenna
Low End of Frequency Band (903 MHz)
Rx Antenna Orientation: Horizontal

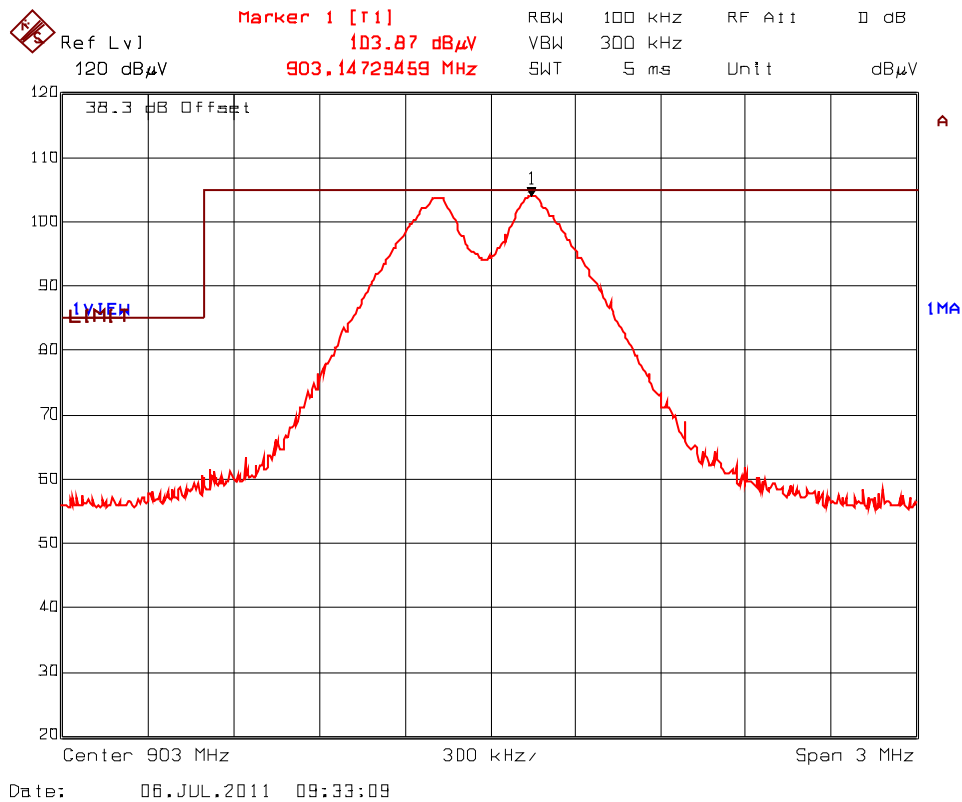


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.9.4.1.2. Band-Edge RF Radiated Emissions @ 3 m, 2-FSK modulation, Wire Antenna
Low End of Frequency Band, 903 MHz
Rx Antenna Orientation: Vertical

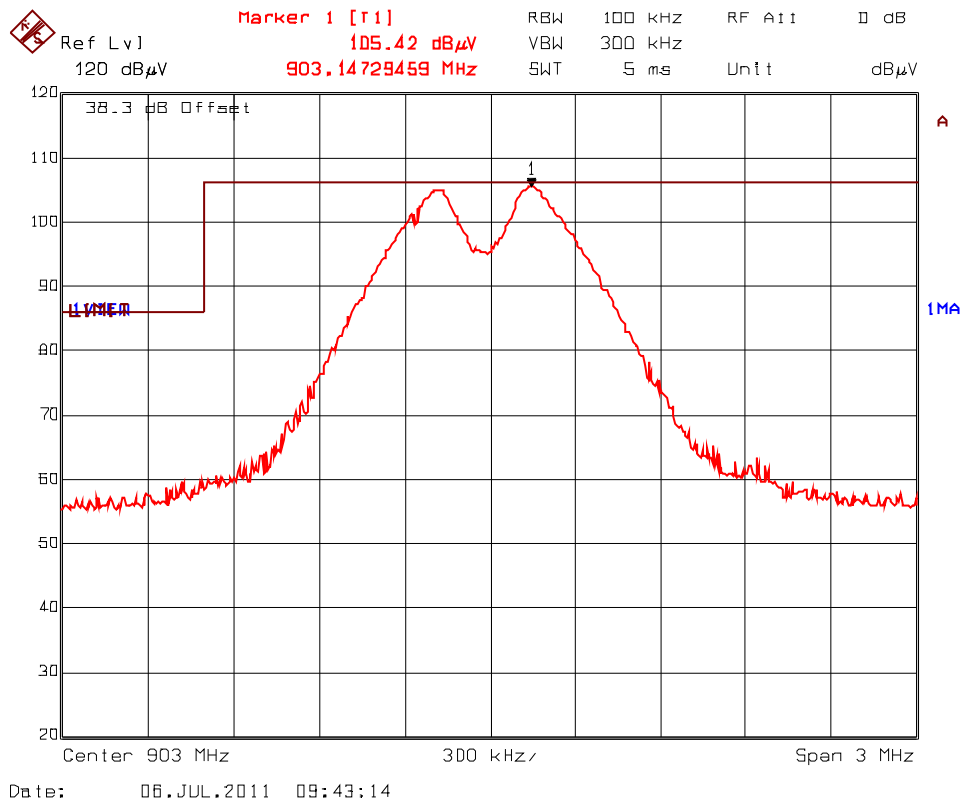


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.9.4.1.3. Band-Edge RF Radiated Emissions @ 3 m, 2-FSK modulation, Wire Antenna
High End of Frequency Band (927 MHz)
Rx Antenna Orientation: Horizontal

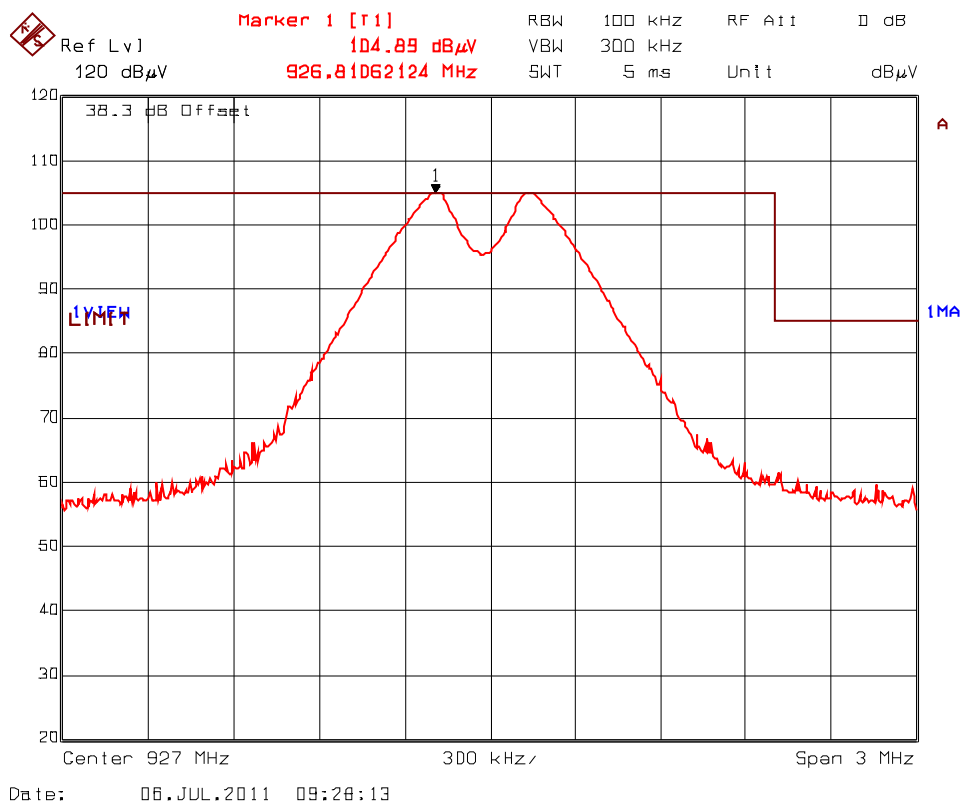

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.9.4.1.4. Band-Edge RF Radiated Emissions @ 3 m, 2-FSK modulation, Wire Antenna
High End of Frequency Band (927 MHz)
Rx Antenna Orientation: Vertical

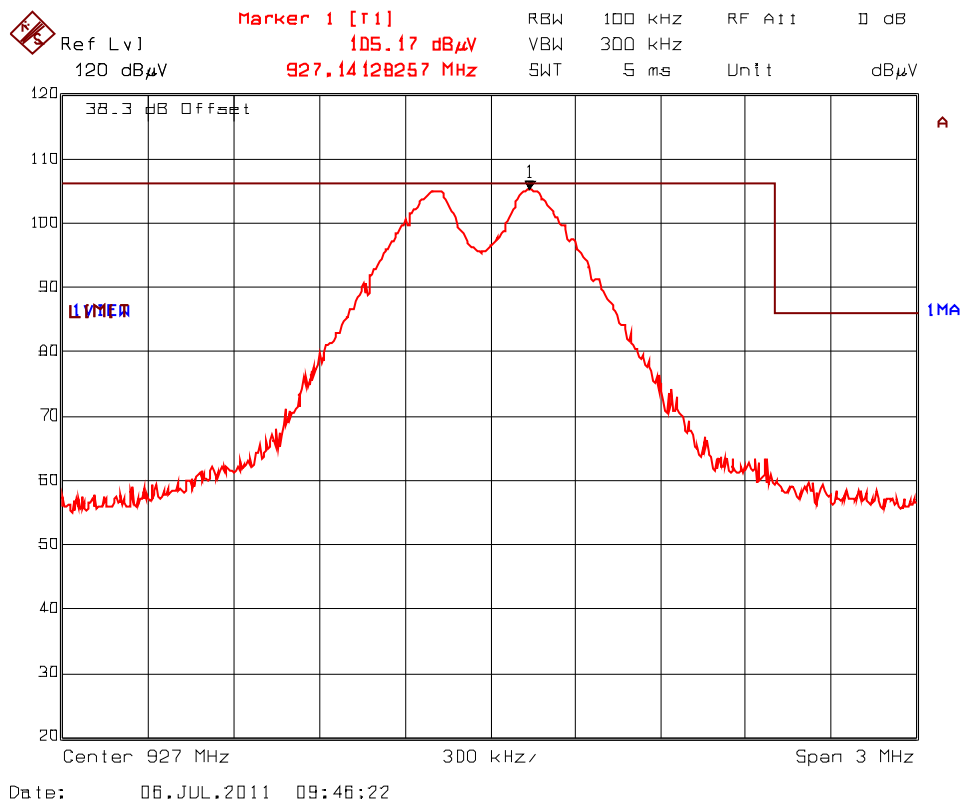

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10. POWER SPECTRAL DENSITY [§ 15.247(e)]


5.10.1. Limit(s)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.10.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

5.10.3. Test Arrangement

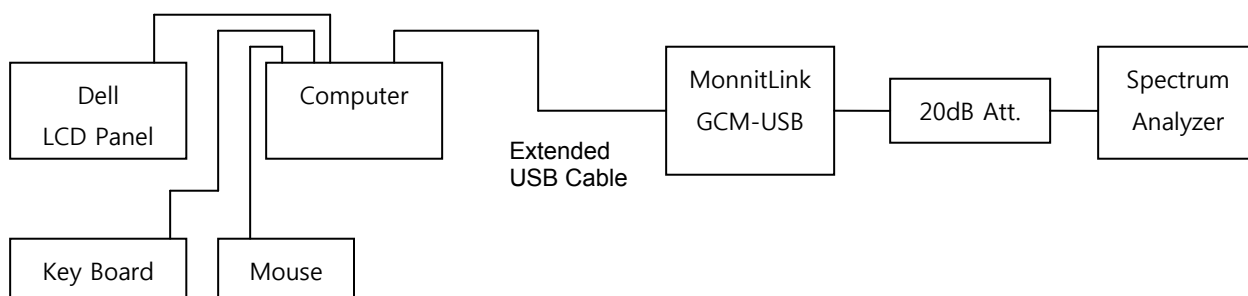

HP xw4300 Workstation, s/n: 2UA6210WN6

Dell LCD Panel, m/n: 2408WFPb, s/n: MX-OJU436-74262-85F-29PS

5.10.4. Test Data

Remarks:

- Measurement method: Power spectral density (PSD) Option 1.
- Investigation of all combinations of modulations and data rates were carried out to determine the worst-case operation and the highest level is recorded in the following table.

Frequency (MHz)	Modulation	*PSD in 3 kHz BW (dBm)	Limit (dBm)	Margin (dB)
903	2-FSK	7.53	8	-0.47
915	2-FSK	7.58	8	-0.42
927	2-FSK	7.76	8	-0.24

*See the following plots for measurement details.


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.10.4.1. Power Spectral Density, 2-FSK modulation
Test Frequency: 903 MHz

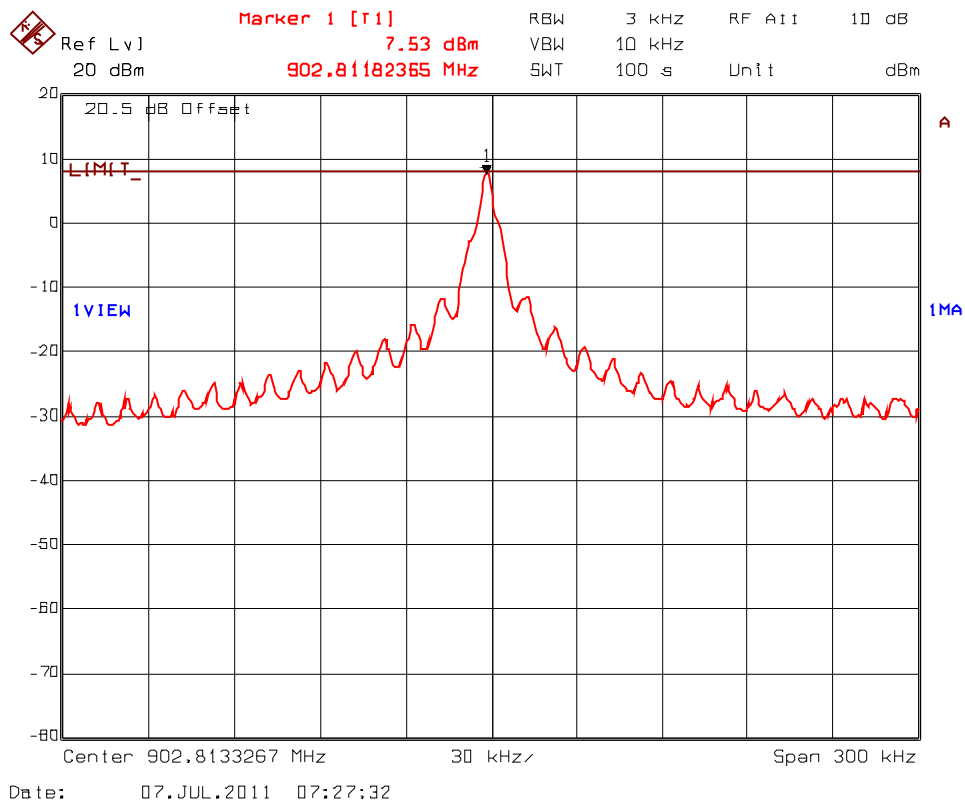

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.10.4.2. Power Spectral Density, 2-FSK modulation
Test Frequency: 915 MHz

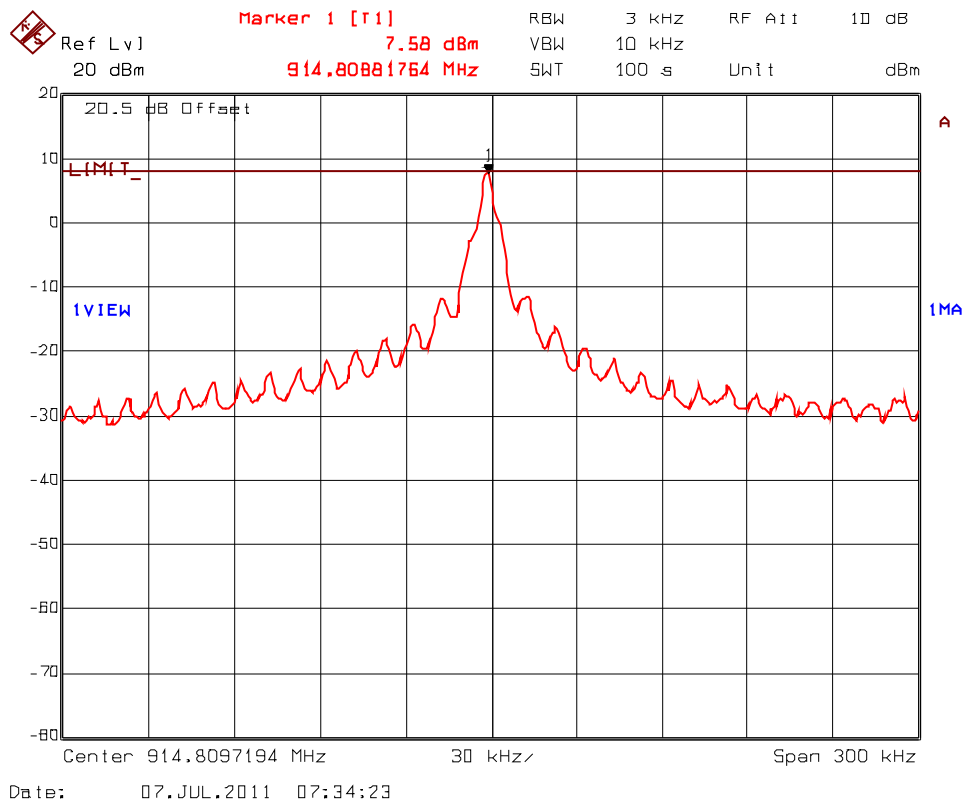

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.10.4.3. Power Spectral Density, 2-FSK modulation
Test Frequency: 927 MHz

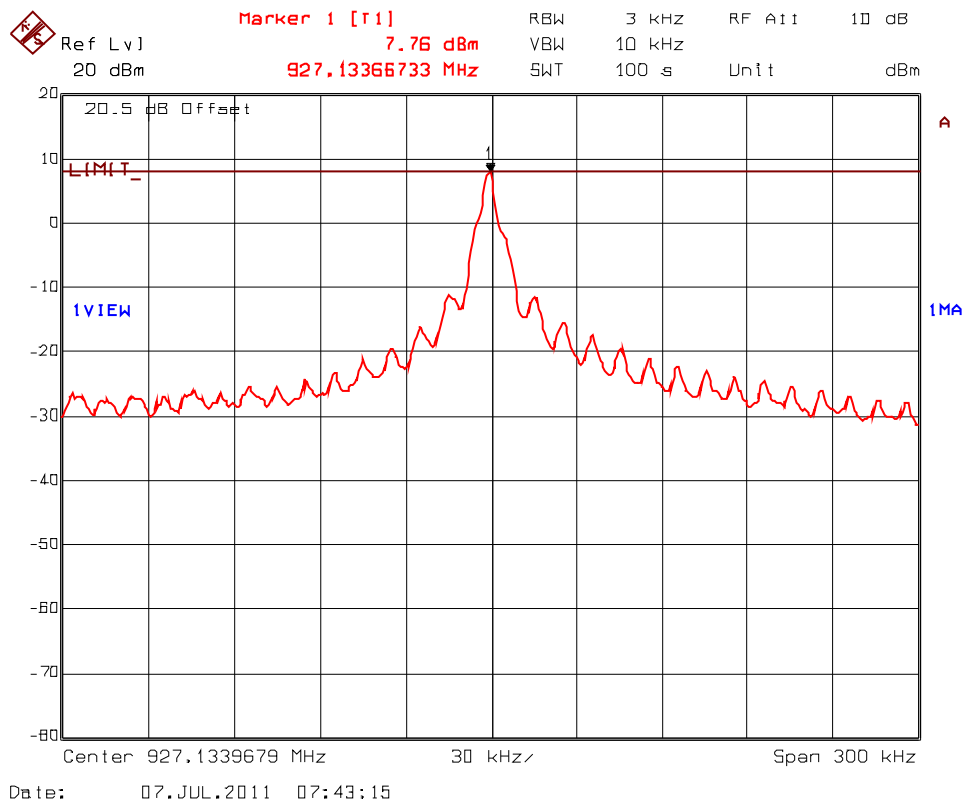

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.11. RF EXPOSURE REQUIRMENTS [§§ 15.247(e)(i), 1.1310 & 2.1091]

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation.

FCC 47 CFR § 1.1310:

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

5.11.1. Method of Measurements

Refer to Sections 1.1310, 2.1091

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247

July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

This device is categorically excluded from routine environmental evaluation for RF Exposure requirement as per section 2.1093.

This device may be used as stand-alone portable exposure conditions with no restrictions on host platforms when the source-based time-averaged output power is $\leq 60/f_{(\text{GHz})}$ mW as specified in sec 2(a)(1) of FCC KDB 447498 v04.

Measured Maximum Peak Conducted Power = 6.1 mW

SAR is not required as Peak Conducted Power (6.1 mW) is well below the threshold value of 64 mW for 927 MHz band as calculated below.

Threshold Value = $[60/f(\text{GHz})]$ mW
= $(60/0.927)$ mW
= 64 mW

EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz – 40 GHz	14 Aug 2011
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	15 Mar 2012
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	17 Feb 2012
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	15 Mar 2012
High Pass Filter	K & L	11SH10-1500/T8000	2	Cut off 900 MHz	Cal. on use
Horn Antenna	Emco	3155	6570	1 – 18 GHz	22 Feb 2012
Horn Antenna	Emco	3155	5955	1 – 18 GHz	09 Jan 2012
Biconi-Log Antenna	Emco	3142C	00034792	26 – 3000 MHz	26 April 2012
Dipole Antenna	Emco	3121C	434	26 – 1000 MHz	16 Aug 2011
Signal Generator	Hewlett Packard	8648C	3443U00391	100 kHz – 3200 MHz	16 Dec, 2011
Power Divider	Mini-Circuits	15542	0235	DC – 18 GHz	Cal. on use
Attenuator	Narda	4768-20	-	DC – 40 GHz	Cal. on use
Spectrum Analyzer	Hewlett Packard	HP 8593EM	3710A00223	9 kHz – 22 GHz	25 April 2012
LISN	EMCO	3825/2R	1165	10 kHz – 30 MHz	8 April 2012
Attenuator	Pasternack	PE7010-20	-	-	18 Jan 2012

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

	Line Conducted Emission Measurement Uncertainty (150 kHz – 30 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.57	± 1.8
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.14	± 3.6

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MONN-004QF15C247
July 29, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)