


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	Steven Liang	Configurations	EUT in Y axis - 2.4GHz + 5GHz

Horizontal

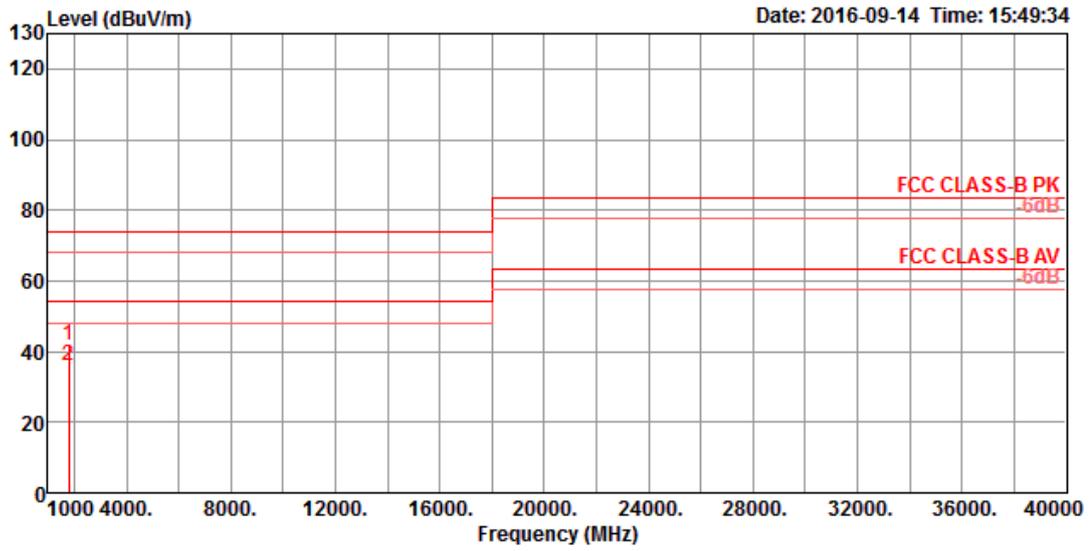

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1799.91	41.96	74.00	-32.04	44.10	4.60	25.80	32.54	130	142	Peak	HORIZONTAL
2	1800.02	35.97	54.00	-18.03	38.11	4.60	25.80	32.54	130	142	Average	HORIZONTAL

Vertical

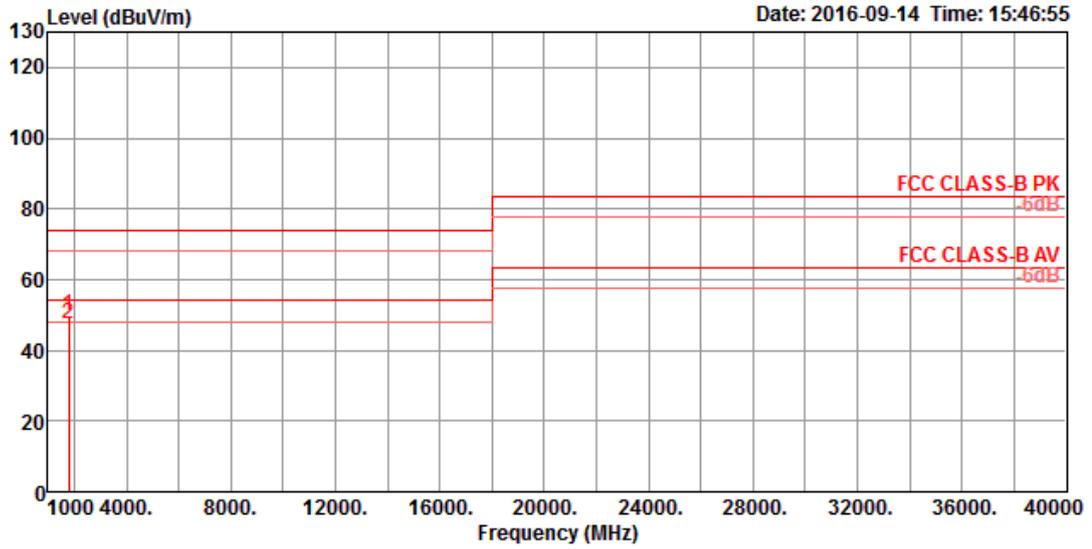

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1799.88	49.77	74.00	-24.23	51.91	4.60	25.80	32.54	100	180	Peak	VERTICAL
2	1800.00	47.70	54.00	-6.30	49.84	4.60	25.80	32.54	100	180	Average	VERTICAL