



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw


Project No: CB10505199

Maximum Permissible Exposure Report

| | |
|------------------------|--|
| Applicant's company | Amped Wireless |
| Applicant Address | 13089 Peyton Dr. #C307 Chino Hills CA 91709 USA |
| FCC ID | ZTT-LRC100 |
| Manufacturer's company | Brickcom Corporation |
| Manufacturer Address | No.1 Jen Ai Road, Hsinchu Industrial Park, Hsinchu, Taiwan |

| | |
|------------------|---|
| Product Name | LRC100 |
| Brand Name | amped wireless |
| Model Name | LRC100 |
| Ref. Standard(s) | 47 CFR FCC Part 2 Subpart J, section 2.1091 |
| Received Date | Jan. 19, 2016 |
| Final Test Date | Apr. 19, 2016 |
| Submission Type | Original Equipment |



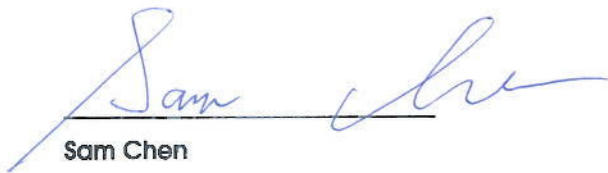

Sam Chen
SPORTON INTERNATIONAL INC.



Table of Contents

| | |
|--|----------|
| 1. GENERAL DESCRIPTION..... | 1 |
| 1.1. EUT General Information | 1 |
| 1.2. Testing Location..... | 1 |
| 2. MAXIMUM PERMISSIBLE EXPOSURE..... | 2 |
| 2.1. Limit of Maximum Permissible Exposure | 2 |
| 2.2. MPE Calculation Method | 2 |
| 2.3. Calculated Result and Limit..... | 3 |

History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|-------------|---------|-------------------------|--------------|
| FA611901-01 | Rev. 01 | Initial issue of report | May 18, 2016 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1. GENERAL DESCRIPTION

1.1. EUT General Information

| RF General Information | | | |
|------------------------|-----------------------|---------------------------|---|
| Evaluation Mode | Frequency Range (MHz) | Operating Frequency (MHz) | Modulation Type |
| 2.4GHz WLAN | 2400-2483.5 | 2412-2462 | 802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) |

1.2. Testing Location

| Testing Location | | |
|-------------------------------------|--------|--|
| <input type="checkbox"/> | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973 |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|---|
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|---|
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180/f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1.0 | 30 |

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2. MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Antenna Type : Dipole Antenna

Conducted Power for IEEE 802.11b: 23.43 dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power | | Power Density (S) (mW/cm ²) | Limit of Power Density (S) (mW/cm ²) | Test Result |
|---------------|------------------|--------------------|------------------------|---|----------|---|--|-------------|
| | | | | (dBm) | (mW) | | | |
| 20 | 2437 | 3.50 | 2.2387 | 23.4300 | 220.2926 | 0.098164 | 1 | Complies |