# FCC PART 15 SUBPART C TEST REPORT

for

# High Power AC1200 Wi-Fi PCI-E Adapter

## Model No.: PCI20E

# FCC ID: ZTT-PCI20E

of

Applicant: Amped Wireless Address: 13089 Peyton Dr. #C307 Chino Hills California 91709 United States

Tested and Prepared

by

## Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01



#### Report No.: W6M21401-13806-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: <u>wts@wts-lab.com</u>



# TABLE OF CONTENTS

| 1 G   | ENERAL INFORMATION                                 | 2  |
|-------|--|----|
| 1.1   | Notes  | 2  |
| 1.2   | TESTING LABORATORY                                 | 3  |
| 1.2   | 2.1 Location                                       | 3  |
| 1.2   | 2.2 Details of accreditation status                | 3  |
| 1.3   | DETAILS OF APPROVAL HOLDER                         | 3  |
| 1.4   | APPLICATION DETAILS                                | 4  |
| 1.5   | GENERAL INFORMATION OF TEST ITEM                   | 4  |
| 1.6   | TEST STANDARDS                                     |    |
| 2 TI  | ECHNICAL TEST                                      | 9  |
| 2.1   | SUMMARY OF TEST RESULTS                            | 9  |
| 2.2   | TEST ENVIRONMENT                                   | 9  |
| 2.3   | TEST EQUIPMENT LIST                                |    |
| 2.4   | GENERAL TEST PROCEDURE                             |    |
| 3 TI  | EST RESULTS (ENCLOSURE)                            | 14 |
| 3.1   | PEAK OUTPUT POWER (TRANSMITTER)                    |    |
| 3.2   | EQUIVALENT ISOTROPIC RADIATED POWER                |    |
| 3.3   | RF Exposure Compliance Requirements                |    |
| 3.4   | TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS |    |
| 3.5   | Spurious Emissions (tx)                            | 41 |
| 3.6   | RADIATED EMISSION ON THE BAND EDGE                 |    |
| 3.7   | MINIMUM 6 dB BANDWIDTH                             |    |
| 3.8   | PEAK POWER SPECTRAL DENSITY                        |    |
| 3.9   | RADIATED EMISSION FROM DIGITAL PART                |    |
| 3.10  | Power Line Conducted Emission                      |    |
| APPEN | DIX  |    |



#### **<u>1</u>** General Information

#### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 a/b/g/n/ac.

This report is related to FCC Part 15 C (DSSS and OFDM device).

## **Tester:**

February 25, 2014

Date

WTS-Lab. Name

pencer

Signature

#### Technical responsibility for area of testing:

Kevin Wong February 25, 2014 Kevin Wang WTS Date Name Signature

Spencer Yang



#### **1.2 Testing laboratory**

#### 1.2.1 Location

OATS No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.) 3 meter semi-anechoic chamber No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.) TEL:886-2-6613-0228 FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C. Tel : 886-2-66068877 Fax : 886-2-66068879

#### **1.2.2** Details of accreditation status

Accredited testing laboratory A2LA accredited number: 2732.01 FCC filed test laboratory Reg. No. 930600 Industry Canada filed test laboratory Reg. No. IC 5679A-1



#### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

| Name:              | ./ |
|--------------------|----|
| Accredited number: | ./ |
| Street:            | ./ |
| Town:              | ./ |
| Country:           | ./ |
| Telephone:         | ./ |
| Fax:               | ./ |
|                    |    |

#### 1.3 Details of approval holder

| Name:      | Amped Wireless               |
|------------|------------------------------|
| Street:    | 13089 Peyton Dr. #C307       |
| Town:      | Chino Hills California 91709 |
| Country:   | United States                |
| Telephone: | (909) 217-3229               |
| Fax:       | (909) 580-8883               |



# 1.4 Application details

| Date of receipt of test item: | January 14, 2014                           |
|-------------------------------|--|
| Date of test:                 | from January 15, 2014 to February 25, 2014 |

#### 1.5 General information of Test item

| Type of test item:          | High Power AC1200 Wi-Fi PCI-E Adapter |
|-----------------------------|---------------------------------------|
| Model Number:               | PCI20E                                |
| Brand Name:                 | amped wireless                        |
| Multi-listing model number: | ./.                                   |
| Photos:                     | see Appendix                          |

#### **Technical data**

| Frequency band:      | 5.745 GHz-5.825GHz, 2.4 GHz-2.4835 GHz |
|----------------------|--|
| 802.11a              |  |
| Frequency ( ch 149): | 5.745 GHz                              |
| Frequency ( ch 157): | 5.785 GHz                              |
| Frequency ( ch 165): | 5.825 GHz                              |
| 802.11n 20MHz        |  |
| Frequency ( ch 149): | 5.745 GHz                              |
| Frequency ( ch 157): | 5.785 GHz                              |
| Frequency ( ch 165): | 5.825 GHz                              |
| 802.11n 40MHz        |  |
| Frequency ( ch 151): | 5.755 GHz                              |
| Frequency ( ch 159): | 5.795 GHz                              |
| 802.11ac             |  |
| Frequency (ch 155):  | 5.775 GHz                              |
| 11b, 11g, 11n 20MHz  |  |
| Frequency ( ch 1):   | 2.412 GHz                              |
| Frequency ( ch 6):   | 2.437 GHz                              |
| Frequency ( ch 11):  | 2.462 GHz                              |
| 11n 40MHz            |  |
| Frequency ( ch 1):   | 2.422 GHz                              |
| Frequency ( ch 4):   | 2.437 GHz                              |
| Frequency ( ch 7):   | 2.452 GHz                              |



Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| Number of Channels:             | 11a, 11n 20MHz : 5 channels                |
|---------------------------------|--|
|                                 | 11n 40MHz: 2 channels                      |
|                                 | 11ac : 1 channels                          |
|                                 | 11b, 11g, 11n 20MHz: 11 channels           |
|                                 | 11n 40MHz: 7 channels                      |
| Operation modes:                | duplex                                     |
| Modulation Type:                | DSSS / OFDM                                |
| Fixed point-to-point operation: | $\Box$ Yes / $\boxtimes$ No                |
| Type of Antenna:                | Dual Band Omni-Antenna (for 2.4GHz & 5GHz) |
| Antenna gain:                   | 2 dBi (for 2.4GHz)                         |
|                                 | 4 dBi (for 5GHz)                           |
| Directional gain:               | 5.01 dBi (for 2.4GHz)                      |
| Directional gain:               | 7.01 dBi (for 5GHz)                        |

According to KDB 662911, Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1$ ,  $G_2$ , ...,  $G_N$  dBi. If transmit signals are correlated, then Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2 /N]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

 Power supply:
 120Vac (Power from PC)

 Emission designator:
 **5.8GHz** 

 802.11a: OFDM: 17M4D1D
 802.11n 20MHz: OFDM: 17M6D1D

 802.11n 40MHz: OFDM: 34M0D1D
 802.11ac: OFDM: 78M1D4D

 **2.4GHz** 802.11b: DSSS: 16M8G1D

 802.11n 20MHz: OFDM: 17M2D1D
 802.11g: OFDM: 17M2D1D

 802.11n 20MHz: OFDM: 38M4D1D
 802.11n 20MHz: OFDM: 38M4D1D

Host device:

none

#### Classification

| Fixed Device                                    |  |
|---|--|
| Mobile Device (Human Body distance $> 20$ cm)   |  |
| Portable Device (Human Body distance $< 20$ cm) |  |
| Modular Radio Device                            |  |

:



Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

# Transmitter Antenna A

#### Unom

# Mode A (802.11a)

Power (ch 149 or A): Power (ch 157 or B): Power (ch 165 or C):

Conducted: 20.98 dBm Conducted: 20.42 dBm Conducted: 21.02 dBm

#### Mode B (802.11n 20MHz)

Power (ch 149 or A): Power (ch 157 or B): Power (ch 165 or C):

Conducted: 20.48 dBm Conducted: 20.06 dBm Conducted: 20.97 dBm

Conducted: 19.26 dBm

Conducted: 18.90 dBm

Conducted: 20.27 dBm

Conducted: 22.74 dBm

Conducted: 21.99 dBm

Conducted: 20.85 dBm

Conducted: 22.29 dBm

Conducted: 21.68 dBm

Conducted: 20.37 dBm

#### Mode C (802.11n 40MHz)

Power (ch 151 or A): Power (ch 159 or B):

Mode D (802.11ac)

Power (ch 155 or A):

#### Mode E (802.11b)

Power (ch 1 or A): Power (ch 6 or B): Power (ch 11 or C):

#### Mode F (802.11g)

Power (ch 1 or A): Power (ch 6 or B): Power (ch 11 or C):

#### Mode G (802.11n 20MHz)

Power (ch 1 or A): Power (ch 6 or B): Power (ch 11 or C): Conducted: 22.04 dBm Conducted: 21.38 dBm Conducted: 20.05 dBm

#### Mode H (802.11n 40MHz)

Power (ch 1 or A): Power (ch 4 or B): Power (ch 7 or C):

Conducted: 21.07 dBm Conducted: 20.64 dBm Conducted: 19.89 dBm



Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

#### Antenna B

Mode A (802.11a)

| Power (ch  | 149 or A): |
|------------|------------|
| Power ( ch | 157 or B): |
| Power ( ch | 165 or C): |

| Conducted: 19.92 dBm |
|----------------------|
| Conducted: 20.42 dBm |
| Conducted: 20.48 dBm |

#### Mode B (802.11n 20MHz)

Power ( ch 149 or A): Power ( ch 157 or B): Power ( ch 165 or C): Conducted: 19.57 dBm Conducted: 20.29 dBm Conducted: 21.24 dBm

#### Mode C (802.11n 40MHz)

Power ( ch 151 or A): Power ( ch 159 or B): Conducted: 19.52 dBm Conducted: 19.97 dBm

#### Mode D (802.11ac)

Power ( ch 155 or A):

Conducted: 20.23 dBm

Conducted: 23.28 dBm

Conducted: 22.85 dBm

Conducted: 22.03 dBm

#### Mode E (802.11b)

Power ( ch 1 or A): Power ( ch 6 or B): Power ( ch 11 or C):

#### Mode F (802.11g)

Power ( ch 1 or A):Conducted: 22.10 dBmPower ( ch 6 or B):Conducted: 21.73 dBmPower ( ch 11 or C):Conducted: 20.90 dBm

#### Mode G (802.11n 20MHz)

Power ( ch 1 or A): Power ( ch 6 or B): Power ( ch 11 or C): Conducted: 19.94 dBm Conducted: 19.44 dBm Conducted: 18.59 dBm

#### Mode H (802.11n 40MHz)

Power ( ch 1 or A): Power ( ch 4 or B): Power ( ch 7 or C): Conducted: 18.93 dBm Conducted: 18.56 dBm Conducted: 18.14 dBm

| Combine               | mW     |        |         | dBm    |        |         |
|-----------------------|--------|--------|---------|--------|--------|---------|
|                       | Ch Low | Ch Mid | Ch High | Ch Low | Ch Mid | Ch High |
| 802.11n 20MHz(5.8GHz) | 202.26 | 208.30 | 258.08  | 23.06  | 23.19  | 24.12   |
| 802.11n 40MHz         | 173.87 |        | 176.93  | 22.40  |        | 22.48   |
| 802.11ac              | 211.85 |        |         | 23.26  |        |         |
| 802.11n 20MHz(2.4GHz) | 258.59 | 225.30 | 173.44  | 24.13  | 23.53  | 22.39   |
| 802.11n 40MHz         | 206.10 | 187.66 | 162.66  | 23.14  | 22.73  | 22.11   |



Manufacturer: (if applicable) Name: Street: Town: Country:

Loopcomm Technology, Ltd. 6F,No.236,Bo'ai St.,Shulin Dist., New Taipei City 23845, Taiwan,R.O.C.

#### 1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2011-10)



#### 2 Technical test

## 2.1 Summary of test results

| No deviations from the technical specification(s) were ascertained in the course of the tests performed. |  |  |
|--|--|--|
| or   |  |  |
| The deviations as specified in 2.5 were ascertained in the course of the tests performed.                |  |  |

#### 2.2 Test environment

| Temperature:               | 23 °C                  |
|----------------------------|------------------------|
| Relative humidity content: | 20 75 %                |
| Air pressure:              | 86 103 kPa             |
| Power supply:              | 120Vac (Power from PC) |
|                            |                        |

Extreme conditions parameters: ./.



Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

#### 2.3 Test Equipment List

| No. Test equipment |  | Туре            | Serial No.    | Manufacturer          | Cal. Date     | Next Cal.<br>Date |  |
|--------------------|--|-----------------|---------------|-----------------------|---------------|-------------------|--|
| ETSTW-CE 001       | EMI TEST RECEIVER                                  | ESHS10          | 842121/013    | R&S                   | 2013/9/2      | 2014/9/1          |  |
| ETSTW-CE 003       | AC POWER SOURCE                                    | APS-9102        | D161137       | GW                    | Function Test |                   |  |
| ETSTW-CE 008       | HF-EICHLEITUNG RF<br>STEP ATTENUATOR<br>139dB DPSP | 334.6010.02     | 844581/024    | R&S                   | Function      | on Test           |  |
| ETSTW-CE 009       | TEMP.&HUMIDITY<br>CHAMBER                          | GTH-225-40-1P-U | MAA0305-009   | GIANT FORCE           | 2013/7/10     | 2014/7/9          |  |
| ETSTW-CE 016       | TWO-LINE V-NETWORK                                 | ENV216          | 100050        | R&S                   | 2013/10/28    | 2014/10/27        |  |
| ETSTW-RE 004       | EMI TEST RECEIVER                                  | ESI 40          | 832427/004    | R&S                   | 2013/9/2      | 2014/9/1          |  |
| ETSTW-RE 005       | EMI TEST RECEIVER                                  | ESVS10          | 843207/020    | R&S                   | 2013/9/2      | 2014/9/1          |  |
| ETSTW-RE 012       | TUNABLE BANDREJECT<br>FILTER                       | D.C 0309        | 146           | K&L                   | Function      | on Test           |  |
| ETSTW-RE 013       | TUNABLE BANDREJECT<br>FILTER                       | D.C 0336        | 397           | K&L                   | Function      | on Test           |  |
| ETSTW-RE 018       | MICROWAVE HORN<br>ANTENNA                          | AT4560          | 27212         | AR                    | 2013/10/15    | 2014/10/14        |  |
| ETSTW-RE 027       | Passive Loop Antenna                               | 6512            | 00034563      | ETS-Lindgren          | 2013/7/3      | 2014/7/2          |  |
| ETSTW-RE 030       | Double-Ridged Guide Horn<br>Antenna                | 3117            | 00035224      | EMCO                  | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 045       | ESA-E SERIES<br>SPECTRUM ANALYZER                  | E4404B          | MY45111242    | Agilent               | Pre-te        | st Use            |  |
| ETSTW-RE 049       | TRILOG Super Broadband<br>test Antenna             | VULB 9160       | 9160-3185     | Schwarzbeck           | 2014/2/18     | 2015/2/17         |  |
| ETSTW-RE 050       | Attenuator 10dB                                    | 50HF-010-1      | None          | JFW                   | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 051       | Attenuator 6dB                                     | 50HF-006-1      | None          | JFW                   | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 053       | Attenuator 3dB                                     | 50HF-003-1      | None          | JFW                   | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 055       | SPECTRUM ANALYZER                                  | FSU 26          | 200074        | R&S                   | 2013/5/31     | 2014/5/30         |  |
| ETSTW-RE 060       | Attenuator 30dB                                    | 5015-30         | F651012z-01   | ATM                   | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 062       | Amplifier Module                                   | CHC 2           | None          | KMIC                  | 2013/11/27    | 2014/11/26        |  |
| ETSTW-RE 064       | Bluetooth Test Set                                 | MT8852B-042     | 6K00005709    | Anritsu               | Function      | on Test           |  |
| ETSTW-RE 069       | Double-Ridged Guide Horn<br>Antenna                | 3117            | 00069377      | EMCO                  | Function      | on Test           |  |
| ETSTW-RE 072       | CELL SITE TEST SET                                 | 8921A           | 3339A00375    | HP                    | 2013/10/7     | 2014/10/6         |  |
| ETSTW-RE 088       | SOLID STATE<br>AMPLIFIER                           | KMA180265A01    | 99057         | KMIC                  | 2013/10/11    | 2014/10/10        |  |
| ETSTW-RE 099       | DC Block   | 50DB-007-1      | None          | JFW                   | 2013/3/4      | 2014/3/3          |  |
| ETSTW-RE 106       | Humidity Temperature<br>Meter                      | TES-1366        | 091011113     | TES                   | 2013/12/04    | 2014/12/03        |  |
| ETSTW-RE 111       | TRILOG Super Broadband<br>test Antenna             | VULB 9160       | 9160-3309     | Schwarz beck          | 2013/12/27    | 2014/12/26        |  |
| ETSTW-RE 112       | AC POWER SOURCE                                    | TFC-1005        | None          | T-Power               | Functi        | on test           |  |
| ETSTW-RE 115       | 2.4GHz Notch Filter                                | N0124411        | 473874        | MICROWAVE<br>CIRCUITS | 2014/1/10     | 2015/1/09         |  |
| ETSTW-RE 120       | RF Player  | MP9200          | MP9210-111022 | ADIVIC                | Function test |                   |  |
| ETSTW-RE 122       | SIGNAL GENERATOR                                   | SMF100A         | 102149        | R&S                   | 2013/6/28     | 2014/6/27         |  |
| ETSTW-RE 125       | ETSTW-RE 125 5GHz Notch filter                     |                 | 1             | K&L Microwave         | 2013/8/16     | 2014/8/15         |  |



#### Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| ETSTW-RE 126    | 5GHz Notch filter                       | 5NSL11-<br>5800/E221.3-O/O                     | 1            | K&L Microwave     | 2013/8/16        | 2014/8/15  |
|-----------------|---|--|--------------|-------------------|------------------|------------|
| ETSTW-RE 127    | RF Switch Box                           | RFS-01   | None         | WTS               | 2013/3/4         | 2014/3/3   |
| ETSTW-RE 128    | 5.3GHz Notch filter                     | N0153001                                       | SN487233     | Microwave Circits | 2013/8/13        | 2014/8/12  |
| ETSTW-RE 129    | 5.5GHz Notch filter                     | N0555984                                       | SN487234     | Microwave Circits | 2013/8/13        | 2014/8/12  |
| ETSTW-RE 130    | Handheld RF Spectrum<br>Analyzer        | N9340A   | CN0147000204 | Agilent           | Pre-te           | st Use     |
| ETSTW-GSM 002   | Universal Radio<br>Communication Tester | CMU 200  | 109439       | R&S               | 2013/10/7        | 2014/10/6  |
| ETSTW-GSM 019   | Band Reject Filter                      | WRCTF824/849-<br>822/851-40 /12+9SS            | 3            | WI                | 2014/1/10        | 2015/1/09  |
| ETSTW-GSM 020   | Band Reject Filter                      | WRCD1747/1748-<br>1743/1752-32/58S             | 1            | WI                | 2014/1/10        | 2015/1/09  |
| ETSTW-GSM 021   | Band Reject Filter                      | WRCD1879.5/1880.5<br>-1875.5/1884.5-<br>32/5SS | 3            | WI                | 2014/1/10        | 2015/1/09  |
| ETSTW-GSM 022   | Band Reject Filter                      | WRCT901.9/903.1-<br>904.25-50/8SS              | 1            | WI                | 2014/1/10        | 2015/1/09  |
| ETSTW-GSM 023   | Power Divider                           | 4901.19.A                                      | None         | SUHNER            | 2013/9/18        | 2014/9/17  |
| ETSTW-Cable 010 | BNC Cable                               | 5 M BNC Cable                                  | None         | JYE BAO CO.,LTD.  | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 011 | BNC Cable                               | BNC Cable 1                                    | None         | JYE BAO CO.,LTD.  | Pre-test         | Use NCR    |
| ETSTW-Cable 012 | N TYPE To SMA Cable                     | Cable 012                                      | None         | JYE BAO CO.,LTD.  | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 016 | BNC Cable                               | Switch Box                                     | B Cable 1    | Schwarz beck      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 017 | BNC Cable                               | X Cable  | B Cable 2    | Schwarz beck      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 018 | BNC Cable                               | Y Cable  | B Cable 3    | Schwarz beck      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 019 | BNC Cable                               | Z Cable  | B Cable 4    | Schwarz beck      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 022 | N TYPE Cable                            | 5006   | 0002         | JYE BAO CO.,LTD.  | 2014/2/19        | 2015/2/18  |
| ETSTW-Cable 026 | Microwave Cable                         | SUCOFLEX 104                                   | 279075       | HUBER+SUHNER      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 027 | Microwave Cable                         | SUCOFLEX 104                                   | 279083       | HUBER+SUHNER      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 028 | Microwave Cable                         | FA147A0015M2020                                | 30064-2      | UTIFLEX           | 2013/10/11       | 2014/10/10 |
| ETSTW-Cable 029 | Microwave Cable                         | FA147A0015M2020                                | 30064-3      | UTIFLEX           | 2013/10/11       | 2014/10/10 |
| ETSTW-Cable 030 | Microwave Cable                         | SUCOFLEX 104<br>(S_Cable 9)                    | 279067       | HUBER+SUHNER      | 2013/3/4         | 2014/3/3   |
| ETSTW-Cable 031 | Microwave Cable                         | SUCOFLEX 104<br>(S_Cable 10)                   | 238092       | HUBER+SUHNER      | 2013/11/27       | 2014/11/26 |
| ETSTW-Cable 043 | Microwave Cable                         | SUCOFLEX 104                                   | 317576       | HUBER+SUHNER      | 2013/11/27       | 2014/11/26 |
| ETSTW-Cable 047 | Microwave Cable                         | SUCOFLEX 104                                   | 325518       | HUBER+SUHNER      | 2013/11/27       | 2014/11/26 |
| ETSTW-Cable 053 | N TYPE To SMA Cable                     | RG142  | None         | JYE BAO CO.,LTD.  | 2014/2/19        | 2015/2/18  |
| ETSTW-Cable 058 | Microwave Cable                         | SUCOFLEX 104                                   | none         | HUBER+SUHNER      | 2014/2/19        | 2015/2/18  |
| WTSTW-SW 002    | EMI TEST SOFTWARE                       | EZ_EMC   | None         | Farad             | Version ETS-03A1 |            |



#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50µH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:Freq (MHz)METER READING + ACF + CABLE LOSS (to the receiver) = FS33 $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} @3m$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows: Average = Peak + Duty Factor Duty Factor = 20 log (dwell time/T) T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



#### 3 Test results (enclosure)

| TEST CASE                                 | Para. Number | Required | Test<br>passed | Test<br>failed |
|---|--------------|----------|----------------|----------------|
| Peak Output Power                         | 15.247(b)    | ×        | ×              |                |
| Equivalent isotropically radiated Power   | 15.247(b)    | ×        | ×              |                |
| Spurious Emissions radiated – Transmitter | 15.247(c):   | ×        | ×              |                |
| operating                                 | 15.209       |          |                |                |
| Band Edge Measurement                     | 15.247(d)    | ×        | X              |                |
| Minimum 6 dB Bandwidth                    | 15.247(a)(2) | ×        | X              |                |
| Peak Power Spectral Density               | 15.247(e)    | ×        | X              |                |
| Radiated Emission from Digital Part       | 15.109       |          |                |                |
| Power Line Conducted Emission             | 15.207       | ×        | ×              |                |

#### Note:

- 1. This EUT incorporates a MIMO function with IEEE 802.11a, 802.11ac, 802.11b, 802.11g, and 802.11n. Physically, this EUT includes two transmitters and two receivers with two incoherent streams. This device uses multiplexing and also employ cyclic delay diversity to improve range and throughput, and this device simultaneously operates on two adjacent channels.
- 2. This EUT is 2\*2 spatial MIMO (2Tx&2Rx) without beam forming function. That operates dual chain configuration. The Pre-test was performed to determine the worst case mode from all possible combinations between all available modulations, data rates, bandwidths, and spatial stream modes.




#### 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.


The power was measured with modulation (declared by the applicant).

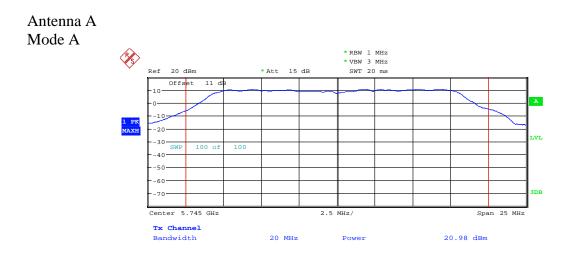

MAX OUTPUT POWER 802.11A CH149 Date: 19.FEB.2014 12:20:55



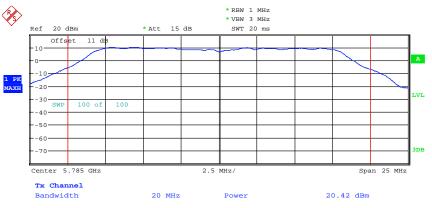

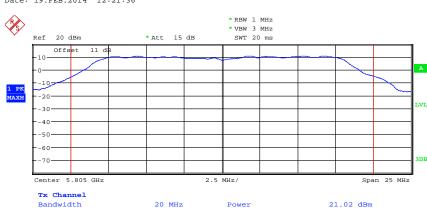


MAX OUTPUT POWER 802.11A CH157 Date: 19.FEB.2014 12:21:36


MAX OUTPUT POWER 802.11A CH161 Date: 21.FEB.2014 10:11:11



Mode B

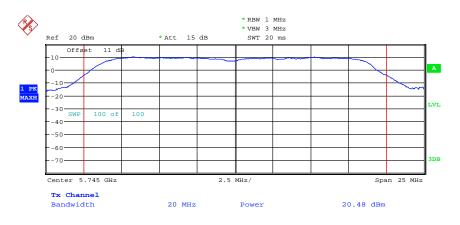


MAX OUTPUT POWER 802.11N 20MHZ CH149 Date: 21.FEB.2014 09:01:47

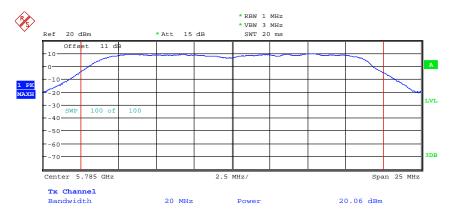


MAX OUTPUT POWER 802.11N 20MHZ CH157 Date: 21.FEB.2014 09:02:40



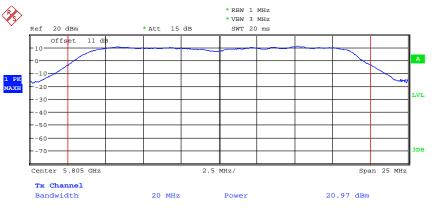


MAX OUTPUT POWER 802.11N 20MHZ CH161 Date: 21.FEB.2014 10:11:53

#### Mode C

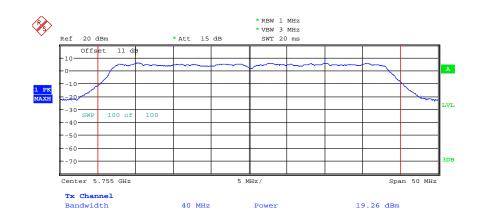


MAX OUTPUT POWER 802.11N 40MHZ CH151 Date: 21.FEB.2014 09:03:46



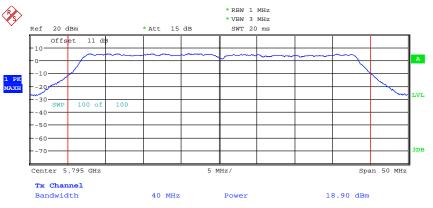

MAX OUTPUT POWER 802.11N 40MHZ CH159 Date: 21.FEB.2014 09:04:45


#### Mode D

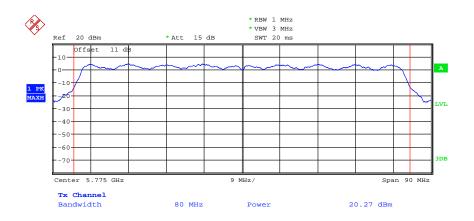

MAX OUTPUT POWER 802.11AC CH155 Date: 21.FEB.2014 10:13:30




Mode E

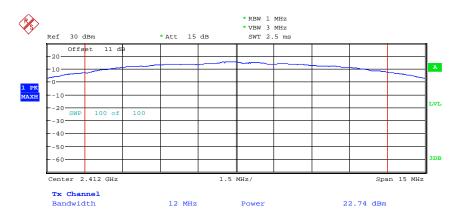




MAX OUTPUT POWER 802.11B CH06 Date: 19.FEB.2014 10:18:05



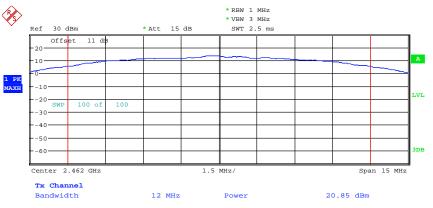


MAX OUTPUT POWER 802.11B CH11 Date: 19.FEB.2014 10:18:40


Mode F

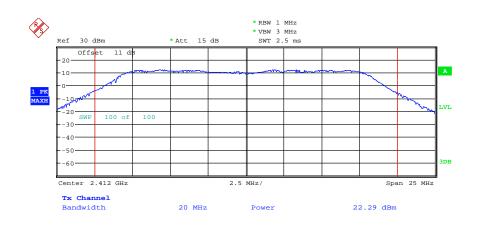

MAX OUTPUT POWER 802.11G CH01 Date: 19.FEB.2014 10:21:45



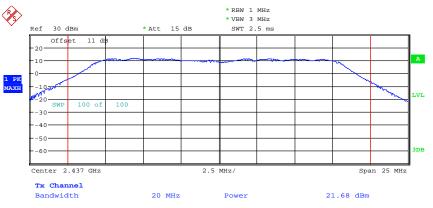


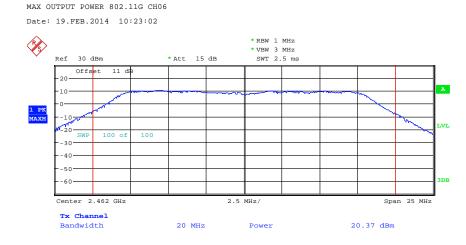


MAX OUTPUT POWER 802.11G CH11 Date: 19.FEB.2014 10:23:55



Mode G

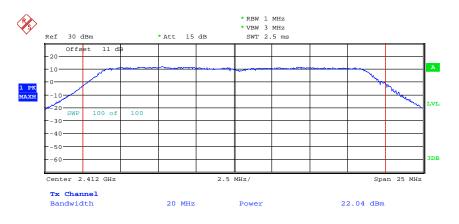


MAX OUTPUT POWER 802.11N 20MHZ CH01 Date: 19.FEB.2014 10:25:16

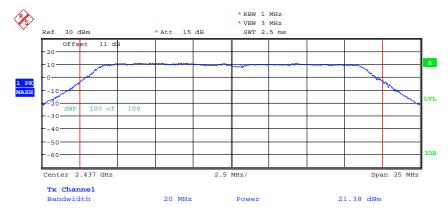


MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 19.FEB.2014 10:26:10



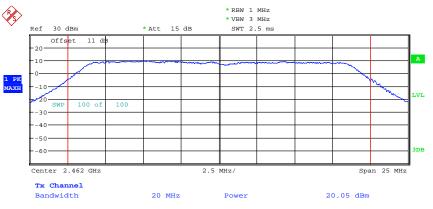


MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 19.FEB.2014 10:26:59


#### Mode H

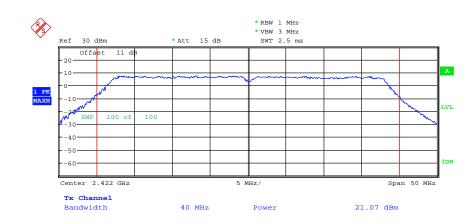

MAX OUTPUT POWER 802.11N 40MHZ CH01 Date: 19.FEB.2014 10:27:57



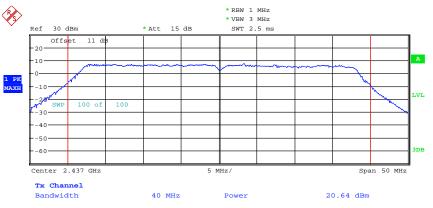

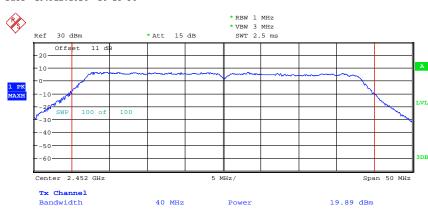


MAX OUTPUT POWER 802.11N 40MHZ CH04 Date: 19.FEB.2014 10:28:54

MAX OUTPUT POWER 802.11N 40MHZ CH07 Date: 19.FEB.2014 10:29:30




Antenna B Mode A

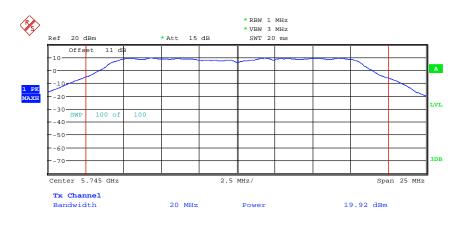

|      | MAX OUTPUT POWER 802.11A CH149<br>Date: 19.FEB.2014 11:41:44<br>* RBW 1 MHz<br>* VEW 3 MHz<br>Ref 20 dBm * Att 15 dB SWT 20 ms |          |     |        |     |       |  |   |          |           |     |
|------|--|----------|-----|--------|-----|-------|--|---|----------|-----------|-----|
|      | Offs   | et 11 di | в   |        |     | _     |  |   |          |           | 1   |
|      | -10  |          |     |        |     |       |  |   |          |           | A   |
|      | -10  |          |     |        |     |       |  |   | /        | /         |     |
| 1 PK | -20  |          |     |        |     |       |  |   |          |           |     |
| MAXH | -30  |          |     |        |     |       |  |   |          |           | LVL |
|      | -40 SWP  | 100 of   | 100 |        |     |       |  |   |          |           |     |
|      | -50  |          |     |        |     |       |  |   |          |           |     |
|      |  |          |     |        |     |       |  |   |          |           |     |
|      | -70  |          |     |        |     |       |  |   |          |           | 3DB |
|      |  |          |     |        |     |       |  |   |          |           | ļ   |
|      | Center 5.785 GHz   |          |     |        | 2.5 | MHz/  |  |   | Spa      | in 25 MHz |     |
|      | <b>Tx Channel</b><br>Bandwidth   |          |     | 20 MHz |     | Power |  | 2 | 0.42 dBm |           |     |


MAX OUTPUT POWER 802.11A CH157 Date: 19.FEB.2014 11:42:36



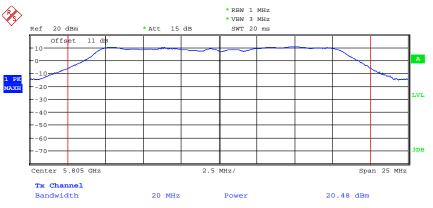


MAX OUTPUT POWER 802.11A CH161 Date: 21.FEB.2014 07:00:43


Mode B

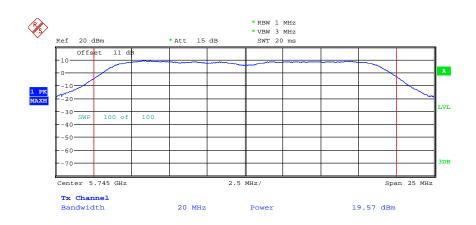

MAX OUTPUT POWER 802.11N 20MHZ CH149 Date: 21.FEB.2014 06:12:56



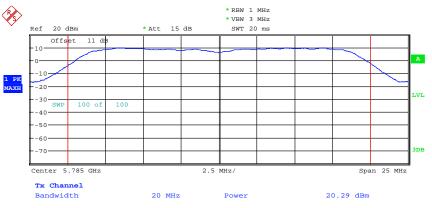

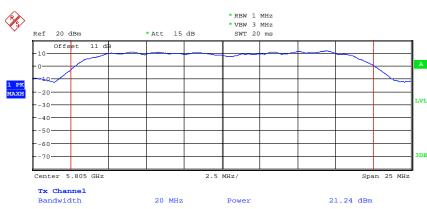


MAX OUTPUT POWER 802.11N 20MHZ CH157 Date: 21.FEB.2014 06:13:47


MAX OUTPUT POWER 802.11N 20MHZ CH161 Date: 21.FEB.2014 06:59:58



Mode C

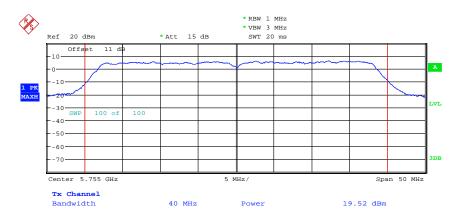


MAX OUTPUT POWER 802.11N 40MHZ CH151 Date: 21.FEB.2014 06:14:43

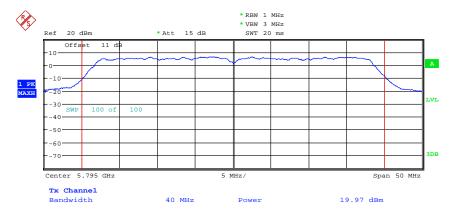

MAX OUTPUT POWER 802.11N 40MHZ CH159 Date: 21.FEB.2014 06:15:43




Mode D

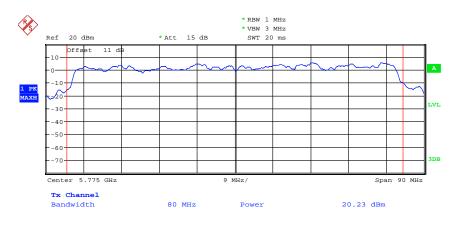


MAX OUTPUT POWER 802.11AC CH155 Date: 21.FEB.2014 08:47:59


#### Mode E

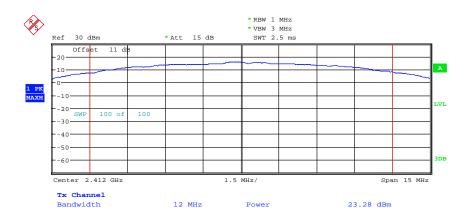

MAX OUTPUT POWER 802.11B CH01 Date: 19.FEB.2014 11:01:11



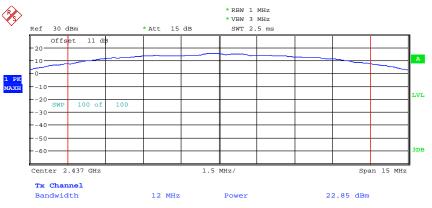


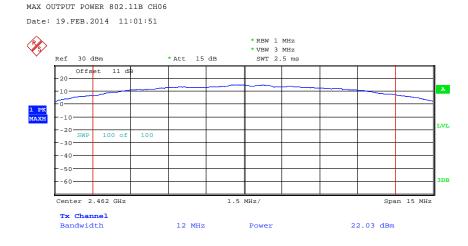


MAX OUTPUT POWER 802.11B CH11 Date: 19.FEB.2014 11:02:36




Mode F

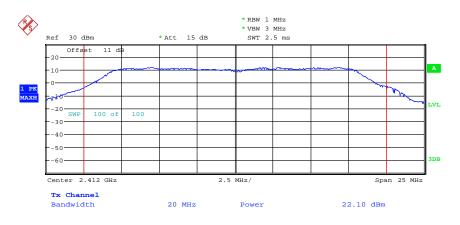

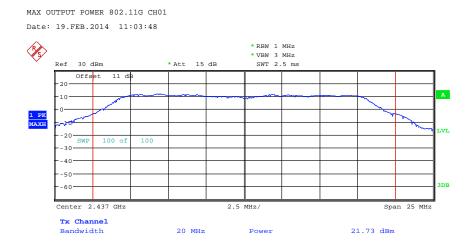


MAX OUTPUT POWER 802.11G CH06 Date: 19.FEB.2014 11:04:26



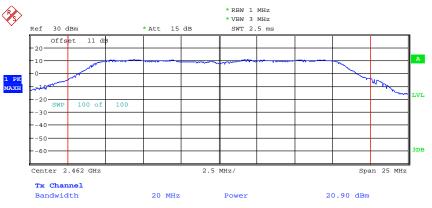


MAX OUTPUT POWER 802.11G CH11 Date: 19.FEB.2014 11:05:27




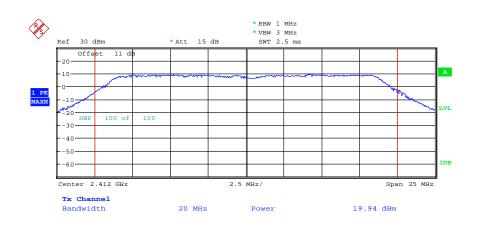

MAX OUTPUT POWER 802.11N 20MHZ CH01 Date: 19.FEB.2014 11:06:09



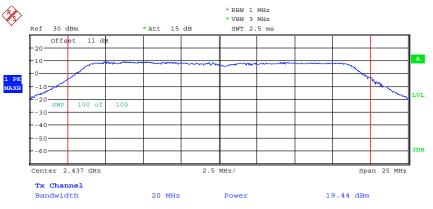

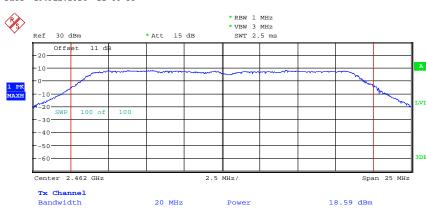


MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 19.FEB.2014 11:06:58


MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 19.FEB.2014 11:07:33



Mode H

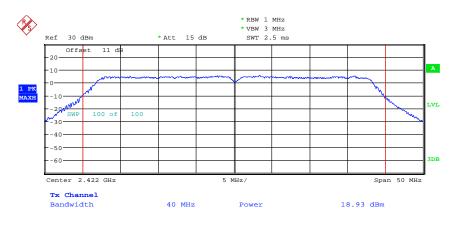


MAX OUTPUT POWER 802.11N 40MHZ CH01 Date: 19.FEB.2014 11:08:24

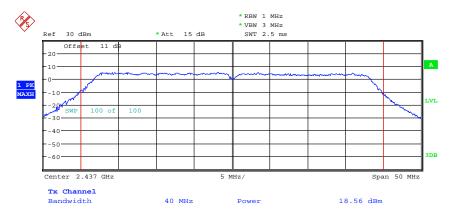

MAX OUTPUT POWER 802.11N 40MHZ CH04 Date: 19.FEB.2014 11:09:02



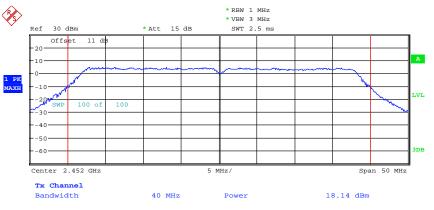

MAX OUTPUT POWER 802.11N 40MHZ CH07 Date: 19.FEB.2014 11:09:39

| Antenna A             |        | mW     |                       | dBm    |        |         |  |  |
|-----------------------|--------|--------|-----------------------|--------|--------|---------|--|--|
| Antenna A             | Ch Low | Ch Mid | Ch High               | Ch Low | Ch Mid | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 111.69 | 101.39 | 125.03                | 20.48  | 20.06  | 20.97   |  |  |
| 802.11n 40MHz         | 84.33  |        | 77.62                 | 19.26  |        | 18.9    |  |  |
| 802.11ac              | 106.41 |        |                       | 20.27  |        |         |  |  |
| 802.11n 20MHz(2.4GHz) | 159.96 | 137.40 | 101.16                | 22.04  | 21.38  | 20.05   |  |  |
| 802.11n 40MHz         | 127.94 | 115.88 | 97.50                 | 21.07  | 20.64  | 19.89   |  |  |
| Antenna B             |        | mW     |                       |        | dBm    |         |  |  |
| Antenna D             | Ch Low | Ch Mid | Ch High               | Ch Low | Ch Mid | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 90.57  | 106.91 | 106.91 133.05 19.57 2 |        | 20.29  | 21.24   |  |  |
| 802.11n 40MHz         | 89.54  |        | 99.31                 | 19.52  |        | 19.97   |  |  |
| 802.11ac              | 105.44 |        |                       | 20.23  |        |         |  |  |
| 802.11n 20MHz(2.4GHz) | 98.63  | 87.90  | 72.28                 | 19.94  | 19.44  | 18.59   |  |  |
| 802.11n 40MHz         | 78.16  | 71.78  | 65.16                 | 18.93  | 18.56  | 18.14   |  |  |
| Combine               |        | mW     |                       | dBm    |        |         |  |  |
| Comonie               | Ch Low | Ch Mid | Ch High               | Ch Low | Ch Mid | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 202.26 | 208.30 | 258.08                | 23.06  | 23.19  | 24.12   |  |  |
| 802.11n 40MHz         | 173.87 |        | 176.93                | 22.40  |        | 22.48   |  |  |
| 802.11ac              | 211.85 |        |                       | 23.26  |        |         |  |  |
| 802.11n 20MHz(2.4GHz) | 258.59 | 225.30 | 173.44                | 24.13  | 23.53  | 22.39   |  |  |
| 802.11n 40MHz         | 206.10 | 187.66 | 162.66                | 23.14  | 22.73  | 22.11   |  |  |

Worldwide Testing Services(Taiwan) Co., Ltd.



Limits:

| Frequency     | Power |
|---------------|-------|
| MHz           | dBm   |
| 902 - 928     | 30    |
| 2400 - 2483.5 | 30    |
| 5725 - 5850   | 30    |

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider 15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



### 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3) EIRP = max. conducted output power + antenna gain

5.8GHz:802.11aEIRP = 21.02 dBm + 7.01 dBi = 28.03 dBm 5.8GHz:802.11n(20MHz), 802.11n(40MHz)EIRP = 24.12 dBm + 7.01 dBi = 31.13 dBm 5.8GHz:802.11acEIRP = 23.26 dBm + 7.01 dBi = 30.27 dBm 2.4GHz:802.11b/gEIRP = 23.28 dBm + 5.01 dBi = 28.29 dBm 2.4GHz: 802.11n(20MHz), 802.11n(40MHz)EIRP = 24.13 dBm + 5.01 dBi = 29.14 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

Test equipment used: ETSTW-RE 055

### 3.3 **RF Exposure Compliance Requirements**

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

S – Power Density P – Output power ERP R – Distance D – Cable Loss AG – Antenna Gain

5.8GHz:802.11a

| Item | Unit   | Value    | Remarks          |
|------|--------|----------|------------------|
| Р    | mW     | 126.4736 | Peak value       |
| D    | dB     |          |                  |
| AG   | dBi    | 7.01     |                  |
| G    |        | 5.0234   | Calculated Value |
| R    | cm     | 20       | Assumed value    |
| Ŝ    | mW/cm2 | 0.1264   | Calculated value |



Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

#### 5.8GHz:802.11n(20MHz), 802.11n(40MHz)

| Item | Unit   | Value    | Remarks          |
|------|--------|----------|------------------|
| Р    | mW     | 258.2260 | Peak value       |
| D    | dB     |          |                  |
| AG   | dBi    | 7.01     |                  |
| G    |        | 5.0234   | Calculated Value |
| R    | cm     | 20       | Assumed value    |
| S    | mW/cm2 | 0.2581   | Calculated value |

#### 5.8GHz:802.11ac

| Item      | Unit   | Value    | Remarks          |
|-----------|--------|----------|------------------|
| Р         | mW     | 211.8361 | Peak value       |
| D         | dB     |          |                  |
| AG        | dBi    | 7.01     |                  |
| G         |        | 5.0234   | Calculated Value |
| R         | cm     | 20       | Assumed value    |
| S         | mW/cm2 | 0.2117   | Calculated value |
| 802 11b/g |        |          |                  |

| 802.11b/g           |                  |          |                  |
|---------------------|------------------|----------|------------------|
| Item                | Unit             | Value    | Remarks          |
| Р                   | mW               | 212.8139 | Peak value       |
| D                   | dB               |          |                  |
| AG                  | dBi              | 5.01     |                  |
| G                   |                  | 3.1696   | Calculated Value |
| R                   | cm               | 20       | Assumed value    |
| S                   | mW/cm2           | 0.1342   | Calculated value |
| 2.4G:802.11n(20MHz) | , 802.11n(40MHz) |          |                  |
| Item                | Unit             | Value    | Remarks          |
| Р                   | mW               | 258.8213 | Peak value       |
| D                   | dB               |          |                  |
| AG                  | dBi              | 5.01     |                  |
| G                   |                  | 3.1696   | Calculated Value |
| R                   | cm               | 20       | Assumed value    |
| S                   | mW/cm2           | 0.1632   | Calculated value |

Limits:

| Limit for General Population / Uncontrolled ExposureFrequency<br>(MHz)Power Density<br>(mW/cm²) |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| Frequency<br>(MHz)  | Power Density<br>(mW/cm <sup>2</sup> ) |  |  |  |  |  |  |
| 1500 - 100.000  | 1.0                                    |  |  |  |  |  |  |



### 3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35 Radiated emission measurements were performed from 30 MHz to 26500 MHz. For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq 1$  GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

| Frequency of Emission | Field strength     | Field Strength        |
|-----------------------|--------------------|-----------------------|
| (MHz)                 | (microvolts/meter) | (dB microvolts/meter) |
| 30 - 88               | 100                | 40.0                  |
| 88 - 216              | 150                | 43.5                  |
| 216 - 960             | 200                | 46.0                  |
| Above                 | 500                | 54.0                  |

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.



### 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

#### FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements). Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Note: No duty cycle correction was added to the reading of EUT.



SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

#### Summary table with radiated data of the test plots ntonno

| Antenna A                  |                               |            |                         |                |                   |                  |                                    |             |               |                           |                      |                       |                      |
|----------------------------|-------------------------------|------------|-------------------------|----------------|-------------------|------------------|------------------------------------|-------------|---------------|---------------------------|----------------------|-----------------------|----------------------|
| Model:                     |                               | D          | Date: 2014/02/          |                |                   | )2/09~20         | )14/02/ <sup>-</sup>               | 15          |               |                           |                      |                       |                      |
| Mode:                      | 802                           | .11a 5745M | IHz                     | z Temperature: |                   |                  | 24 °C                              |             |               |                           | ngineer:             | Leon                  |                      |
| Polarization:              | Horizontal                    |            |                         | Н              | umidit            | y:               |                                    | 60          | %             |                           |                      |                       |                      |
| Frequency<br>(MHz)         | Reading<br>(dBuV)             | Detector   | Facto<br>(dB)           |                |                   |                  | Limit<br>(dBuV/m)                  |             |               |                           |                      | able Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 232.1643                   | 13.86                         | peak       | 13.98                   | }              | 2                 | 7.84             | 46                                 | .00         | -18.1         | 6                         | 75                   | 100                   |                      |
| 300.2004                   | 12.93                         | peak       | 16.00                   | )              | 2                 | 8.93             | 46                                 | .00         | -17.0         | 7                         | 160                  | 100                   |                      |
| 335.1904                   | 13.02                         | peak       | 16.91                   |                | 2                 | 9.93             | 46                                 | .00         | -16.0         | 7                         | 155                  | 100                   |                      |
| 368.2365                   | 10.80                         | peak       | 17.73                   | }              | 2                 | 8.53             | 46                                 | .00         | -17.4         | 7                         | 80                   | 100                   |                      |
|                            |                               |            |                         |                |                   |                  | _                                  |             |               |                           |                      |                       |                      |
| Frequency<br>(MHz)         | Rea<br>(dB<br>Peak            |            | Factor<br>(dB)<br>Corr. |                |                   | (dB              | Limit @3m<br>(dBuV/m)<br>Peak Ave. |             | argin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |                       |                      |
| 11490.0000                 | 36.48                         |            | 12.09                   | 4              | 8.57              |                  | 74.00 54.00                        |             | 0 -2          | 25.43                     | 125                  | 100                   |                      |
| 17235.0000                 | 27.80                         |            | 20.39                   | 4              | 8.19              |                  | 74.00 54.00                        |             |               | 25.81                     | 230                  | 100                   |                      |
| Polarization:<br>Frequency | Vertical<br>Reading<br>(dBuV) | Detecto    | r Fact                  |                |                   | Result<br>BuV/m) | Lin<br>(dBu <sup>v</sup>           | -           | Marg          |                           | Table<br>Degree      | Ant.<br>High          |                      |
| (MHz)                      | (ubuv)                        |            | ' (dE                   | 5)             | (ut               | Suv/III)         | (иви                               | v/III)      | (dB           | )                         | (Deg.)               | (cm)                  |                      |
| 99.9800                    | 18.64                         | peak       | 10.8                    | 39             |                   | 29.53            | 43.                                | 50          | -13.9         | 7                         | 135                  | 100                   |                      |
| 166.0721                   | 11.06                         | peak       | 15.0                    |                |                   | 26.09            | 43.                                |             | -17.4         |                           | 140                  | 100                   |                      |
| 300.2004                   | 12.71                         | peak       | 16.0                    | 00             | 2                 | 28.71            | 46.                                | 00          | -17.2         | 9                         | 170                  | 100                   |                      |
| 502.3647                   | 10.46                         | peak       | 20.9                    |                |                   | 31.42            | 46.                                |             | -14.5         |                           | 90                   | 100                   |                      |
|                            |                               |            |                         |                |                   | • •              |                                    |             |               | _                         |                      |                       |                      |
| Frequency                  | Read<br>(dBu                  |            | Factor<br>(dB)          |                | Result (<br>(dBuV |                  | Limit<br>(dBu                      | @3m<br>V/m) | Ма            | rgin                      | Table<br>Degree      | Ant. High             |                      |
| (MHz)                      | Peak                          | Áve.       | Corr.                   |                | Peak              | Ave.             | Peak                               | Ave.        | ((            | dB)                       | (Deg.)               | (cm)                  |                      |
| 11490.0000                 | 35.51                         |            | 12.09                   | 47.            | 60                |                  | 74.00                              | 54.00       | -26           | 6.40                      | 175                  | 100                   |                      |
|                            |                               |            |                         |                |                   |                  |                                    |             |               |                           |                      |                       |                      |

74.00

54.00

-26.07

---

20.39

47.93

----

27.54

17235.0000

70

100



| Mode:<br>Polarization: | 802<br>Horizontal    | .11a 5785MF | łz                      |             |                       |                     |                       |                       |                |                           |                        |
|------------------------|----------------------|-------------|-------------------------|-------------|-----------------------|---------------------|-----------------------|-----------------------|----------------|---------------------------|------------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector    | Facto<br>(dB)           |             | Result (dBuV/m)       |                     | Limit<br>(dBuV/m)     |                       | Margin<br>(dB) | Table Degree<br>(Deg.)    | e Ant.<br>High<br>(cm) |
| 234.1082               | 13.75                | peak        | 14.02                   | 2           | 2                     | 27.77               | 46.                   | 00                    | -18.23         | 115                       | 100                    |
| 300.2004               | 13.47                | peak        | 16.00                   | )           | 2                     | 29.47               | 46.                   | 00                    | -16.53         | 70                        | 100                    |
| 335.1904               | 12.26                | peak        | 16.91                   | 1           | 2                     | 29.17               | 46.                   | 00                    | -16.83         | 80                        | 100                    |
| 368.2365               | 10.95                | peak        | 17.73                   | 17.73 28.68 |                       | 46.                 | 00                    | -17.32                | 165            | 100                       |                        |
| Frequency<br>(MHz)     | Read<br>(dBi<br>Peak |             | Factor<br>(dB)          |             |                       | lt @3m<br>uV/m)     |                       | Limit @3m<br>(dBuV/m) |                | gin Table<br>Degree       |                        |
| 11570.0000             | 35.52                | Ave         | Corr.<br>12.47          | 17          | 7.99                  | Ave.                | 74.00                 | k Ave<br>54.0         | ```            | / \ J/                    | (cm)<br>100            |
| 17316.1320             | 29.11                |             | 20.96                   |             | ).07                  |                     | 74.00                 | 54.0                  |                |                           | 100                    |
| Polarization:          | Vertical             |             | -                       |             |                       |                     |                       |                       |                | -                         |                        |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector    | Fact<br>(dE             |             | -                     | Result<br>BuV/m)    |                       | Limit<br>(dBuV/m)     |                | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm)   |
| 99.9800                | 17.16                | peak        | 10.8                    | 89          |                       | 28.05               | 43.50                 |                       | -15.45         | 95                        | 100                    |
| 166.0721               | 10.69                | peak        | 15.0                    | 03          |                       | 25.72               | 43.50                 |                       | -17.78         | 60                        | 100                    |
| 300.2004               | 12.94                | peak        | 16.0                    | 00          |                       | 28.94               | 46.00                 |                       | -17.06         | 140                       | 100                    |
| 502.3647               | 9.24                 | peak        | 20.9                    | 96          |                       | 30.20               | 46.00 -15.80          |                       | -15.80         | 70                        | 100                    |
| Frequency<br>(MHz)     | Read<br>(dBu<br>Peak |             | Factor<br>(dB)<br>Corr. | (           | esult<br>(dBu\<br>eak | @3m<br>//m)<br>Ave. | Limit<br>(dBu<br>Peak |                       | Marg<br>(dB    | Degree                    | Ant. Hig<br>(cm)       |
| 11579.1580             | 38.97                |             | 12.51                   | 51.4        |                       |                     | 74.00                 | 54.00                 | · · ·          | , , , , , ,               | 100                    |
| 17355.0000             | 28.02                |             | 20.33                   | 48.3        |                       |                     | 74.00                 | 54.00                 | -25.6          |                           | 100                    |
| Mode:<br>Polarization: |                      | .11a 5825MF |                         |             |                       |                     |                       |                       |                |                           |                        |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector    | Facto<br>(dB)           |             |                       | t (dBuV/m)          | Lir<br>(dBu           |                       | Margin<br>(dB) | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm)   |
| 232.1643               | 13.86                | peak        | 13.98                   | 3           | 2                     | 27.84               | 46.                   | 00                    | -18.16         | 255                       | 100                    |
| 300.2004               | 13.92                | peak        | 16.00                   |             |                       | 29.92               | 46.                   |                       | -16.08         | 80                        | 100                    |
| 335.1904               | 12.14                | peak        | 16.91                   |             | 2                     | 29.05               | 46.                   | 00                    | -16.95         | 170                       | 100                    |
| 368.2364               | 11.97                | peak        | 17.73                   | 3           | 2                     | 29.70               | 46.                   | 00                    | -16.30         | 95                        | 100                    |
| Frequency              | Read                 | dina        | Factor                  |             | Resu                  | lt @3m              | Limi                  | t @3m                 | Mar            | gin Table                 | Ant.                   |

| Frequency  | Readir<br>(dBuV | 0    | Factor<br>(dB) |       | t @3m<br>ıV/m) | Limit @3m<br>(dBuV/m) |           | Margin | Table<br>Degree | Ant.<br>High |
|------------|-----------------|------|----------------|-------|----------------|-----------------------|-----------|--------|-----------------|--------------|
| (MHz)      | Peak /          | Ave. | Corr.          | Peak  | · · /          |                       | Peak Ave. |        | (Deg.)          | (cm)         |
| 11617.2350 | 37.08           |      | 12.51          | 49.59 |                | 74.00                 | 54.00     | -24.41 | 235             | 100          |
| 17415.0000 | 27.65           |      | 19.73          | 47.38 |                | 74.00                 | 54.00     | -26.62 | 140             | 100          |



| Polarization:          | Vertical           | 1         |                |       | 1                      |                  |               |                       |        |     |                           |                      |
|------------------------|--------------------|-----------|----------------|-------|------------------------|------------------|---------------|-----------------------|--------|-----|---------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV)  | Detector  | . Fact<br>(dE  |       | Result<br>(dBuV/m)     |                  |               | Limit<br>(dBuV/m)     |        |     | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 18.16              | peak      | 10.8           | 39    |                        | 29.05            | 43.           | 43.50                 |        |     | 35                        | 100                  |
| 168.0160               | 12.84              | peak      | 14.9           | 91    |                        | 27.75            | 43.           | 50                    | -15.75 |     | 110                       | 100                  |
| 300.2004               | 12.35              | peak      | 16.0           | 00    |                        | 28.35            | 46.0          | 00                    | -17.65 |     | 175                       | 100                  |
| 498.4770               | 10.55              | peak      | 20.8           | 37    |                        | 31.42            | 46.0          | )0                    | -14.58 |     | 90                        | 100                  |
|                        |                    | , ı<br>   |                |       |                        |                  |               |                       |        |     | I                         | 1                    |
| Frequency              | Readi<br>(dBu)     | V)        | Factor<br>(dB) |       | Result<br>(dBu\        | //m)             | Limit<br>(dBu | V/m)                  | Marg   |     | Table<br>Degree           | Ant. High            |
| (MHz)                  | -                  | Ave.      | Corr.          |       | Peak                   | Ave.             | Peak          | Ave.                  | (dB)   | /   | (Deg.)                    | (cm)                 |
| 11617.2350             | 36.59              |           | 12.51          | 49.   | -                      |                  | 74.00         | 54.00                 | -24.9  |     | 120                       | 100                  |
| 17415.0000             | 28.04              |           | 19.73          | 47.   | 77                     |                  | 74.00         | 54.00                 | -26.2  | 3   | 105                       | 100                  |
| Mode:<br>Polarization: | 802.<br>Horizontal | 11b 2412M | Hz             |       |                        |                  |               |                       |        | -1  |                           | 1                    |
| Frequency<br>(MHz)     | Reading<br>(dBuV)  | Detector  | Facto<br>(dB)  | r     | Result (dBuV/m)        |                  |               | Limit<br>(dBuV/m)     |        | Та  | ble Degree<br>(Deg.)      | Ant.<br>High<br>(cm) |
| 300.2004               | 14.36              | peak      | 16.00          | 16.00 |                        | 30.36            |               | 46.00                 |        |     | 80                        | 100                  |
| 640.3808               | 12.53              | peak      | 23.51          |       | 36.04                  |                  | 46.           | 46.00                 |        |     | 75                        | 100                  |
| <b>-</b>               | 1                  |           | 1              |       |                        |                  | 1             |                       |        |     | T                         | i                    |
| Frequency              | Read<br>(dBu       |           | Factor<br>(dB) |       | Result @3m<br>(dBuV/m) |                  |               | Limit @3m<br>(dBuV/m) |        | gin | Table<br>Degree           | Ant.<br>High         |
| (MHz)                  | Peak               | Ave.      | Corr.          |       | Peak Ave.              |                  | Pea           | k Ave                 | . (dl  | B)  | (Deg.)                    | (cm)                 |
| 4824.0000              | 43.70              |           | 0.56           | 4     | 4.26                   |                  | 74.00         | 54.0                  | 0 -29. | 74  | 55                        | 100                  |
| 7236.0000              | 40.58              |           | 3.93           | 4     | 4.51                   |                  | 74.00         | 54.0                  | 0 -29. | 49  | 160                       | 100                  |
| 9648.0000              | 35.31              |           | 7.98           | 4     | 3.29                   |                  | 74.00         | 54.0                  |        |     | 230                       | 100                  |
| 12060.0000             | 34.05              |           | 13.03          | 4     | 7.08                   |                  | 74.00         | 54.0                  | 0 -26. | 92  | 140                       | 100                  |
| Polarization:          | Vertical           |           |                |       |                        |                  | [             |                       |        |     |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV)  | Detector  | . Fact<br>(dE  |       |                        | Result<br>BuV/m) |               | Limit<br>(dBuV/m)     |        |     | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 18.36              | peak      | 10.8           | 39    |                        | 29.25            | 43.           | 50                    | -14.25 |     | 155                       | 100                  |
| 164.1283               | 11.21              | peak      | 15.1           | 15    |                        | 26.36            | 43.           |                       | -17.14 |     | 90                        | 100                  |
|                        |                    | 1         |                |       |                        |                  |               |                       |        |     |                           |                      |
| Frequency              | Readi<br>(dBu)     | V)        | Factor<br>(dB) |       | Result<br>(dBu\        | //m)             | (dBu          | Limit @3m<br>(dBuV/m) |        | in  | Table<br>Degree           | Ant. High            |
| (MHz)                  |                    | Ave.      | Corr.          |       | Peak                   | Ave.             | Peak          | Ave.                  | (dB)   | ,   | (Deg.)                    | (cm)                 |
| 4824.0000              | 47.21              |           | 0.56           | 47.   |                        |                  | 74.00         | 54.00                 |        |     | 75                        | 100                  |
| 7236.0000              | 41.16              |           | 3.93           | 45.   |                        |                  | 74.00         | 54.00                 | -28.9  |     | 90                        | 100                  |
| 9637.2750              | 37.08              |           | 8.00           | 45.   |                        |                  | 74.00         | 54.00                 |        |     | 125                       | 100                  |
| 12060.0000             | 34.29              |           | 13.03          | 47.   | 3Z                     |                  | 74.00         | 54.00                 | -26.6  | б   | 130                       | 100                  |



#### Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| olarization:<br>Frequency<br>(MHz) | Horizontal<br>Reading<br>(dBuV) | Detector | Facto<br>(dB)           |      | Result                   | (dBuV/m)                  | Lir<br>(dBu           |                         | Margin<br>(dB) | Table Degree<br>(Deg.)      | Ant.<br>High<br>(cm) |
|------------------------------------|---------------------------------|----------|-------------------------|------|--------------------------|---------------------------|-----------------------|-------------------------|----------------|-----------------------------|----------------------|
| 300.2004                           | 14.37                           | peak     | 16.00                   | )    | 3                        | 0.37                      | 46.                   | 00                      | -15.63         | 135                         | 100                  |
| 640.3808                           | 12.54                           | peak     | 23.5                    |      | 3                        | 6.05                      | 46.                   | 00                      | -9.95          | 105                         | 100                  |
| Frequency<br>(MHz)                 | Read<br>(dBi<br>Peak            |          | Factor<br>(dB)<br>Corr. |      |                          | lt @3m<br>uV/m)<br>: Ave. |                       | t @3m<br>uV/m)<br>k Ave | Marg<br>(dE    | Degree                      | Ant.<br>High<br>(cm) |
| 4873.7480                          | 43.88                           | Ave      | 0.70                    | 1    | 4.58                     |                           | 74.00                 | 54.00                   |                | /                           | 100                  |
| 7311.0000                          | 43.88                           |          | 3.74                    |      | 4.56<br>4.62             |                           | 74.00                 | 54.00                   |                |                             | 100                  |
| 9748.0000                          | 35.15                           |          | 8.30                    |      | 4.02<br>3.45             |                           | 74.00                 | 54.00                   |                |                             | 100                  |
| 12185.0000                         | 32.25                           |          | 13.62                   |      | 5.43<br>5.87             |                           | 74.00                 | 54.00                   |                |                             | 100                  |
| olarization:<br>Frequency<br>(MHz) | Vertical<br>Reading<br>(dBuV)   | Detector | Fac<br>(dE              |      |                          | Result<br>3uV/m)          | Lin<br>(dBu\          | -                       | Margin<br>(dB) | Table<br>Degree<br>(Deg.)   | Ant.<br>High<br>(cm) |
| 99.9800                            | 17.49                           | peak     | 10.8                    | 39   | 2                        | 28.38                     | 43.                   | 50                      | -15.12         | 115                         | 100                  |
| 162.1844                           | 9.77                            | peak     | 15.2                    | 27   |                          | 25.04                     | 43.                   | 50                      | -18.46         | 70                          | 100                  |
| Frequency<br>(MHz)                 | Read<br>(dBu<br>Peak            |          | Factor<br>(dB)<br>Corr. |      | esult (<br>(dBuV<br>Peak | -                         | Limit<br>(dBu<br>Peak |                         | Margi<br>(dB)  | n Table<br>Degree<br>(Deg.) | Ant. Hig<br>(cm)     |
| 4873.7480                          | 43.81                           |          | 0.70                    | 44.  | 51                       |                           | 74.00                 | 54.00                   | -29.49         |                             | 100                  |
| 7311.0000                          | 40.87                           |          | 3.74                    | 44.0 |                          |                           | 74.00                 | 54.00                   | -29.39         |                             | 100                  |
| 9748.0000                          | 35.32                           |          | 8.30                    | 43.0 |                          |                           | 74.00                 | 54.00                   | -30.38         |                             | 100                  |
| 12185.0000                         | 32.07                           |          | 13.62                   | 45.0 | 69                       |                           | 74.00                 | 54.00                   | -28.3          | 1 40                        | 100                  |

*Polarization:* Horizoniai Frequency Reading Factor D 

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
| 368.2365           | 12.47             | peak     | 17.73          | 30.20           | 46.00             | -15.80         | 160                    | 100                  |
| 640.3808           | 12.70             | peak     | 23.51          | 36.21           | 46.00             | -9.79          | 45                     | 100                  |

| Frequency<br>(MHz) | Readir<br>(dBu\<br>Peak | Factor<br>(dB)<br>Corr. |       | t @3m<br>JV/m)<br>Ave. |       | @3m<br>V/m)<br>Ave. | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------------|-------------------------|-------|------------------------|-------|---------------------|----------------|---------------------------|----------------------|
| 4921.8440          | 45.85                   | <br>0.92                | 46.77 |                        | 74.00 | 54.00               | -27.23         | 80                        | 100                  |
| 7386.0000          | 40.11                   | <br>3.92                | 44.03 |                        | 74.00 | 54.00               | -29.97         | 155                       | 100                  |
| 9848.0000          | 36.15                   | <br>8.67                | 44.82 |                        | 74.00 | 54.00               | -29.18         | 145                       | 100                  |
| 12310.0000         | 34.30                   | <br>14.38               | 48.68 |                        | 74.00 | 54.00               | -25.32         | 130                       | 100                  |



| Polarization:          | Vertical          | -          |                |     |                 |                   |                |                |                |          |                           |                      |
|------------------------|-------------------|------------|----------------|-----|-----------------|-------------------|----------------|----------------|----------------|----------|---------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector   | . Fac<br>(dE   |     |                 | Result<br>BuV/m)  | Lim<br>(dBu\   |                | Margin<br>(dB) |          | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 17.70             | peak       | 10.8           | 39  |                 | 28.59             | 43.5           | 50             | -14.91         |          | 75                        | 100                  |
| 164.1283               | 10.19             | peak       | 15.1           | 15  |                 | 25.34             | 43.5           | 50             | -18.16         |          | 130                       | 100                  |
|                        | -                 |            |                |     |                 |                   |                |                | 1              |          |                           | T                    |
| Frequency              | Read<br>(dBu      |            | Factor<br>(dB) | F   | Result<br>(dBu\ |                   | Limit<br>(dBu) |                | Marg           | in       | Table<br>Degree           | Ant. High            |
| (MHz)                  | Peak              | Ave.       | Corr.          |     | Peak            | Ave.              | Peak           | Ave.           | (dB            | ,        | (Deg.)                    | (cm)                 |
| 4921.8440              | 46.17             |            | 0.92           | 47. |                 |                   | 74.00          | 54.00          |                |          | 130                       | 100                  |
| 7386.0000              | 40.56             |            | 3.92           | 44. |                 |                   | 74.00          | 54.00          |                |          | 55                        | 100                  |
| 9848.0000              | 34.98             |            | 8.67           | 43. |                 |                   | 74.00          | 54.00          |                |          | 205                       | 100                  |
| 12310.0000             | 35.10             |            | 14.38          | 49. | 48              |                   | 74.00          | 54.00          | -24.5          | 52       | 110                       | 100                  |
| Mode:<br>Polarization: | 802<br>Horizontal | .11g 2412M | Hz             |     |                 |                   |                |                |                |          |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector   | Facto<br>(dB)  |     | Result          | t (dBuV/m)        | Lin<br>(dBu'   |                | Margin<br>(dB) | Та       | ble Degree<br>(Deg.)      | Ant.<br>High<br>(cm) |
| 366.2926               | 12.75             | peak       | 17.66          | 5   |                 | 30.41             | 46.            | 00             | -15.59         |          | 110                       | 100                  |
| 640.3808               | 12.93             | peak       | 23.51          |     | 3               | 36.44             | 46.            | 00             | -9.56          |          | 245                       | 100                  |
|                        | 1                 |            | 1              |     |                 |                   | <del></del>    |                |                |          | 1                         | 1                    |
| Frequency              | Rea<br>(dB        |            | Factor<br>(dB) |     |                 | ult @3m<br>BuV/m) |                | t @3m<br>uV/m) | Mar            | gin      | Table<br>Degree           | Ant.<br>High         |
| (MHz)                  | Peak              | Ave.       | Corr.          |     | Peak            | k Ave.            | Pea            |                |                | ,        | (Deg.)                    | (cm)                 |
| 4824.0000              | 41.45             |            | 0.56           | 4   | 2.01            |                   | 74.00          | 54.0           | 0 -31.         | .99      | 115                       | 100                  |
| 7236.0000              | 40.52             |            | 3.93           | 4   | 4.45            |                   | 74.00          | 54.0           | 0 -29.         | .55      | 160                       | 100                  |
| 9648.0000              | 35.07             |            | 7.98           | 4   | 3.05            |                   | 74.00          | 54.0           | 0 -30.         | .95      | 235                       | 100                  |
| 12060.0000             | 34.56             |            | 13.03          | 4   | 7.59            |                   | 74.00          | 54.0           | 0 -26.         | .41      | 90                        | 100                  |
| Polarization:          | Vertical          |            |                |     |                 |                   |                |                |                | -        |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector   | . Fac<br>(dE   |     |                 | Result<br>BuV/m)  | Lim<br>(dBu\   |                | Margin<br>(dB) |          | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 19.64             | peak       | 10.8           | 39  |                 | 30.53             | 43.5           | 50             | -12.97         | ĺ        | 155                       | 100                  |
| 640.3808               | 9.49              | peak       | 23.5           | 51  |                 | 33.00             | 46.0           |                | -13.00         |          | 130                       | 100                  |
|                        |                   | 1 1        |                |     |                 |                   |                |                |                |          |                           |                      |
| Frequency              | Read<br>(dBu      |            | Factor<br>(dB) | F   | Result<br>(dBu\ |                   | Limit<br>(dBu) |                | Marg           | in       | Table<br>Degree           | Ant. High            |
| (MHz)                  | Peak              | Ave.       | Corr.          |     | Peak            | Ave.              | Peak           | Ave.           | (dB            | <i>,</i> | (Deg.)                    | (cm)                 |
| 4824.0000              | 41.91             |            | 0.56           | 42. | 47              |                   | 74.00          | 54.00          | -31.5          | 53       | 70                        | 100                  |
| 7236.0000              | 40.99             |            | 3.93           | 44. | 92              |                   | 74.00          | 54.00          | -29.0          | )8       | 135                       | 100                  |
| 9648.0000              | 34.45             |            | 7.98           | 42. | 43              |                   | 74.00          | 54.00          |                |          | 160                       | 100                  |
| 12060.0000             | 34.04             |            | 13.03          | 47. | 07              |                   | 74.00          | 54.00          | -26.9          | )2       | 140                       | 100                  |



| Mode:<br>Polarization:              | 802.<br>Horizontal            | 11g 2437Mł | Ηz                      |     |               |                           |               |                         |                | _   |                           |                      |
|-------------------------------------|-------------------------------|------------|-------------------------|-----|---------------|---------------------------|---------------|-------------------------|----------------|-----|---------------------------|----------------------|
| Frequency<br>(MHz)                  | Reading<br>(dBuV)             | Detector   | Facto<br>(dB)           | r   | Result        | (dBuV/m)                  | Lir<br>(dBu'  |                         | Margin<br>(dB) | Tab | ble Degree<br>(Deg.)      | Ant.<br>High<br>(cm) |
| 300.2004                            | 13.61                         | peak       | 16.00                   | )   | 2             | 9.61                      | 46.           | 00                      | -16.39         |     | 235                       | 100                  |
| 640.3808                            | 11.86                         | peak       | 23.51                   |     |               | 35.37                     | 46.           | 00                      | -10.63         |     | 140                       | 100                  |
|                                     | _                             |            | -                       |     |               |                           |               |                         |                |     |                           |                      |
| Frequency<br>(MHz)                  | Read<br>(dBu<br>Peak          |            | Factor<br>(dB)<br>Corr. |     |               | lt @3m<br>uV/m)<br>< Ave. |               | t @3m<br>uV/m)<br>k Ave | Març           | ,   | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 4874.0000                           | 42.33                         |            | 0.70                    | Δ   | 3.03          |                           | 74.00         | 54.0                    | ```            | ,   | 95                        | 100                  |
| 7311.0000                           | 40.41                         |            | 3.74                    |     | 4.15          |                           | 74.00         | 54.0                    |                |     | 160                       | 100                  |
| 9748.0000                           | 34.98                         |            | 8.30                    |     | 3.28          |                           | 74.00         | 54.0                    |                |     | 105                       | 100                  |
| 12185.0000                          | 33.97                         |            | 13.62                   |     | 7.59          |                           | 74.00         | 54.0                    |                |     | 140                       | 100                  |
| Polarization:<br>Frequency<br>(MHz) | Vertical<br>Reading<br>(dBuV) | Detector   | Fact<br>(dE             |     |               | Result<br>BuV/m)          | Lim<br>(dBu\  | -                       | Margin<br>(dB) |     | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                             | 19.12                         | peak       | 10.8                    | 39  |               | 30.01                     | 43.           | 50                      | -13.49         |     | 105                       | 100                  |
| 640.3808                            | 8.94                          | peak       | 23.5                    | 51  |               | 32.45                     | 46.0          | 00                      | -13.55         |     | 130                       | 100                  |
| Frequency                           | Read                          | ng         | Factor                  | F   | Result        | @3m                       | Limit         | @3m                     | Margi          | n   | Table                     |                      |
| (MHz)                               | (dBu<br>Peak                  | V)<br>Ave. | (dB)<br>Corr.           | ŀ   | (dBu\<br>Peak | //m)<br>Ave.              | (dBu'<br>Peak | V/m)<br>Ave.            | (dB)           |     | Degree<br>(Deg.)          | Ant. High<br>(cm)    |
| 4874.0000                           | 42.13                         |            | 0.70                    | 42. | 83            |                           | 74.00         | 54.00                   | -31.1          | 7   | 230                       | 100                  |
| 7311.0000                           | 40.62                         |            | 3.74                    | 44. | 36            |                           | 74.00         | 54.00                   | -29.6          | 4   | 115                       | 100                  |
| 9748.0000                           | 36.16                         |            | 8.30                    | 44. | 46            |                           | 74.00         | 54.00                   | -29.5          | 4   | 125                       | 100                  |
| 12185.0000                          | 32.91                         |            | 13.62                   | 46. | 53            |                           | 74.00         | 54.00                   | -27.4          | 7   | 140                       | 100                  |
| Mode:<br>Polarization:              | 802.<br>Horizontal            | 11g 2462MI | Hz                      |     |               |                           |               |                         |                |     |                           |                      |

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
| 368.2365           | 12.42             | peak     | 17.73          | 30.15           | 46.00             | -15.85         | 165                    | 100                  |
| 640.3808           | 12.55             | peak     | 23.51          | 36.06           | 46.00             | -9.94          | 90                     | 100                  |

| Frequency<br>(MHz) | Readir<br>(dBu\<br>Peak | Factor<br>(dB)<br>Corr. |       | t @3m<br>ıV/m)<br>Ave. |       | @3m<br>V/m)<br>Ave. | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------------|-------------------------|-------|------------------------|-------|---------------------|----------------|---------------------------|----------------------|
| 4924.0000          | 41.57                   | <br>0.93                | 42.50 |                        | 74.00 | 54.00               | -31.50         | 90                        | 100                  |
| 7386.0000          | 40.70                   | <br>3.92                | 44.62 |                        | 74.00 | 54.00               | -29.38         | 110                       | 100                  |
| 9848.0000          | 34.92                   | <br>8.67                | 43.59 |                        | 74.00 | 54.00               | -30.41         | 175                       | 100                  |
| 12310.0000         | 35.11                   | <br>14.38               | 49.49 |                        | 74.00 | 54.00               | -24.51         | 80                        | 100                  |



| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector   | Fact<br>(dB    |     |                 | Result<br>BuV/m) | Lim<br>(dBu\  |                | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------------|----------------|-----|-----------------|------------------|---------------|----------------|----------------|---------------------------|----------------------|
| 99.9800            | 17.94             | peak       | 10.8           | 39  |                 | 28.83            | 43.           | 50             | -14.67         | 215                       | 100                  |
| 166.0721           | 11.04             | peak       | 15.0           | )3  |                 | 26.07            | 43.           | 50             | -17.43         | 170                       | 100                  |
|                    |                   |            |                | -   |                 |                  |               |                |                |                           | 1                    |
| Frequency          | Read<br>(dBu      | V)         | Factor<br>(dB) |     | Result<br>(dBu\ | //m)             | Limit<br>(dBu | V/m)           | Margir         | Degree                    | Ant. High            |
| (MHz)              | Peak              | Ave.       | Corr.          |     | Peak            | Ave.             | Peak          | Ave.           | (dB)           | (Deg.)                    | (cm)                 |
| 4924.0000          | 41.85             |            | 0.93           | 42. | -               |                  | 74.00         | 54.00          | -31.22         |                           | 100                  |
| 7386.0000          | 40.09             |            | 3.92           | 44. |                 |                  | 74.00         | 54.00          | -29.99         |                           | 100                  |
| 9848.0000          | 35.23             |            | 8.67           | 43. | 90              |                  | 74.00         | 54.00          | -30.10         | ) 95                      | 100                  |
| 12310.0000         | 34.95             |            | 14.38          | 49. | 33              |                  | 74.00         | 54.00          | -24.67         | / 110                     | 100                  |
| Antenna B          |                   |            |                |     |                 |                  |               |                |                |                           |                      |
| Mode:              | 802.              | 11a 5745MI | Ηz             |     |                 |                  |               |                |                |                           |                      |
| Polarization: H    | Horizontal        |            |                |     |                 |                  |               |                |                |                           |                      |
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector   | Facto<br>(dB)  | r   | Result          | t (dBuV/m)       | Lir<br>(dBu   |                | Margin<br>(dB) | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643           | 13.75             | peak       | 13.98          | }   | 2               | 27.73            | 46.           | 00             | -18.27         | 170                       | 100                  |
| 300.2004           | 13.77             | peak       | 16.00          | )   |                 | 29.77            | 46.           | 00             | -16.23         | 135                       | 100                  |
| 335.1904           | 12.12             | peak       | 16.91          |     |                 | 29.03            | 46.           | 00             | -16.97         | 60                        | 100                  |
| 368.2365           | 10.83             | peak       | 17.73          | }   |                 | 28.56            | 46.           | 00             | -17.44         | 80                        | 100                  |
|                    |                   | 1 1        |                |     |                 |                  | 1             |                |                | I                         |                      |
| Frequency          | Read<br>(dBi      | 0          | Factor<br>(dB) |     |                 | ılt @3m<br>uV/m) |               | t @3m<br>uV/m) | Marg           | in Table<br>Degree        | Ant.<br>High         |
| (MHz)              | Peak              | Áve.       | Corr.          |     | Peal            |                  | Pea           |                | . (dB          |                           | (cm)                 |
| 11483.9680         | 36.69             |            | 12.03          | 4   | 8.72            |                  | 74.00         | 54.00          | ) -25.2        |                           | 100                  |
| 17235.0000         | 27.89             |            | 20.39          |     | 8.28            |                  | 74.00         | 54.00          |                |                           | 100                  |
| Polarization:      | Vertical          |            |                |     | r               |                  |               | <u>_</u>       |                |                           |                      |
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector   | Fact<br>(dB    |     |                 | Result<br>BuV/m) | Lim<br>(dBu\  |                | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800            | 17.93             | peak       | 10.8           | 39  |                 | 28.82            | 43.           | 50             | -14.68         | 85                        | 100                  |
| 164.1283           | 11.49             | peak       | 15.1           | 5   |                 | 26.64            | 43.           | 50             | -16.86         | 160                       | 100                  |
| 368.2365           | 11.91             | peak       | 17.7           |     |                 | 29.64            | 46.0          |                | -16.36         | 110                       | 100                  |
| 500.4208           | 9.20              | peak       | 20.9           |     |                 | 30.12            | 46.0          |                | -15.88         | 145                       | 100                  |
| 300.4200           | 7.20              | peak       | 20.7           | 2   |                 | 50.12            | 10.0          | 00             | 15.00          | 145                       | 100                  |
| Frequency          | Read<br>(dBu      |            | Factor<br>(dB) | R   | Result<br>(dBu\ | @3m<br>//m)      | Limit<br>(dBu |                | Margir         | n Table<br>Degree         | Ant. High            |
| (MHz)              | Peak              | Ave.       | Corr.          | F   | Peak            | Ave.             | Peak          | Ave.           | (dB)           | (Deg.)                    | (cm)                 |
|                    |                   | T          | 8.63           | 45. | F.2             |                  | 74.00         | 54.00          | -8.48          | 230                       | 100                  |
| 9789.5790          | 36.89             |            | 0.03           | 40. | JZ              |                  | 74.00         | 54.00          | -0.40          | 230                       | 100                  |



| Mode:<br>Polarization:              |                               | .11a 5785MI<br>Horizontal | Hz                      |     |                           |                        | 1                        |                         |      |                |                           |                      |
|-------------------------------------|-------------------------------|---------------------------|-------------------------|-----|---------------------------|------------------------|--------------------------|-------------------------|------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz)                  | Reading<br>(dBuV)             | Detector                  | Facto<br>(dB)           | r   | Result                    | (dBuV/m)               | Lir<br>(dBu              | -                       |      | rgin<br>IB)    | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643                            | 13.92                         | peak                      | 13.98                   | }   | 2                         | 7.90                   | 46                       | 00                      | -18  | 8.10           | 110                       | 100                  |
| 300.2004                            | 14.03                         | peak                      | 16.00                   | )   | 3                         | 0.03                   | 46                       | 00                      | -15  | i.97           | 95                        | 100                  |
| 335.1904                            | 12.84                         | peak                      | 16.91                   |     | 2                         | 9.75                   | 46                       | 00                      | -16  | o.25           | 130                       | 100                  |
| 368.2365                            | 11.61                         | peak                      | 17.73                   | ;   | 2                         | 9.34                   | 46                       | 00                      | -16  | .66            | 170                       | 100                  |
| Frequency<br>(MHz)                  | Read<br>(dBu<br>Peak          |                           | Factor<br>(dB)<br>Corr. |     |                           | t @3m<br>JV/m)<br>Ave. |                          | t @3m<br>uV/m)<br>k Ave |      | Margi<br>(dB)  | Degree                    | Ant.<br>High<br>(cm) |
| 11569.6390                          | 37.01                         |                           | 12.47                   | 4   | 9.48                      |                        | 74.00                    | 54.0                    | 0    | -24.52         | 2 173                     | 100                  |
| 17355.0000                          | 27.96                         |                           | 20.33                   |     | 8.29                      |                        | 74.00                    | 54.0                    | -    | -25.7          |                           | 100                  |
| Polarization:<br>Frequency<br>(MHz) | Vertical<br>Reading<br>(dBuV) | Detector                  | Faci                    |     |                           | esult<br>3uV/m)        | Lin<br>(dBu <sup>v</sup> |                         |      | argin<br>dB)   | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                             | 18.55                         | peak                      | 10.8                    | 39  | 2                         | 9.44                   | 43.                      | 50                      | -1   | 4.06           | 45                        | 100                  |
| 166.0721                            | 11.86                         | peak                      | 15.0                    |     |                           | 26.89                  | 43.                      |                         |      | 6.61           | 110                       | 100                  |
| 368.2365                            | 10.62                         | peak                      | 17.7                    |     | -                         | 28.35                  | 46.                      |                         |      | 7.65           | 270                       | 100                  |
| 498.4770                            | 10.02                         | peak                      | 20.8                    |     |                           | 1.07                   | 46.                      |                         |      | 4.93           | 150                       | 100                  |
| 490.4770                            | 10.20                         | реак                      | 20.0                    | 57  |                           | 01.07                  | 40.                      | 00                      | - 1- | 4.93           | 150                       | 100                  |
| Frequency<br>(MHz)                  | Read<br>(dBu<br>Peak          | 0                         | Factor<br>(dB)<br>Corr. |     | Result (<br>(dBuV<br>Peak |                        | Limit<br>(dBu<br>Peak    |                         |      | Vargin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant. High<br>(cm)    |
| 11569.6390                          | 39.14                         |                           | 12.47                   | 51. | 61                        |                        | 74.00                    | 54.00                   |      | -22.39         | 217                       | 100                  |
| 17355.0000                          | 27.79                         |                           | 20.33                   | 48. | 12                        |                        | 74.00                    | 54.00                   |      | -25.88         | 95                        | 100                  |
| Mode:<br>Polarization:              | 802.                          | .11a 5825MI<br>Horizontal | Hz                      |     |                           |                        | 1                        |                         |      |                |                           |                      |
| Frequency<br>(MHz)                  | Reading<br>(dBuV)             | Detector                  | Facto<br>(dB)           | r   | Result                    | (dBuV/m)               | Lir<br>(dBu              |                         |      | rgin<br>IB)    | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643                            | 14.01                         | peak                      | 13.98                   | }   | 2                         | 7.99                   | 46                       | 00                      | -18  | 8.01           | 165                       | 100                  |
| 300.2004                            | 13.19                         | peak                      | 16.00                   | )   | 2                         | 9.19                   | 46                       | 00                      | -16  | .81            | 210                       | 100                  |
| 335.1904                            | 12.59                         | peak                      | 16.91                   |     |                           | 9.50                   | 46                       | 00                      |      | o.50           | 170                       | 100                  |
| 368.2364                            | 10.88                         | peak                      | 17.73                   | 3   | 2                         | 8.61                   | 46                       | 00                      | -17  | .39            | 125                       | 100                  |
| Frequency<br>(MHz)                  | Read<br>(dBu<br>Peak          |                           | Factor<br>(dB)<br>Corr. |     |                           | t @3m<br>JV/m)<br>Ave. |                          | t@3m<br>uV/m)<br>k Ave  |      | Margii<br>(dB) | Degree                    | Ant.<br>High<br>(cm) |
| 11617.2350                          | 37.34                         |                           | 12.51                   | 4   | 9.85                      |                        | 74.00                    | 54.0                    |      | -24.1          |                           | 100                  |
| 11017.2000                          |                               |                           |                         |     |                           |                        |                          |                         |      |                |                           |                      |



#### Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| Polarization:      | Vertical          |          |                |                    |                   |                |                           |                      |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800            | 18.63             | peak     | 10.89          | 29.52              | 43.50             | -13.98         | 60                        | 100                  |
| 164.1283           | 11.63             | peak     | 15.15          | 26.78              | 43.50             | -16.72         | 115                       | 100                  |
| 366.2926           | 11.11             | peak     | 17.66          | 28.77              | 46.00             | -17.23         | 140                       | 100                  |
| 502.3647           | 9.12              | peak     | 20.96          | 30.08              | 46.00             | -15.92         | 235                       | 100                  |

| Frequency  | Read<br>(dBi | 0    | Factor<br>(dB) |       | t @3m<br>ıV/m) |       | @3m<br>V/m) | Margin | Table<br>Degree | Ant. High |
|------------|--------------|------|----------------|-------|----------------|-------|-------------|--------|-----------------|-----------|
| (MHz)      | Peak         | Ave. | Corr.          | Peak  | Ave.           | Peak  | Ave.        | (dB)   | (Deg.)          | (cm)      |
| 11607.7150 | 38.43        |      | 12.55          | 50.98 |                | 74.00 | 54.00       | -23.02 | 230             | 100       |
| 17415.0000 | 27.19        |      | 19.73          | 46.92 |                | 74.00 | 54.00       | -27.08 | 190             | 100       |

| Mode:<br>Polarization: |                   | 11b 2412MHz<br>Horizontal | 2              |                 |                   |                |                        |                      |
|------------------------|-------------------|---------------------------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                  | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 300.2004               | 14.21             | peak                      | 16.00          | 30.21           | 46.00             | -15.79         | 45                     | 100                  |
| 640.3808               | 13.32             | peak                      | 23.51          | 36.83           | 46.00             | -9.17          | 70                     | 100                  |

| Frequency  | Readir<br>(dBuV | 0    | Factor<br>(dB) |       | t @3m<br>ıV/m) |       | @3m<br>V/m) | Margin | Table<br>Degree | Ant.<br>High |
|------------|-----------------|------|----------------|-------|----------------|-------|-------------|--------|-----------------|--------------|
| (MHz)      | Peak            | Ave. | Corr.          | Peak  | Ave.           | Peak  | Ave.        | (dB)   | (Deg.)          | (cm)         |
| 4825.6510  | 43.09           |      | 0.56           | 43.65 |                | 74.00 | 54.00       | -30.35 | 90              | 100          |
| 7236.0000  | 40.72           |      | 3.93           | 44.65 |                | 74.00 | 54.00       | -29.35 | 155             | 100          |
| 9648.0000  | 35.88           |      | 7.98           | 43.86 |                | 74.00 | 54.00       | -30.14 | 235             | 100          |
| 12060.0000 | 35.08           |      | 13.03          | 48.11 |                | 74.00 | 54.00       | -25.89 | 160             | 100          |

Polarization: Vertical

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 99.9800            | 18.34             | peak     | 10.89          | 29.23              | 43.50             | -14.27         | 130                       | 100                  |
| 502.3647           | 11.38             | peak     | 20.96          | 32.34              | 46.00             | -13.66         | 90                        | 100                  |



| Frequency  | Read<br>(dBi | 0     | Factor<br>(dB) | Result @3m<br>(dBuV/m) |       |       | @3m<br>V/m) | Margin | Table<br>Degree | Ant. High |
|------------|--------------|-------|----------------|------------------------|-------|-------|-------------|--------|-----------------|-----------|
| (MHz)      | Peak         | Ave.  | Corr.          | Peak                   | Ave.  | Peak  | Ave.        | (dB)   | (Deg.)          | (cm)      |
| 4824.0000  | 44.43        |       | 0.56           | 44.99                  |       | 74.00 | 54.00       | -29.01 | 135             | 100       |
| 5170.3410  | 53.23        | 41.29 | 1.62           | 54.85                  | 42.91 | 74.00 | 54.00       | -11.09 | 0               | 100       |
| 7236.0000  | 41.75        |       | 3.93           | 45.68                  |       | 74.00 | 54.00       | -28.32 | 190             | 100       |
| 9648.0000  | 34.97        |       | 7.98           | 42.95                  |       | 74.00 | 54.00       | -31.05 | 255             | 100       |
| 12060.0000 | 34.88        |       | 13.03          | 47.91                  |       | 74.00 | 54.00       | -26.09 | 170             | 100       |

| _ | Mode:<br>Polarization: |                   | 11b 2437MHz<br>Horizontal | 7              |                 |                   |                |                        |                      |
|---|------------------------|-------------------|---------------------------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
|   | Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                  | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|   | 300.2004               | 14.23             | peak                      | 16.00          | 30.23           | 46.00             | -15.77         | 125                    | 100                  |
|   | 640.3808               | 13.44             | peak                      | 23.51          | 36.95           | 46.00             | -9.05          | 80                     | 100                  |

| Frequency<br>(MHz) | Readir<br>(dBu\<br>Peak | 0 | Factor<br>(dB)<br>Corr. |       | t @3m<br>JV/m)<br>Ave. |       | @3m<br>V/m)<br>Ave. | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------------|---|-------------------------|-------|------------------------|-------|---------------------|----------------|---------------------------|----------------------|
| 4873.7480          | 45.64                   |   | 0.70                    | 46.34 |                        | 74.00 | 54.00               | -27.66         | 135                       | 100                  |
| 7311.0000          | 40.93                   |   | 3.74                    | 44.67 |                        | 74.00 | 54.00               | -29.33         | 40                        | 100                  |
| 9748.0000          | 34.63                   |   | 8.30                    | 42.93 |                        | 74.00 | 54.00               | -31.07         | 225                       | 100                  |
| 12185.0000         | 33.35                   |   | 13.62                   | 46.97 |                        | 74.00 | 54.00               | -27.03         | 190                       | 100                  |

| Polarization:      | Vertical          |          |                |                    |                   |                |                           |                      |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800            | 19.46             | peak     | 10.89          | 30.35              | 43.50             | -13.15         | 60                        | 100                  |
| 164.1283           | 10.80             | peak     | 15.15          | 25.95              | 43.50             | -17.55         | 135                       | 100                  |

| Frequency  | Read<br>(dBi | 0    | Factor<br>(dB) |       | t @3m<br>ıV/m) |       | @3m<br>V/m) | Margin | Table<br>Degree | Ant. High |
|------------|--------------|------|----------------|-------|----------------|-------|-------------|--------|-----------------|-----------|
| (MHz)      | Peak         | Áve. | Corr.          | Peak  | Ave.           | Peak  | Áve.        | (dB)   | (Deg.)          | (cm)      |
| 4873.7480  | 45.08        |      | 0.70           | 45.78 |                | 74.00 | 54.00       | -28.22 | 120             | 100       |
| 7311.0000  | 40.57        |      | 3.74           | 44.31 |                | 74.00 | 54.00       | -29.69 | 55              | 100       |
| 9748.0000  | 34.09        |      | 8.30           | 42.39 |                | 74.00 | 54.00       | -31.61 | 65              | 100       |
| 12185.0000 | 32.67        |      | 13.62          | 46.29 |                | 74.00 | 54.00       | -27.71 | 140             | 100       |



| Mode:<br>Polarization: |                   | 11b 2462MF<br>Horizontal | Ηz             |       |                   |                  |                |               |        |                        |                      |
|------------------------|-------------------|--------------------------|----------------|-------|-------------------|------------------|----------------|---------------|--------|------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Factor<br>(dB) | Resu  | ılt (dBuV/m)      | Lin<br>(dBu\     | -              | Margi<br>(dB) |        | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 366.2926               | 12.41             | peak                     | 17.66          |       | 30.07             | 46.              | 00             | -15.9         | 3      | 80                     | 100                  |
| 640.3808               | 12.44             | peak                     | 23.51          |       | 35.95             | 46.              | 00             | -10.0         | )5     | 175                    | 100                  |
|                        |                   |                          |                |       |                   |                  |                |               |        |                        |                      |
| Frequency              | Read<br>(dBu      | ıV)                      | Factor<br>(dB) | (d    | ult @3m<br>BuV/m) | (dBi             | t @3m<br>uV/m) |               | largin | Degree                 | Ant.<br>High         |
| (MHz)                  | Peak              | Ave.                     | Corr.          | Pea   | ak Ave.           | Peal             | -              |               | (dB)   | (Deg.)                 | (cm)                 |
| 4921.8440              | 47.93             |                          | 0.92           | 48.85 |                   | 74.00            | 54.0           |               | 25.15  |                        | 100                  |
| 7386.0000              | 40.40             |                          | 3.92           | 44.32 |                   | 74.00            | 54.0           |               | 29.68  |                        | 100                  |
| 9848.0000              | 34.43             |                          | 8.67           | 43.10 |                   | 74.00            | 54.0           |               | 30.90  |                        | 100                  |
| 12310.0000             | 34.43             |                          | 14.38          | 48.81 |                   | 74.00            | 54.0           | 0 -2          | 25.19  | 140                    | 100                  |
| Polarization:          | Vertical          |                          |                |       |                   |                  |                |               |        | Table                  | Ant.                 |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Facto<br>(dB)  |       | Result<br>dBuV/m) | Lim<br>(dBuV     | -              | Marg<br>(dB   |        | Degree<br>(Deg.)       | High<br>(cm)         |
| 99.9800                | 18.21             | peak                     | 10.8           | 9     | 29.10             | 43.5             | 50             | -14.4         | 40     | 155                    | 100                  |
| 640.3808               | 9.87              | peak                     | 23.5           | 1     | 33.38             | 46.0             | )0             | -12.6         | 62     | 230                    | 100                  |
|                        | •                 |                          |                |       |                   |                  |                |               |        |                        |                      |
| Frequency              | Readi<br>(dBu\    | 0                        | Factor<br>(dB) |       | t @3m<br>IV/m)    | Limit (<br>(dBu) |                | Ма            | argin  | Table<br>Degree        | Ant. High            |
| (MHz)                  | Peak              | Ave.                     | Corr.          | Peak  | Ave.              | Peak             | Ave.           |               | dB)    | (Deg.)                 | (cm)                 |
| 4921.8440              | 47.41             |                          | 0.92           | 48.33 |                   | 74.00            | 54.00          | -25           | 5.67   | 120                    | 100                  |
| 7386.0000              | 40.44             |                          | 3.92           | 44.36 |                   | 74.00            | 54.00          | -29           | 9.64   | 55                     | 100                  |
| 9848.0000              | 35.34             |                          | 8.67           | 44.01 |                   | 74.00            | 54.00          | -29           | 9.99   | 115                    | 100                  |
| 12310.0000             | 35.18             |                          | 14.38          | 49.56 |                   | 74.00            | 54.00          | -24           | 4.44   | 80                     | 100                  |
| Mode:<br>Polarization: |                   | 11g 2412MF<br>Horizontal | Ηz             |       |                   |                  |                |               |        |                        |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Factor<br>(dB) | Rest  | ılt (dBuV/m)      | Lin<br>(dBu\     | V/m)           | Margi<br>(dB) | )      | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 366.2926               | 12.35             | peak                     | 17.66          |       | 30.01             | 46.              |                | -15.9         |        | 140                    | 100                  |
| 640.3808               | 12.35             | peak                     | 23.51          |       | 35.86             | 46.              | 00             | -10.1         | 4      | 35                     | 100                  |
|                        |                   |                          |                |       |                   | T                |                |               |        |                        | -1                   |
| Frequency              | Read<br>(dBu      | 0                        | Factor<br>(dB) |       | ult @3m<br>BuV/m) |                  | t @3m<br>uV/m) | M             | largin | n Table<br>Degree      | Ant.<br>High         |
| (MHz)                  | Peak              | Áve.                     | Corr.          | Pea   | ak Ave.           | Peal             | <u>k</u> Áve   |               | (dB)   | (Deg.)                 | (cm)                 |
| 4824.0000              | 41.65             |                          | 0.56           | 42.21 |                   | 74.00            | 54.0           | 0 -3          | 31.79  | 105                    | 100                  |
| 7236.0000              | 40.69             |                          | 3.93           | 44.62 |                   | 74.00            | 54.0           |               | 29.38  | 130                    | 100                  |
|                        | 37.66             |                          | 8.00           | 45.66 |                   | 74.00            | 54.0           |               | 28.34  |                        | 100                  |
| 9637.2750              | 37.00             |                          | 0.00           | 40.00 |                   | 74.00            | 01.0           |               | 20.01  | 100                    | 100                  |
| 12060.0000             | 34.59             |                          | 13.03          | 47.62 |                   | 74.00            | 54.0           |               | 26.38  |                        | 100                  |



| Polarization:          | Vertical          | <u> </u>                  |                |      |                |                   |                          |                |    |                 |                           |                      |
|------------------------|-------------------|---------------------------|----------------|------|----------------|-------------------|--------------------------|----------------|----|-----------------|---------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                  | Fact<br>(dB    |      |                | Result<br>BuV/m)  | Lim<br>(dBuV             |                | N  | /largin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 19.32             | peak                      | 10.8           | 9    |                | 30.21             | 43.5                     | 50             | -  | 13.29           | 75                        | 100                  |
| 502.3647               | 10.84             | peak                      | 20.9           | 6    |                | 31.80             | 46.0                     | )0             | -  | 14.20           | 110                       | 100                  |
|                        | 1                 |                           | T              |      |                |                   |                          |                |    |                 | - I                       | 1                    |
| Frequency              | Read<br>(dBu      | 0                         | Factor<br>(dB) |      | esult<br>(dBu\ | @3m<br>V/m)       | Limit (<br>(dBu)         |                |    | Margin          | Table<br>Degree           | Ant. High            |
| (MHz)                  | Peak              | Ave.                      | Corr.          | P    | Peak           | Ave.              | Peak                     | Ave.           |    | (dB)            | (Deg.)                    | (cm)                 |
| 4824.0000              | 42.42             |                           | 0.56           | 42.9 | <del>)</del> 8 |                   | 74.00                    | 54.00          |    | -31.02          | 55                        | 100                  |
| 7236.0000              | 40.88             |                           | 3.93           | 44.8 | 31             |                   | 74.00                    | 54.00          |    | -29.19          | 170                       | 100                  |
| 9656.3130              | 36.72             |                           | 7.97           | 44.6 | 59             |                   | 74.00                    | 54.00          |    | -29.31          | 145                       | 100                  |
| 12060.0000             | 34.40             |                           | 13.03          | 47.4 | 13             |                   | 74.00                    | 54.00          |    | -26.57          | 255                       | 100                  |
| Mode:<br>Polarization: |                   | .11g 2437MF<br>Horizontal | Ηz             |      |                |                   |                          |                |    |                 |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                  | Factor<br>(dB) | F    | Result         | t (dBuV/m)        | Lin<br>(dBu <sup>v</sup> |                |    | largin<br>(dB)  | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 368.2365               | 12.34             | peak                      | 17.73          |      | 3              | 30.07             | 46.                      | 00             | -  | 15.93           | 135                       | 100                  |
| 640.3808               | 12.27             | peak                      | 23.51          |      | 3              | 35.78             | 46.                      | 00             | -1 | 10.22           | 110                       | 100                  |
| Frequency              | Read<br>(dBu      | 0                         | Factor<br>(dB) |      | (dB            | ult @3m<br>suV/m) | (dB                      | t @3m<br>uV/m) |    | Margi           | Degree                    | Ant.<br>High         |
| (MHz)                  | Peak              | Ave.                      | Corr.          |      | Peak           | k Ave.            | Peal                     |                |    | (dB)            |                           | (cm)                 |
| 4874.0000              | 42.27             |                           | 0.70           |      | 2.97           |                   | 74.00                    | 54.0           |    | -31.0           |                           | 100                  |
| 7311.0000              | 40.71             |                           | 3.74           |      | 4.45           |                   | 74.00                    | 54.0           |    | -29.5           |                           | 100                  |
| 9748.0000              | 35.83             |                           | 8.30           | 44   | 4.13           |                   | 74.00                    | 54.0           |    | -29.8           |                           | 100                  |
| 12185.0000             | 32.87             |                           | 13.62          | 40   | 6.49           |                   | 74.00                    | 54.0           | 0  | -27.5           | 1 115                     | 100                  |
| Polarization:          | Vertical          |                           |                |      |                |                   | [                        |                |    |                 | 1                         |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                  | Fact<br>(dB    |      |                | Result<br>BuV/m)  | Lim<br>(dBu\             |                | N  | /largin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 17.68             | peak                      | 10.8           | 9    |                | 28.57             | 43.5                     | 50             | -  | 14.93           | 50                        | 100                  |
| 640.3808               | 10.09             | peak                      | 23.5           |      |                | 33.60             | 46.0                     |                |    | 12.40           | 75                        | 100                  |
|                        |                   |                           |                |      |                |                   |                          |                |    |                 |                           |                      |
| Frequency              | Read<br>(dBu      | IV)                       | Factor<br>(dB) |      | (dBu∖          |                   | Limit (<br>(dBu)         | V/m)           |    | Margin          | Degree                    | Ant. High            |
| (MHz)                  | Peak              | Ave.                      | Corr.          |      | Peak           | Ave.              | Peak                     | Ave.           | +  | (dB)            | (Deg.)                    | (cm)                 |
| 4873.7480              | 42.76             |                           | 0.70           | 43.4 |                |                   | 74.00                    | 54.00          |    | -30.54          |                           | 100                  |
| 7311.0000              | 40.34             |                           | 3.74           | 44.( |                |                   | 74.00                    | 54.00          |    | -29.92          |                           | 100                  |
| 9748.0000              | 35.33             |                           | 8.30           | 43.6 |                |                   | 74.00                    | 54.00          | -  | -30.37          |                           | 100                  |
| 12185.0000             | 32.84             |                           | 13.62          | 46.4 |                |                   | 74.00                    | 54.00          |    | -27.54          | 170                       | 100                  |



| Mode:<br>Polarization:                   | 802                  | .11g 2462MI<br>Horizontal | Hz                      |     |                   |                           | 1             |                         |           |                |                           |                      |
|--|----------------------|---------------------------|-------------------------|-----|-------------------|---------------------------|---------------|-------------------------|-----------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz)                       | Reading<br>(dBuV)    | Detector                  | Facto<br>(dB)           | r   | Result            | (dBuV/m)                  | Lir<br>(dBu   | nit<br>V/m)             | Mar<br>(d | gin<br>B)      | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 300.2004                                 | 15.00                | peak                      | 16.00                   | )   | 3                 | 1.00                      | 46            | 00                      | -15       | .00            | 165                       | 100                  |
| 640.3808                                 | 11.61                | peak                      | 23.51                   |     | 3                 | 5.12                      | 46.           | 00                      | -10       | .88            | 120                       | 100                  |
|  |                      |                           |                         |     |                   |                           |               |                         |           |                |                           |                      |
| Frequency                                | Rea<br>(dB           | 0                         | Factor<br>(dB)          |     |                   | lt @3m<br>uV/m)           |               | t @3m<br>uV/m)          |           | Margii         | n Table<br>Degree         | Ant.<br>High         |
| (MHz)                                    | Peak                 | Áve.                      | Corr.                   |     | Peak              |                           | Pea           |                         |           | (dB)           |                           | (cm)                 |
| 4921.8440                                | 43.00                |                           | 0.92                    | 4   | 3.92              |                           | 74.00         | 54.0                    | 0         | -30.08         | 3 160                     | 100                  |
| 7386.0000                                | 40.13                |                           | 3.92                    | 4   | 4.05              |                           | 74.00         | 54.0                    | 0         | -29.95         | 5 95                      | 100                  |
| 9848.0000                                | 34.52                |                           | 8.67                    |     | 3.19              |                           | 74.00         | 54.0                    |           | -30.8          |                           | 100                  |
| 12310.0000                               | 33.83                |                           | 14.38                   |     | 8.21              |                           | 74.00         | 54.0                    |           | -25.79         |                           | 100                  |
| Polarization:                            | Vertical             | 1                         |                         |     |                   |                           |               |                         |           |                |                           |                      |
| Frequency<br>(MHz)                       | Reading<br>(dBuV)    | Detector                  | . Fact<br>(dE           |     |                   | Result<br>3uV/m)          | Lin<br>(dBu\  | -                       |           | rgin<br>JB)    | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                                  | 19.20                | peak                      | 10.8                    | 39  | 3                 | 30.09                     | 43.           | 50                      | -13       | 8.41           | 85                        | 100                  |
| 640.3808                                 | 9.76                 | peak                      | 23.5                    | 51  | 3                 | 33.27                     | 46.           | 00                      |           | 2.73           | 130                       | 100                  |
|  | •                    | 1 1                       |                         |     |                   |                           |               |                         |           |                |                           |                      |
| Frequency                                | Read<br>(dBu         | V)                        | Factor<br>(dB)          |     | Result (<br>(dBuV | //m)                      | Limit<br>(dBu | V/m)                    | Ν         | /largin        | Degree                    | Ant. High            |
| (MHz)                                    | Peak                 | Ave.                      | Corr.                   |     | Peak              | Ave.                      | Peak          |                         |           | (dB)           | (Deg.)                    | (cm)                 |
| 4924.0000                                | 41.79                |                           | 0.93                    | 42. |                   |                           | 74.00         | 54.00                   |           | 31.28          | 115                       | 100                  |
| 7386.0000                                | 40.75                |                           | 3.92                    | 44. |                   |                           | 74.00         | 54.00                   | -         | 29.33          | 145                       | 100                  |
| 9848.0000                                | 34.65                |                           | 8.67                    | 43. |                   |                           | 74.00         | 54.00                   |           | 30.68          | 110                       | 100                  |
| 12310.0000                               | 34.52                |                           | 14.38                   | 48. | 90                |                           | 74.00         | 54.00                   | -         | 25.10          | 35                        | 100                  |
| Antenna A + Ar<br>Mode:<br>Polarization: |                      | 20MHz 574                 | 15MHz                   |     |                   |                           |               |                         |           |                |                           |                      |
| Frequency<br>(MHz)                       | Reading<br>(dBuV)    | Detector                  | Facto<br>(dB)           | r   | Result            | (dBuV/m)                  |               | nit<br>V/m)             | Mar<br>(d | rgin<br>B)     | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643                                 | 14.08                | peak                      | 13.98                   |     |                   | 8.06                      | 46.           |                         | -17       |                | 170                       | 100                  |
| 300.2004                                 | 14.06                | peak                      | 16.00                   | )   |                   | 0.06                      | 46.           | 00                      | -15       | .94            | 140                       | 100                  |
| 335.1904                                 | 12.32                | peak                      | 16.91                   |     |                   | 9.23                      | 46.           |                         | -16       |                | 165                       | 100                  |
| 368.2365                                 | 11.71                | peak                      | 17.73                   |     | 2                 | 9.44                      | 46            | 00                      | -16       | .56            | 90                        | 100                  |
| Frequency<br>(MHz)                       | Read<br>(dB)<br>Peak |                           | Factor<br>(dB)<br>Corr. |     |                   | lt @3m<br>uV/m)<br>: Ave. |               | t @3m<br>uV/m)<br>k Ave |           | Margii<br>(dB) | Degree                    | Ant.<br>High<br>(cm) |
| 11493.4870                               | 36.76                | Ave                       | 12.13                   | 1   | 8.89              | Ave.                      | 74.00         | 54.0                    |           | -25.1          |                           | 100                  |
|  | -                    |                           |                         |     |                   |                           |               |                         |           |                |                           |                      |
| 17235.0000                               | 28.32                |                           | 20.39                   | 4   | 8.71              |                           | 74.00         | 54.0                    | U         | -25.29         | 9 195                     | 100                  |



| Polarization:      | Vertical          |          |                |                    |                   |                |                           |                      |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800            | 18.48             | peak     | 10.89          | 29.37              | 43.50             | -14.13         | 205                       | 100                  |
| 164.1283           | 12.17             | peak     | 15.15          | 27.32              | 43.50             | -16.18         | 140                       | 100                  |
| 434.3287           | 9.85              | peak     | 19.77          | 29.62              | 46.00             | -16.38         | 70                        | 100                  |
| 502.3647           | 10.32             | peak     | 20.96          | 31.28              | 46.00             | -14.72         | 160                       | 100                  |

| Frequency  | Read<br>(dBi | 0    | Factor<br>(dB) |       | t @3m<br>ıV/m) |       | @3m<br>V/m) | Margin | Table<br>Degree | Ant. High |
|------------|--------------|------|----------------|-------|----------------|-------|-------------|--------|-----------------|-----------|
| (MHz)      | Peak         | Ave. | Corr.          | Peak  | Ave.           | Peak  | Ave.        | (dB)   | (Deg.)          | (cm)      |
| 11493.4870 | 37.03        |      | 12.13          | 49.16 |                | 74.00 | 54.00       | -24.84 | 155             | 100       |
| 17235.0000 | 28.33        |      | 20.39          | 48.72 |                | 74.00 | 54.00       | -25.28 | 160             | 100       |

| Mode:<br>Polarization: |                   | 20MHz 5785<br>Horizontal | MHz            |                 |                   |                |                        |                      |
|------------------------|-------------------|--------------------------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 232.1643               | 13.83             | peak                     | 13.98          | 27.81           | 46.00             | -18.19         | 65                     | 100                  |
| 300.2004               | 13.91             | peak                     | 16.00          | 29.91           | 46.00             | -16.09         | 70                     | 100                  |
| 335.1904               | 12.65             | peak                     | 16.91          | 29.56           | 46.00             | -16.44         | 135                    | 100                  |
| 368.2365               | 10.75             | peak                     | 17.73          | 28.48           | 46.00             | -17.52         | 140                    | 100                  |

| Frequency  | Readi<br>(dBu\ | 0    | Factor<br>(dB) | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin | Table<br>Degree | Ant.<br>High |
|------------|----------------|------|----------------|------------------------|------|-----------------------|-------|--------|-----------------|--------------|
| (MHz)      | Peak           | Ave. | Corr.          | Peak                   | Ave. | Peak                  | Ave.  | (dB)   | (Deg.)          | (cm)         |
| 11579.1580 | 36.96          |      | 12.51          | 49.47                  |      | 74.00                 | 54.00 | -24.53 | 235             | 100          |
| 17355.0000 | 28.12          |      | 20.33          | 48.45                  |      | 74.00                 | 54.00 | -25.55 | 210             | 100          |

| Polarization: | Vertical |
|---------------|----------|
|---------------|----------|

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 98.0361            | 17.62             | peak     | 10.49          | 28.11              | 43.50             | -15.39         | 125                       | 100                  |
| 166.0721           | 11.73             | peak     | 15.03          | 26.76              | 43.50             | -16.74         | 30                        | 100                  |
| 368.2365           | 11.29             | peak     | 17.73          | 29.02              | 46.00             | -16.98         | 115                       | 100                  |
| 500.4208           | 10.04             | peak     | 20.92          | 30.96              | 46.00             | -15.04         | 40                        | 100                  |

| Frequency  | Read<br>(dBi | 0    | Factor<br>(dB) | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin | Table<br>Degree | Ant. High |
|------------|--------------|------|----------------|------------------------|------|-----------------------|-------|--------|-----------------|-----------|
| (MHz)      | Peak         | Ave. | Corr.          | Peak                   | Ave. | Peak                  | Ave.  | (dB)   | (Deg.)          | (cm)      |
| 11569.6390 | 38.12        |      | 12.47          | 50.59                  |      | 74.00                 | 54.00 | -23.41 | 75              | 100       |
| 17355.0000 | 27.56        |      | 20.33          | 47.89                  |      | 74.00                 | 54.00 | -26.11 | 115             | 100       |



| Mode:<br>Polarization:           | 802.11               | n 20MHz 582<br>Horizontal | 25MHz                   |        |                           |                         |              |                           |             |                         |                           |                      |
|----------------------------------|----------------------|---------------------------|-------------------------|--------|---------------------------|-------------------------|--------------|---------------------------|-------------|-------------------------|---------------------------|----------------------|
| Frequency<br>(MHz)               | Reading<br>(dBuV)    | Detector                  | Facto<br>(dB)           |        | Result                    | (dBuV/m)                |              | nit<br>V/m)               | Marg<br>(dł | 0                       | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643                         | 14.55                | peak                      | 13.98                   | }      | 2                         | 8.53                    | 46           | .00                       | -17.        | 47                      | 195                       | 100                  |
| 300.2004                         | 13.78                | peak                      | 16.00                   | )      | 29.78                     |                         | 46           | .00                       | -16.        | 22                      | 60                        | 100                  |
| 335.1904                         | 12.74                | peak                      | 16.91                   |        | 2                         | 9.65                    | 46           | .00                       | -16.        | 35                      | 135                       | 100                  |
| 366.2926                         | 10.86                | peak                      | 17.66                   | ,<br>) | 2                         | 8.52                    | 46           | .00                       | -17.        | 48                      | 210                       | 100                  |
|                                  |                      |                           |                         | -      |                           |                         |              |                           |             |                         |                           |                      |
| Frequency                        |                      | ding<br>uV)               | Factor<br>(dB)          |        |                           | lt @3m<br>uV/m)         |              | it @3m<br>suV/m)          | I           | Margi                   | n Table<br>Degree         | Ant.<br>High         |
| (MHz)                            | Peak                 | Ave.                      | Corr.                   |        | Peak                      | •                       | Pea          |                           |             | (dB)                    |                           | (cm)                 |
| 11607.7150                       | 37.38                |                           | 12.55                   | 4      | 9.93                      |                         | 74.00        | 54.0                      |             | -24.0                   | , J,                      | 100                  |
| 17415.0000                       | 27.40                |                           | 19.73                   |        | 7.13                      |                         | 74.00        | 54.0                      |             | -26.8                   |                           | 100                  |
|                                  |                      |                           |                         |        |                           |                         | 1 1100       | 0.110                     | •           | 2010                    |                           |                      |
| Polarization:                    | Vertical             |                           |                         |        |                           |                         |              |                           |             |                         |                           |                      |
| Frequency<br>(MHz)               | Reading<br>(dBuV)    | Detector                  | . Fac<br>(dE            |        |                           | Result<br>BuV/m)        | Lin<br>(dBu) |                           | Mar<br>(d   | rgin<br>B)              | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                          | 18.27                | peak                      | 10.8                    | 10.89  |                           | 29.16                   | 43.50        |                           | -14         | .34                     | 250                       | 100                  |
| 166.0721                         | 11.85                | peak                      | 15.0                    | )3     | 26.88                     |                         | 43.50        |                           | -16         |                         | 175                       | 100                  |
| 368.2364                         | 11.09                | peak                      |                         | 17.73  |                           | 28.82                   | 46.00        |                           | -17         |                         | 80                        | 100                  |
| 502.3647                         | 9.35                 | peak                      | 20.9                    |        |                           | 30.31                   | 46.          |                           | -15         |                         | 165                       | 100                  |
|                                  | 1                    |                           |                         |        |                           |                         |              |                           |             |                         |                           |                      |
| Frequency<br>(MHz)               | Read<br>(dBu<br>Peak | 0                         | Factor<br>(dB)<br>Corr. |        | Result (<br>(dBuV<br>Peak |                         |              | @3m<br>V/m)<br>Ave.       |             | largin<br>(dB)          | Table<br>Degree<br>(Deg.) | Ant. High<br>(cm)    |
| 11607.7150                       | 43.39                | 40.10                     | 12.55                   | 55.    | 94                        | 52.65                   | 74.00        | 54.00                     | -           | 1.35                    | 153                       | 100                  |
| 17415.0000                       | 27.78                |                           | 19.73                   | 47.    | 51                        |                         | 74.00        | 54.00                     | -2          | 26.49                   | 50                        | 100                  |
| Mode:<br>Polarization:           | 802.11               | n 40MHz 575<br>Horizontal | 55MHz                   |        |                           |                         | 1            |                           |             |                         |                           |                      |
| Frequency<br>(MHz)               | Reading<br>(dBuV)    | Detector                  | Facto<br>(dB)           |        | Result                    | (dBuV/m)                |              | nit<br>V/m)               | Marg<br>(df | 0                       | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 232.1643                         | 13.65                | peak                      | 13.98                   | }      |                           | 7.63                    | 46           | .00                       | -18.        | 37                      | 165                       | 100                  |
| 300.2004                         | 13.97                | peak                      | 16.00                   |        |                           | 9.97                    |              | .00                       | -16.        |                         | 130                       | 100                  |
| 335.1904                         | 12.49                | peak                      | 16.91                   |        |                           | 9.40                    |              | .00                       | -16.        |                         | 170                       | 100                  |
| 368.2365                         | 11.39                | peak                      | 17.73                   | }      | 2                         | 9.12                    | 46           | .00                       | -16.        | 88                      | 40                        | 100                  |
|                                  |                      |                           |                         |        |                           |                         |              |                           | -           |                         |                           |                      |
| Frequency<br>(MHz)               | (dB                  | ding<br>uV)<br>Ave.       | Factor<br>(dB)<br>Corr. |        | (dBı                      | lt @3m<br>uV/m)<br>Ave. | (dE          | it @3m<br>suV/m)<br>k Ave |             | Margi<br>(dB)           | Degree                    | Ant.<br>High<br>(cm) |
| Frequency<br>(MHz)<br>11510.0000 |                      |                           |                         |        |                           | uV/m)                   |              | uV/m)                     |             | Margi<br>(dB)<br>-25.74 | Degree<br>(Deg.)          |                      |



#### Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| Polarization:      | Vertical          |          |                |                    |                   |                |                           |                      |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800            | 18.19             | peak     | 10.89          | 29.08              | 43.50             | -14.42         | 50                        | 100                  |
| 300.2004           | 11.87             | peak     | 16.00          | 27.87              | 46.00             | -18.13         | 135                       | 100                  |
| 368.2365           | 11.69             | peak     | 17.73          | 29.42              | 46.00             | -16.58         | 175                       | 100                  |
| 502.3647           | 10.70             | peak     | 20.96          | 31.66              | 46.00             | -14.34         | 80                        | 100                  |

| Frequency  | Read<br>(dBi | 0    | Factor<br>(dB) | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin | Table<br>Degree | Ant. High |
|------------|--------------|------|----------------|------------------------|------|-----------------------|-------|--------|-----------------|-----------|
| (MHz)      | Peak         | Ave. | Corr.          | Peak                   | Ave. | Peak                  | Ave.  | (dB)   | (Deg.)          | (cm)      |
| 11512.5250 | 36.83        |      | 12.25          | 49.08                  |      | 74.00                 | 54.00 | -24.92 | 170             | 100       |
| 17265.0000 | 28.55        |      | 20.77          | 49.32                  |      | 74.00                 | 54.00 | -24.68 | 103             | 100       |

| Mode:<br>Polarization: |                   | 40MHz 5795<br>Horizontal | MHz            |                 |                   |                |                        |                      |
|------------------------|-------------------|--------------------------|----------------|-----------------|-------------------|----------------|------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Factor<br>(dB) | Result (dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 232.1643               | 13.94             | peak                     | 13.98          | 27.92           | 46.00             | -18.08         | 130                    | 100                  |
| 300.2004               | 14.17             | peak                     | 16.00          | 30.17           | 46.00             | -15.83         | 115                    | 100                  |
| 335.1904               | 12.66             | peak                     | 16.91          | 29.57           | 46.00             | -16.43         | 70                     | 100                  |
| 368.2365               | 11.36             | peak                     | 17.73          | 29.09           | 46.00             | -16.91         | 165                    | 100                  |

| Frequency  | Readir<br>(dBu\ | 0    | Factor<br>(dB) | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin | Table<br>Degree | Ant.<br>High |
|------------|-----------------|------|----------------|------------------------|------|-----------------------|-------|--------|-----------------|--------------|
| (MHz)      | Peak            | Ave. | Corr.          | Peak                   | Ave. | Peak                  | Ave.  | (dB)   | (Deg.)          | (cm)         |
| 11590.0000 | 35.44           |      | 12.55          | 47.99                  |      | 74.00                 | 54.00 | -26.01 | 140             | 100          |
| 17385.0000 | 29.27           |      | 19.85          | 49.12                  |      | 74.00                 | 54.00 | -24.88 | 210             | 100          |

Polarization: Vertical

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 99.9800            | 17.51             | peak     | 10.89          | 28.40              | 43.50             | -15.10         | 150                       | 100                  |
| 166.0721           | 11.10             | peak     | 15.03          | 26.13              | 43.50             | -17.37         | 195                       | 100                  |
| 366.2926           | 11.24             | peak     | 17.66          | 28.90              | 46.00             | -17.10         | 60                        | 100                  |
| 500.4208           | 9.26              | peak     | 20.92          | 30.18              | 46.00             | -15.82         | 130                       | 100                  |

| Frequency  |       | Reading F<br>(dBuV) |       | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin | Table<br>Degree | Ant. High |
|------------|-------|---------------------|-------|------------------------|------|-----------------------|-------|--------|-----------------|-----------|
| (MHz)      | Peak  | Ave.                | Corr. | Peak                   | Ave. | Peak                  | Ave.  | (dB)   | (Deg.)          | (cm)      |
| 11588.6770 | 38.79 |                     | 12.55 | 51.34                  |      | 74.00                 | 54.00 | -22.66 | 216             | 100       |
| 17385.0000 | 28.25 |                     | 19.85 | 48.10                  |      | 74.00                 | 54.00 | -25.90 | 110             | 100       |



| Mode:<br>Polarization:                         |                            | 1ac 5775M<br>Horizontal  | Hz                      |      |                        |                           |                   |                        |                |                 |                        |                      |
|--|----------------------------|--------------------------|-------------------------|------|------------------------|---------------------------|-------------------|------------------------|----------------|-----------------|------------------------|----------------------|
| Frequency<br>(MHz)                             | Reading<br>(dBuV)          | Detector                 | Factor<br>(dB)          | r F  | Result                 | (dBuV/m)                  | Lin<br>(dBu\      | -                      | Mar<br>(d      | 0               | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 232.1643                                       | 15.17                      | peak                     | 13.98                   |      | 2                      | 9.15                      | 46.               | 00                     | -16            | .85             | 235                    | 100                  |
| 300.2004                                       | 13.99                      | peak                     | 16.00                   |      | 2                      | 9.99                      | 46.               | 00                     | -16            | .01             | 170                    | 100                  |
| 335.1904                                       | 12.94                      | peak                     | 16.91                   |      | 2                      | 9.85                      | 46.               | 00                     | -16            | .15             | 45                     | 100                  |
| 366.2926                                       | 10.93                      | peak                     | 17.66                   |      | 2                      | 8.59                      | 46.               | 00                     | -17            | .41             | 120                    | 100                  |
| Frequency<br>(MHz)                             | Read<br>(dBu<br>Peak       | 0                        | Factor<br>(dB)<br>Corr. |      |                        | lt @3m<br>uV/m)<br>: Ave. |                   | :@3m<br>uV/m)<br>c Ave |                | Margii<br>(dB)  | Degree                 | Ant.<br>High<br>(cm) |
| 11510.0000                                     | 34.61                      |                          | 12.24                   | 46   | 5.85                   |                           | 74.00             | 54.00                  |                | -27.1           | ( )/                   | 100                  |
| 17265.0000                                     | 27.36                      |                          | 20.77                   |      | 3.13                   |                           | 74.00             | 54.00                  |                | -25.8           |                        | 100                  |
| Polarization:<br>Frequency                     | Vertical<br>Reading        |                          | Fact                    | or   | F                      | Result                    | Lim               | it                     | Ма             | rgin            | Table                  | Ant.                 |
| (MHz)  | (dBuV)                     | Detector                 | (dB                     | )    | (dBuV/m)               |                           | (dBuV/m)          |                        | (dB)           |                 | Degree<br>(Deg.)       | High<br>(cm)         |
| 99.9800  | 18.20                      | peak                     | 10.8                    |      |                        | 29.09                     |                   | 43.50                  |                | .41             | 95                     | 100                  |
| 168.0160                                       | 10.90                      | peak                     | 14.9                    | 1    |                        | 25.81                     | 43.50             |                        | -17            | .69             | 110                    | 100                  |
| 300.2004                                       | 12.52                      | peak                     | 16.0                    | 0    | 2                      | 28.52                     | 46.0              | 0                      | -17            | .48             | 165                    | 100                  |
| 502.3647                                       | 9.86                       | peak                     | 20.9                    | 6    | 3                      | 30.82                     | 46.0              | 00                     | -15            | .18             | 130                    | 100                  |
|  |                            |                          |                         |      |                        |                           |                   |                        |                |                 |                        |                      |
| Frequency                                      | Readi<br>(dBu <sup>v</sup> | ٧)                       | Factor<br>(dB)          | (    | Result @3m<br>(dBuV/m) |                           | Limit (<br>(dBu)  | //m)                   | N              | /largin         | Table<br>Degree        | Ant. High            |
| (MHz)  | 1                          | Ave.                     | Corr.                   |      | eak                    | Ave.                      | Peak              | Ave.                   |                | (dB)            | (Deg.)                 | (cm)                 |
| 11510.0000                                     | 34.25                      |                          | 12.24                   | 46.4 |                        |                           | 74.00             | 54.00                  | -              | 27.51           | 215                    | 100                  |
| 17265.0000                                     | 28.46                      |                          | 20.77                   | 49.2 | 23                     |                           | 74.00             | 54.00                  | -              | 24.77           | 140                    | 100                  |
| Mode:<br>Polarization:                         |                            | 20 MHz 241<br>Horizontal | 12MHz                   |      |                        |                           | 1                 |                        |                |                 |                        |                      |
| Frequency<br>(MHz)                             | Reading<br>(dBuV)          | Detector                 | Facto<br>(dB)           | r F  | Result (dBuV/m)        |                           | Limit<br>(dBuV/m) |                        | Margin<br>(dB) |                 | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 300.2004                                       | 14.97                      | peak                     | 16.00                   |      |                        | 0.97                      | 46.               | 00                     | -15.03         |                 | 115                    | 100                  |
| 640.3808                                       | 11.94                      | peak                     | 23.51                   |      | 3                      | 5.45                      | 46.               | 00                     | -10.55         |                 | 90                     | 100                  |
|  |                            |                          |                         |      |                        |                           | 1                 |                        |                |                 |                        |                      |
| Frequency                                      | Read<br>(dBu               | 0                        | Factor<br>(dB)          |      | Result @3m<br>(dBuV/m) |                           |                   | : @3m<br>uV/m)         | Margi          |                 | n Table<br>Degree      | Ant.<br>High         |
| $(\Lambda \Lambda \downarrow \downarrow \neg)$ | Peak                       | Ave.                     | Corr.                   |      | Peak                   | Ave.                      | Peal              | <u>Ave</u>             |                | (dB)            | (Deg.)                 | (cm)                 |
| (MHz)  |                            |                          | 0.56                    | 42   | 2.25                   |                           | 74.00             | 54.00                  | )              | -31.7           | 5 155                  | 100                  |
| 4824.0000                                      | 41.69                      |                          | 0.50                    |      |                        |                           |                   |                        | -              |                 |                        |                      |
| · · ·  | 41.69<br>40.81             |                          | 3.93                    |      | 1.74                   |                           | 74.00             | 54.00                  |                | -29.20          |                        | 100                  |
| 4824.0000                                      |                            |                          |                         | 44   |                        |                           |                   |                        | C              | -29.20<br>-31.0 | 6 70                   | 100<br>100           |



| Polarization:          | Vertical             | T                       |                         |      |                    |                             |                   |       |                |                           |                      |
|------------------------|----------------------|-------------------------|-------------------------|------|--------------------|-----------------------------|-------------------|-------|----------------|---------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                | Fact<br>(dB             |      |                    | Result<br>BuV/m)            | Lin<br>(dBu\      |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 101.9238               | 17.58                | peak                    | 11.1                    | 19   |                    | 28.77                       | 43.               | 50    | -14.73         | 75                        | 100                  |
| 168.0160               | 10.48                | peak                    | 14.9                    | 91   |                    | 25.39                       | 43.               | 50    | -18.11         | 120                       | 100                  |
|                        |                      |                         |                         | 1    |                    |                             |                   |       | r              |                           | 1                    |
| Frequency              | Read<br>(dBu         | V)                      | Factor<br>(dB)          | (    | (dBu\              |                             | Limit<br>(dBu     |       | Margir         | Degree                    | Ant. High            |
| (MHz)                  | 1                    | Ave.                    | Corr.                   |      | eak                | Ave.                        | Peak              | Ave.  | (dB)           | (Deg.)                    | (cm)                 |
| 4824.0000              | 41.67                |                         | 0.56                    | 42.2 |                    |                             | 74.00             | 54.00 | -31.77         |                           | 100                  |
| 7236.0000              | 40.44                |                         | 3.93                    | 44.3 |                    |                             | 74.00             | 54.00 | -29.63         |                           | 100                  |
| 9648.0000              | 35.57                |                         | 7.98                    | 43.5 |                    |                             | 74.00             | 54.00 | -30.45         |                           | 100                  |
| 12060.0000             | 33.82                |                         | 13.03                   | 46.8 | 35                 |                             | 74.00             | 54.00 | -27.15         | 5 110                     | 100                  |
| Mode:<br>Polarization: |                      | 20MHz 243<br>Horizontal | 7MHz                    |      |                    |                             |                   |       |                | Γ                         |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                | Facto<br>(dB)           | r F  | Resul              | t (dBuV/m)                  | Lir<br>(dBu       |       | Margin<br>(dB) | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 368.2365               | 12.49                | peak                    | 17.73                   |      | 30.22              |                             | 46.00             |       | -15.78         | 80                        | 100                  |
| 640.3808               | 12.17                | peak                    | 23.51                   |      | 35.68              |                             | 46.00             |       | -10.32         | 250                       | 100                  |
| Frequency<br>(MHz)     | Read<br>(dBu<br>Peak | 0                       | Factor<br>(dB)<br>Corr. |      | (dB<br>Peal        | ult @3m<br>suV/m)<br>k Ave. | (dB<br>Pea        | 1     |                | Degree<br>) (Deg.)        | Ant.<br>High<br>(cm) |
| 4874.0000              | 42.01                |                         | 0.70                    |      | 2.71               |                             | 74.00             | 54.00 |                |                           | 100                  |
| 7311.0000              | 40.65                |                         | 3.74                    |      | 4.39               |                             | 74.00             | 54.00 |                |                           | 100                  |
| 9748.0000              | 34.91                |                         | 8.30                    |      | 3.21               |                             | 74.00             | 54.00 |                |                           | 100                  |
| 12185.0000             | 32.80                |                         | 13.62                   | 46   | 5.42               |                             | 74.00             | 54.00 | 0 -27.5        | 120                       | 100                  |
| Polarization:          | Vertical             |                         |                         |      |                    |                             |                   |       |                |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                | Fact<br>(dB             |      | Result<br>(dBuV/m) |                             | Limit<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 98.0361                | 17.62                | peak                    | 10.4                    | 49   | 28.11              |                             | 43.               | 50    | -15.39         | 115                       | 100                  |
| 640.3808               | 9.78                 | peak                    | 23.5                    | 51   |                    | 33.29                       | 46.0              | 00    | -12.71         | 130                       | 100                  |
| Frequency              | Read<br>(dBu         | 0                       | Factor<br>(dB)          |      | esult<br>(dBu\     | @3m<br>V/m)                 | Limit<br>(dBu     |       | Margir         | n Table<br>Degree         | Ant. High            |
| (MHz)                  |                      | Ave.                    | Corr.                   |      | Peak               | Ave.                        | Peak              | Ave.  | (dB)           | (Deg.)                    | (cm)                 |
| 4874.0000              | 41.97                |                         | 0.70                    | 42.6 |                    |                             | 74.00             | 54.00 | -31.33         |                           | 100                  |
| 7311.0000              | 41.05                |                         | 3.74                    | 44.7 |                    |                             | 74.00             | 54.00 | -29.21         |                           | 100                  |
| 9748.0000              | 34.91                |                         | 8.30                    | 43.2 |                    |                             | 74.00             | 54.00 | -30.79         |                           | 100                  |
| 12185.0000             | 32.60                |                         | 13.62                   | 46.2 | 22                 |                             | 74.00             | 54.00 | -27.78         | 8 50                      | 100                  |



| Mode:<br>Polarization: |                   | 20MHz 246<br>Horizontal | 2MHz           |                        |                        |                       | 1                        |             |                |                 |                        |                      |
|------------------------|-------------------|-------------------------|----------------|------------------------|------------------------|-----------------------|--------------------------|-------------|----------------|-----------------|------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                | Factor<br>(dB) | Re                     | esult                  | (dBuV/m)              | Lin<br>(dBu <sup>v</sup> |             |                | argin<br>(dB)   | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 300.2004               | 14.09             | peak                    | 16.00          |                        | 3                      | 0.09                  | 46.                      | 00          | -1             | 5.91            | 80                     | 100                  |
| 640.3808               | 12.28             | peak                    | 23.51          |                        | 3                      | 5.79                  | 46.                      | 00          | -1             | 0.21            | 135                    | 100                  |
|                        |                   |                         |                |                        |                        |                       |                          |             |                |                 |                        |                      |
| Frequency              | Read<br>(dBu      | 0                       | Factor<br>(dB) | F                      | Result @3m<br>(dBuV/m) |                       | Limit @3m<br>(dBuV/m)    |             |                | Margi           | n Table<br>Degree      | Ant.<br>High         |
| (MHz)                  | Peak              | Áve.                    | Corr.          | F                      | Peak                   | Áve.                  | Peal                     |             | ).             | (dB)            |                        | (cm)                 |
| 4924.0000              | 41.47             |                         | 0.93           | 42.                    | .40                    |                       | 74.00                    | 54.0        | 0              | -31.6           | 0 105                  | 100                  |
| 7386.0000              | 39.92             |                         | 3.92           | 43.                    | .84                    |                       | 74.00                    | 54.0        | 0              | -30.1           | 6 130                  | 100                  |
| 9848.0000              | 34.58             |                         | 8.67           | 43.                    |                        |                       | 74.00                    | 54.0        |                | -30.7           |                        | 100                  |
| 12310.0000             | 35.08             |                         | 14.38          | 49.                    |                        |                       | 74.00                    | 54.0        |                | -24.5           |                        | 100                  |
| 12310.0000             | 55.00             |                         | 14.30          | 47.                    | .40                    |                       | 74.00                    | 54.0        | U              | -24.5           | 4 155                  | 100                  |
| Polarization:          | Vertical          | 1                       |                |                        |                        |                       |                          |             |                |                 | 1                      |                      |
| Fraguanay              | Dooding           |                         | Fact           | or                     | Decult                 |                       | L ins H                  |             | N              | Iorain          | Table                  | Ant.                 |
| Frequency              | Reading           | Detector                | Fact           |                        |                        |                       | Limit<br>(dBuV/m)        |             | IV             | largin<br>(dB)  | Degree                 | High                 |
| (MHz)                  | (dBuV)            |                         | (dB            | )                      |                        |                       |                          |             | (ub)           |                 | (Deg.)                 | (cm)                 |
| 99.9800                | 18.58             | peak                    | 10.8           | 20                     | 29.47                  |                       | 43.50                    |             |                | 14.03           | 125                    | 100                  |
|                        |                   |                         |                |                        |                        |                       | 43.50                    |             |                |                 |                        |                      |
| 162.1844               | 12.04             | peak                    | 15.2           | .7                     | 2                      | 27.31                 | 43.3                     | 0           | -              | 16.19           | 140                    | 100                  |
|                        |                   |                         |                |                        |                        |                       |                          |             |                |                 |                        |                      |
| Frequency              | Read<br>(dBu      | 0                       | Factor<br>(dB) | Result @3m<br>(dBuV/m) |                        | Limit @3m<br>(dBuV/m) |                          | Margin      |                | Table<br>Degree | Ant. High              |                      |
| (MHz)                  | Peak              | Ave.                    | Corr.          | •                      | Peak Ave.              |                       | Peak Ave.                |             |                | (dB)            | (Deg.)                 | (cm)                 |
| 4924.0000              | 41.51             |                         | 0.93           | 42.44                  |                        |                       |                          | 74.00 54.00 |                | -31.56          |                        | 100                  |
| 7386.0000              | 39.85             |                         | 3.92           | 43.77                  |                        |                       | 74.00                    | 54.00       |                | -30.23          |                        | 100                  |
| 9848.0000              | 34.92             |                         | 8.67           | 43.59                  |                        |                       | 74.00                    | 54.00       |                | -30.23          | 95                     | 100                  |
|                        |                   |                         |                |                        |                        |                       |                          |             |                |                 |                        |                      |
| 12310.0000             | 35.13             |                         | 14.38          | 49.51                  | I                      |                       | 74.00                    | 54.00       |                | -24.49          | 170                    | 100                  |
| Mode:<br>Polarization: |                   | 40MHz 242<br>Horizontal | 2MHz           |                        |                        |                       |                          |             |                |                 |                        |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                | Factor<br>(dB) | r Re                   | Result (dBuV/m)        |                       | Limit<br>(dBuV/m)        |             | Margin<br>(dB) |                 | Table Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 300.2004               | 15.85             | peak                    | 16.00          |                        | 3                      | 1.85                  | 46.                      | 00          | -14.15         |                 | 170                    | 100                  |
| 640.3808               | 12.57             | peak                    | 23.51          |                        | 3                      | 6.08                  | 46.                      | 00          | _(             | 9.92            | 205                    | 100                  |
|                        |                   |                         |                |                        |                        |                       |                          |             |                |                 |                        |                      |
| Frequency              | Read              | 0                       | Factor         | F                      |                        | t @3m                 |                          | :@3m        |                | Margi           |                        | Ant.                 |
| riequency              | I (dBi            | JV)                     | (dB)           |                        | •                      | uV/m)                 | •                        | uV/m)       |                | ,               | Degree                 | High                 |
|                        |                   | •                       |                | I [                    | Peak Ave.              |                       | Peak Ave                 |             | e. (dB)        |                 | (Deg.)                 | (cm)                 |
| (MHz)                  | Peak              | Áve.                    | Corr.          |                        |                        | 7100.                 |                          |             |                | . ,             | · 37                   |                      |
| (MHz)<br>4844.0000     | Peak<br>41.37     | •                       | 0.62           | 41.                    | .99                    |                       | 74.00                    | 54.0        | 0              | -32.0           | 1 45                   | 100                  |
| (MHz)                  | Peak              | Áve.                    |                |                        | .99                    |                       |                          |             | 0              | . ,             | 1 45                   |                      |
| (MHz)<br>4844.0000     | Peak<br>41.37     | Áve                     | 0.62           | 41.                    | .99<br>.01             |                       | 74.00                    | 54.0        | 0              | -32.0           | 1 45<br>9 130          | 100                  |



| Polarization:          | Vertical             |                           |                         |      |                        |                           |                                 |                   |                |                     |   |                      |
|------------------------|----------------------|---------------------------|-------------------------|------|------------------------|---------------------------|---------------------------------|-------------------|----------------|---------------------|---|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                  | Fact<br>(dB             |      |                        | Result<br>BuV/m)          |                                 | Limit<br>(dBuV/m) |                | n                   | Table<br>Degree<br>(Deg.)               | Ant.<br>High<br>(cm) |
| 99.9800                | 18.05                | peak                      | 10.8                    | 9    |                        | 28.94                     | 43.                             | 50                | -14.56         | 5                   | 110                                     | 100                  |
| 640.3808               | 9.57                 | peak                      | 23.5                    |      |                        | 33.08                     | 46.0                            |                   | -12.92         |                     | 75                                      | 100                  |
| 01010000               | ,,                   | pour                      | 2010                    | •    |                        |                           | 10.1                            |                   |                | -                   | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | 100                  |
| Frequency              | Read<br>(dBu         |                           | Factor<br>(dB)          |      | esult<br>(dBu∖         | @3m<br>//m)               | Limit<br>(dBu                   |                   | Mar            | gin                 | Table<br>Degree                         | Ant. High            |
| (MHz)                  | Peak                 | Ave.                      | Corr.                   | Р    | eak                    | Ave.                      | Peak                            | Ave.              | (d             | B)                  | (Deg.)                                  | (cm)                 |
| 4844.0000              | 41.33                |                           | 0.62                    | 41.9 | 95                     |                           | 74.00                           | 54.00             | -32.           | .05                 | 145                                     | 100                  |
| 7266.0000              | 41.03                |                           | 3.83                    | 44.8 | 36                     |                           | 74.00                           | 54.00             | -29.           | .14                 | 220                                     | 100                  |
| 9688.0000              | 34.90                |                           | 7.93                    | 42.8 | 33                     |                           | 74.00                           | 54.00             | -31.           | .17                 | 135                                     | 100                  |
| 12110.0000             | 33.17                |                           | 13.44                   | 46.6 | 51                     |                           | 74.00                           | 54.00             | -27.           | .39                 | 90                                      | 100                  |
| Mode:<br>Polarization: | 802.11n              | n 40MHz 243<br>Horizontal | 57MHz                   |      |                        |                           |                                 |                   |                |                     |   |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                  | Factor<br>(dB)          |      | Result (dBuV/m)        |                           | Limit<br>(dBuV/m)               |                   | Margin<br>(dB) | n T                 | able Degree<br>(Deg.)                   | Ant.<br>High<br>(cm) |
| 300.2004               | 14.30                | peak                      | 16.00                   |      | 30.30                  |                           | 46.00                           |                   | -15.70         | )                   | 105                                     | 100                  |
| 640.3808               | 11.54                | peak                      | 23.51                   |      | 35.05                  |                           | 46.00                           |                   | -10.95         |                     | 150                                     | 100                  |
| Frequency<br>(MHz)     | Read<br>(dBi<br>Peak | 0                         | Factor<br>(dB)<br>Corr. | (dB  |                        | lt @3m<br>uV/m)<br>< Ave. | Limit @3r<br>(dBuV/m)<br>Peak A |                   |                | argin<br>dB)        | Degree                                  | Ant.<br>High<br>(cm) |
| 4874.0000              | 41.89                | Ave                       | 0.70                    | 1    | <u>Peak</u><br>2.59    |                           | 74.00                           | k Ave<br>54.00    |                | и <i>Б)</i><br>1.41 | (Deg.)<br>195                           | 100                  |
| 7311.0000              | 40.34                |                           | 3.74                    |      | 4.08                   |                           | 74.00                           | 54.00             |                | 9.92                | 210                                     | 100                  |
| 9748.0000              |                      |                           |                         |      |                        |                           | -                               |                   |                |                     | 75                                      |                      |
| 12185.0000             | 34.96<br>33.12       |                           | 8.30<br>13.62           |      | 3.26<br>5.74           |                           | 74.00                           | 54.00<br>54.00    |                | 0.74<br>7.26        | 160                                     | 100<br>100           |
| 12165.0000             | 33.TZ                |                           | 13.02                   | 40   | ).74                   |                           | 74.00                           | 34.00             | 0 -2           | 1.20                | 100                                     | 100                  |
| Polarization:          | Vertical             | -                         |                         |      |                        |                           |                                 |                   |                |                     |   |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV)    | Detector                  | Fact<br>(dB             |      | Result<br>(dBuV/m)     |                           | Limit<br>(dBuV/m)               |                   | Margii<br>(dB) |                     | Table<br>Degree<br>(Deg.)               | Ant.<br>High<br>(cm) |
| 99.9800                | 17.86                | peak                      | 10.8                    | 9    |                        | 28.75                     | 43.                             | 50                | -14.75         | 5                   | 145                                     | 100                  |
| 164.1283               | 11.56                | peak                      | 15.1                    | 5    | 4                      | 26.71                     | 43.                             | 50                | -16.79         | 9                   | 130                                     | 100                  |
|                        |                      |                           |                         |      |                        |                           |                                 |                   |                |                     |   |                      |
| Frequency              | Read<br>(dBu         | IV)                       | Factor<br>(dB)          | (    | Result @3m<br>(dBuV/m) |                           | Limit @3m<br>(dBuV/m)           |                   | Margin         |                     | Table<br>Degree                         | Ant. High            |
| (MHz)                  | Peak                 | Ave.                      | Corr.                   |      | eak                    | Ave.                      | Peak                            | Ave.              | (d             |                     | (Deg.)                                  | (cm)                 |
| 4874.0000              | 42.06                |                           | 0.70                    | 42.7 | 76                     |                           | 74.00                           | 54.00             | -31.           | .24                 | 80                                      | 100                  |
| 7311.0000              | 40.31                |                           | 3.74                    | 44.0 | )5                     |                           | 74.00                           | 54.00             | -29.           | .95                 | 205                                     | 100                  |
| 9748.0000              | 34.58                |                           | 8.30                    | 42.8 | 38                     |                           | 74.00                           | 54.00             | -31.           | .12                 | 155                                     | 100                  |
|                        | 33.25                |                           |                         |      |                        |                           |                                 |                   |                | .13                 |   |                      |



#### Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

| Mode:<br>Polarization: | 802.11r           | n 40MHz 24<br>Horizontal | 52MHz          |        |                        |       |                       |         |                           |                      |
|------------------------|-------------------|--------------------------|----------------|--------|------------------------|-------|-----------------------|---------|---------------------------|----------------------|
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detector                 | Facto<br>(dB)  | r Resu | Result (dBuV/m)        |       | Limit<br>(dBuV/m)     |         | Table Degree<br>(Deg.)    | Ant.<br>High<br>(cm) |
| 368.2365               | 12.76             | peak                     | 17.73          | }      | 30.49                  | 46    | .00                   | -15.51  | 55                        | 100                  |
| 640.3808               | 11.07             | peak                     | 23.51          |        | 34.58                  | 46    | .00                   | -11.42  | 160                       | 100                  |
|                        |                   |                          |                |        |                        | Т     |                       |         |                           |                      |
| Frequency              | Rea<br>(dB        | 5                        | Factor<br>(dB) |        | Result @3m<br>(dBuV/m) |       | Limit @3m<br>(dBuV/m) |         | in Table<br>Degree        | Ant.<br>High         |
| (MHz)                  | Peak              | Ave.                     | Corr.          | Pea    | ak Ave.                | Pea   | k Ave                 | . (dB   | ) (Deg.)                  | (cm)                 |
| 4904.0000              | 41.41             |                          | 0.81           | 42.22  |                        | 74.00 | 54.00                 | .31.7   | 8 75                      | 100                  |
| 7356.0000              | 41.72             |                          | 3.84           | 45.56  |                        | 74.00 | 54.00                 | ) -28.4 | 4 160                     | 100                  |
| 9808.0000              | 35.24             |                          | 8.70           | 43.94  | 43.94 74.00 54.00 -30  |       | -30.0                 | 6 235   | 100                       |                      |
| 12260.0000             | 33.51             |                          | 14.09          | 47.60  |                        | 74.00 | 54.00                 | -26.4   | 0 110                     | 100                  |
| Polarization:          | Vertical          |                          |                |        |                        |       |                       |         |                           |                      |
| Frequency<br>(MHz)     | Reading<br>(dBuV) | Detecto                  | r Fact<br>(dE  |        | r Result<br>(dBuV/m)   |       | Limit<br>(dBuV/m)     |         | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
| 99.9800                | 18.28             | peak                     | 10.8           | 39     | 29.17                  | 43.   | 50                    | -14.33  | 75                        | 100                  |
| 300.2004               | 13.50             | peak                     | 16.0           | )0     | 29.50                  | 46.   | 00                    | -16.50  | 130                       | 100                  |
|                        |                   |                          |                |        |                        |       |                       |         |                           | T                    |
| Frequency              | Read<br>(dBu      |                          | Factor<br>(dB) |        | t @3m<br>ıV/m)         |       | @3m<br>V/m)           | Margir  | n Table<br>Degree         | Ant. High            |
| (MHz)                  | Peak              | Áve.                     | Corr.          | Peak   | Áve.                   | Peak  | Áve.                  | (dB)    | (Deg.)                    | (cm)                 |
| 4904.0000              | 41.84             |                          | 0.81           | 42.65  |                        | 74.00 | 54.00                 | -31.35  | 5 145                     | 100                  |
| 7356.0000              | 41.49             |                          | 3.84           | 45.33  |                        | 74.00 | 54.00                 | -28.67  | <sup>'</sup> 90           | 100                  |
| 9808.0000              | 35.46             |                          | 8.70           | 44.16  |                        | 74.00 | 54.00                 | -29.84  | 60                        | 100                  |
| 12260.0000             | 33.26             |                          | 14.09          | 47.35  |                        | 74.00 | 54.00                 | -26.65  | 5 130                     | 100                  |

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- **3.** Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement:  $30-1000 \text{ MHz} = \pm 3.68 \text{ dB}$ ,  $1-18 \text{ GHz} = \pm 5.37 \text{ dB}$ ,  $18-40 \text{ GHz} = \pm 3.43 \text{ dB}$ ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams in appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018



### 3.6 Radiated Emission on the band edge


According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

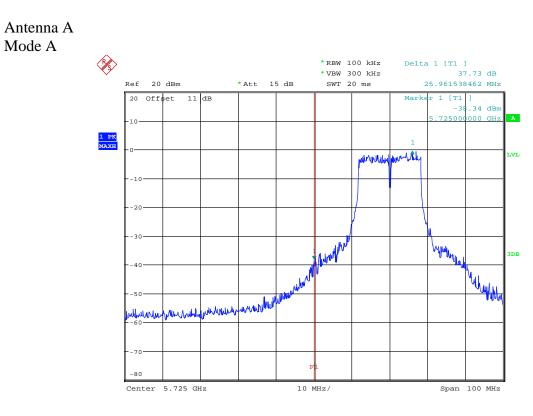


BANDEDGE 802.11A CH149 Date: 19.FEB.2014 12:21:15



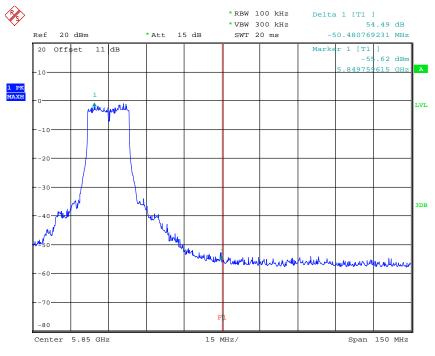


BANDEDGE 802.11A CH161 Date: 21.FEB.2014 10:07:52


Mode B

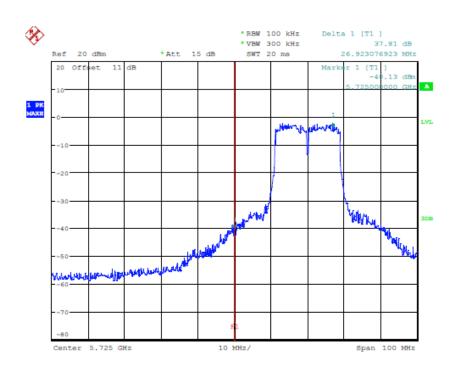


BANDEDGE 802.11N 20MHZ CH149 Date: 21.FEB.2014 09:02:06



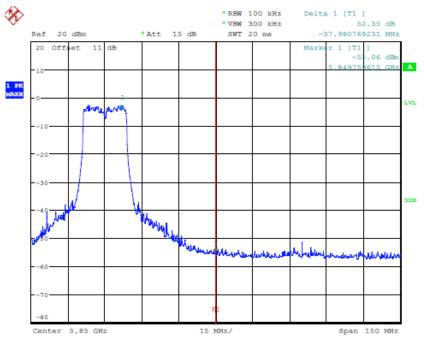




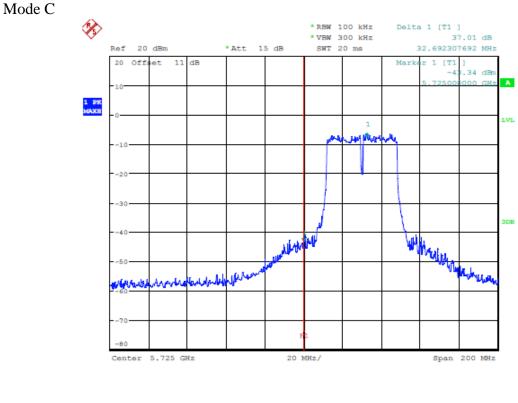


BANDEDGE 802.11N 40MHZ CH151 Date: 21.FEB.2014 09:04:04



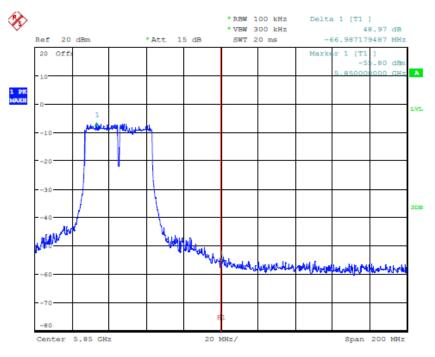




Mode D

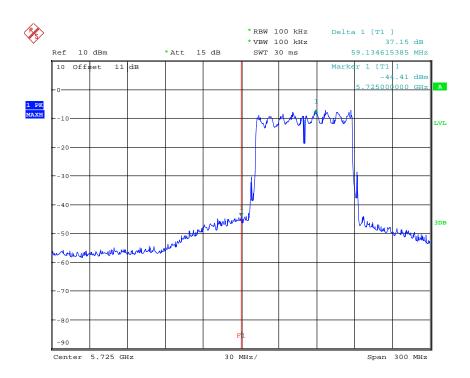


BANDEDGE 802.11AC CH155 Date: 21.FEB.2014 08:55:11



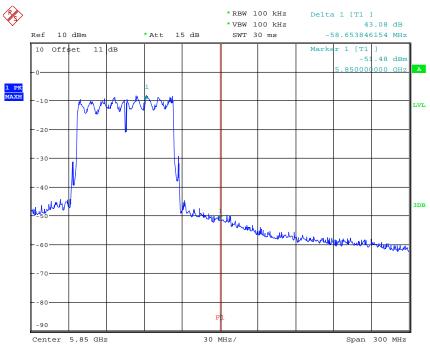


BANDEDGE 802.11AC CH155 Date: 21.FEB.2014 08:55:50


Mode E

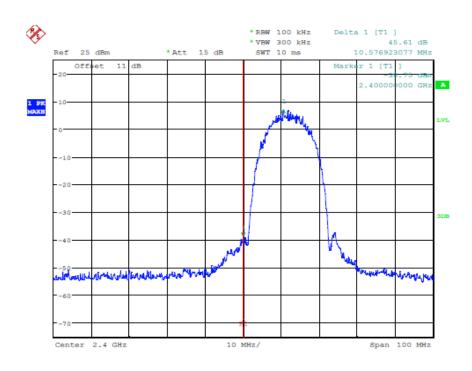


BANDEDGE 002.11B CH01 Date: 19.FEB.2014 10:17:26



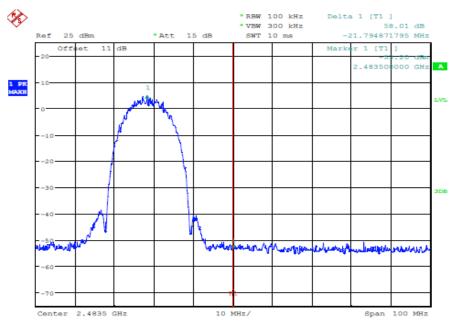




Mode F

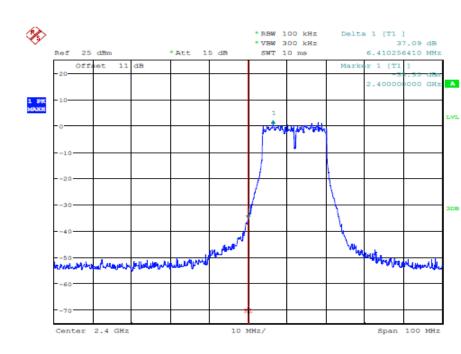


BANDEDGE 802.11G CH01 Date: 19.FEB.2014 10:22:03



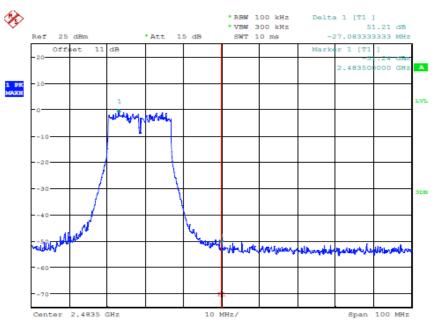


BANDEDGE 802.11G CH11 Date: 19.FEB.2014 10:24:13

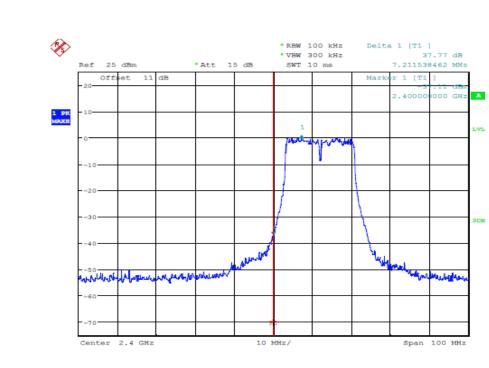


BANDEDGE 802.11N 20MHZ CH01 Date: 19.FEB.2014 10:25:34


Mode G



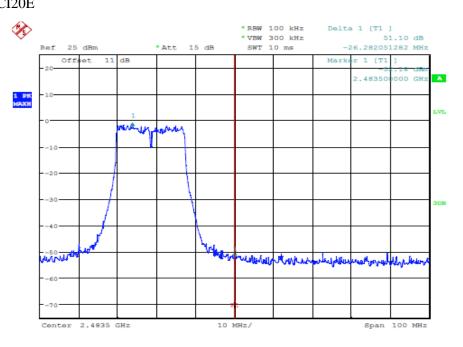




#### Mode H

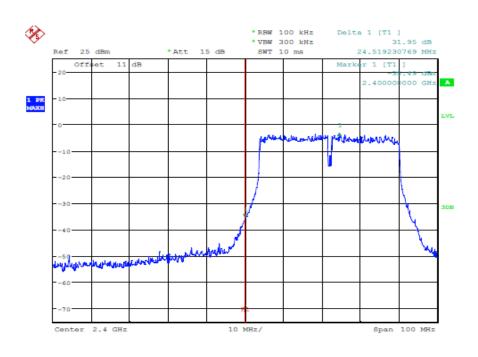


BANDEDGE 802.11N 40MHZ CH01 Date: 19.FEB.2014 10:28:15



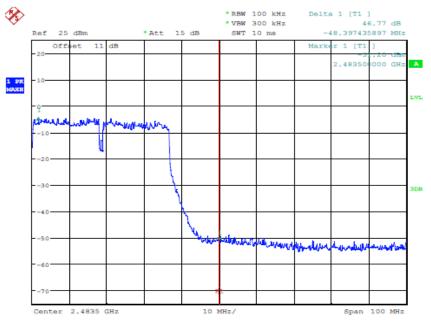

BANDEDGE 802.11N 40MHZ CH07 Date: 19.FEB.2014 10:29:48

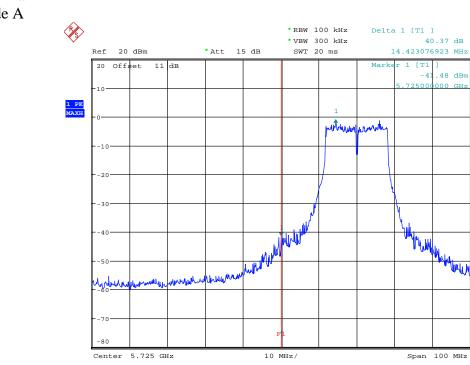


Antenna B Mode A

> BANDEDGE 802.11A CH149 Date: 19.FEB.2014 11:42:04

VL


DE



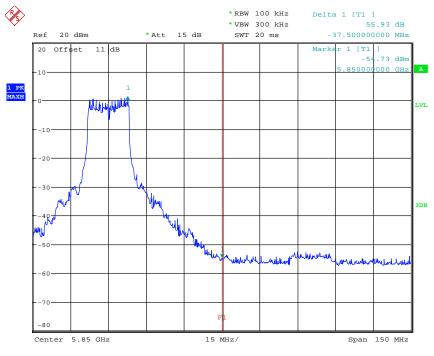


BANDEDGE 802.11A CH161 Date: 21.FEB.2014 07:11:28

Mode B

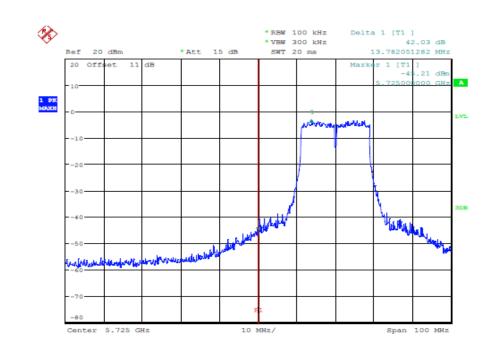


BANDEDGE 802.11N 20MHZ CH149 Date: 21.FEB.2014 06:13:15



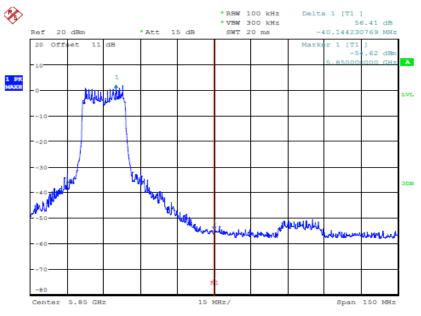


BANDEDGE 802.11N 20MHZ CH161 Date: 21.FEB.2014 07:12:19



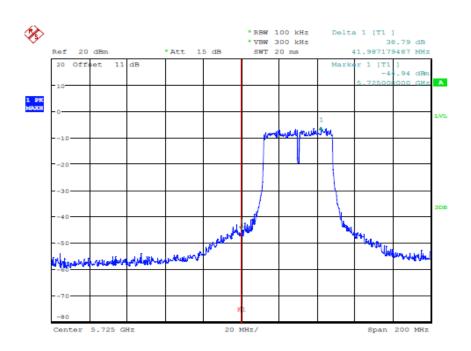


BANDEDGE 802.11N 40MHZ CH151 Date: 21.FEB.2014 06:15:01



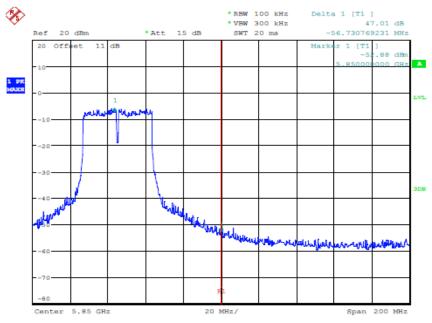

BANDEDGE 802.11N 40MHZ CH159 Date: 21.FEB.2014 06:16:01

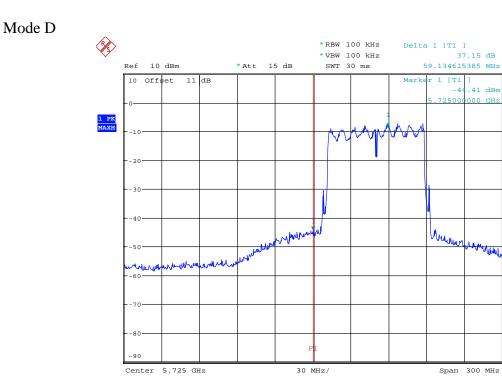


BANDEDGE 802.11AC CH155 Date: 21.FEB.2014 08:55:11 А

3DE




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21401-13806-C-1 FCC ID: ZTT-PCI20E

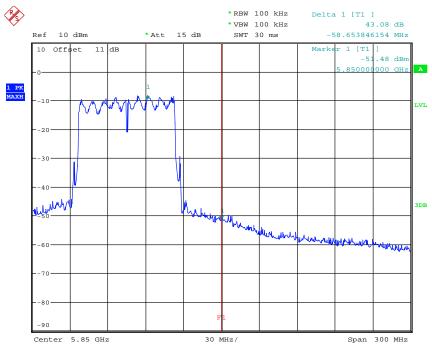


BANDEDGE 802.11AC CH155 Date: 21.FEB.2014 08:55:50

Mode E

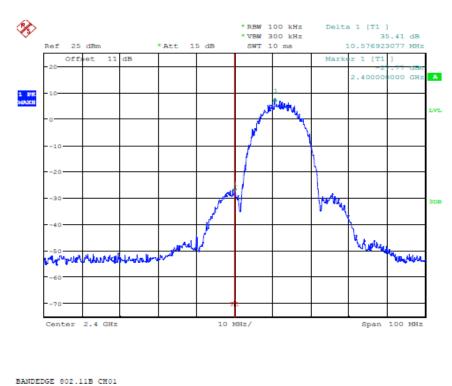


Date: 19.FEB.2014 11:01:30



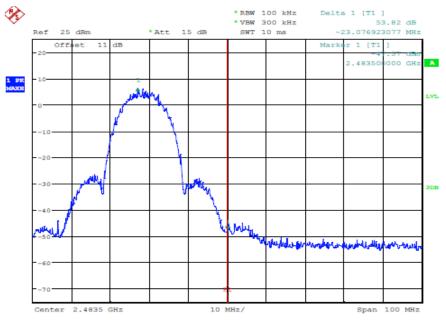


BANDEDGE 802.11B CH11 Date: 19.FEB.2014 11:02:54



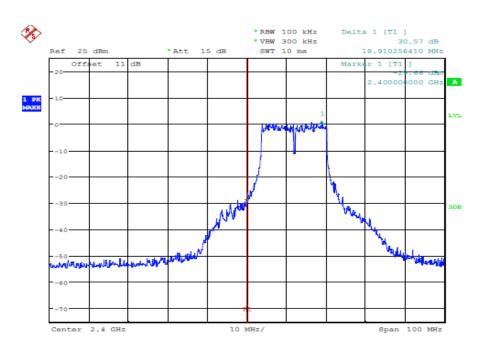


BANDEDGE 802.11G CH01 Date: 19.FEB.2014 11:04:06



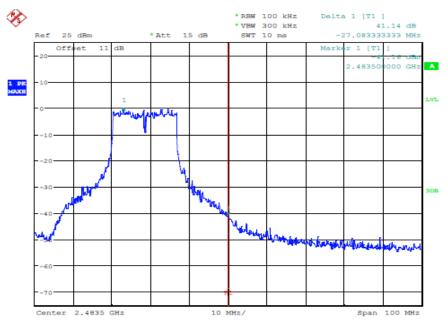


BANDEDGE 802.11G CH11 Date: 19.FEB.2014 11:05:45

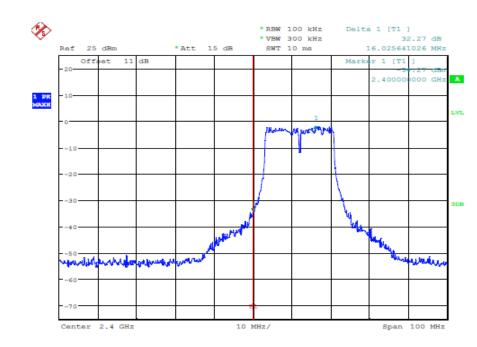

BANDEDGE 802.11N 20MHZ CH01 Date: 19.FEB.2014 11:06:27


Mode G



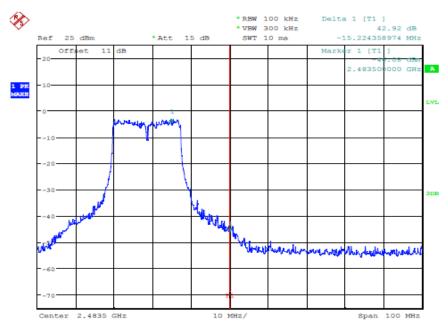




Mode H

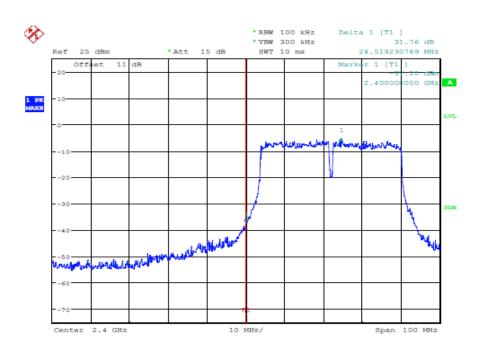

BANDEDGE 802.11N 40MHZ CH01 Date: 19.FEB.2014 11:08:42



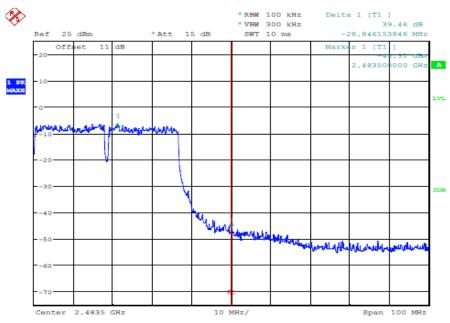

BANDEDGE 802.11N 40MHZ CH07 Date: 19.FEB.2014 11:09:57

Limit:

| Frequency Range / MHz | Limit   |
|-----------------------|---------|
| 902 –928              |         |
| 2400 - 2483.5         | - 20 dB |
| 5725 - 5850           |         |


Test equipment used: ETSTW-RE 055, ETSTW-RE 050



## 3.7 Minimum 6 dB Bandwidth


The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

Antenna A Mode A

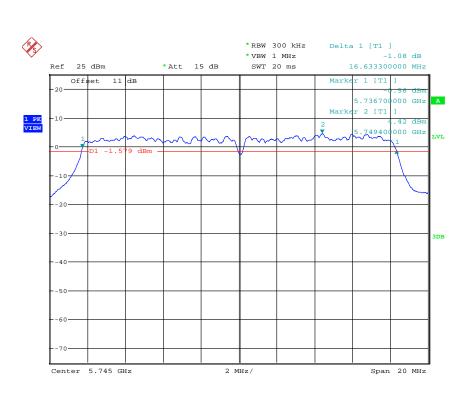


6DB BANDWIDTH 802.11A CH149 Date: 19.FEB.2014 12:21:03



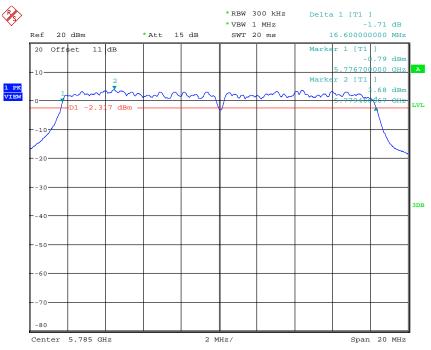


<sup>6</sup>DB BANDWIDTH 802.11A CH157 Date: 19.FEB.2014 12:21:44

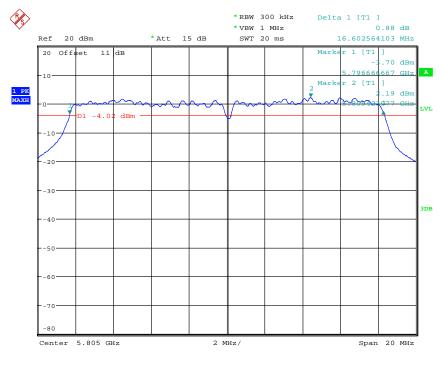


6DB BANDWIDTH 802.11A CH161 Date: 21.FEB.2014 09:56:01



Mode B

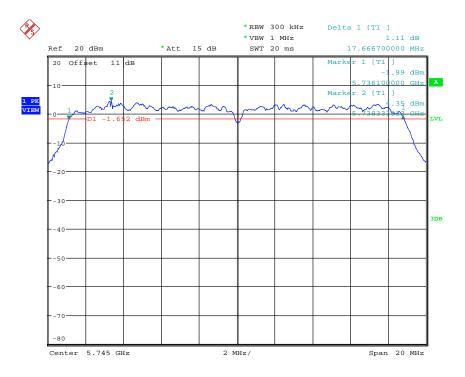


6DB BANDWIDTH 802.11N 20MHZ CH149 Date: 21.FEB.2014 09:01:55

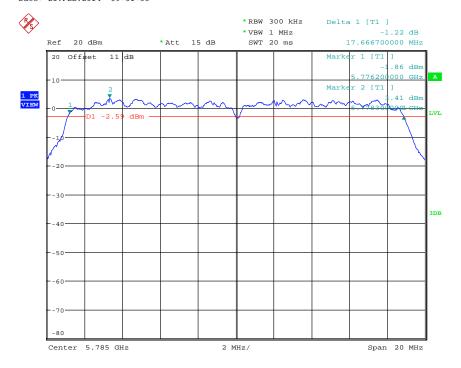


6DB BANDWIDTH 802.11N 20MHZ CH157 Date: 21.FEB.2014 09:02:47



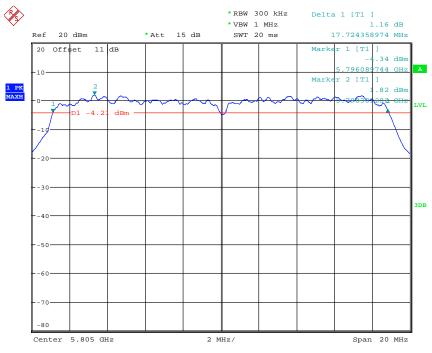


6DB BANDWIDTH 802.11N 20MHZ CH161 Date: 21.FEB.2014 09:54:25

Mode C

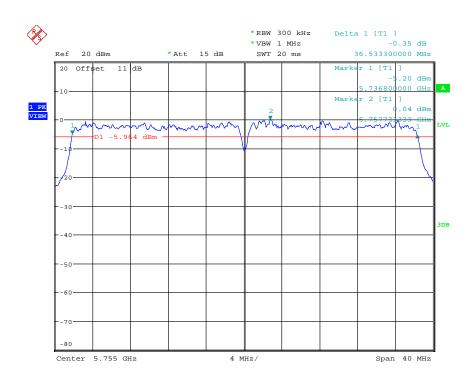


6DB BANDWIDTH 802.11N 40MHZ CH151 Date: 21.FEB.2014 09:03:53



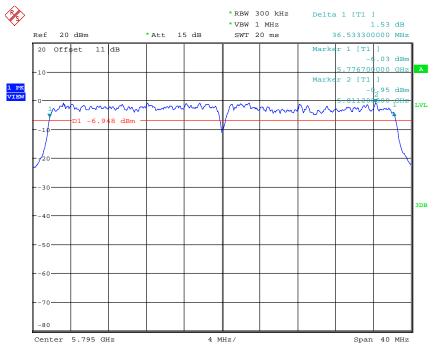

6DB BANDWIDTH 802.11N 40MHZ CH159 Date: 21.FEB.2014 09:04:52


Mode D

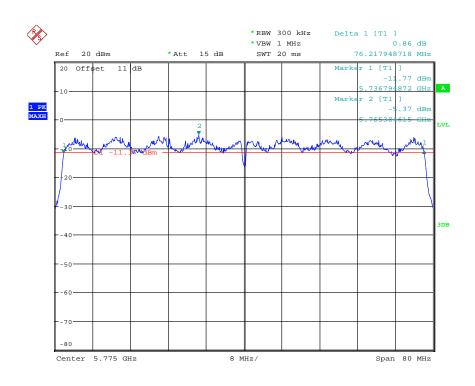


6DB BANDWIDTH 802.11AC CH155 Date: 21.FEB.2014 09:59:31



Mode E

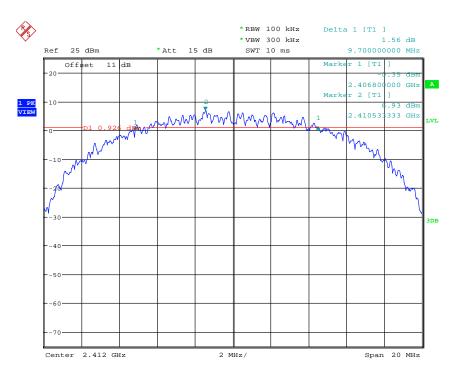


6DB BANDWIDTH 802.11B CH01 Date: 19.FEB.2014 10:17:15

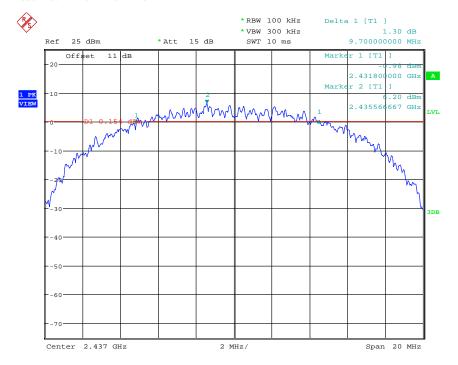


6DB BANDWIDTH 802.11B CH06 Date: 19.FEB.2014 10:18:12



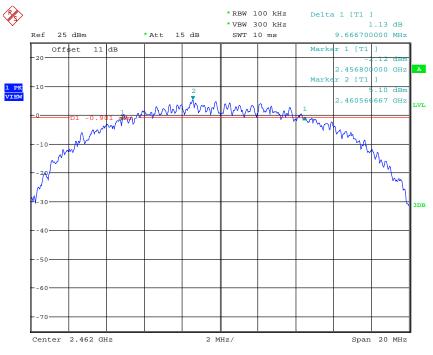


6DB BANDWIDTH 802.11B CH11 Date: 19.FEB.2014 10:18:47

Mode F

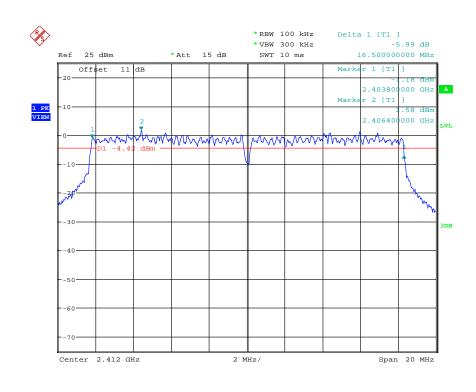


6DB BANDWIDTH 802.11G CH01 Date: 19.FEB.2014 10:21:52



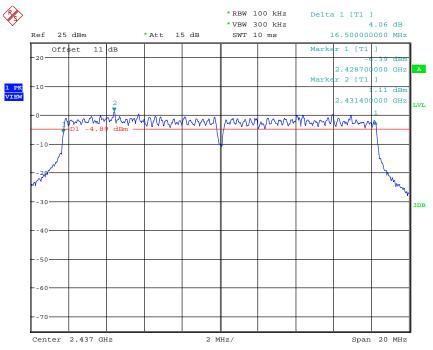


<sup>6</sup>DB BANDWIDTH 802.11G CH06 Date: 19.FEB.2014 10:23:09

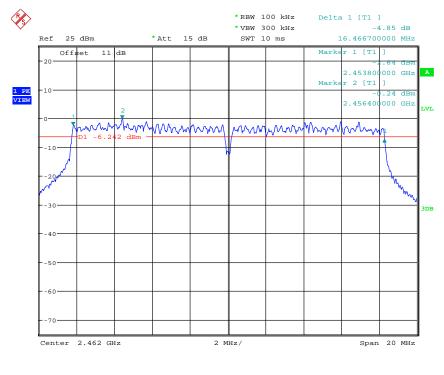


6DB BANDWIDTH 802.11G CH11 Date: 19.FEB.2014 10:24:02



Mode G

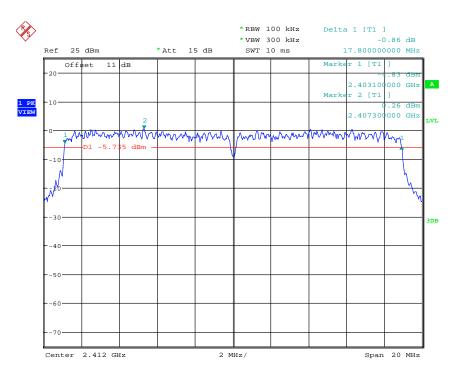


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 19.FEB.2014 10:25:23

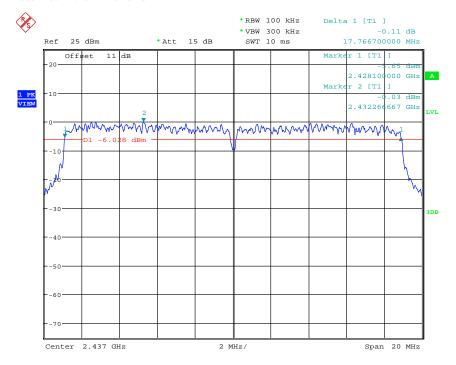


6DB BANDWIDTH 802.11N 20MHZ CH06 Date: 19.FEB.2014 10:26:17



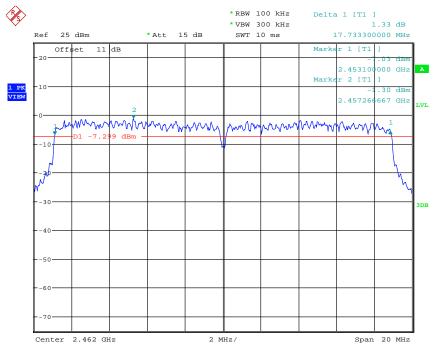


6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 19.FEB.2014 10:27:07

Mode H

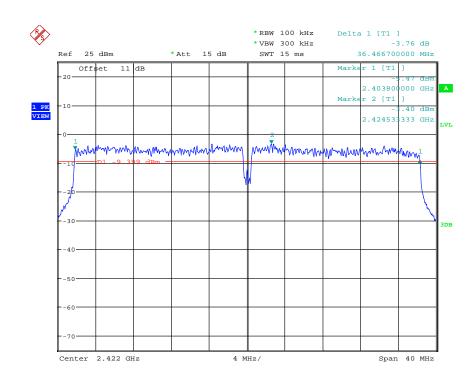


6DB BANDWIDTH 802.11N 40MHZ CH01 Date: 19.FEB.2014 10:28:04



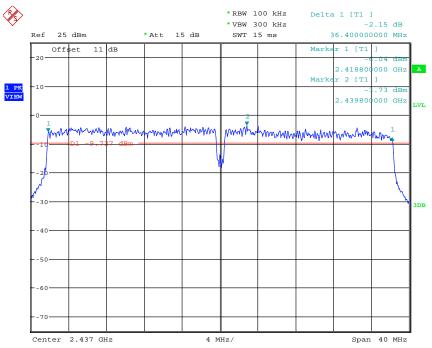


<sup>6</sup>DB BANDWIDTH 802.11N 40MHZ CH04 Date: 19.FEB.2014 10:29:01

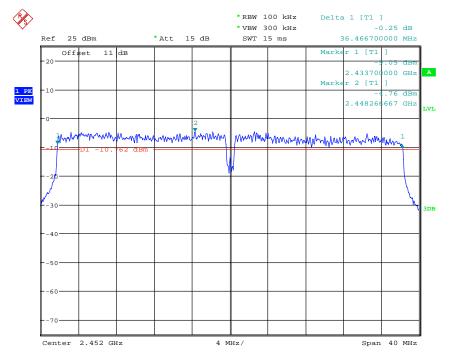


6DB BANDWIDTH 802.11N 40MHZ CH07 Date: 19.FEB.2014 10:29:37



Antenna B Mode A

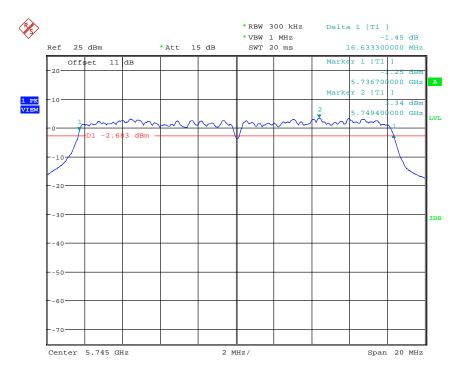


6DB BANDWIDTH 802.11A CH149 Date: 19.FEB.2014 11:41:52

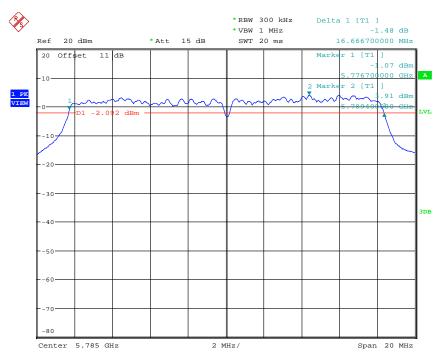


6DB BANDWIDTH 802.11A CH157 Date: 19.FEB.2014 11:42:44



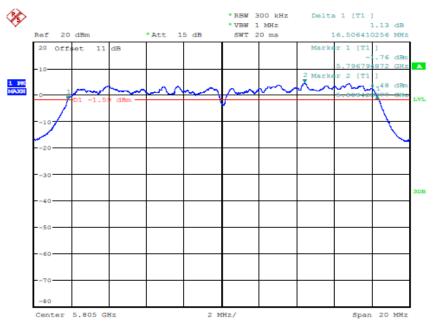


<sup>6</sup>DB BANDWIDTH 802.11A CH161 Date: 21.FEB.2014 06:54:59



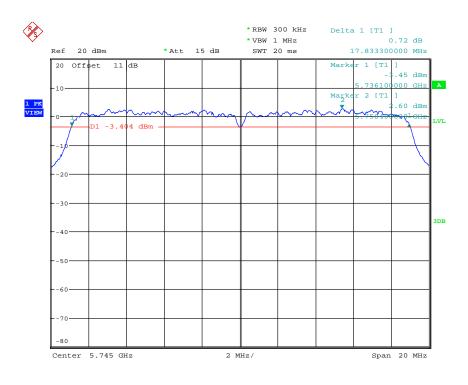


6DB BANDWIDTH 802.11N 20MHZ CH149 Date: 21.FEB.2014 06:13:04



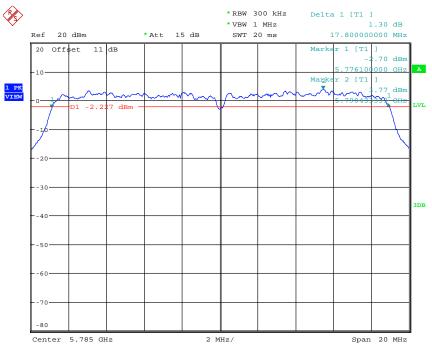


<sup>6</sup>DB BANDWIDTH 802.11N 20MHZ CH157 Date: 21.FEB.2014 06:13:54

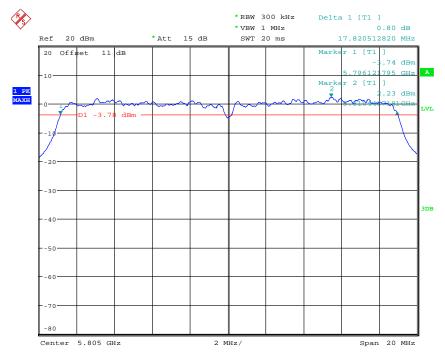


6DB BANDWIDTH 802.11N 20MHZ CH161 Date: 21.FEB.2014 06:49:53



Mode C

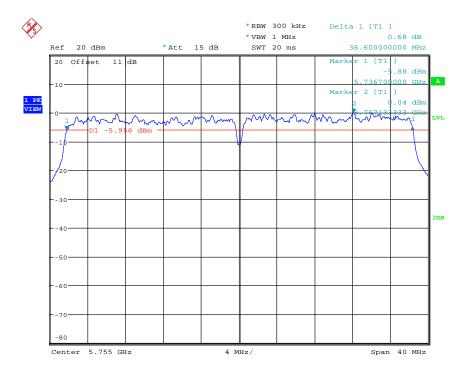


6DB BANDWIDTH 802.11N 40MHZ CH151 Date: 21.FEB.2014 06:14:50

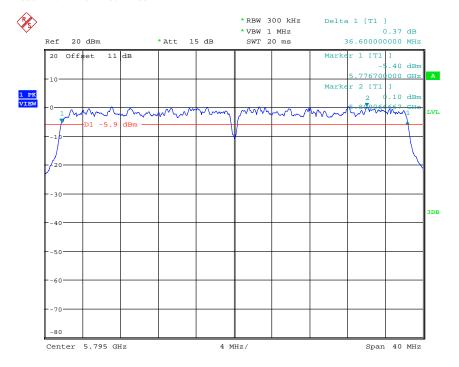

6DB BANDWIDTH 802.11N 40MHZ CH159 Date: 21.FEB.2014 06:15:50






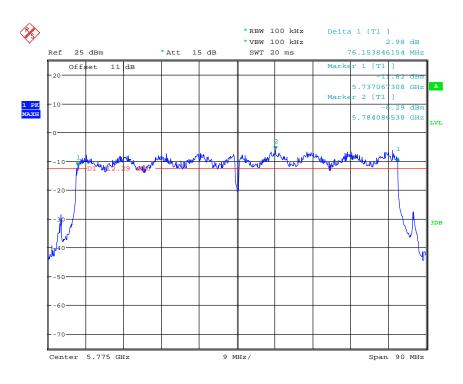


6DB BANDWIDTH 802.11AC CH155 Date: 21.FEB.2014 08:52:01

Mode E

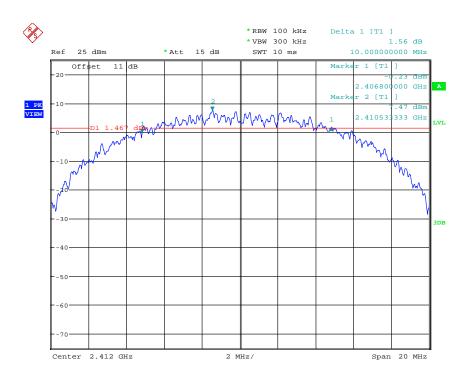


6DB BANDWIDTH 802.11B CH01 Date: 19.FEB.2014 11:01:20



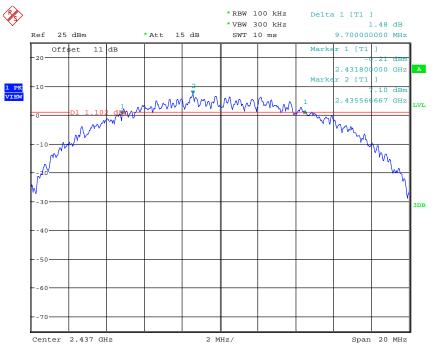


<sup>6</sup>DB BANDWIDTH 802.11B CH06 Date: 19.FEB.2014 11:01:59

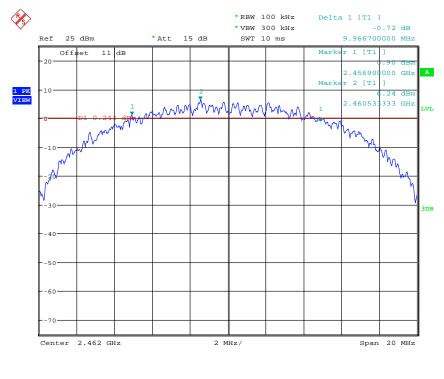


6DB BANDWIDTH 802.11B CH11 Date: 19.FEB.2014 11:02:44



Mode F

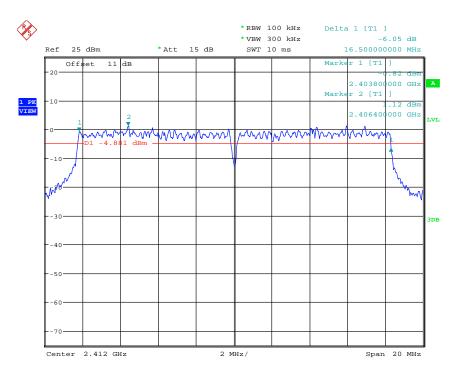


<sup>6</sup>DB BANDWIDTH 802.11G CH01 Date: 19.FEB.2014 11:03:56

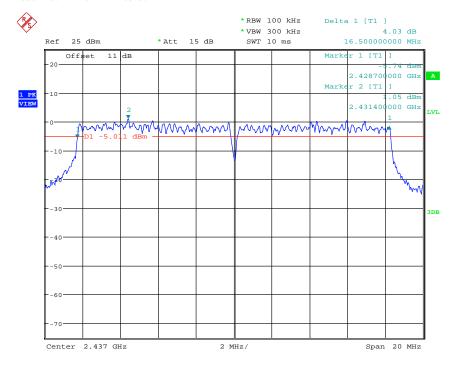


6DB BANDWIDTH 802.11G CH06 Date: 19.FEB.2014 11:04:34



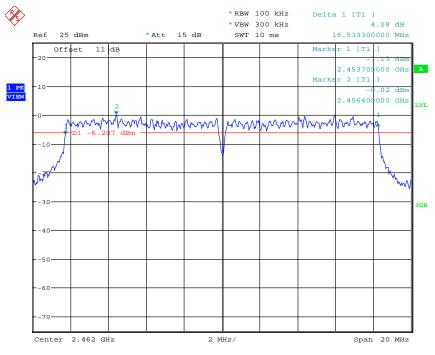


6DB BANDWIDTH 802.11G CH11 Date: 19.FEB.2014 11:05:35

Mode G

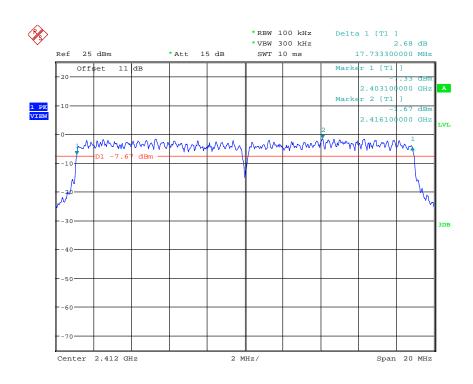


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 19.FEB.2014 11:06:17



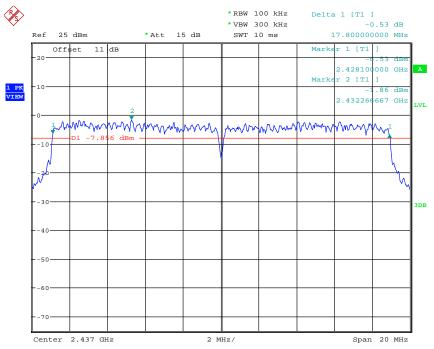


<sup>6</sup>DB BANDWIDTH 802.11N 20MHZ CH06 Date: 19.FEB.2014 11:07:06

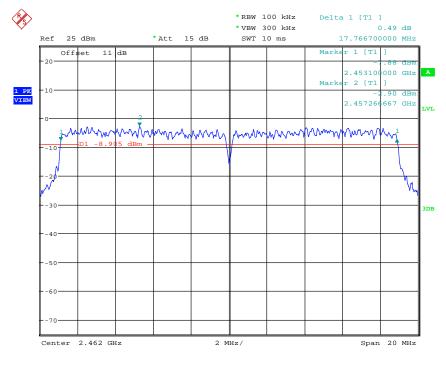


6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 19.FEB.2014 11:07:42



Mode H

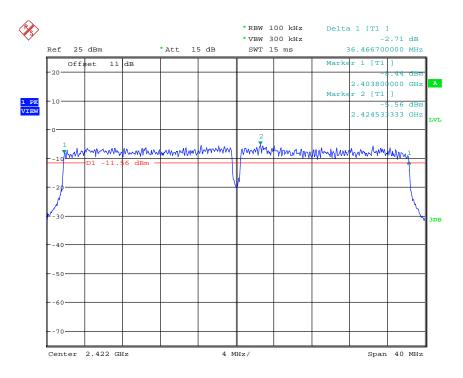


6DB BANDWIDTH 802.11N 40MHZ CH01 Date: 19.FEB.2014 11:08:31

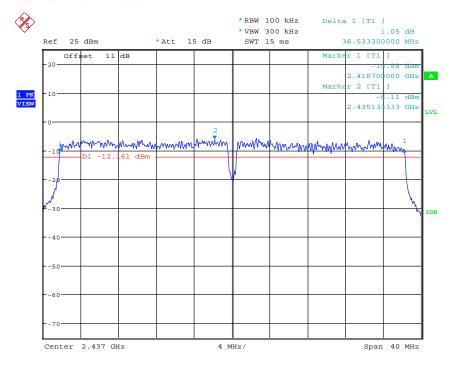

6DB BANDWIDTH 802.11N 40MHZ CH04 Date: 19.FEB.2014 11:09:10



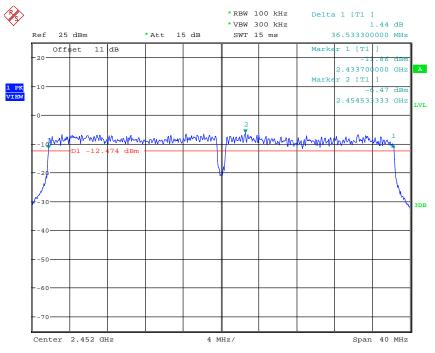

6DB BANDWIDTH 802.11N 40MHZ CH07 Date: 19.FEB.2014 11:09:47

## Limits:

| Frequency Range<br>MHz | Limits      |
|------------------------|-------------|
| 902-928                | min 500 kHz |
| 2400-2483.5            | min 500 kHz |
| 5725-5850              | min 500 kHz |

Test equipment used: ETSTW-RE 055, ETSTW-RE 050




## 3.8 **Peak Power Spectral Density**

Peak Power Spectral density is a measured at low, middle and high channel.


The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Antenna A Mode A

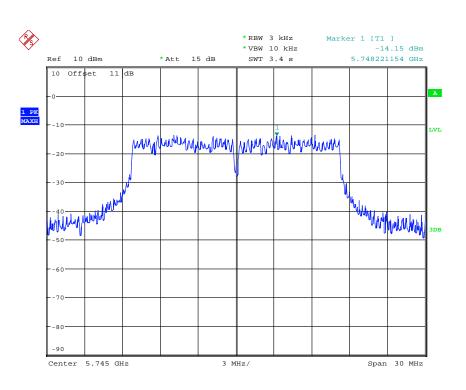


POWER DENSITY 802.11A CH149 Date: 21.FEB.2014 10:23:28



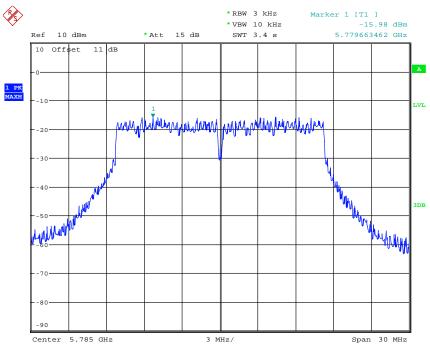


POWER DENSITY 802.11A CH157 Date: 21.FEB.2014 10:22:56

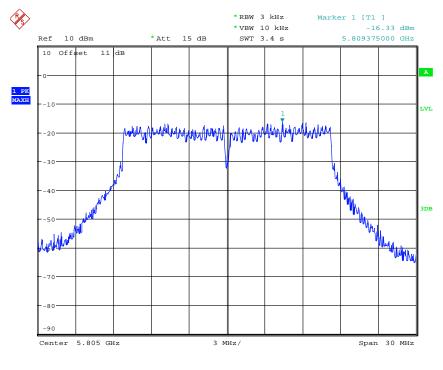


POWER DENSITY 802.11A CH161 Date: 21.FEB.2014 10:22:23



Mode B

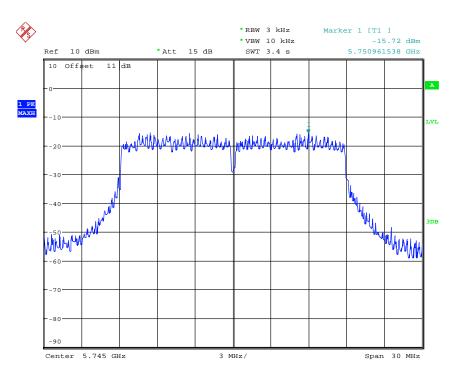


POWER DENSITY 802.11N 20MHz CH149 Date: 21.FEB.2014 10:19:57

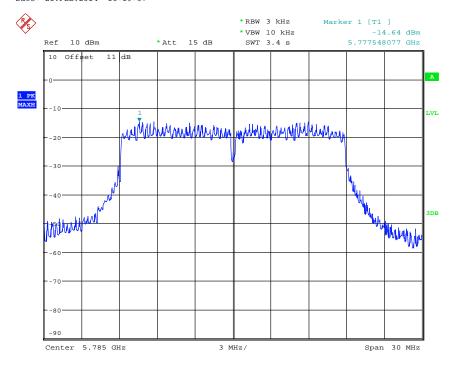


POWER DENSITY 802.11N 20MHZ CH157 Date: 21.FEB.2014 10:20:50



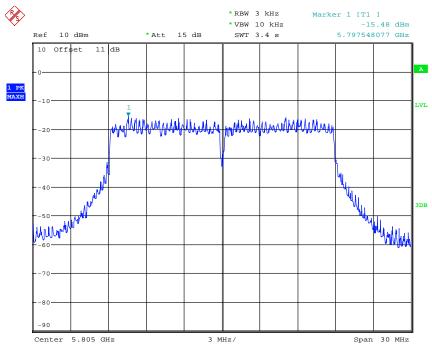


POWER DENSITY 802.11N 20MHZ CH161 Date: 21.FEB.2014 10:21:41

Mode C

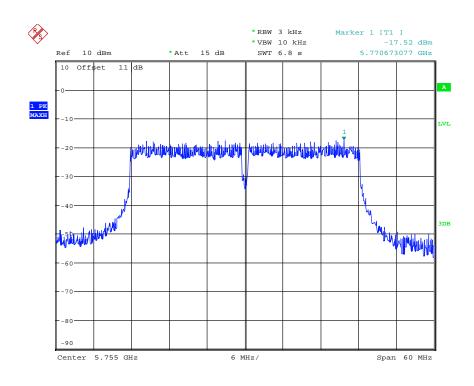


POWER DENSITY 802.11N 40MHZ CH151 Date: 21.FEB.2014 10:24:55



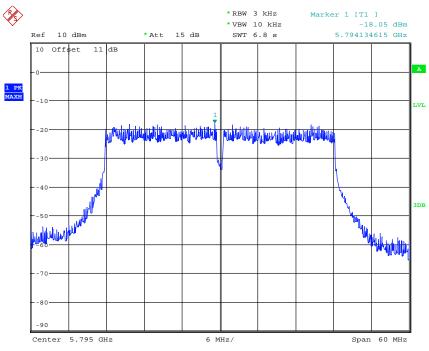

POWER DENSITY 802.11N 40MHZ CH159 Date: 21.FEB.2014 10:25:33


Mode D

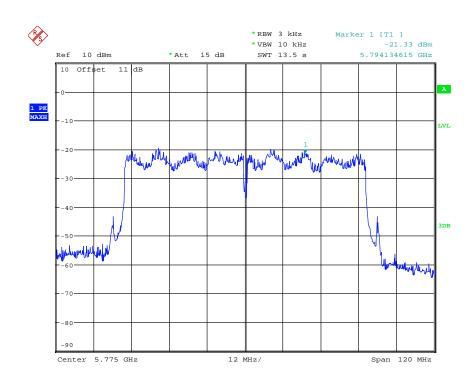


POWER DENSITY 802.11AC CH155 Date: 21.FEB.2014 10:26:57



Mode E

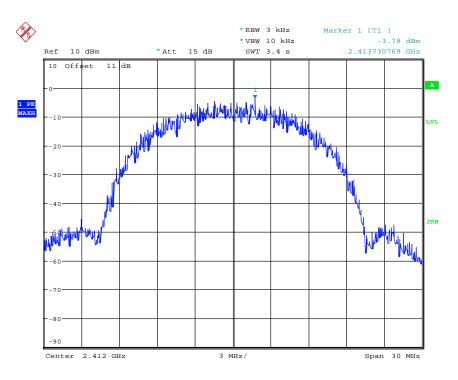


POWER DENSITY 802.11B CH1 Date: 19.FEB.2014 10:48:02

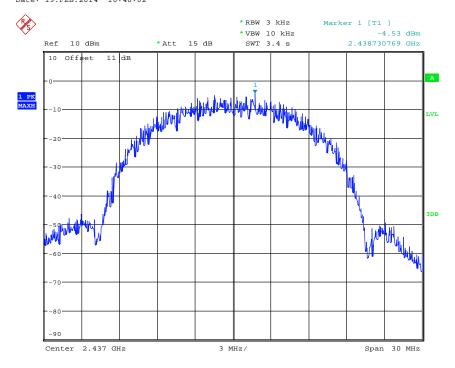


POWER DENSITY 802.11B CH6 Date: 19.FEB.2014 10:48:35



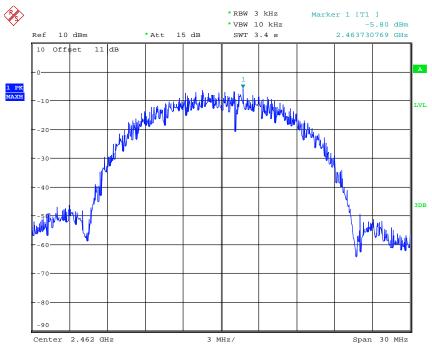


POWER DENSITY 802.11B CH11 Date: 19.FEB.2014 10:49:10

Mode F

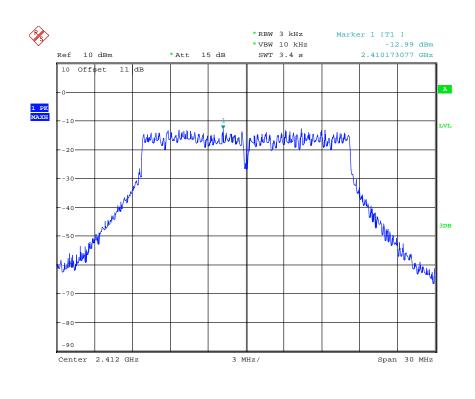


POWER DENSITY 802.11G CH1 Date: 19.FEB.2014 10:46:43



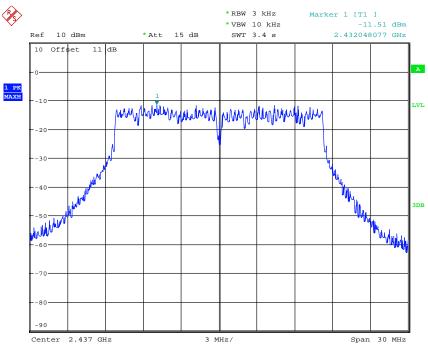


POWER DENSITY 802.11G CH6 Date: 19.FEB.2014 10:44:58

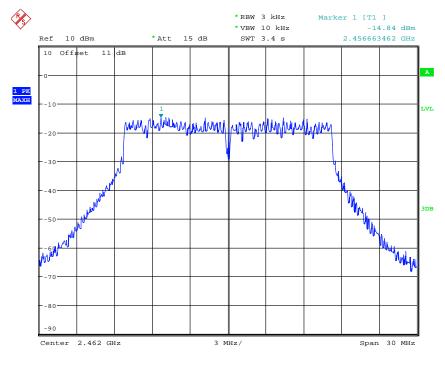


POWER DENSITY 802.11G CH11 Date: 19.FEB.2014 10:44:22



Mode G

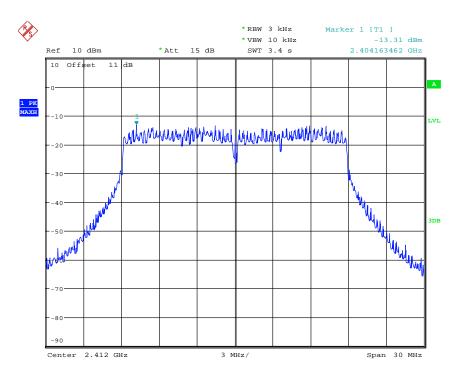


POWER DENSITY 802.11N 20MHZ CH1 Date: 19.FEB.2014 10:42:18

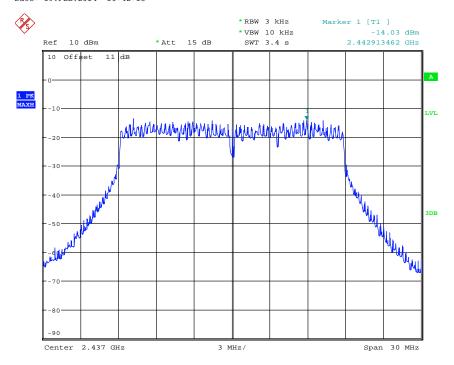


POWER DENSITY 802.11N 20MHZ CH6 Date: 19.FEB.2014 10:42:55



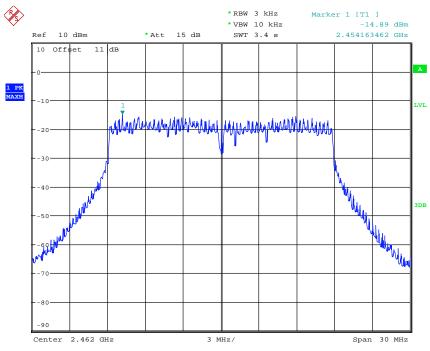


POWER DENSITY 802.11N 20MHZ CH11 Date: 19.FEB.2014 10:43:34

Mode H

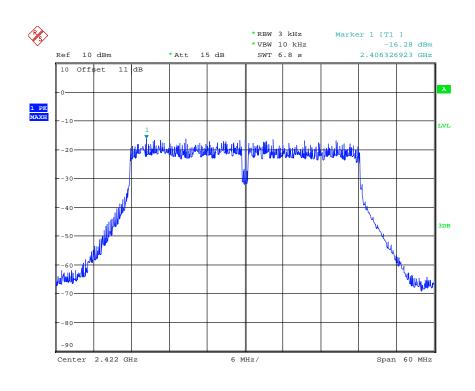


POWER DENSITY 802.11N 40MHZ CH1 Date: 19.FEB.2014 10:41:16



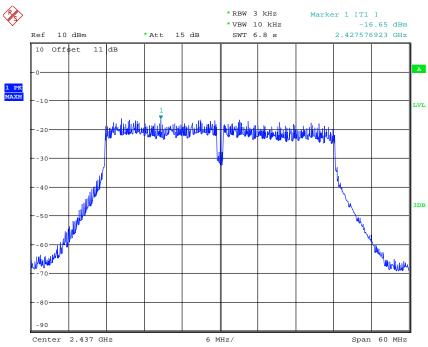


POWER DENSITY 802.11N 40MHZ CH4 Date: 19.FEB.2014 10:55:49

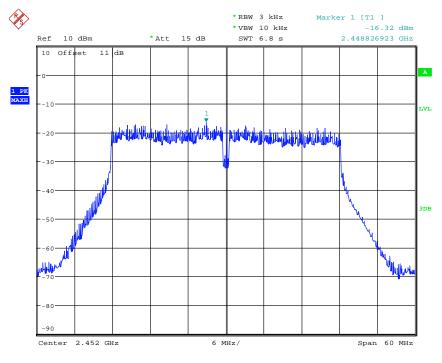


POWER DENSITY 802.11N 40MHZ CH7 Date: 19.FEB.2014 10:40:31



Antenna B Mode A

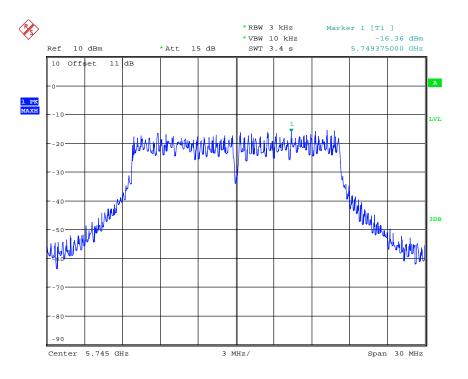


POWER DENSITY 802.11A CH149 Date: 21.FEB.2014 07:19:43

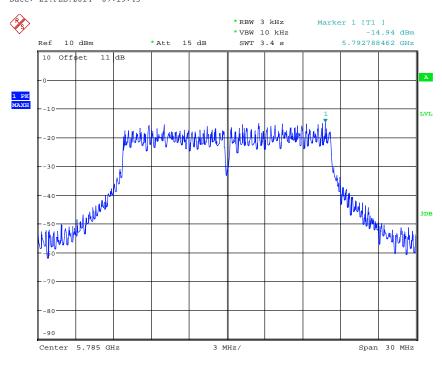


POWER DENSITY 802.11A CH157 Date: 21.FEB.2014 07:20:27



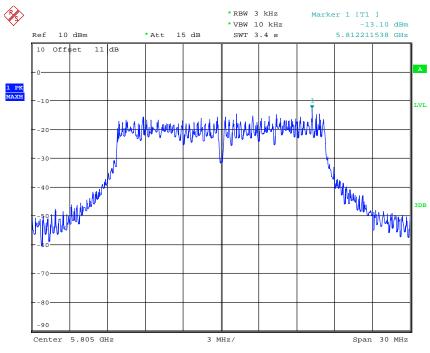


POWER DENSITY 802.11A CH161 Date: 21.FEB.2014 07:21:13

Mode B

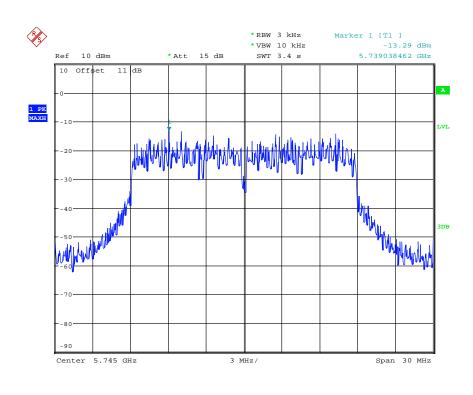


POWER DENSITY 802.11N 20MHZ CH149 Date: 21.FEB.2014 07:27:00



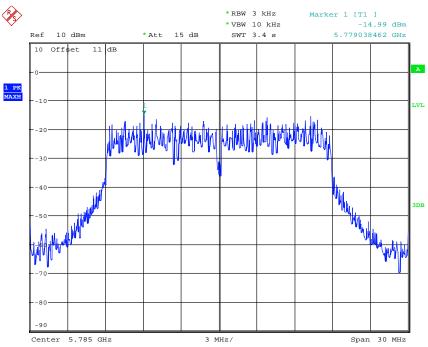


POWER DENSITY 802.11N 20MHZ CH157 Date: 21.FEB.2014 07:25:53

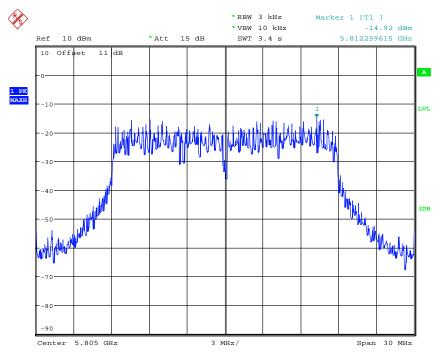


POWER DENSITY 802.11N 20MHZ CH161 Date: 21.FEB.2014 07:24:41



Mode C

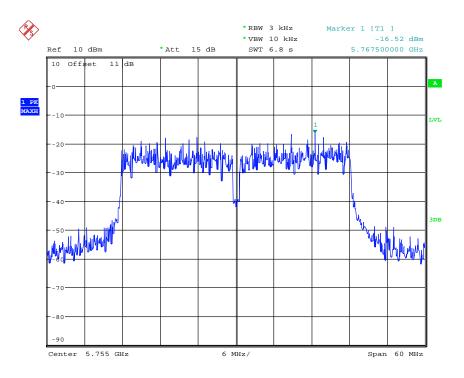


POWER DENSITY 802.11N 40MHZ CH151 Date: 21.FEB.2014 07:29:38

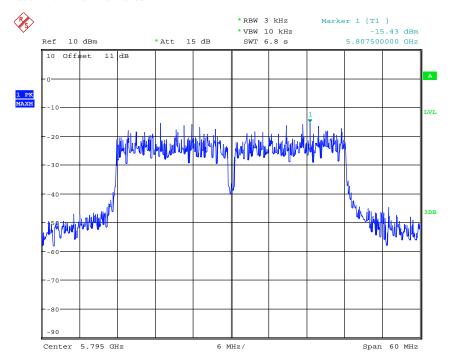

POWER DENSITY 802.11N 40MHZ CH159 Date: 21.FEB.2014 07:30:44




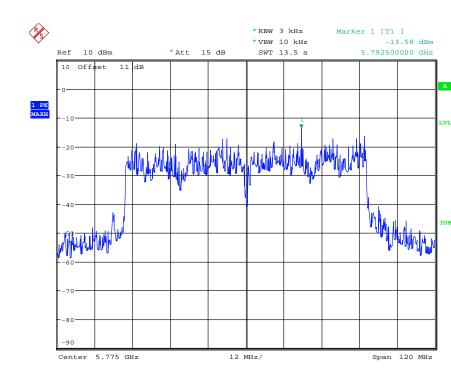

POWER DENSITY 802.11AC CH155 Date: 21.FEB.2014 08:45:26


Mode E

Mode D

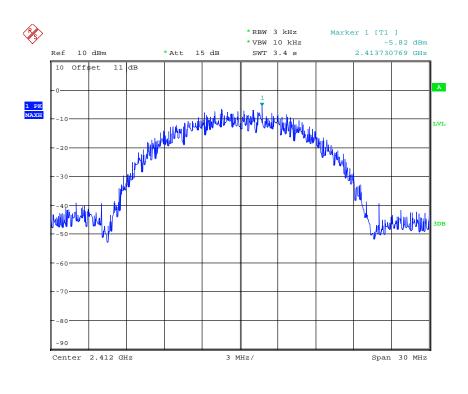


POWER DENSITY 802.11B CH1 Date: 19.FEB.2014 11:19:59



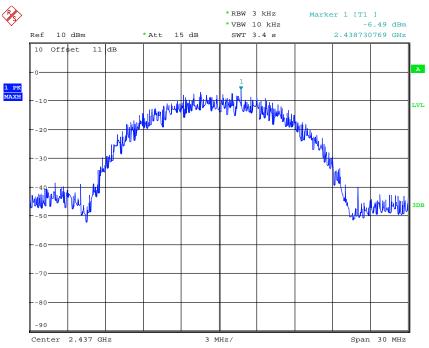


POWER DENSITY 802.11B CH6 Date: 19.FEB.2014 11:20:35

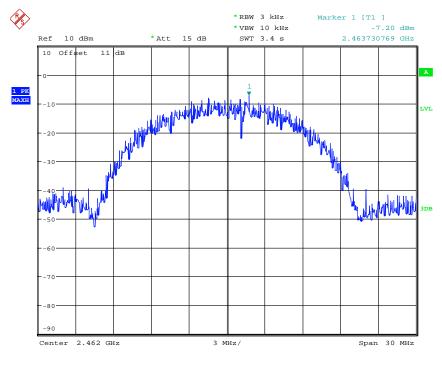


POWER DENSITY 802.11B CH11 Date: 19.FEB.2014 11:21:09



Mode F

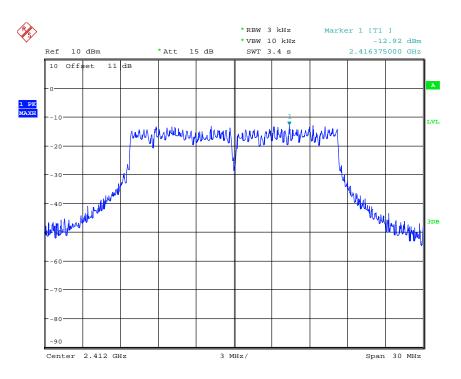


POWER DENSITY 802.11G CH1 Date: 19.FEB.2014 11:19:16

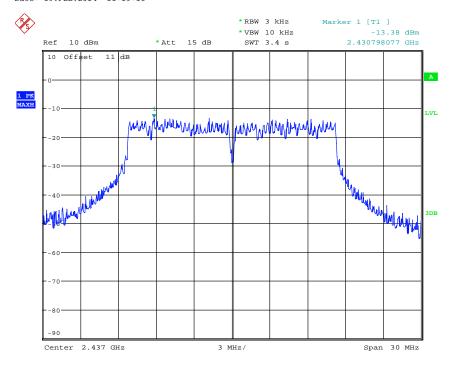


POWER DENSITY 802.11G CH6 Date: 19.FEB.2014 11:18:39



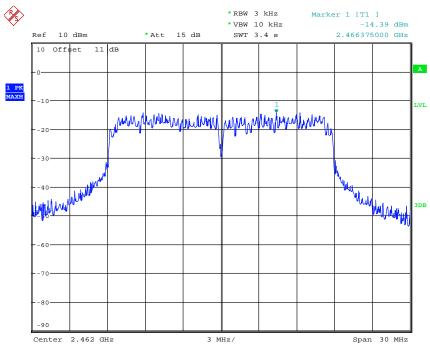


POWER DENSITY 802.11G CH11 Date: 19.FEB.2014 11:18:05

Mode G

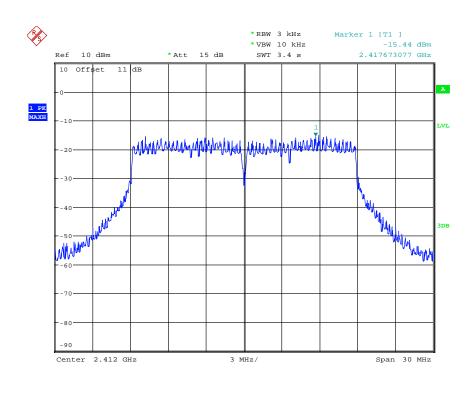


POWER DENSITY 802.11N 20MHZ CH1 Date: 19.FEB.2014 11:16:16



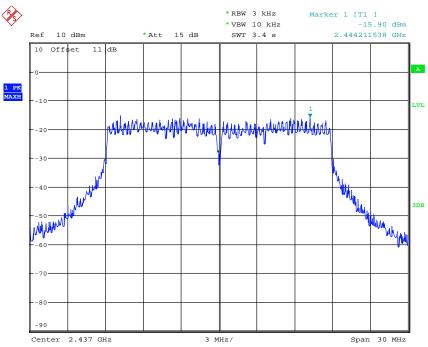


POWER DENSITY 802.11N 20MHZ CH6 Date: 19.FEB.2014 11:16:50

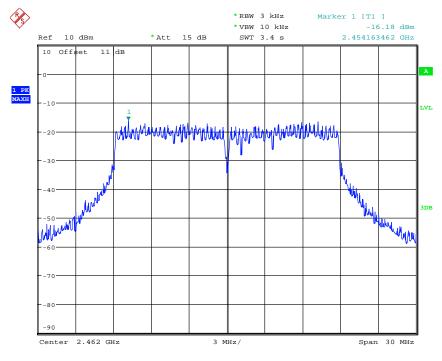


POWER DENSITY 802.11N 20MHZ CH11 Date: 19.FEB.2014 11:17:20



Mode H

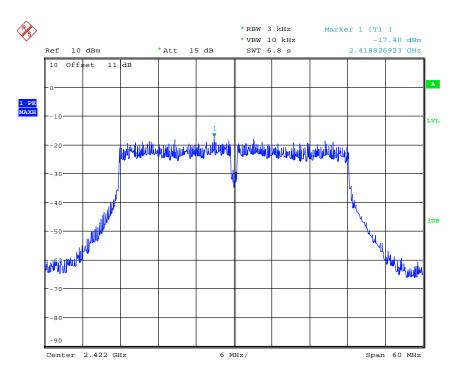


POWER DENSITY 802.11N 40MHZ CH1 Date: 19.FEB.2014 11:15:23

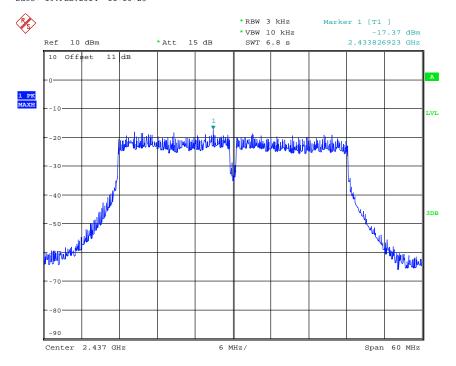

POWER DENSITY 802.11N 40MHZ CH4 Date: 19.FEB.2014 11:14:30



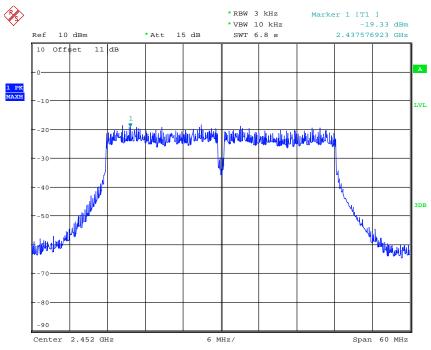

POWER DENSITY 802.11N 40MHZ CH7 Date: 19.FEB.2014 11:13:22

|                       |        | mW     |         | dBm     |         |         |  |  |
|-----------------------|--------|--------|---------|---------|---------|---------|--|--|
| Antenna A             | Ch Low | Ch Mid | Ch High | Ch Low  | Ch Mid  | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 0.027  | 0.034  | 0.028   | -15.72  | -14.64  | -15.48  |  |  |
| 802.11n 40MHz         | 0.018  |        | 0.016   | -17.52  |         | -18.05  |  |  |
| 802.11ac              | 0.007  |        |         | -21.33  |         |         |  |  |
| 802.11n 20MHz(2.4GHz) | 0.047  | 0.032  | 0.040   | -13.31  | -14.89  | -14.03  |  |  |
| 802.11n 40MHz         | 0.024  | 0.022  | 0.023   | -16.28  | -16.65  | -16.32  |  |  |
| Antenna B             |        | mW     |         |         | dBm     |         |  |  |
| Antenna D             | Ch Low | Ch Mid | Ch High | Ch Low  | Ch Mid  | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 0.047  | 0.032  | 0.032   | -13.29  | -14.99  | -14.92  |  |  |
| 802.11n 40MHz         | 0.022  |        | 0.029   | -16.52  |         | -15.43  |  |  |
| 802.11ac              | 0.044  |        |         | -13.58  |         |         |  |  |
| 802.11n 20MHz(2.4GHz) | 0.029  | 0.024  | 0.026   | -15.44  | -16.18  | -15.9   |  |  |
| 802.11n 40MHz         | 0.018  | 0.018  | 0.012   | -17.4   | -17.37  | -19.33  |  |  |
| Combine               | mW     |        |         | dBm     |         |         |  |  |
| Comonie               | Ch Low | Ch Mid | Ch High | Ch Low  | Ch Mid  | Ch High |  |  |
| 802.11n 20MHz(5.8GHz) | 0.074  | 0.066  | 0.060   | -11.308 | -11.805 | -12.218 |  |  |
| 802.11n 40MHz         | 0.040  |        | 0.045   | -13.979 |         | -13.468 |  |  |
| 802.11ac              | 0.051  |        |         | -12.924 |         |         |  |  |
| 802.11n 20MHz(2.4GHz) | 0.076  | 0.056  | 0.066   | -11.192 | -12.518 | -11.805 |  |  |
| 802.11n 40MHz         | 0.042  | 0.040  | 0.035   | -13.768 | -13.979 | -14.559 |  |  |

Worldwide Testing Services(Taiwan) Co., Ltd.



#### Limits:

| Frequency Range<br>MHz | dBm |
|------------------------|-----|
| 902-928                | 8   |
| 2400-2483.5            | 8   |
| 5725-5850              | 8   |

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



## 3.9 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency of Emission | Field Strength     | Field Strength       |  |  |
|-----------------------|--------------------|----------------------|--|--|
| (MHz)                 | (microvolts/meter) | (dBmicrovolts/meter) |  |  |
| 30 - 88               | 100                | 40.0                 |  |  |
| 88 - 216              | 150                | 43.5                 |  |  |
| 216 - 960             | 200                | 46.0                 |  |  |
| Above 960             | 500                | 54.0                 |  |  |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111


Explanation: The test results are listed in the separated test report no.: W6M21401-13806-P-15B.



## 3.9 Power Line Conducted Emission


For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

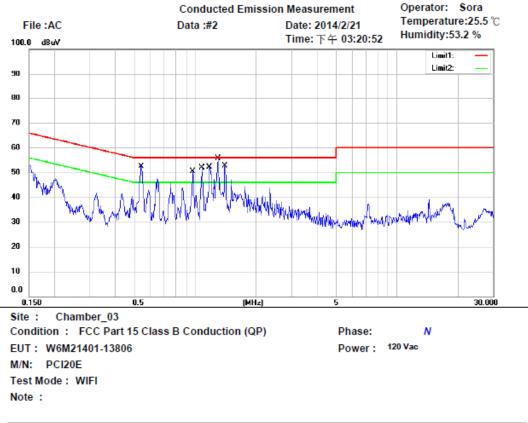

| Mk. | Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Corrected<br>factor(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Comment |
|-----|--------------------|-------------------|----------|-------------------------|------------------|-----------------|----------------|---------|
|     | 0.5396             | 41.45             | QP       | 9.67                    | 51.12            | 56.00           | -4.88          |         |
|     | 0.5396             | 24.14             | AVG      | 9.67                    | 33.81            | 46.00           | -12.19         |         |
|     | 0.9700             | 37.35             | QP       | 9.69                    | 47.04            | 56.00           | -8.96          |         |
|     | 0.9700             | 22.36             | AVG      | 9.69                    | 32.05            | 46.00           | -13.95         |         |
|     | 1.0785             | 39.69             | QP       | 9.69                    | 49.38            | 56.00           | -6.62          |         |
|     | 1.0785             | 24.46             | AVG      | 9.69                    | 34.15            | 46.00           | -11.85         |         |
|     | 1.1865             | 38.35             | QP       | 9.69                    | 48.04            | 56.00           | -7.96          |         |
|     | 1.1865             | 23.57             | AVG      | 9.69                    | 33.26            | 46.00           | -12.74         |         |
| *   | 1.2942             | 42.03             | QP       | 9.70                    | 51.73            | 56.00           | -4.27          |         |
|     | 1.2942             | 25.80             | AVG      | 9.70                    | 35.50            | 46.00           | -10.50         |         |
|     | 1.4027             | 40.99             | QP       | 9.70                    | 50.69            | 56.00           | -5.31          |         |
|     | 1.4027             | 24.14             | AVG      | 9.70                    | 33.84            | 46.00           | -12.16         |         |



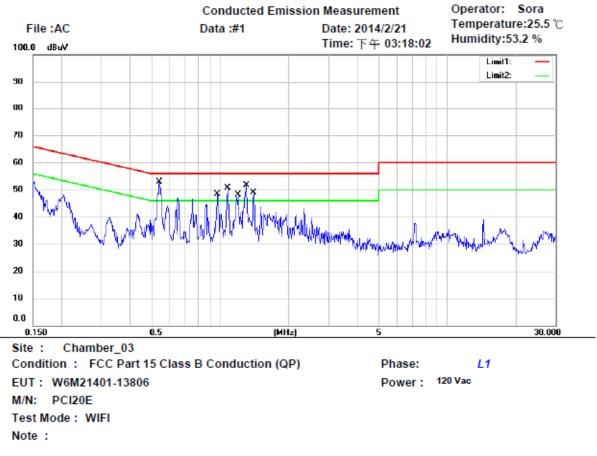

| Mk. | Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Corrected<br>factor(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Comment |
|-----|--------------------|-------------------|----------|-------------------------|------------------|-----------------|----------------|---------|
| *   | 0.5385             | 41.27             | QP       | 9.66                    | 50.93            | 56.00           | -5.07          |         |
|     | 0.5385             | 25.19             | AVG      | 9.66                    | 34.85            | 46.00           | -11.15         |         |
|     | 0.9705             | 36.60             | QP       | 9.69                    | 46.29            | 56.00           | -9.71          |         |
|     | 0.9705             | 24.27             | AVG      | 9.69                    | 33.96            | 46.00           | -12.04         |         |
|     | 1.0781             | 38.07             | QP       | 9.69                    | 47.76            | 56.00           | -8.24          |         |
|     | 1.0781             | 23.79             | AVG      | 9.69                    | 33.48            | 46.00           | -12.52         |         |
|     | 1.1845             | 34.39             | QP       | 9.69                    | 44.08            | 56.00           | -11.92         |         |
|     | 1.1845             | 20.01             | AVG      | 9.69                    | 29.70            | 46.00           | -16.30         |         |
|     | 1.2956             | 39.46             | QP       | 9.70                    | 49.16            | 56.00           | -6.84          |         |
|     | 1.2956             | 23.08             | AVG      | 9.70                    | 32.78            | 46.00           | -13.22         |         |
|     | 1.4021             | 38.11             | QP       | 9.70                    | 47.81            | 56.00           | -8.19          |         |
|     | 1.4021             | 22.51             | AVG      | 9.70                    | 32.21            | 46.00           | -13.79         |         |

Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor

- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- **3.** Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty =  $\pm 1.41$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.



## Limits:

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |          |  |
|-----------------------------|------------------------|----------|--|
|                             | Quasi Peak             | Average  |  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |  |
| 0.5-5                       | 56                     | 46       |  |
| 5-30                        | 60                     | 50       |  |

Test equipment used:ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



# Appendix

## **Measurement diagrams**

Spurious Emissions radiated




## Radiated Emission-Transmitter

# Antenna A


## 802.11a 5745MHz

## Antenna Polarization H

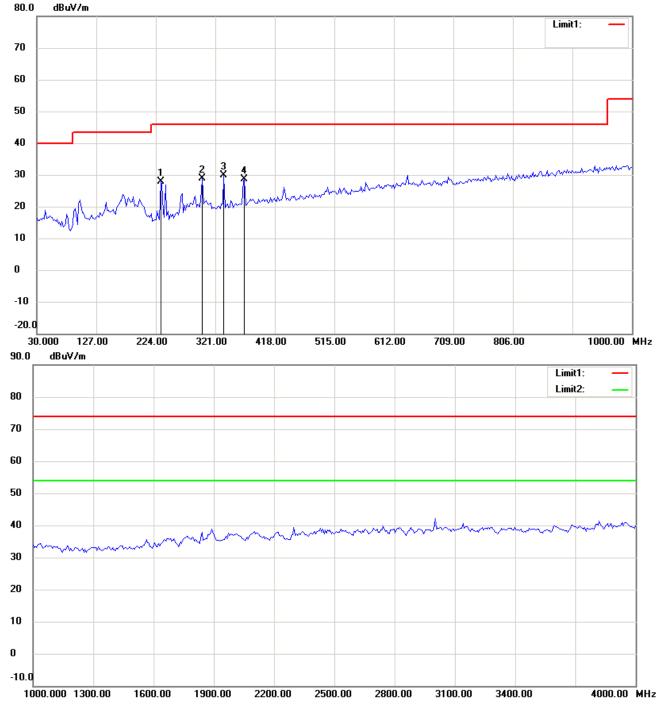


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



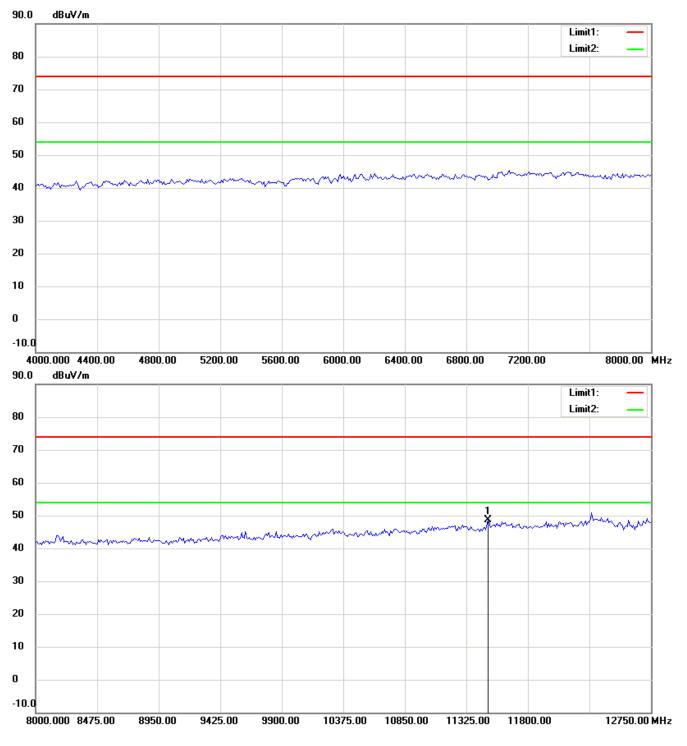


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



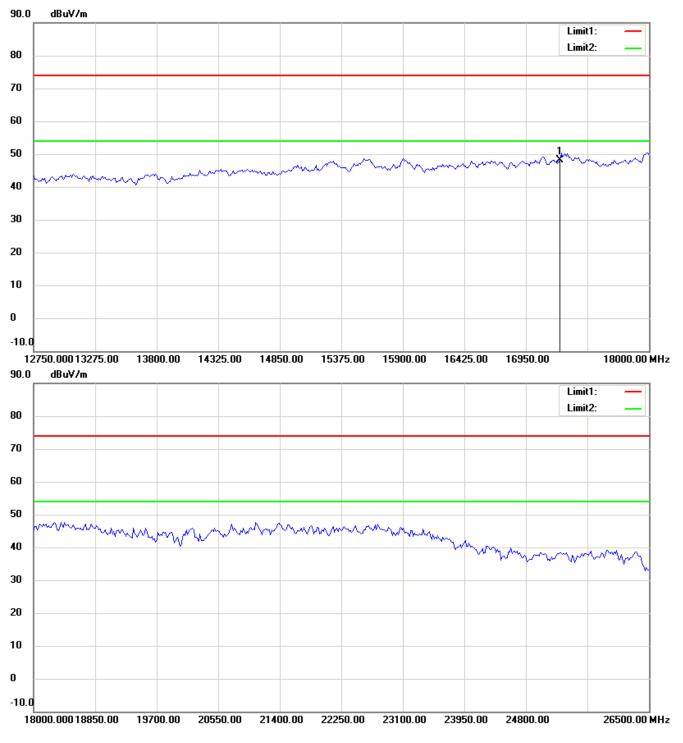


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



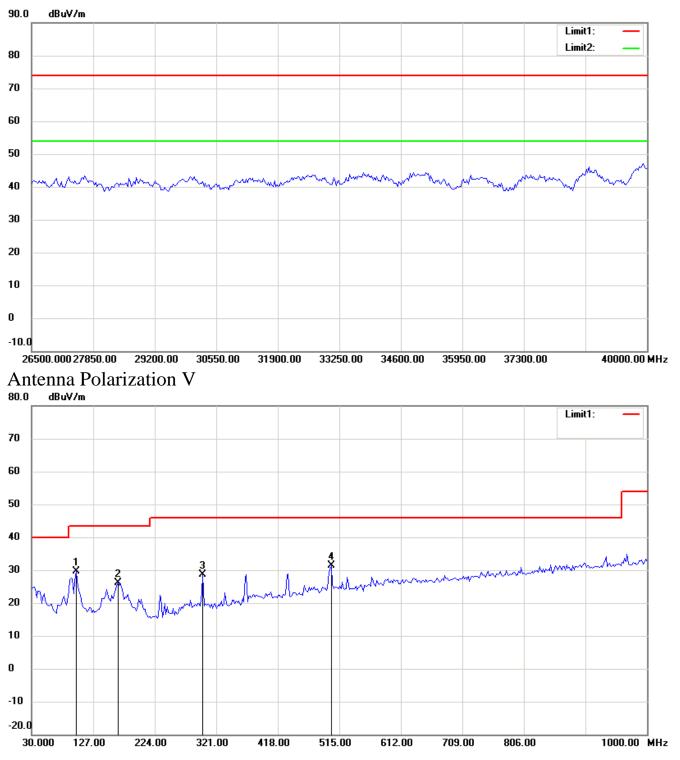


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



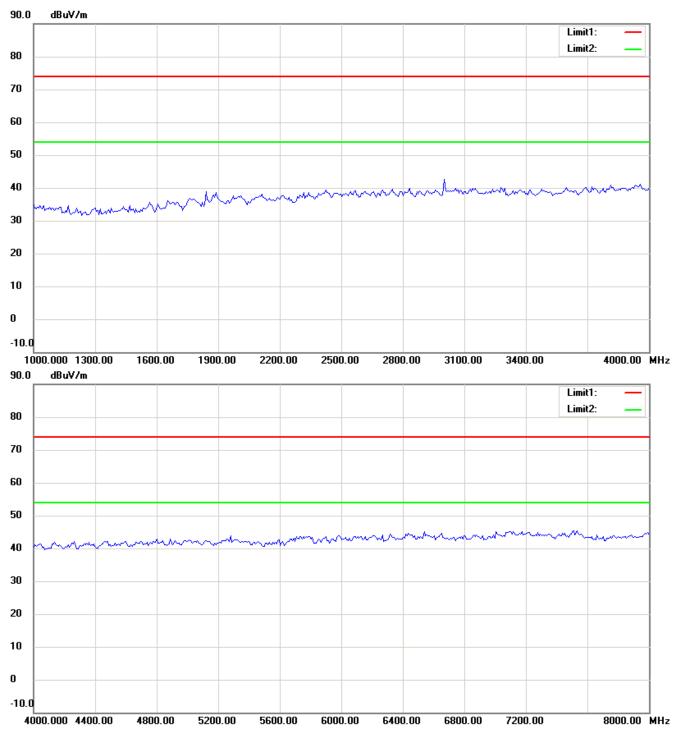


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



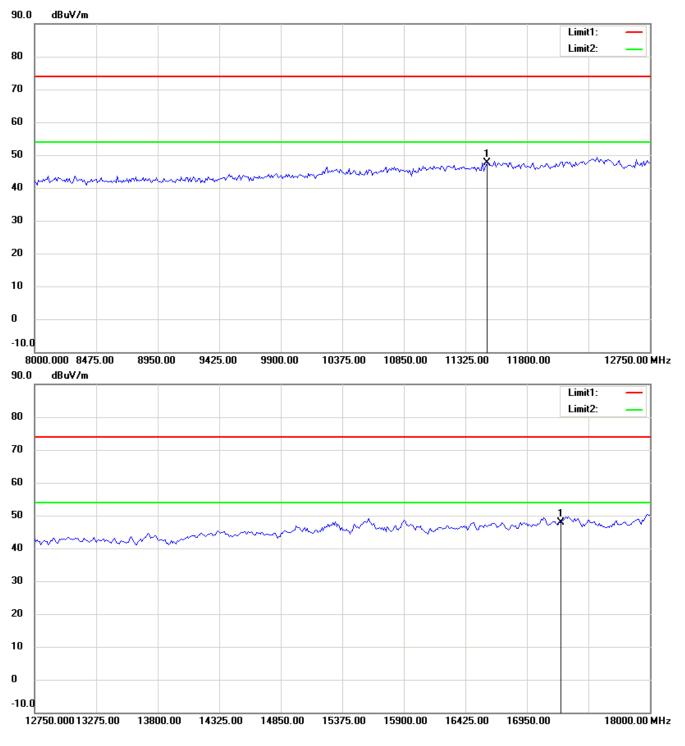

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



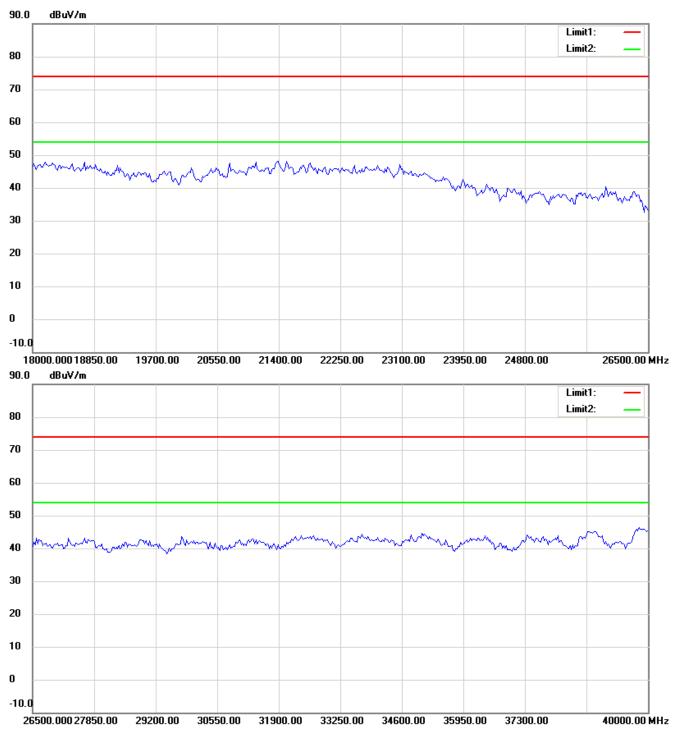


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11a 5785MHz

# Antenna Polarization H

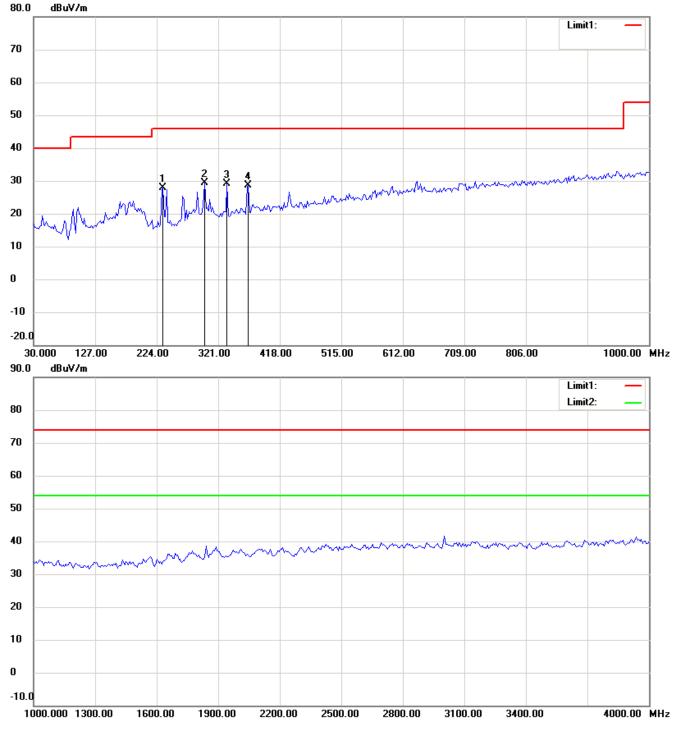


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



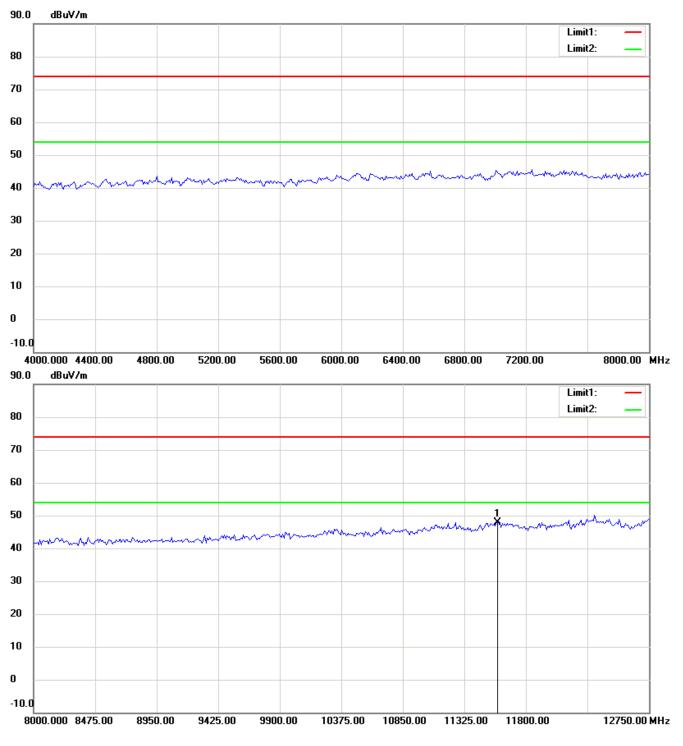


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



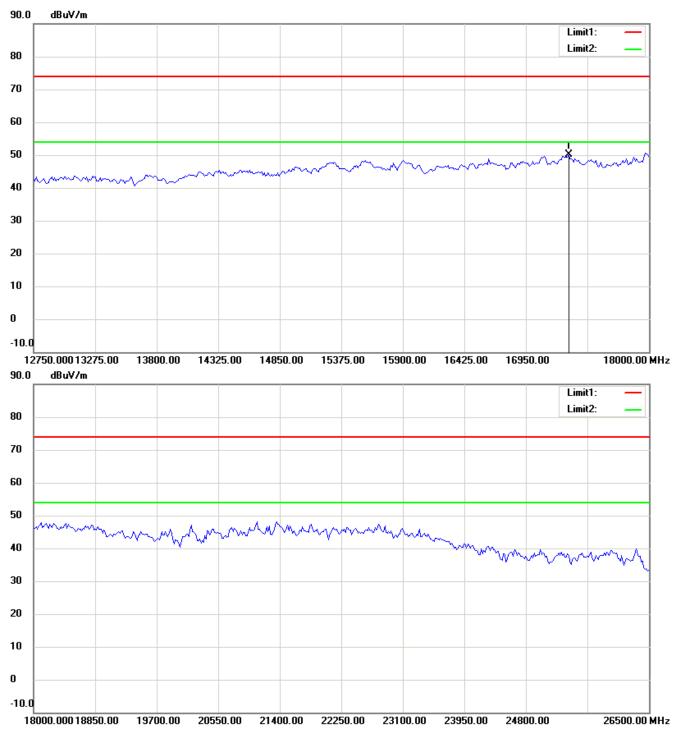


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



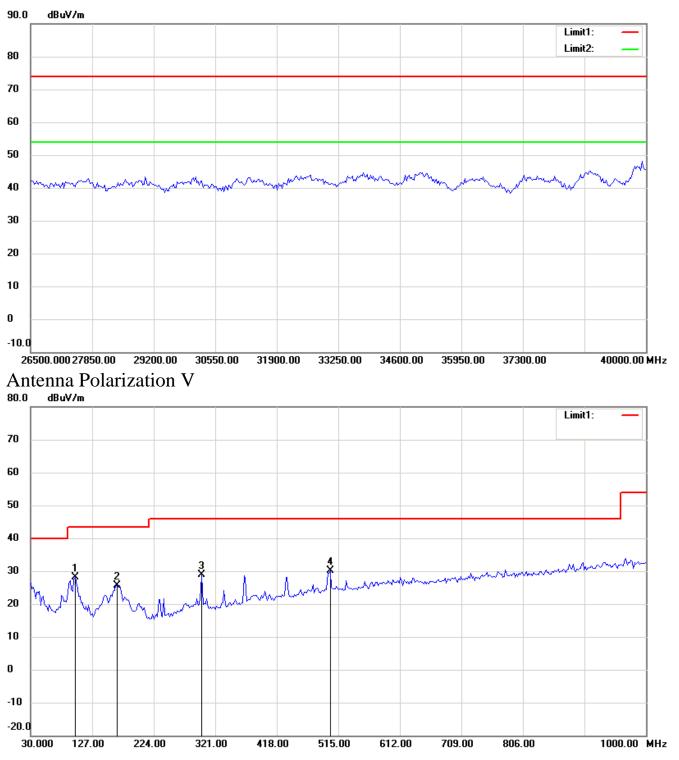


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



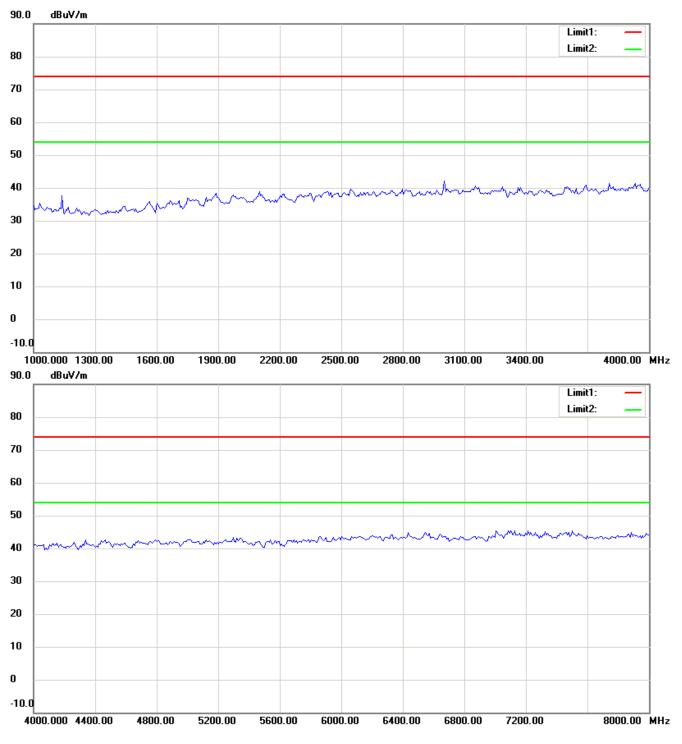


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



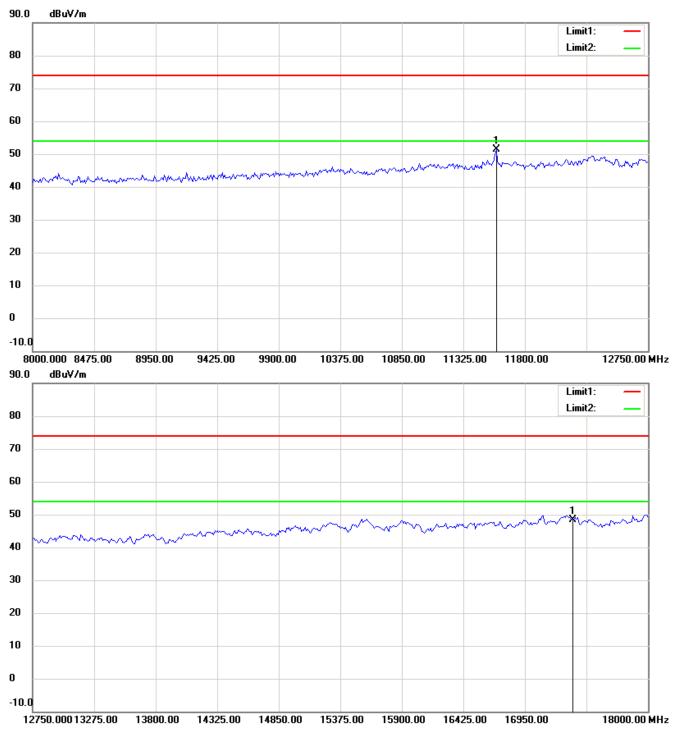

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



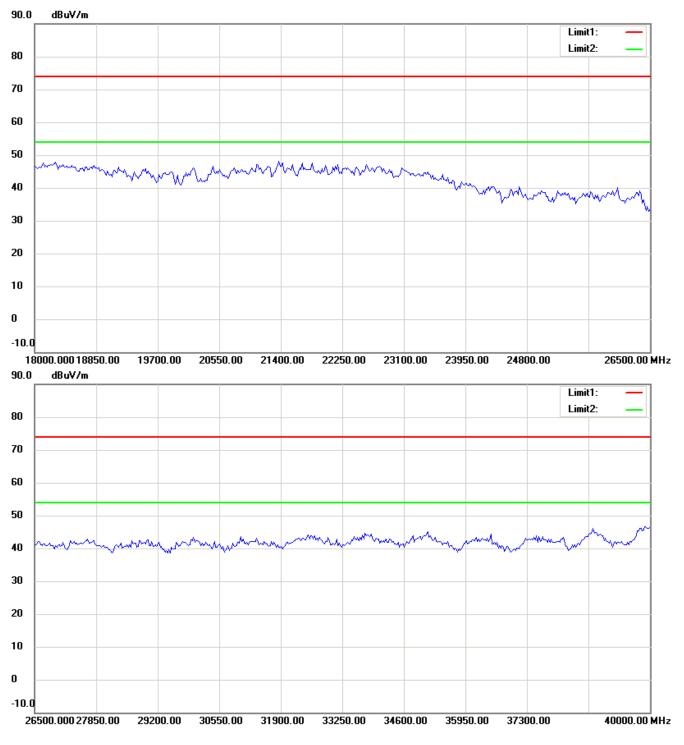


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11a 5825MHz

# Antenna Polarization H

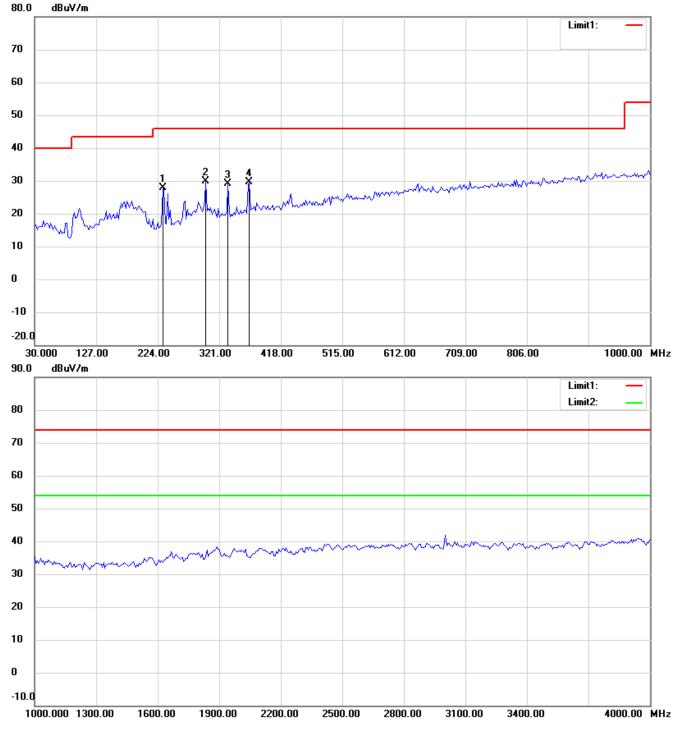


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



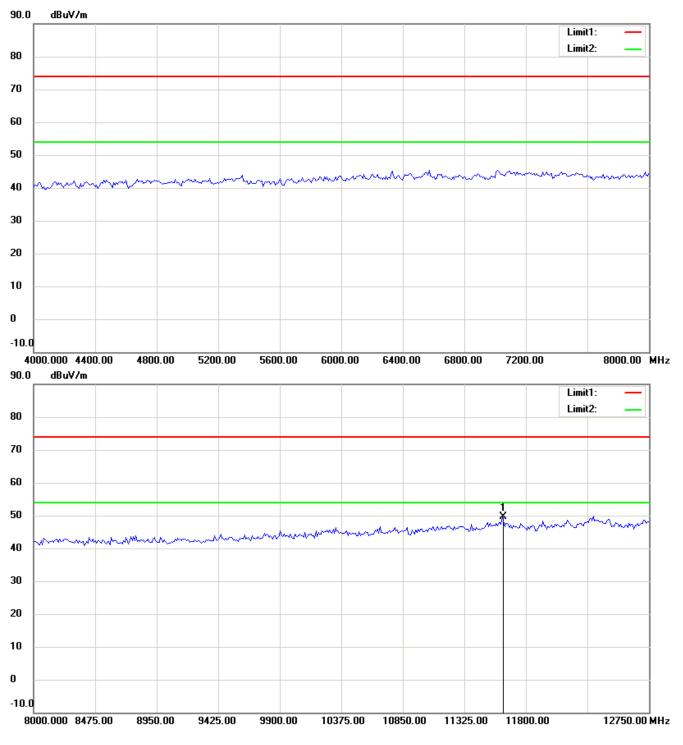


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



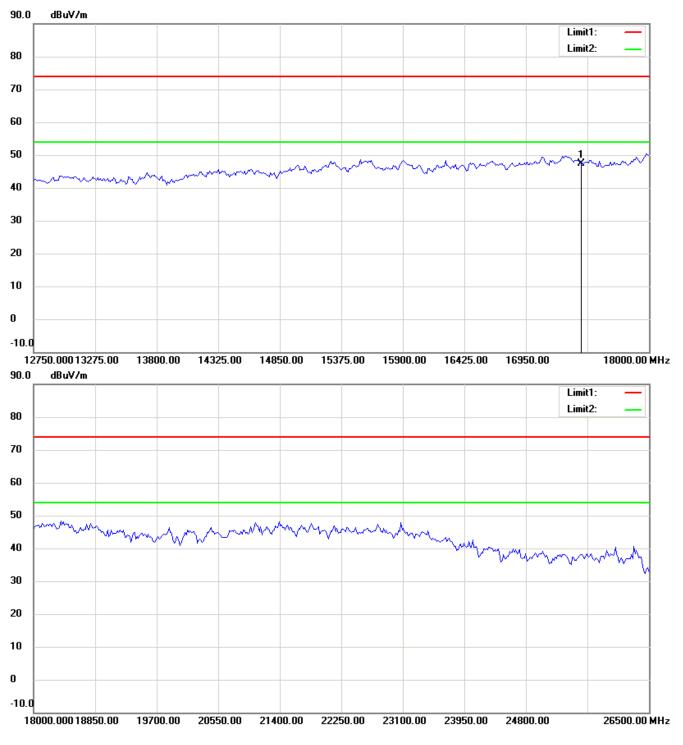


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



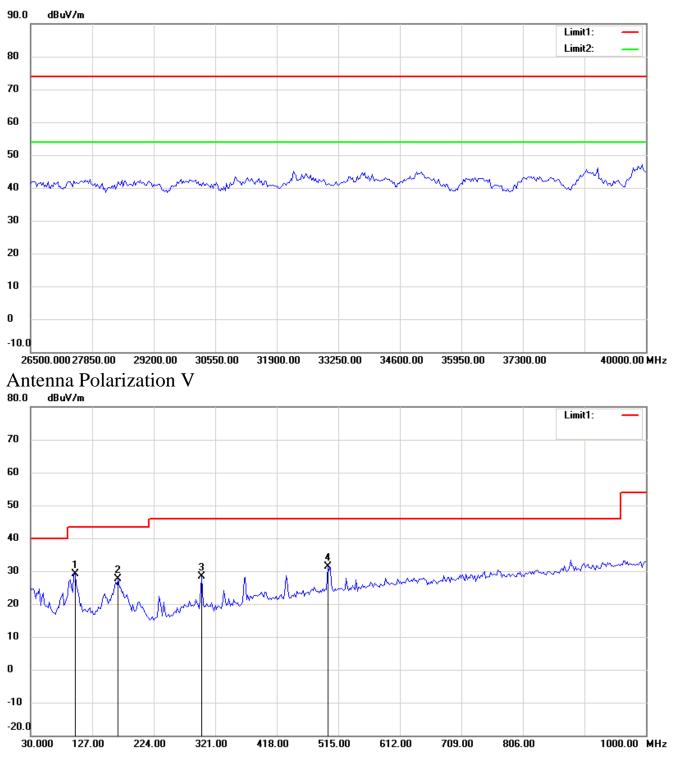


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



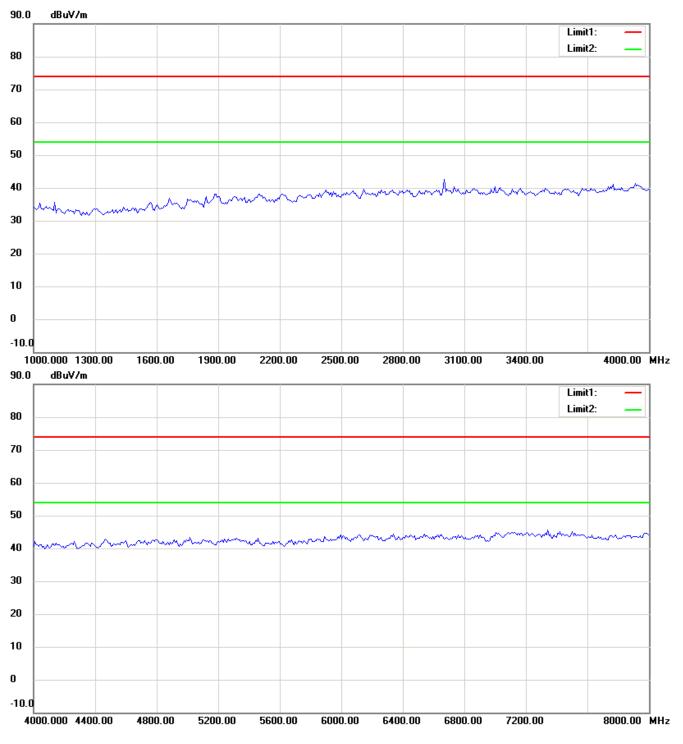


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



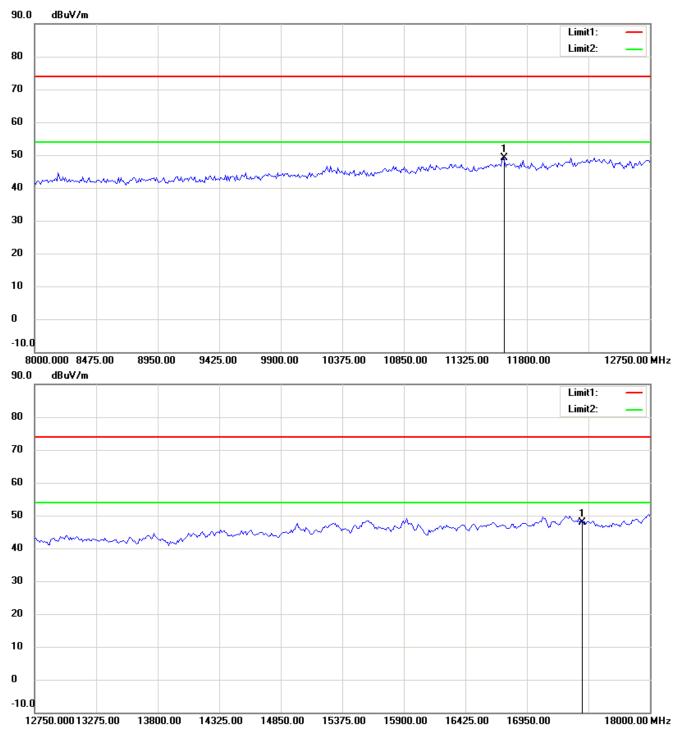

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



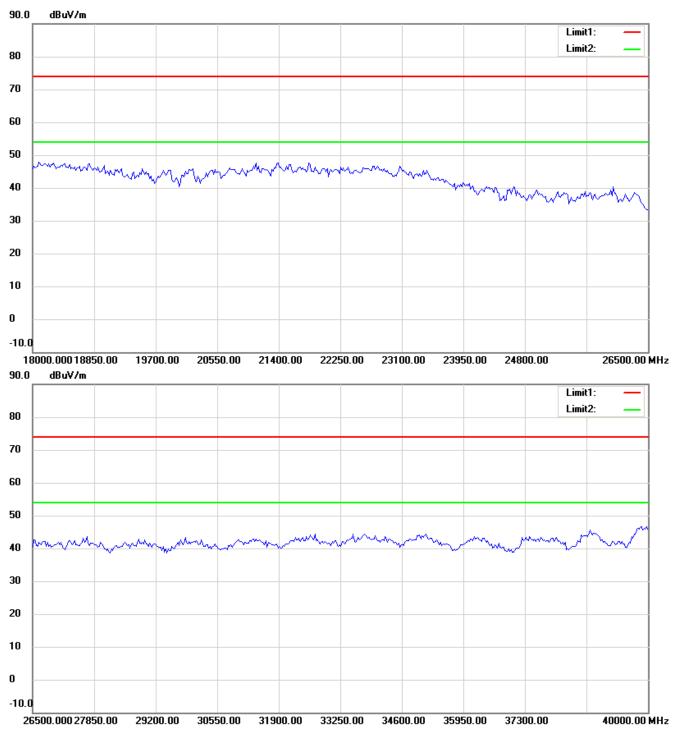


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11b 2412MHz

## Antenna Polarization H

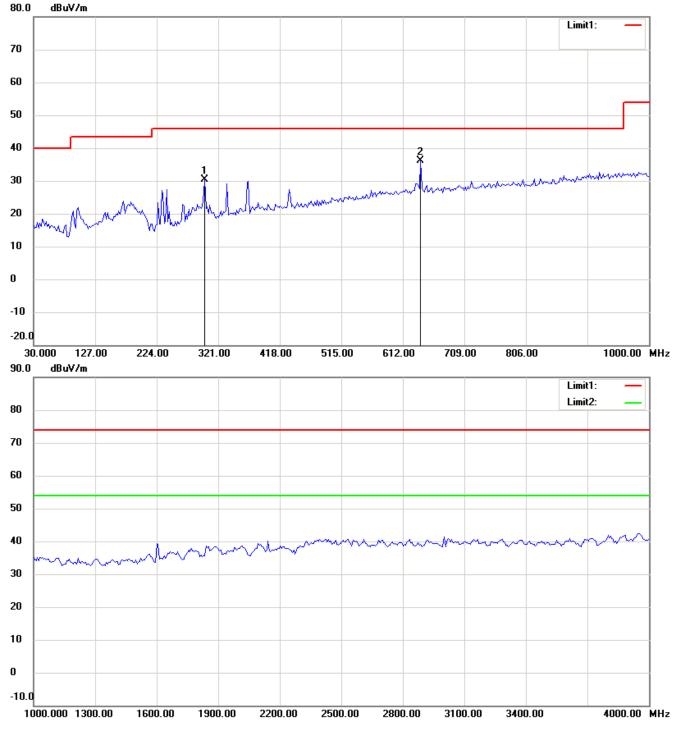


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



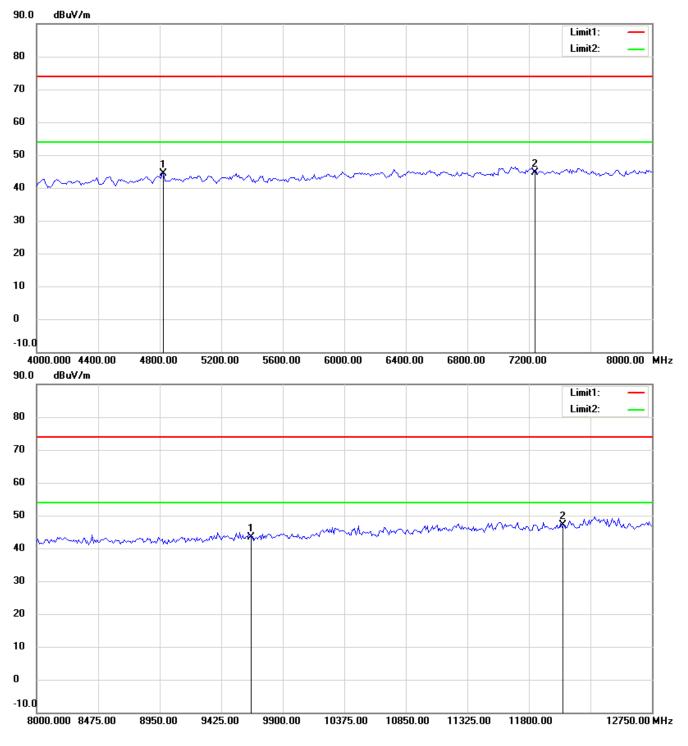

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




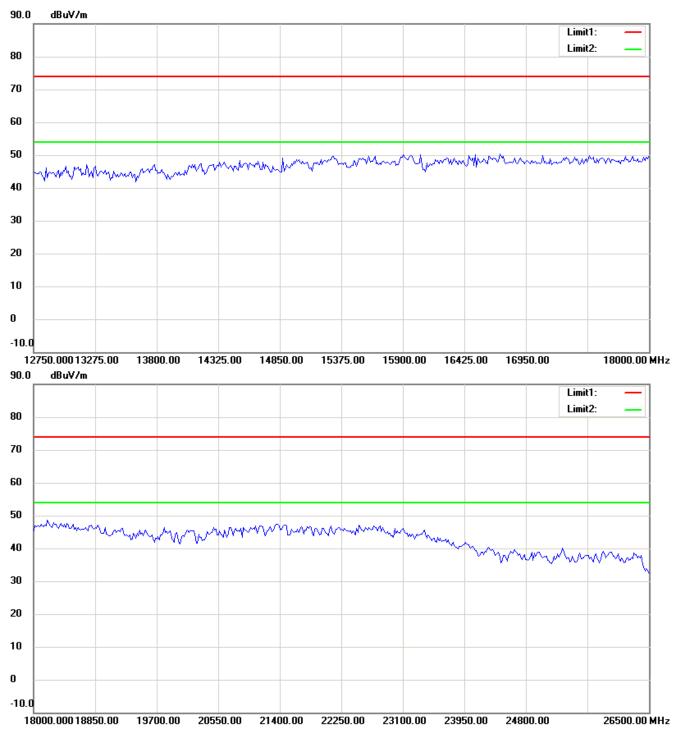

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

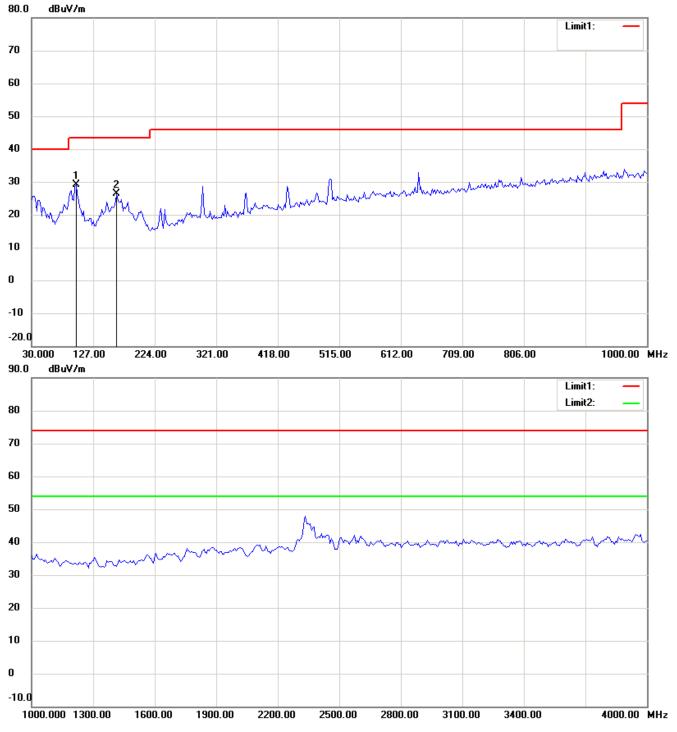


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



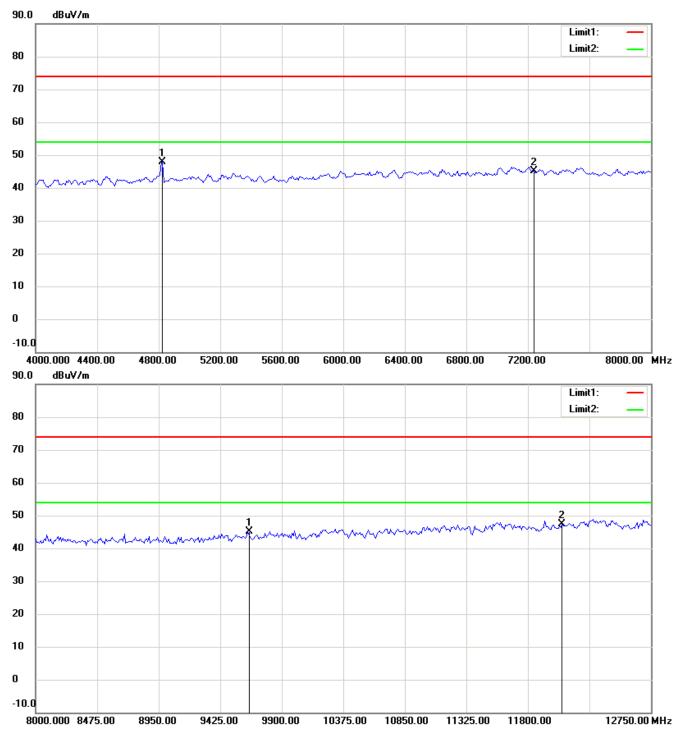

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



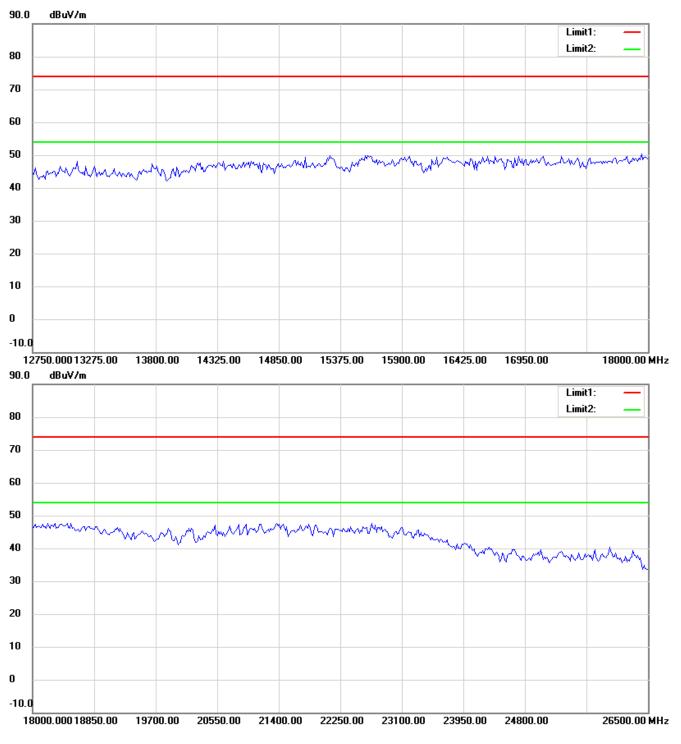


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11b 2437MHz

## Antenna Polarization H

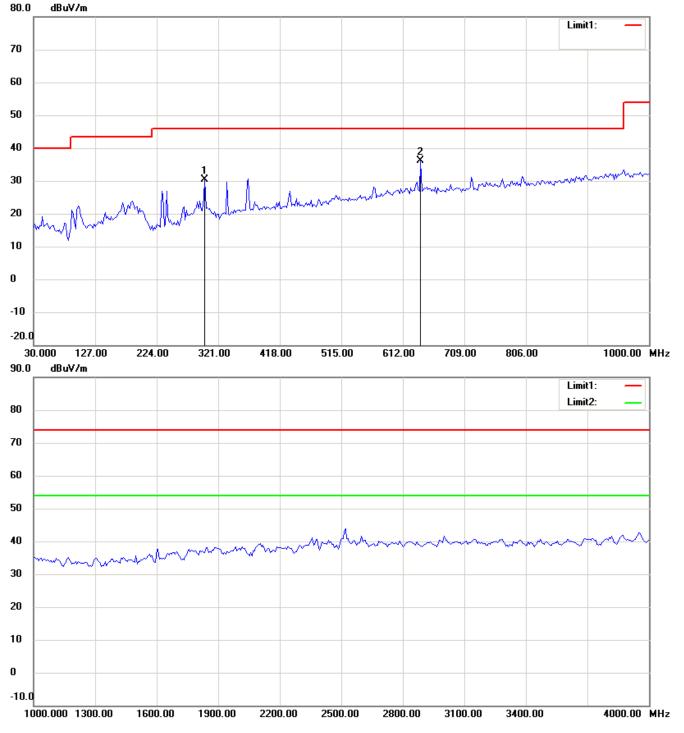


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



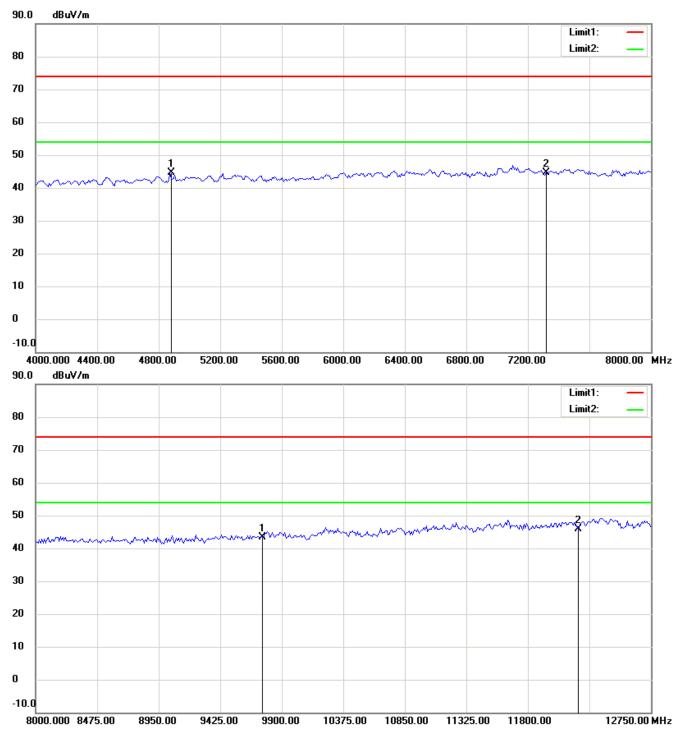

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




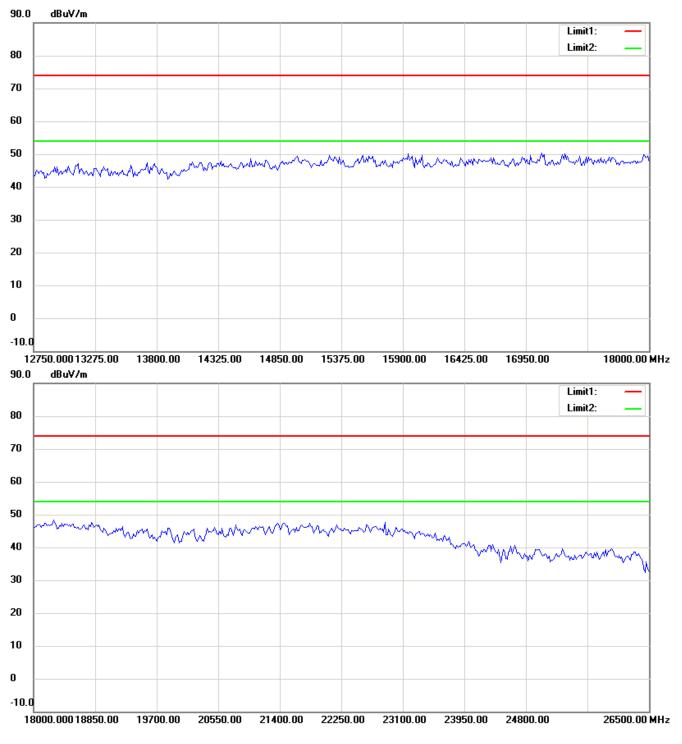

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

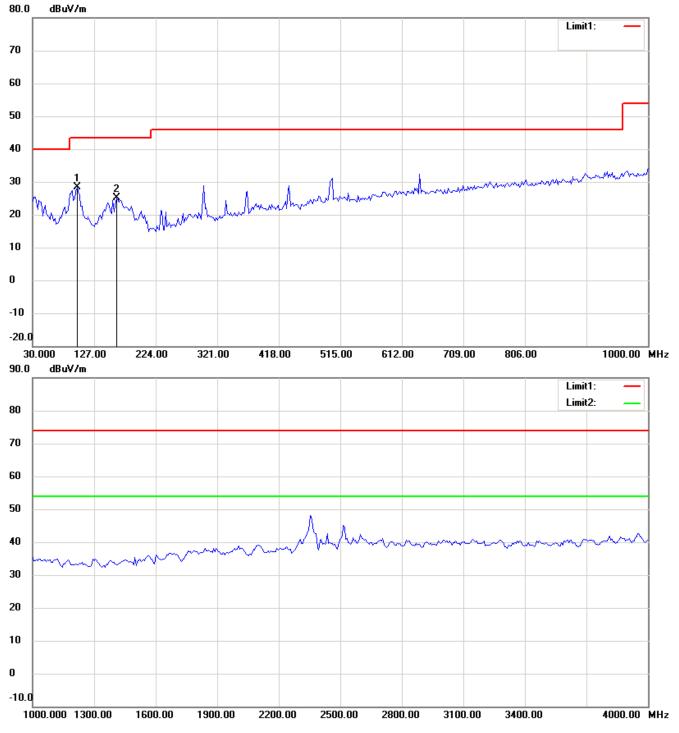


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



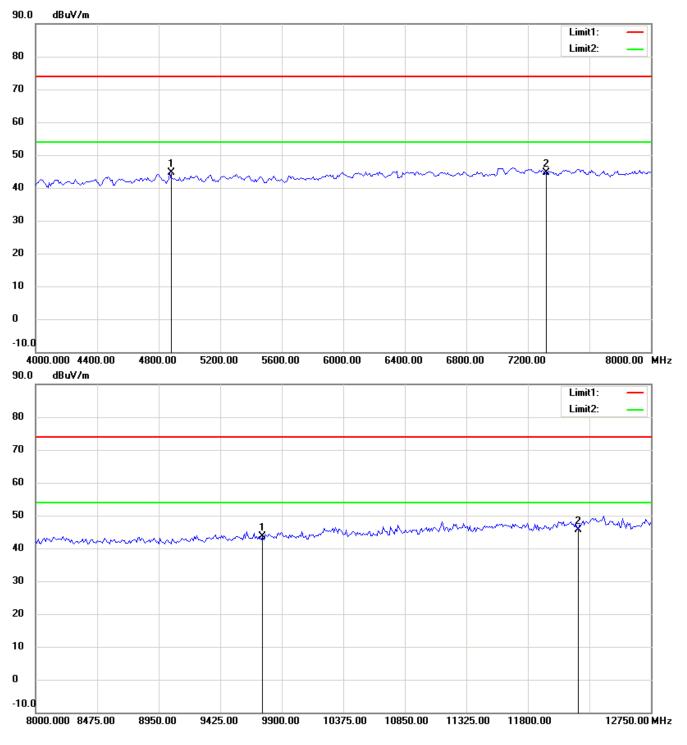

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



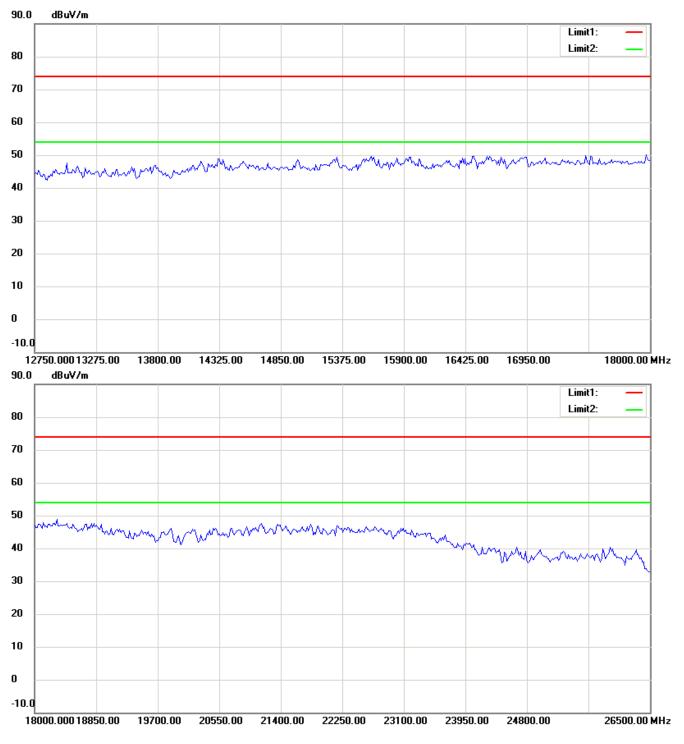


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11b 2462MHz

## Antenna Polarization H

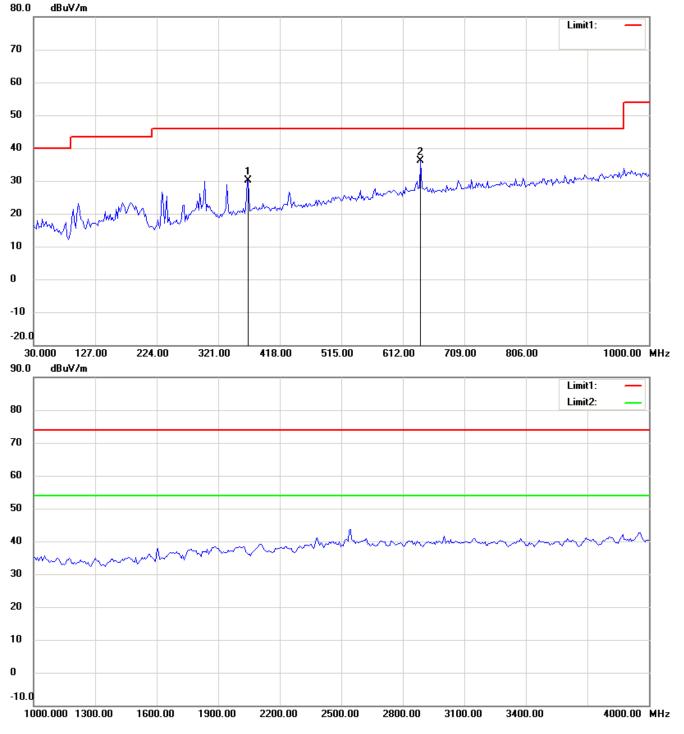


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



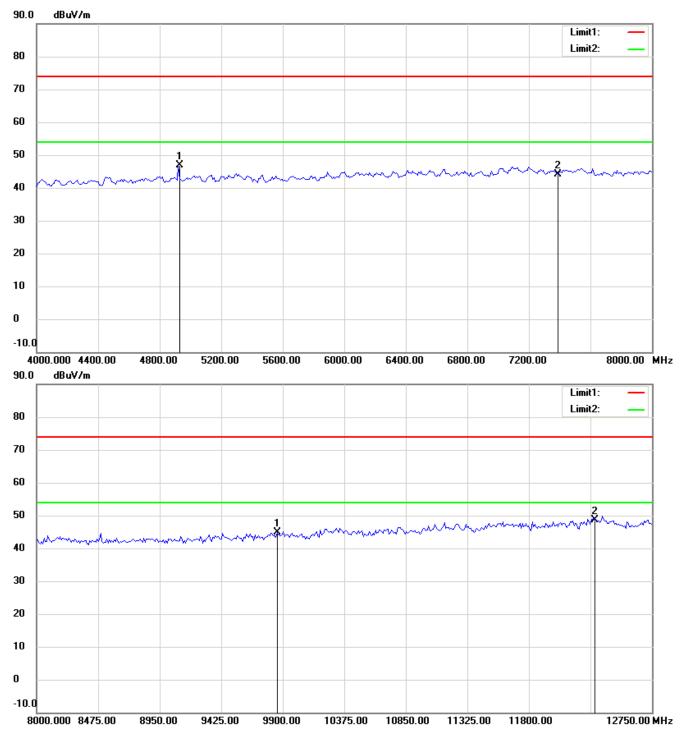

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




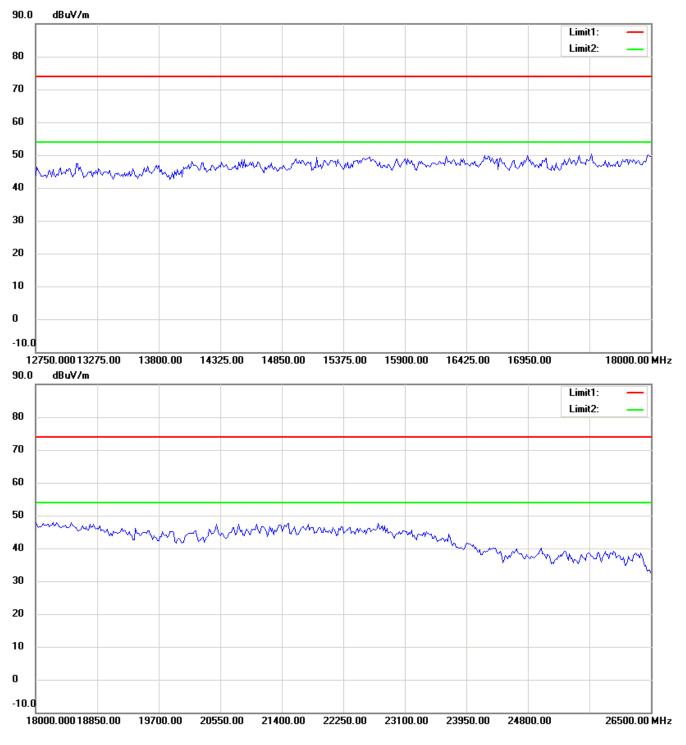

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

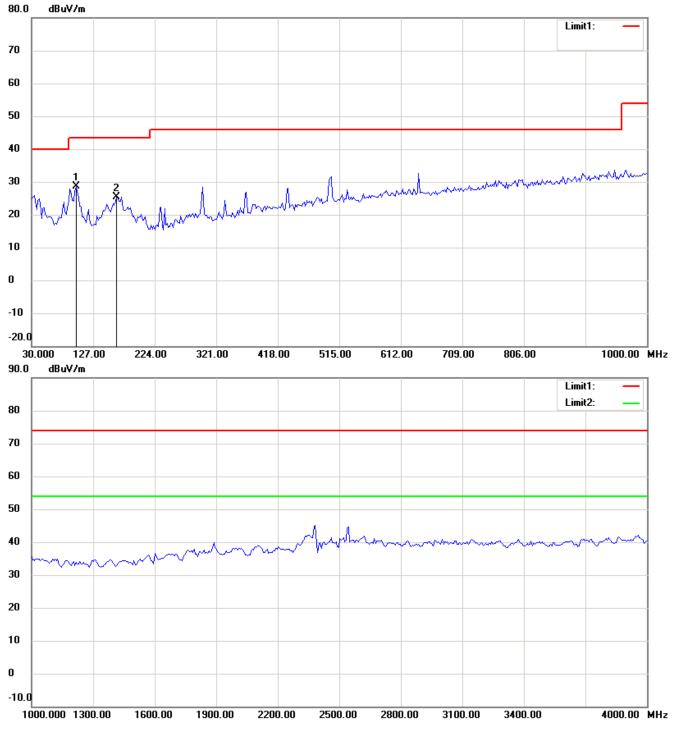


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



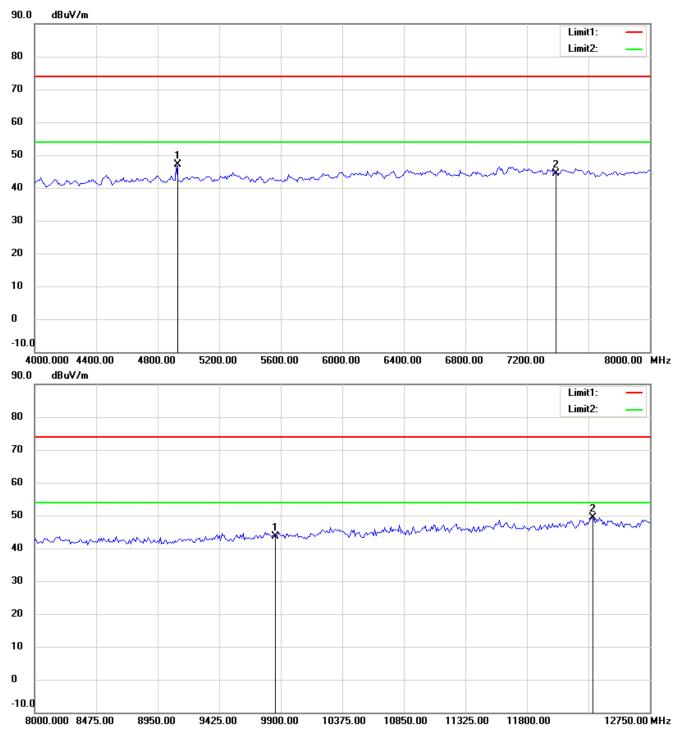

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



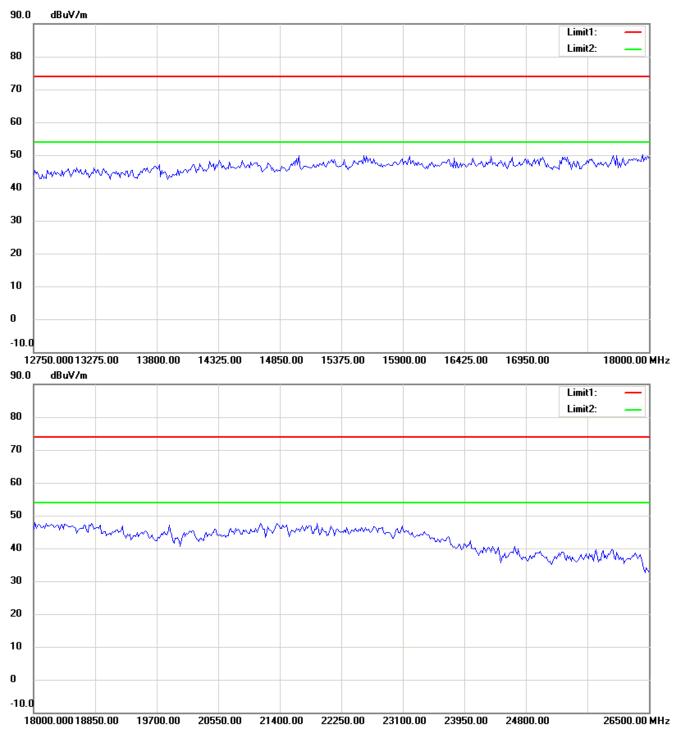


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11g 2412MHz

## Antenna Polarization H

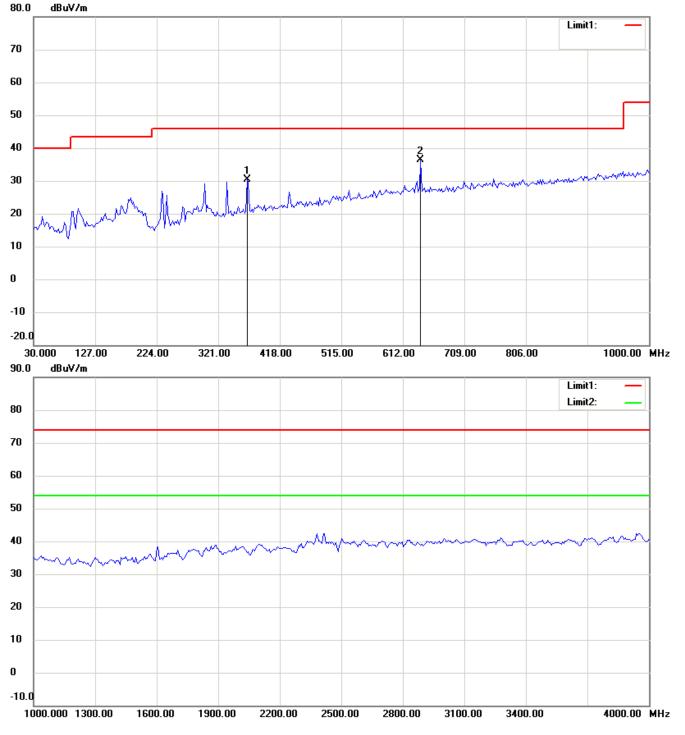


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



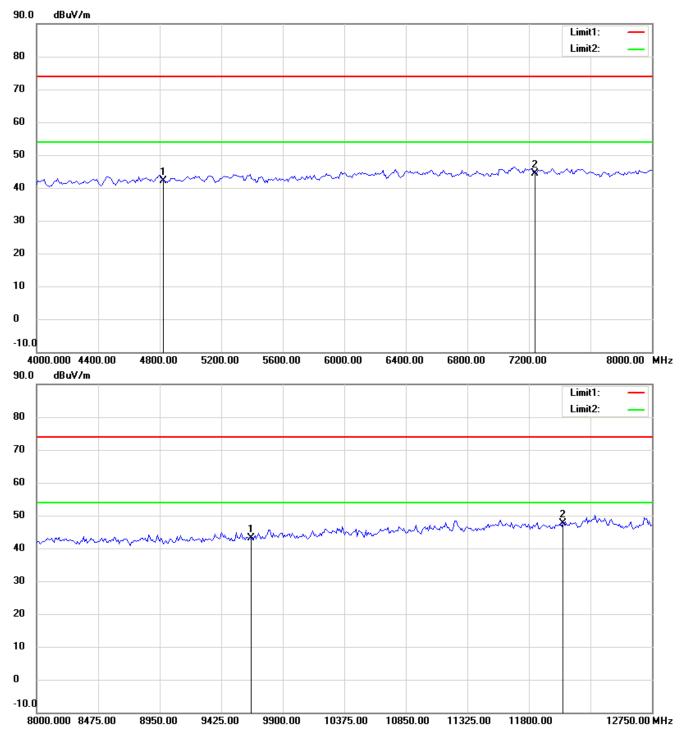

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




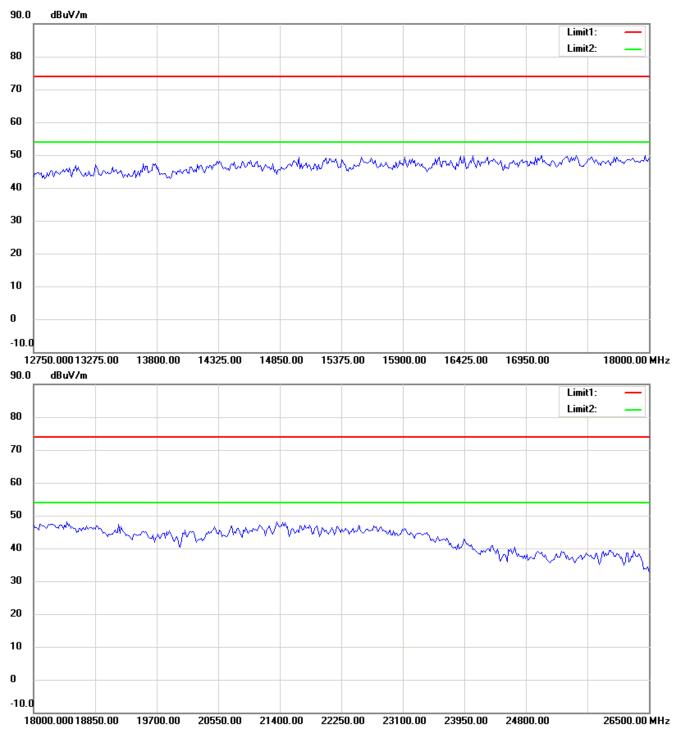

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

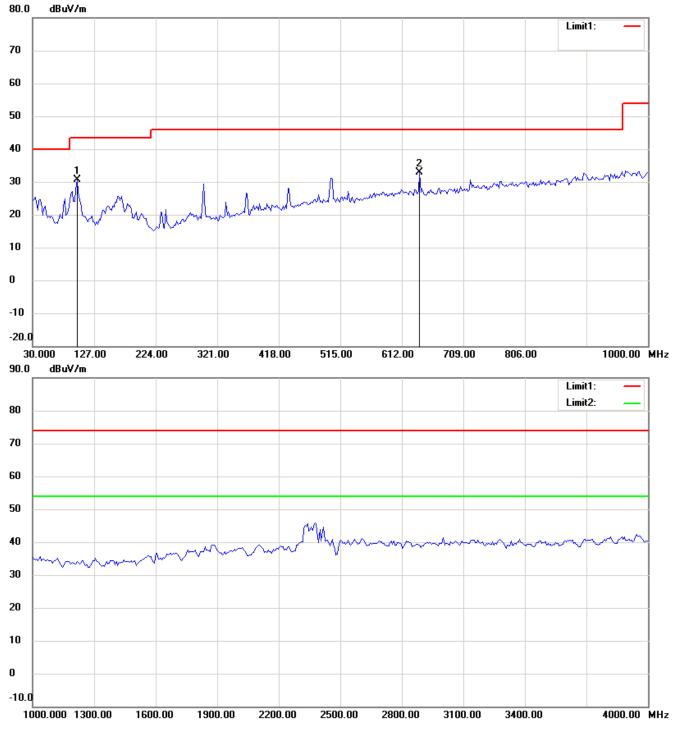


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



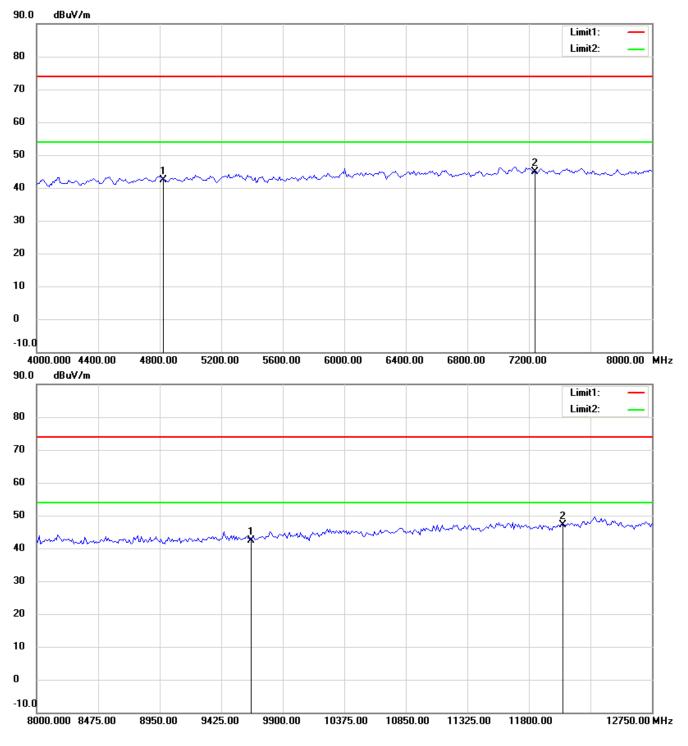

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



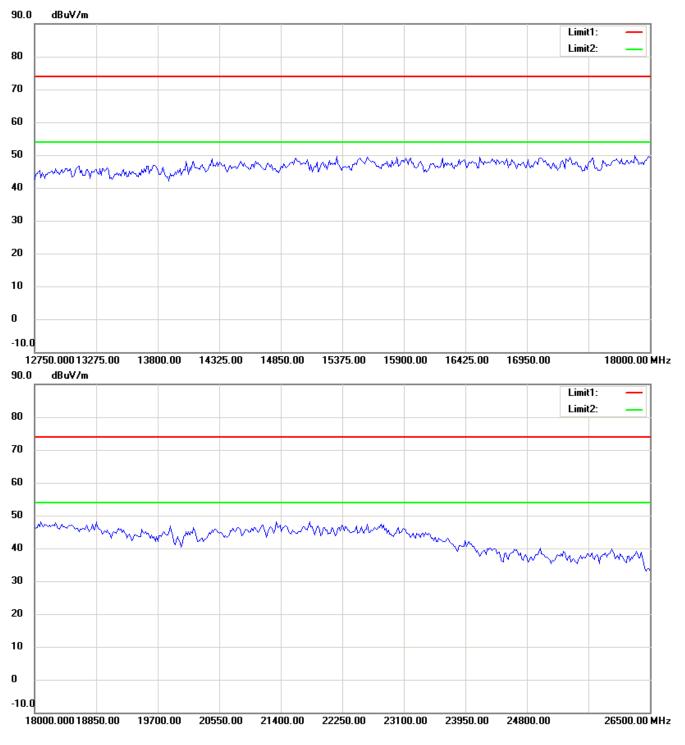


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11g 2437MHz

## Antenna Polarization H

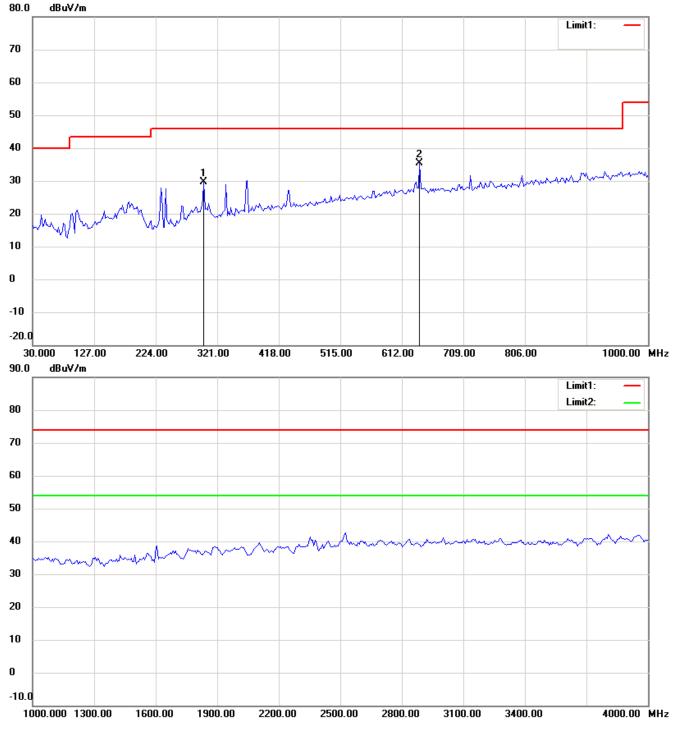


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



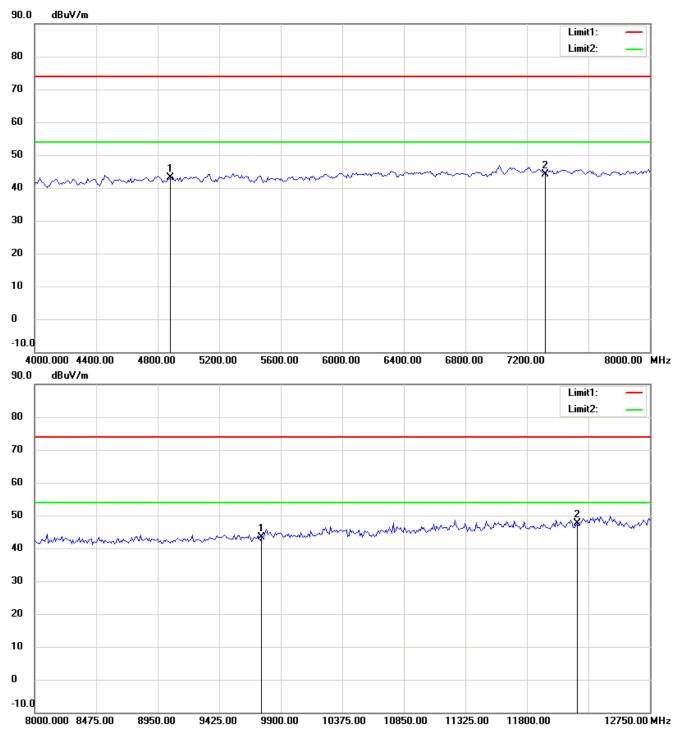

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




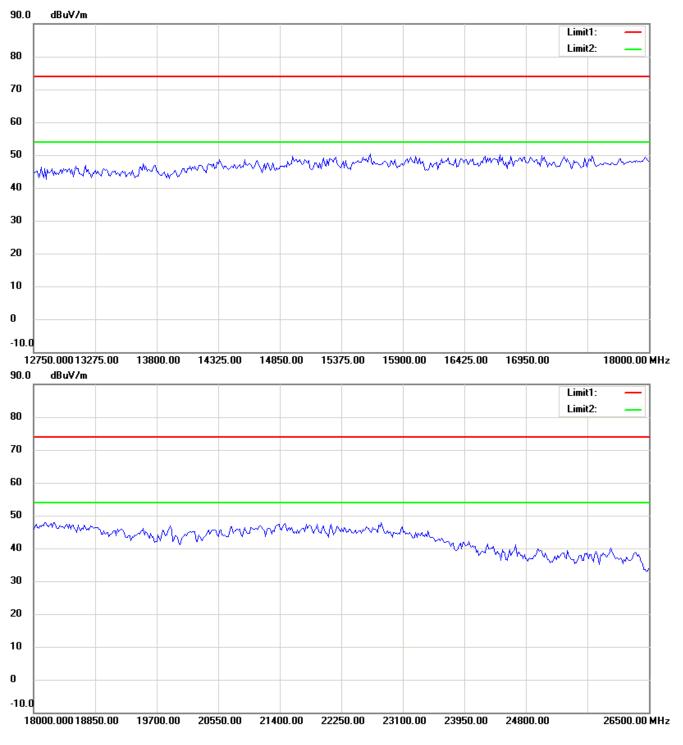

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

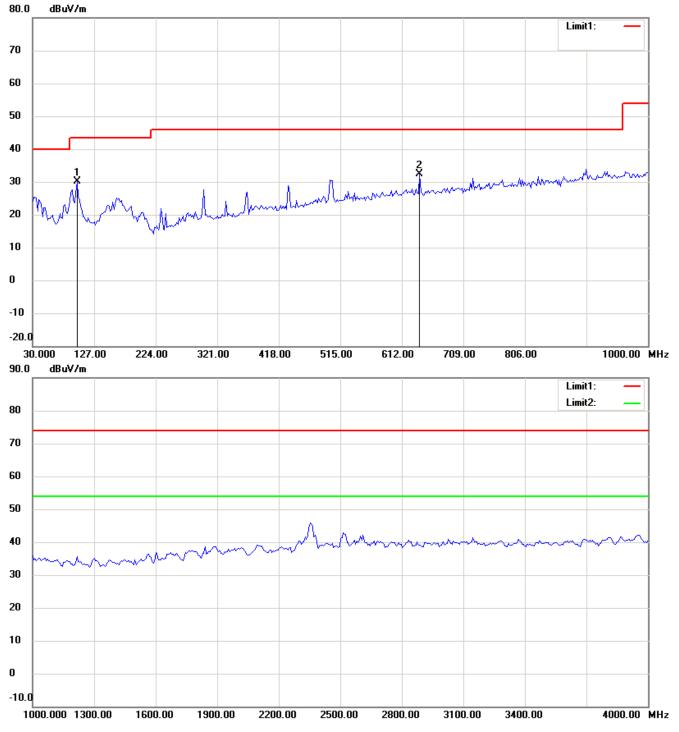


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



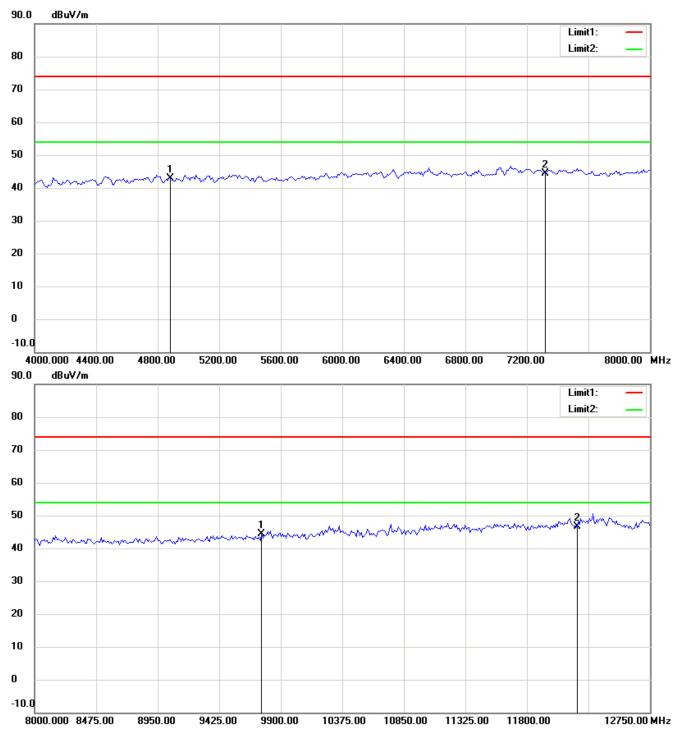

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



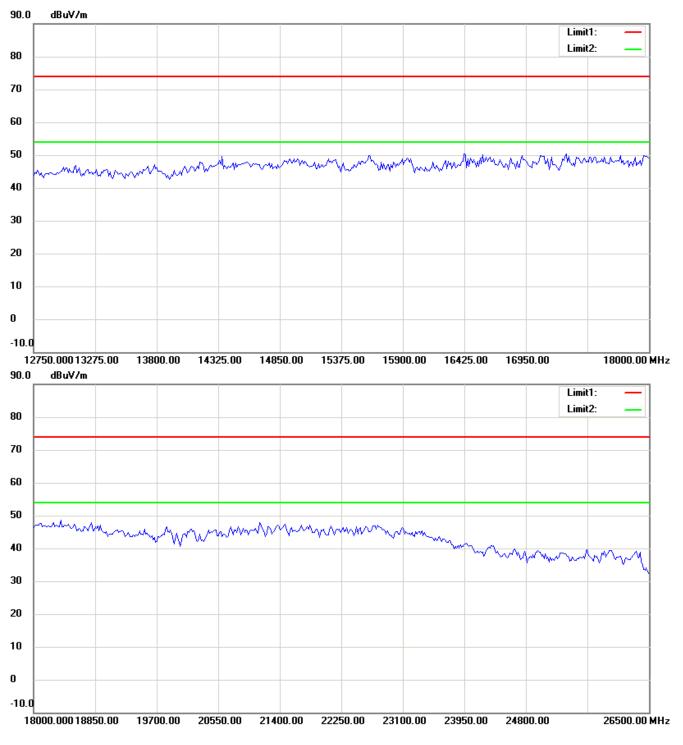


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11g 2462MHz

### Antenna Polarization H

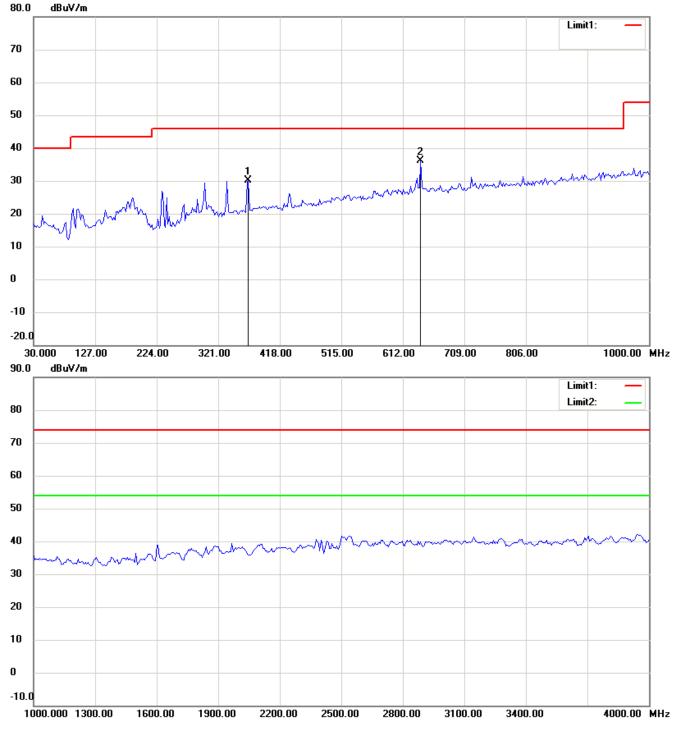


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



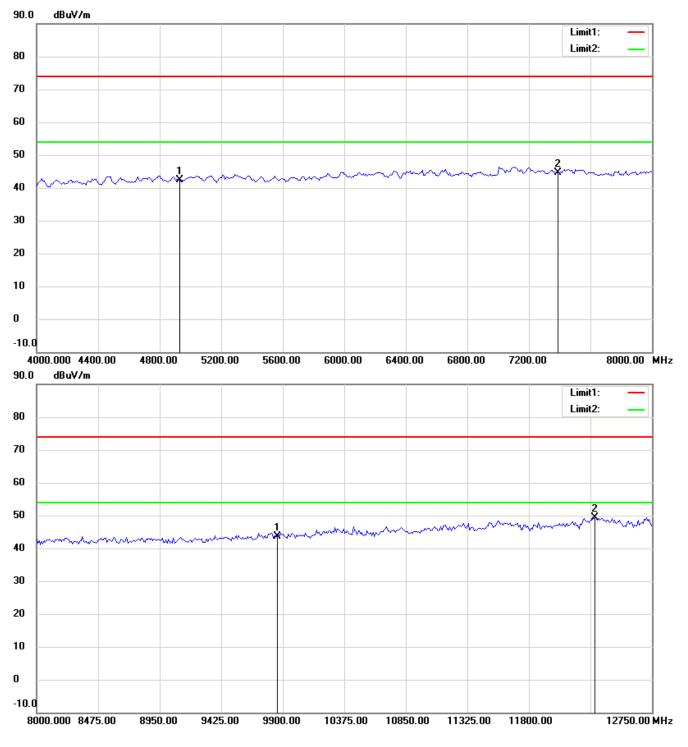

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




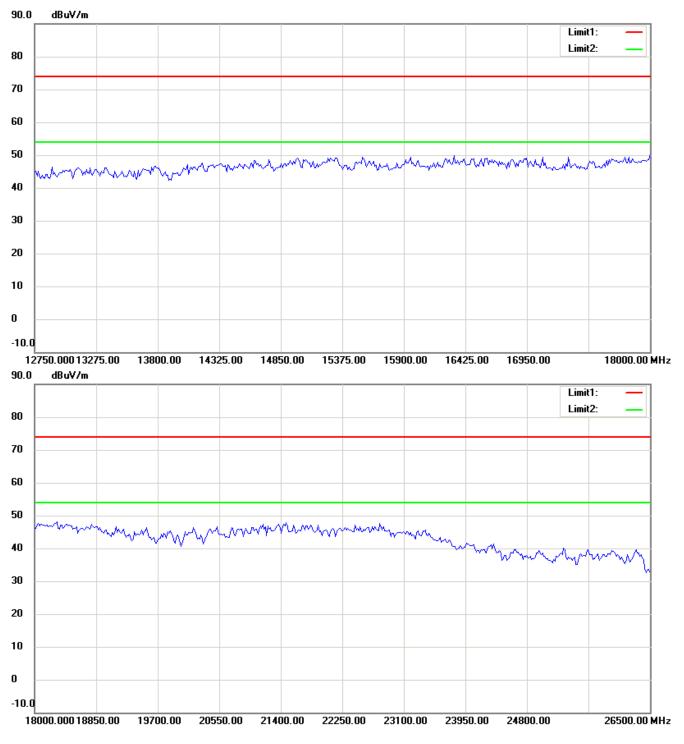

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

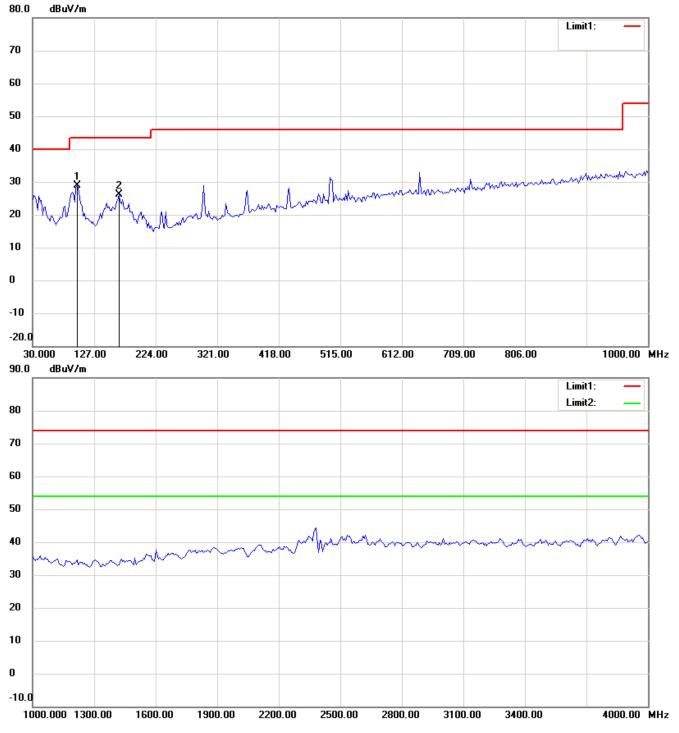


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



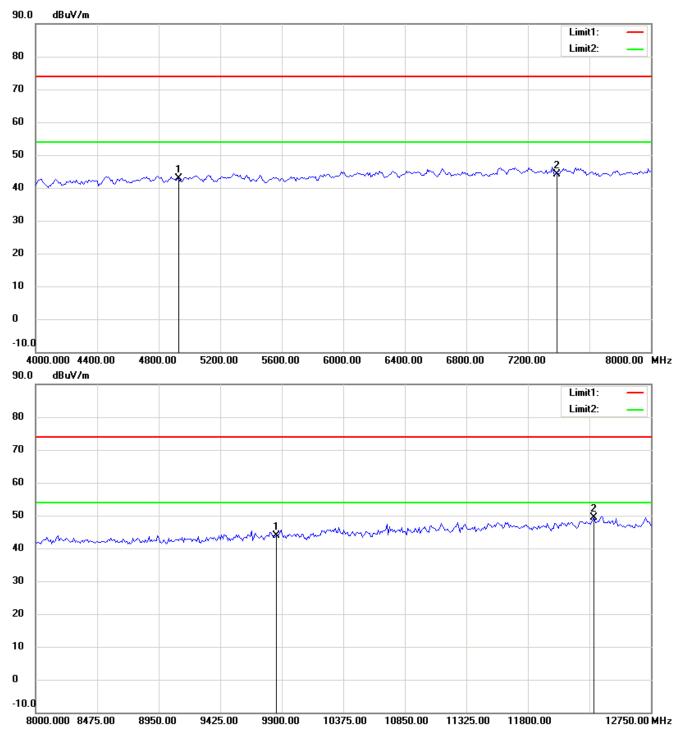

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



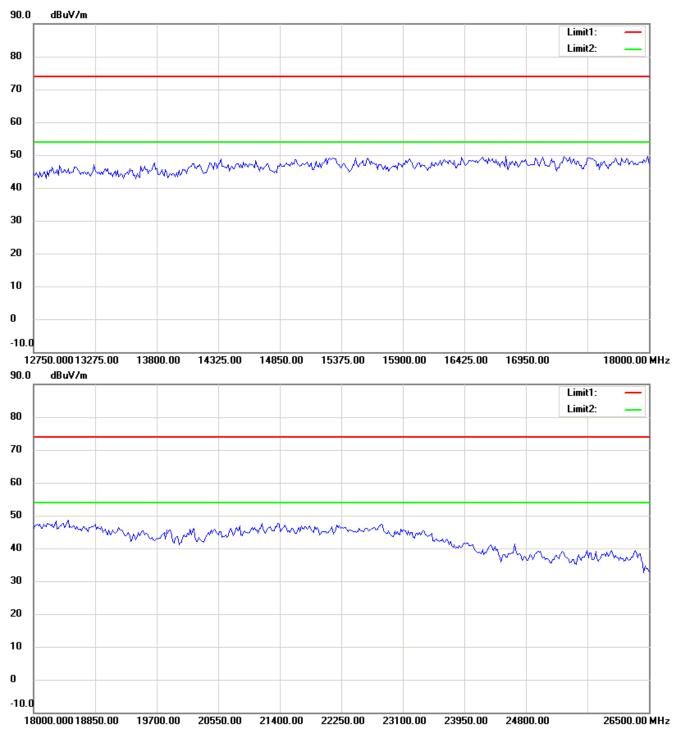


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna B 802.11a 5745MHz Antenna Polarization H



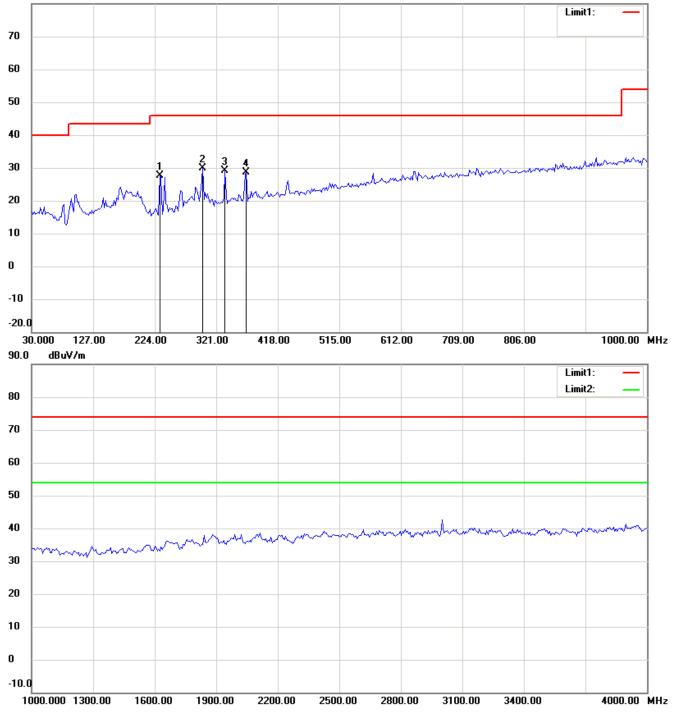


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



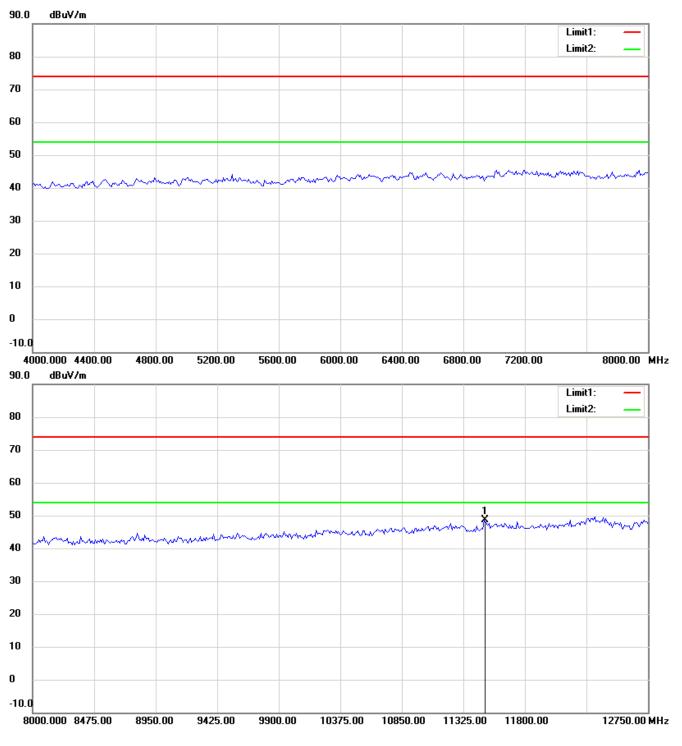


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



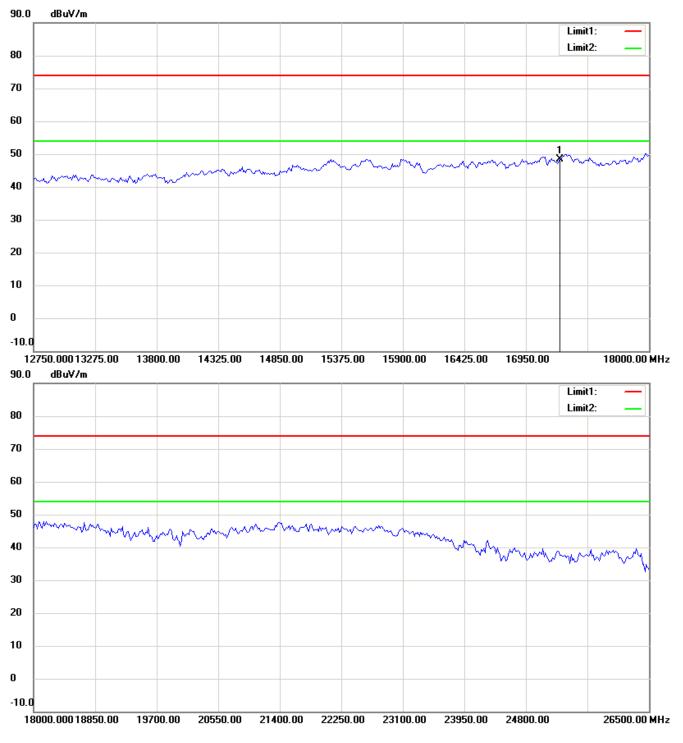


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



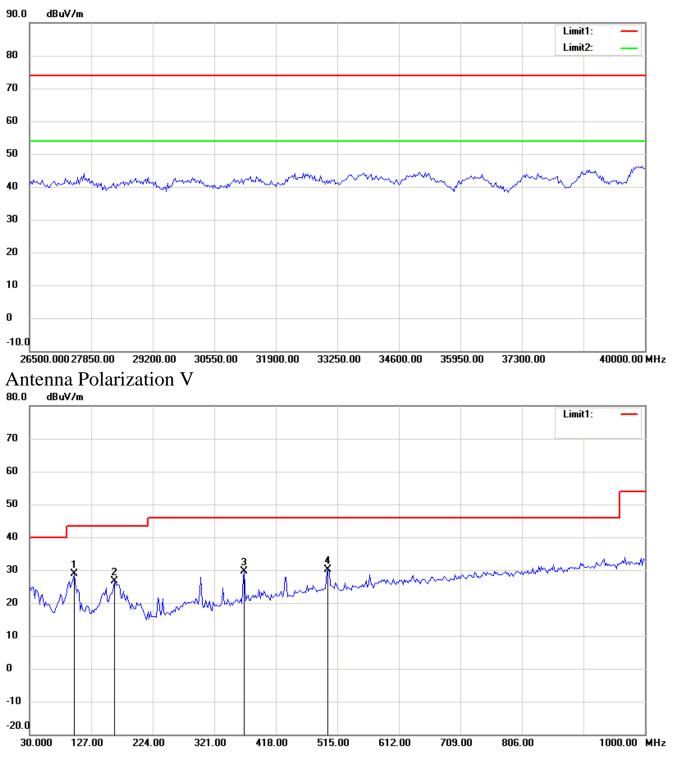


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



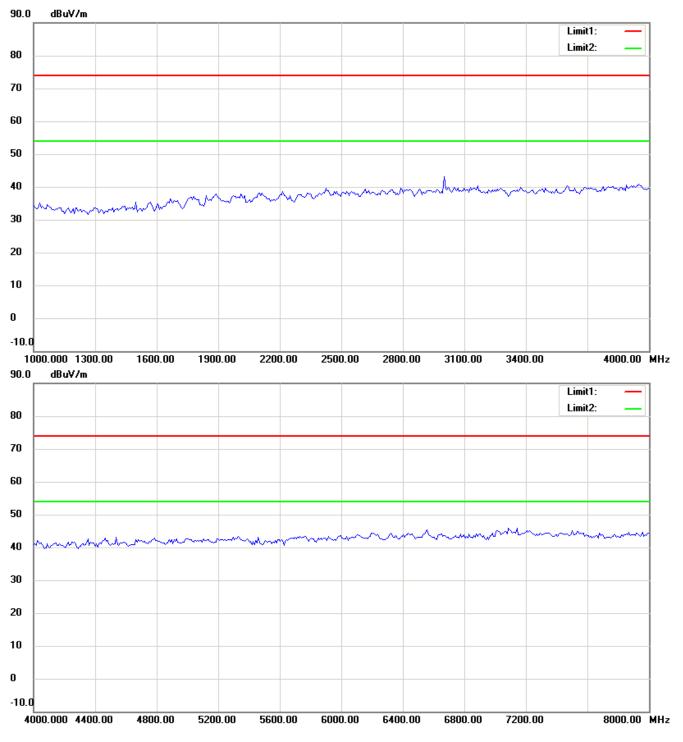


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



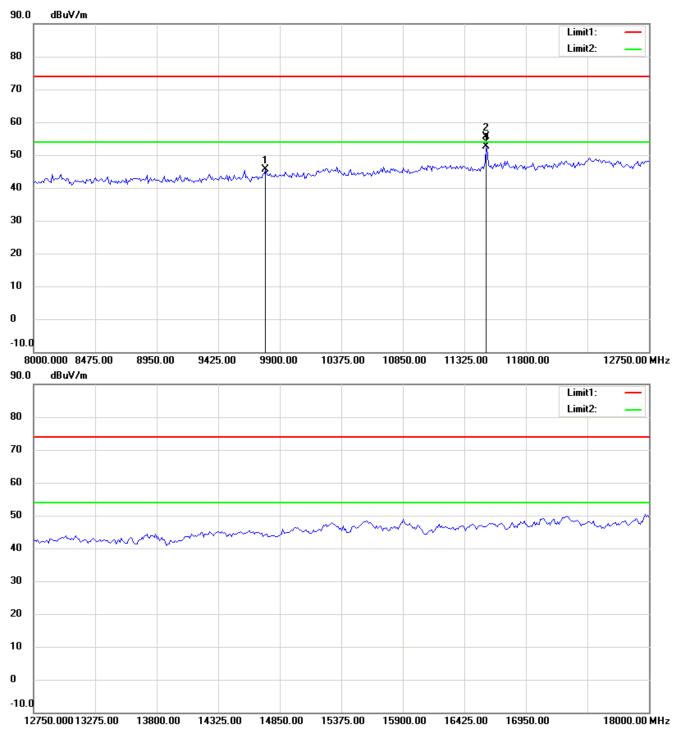

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



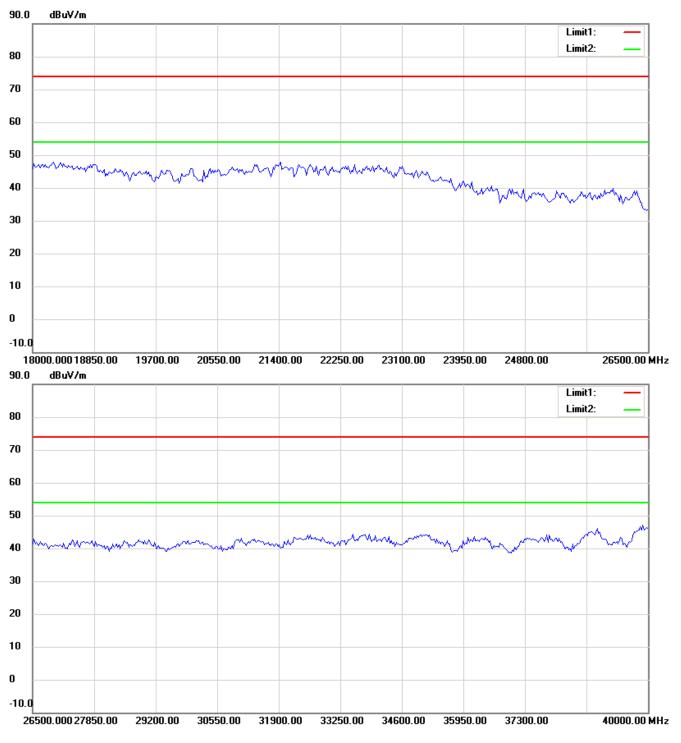


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11a 5785MHz

# Antenna Polarization H

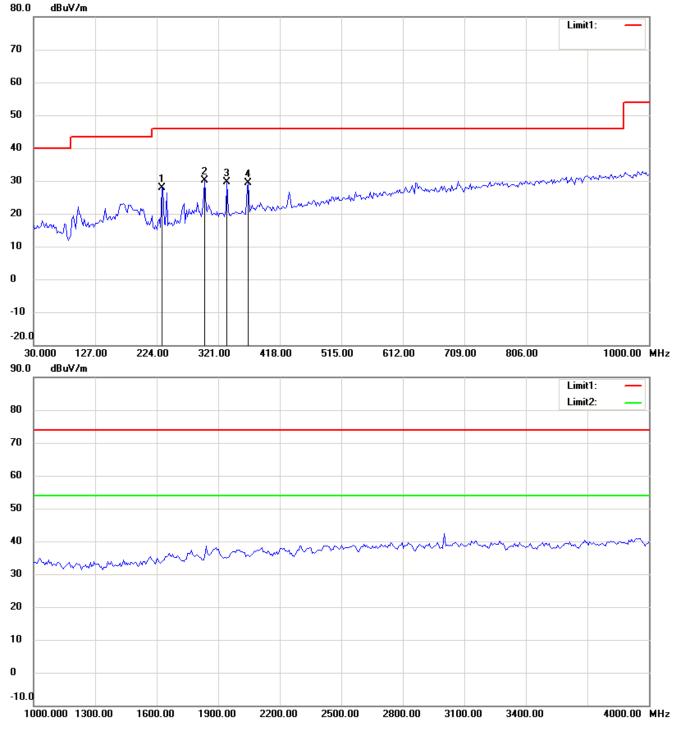


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



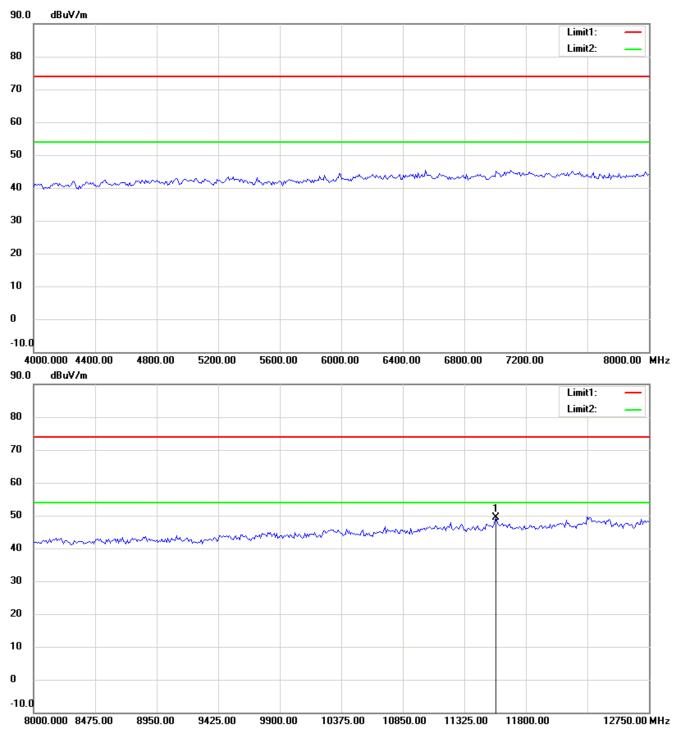


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



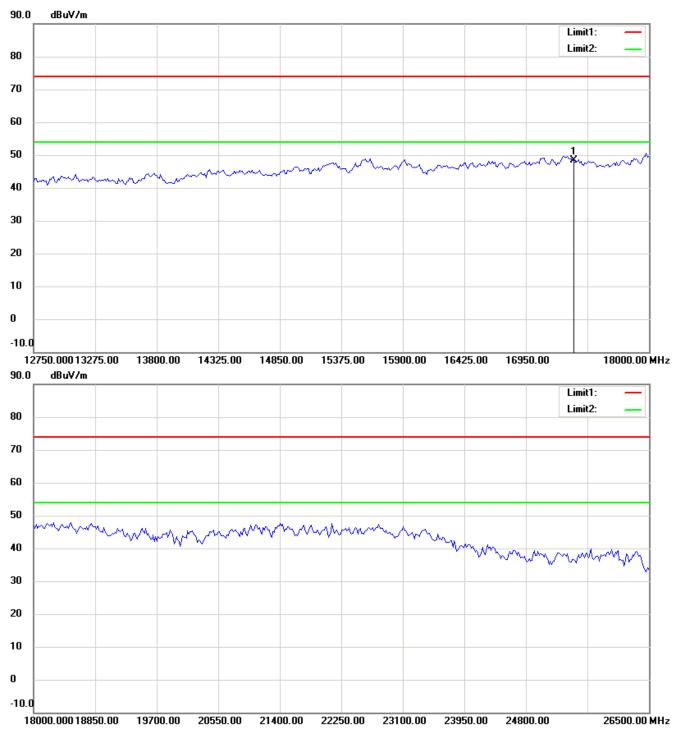


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



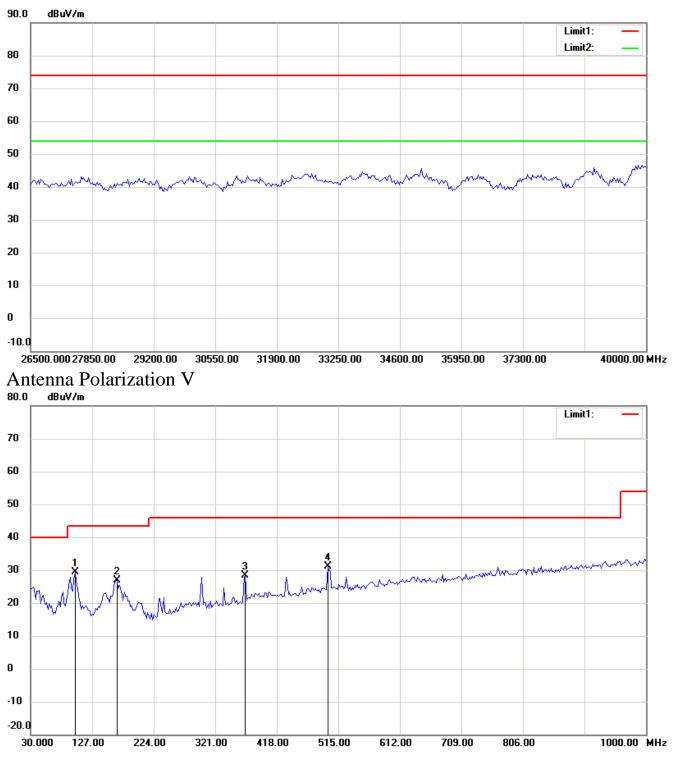


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



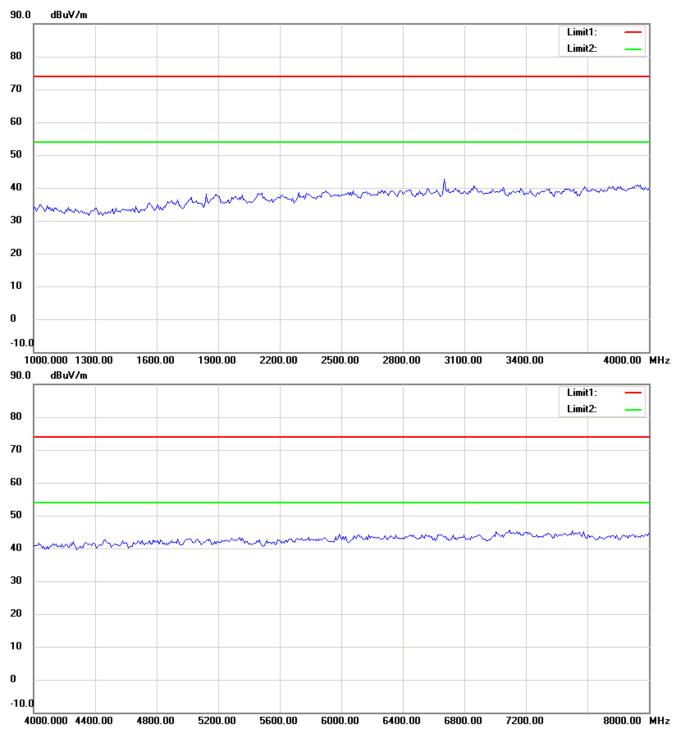


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



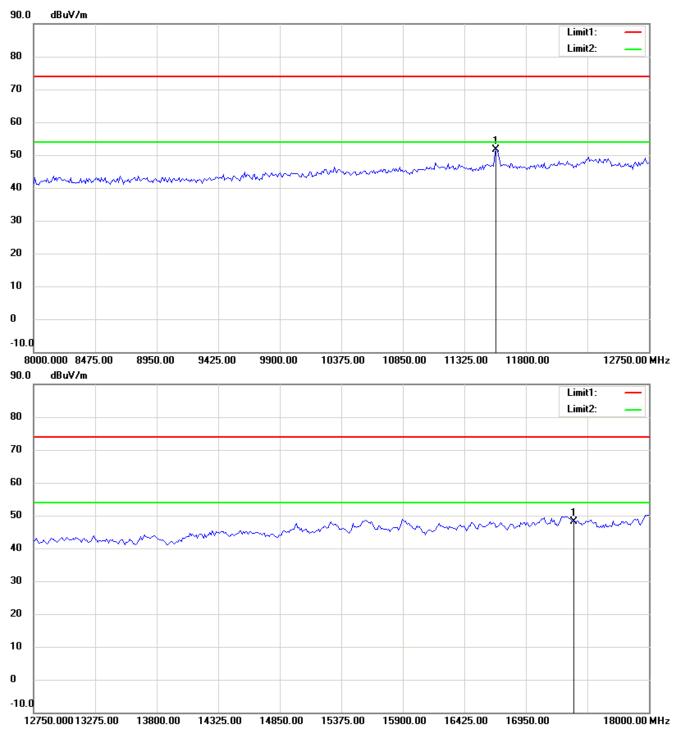

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



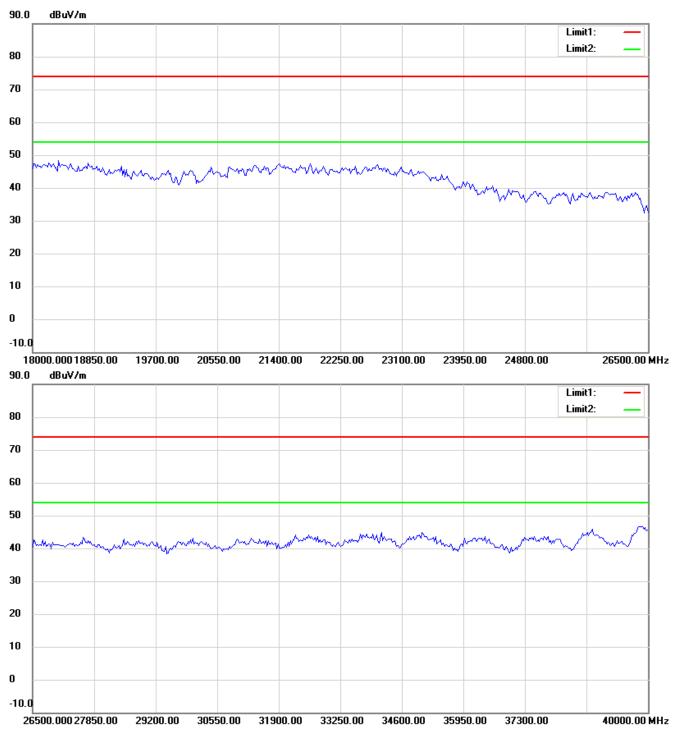


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11a 5825MHz

# Antenna Polarization H

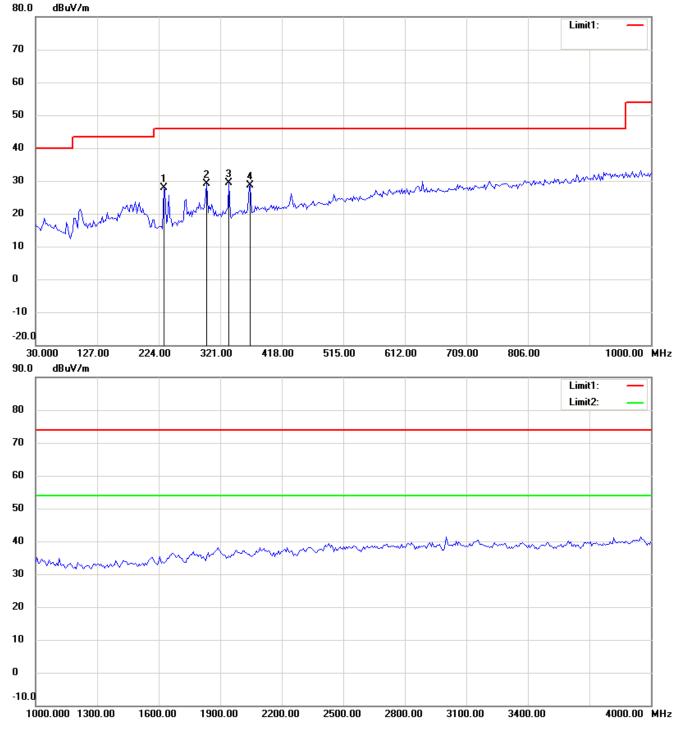


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



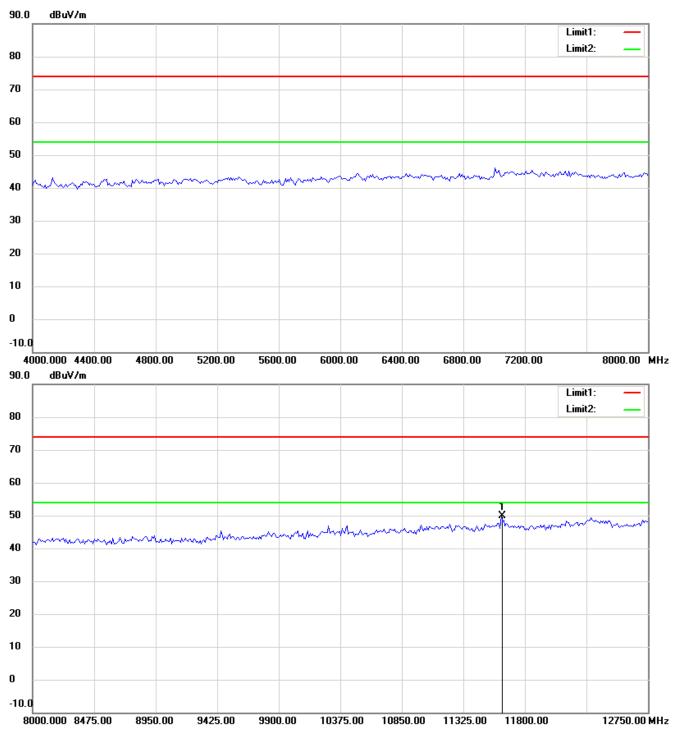


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



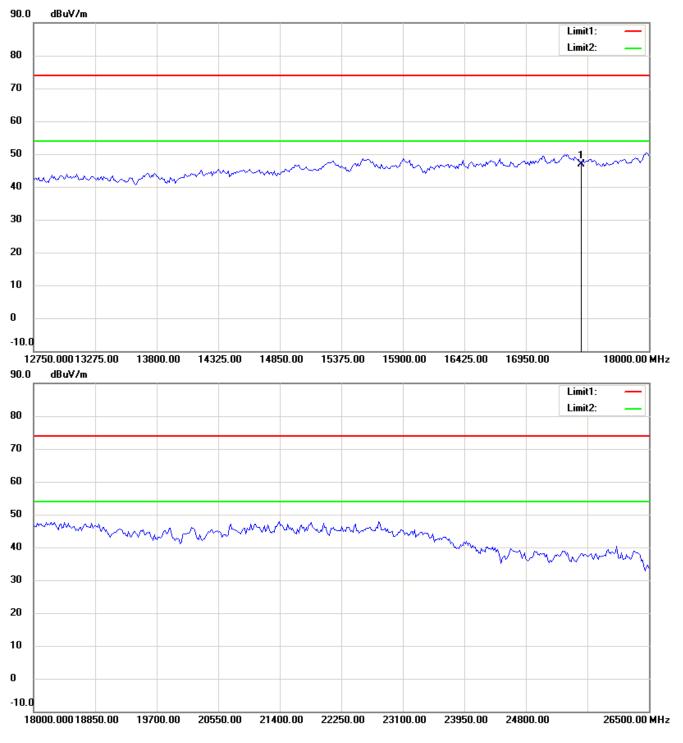


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



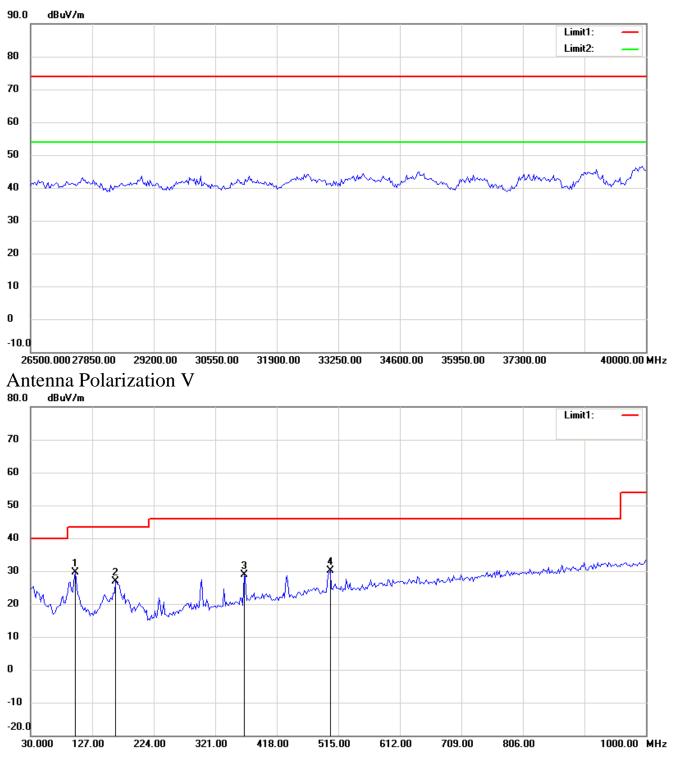


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



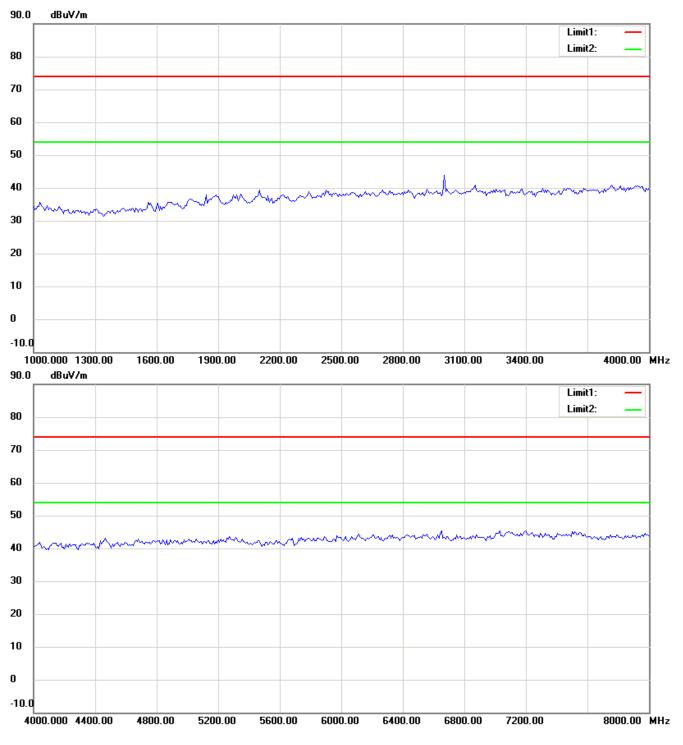


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



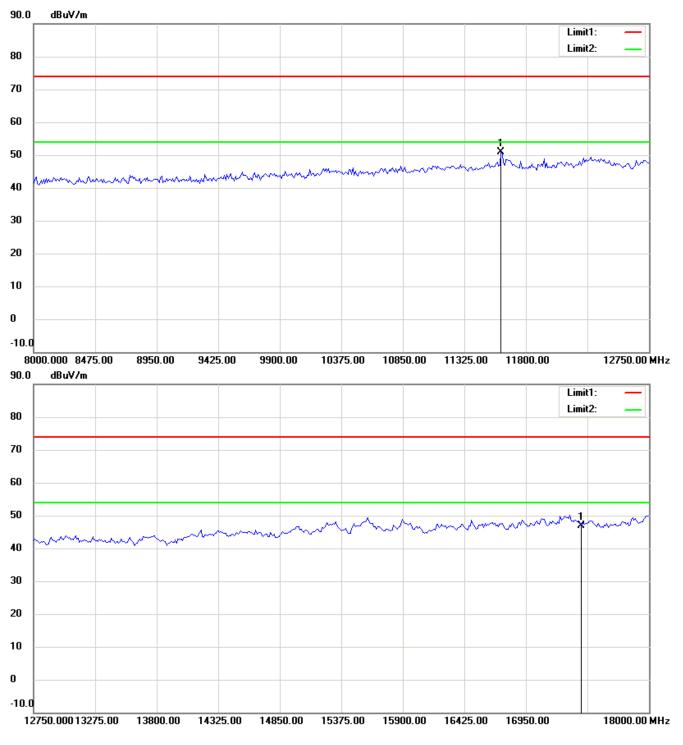

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



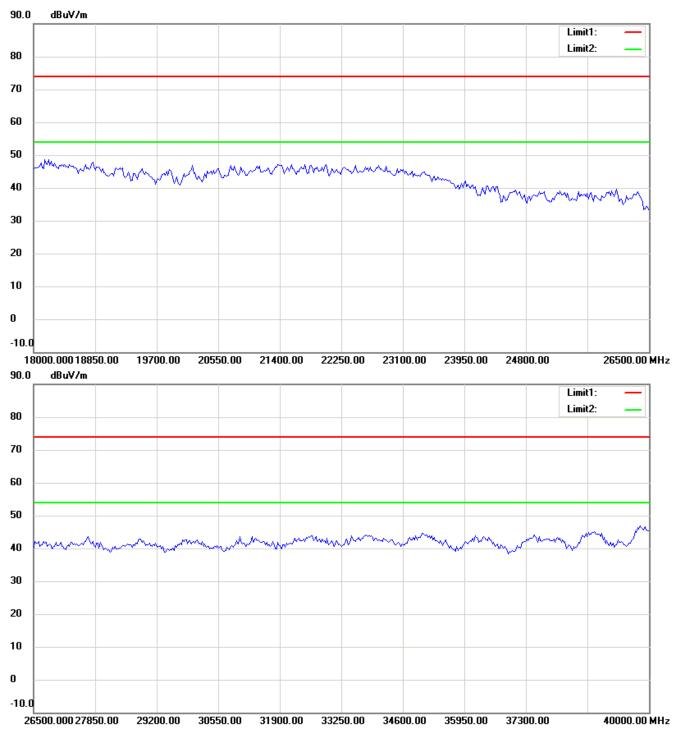


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11b 2412MHz

# Antenna Polarization H

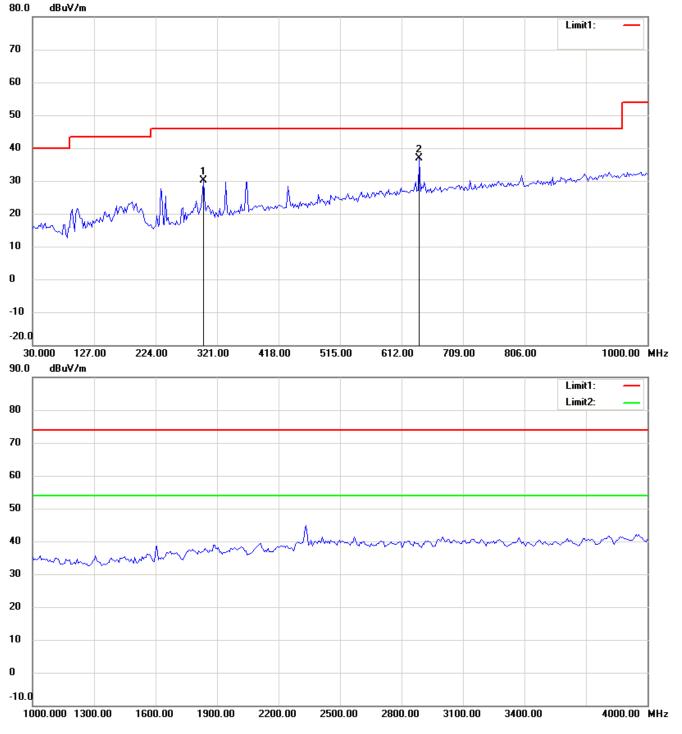


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



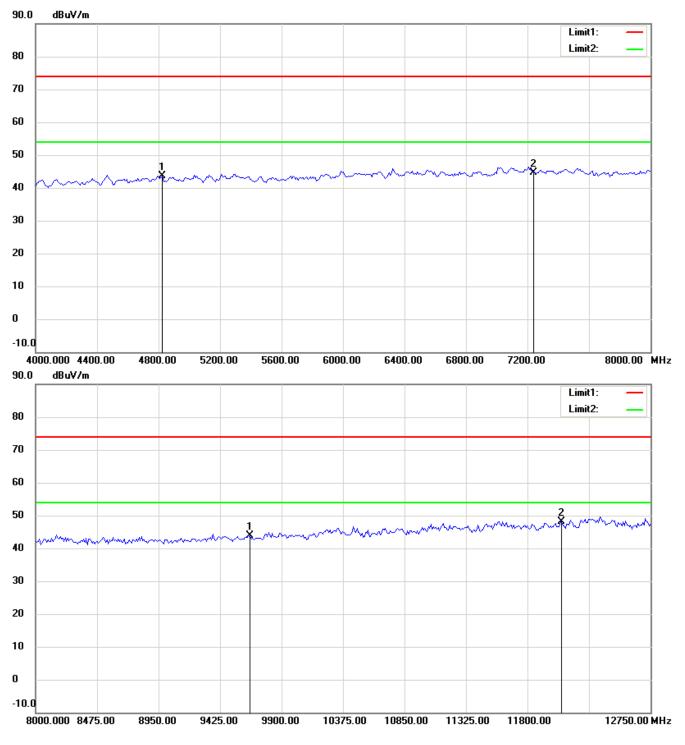

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




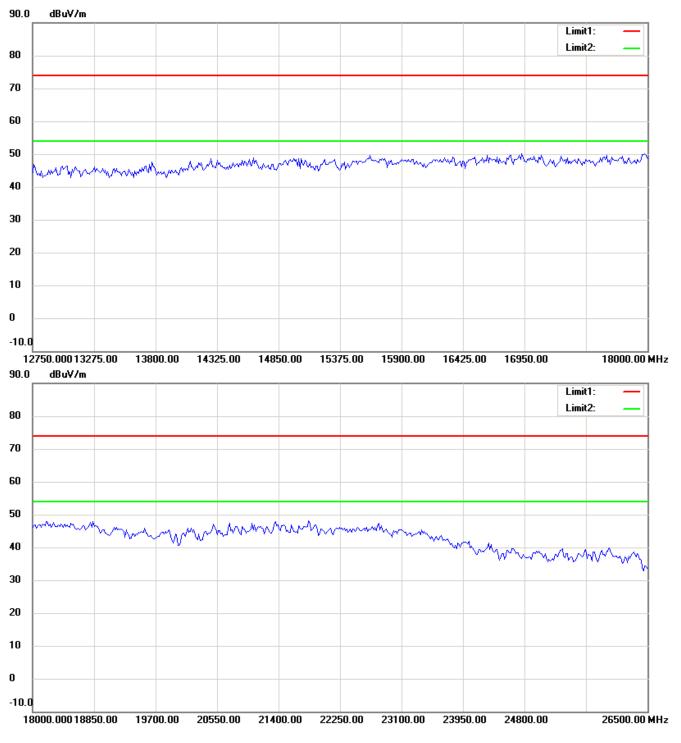

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

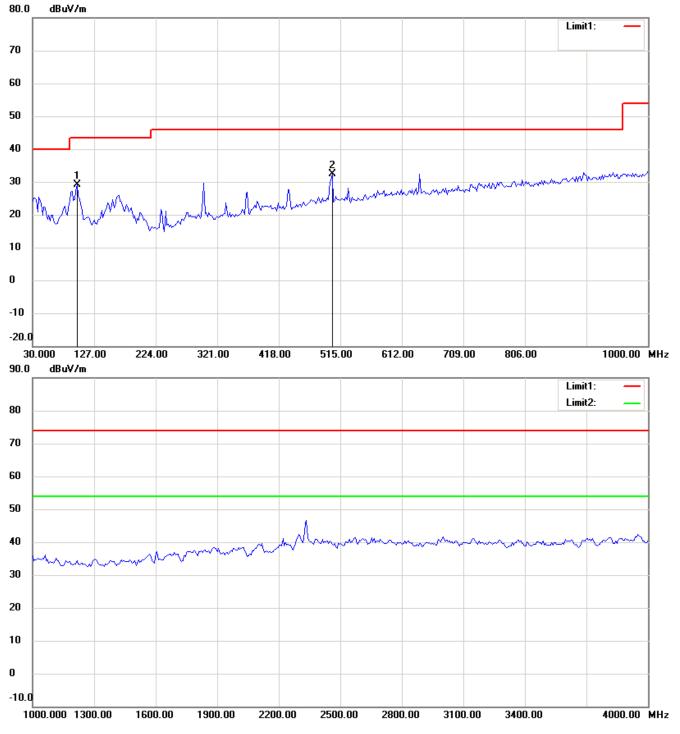


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



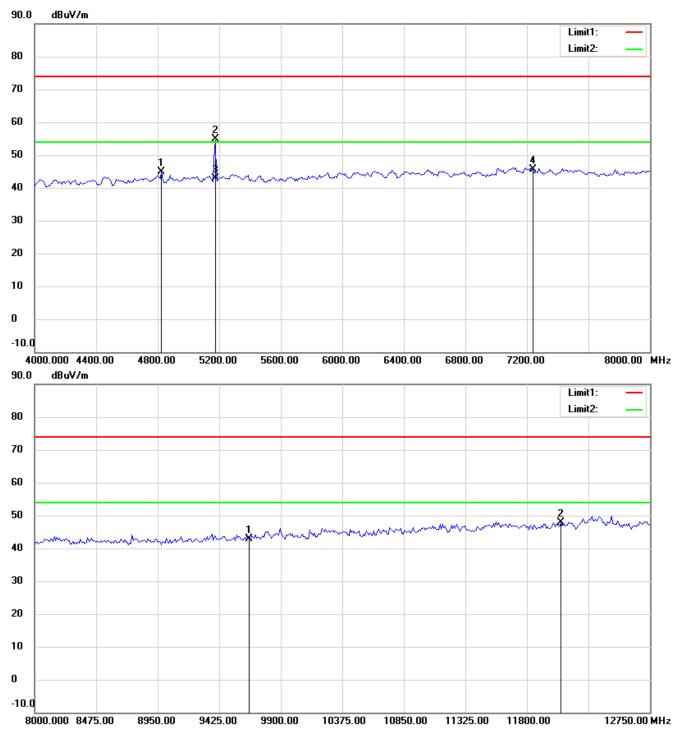

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



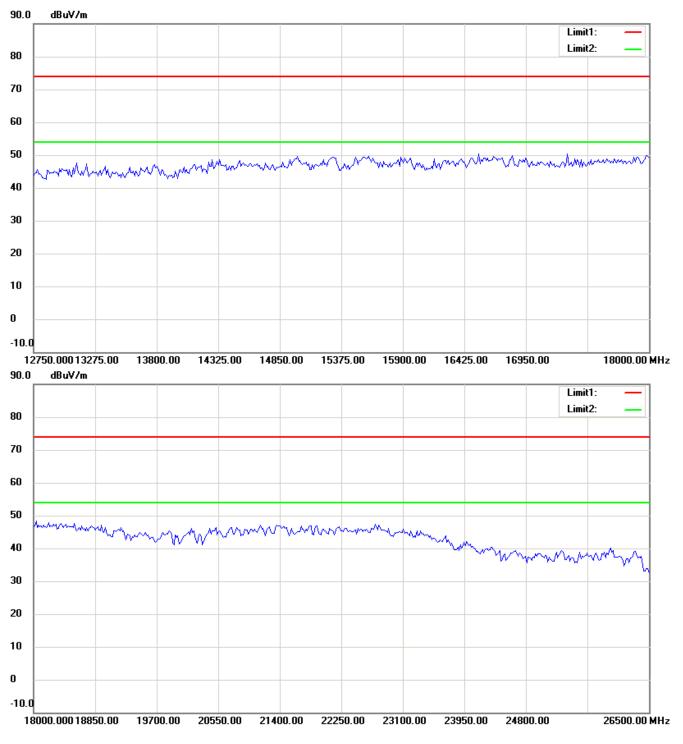


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11b 2437MHz

# Antenna Polarization H

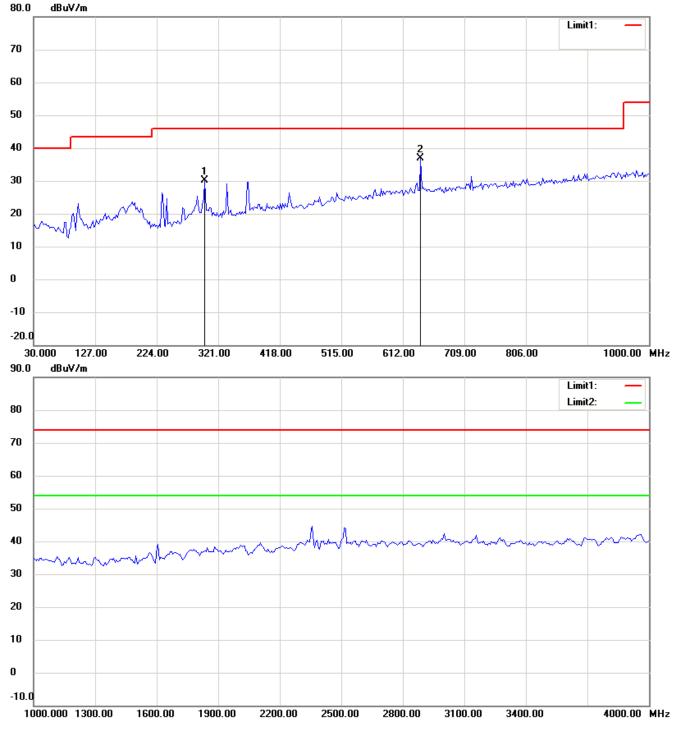


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



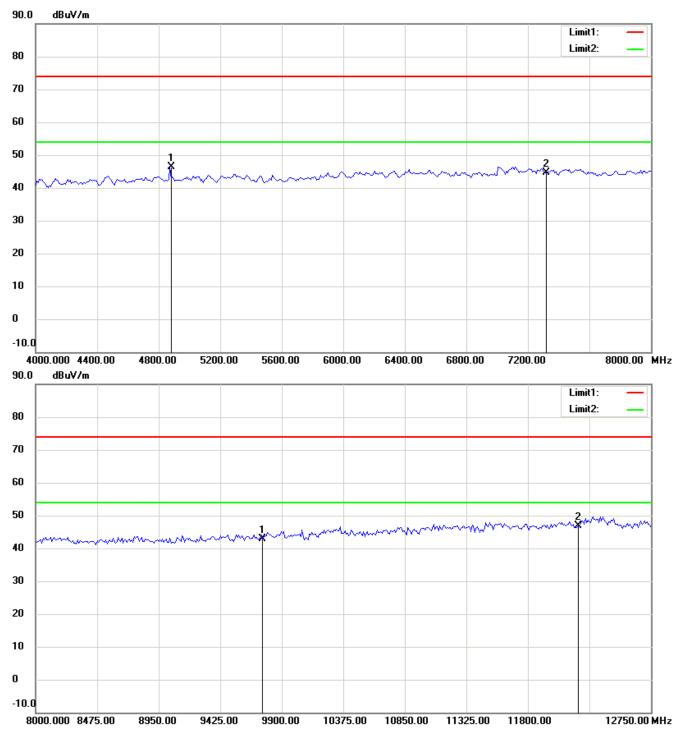

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




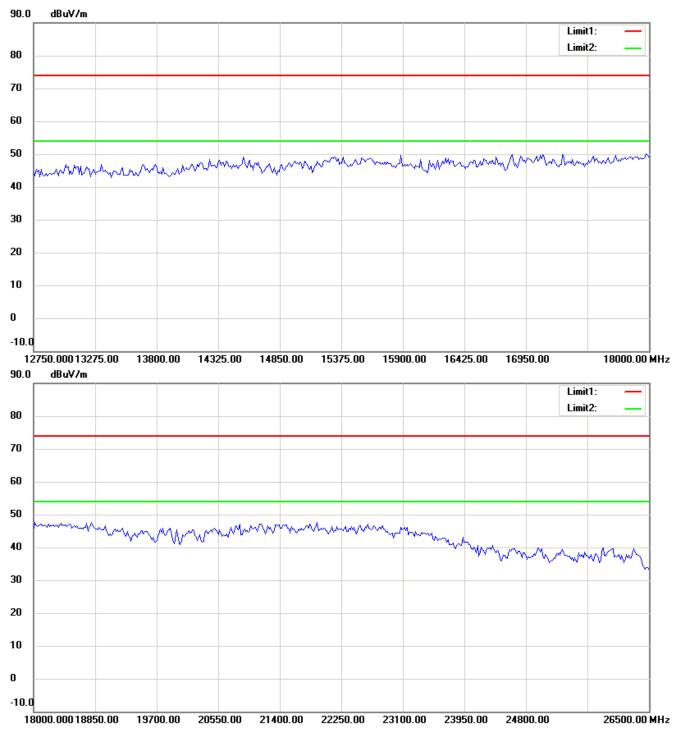

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## Antenna Polarization V

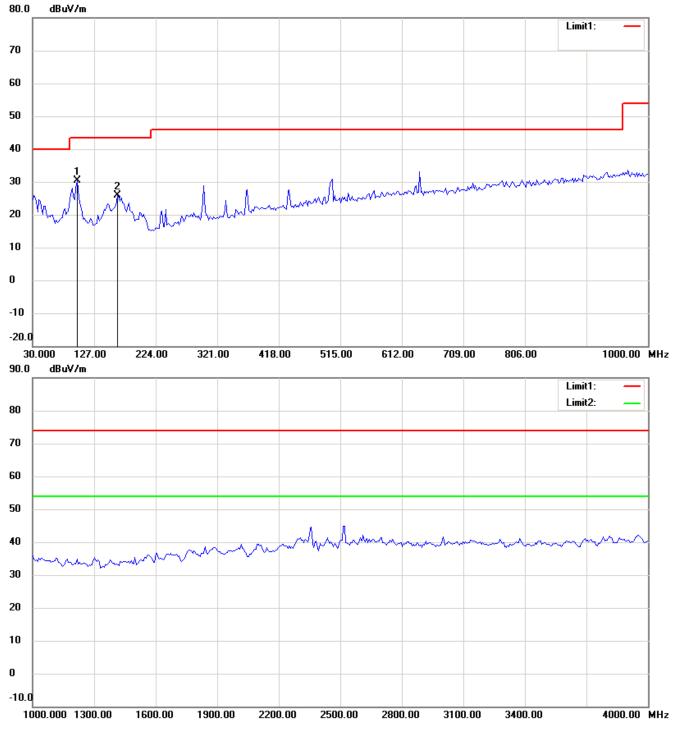


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



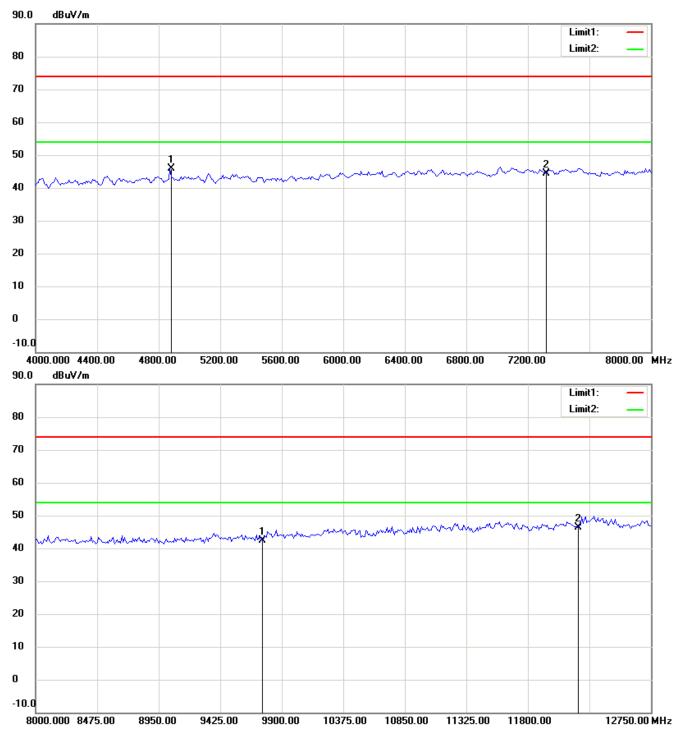

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



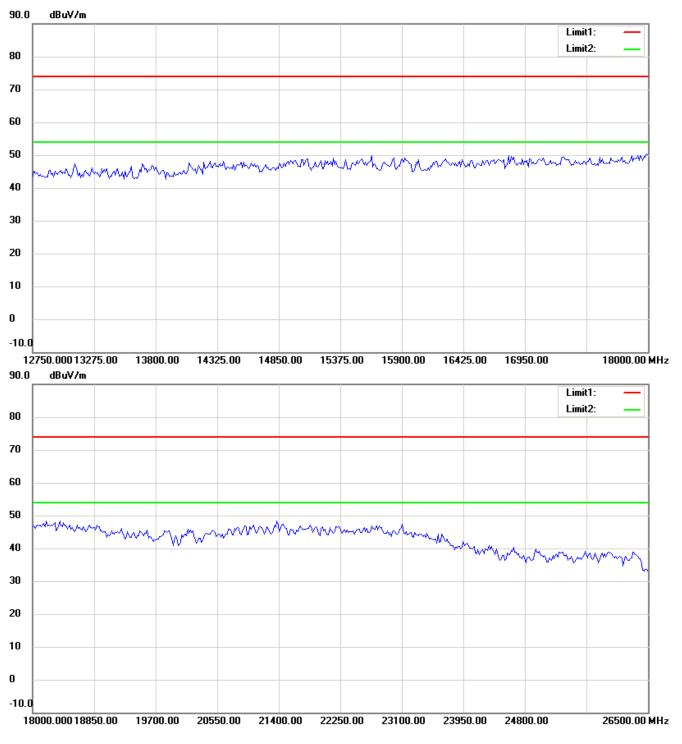


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11b 2462MHz

# Antenna Polarization H

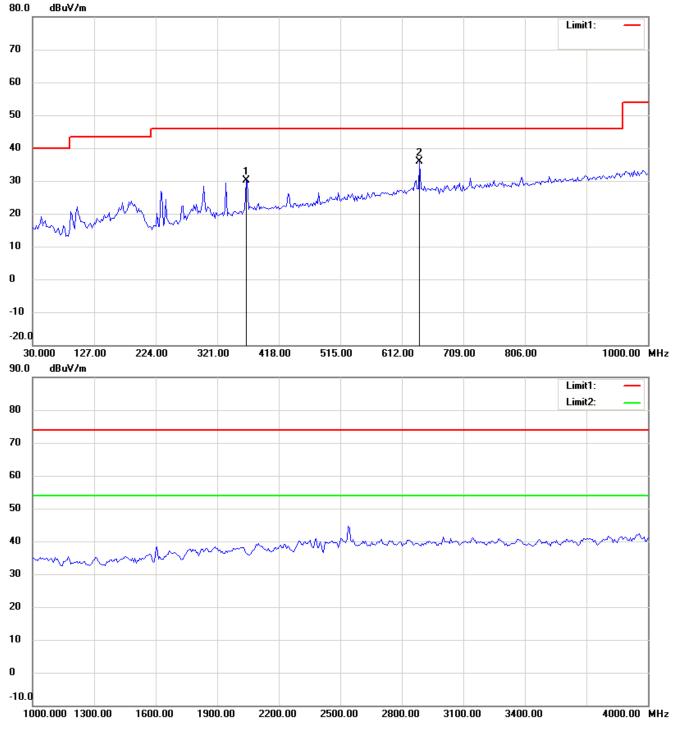


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



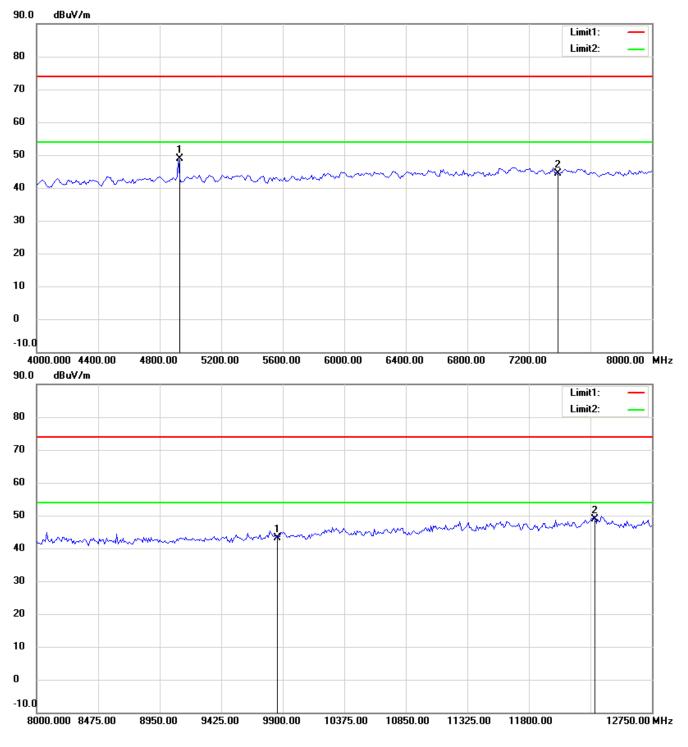

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




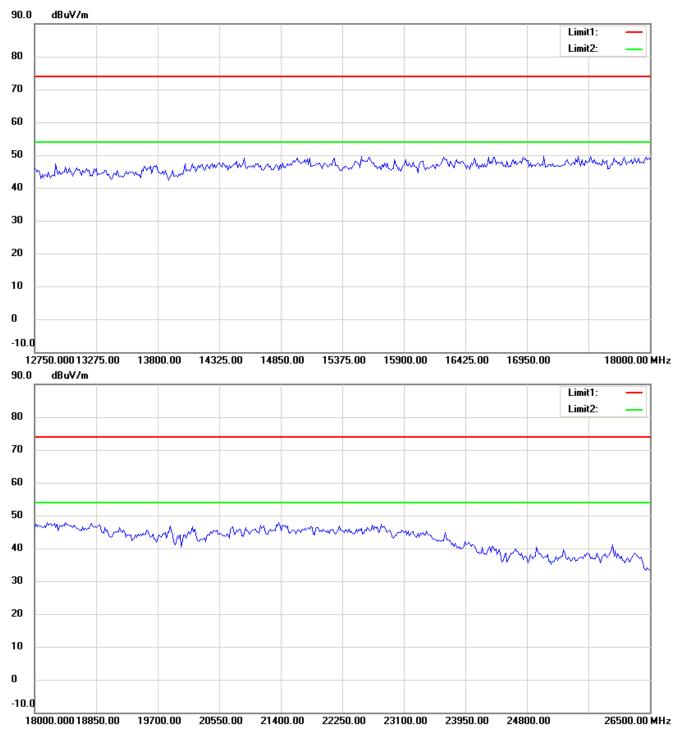

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## Antenna Polarization V

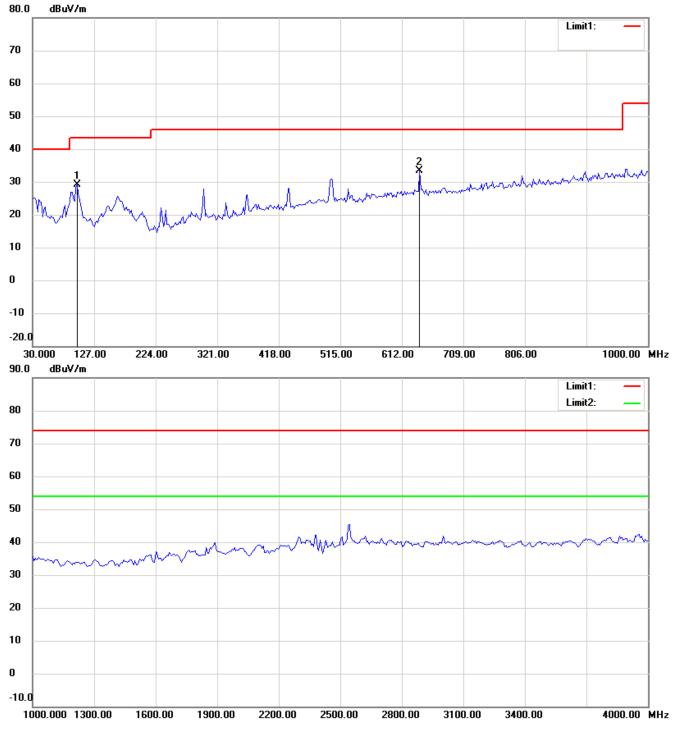


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



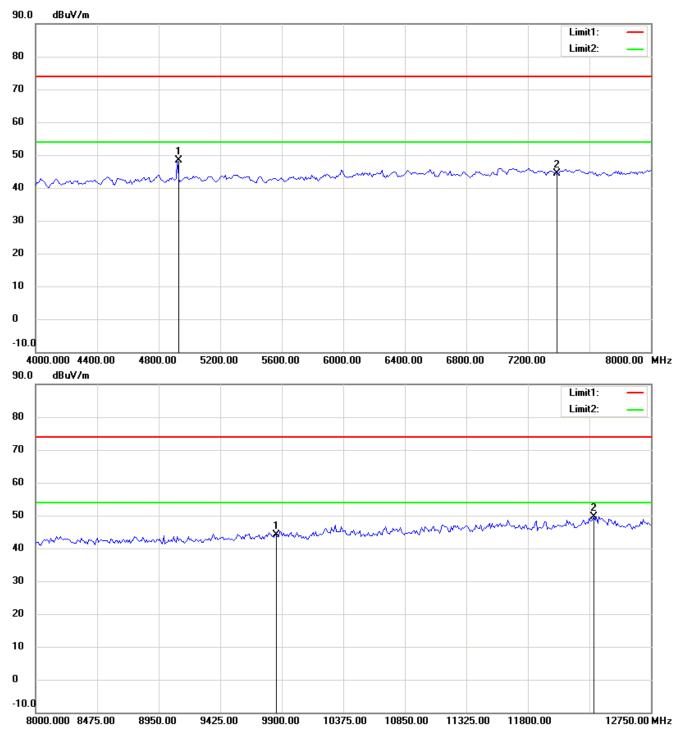

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



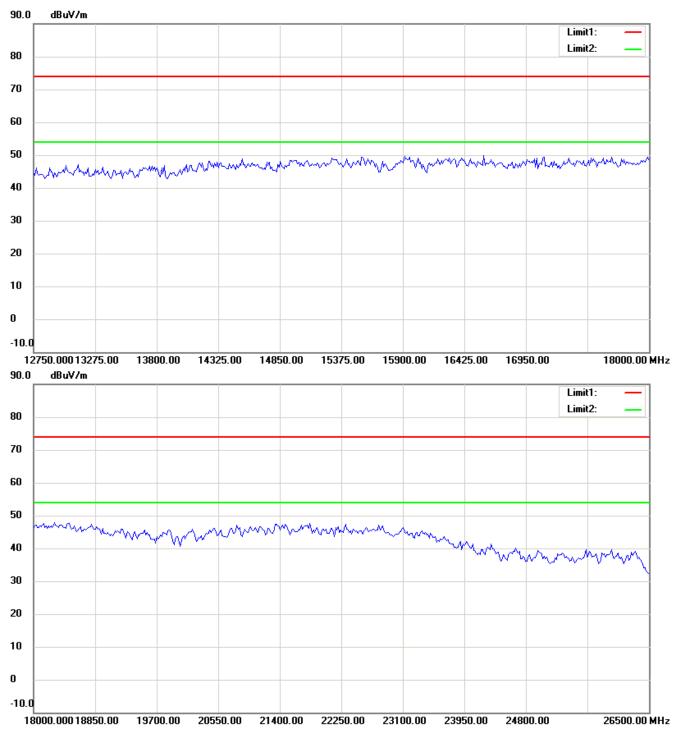


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11g 2412MHz

# Antenna Polarization H

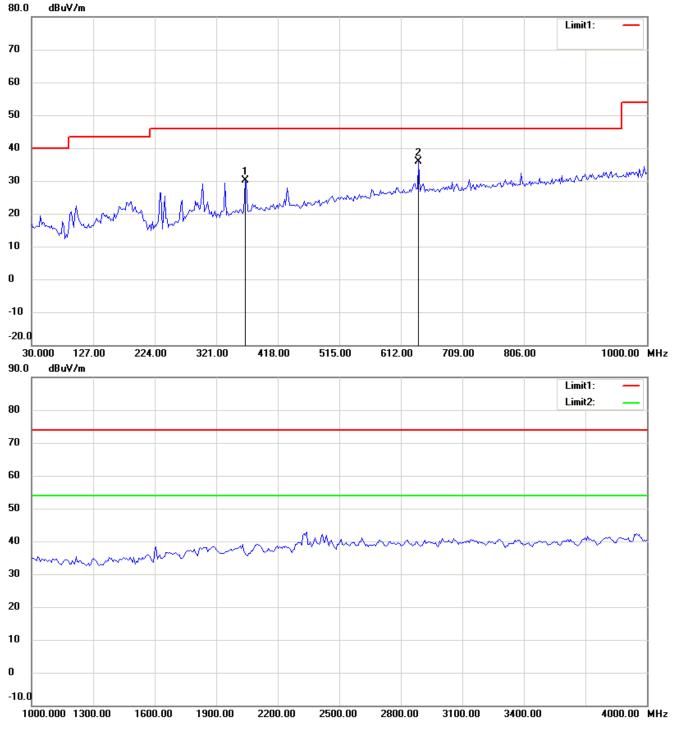


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



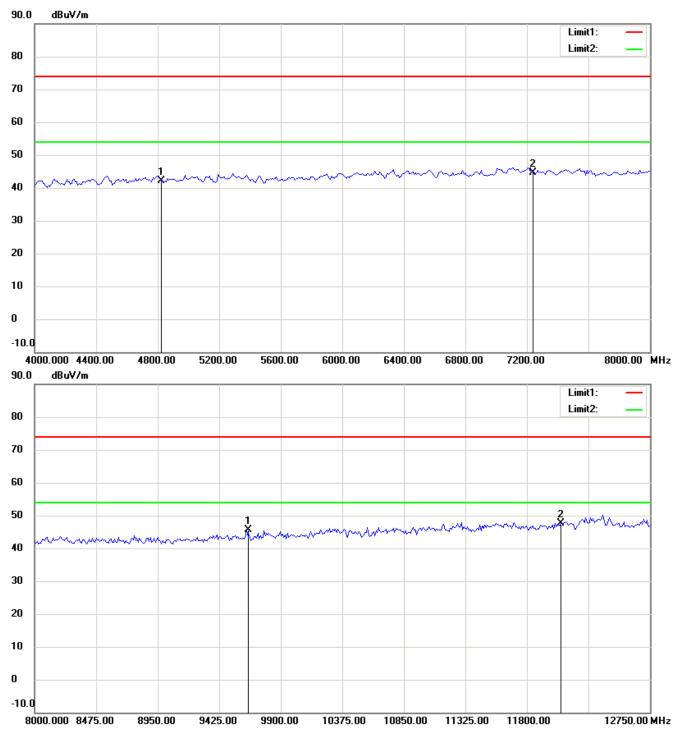

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




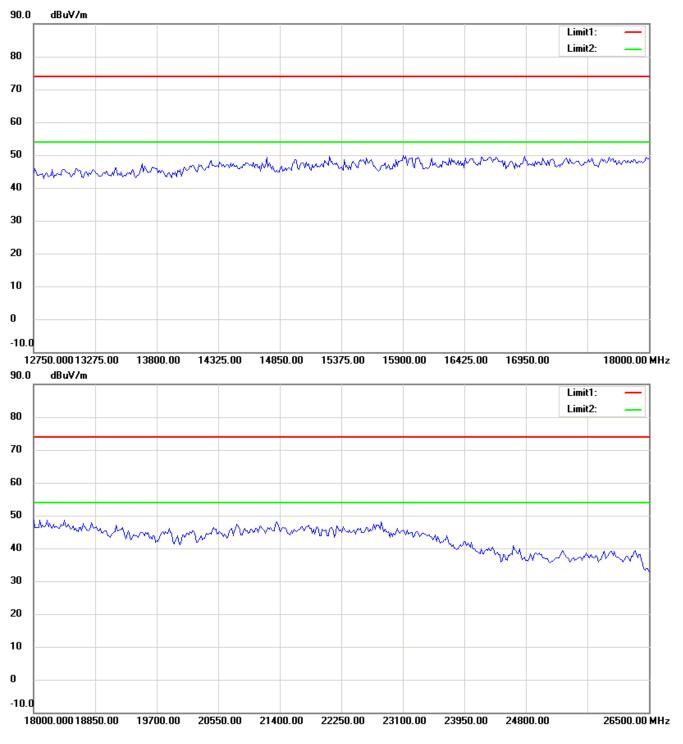

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## Antenna Polarization V

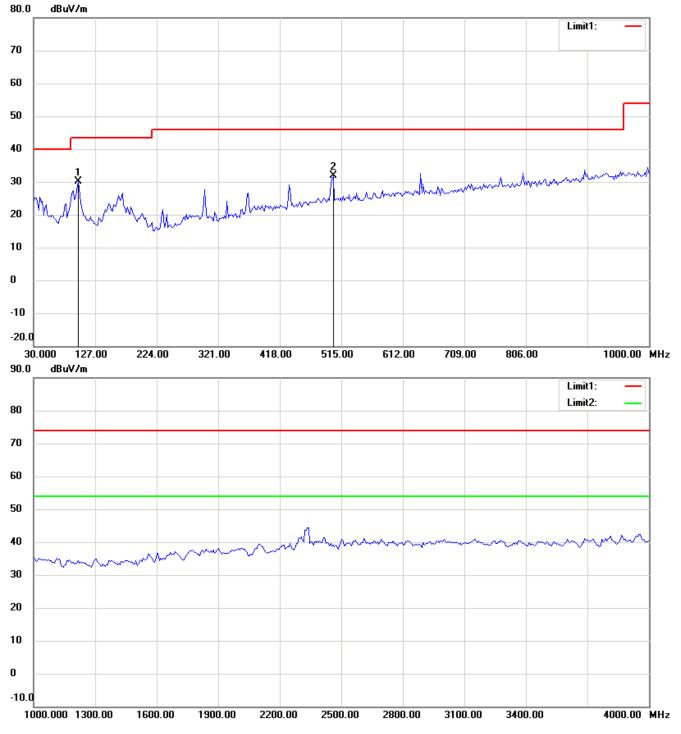


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



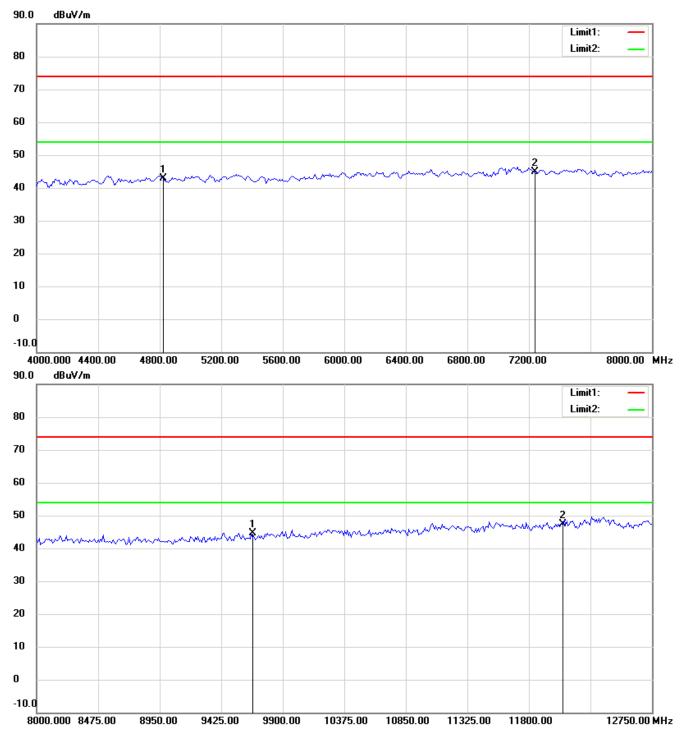

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



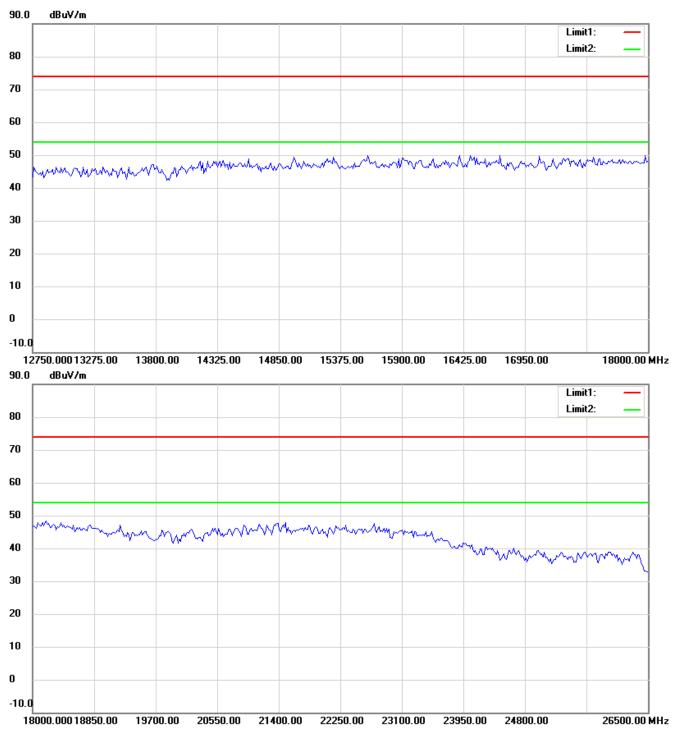


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11g 2437MHz

# Antenna Polarization H

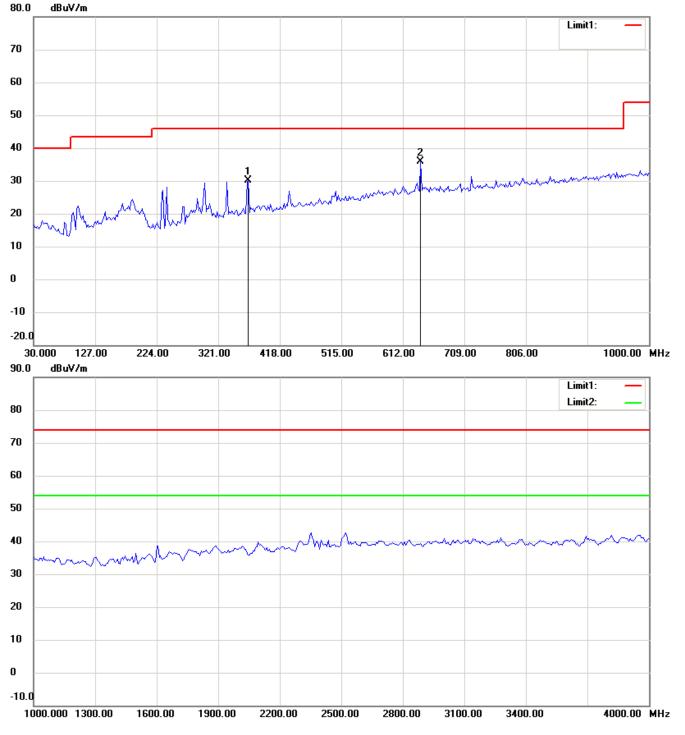


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



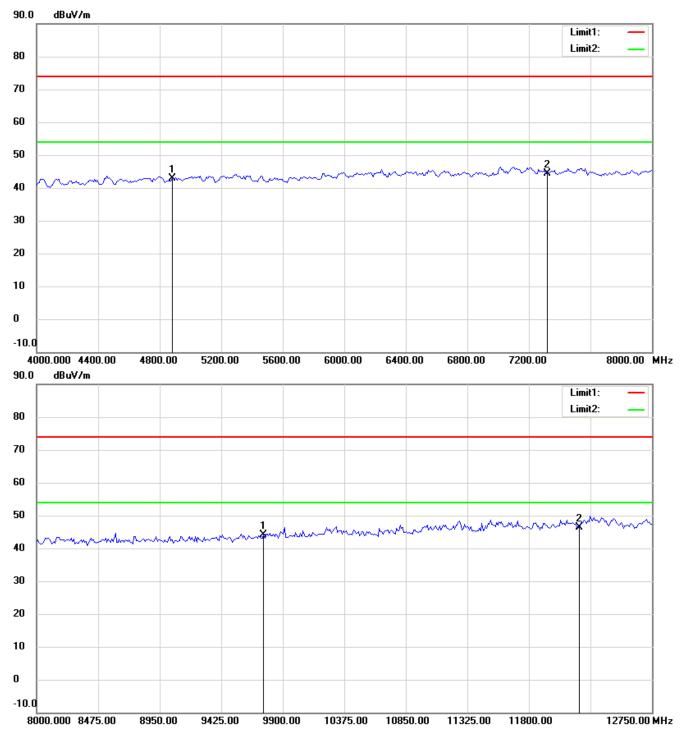

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




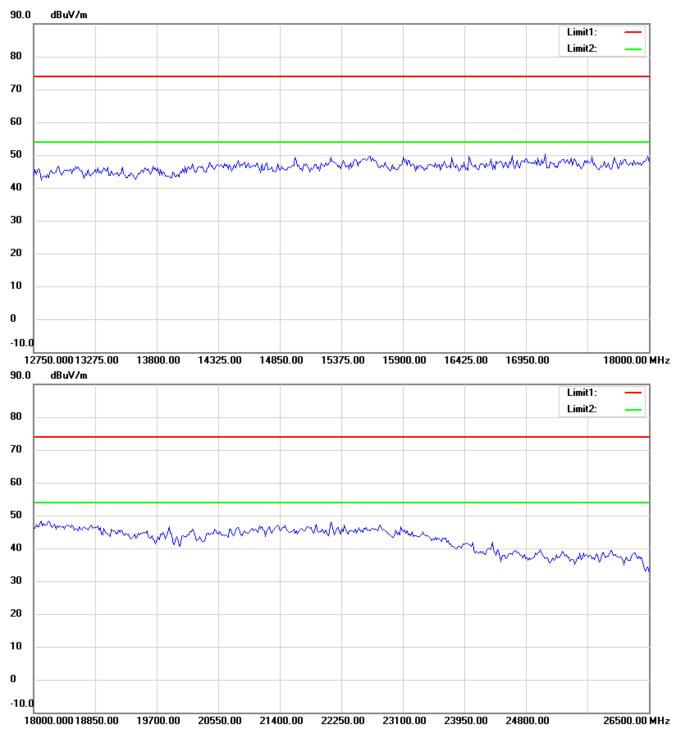

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## Antenna Polarization V

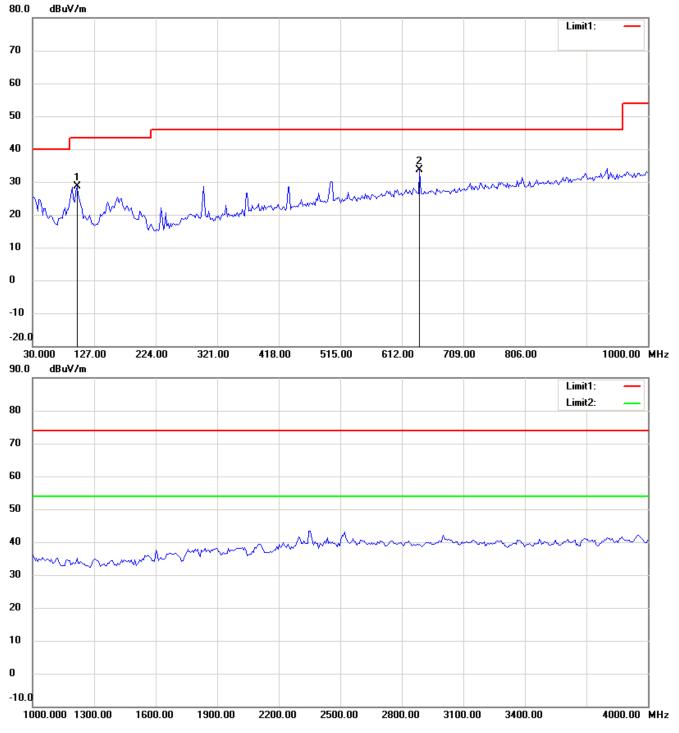


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



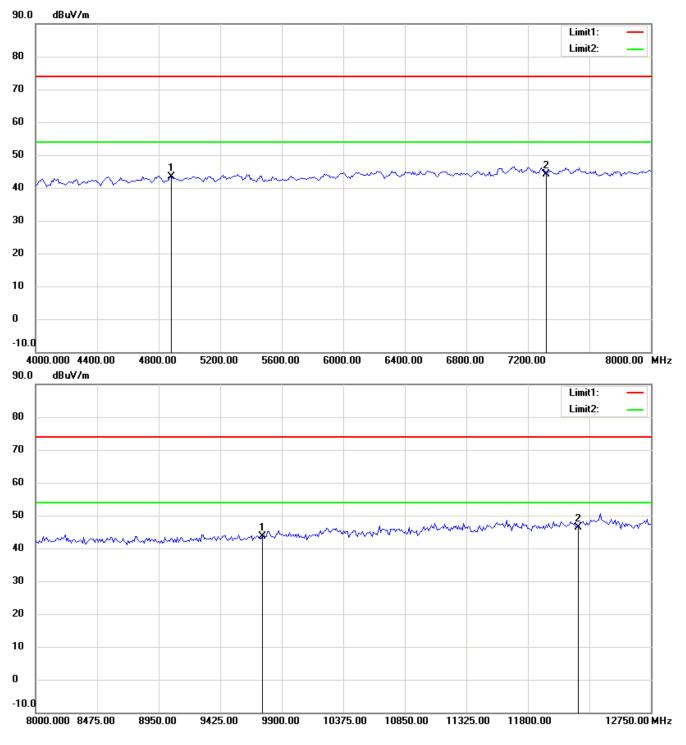

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



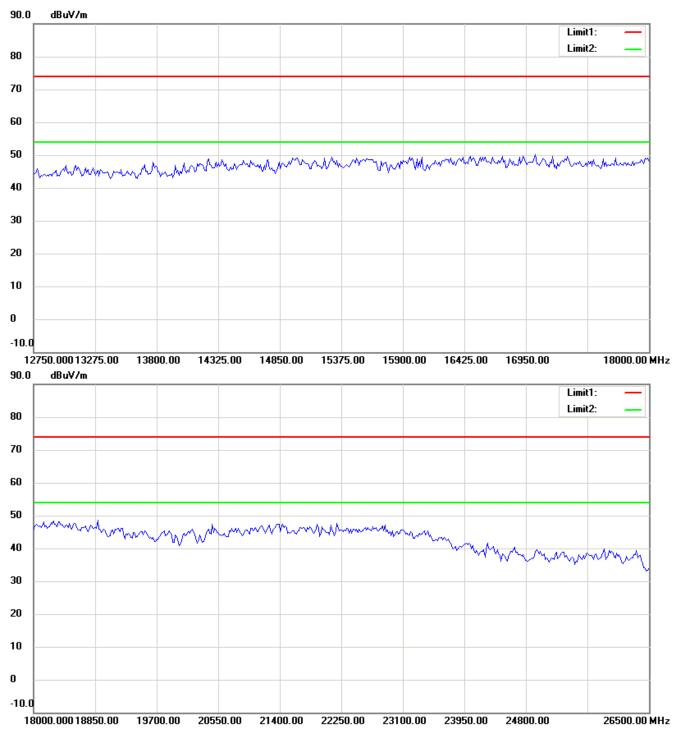


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11g 2462MHz

# Antenna Polarization H

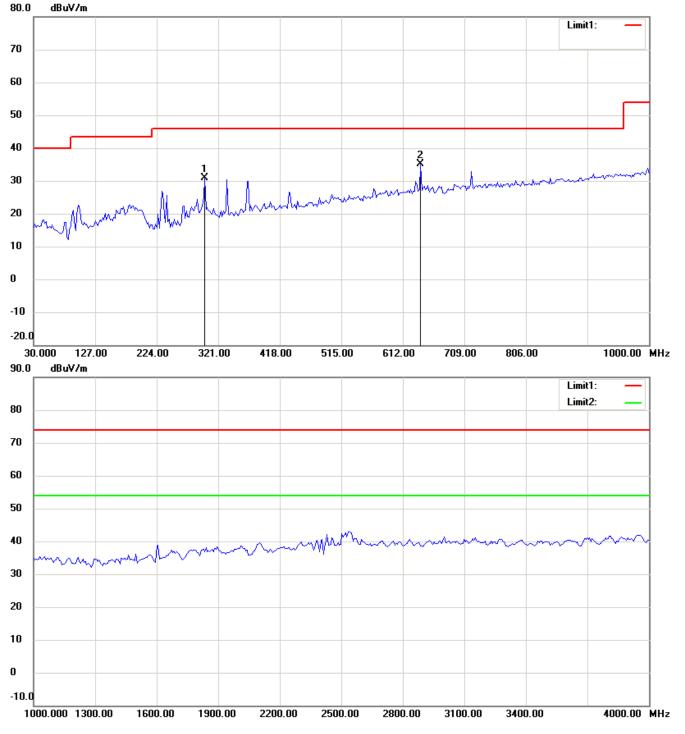


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



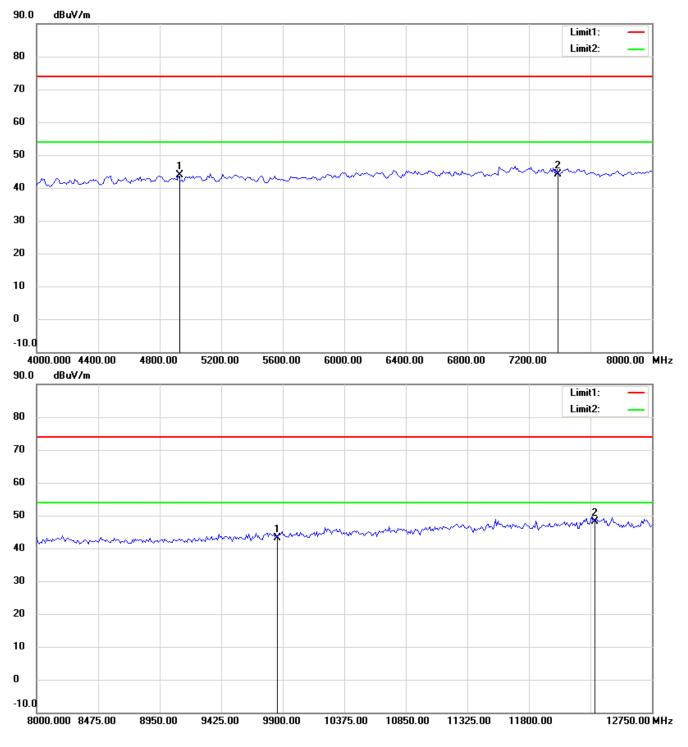

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




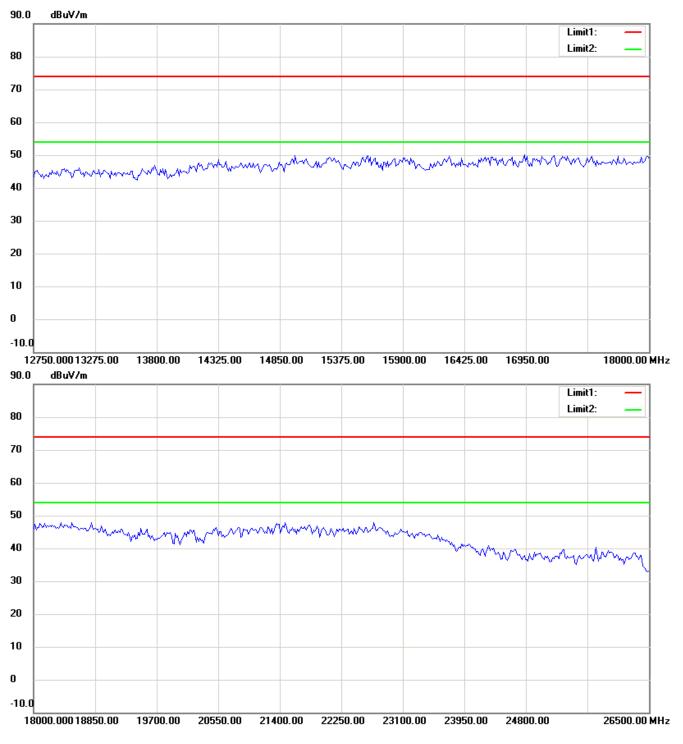

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## Antenna Polarization V

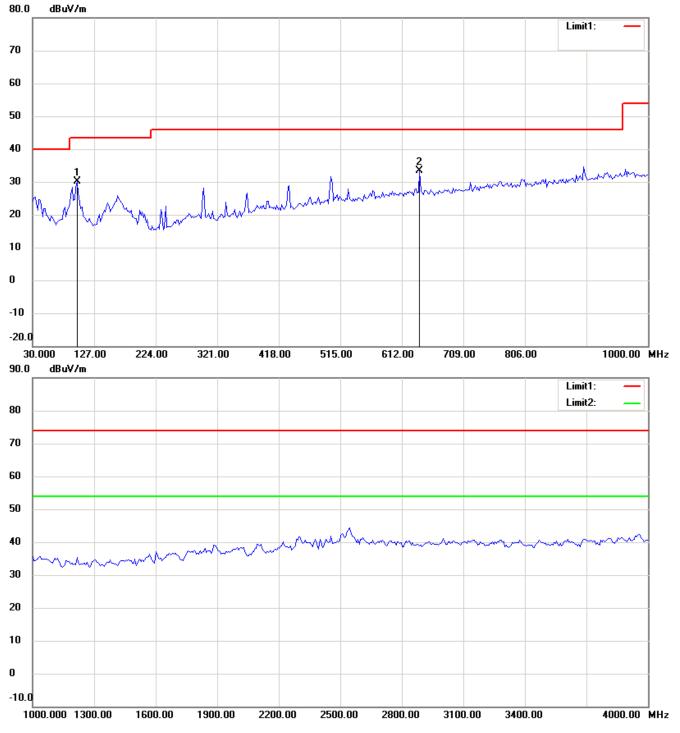


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



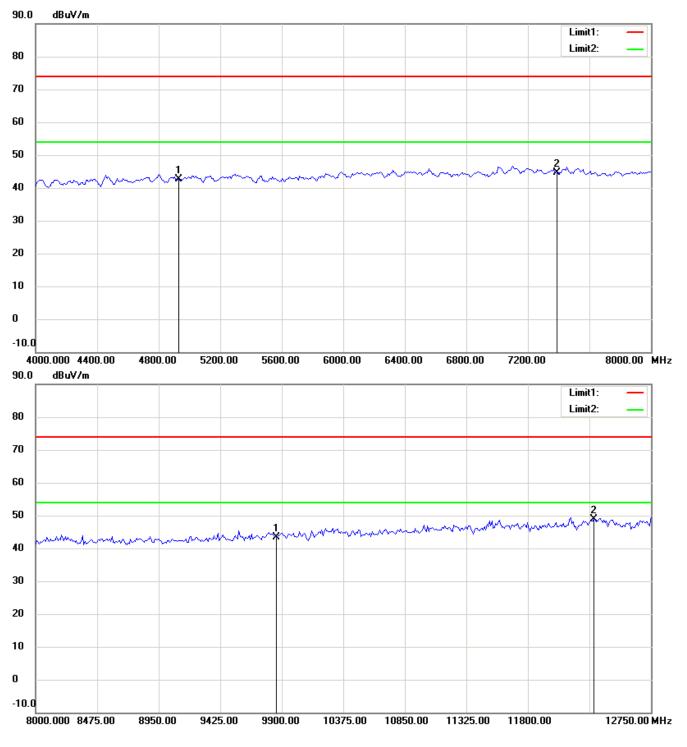

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



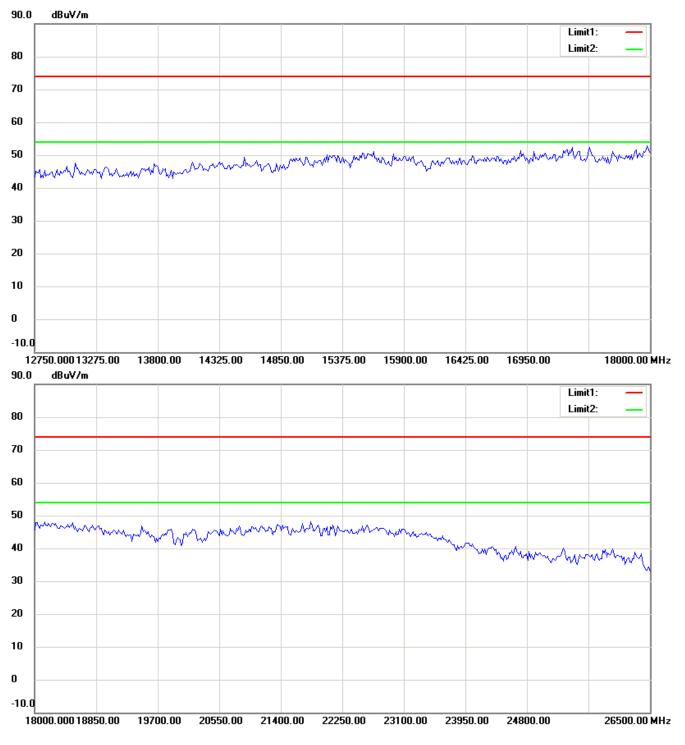


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Antenna A + Antenna B 802.11n 20MHz 5745MHz Antenna Polarization H

80.0 dBuV/m

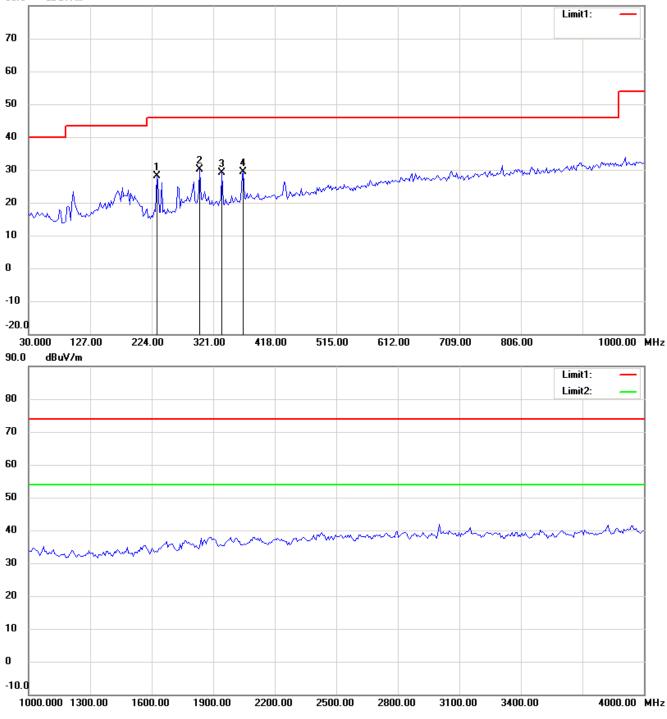


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



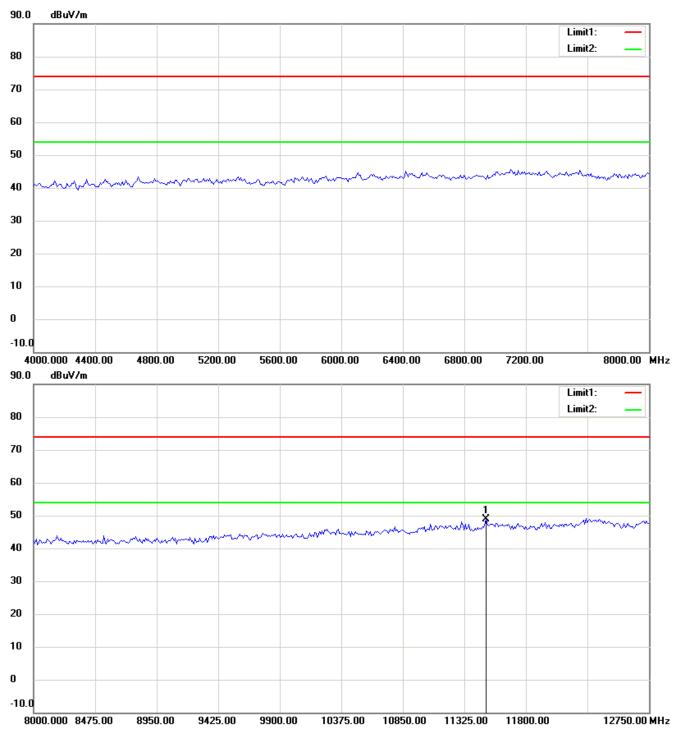


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



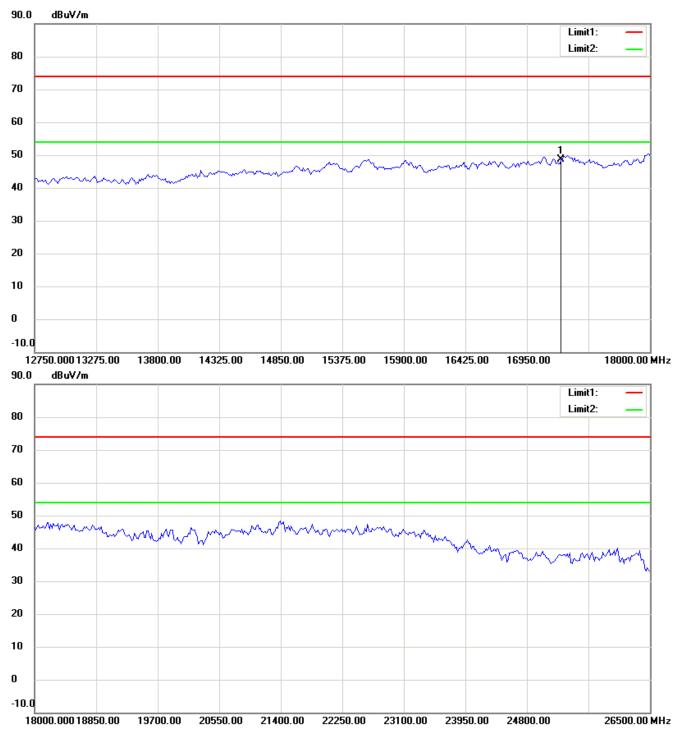


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



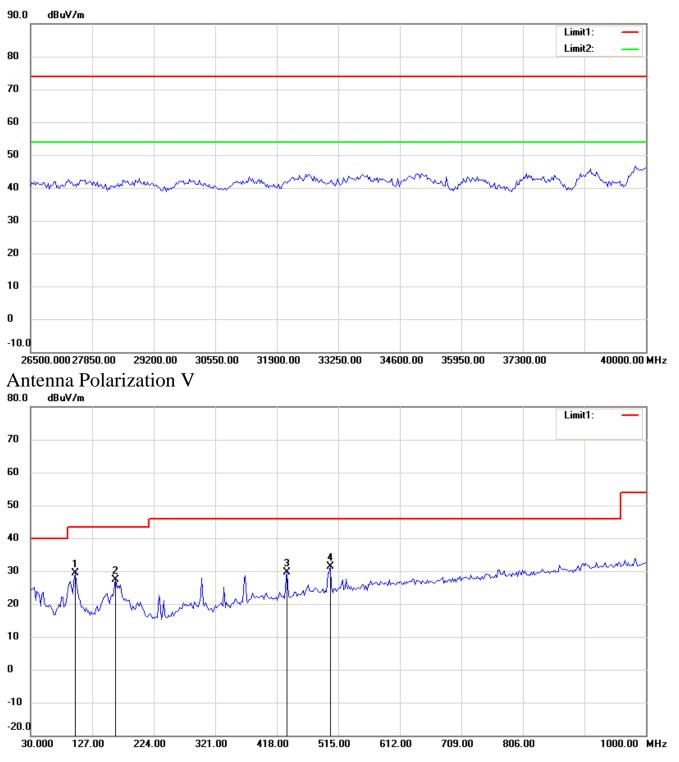


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



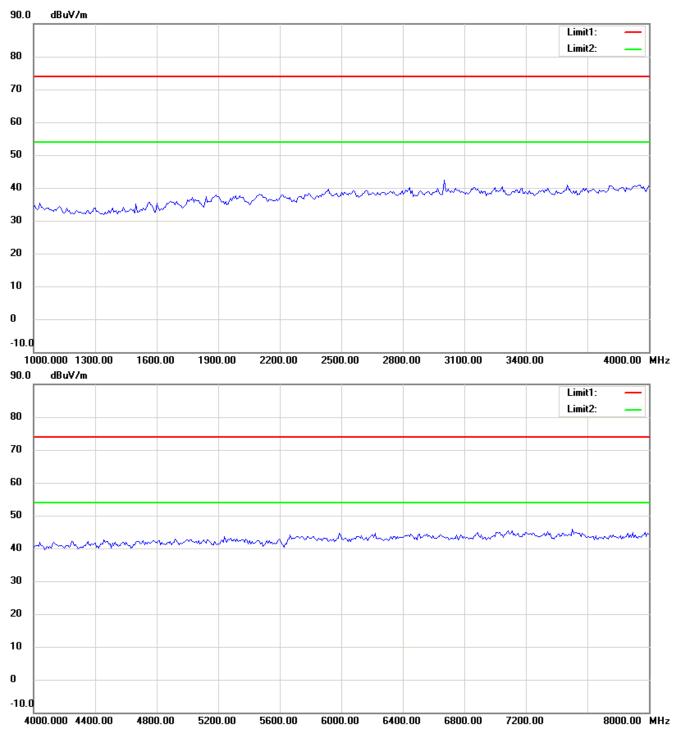


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



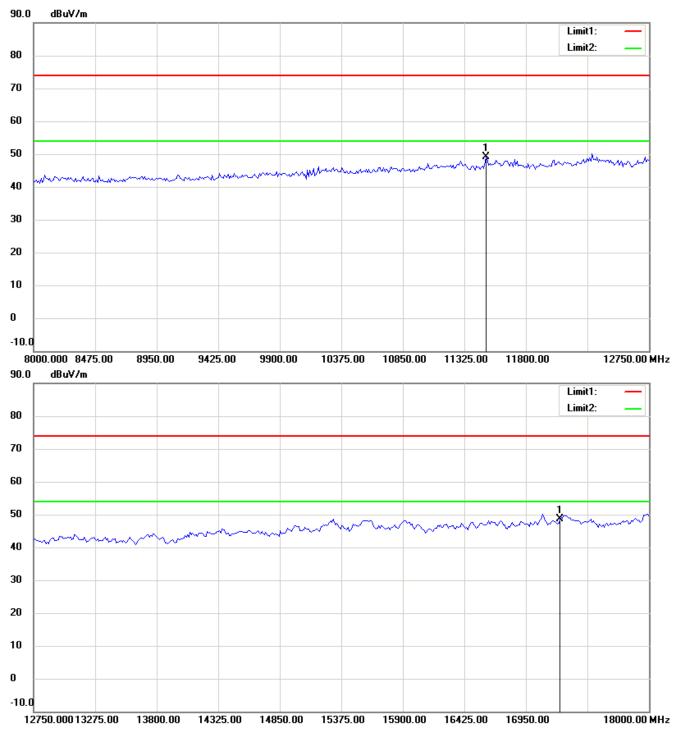

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



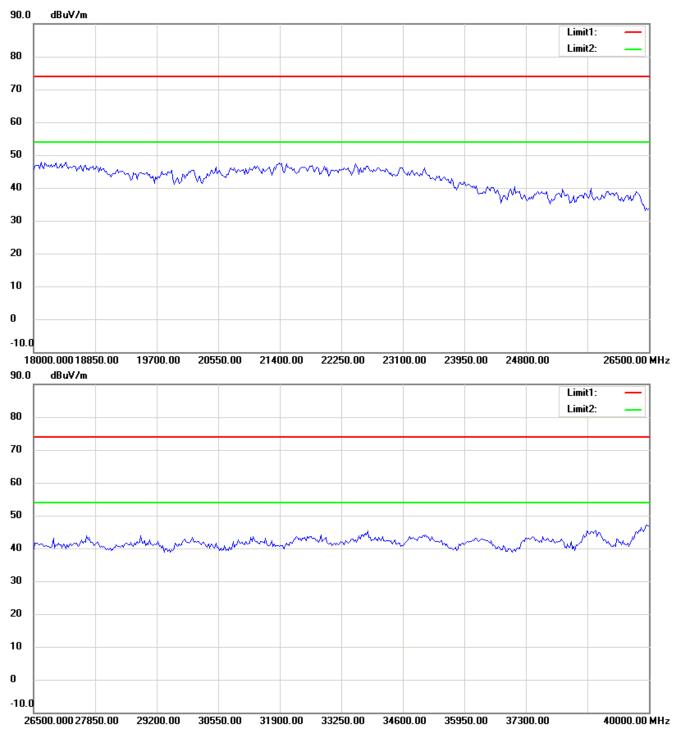


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11n 20MHz 5785MHz

Antenna Polarization H

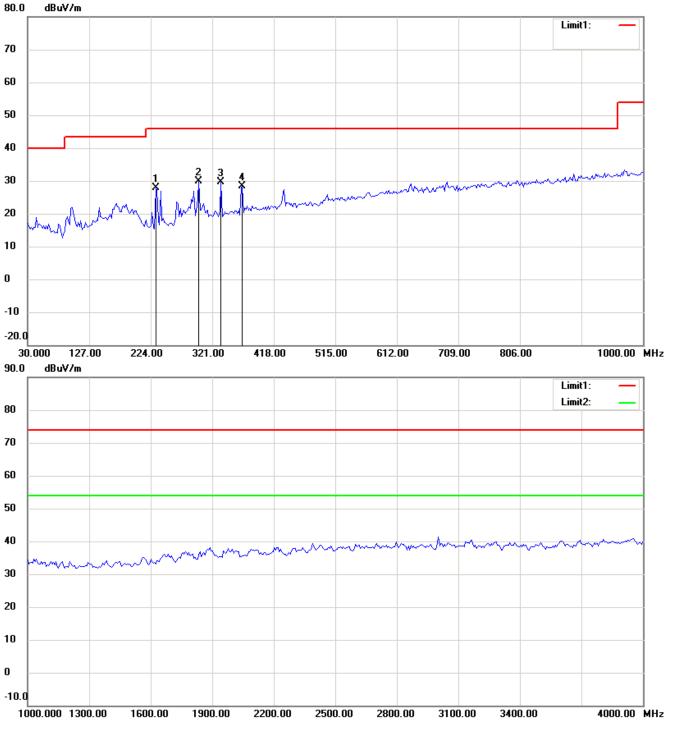


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



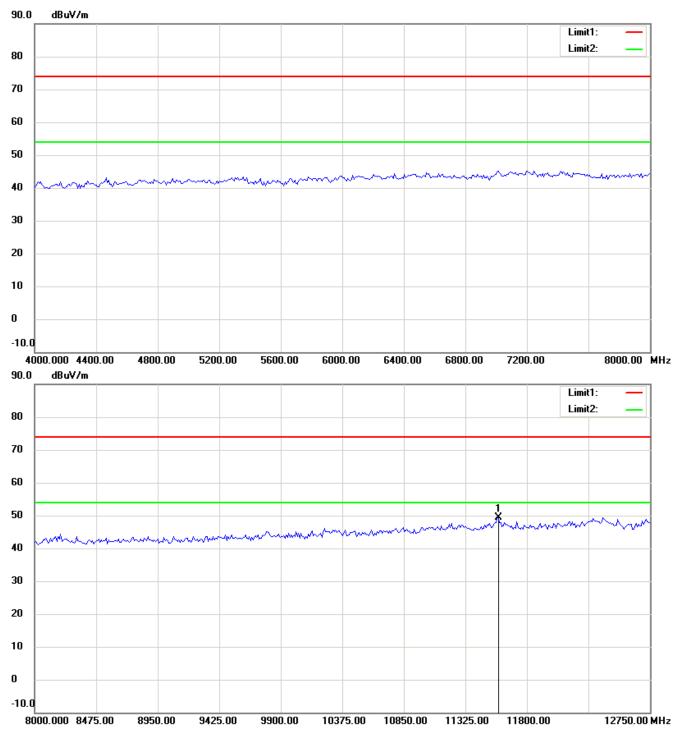


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



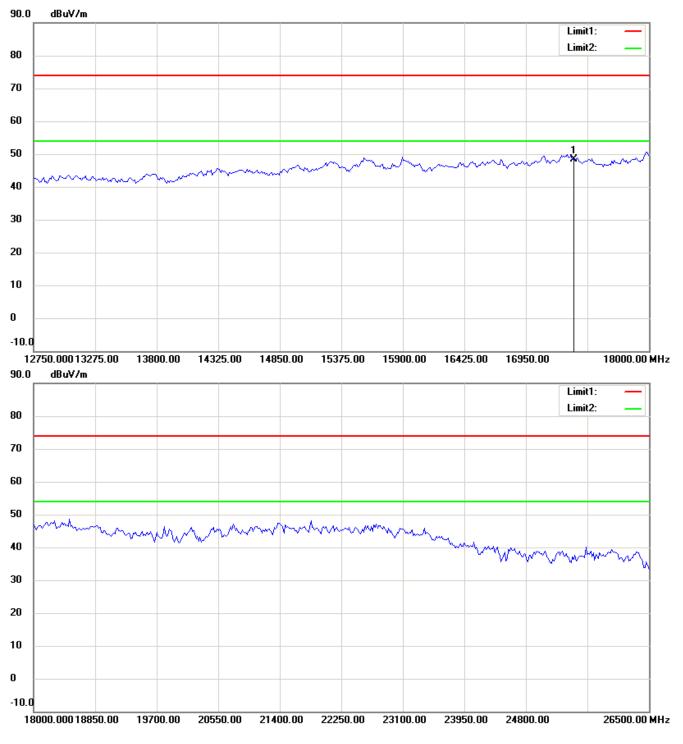


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



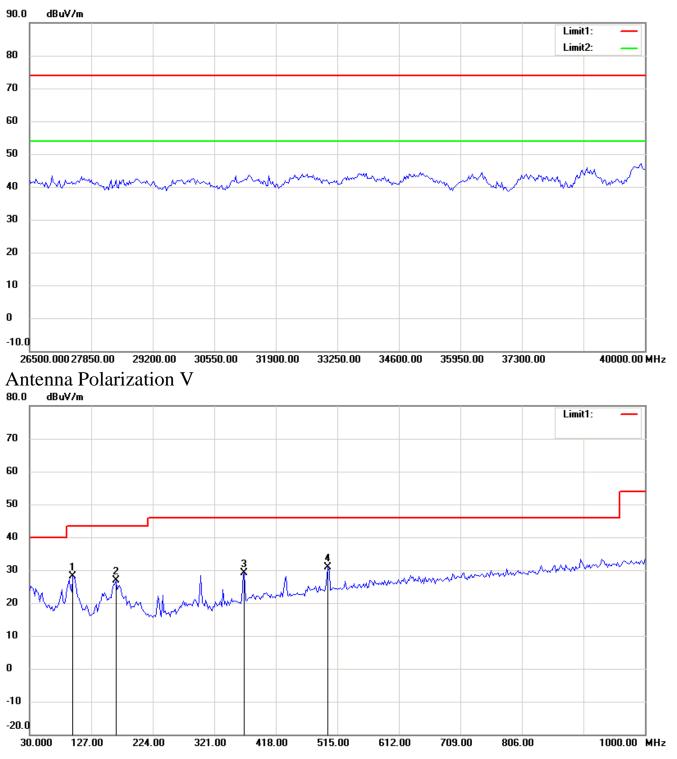


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



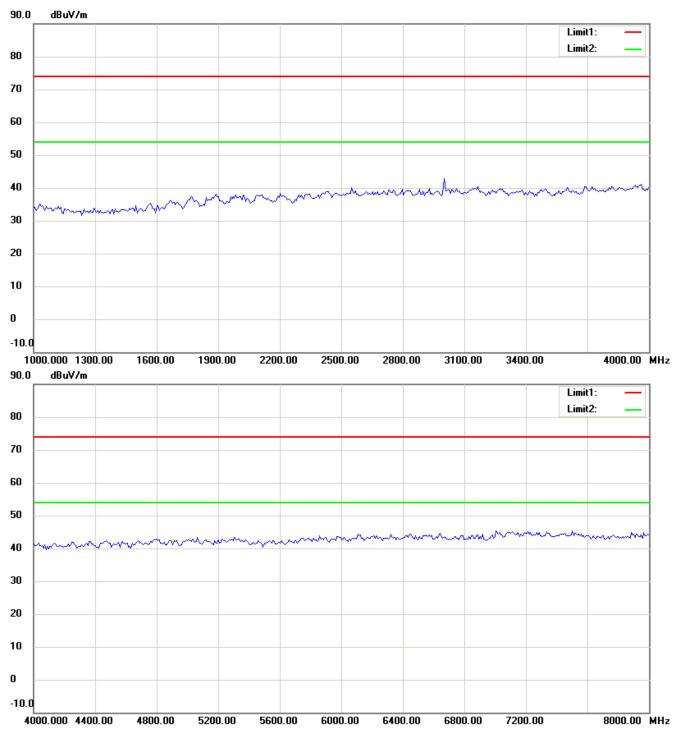


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



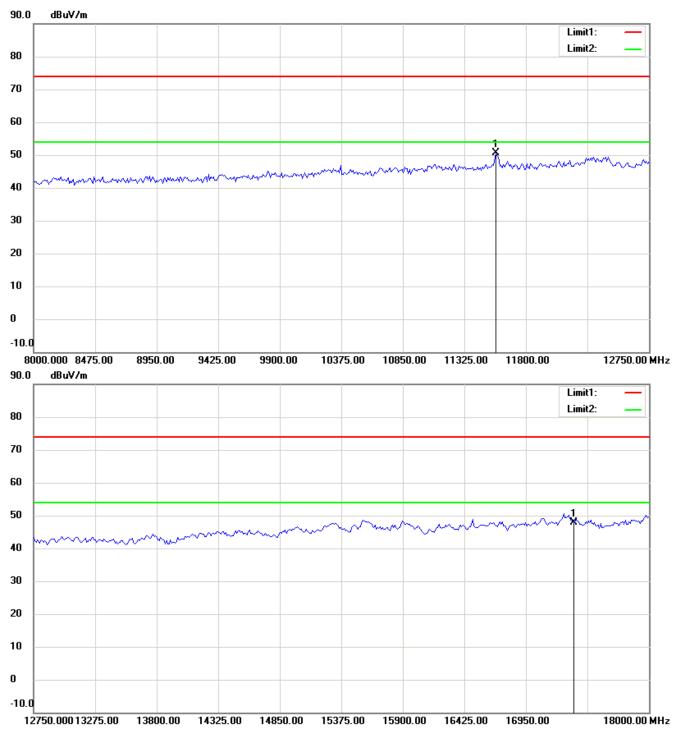

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



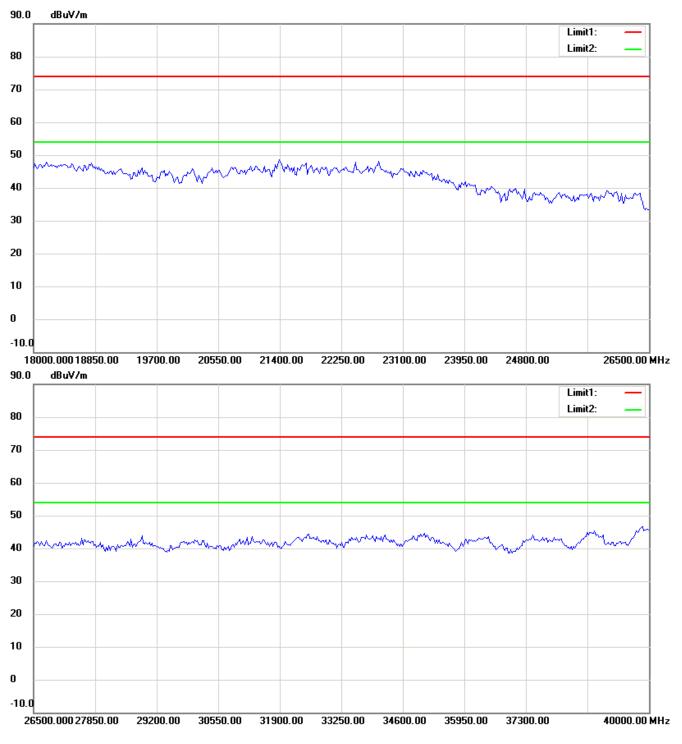


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11n 20MHz 5825MHz

Antenna Polarization H

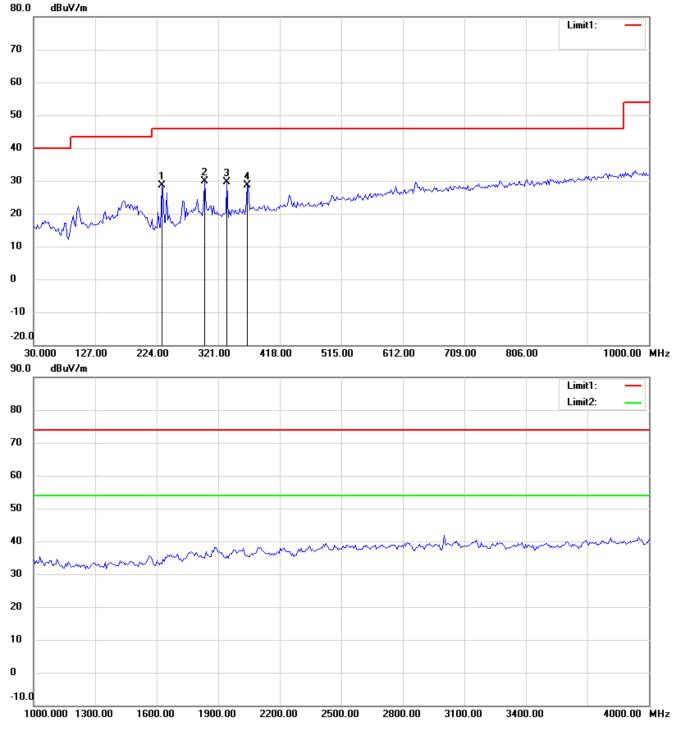


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



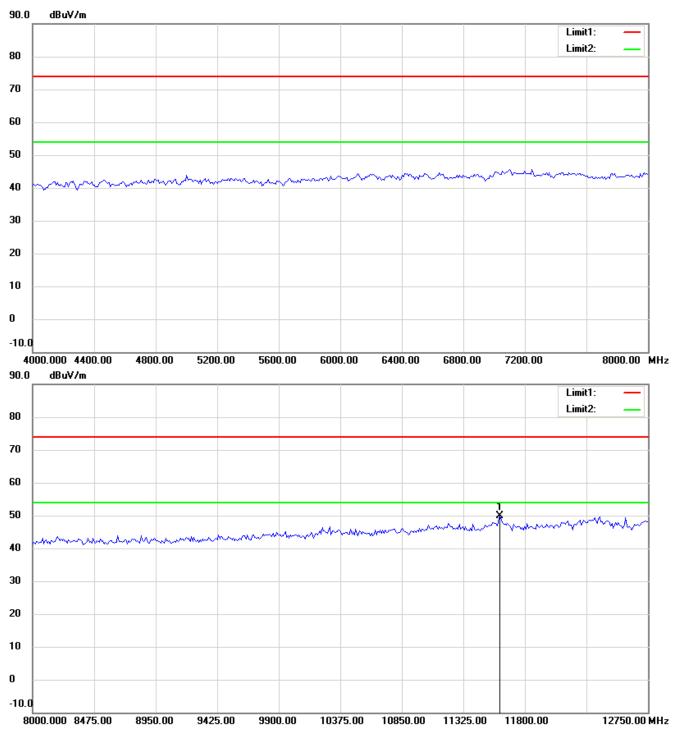


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



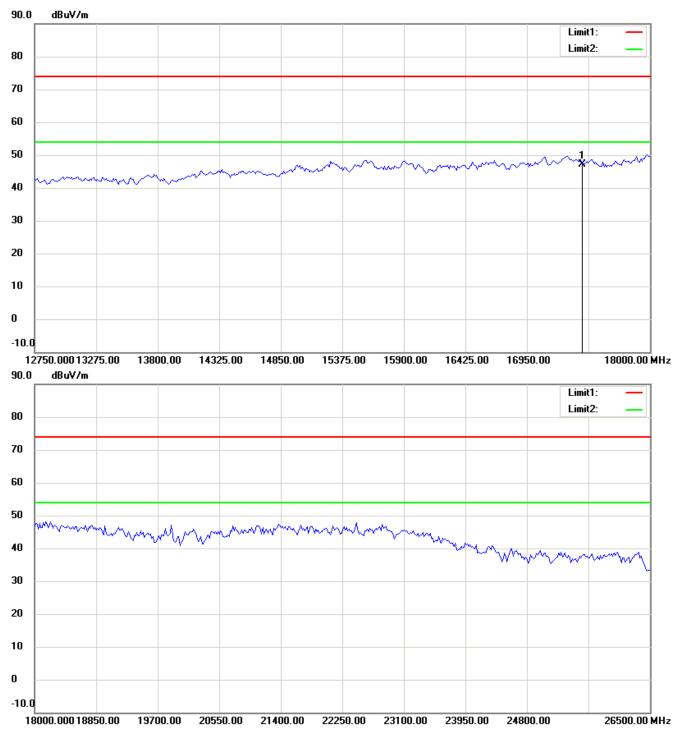


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



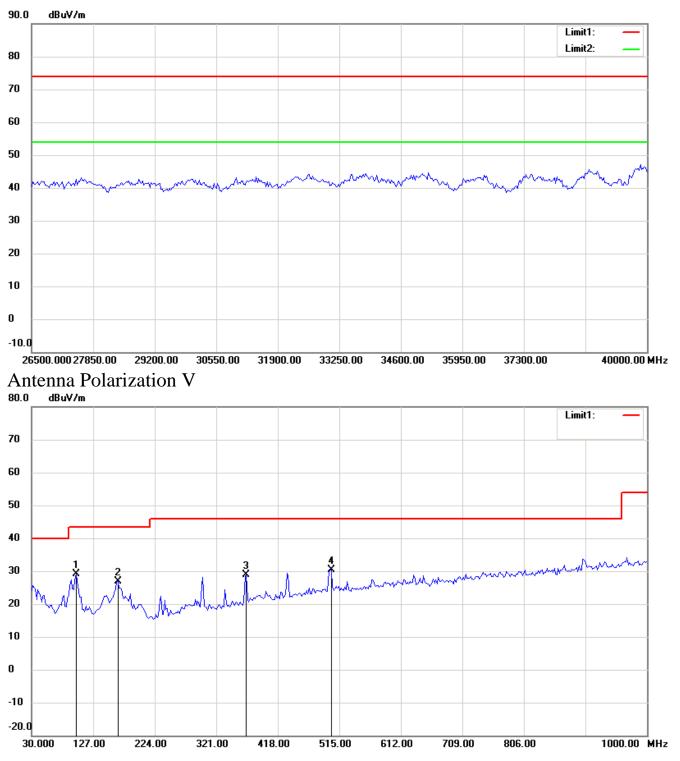


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



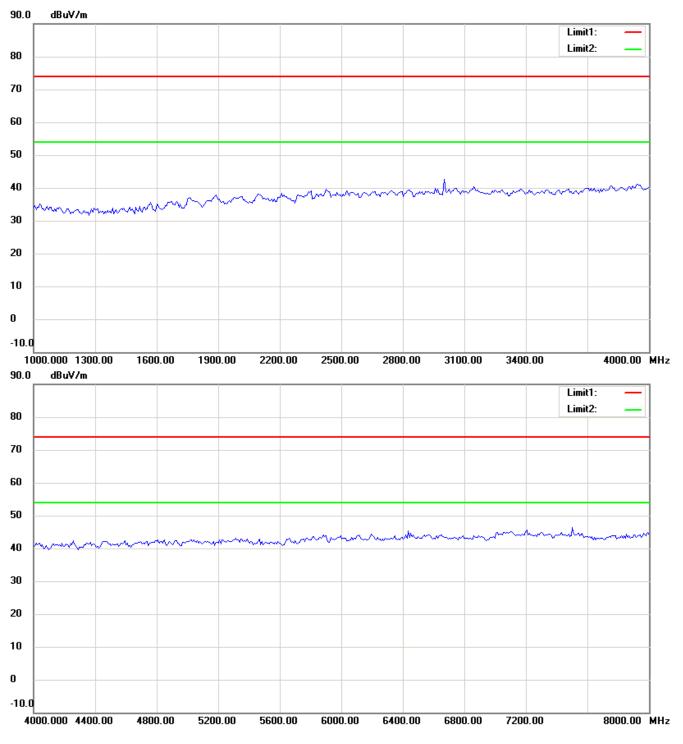


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



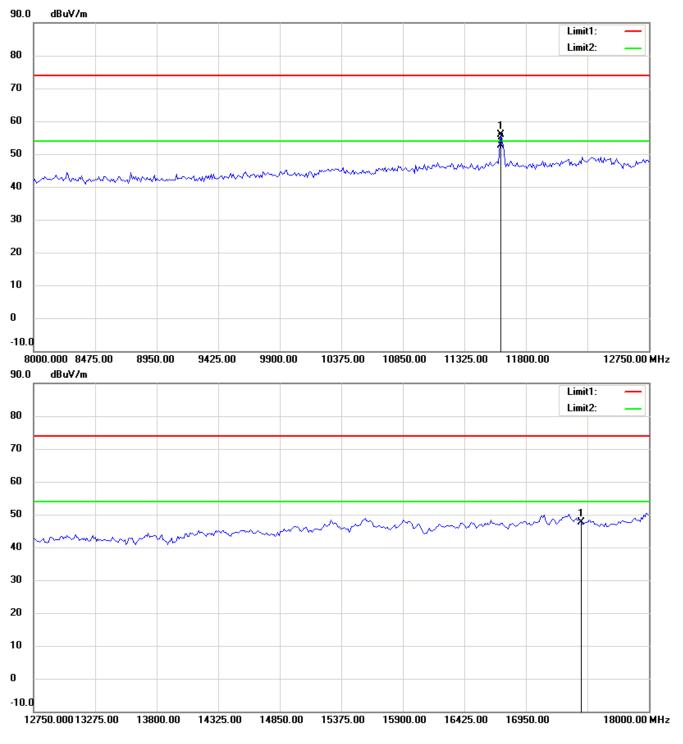

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



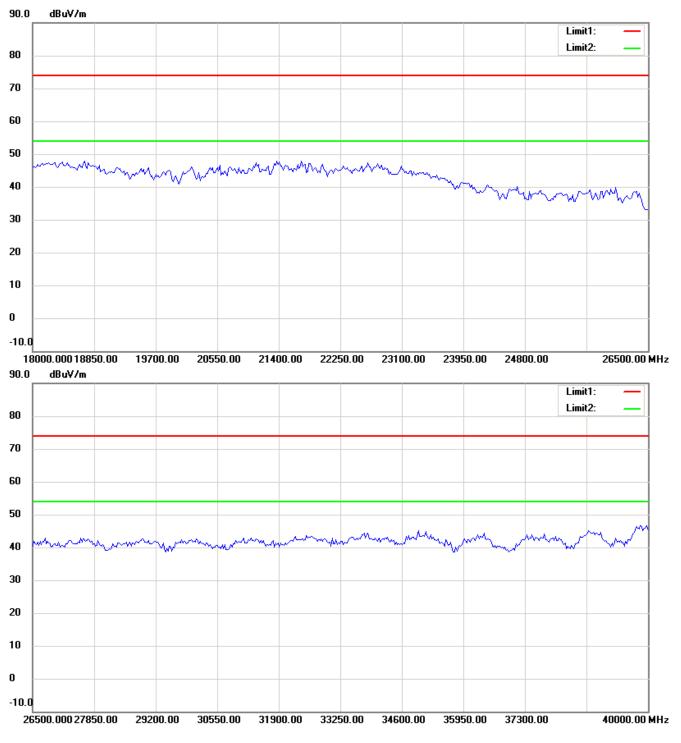


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11n 40MHz 5755MHz

Antenna Polarization H

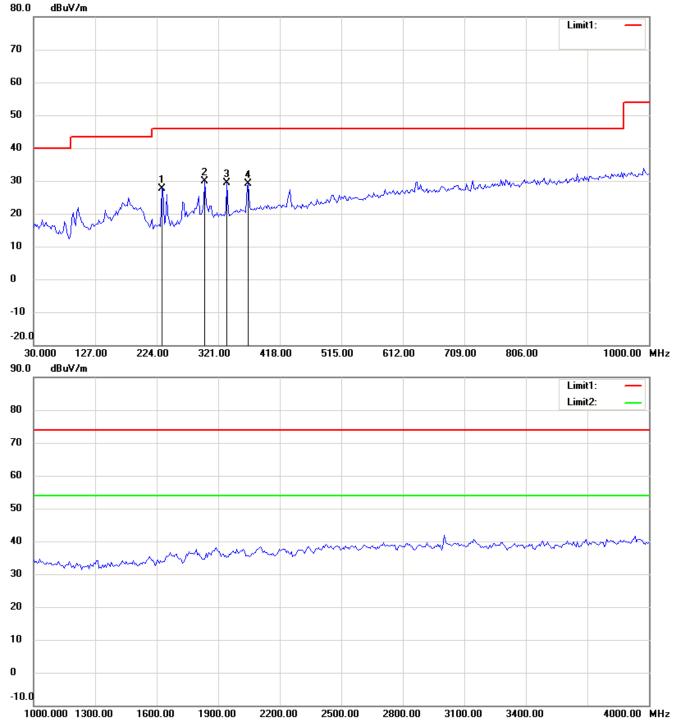


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



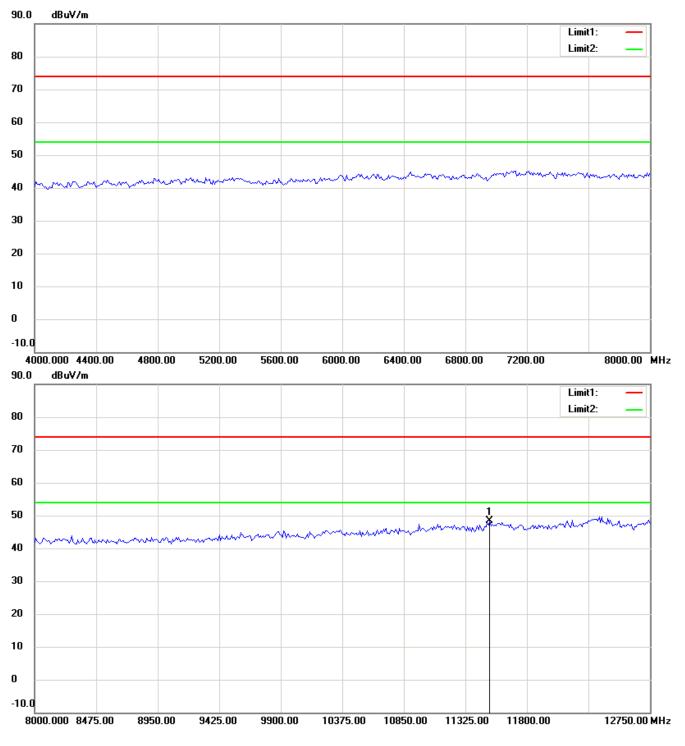


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



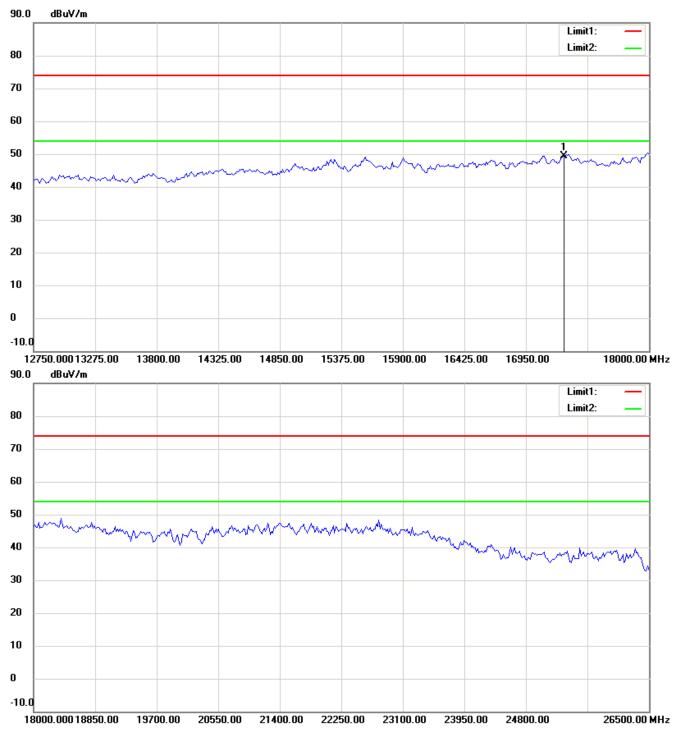


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



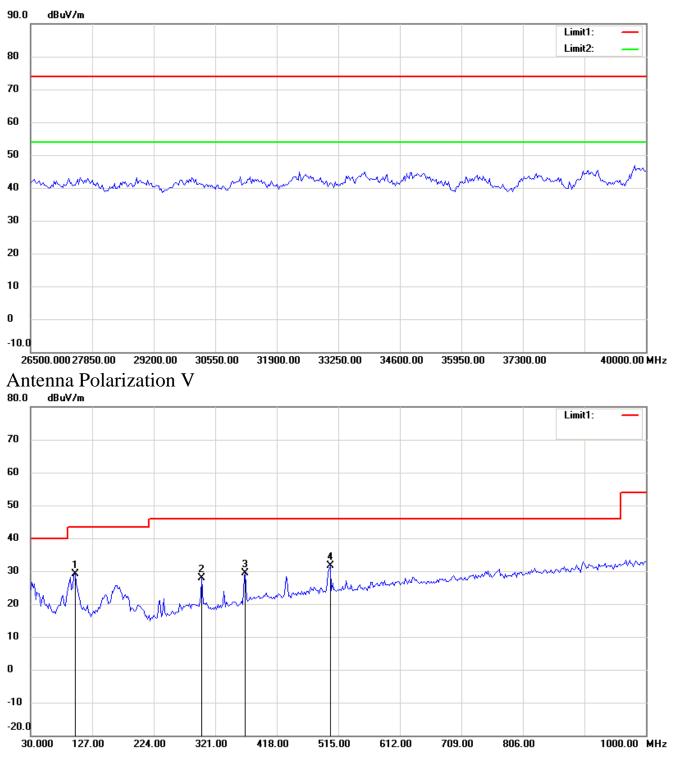


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



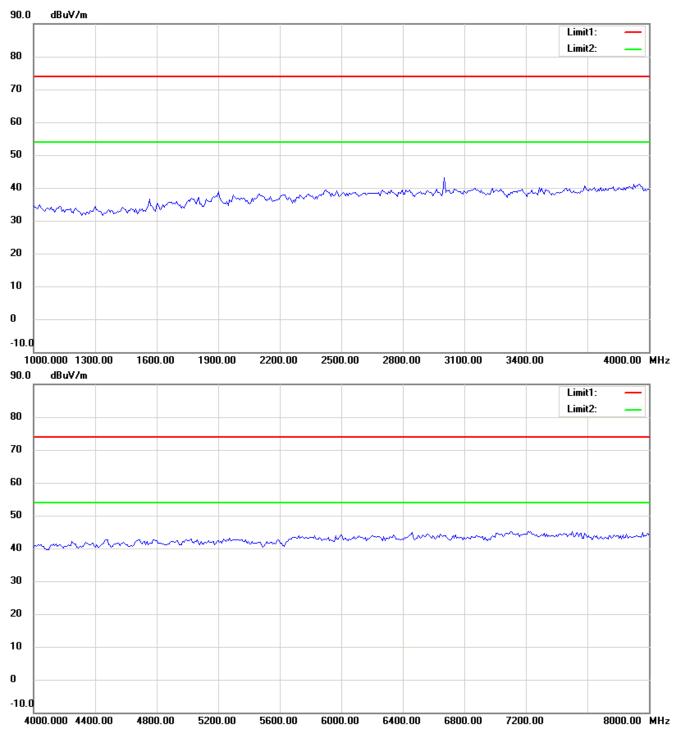


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



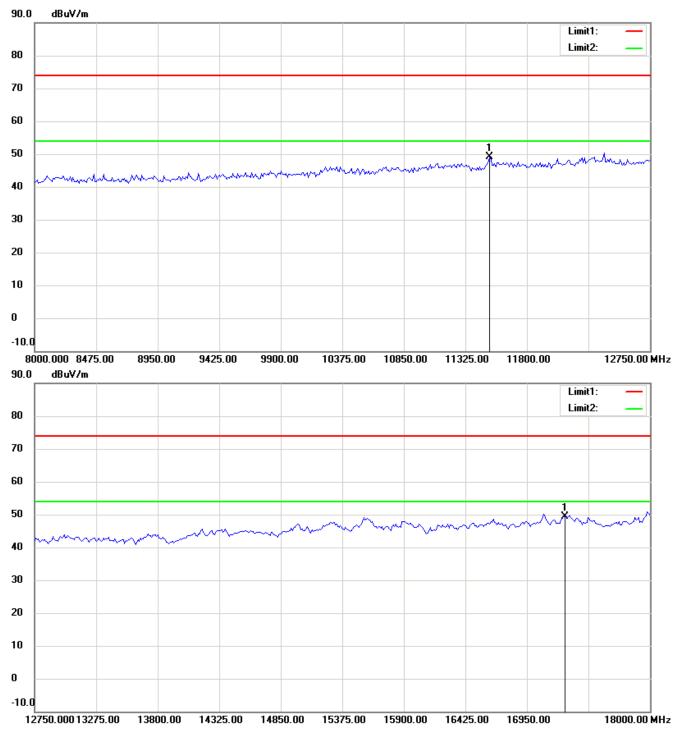

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



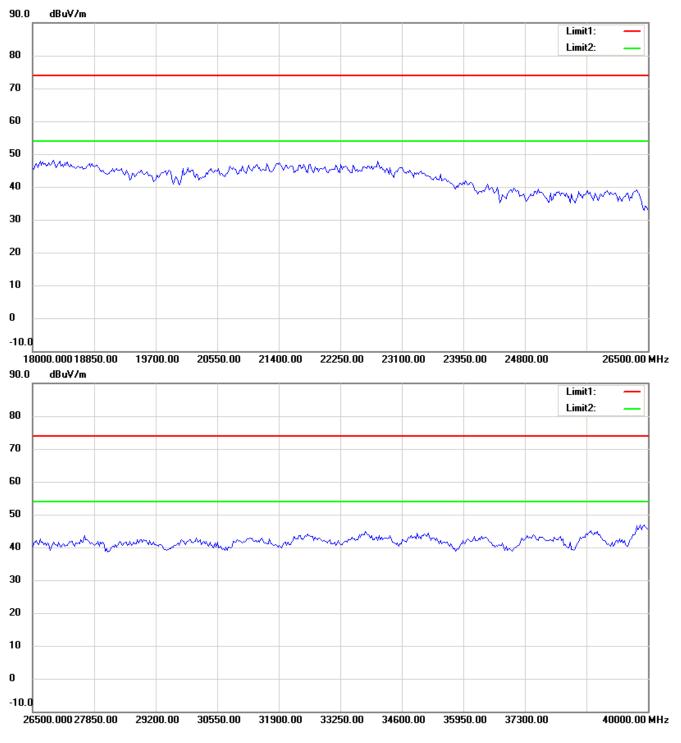


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11n 40MHz 5795MHz

Antenna Polarization H

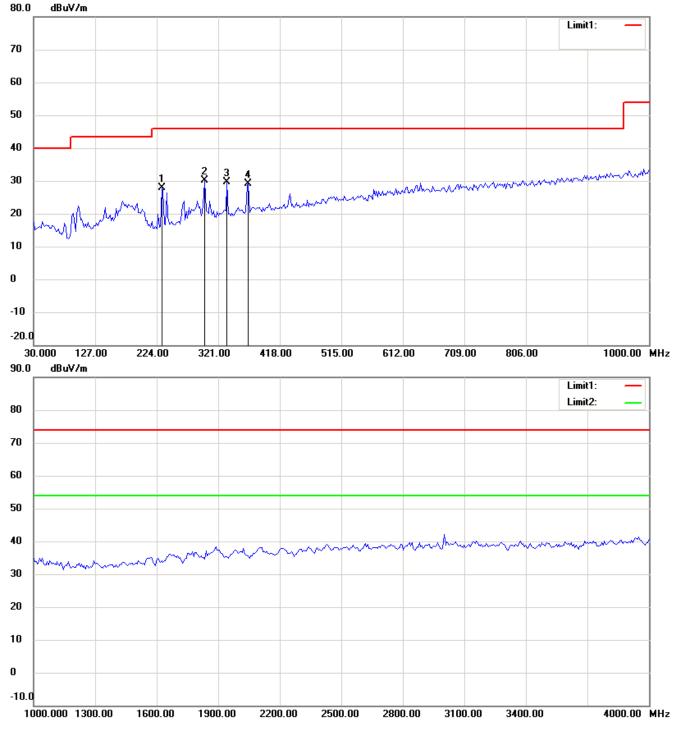


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



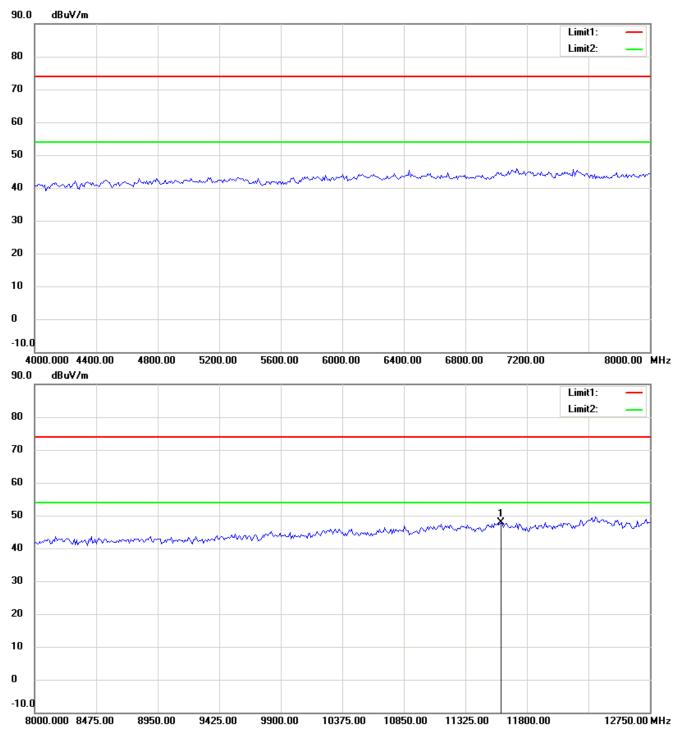


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



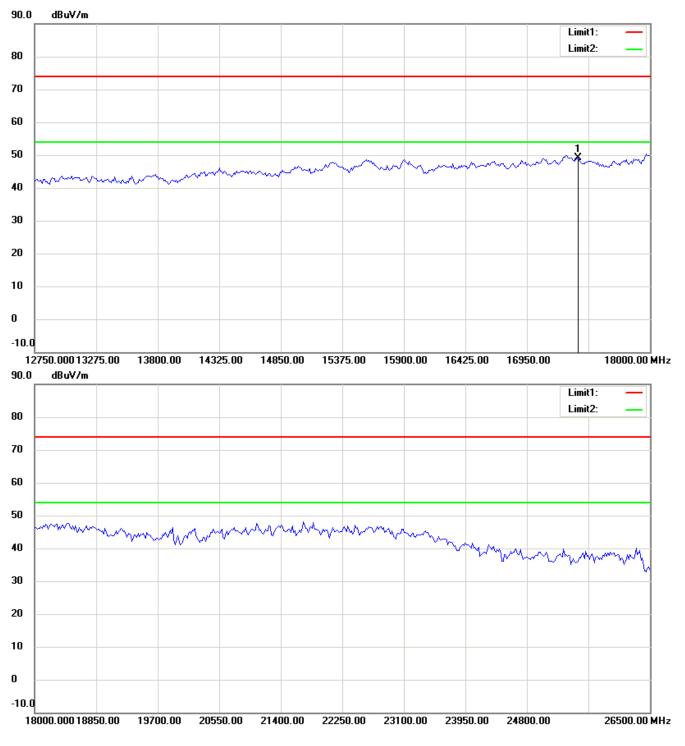


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



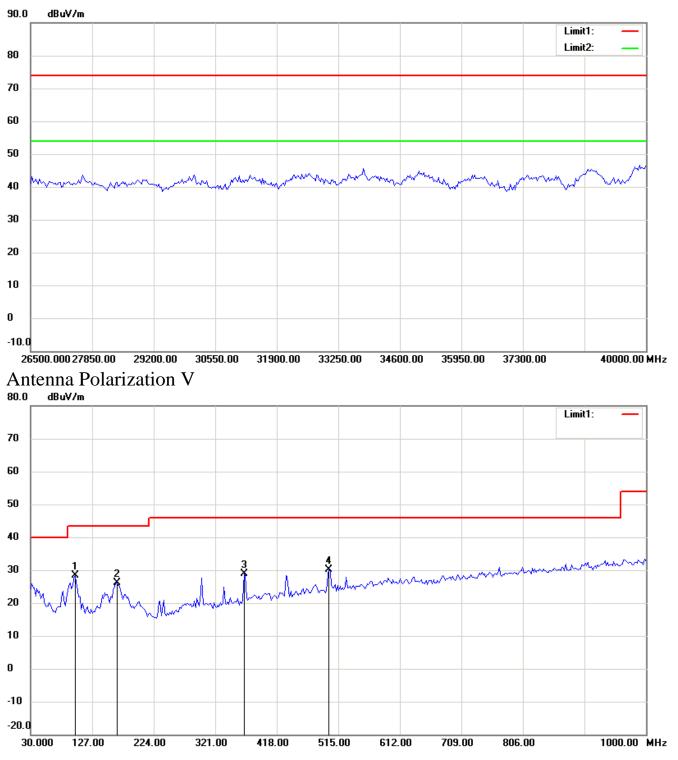


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



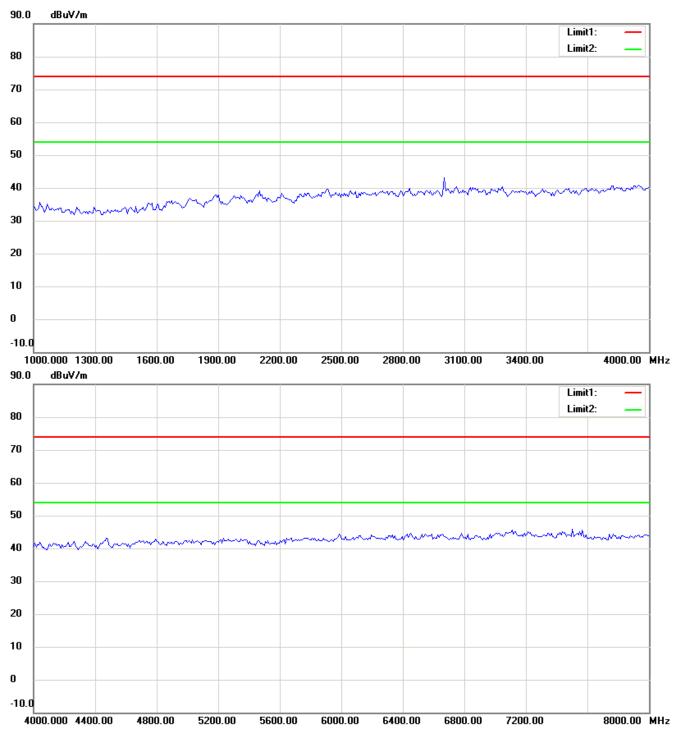


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



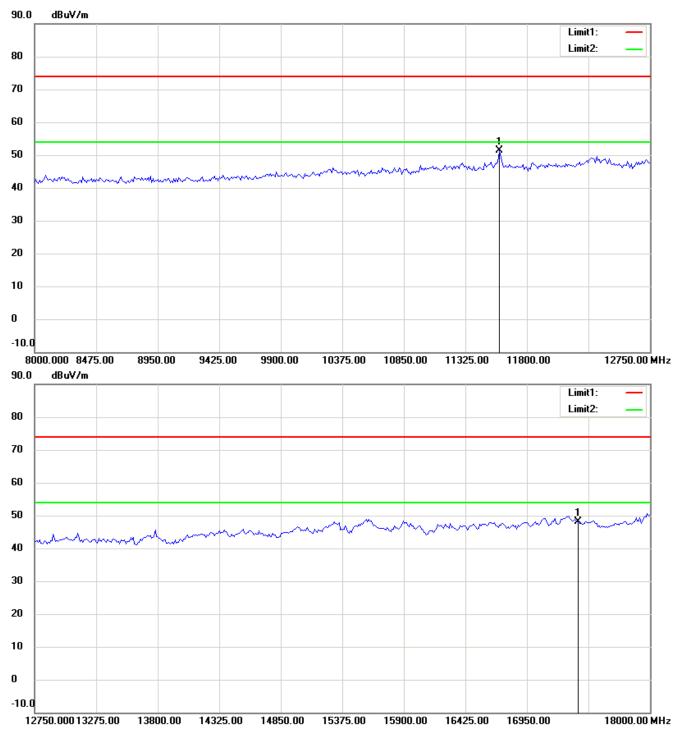

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



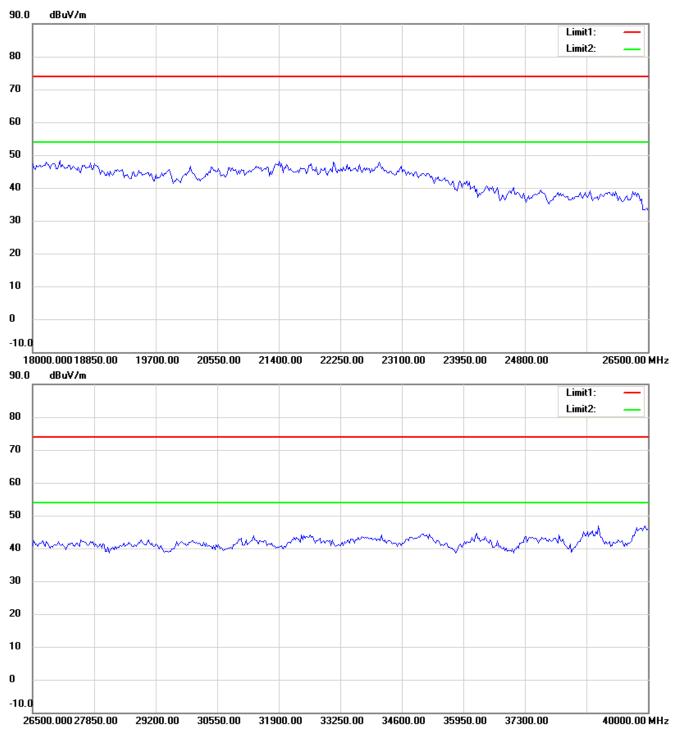


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




#### 802.11ac 5775MHz

# Antenna Polarization H

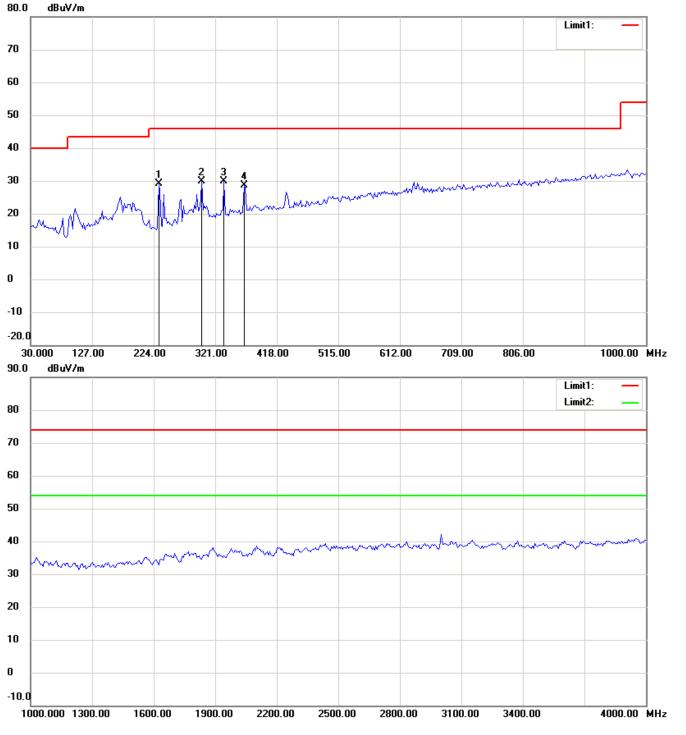


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



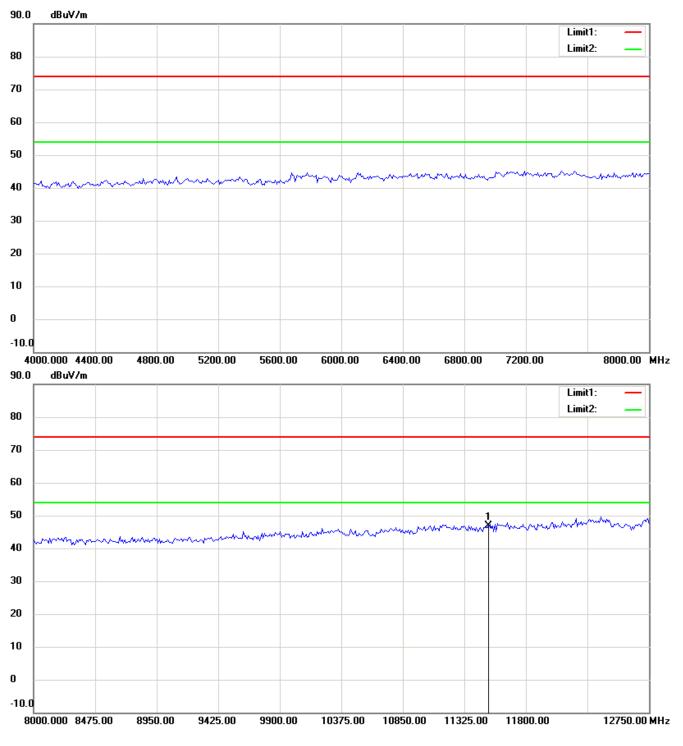


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



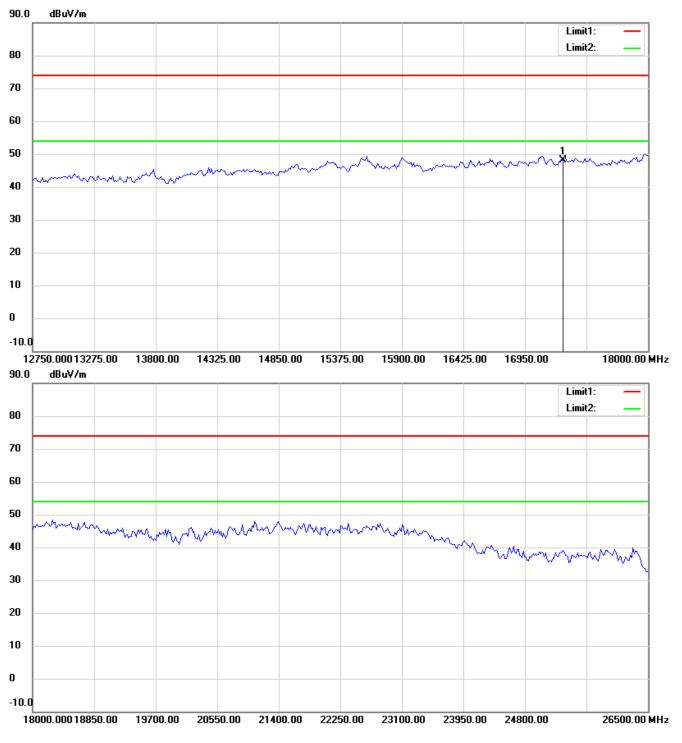


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



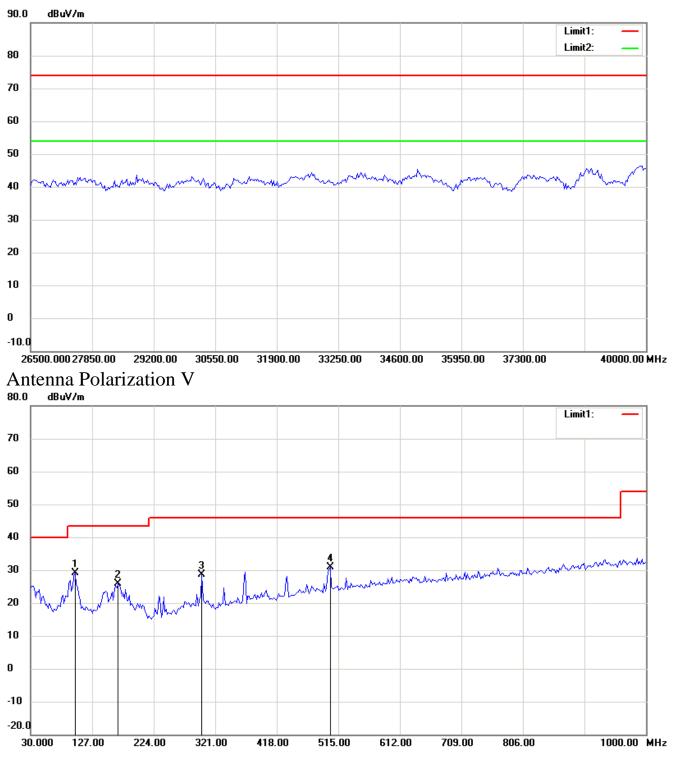


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



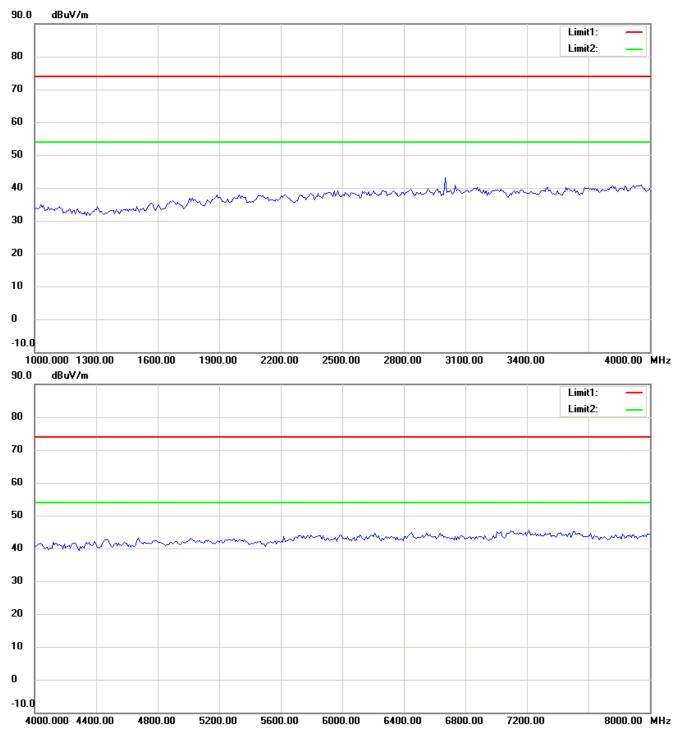


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



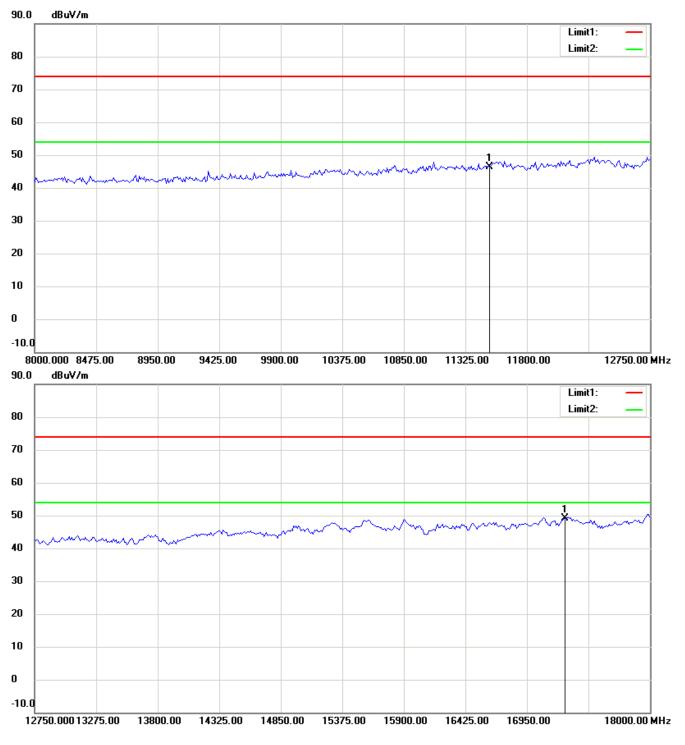

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



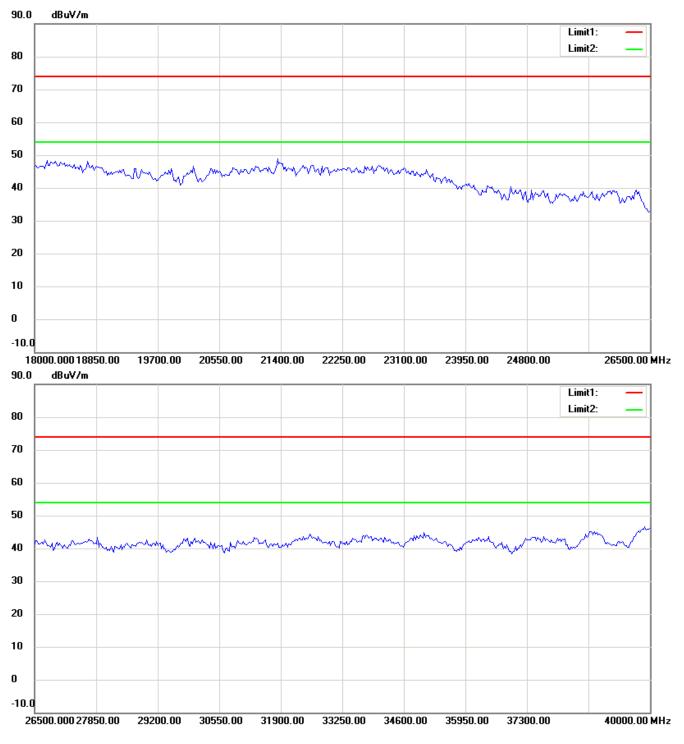


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11n 20MHz 2412MHz

Antenna Polarization H

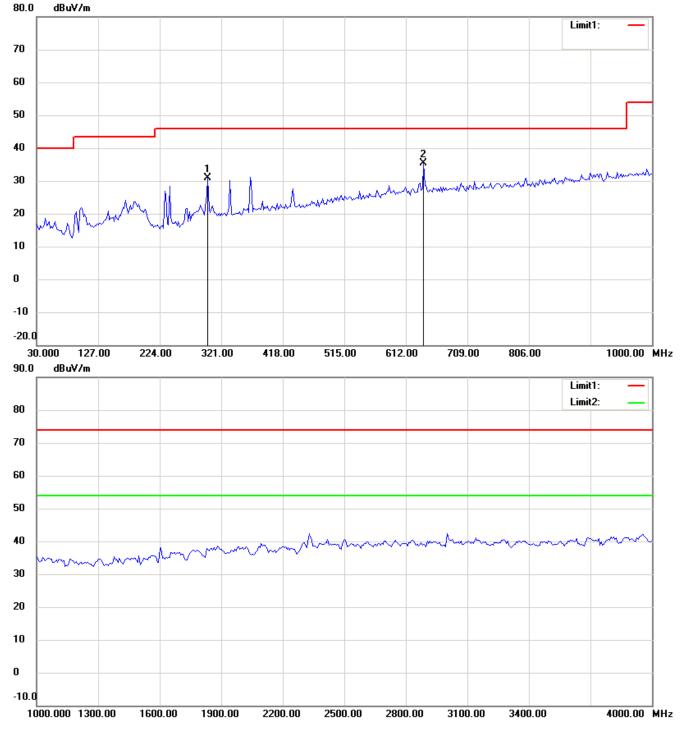


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



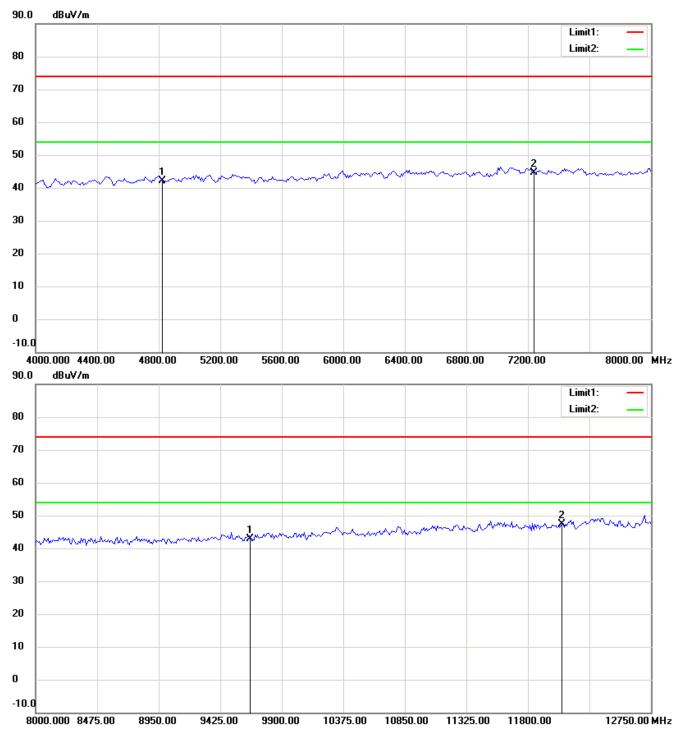

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




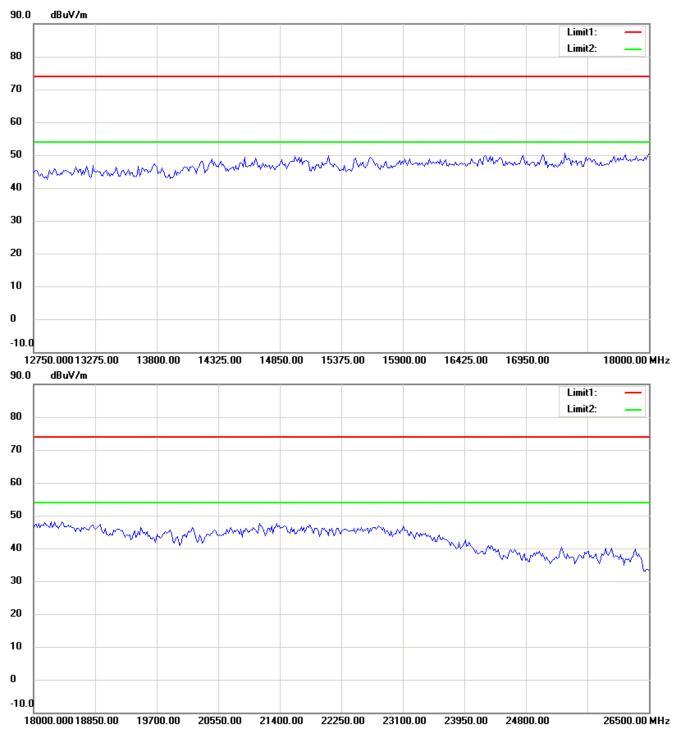

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

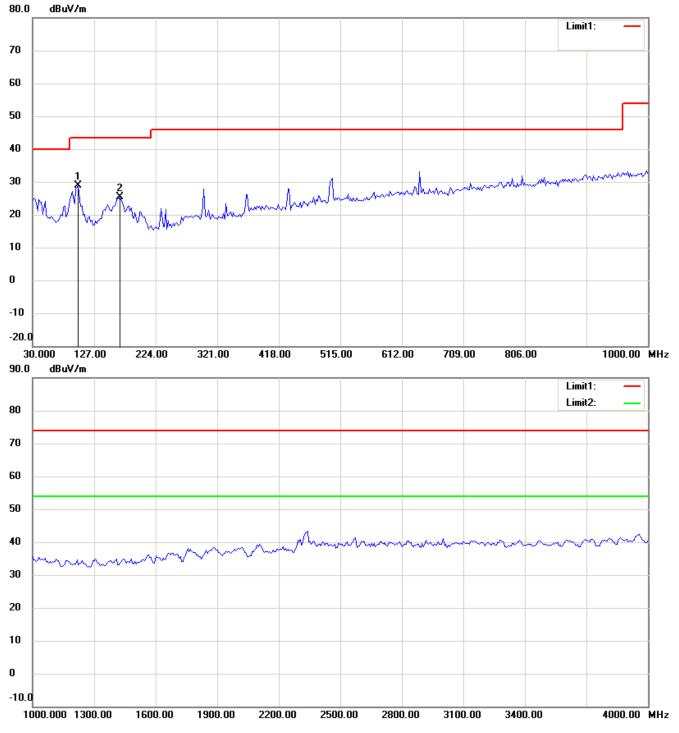


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



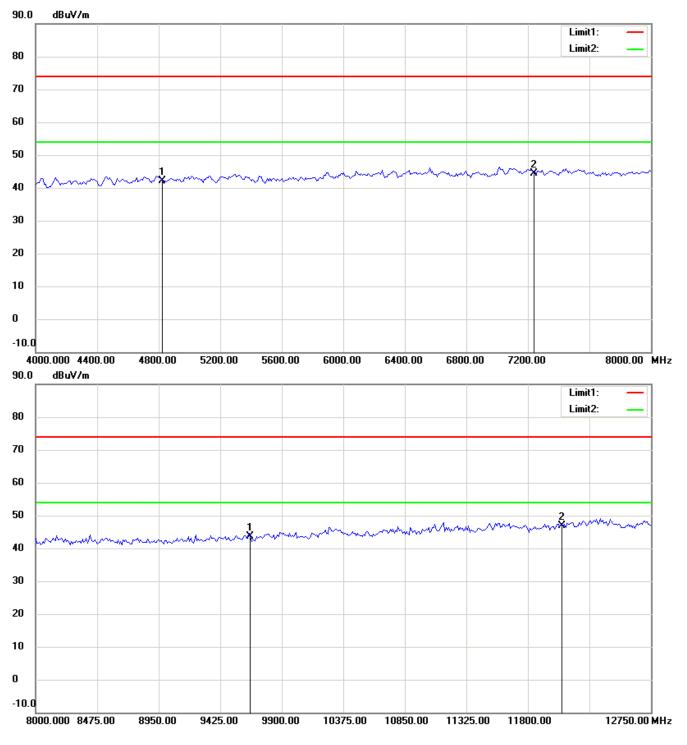

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



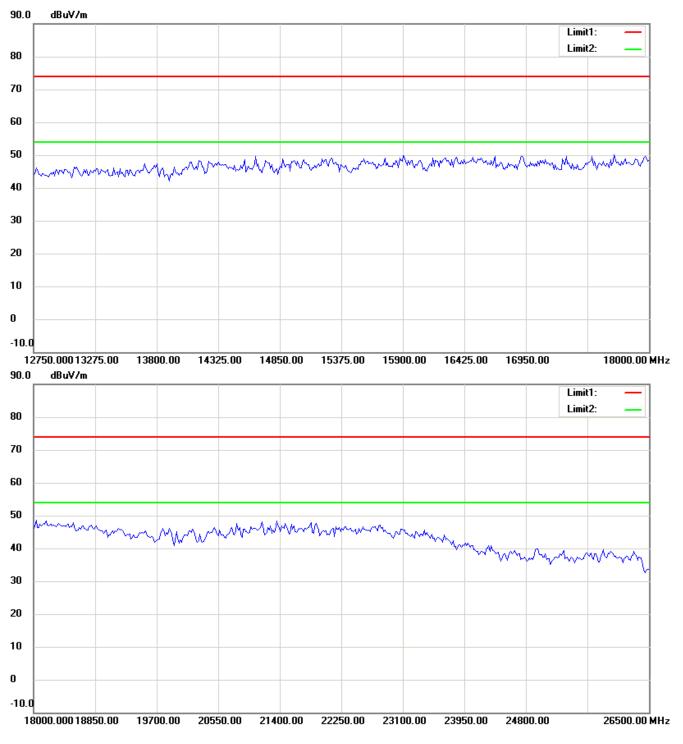


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




## 802.11n 20MHz 2437MHz

Antenna Polarization H

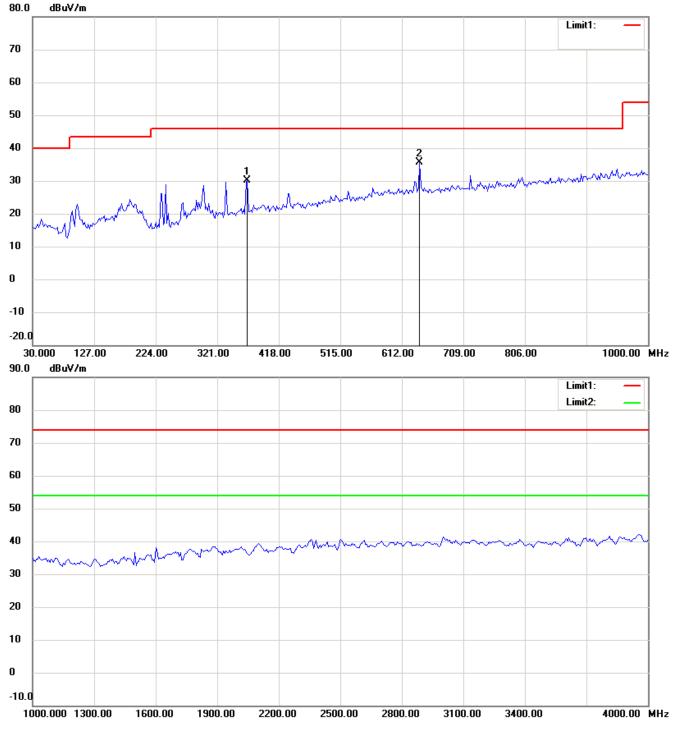


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



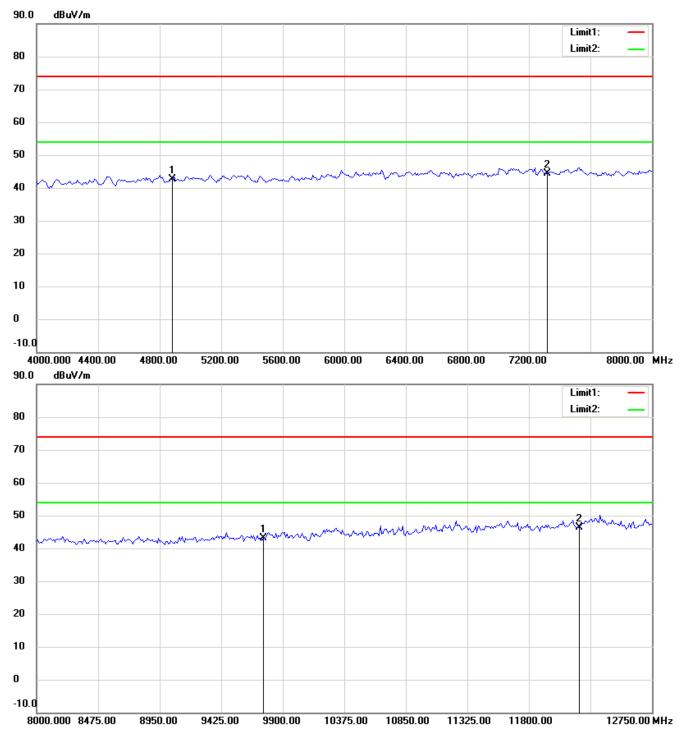

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




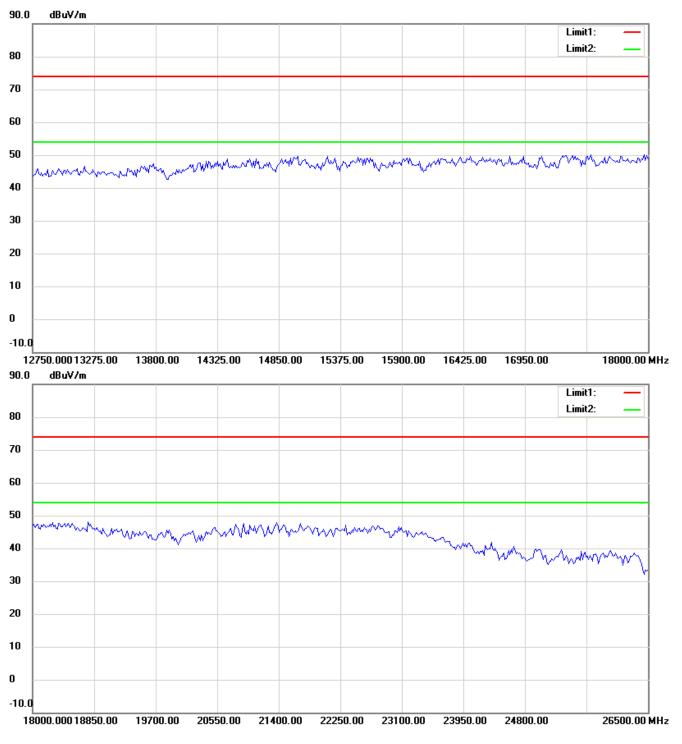

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

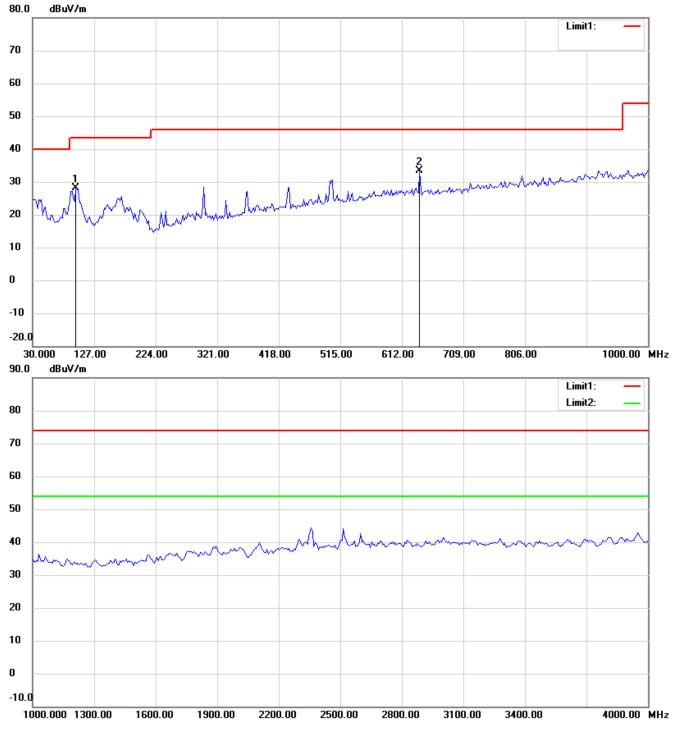


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



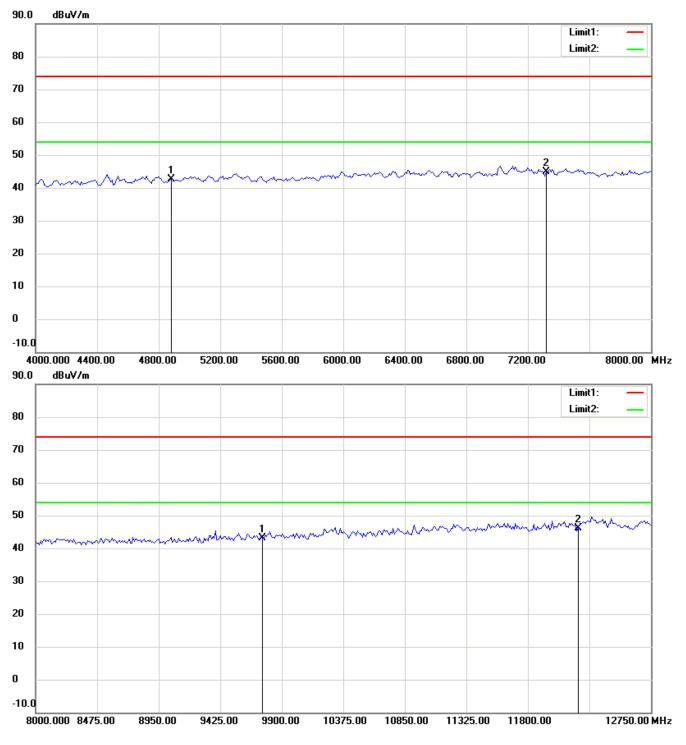

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



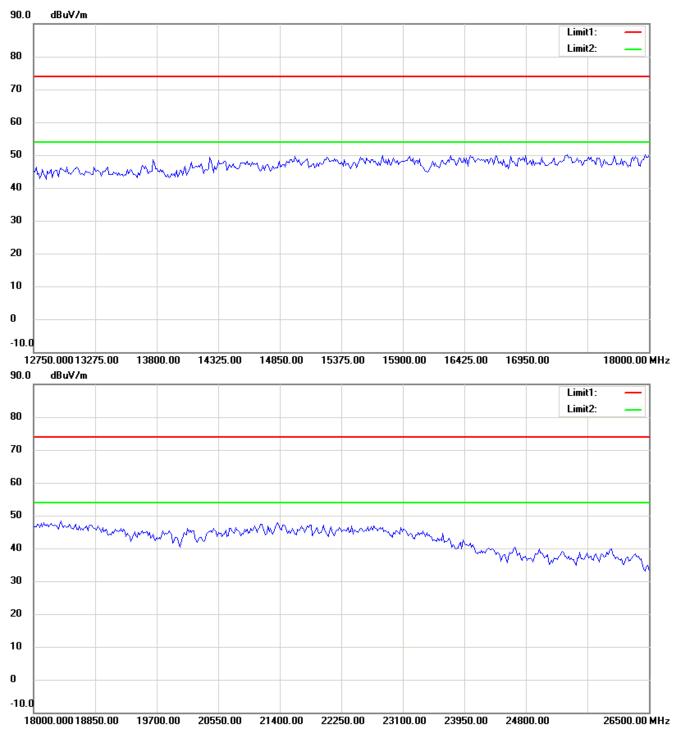


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# 802.11n 20MHz 2462MHz

Antenna Polarization H

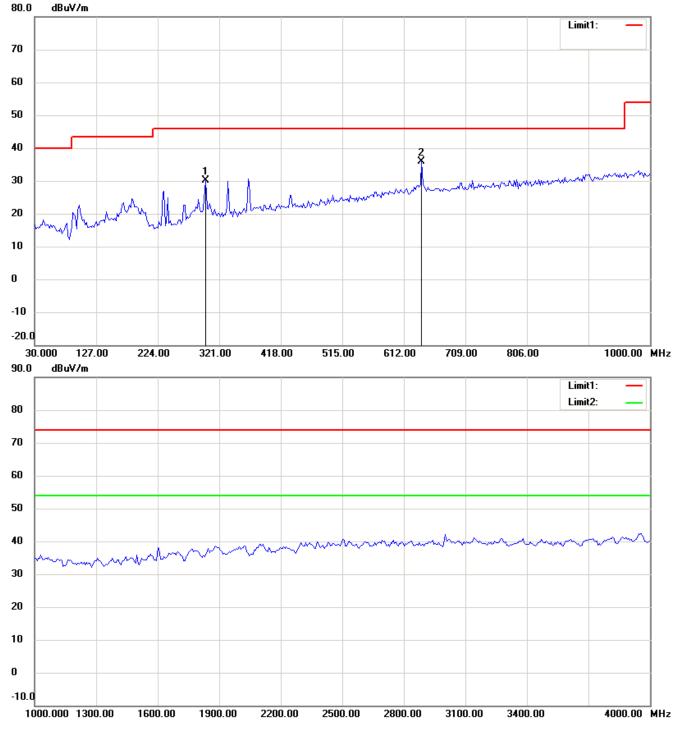


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



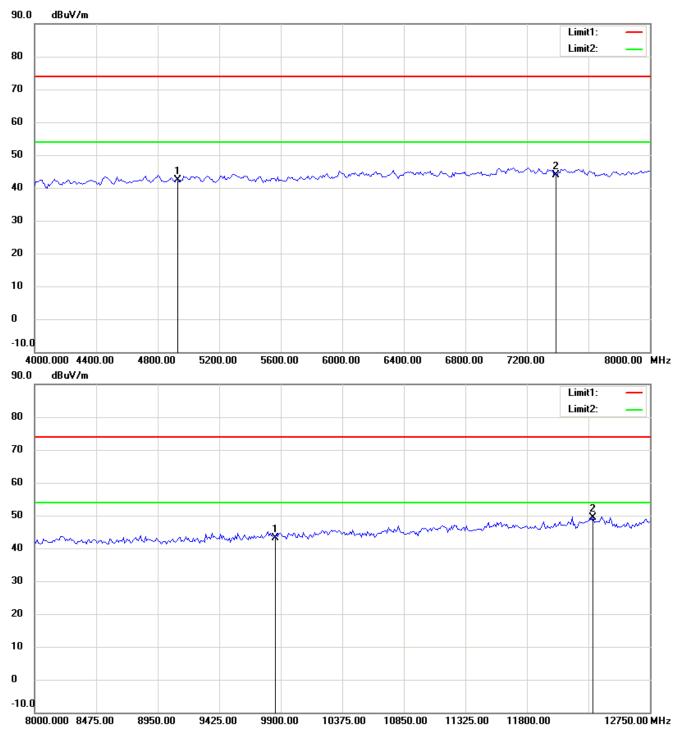

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




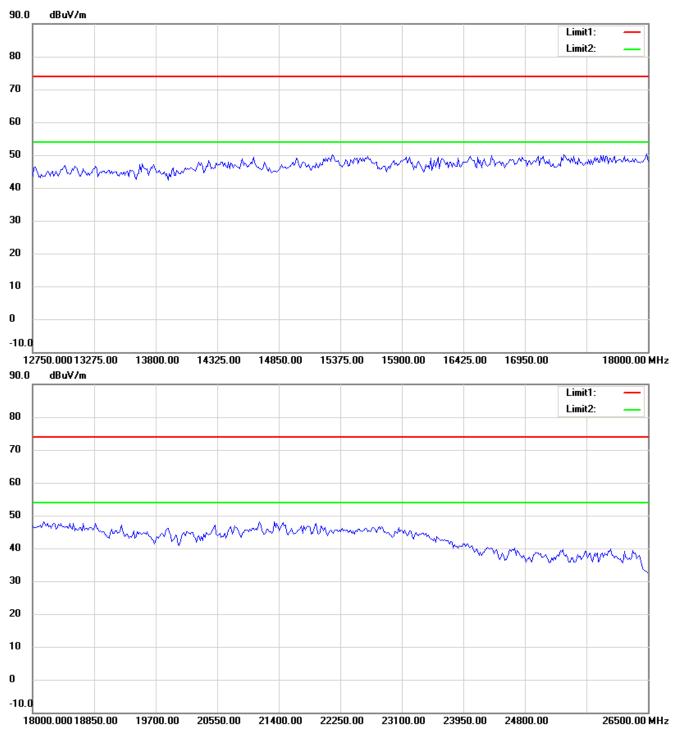

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

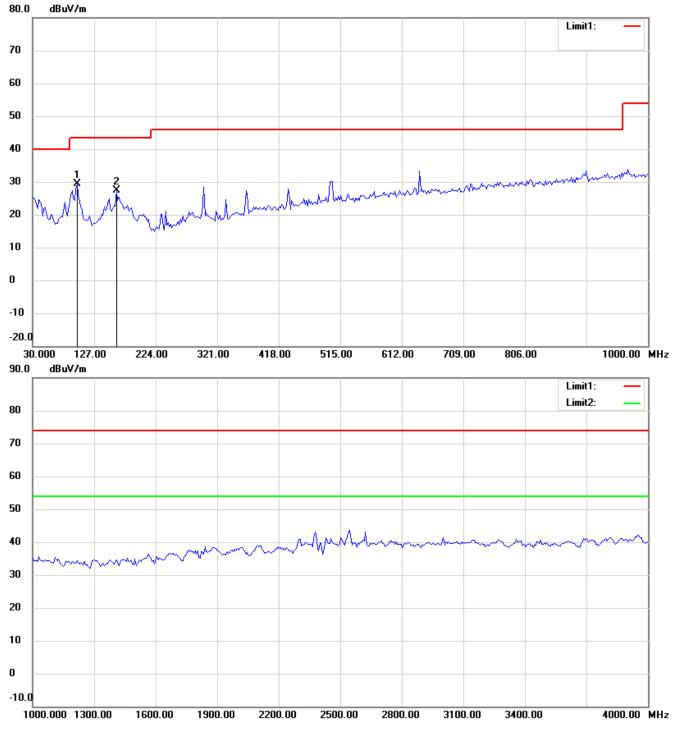


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



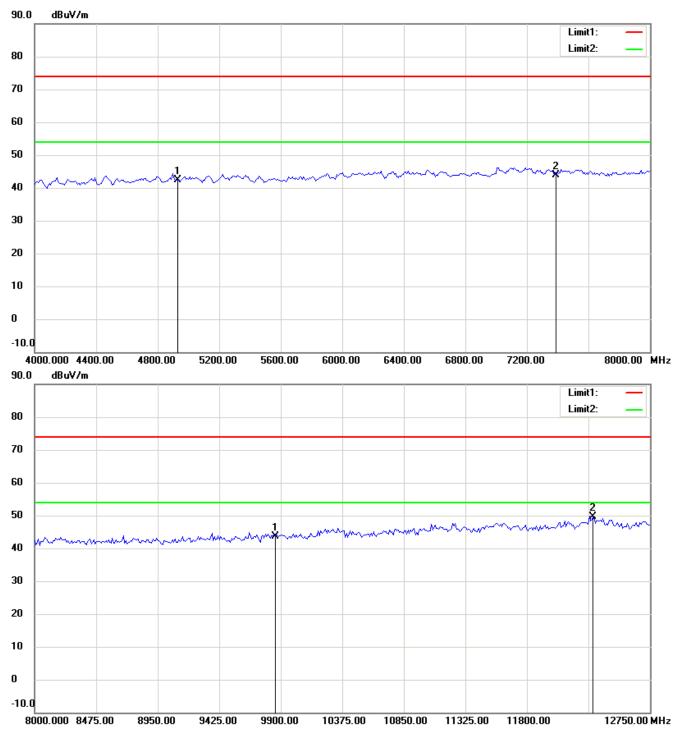

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



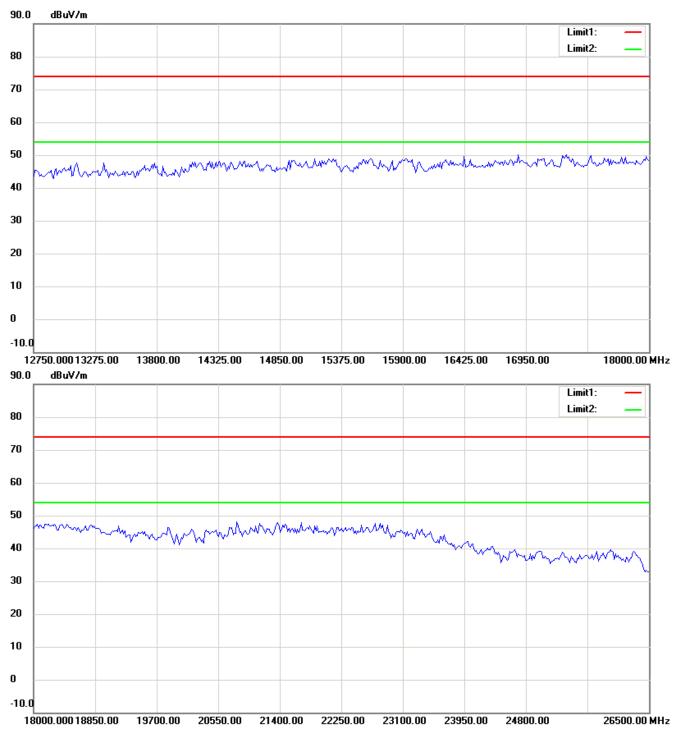


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11n 40MHz 2422MHz

Antenna Polarization H

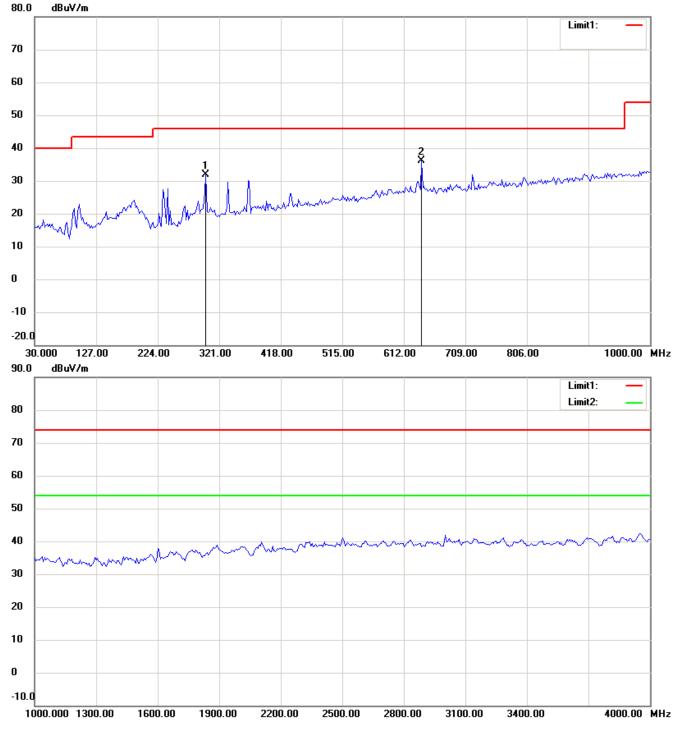


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



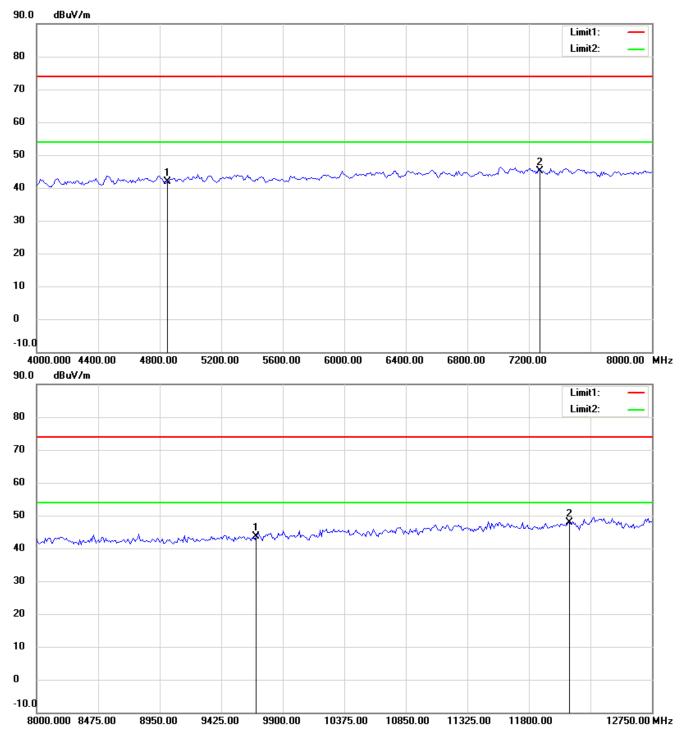

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




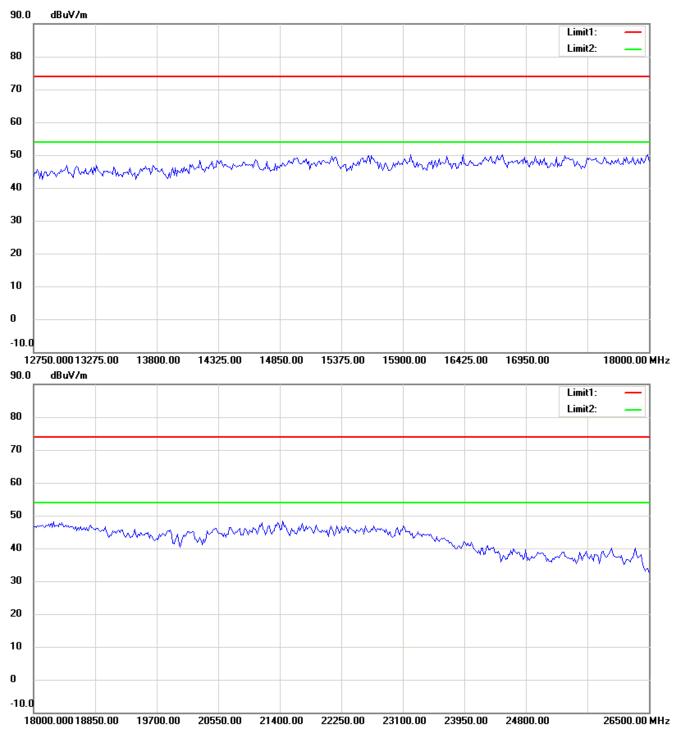

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

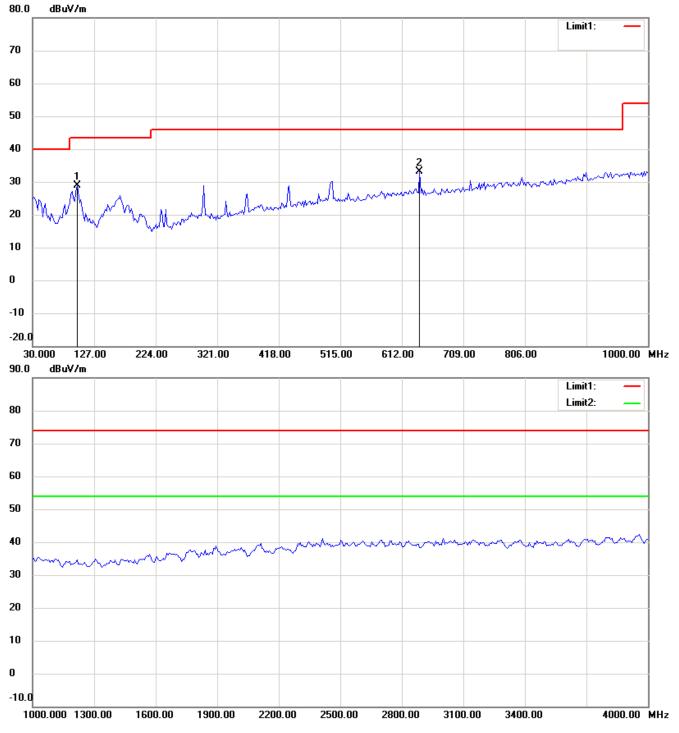


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



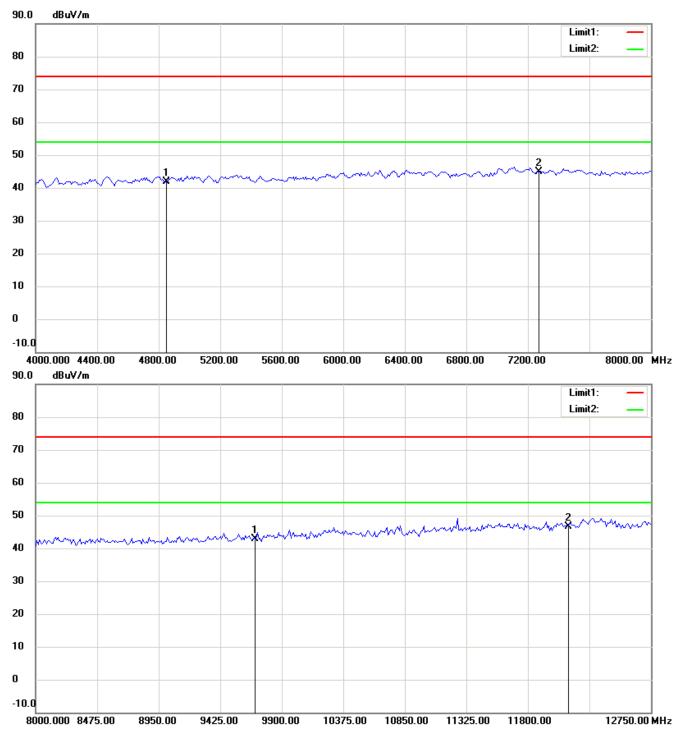

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



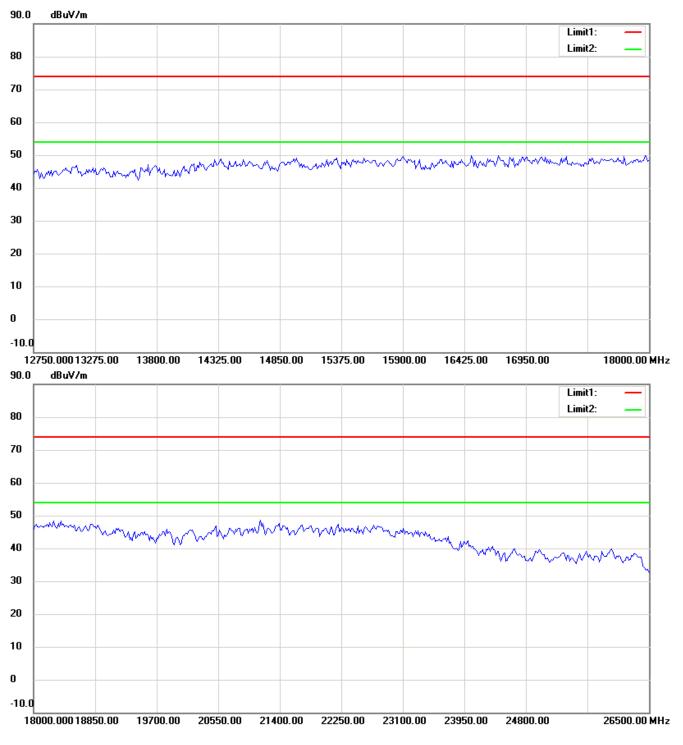


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11n 40MHz 2437MHz

Antenna Polarization H

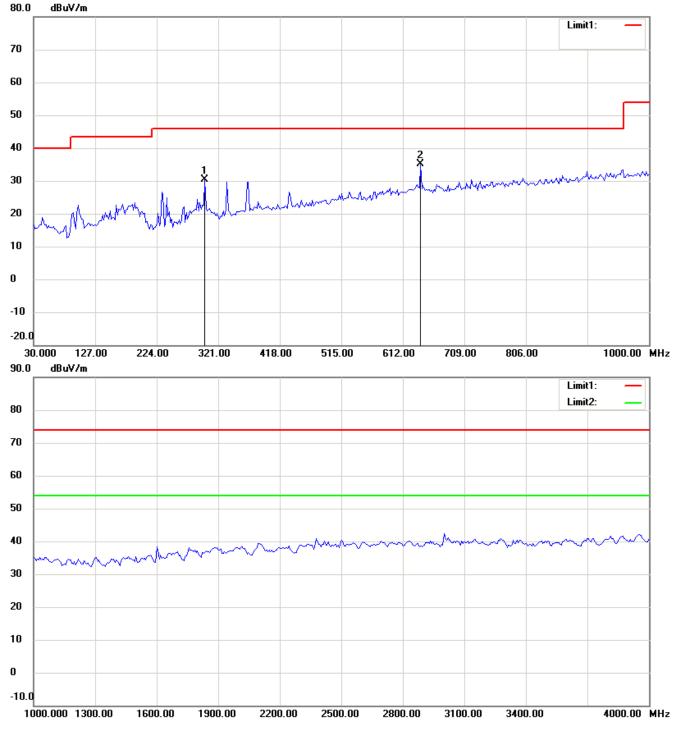


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



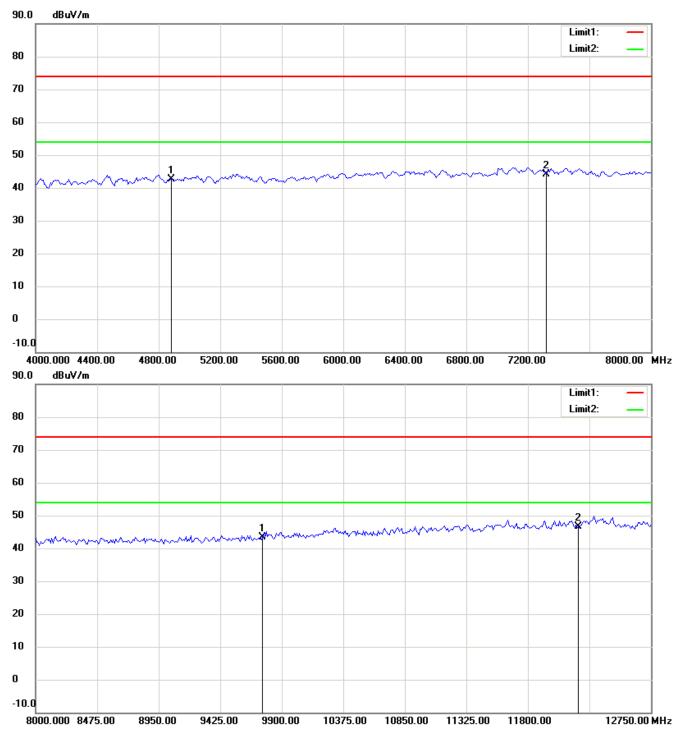

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




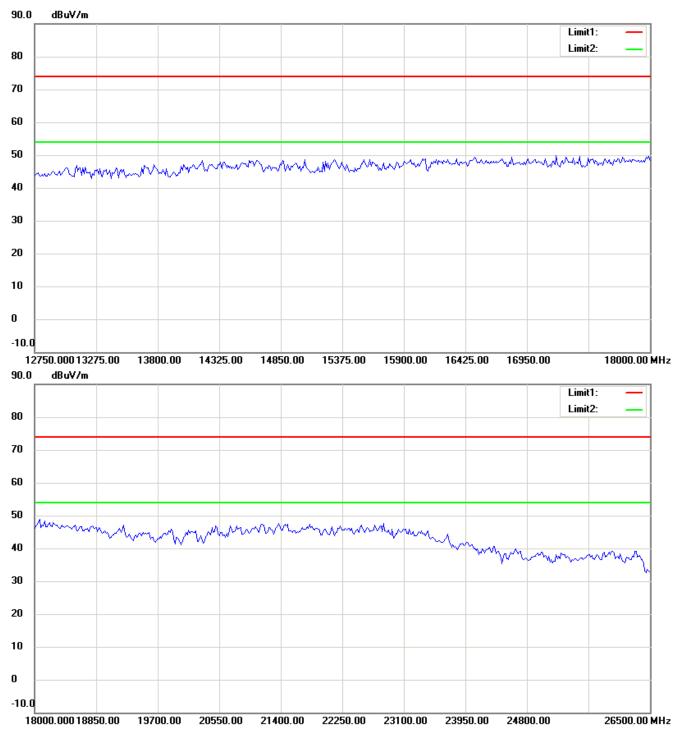

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

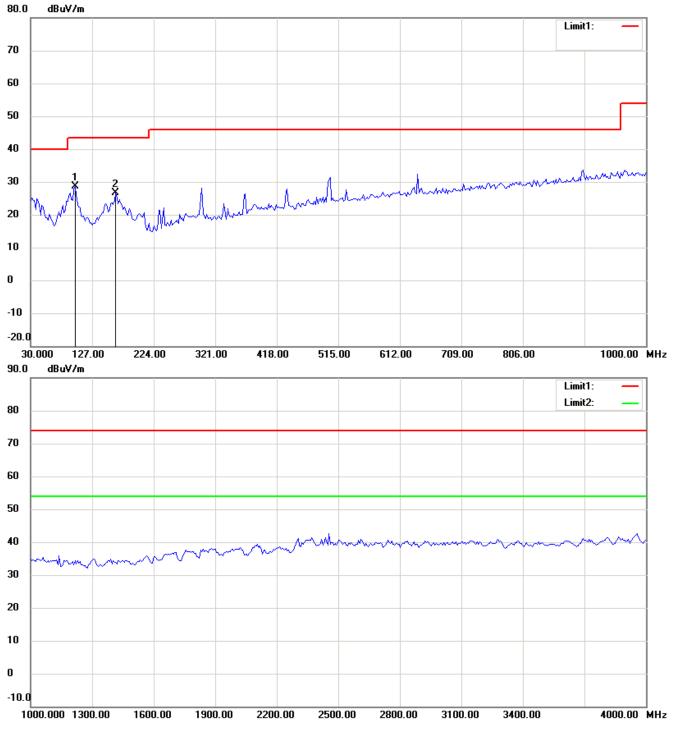


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



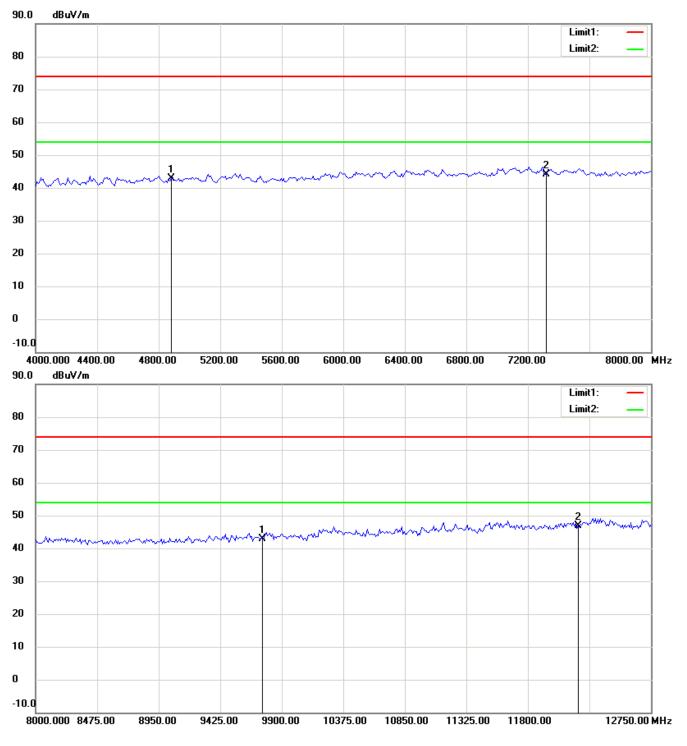

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



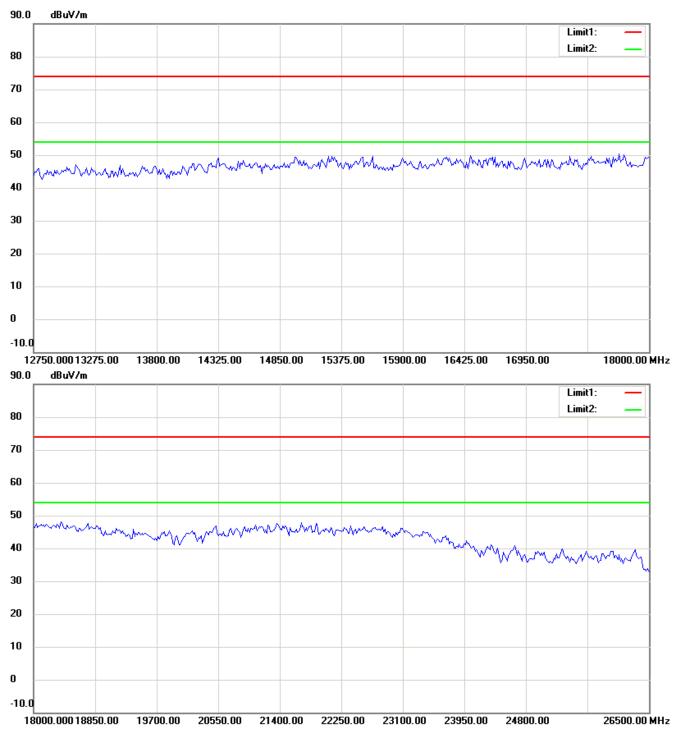


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### 802.11n 40MHz 2452MHz

Antenna Polarization H

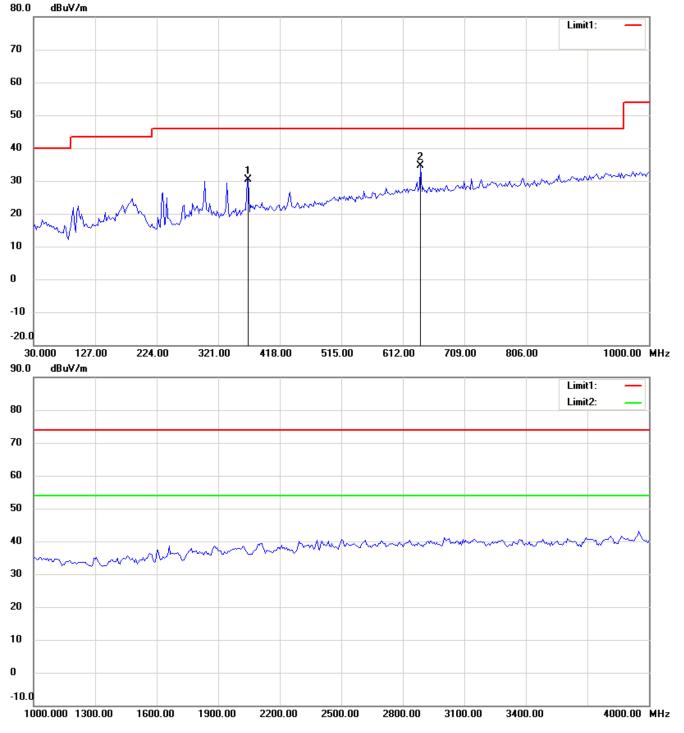


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



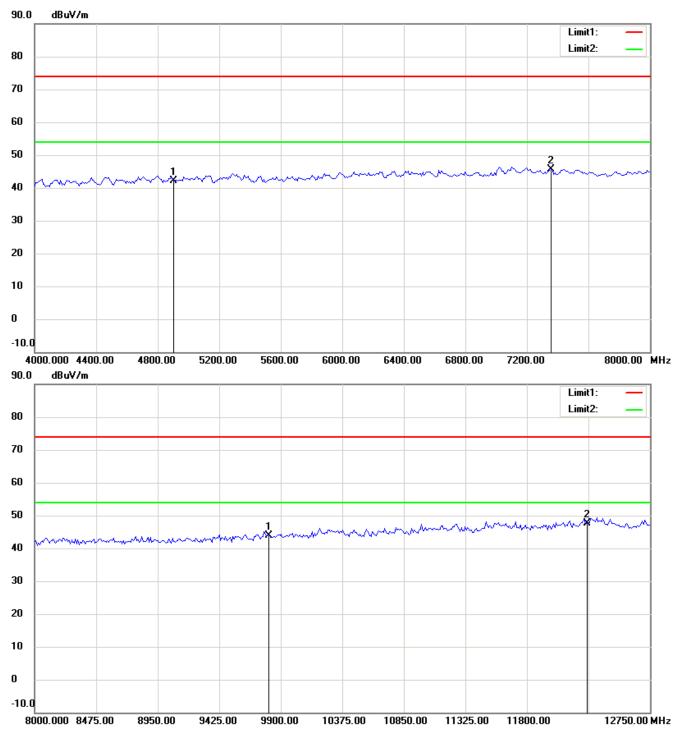

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




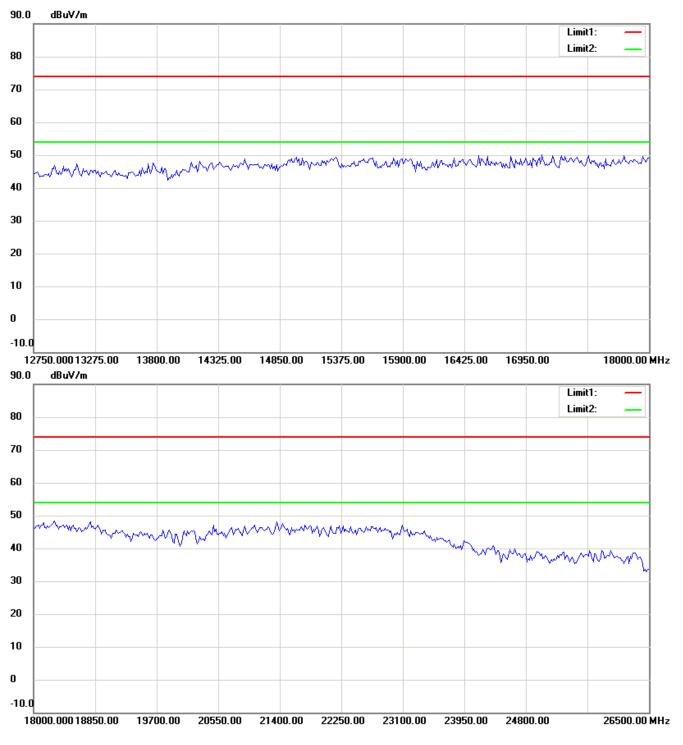

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.




### Antenna Polarization V

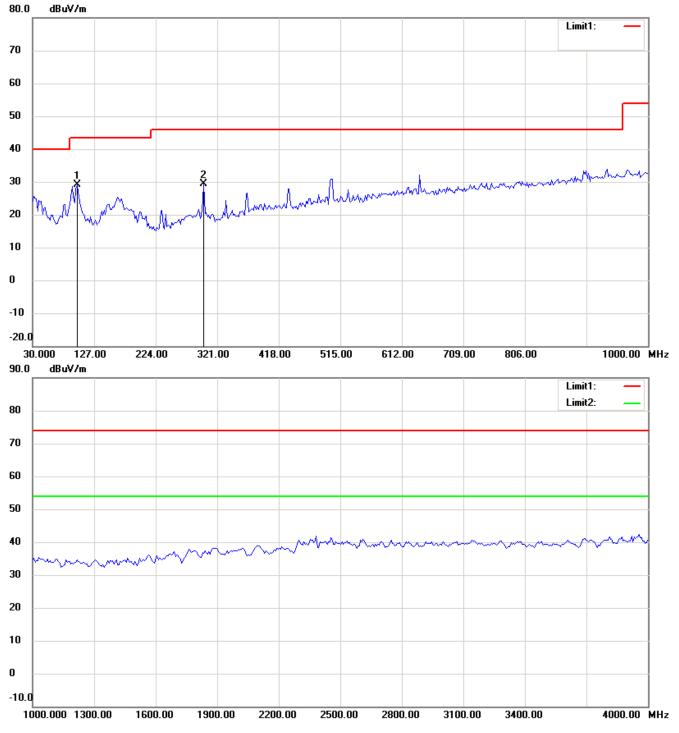


- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



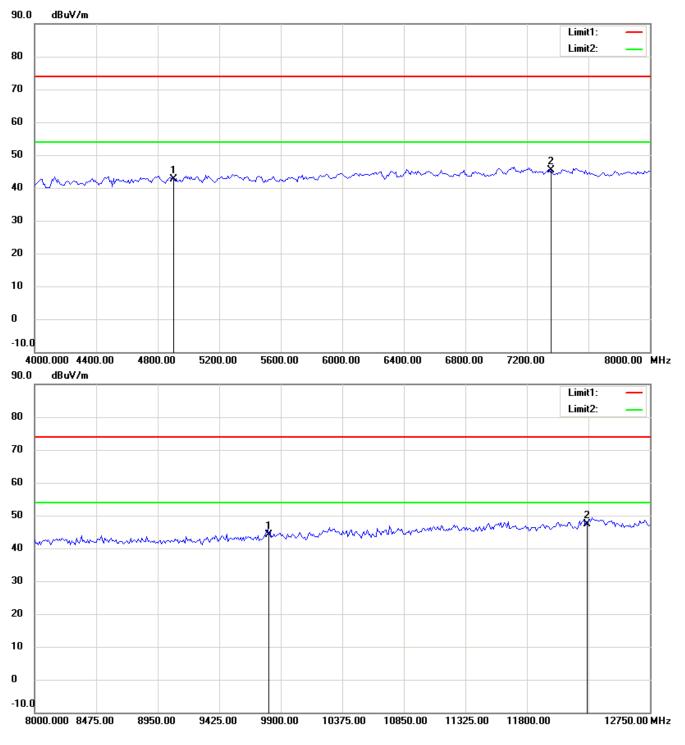

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.



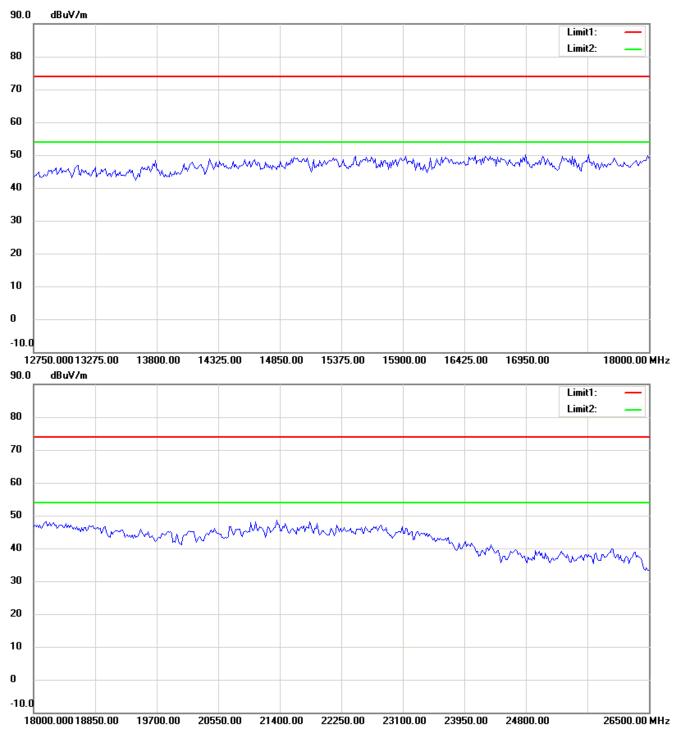

- 1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3. For corrected test results are listed in the relevant table of radiated test data of this test report.