

# FCC Test Report

**FCC ID** : ZTT-REC22P  
**Equipment** : High Power AC1200 Plug-In Wi-Fi Range Extender  
**Model No.** : REC22P 、 REC22PG  
(Different case color for marketing purpose only.)  
**Brand Name** : Amped  
**Applicant** : Amped Wireless  
**Address** : 13089 Peyton Dr. #C307 Chino Hills, California 91709 United State  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : Dec. 28, 2015  
**Tested Date** : Jan. 18 ~ Feb. 02, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Testing Applied Standards .....	10
1.6	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>13</b>
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth .....	18
3.3	RF Output Power .....	21
3.4	Peak Power Spectral Density .....	23
3.5	Transmitter Radiated and Band Edge Emissions .....	27
3.6	Frequency Stability.....	70
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>72</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR5D2803-01AN	Rev. 01	Initial issue	Feb. 19, 2016

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 2.174MHz 44.95 (Margin -1.05dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 500.04MHz 45.48 (Margin -0.52dB) - QP	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 22.48 5725-5850MHz: 22.37	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	2	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	MCS 0-15
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	MCS 0-15
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	2	MCS 0-8
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	2	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5725-5850	a	5745-5825	149-165 [5]	2	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-15
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-15
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	2	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	2	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Antenna Gain (dBi)		
				2400~2483.5MHz	5150~5250 MHz	5725~5850 MHz
1	WAN8010F245M05	Chip	N/A	3.45	--	--
2	ACM3-5036-A1-CC-S	Chip	N/A	3	3.3	3.3
3	8619 replacement antenna	Dipole	N/A	3.48	3.49	3.17

Note1: Ant 1 and 3 are used for 2.4 GHz transmission.

Note2: Ant 2 and 3 are used for 5 GHz transmission.

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	AC 110~120V, 60Hz, 7A
--------------------------	-----------------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	<b>VHT 80</b>	
48	5240	42	5210

For Frequency band 5725~5850 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	<b>VHT80</b>	
161	5805	155	5775
165	5825	---	---

### 1.1.6 Test Tool and Duty Cycle

<b>Test Tool</b>	MP_TEST, V1.3.8.0		
<b>Duty Cycle and Duty Factor</b>	<b>Mode</b>	<b>Duty cycle (%)</b>	<b>Duty factor (dB)</b>
	11a	92.41%	0.34
	VHT20	93.40%	0.30
	VHT40	82.51%	0.83
	VHT80	83.15%	0.80

### 1.1.7 Power Setting


For Frequency band 5150-5250 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	57/61
11a	5200	55/57
11a	5240	55/60
HT20	5180	54/57
HT20	5200	52/56
HT20	5240	51/54
HT40	5190	53/58
HT40	5230	53/56
VHT20	5180	54/57
VHT20	5200	52/56
VHT20	5240	51/54
VHT40	5190	53/58
VHT40	5230	53/56
VHT80	5210	48/51

For Frequency band 5725~5850 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	57/63
11a	5785	60/63
11a	5825	59/60
HT20	5745	54/57
HT20	5785	57/60
HT20	5825	57/60
HT40	5755	56/58
HT40	5795	58/60
VHT20	5745	54/57
VHT20	5785	57/60
VHT20	5825	57/60
VHT40	5755	56/58
VHT40	5795	58/60
VHT80	5775	51/54

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.
2	700W Light bulb load	ICC	---	---	---

## 1.3 Test Setup Chart

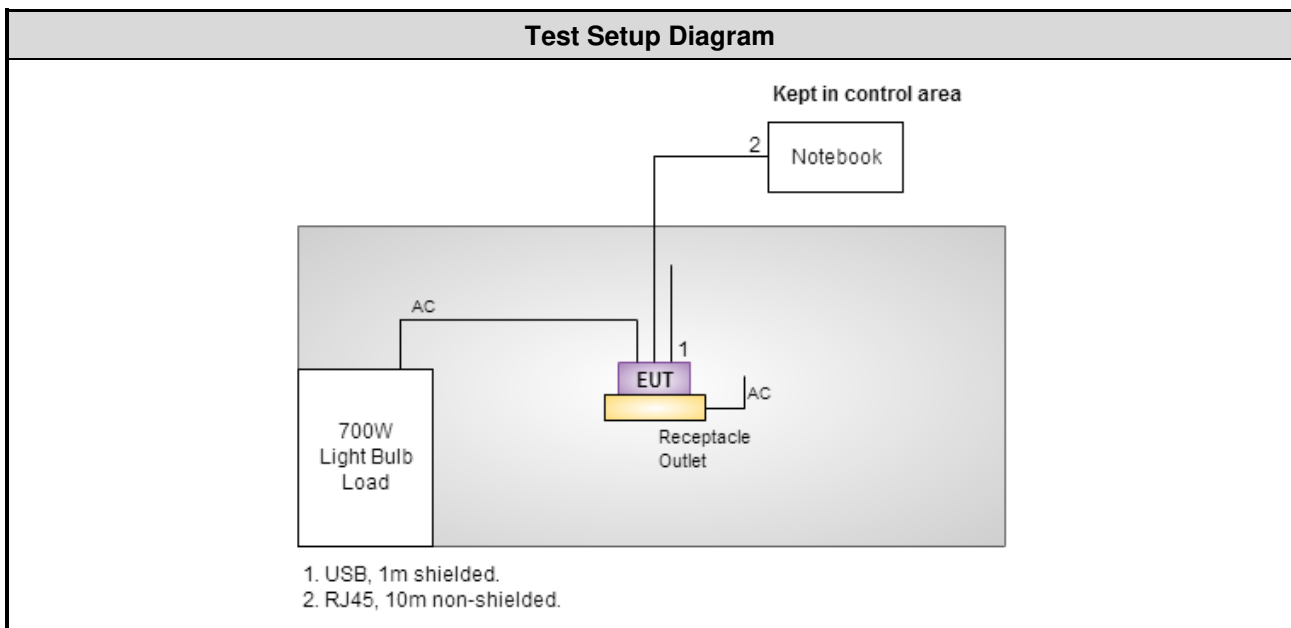



## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Dec. 17, 2015	Dec. 16, 2016
Receiver	R&S	ESR3	101657	Jan. 12, 2016	Jan. 11, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 09, 2015	Nov. 08, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 07, 2015	Oct. 06, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 16, 2015	Nov. 15, 2016
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 10, 2015	Dec. 09, 2016
Preamplifier	Burgeon	BPA-530	100218	Nov. 03, 2015	Nov. 02, 2016
Preamplifier	Agilent	83017A	MY39501309	Sep. 22, 2015	Sep. 21, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 10, 2015	Dec. 09, 2016
LF cable 10M	EMCC	CFD400-E	CFD400-001	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 27, 2015	Nov. 26, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r01

FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Frequency error	$\pm 34.134$ Hz
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.87$ dB
Radiated emission $> 1$ GHz	$\pm 5.60$ dB
Time	$\pm 0.1\%$
Temperature	$\pm 0.6$ °C

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	18°C / 59%	Sky Huang
Radiated Emissions	03CH01-WS	20°C / 65%	Aska Huang Mark Liao
RF Conducted	TH01-WS	21°C / 64%	Alex Huang

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5200	6 Mbps	---
Radiated Emissions $\leq 1$ GHz	11a	5200	6 Mbps	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	
	HT40	5190 / 5230	MCS 0	
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Radiated Emissions $> 1$ GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Frequency Stability	Un-modulation	5200	---	---
<b>NOTE:</b>				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The <b>Z-plane</b> results were found as the worst case and were shown in this report.				

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5745	6 Mbps	---
Radiated Emissions $\leq 1$ GHz	11a	5745	6 Mbps	---
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	
	HT40	5755 / 5795	MCS 0	
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions $> 1$ GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	---
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Frequency Stability	Un-modulation	5785	---	---
<b>NOTE:</b>				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The <b>Z-plane</b> results were found as the worst case and were shown in this report.				

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

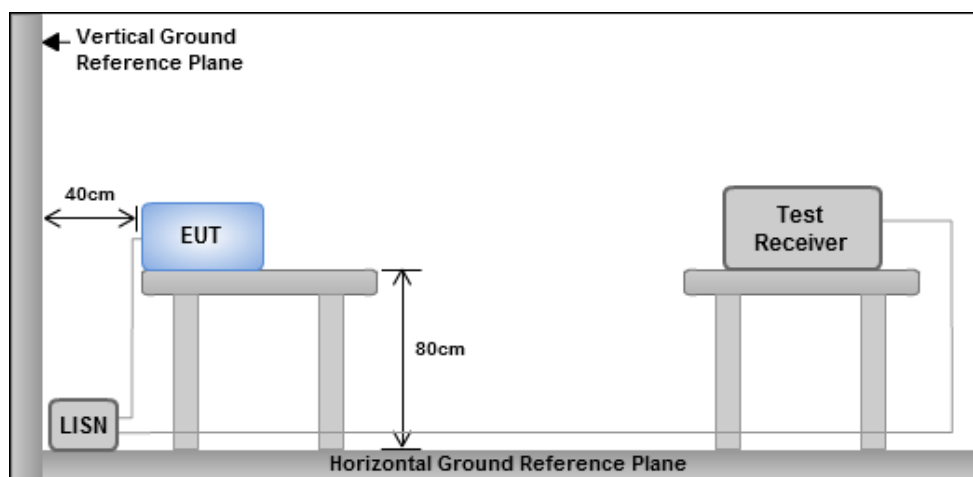


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Power Phase</b>	Line		


  

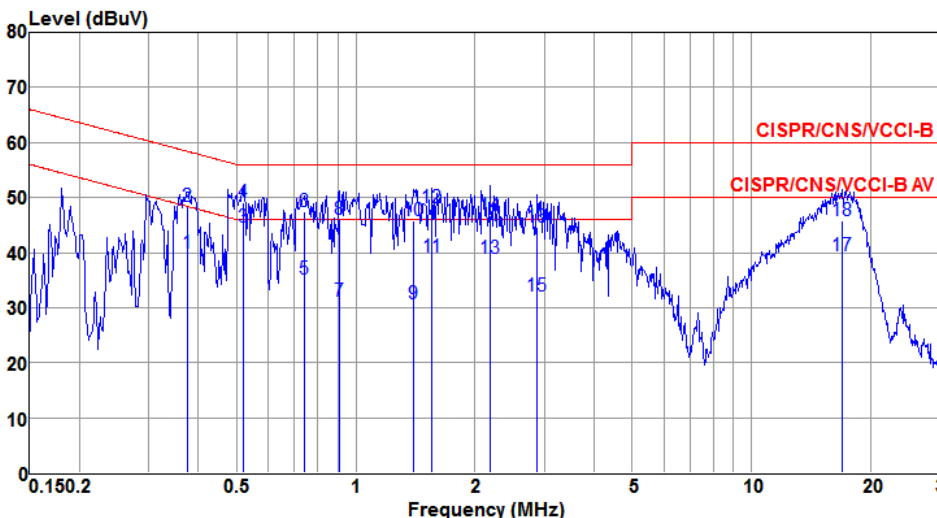

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.375	39.78	48.39	-8.61	39.56	0.19	0.03	Average
2	0.375	48.42	58.39	-9.97	48.20	0.19	0.03	QP
3	0.520	44.62	46.00	-1.38	44.43	0.15	0.04	Average
4	0.520	49.04	56.00	-6.96	48.85	0.15	0.04	QP
5	0.743	35.27	46.00	-10.73	35.10	0.12	0.05	Average
6	0.743	47.46	56.00	-8.54	47.29	0.12	0.05	QP
7	0.909	31.27	46.00	-14.73	31.11	0.10	0.06	Average
8	0.909	46.04	56.00	-9.96	45.88	0.10	0.06	QP
9	1.396	30.77	46.00	-15.23	30.35	0.35	0.07	Average
10	1.396	45.73	56.00	-10.27	45.31	0.35	0.07	QP
11	1.560	39.23	46.00	-6.77	38.72	0.44	0.07	Average
12	1.560	48.19	56.00	-7.81	47.68	0.44	0.07	QP
13	2.178	38.89	46.00	-7.11	38.22	0.58	0.09	Average
14	2.178	46.63	56.00	-9.37	45.96	0.58	0.09	QP
15	2.869	32.09	46.00	-13.91	31.55	0.44	0.10	Average
16	2.869	44.62	56.00	-11.38	44.08	0.44	0.10	QP
17	16.928	39.42	50.00	-10.58	38.48	0.75	0.19	Average
18	16.928	45.78	60.00	-14.22	44.84	0.75	0.19	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Power Phase</b>	Neutral		

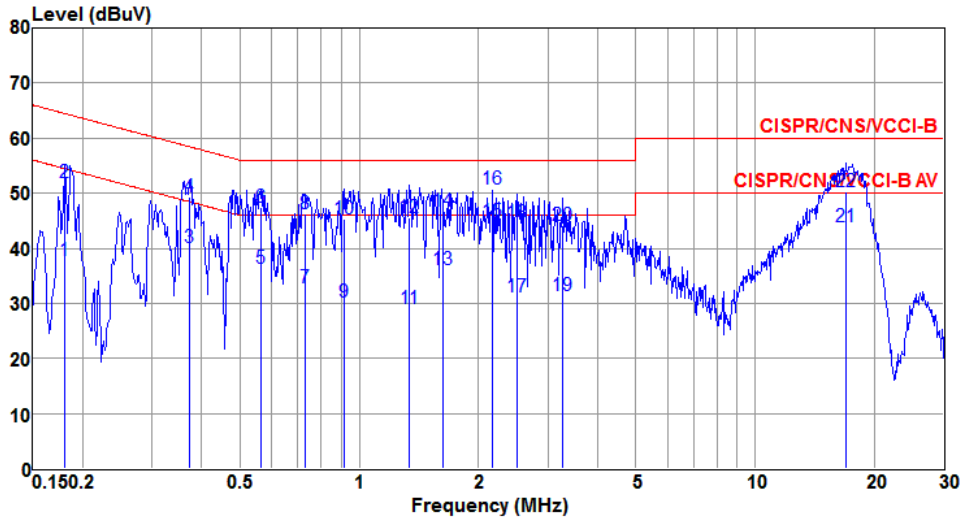

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.181	37.83	54.46	-16.63	37.36	0.45	0.02	Average
2	0.181	51.97	64.46	-12.49	51.50	0.45	0.02	QP
3	0.373	40.20	48.43	-8.23	40.03	0.14	0.03	Average
4	0.373	49.35	58.43	-9.08	49.18	0.14	0.03	QP
5	0.564	36.38	46.00	-9.62	36.16	0.18	0.04	Average
6	0.564	47.46	56.00	-8.54	47.24	0.18	0.04	QP
7	0.727	32.93	46.00	-13.07	32.66	0.22	0.05	Average
8	0.727	46.27	56.00	-9.73	46.00	0.22	0.05	QP
9	0.918	30.26	46.00	-15.74	29.94	0.26	0.06	Average
10	0.918	45.39	56.00	-10.61	45.07	0.26	0.06	QP
11	1.338	29.14	46.00	-16.86	28.82	0.25	0.07	Average
12	1.338	45.48	56.00	-10.52	45.16	0.25	0.07	QP
13	1.622	36.00	46.00	-10.00	35.69	0.24	0.07	Average
14	1.622	46.84	56.00	-9.16	46.53	0.24	0.07	QP
15@	2.174	44.95	46.00	-1.05	44.59	0.28	0.08	Average
16	2.174	50.83	56.00	-5.17	50.47	0.28	0.08	QP
17	2.513	31.18	46.00	-14.82	30.70	0.39	0.09	Average
18	2.513	44.53	56.00	-11.47	44.05	0.39	0.09	QP
19	3.276	31.40	46.00	-14.60	30.70	0.59	0.11	Average
20	3.276	44.14	56.00	-11.86	43.44	0.59	0.11	QP
21	16.928	43.99	50.00	-6.01	43.11	0.69	0.19	Average
22	16.928	50.24	60.00	-9.76	49.36	0.69	0.19	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Power Phase</b>	Line		

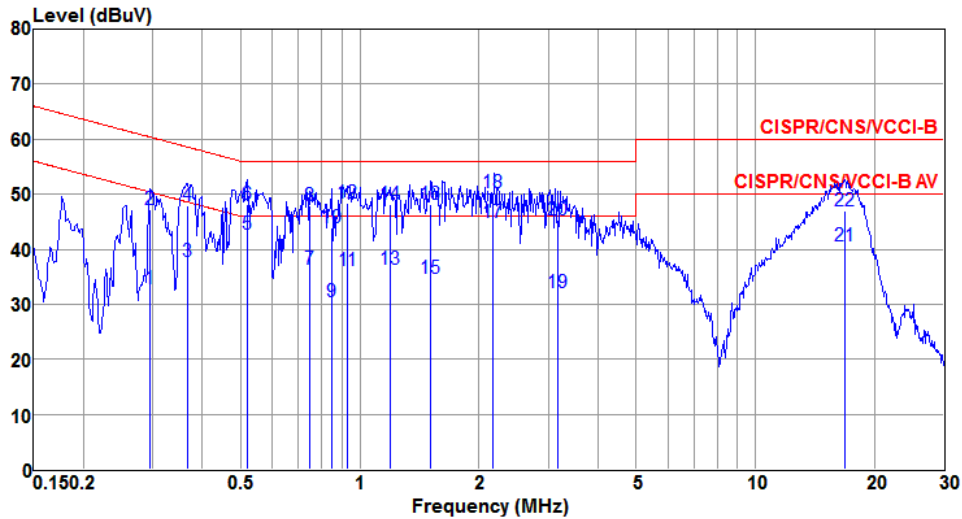


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.294	32.81	50.41	-17.60	32.57	0.21	0.03	Average
2	0.294	47.27	60.41	-13.14	47.03	0.21	0.03	QP
3	0.367	37.69	48.56	-10.87	37.47	0.19	0.03	Average
4	0.367	48.02	58.56	-10.54	47.80	0.19	0.03	QP
5	0.518	42.76	46.00	-3.24	42.57	0.15	0.04	Average
6	0.518	48.16	56.00	-7.84	47.97	0.15	0.04	QP
7	0.747	36.30	46.00	-9.70	36.13	0.12	0.05	Average
8	0.747	47.88	56.00	-8.12	47.71	0.12	0.05	QP
9	0.848	30.52	46.00	-15.48	30.36	0.11	0.05	Average
10	0.848	44.00	56.00	-12.00	43.84	0.11	0.05	QP
11	0.933	36.04	46.00	-9.96	35.88	0.10	0.06	Average
12	0.933	48.38	56.00	-7.62	48.22	0.10	0.06	QP
13	1.191	36.45	46.00	-9.55	36.17	0.22	0.06	Average
14	1.191	48.14	56.00	-7.86	47.86	0.22	0.06	QP
15	1.503	34.81	46.00	-11.19	34.33	0.41	0.07	Average
16	1.503	48.12	56.00	-7.88	47.64	0.41	0.07	QP
17	2.176	44.78	46.00	-1.22	44.11	0.58	0.09	Average
18	2.176	50.36	56.00	-5.64	49.69	0.58	0.09	QP
19	3.156	32.11	46.00	-13.89	31.61	0.39	0.11	Average
20	3.156	45.24	56.00	-10.76	44.74	0.39	0.11	QP
21	16.839	40.69	50.00	-9.31	39.75	0.75	0.19	Average
22	16.839	46.89	60.00	-13.11	45.95	0.75	0.19	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Power Phase</b>	Neutral		

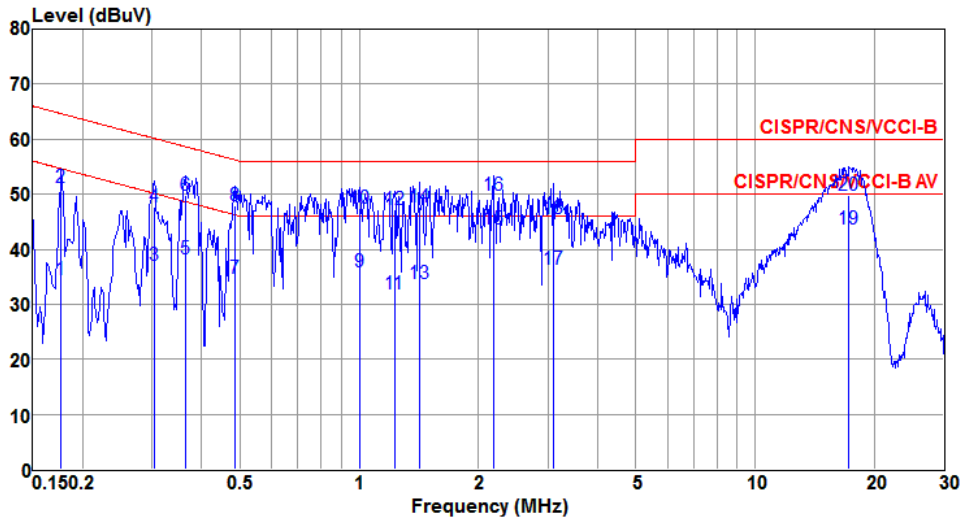

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.177	34.48	54.64	-20.16	33.96	0.50	0.02	Average
2	0.177	51.13	64.64	-13.51	50.61	0.50	0.02	QP
3	0.303	37.10	50.15	-13.05	36.90	0.17	0.03	Average
4	0.303	47.72	60.15	-12.43	47.52	0.17	0.03	QP
5	0.363	38.15	48.65	-10.50	37.97	0.15	0.03	Average
6	0.363	49.74	58.65	-8.91	49.56	0.15	0.03	QP
7	0.486	34.76	46.23	-11.47	34.56	0.16	0.04	Average
8	0.486	47.86	56.23	-8.37	47.66	0.16	0.04	QP
9	1.000	35.80	46.00	-10.20	35.47	0.27	0.06	Average
10	1.000	47.41	56.00	-8.59	47.08	0.27	0.06	QP
11	1.229	31.87	46.00	-14.13	31.54	0.26	0.07	Average
12	1.229	47.09	56.00	-8.91	46.76	0.26	0.07	QP
13	1.418	33.67	46.00	-12.33	33.36	0.24	0.07	Average
14	1.418	47.61	56.00	-8.39	47.30	0.24	0.07	QP
15	2.178	43.74	46.00	-2.26	43.36	0.29	0.09	Average
16	2.178	49.74	56.00	-6.26	49.36	0.29	0.09	QP
17	3.090	36.30	46.00	-9.70	35.64	0.55	0.11	Average
18	3.090	45.64	56.00	-10.36	44.98	0.55	0.11	QP
19	17.291	43.70	50.00	-6.30	42.82	0.69	0.19	Average
20	17.291	49.88	60.00	-10.12	49.00	0.69	0.19	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Emission Bandwidth

### 3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 3.2.2 Test Procedures

#### 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


#### Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW  $\geq$  3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

#### 6dB Bandwidth


1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 3.2.3 Test Setup




### 3.2.4 Test Result of Emission Bandwidth

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N <sub>TX</sub>	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5180	20.93	21.68	---	---	16.81	16.84	---	---
11a	2	5200	20.81	21.74	---	---	16.81	16.85	---	---
11a	2	5240	20.99	21.74	---	---	16.81	16.91	---	---
VHT20	2	5180	21.97	22.09	---	---	17.88	17.89	---	---
VHT20	2	5200	21.97	22.20	---	---	17.90	17.90	---	---
VHT20	2	5240	22.09	22.09	---	---	17.88	17.90	---	---
VHT40	2	5190	44.99	44.64	---	---	36.74	36.78	---	---
VHT40	2	5230	45.10	44.75	---	---	36.72	36.80	---	---
VHT80	2	5210	81.16	81.39	---	---	75.56	75.52	---	---

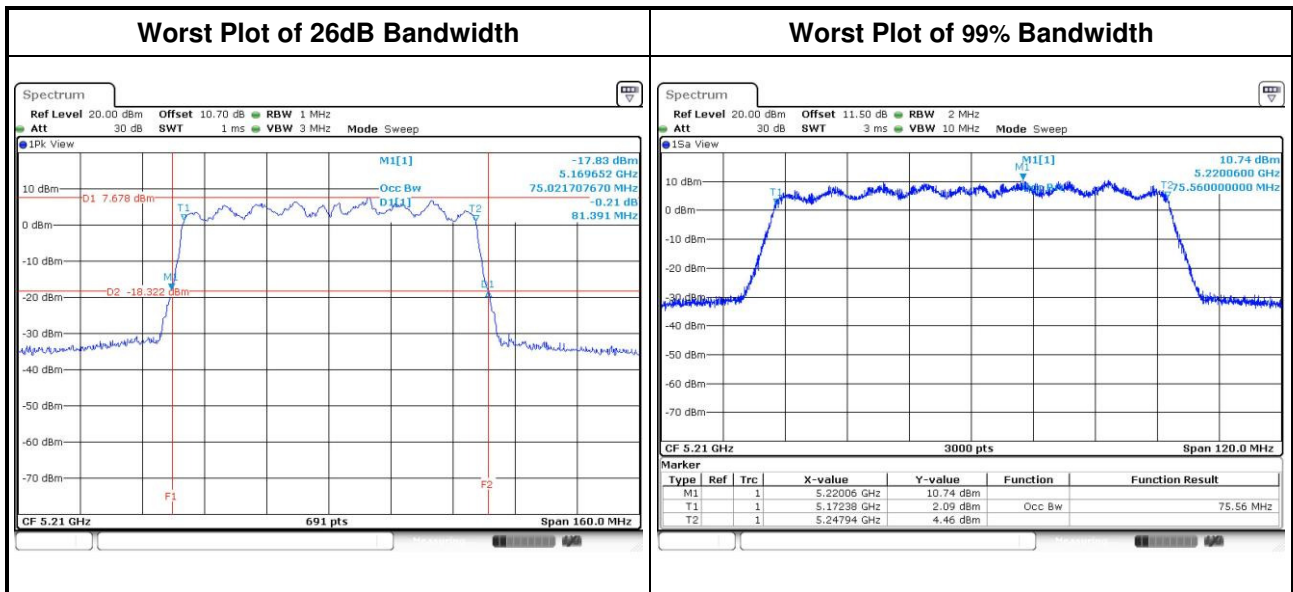

For Frequency band 5725-5850 MHz											
Emission Bandwidth											
Mode	N <sub>TX</sub>	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5745	16.79	16.95	---	---	16.29	16.35	---	---	0.5
11a	2	5785	16.79	16.90	---	---	16.29	16.35	---	---	0.5
11a	2	5825	16.79	16.85	---	---	16.35	16.35	---	---	0.5
VHT20	2	5745	17.86	17.88	---	---	16.93	17.04	---	---	0.5
VHT20	2	5785	17.86	17.87	---	---	17.28	17.04	---	---	0.5
VHT20	2	5825	17.84	17.87	---	---	17.28	17.04	---	---	0.5
VHT40	2	5755	36.80	36.86	---	---	36.06	36.06	---	---	0.5
VHT40	2	5795	36.80	36.76	---	---	36.06	36.06	---	---	0.5
VHT80	2	5775	75.64	75.60	---	---	75.13	75.13	---	---	0.5

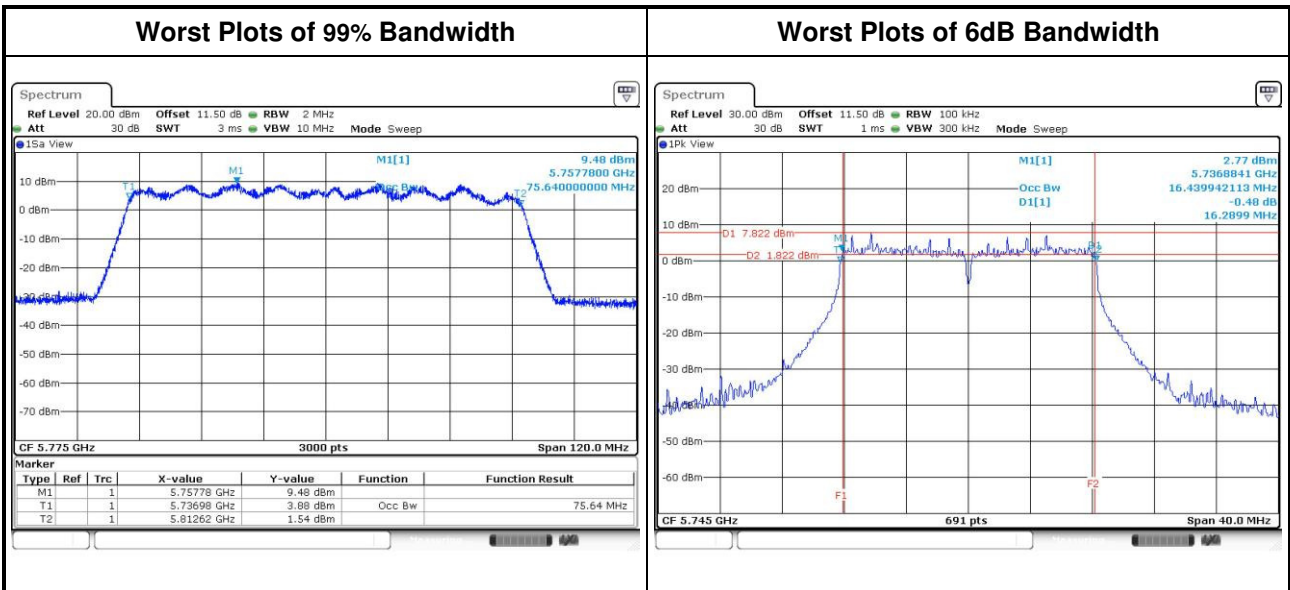

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input checked="" type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/> Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

#### 3.3.2 Test Procedures

- Method PM-G ( Measurement using a gated RF average power meter )**
  - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Conducted Output Power

For Frequency band 5150-5250 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	19.21	19.14	---	---	165.403	22.19	30.00
11a	2	5200	19.88	19.02	---	---	177.074	<b>22.48</b>	30.00
11a	2	5240	19.22	19.31	---	---	168.870	22.28	30.00
HT20	2	5180	17.45	17.32	---	---	109.541	20.40	30.00
HT20	2	5200	17.24	17.29	---	---	106.546	20.28	30.00
HT20	2	5240	17.27	17.01	---	---	103.568	20.15	30.00
HT40	2	5190	17.01	17.38	---	---	104.936	20.21	30.00
HT40	2	5230	17.32	17.61	---	---	111.628	20.48	30.00
VHT20	2	5180	17.51	17.43	---	---	111.699	20.48	30.00
VHT20	2	5200	17.31	17.41	---	---	108.908	20.37	30.00
VHT20	2	5240	17.34	17.03	---	---	104.666	20.20	30.00
VHT40	2	5190	17.05	17.45	---	---	106.289	20.26	30.00
VHT40	2	5230	17.41	17.66	---	---	113.425	20.55	30.00
VHT80	2	5210	15.09	15.29	---	---	66.091	18.20	30.00

For Frequency band 5725-5850 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5745	19.15	19.56	---	---	172.589	<b>22.37</b>	30.00
11a	2	5785	19.16	19.31	---	---	167.724	22.25	30.00
11a	2	5825	18.16	18.06	---	---	129.437	21.12	30.00
HT20	2	5745	17.36	17.33	---	---	108.526	20.36	30.00
HT20	2	5785	17.85	17.49	---	---	117.058	20.68	30.00
HT20	2	5825	16.98	16.92	---	---	99.092	19.96	30.00
HT40	2	5755	17.32	17.02	---	---	104.301	20.18	30.00
HT40	2	5795	17.26	17.02	---	---	103.561	20.15	30.00
VHT20	2	5745	17.45	17.41	---	---	110.671	20.44	30.00
VHT20	2	5785	17.94	17.57	---	---	119.378	20.77	30.00
VHT20	2	5825	17.04	17.06	---	---	101.398	20.06	30.00
VHT40	2	5755	17.39	17.11	---	---	106.232	20.26	30.00
VHT40	2	5795	17.32	17.01	---	---	104.185	20.18	30.00
VHT80	2	5775	15.1	15.2	---	---	65.472	18.16	30.00

### 3.4 Peak Power Spectral Density

#### 3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm / 500 kHz

### 3.4.2 Test Procedures

#### For 5150 ~ 5250 MHz

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log(1/x)$ , where x is the duty cycle.

#### For 5725 ~ 5850 MHz


Method SA-1

1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log(1/x)$ , where x is the duty cycle.

### 3.4.3 Test Setup






### 3.4.4 Test Result of Peak Power Spectral Density

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	2	5180	8.91	0.34	9.25	16.59
11a	2	5200	8.86	0.34	9.20	16.59
11a	2	5240	9.11	0.34	9.45	16.59
VHT20	2	5180	6.56	0.30	6.86	16.59
VHT20	2	5200	6.98	0.30	7.28	16.59
VHT20	2	5240	6.73	0.30	7.03	16.59
VHT40	2	5190	3.27	0.83	4.10	16.59
VHT40	2	5230	3.10	0.83	3.93	16.59
VHT80	2	5210	-1.21	0.80	-0.41	16.59

**Note:**

1. D.F is duty factor.
2. Test results are bin-by-bin summing measured value of each TX port.
3. Directional gain =  $10 * \log((10^{3.3/20} + 10^{3.49/20})^2 / 2) = 6.41 \text{ dBi} > 6 \text{ dBi}$   
Limit shall be reduced to  $17 \text{ dBm} - (6.41 \text{ dBi} - 6 \text{ dBi}) = 16.59 \text{ dBm}$

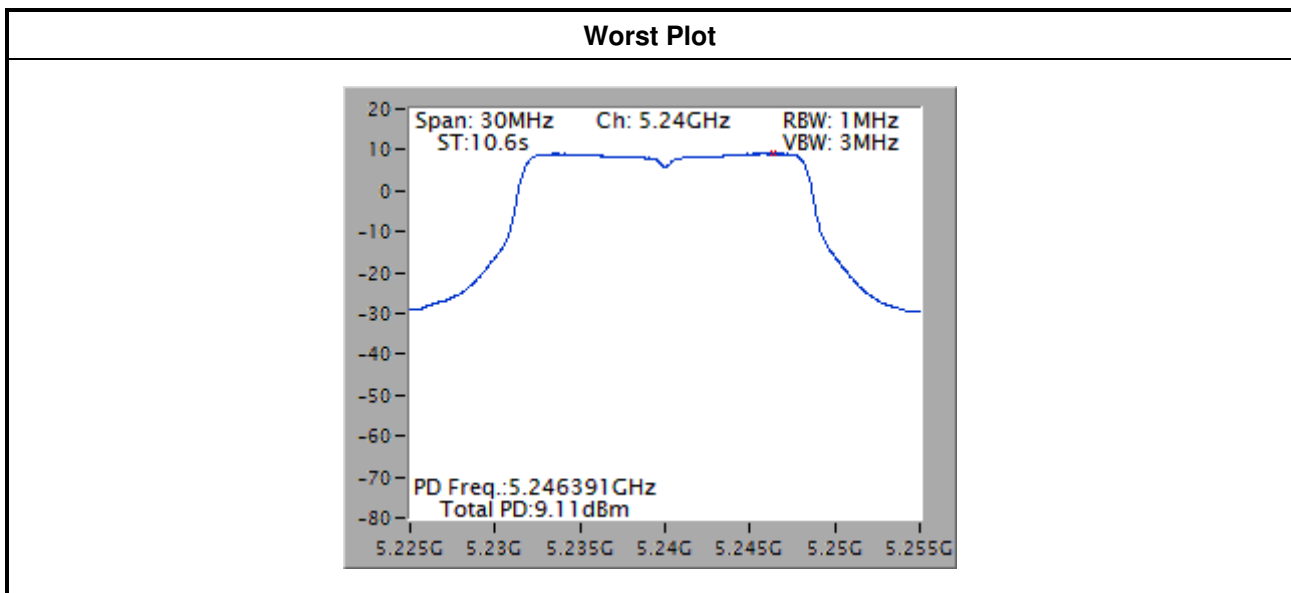


Note: The plot without duty factor

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	2	5745	8.13	0.34	8.47	29.75
11a	2	5785	7.80	0.34	8.14	29.75
11a	2	5825	5.15	0.34	5.49	29.75
VHT20	2	5745	5.24	0.30	5.54	29.75
VHT20	2	5785	4.91	0.30	5.21	29.75
VHT20	2	5825	5.90	0.30	6.20	29.75
VHT40	2	5755	1.74	0.83	2.57	29.75
VHT40	2	5795	1.86	0.83	2.69	29.75
VHT80	2	5775	-1.97	0.80	-1.17	29.75

**Note:**

1. D.F is duty factor.
2. Test results are bin-by-bin summing measured value of each TX port.
3. Directional gain =  $10 * \log((10^{3.3/20} + 10^{3.17/20})^2 / 2) = 6.25 \text{ dBi} > 6 \text{ dBi}$   
Limit shall be reduced to  $30 \text{ dBm} - (6.25 \text{ dBi} - 6 \text{ dBi}) = 29.75 \text{ dBm}$

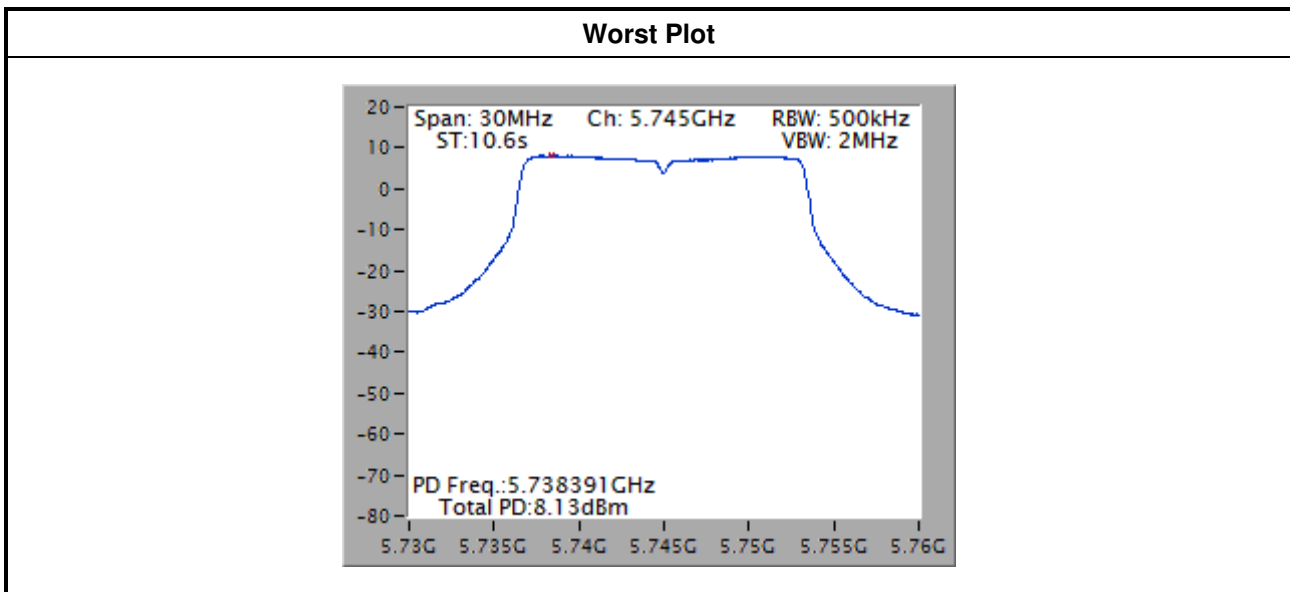

Note: The plot without duty factor

### 3.5 Transmitter Radiated and Band Edge Emissions

#### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1 m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

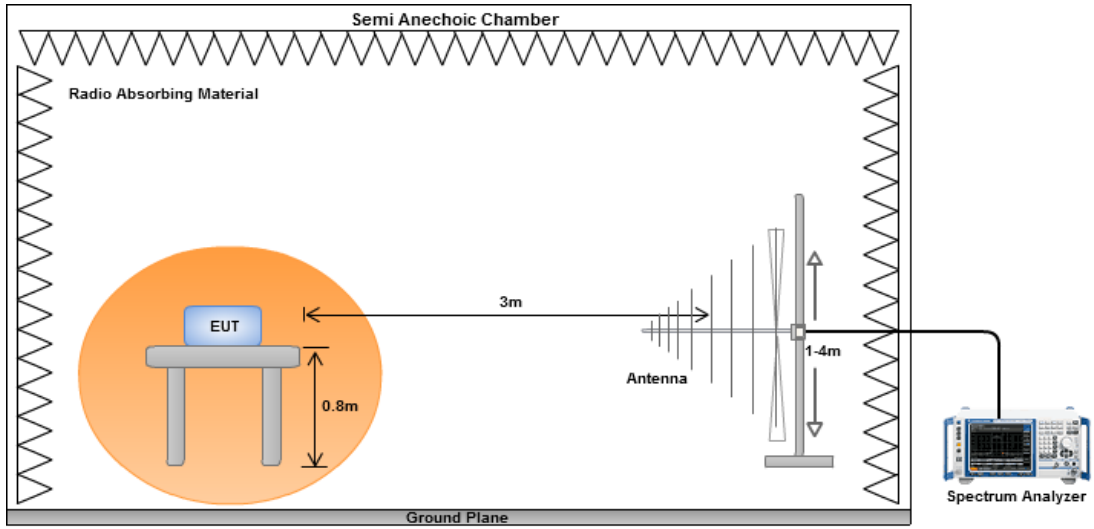

#### Radiated Emissions above 1 GHz

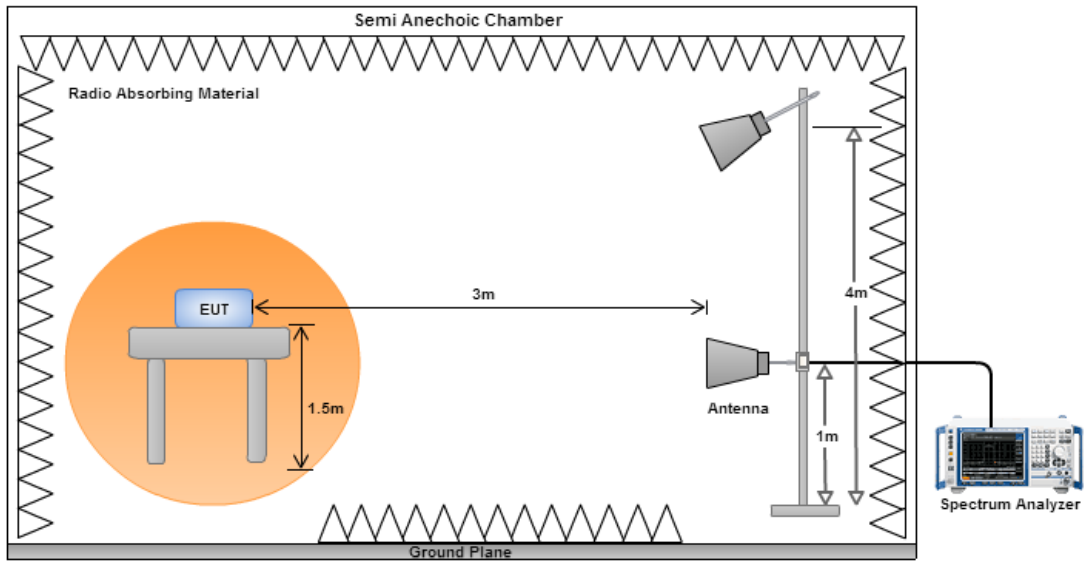


### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

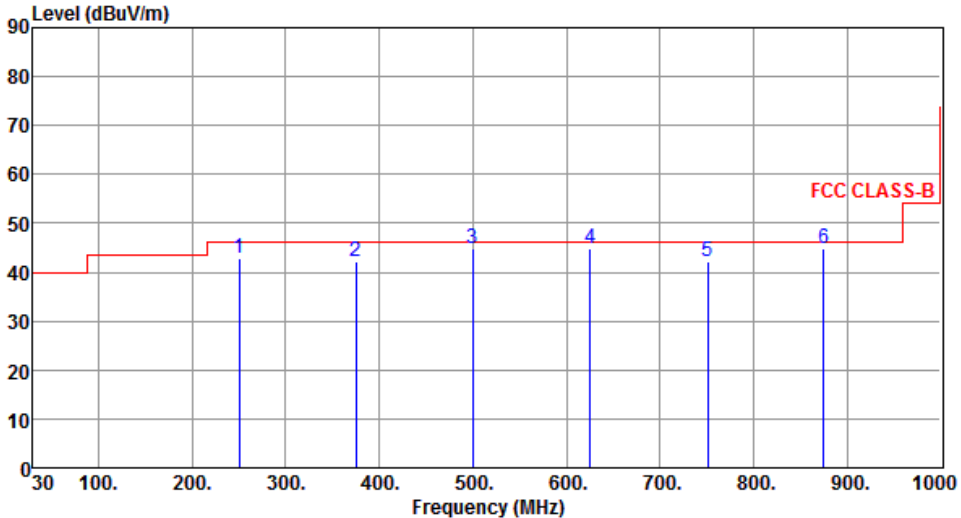Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	250.22	42.77	46.00	-3.23	55.54	-12.77	QP	120	255
2	375.35	42.20	46.00	-3.80	51.53	-9.33	Peak	---	---
3	500.16	44.92	46.00	-1.08	51.43	-6.51	QP	190	207
4	625.02	44.96	46.00	-1.04	49.24	-4.28	QP	130	225
5	750.65	42.20	46.00	-3.80	44.56	-2.36	Peak	---	---
6	875.28	44.83	46.00	-1.17	45.75	-0.92	QP	152	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

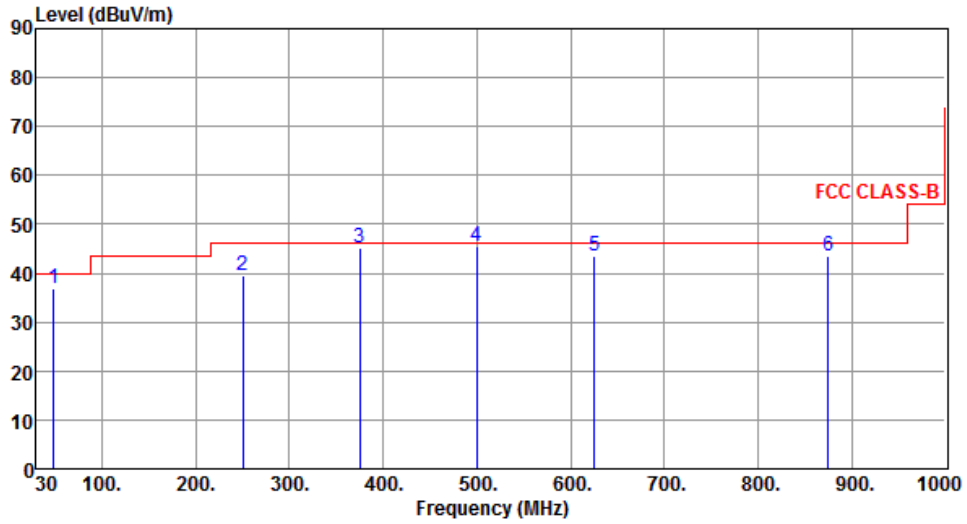

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	48.56	36.90	40.00	-3.10	48.56	-11.66	Peak	---	---
2	250.23	39.68	46.00	-6.32	52.45	-12.77	Peak	---	---
3	375.16	45.14	46.00	-0.86	54.48	-9.34	QP	125	196
4	500.04	45.48	46.00	-0.52	51.99	-6.51	QP	100	225
5	625.10	43.47	46.00	-2.53	47.75	-4.28	QP	100	224
6	875.16	43.61	46.00	-2.39	44.53	-0.92	QP	100	195


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

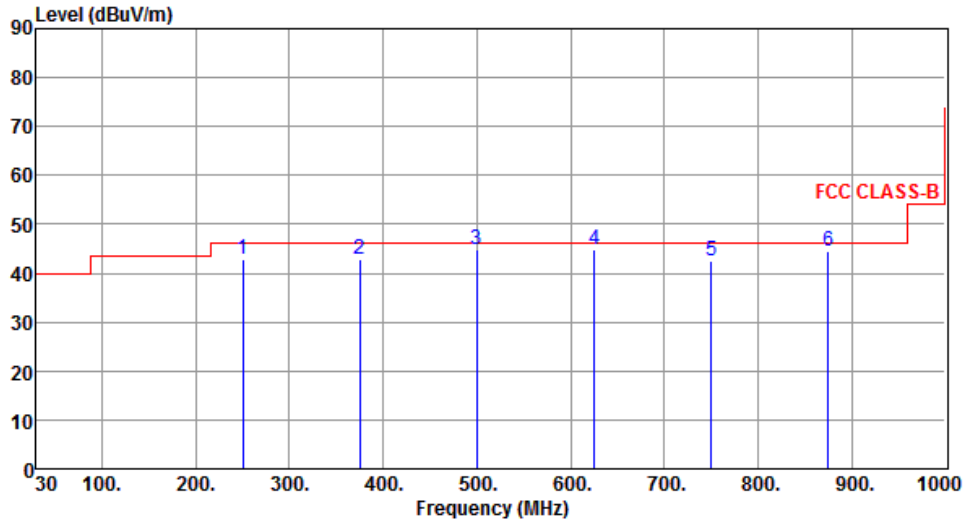

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	250.18	42.89	46.00	-3.11	55.66	-12.77	QP	122	251
2	375.24	42.92	46.00	-3.08	52.25	-9.33	Peak	---	---
3	500.21	44.95	46.00	-1.05	51.46	-6.51	QP	195	205
4	625.11	44.97	46.00	-1.03	49.25	-4.28	QP	128	227
5	750.56	42.60	46.00	-3.40	44.97	-2.37	Peak	---	---
6	875.16	44.49	46.00	-1.51	45.41	-0.92	QP	152	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

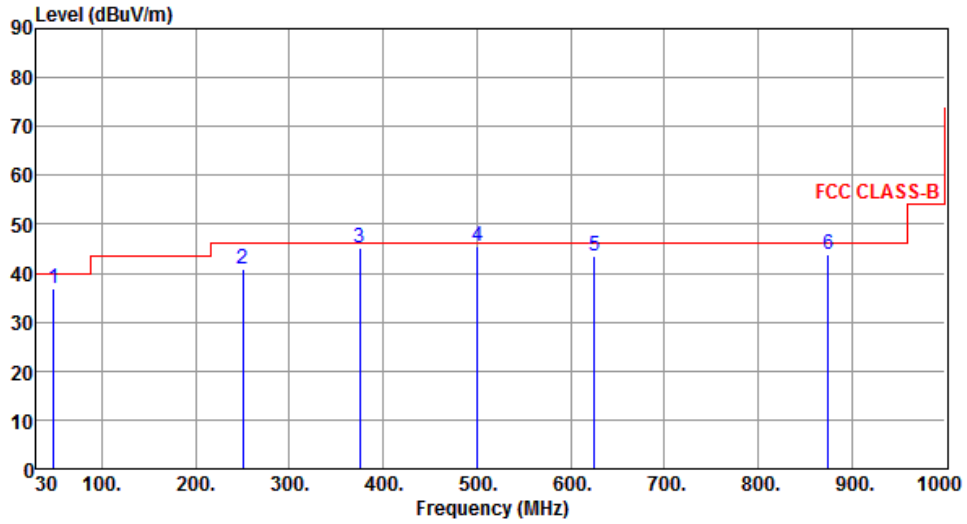

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	48.56	36.88	40.00	-3.12	48.54	-11.66	Peak	---	---
2	250.38	40.89	46.00	-5.11	53.65	-12.76	Peak	---	---
3	375.24	45.15	46.00	-0.85	54.48	-9.33	QP	122	195
4	500.31	45.44	46.00	-0.56	51.95	-6.51	QP	100	228
5	625.16	43.37	46.00	-2.63	47.65	-4.28	QP	100	223
6	875.31	43.76	46.00	-2.24	44.68	-0.92	QP	100	192

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180																																																																									
Polarization	Horizontal																																																																											
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.00</td> <td>44.57</td> <td>54.00</td> <td>-9.43</td> <td>39.73</td> <td>4.84</td> <td>Average</td> <td>240</td> <td>52</td> </tr> <tr> <td>2</td> <td>5100.00</td> <td>57.38</td> <td>74.00</td> <td>-16.62</td> <td>52.54</td> <td>4.84</td> <td>Peak</td> <td>240</td> <td>52</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>44.53</td> <td>54.00</td> <td>-9.47</td> <td>39.63</td> <td>4.90</td> <td>Average</td> <td>240</td> <td>52</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>57.75</td> <td>74.00</td> <td>-16.25</td> <td>52.85</td> <td>4.90</td> <td>Peak</td> <td>240</td> <td>52</td> </tr> <tr> <td>5</td> <td>10360.00</td> <td>67.10</td> <td>68.20</td> <td>-1.10</td> <td>53.43</td> <td>13.67</td> <td>Peak</td> <td>193</td> <td>45</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5100.00	44.57	54.00	-9.43	39.73	4.84	Average	240	52	2	5100.00	57.38	74.00	-16.62	52.54	4.84	Peak	240	52	3	5150.00	44.53	54.00	-9.47	39.63	4.90	Average	240	52	4	5150.00	57.75	74.00	-16.25	52.85	4.90	Peak	240	52	5	10360.00	67.10	68.20	-1.10	53.43	13.67	Peak	193	45							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																				
1	5100.00	44.57	54.00	-9.43	39.73	4.84	Average	240	52																																																																			
2	5100.00	57.38	74.00	-16.62	52.54	4.84	Peak	240	52																																																																			
3	5150.00	44.53	54.00	-9.47	39.63	4.90	Average	240	52																																																																			
4	5150.00	57.75	74.00	-16.25	52.85	4.90	Peak	240	52																																																																			
5	10360.00	67.10	68.20	-1.10	53.43	13.67	Peak	193	45																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																												

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

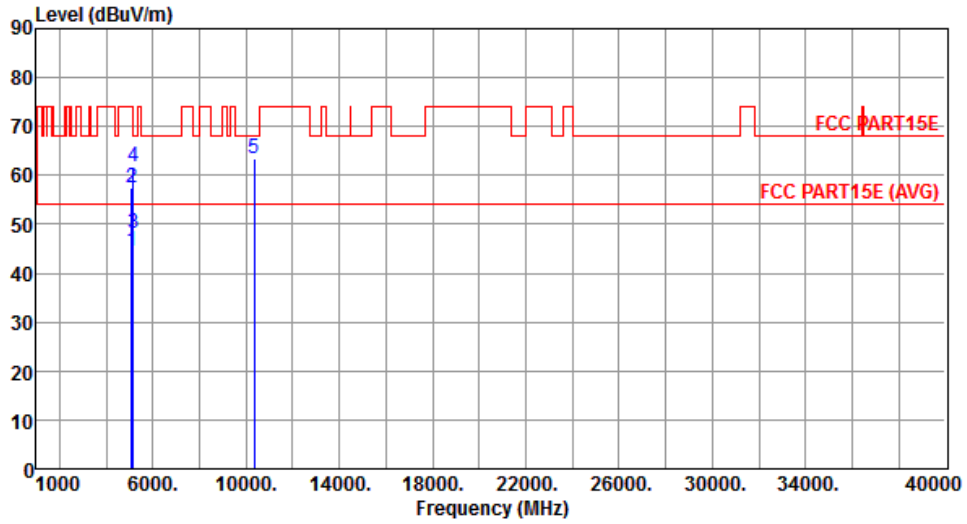


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	44.37	54.00	-9.63	39.53	4.84	Average	246	207
2	5100.00	57.38	74.00	-16.62	52.54	4.84	Peak	246	207
3	5150.00	48.09	54.00	-5.91	43.19	4.90	Average	246	207
4	5150.00	61.93	74.00	-12.07	57.03	4.90	Peak	246	207
5	10360.00	63.54	68.20	-4.66	49.87	13.67	Peak	179	229

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

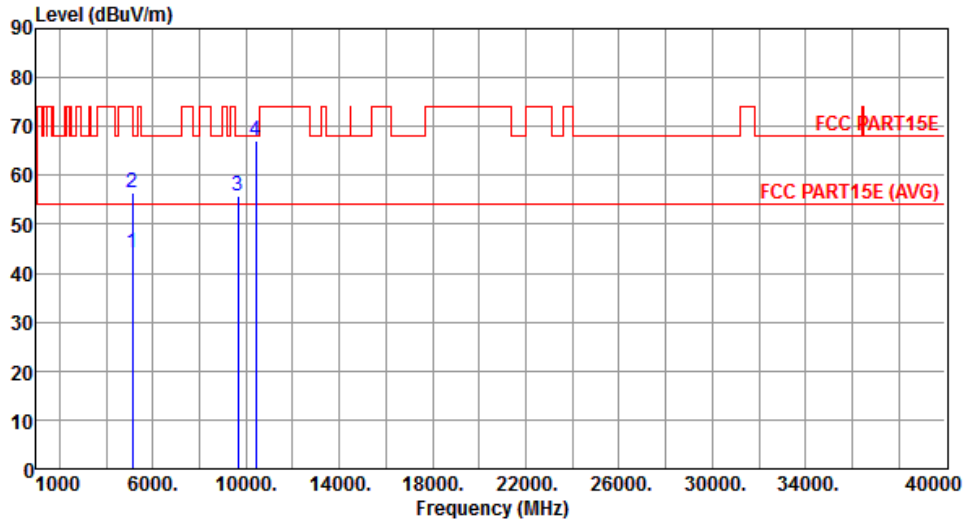


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5120.00	44.19	54.00	-9.81	39.33	4.86	Average	241	52
2	5120.00	56.32	74.00	-17.68	51.46	4.86	Peak	241	52
3	9648.00	55.76	68.20	-12.44	43.00	12.76	Peak	216	3
4	10400.00	67.06	68.20	-1.14	53.31	13.75	Peak	197	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

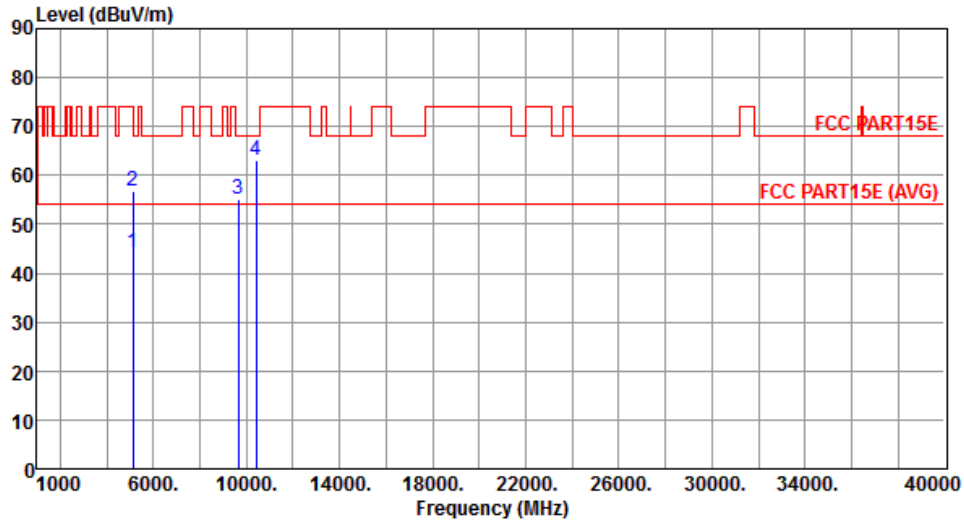


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5120.00	44.13	54.00	-9.87	39.27	4.86	Average	209	342
2	5120.00	56.73	74.00	-17.27	51.87	4.86	Peak	209	342
3	9648.00	55.06	68.20	-13.14	42.30	12.76	Peak	195	1
4	10400.00	63.05	68.20	-5.15	49.30	13.75	Peak	209	342

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

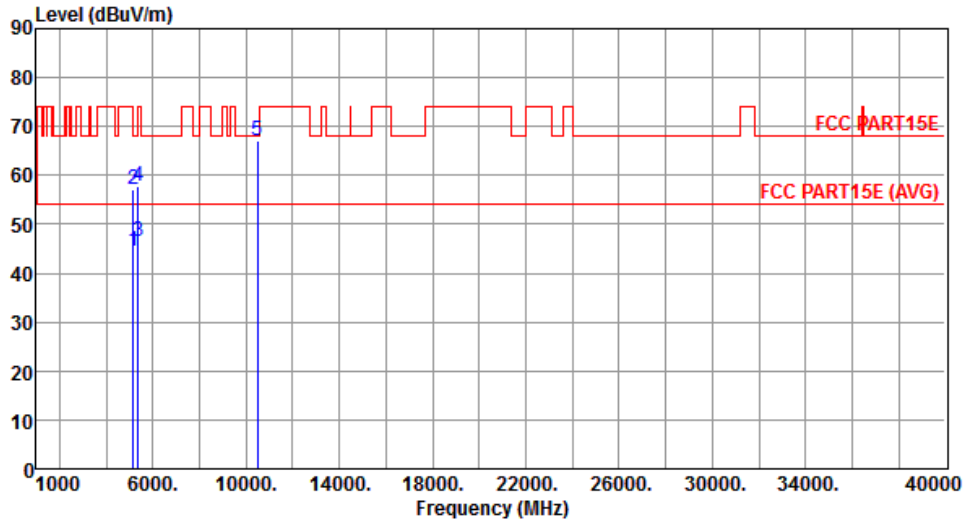


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.43	54.00	-9.57	39.53	4.90	Average	240	53
2	5150.00	57.12	74.00	-16.88	52.22	4.90	Peak	240	53
3	5350.00	46.46	54.00	-7.54	41.33	5.13	Average	240	53
4	5350.00	57.69	74.00	-16.31	52.56	5.13	Peak	240	53
5	10480.00	67.11	68.20	-1.09	53.21	13.90	Peak	193	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

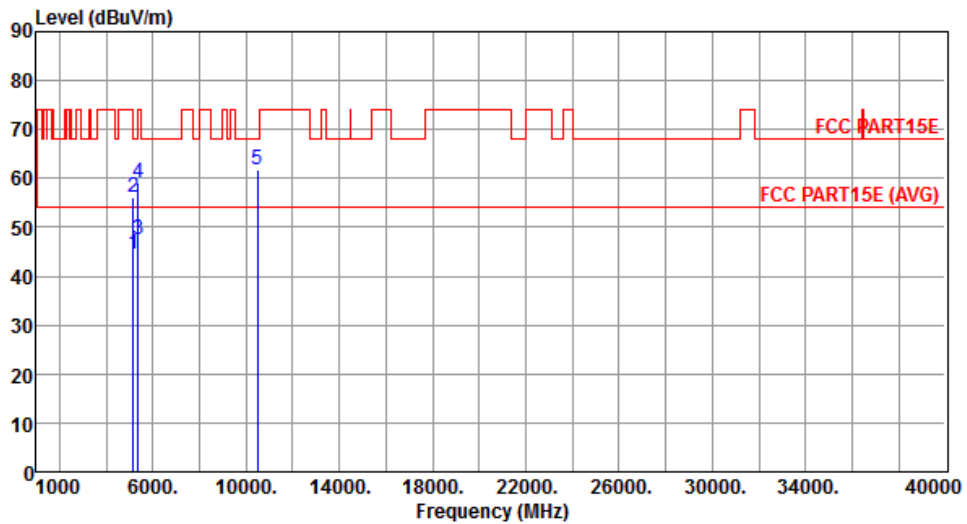


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.43	54.00	-9.57	39.53	4.90	Average	246	208
2	5150.00	56.12	74.00	-17.88	51.22	4.90	Peak	246	208
3	5350.00	47.39	54.00	-6.61	42.26	5.13	Average	246	208
4	5350.00	59.14	74.00	-14.86	54.01	5.13	Peak	246	208
5	10480.00	61.71	68.20	-6.49	47.81	13.90	Peak	173	231

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

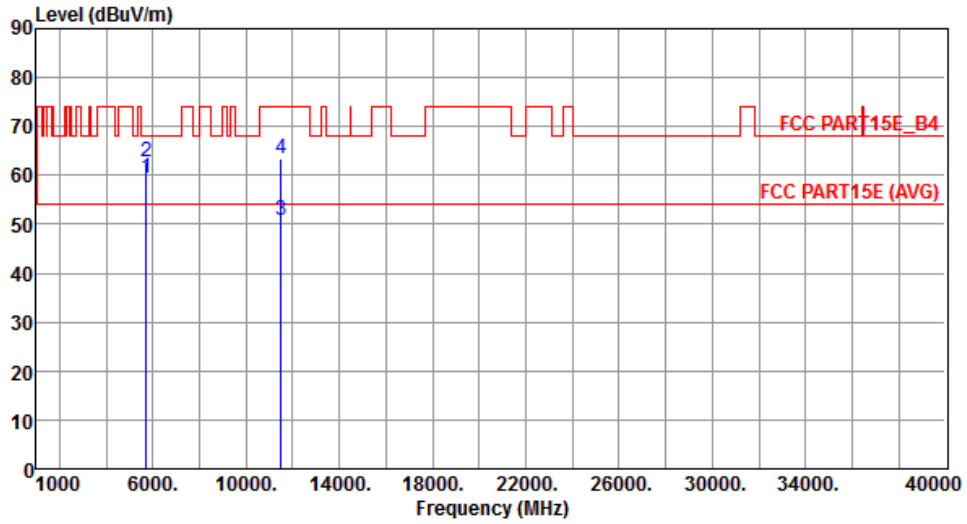

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	59.54	68.20	-8.66	53.84	5.70	Peak	336	295
2	5725.00	62.73	78.20	-15.47	57.02	5.71	Peak	336	295
3	11490.00	50.69	54.00	-3.31	36.07	14.62	Average	195	314
4	11490.00	63.33	74.00	-10.67	48.71	14.62	Peak	195	314


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

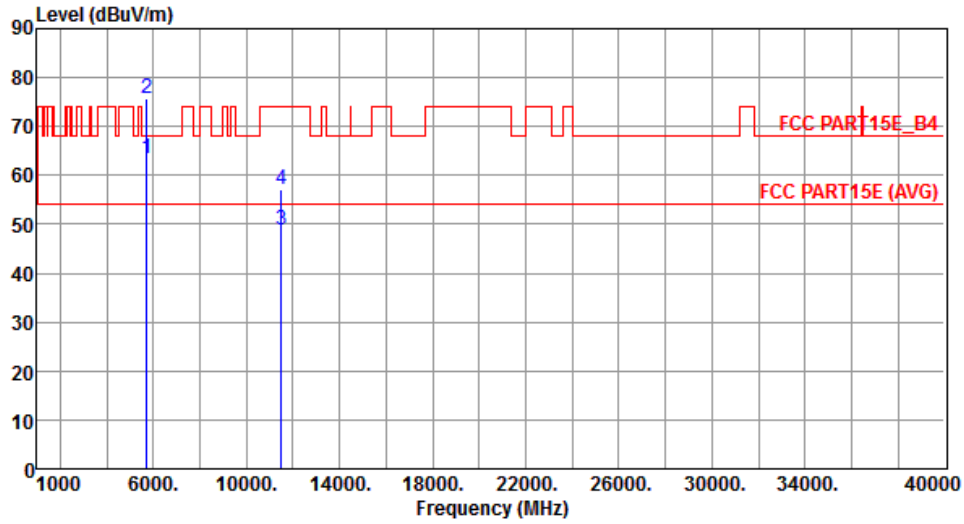


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	63.54	68.20	-4.66	57.84	5.70	Peak	228	158
2	5725.00	75.84	78.20	-2.36	70.13	5.71	Peak	228	158
3	11490.00	48.67	54.00	-5.33	34.05	14.62	Average	178	6
4	11490.00	57.04	74.00	-16.96	42.42	14.62	Peak	178	6

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

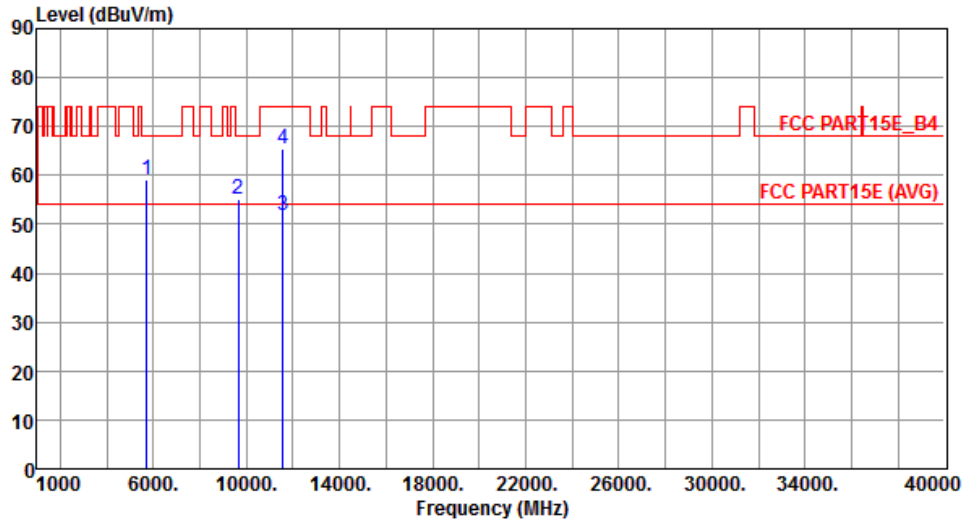


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5700.00	59.10	68.20	-9.10	53.44	5.66	Peak	204	344
2	9648.00	55.03	68.20	-13.17	42.27	12.76	Peak	205	5
3	11570.00	51.74	54.00	-2.26	37.22	14.52	Average	200	277
4	11570.00	65.50	74.00	-8.50	50.98	14.52	Peak	200	277

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

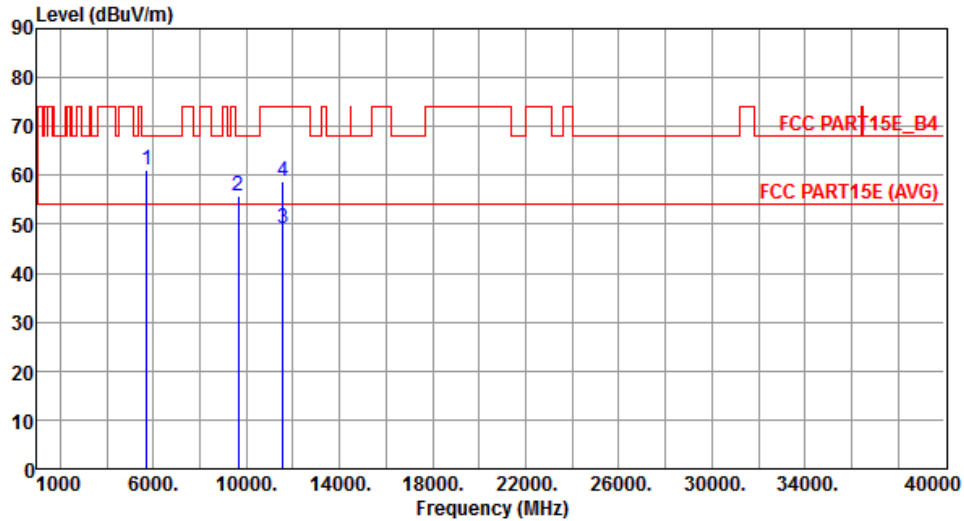


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5700.00	61.20	68.20	-7.00	55.54	5.66	Peak	193	190
2	9648.00	55.85	68.20	-12.35	43.09	12.76	Peak	191	12
3	11570.00	49.31	54.00	-4.69	34.79	14.52	Average	182	1
4	11570.00	58.85	74.00	-15.15	44.33	14.52	Peak	182	1

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

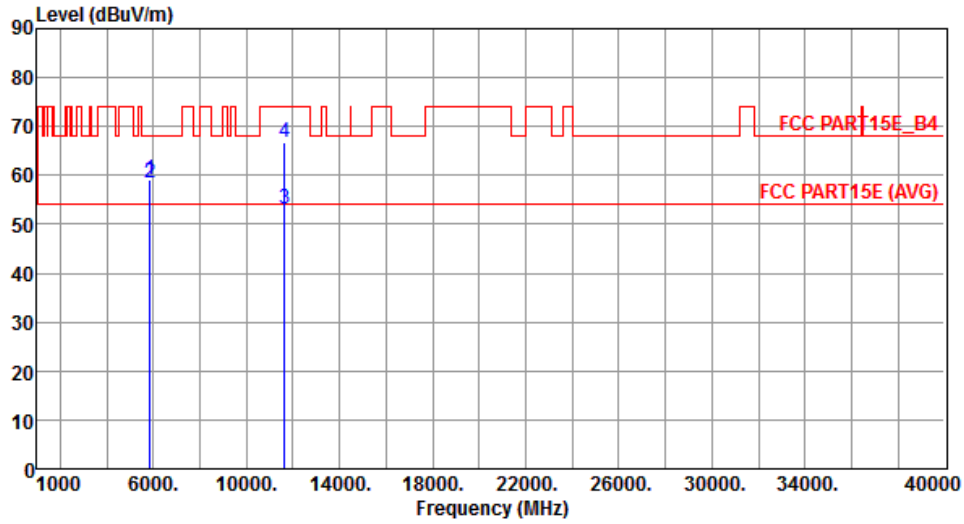


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.08	78.20	-19.12	53.11	5.97	Peak	333	308
2	5860.00	58.43	68.20	-9.77	52.45	5.98	Peak	333	308
3	11650.00	52.99	54.00	-1.01	38.59	14.40	Average	179	316
4	11650.00	66.64	74.00	-7.36	52.24	14.40	Peak	179	316

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

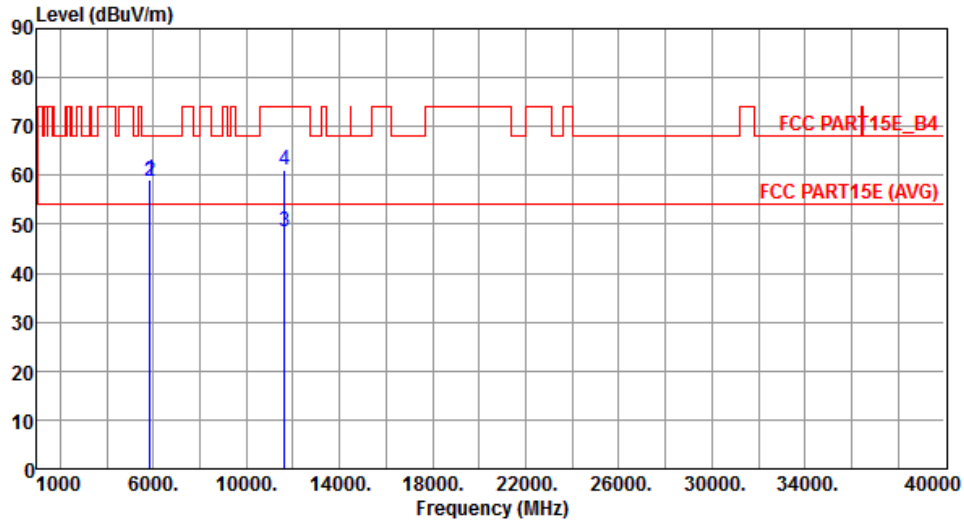


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.12	78.20	-19.08	53.15	5.97	Peak	220	166
2	5860.00	58.84	68.20	-9.36	52.86	5.98	Peak	220	166
3	11650.00	48.63	54.00	-5.37	34.23	14.40	Average	171	2
4	11650.00	61.15	74.00	-12.85	46.75	14.40	Peak	171	2

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

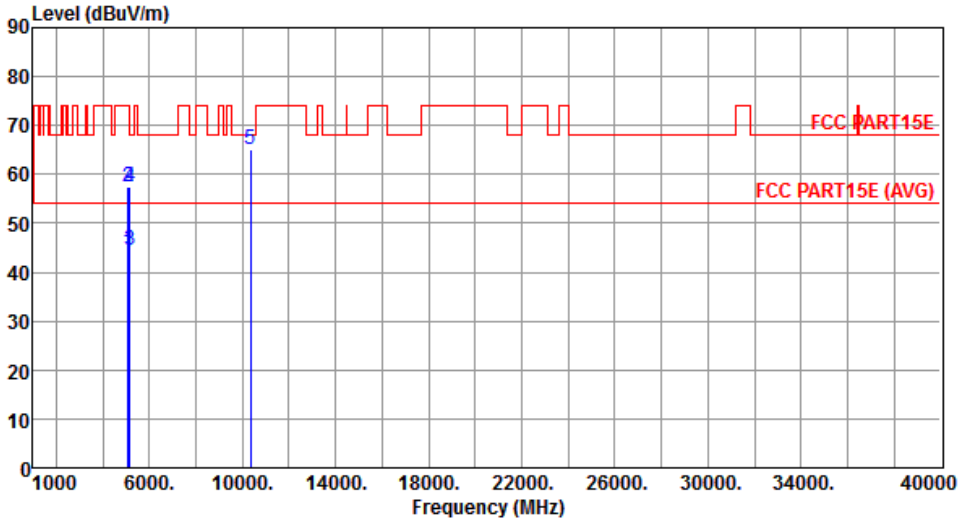Modulation	VHT20	Test Freq. (MHz)	5180																																																																		
Polarization	Horizontal																																																																				
																																																																					
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.00</td> <td>44.18</td> <td>54.00</td> <td>-9.82</td> <td>39.34</td> <td>4.84</td> <td>Average</td> <td>240</td> <td>50</td> </tr> <tr> <td>2</td> <td>5100.00</td> <td>57.33</td> <td>74.00</td> <td>-16.67</td> <td>52.49</td> <td>4.84</td> <td>Peak</td> <td>240</td> <td>50</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>44.41</td> <td>54.00</td> <td>-9.59</td> <td>39.51</td> <td>4.90</td> <td>Average</td> <td>240</td> <td>50</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>57.55</td> <td>74.00</td> <td>-16.45</td> <td>52.65</td> <td>4.90</td> <td>Peak</td> <td>240</td> <td>50</td> </tr> <tr> <td>5</td> <td>10360.00</td> <td>65.21</td> <td>68.20</td> <td>-2.99</td> <td>51.54</td> <td>13.67</td> <td>Peak</td> <td>190</td> <td>44</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5100.00	44.18	54.00	-9.82	39.34	4.84	Average	240	50	2	5100.00	57.33	74.00	-16.67	52.49	4.84	Peak	240	50	3	5150.00	44.41	54.00	-9.59	39.51	4.90	Average	240	50	4	5150.00	57.55	74.00	-16.45	52.65	4.90	Peak	240	50	5	10360.00	65.21	68.20	-2.99	51.54	13.67	Peak	190	44
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																													
1	5100.00	44.18	54.00	-9.82	39.34	4.84	Average	240	50																																																												
2	5100.00	57.33	74.00	-16.67	52.49	4.84	Peak	240	50																																																												
3	5150.00	44.41	54.00	-9.59	39.51	4.90	Average	240	50																																																												
4	5150.00	57.55	74.00	-16.45	52.65	4.90	Peak	240	50																																																												
5	10360.00	65.21	68.20	-2.99	51.54	13.67	Peak	190	44																																																												
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																					

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

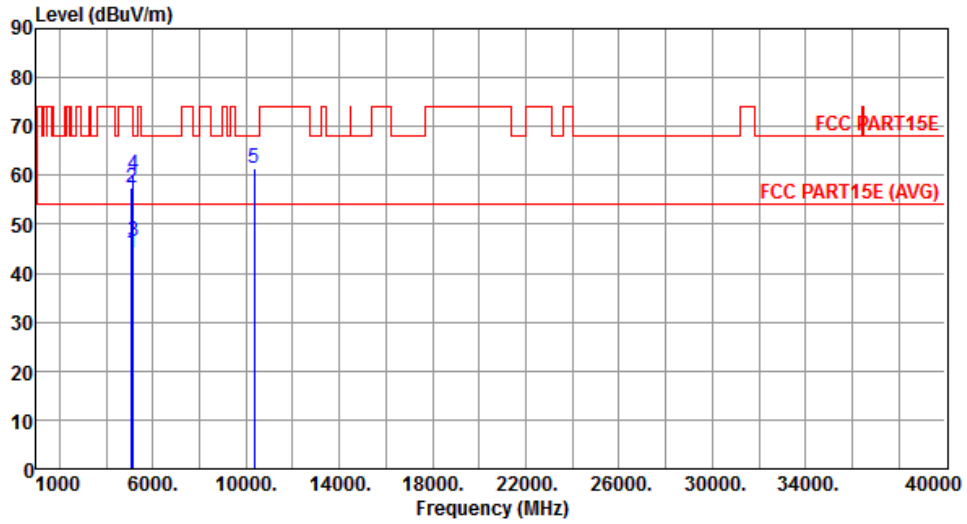


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	44.30	54.00	-9.70	39.46	4.84	Average	236	175
2	5100.00	57.38	74.00	-16.62	52.54	4.84	Peak	236	175
3	5150.00	46.55	54.00	-7.45	41.65	4.90	Average	236	175
4	5150.00	60.11	74.00	-13.89	55.21	4.90	Peak	236	175
5	10360.00	61.32	68.20	-6.88	47.65	13.67	Peak	180	222

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

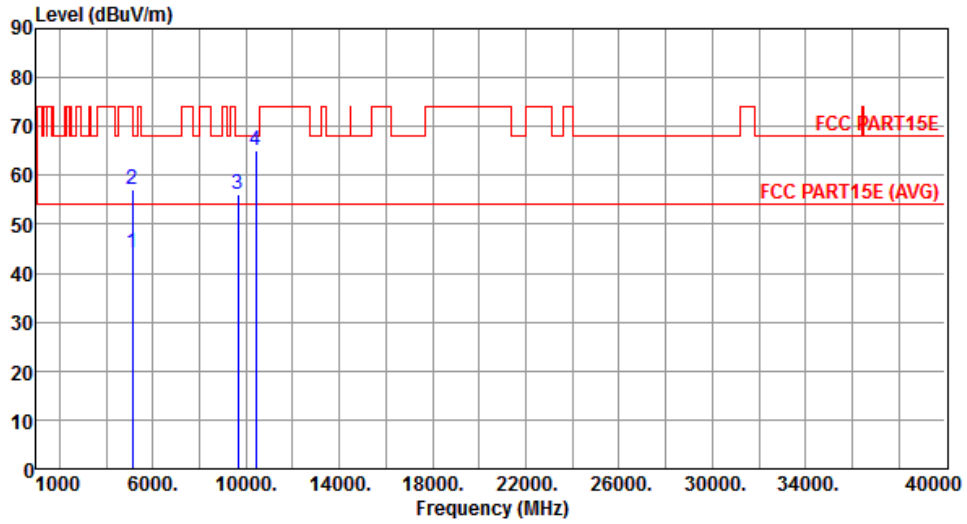

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5120.00	44.20	54.00	-9.80	39.34	4.86	Average	240	50
2	5120.00	57.02	74.00	-16.98	52.16	4.86	Peak	240	50
3	9648.00	56.14	68.20	-12.06	43.38	12.76	Peak	222	5
4	10400.00	65.09	68.20	-3.11	51.34	13.75	Peak	200	20


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

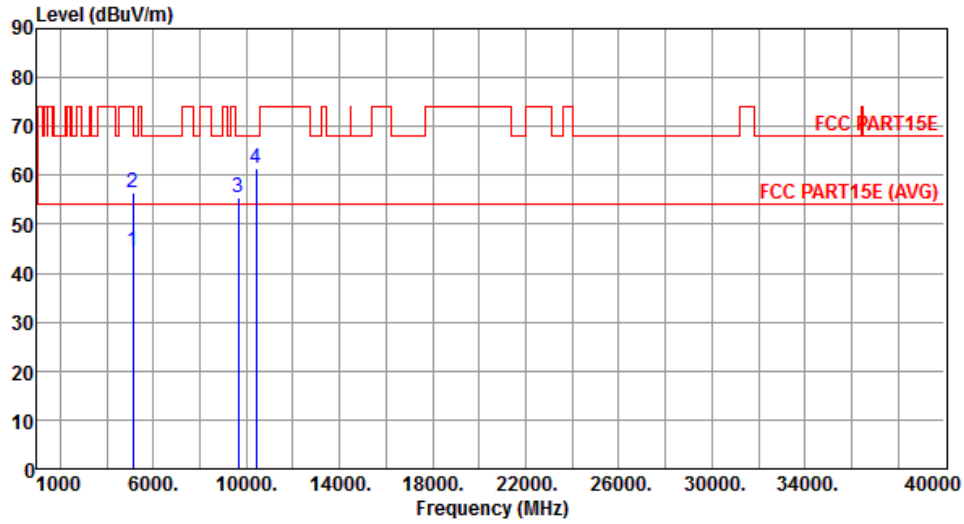


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5120.00	44.52	54.00	-9.48	39.66	4.86	Average	210	340
2	5120.00	56.31	74.00	-17.69	51.45	4.86	Peak	210	340
3	9648.00	55.30	68.20	-12.90	42.54	12.76	Peak	190	0
4	10400.00	61.30	68.20	-6.90	47.55	13.75	Peak	210	340

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

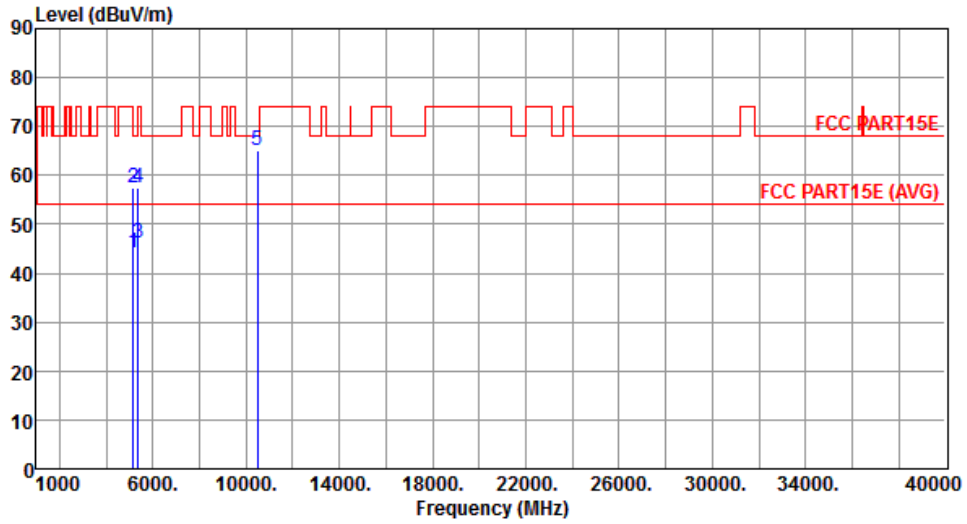


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.12	54.00	-9.88	39.22	4.90	Average	240	50
2	5150.00	57.31	74.00	-16.69	52.41	4.90	Peak	240	50
3	5350.00	46.13	54.00	-7.87	41.00	5.13	Average	240	50
4	5350.00	57.54	74.00	-16.46	52.41	5.13	Peak	240	50
5	10480.00	64.94	68.20	-3.26	51.04	13.90	Peak	190	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

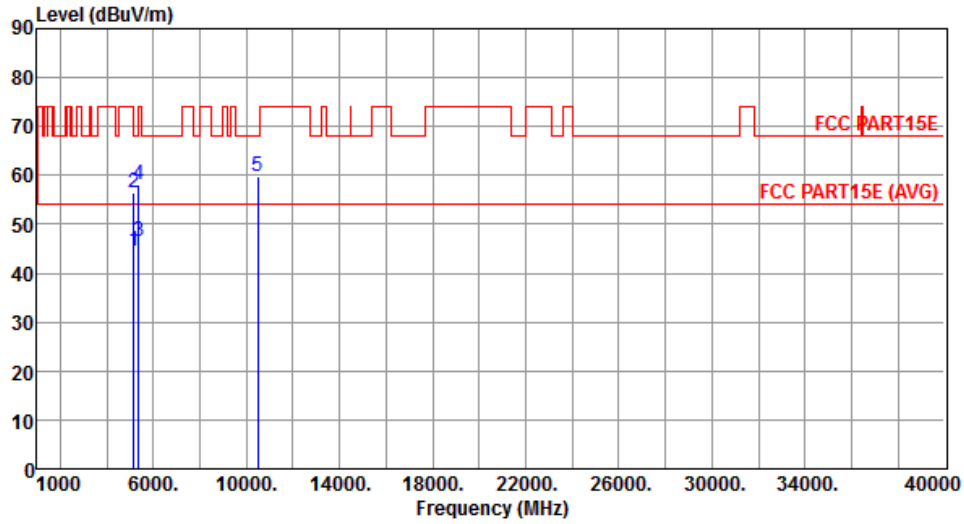


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.38	54.00	-9.62	39.48	4.90	Average	241	210
2	5150.00	56.35	74.00	-17.65	51.45	4.90	Peak	241	210
3	5350.00	46.45	54.00	-7.55	41.32	5.13	Average	241	210
4	5350.00	57.99	74.00	-16.01	52.86	5.13	Peak	241	210
5	10480.00	59.85	68.20	-8.35	45.95	13.90	Peak	170	230

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

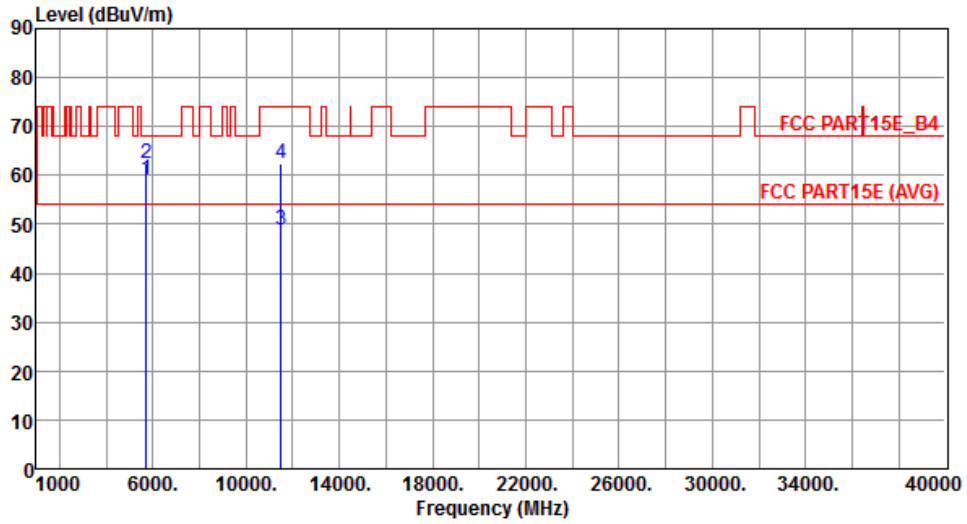


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	59.23	68.20	-8.97	53.53	5.70	Peak	330	295
2	5725.00	62.37	78.20	-15.83	56.66	5.71	Peak	330	295
3	11490.00	48.79	54.00	-5.21	34.17	14.62	Average	190	312
4	11490.00	62.38	74.00	-11.62	47.76	14.62	Peak	190	312

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

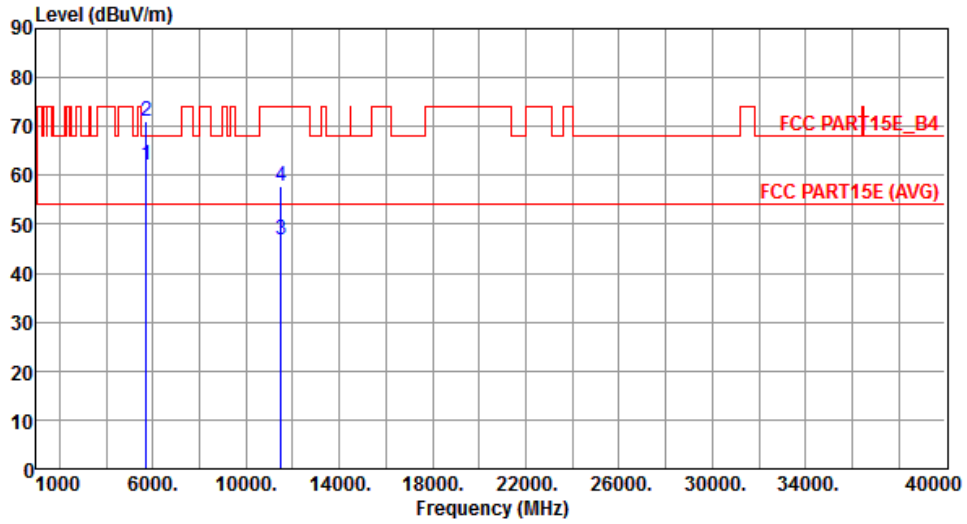


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	62.23	68.20	-5.97	56.53	5.70	Peak	230	160
2	5725.00	70.95	78.20	-7.25	65.24	5.71	Peak	230	160
3	11490.00	46.79	54.00	-7.21	32.17	14.62	Average	175	5
4	11490.00	57.94	74.00	-16.06	43.32	14.62	Peak	175	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

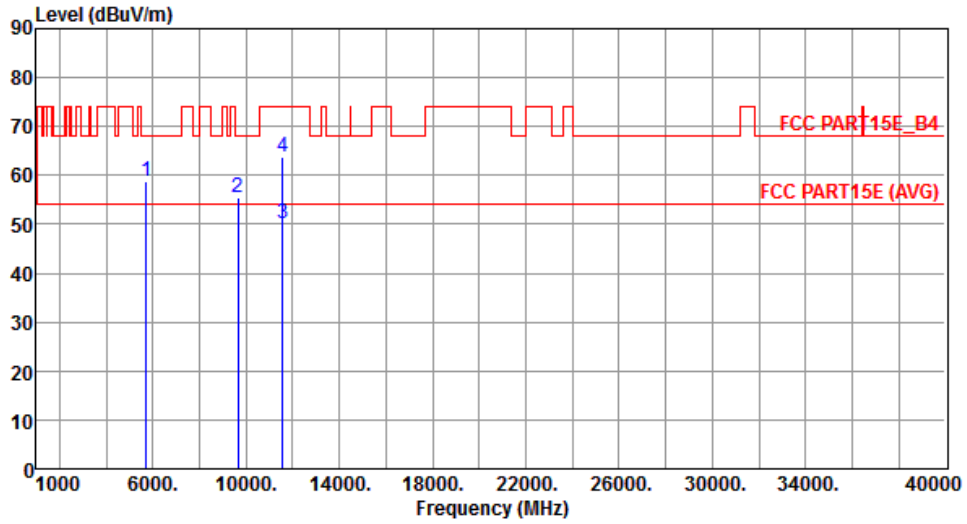


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5700.00	58.88	68.20	-9.32	53.22	5.66	Peak	200	340
2	9648.00	55.30	68.20	-12.90	42.54	12.76	Peak	200	5
3	11570.00	50.17	54.00	-3.83	35.65	14.52	Average	198	175
4	11570.00	63.90	74.00	-10.10	49.38	14.52	Peak	198	175

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

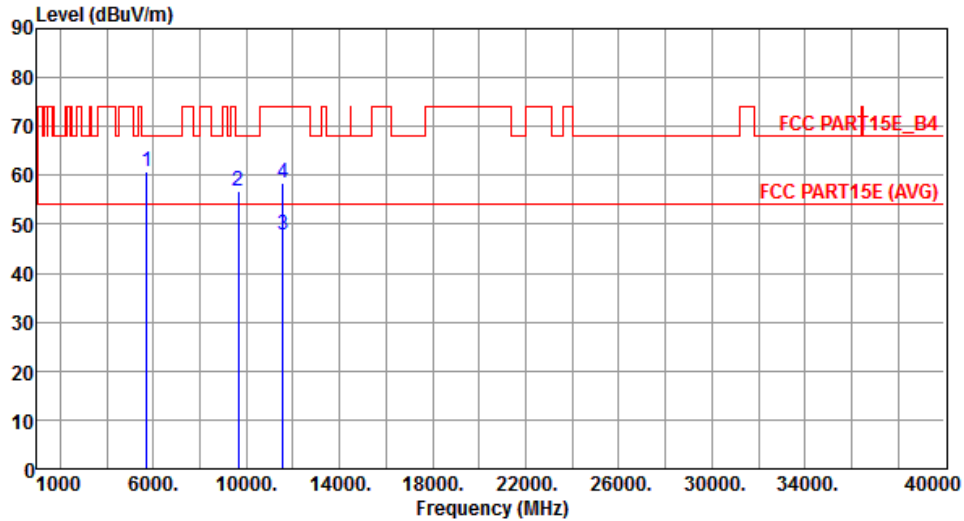


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5700.00	60.89	68.20	-7.31	55.23	5.66	Peak	190	185
2	9648.00	56.88	68.20	-11.32	44.12	12.76	Peak	190	5
3	11570.00	47.83	54.00	-6.17	33.31	14.52	Average	185	5
4	11570.00	58.38	74.00	-15.62	43.86	14.52	Peak	185	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

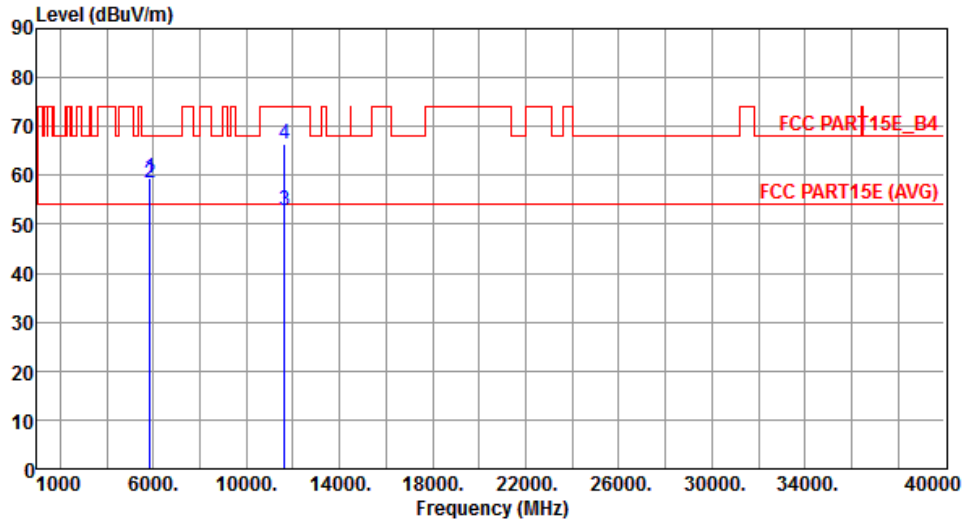

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.39	78.20	-18.81	53.42	5.97	Peak	300	310
2	5860.00	58.33	68.20	-9.87	52.35	5.98	Peak	300	310
3	11650.00	52.81	54.00	-1.19	38.41	14.40	Average	180	315
4	11650.00	66.57	74.00	-7.43	52.17	14.40	Peak	180	315


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

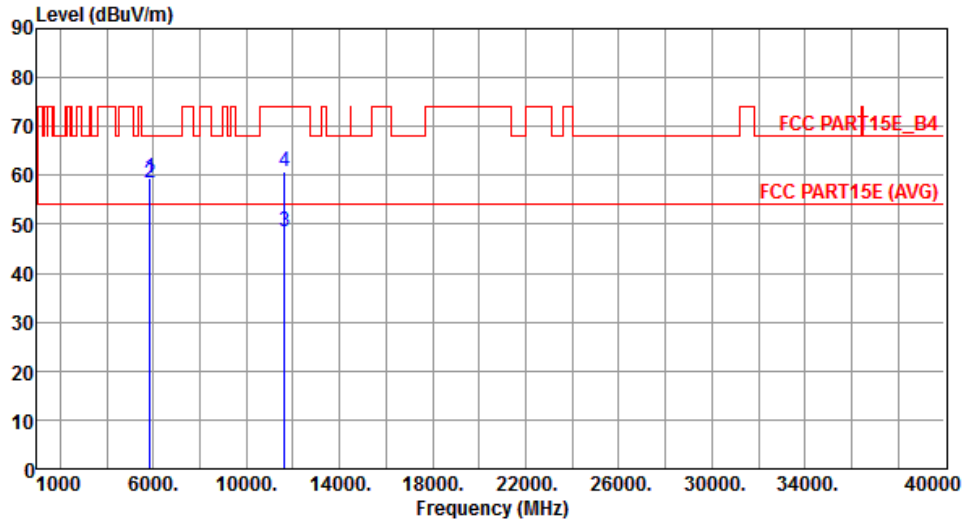


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.41	78.20	-18.79	53.44	5.97	Peak	220	160
2	5860.00	58.51	68.20	-9.69	52.53	5.98	Peak	220	160
3	11650.00	48.56	54.00	-5.44	34.16	14.40	Average	170	5
4	11650.00	60.94	74.00	-13.06	46.54	14.40	Peak	170	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

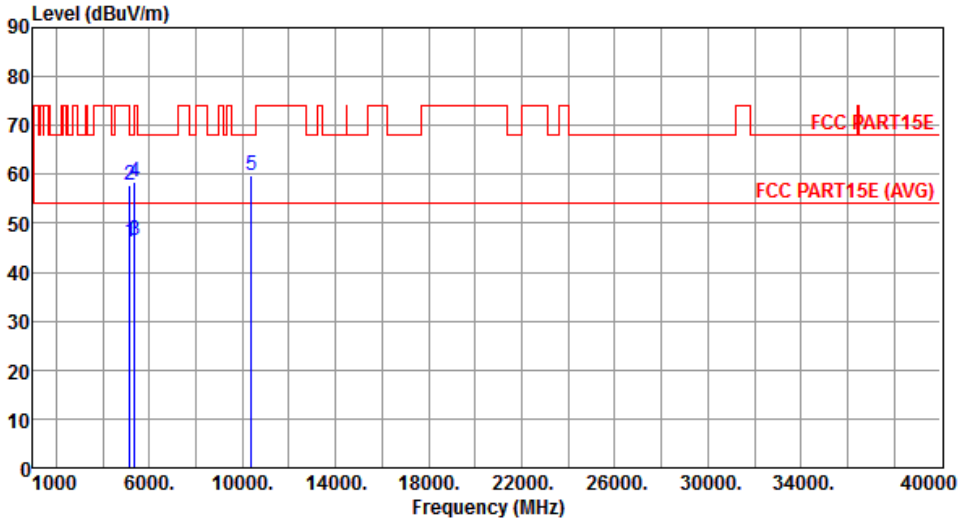Modulation	VHT40	Test Freq. (MHz)	5190																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>46.00</td> <td>54.00</td> <td>-8.00</td> <td>41.10</td> <td>4.90</td> <td>Average</td> <td>53</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>57.63</td> <td>74.00</td> <td>-16.37</td> <td>52.73</td> <td>4.90</td> <td>Peak</td> <td>53</td> </tr> <tr> <td>3</td> <td>5350.00</td> <td>46.51</td> <td>54.00</td> <td>-7.49</td> <td>41.38</td> <td>5.13</td> <td>Average</td> <td>53</td> </tr> <tr> <td>4</td> <td>5350.00</td> <td>58.34</td> <td>74.00</td> <td>-15.66</td> <td>53.21</td> <td>5.13</td> <td>Peak</td> <td>53</td> </tr> <tr> <td>5</td> <td>10380.00</td> <td>59.92</td> <td>68.20</td> <td>-8.28</td> <td>46.21</td> <td>13.71</td> <td>Peak</td> <td>50</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	46.00	54.00	-8.00	41.10	4.90	Average	53	2	5150.00	57.63	74.00	-16.37	52.73	4.90	Peak	53	3	5350.00	46.51	54.00	-7.49	41.38	5.13	Average	53	4	5350.00	58.34	74.00	-15.66	53.21	5.13	Peak	53	5	10380.00	59.92	68.20	-8.28	46.21	13.71	Peak	50			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5150.00	46.00	54.00	-8.00	41.10	4.90	Average	53																																																											
2	5150.00	57.63	74.00	-16.37	52.73	4.90	Peak	53																																																											
3	5350.00	46.51	54.00	-7.49	41.38	5.13	Average	53																																																											
4	5350.00	58.34	74.00	-15.66	53.21	5.13	Peak	53																																																											
5	10380.00	59.92	68.20	-8.28	46.21	13.71	Peak	50																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

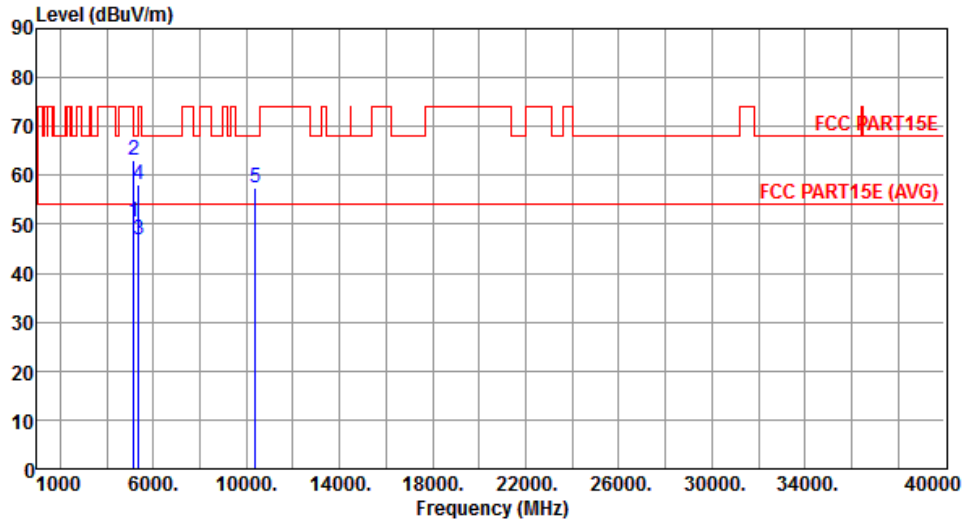


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.57	54.00	-3.43	45.67	4.90	Average	260	175
2	5150.00	63.04	74.00	-10.96	58.14	4.90	Peak	260	175
3	5350.00	46.93	54.00	-7.07	41.80	5.13	Average	260	175
4	5350.00	58.19	74.00	-15.81	53.06	5.13	Peak	260	175
5	10380.00	57.57	68.20	-10.63	43.86	13.71	Peak	210	170

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

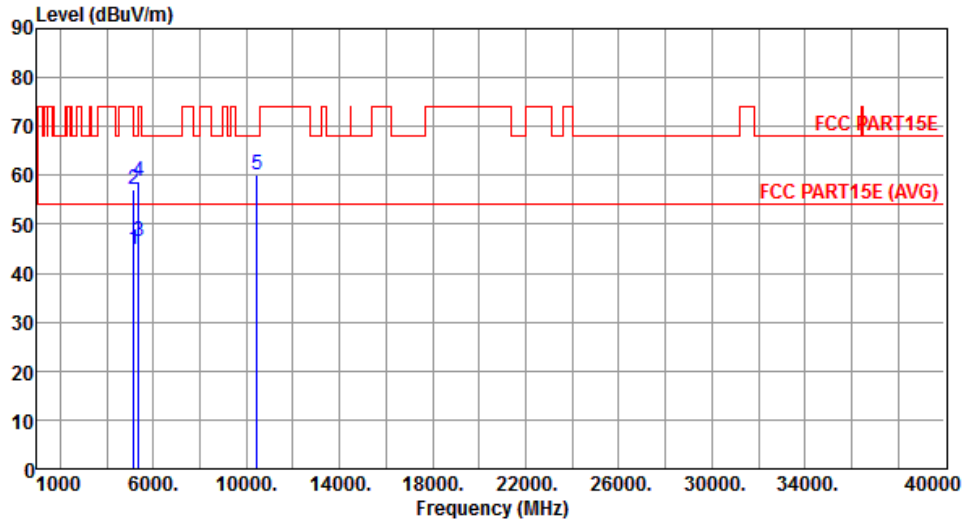


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.97	54.00	-9.03	40.07	4.90	Average	240	55
2	5150.00	57.16	74.00	-16.84	52.26	4.90	Peak	240	55
3	5350.00	46.60	54.00	-7.40	41.47	5.13	Average	240	55
4	5350.00	58.73	74.00	-15.27	53.60	5.13	Peak	240	55
5	10460.00	60.24	68.20	-7.96	46.38	13.86	Peak	235	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

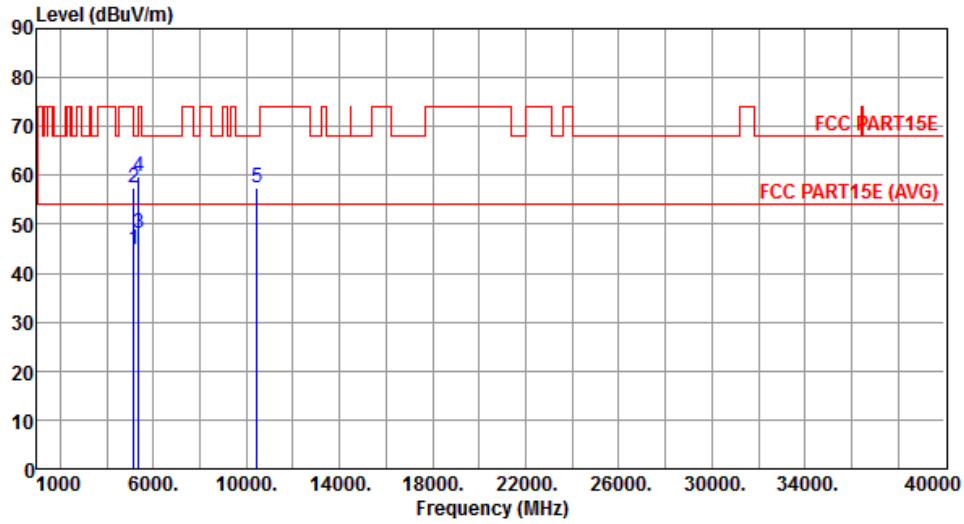


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.96	54.00	-9.04	40.06	4.90	Average	240	175
2	5150.00	57.41	74.00	-16.59	52.51	4.90	Peak	240	175
3	5350.00	48.22	54.00	-5.78	43.09	5.13	Average	240	175
4	5350.00	59.81	74.00	-14.19	54.68	5.13	Peak	240	175
5	10460.00	57.51	68.20	-10.69	43.65	13.86	Peak	210	170

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Horizontal		

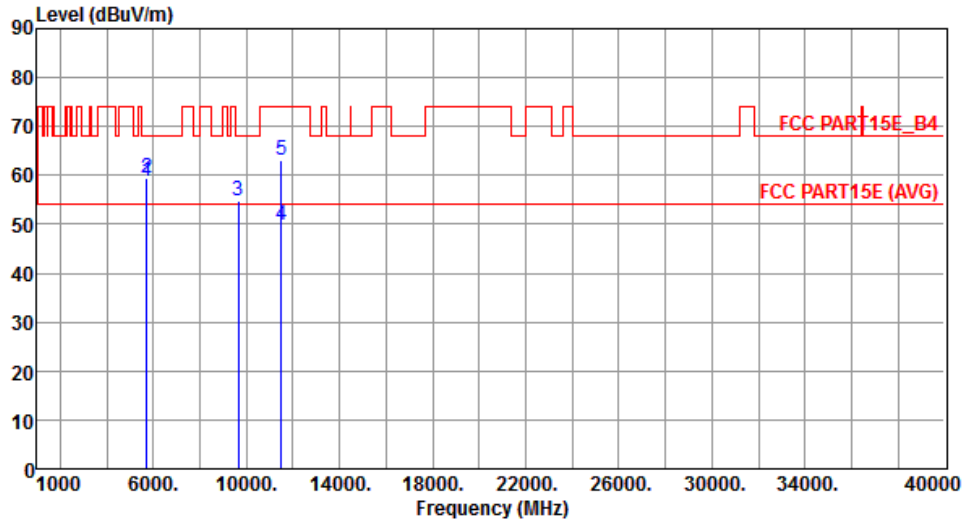


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	58.95	68.20	-9.25	53.25	5.70	Peak	228	297
2	5725.00	59.37	78.20	-18.83	53.66	5.71	Peak	228	297
3	9648.00	54.89	68.20	-13.31	42.13	12.76	Peak	211	16
4	11510.00	49.85	54.00	-4.15	35.23	14.62	Average	179	277
5	11510.00	63.12	74.00	-10.88	48.50	14.62	Peak	179	277

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Vertical		

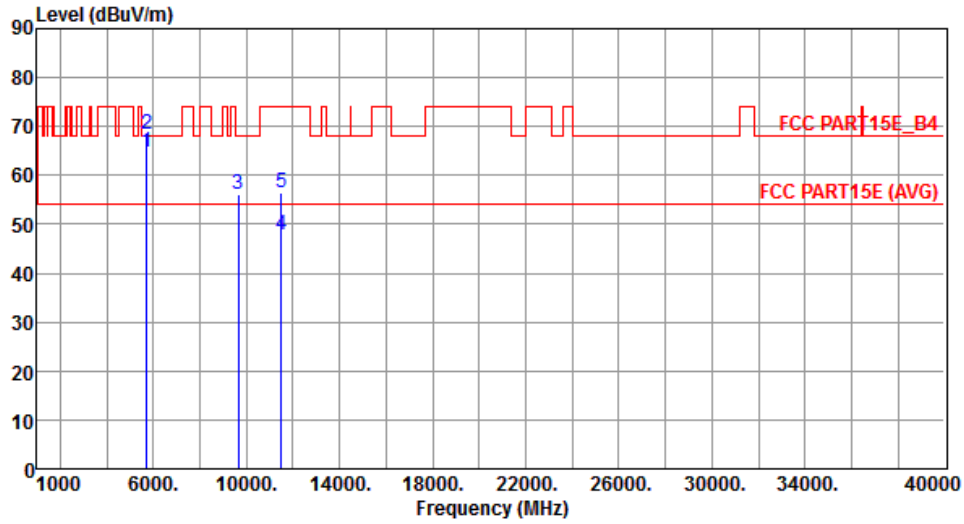


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	64.80	68.20	-3.40	59.10	5.70	Peak	173	220
2	5725.00	68.26	78.20	-9.94	62.55	5.71	Peak	173	220
3	9648.00	55.99	68.20	-12.21	43.23	12.76	Peak	188	16
4	11510.00	47.83	54.00	-6.17	33.21	14.62	Average	176	5
5	11510.00	56.42	74.00	-17.58	41.80	14.62	Peak	176	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Horizontal		

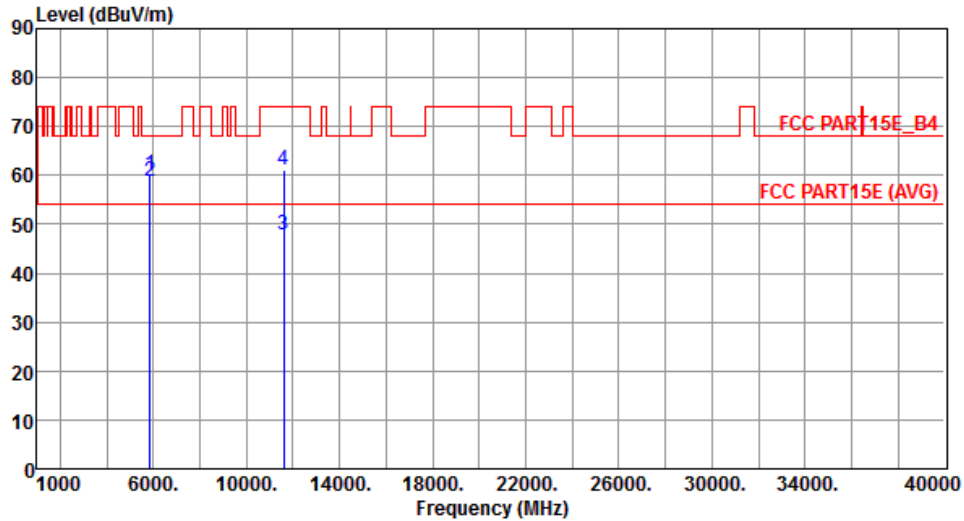

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	60.22	78.20	-17.98	54.25	5.97	Peak	301	295
2	5860.00	58.73	68.20	-9.47	52.75	5.98	Peak	301	295
3	11590.00	47.76	54.00	-6.24	33.26	14.50	Average	180	279
4	11590.00	60.96	74.00	-13.04	46.46	14.50	Peak	180	279


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Vertical		

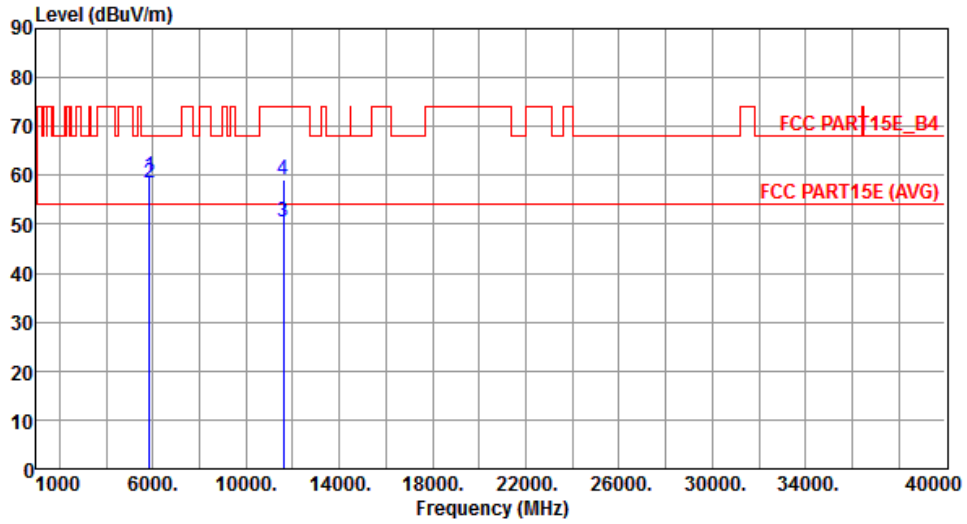


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.75	78.20	-18.45	53.78	5.97	Peak	196	210
2	5860.00	58.42	68.20	-9.78	52.44	5.98	Peak	196	210
3	11590.00	50.62	54.00	-3.38	36.12	14.50	Average	180	3
4	11590.00	59.10	74.00	-14.90	44.60	14.50	Peak	180	3

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

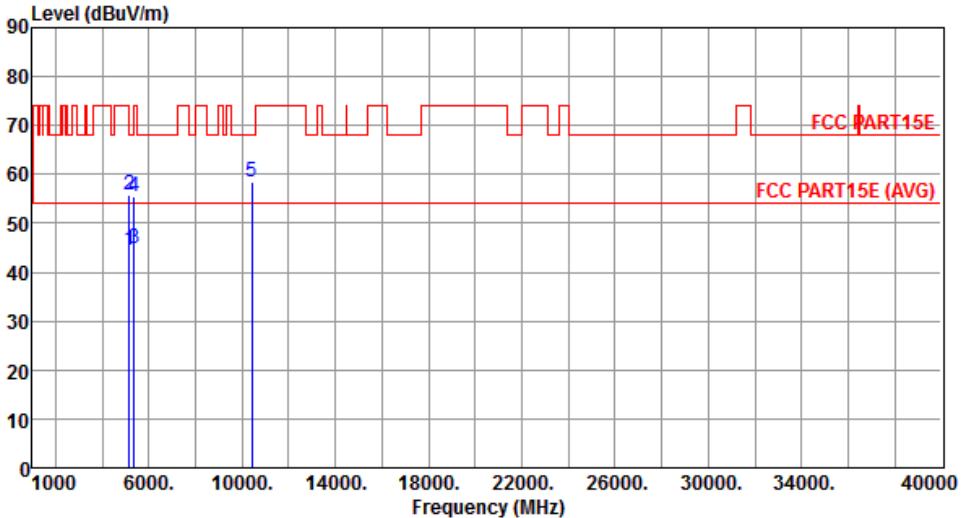Modulation	VHT80	Test Freq. (MHz)	5210																																																									
Polarization	Horizontal																																																											
																																																												
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>44.38</td> <td>54.00</td> <td>-9.62</td> <td>39.48</td> <td>4.90</td> <td>Average</td> <td>398</td> <td>5</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>55.92</td> <td>74.00</td> <td>-18.08</td> <td>51.02</td> <td>4.90</td> <td>Peak</td> <td>398</td> <td>5</td> </tr> <tr> <td>3</td> <td>5350.00</td> <td>44.70</td> <td>54.00</td> <td>-9.30</td> <td>39.57</td> <td>5.13</td> <td>Average</td> <td>398</td> <td>5</td> </tr> <tr> <td>4</td> <td>5350.00</td> <td>55.49</td> <td>74.00</td> <td>-18.51</td> <td>50.36</td> <td>5.13</td> <td>Peak</td> <td>398</td> <td>5</td> </tr> <tr> <td>5</td> <td>10420.00</td> <td>58.34</td> <td>68.20</td> <td>-9.86</td> <td>44.56</td> <td>13.78</td> <td>Peak</td> <td>100</td> <td>166</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	5150.00	44.38	54.00	-9.62	39.48	4.90	Average	398	5	2	5150.00	55.92	74.00	-18.08	51.02	4.90	Peak	398	5	3	5350.00	44.70	54.00	-9.30	39.57	5.13	Average	398	5	4	5350.00	55.49	74.00	-18.51	50.36	5.13	Peak	398	5	5	10420.00	58.34	68.20	-9.86	44.56	13.78	Peak	100	166
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																				
1	5150.00	44.38	54.00	-9.62	39.48	4.90	Average	398	5																																																			
2	5150.00	55.92	74.00	-18.08	51.02	4.90	Peak	398	5																																																			
3	5350.00	44.70	54.00	-9.30	39.57	5.13	Average	398	5																																																			
4	5350.00	55.49	74.00	-18.51	50.36	5.13	Peak	398	5																																																			
5	10420.00	58.34	68.20	-9.86	44.56	13.78	Peak	100	166																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																												

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>Polarization</b>	Vertical		

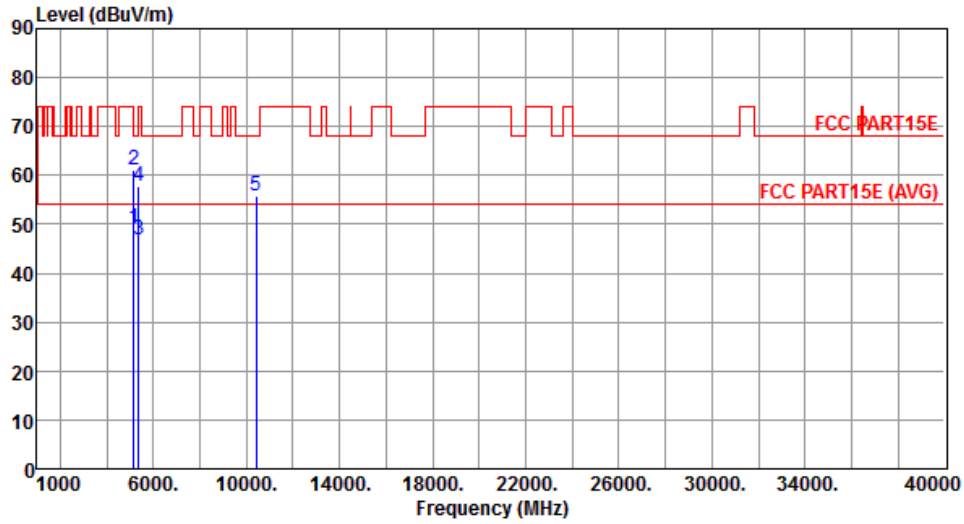


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.23	54.00	-4.77	44.33	4.90	Average	207	0
2	5150.00	61.11	74.00	-12.89	56.21	4.90	Peak	207	0
3	5350.00	46.88	54.00	-7.12	41.75	5.13	Average	207	0
4	5350.00	57.94	74.00	-16.06	52.81	5.13	Peak	207	0
5	10420.00	55.90	68.20	-12.30	42.12	13.78	Peak	150	193

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Horizontal		

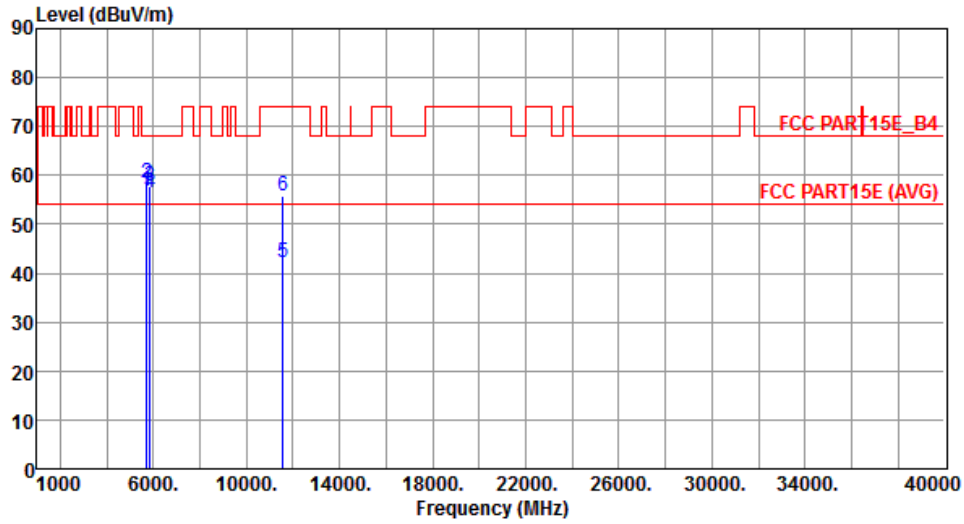

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	56.68	68.20	-11.52	50.98	5.70	Peak	360	295
2	5725.00	58.38	78.20	-19.82	52.67	5.71	Peak	213	295
3	5850.00	57.95	78.20	-20.25	51.98	5.97	Peak	213	295
4	5860.00	56.34	68.20	-11.86	50.36	5.98	Peak	213	295
5	11550.00	42.21	54.00	-11.79	27.66	14.55	Average	200	173
6	11550.00	55.90	74.00	-18.10	41.35	14.55	Peak	200	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Vertical		

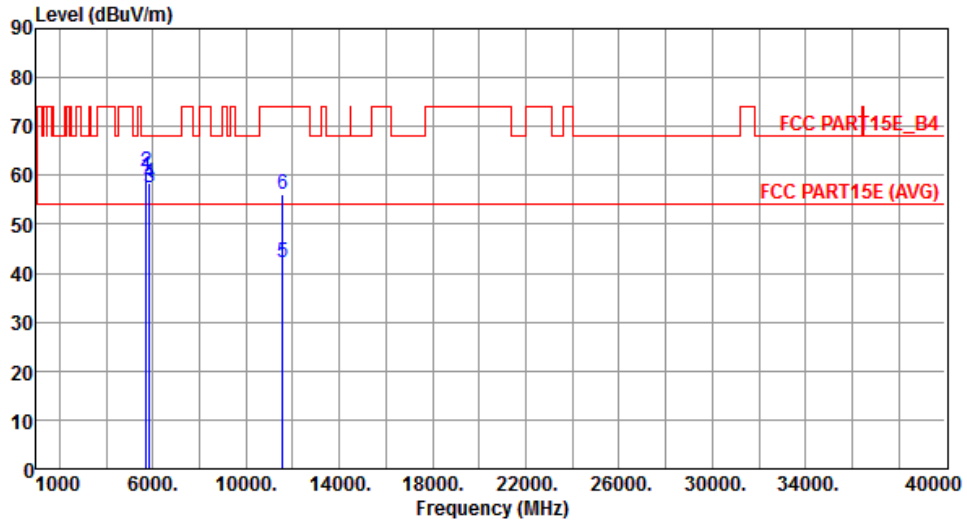

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	59.82	68.20	-8.38	54.12	5.70	Peak	219	175
2	5725.00	60.90	78.20	-17.30	55.19	5.71	Peak	219	175
3	5850.00	57.36	78.20	-20.84	51.39	5.97	Peak	219	175
4	5860.00	58.49	68.20	-9.71	52.51	5.98	Peak	219	175
5	11550.00	42.21	54.00	-11.79	27.66	14.55	Average	100	168
6	11550.00	56.08	74.00	-17.92	41.53	14.55	Peak	100	168

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Frequency Stability


### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

### 3.6.3 Test Setup

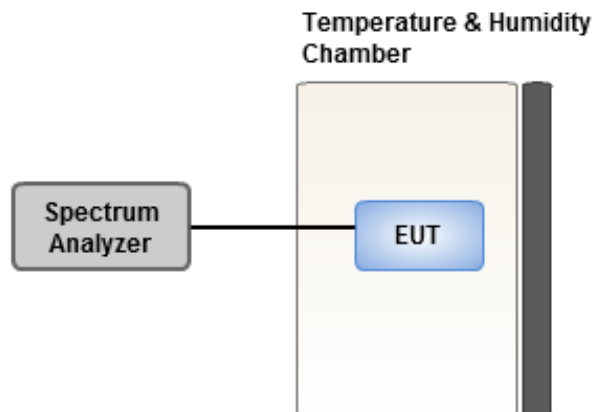

### 3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	1.25	1.25	1.35	1.37
T20°C Vmin	0.76	0.83	0.84	0.89
T50°C Vnom	0.84	0.94	0.99	1.02
T40°C Vnom	0.83	0.76	0.75	0.88
T30°C Vnom	1.30	1.35	1.48	1.62
T20°C Vnom	1.29	1.26	1.30	1.40
T10°C Vnom	1.19	1.26	1.28	1.44
T0°C Vnom	1.62	1.60	1.52	1.50
T-10°C Vnom	1.16	1.26	1.25	1.41
T-20°C Vnom	1.27	1.21	1.18	1.36
T-30°C Vnom	1.14	1.07	1.31	1.44
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	1.01	1.08	1.16	1.16
T20°C Vmin	1.39	1.34	1.34	1.35
T50°C Vnom	0.81	0.86	0.79	0.94
T40°C Vnom	0.72	0.84	0.84	0.96
T30°C Vnom	0.86	0.85	0.85	0.77
T20°C Vnom	1.22	1.19	1.33	1.44
T10°C Vnom	1.28	1.31	1.30	1.42
T0°C Vnom	1.12	1.12	1.18	1.30
T-10°C Vnom	1.35	1.39	1.40	1.57
T-20°C Vnom	1.01	1.03	1.02	1.11
T-30°C Vnom	1.48	1.55	1.41	1.55
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==