




Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	53%
Test Engineer	Alvin Li	Configurations	2.4GHz + 5GHz

Horizontal

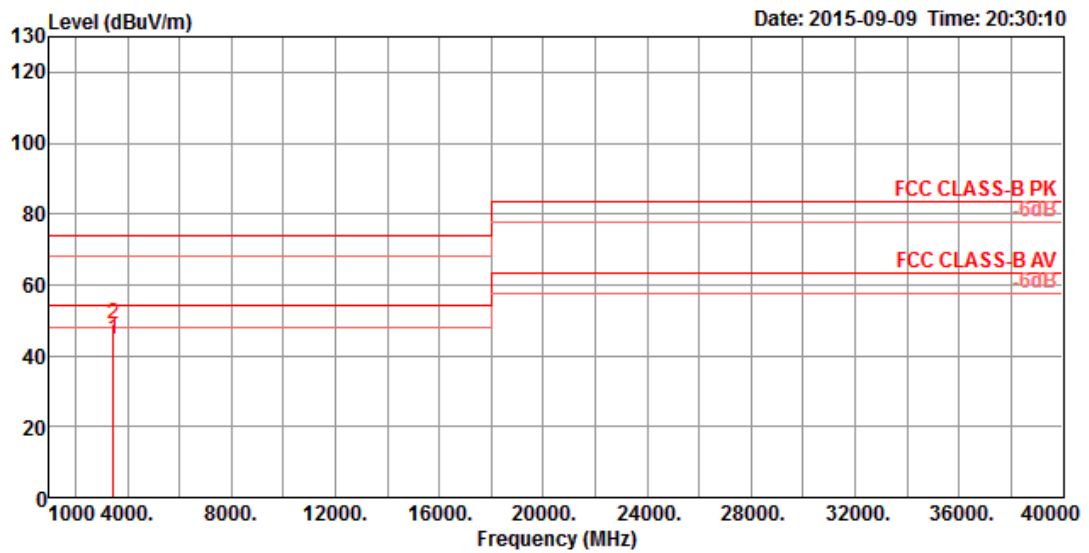

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3473.28	44.44	54.00	-9.56	45.45	4.65	28.70	34.36	100	156 Average	HORIZONTAL
2	3473.30	48.75	74.00	-25.25	49.76	4.65	28.70	34.36	100	156 Peak	HORIZONTAL

Vertical

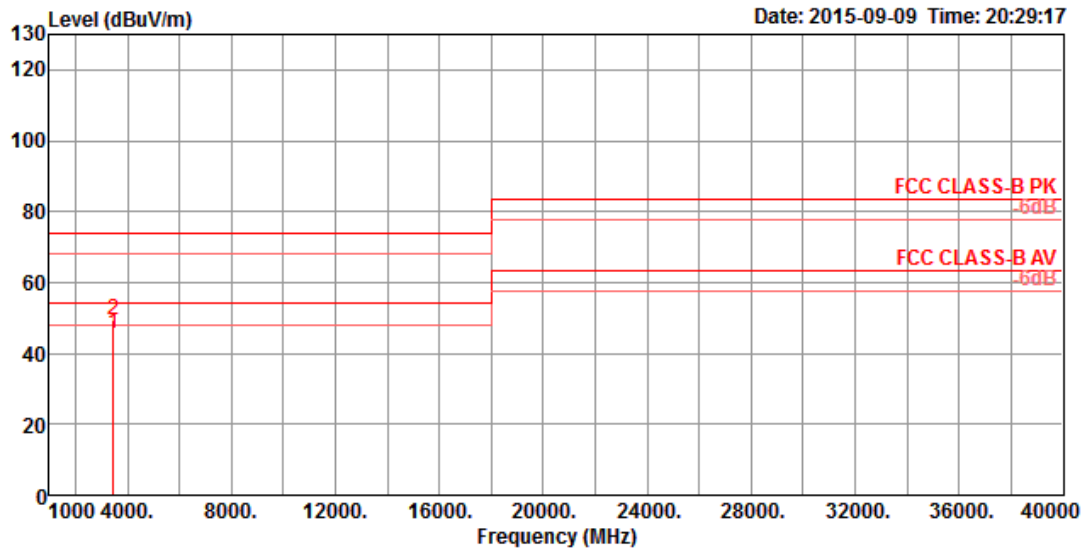

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3473.20	45.55	54.00	-8.45	46.56	4.65	28.70	34.36	132	207	Average	VERTICAL
2	3473.36	49.55	74.00	-24.45	50.56	4.65	28.70	34.36	132	207	Peak	VERTICAL