

Test Plot 1#:DECT 1900_Head Left Cheek_Middle**DUT: VoIP Phone; Type: 9602IPMWD; Serial: 18052305021**

Communication System: GFSK; Frequency: 1924.992 MHz;Duty Cycle: 1:24.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.247$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0375 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.238 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0495 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.0128 W/kg

Maximum value of SAR (measured) = 0.0345 W/kg

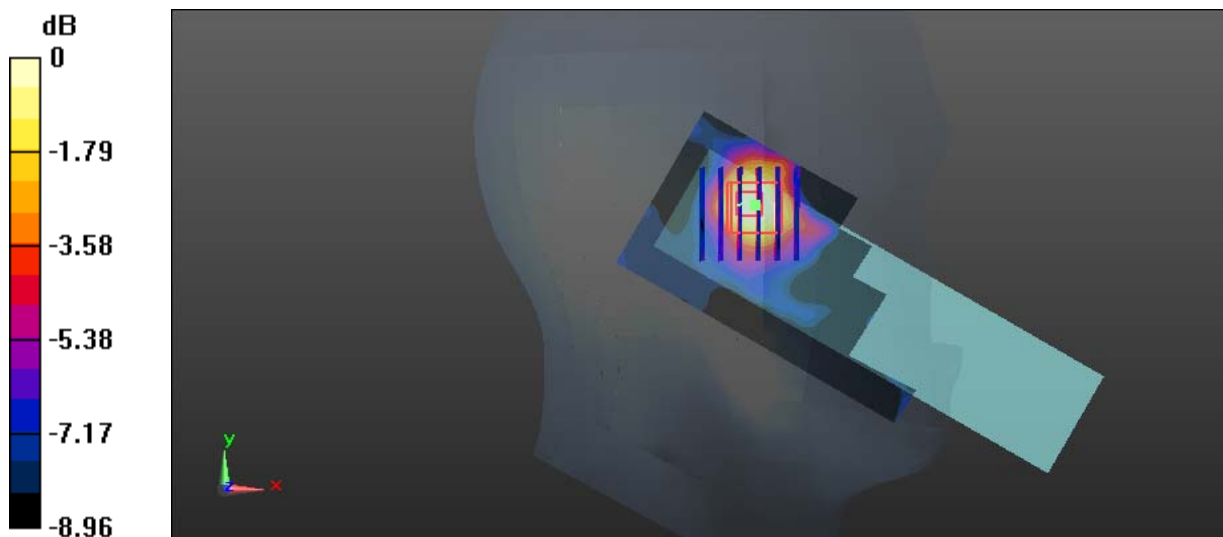

0 dB = 0.0345 W/kg = -14.62 dBW/kg

Test Plot 2#: DECT 1900_Head Left Tilt_Middle**DUT: VoIP Phone; Type: 9602IPMWD; Serial: 18052305021**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.247$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0183 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.234 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0249 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00781 W/kg

Maximum value of SAR (measured) = 0.0195 W/kg

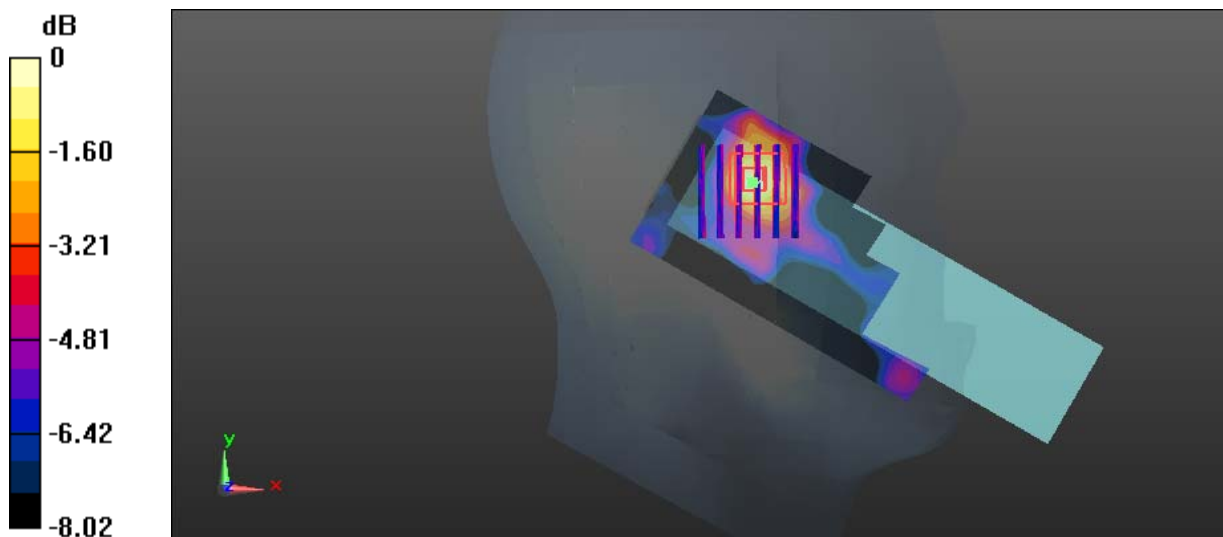

0 dB = 0.0195 W/kg = -17.10 dBW/kg

Test Plot 3#: DECT 1900_Head Right Cheek_Middle**DUT: VoIP Phone; Type: 9602IPMWD; Serial: 18052305021**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.247$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0309 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.706 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0468 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0277 W/kg

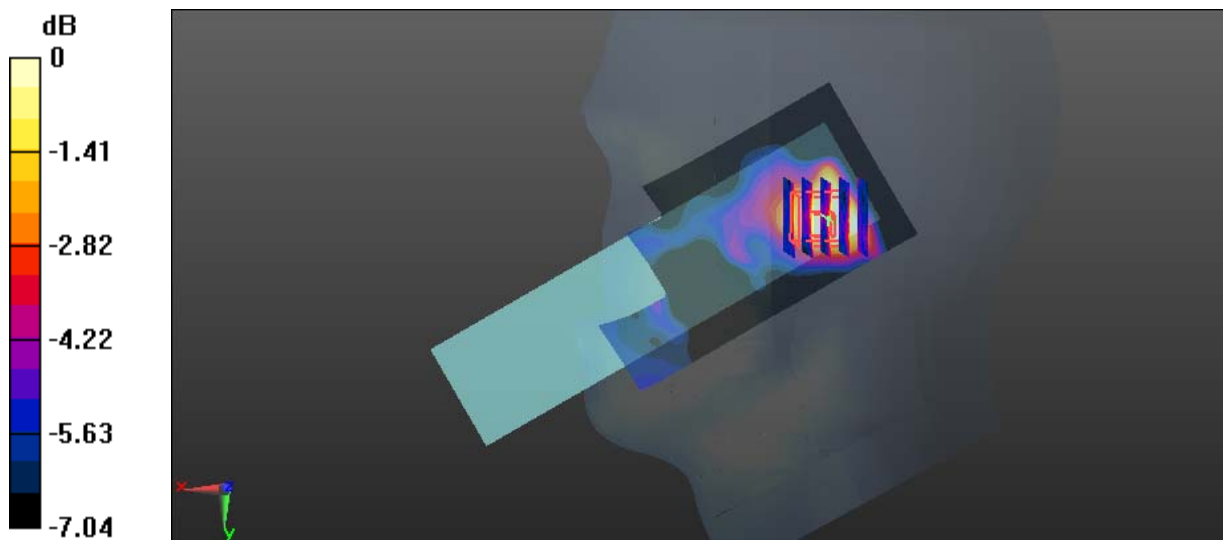

0 dB = 0.0277 W/kg = -15.58 dBW/kg

Test Plot 4#: DECT 1900_Head Right Tilt_Middle**DUT: VoIP Phone; Type: 9602IPMWD; Serial: 18052305021**

Communication System: GFSK; Frequency: 1924.992MHz; Duty Cycle: 1:24.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.247$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0156 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8620 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0191 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00775 W/kg

Maximum value of SAR (measured) = 0.0151 W/kg

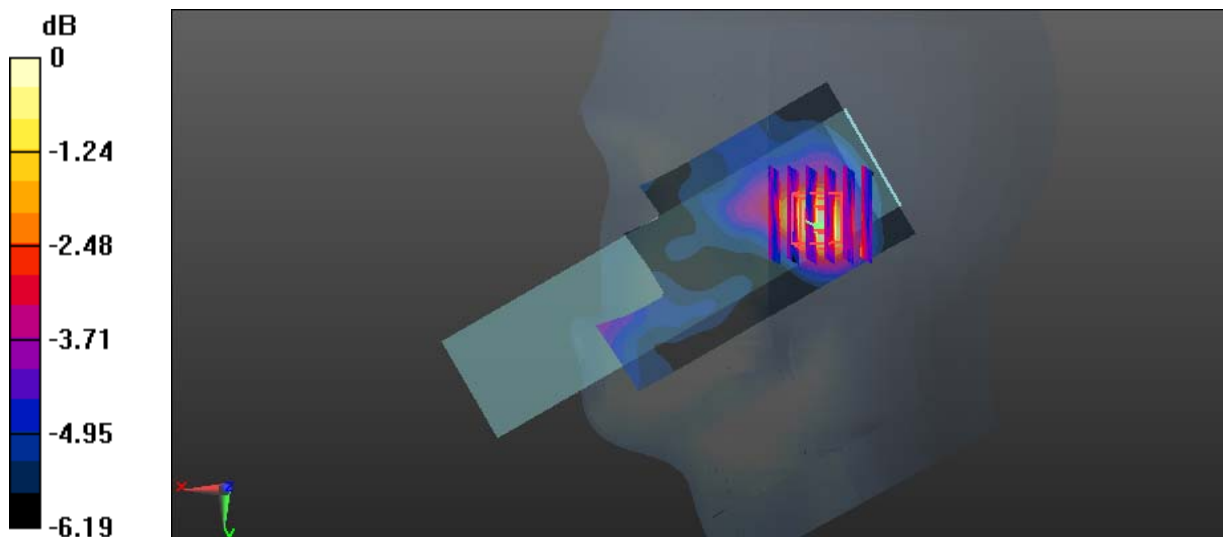

0 dB = 0.0151 W/kg = -18.21 dBW/kg