

Test Plot 1#:DECT 1900_Head Left Cheek_Middle**DUT: Cordless Telephone; Type: M203106; Serial: 17092000621**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:18.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.294$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0361 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.630 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0413 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.0133 W/kg

Maximum value of SAR (measured) = 0.0299 W/kg

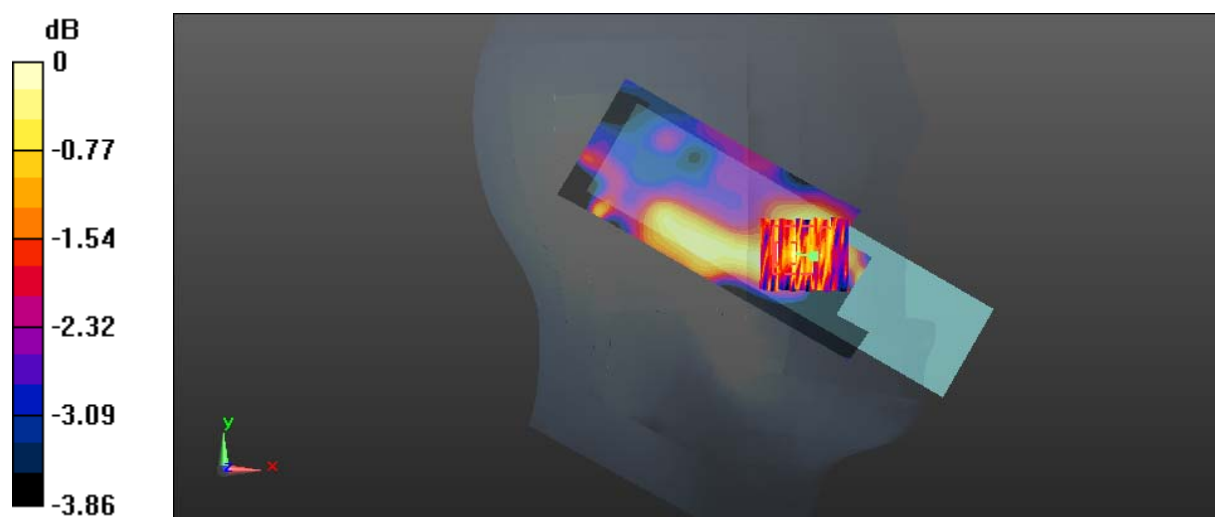

0 dB = 0.0299 W/kg = -15.24 dBW/kg

Test Plot 2#:DECT 1900_Head Left Tilt_Middle**DUT: Cordless Telephone; Type: M203106; Serial: 17092000621**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:18.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.294$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0199 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.334 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0252 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00921 W/kg

Maximum value of SAR (measured) = 0.0192 W/kg

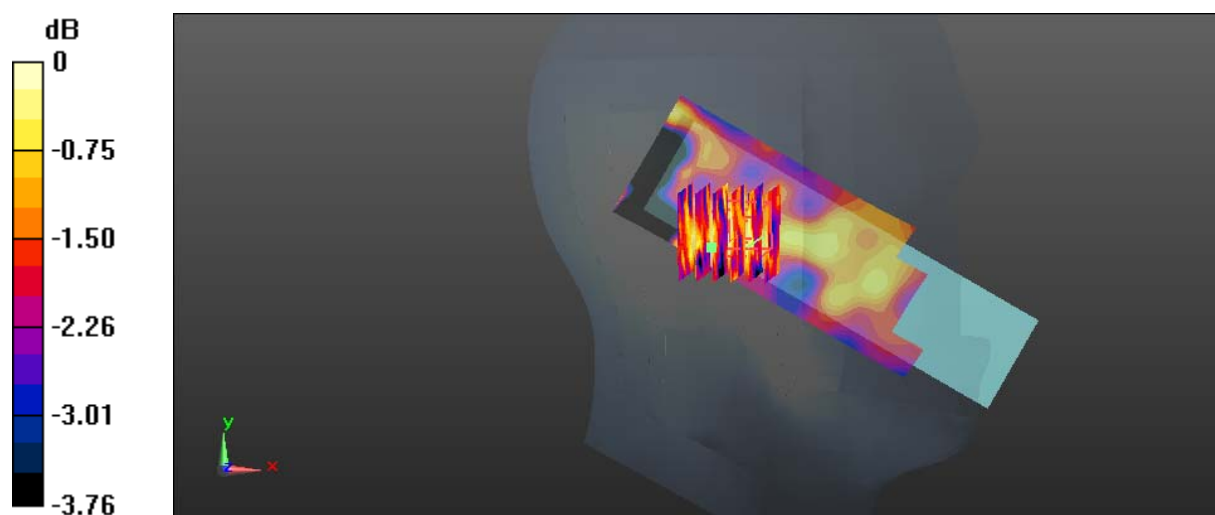

0 dB = 0.0192 W/kg = -17.17 dBW/kg

Test Plot 3#:DECT 1900_Head Right Cheek_Middle**DUT: Cordless Telephone; Type: M203106; Serial: 17092000621**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:18.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.294$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0326 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.934 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0383 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.0105 W/kg

Maximum value of SAR (measured) = 0.0293 W/kg

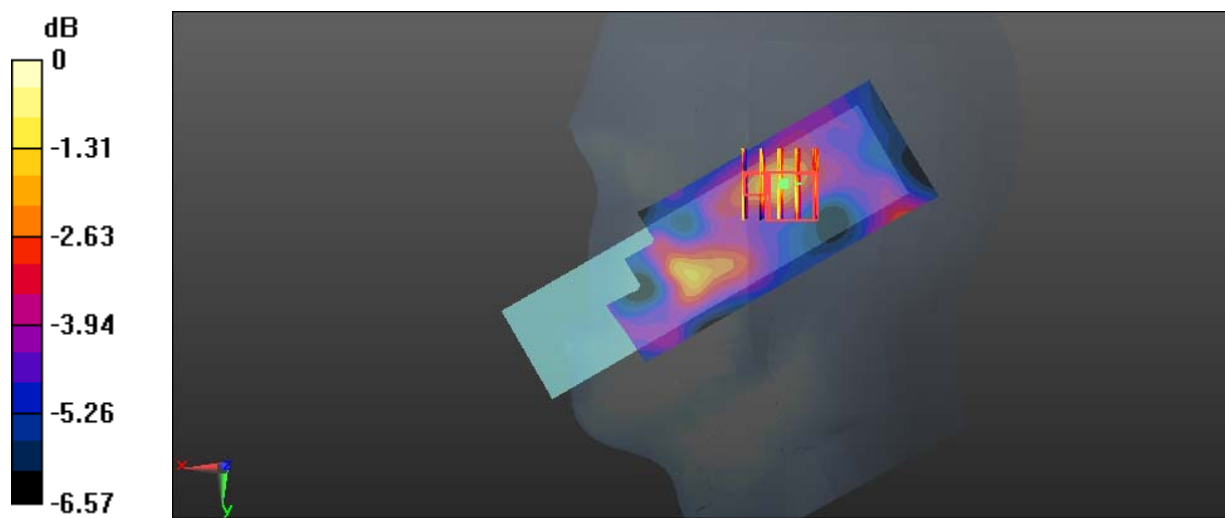

0 dB = 0.0293 W/kg = -15.33 dBW/kg

Test Plot 4#:DECT 1900_Head Right Tilt_Middle

DUT: Cordless Telephone; Type: M203106; Serial: 17092000621

Communication System: GFSK; Frequency: 1924.992 MHz;Duty Cycle: 1:18.8

Medium parameters used: $f = 1924.992 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.294$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0265 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.453 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0317 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.0106 W/kg

Maximum value of SAR (measured) = 0.0144 W/kg

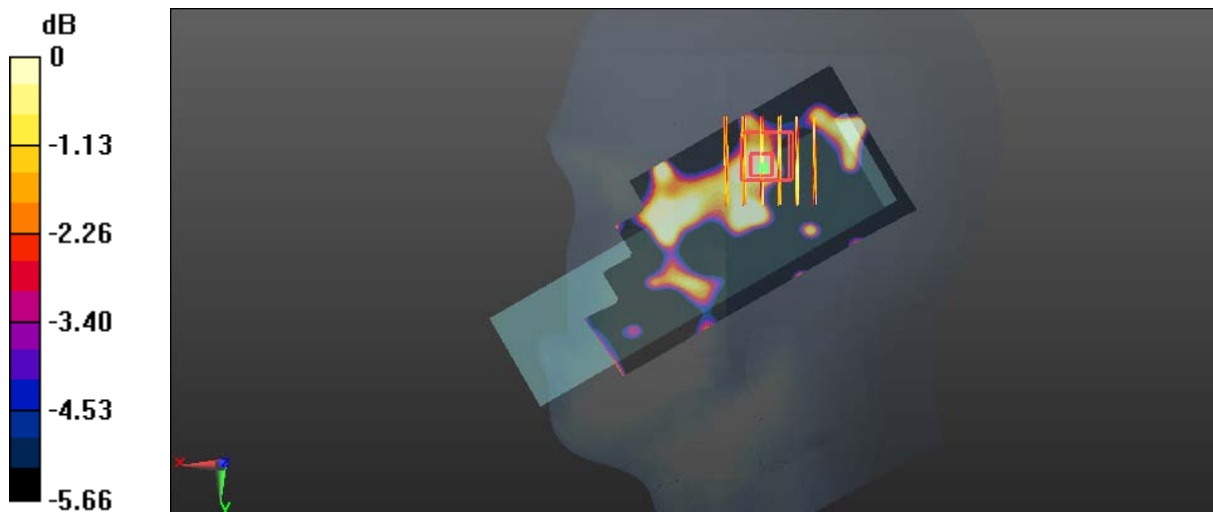

0 dB = 0.0144 W/kg = -18.42 dBW/kg