

FCC TEST REPORT
On Behalf of
Wintop Electronics Co., Ltd.

2.4GHz Wireless Optical Mouse Receiver
Model No.: WM-660, WM-690, WM-697, WM-698, WM-700

Prepared for : Wintop Electronics Co., Ltd.
Address : Huaguan Industrial Park, Xinhe Road, Baolai Industrial District,
Shangmugu, Pinghu Town, Longgang District, Shenzhen City,
China

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan
District, Shenzhen, 518054, China
Tel: (86) 755-26014771
Fax: (86) 755-26014772

Report Number : 201203762F-2
Date of Test : Mar. 14~23, 2012
Date of Report : Mar. 14~26, 2012

TABLE OF CHONTENTS

Description

Page

Test Report Verification

1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
1.4. Test Summary	5
2. POWER LINE CONDUCTED MEASUREMENT	6
2.1. Test Equipment	6
2.2. Block Diagram of Test Setup	6
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)	6
2.4. Configuration of EUT on Measurement.....	7
2.5. Operating Condition of EUT.....	7
2.6. Test Procedure.....	7
2.7. Power Line Conducted Emission Measurement Results.....	7
3. RADIATED EMISSION MEASUREMENT	10
3.1. Test Equipment	10
3.2. Block Diagram of Test Setup	10
3.3. Radiated Emission Limit (Subpart B Class B)	11
3.4. EUT Configuration on Measurement.....	11
3.5. Operating Condition of EUT.....	11
3.6. Test Procedure.....	11
3.7. Radiated Emission Measurement Results	12
4. PHOTOGRAPH.....	15
4.1. Photo of Power Line Conducted Emission Test.....	15
4.2. Photo of Radiated Emission Test	15

APPENDIX I (External Photos) (1 Page)

APPENDIX II (Internal Photos) (1 Page)

TEST REPORT VERIFICATION

Applicant : Wintop Electronics Co., Ltd.
 Manufacturer : Shenzhen Wintop Electronics Co., Ltd.
 EUT : 2.4GHz Wireless Optical Mouse Receiver
 Model No. : WM-660, WM-690, WM-697, WM-698, WM-700
 Serial No. : N/A
 Rating : DC 3V
 Trade Mark : N.A.

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 2010 & FCC / ANSI C63.4-2009

The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test : Mar. 14~23, 2012

Andy chen

Prepared by :

(Engineer / Andy Chen)

Jerry Du

Reviewer :

(Project Manager / Jerry Du)

Henry. yang .

Approved & Authorized Signer :

(Manager / Henry Yang)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	: 2.4GHz Wireless Optical Mouse Receiver
Model Number	: WM-660, WM-690, WM-697, WM-698, WM-700 (Note: All samples are the same except the model number & Output of appliances, so we prepare “WM-660” PATA SSD” for EMC test only.)
Test Power Supply	: DC 3V
Applicant	: Wintop Electronics Co., Ltd.
Address	: Huaguan Industrial Park, Xinhe Road, Shangmugu, Pinghu Town, Longgang District, Shenzhen City, China
Manufacturer	: Wintop Electronics Co., Ltd.
Address	: Huaguan Industrial Park, Xinhe Road, Shangmugu, Pinghu Town, Longgang District, Shenzhen City, China
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC: DOC
Date of Sample received	: Mar. 14, 2012
Date of Test	: Mar. 14~23, 2012

1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010

Test Location

All Emissions tests were performed

Anbotek Compliance Laboratory Limited. at 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

1.4. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions.

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Power Line Conducted Emission Test (150KHz To 30MHz)	√
FCC Part 15 Subpart B	Radiated Emission Test (30MHz To 1000MHz)	√

√ Indicates that the test is applicable

x Indicates that the test is not applicable

2. POWER LINE CONDUCTED MEASUREMENT


2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May. 12, 2011	1 Year
2.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	May. 19, 2011	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May. 19, 2011	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

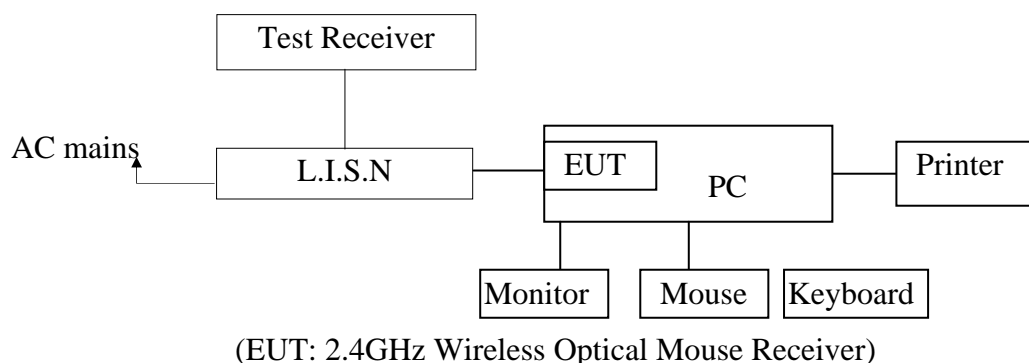

2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15

Class B)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

- Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : 2.4GHz Wireless Optical Mouse Receiver
Model Number : WM-660
Applicant : Wintop Electronics Co., Ltd.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (On) and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


The test curves are shown in the following pages.

CONDUCTED EMISSION TEST DATA

EUT: 2.4GHz Wireless Optical Mouse Receiver M/N: WM-660
 Operating Condition: On
 Test Site: 1# Shielded Room
 Operator: Heise Chen
 Test Specification: DC 3V
 Comment: L
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

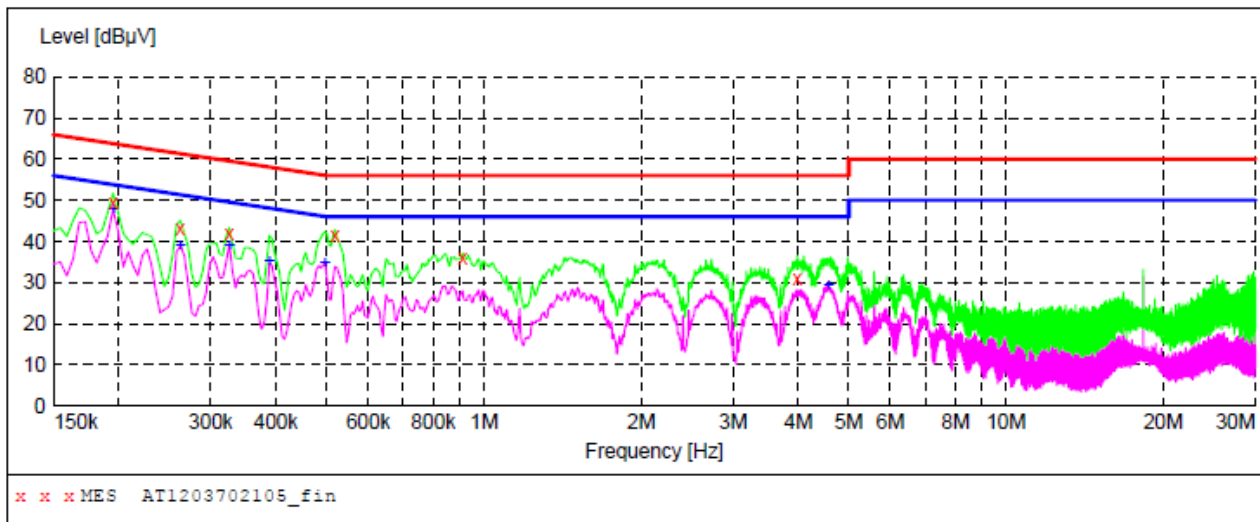

MEASUREMENT RESULT: "AT1203702105_fin"

3/15/2012 11:44AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	49.60	10.1	64	14.2	QP	L1	GND
0.262500	43.00	10.1	61	18.4	QP	L1	GND
0.325500	42.10	10.1	60	17.5	QP	L1	GND
0.519000	41.30	10.1	56	14.7	QP	L1	GND
0.910500	35.80	10.1	56	20.2	QP	L1	GND
3.979000	31.10	10.5	56	24.9	QP	L1	GND

MEASUREMENT RESULT: "AT1203702105_fin2"

3/15/2012 11:44AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	47.80	10.1	54	6.0	AV	L1	GND
0.262500	38.80	10.1	51	12.6	AV	L1	GND
0.325500	38.90	10.1	50	10.7	AV	L1	GND
0.388500	35.00	10.1	48	13.1	AV	L1	GND
0.496500	34.60	10.1	46	11.5	AV	L1	GND
4.573000	29.20	10.5	46	16.8	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: 2.4GHz Wireless Optical Mouse Receiver M/N: WM-660
 Operating Condition: On
 Test Site: 1# Shielded Room
 Operator: Heise Chen
 Test Specification: DC 3V
 Comment: N
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

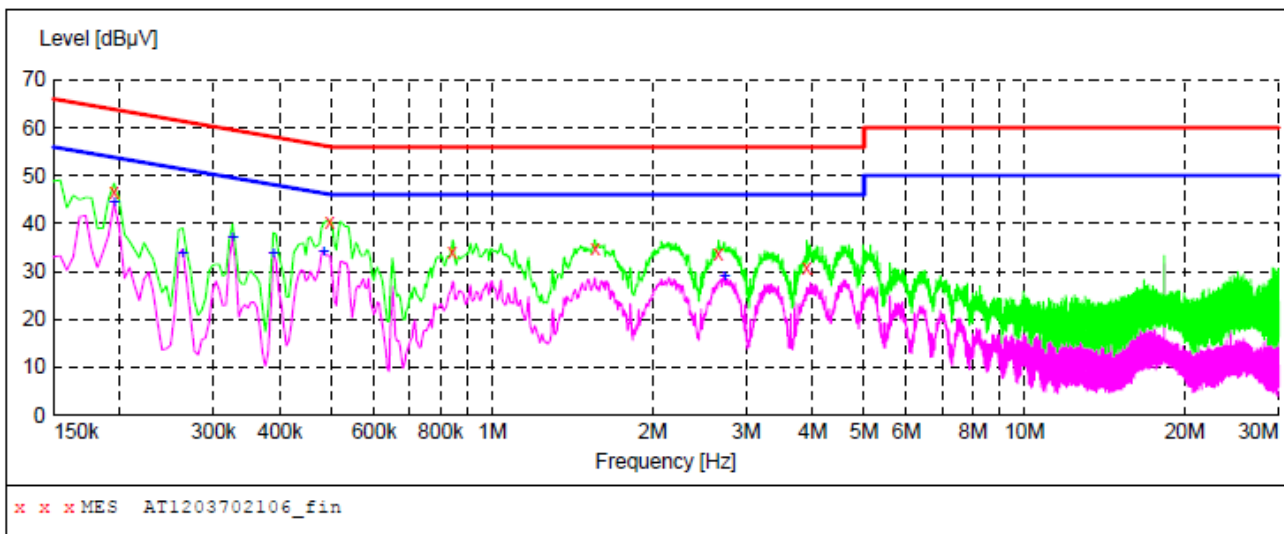

MEASUREMENT RESULT: "AT1203702106_fin"

3/15/2012 11:47AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	46.50	10.1	64	17.3	QP	N	GND
0.496500	40.20	10.1	56	15.9	QP	N	GND
0.843000	34.10	10.1	56	21.9	QP	N	GND
1.562500	34.70	10.3	56	21.3	QP	N	GND
2.665000	33.60	10.4	56	22.4	QP	N	GND
3.907000	30.80	10.4	56	25.2	QP	N	GND

MEASUREMENT RESULT: "AT1203702106_fin2"

3/15/2012 11:47AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	44.50	10.1	54	9.3	AV	N	GND
0.262500	33.70	10.1	51	17.7	AV	N	GND
0.325500	37.20	10.1	50	12.4	AV	N	GND
0.388500	33.70	10.1	48	14.4	AV	N	GND
0.483000	33.90	10.1	46	12.4	AV	N	GND
2.732500	29.00	10.4	46	17.0	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May. 12, 2011	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	100015	May. 17, 2011	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May. 19, 2011	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

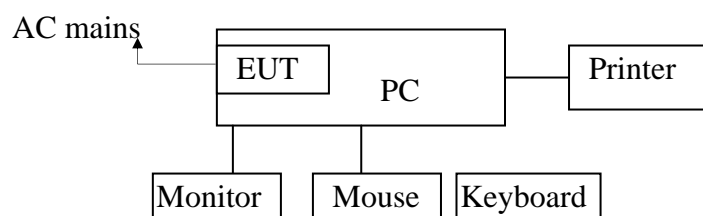

(EUT: 2.4GHz Wireless Optical Mouse Receiver)

3.2.2. Anechoic Chamber Test Setup Diagram

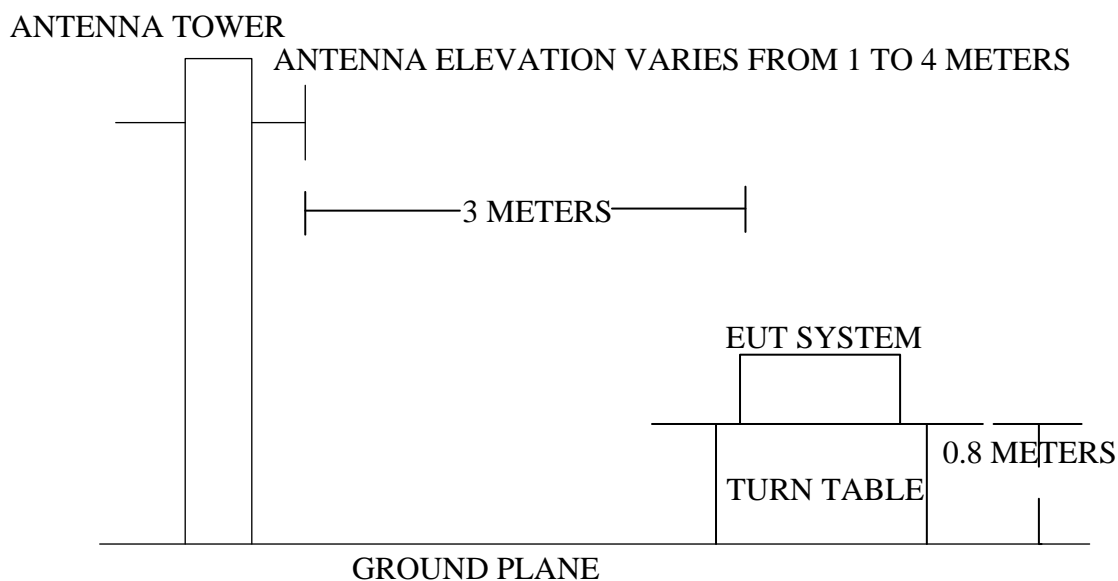

(EUT: 2.4GHz Wireless Optical Mouse Receiver)

3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0

- Remark :
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : 2.4GHz Wireless Optical Mouse Receiver
 Model Number : WM660
 Applicant : Wintop Electronics Co., Ltd.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown in Section 3.2.
- 3.5.2. Let the EUT work in test mode (On) and measure it.

3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESCI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (On) is tested in chamber and all the test results are listed in Section 3.7.

3.7. Radiated Emission Measurement Results

PASS.

The test curves are shown in the following pages.




Anbotek Compliance Laboratory Limited

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771
Fax: (86)755-26014772
Http://www.anbotek.com

Job No.:	AT1203702F-1	Polarziation:	Horizontal
Standard:	(RE)FCC PART15 B _3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012/03/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	9:37:00
EUT:	2.4GHz Wireless Optical Mouse Receiver	Test By:	Heise Chen
Model:	WM-660	Distance:	3m
Mode:	On		

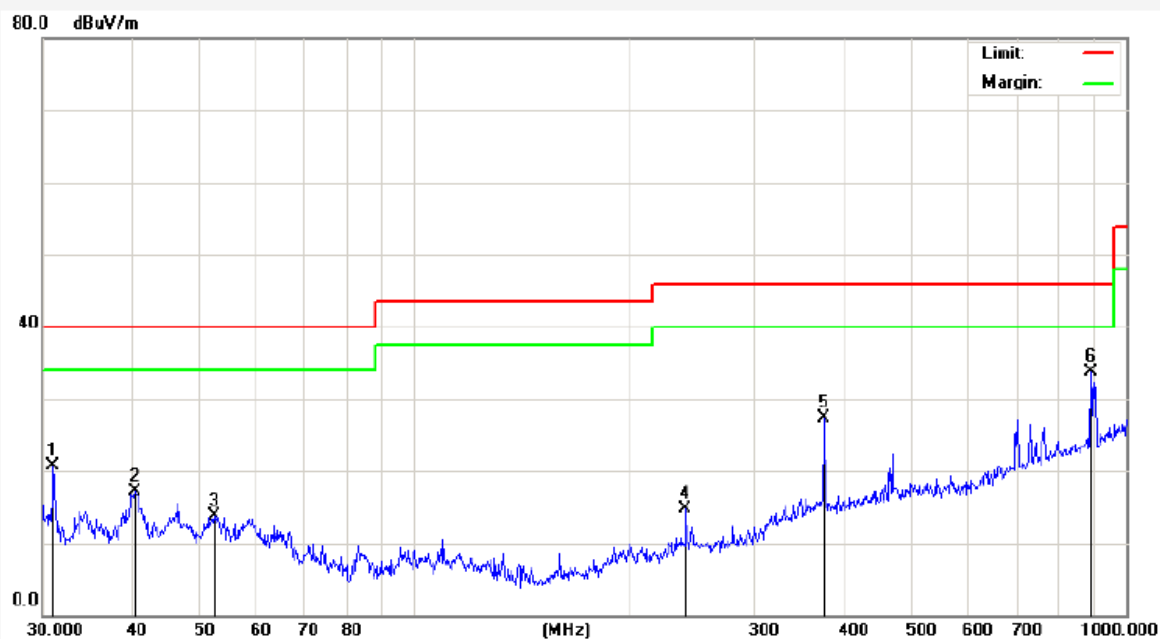

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9619	46.98	-26.30	20.68	40.00	-19.32	peak			
2	40.2757	41.98	-24.83	17.15	40.00	-22.85	peak			
3	52.2079	38.74	-25.01	13.73	40.00	-26.27	peak			
4	239.9874	41.38	-26.60	14.78	46.00	-31.22	peak			
5	375.9385	49.11	-21.90	27.21	46.00	-18.79	peak			
6	890.7278	45.63	-11.86	33.77	46.00	-12.23	peak			


Anbotek Compliance Laboratory Limited


 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771

Fax: (86)755-26014772

Http://www.anbotek.com

Job No.:	AT1203702F-1	Polarziation:	Vertical
Standard:	(RE)FCC PART15 B _3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012/03/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	9:40:20
EUT:	2.4GHz Wireless Optical Mouse Receiver	Test By:	Heise Chen
Model:	WM-660	Distance:	3m
Mode:	On		

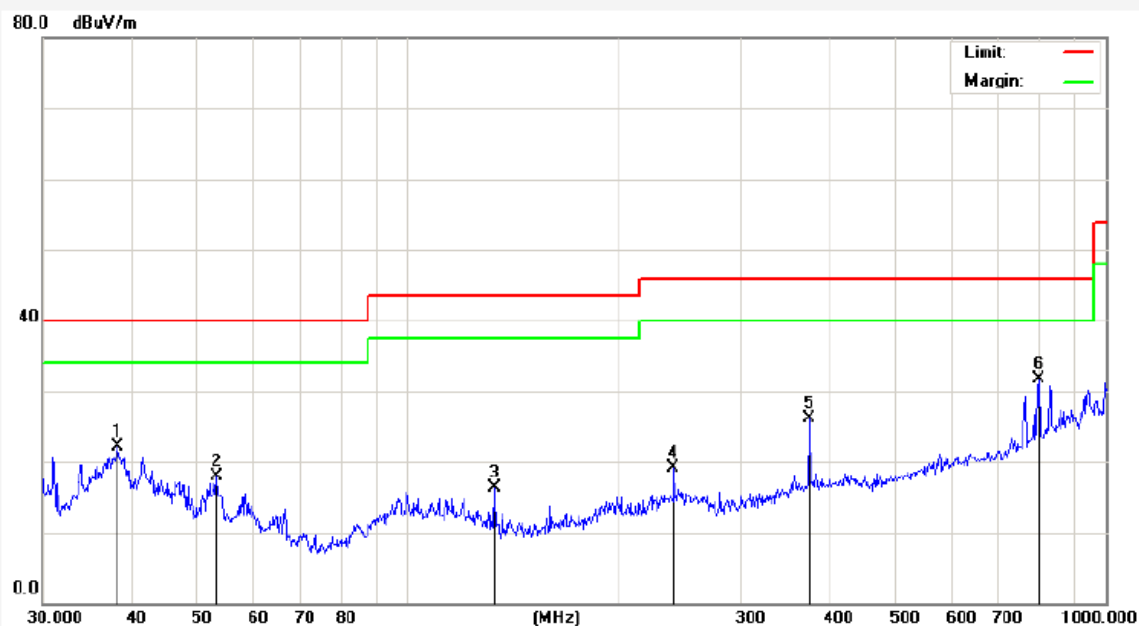

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.3462	47.41	-25.28	22.13	40.00	-17.87	peak			
2	53.1313	42.96	-25.04	17.92	40.00	-22.08	peak			
3	132.6850	42.90	-26.67	16.23	43.50	-27.27	peak			
4	239.9874	41.75	-22.60	19.15	46.00	-26.85	peak			
5	375.9384	47.00	-20.90	26.10	46.00	-19.90	peak			
6	801.7862	44.22	-12.59	31.63	46.00	-14.37	peak			