

# FCC Part 15C

## Measurement And Test Report For


### **iBaby Labs, Inc.**

Room 218, Building 17, ShangSha Inovation Park, Futian District, Shenzhen, China

**FCC ID: ZUXIBB-M3**

Aug 09, 2011

|   |  |
|---|--|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report | <b>Equipment Type:</b><br>IP Camera  |
| <b>Report Number:</b>   | MTI110803001RF   |
| <b>Test Engineer:</b>   | Bill Chen <i>Bill Chen</i>   |
| <b>Reviewed By:</b>   | Jason Zheng <i>Jason zheng</i>   |
| <b>Approved &amp; Authorized By:</b>  | Hebe Lee <i>Hebe Lee</i>   |
| <b>Test Date:</b>   | Aug 03-08,2011   |
| <b>Prepared By:</b>   | <b>MTI Technology Laboratory Ltd.</b><br>10F, Yinxing Business Hotel, Xixiang Road,<br>Bao'an District, Shenzhen, P,R.China.<br>Tel: +86-755-8885 0135<br>Fax: +86-755-8885 0136 |



**Note:** This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of MTI Technology Laboratory Ltd.

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION</b>                          | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4         |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S)                   | 4         |
| 1.3 TEST METHODOLOGY                                   | 4         |
| 1.4 TEST FACILITY                                      | 5         |
| <b>2. SYSTEM TEST CONFIGURATION</b>                    | <b>6</b>  |
| 2.1 EUT CONFIGURATION                                  | 6         |
| 2.2 EUT EXERCISE                                       | 6         |
| 2.3 GENERAL TEST PROCEDURES                            | 6         |
| 2.4 LIST OF MEASURING EQUIPMENTS USED                  | 7         |
| <b>3. SUMMARY OF TEST RESULTS</b>                      | <b>8</b>  |
| <b>4. ANTENNA REQUIREMENT</b>                          | <b>9</b>  |
| 4.1 STANDARD APPLICABLE                                | 9         |
| 4.2 ANTENNA CONNECTED CONSTRUCTION                     | 9         |
| <b>5. CONDUCTED EMISSION MEASUREMENT</b>               | <b>10</b> |
| 5.1 LIMITS OF CONDUCTED EMISSION                       | 10        |
| 5.2 TEST SETUP DIAGRAM                                 | 10        |
| 5.3 INSTRUMENT SETTING                                 | 10        |
| 5.4 TEST EQUIPMENT LIST AND DETAILS                    | 11        |
| 5.5 TEST PROCEDURE                                     | 11        |
| 5.6 TEST RESULT  | 11        |
| <b>6. 6DB BANDWIDTH MEASUREMENT</b>                    | <b>14</b> |
| 6.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT                | 14        |
| 6.2 EUT SETUP  | 14        |
| 6.3 TEST EQUIPMENT LIST AND DETAILS                    | 14        |
| 6.4 TEST PROCEDURE                                     | 14        |
| 6.5 TEST RESULT  | 14        |
| <b>7. MAXIMUM PEAK OUTPUT POWER</b>                    | <b>21</b> |
| 7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT    | 21        |
| 7.2 EUT SETUP  | 21        |
| 7.3 TEST EQUIPMENT LIST AND DETAILS                    | 21        |
| 7.4 TEST PROCEDURE                                     | 21        |
| 7.5 TEST RESULT  | 21        |
| <b>8. POWER SPECTRAL DENSITY MEASUREMENT</b>           | <b>29</b> |
| 8.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT       | 29        |
| 8.2 EUT SETUP  | 29        |
| 8.3 TEST EQUIPMENT LIST AND DETAILS                    | 29        |
| 8.4 TEST PROCEDURE                                     | 29        |
| 8.5 TEST RESULT  | 29        |
| <b>HIGH CHANNEL</b>                                    | <b>33</b> |
| <b>9. BAND EDGES MEASUREMENT</b>                       | <b>37</b> |
| 9.1 LIMITS OF BAND EDGES MEASUREMENT                   | 37        |
| 9.2 TEST EQUIPMENT LIST AND DETAILS                    | 37        |
| 9.3 TEST PROCEDURE                                     | 37        |
| 9.4 TEST RESULT  | 37        |
| <b>10. RADIATED EMISSION MEASUREMENT</b>               | <b>46</b> |
| 10.1 LIMITS OF RADIATED EMISSION MEASUREMENT           | 46        |
| 10.2 EUT SETUP   | 46        |

10.3 TEST EQUIPMENT LIST AND DETAILS .....46  
10.4 TEST PROCEDURE .....47  
10.5 TEST RESULT .....47

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

|                          |  |
|--------------------------|--|
| Applicant:               | iBaby Labs, Inc.   |
| Address of applicant:    | Room 218, Building 17, ShangSha Inovation Park, Futian District, Shenzhen, China                                     |
| Manufacturer:            | iBaby Labs, Inc.   |
| Address of manufacturer: | #6 Northern Zone, Shangxue S&T City, Bantian, Longgang District, Shenzhen, China                                     |
| Equipment Under Test:    | IP Camera  |
| Tested Model No.:        | M3   |
| Supplementary Models No: | M1, M4, M5, M7   |
|                          | Remark: supplementary models are only different in exterior with tested Model and with the same circuit construction |
| Trade Name:              | iBaby  |
| Type of Modulation:      | CCK, OFDM  |
| Frequency Band:          | 2412~2462 MHz for 802.11b/g, 802.11n/HT20;<br>2422~2452 MHz for 802.11n/HT40   |
| Number of Channels:      | 11 for 802.11b/g, 802.11n/HT20; 7 for 802.11n/HT40   |
| Channel Separation:      | 5MHz   |
| EIRP Power:              | 16.19 dBm  |
| Power Supply:            | 120V/60Hz  |

Remark: \* The test data gathered are from the production sample provided by the manufacturer.

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

## **1.4 Test Facility**

All measurement required was performed at laboratory of NTEK Testing Technology Co., Ltd., at 1/F, Building E, Fenda Science Park Sanwei Community, Xixiang Street, Baoan District , Shenzhen,Guangdong

## **1.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC – Registration No.: 238937**

NTEK Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 238937.

The facility also complies with the radiated and AC line conducted test site criteria set forth in CISPR 16-1: 2002, CISPR16-2: 2002.

## **2. SYSTEM TEST CONFIGURATION**

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### **2.3 General Test Procedures**

**Conducted Emissions** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions** The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

## 2.4 List of Measuring Equipments Used

| Items | Equipment                    | Manufacturer    | Model No. | Serial No.   | Last Cal | Calibration Period |
|-------|------------------------------|-----------------|-----------|--------------|----------|--------------------|
| 1     | EMI Test Receiver            | ROHDE & SCHWARZ | ESI 26    | 100079       | 2011/6   | 1 year             |
| 2     | Horn Antenna                 | R/S             | CH14-H052 | 1091698      | 2011/6   | 1 year             |
| 3     | 3m Semi- Anechoic Chamber    | ETS             | N/A       | N/A          | 2011/6   | 1 year             |
| 1     | EMI Test Receiver            | ROHDE & SCHWARZ | ESCS30    | 100038       | 2010/11  | 1 year             |
| 2     | EMI Test Receiver            | ROHDE & SCHWARZ | ESI 26    | 100009       | 2010/11  | 1 year             |
| 3     | Receiver/ Spectrum Analyzer  | ROHDE & SCHWARZ | ESCI      | 100106       | 2010/11  | 1 year             |
| 4     | Spectrum Analyzer            | Agilent         | E7405A    | US41160415   | 2010/11  | 1 year             |
| 5     | Artificial Mains             | ROHDE & SCHWARZ | ESH2-Z5   | 100028       | 2010/11  | 1 year             |
| 6     | Pulse Limiter                | ROHDE & SCHWARZ | ESHSZ2    | 100044       | 2010/11  | 1 year             |
| 7     | LISN                         | COM Power       | LI-200    | 12212        | 2010/11  | 1 year             |
| 8     | LISN                         | COM Power       | LI-200    | 12019        | 2010/11  | 1 year             |
| 9     | 3m/5m Semi- Anechoic Chamber | ETS             | N/A       | N/A          | 2010/11  | 1 year             |
| 10    | Ultra-Broadband Antenna      | R/S             | HL562     | 100015       | 2010/11  | 1 year             |
| 11    | Horn Antenna                 | R/S             | HF906     | 100039       | 2010/11  | 1 year             |
| 12    | RF Test Panel                | R/S             | TS / RSP  | 335015/ 0017 | N/A      | N/A                |
| 13    | Turntable                    | ETS             | 2088      | 2149         | N/A      | N/A                |
| 14    | Antenna Mast                 | ETS             | 2075      | 2346         | N/A      | N/A                |

### 3. SUMMARY OF TEST RESULTS

| FCC Rules            | Description of Test  | Result |
|----------------------|--|--------|
| 15.203/15.247(b)/(c) | Antenna Requirement  | Pass   |
| 15.207               | AC Power Line Conducted Emission                               | Pass   |
| 15.247(a)(2)         | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System | Pass   |
| 15.247(e)            | Power Spectral Density   | Pass   |
| 15.247(b)(1)         | Maximum Peak Output Power                                      | Pass   |
| 15.247(d)            | Band Edges Emission  | Pass   |
| 15.247(d)            | Radiated Emission  | Pass   |



## **4. ANTENNA REQUIREMENT**

### **4.1 Standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **4.2 Antenna Connected Construction**

The antennas used in this product are PIFA. PIFA antenna with RP-SMA connector, The maximum Gain of the antenna is 2.50dBi.


## 5. CONDUCTED EMISSION Measurement

### 5.1 Limits of Conducted Emission

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency Range (MHz) | Limits ( dBuV) |         |
|-----------------------|----------------|---------|
|                       | Quasi-Peak     | Average |
| 0.150~0.500           | 66~56          | 56~46   |
| 0.500~5.000           | 56             | 46      |
| 5.000~30.00           | 60             | 50      |

### 5.2 Test Setup Diagram

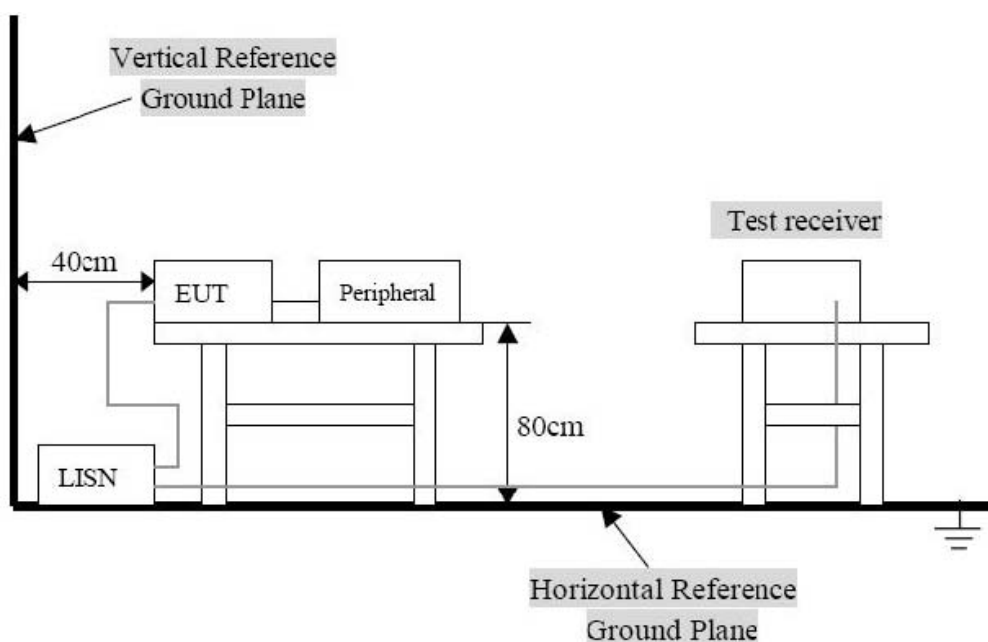

### 5.3 Instrument Setting

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz  
 Detector.....Peak & Quasi-Peak & Average  
 Sweep Speed.....Auto  
 IF Band Width.....9 KHz

## 5.4 Test Equipment List and Details

See section 2.4 of this report.

## 5.5 Test Procedure

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISN. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

## 5.6 Test Result

Detailed information please refers to the following page.

According to the data in this section, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the worst margin reading of:


**-1.99 dB $\mu$ V at 0.670 MHz in the Line mode, AV detector, 0.15-30MHz**

EUT: IP Camera  
M/N: M3  
Operator: Amy  
Test Specification: L



RBW 9 kHz  
MT 100 ms

Att 10 dB AUTO

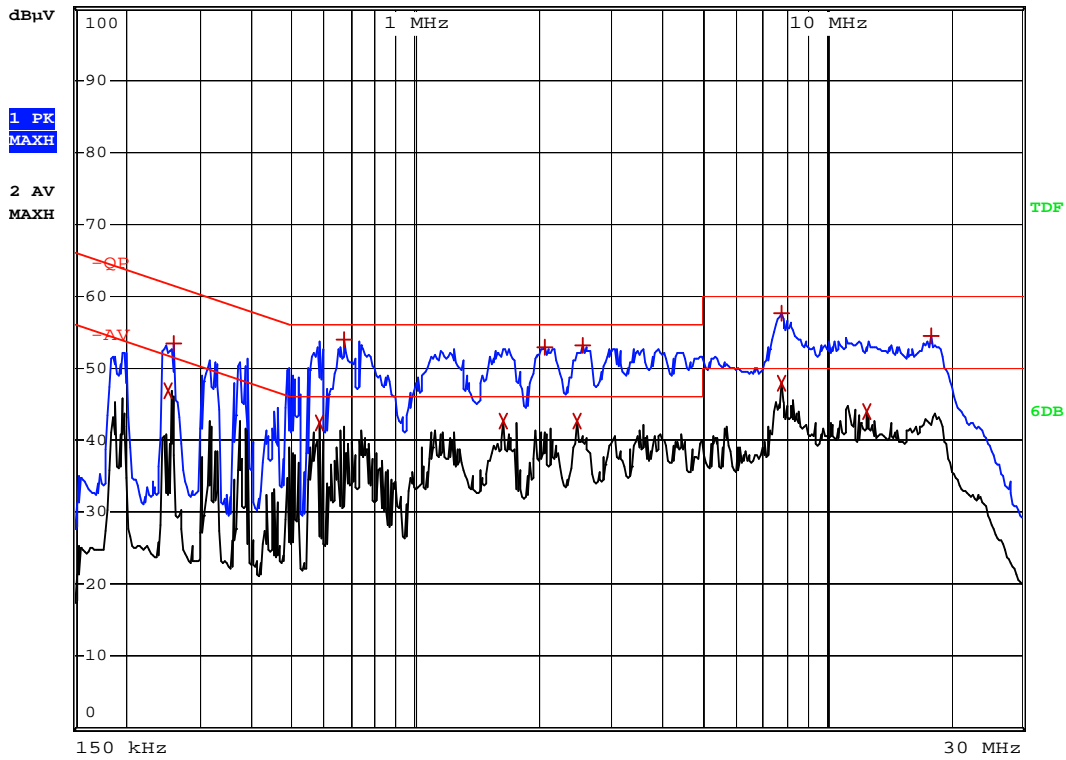


| EDIT PEAK LIST (Prescan Results) |            |            |                |
|----------------------------------|------------|------------|----------------|
| Trace1:                          | -QP        |            |                |
| Trace2:                          | -AV        |            |                |
| Trace3:                          | ---        |            |                |
| TRACE                            | FREQUENCY  | LEVEL dBµV | DELTA LIMIT dB |
| 2 Average                        | 254 kHz    | 46.81      | -4.81          |
| 1 Max Peak                       | 258 kHz    | 53.46      | -8.03          |
| 2 Average                        | 582 kHz    | 42.27      | -3.72          |
| 1 Max Peak                       | 670 kHz    | 54.00      | -1.99          |
| 2 Average                        | 1.638 MHz  | 42.72      | -3.27          |
| 1 Max Peak                       | 2.066 MHz  | 52.83      | -3.16          |
| 2 Average                        | 2.494 MHz  | 42.52      | -3.47          |
| 1 Max Peak                       | 2.554 MHz  | 53.18      | -2.81          |
| 1 Max Peak                       | 7.782 MHz  | 57.62      | -2.38          |
| 2 Average                        | 7.782 MHz  | 47.90      | -2.09          |
| 2 Average                        | 12.594 MHz | 43.95      | -6.04          |
| 1 Max Peak                       | 18.05 MHz  | 54.46      | -5.53          |

EUT: IP Camera  
M/N: M3  
Operator: Amy  
Test Specification: N



RBW 9 kHz  
MT 5 s

Att 10 dB AUTO

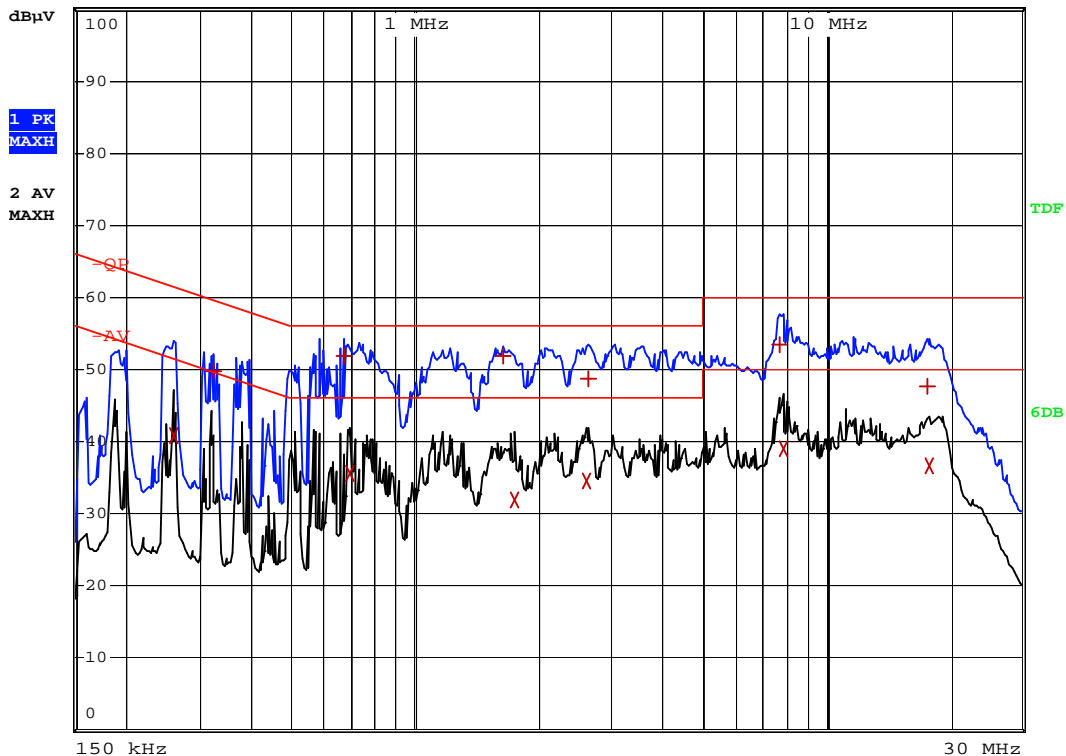


| EDIT PEAK LIST (Final Measurement Results) |            |            |                |
|--|------------|------------|----------------|
| TRACE                                      | FREQUENCY  | LEVEL dBμV | DELTA LIMIT dB |
| Trace1:                                    | -QP        |            |                |
| Trace2:                                    | -AV        |            |                |
| Trace3:                                    | ---        |            |                |
| 2 Average                                  | 258 kHz    | 40.79      | -10.70         |
| 1 Quasi Peak                               | 322 kHz    | 49.78      | -9.87          |
| 1 Quasi Peak                               | 674 kHz    | 51.84      | -4.15          |
| 2 Average                                  | 690 kHz    | 35.58      | -10.41         |
| 1 Quasi Peak                               | 1.642 MHz  | 51.71      | -4.28          |
| 2 Average                                  | 1.758 MHz  | 31.94      | -14.05         |
| 2 Average                                  | 2.626 MHz  | 34.47      | -11.53         |
| 1 Quasi Peak                               | 2.658 MHz  | 48.62      | -7.37          |
| 1 Quasi Peak                               | 7.726 MHz  | 53.29      | -6.70          |
| 2 Average                                  | 7.914 MHz  | 39.04      | -10.95         |
| 1 Quasi Peak                               | 17.586 MHz | 47.69      | -12.30         |
| 2 Average                                  | 17.774 MHz | 36.65      | -13.35         |

## 6. 6dB Bandwidth Measurement

### 6.1 Limits of 6dB Bandwidth Measurement

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 EUT Setup

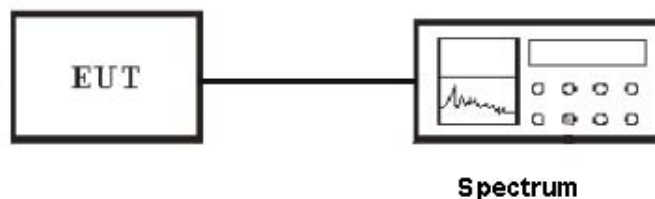

### 6.3 Test Equipment List and Details

See section 2.4.

### 6.4 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300 KHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.


### 6.5 Test Result

PASS


Detailed information, Please refer to the following pages.

| Test mode    | Frequency MHz | 6 dB Bandwidth kHz | Limit kHz |
|--------------|---------------|--------------------|-----------|
| 802.11b      | 2412          | 10179              | 500       |
|              | 2437          | 10187              | 500       |
|              | 2462          | 10195              | 500       |
| 802.11g      | 2412          | 16423              | 500       |
|              | 2437          | 16480              | 500       |
|              | 2462          | 16536              | 500       |
| 802.11n/HT20 | 2412          | 17892              | 500       |
|              | 2437          | 17851              | 500       |
|              | 2462          | 17699              | 500       |
| 802.11n/HT40 | 2422          | 36403              | 500       |
|              | 2437          | 36365              | 500       |
|              | 2452          | 36517              | 500       |


**For 802.11b  
Low Channel**

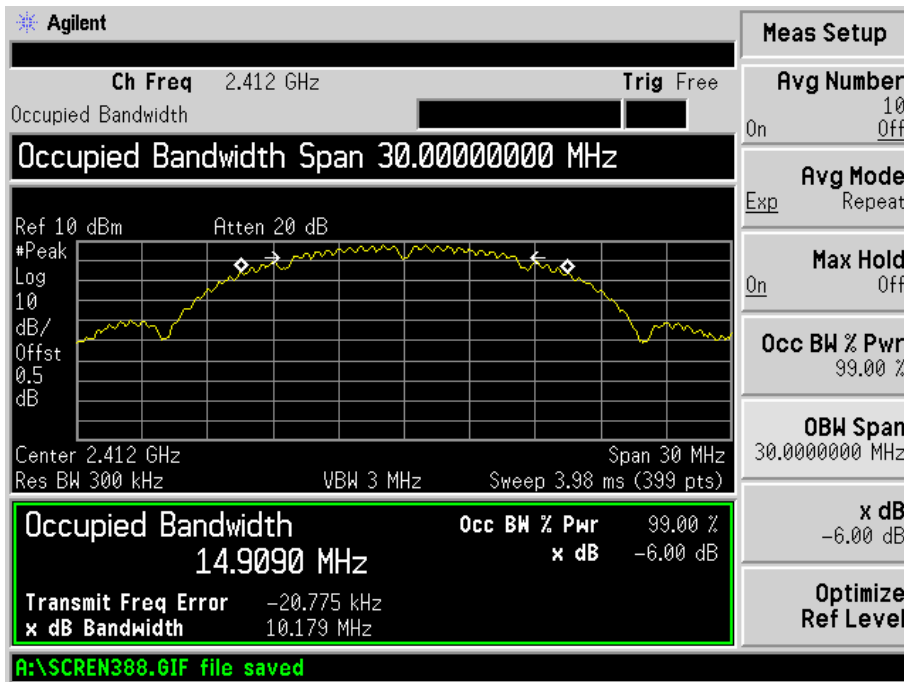


**Middle Channel**

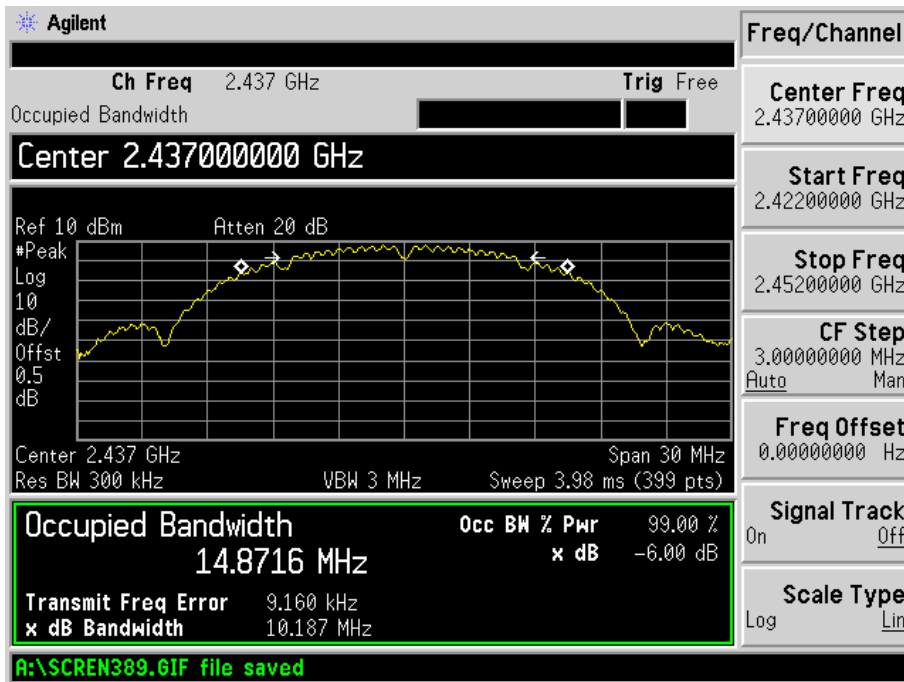

### High Channel

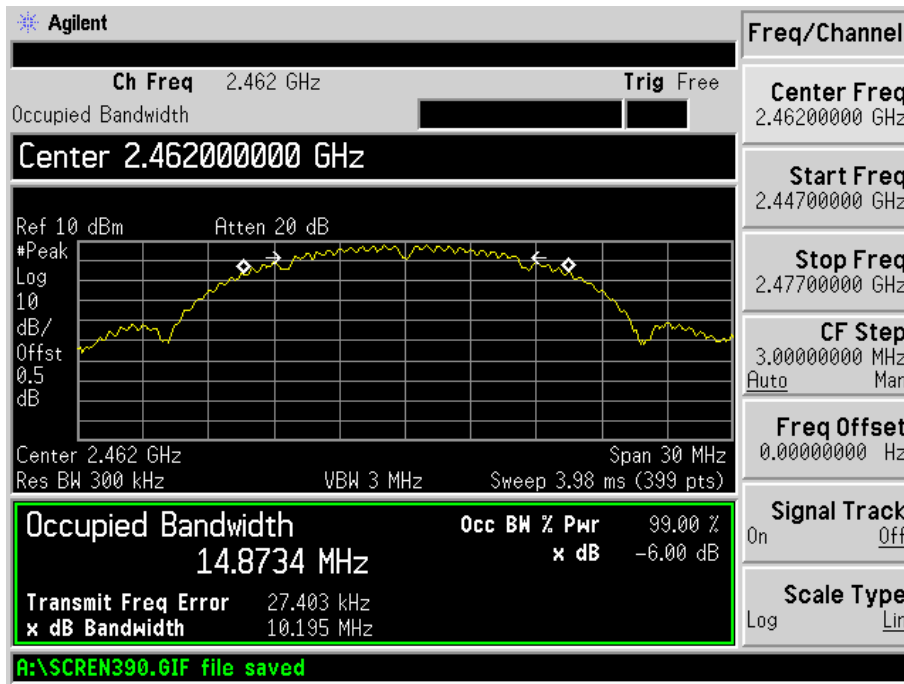


### For 802.11g Low Channel

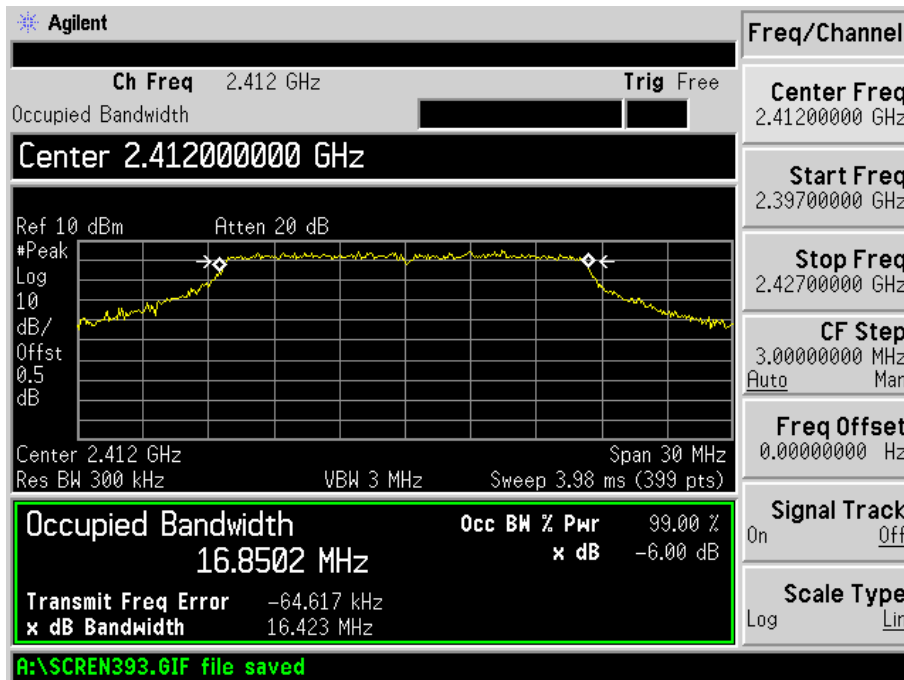





Middle Channel

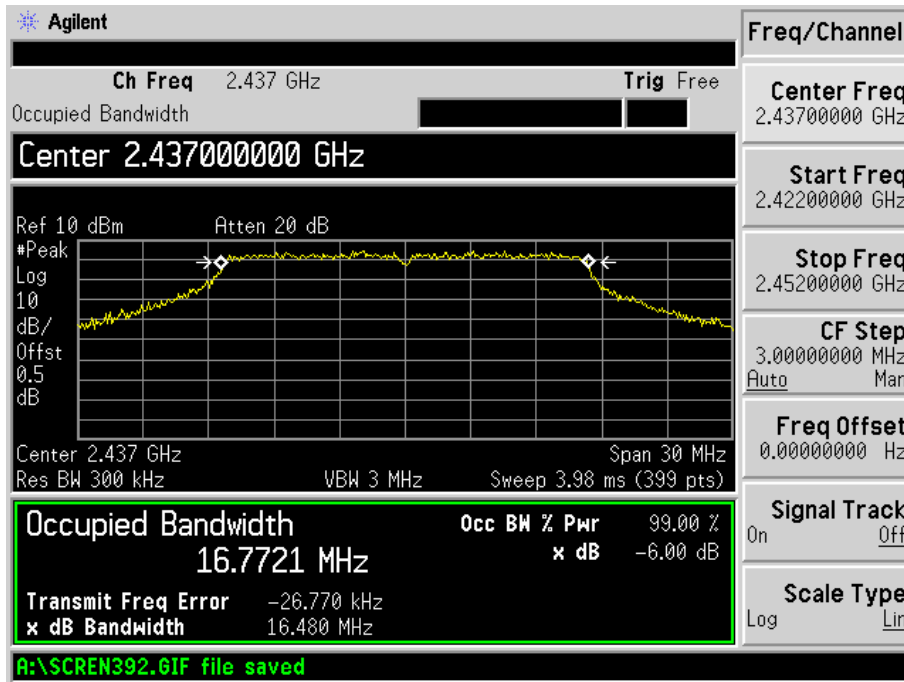


High Channel

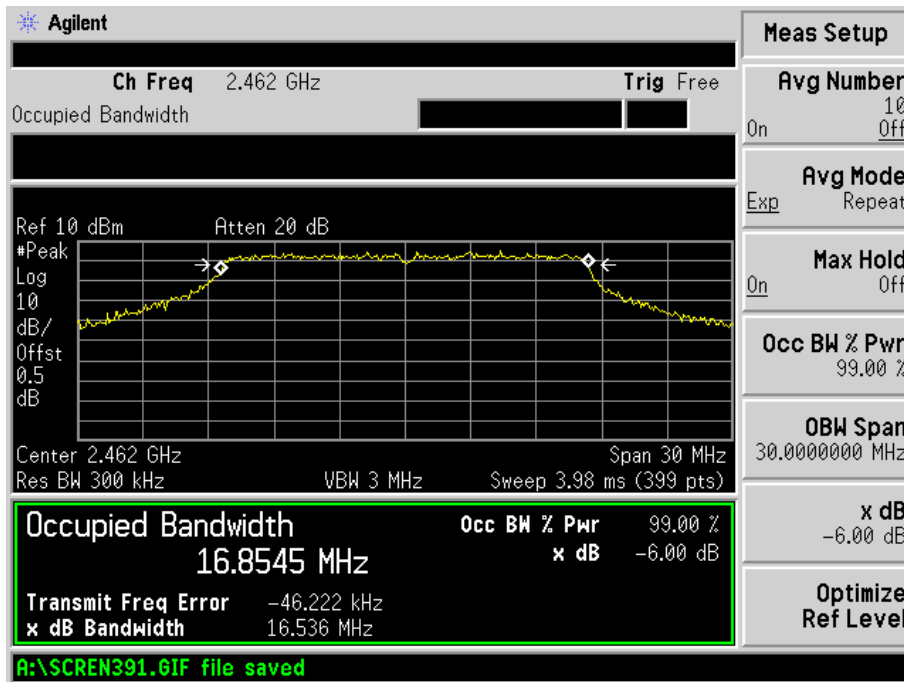


**For 802.11n/HT20**  
Low Channel

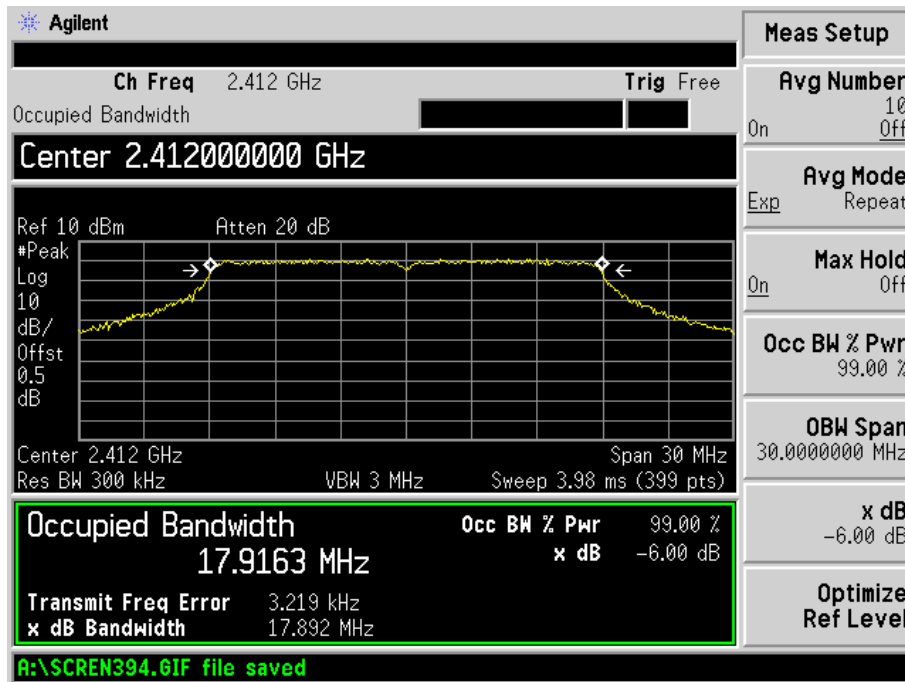

Middle Channel

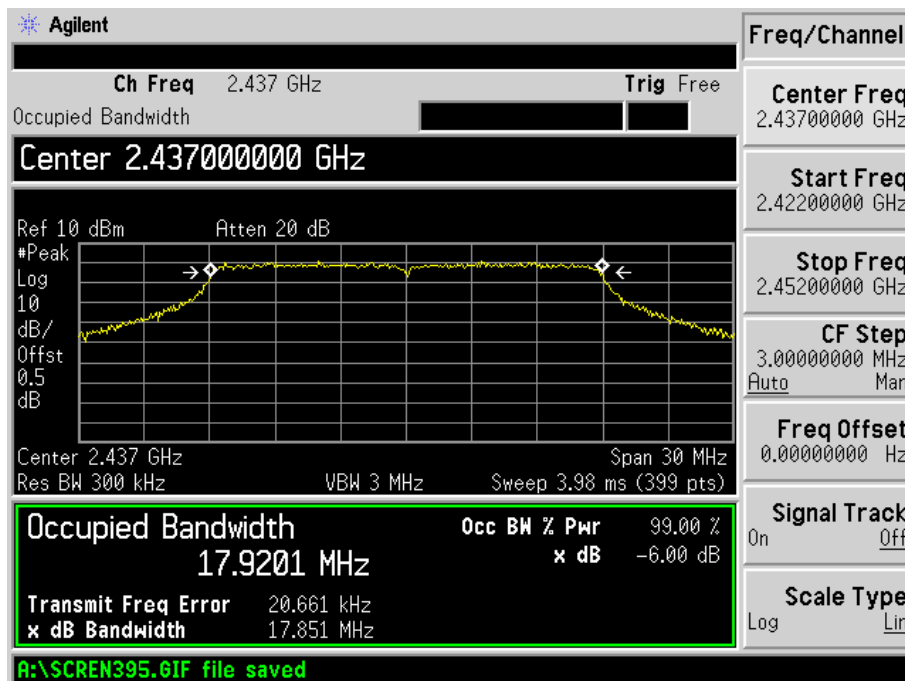


High Channel:

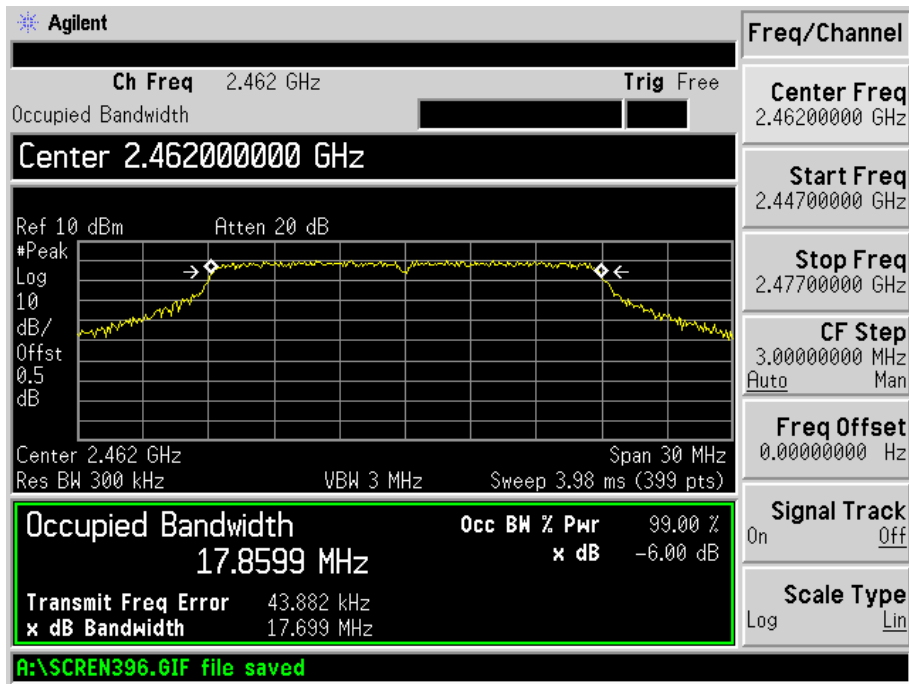


For 802.11n/HT40


Low Channel

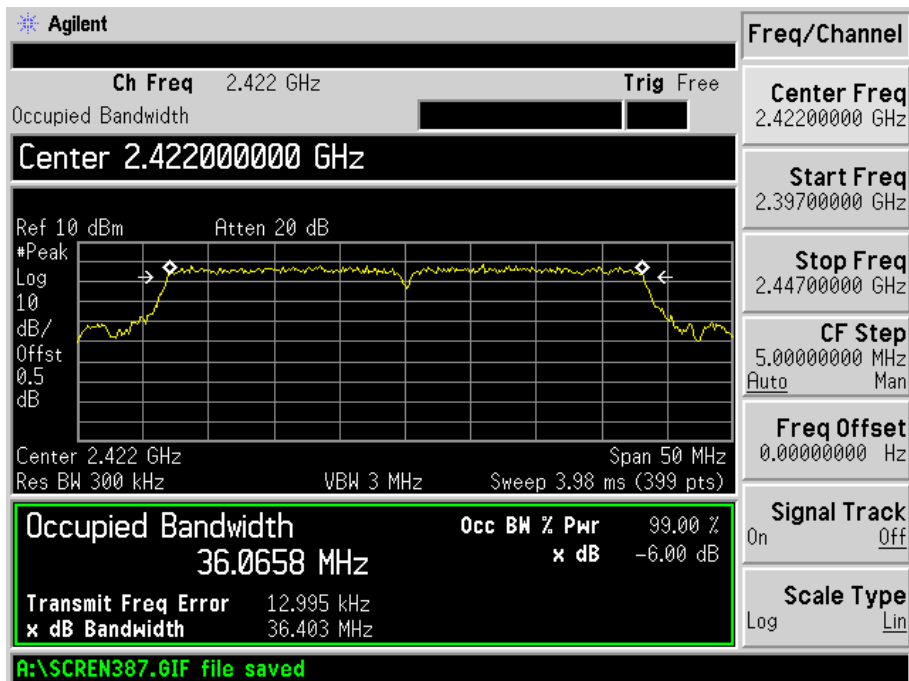

Middle Channel

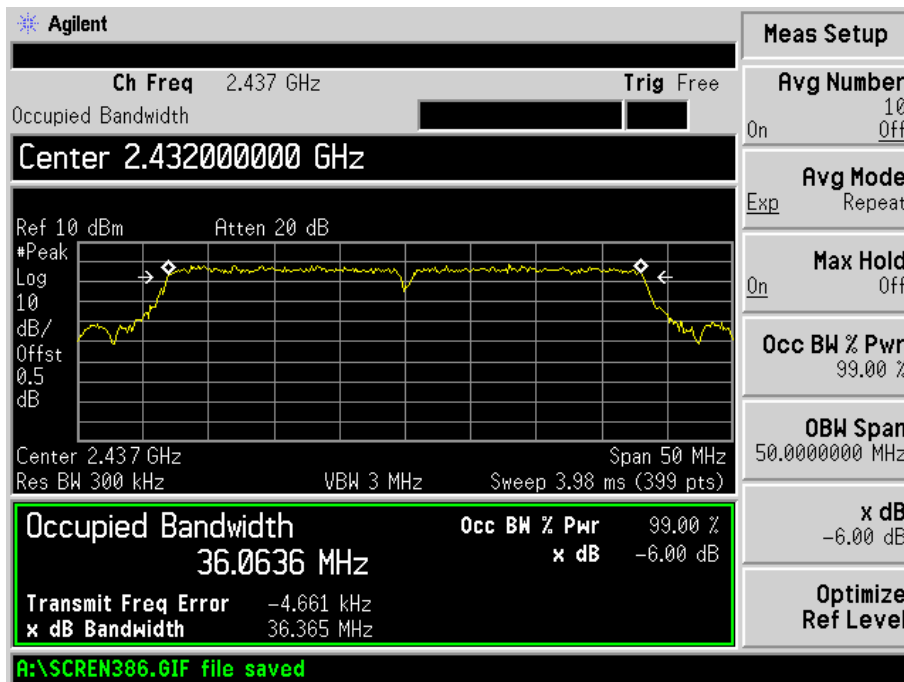

High Channel

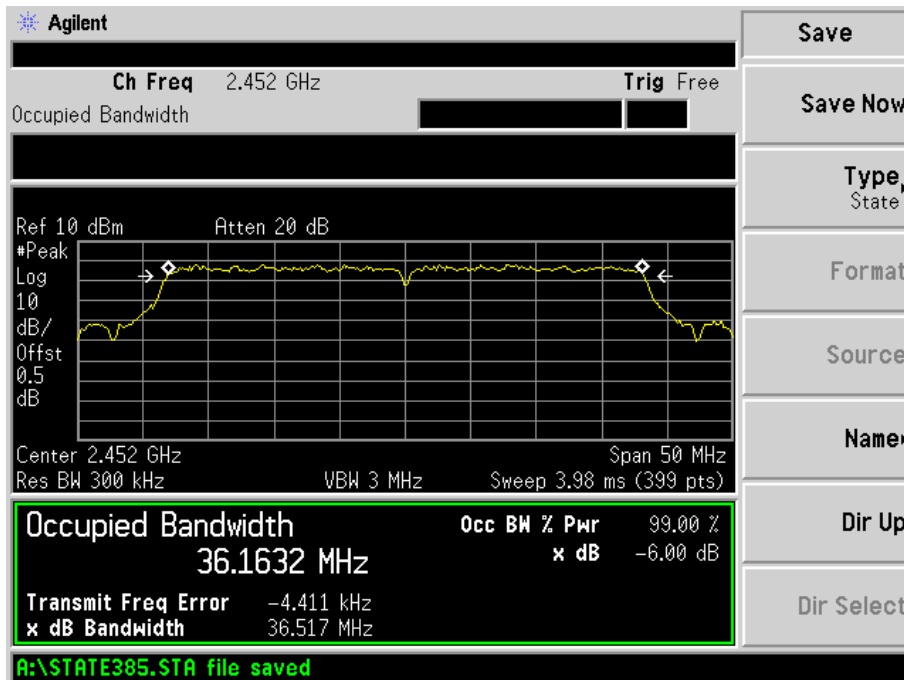


## 7. Maximum Peak Output Power

### 7.1 Limits of Maximum Peak Output Power Measurement

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 EUT Setup

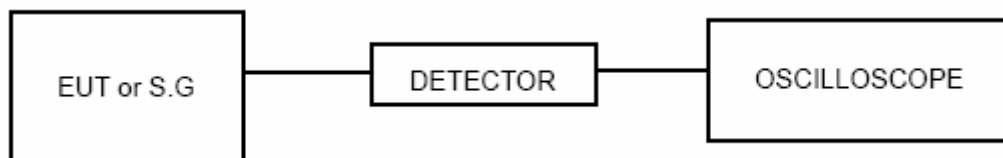

### 7.3 Test Equipment List and Details

See section 2.4.

### 7.4 Test Procedure

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

### 7.5 Test Result

PASS

802.11b:

| Channel No. | Frequency (MHz) | PEAK POWEROUTPUT (dBm) | PEAK POWEROUTPUT (W) | PEAK POWER LIMIT (W) | PASS/FAIL |
|-------------|-----------------|------------------------|----------------------|----------------------|-----------|
| LOW         | 2412            | 15.75                  | 0.0376               | 1                    | PASS      |
| Mid         | 2437            | 16.17                  | 0.0414               | 1                    | PASS      |
| High        | 2462            | 16.19                  | 0.0416               | 1                    | PASS      |

802.11g:

| Channel No. | Frequency (MHz) | PEAK POWEROUTPUT (dBm) | PEAK POWEROUTPUT (W) | PEAK POWER LIMIT (W) | PASS/FAIL |
|-------------|-----------------|------------------------|----------------------|----------------------|-----------|
| LOW         | 2412            | 12.84                  | 0.0192               | 1                    | PASS      |
| Mid         | 2437            | 14.91                  | 0.0310               | 1                    | PASS      |
| High        | 2462            | 12.64                  | 0.0184               | 1                    | PASS      |


802.11n/HT20

| Channel No. | Frequency (MHz) | PEAK POWEROUTPUT (dBm) | PEAK POWEROUTPUT (W) | PEAK POWER LIMIT (W) | PASS/FAIL |
|-------------|-----------------|------------------------|----------------------|----------------------|-----------|
| LOW         | 2412            | 11.05                  | 0.0127               | 1                    | PASS      |
| Mid         | 2437            | 13.37                  | 0.0217               | 1                    | PASS      |
| High        | 2462            | 10.71                  | 0.0118               | 1                    | PASS      |


802.11n/HT40

| Channel No. | Frequency (MHz) | PEAK POWEROUTPUT (dBm) | PEAK POWEROUTPUT (W) | PEAK POWER LIMIT (W) | PASS/FAIL |
|-------------|-----------------|------------------------|----------------------|----------------------|-----------|
| LOW         | 2422            | 10.25                  | 0.0106               | 1                    | PASS      |
| Mid         | 2437            | 10.17                  | 0.0104               | 1                    | PASS      |
| High        | 2452            | 10.04                  | 0.0101               | 1                    | PASS      |


For 802.11b  
Low Channel

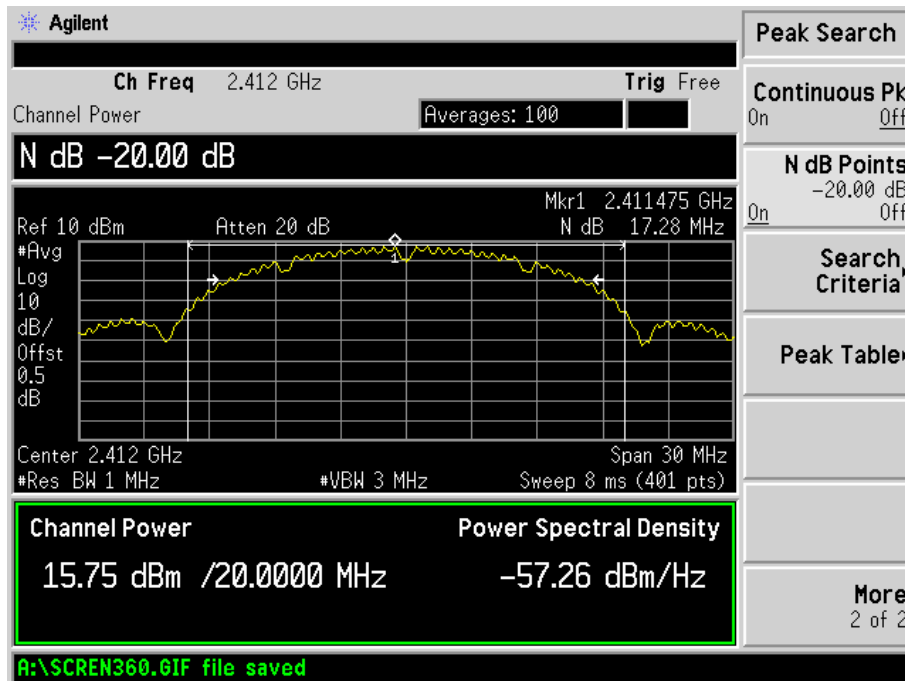


Middle Channel

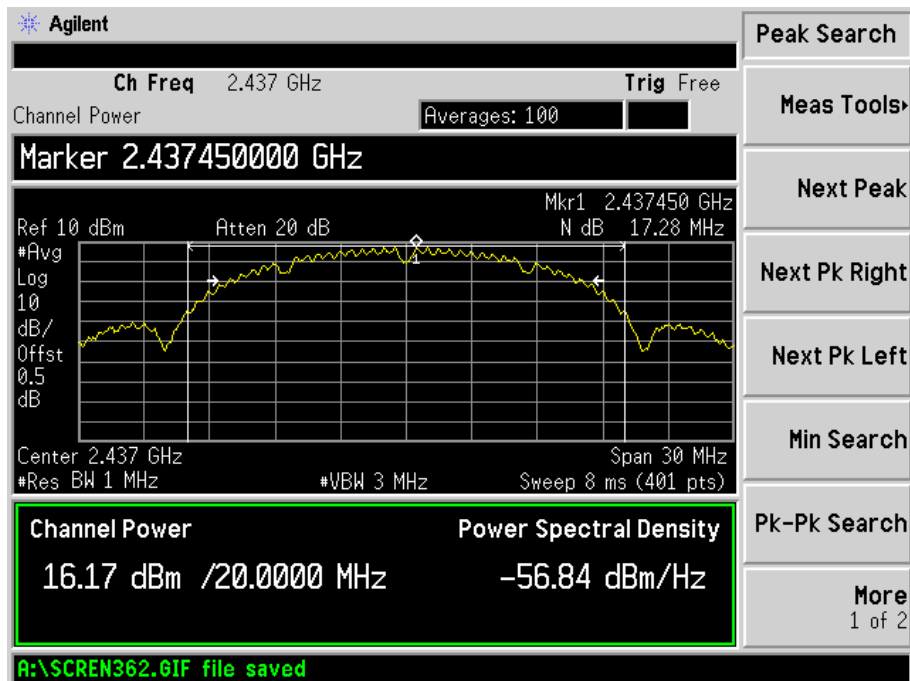

### High Channel

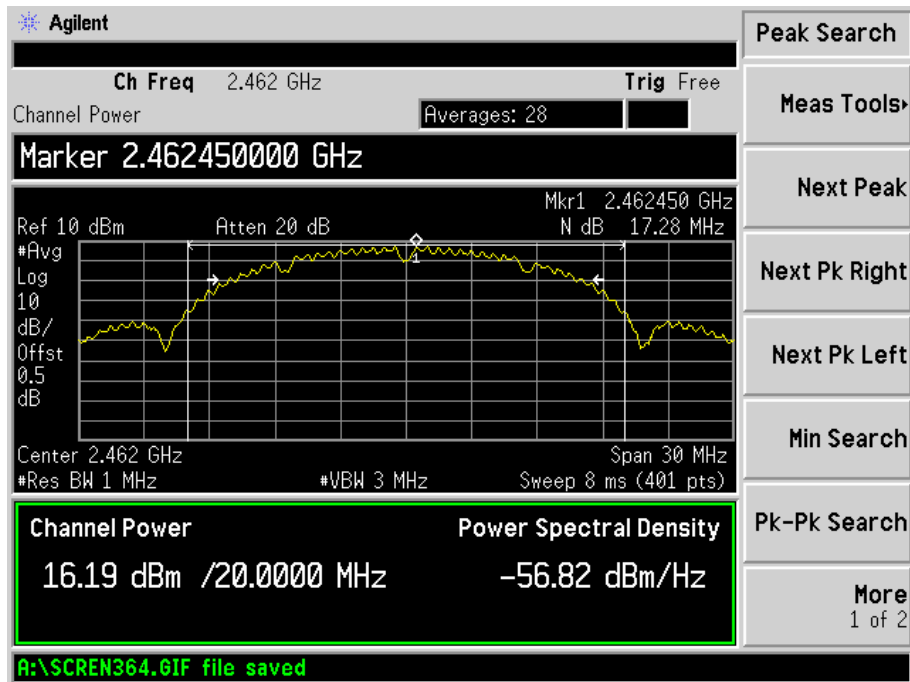


### For 802.11g Low Channel

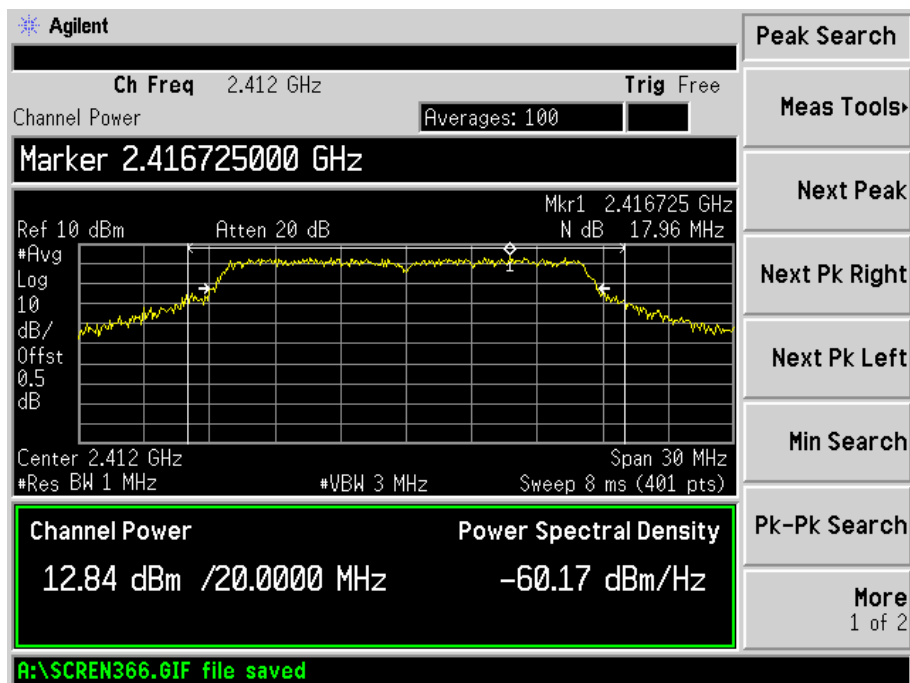





Middle Channel

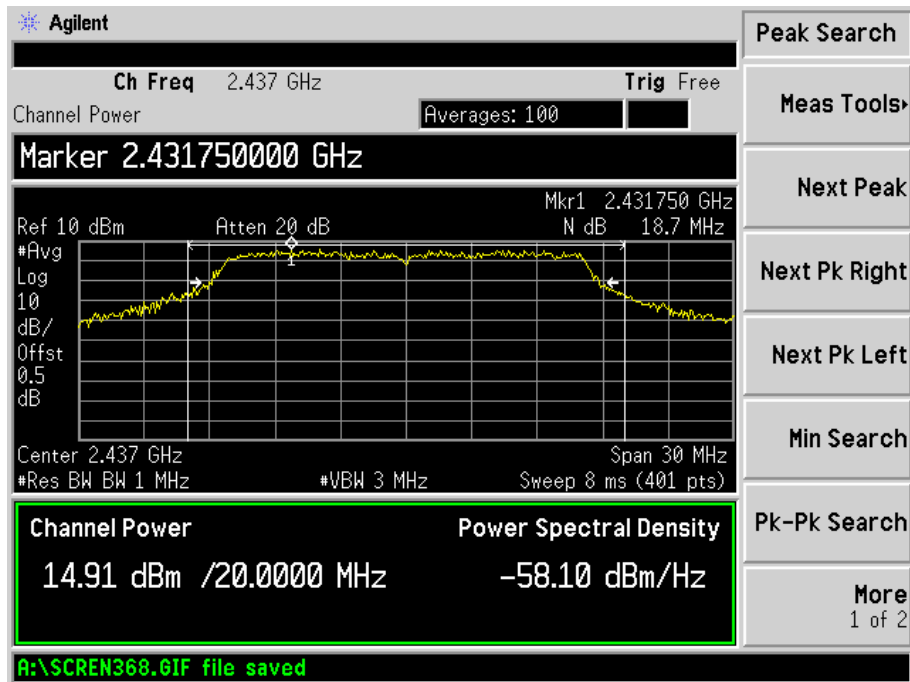


High Channel

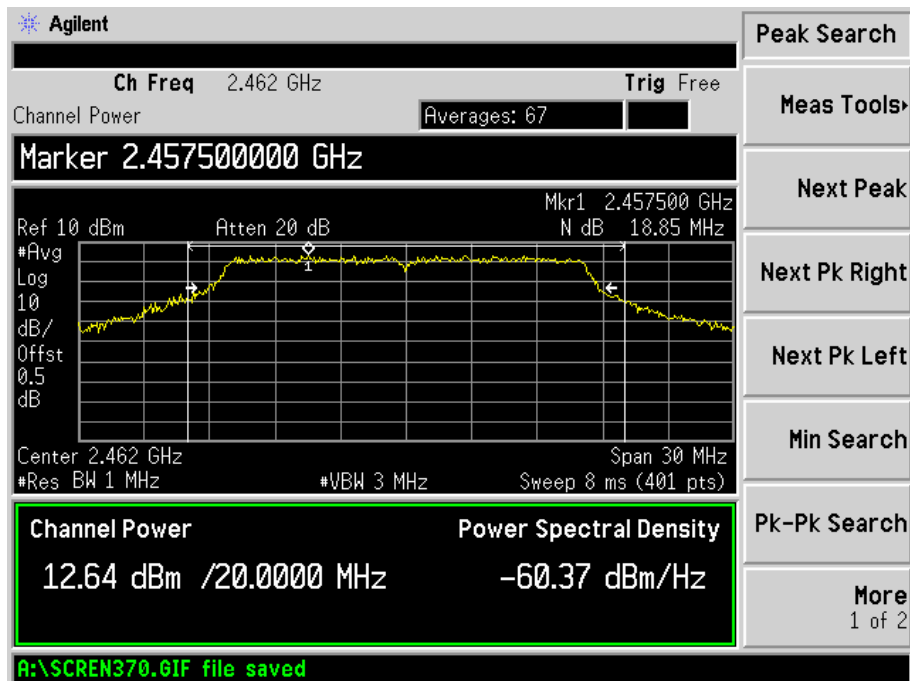


For 802.11n/HT20  
Low Channel

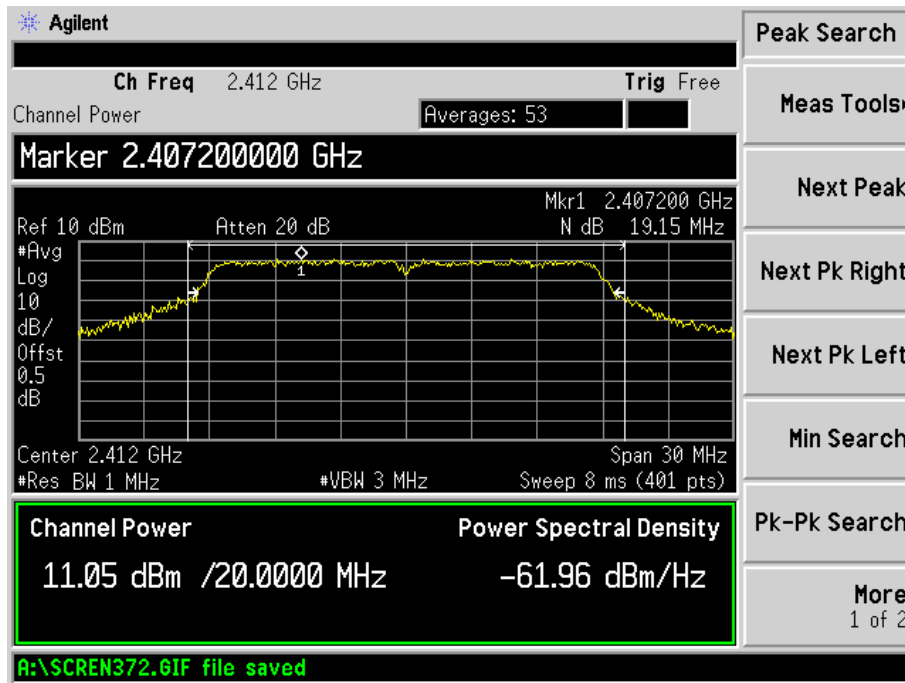


Mid Channel

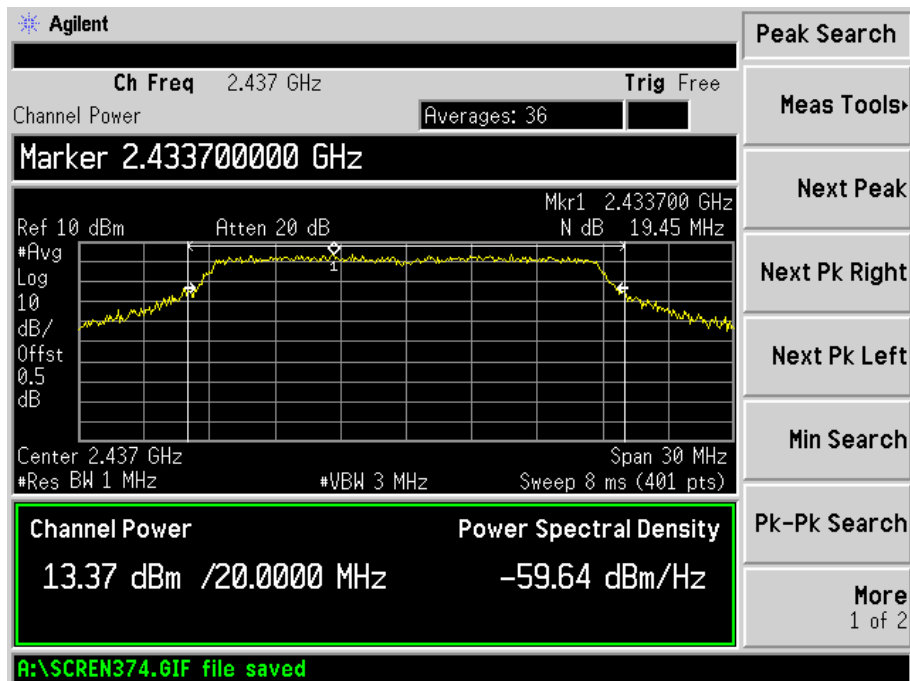


### High Channel

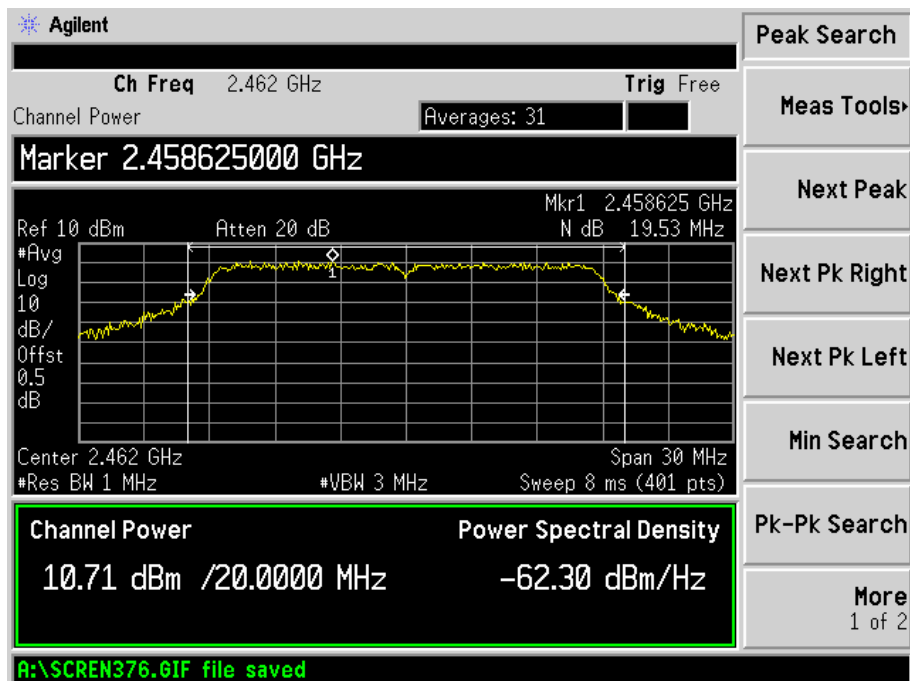


### 802.11n/HT40 Low Channel

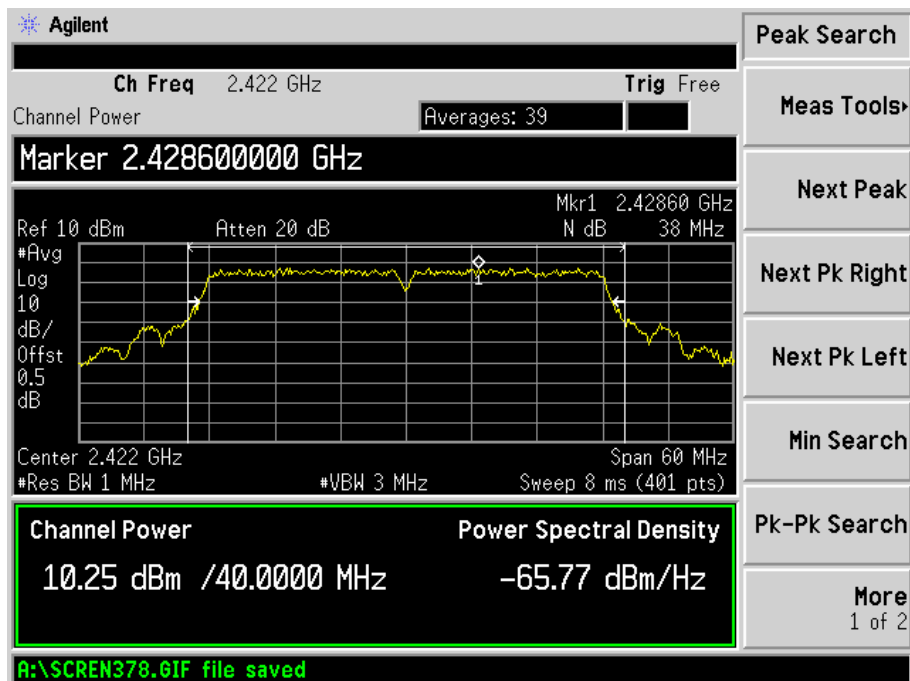

Middle Channel

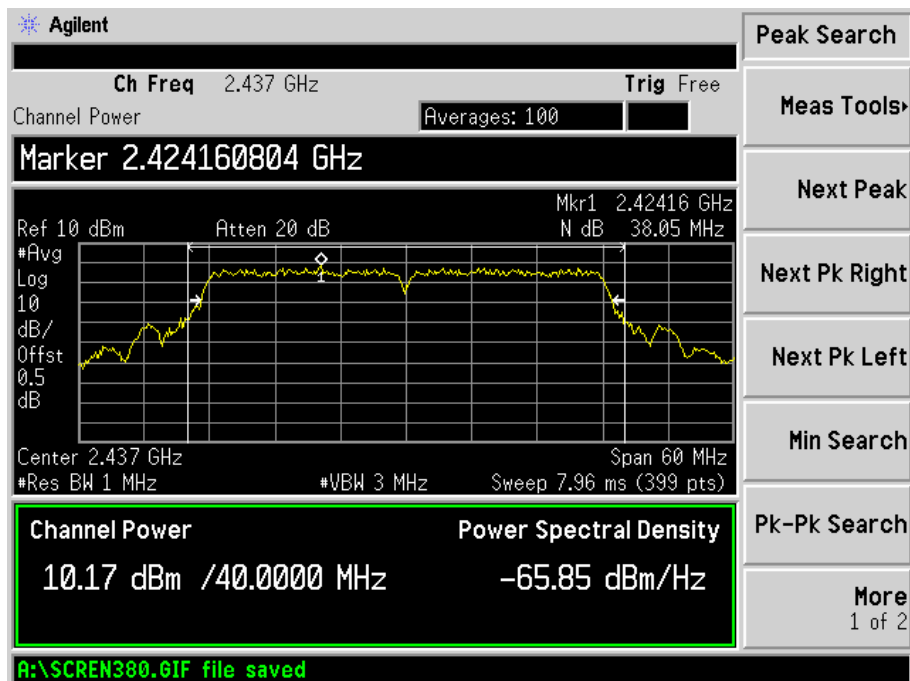

High Channel

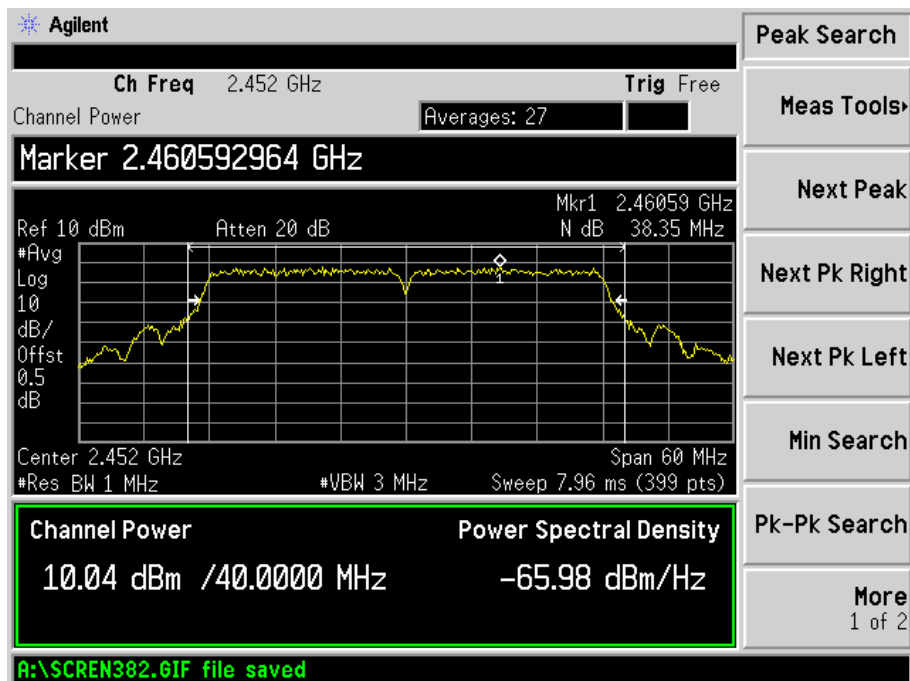


## 8. Power Spectral Density Measurement

### 8.1 Limits of Power Spectral Density Measurement

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2 EUT Setup

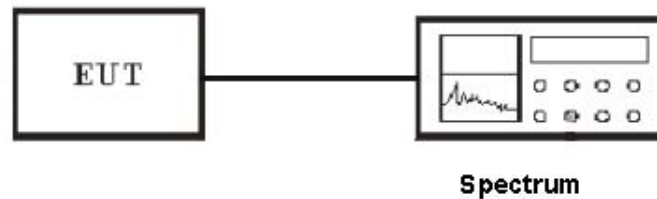

### 8.3 Test Equipment List and Details

See section 2.4.

### 8.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 3kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 8.5 Test Result


PASS

| Test mode       | Test channel                | Reading<br>dBm/3kHz | Limit<br>dBm/3kHz |
|-----------------|-----------------------------|---------------------|-------------------|
| 802.11b         | Low channel<br>(2412MHz)    | -13.54              | 8                 |
|                 | Middle channel<br>(2437MHz) | -13.40              | 8                 |
|                 | High channel<br>(2462MHz)   | -13.59              | 8                 |
| 802.11g         | Low channel<br>(2412MHz)    | -15.01              | 8                 |
|                 | Middle channel<br>(2437MHz) | -15.07              | 8                 |
|                 | High channel<br>(2462MHz)   | -15.05              | 8                 |
| 802.11n<br>HT20 | Low channel<br>(2412MHz)    | -17.83              | 8                 |
|                 | Middle channel<br>(2437MHz) | -17.96              | 8                 |
|                 | High channel<br>(2462MHz)   | -17.39              | 8                 |
| 802.11n<br>HT40 | Low channel<br>(2422MHz)    | -21.35              | 8                 |
|                 | Middle channel<br>(2437MHz) | -21.25              | 8                 |
|                 | High channel<br>(2452MHz)   | -21.42              | 8                 |


IEEE 802.11b  
Low Channel:

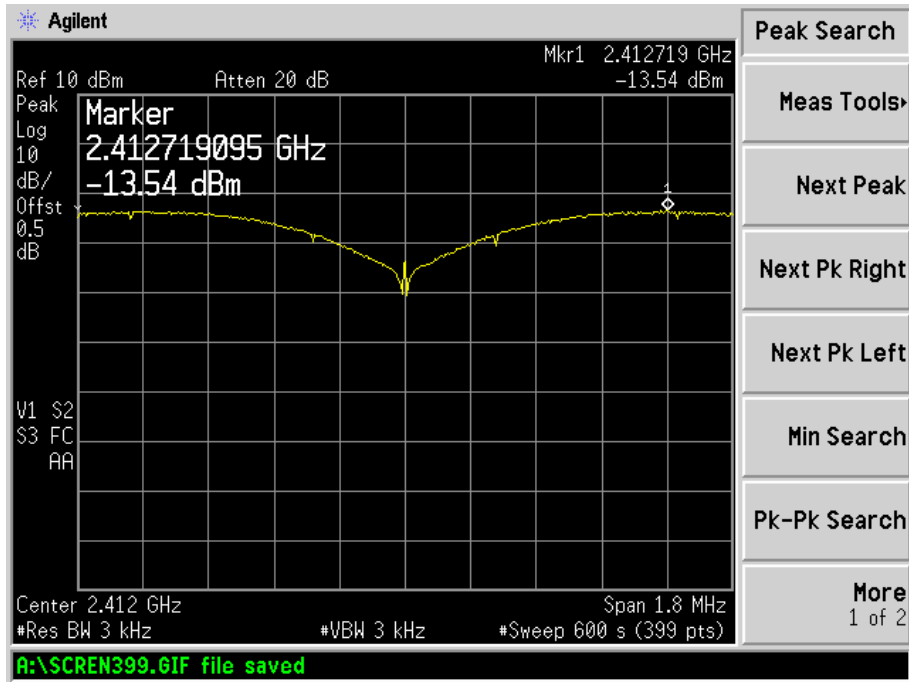


Middle Channel

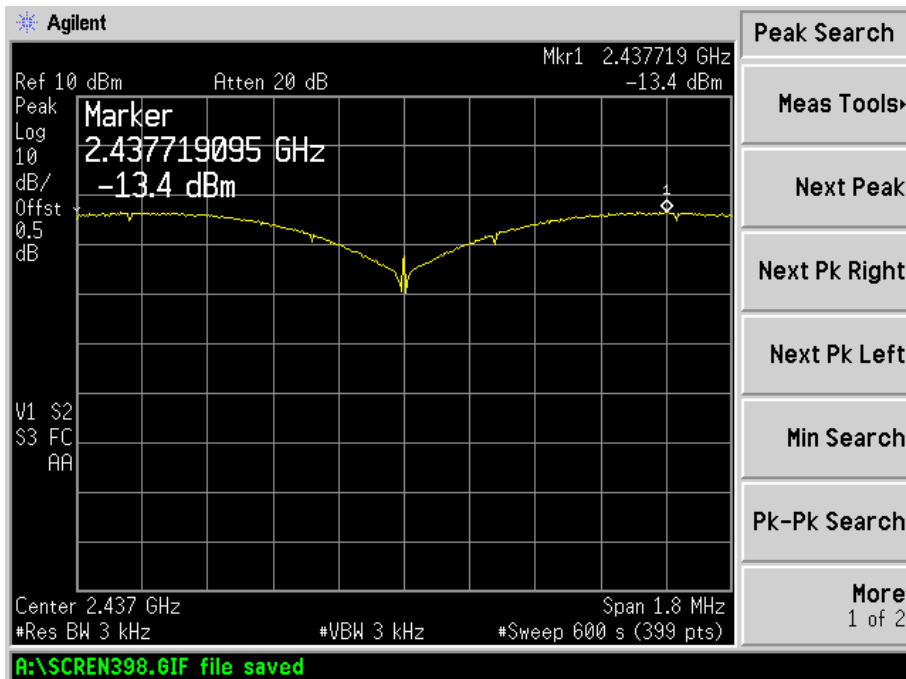

### High Channel

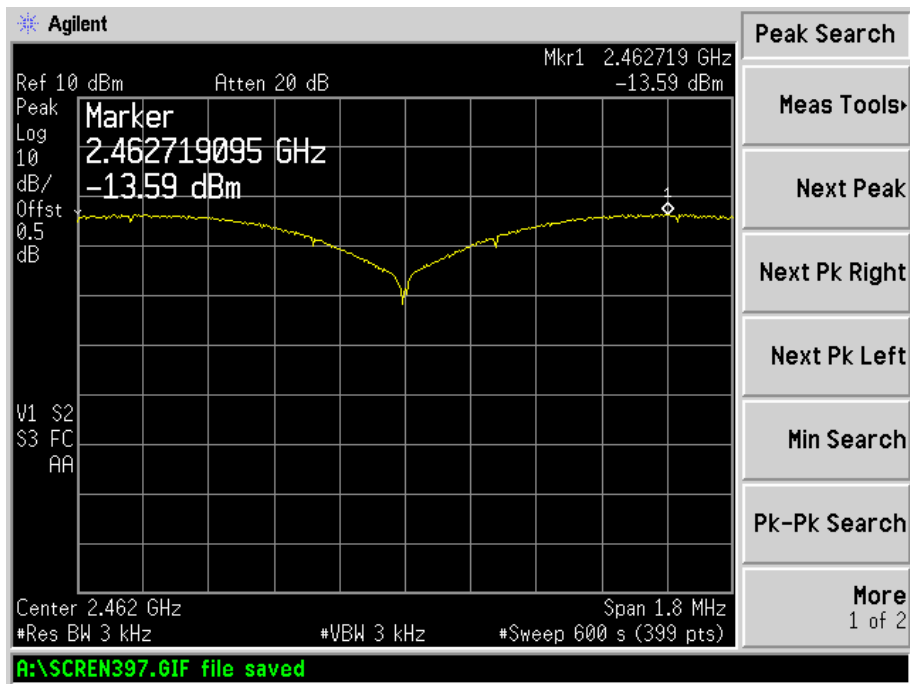


### For 802.11g Low Channel

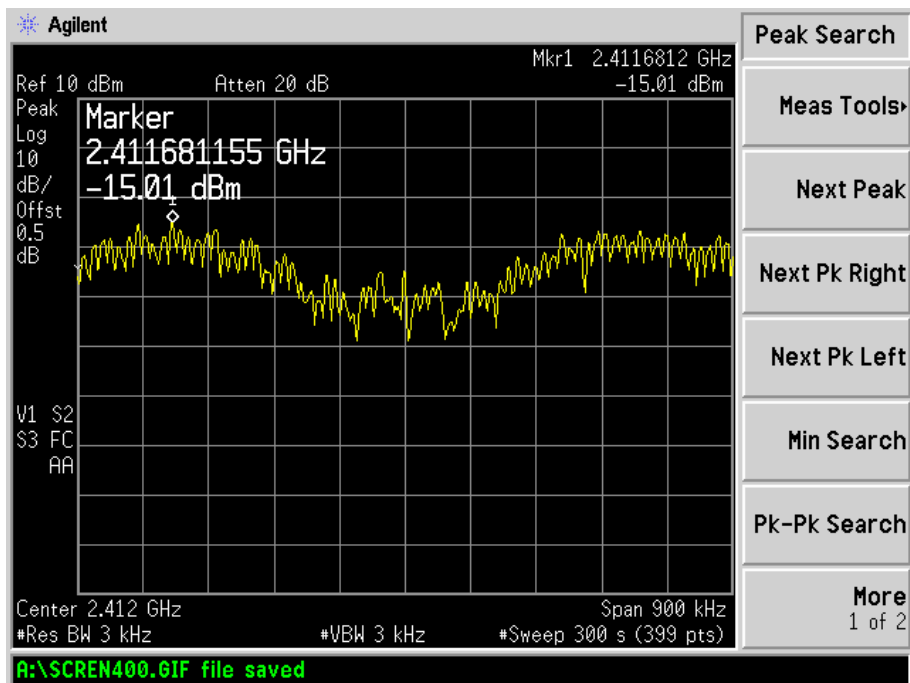





### Middle Channel

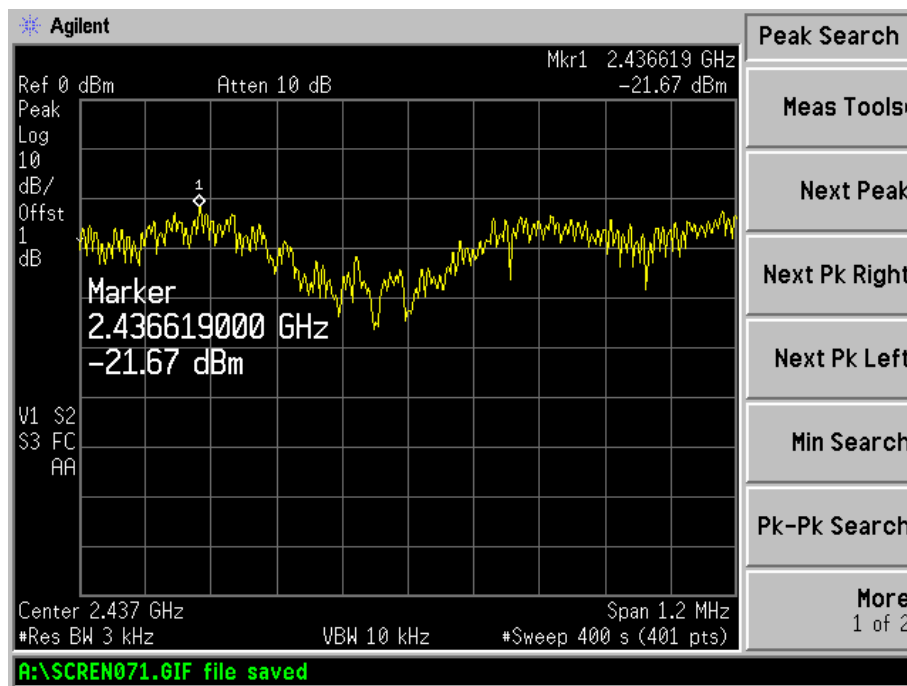


### High Channel

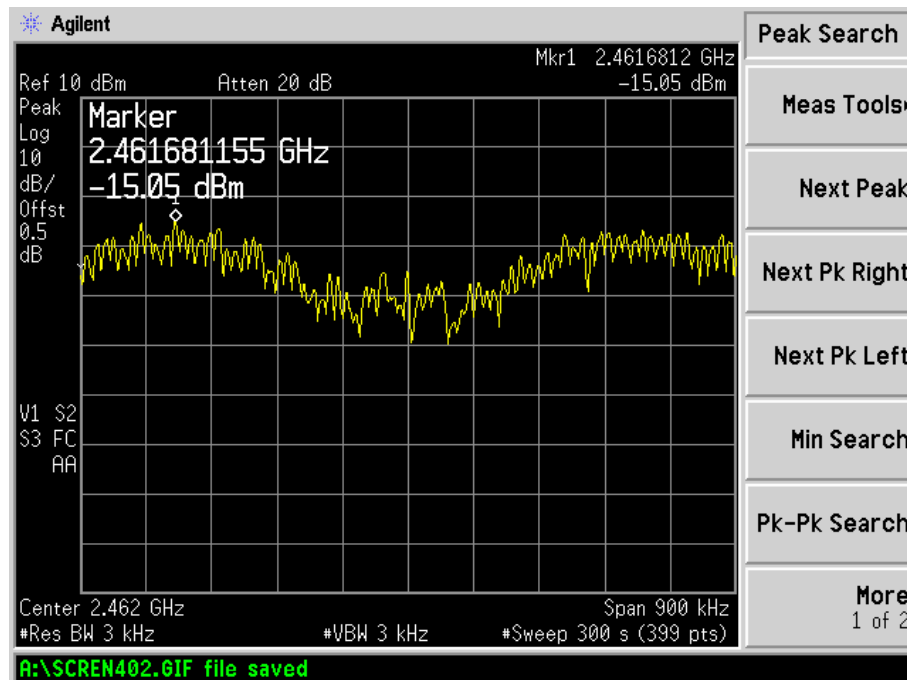


For 802.11n/HT20  
Low Channel

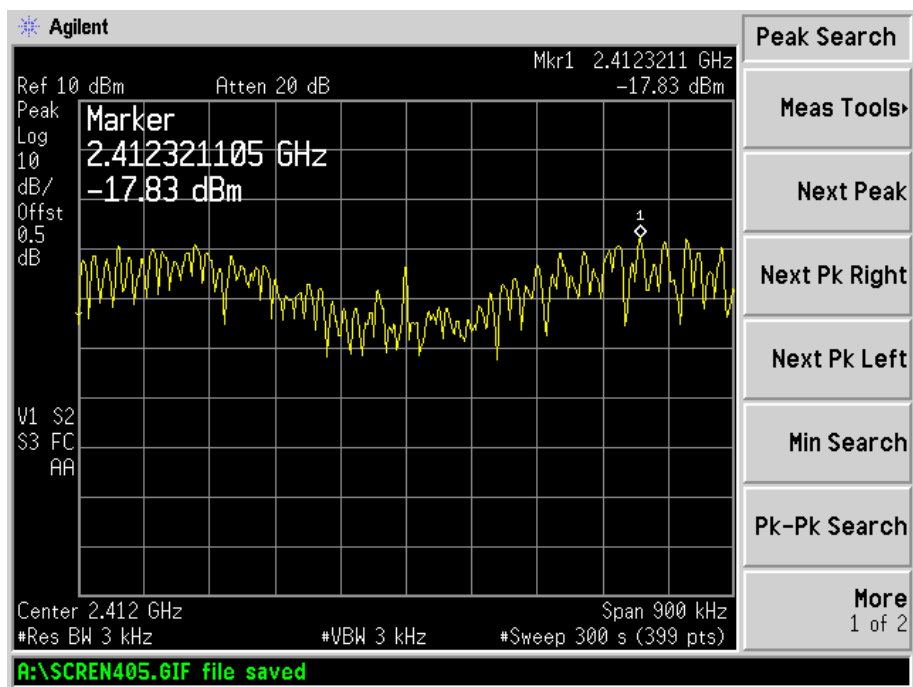


Middle Channel

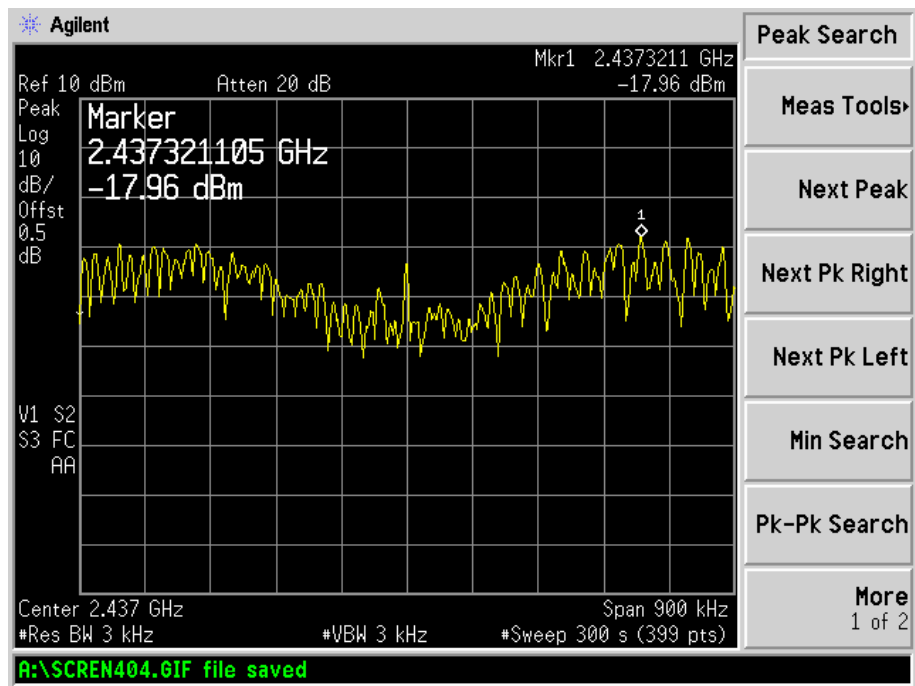


### High Channel

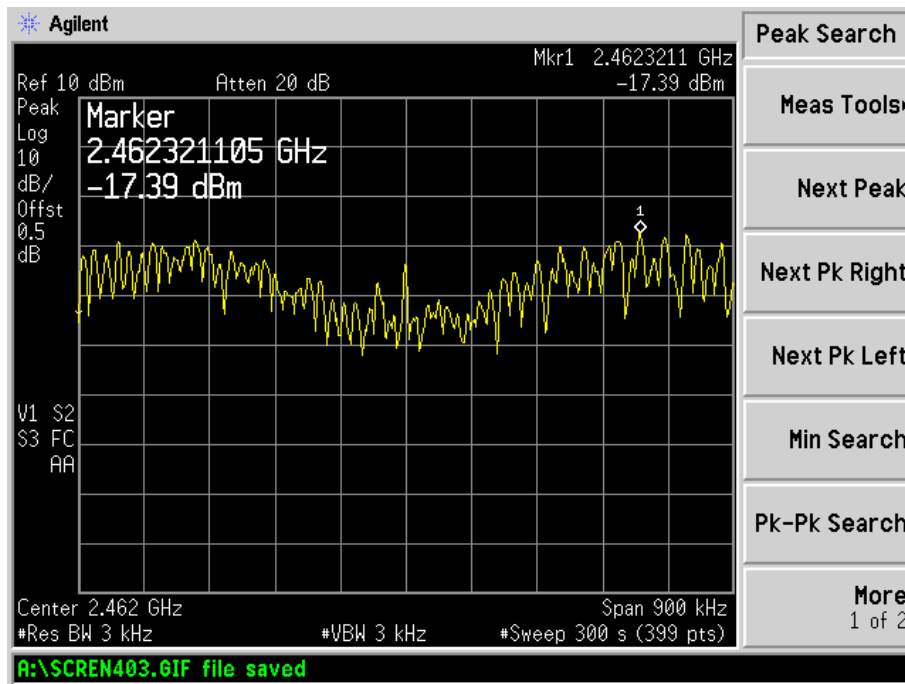


### For 802.11n/HT40 Low Channel

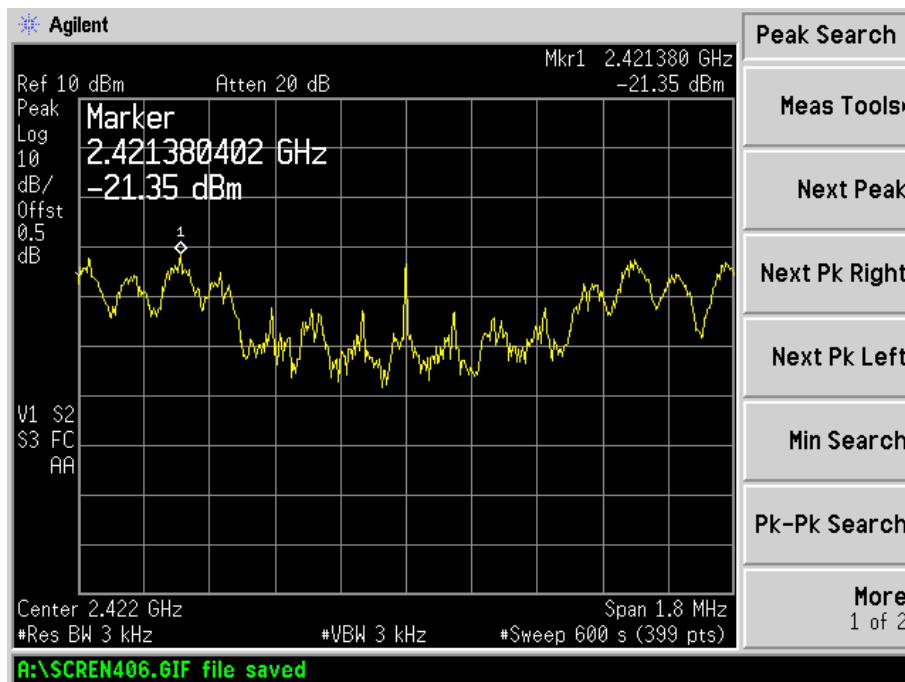

Middle Channel

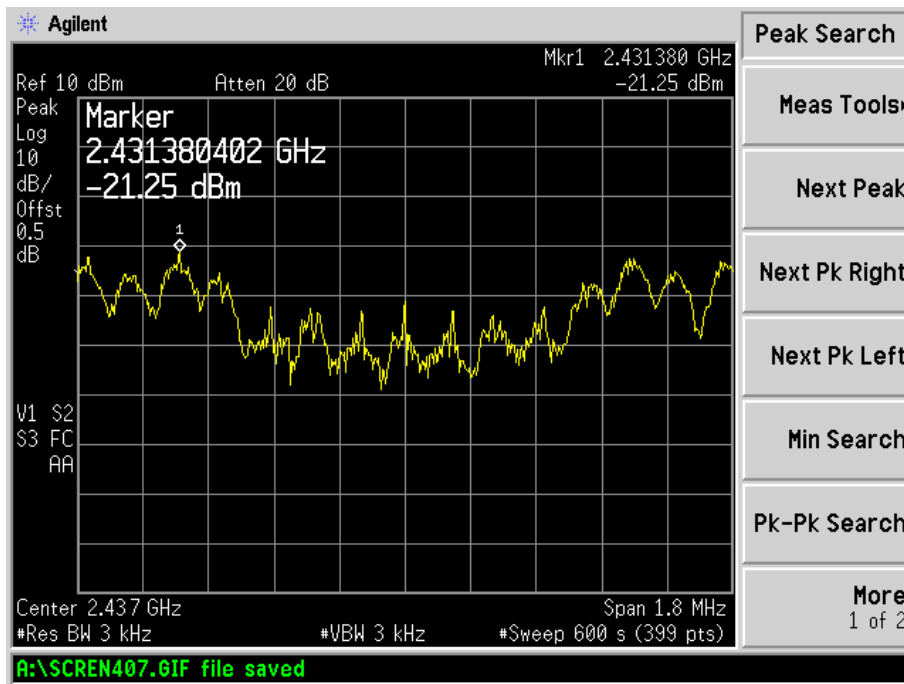

High Channel

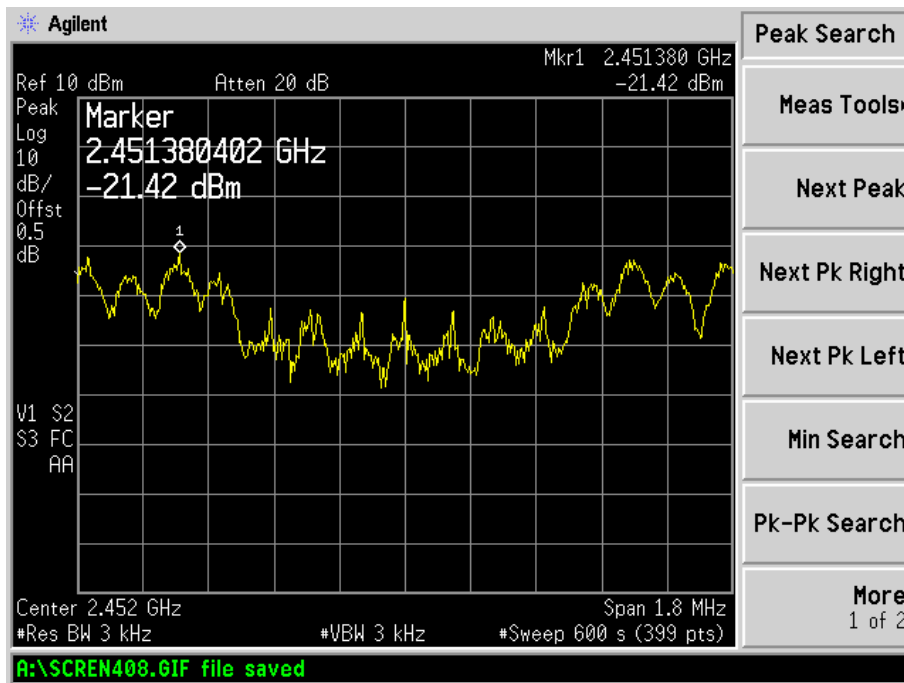

## 9. Band Edges Measurement

### 9.1 Limits of Band Edges Measurement

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.2 Test Equipment List and Details

See section 2.4.

### 9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.


### 9.4 Test Result

PASS

| Test mode       | Frequency MHz | Limit dBuV /dB | Result |
|-----------------|---------------|----------------|--------|
| 802.11b         | 2390.00       | <54dBuv        | Pass   |
|                 | 2400.00       | >20dB          | Pass   |
|                 | 2483.50       | <54dBuv        | Pass   |
| 802.11g         | 2390.00       | <54dBuv        | Pass   |
|                 | 2400.00       | >20dB          | Pass   |
|                 | 2483.50       | <54dBuv        | Pass   |
| 802.11n<br>HT20 | 2390.00       | <54dBuv        | Pass   |
|                 | 2400.00       | >20dB          | Pass   |
|                 | 2483.50       | <54dBuv        | Pass   |
| 802.11n<br>HT40 | 2390.00       | <54dBuv        | Pass   |
|                 | 2400.00       | >20dB          | Pass   |
|                 | 2483.50       | <54dBuv        | Pass   |


**IEEE 802.11b**

Lowest channel:

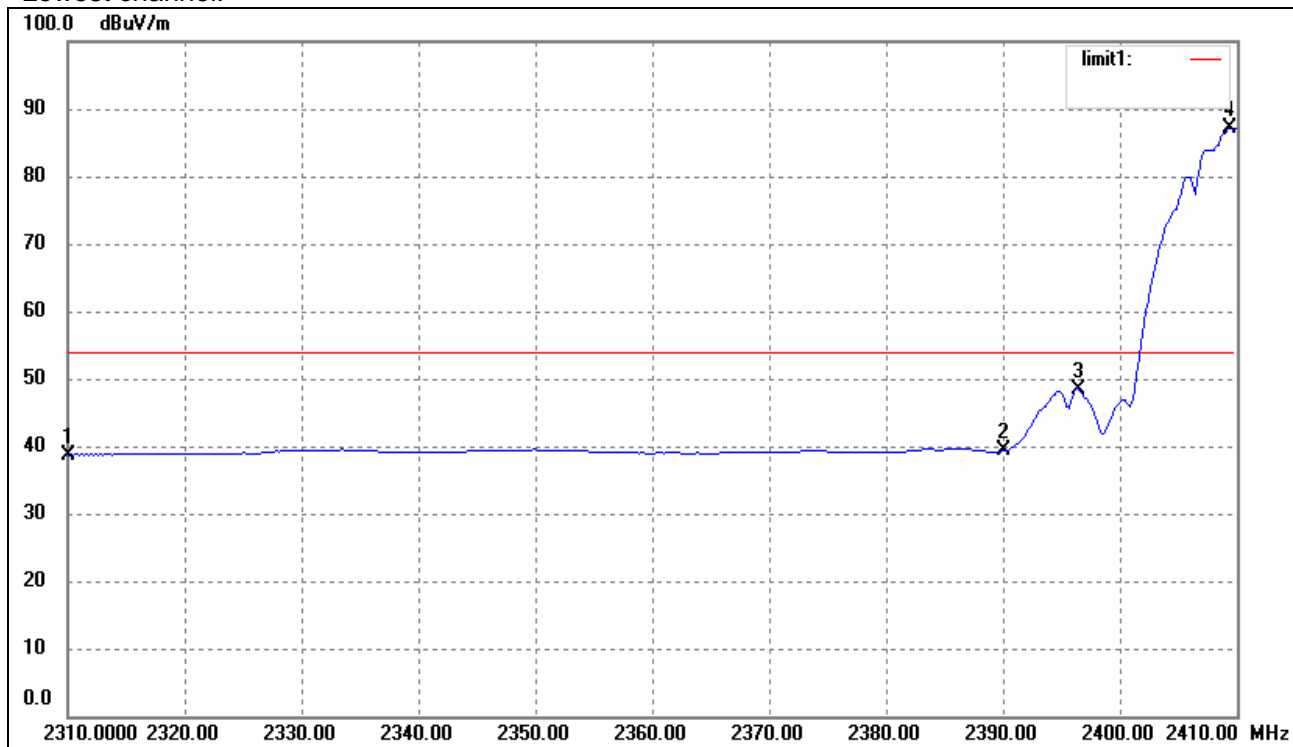


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2310.000        | 36.25            | 2.49           | 38.74           | 54.00          | -15.26      | Average |
|     | 2310.000        | 49.65            | 2.49           | 52.14           | 74.00          | -21.86      | Peak    |
| 2   | 2390.000        | 36.61            | 2.66           | 39.27           | 54.00          | -14.73      | Average |
|     | 2390.000        | 50.10            | 2.66           | 52.76           | 74.00          | -21.24      | Peak    |
| 3   | 2396.400        | 45.82            | 2.68           | 48.50           | 54.00          | -5.50       | Average |
|     | 2396.400        | 58.89            | 2.68           | 61.57           | 74.00          | -12.43      | Peak    |

Highest Channel:

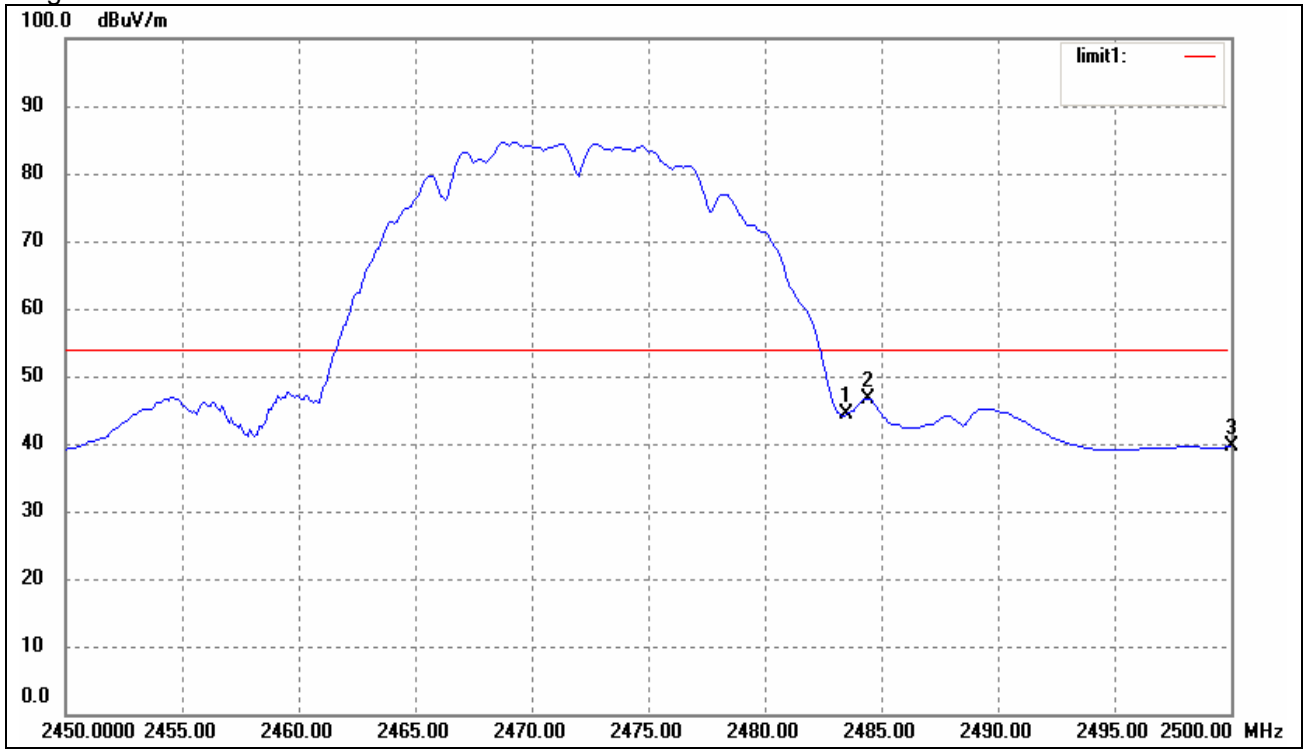

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2483.500        | 41.48            | 2.87           | 44.35           | 54.00          | -9.65       | Average |
|     | 2483.5          | 53.61            | 2.87           | 56.48           | 74.00          | -17.52      | Peak    |
| 2   | 2484.400        | 43.76            | 2.88           | 46.64           | 54.00          | -7.36       | Average |
|     | 2484.400        | 56.13            | 2.88           | 59.01           | 74.00          | -14.99      | Peak    |
| 3   | 2500.000        | 36.64            | 2.92           | 39.56           | 54.00          | -14.44      | Average |
|     | 2500.000        | 48.43            | 2.92           | 51.30           | 74.00          | -22.70      | Peak    |


**IEEE 802.11g**  
 Lowest Channel:

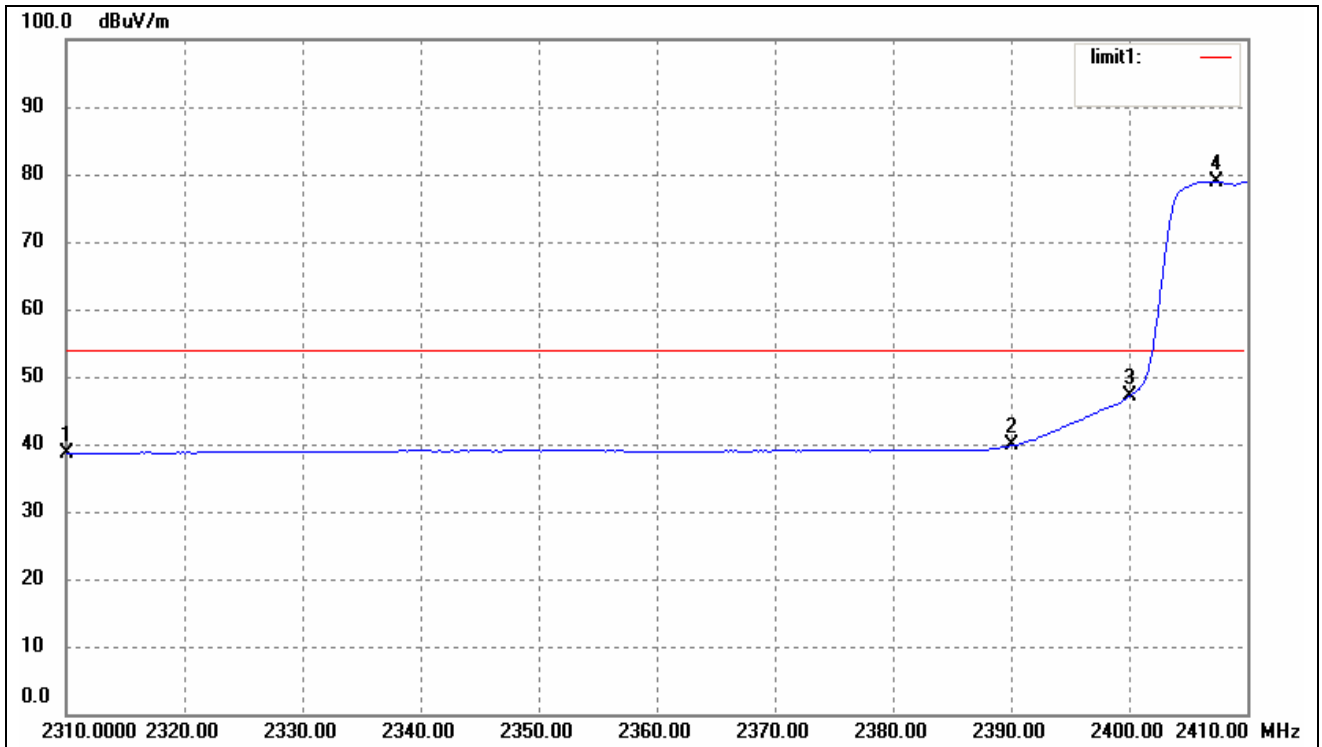

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2310.000        | 36.21            | 2.49           | 38.70           | 54.00          | -15.30      | Average |
|     | 2310.000        | 49.37            | 2.49           | 51.86           | 74.00          | -22.14      | Peak    |
| 2   | 2390.000        | 37.10            | 2.66           | 39.76           | 54.00          | -14.24      | Average |
|     | 2390.000        | 50.36            | 2.66           | 53.02           | 74.00          | -20.98      | Peak    |




Highest Channel:

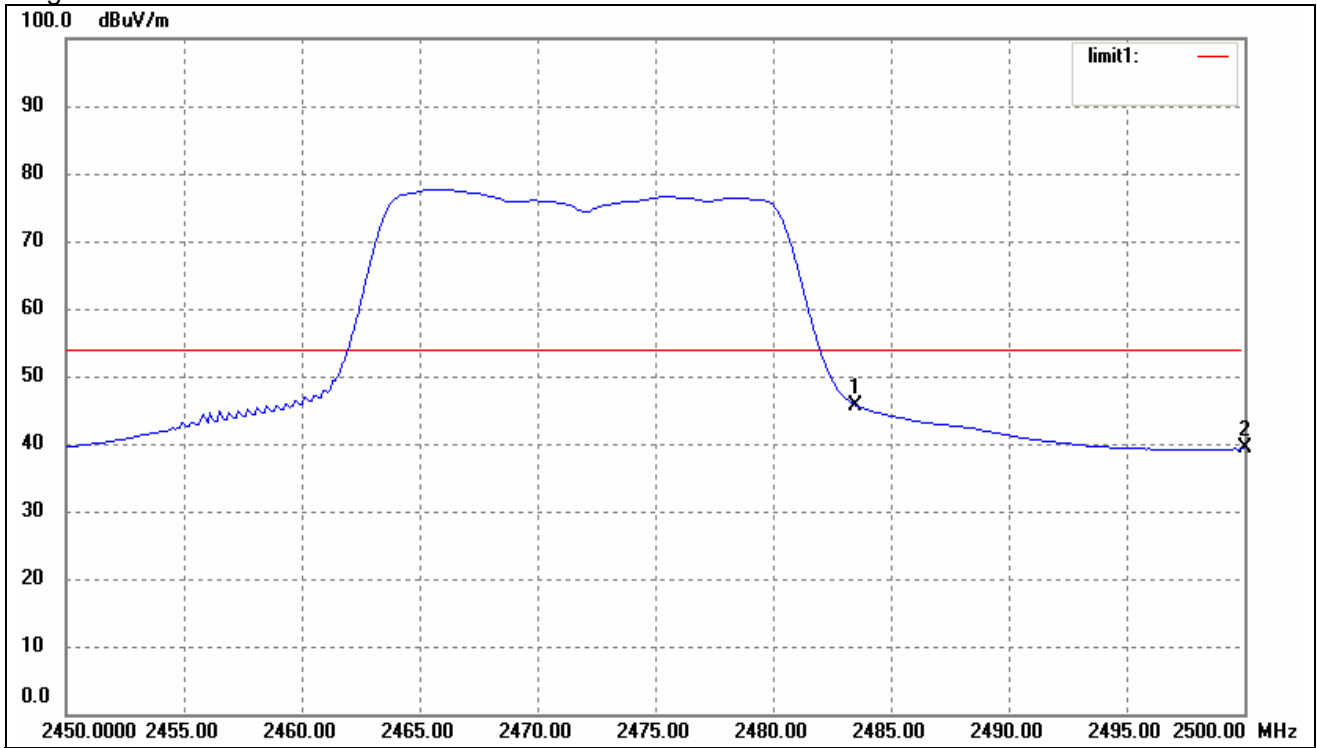


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------|
| 1   | 2483.500           | 42.87               | 2.87            | 45.74              | 54.00             | -8.26          | Average |
|     | 2483.500           | 56.78               | 2.87            | 59.65              | 74.00             | -14.35         | Peak    |
| 2   | 2500.000           | 36.37               | 2.92            | 39.29              | 54.00             | -14.71         | Average |
|     | 2500.000           | 49.96               | 2.92            | 52.88              | 74.00             | -21.12         | Peak    |

For 802.11n/HT20  
 Lowest Channel

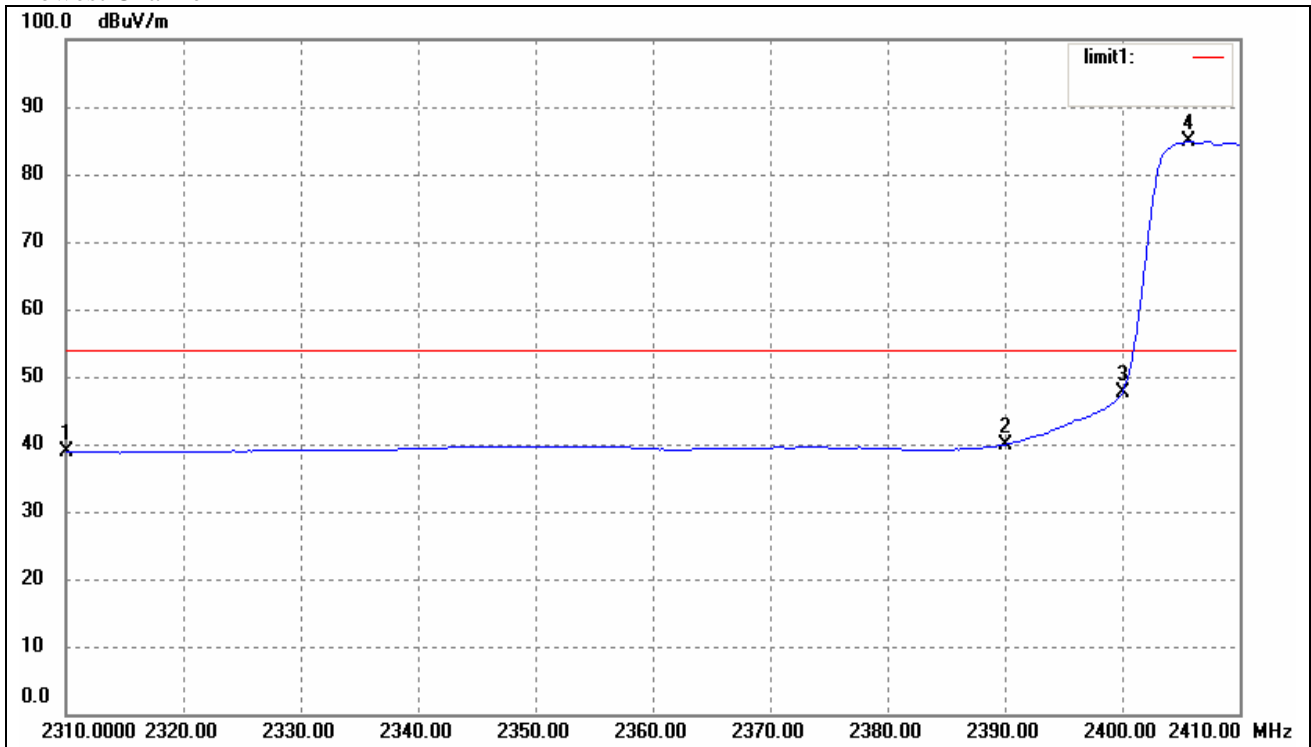


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------|
| 1   | 2310.000           | 36.30               | 2.49            | 38.79              | 54.00             | -15.21         | Average |
|     | 2310.000           | 49.19               | 2.49            | 51.68              | 74.00             | -22.32         | Peak    |
| 2   | 2390.000           | 37.34               | 2.66            | 40.00              | 54.00             | -14.00         | Average |
|     | 2390.000           | 49.97               | 2.66            | 52.63              | 74.00             | -21.37         | Peak    |

Highest channel

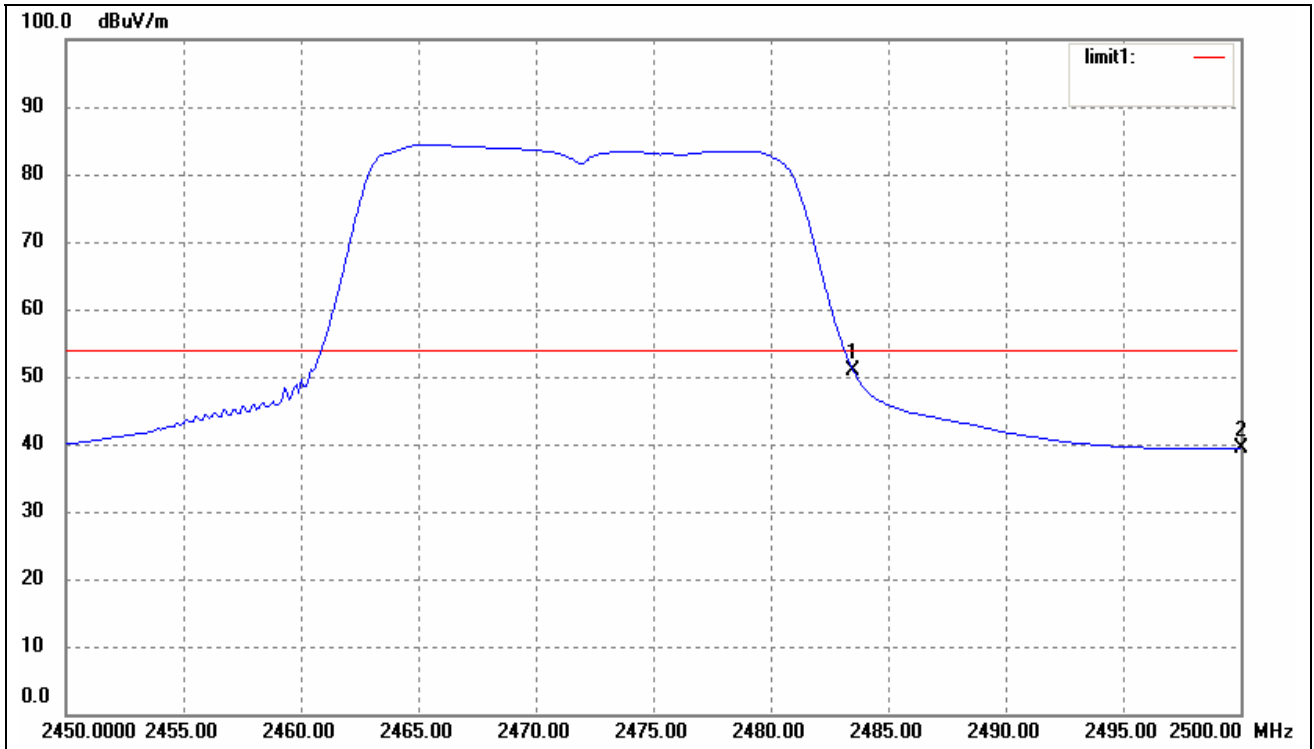


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2483.500        | 48.07            | 2.87           | 50.94           | 54.00          | -3.06       | Average |
|     | 2483.500        | 59.59            | 2.87           | 62.46           | 74.00          | -11.54      | Peak    |
| 2   | 2500.000        | 36.48            | 2.92           | 39.40           | 54.00          | -14.60      | Average |
|     | 2500.000        | 48.87            | 2.92           | 51.79           | 74.00          | -22.21      | Peak    |

For 802.11n/HT40  
 Lowest Channel

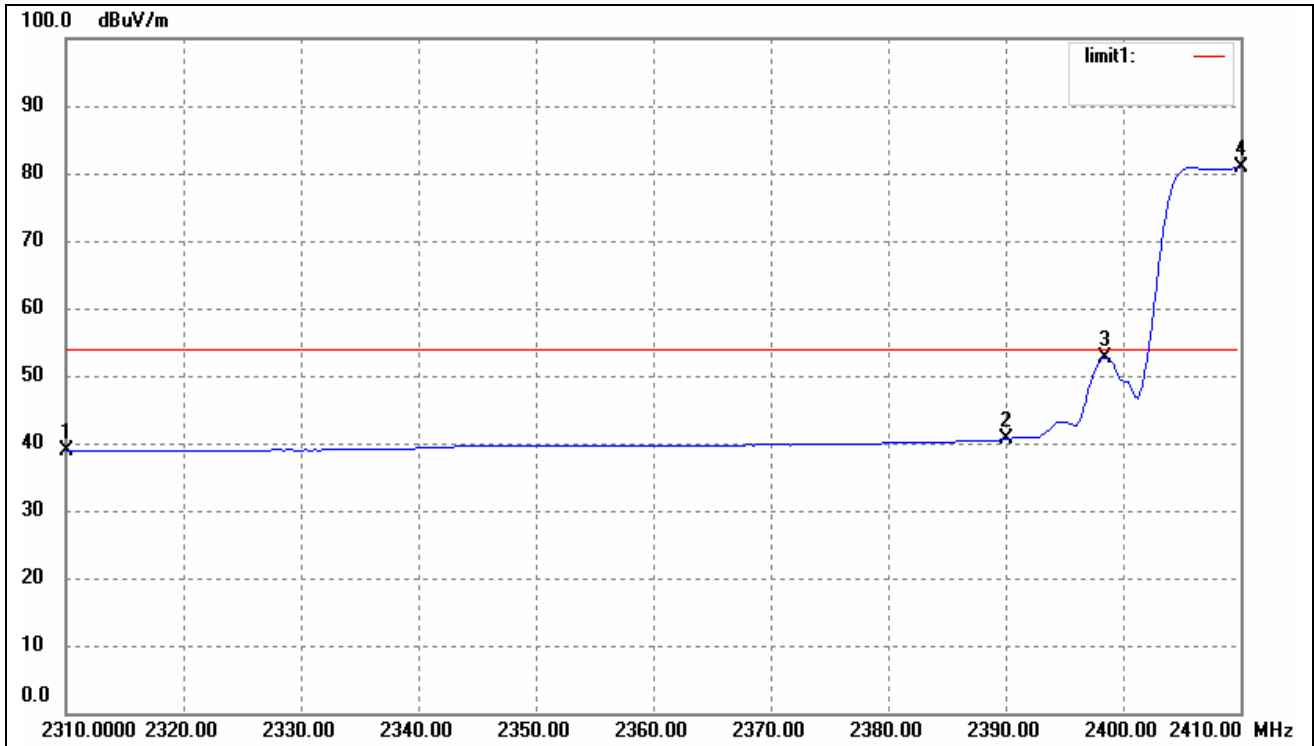

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2310.000        | 36.30            | 2.49           | 38.79           | 54.00          | -15.21      | Average |
|     | 2310.000        | 48.17            | 2.49           | 50.66           | 74.00          | -23.34      | Peak    |
| 2   | 2390.000        | 37.92            | 2.66           | 40.58           | 54.00          | -13.42      | Average |
|     | 2390.000        | 50.21            | 2.66           | 52.87           | 74.00          | -21.13      | Peak    |
| 3   | 2398.400        | 49.98            | 2.69           | 52.67           | 54.00          | -1.33       | Average |
|     | 2398.400        | 61.81            | 2.69           | 64.50           | 74.00          | -9.50       | Peak    |

### Highest Channel

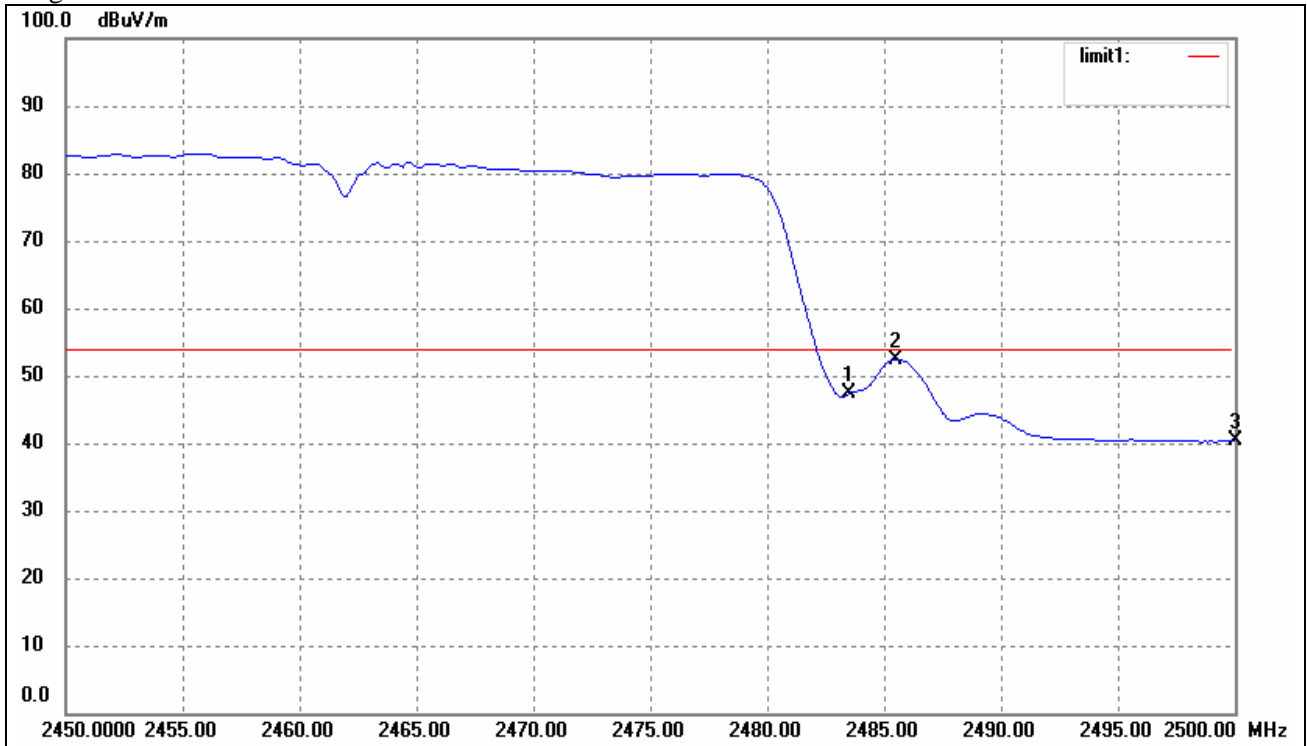

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark  |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|---------|
| 1   | 2483.500        | 44.50            | 2.87           | 47.37           | 54.00          | -6.63       | Average |
|     | 2483.500        | 55.60            | 2.87           | 58.47           | 74.00          | -15.53      | Peak    |
| 2   | 2485.500        | 49.47            | 2.88           | 52.35           | 54.00          | -1.65       | Average |
|     | 2485.500        | 61.25            | 2.88           | 64.13           | 74.00          | -9.87       | Peak    |
| 3   | 2500.000        | 37.37            | 2.92           | 40.29           | 54.00          | -13.71      | Average |
|     | 2500.000        | 49.55            | 2.92           | 52.47           | 74.00          | -21.53      | Peak    |

## 10. Radiated Emission Measurement

### 10.1 Limits of Radiated Emission Measurement

According to §15.247(c), 15.205 15.209(b) &15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M


Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

### 10.2 EUT Setup

#### Radiated Measurement Setup

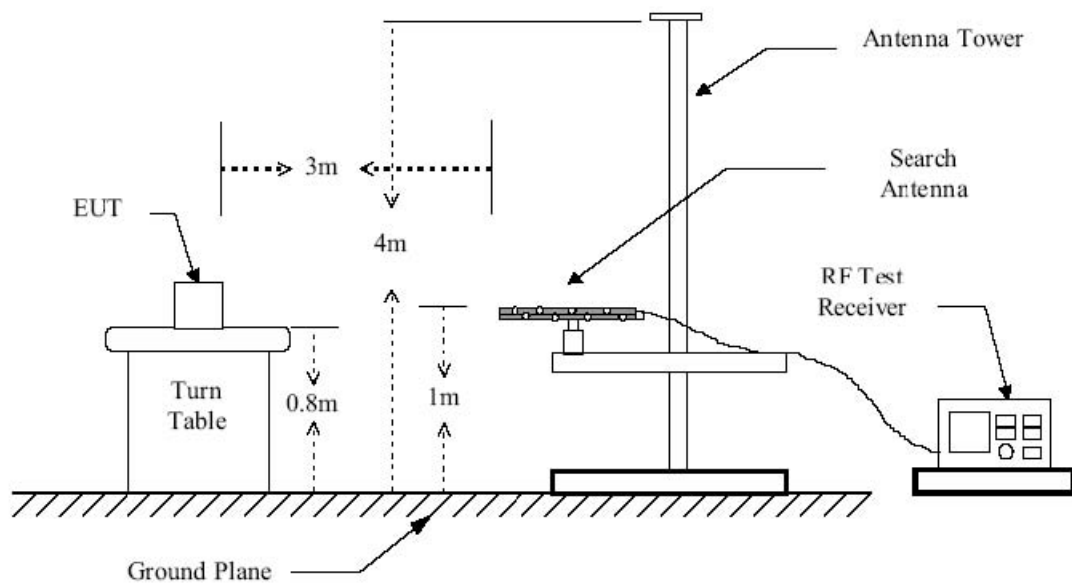

### 10.3 Test Equipment List and Details

See section 2.4.

## 10.4 Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the

highest radiation.

2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.

2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.


## 10.5 Test Result

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

**-2.0 dB $\mu$ V at 4824MHz in the Vertical polarization, Transmitting 802.11b Low Channel test mode with, 30 MHz to 25 GHz, 3Meters**

**Note:** *this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


Spurious Emission From 30 MHz to 1 GHz  
 802.11b-Middle CH  
 Horizontal

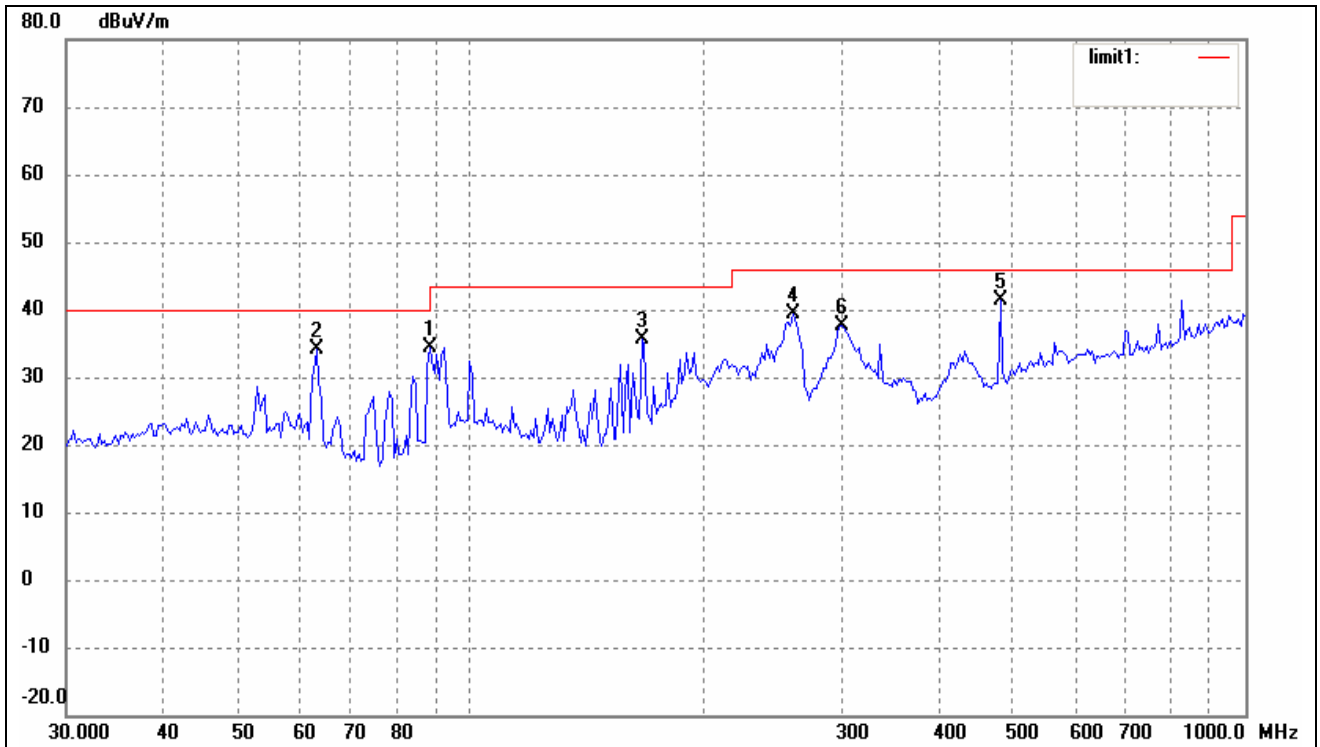

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree ( ) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 88.3421         | 27.88            | 6.54           | 34.42           | 43.50          | -9.08       | 125        | 100         | peak   |
| 2   | 63.0916         | 27.72            | 6.32           | 34.04           | 40.00          | -5.96       | 47         | 200         | peak   |
| 3   | 166.0680        | 30.76            | 4.75           | 35.51           | 43.50          | -7.99       | 245        | 200         | peak   |
| 4   | 260.1444        | 30.35            | 8.95           | 39.30           | 46.00          | -6.70       | 124        | 200         | peak   |
| 5   | 482.2156        | 28.72            | 12.67          | 41.39           | 46.00          | -4.61       | 3          | 100         | peak   |
| 6   | 301.4224        | 27.95            | 9.78           | 37.73           | 46.00          | -8.27       | 54         | 100         | peak   |




# Vertical

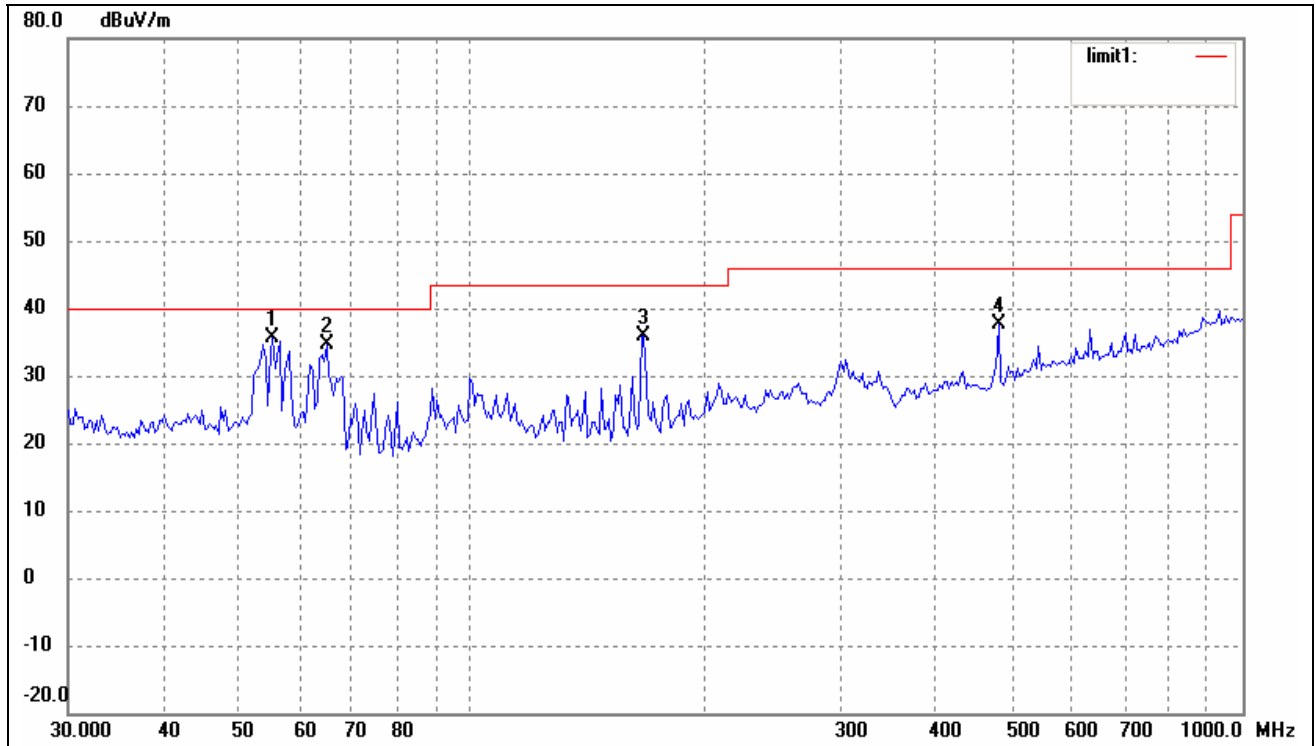


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|--------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 55.2207         | 27.95            | 7.76         | 35.71           | 40.00          | -4.29       | 225        | 200         | peak   |
| 2   | 64.8865         | 29.04            | 5.63         | 34.67           | 40.00          | -5.33       | 34         | 200         | peak   |
| 3   | 167.2368        | 31.13            | 4.79         | 35.92           | 43.50          | -7.58       | 69         | 200         | peak   |
| 4   | 482.2156        | 24.94            | 12.67        | 37.61           | 46.00          | -8.39       | 55         | 100         | peak   |

802.11g-Middle CH  
Horizontal

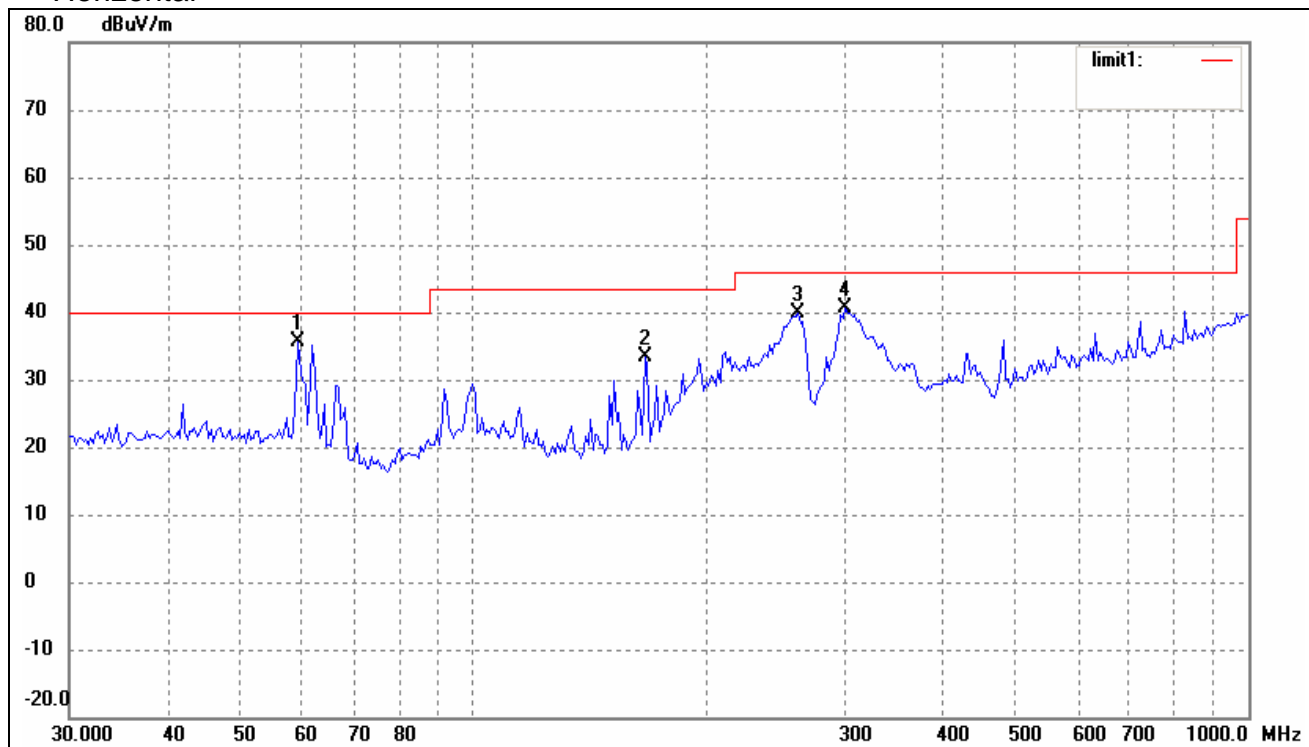


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 59.2325         | 28.13            | 7.57           | 35.70           | 40.00          | -4.30       | 239        | 100         | peak   |
| 2   | 166.0680        | 28.51            | 4.75           | 33.26           | 43.50          | -10.24      | 6          | 100         | peak   |
| 3   | 261.9753        | 30.84            | 9.00           | 39.84           | 46.00          | -6.16       | 55         | 100         | peak   |
| 4   | 301.4224        | 30.78            | 9.78           | 40.56           | 46.00          | -5.44       | 54         | 100         | peak   |

# Vertical

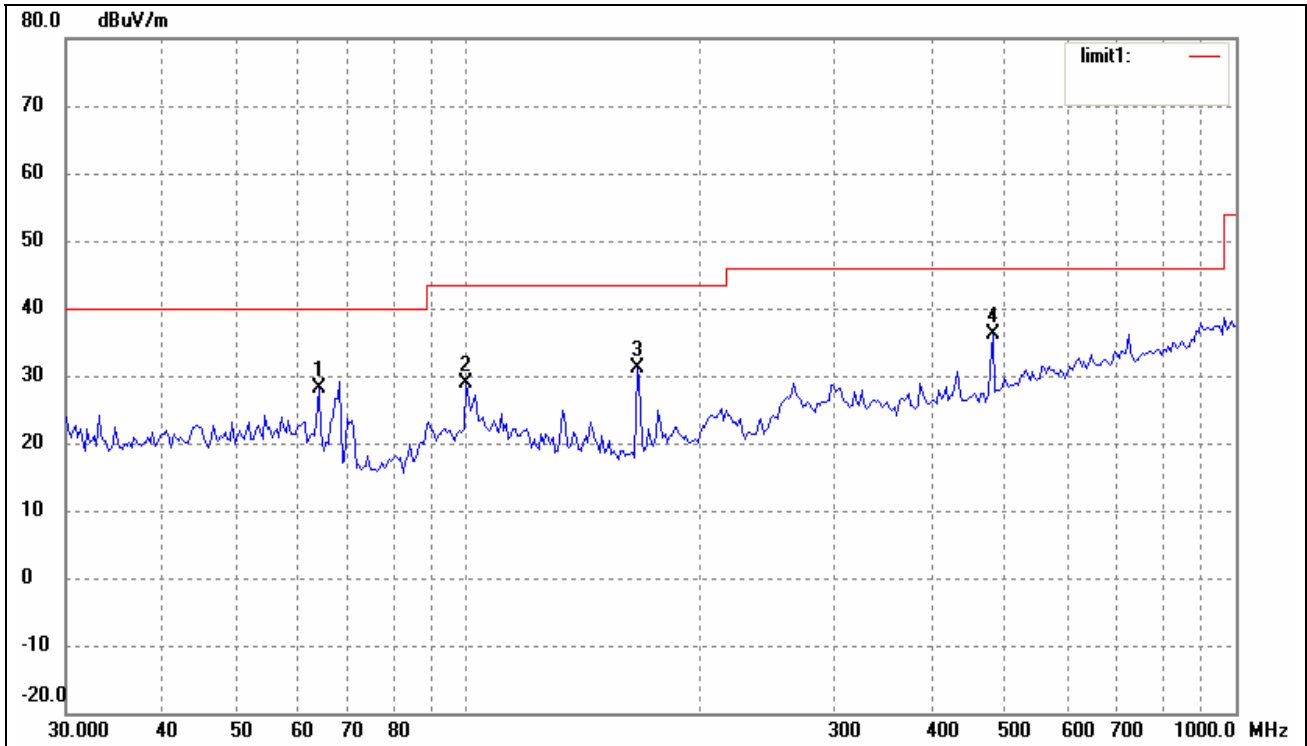


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree ( ) | Height (cm) | Remark |
|-----|-----------------|------------------|--------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 63.9828         | 22.16            | 5.97         | 28.13           | 40.00          | -11.87      | 234        | 100         | peak   |
| 2   | 99.5281         | 20.47            | 8.40         | 28.87           | 43.50          | -14.63      | 57         | 100         | peak   |
| 3   | 166.0680        | 26.36            | 4.75         | 31.11           | 43.50          | -12.39      | 22         | 100         | peak   |
| 4   | 482.2156        | 23.35            | 12.67        | 36.02           | 46.00          | -9.98       | 57         | 200         | peak   |

802.11n/HT20-Middle CH  
Horizontal

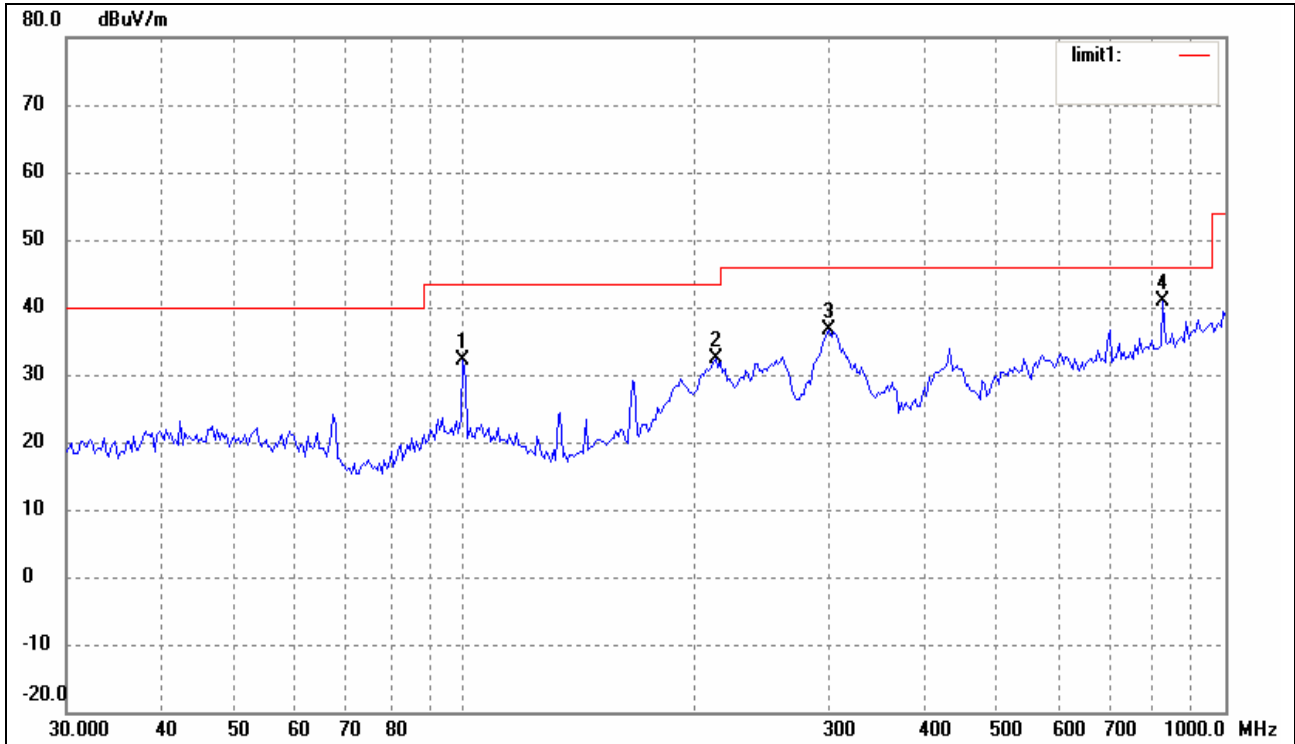


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 99.5281         | 23.77            | 8.40           | 32.17           | 43.50          | -11.33      | 25         | 200         | peak   |
| 2   | 213.7634        | 25.25            | 7.06           | 32.31           | 43.50          | -11.19      | 47         | 100         | peak   |
| 3   | 301.4224        | 26.80            | 9.78           | 36.58           | 46.00          | -9.42       | 67         | 100         | peak   |
| 4   | 827.4934        | 21.36            | 19.53          | 40.89           | 46.00          | -5.11       | 125        | 200         | peak   |

# Vertical

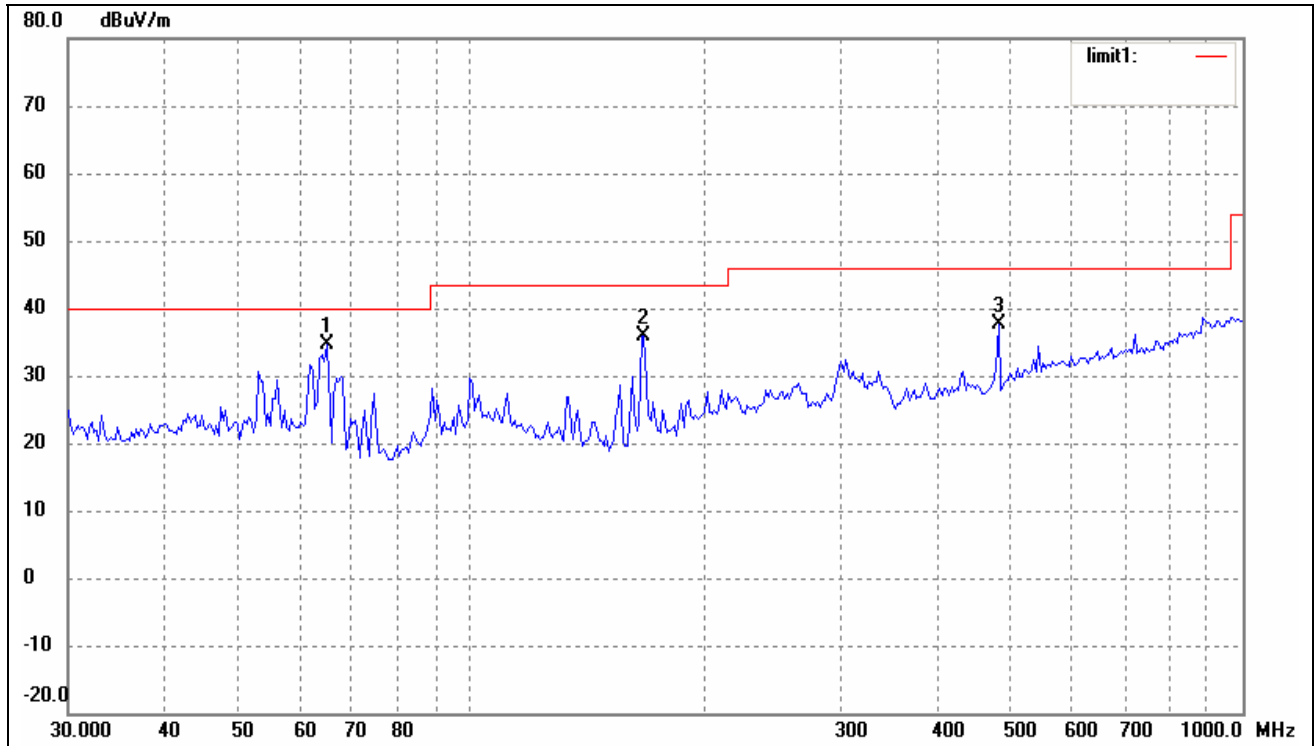


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 64.8865         | 29.04            | 5.63           | 34.67           | 40.00          | -5.33       | 48         | 100         | peak   |
| 2   | 167.2368        | 31.13            | 4.79           | 35.92           | 43.50          | -7.58       | 22         | 200         | peak   |
| 3   | 482.2156        | 24.94            | 12.67          | 37.61           | 46.00          | -8.39       | 54         | 100         | peak   |

802.11n/HT40-Middle CH  
Horizontal

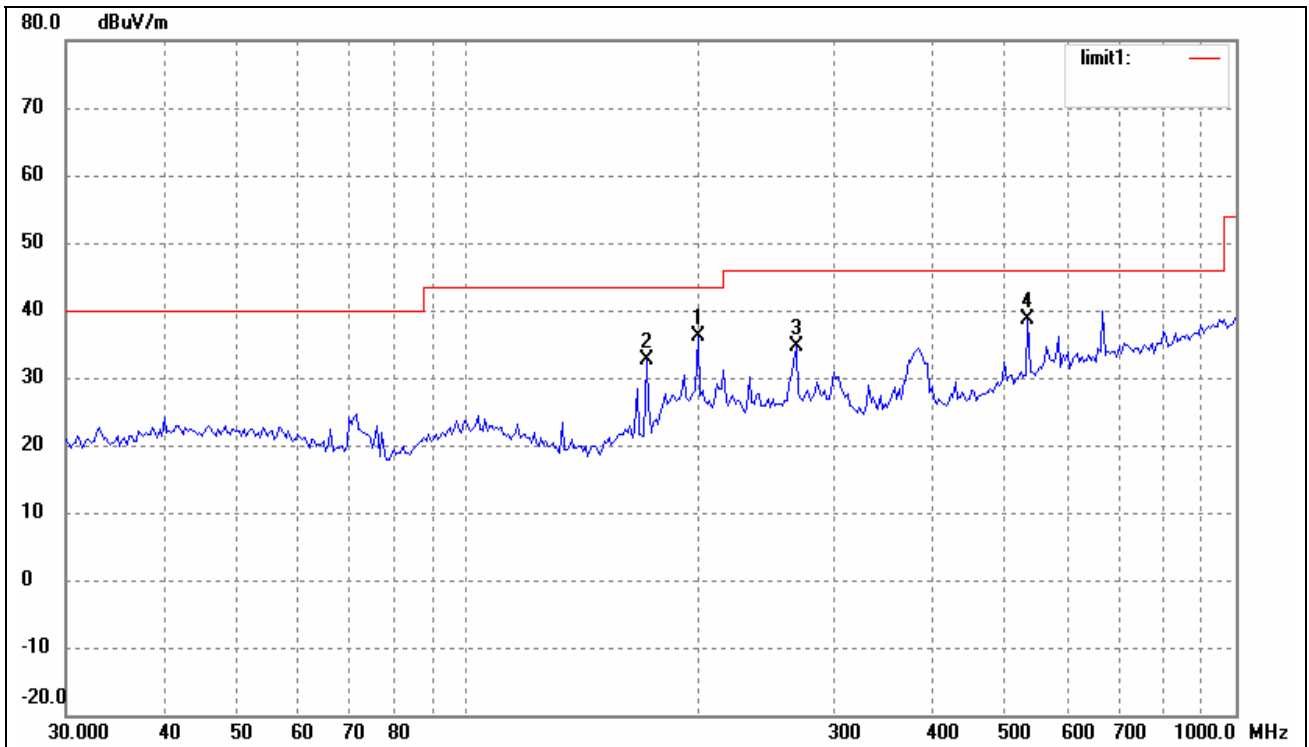

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 199.2855        | 29.54            | 6.58           | 36.12           | 43.50          | -7.38       | 236        | 100         | peak   |
| 2   | 170.7926        | 27.64            | 4.95           | 32.59           | 43.50          | -10.91      | 78         | 200         | peak   |
| 3   | 267.5455        | 25.49            | 9.17           | 34.66           | 46.00          | -11.34      | 51         | 200         | peak   |
| 4   | 535.7073        | 23.39            | 15.21          | 38.60           | 46.00          | -7.40       | 54         | 100         | peak   |

# Vertical

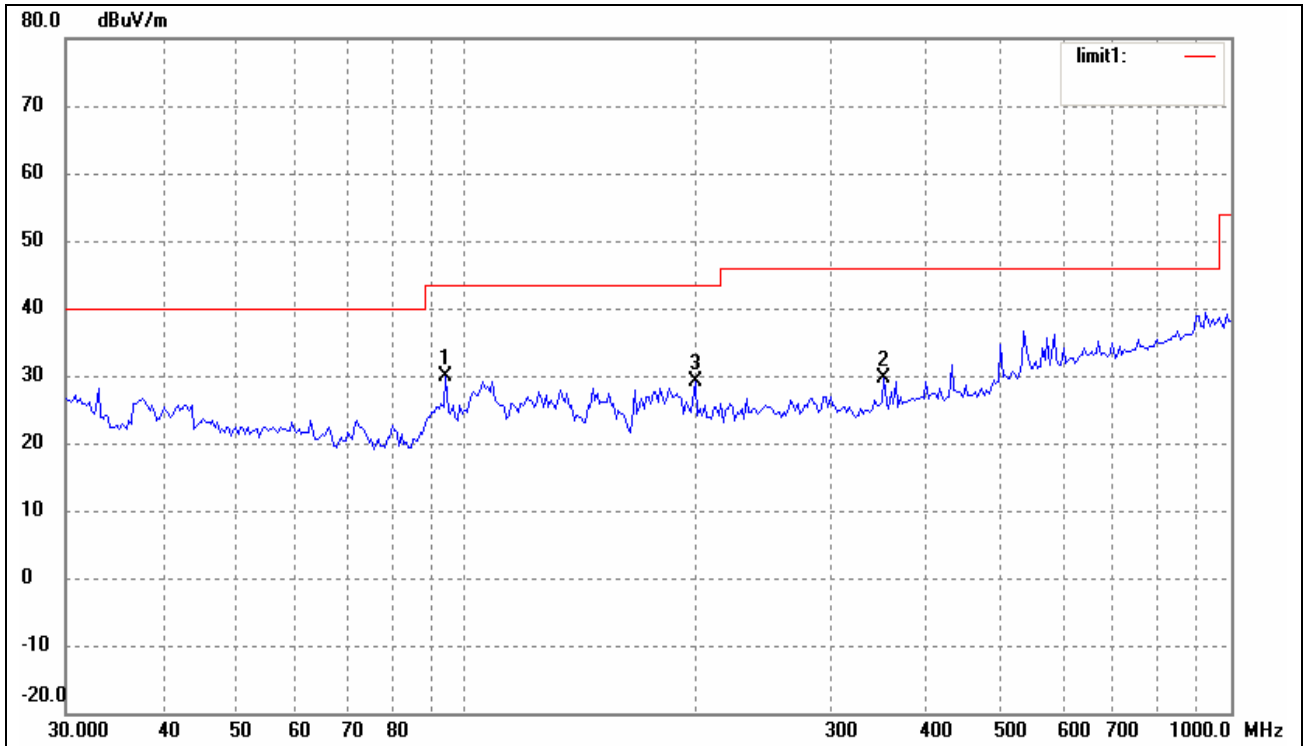

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree ( ) | Height (cm) | Remark |
|-----|-----------------|------------------|--------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1   | 94.0979         | 22.01            | 7.88         | 29.89           | 43.50          | -13.61      | 235        | 200         | peak   |
| 2   | 351.7079        | 18.91            | 10.70        | 29.61           | 46.00          | -16.39      | 97         | 100         | peak   |
| 3   | 199.2855        | 22.63            | 6.58         | 29.21           | 43.50          | -14.29      | 44         | 200         | peak   |

## Spurious Emission Above 1GHz

For 802.11b

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4824.0                       | PK       | 53.0               | 360              | V           | 34.1            | 5.2           | 33.0         | 59.3                        | 74           | -14.7     |
| 4824.0                       | PK       | 55.2               | 270              | H           | 34.1            | 5.2           | 33.0         | 61.5                        | 74           | -12.5     |
| 7236.0                       | PK       | 48.9               | 180              | V           | 37.4            | 6.1           | 33.5         | 58.9                        | 74           | -15.1     |
| 7236.0                       | PK       | 50.3               | 45               | H           | 37.4            | 6.1           | 33.5         | 60.3                        | 74           | -13.7     |
| 4824.0                       | AV       | 45.1               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.4                        | 54           | -2.6      |
| 4824.0                       | AV       | 45.7               | 90               | H           | 34.1            | 5.2           | 33.0         | 52.0                        | 54           | -2.0      |
| 7236.0                       | AV       | 40.6               | 45               | V           | 37.4            | 6.1           | 33.5         | 50.6                        | 54           | -3.4      |
| 7236.0                       | AV       | 41.7               | 60               | H           | 37.4            | 6.1           | 33.5         | 51.7                        | 54           | -2.3      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 4874.0                       | PK       | 52.3               | 45               | V           | 34.1            | 5.2           | 33.0         | 58.6                        | 74           | -15.4     |
| 4874.0                       | PK       | 54.0               | 270              | H           | 34.1            | 5.2           | 33.0         | 60.3                        | 74           | -13.7     |
| 7311.0                       | PK       | 49.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 59.4                        | 74           | -14.6     |
| 7311.0                       | PK       | 52.0               | 180              | H           | 37.4            | 6.1           | 33.5         | 62.0                        | 74           | -12.0     |
| 4874.0                       | AV       | 44.8               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.1                        | 54           | -2.9      |
| 4874.0                       | AV       | 45.7               | 90               | H           | 34.1            | 5.2           | 33.0         | 52.0                        | 54           | -2.0      |
| 7311.0                       | AV       | 40.3               | 60               | V           | 37.4            | 6.1           | 33.5         | 50.3                        | 54           | -3.7      |
| 7311.0                       | AV       | 41.6               | 45               | H           | 37.4            | 6.1           | 33.5         | 51.6                        | 54           | -2.4      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4924.0                       | PK       | 51.6               | 270              | V           | 34.1            | 5.2           | 33.0         | 57.9                        | 74           | -16.1     |
| 4924.0                       | PK       | 55.0               | 45               | H           | 34.1            | 5.2           | 33.0         | 61.3                        | 74           | -12.7     |
| 7386.0                       | PK       | 47.5               | 180              | V           | 37.4            | 6.1           | 33.5         | 57.5                        | 74           | -16.5     |
| 7386.0                       | PK       | 50.5               | 360              | H           | 37.4            | 6.1           | 33.5         | 60.5                        | 74           | -13.5     |
| 4924.0                       | AV       | 43.9               | 90               | V           | 34.1            | 5.2           | 33.0         | 50.2                        | 54           | -3.8      |
| 4924.0                       | AV       | 45.0               | 270              | H           | 34.1            | 5.2           | 33.0         | 51.3                        | 54           | -2.7      |
| 7386.0                       | AV       | 39.6               | 180              | V           | 37.4            | 6.1           | 33.5         | 49.6                        | 54           | -4.4      |
| 7386.0                       | AV       | 41.0               | 60               | H           | 37.4            | 6.1           | 33.5         | 51.0                        | 54           | -3.0      |

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.



For 802.11g

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4824.0                       | PK       | 52.6               | 360              | V           | 34.1            | 5.2           | 33.0         | 58.9                        | 74           | -15.1     |
| 4824.0                       | PK       | 54.0               | 270              | H           | 34.1            | 5.2           | 33.0         | 60.3                        | 74           | -13.7     |
| 7236.0                       | PK       | 49.7               | 180              | V           | 37.4            | 6.1           | 33.5         | 59.7                        | 74           | -14.3     |
| 7236.0                       | PK       | 52.0               | 45               | H           | 37.4            | 6.1           | 33.5         | 62.0                        | 74           | -12.0     |
| 4824.0                       | AV       | 44.8               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.1                        | 54           | -2.9      |
| 4824.0                       | AV       | 45.7               | 90               | H           | 34.1            | 5.2           | 33.0         | 52.0                        | 54           | -2.0      |
| 7236.0                       | AV       | 40.8               | 45               | V           | 37.4            | 6.1           | 33.5         | 50.8                        | 54           | -3.2      |
| 7236.0                       | AV       | 41.4               | 60               | H           | 37.4            | 6.1           | 33.5         | 51.4                        | 54           | -2.6      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 4874.0                       | PK       | 52.3               | 45               | V           | 34.1            | 5.2           | 33.0         | 58.6                        | 74           | -15.4     |
| 4874.0                       | PK       | 54.0               | 270              | H           | 34.1            | 5.2           | 33.0         | 60.3                        | 74           | -13.7     |
| 7311.0                       | PK       | 49.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 59.4                        | 74           | -14.6     |
| 7311.0                       | PK       | 52.5               | 180              | H           | 37.4            | 6.1           | 33.5         | 62.5                        | 74           | -11.5     |
| 4874.0                       | AV       | 45.3               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.6                        | 54           | -2.4      |
| 4874.0                       | AV       | 45.7               | 90               | H           | 34.1            | 5.2           | 33.0         | 52.0                        | 54           | -2.0      |
| 7311.0                       | AV       | 40.3               | 60               | V           | 37.4            | 6.1           | 33.5         | 50.3                        | 54           | -3.7      |
| 7311.0                       | AV       | 41.6               | 45               | H           | 37.4            | 6.1           | 33.5         | 51.6                        | 54           | -2.4      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4924.0                       | PK       | 52.0               | 270              | V           | 34.1            | 5.2           | 33.0         | 58.3                        | 74           | -15.7     |
| 4924.0                       | PK       | 54.3               | 45               | H           | 34.1            | 5.2           | 33.0         | 60.6                        | 74           | -13.4     |
| 7386.0                       | PK       | 49.8               | 180              | V           | 37.4            | 6.1           | 33.5         | 59.8                        | 74           | -14.2     |
| 7386.0                       | PK       | 51.5               | 360              | H           | 37.4            | 6.1           | 33.5         | 61.5                        | 74           | -12.5     |
| 4924.0                       | AV       | 43.7               | 90               | V           | 34.1            | 5.2           | 33.0         | 50.0                        | 54           | -4.0      |
| 4924.0                       | AV       | 45.4               | 270              | H           | 34.1            | 5.2           | 33.0         | 51.7                        | 54           | -2.3      |
| 7386.0                       | AV       | 41.1               | 180              | V           | 37.4            | 6.1           | 33.5         | 51.1                        | 54           | -2.9      |
| 7386.0                       | AV       | 41.5               | 60               | H           | 37.4            | 6.1           | 33.5         | 51.5                        | 54           | -2.5      |

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

For 802.11n/HT20

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4824.0                       | PK       | 52.6               | 90               | V           | 34.1            | 5.2           | 33.0         | 58.9                        | 74           | -15.1     |
| 4824.0                       | PK       | 50.9               | 270              | H           | 34.1            | 5.2           | 33.0         | 57.2                        | 74           | -16.8     |
| 7236.0                       | PK       | 49.2               | 180              | V           | 37.4            | 6.1           | 33.5         | 59.2                        | 74           | -14.8     |
| 7236.0                       | PK       | 46.4               | 45               | H           | 37.4            | 6.1           | 33.5         | 56.4                        | 74           | -17.6     |
| 4824.0                       | AV       | 45.2               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.5                        | 54           | -2.5      |
| 4824.0                       | AV       | 43.5               | 90               | H           | 34.1            | 5.2           | 33.0         | 49.8                        | 54           | -4.2      |
| 7236.0                       | AV       | 41.3               | 45               | V           | 37.4            | 6.1           | 33.5         | 51.3                        | 54           | -2.7      |
| 7236.0                       | AV       | 39.4               | 60               | H           | 37.4            | 6.1           | 33.5         | 49.4                        | 54           | -4.6      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 4874.0                       | PK       | 52.9               | 45               | V           | 34.1            | 5.2           | 33.0         | 59.2                        | 74           | -14.8     |
| 4874.0                       | PK       | 51.2               | 270              | H           | 34.1            | 5.2           | 33.0         | 57.5                        | 74           | -16.5     |
| 7311.0                       | PK       | 48.8               | 45               | V           | 37.4            | 6.1           | 33.5         | 58.8                        | 74           | -15.2     |
| 7311.0                       | PK       | 46.2               | 180              | H           | 37.4            | 6.1           | 33.5         | 56.2                        | 74           | -17.8     |
| 4874.0                       | AV       | 45.4               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.7                        | 54           | -2.3      |
| 4874.0                       | AV       | 43.8               | 90               | H           | 34.1            | 5.2           | 33.0         | 50.1                        | 54           | -3.9      |
| 7311.0                       | AV       | 41.6               | 60               | V           | 37.4            | 6.1           | 33.5         | 51.6                        | 54           | -2.4      |
| 7311.0                       | AV       | 39.2               | 45               | H           | 37.4            | 6.1           | 33.5         | 49.2                        | 54           | -4.8      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4924.0                       | PK       | 52.3               | 270              | V           | 34.1            | 5.2           | 33.0         | 58.6                        | 74           | -15.4     |
| 4924.0                       | PK       | 50.8               | 45               | H           | 34.1            | 5.2           | 33.0         | 57.1                        | 74           | -16.9     |
| 7386.0                       | PK       | 48.4               | 180              | V           | 37.4            | 6.1           | 33.5         | 58.4                        | 74           | -15.6     |
| 7386.0                       | PK       | 45.6               | 45               | H           | 37.4            | 6.1           | 33.5         | 55.6                        | 74           | -18.4     |
| 4924.0                       | AV       | 44.8               | 90               | V           | 34.1            | 5.2           | 33.0         | 51.1                        | 54           | -2.9      |
| 4924.0                       | AV       | 43.2               | 270              | H           | 34.1            | 5.2           | 33.0         | 49.5                        | 54           | -4.5      |
| 7386.0                       | AV       | 41.2               | 60               | V           | 37.4            | 6.1           | 33.5         | 51.2                        | 54           | -2.8      |
| 7386.0                       | AV       | 39.0               | 60               | H           | 37.4            | 6.1           | 33.5         | 49                          | 54           | -5.0      |

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

For 802.11n/HT40

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4844.0                       | PK       | 45.3               | 221              | V           | 34.1            | 5.2           | 33.0         | 51.6                        | 74           | -22.4     |
| 4844.0                       | PK       | 43.9               | 270              | H           | 34.1            | 5.2           | 33.0         | 50.2                        | 74           | -23.8     |
| 7266.0                       | PK       | 44.9               | 180              | V           | 37.4            | 6.1           | 33.5         | 54.9                        | 74           | -19.1     |
| 7266.0                       | PK       | 40.4               | 45               | H           | 37.4            | 6.1           | 33.5         | 50.4                        | 74           | -23.6     |
| 4844.0                       | AV       | 41.9               | 270              | V           | 34.1            | 5.2           | 33.0         | 48.2                        | 54           | -5.8      |
| 4844.0                       | AV       | 40.2               | 190              | H           | 34.1            | 5.2           | 33.0         | 46.5                        | 54           | -7.5      |
| 7266.0                       | AV       | 39.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 49.4                        | 54           | -4.6      |
| 7266.0                       | AV       | 37.3               | 360              | H           | 37.4            | 6.1           | 33.5         | 47.3                        | 54           | -6.7      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 4874.0                       | PK       | 44.9               | 245              | V           | 34.1            | 5.2           | 33.0         | 51.2                        | 74           | -22.8     |
| 4874.0                       | PK       | 44.1               | 270              | H           | 34.1            | 5.2           | 33.0         | 50.4                        | 74           | -23.6     |
| 7311.0                       | PK       | 40.1               | 45               | V           | 37.4            | 6.1           | 33.5         | 50.1                        | 74           | -23.9     |
| 7311.0                       | PK       | 39.3               | 180              | H           | 37.4            | 6.1           | 33.5         | 49.3                        | 74           | -24.7     |
| 4874.0                       | AV       | 42.3               | 270              | V           | 34.1            | 5.2           | 33.0         | 48.6                        | 54           | -5.4      |
| 4874.0                       | AV       | 40.5               | 90               | H           | 34.1            | 5.2           | 33.0         | 46.8                        | 54           | -7.2      |
| 7311.0                       | AV       | 39.2               | 60               | V           | 37.4            | 6.1           | 33.5         | 49.2                        | 54           | -4.8      |
| 7311.0                       | AV       | 37.4               | 145              | H           | 37.4            | 6.1           | 33.5         | 47.4                        | 54           | -6.6      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4904.0                       | PK       | 45.2               | 270              | V           | 34.1            | 5.2           | 33.0         | 51.5                        | 74           | -22.5     |
| 4904.0                       | PK       | 43.8               | 45               | H           | 34.1            | 5.2           | 33.0         | 50.1                        | 74           | -23.9     |
| 7356.0                       | PK       | 40.7               | 180              | V           | 37.4            | 6.1           | 33.5         | 50.7                        | 74           | -23.3     |
| 7356.0                       | PK       | 39.5               | 265              | H           | 37.4            | 6.1           | 33.5         | 49.5                        | 74           | -24.5     |
| 4904.0                       | AV       | 41.8               | 90               | V           | 34.1            | 5.2           | 33.0         | 48.1                        | 54           | -5.9      |
| 4904.0                       | AV       | 40.6               | 270              | H           | 34.1            | 5.2           | 33.0         | 46.9                        | 54           | -7.1      |
| 7356.0                       | AV       | 39.4               | 150              | V           | 37.4            | 6.1           | 33.5         | 49.4                        | 54           | -4.6      |
| 7356.0                       | AV       | 37.7               | 260              | H           | 37.4            | 6.1           | 33.5         | 47.7                        | 54           | -6.3      |

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.