



Test Report No.: RF181228N007



# TEST REPORT



Applicant	TCL Technoly Electronics(Huizhou) Co., Ltd
Address	Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang Dong Province, China, 516006.

Manufacturer or Supplier	TCL Technoly Electronics(Huizhou) Co.,Ltd
Address	Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang Dong Province, China, 516006.
Product Name	Wireless Module
Brand Name	N/A
Model	IA9Q5 S83D-E
Additional Model & Model Difference	N/A
Date of tests	Dec. 28, 2018 ~ Feb. 27, 2019

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart E, Section 15.407**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Tom Chen Project Engineer/ EMC Department	Approved by Glyn He Supervisor / EMC Department
	  Date: Mar. 14, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice\\_dg@cn.bureauveritas.com](mailto:customerservice_dg@cn.bureauveritas.com)



Test Report No.: RF181228N007

## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT .....	6
2.2 DESCRIPTION OF TEST MODES.....	7
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	7
2.3 DUTY CYCLE OF TEST SIGNAL .....	9
2.4 DESCRIPTION OF SUPPORT UNITS .....	9
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
<b>3. TEST TYPES AND RESULTS.....</b>	<b>10</b>
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	10
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	10
3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS .....	11
3.1.3 TEST INSTRUMENTS.....	12
3.1.4 TEST PROCEDURES .....	13
3.1.5 DEVIATION FROM TEST STANDARD .....	13
3.1.6 TEST SETUP.....	14
3.1.7 EUT OPERATING CONDITION .....	15
3.1.8 TEST RESULTS .....	16
3.2 TRANSMIT POWER MEASUREMENT.....	23
3.2.1 LIMITS OF TRANSMIT POWER MEASUREMENT.....	23
3.2.2 TEST SETUP.....	23
3.2.3 TEST INSTRUMENTS.....	24
3.2.4 TEST PROCEDURE.....	24
3.2.5 DEVIATION FROM TEST STANDARD .....	25
3.2.6 EUT OPERATING CONDITIONS.....	25
3.2.7 TEST RESULTS .....	26
3.3 PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	28
3.3.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	28
3.3.2 TEST SETUP.....	28



Test Report No.: RF181228N007

3.3.3	TEST INSTRUMENTS.....	28
3.3.4	TEST PROCEDURES .....	28
3.3.5	DEVIATION FROM TEST STANDARD .....	29
3.3.6	EUT OPERATING CONDITIONS.....	29
3.3.7	TEST RESULTS .....	30
3.4	FREQUENCY STABILITY .....	31
3.4.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	31
3.4.2	TEST SETUP.....	31
3.4.3	TEST INSTRUMENTS.....	31
3.4.4	TEST PROCEDURE.....	32
3.4.5	DEVIATION FROM TEST STANDARD .....	32
3.4.6	EUT OPERATING CONDITION .....	32
3.4.7	TEST RESULTS .....	33
4.	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>34</b>
5.	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>35</b>



Test Report No.: RF181228N007

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF181228N007	Original release.	Mar. 14, 2019



Test Report No.: RF181228N007

## 1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407 UNDER NEW RULE)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	N/A	Powered by Host Unit
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT NAME</b>	Wireless Module
<b>MODEL NO.</b>	IA9Q5 S83D-E
<b>FCC ID</b>	ZVA14
<b>POWER SUPPLY</b>	DC 3.3V from Host Unit
<b>MODULATION TYPE</b>	GFSK
<b>OPERATING FREQUENCY</b>	5743~5838MHz
<b>NUMBER OF CHANNEL</b>	Refer to 2.2 section
<b>CONDUCTED OUTPUT POWER</b>	9.76dBm
<b>ANTENNA TYPE</b>	PCB Antenna, 2.85dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

1. The EUT incorporates a SISO function. Physically, the EUT provides 1 completed transmitter and 1 receiver.

<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>GFSK</b>	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 181228N007) for detailed product photo.
5. The EUT is RF module only, it no any accessories.

## 2.2 DESCRIPTION OF TEST MODES

### FOR 5725 ~ 5850MHz

34 channels are provided for GFSK:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	5743	13	5778	25	5812
2	5747	14	5779	26	5815
3	5751	15	5783	27	5818
4	5752	16	5787	28	5819
5	5755	17	5791	29	5823
6	5758	18	5792	30	5827
7	5759	19	5795	31	5831
8	5763	20	5798	32	5832
9	5767	21	5799	33	5835
10	5771	22	5803	34	5838
11	5772	23	5807		
12	5775	24	5811		

### 2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	-	√	DC 3.3V

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** "-" means no effect.

#### RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5725-5850	1, 17, 34	GFSK



Test Report No.: RF181228N007

**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5725-5850	1	GFSK

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5725-5850	1, 17, 34	GFSK

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 51%RH	DC 3.3V	Walker
RE≥1G	25deg. C, 51%RH	DC 3.3V	Walker
PLC	N/A	N/A	N/A
APCM	20deg. C, 55%RH	DC 3.3V	Sen He






**BUREAU  
VERITAS**

Test Report No.: RF181228N007

## 2.3 DUTY CYCLE OF TEST SIGNAL

GFSK: 100%

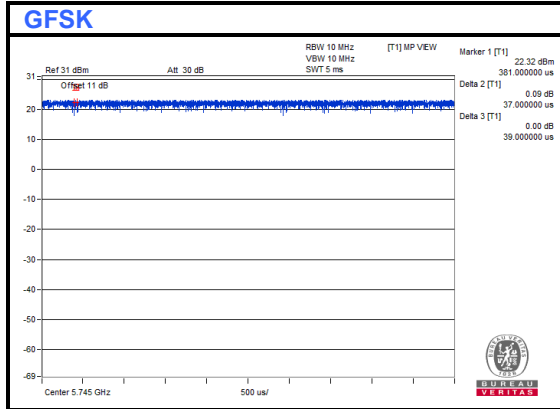

## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together without any other necessary accessories or support units.

## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D02 General UNII Test Procedures New Rules v01r03**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.



Test Report No.: RF181228N007

### 3. TEST TYPES AND RESULTS

#### 3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

##### 3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



Test Report No.: RF181228N007

### 3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01r03	FIELD STRENGTH AT 3m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	Note	Note

**NOTE:** For transmitters operating in the 5.725-5.85 GHz band:

Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$



Test Report No.: RF181228N007

### 3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 21,18	Mar. 20,19
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,18	May 03,19
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 18,18	Apr. 18,19
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Aug. 11, 18	Aug. 10, 19
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 18	Jul. 20, 19
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	May 05,18	May 04,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,19	Feb. 09,20
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 18,18	Apr. 18,19
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 08,18	Nov. 07,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

**NOTE:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



Test Report No.: RF181228N007

### 3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

### 3.1.6 TEST SETUP

#### Below 30MHz test setup

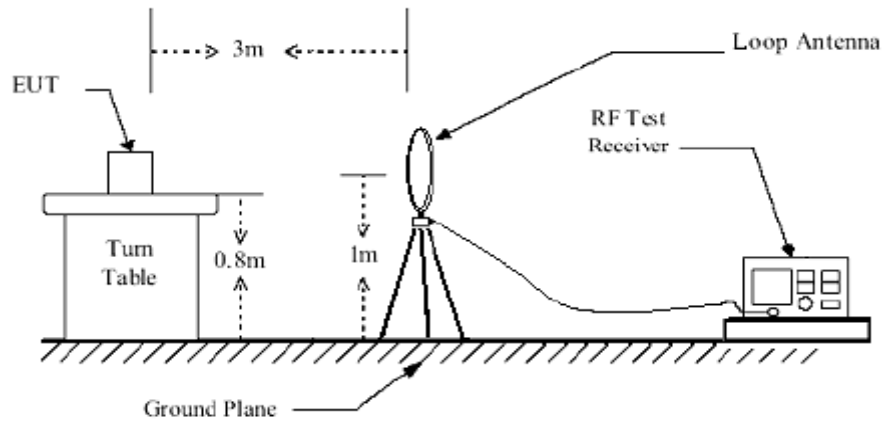


#### Below 1GHz test setup

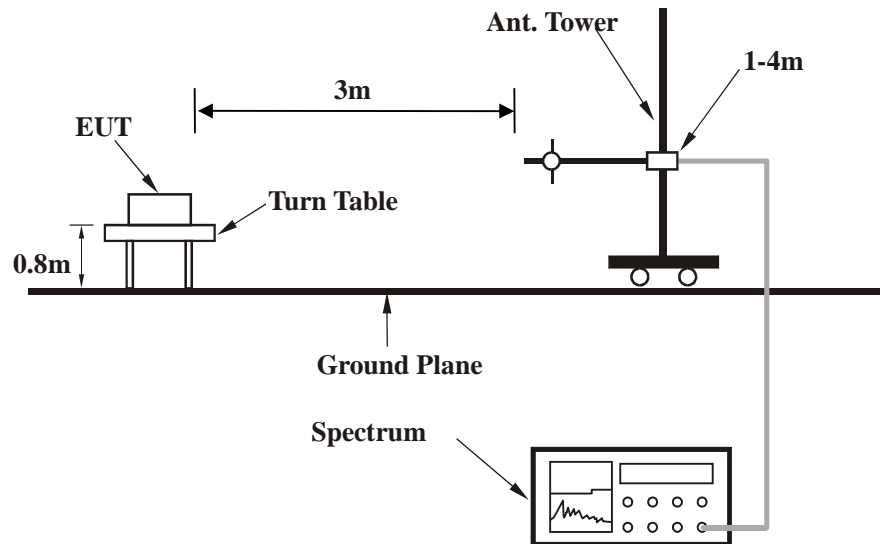

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## Above 1GHz test setup

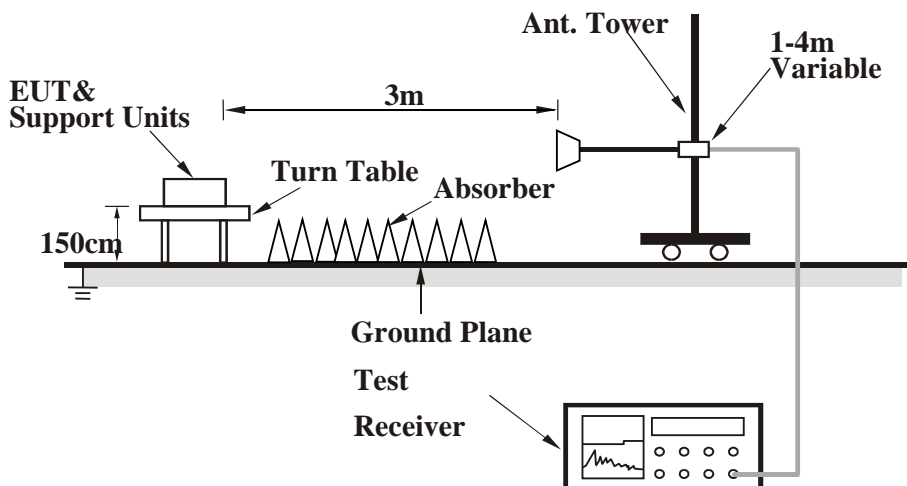

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



Test Report No.: RF181228N007

### 3.1.8 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA


#### GFSK

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	36.91 QP	40.00	-3.09	1.00 H	12	47.04	-10.13
2	326.91	32.00 QP	46.00	-14.00	1.00 H	0	43.55	-11.55
3	712.42	35.94 QP	46.00	-10.06	1.00 H	211	39.80	-3.86
4	805.69	37.53 QP	46.00	-8.47	1.00 H	23	39.46	-1.93
5	880.30	40.86 QP	46.00	-5.14	1.00 H	134	41.64	-0.78
6	954.92	42.65 QP	46.00	-3.35	1.00 H	48	42.92	-0.27

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

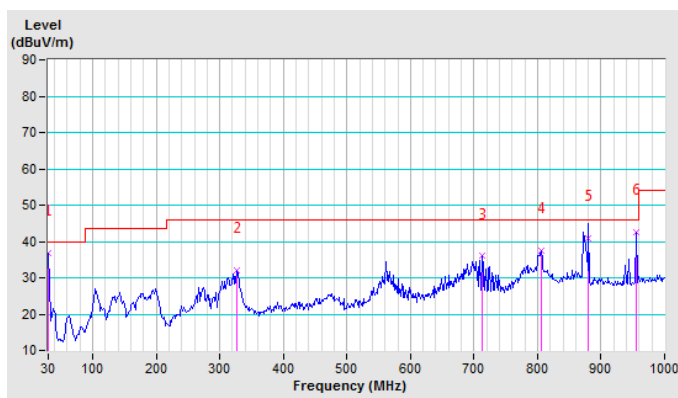






Test Report No.: RF181228N007

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	35.50 QP	40.00	-4.50	2.00 V	117	45.63	-10.13
2	37.77	32.65 QP	40.00	-7.35	2.00 V	242	47.32	-14.67
3	250.74	32.14 QP	46.00	-13.86	2.00 V	183	47.43	-15.29
4	712.42	32.90 QP	46.00	-13.10	2.00 V	159	36.76	-3.86
5	880.30	42.26 QP	46.00	-3.74	2.00 V	194	43.04	-0.78
6	954.92	41.03 QP	46.00	-4.97	2.00 V	302	41.30	-0.27

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

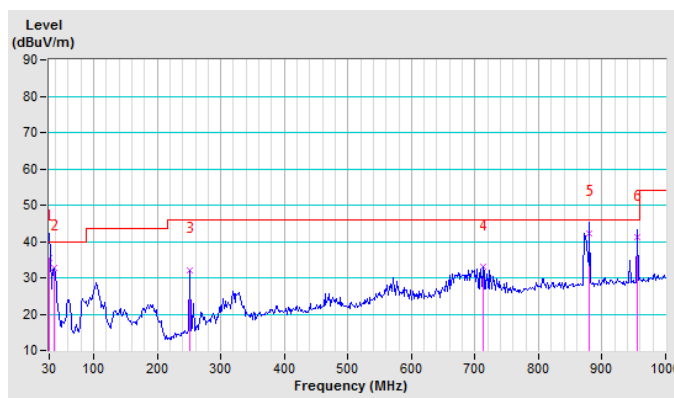



Test Report No.: RF181228N007

**ABOVE 1GHz DATA**

**GFSK**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	@5711.18	59.29 PK	108.33	-49.04	1.00 H	0	52.29	7.00
2	@5725.00	53.21 PK	122.20	-68.99	1.00 H	0	46.22	6.99
3	*5743.00	107.46 PK			1.00 H	136	100.47	6.99
4	*5743.00	103.56 AV			1.00 H	136	96.57	6.99
5	@5851.00	47.48 PK	119.92	-72.44	1.00 H	0	40.54	6.94
6	#11486.00	61.19 PK	74.00	-12.81	1.00 H	80	45.00	16.19
7	#11486.00	49.61 AV	54.00	-4.39	1.00 H	80	33.42	16.19
8	17229.00	64.04 PK	68.20	-4.16	1.00 H	0	40.98	23.06

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	@5710.34	55.17 PK	108.10	-52.93	1.00 V	0	48.17	7.00
2	@5725.00	48.76 PK	122.20	-73.44	1.00 V	0	41.77	6.99
3	*5743.00	104.31 PK			1.00 V	62	97.32	6.99
4	*5743.00	100.57 AV			1.00 V	62	93.58	6.99
5	@5893.07	49.01 PK	91.79	-42.78	1.00 V	0	42.08	6.93
6	#11486.00	62.22 PK	74.00	-11.78	1.00 V	53	46.03	16.19
7	#11486.00	51.40 AV	54.00	-2.60	1.00 V	53	35.21	16.19
8	17229.00	63.79 PK	68.20	-4.41	1.00 V	0	40.73	23.06

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. " @ ": The radiated frequency is limited by the band edge.



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice\\_dg@cn.bureauveritas.com](mailto:customerservice_dg@cn.bureauveritas.com)



### Band edge Plot

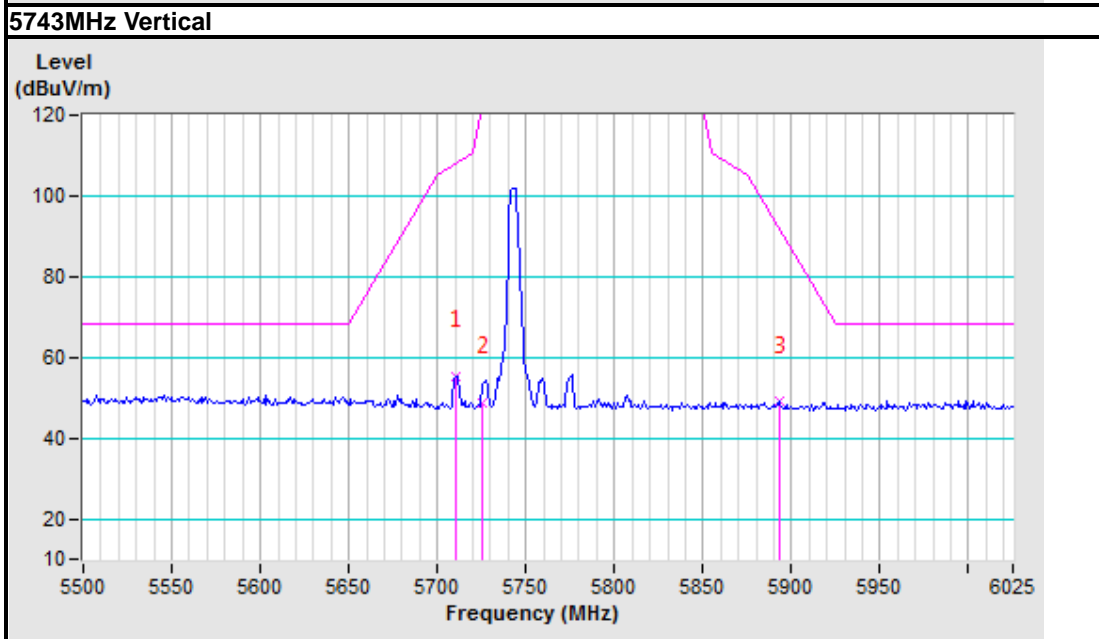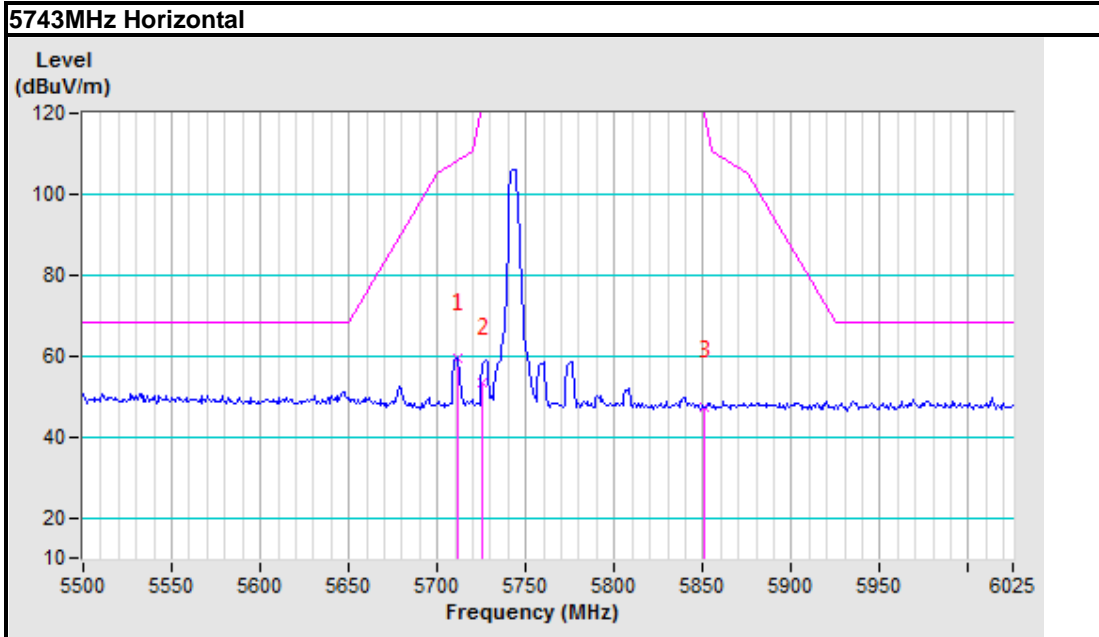



Test Report No.: RF181228N007

CHANNEL		TX Channel 17		DETECTOR FUNCTION		Peak (PK)		
FREQUENCY RANGE		1GHz ~ 40GHz		DETECTOR FUNCTION		Average (AV)		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5791.00	106.34 PK			1.00 H	198	99.38	6.96
2	*5791.00	102.54 AV			1.00 H	198	95.58	6.96
3	#11582.00	62.05 PK	74.00	-11.95	1.00 H	101	45.61	16.44
4	#11582.00	49.11 AV	54.00	-4.89	1.00 H	101	32.67	16.44
5	17373.00	64.95 PK	68.20	-3.25	1.00 H	172	41.84	23.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5791.00	101.80 PK			1.00 V	284	94.84	6.96
2	*5791.00	97.87 AV			1.00 V	284	90.91	6.96
3	#11582.00	62.80 PK	74.00	-11.20	1.00 V	24	46.36	16.44
4	#11582.00	<b>51.48 AV</b>	<b>54.00</b>	<b>-2.52</b>	<b>1.00 V</b>	<b>24</b>	<b>35.04</b>	<b>16.44</b>
5	17373.00	64.03 PK	68.20	-4.17	1.00 V	0	40.92	23.11

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



Test Report No.: RF181228N007

<b>CHANNEL</b>	TX Channel 34	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5838.00	106.08 PK			1.00 H	186	99.13	6.95
2	*5838.00	101.84 AV			1.00 H	186	94.89	6.95
3	@5850.00	50.12 PK	122.20	-72.08	2.00 H	186	43.18	6.94
4	@5854.21	59.82 PK	112.61	-52.79	2.00 H	186	52.88	6.94
5	@5869.35	60.14 PK	106.78	-46.64	2.00 H	186	53.21	6.93
6	#11676.00	63.71 PK	74.00	-10.29	1.00 H	88	47.02	16.69
7	#11676.00	51.14 AV	54.00	-2.86	1.00 H	88	34.45	16.69
8	17514.00	64.25 PK	68.20	-3.95	1.00 H	0	41.09	23.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5838.00	101.18 PK			1.00 V	301	94.23	6.95
2	*5838.00	96.69 AV			1.00 V	301	89.74	6.95
3	@5850.00	48.42 PK	122.20	-73.78	1.00 V	0	41.48	6.94
4	@5869.35	55.45 PK	106.78	-51.33	1.00 V	0	48.52	6.93
5	@5987.14	56.24 PK	68.20	-11.96	1.00 V	0	49.35	6.89
6	#11676.00	63.79 PK	74.00	-10.21	1.00 V	11	47.10	16.69
7	#11676.00	51.29 AV	54.00	-2.71	1.00 V	11	34.60	16.69
8	17514.00	64.93 PK	68.20	-3.27	1.00 V	17	41.77	23.16

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. " @ ": The radiated frequency is limited by the band edge.


Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice\\_dg@cn.bureauveritas.com](mailto:customerservice_dg@cn.bureauveritas.com)



### Band edge Plot

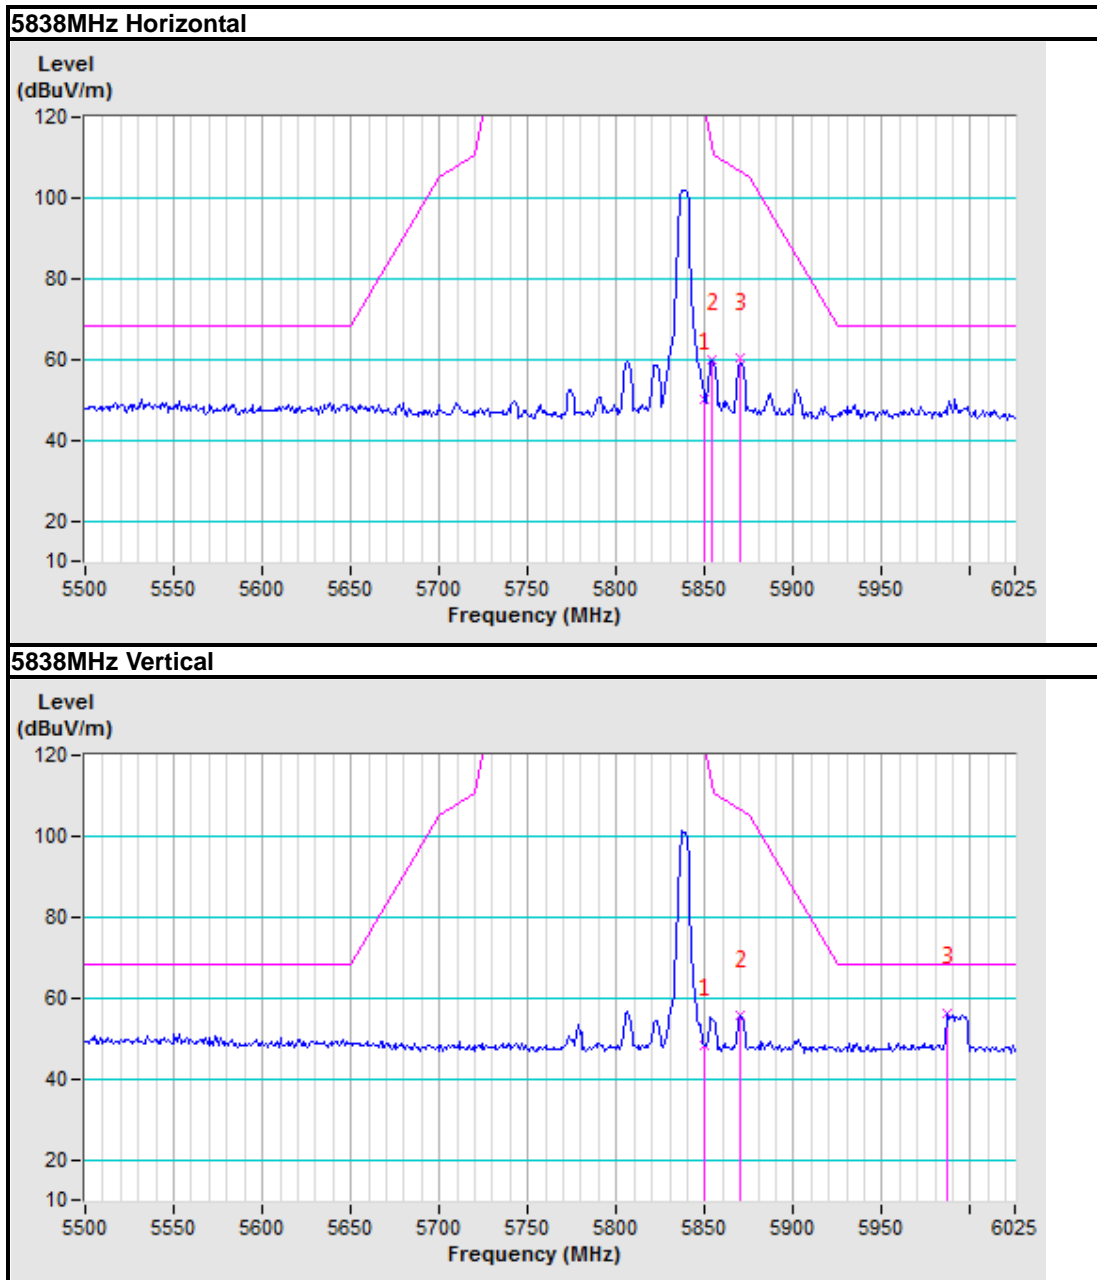


### 3.2 TRANSMIT POWER MEASUREMENT

#### 3.2.1 LIMITS OF TRANSMIT POWER MEASUREMENT


Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	√		250mW(24dBm) or 11 dBm+10LogB*
U-NII-2C	-		250mW(24dBm) or 11 dBm+10LogB*
U-NII-3	-		1 Watt (30 dBm)

**NOTE:** 1. Where B is the 26dB emission bandwidth in MHz.

#### 3.2.2 TEST SETUP

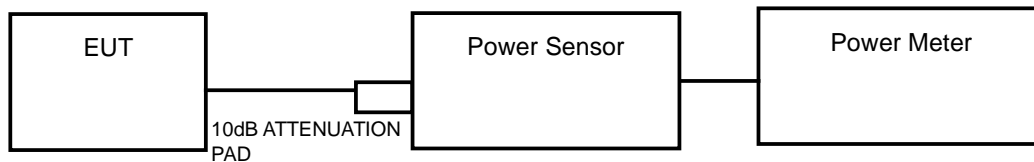

#### FOR 6/26dB BANDWIDTH



### 3.2.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.20,18	Sep. 19,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,18	Nov. 07,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02, 19	Jan. 01, 20
Agile Signal Generator	Agilent	8645A	Agilent	Oct. 27, 18	Oct. 26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02, 19	Jan. 01, 20
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

### 3.2.4 TEST PROCEDURE

#### FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = RMS.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.





Test Report No.: RF181228N007

#### FOR 6dB BANDWIDTH

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.2.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



BUREAU  
VERITAS

Test Report No.: RF181228N007

### 3.2.7 TEST RESULTS

#### OUTPUT POWER:

##### GFSK

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	LIMIT (dBm)	PASS /FAIL
1	5743	9.76	30.00	PASS
17	5785	7.92	30.00	PASS
34	5825	6.83	30.00	PASS

#### 6dB BANDWIDTH

##### GFSK


Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)	PASS /FAIL
1	5743	1.82	PASS
17	5785	1.84	PASS
34	5825	2.04	PASS



BUREAU VERITAS

Test Report No.: RF181228N007

### 6dB BANDWIDTH

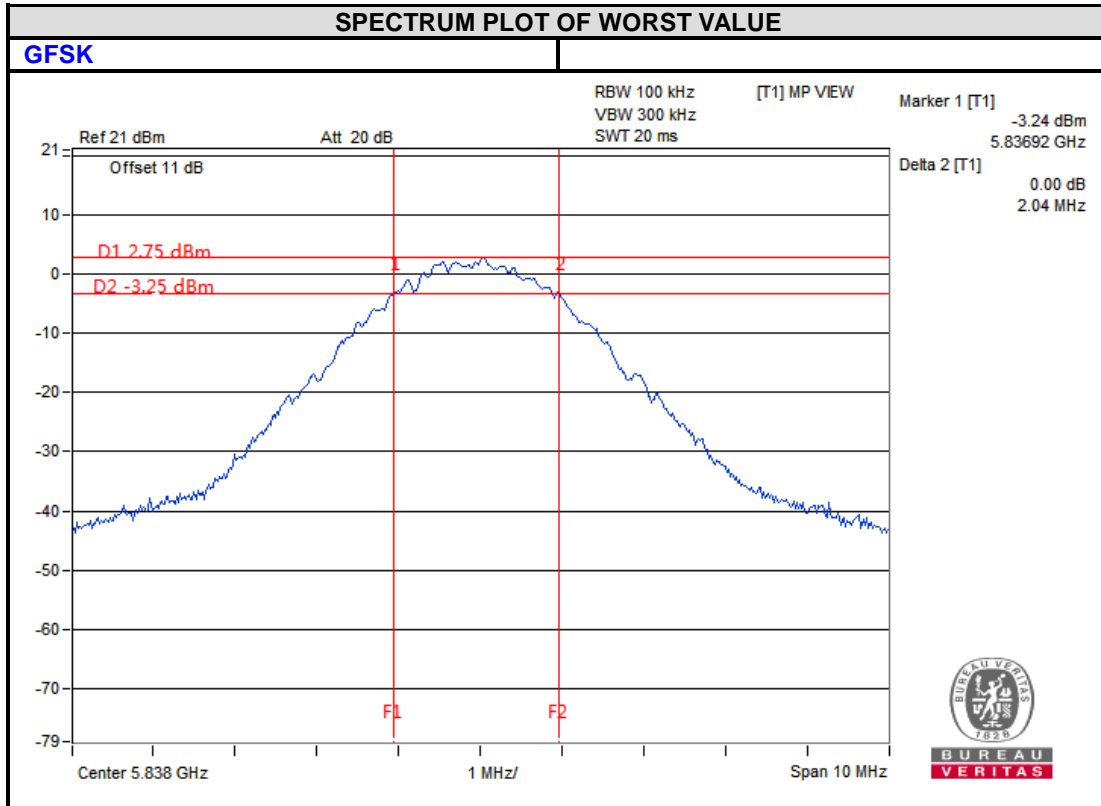


### 3.3 PEAK POWER SPECTRAL DENSITY MEASUREMENT

#### 3.3.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C	-		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

#### 3.3.2 TEST SETUP



#### 3.3.3 TEST INSTRUMENTS

Refer to section 3.2.3 to get information of above instrument.

#### 3.3.4 TEST PROCEDURES

##### For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW =3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)



Test Report No.: RF181228N007

### For U-NII-3 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW = 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

### 3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.6 EUT OPERATING CONDITIONS


Same as 3.3.6

### 3.3.7 TEST RESULTS

#### GFSK

Channel Number	Frequency (MHz)	RF Power Level in 300kHz BW (dBm)	RF Power Level in 500kHz BW (dBm)	MAX. Limit (dBm/500k)	PASS / FAIL
1	5743	-1.86	0.36	30.00	PASS
17	5785	-3.69	-1.47	30.00	PASS
34	5825	-5.12	-2.90	30.00	PASS

#### PSD Test Plot

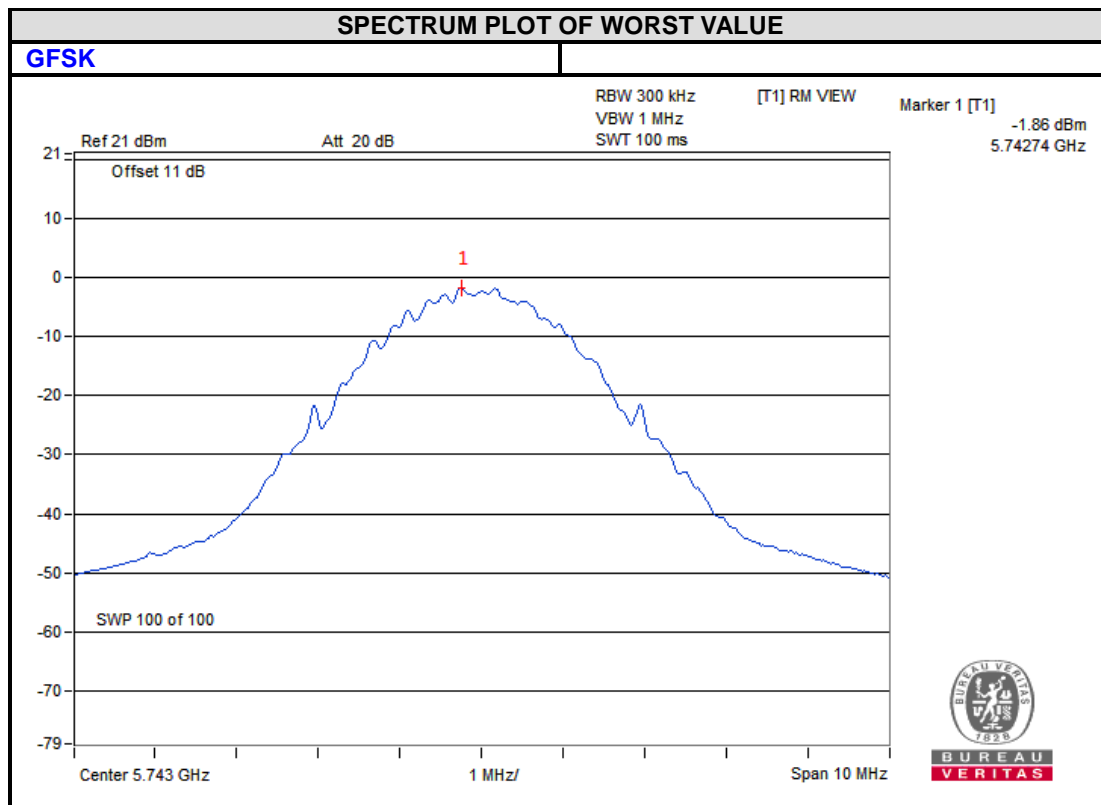


### 3.4 FREQUENCY STABILITY

#### 3.4.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation.

#### 3.4.2 TEST SETUP

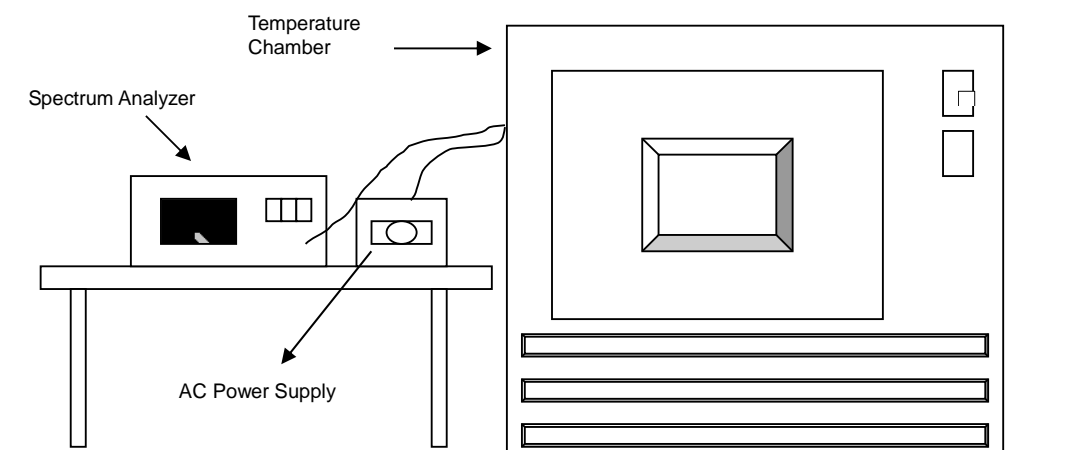

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.2.3 to get information of above instrument.



Test Report No.: RF181228N007

#### 3.4.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.4.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.





Test Report No.: RF181228N007

### 3.4.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5743MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
50	3.3	5742.999	-0.00002	5742.9955	-0.00008	5742.9947	-0.00009	5742.9947	-0.00009
40	3.3	5742.984	-0.00028	5742.9863	-0.00024	5742.9836	-0.00029	5742.9843	-0.00027
30	3.3	5743.0292	0.00051	5743.0276	0.00048	5743.0264	0.00046	5743.026	0.00045
20	3.3	5743.0249	0.00043	5743.0222	0.00039	5743.0209	0.00036	5743.0208	0.00036
10	3.3	5742.9788	-0.00037	5742.978	-0.00038	5742.9782	-0.00038	5742.9771	-0.00040
0	3.3	5742.9867	-0.00023	5742.985	-0.00026	5742.985	-0.00026	5742.988	-0.00021
-10	3.3	5743.0286	0.00050	5743.0268	0.00047	5743.0287	0.00050	5743.0291	0.00051
-20	3.3	5743.0259	0.00045	5743.0274	0.00048	5743.0233	0.00041	5743.0256	0.00045
-30	3.3	5742.9868	-0.00023	5742.9839	-0.00028	5742.9843	-0.00027	5742.989	-0.00019

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5743MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
20	3.0	5743.0245	0.00043	5743.0225	0.00039	5743.0212	0.00037	5743.0214	0.00037
	3.3	5743.0249	0.00043	5743.0222	0.00039	5743.0209	0.00036	5743.0208	0.00036
	3.6	5743.0252	0.00044	5743.0224	0.00039	5743.0199	0.00035	5743.0201	0.00035



Test Report No.: RF181228N007

#### 4. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF181228N007

## 5. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---