

# FCC Radio Test Report

## FCC ID: ZVAPS000017

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1503C087  
**Equipment** : SHOUT Dual Mode WiFi/Bluetooth Smart Speaker  
**Model Name** : IS0101  
**Applicant** : TCL Technoly Electronics(Huizhou) Co.,Ltd.  
**Address** : Section 37, Zhongkai High-tech Development Zone,  
Huizhou City, Guang Dong Province, China, 516006

**Date of Receipt** : Mar. 09, 2015  
**Date of Test** : Mar. 09, 2015 ~ Apr. 27, 2015  
**Issued Date** : Apr. 28 2015  
**Tested by** : BTL Inc.

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
<b>4 . EMC EMISSION TEST</b>	<b>14</b>
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
<b>5 . BANDWIDTH TEST</b>	<b>20</b>
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20

<b>Table of Contents</b>	<b>Page</b>
<b>6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST</b>	<b>21</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>21</b>
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>22</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>22</b>
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>23</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>24</b>
<b>10 . EUT TEST PHOTO</b>	<b>26</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>30</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>33</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>35</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>42</b>
<b>ATTACHMENT E - BANDWIDTH</b>	<b>91</b>
<b>ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER</b>	<b>100</b>
<b>ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>105</b>
<b>ATTACHMENT H - POWER SPECTRAL DENSITY</b>	<b>130</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1503C087	Original Issue.	Apr. 28, 2015

## 1. CERTIFICATION

Equipment : SHOUT Dual Mode WiFi/Bluetooth Smart Speaker  
Brand Name : ihave  
Model Name : IS0101  
Applicant : TCL Technoly Electronics(Huizhou) Co.,Ltd.  
Manufacturer: SHENZHEN RENQING TECHNOLOGY CO.,LTD  
Address : Room 2001,Modern International Building,Jintian Rd,Futian,Shenzhen  
Factory : TCL Technoly Electronics(Huizhou) Co.,Ltd.  
Address : Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang  
Dong Province, China, 516006  
Date of Test : Mar. 09, 2015 ~ Apr. 27, 2015  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C: 2014 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc..

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1503C087) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

<b>Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2014</b>				
Standard(s)	Section	Test Item	Judgment	Remark
	15.207	Conducted Emission	PASS	
	15.247(d)	Antenna conducted Spurious Emission	PASS	
	15.247(a)(2)	6dB Bandwidth	PASS	
	15.247(b)(3)	Peak Output Power	PASS	
	15.247(e)	Power Spectral Density	PASS	
	15.203	Antenna Requirement	PASS	
	15.209/15.205	Transmitter Radiated Emissions	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report.

(2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is located at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	SHOUT Dual Mode WiFi/Bluetooth Smart Speaker	
Brand Name	ihave	
Model Name	IS0101	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 19.09dBm 802.11g: 23.21dBm 802.11n(20MHz): 21.89dBm 802.11n(40MHz): 22.69dBm
Power Source	#1 DC Voltage supplied from AC adapter. Model: IU018A120150A #2 Supplied from battery	
Power Rating	#1 I/P: 100-240V~ 50/60Hz 0.6A O/P: DC 12V 1.5A #2 DC 7.4V 4500mAh 33.3Wh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Internal	N/A	3.44	TX/RX
2	N/A	N/A	Internal	N/A	3.29	TX/RX

Note:

(1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R), all transmit signals are completely uncorrelated, then, **Direction gain = G<sub>ANT</sub>**, that is Directional gain=3.44.

4.

Operating Mode	2TX
TX Mode	
802.11b	V (ANT 1 + ANT 2)
802.11g	V (ANT 1 + ANT 2)
802.11n(20MHz)	V (ANT 1 + ANT 2)
802.11n(40MHz)	V (ANT 1 + ANT 2)

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)  
 802.11g mode: OFDM (6Mbps)  
 802.11n HT20 mode : BPSK (13Mbps)  
 802.11n HT40 mode : BPSK (27Mbps)  
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	MT7620QA.exe		
Frequency (MHz)	2412	2437	2462
802.11b	06	06	07
802.11g	02	03	03
802.11n (20MHz)	00	01	02
Frequency	2422	2437	2452
802.11n (40MHz)	00	03	03

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

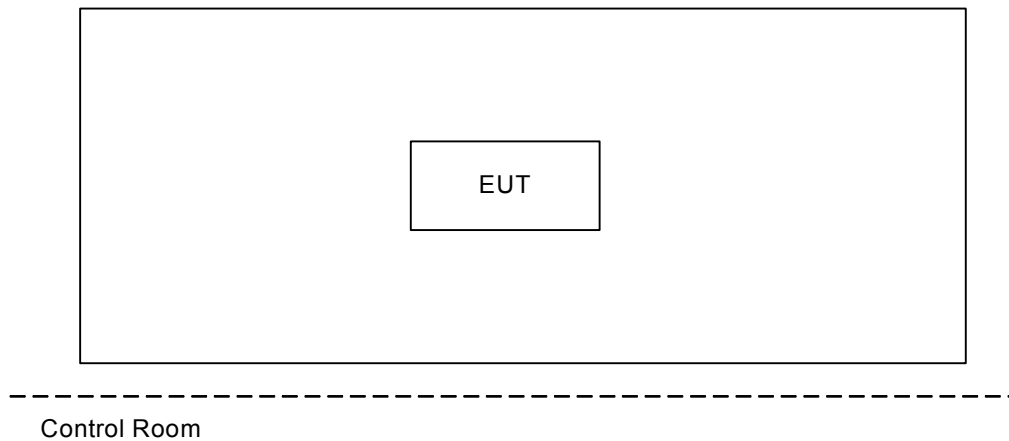

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

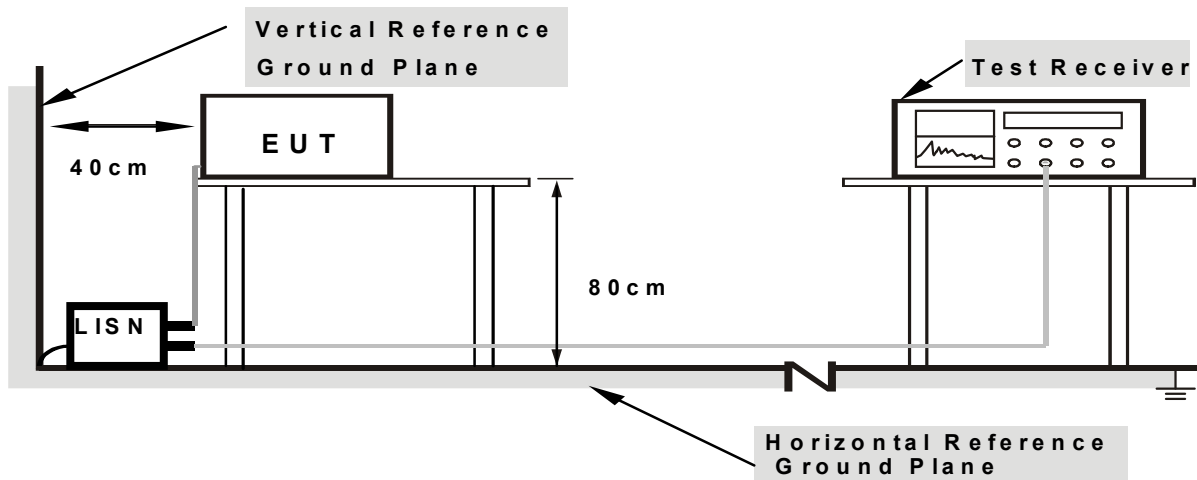

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: AC 120V

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

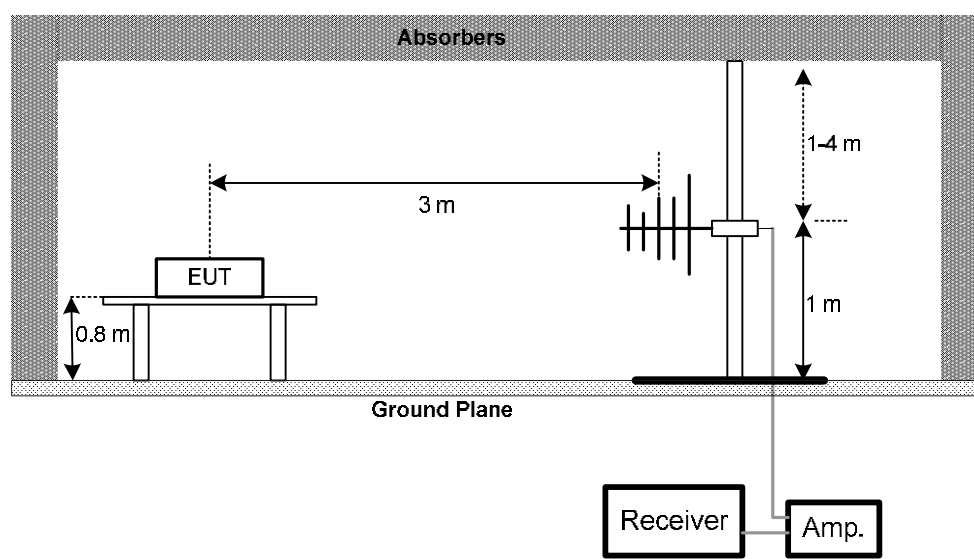

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

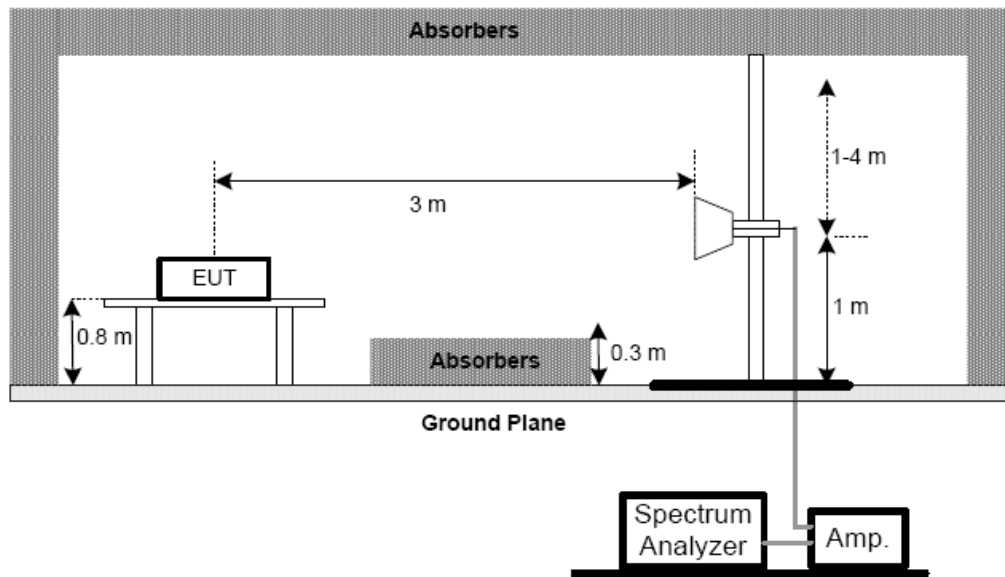

(C) For radiated emissions below 30MHz

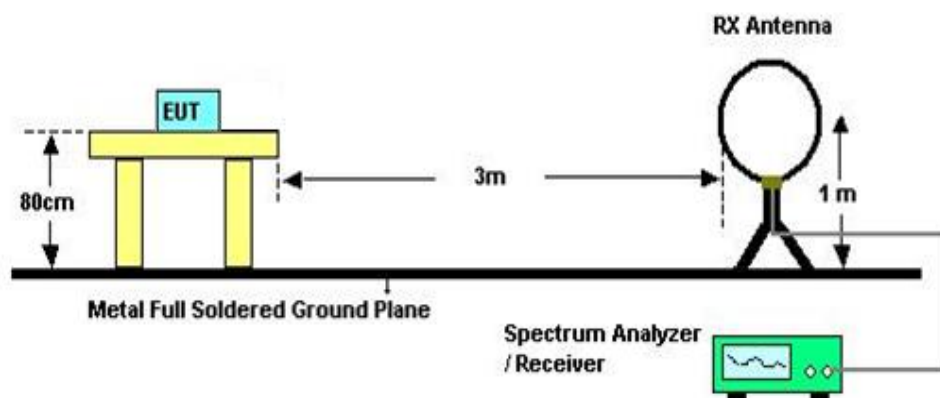

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 **Unless** otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 7.4V

**4.2.7 TEST RESULTS (9KHZ TO 30MHZ)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)**

Please refer to the Attachment C.

**4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 7.4V

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 7.4V

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

## **7. ANTENNA CONDUCTED SPURIOUS EMISSION**

### **7.1 APPLIED PROCEDURES / LIMIT**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


#### **7.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### **7.1.2 DEVIATION FROM STANDARD**

No deviation.

#### **7.1.3 TEST SETUP**

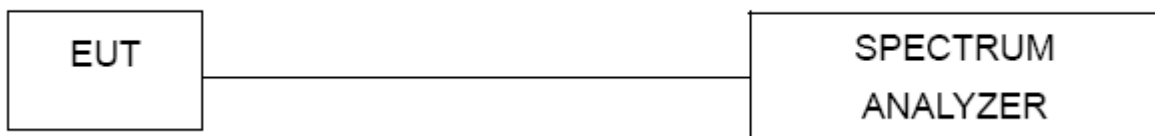

#### **7.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### **7.1.5 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 7.4V

#### **7.1.6 TEST RESULTS**

Please refer to the Attachment G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 7.4V

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar.13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1 -01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 17, 2015
3	Receiver	AGILENT	N9038A	MY5213003 9	Sep. 30, 2015
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015
5	Controller	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 28, 2016
8	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
9	Receiver	AGILENT	N9038A	MY5213003 9	Sep. 30, 2015
10	Test Cable	HUBER+SUHNER	C-48	N/A	Apr. 30, 2015
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 16, 2015



<b>6dB Bandwidth Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

<b>Peak Output Power Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 28, 2016
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 28, 2016

<b>Antenna Conducted Spurious Emission Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015


<b>Power Spectral Density Measurement</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.

**10. EUT TEST PHOTO****Conducted Measurement Photos**



## Radiated Measurement Photos

9KHz to 30MHz

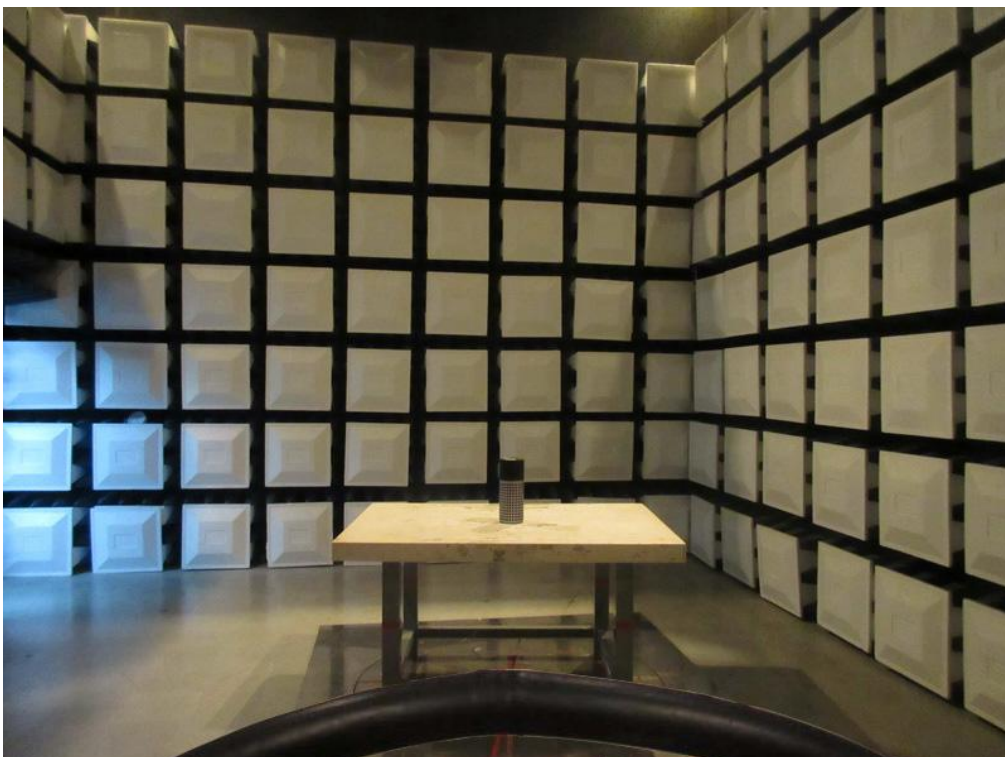

## Radiated Measurement Photos

30MHz to 1000MHz

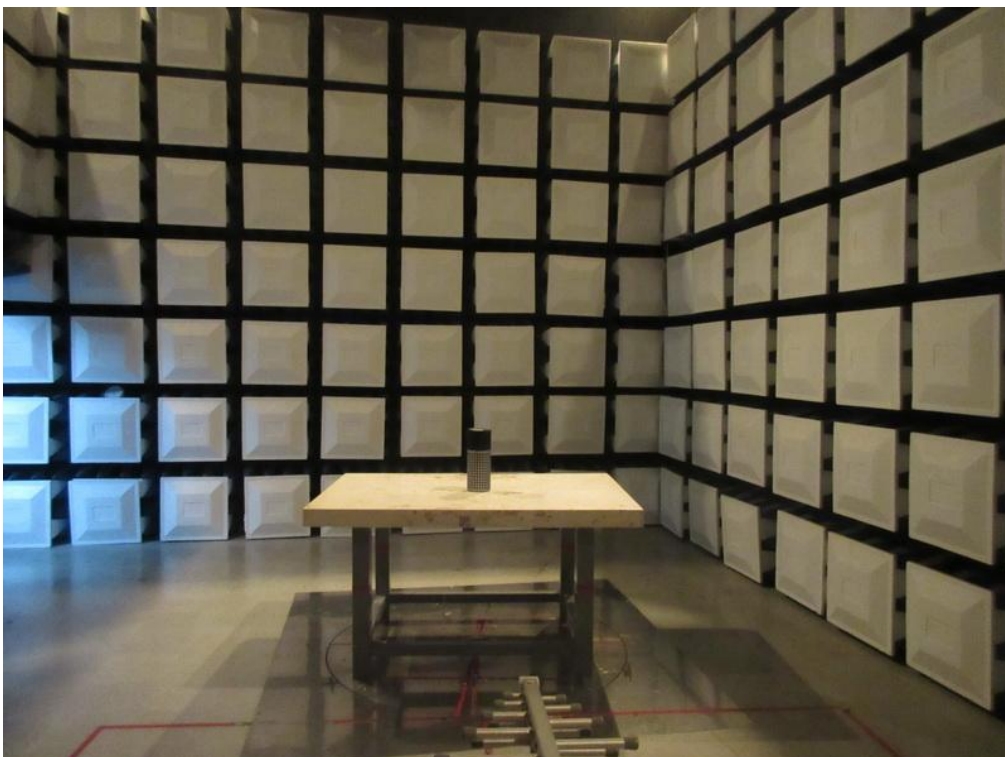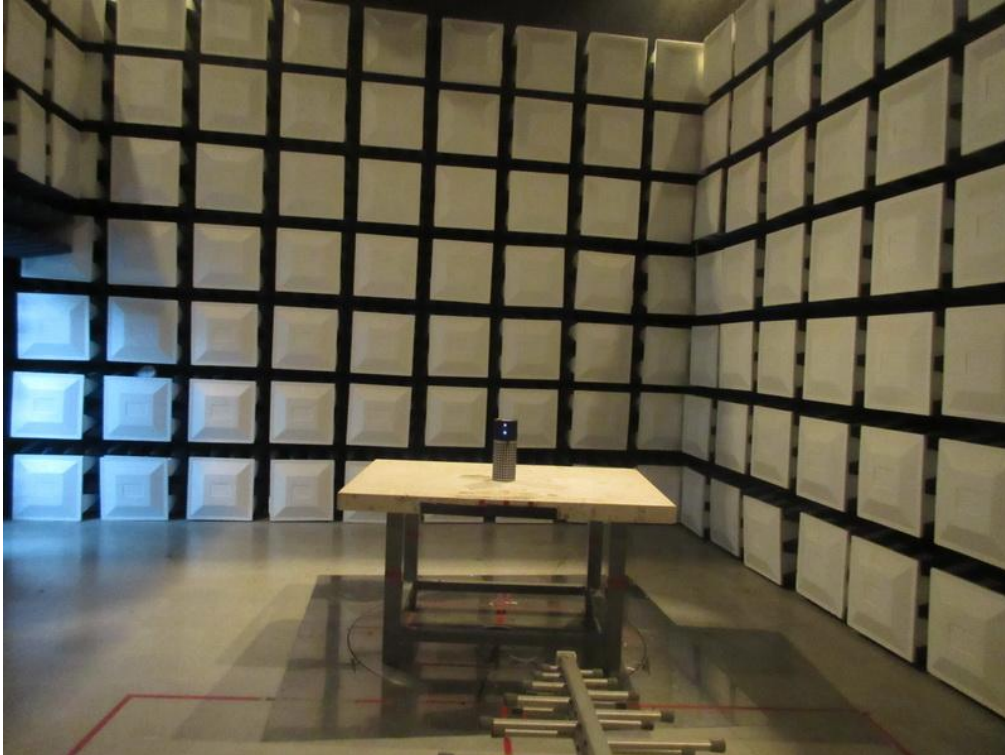

## Radiated Measurement Photos


Above 1000MHz



## **ATTACHMENT A - CONDUCTED EMISSION**

Test Mode : TX MODE


### Line

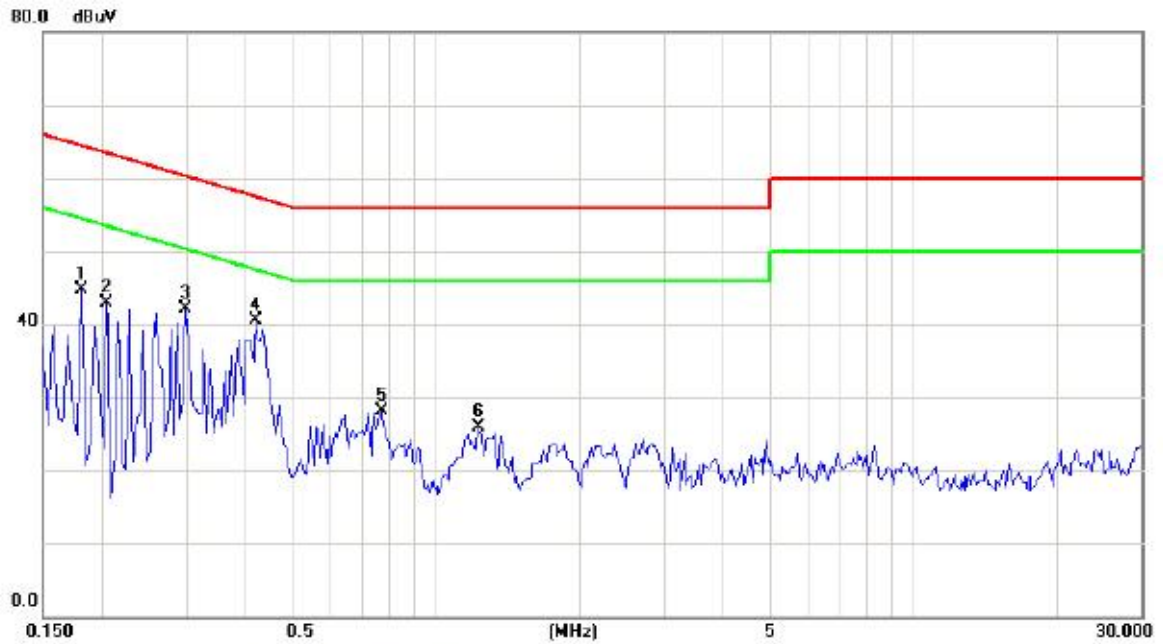

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1812	35.22	9.46	44.68	64.43	-19.75	peak	
2		0.2046	33.36	9.47	42.83	63.42	-20.59	peak	
3		0.2983	32.60	9.51	42.11	60.29	-18.18	peak	
4	*	0.4195	30.86	9.57	40.43	57.46	-17.03	peak	
5		0.7671	18.57	9.52	28.09	56.00	-27.91	peak	
6		1.2242	16.29	9.56	25.85	56.00	-30.15	peak	

Test Mode : TX MODE

### Neutral

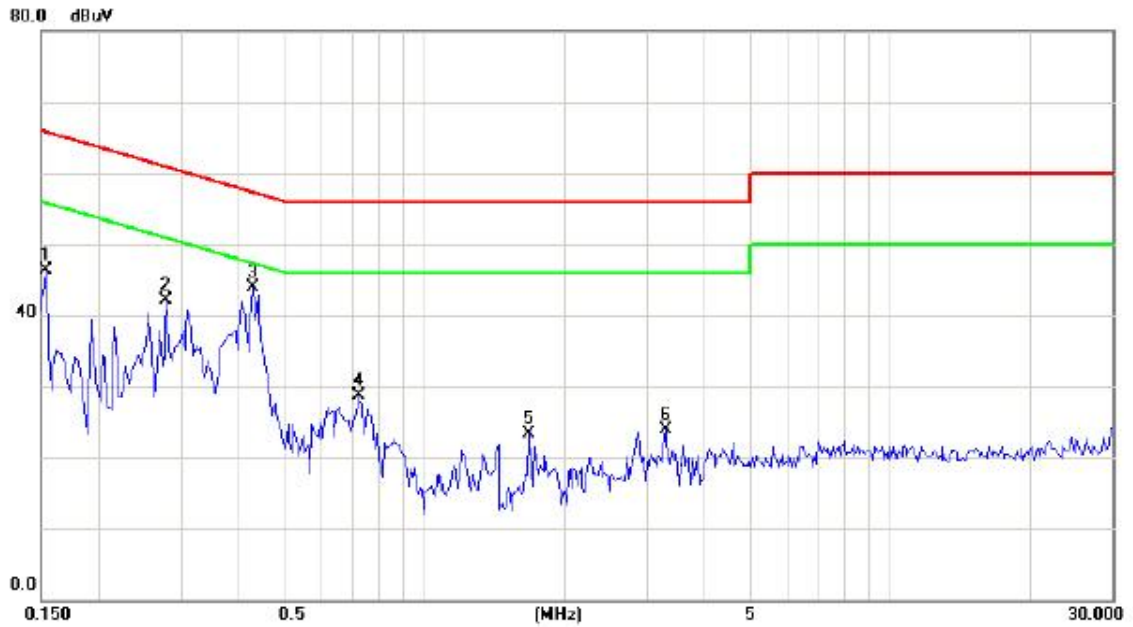

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	36.66	9.56	46.22	65.78	-19.56	peak	
2		0.2790	32.52	9.54	42.06	60.85	-18.79	peak	
3	*	0.4273	34.32	9.54	43.86	57.31	-13.45	peak	
4		0.7203	19.12	9.54	28.66	56.00	-27.34	peak	
5		1.6773	13.81	9.54	23.35	56.00	-32.65	peak	
6		3.2930	14.38	9.54	23.92	56.00	-32.08	peak	



**ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**

Test Mode:	TX Mode 2412MHz
------------	-----------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0069	0°	8.24	25.13	33.37	110.83	-77.46	AVG
0.0069	0°	12.11	25.13	37.24	130.83	-93.59	PEAK
0.0251	0°	6.72	23.98	30.70	99.61	-68.91	AVG
0.0251	0°	9.21	23.98	33.19	119.61	-86.42	PEAK
0.0322	0°	2.15	23.53	25.68	97.45	-71.77	AVG
0.0322	0°	6.34	23.53	29.87	117.45	-87.58	PEAK
0.0374	0°	2.34	23.20	25.54	96.15	-70.61	AVG
0.0374	0°	5.35	23.20	28.55	116.15	-87.60	PEAK
0.4856	0°	20.25	19.83	40.08	73.88	-33.79	QP
1.8726	0°	21.52	19.51	41.03	69.54	-28.51	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0048	90°	9.40	24.30	33.70	133.98	-100.28	AVG
0.0048	90°	12.31	24.30	36.61	153.98	-117.37	PEAK
0.0369	90°	4.62	23.23	27.85	116.26	-88.41	AVG
0.0369	90°	8.74	23.23	31.97	136.26	-104.29	PEAK
0.0412	90°	2.62	22.96	25.58	115.31	-89.73	AVG
0.0412	90°	4.87	22.96	27.83	135.31	-107.48	PEAK
0.0488	90°	1.55	22.48	24.03	113.84	-89.81	AVG
0.0488	90°	3.73	22.48	26.21	133.84	-107.63	PEAK
0.4586	90°	21.89	19.90	41.79	94.38	-52.59	QP
1.8861	90°	23.73	19.51	43.24	69.54	-26.30	QP

**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: TX B MODE CHANNEL 01


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		83.3500	42.18	-17.34	24.84	40.00	-15.16	peak	
2		192.9600	48.13	-14.54	33.59	43.50	-9.91	peak	
3		359.8000	42.86	-11.35	31.51	46.00	-14.49	peak	
4		482.0200	37.97	-9.84	28.13	46.00	-17.87	peak	
5		579.9900	36.90	-7.92	28.98	46.00	-17.02	peak	
6	*	834.1300	43.42	-3.07	40.35	46.00	-5.65	peak	

Test Mode: TX B MODE CHANNEL 01

### Horizontal

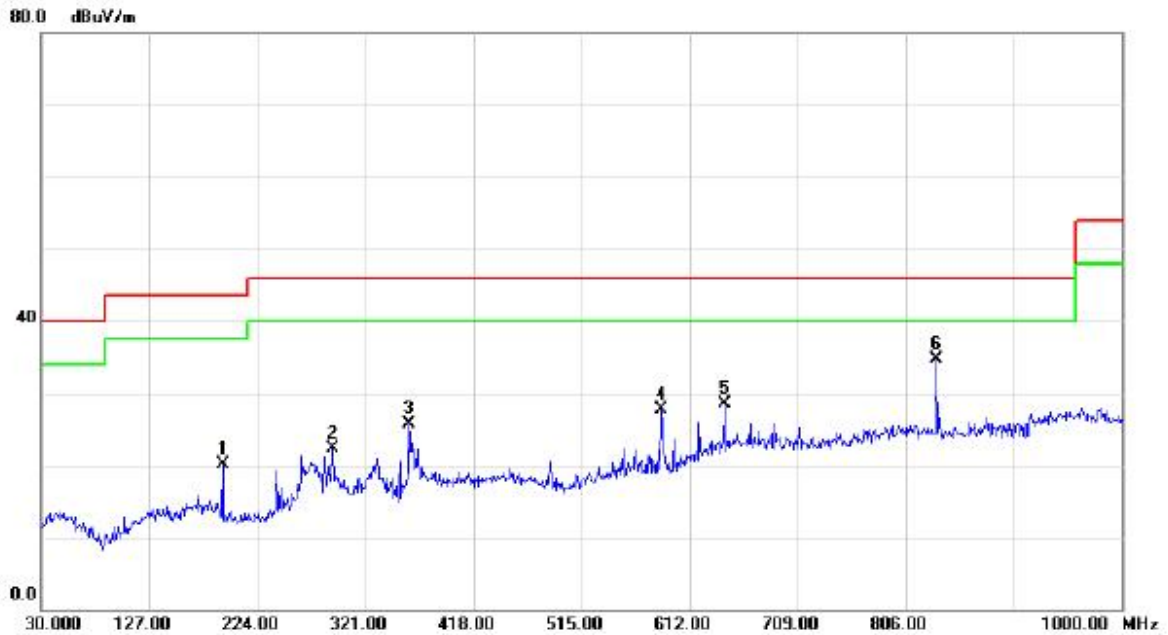

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		192.9600	34.59	-14.54	20.05	43.50	-23.45	peak	
2		291.9000	33.43	-11.15	22.28	46.00	-23.72	peak	
3		359.8000	37.12	-11.35	25.77	46.00	-20.23	peak	
4		586.7800	35.58	-7.91	27.67	46.00	-18.33	peak	
5		644.0100	33.91	-5.49	28.42	46.00	-17.58	peak	
6	*	833.1600	37.84	-3.06	34.78	46.00	-11.22	peak	

Test Mode: TX B MODE CHANNEL 06


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		83.3500	42.68	-17.34	25.34	40.00	-14.66	peak	
2		192.9600	49.13	-14.54	34.59	43.50	-8.91	peak	
3		359.8000	42.86	-11.35	31.51	46.00	-14.49	peak	
4		482.0200	38.97	-9.84	29.13	46.00	-16.87	peak	
5		579.9900	37.40	-7.92	29.48	46.00	-16.52	peak	
6	*	834.1300	42.42	-3.07	39.35	46.00	-6.65	peak	

Test Mode: TX B MODE CHANNEL 06

### Horizontal

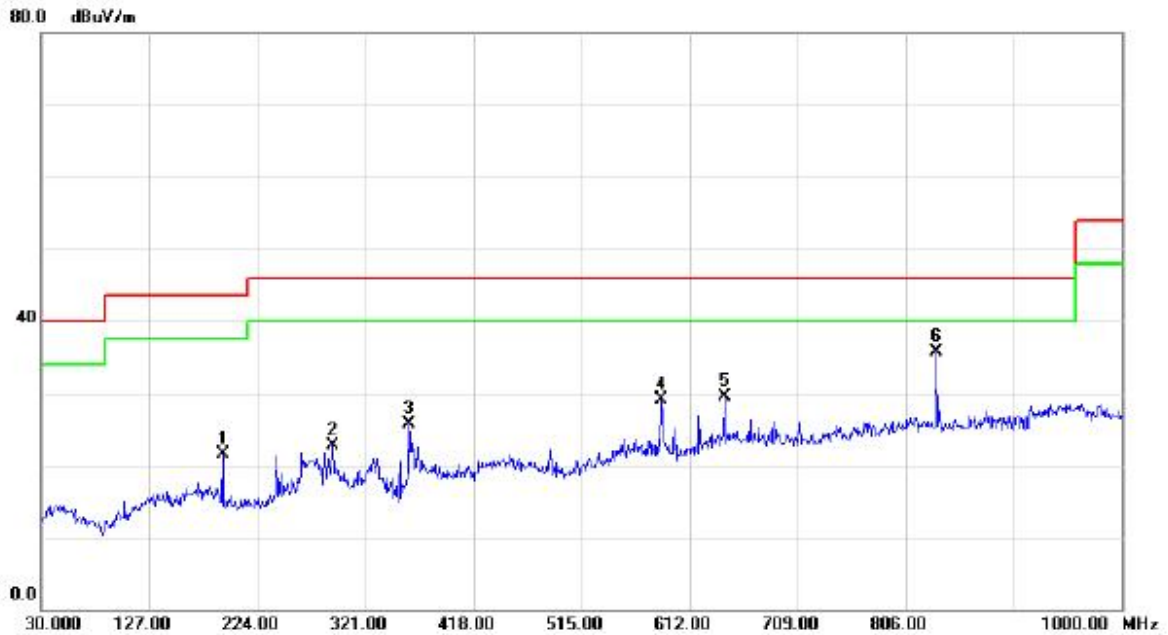

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		192.9600	36.09	-14.54	21.55	43.50	-21.95	peak	
2		291.9000	33.93	-11.15	22.78	46.00	-23.22	peak	
3		359.8000	37.12	-11.35	25.77	46.00	-20.23	peak	
4		586.7800	37.08	-7.91	29.17	46.00	-16.83	peak	
5		644.0100	34.91	-5.49	29.42	46.00	-16.58	peak	
6	*	833.1600	38.84	-3.06	35.78	46.00	-10.22	peak	

Test Mode: TX B MODE CHANNEL 11

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		83.3500	41.68	-17.34	24.34	40.00	-15.66	peak	
2		192.9600	47.63	-14.54	33.09	43.50	-10.41	peak	
3		359.8000	41.86	-11.35	30.51	46.00	-15.49	peak	
4		482.0200	36.47	-9.84	26.63	46.00	-19.37	peak	
5		579.9900	34.90	-7.92	26.98	46.00	-19.02	peak	
6	*	834.1300	42.92	-3.07	39.85	46.00	-6.15	peak	



Test Mode: TX B MODE CHANNEL 11

### Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		192.9600	37.59	-14.54	23.05	43.50	-20.45	peak	
2		291.9000	35.93	-11.15	24.78	46.00	-21.22	peak	
3		359.8000	38.12	-11.35	26.77	46.00	-19.23	peak	
4		586.7800	37.08	-7.91	29.17	46.00	-16.83	peak	
5		644.0100	34.91	-5.49	29.42	46.00	-16.58	peak	
6	*	833.1600	37.84	-3.06	34.78	46.00	-11.22	peak	

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

### Vertical

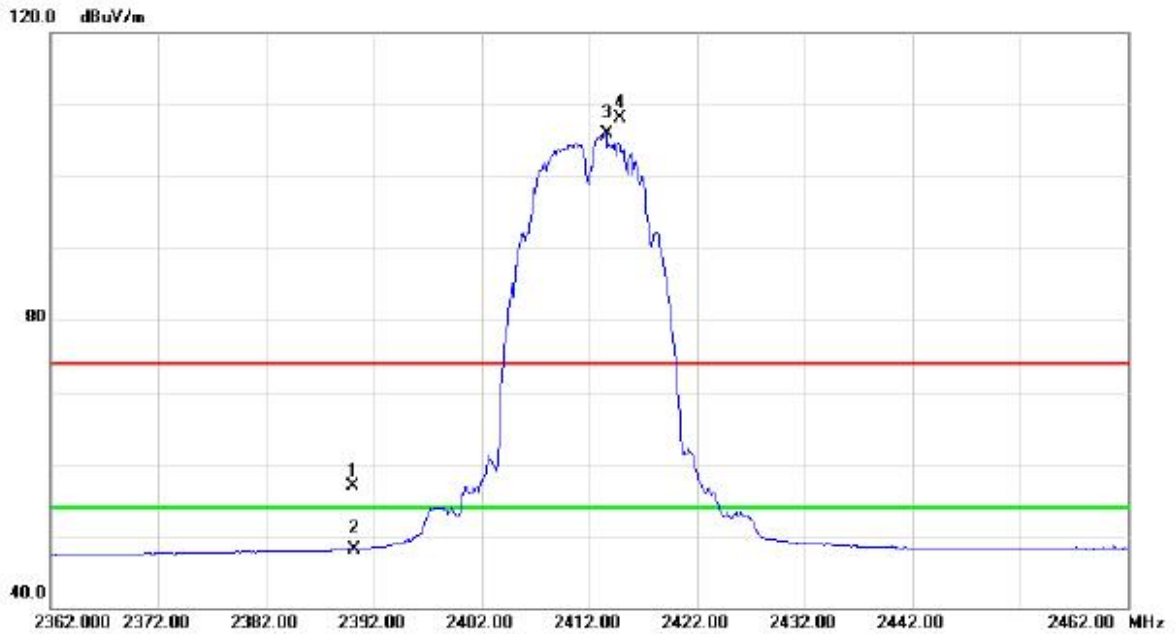

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	24.22	32.68	56.90	74.00	-17.10	peak	
2		2390.000	15.51	32.68	48.19	54.00	-5.81	AVG	
3	*	2413.600	73.11	32.71	105.82	54.00	51.82	AVG	No Limit
4	X	2414.800	75.47	32.71	108.18	74.00	34.18	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.020	42.52	3.62	46.14	54.00	-7.86	AVG	
2		4824.400	45.83	3.62	49.45	74.00	-24.55	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

### Horizontal

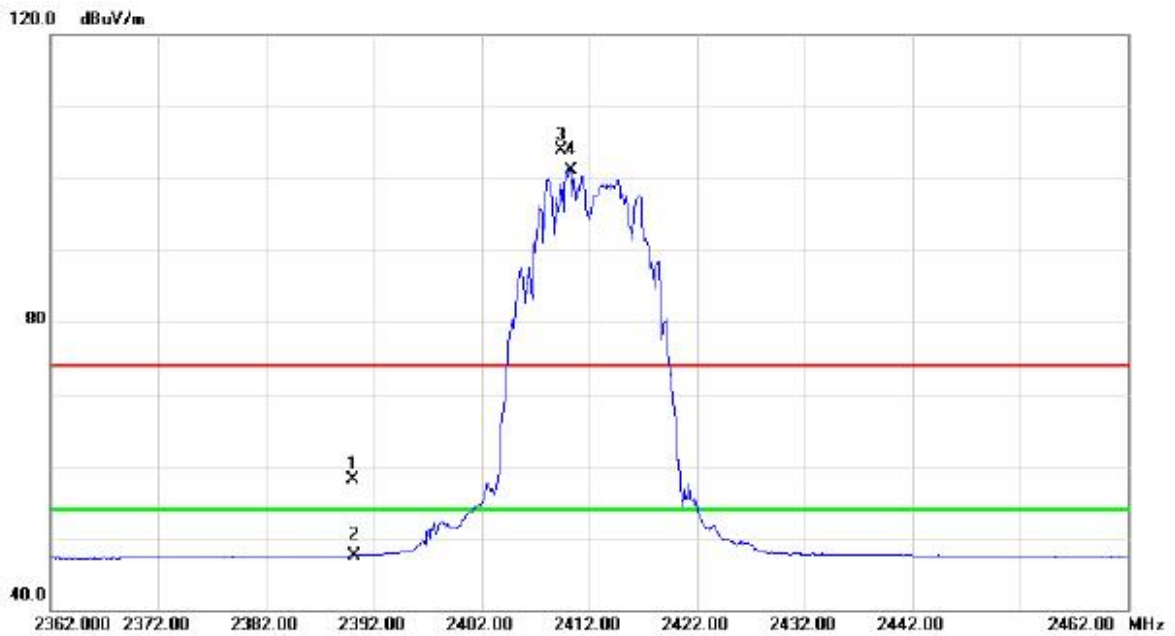

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.46	32.68	58.14	74.00	-15.86	peak	
2		2390.000	14.87	32.68	47.55	54.00	-6.45	AVG	
3	X	2409.400	71.12	32.71	103.83	74.00	29.83	peak	No Limit
4	*	2410.300	68.43	32.71	101.14	54.00	47.14	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4823.960	44.52	3.62	48.14	54.00	-5.86	AVG	
2		4824.010	47.74	3.62	51.36	74.00	-22.64	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

### Vertical

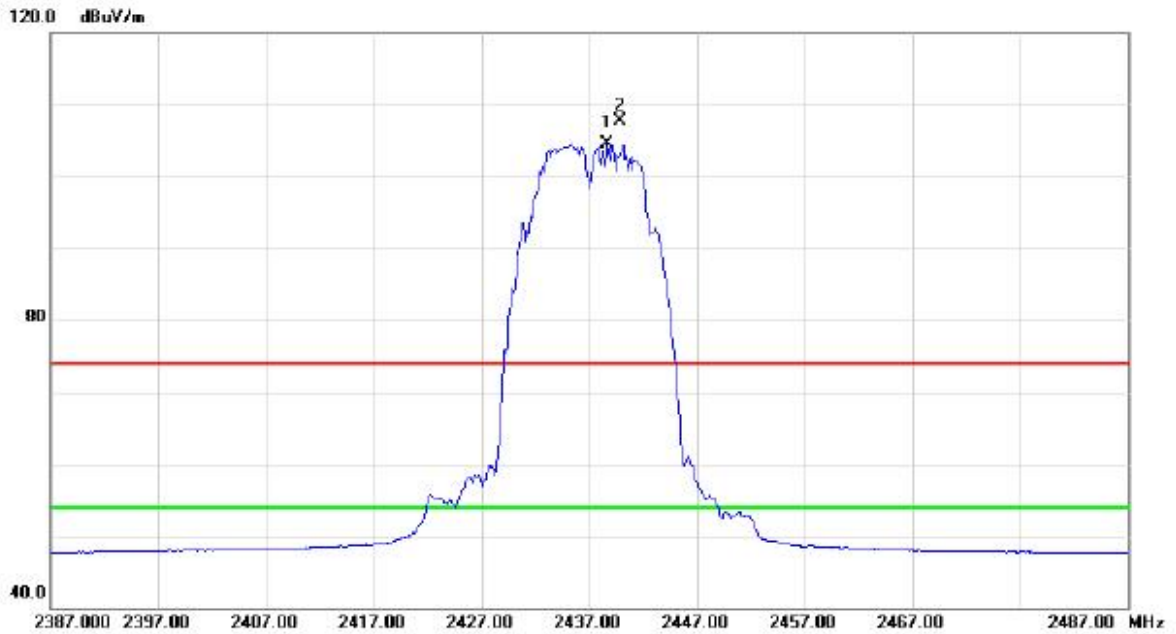

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2438.700	71.83	32.74	104.57	54.00	50.57	AVG	No Limit
2	X	2439.800	75.02	32.75	107.77	74.00	33.77	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

### Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.940	44.53	3.72	48.25	74.00	-25.75	peak	
2	*	4874.020	39.54	3.72	43.26	54.00	-10.74	AVG	



Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

### Horizontal

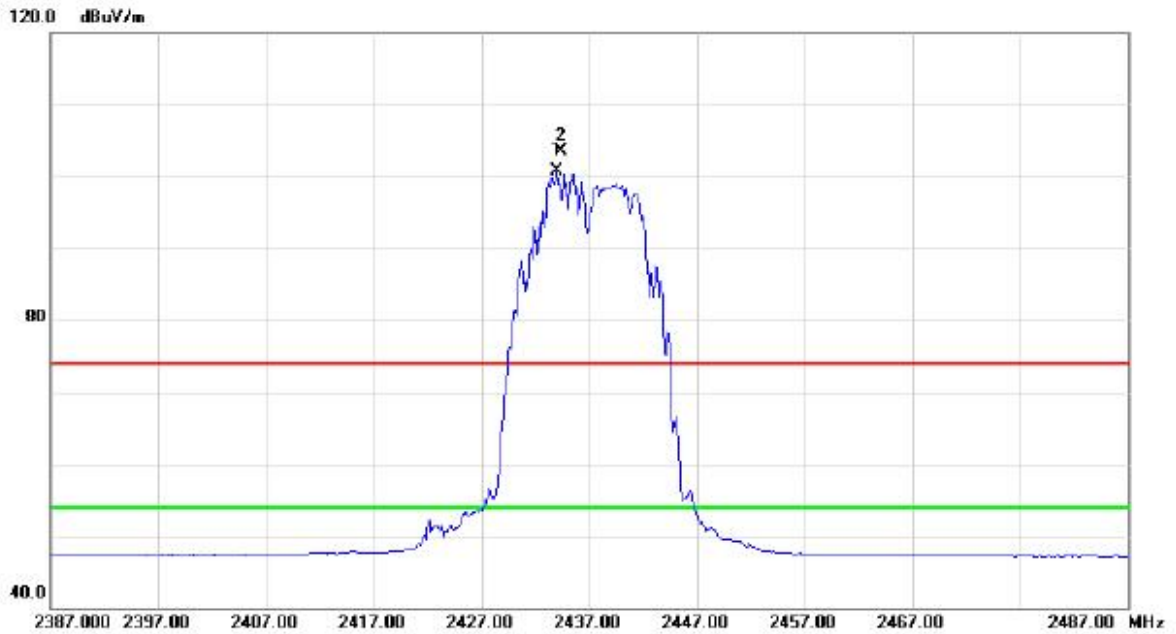

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2434.000	67.89	32.74	100.63	54.00	46.63	AVG	No Limit
2	X	2434.400	70.79	32.74	103.53	74.00	29.53	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.980	50.57	3.72	54.29	74.00	-19.71	peak	
2	*	4874.010	46.86	3.72	50.58	54.00	-3.42	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

### Vertical

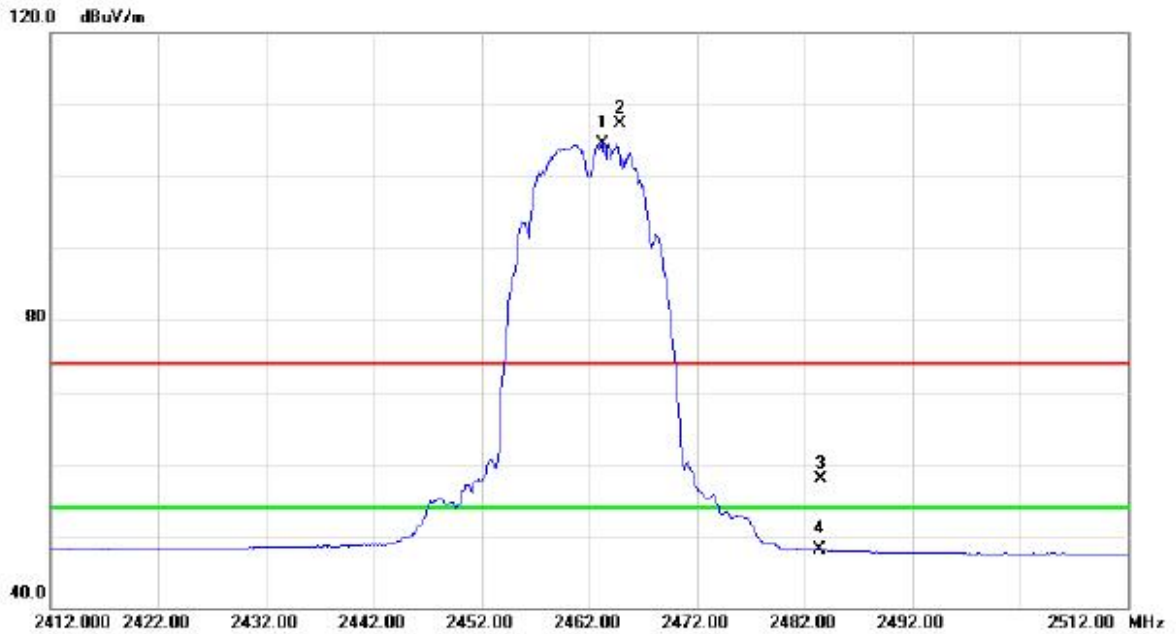

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.200	71.75	32.78	104.53	54.00	50.53	AVG	No Limit
2	X	2464.800	74.50	32.78	107.28	74.00	33.28	peak	No Limit
3		2483.500	25.02	32.81	57.83	74.00	-16.17	peak	
4		2483.500	15.31	32.81	48.12	54.00	-5.88	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.980	42.83	3.80	46.63	74.00	-27.37	peak	
2	*	4924.020	39.54	3.80	43.34	54.00	-10.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

### Horizontal

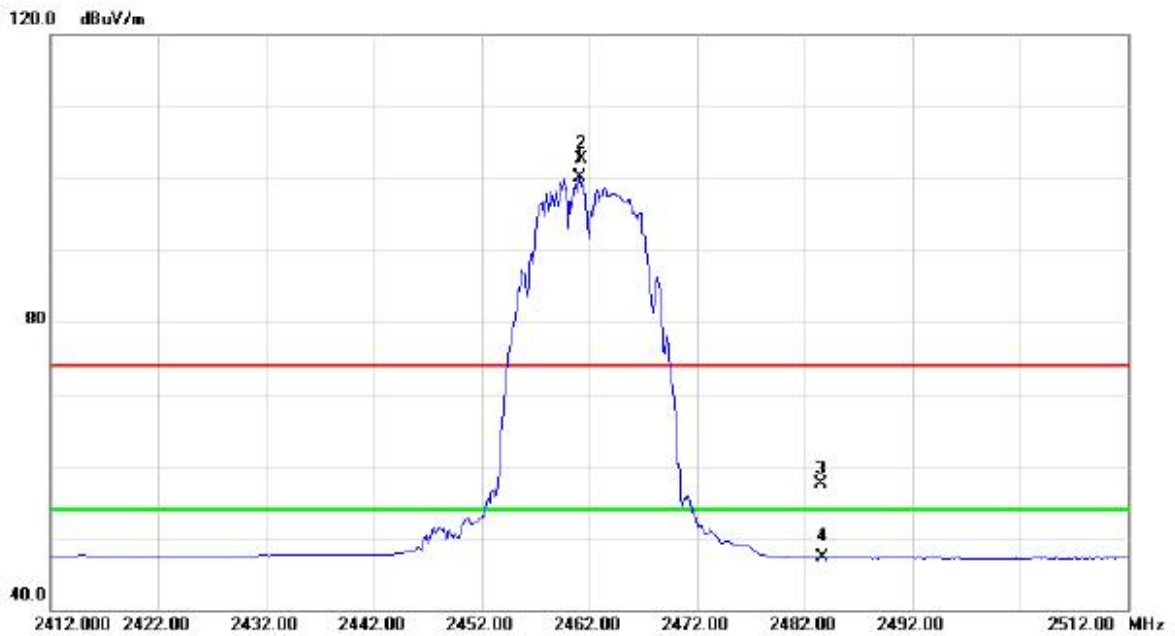

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2461.100	67.34	32.78	100.12	54.00	46.12	AVG	No Limit
2	X	2461.300	69.88	32.78	102.66	74.00	28.66	peak	No Limit
3		2483.500	24.72	32.81	57.53	74.00	-16.47	peak	
4		2483.500	14.52	32.81	47.33	54.00	-6.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.980	48.64	3.80	52.44	74.00	-21.56	peak	
2	*	4923.990	46.13	3.80	49.93	54.00	-4.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

### Vertical

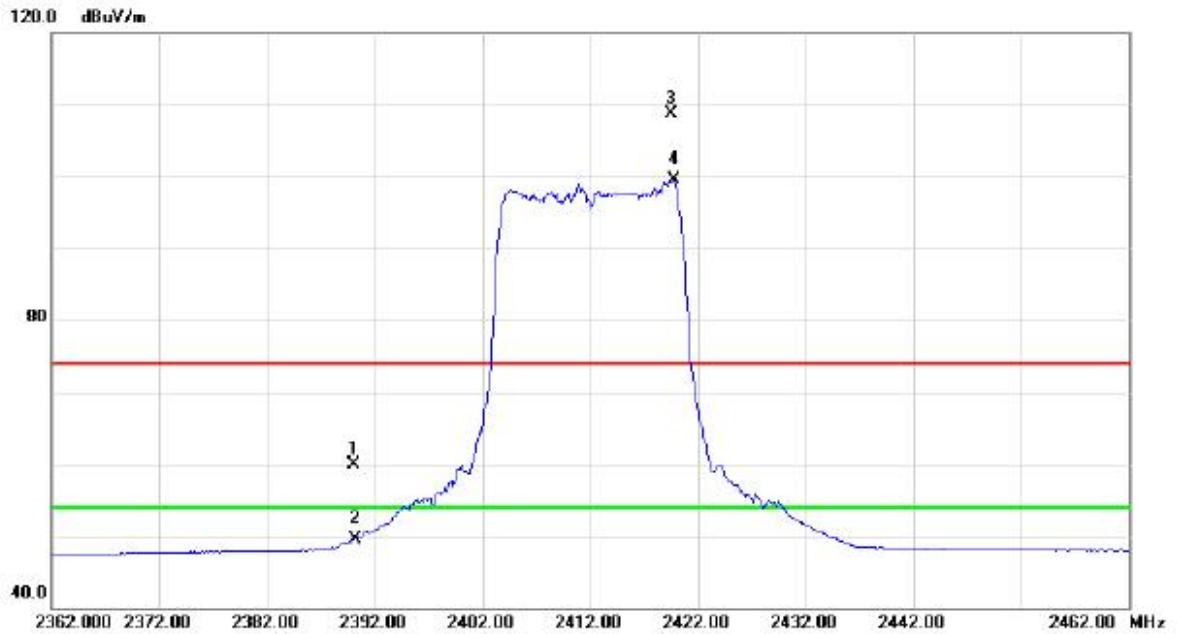

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	27.31	32.68	59.99	74.00	-14.01	peak	
2		2390.000	16.86	32.68	49.54	54.00	-4.46	AVG	
3	X	2419.500	75.92	32.72	108.64	74.00	34.64	peak	No Limit
4	*	2419.800	66.70	32.72	99.42	54.00	45.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

### Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.010	29.88	3.62	33.50	54.00	-20.50	AVG	
2		4824.030	38.93	3.62	42.55	74.00	-31.45	peak	



Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

### Horizontal

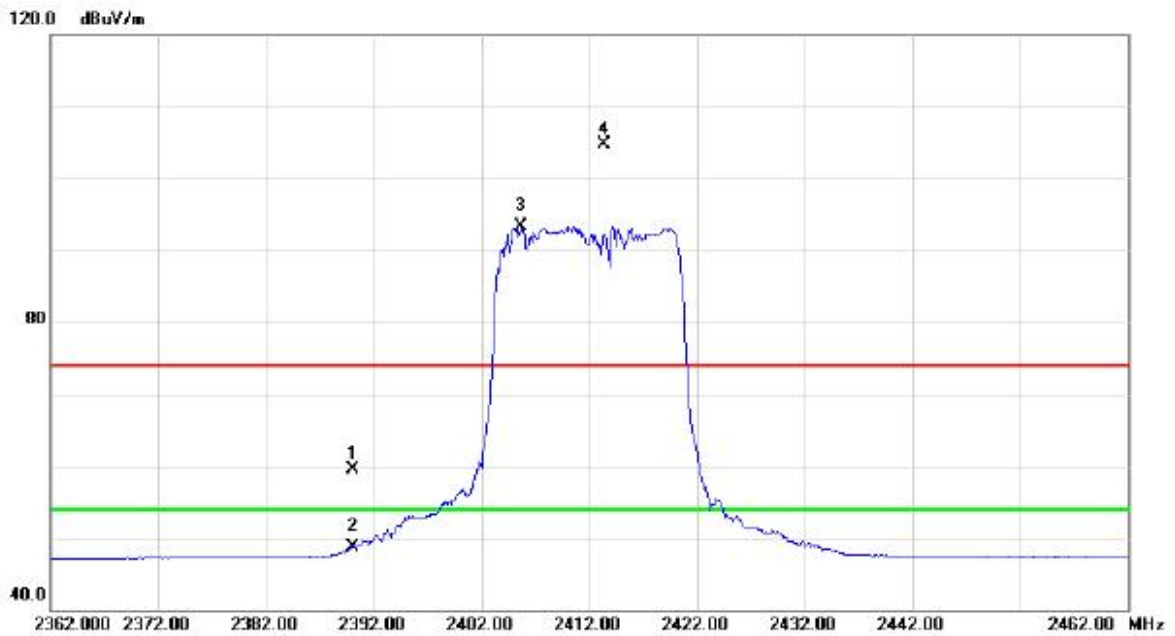

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	26.76	32.68	59.44	74.00	-14.56	peak	
2		2390.000	16.07	32.68	48.75	54.00	-5.25	AVG	
3	*	2405.700	60.70	32.70	93.40	54.00	39.40	AVG	No Limit
4	X	2413.400	72.08	32.71	104.79	74.00	30.79	peak	No Limit


Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	42.37	3.62	45.99	74.00	-28.01	peak	
2	*	4824.010	31.62	3.62	35.24	54.00	-18.76	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

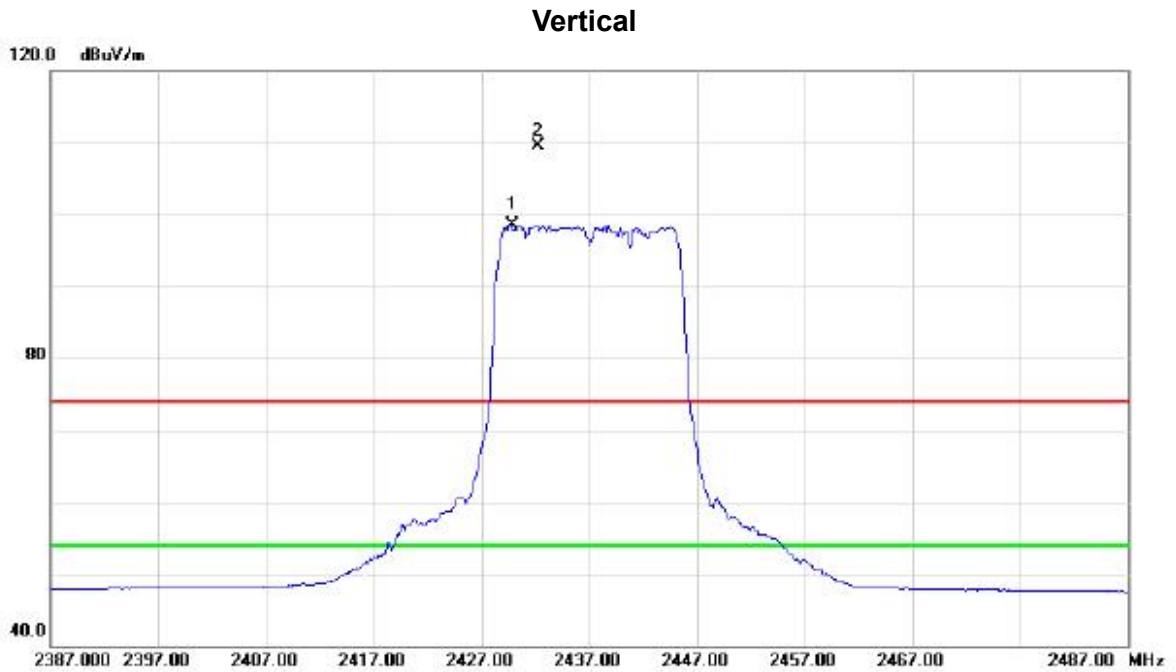

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2429.800	65.86	32.73	98.59	54.00	44.59	AVG	No Limit
2	X	2432.300	76.69	32.74	109.43	74.00	35.43	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4874.020	30.47	3.72	34.19	54.00	-19.81	AVG	
2		4874.040	39.39	3.72	43.11	74.00	-30.89	peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

### Horizontal

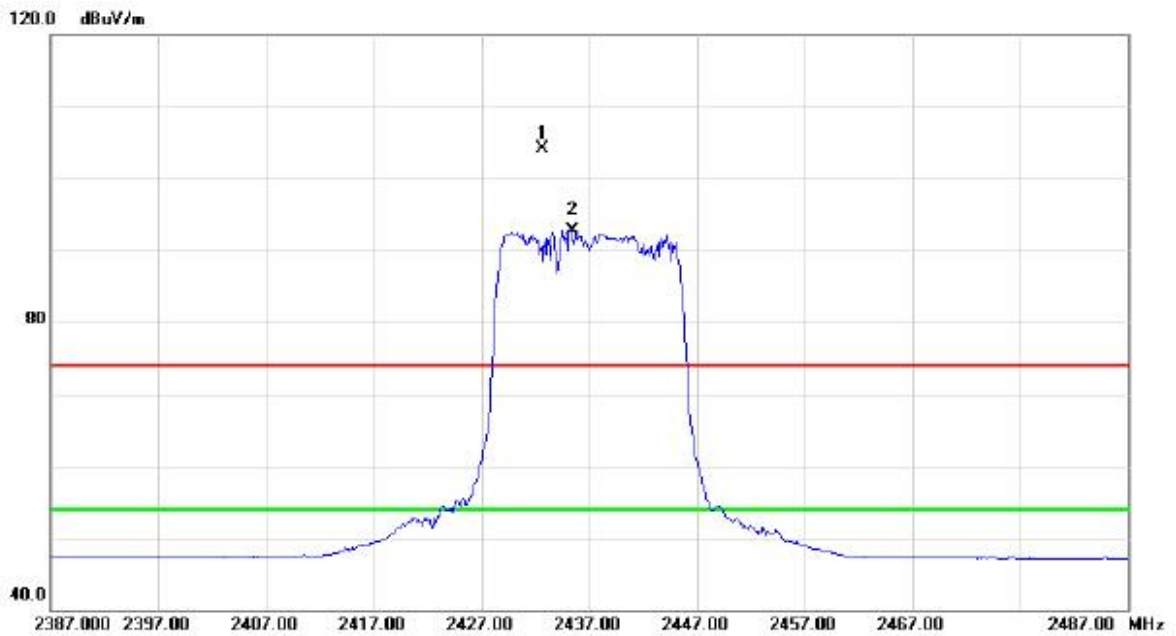

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2432.600	71.27	32.74	104.01	74.00	30.01	peak	No Limit
2	*	2435.400	60.03	32.74	92.77	54.00	38.77	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.980	42.88	3.72	46.60	74.00	-27.40	peak	
2	*	4874.080	32.59	3.72	36.31	54.00	-17.69	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

### Vertical

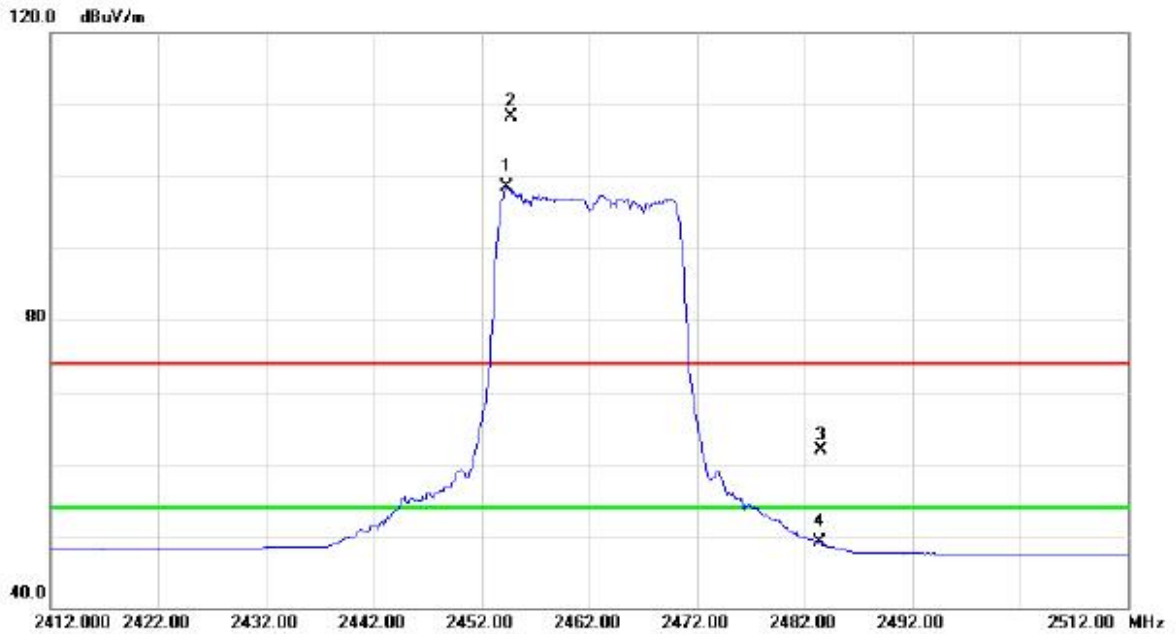

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.300	65.83	32.76	98.59	54.00	44.59	AVG	No Limit
2	X	2454.700	75.52	32.76	108.28	74.00	34.28	peak	No Limit
3		2483.500	29.18	32.81	61.99	74.00	-12.01	peak	
4		2483.500	16.38	32.81	49.19	54.00	-4.81	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

### Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4924.020	29.37	3.80	33.17	54.00	-20.83	AVG	
2		4924.140	38.92	3.80	42.72	74.00	-31.28	peak	



Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

### Horizontal

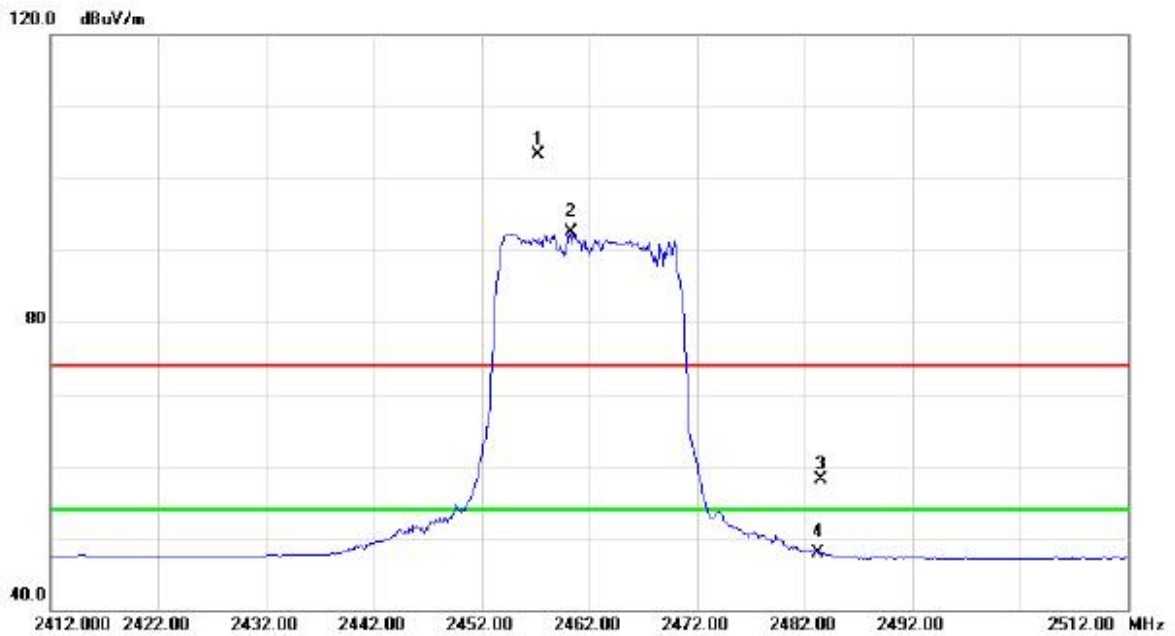

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2457.200	70.55	32.78	103.33	74.00	29.33	peak	No Limit
2	*	2460.300	59.80	32.78	92.58	54.00	38.58	AVG	No Limit
3		2483.500	25.28	32.81	58.09	74.00	-15.91	peak	
4		2483.500	15.06	32.81	47.87	54.00	-6.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.980	41.22	3.80	45.02	74.00	-28.98	peak	
2	*	4923.980	31.12	3.80	34.92	54.00	-19.08	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

### Vertical

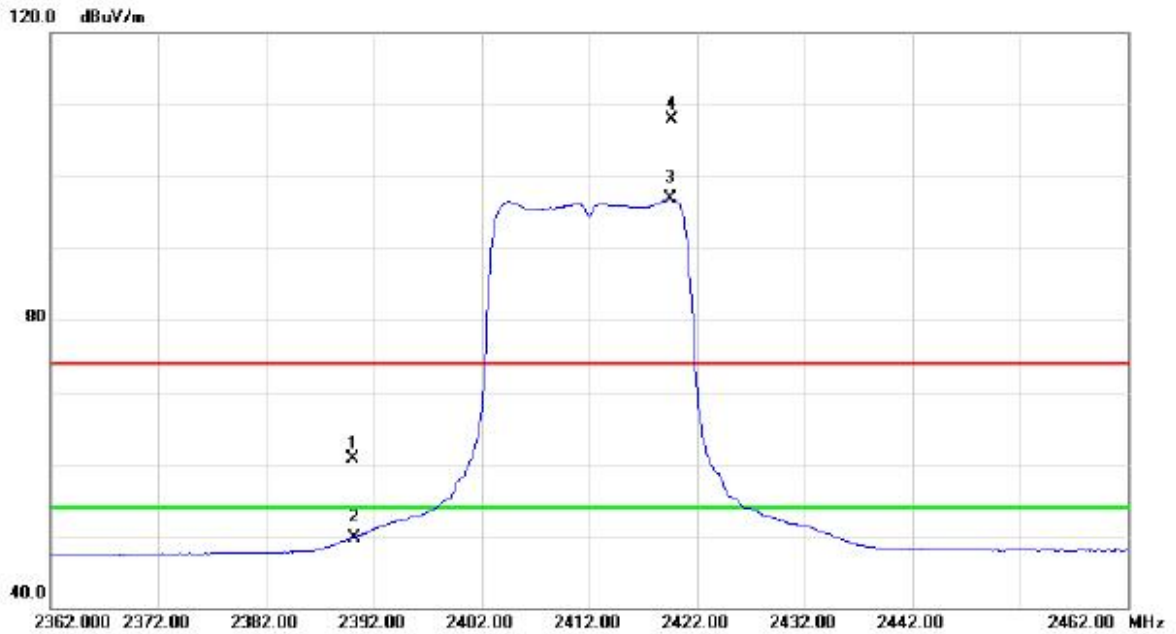

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	28.10	32.68	60.78	74.00	-13.22	peak	
2		2390.000	17.02	32.68	49.70	54.00	-4.30	AVG	
3	*	2419.500	64.25	32.72	96.97	54.00	42.97	AVG	No Limit
4	X	2419.700	75.12	32.72	107.84	74.00	33.84	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.010	28.21	3.62	31.83	54.00	-22.17	AVG	
2		4824.030	37.74	3.62	41.36	74.00	-32.64	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

### Horizontal

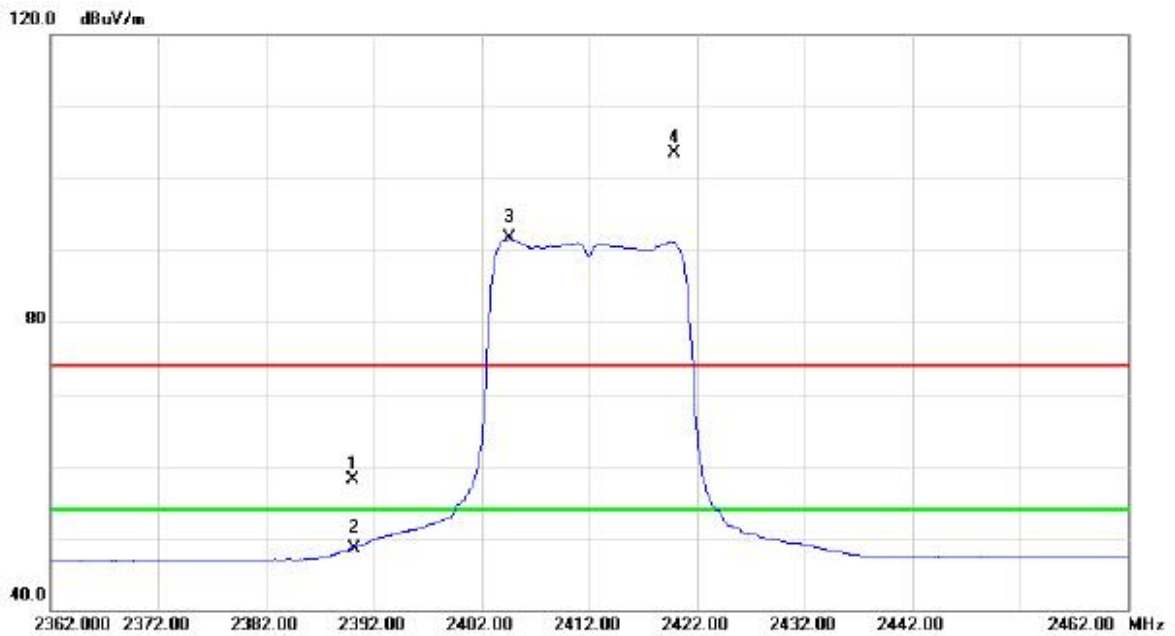

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.33	32.68	58.01	74.00	-15.99	peak	
2		2390.000	15.91	32.68	48.59	54.00	-5.41	AVG	
3	*	2404.600	58.92	32.69	91.61	54.00	37.61	AVG	No Limit
4	X	2419.900	70.69	32.72	103.41	74.00	29.41	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4823.980	43.26	3.62	46.88	74.00	-27.12	peak	
2	*	4823.990	33.51	3.62	37.13	54.00	-16.87	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

### Vertical

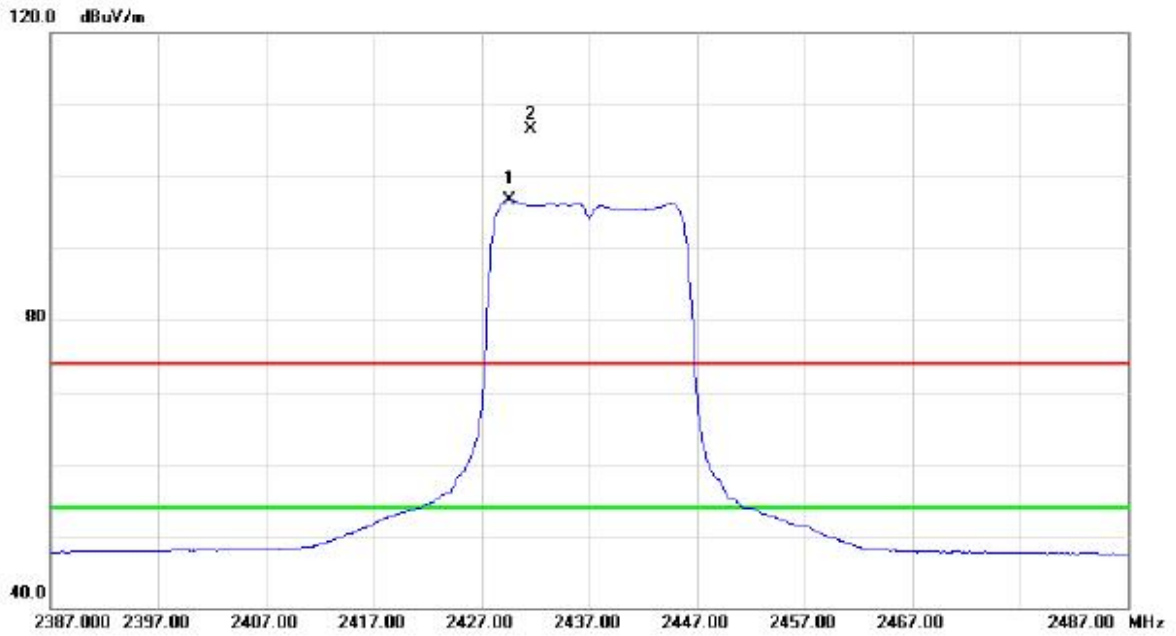

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2429.600	64.07	32.73	96.80	54.00	42.80	AVG	No Limit
2	X	2431.600	73.80	32.74	106.54	74.00	32.54	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

### Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4874.030	28.89	3.72	32.61	54.00	-21.39	AVG	
2		4874.040	37.68	3.72	41.40	74.00	-32.60	peak	



Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

### Horizontal

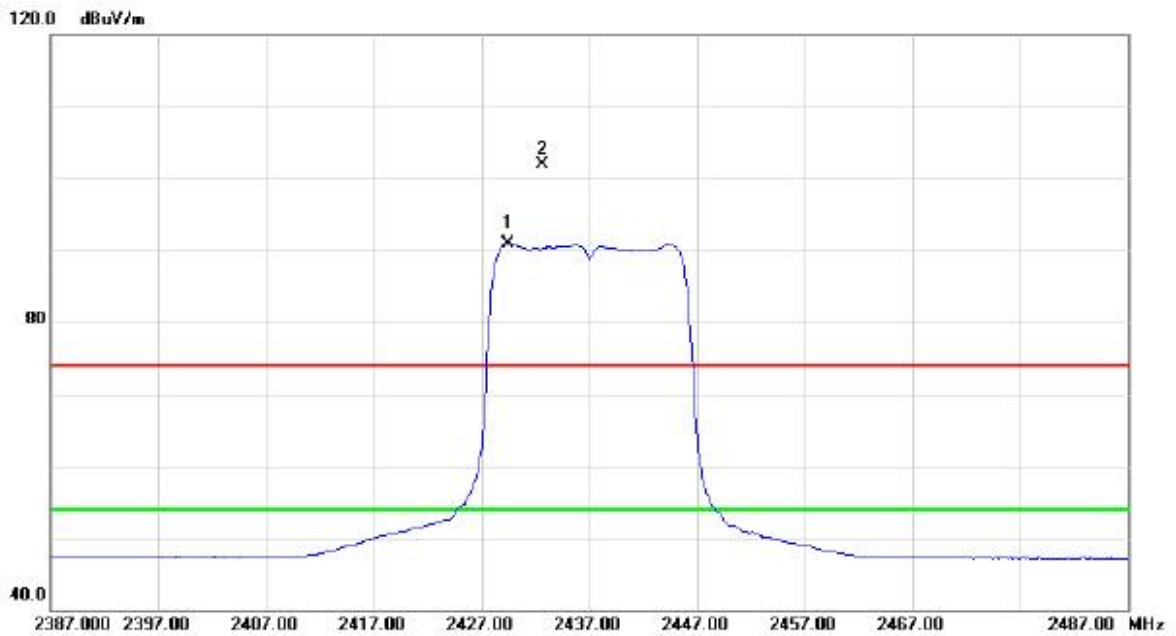

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2429.500	58.25	32.73	90.98	54.00	36.98	AVG	No Limit
2	X	2432.600	69.11	32.74	101.85	74.00	27.85	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


### Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.050	42.87	3.72	46.59	74.00	-27.41	peak	
2	*	4874.080	32.64	3.72	36.36	54.00	-17.64	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

### Vertical

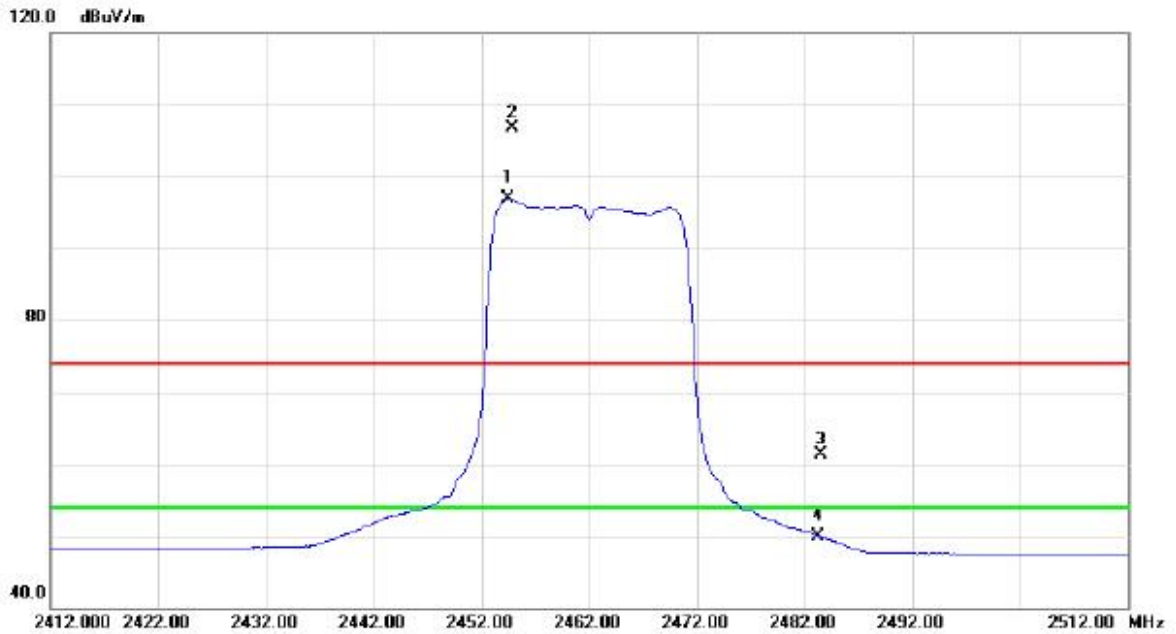

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.500	64.14	32.76	96.90	54.00	42.90	AVG	No Limit
2	X	2454.800	74.00	32.76	106.76	74.00	32.76	peak	No Limit
3		2483.500	28.46	32.81	61.27	74.00	-12.73	peak	
4		2483.500	17.06	32.81	49.87	54.00	-4.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


### Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4924.030	27.38	3.80	31.18	54.00	-22.82	AVG	
2		4924.040	36.52	3.80	40.32	74.00	-33.68	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

### Horizontal

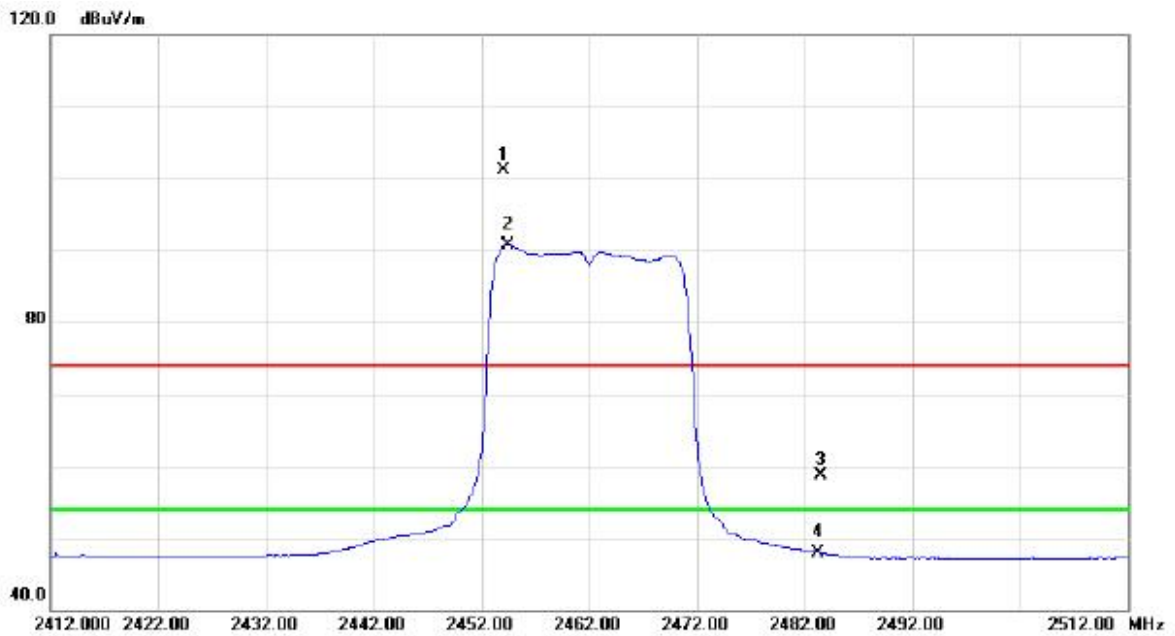

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.000	68.39	32.76	101.15	74.00	27.15	peak	No Limit
2	*	2454.500	57.97	32.76	90.73	54.00	36.73	AVG	No Limit
3		2483.500	25.87	32.81	58.68	74.00	-15.32	peak	
4		2483.500	15.15	32.81	47.96	54.00	-6.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.020	42.62	3.80	46.42	74.00	-27.58	peak	
2	*	4924.050	32.15	3.80	35.95	54.00	-18.05	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

### Vertical

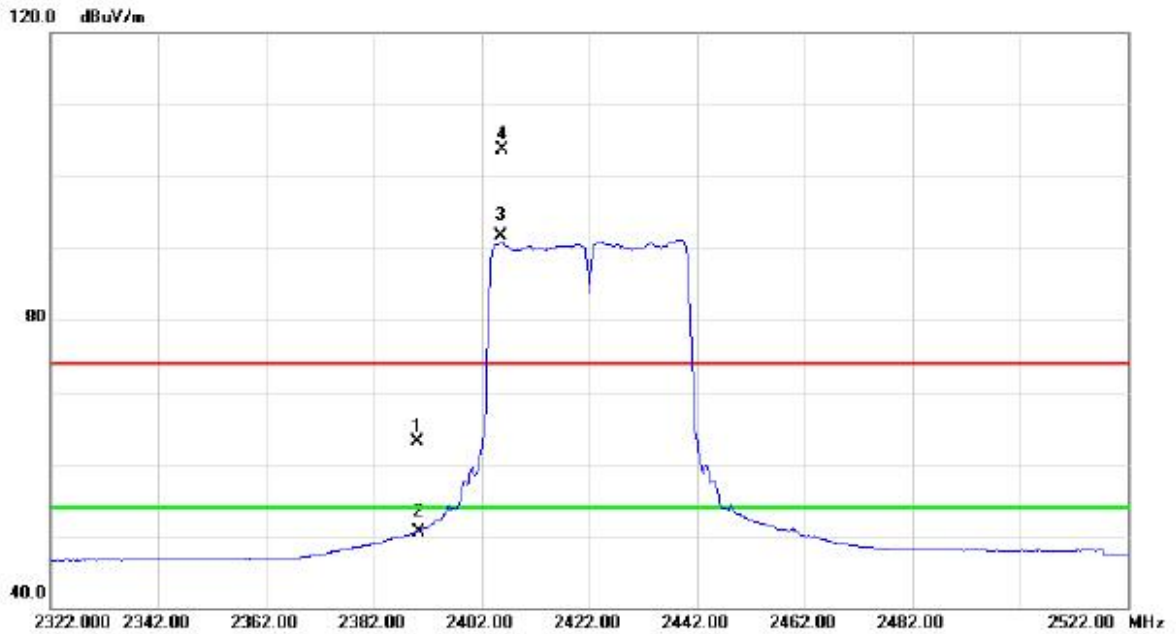

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	30.40	32.68	63.08	74.00	-10.92	peak	
2		2390.000	17.85	32.68	50.53	54.00	-3.47	AVG	
3	*	2405.600	59.05	32.70	91.75	54.00	37.75	AVG	No Limit
4	X	2405.800	70.97	32.70	103.67	74.00	29.67	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

### Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4844.010	29.14	3.66	32.80	54.00	-21.20	AVG	
2		4844.040	38.76	3.66	42.42	74.00	-31.58	peak	



Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

### Horizontal

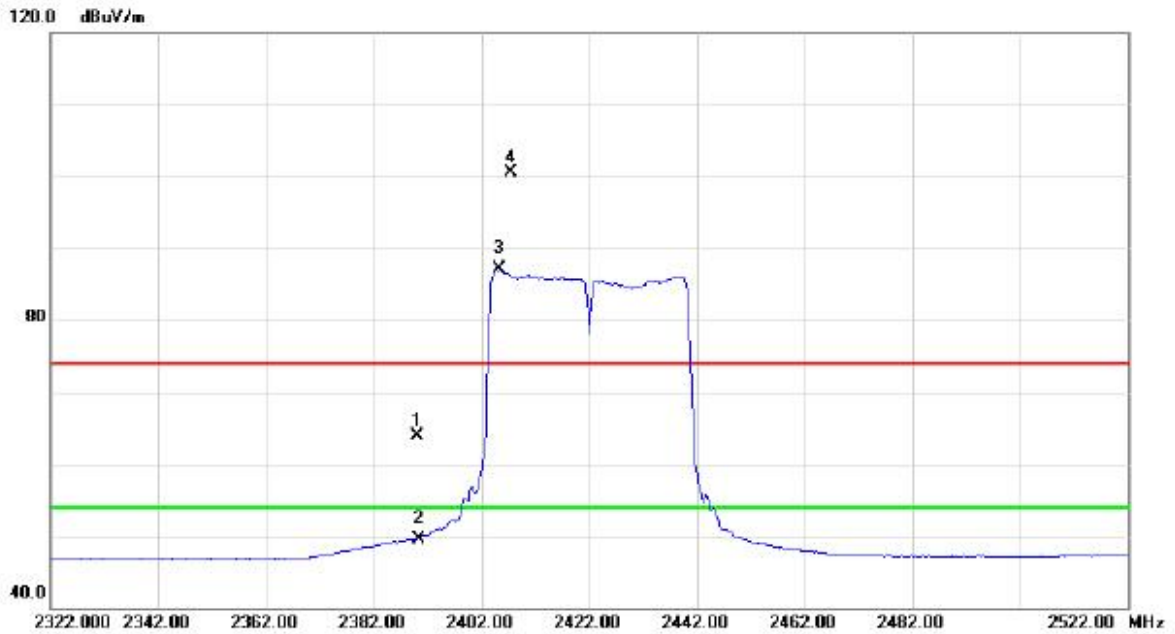

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	31.28	32.68	63.96	74.00	-10.04	peak	
2		2390.000	16.92	32.68	49.60	54.00	-4.40	AVG	
3	*	2405.400	54.41	32.70	87.11	54.00	33.11	AVG	No Limit
4	X	2407.400	67.75	32.71	100.46	74.00	26.46	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


### Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4844.030	30.29	3.66	33.95	54.00	-20.05	AVG	
2		4844.050	40.78	3.66	44.44	74.00	-29.56	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

### Vertical

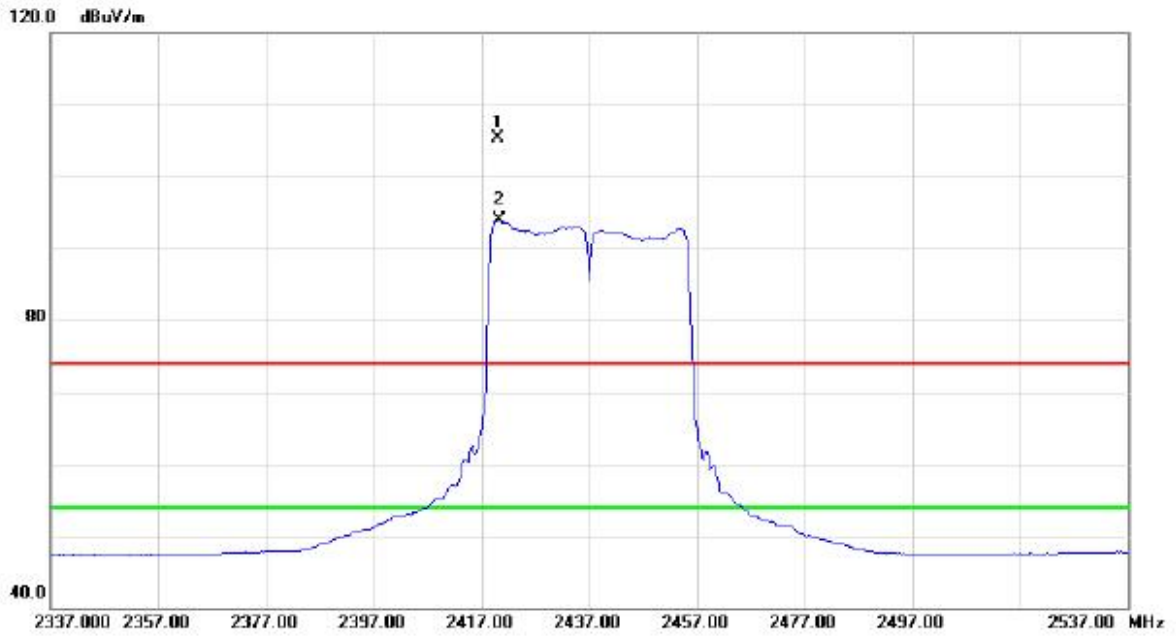

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2420.000	72.67	32.72	105.39	74.00	31.39	peak	No Limit
2	*	2420.400	61.20	32.72	93.92	54.00	39.92	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


### Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4874.000	29.33	3.72	33.05	54.00	-20.95	AVG	
2		4874.040	38.89	3.72	42.61	74.00	-31.39	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

### Horizontal

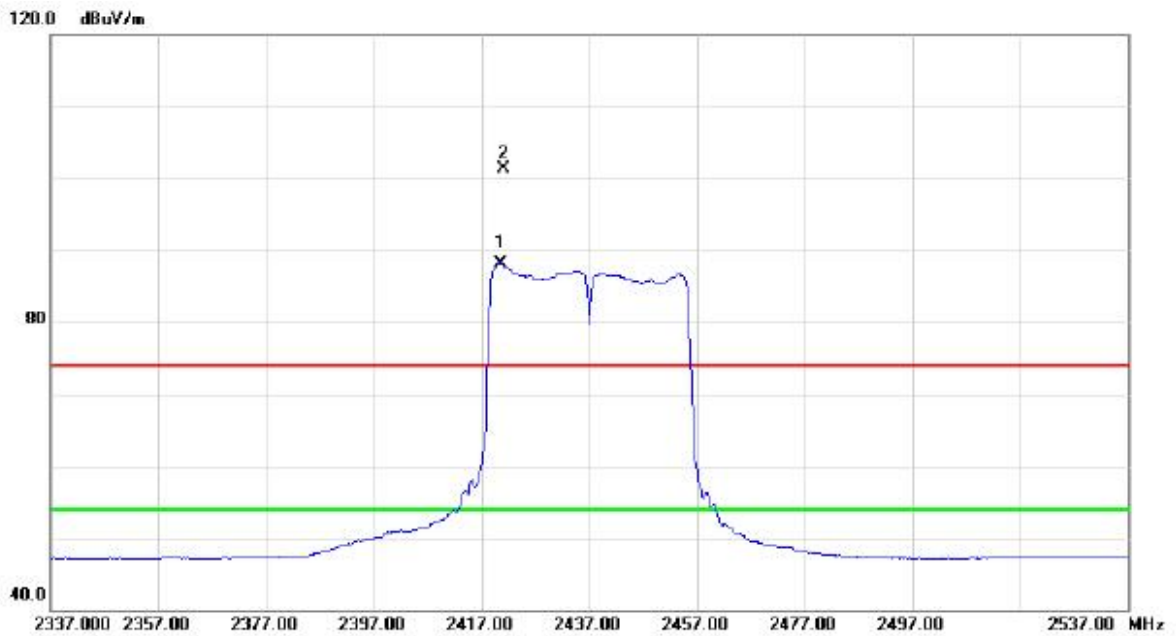

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2420.600	55.35	32.72	88.07	54.00	34.07	AVG	No Limit
2	X	2421.000	68.49	32.72	101.21	74.00	27.21	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


### Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4873.990	31.22	3.72	34.94	54.00	-19.06	AVG	
2		4874.000	42.87	3.72	46.59	74.00	-27.41	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

### Vertical

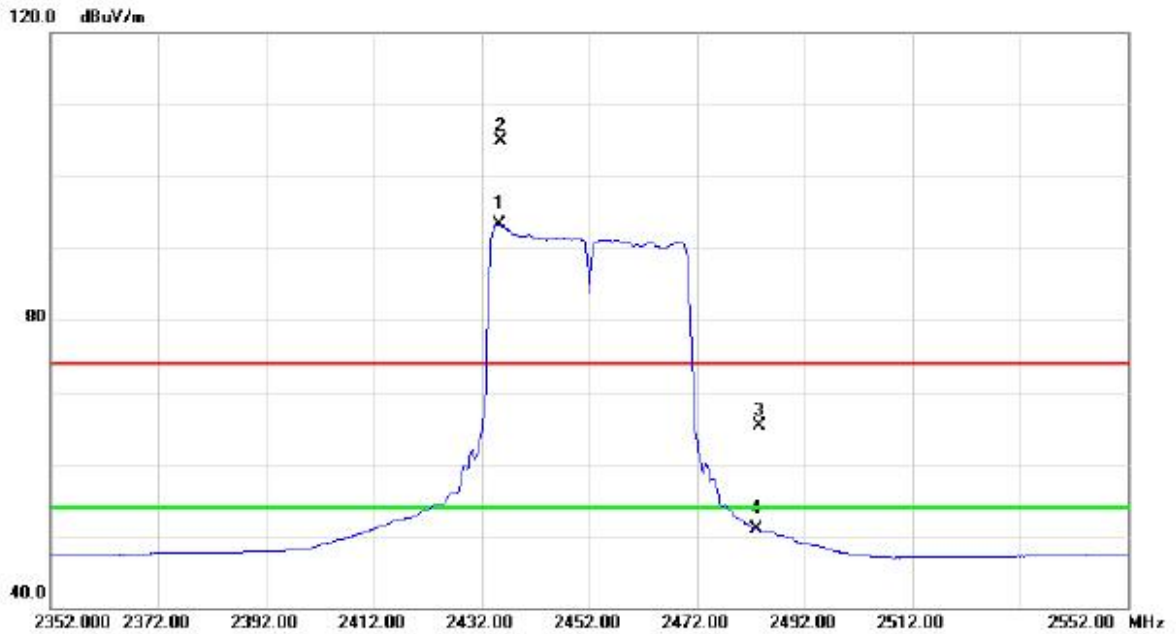

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2435.400	60.61	32.74	93.35	54.00	39.35	AVG	No Limit
2	X	2435.600	72.23	32.74	104.97	74.00	30.97	peak	No Limit
3		2483.500	32.47	32.81	65.28	74.00	-8.72	peak	
4		2483.500	18.13	32.81	50.94	54.00	-3.06	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

### Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4904.010	28.31	3.77	32.08	54.00	-21.92	AVG	
2		4904.020	37.83	3.77	41.60	74.00	-32.40	peak	



Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

### Horizontal

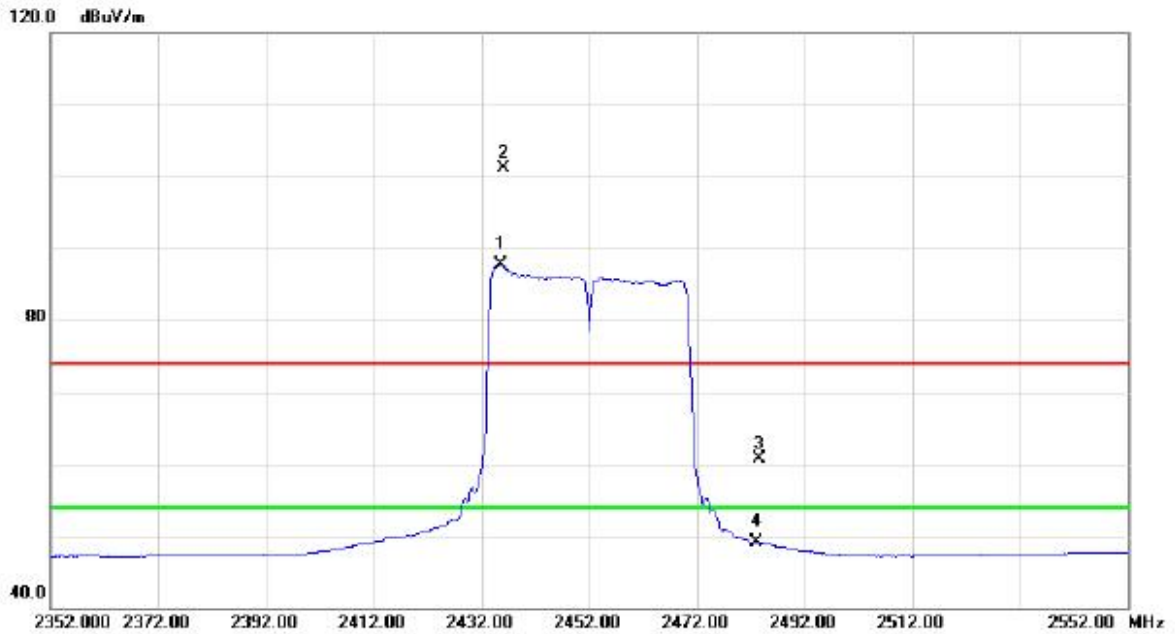

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2435.600	55.03	32.74	87.77	54.00	33.77	AVG	No Limit
2	X	2436.200	68.44	32.74	101.18	74.00	27.18	peak	No Limit
3		2483.500	27.87	32.81	60.68	74.00	-13.32	peak	
4		2483.500	16.21	32.81	49.02	54.00	-4.98	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

### Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4903.980	41.82	3.77	45.59	74.00	-28.41	peak	
2	*	4903.980	31.97	3.77	35.74	54.00	-18.26	AVG	

## **ATTACHMENT E - BANDWIDTH**

**Test Mode : TX B Mode\_CH01/06/11**


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.02	12.60	500	Complies
2437	10.06	12.84	500	Complies
2462	10.06	12.68	500	Complies

**TX CH01**

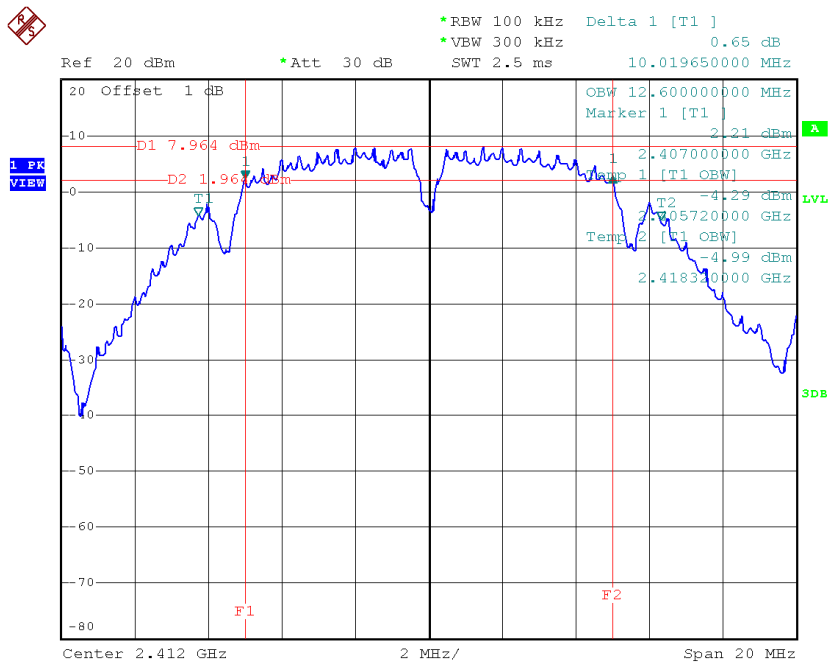


Date: 30.MAR.2015 10:00:10

### TX CH06

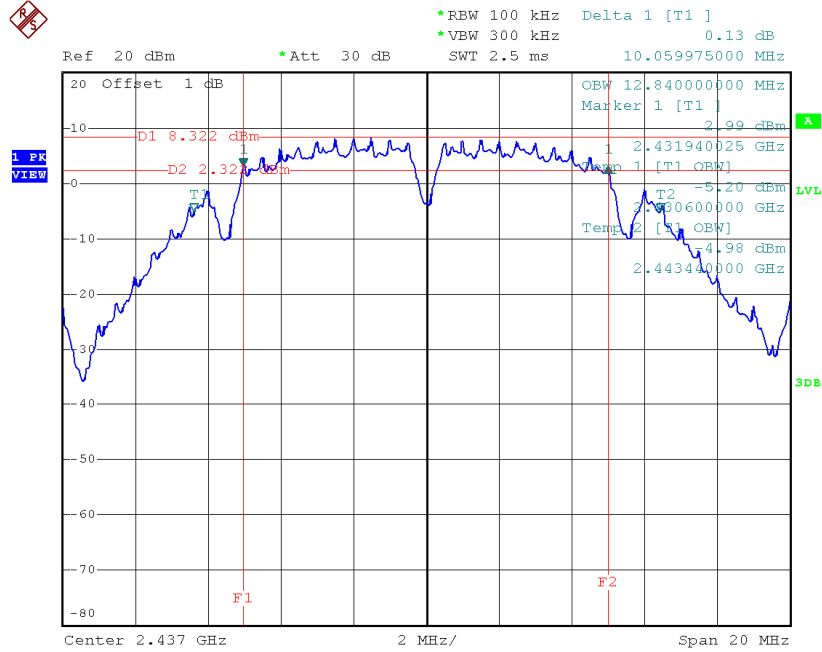

Date: 30.MAR.2015 10:01:17

### TX CH11

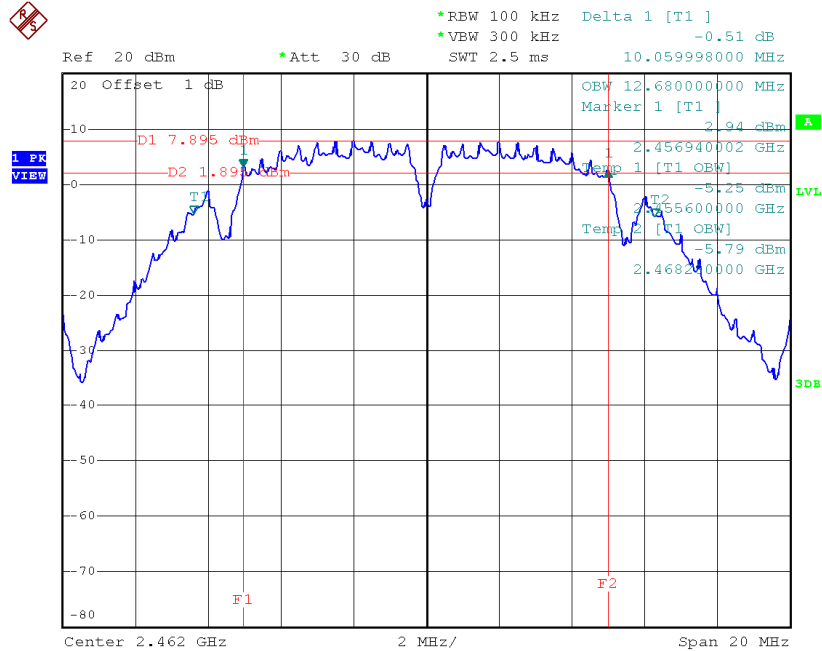


Date: 30.MAR.2015 10:02:14

**Test Mode: TX G Mode\_CH01/06/11**


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.39	16.52	500	Complies
2437	16.40	16.52	500	Complies
2462	16.30	16.56	500	Complies

**TX CH01**

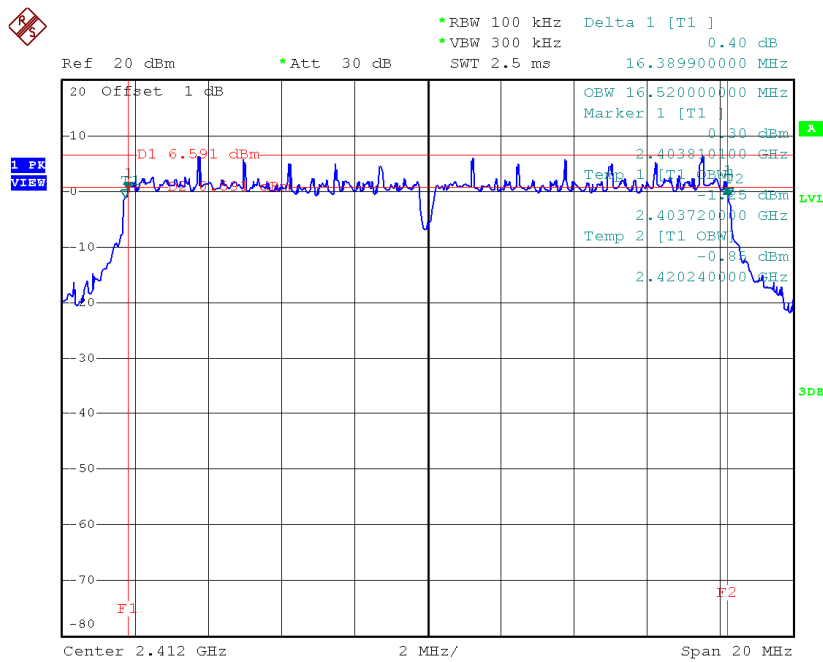


Date: 30.MAR.2015 10:03:18

### TX CH06

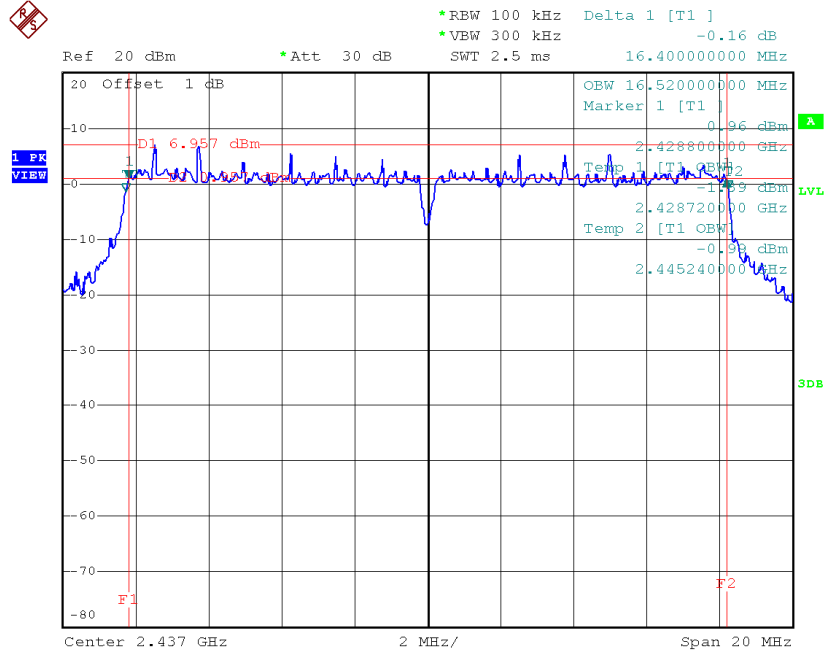

Date: 30.MAR.2015 10:04:24

### TX CH11

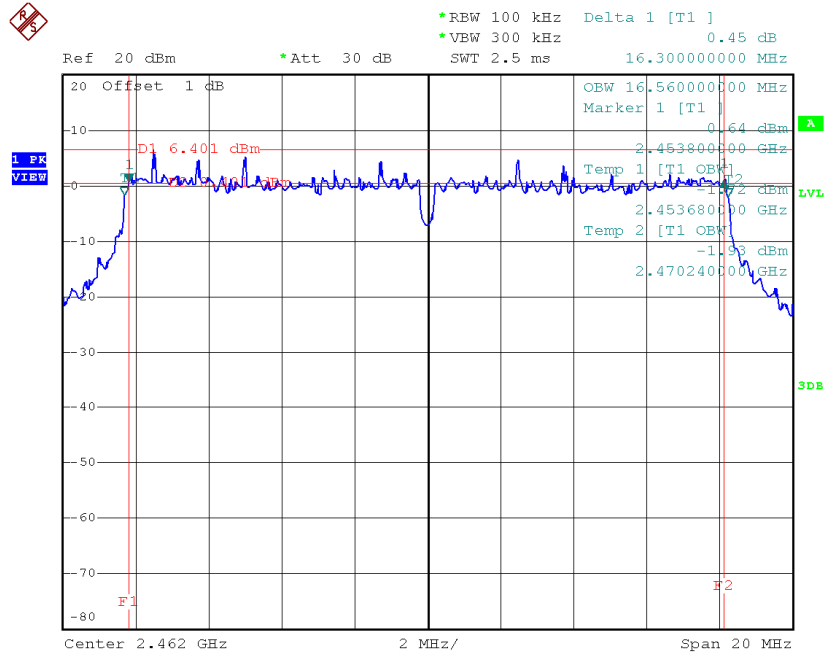


Date: 30.MAR.2015 10:05:20

**Test Mode : TX N-20MHz Mode\_CH01/06/11**

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.34	17.60	500	Complies
2437	17.34	17.60	500	Complies
2462	16.83	17.64	500	Complies


**TX CH01**

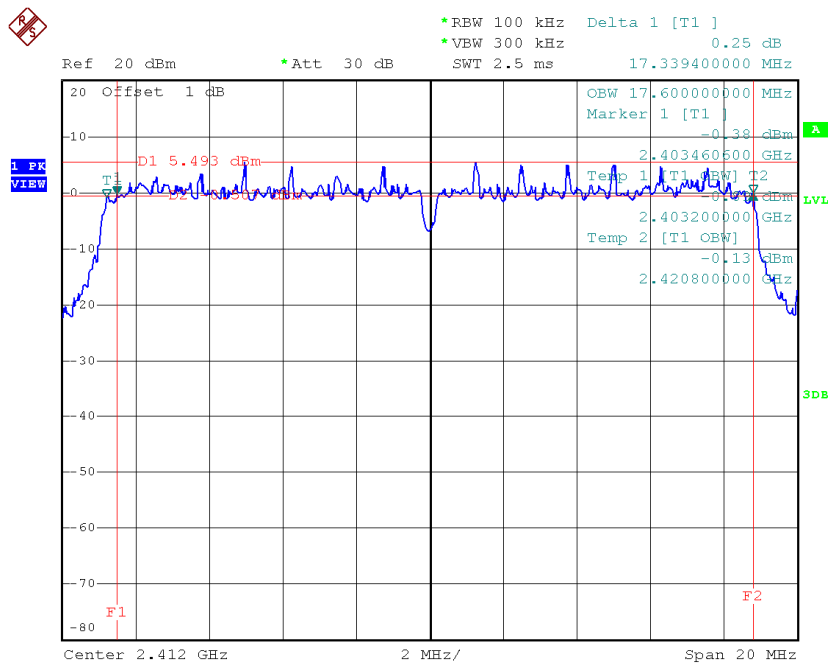

Date: 30.MAR.2015 10:06:36




### TX CH06

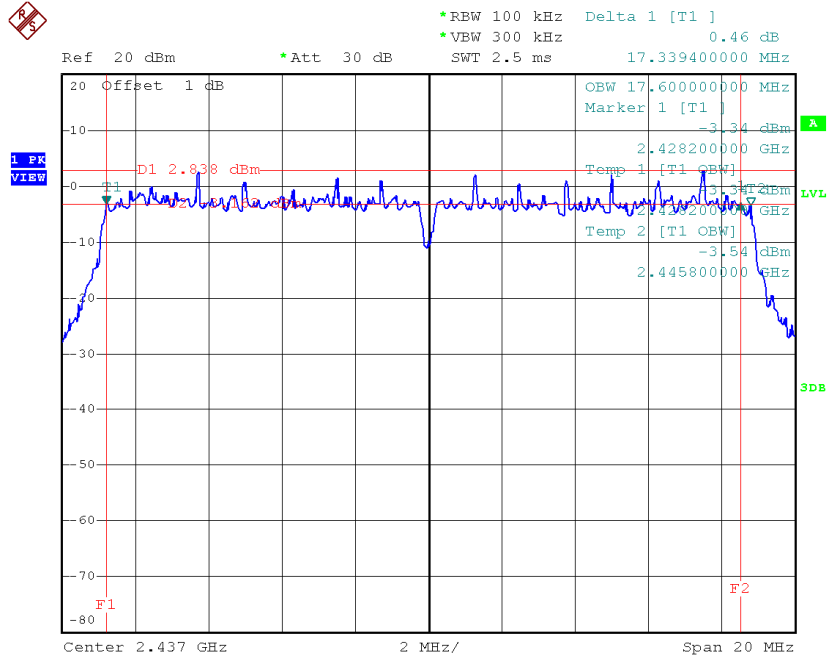

Date: 30.MAR.2015 10:07:49

### TX CH11

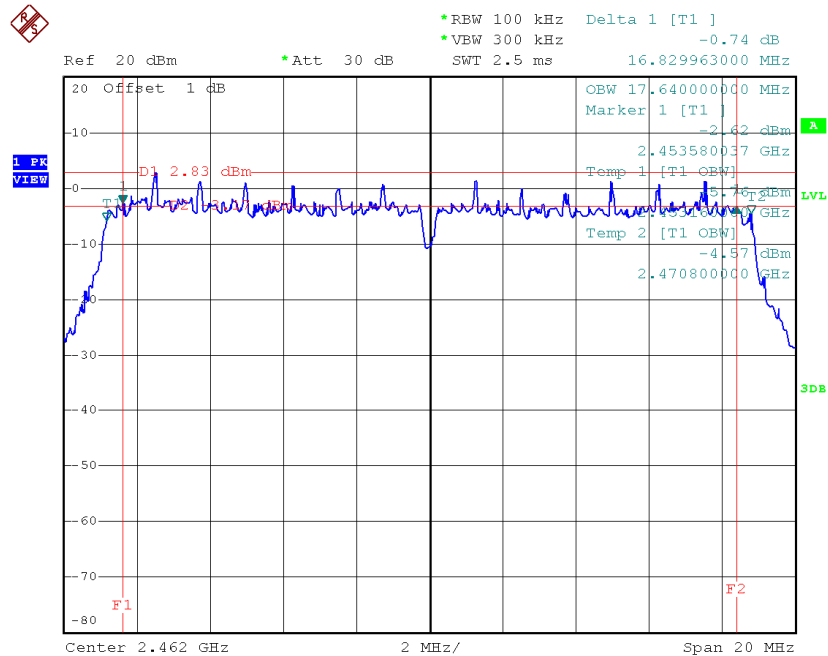


Date: 30.MAR.2015 10:08:47

**Test Mode : TX N-40MHz Mode\_CH03/06/09**


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.10	36.16	500	Complies
2437	35.84	36.24	500	Complies
2452	35.84	36.24	500	Complies

**TX CH03**

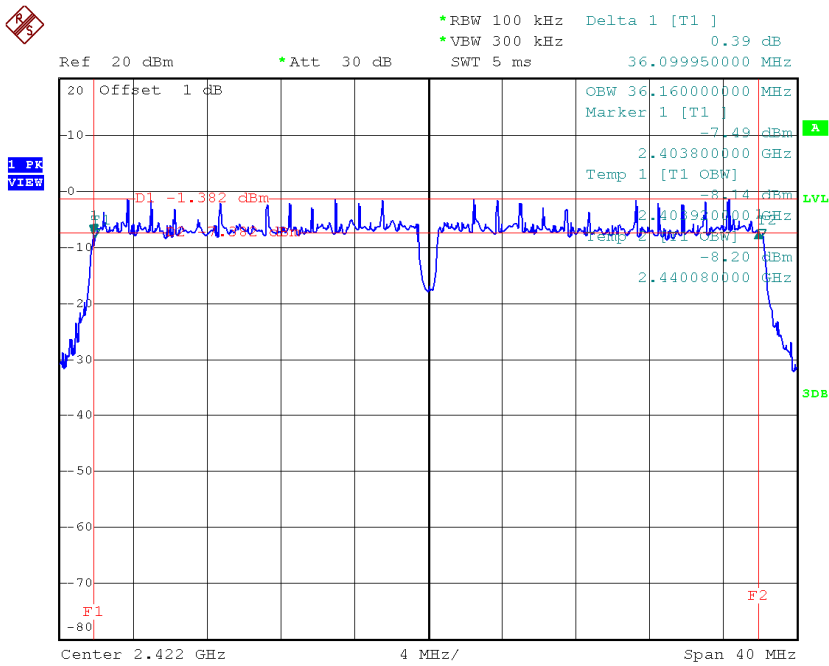


Date: 30.MAR.2015 10:10:04

### TX CH06

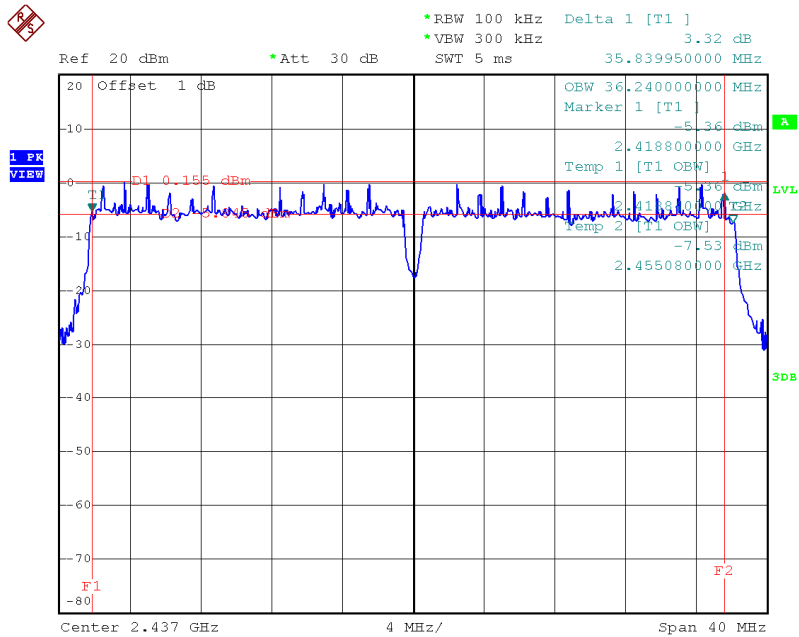

Date: 30.MAR.2015 10:11:45

### TX CH09

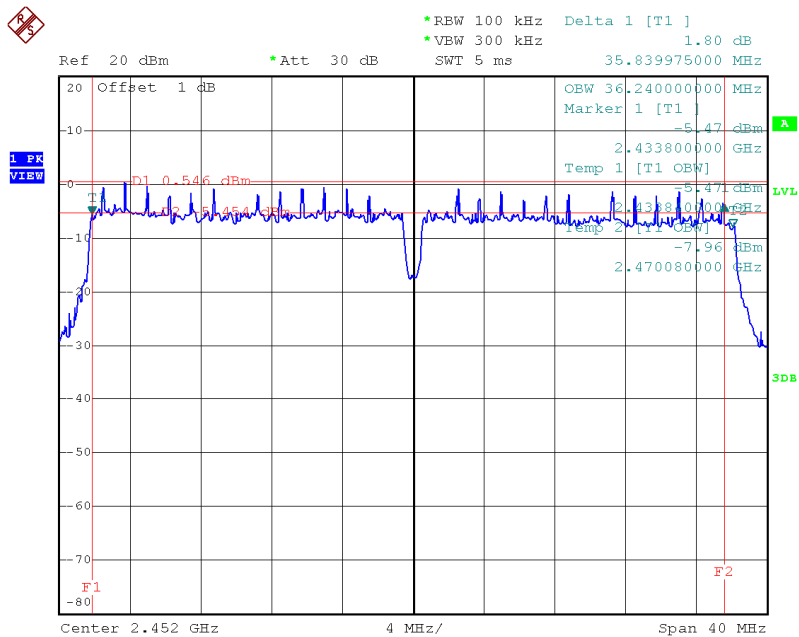

Date: 30.MAR.2015 10:13:27

**ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT  
POWER**

**Test Mode :TX B Mode\_CH01/06/11\_ANT 1**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	15.97	0.04	30.00	1.00	Complies
2437	16.00	0.04	30.00	1.00	Complies
2462	15.98	0.04	30.00	1.00	Complies

**Test Mode :TX B Mode\_CH01/06/11\_ANT 2**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	15.97	0.04	30.00	1.00	Complies
2437	15.67	0.04	30.00	1.00	Complies
2462	16.17	0.04	30.00	1.00	Complies

**Test Mode :TX B Mode\_CH01/06/11\_Total**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.98	0.08	30.00	1.00	Complies
2437	18.85	0.08	30.00	1.00	Complies
2462	19.09	0.08	30.00	1.00	Complies

**Test Mode :TX G Mode\_CH01/06/11\_ANT 1**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	20.17	0.10	30.00	1.00	Complies
2437	20.18	0.10	30.00	1.00	Complies
2462	19.97	0.10	30.00	1.00	Complies

**Test Mode :TX G Mode\_CH01/06/11\_ANT 2**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	20.22	0.11	30.00	1.00	Complies
2437	20.09	0.10	30.00	1.00	Complies
2462	20.05	0.10	30.00	1.00	Complies

**Test Mode :TX G Mode\_CH01/06/11\_Total**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.21	0.21	30.00	1.00	Complies
2437	23.15	0.21	30.00	1.00	Complies
2462	23.02	0.20	30.00	1.00	Complies

**Test Mode :TX N20 Mode\_CH01/06/11\_ANT 1**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.99	0.08	30.00	1.00	Complies
2437	18.67	0.07	30.00	1.00	Complies
2462	18.44	0.07	30.00	1.00	Complies

**Test Mode :TX N20 Mode\_CH01/06/11\_ANT 2**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.77	0.08	30.00	1.00	Complies
2437	18.84	0.08	30.00	1.00	Complies
2462	18.76	0.08	30.00	1.00	Complies

**Test Mode :TX N20 Mode\_CH01/06/11\_Total**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	21.89	0.15	30.00	1.00	Complies
2437	21.77	0.15	30.00	1.00	Complies
2462	21.61	0.14	30.00	1.00	Complies

**Test Mode :TX N40 Mode\_CH03/06/09\_ANT 1**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	19.21	0.08	30.00	1.00	Complies
2437	19.83	0.10	30.00	1.00	Complies
2452	19.72	0.09	30.00	1.00	Complies

**Test Mode :TX N40 Mode\_CH03/06/09\_ANT 2**

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	19.08	0.08	30.00	1.00	Complies
2437	19.53	0.09	30.00	1.00	Complies
2452	19.17	0.08	30.00	1.00	Complies

**Test Mode :TX N40 Mode\_CH03/06/09\_Total**


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	22.16	0.16	30.00	1.00	Complies
2437	22.69	0.19	30.00	1.00	Complies
2452	22.46	0.18	30.00	1.00	Complies



**ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS  
EMISSION**


Test Mode : TX B Mode\_ANT 1

### TX B mode CH01

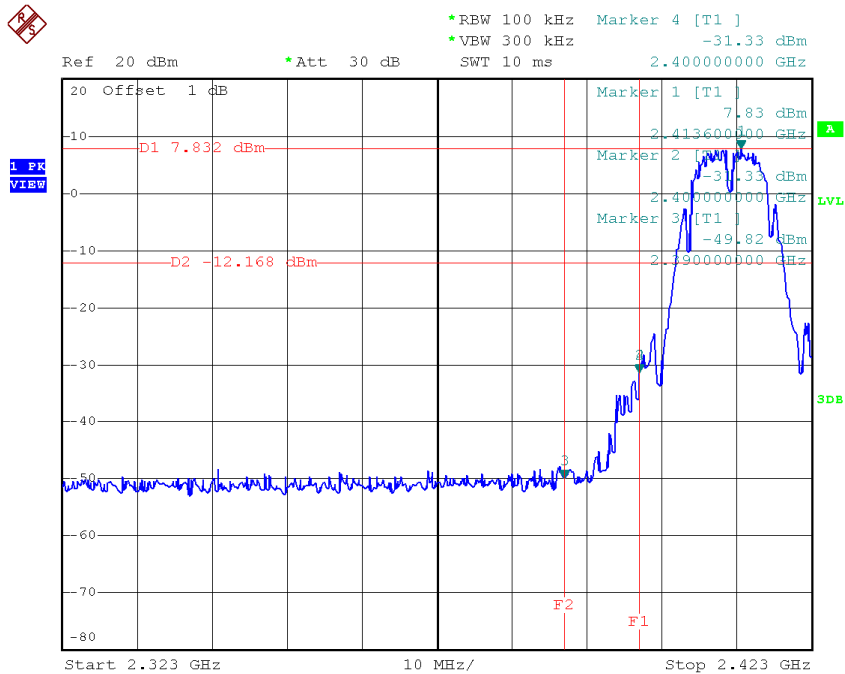


Date: 30.MAR.2015 10:00:32

### TX B mode CH11

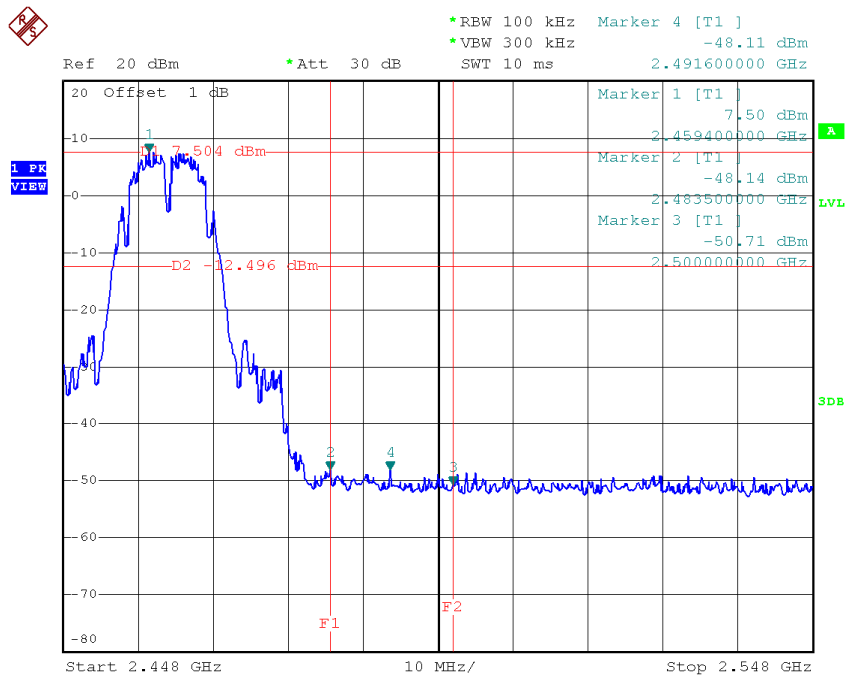


Date: 30.MAR.2015 10:02:35

### TX B mode CH01 (10 Harmonic of the frequency)

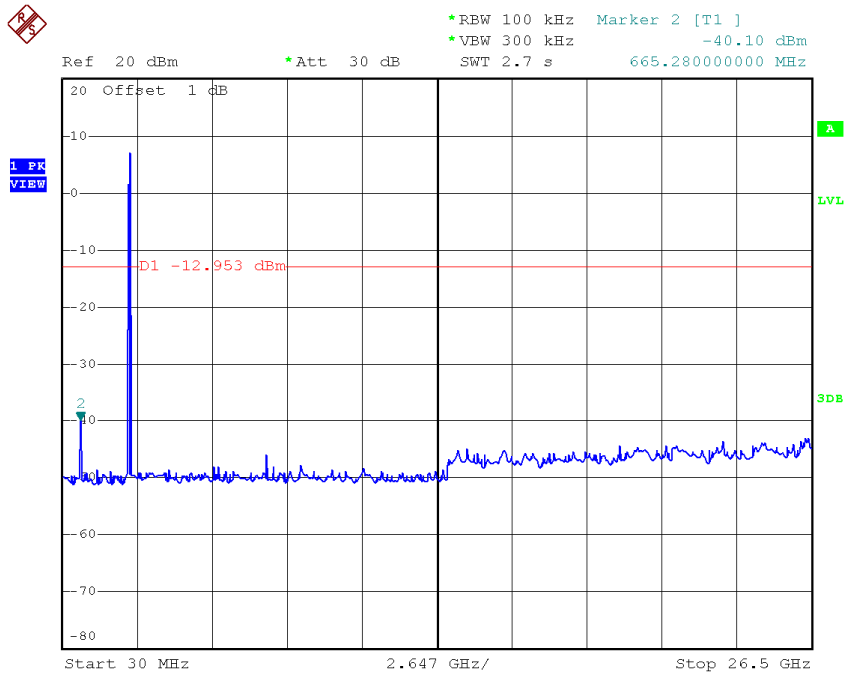

Date: 30.MAR.2015 10:00:24

### TX B mode CH06 (10 Harmonic of the frequency)

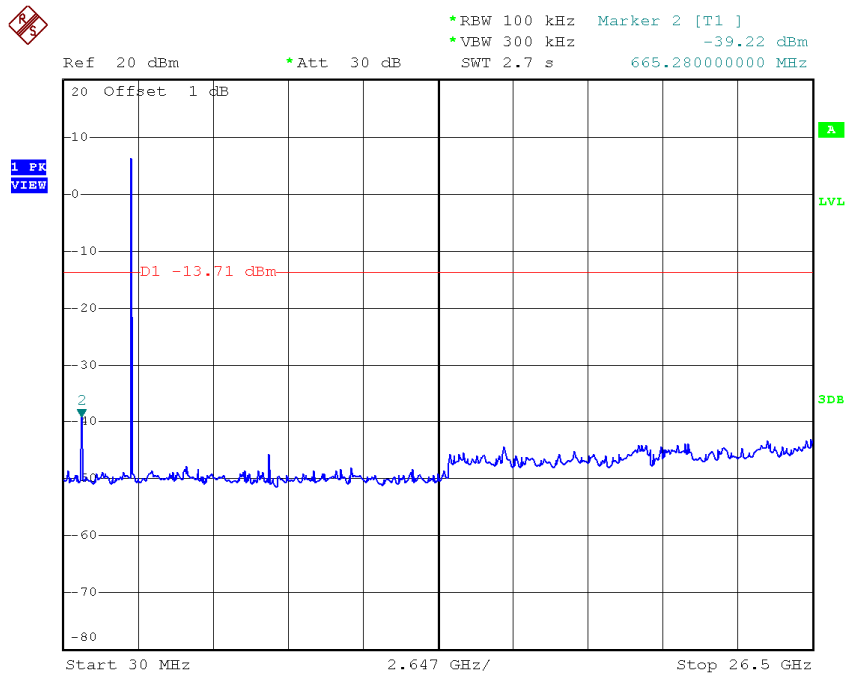


Date: 30.MAR.2015 10:01:31

### TX B mode CH11 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
 \*VBW 300 kHz -40.12 dBm


Ref 20 dBm \*Att 30 dB SWT 2.7 s 718.22000000 MHz

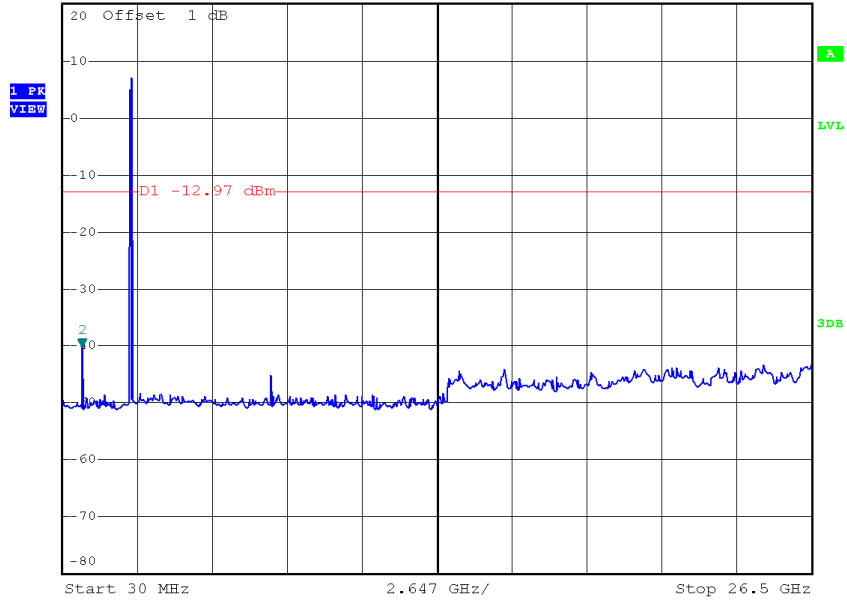

Date: 30.MAR.2015 10:02:28


Test Mode : TX B Mode\_ANT 2

### TX B mode CH01

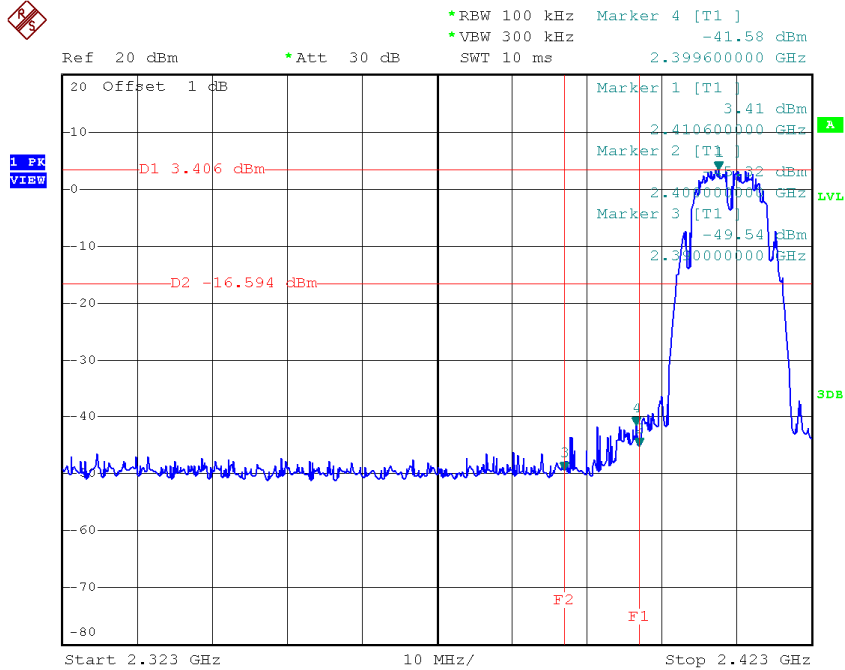


Date: 30.MAR.2015 10:17:02

### TX B mode CH11

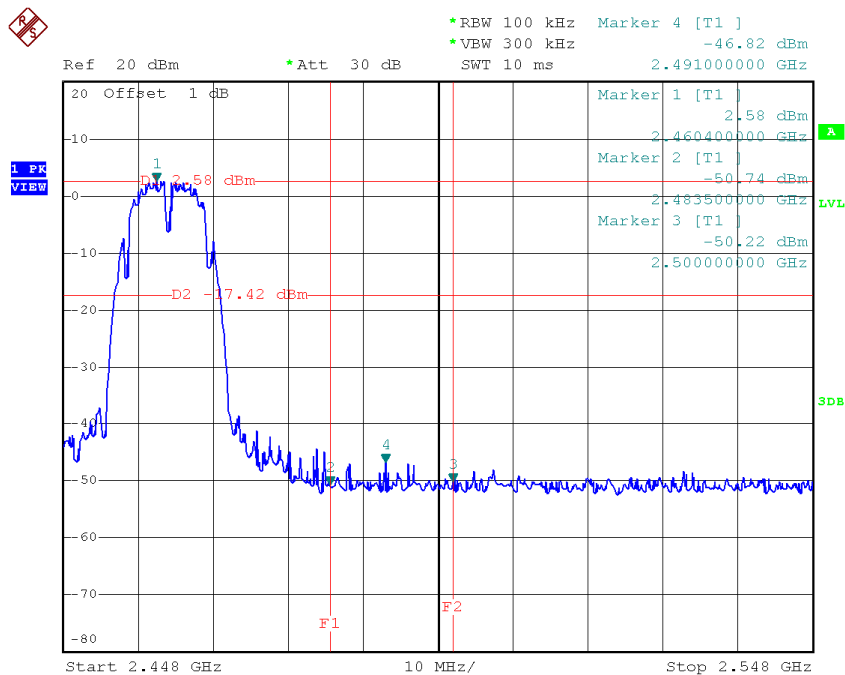


Date: 30.MAR.2015 10:19:14

### TX B mode CH01 (10 Harmonic of the frequency)

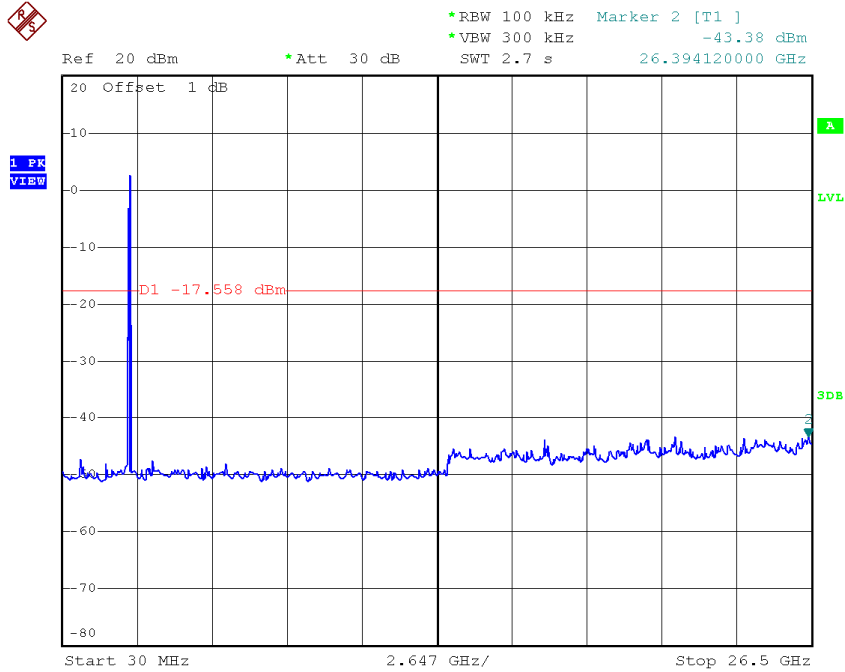

Date: 30.MAR.2015 10:16:55

### TX B mode CH06 (10 Harmonic of the frequency)

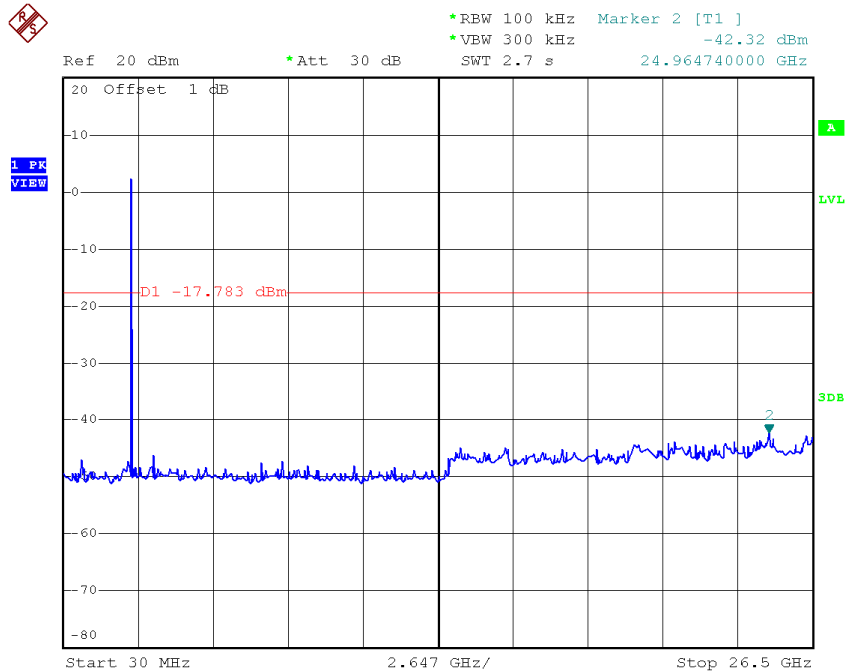


Date: 30.MAR.2015 10:18:10

### TX B mode CH11 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
 \*VBW 300 kHz -42.87 dBm


Ref 20 dBm \*Att 30 dB SWT 2.7 s 25.070620000 GHz

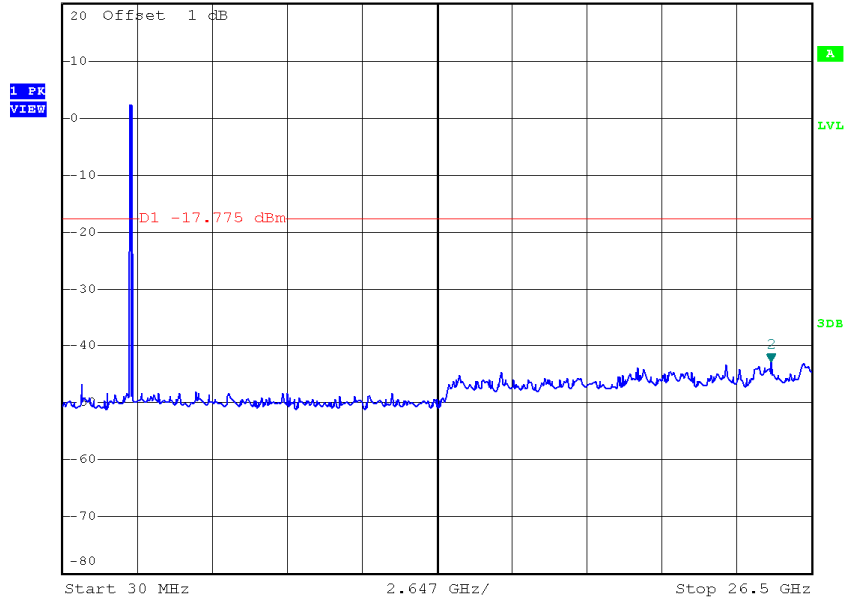

Date: 30.MAR.2015 10:19:07


Test Mode : TX G Mode\_ANT 1

### TX G mode CH01

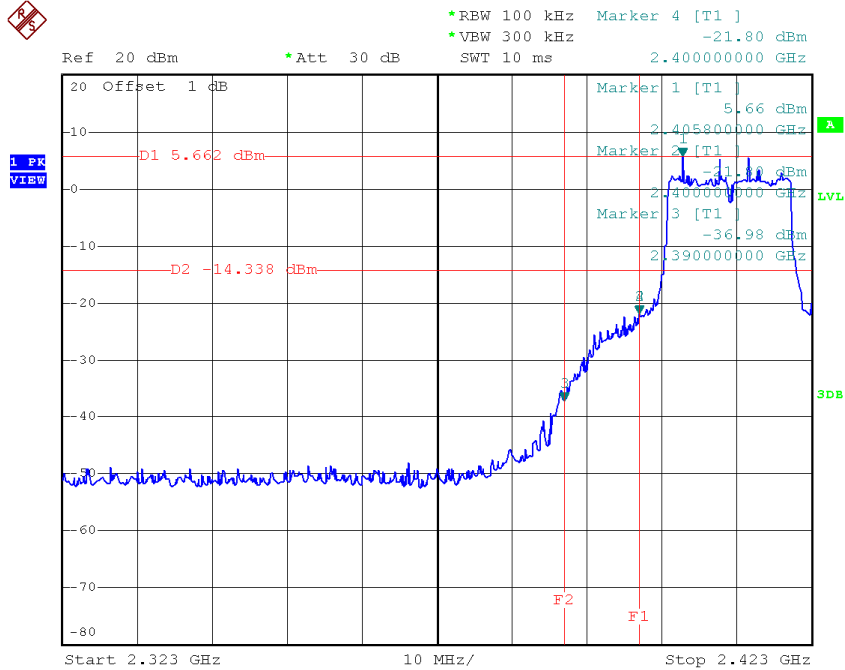

Date: 30.MAR.2015 10:03:39


### TX G mode CH11

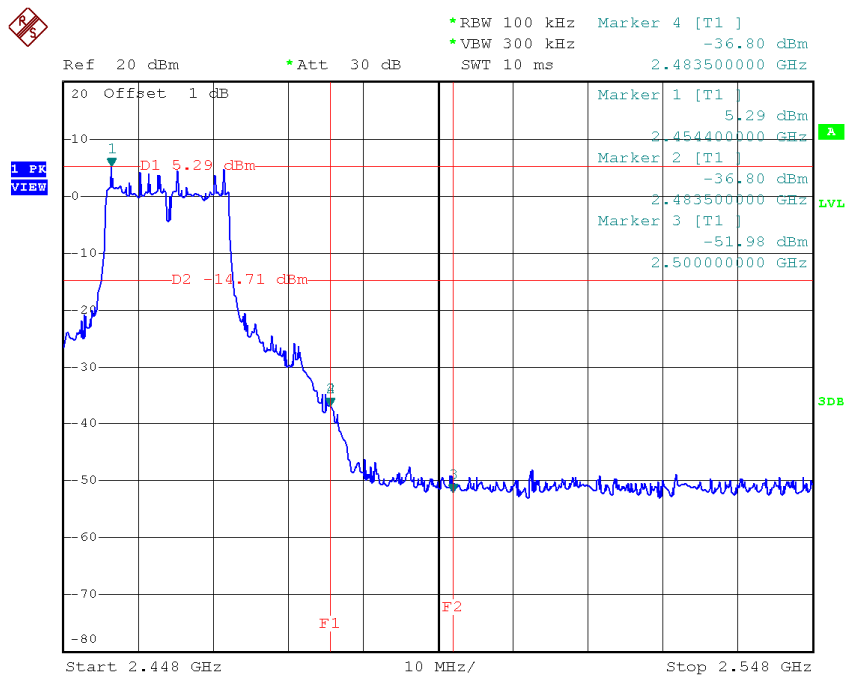

Date: 30.MAR.2015 10:05:41




### TX G mode CH01 (10 Harmonic of the frequency)

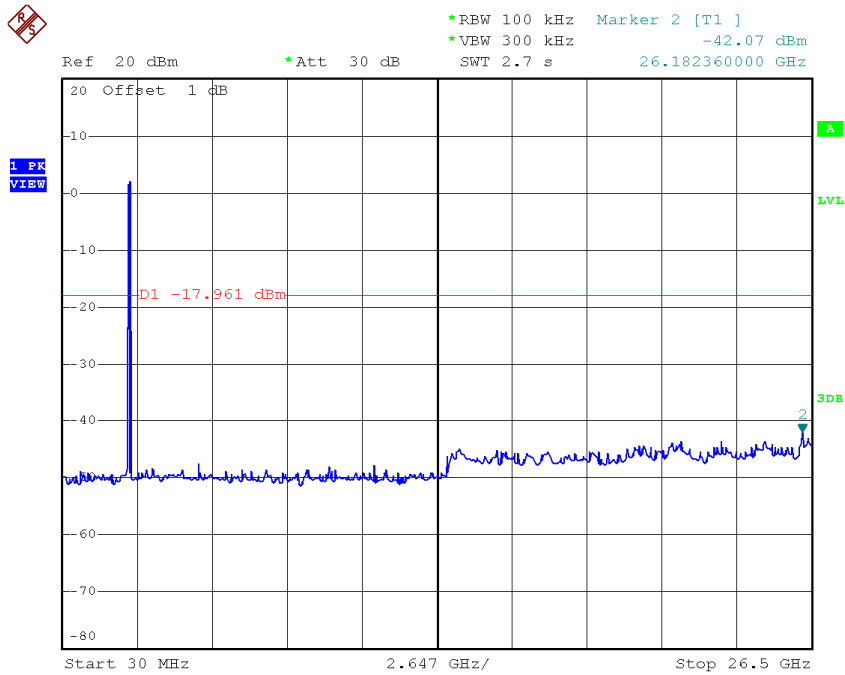


Date: 30.MAR.2015 10:03:32

### TX G mode CH06 (10 Harmonic of the frequency)

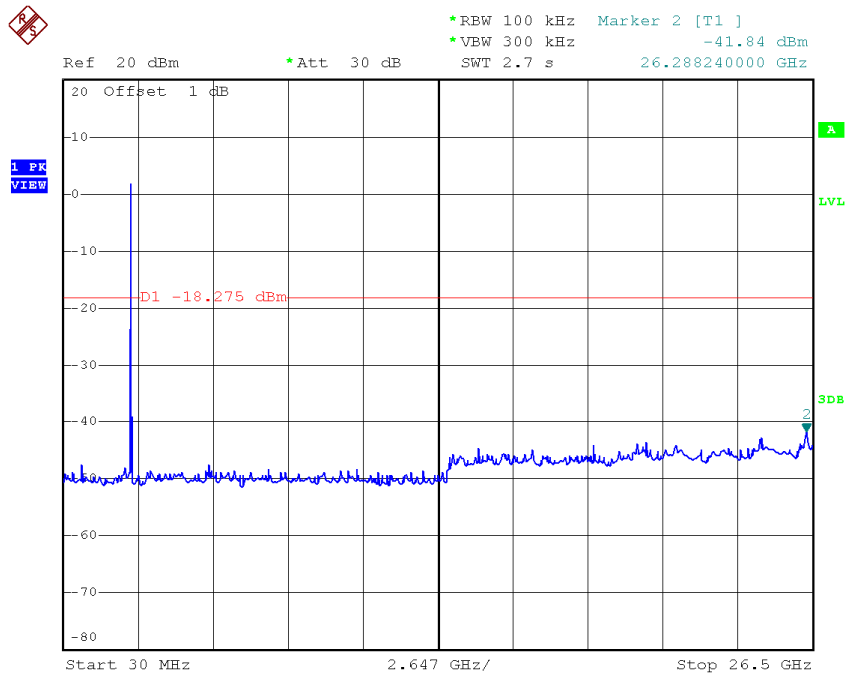

Date: 30.MAR.2015 10:04:38


### TX G mode CH11 (10 Harmonic of the frequency)

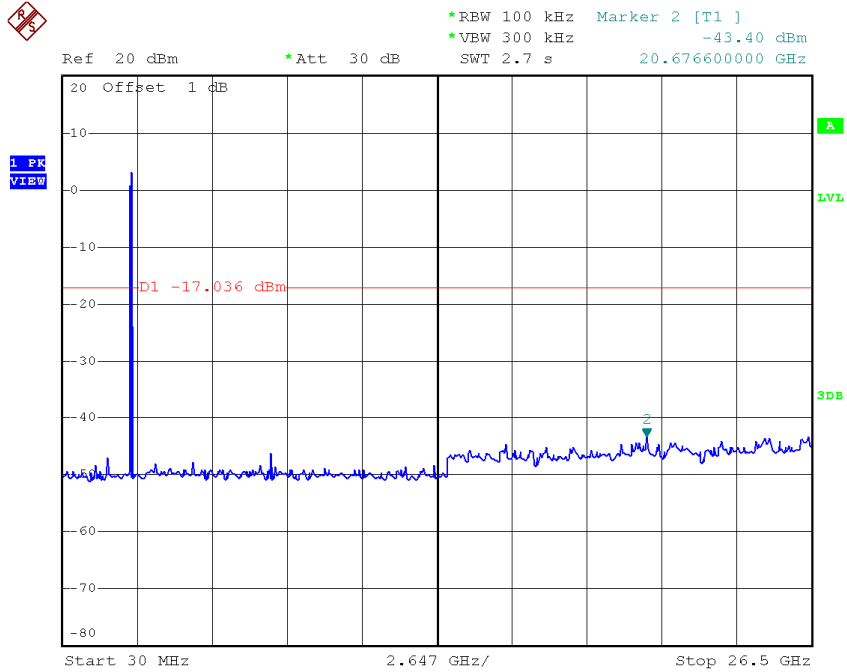

Date: 30.MAR.2015 10:05:34


Test Mode : TX G Mode\_ANT 2

### TX G mode CH01

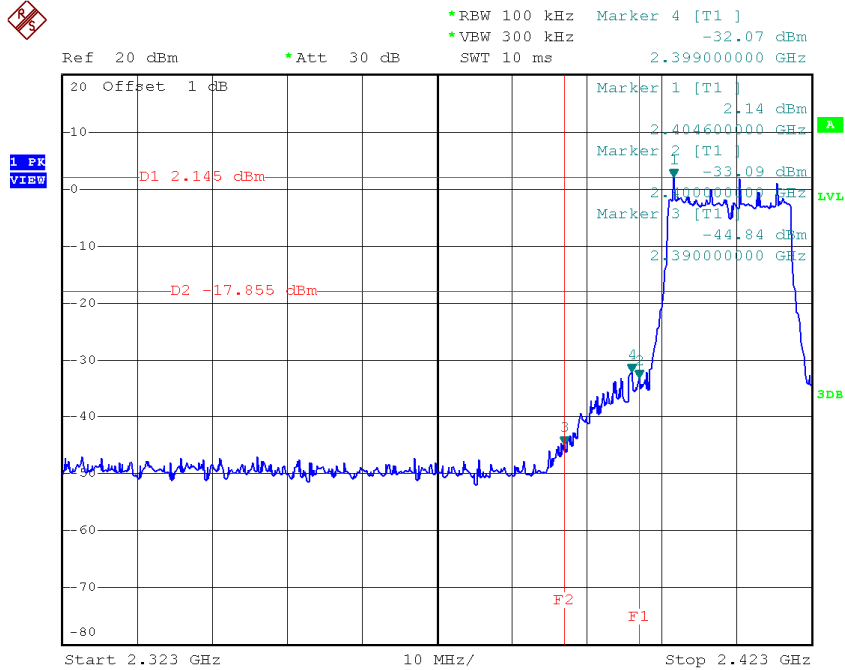


Date: 30.MAR.2015 10:20:30

### TX G mode CH11

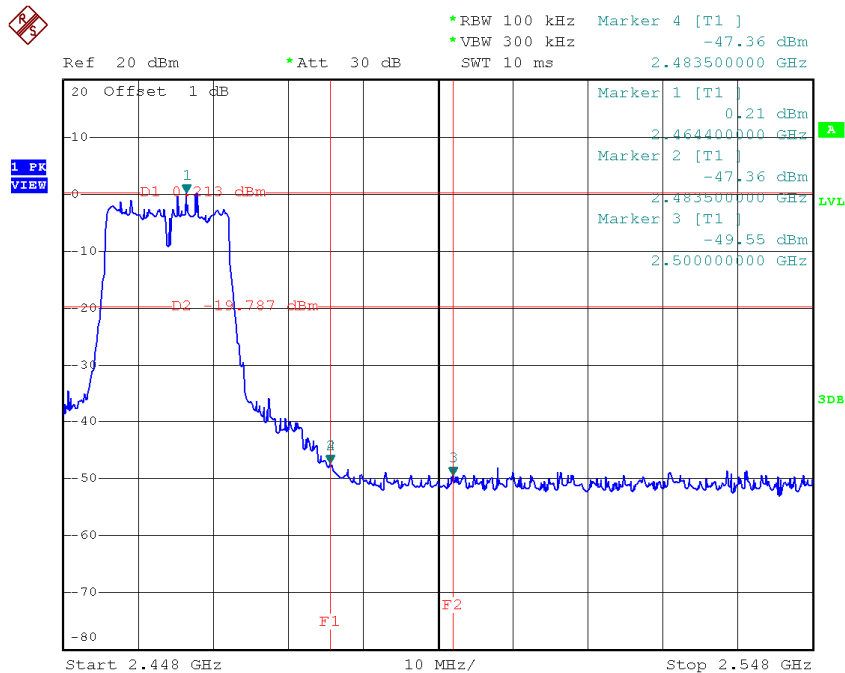


Date: 30.MAR.2015 10:23:11

### TX G mode CH01 (10 Harmonic of the frequency)

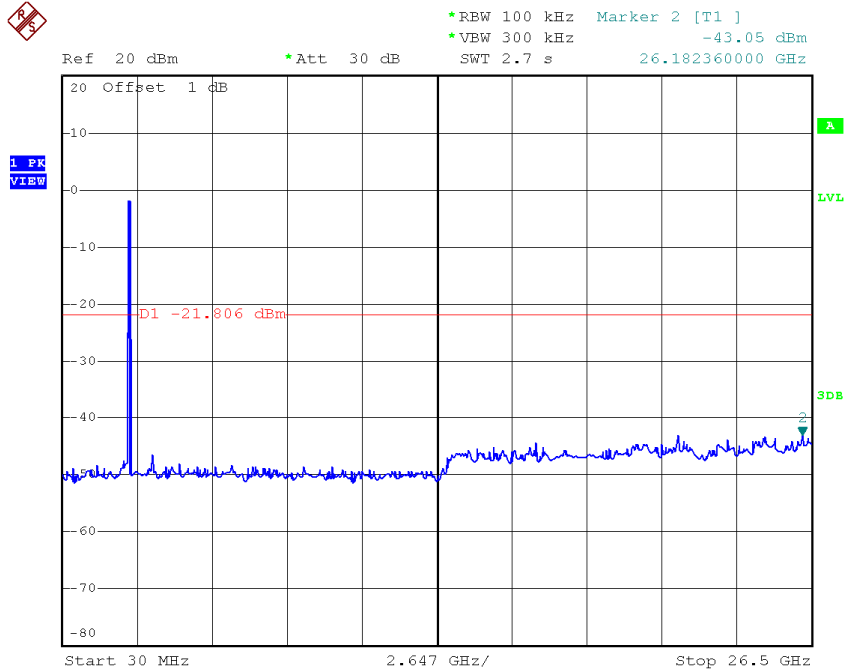

Date: 30.MAR.2015 10:20:23

### TX G mode CH06 (10 Harmonic of the frequency)

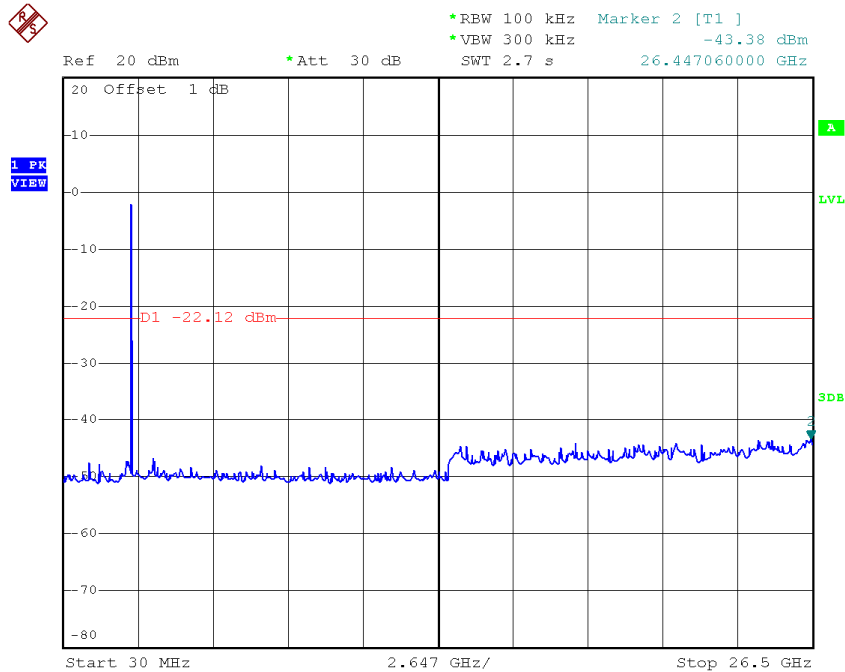


Date: 30.MAR.2015 10:21:30

### TX G mode CH11 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
\*VBW 300 kHz -43.55 dBm  
SWT 2.7 s 26.394120000 GHz


Ref 20 dBm \*Att 30 dB

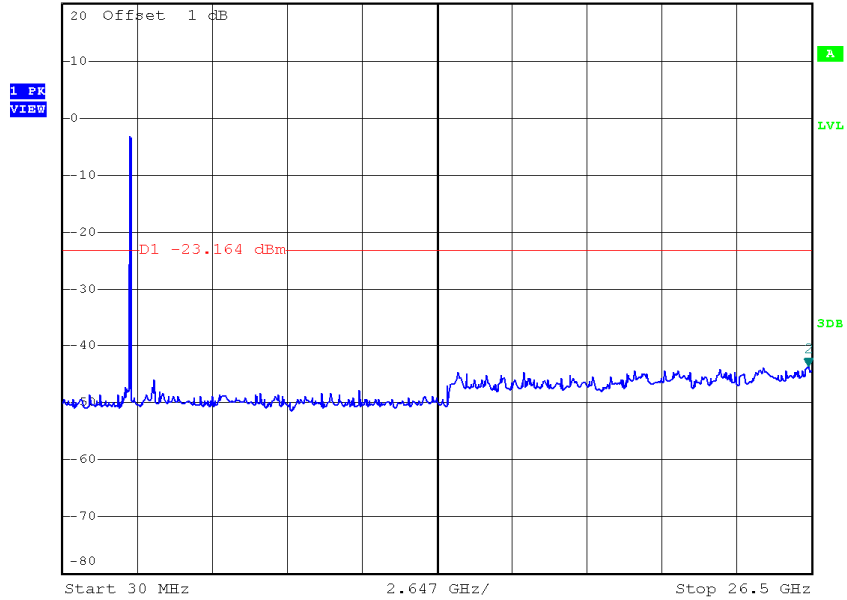

Date: 30.MAR.2015 10:23:03


Test Mode : TX N-20M Mode\_ANT 1

### TX HT20 mode CH01

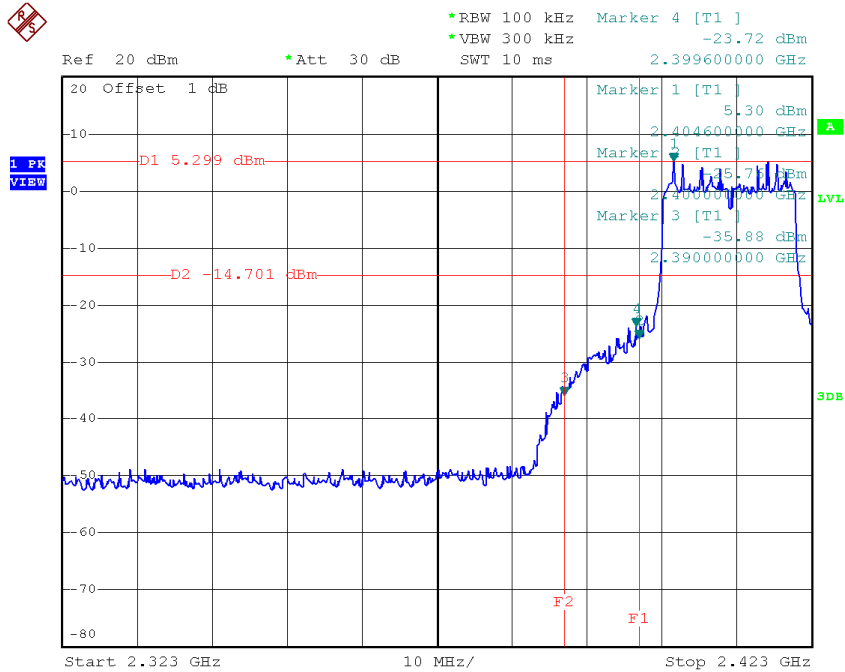


Date: 30.MAR.2015 10:06:57

### TX HT20 mode CH11

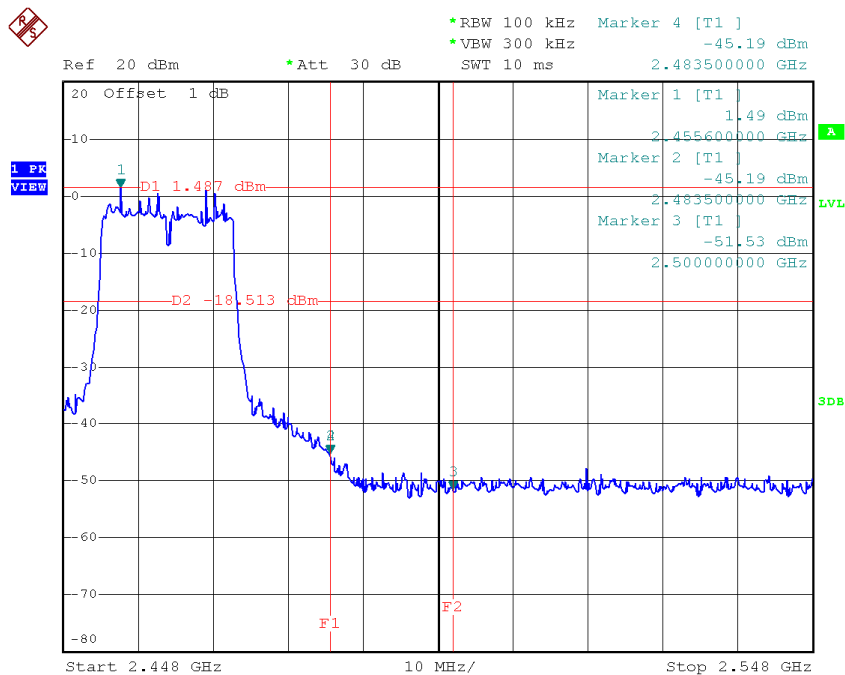


Date: 30.MAR.2015 10:09:08

### TX HT20 mode CH01 (10 Harmonic of the frequency)

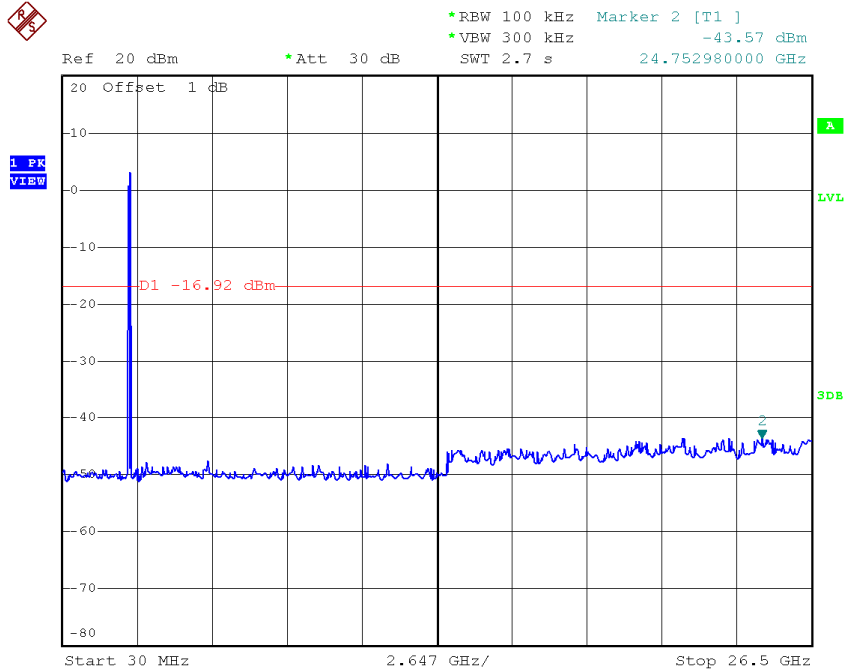

Date: 30.MAR.2015 10:06:49

### TX HT20 mode CH06 (10 Harmonic of the frequency)

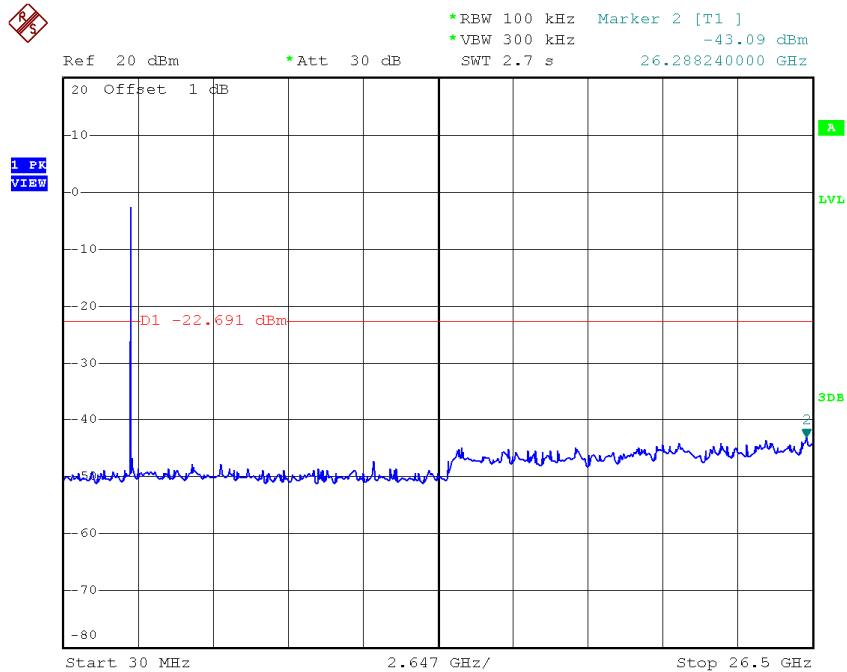


Date: 30.MAR.2015 10:08:02

### TX HT20 mode CH11 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
\*VBW 300 kHz -43.30 dBm  
SWT 2.7 s 26.341180000 GHz

Ref 20 dBm \*Att 30 dB

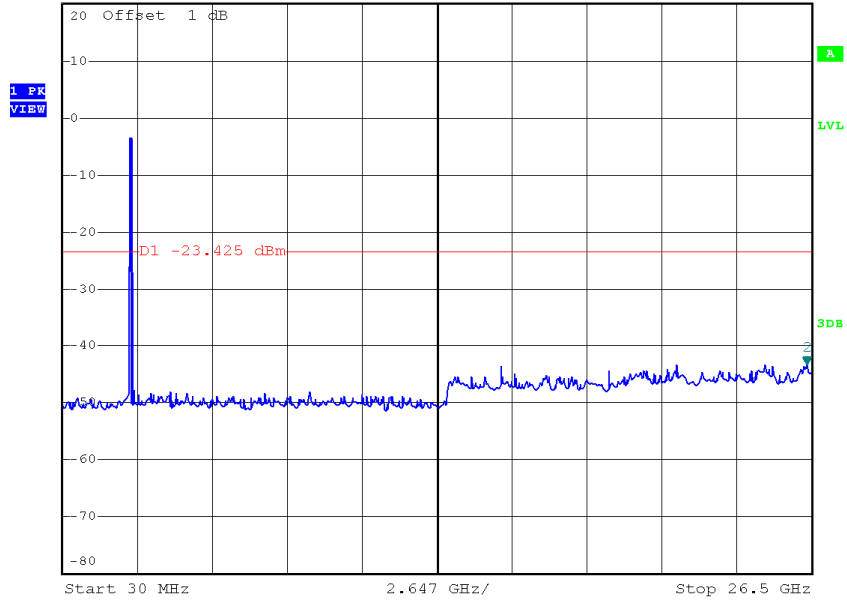


Date: 30.MAR.2015 10:09:01




Test Mode : TX N-20M Mode\_ANT 2

### TX HT20 mode CH01

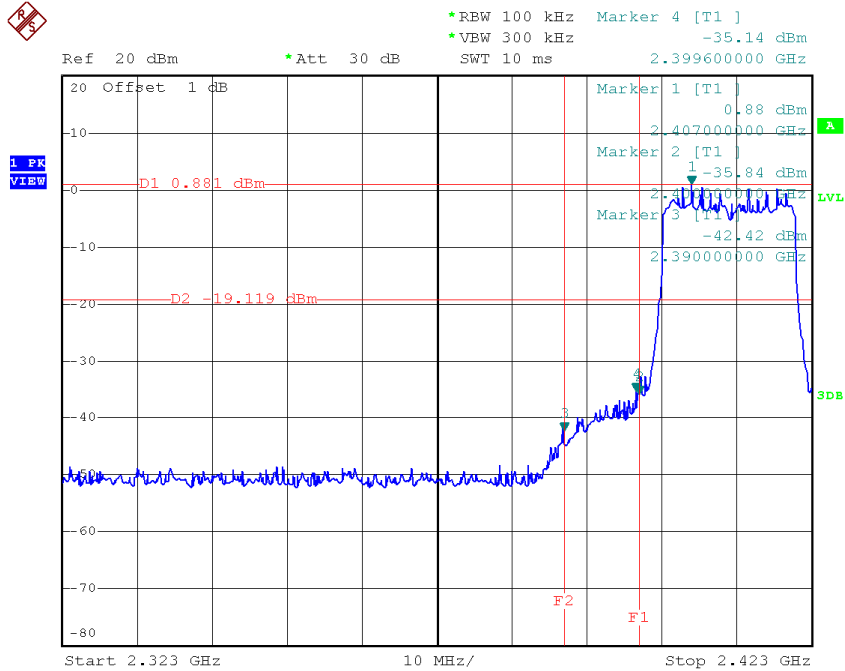


Date: 30.MAR.2015 10:24:18

### TX HT20 mode CH11

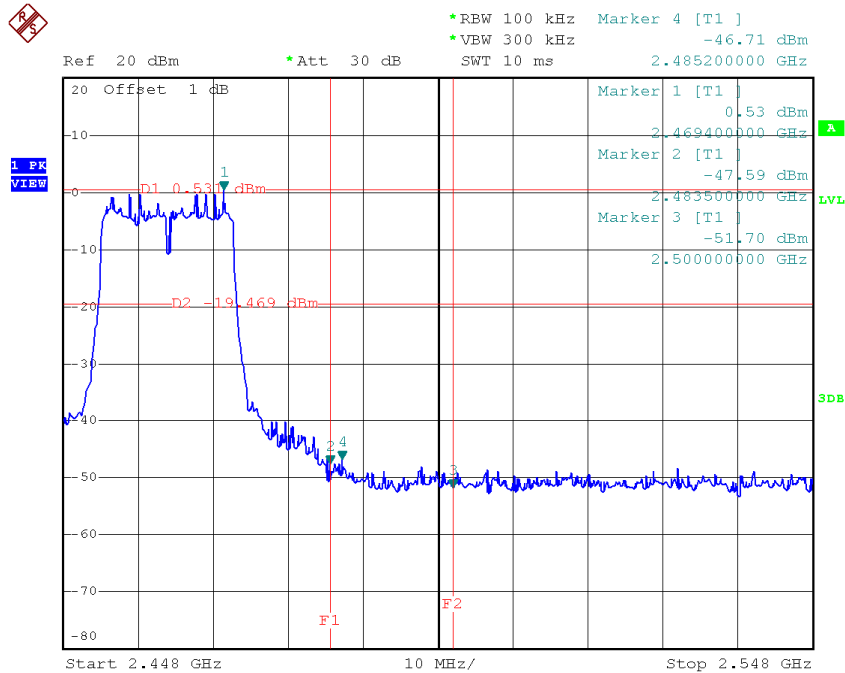


Date: 30.MAR.2015 10:26:22

### TX HT20 mode CH01 (10 Harmonic of the frequency)

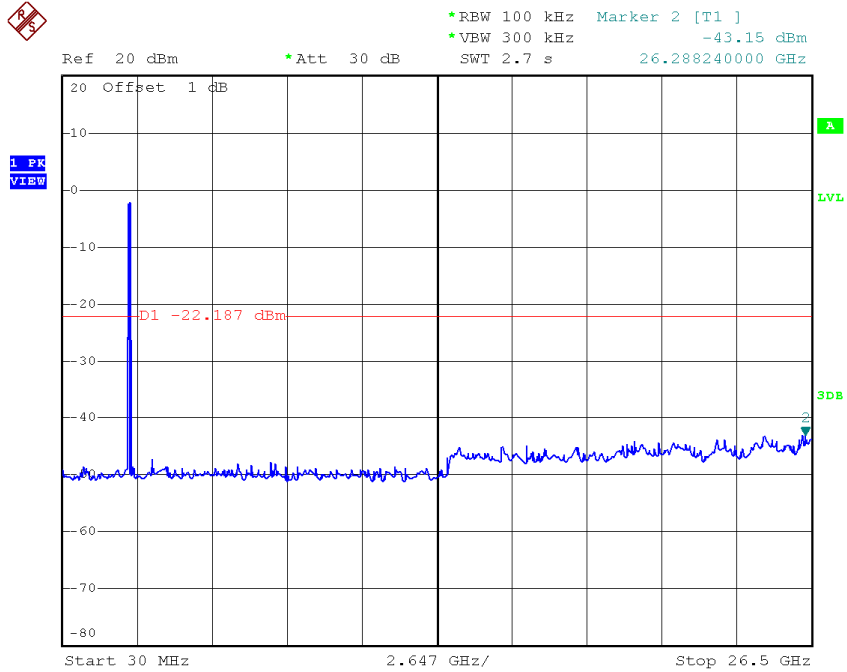

Date: 30.MAR.2015 10:24:11

### TX HT20 mode CH06 (10 Harmonic of the frequency)

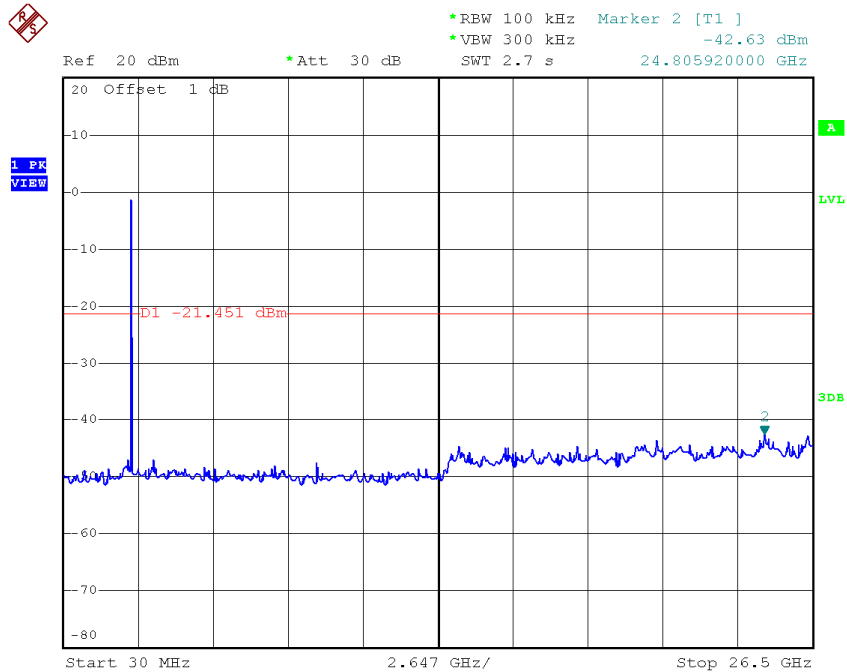


Date: 30.MAR.2015 10:25:14

### TX HT20 mode CH11 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
 \*VBW 300 kHz -42.87 dBm


Ref 20 dBm \*Att 30 dB SWT 2.7 s 24.911800000 GHz

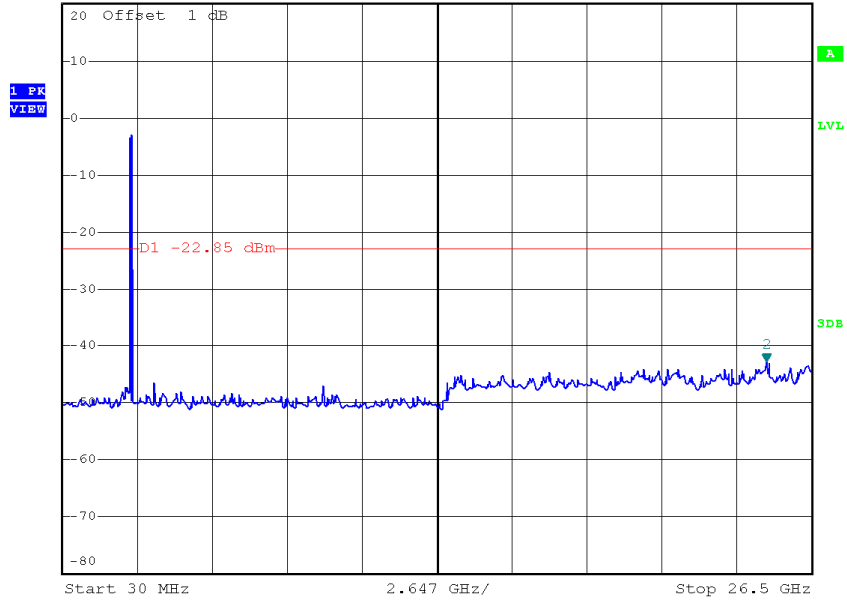

Date: 30.MAR.2015 10:26:15


Test Mode : TX N-40M Mode\_ANT 1

### TX HT40 mode CH03

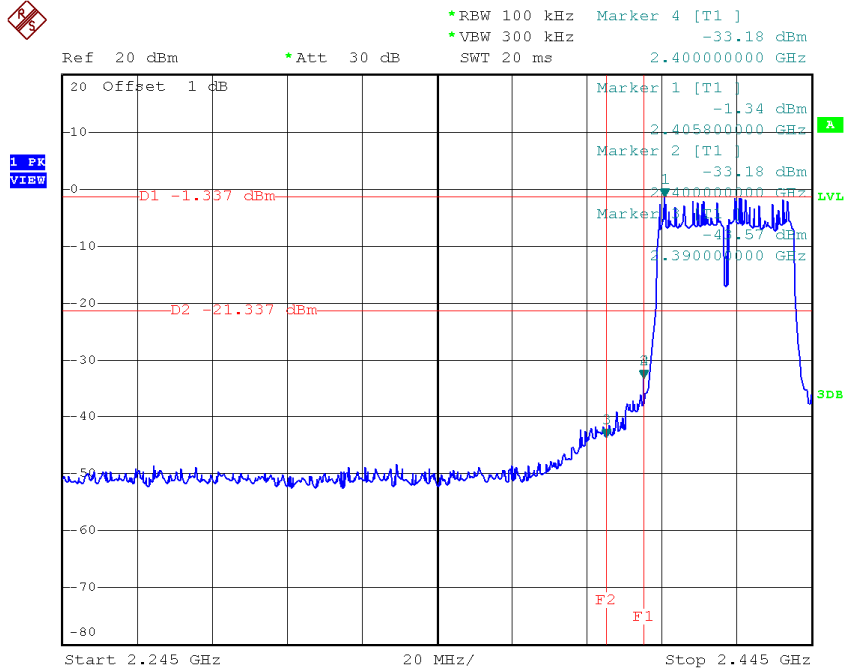


Date: 30.MAR.2015 10:10:26

### TX HT40 mode CH09

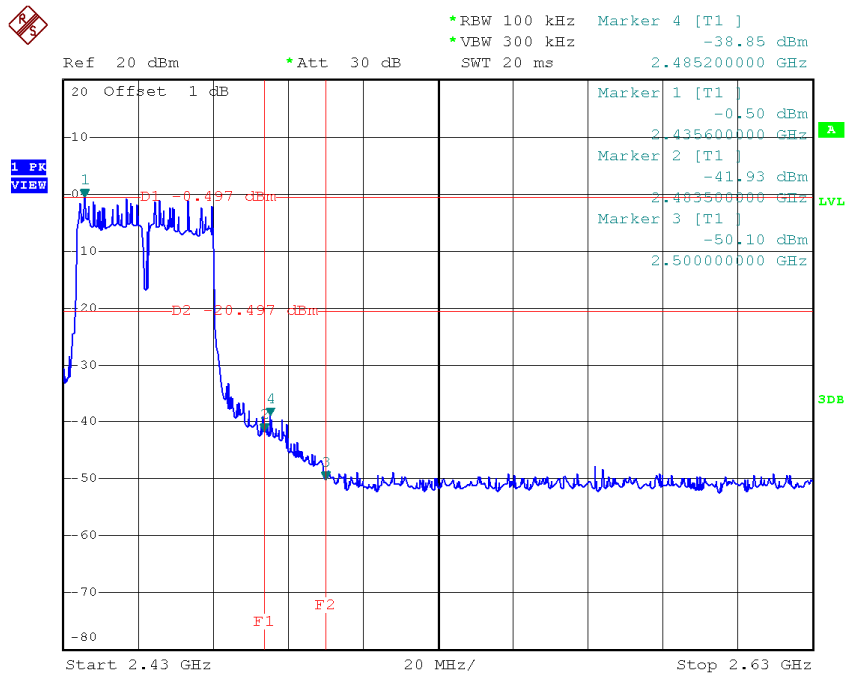


Date: 30.MAR.2015 10:13:48

### TX HT40 mode CH03 (10 Harmonic of the frequency)

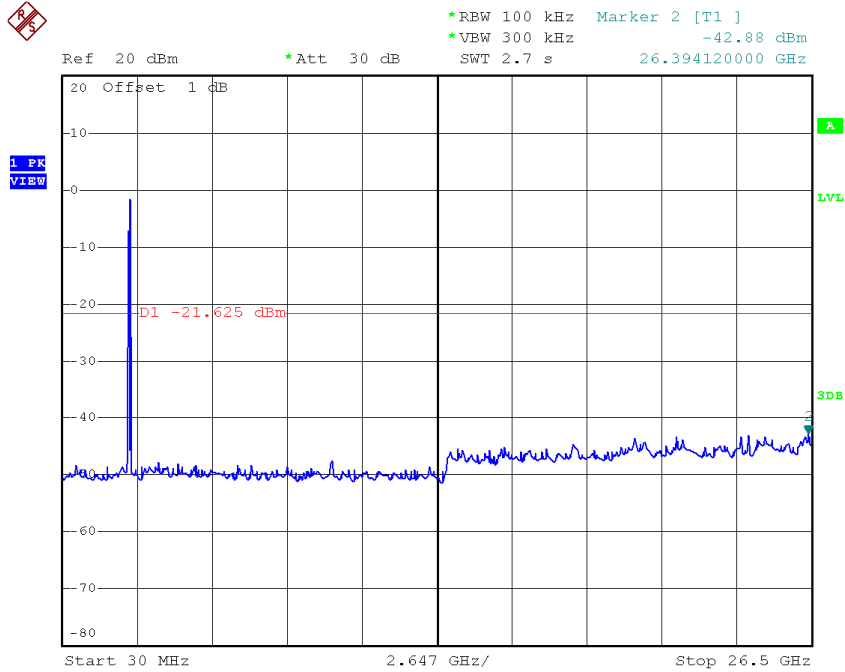

Date: 30.MAR.2015 10:10:18

### TX HT40 mode CH06 (10 Harmonic of the frequency)

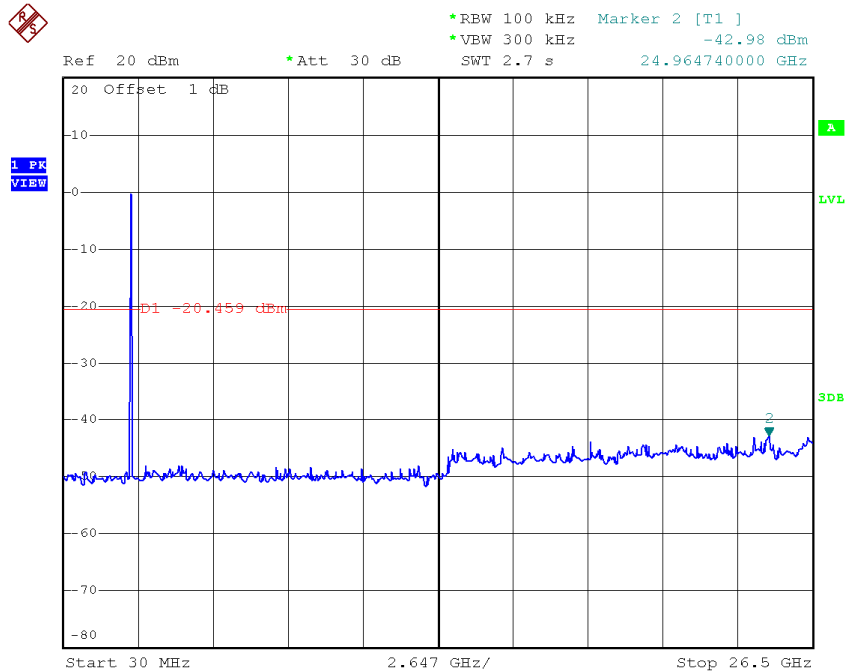


Date: 30.MAR.2015 10:11:58

**TX HT40 mode CH09 (10 Harmonic of the frequency)**




\*REW 100 kHz Marker 2 [T1 ]  
 \*VBW 300 kHz -43.38 dBm  
 Ref 20 dBm \*Att 30 dB SWT 2.7 s 26.182360000 GHz

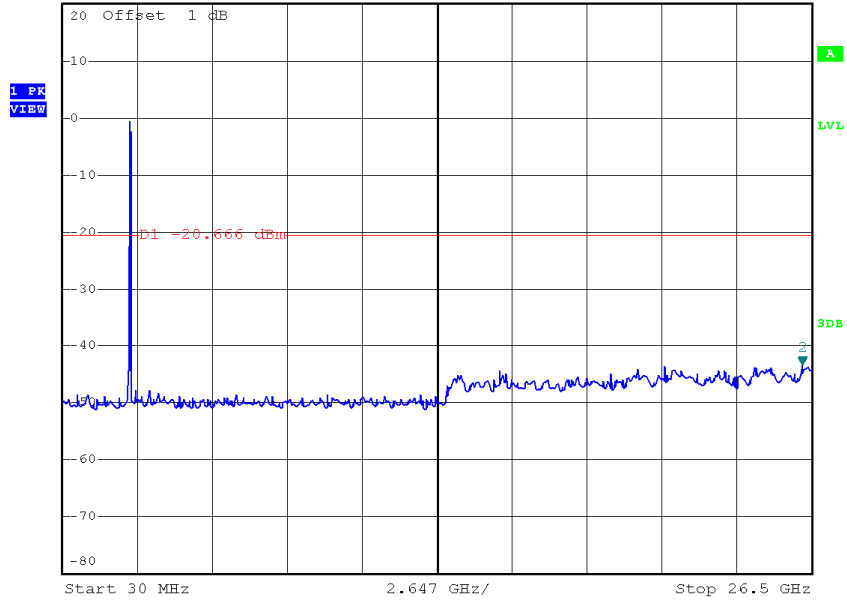

Date: 30.MAR.2015 10:13:41


Test Mode : TX N-40M Mode\_ANT 2

### TX HT40 mode CH03

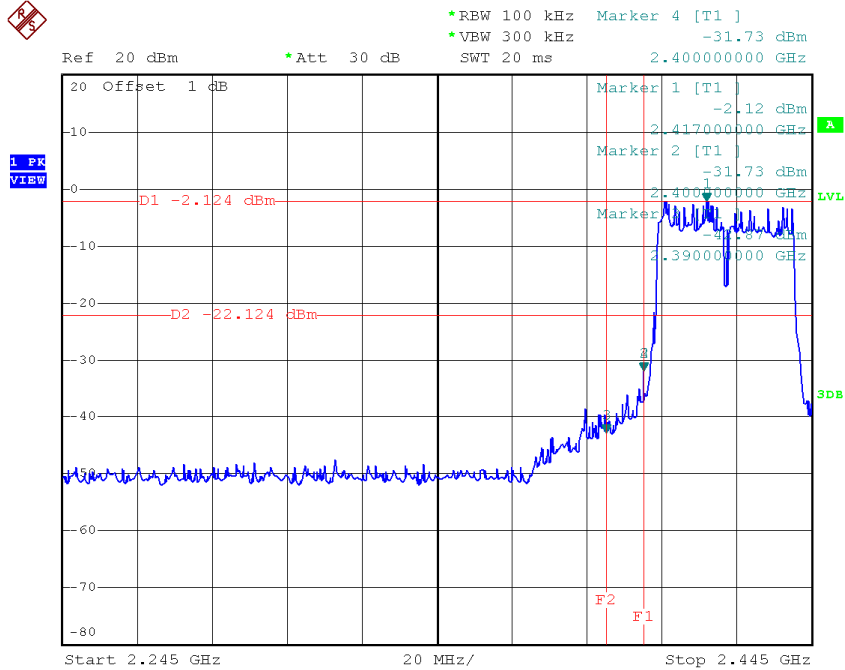


Date: 30.MAR.2015 10:27:40

### TX HT40 mode CH09

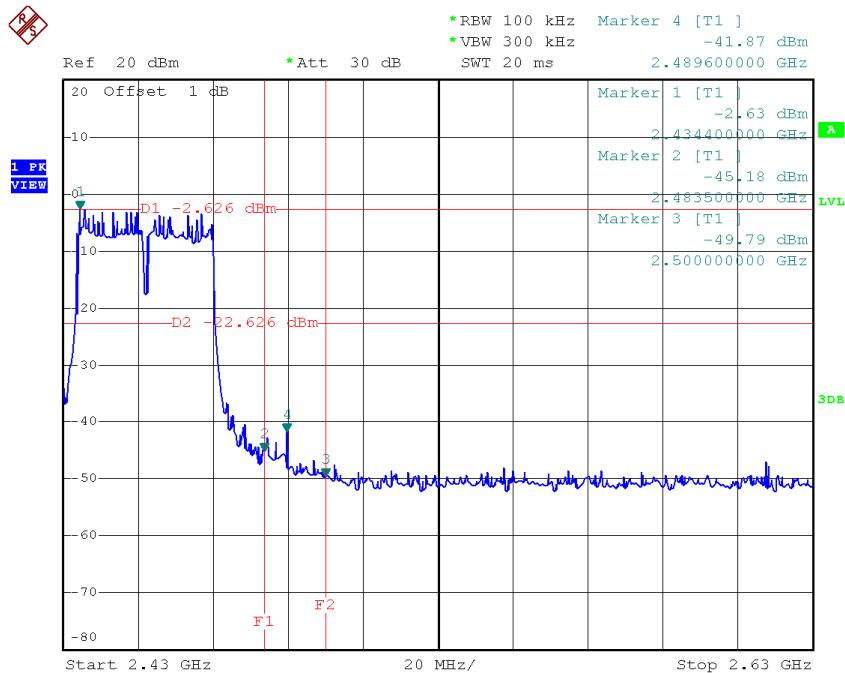


Date: 30.MAR.2015 10:29:58

### TX HT40 mode CH03 (10 Harmonic of the frequency)

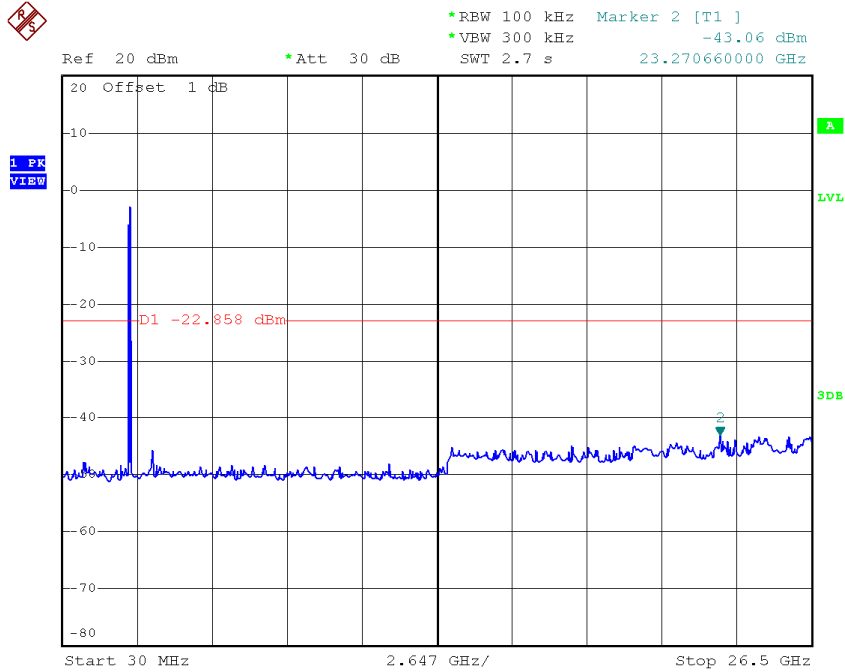

Date: 30.MAR.2015 10:27:33

### TX HT40 mode CH06 (10 Harmonic of the frequency)

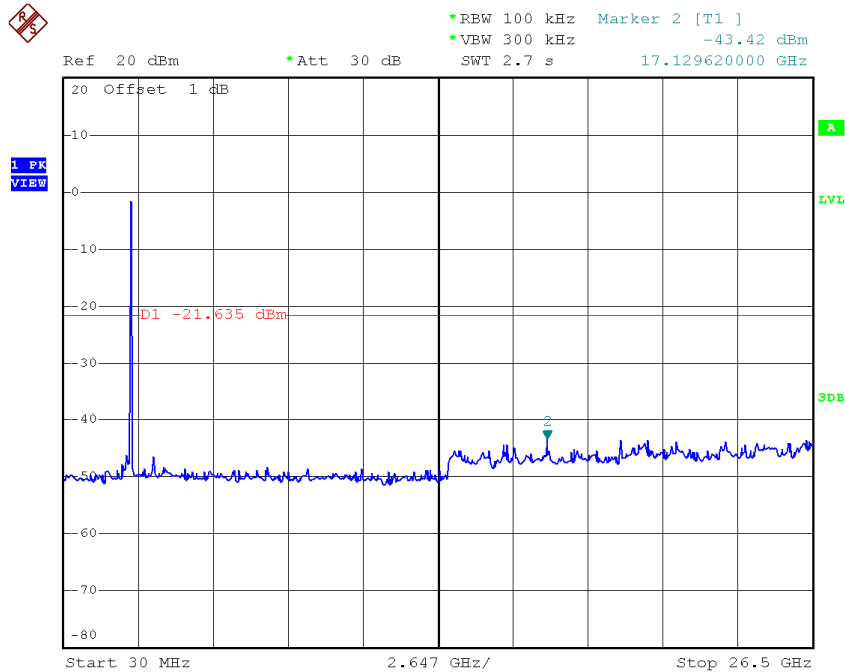

Date: 30.MAR.2015 10:28:51




### TX HT40 mode CH09 (10 Harmonic of the frequency)



\*REW 100 kHz Marker 2 [T1 ]  
\*VBW 300 kHz -42.63 dBm  
SWT 2.7 s 20.570720000 GHz

Ref 20 dBm \*Att 30 dB

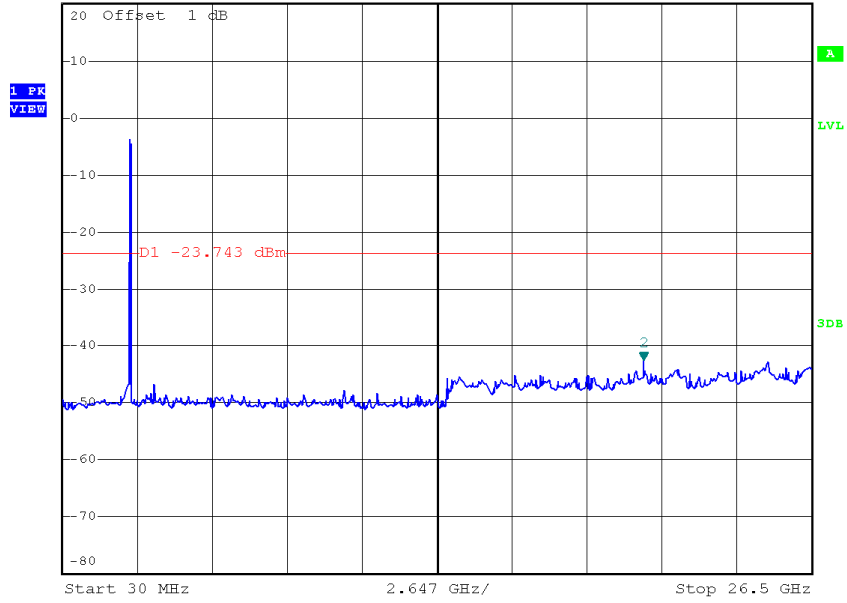


Date: 30.MAR.2015 10:29:50

## ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode\_CH01/06/11\_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-8.20	0.15	8.00	Complies
2437	-7.17	0.19	8.00	Complies
2462	-8.36	0.15	8.00	Complies

TX CH01

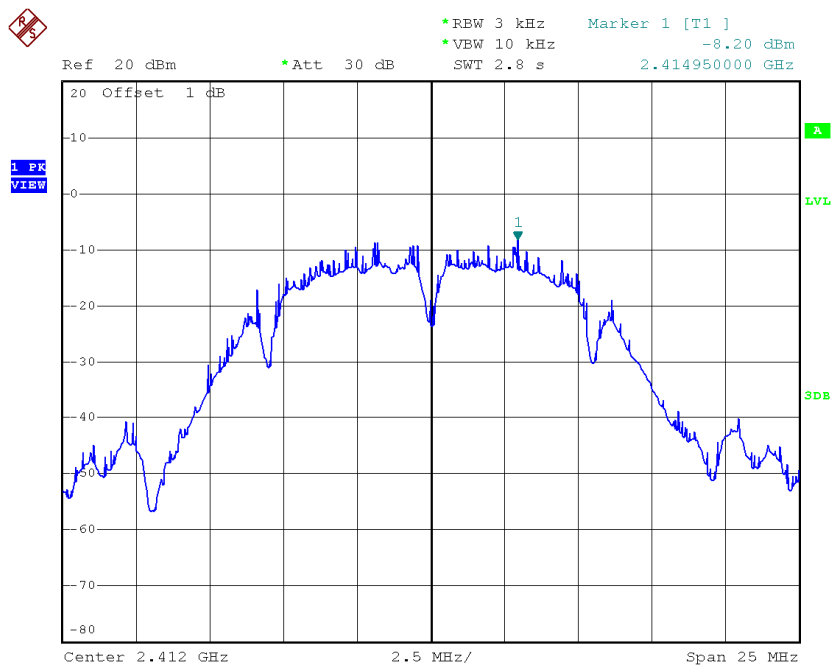


Date: 30.MAR.2015 10:00:41

### TX CH06

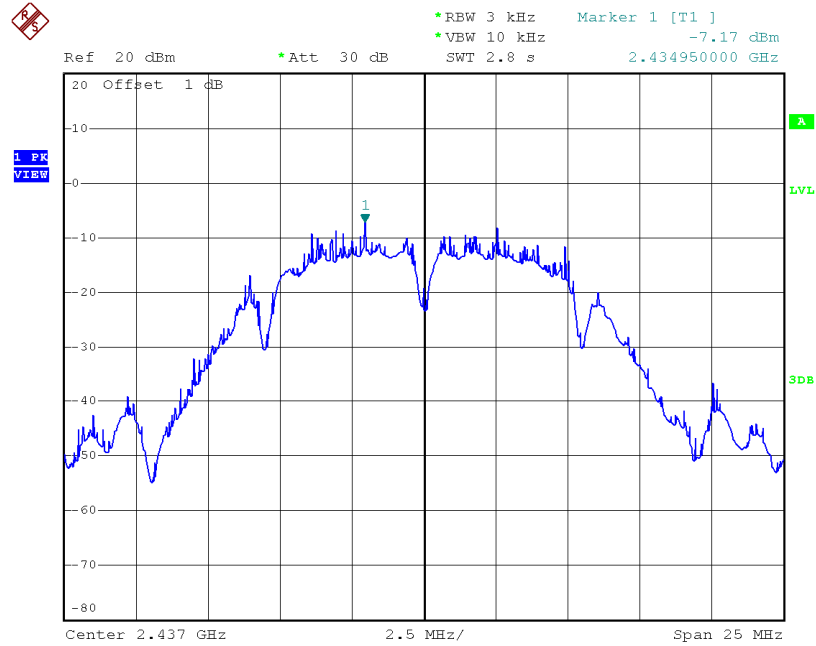

Date: 30.MAR.2015 10:01:39

### TX CH11

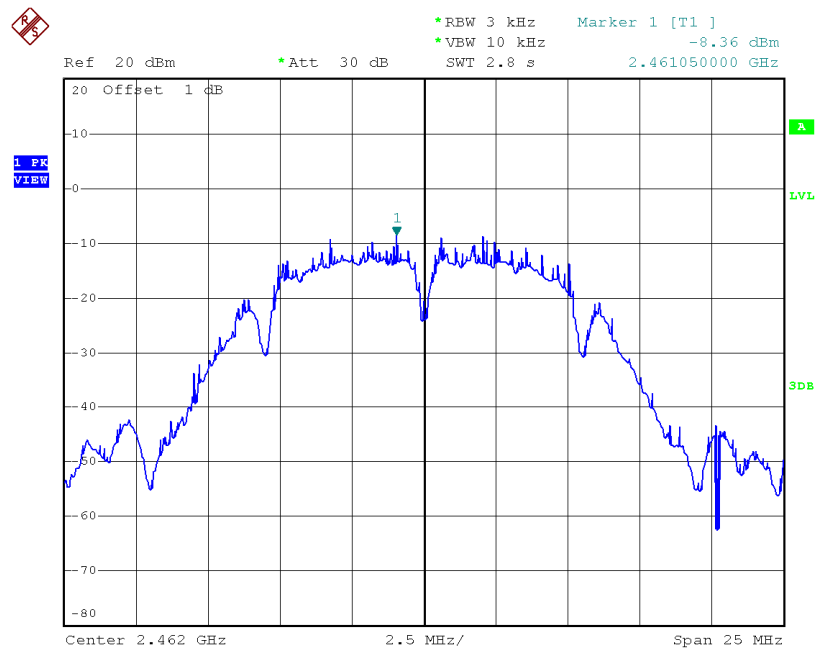


Date: 30.MAR.2015 10:02:44

**Test Mode :TX B Mode\_CH01/06/11\_ANT 2**


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.95	0.06	8.00	Complies
2437	-11.77	0.07	8.00	Complies
2462	-13.15	0.05	8.00	Complies

**TX CH01**

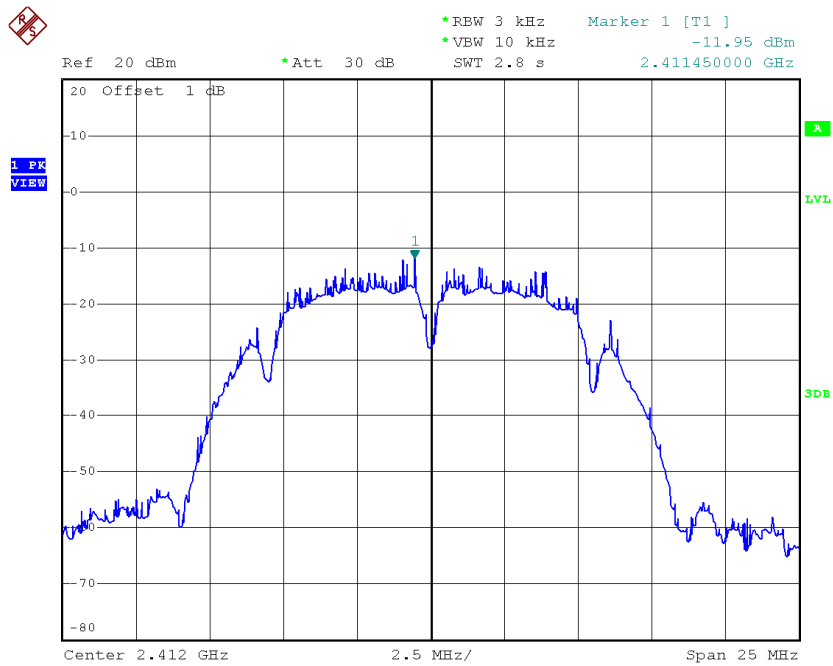


Date: 30.MAR.2015 10:17:11

### TX CH06

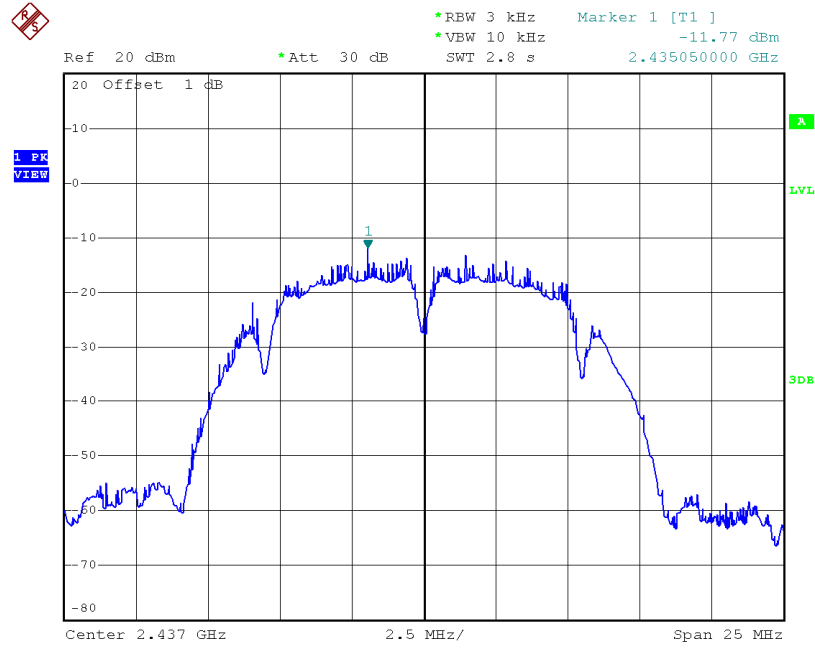

Date: 30.MAR.2015 10:18:19

### TX CH11

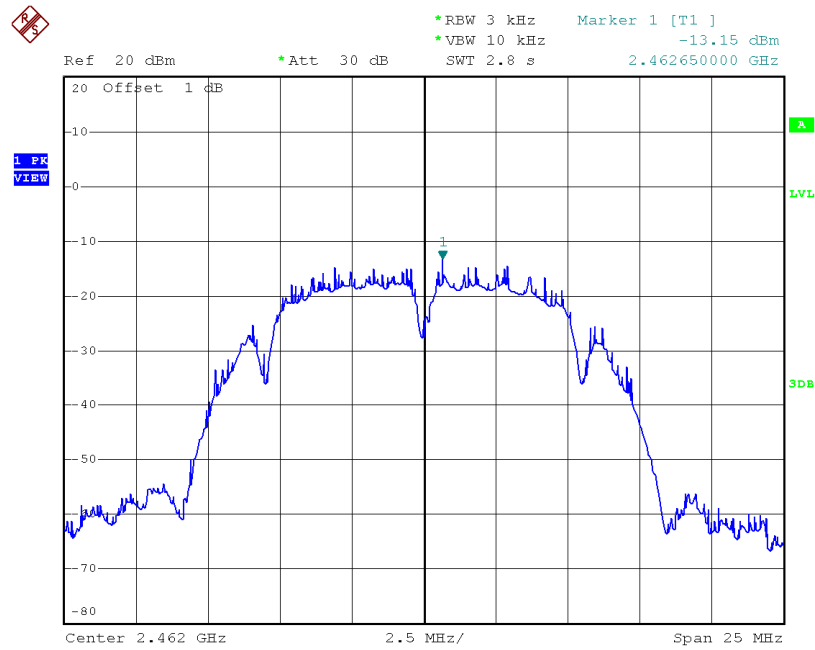

Date: 30.MAR.2015 10:19:37


**Test Mode :TX B Mode\_CH01/06/11\_Total**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-6.67	0.22	8.00	Complies
2437	-5.88	0.26	8.00	Complies
2462	-7.11	0.19	8.00	Complies

**Test Mode :TX G Mode\_CH01/06/11\_ANT 1**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.33	0.07	8.00	Complies
2437	-9.41	0.11	8.00	Complies
2462	-11.97	0.06	8.00	Complies


**TX CH01**

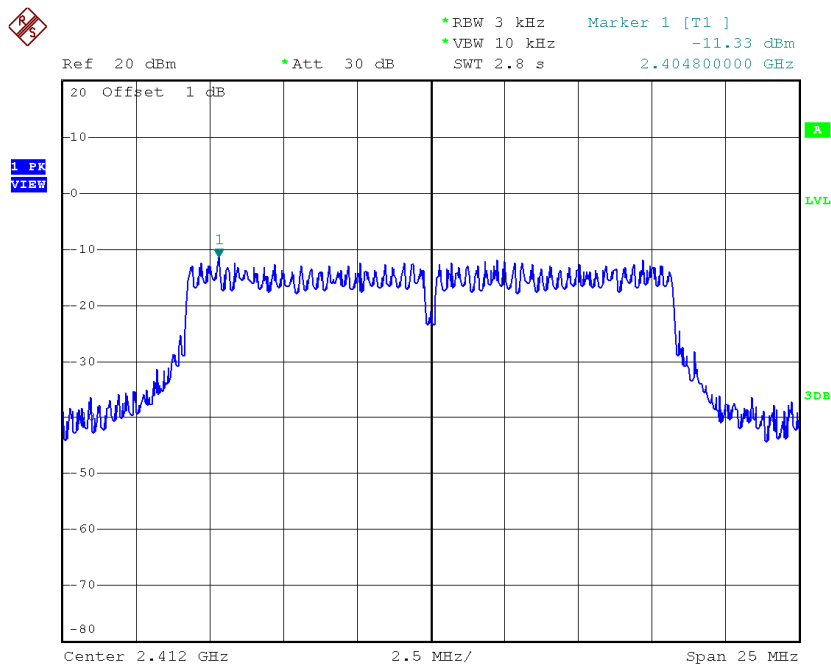

Date: 30.MAR.2015 10:03:48




### TX CH06

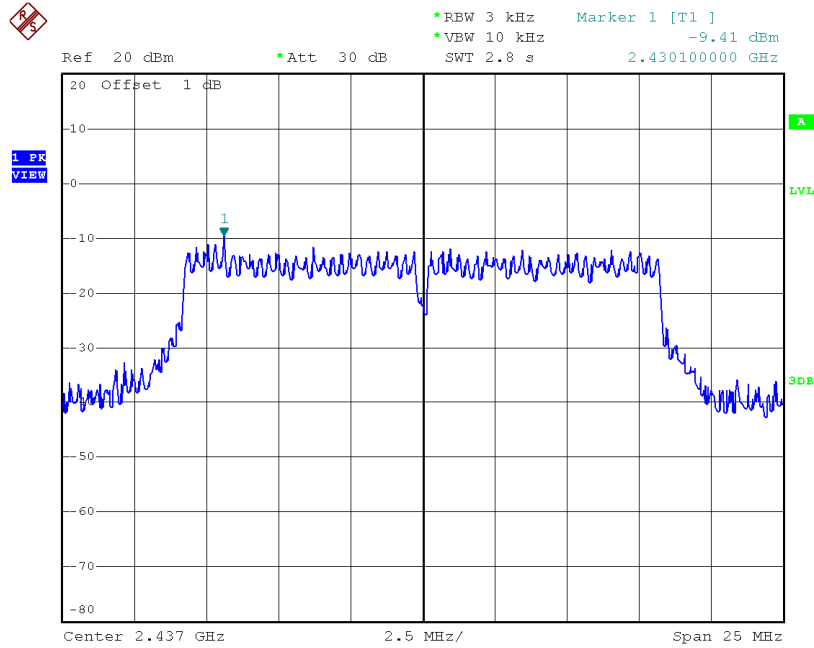

Date: 30.MAR.2015 10:04:47


### TX CH11

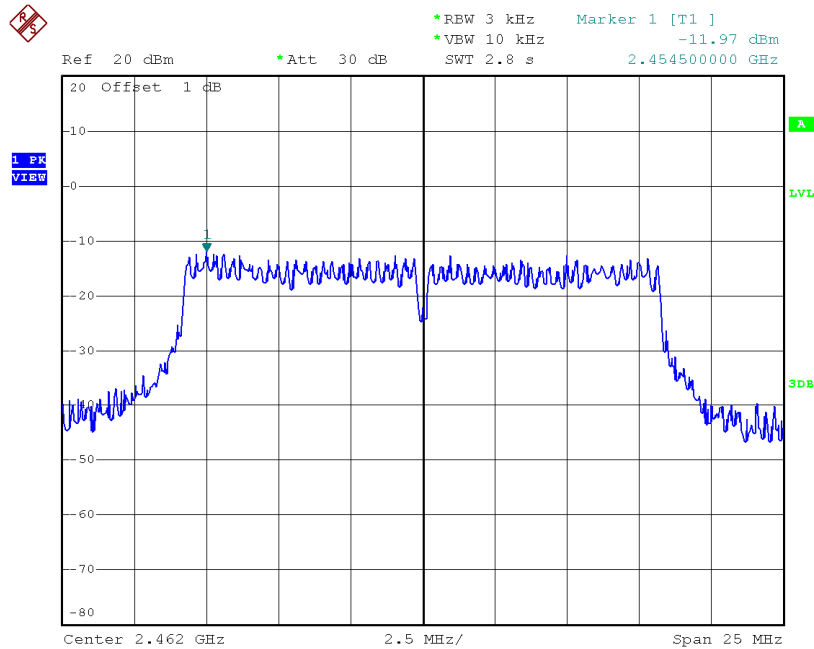

Date: 30.MAR.2015 10:05:50




### TX CH06

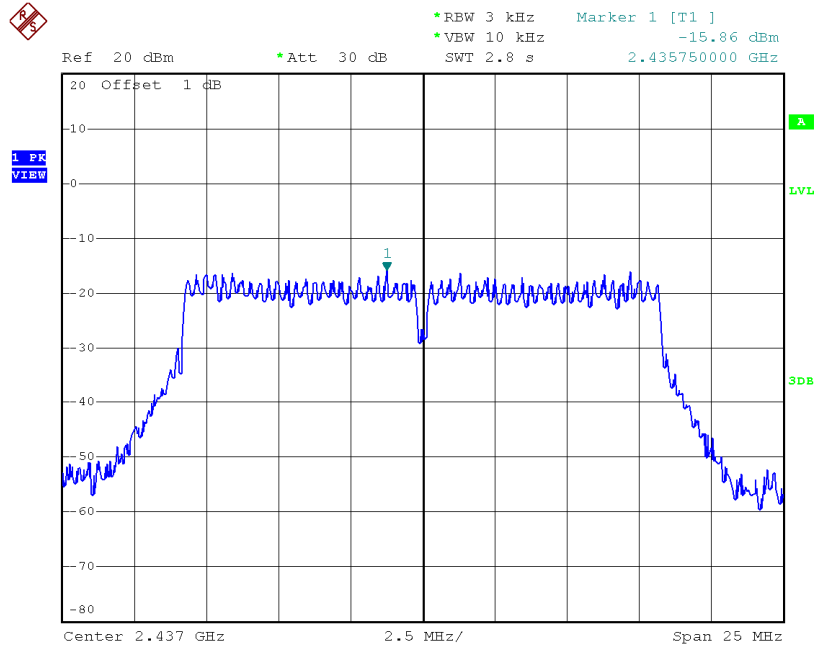

Date: 30.MAR.2015 10:21:39

### TX CH11

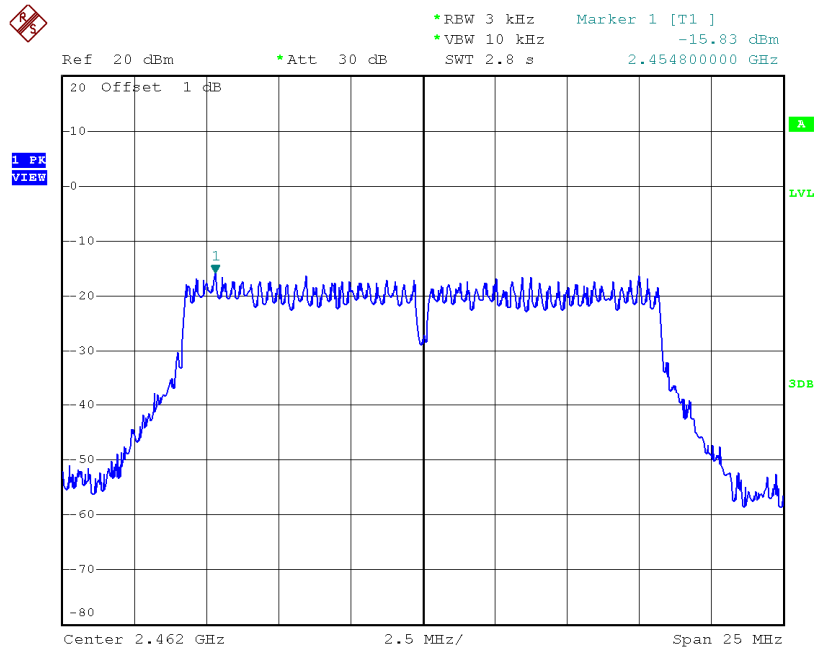

Date: 30.MAR.2015 10:23:19


**Test Mode :TX G Mode\_CH01/06/11\_Total**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.22	0.12	8.00	Complies
2437	-8.52	0.14	8.00	Complies
2462	-10.47	0.09	8.00	Complies

**Test Mode : TX N-20M Mode\_CH01/06/11\_ANT 1**


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.01	0.08	8.00	Complies
2437	-14.46	0.04	8.00	Complies
2462	-15.23	0.03	8.00	Complies

**TX CH01**

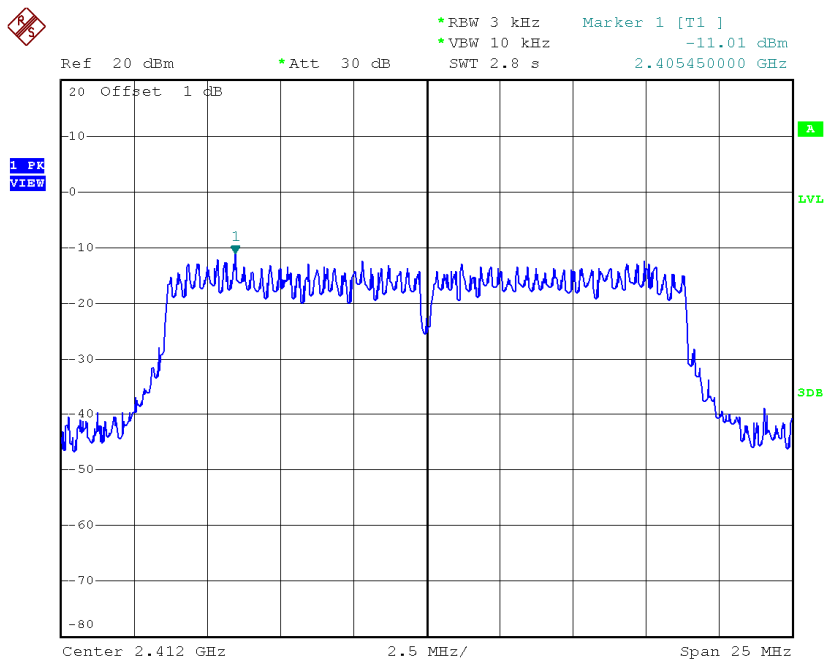


Date: 30.MAR.2015 10:07:05

### TX CH06

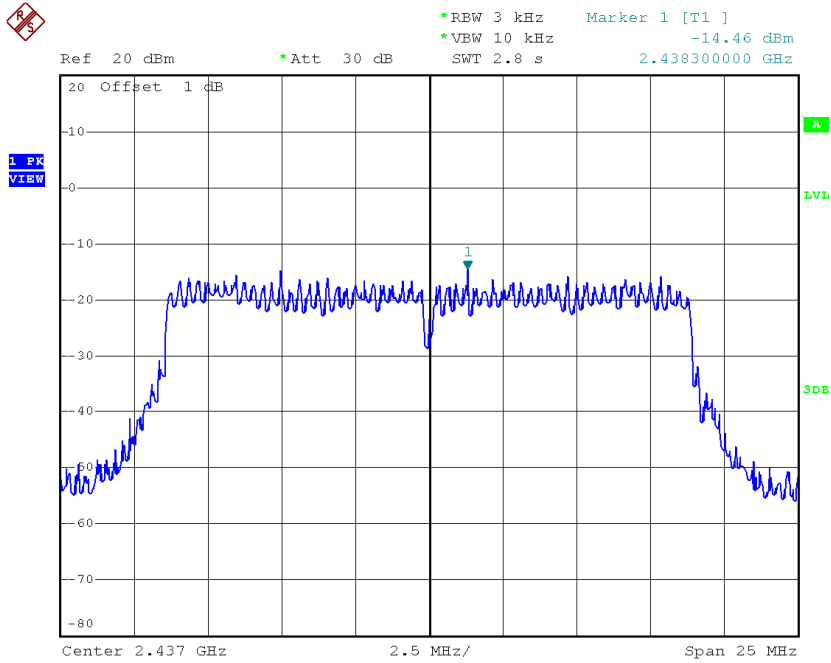

Date: 30.MAR.2015 10:08:11

### TX CH11

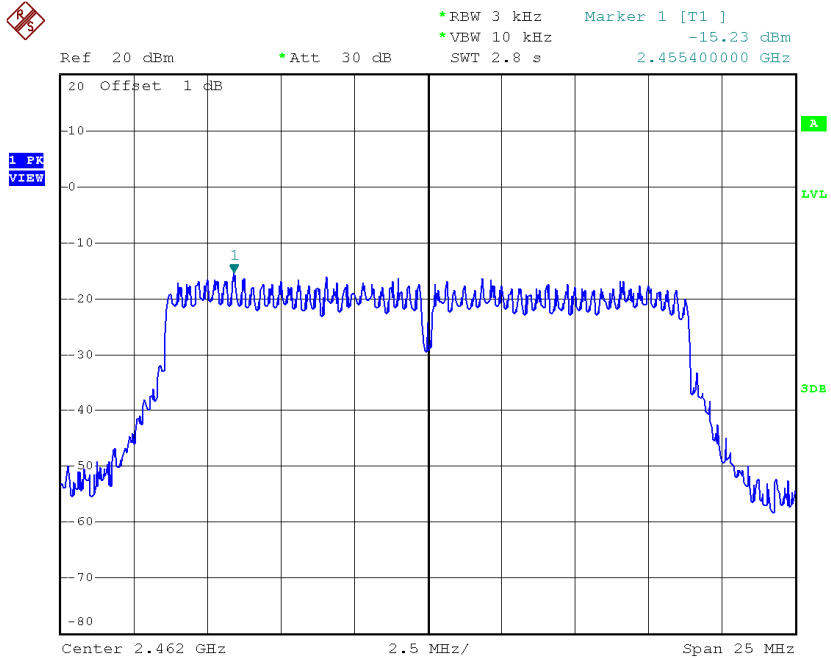


Date: 30.MAR.2015 10:09:17

**Test Mode : TX N-20M Mode\_CH01/06/11\_ANT 2**


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-15.66	0.03	8.00	Complies
2437	-15.36	0.03	8.00	Complies
2462	-15.70	0.03	8.00	Complies

**TX CH01**

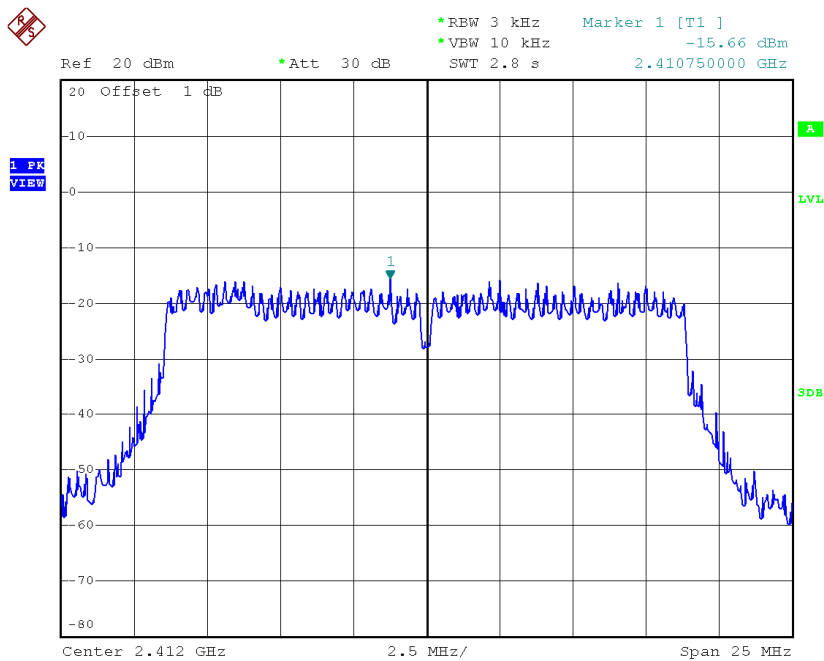


Date: 30.MAR.2015 10:24:27

**TX CH06**

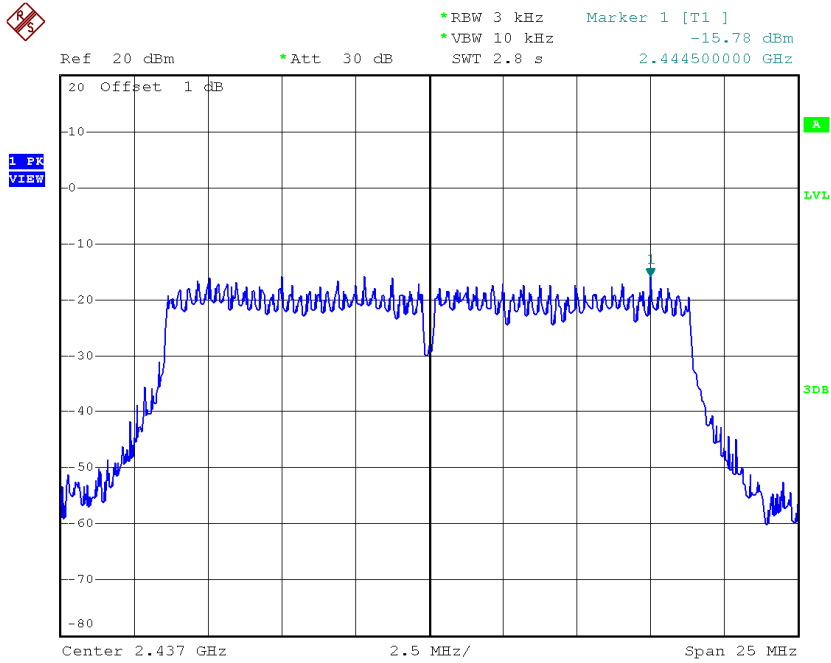

Date: 30.MAR.2015 10:25:23

**TX CH11**

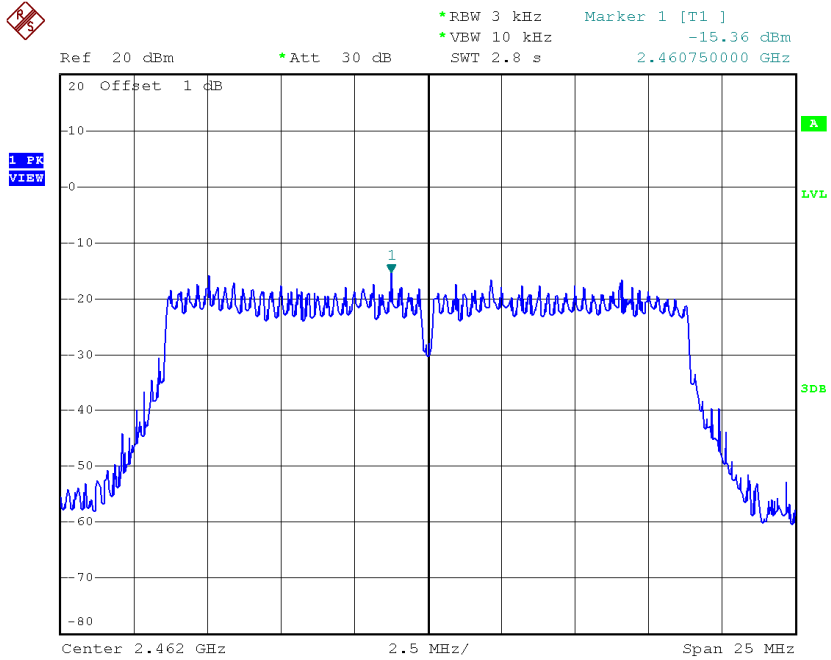

Date: 30.MAR.2015 10:26:31




**Test Mode : TX N-20M Mode\_CH01/06/11\_Total**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.73	0.11	8.00	Complies
2437	-11.87	0.06	8.00	Complies
2462	-12.45	0.06	8.00	Complies




### TX CH06

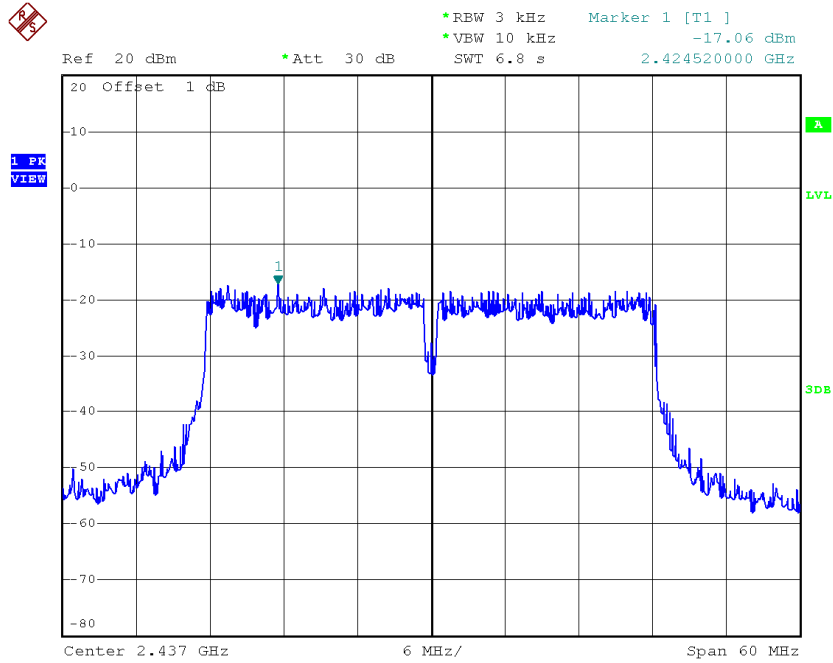

Date: 30.MAR.2015 10:12:10

### TX CH09

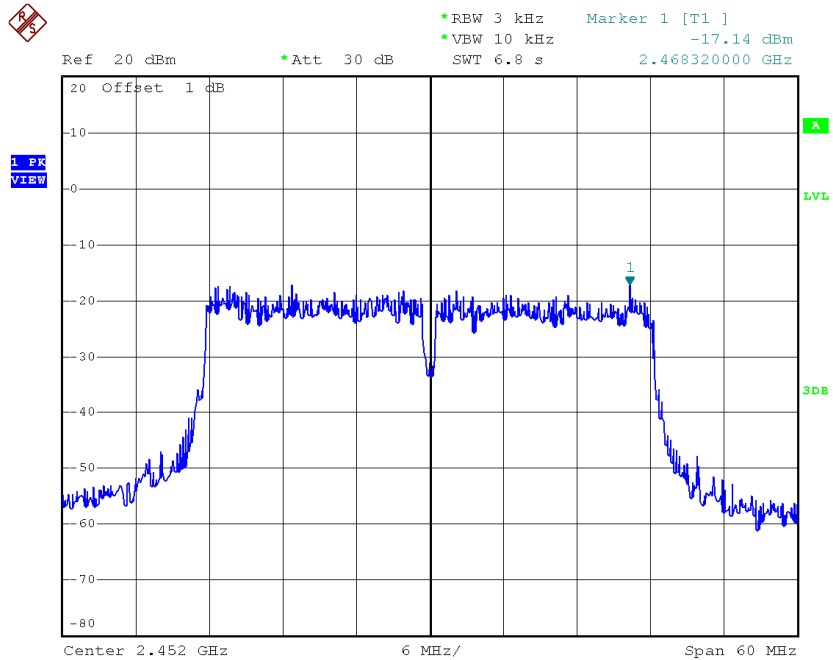


Date: 30.MAR.2015 10:14:00

**Test Mode : TX N-40M Mode\_CH03/06/09\_ANT 2**


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-18.05	0.02	8.00	Complies
2437	-6.24	0.24	8.00	Complies
2452	-18.80	0.01	8.00	Complies

**TX CH03**

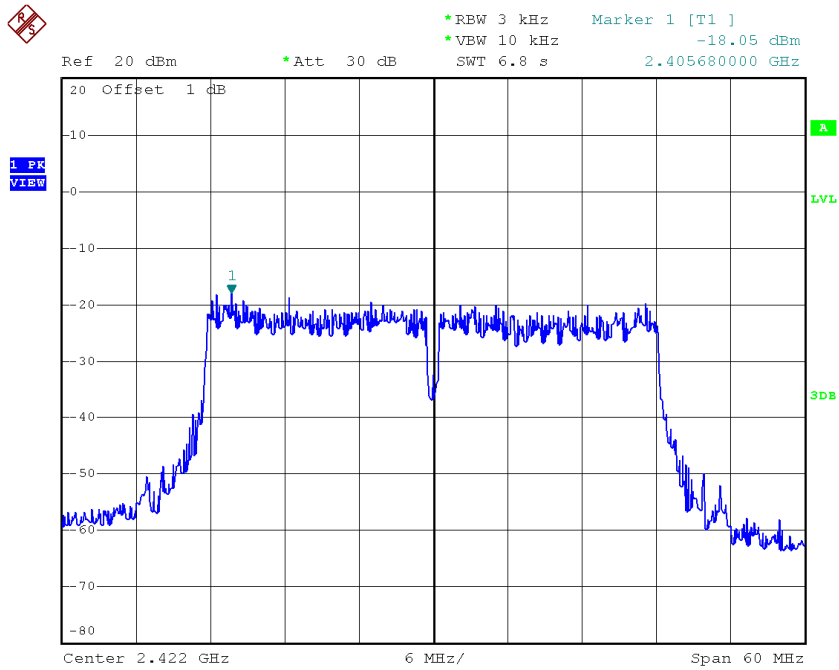


Date: 30.MAR.2015 10:27:52

**TX CH06**

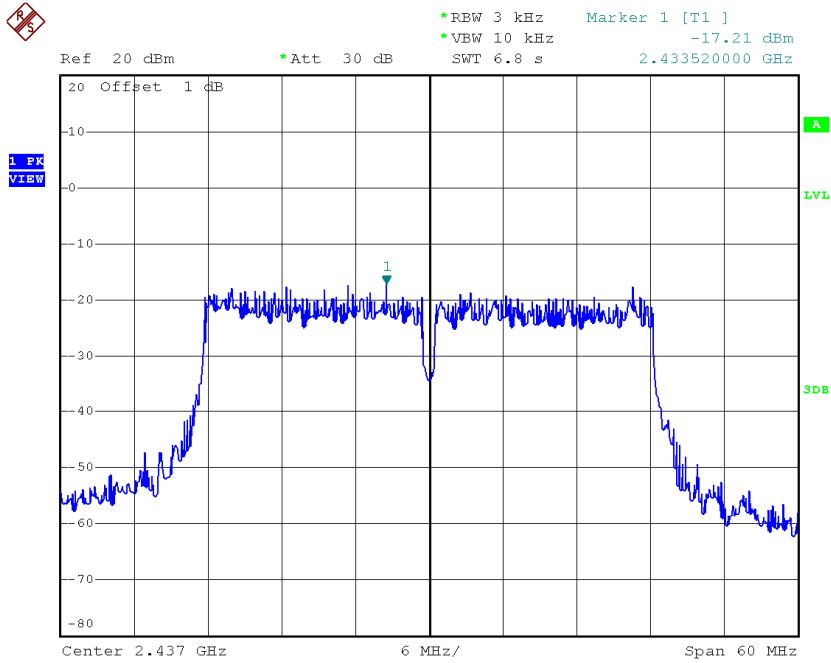

Date: 30.MAR.2015 10:29:03

**TX CH09**

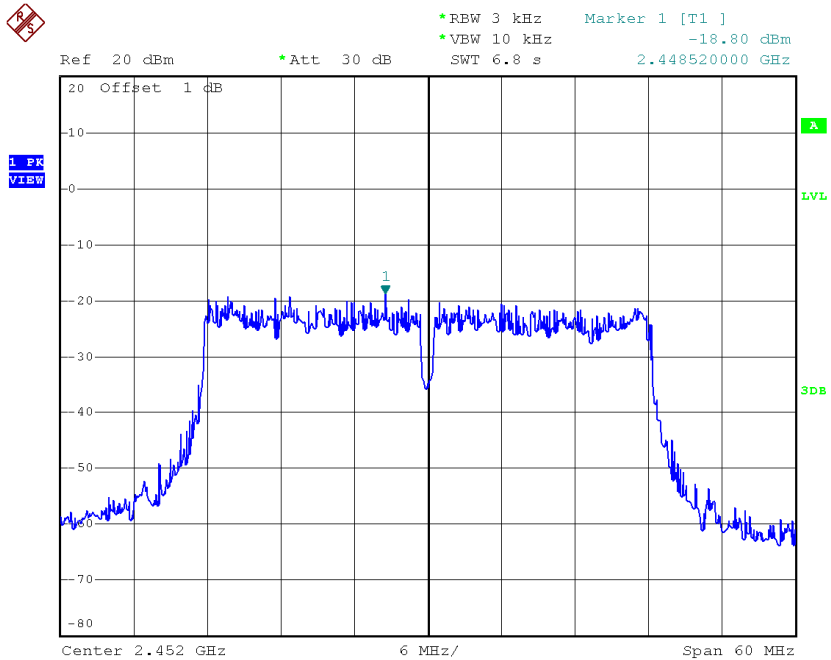

Date: 30.MAR.2015 10:30:10

**Test Mode : TX N-40M Mode\_CH03/06/09\_Total**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-14.60	0.03	8.00	Complies
2437	-5.89	0.26	8.00	Complies
2452	-14.88	0.03	8.00	Complies