

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

TCL Technoly Electronics (Huizhou) Co.,Ltd

Levitation Bluetooth Speaker
(Mars Craft)

Model Number: L141

FCC ID: ZVAPS000021

Prepared for : TCL Technoly Electronics (Huizhou) Co.,Ltd
Section 37, Zhongkai High-tech Development Zone,
Huizhou City, Guang Dong Province, China, 516006

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.




Tel: 86-769-83081888-808

Report Number: ESTE-R1509027
Date of Test : August 15~September 09,2015
Date of Report: September 10,2015

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT)	4
2. SUMMARY OF TEST	5
2.1. Summary of test result.....	5
2.2. Test Facilities	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test	7
2.5. Block Diagram	7
2.6. Test mode	8
2.7. Channel List for GFSK.....	8
2.8. Test Equipment.....	9
3. RADIATED EMISSIONS.....	10
3.1. Limit	10
3.2. Block Diagram of Test setup.....	11
3.3. Test Procedure.....	12
3.4. Test Result.....	12
3.5. Test Data	13
4. 20 DB BANDWIDTH.....	25
4.1. Test Procedure	25
4.2. Test Result.....	25
4.3. Test Data	26
5. BAND EDGE COMPLIANCE	28
5.1. Block Diagram of Test setup.....	28
5.2. Test Procedure.....	28
5.3. Test Result.....	28
5.4. Test Data	29
6. ANTENNA REQUIREMENTS	33
6.1. Limit	33
6.2. Result.....	33
7. TEST SETUP PHOTO.....	34
8. PHOTOS OF EUT	35

Test Report Verification

Applicant:	TCL Technoly Electronics (Huizhou) Co.,Ltd		
Address:	Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang Dong Province, China, 516006		
Manufacturer	Crazybaby Inc.		
Address:	175 South Main Suite,500 Salt Lake City,UT 84111,United States.		
E.U.T:	Levitation Bluetooth Speaker		
Model Number:	L141		
Power Supply:	DC 3.7V		
Test Voltage:	DC 3.7V		
Trade Name:	Mars by crazybaby	Serial No.:	-----
Date of Receipt:	August 11, 2015	Date of Test:	August 15~September 09,2015
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2014 ANSI C63.10:2013		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: right;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: September 10,2015</p>		
Prepared by:	Tested by:	Approved by:	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: Levitation Bluetooth Speaker
Model Number	: L141
FCC ID	: ZVAPS000021
Operation frequency	: 5730-5824 MHz
Number of channel	: 48
Antenna	: Integrated antenna, 3.05 dBi gain
Modulation	: GFSK

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emissions	FCC Part 15C: 15.207 ANSI C63.10-2013	N/A
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2013	PASS
20 dB Bandwidth Test	FCC Part 15: 15.249 ANSI C63.10-2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.215 ANSI C63.10-2013	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
<p>Note: 1、 N/A is an abbreviation for Not Applicable. 2、 The conducted emissions test is not applicable, because the EUT is charging by wireless charge.</p>		

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: Nov 23, 2014
		Certificated by FCC, USA Registration No.: 989591 Date of registration: November 20, 2013
		Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: January 03, 2013
		Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011
		Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011
		Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011
		Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011
		Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011
		Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie District, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4. Assistant equipment used for test

2.4.1. N/A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was be set into BT test mode by software before test.



(EUT: Levitation Bluetooth Speaker)

2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
TX	Low	5730MHz
	Middle	5776MHz
	High	5824MHz

2.7. Channel List for GFSK

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	5730	2	5732	3	5734	4	5736
5	5738	6	5740	7	5742	8	5744
9	5746	10	5748	11	5750	12	5752
13	5754	14	5756	15	5758	16	5760
17	5762	18	5764	19	5766	20	5768
21	5770	22	5772	23	5774	24	5776
25	5778	26	5780	27	5782	28	5784
29	5786	30	5788	31	5790	32	5792
33	5794	34	5796	35	5798	36	5800
37	5802	38	5804	39	5806	40	5808
41	5810	42	5812	43	5814	44	5816
45	5818	46	5820	47	5822	48	5824

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,15	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,15	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June,28,15	1 Year

2.8.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June,28,15	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,15	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,15	1 Year

2.8.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120D1002	June,28,15	1 Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,15	1 Year

3. RADIATED EMISSIONS

3.1. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	


Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.


(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system

3.2. Block Diagram of Test setup

30~1000MHz

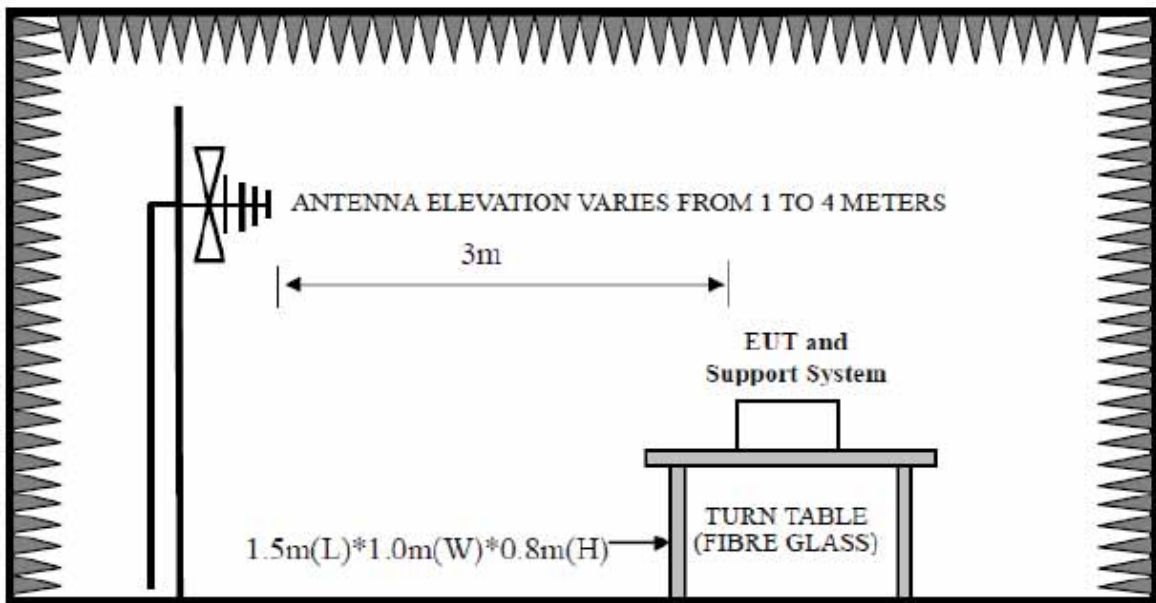

Above 1GHz

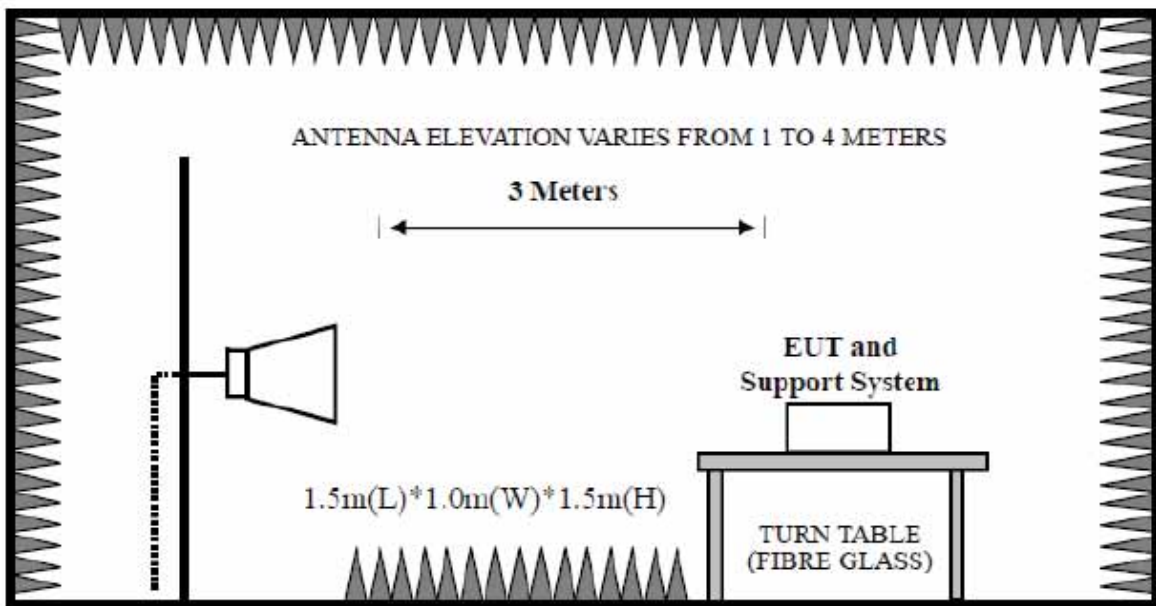

3.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 30~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,
PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (40GHz) are checked. and no any emissions were found from 18GHz to 40 GHz, So the radiated emissions from 18GHz to 40GHz were not record.

3.4. Test Result


PASS.

All the emissions from 30MHz to 40 GHz were comply with 15.209 limits.

- Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- 2、 The frequency 5730MHz 、 5776MHz and 5824MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


3.5. Test Data

30 MHz – 1000 MHz

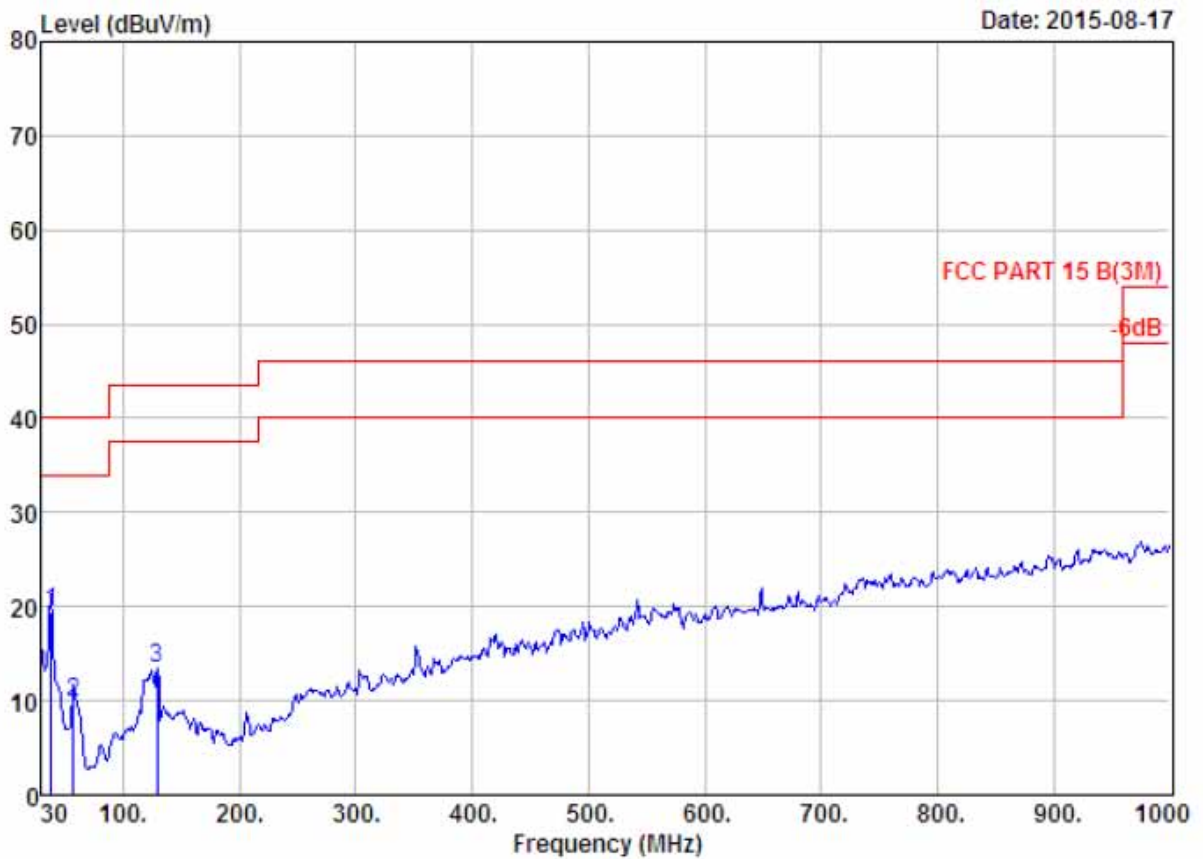


Site no. : 966 1# chamber Data no. : 21
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5730MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	0.79	4.58	19.42	40.00	20.58	QP
2	57.16	5.06	0.99	3.69	9.74	40.00	30.26	QP
3	128.94	11.33	1.47	0.74	13.54	43.50	29.96	QP

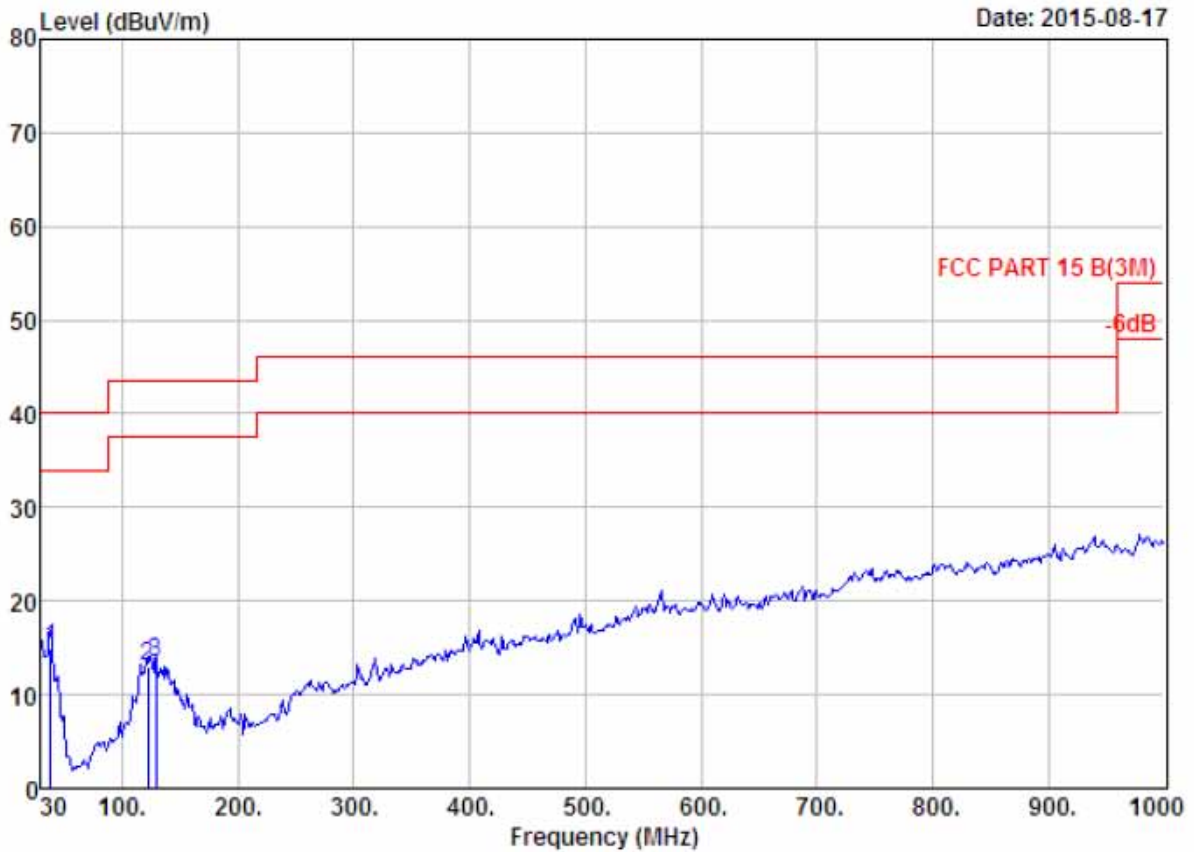


Site no. : 966 1# chamber Data no. : 22
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5730MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	0.79	0.06	14.90	40.00	25.10	QP
2	122.15	11.24	1.45	0.36	13.05	43.50	30.45	QP
3	128.94	11.33	1.47	0.56	13.36	43.50	30.14	QP

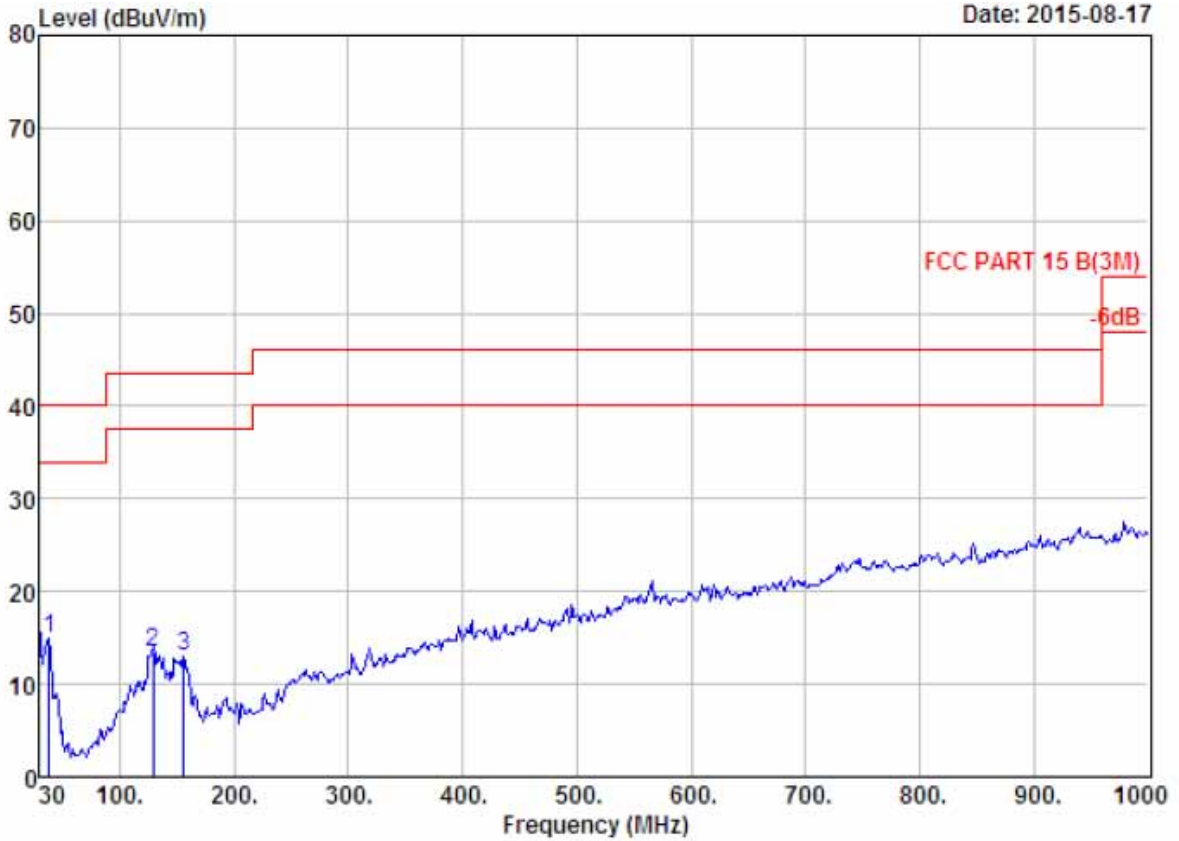


Site no. : 966 1# chamber Data no. : 23
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5776MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	0.79	0.06	14.90	40.00	25.10	QP
2	128.94	11.33	1.47	0.56	13.36	43.50	30.14	QP
3	156.10	10.61	1.67	0.74	13.02	43.50	30.48	QP

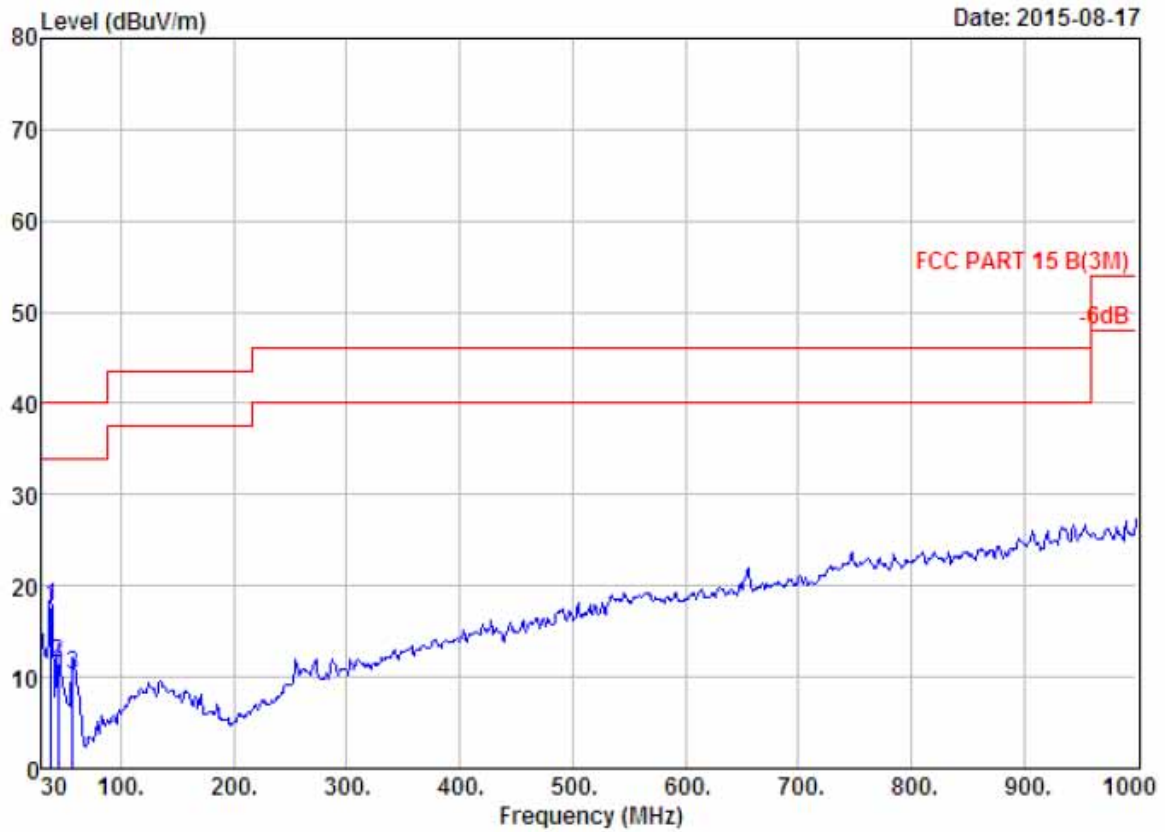


Site no. : 966 1# chamber Data no. : 24
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5776MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	0.79	2.87	17.71	40.00	22.29	QP
2	44.55	10.07	0.85	0.68	11.60	40.00	28.40	QP
3	57.16	5.06	0.99	4.09	10.14	40.00	29.86	QP

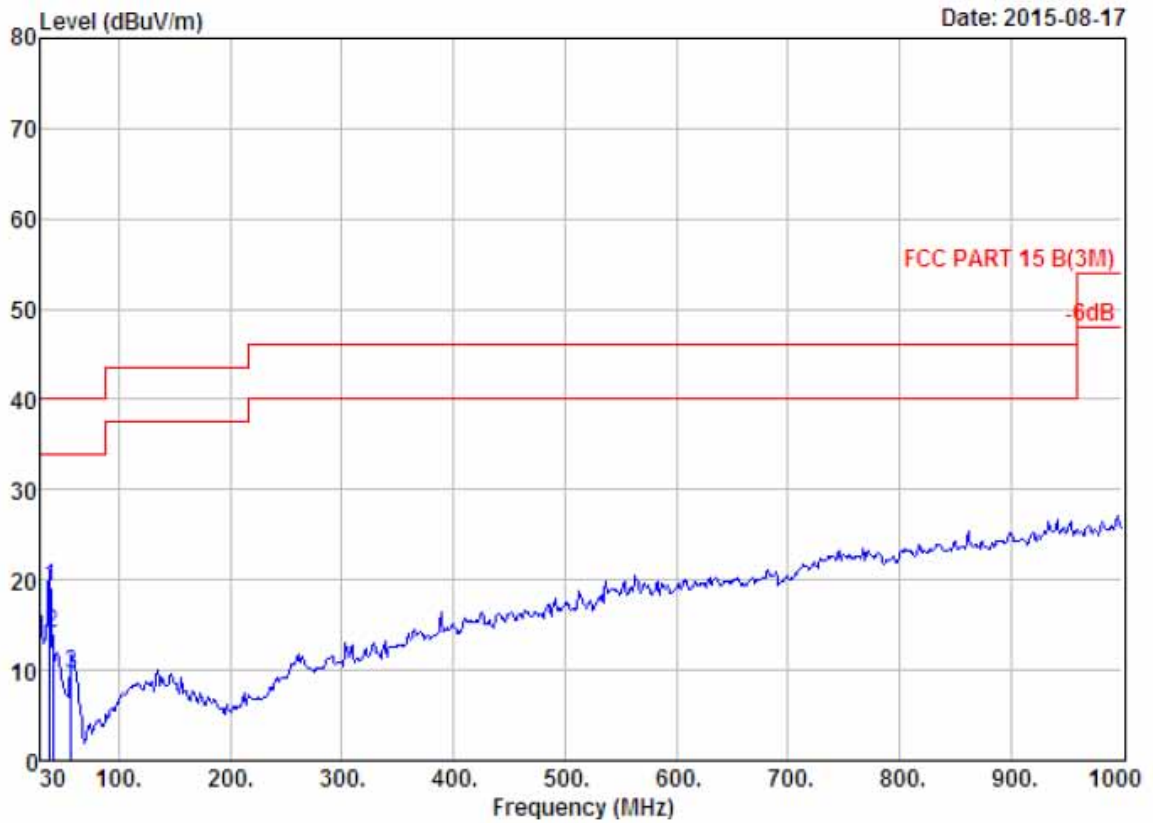

Site no. : 966 1# chamber Data no. : 25
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	0.79	4.27	19.11	40.00	20.89	QP
2	40.67	12.32	0.83	0.84	13.99	40.00	26.01	QP
3	57.16	5.06	0.99	3.60	9.65	40.00	30.35	QP

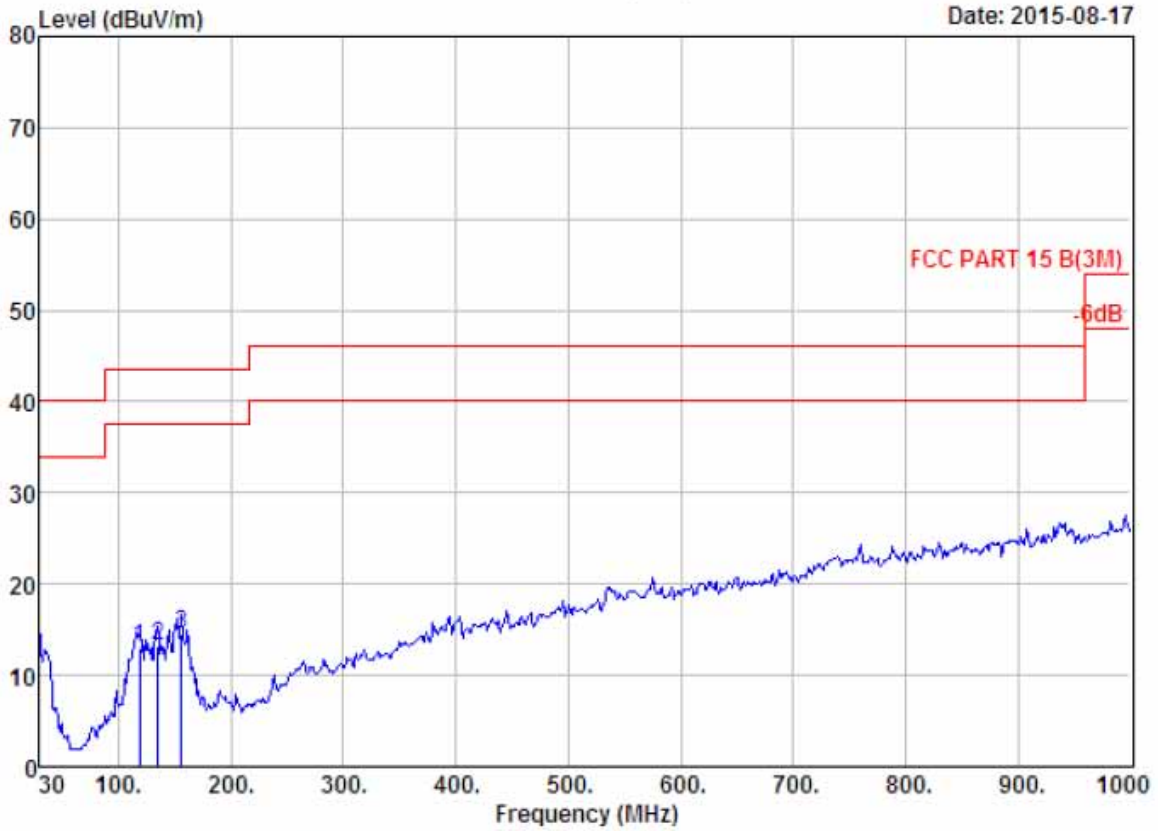


Date: 2015-08-17

Site no. : 966 1# chamber Data no. : 26
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	118.27	11.07	1.45	0.43	12.95	43.50	30.55	QP
2	134.76	11.37	1.57	0.33	13.27	43.50	30.23	QP
3	156.10	10.61	1.67	2.30	14.58	43.50	28.92	QP


1000-18000MHz

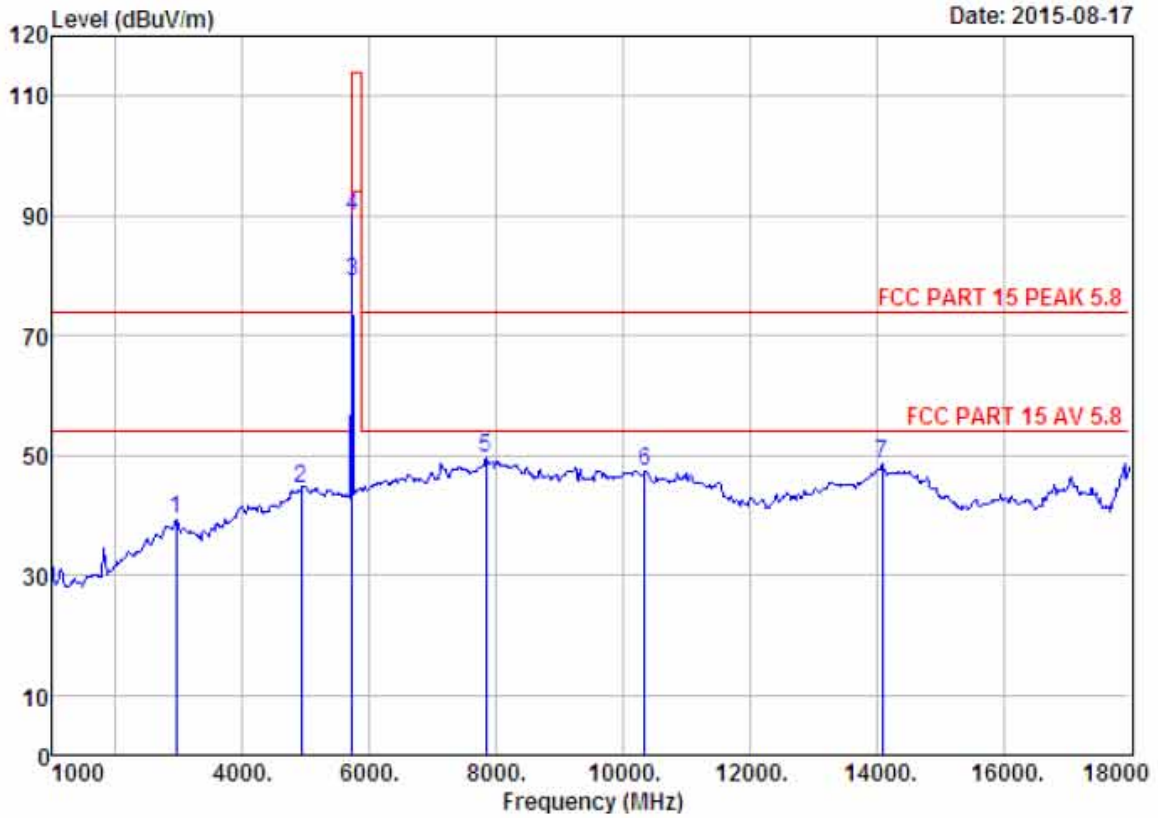

Site no. : 1# 966 chamber Data no. : 91
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK IX 5730MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2955.00	28.12	8.82	33.61	35.93	39.26	74.00	34.74	Peak
2	4927.00	31.45	12.29	31.95	32.66	44.45	74.00	29.55	Peak
3	5730.00	32.27	12.05	32.54	67.10	78.88	94.00	15.12	Average
4	5730.00	32.27	12.05	32.54	77.99	89.77	114.00	24.23	Peak
5	7834.00	36.68	11.47	31.40	32.81	49.56	74.00	24.44	Peak
6	10350.00	38.71	11.39	32.43	29.76	47.43	74.00	26.57	Peak
7	14090.00	41.54	10.91	33.69	29.75	48.51	74.00	25.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

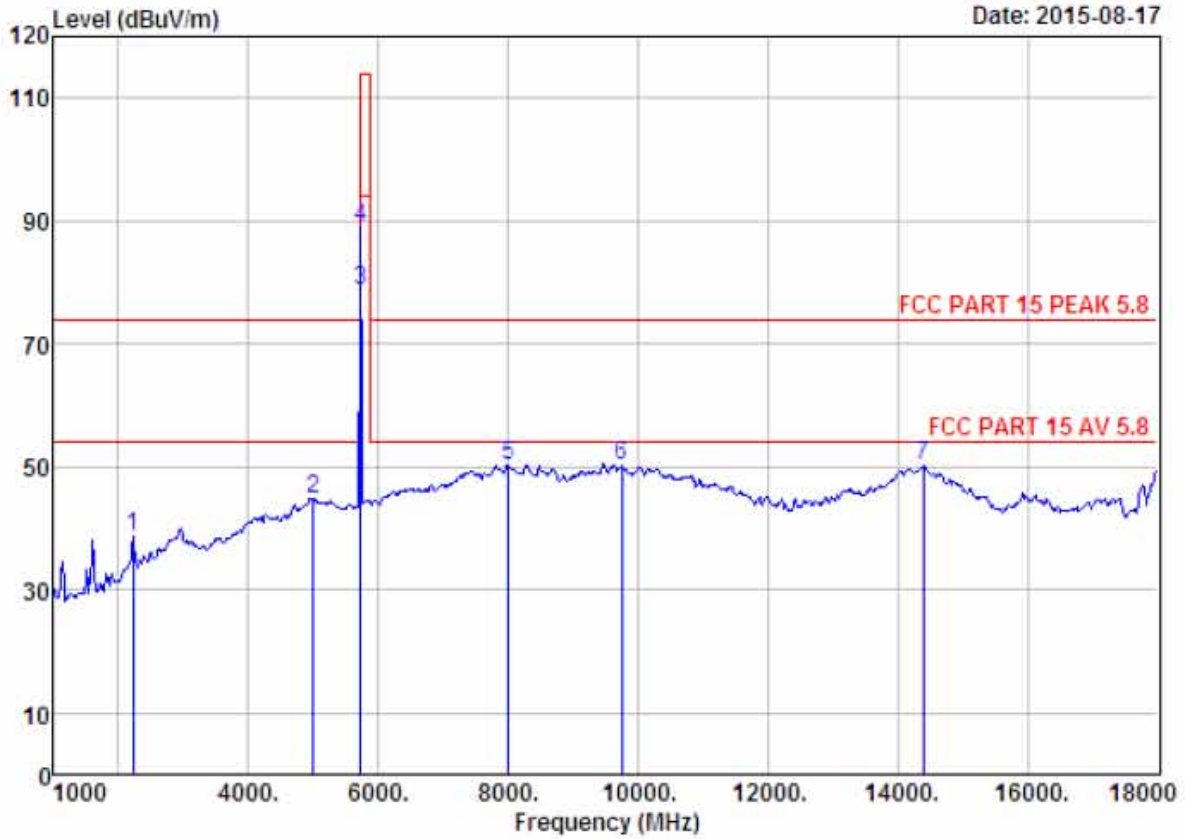

Site no. : 1# 966 chamber Data no. : 92
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5730MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2224.00	27.81	6.43	34.30	38.85	38.79	74.00	35.21	Peak
2	4995.00	31.54	12.59	32.00	32.72	44.85	74.00	29.15	Peak
3	5730.00	32.27	12.05	32.54	66.97	78.75	94.00	15.25	Average
4	5730.00	32.27	12.05	32.54	77.34	89.12	114.00	24.88	Peak
5	8004.00	37.01	11.40	31.22	33.08	50.27	74.00	23.73	Peak
6	9755.00	38.13	11.65	31.86	32.30	50.22	74.00	23.78	Peak
7	14396.00	41.79	10.92	32.83	30.43	50.31	74.00	23.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

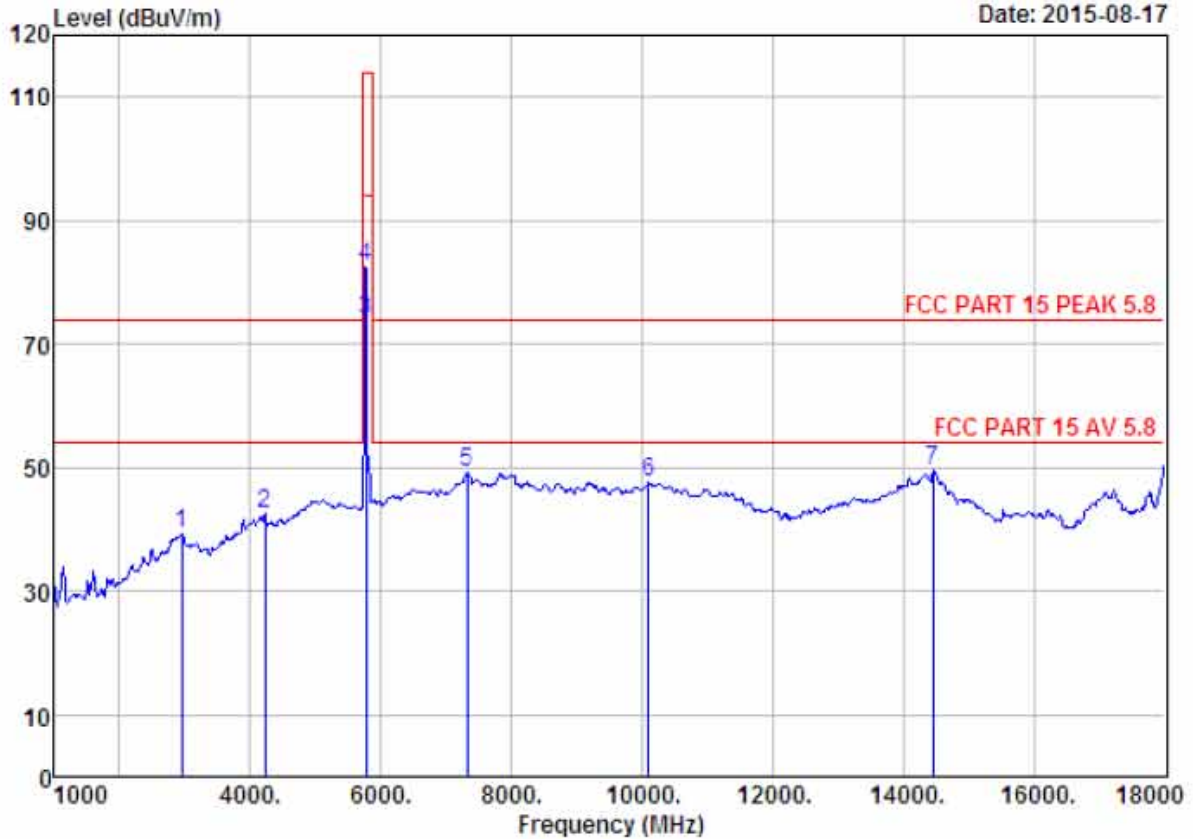

Site no. : 1# 966 chamber Data no. : 101
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5776MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2955.00	28.12	8.82	33.61	36.01	39.34	74.00	34.66	Peak
2	4230.00	30.01	10.67	31.98	33.74	42.44	74.00	31.56	Peak
3	5776.00	32.33	12.06	32.49	62.01	73.91	94.00	20.09	Average
4	5776.00	32.33	12.06	32.49	70.67	82.57	114.00	31.43	Peak
5	7324.00	36.55	11.57	31.99	33.29	49.42	74.00	24.58	Peak
6	10095.00	38.27	11.53	31.95	29.79	47.64	74.00	26.36	Peak
7	14464.00	41.85	10.93	32.96	29.72	49.54	74.00	24.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

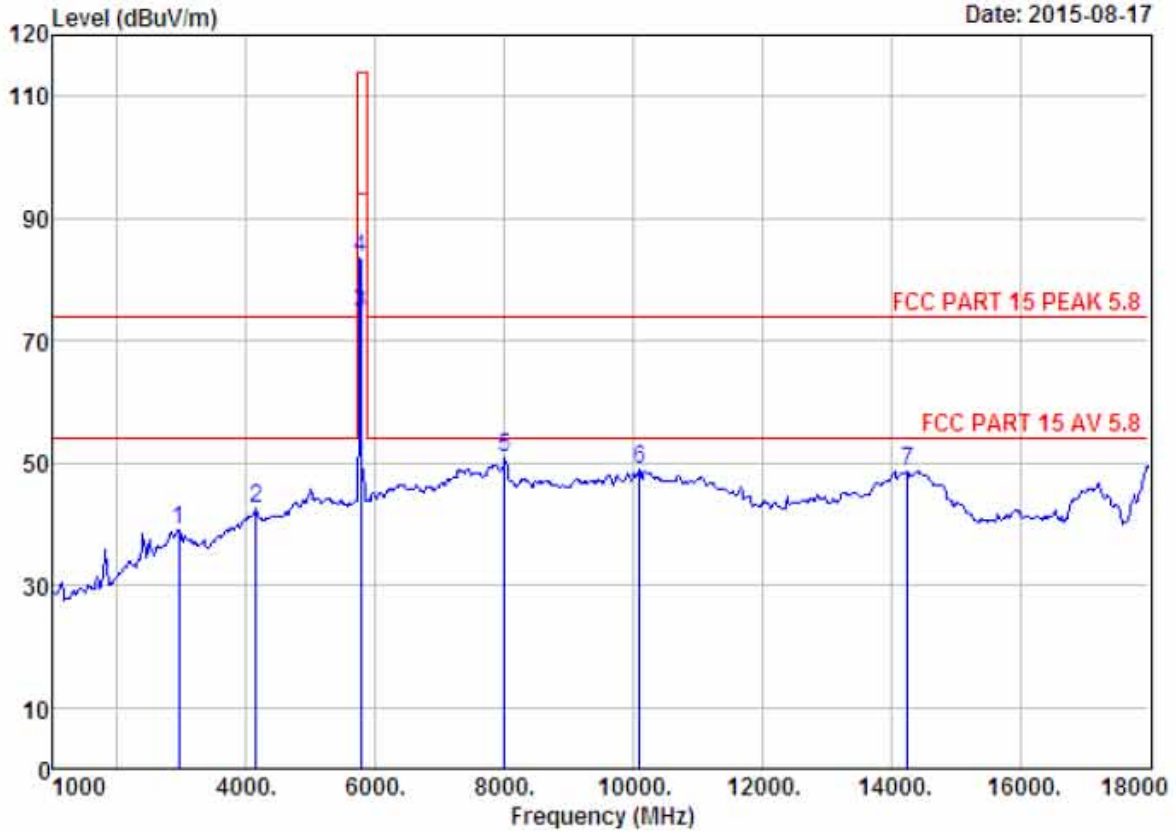

Site no. : 1# 966 chamber Data no. : 102
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5776MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2955.00	28.12	8.82	33.61	35.86	39.19	74.00	34.81	Peak
2	4145.00	29.88	10.75	32.08	33.95	42.50	74.00	31.50	Peak
3	5776.00	32.33	12.06	32.49	62.55	74.45	94.00	19.55	Average
4	5776.00	32.33	12.06	32.49	71.58	83.48	114.00	30.52	Peak
5	8004.00	37.01	11.40	31.22	33.56	50.75	74.00	23.25	Peak
6	10095.00	38.27	11.53	31.95	31.20	49.05	74.00	24.95	Peak
7	14260.00	41.68	10.92	33.19	29.30	48.71	74.00	25.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

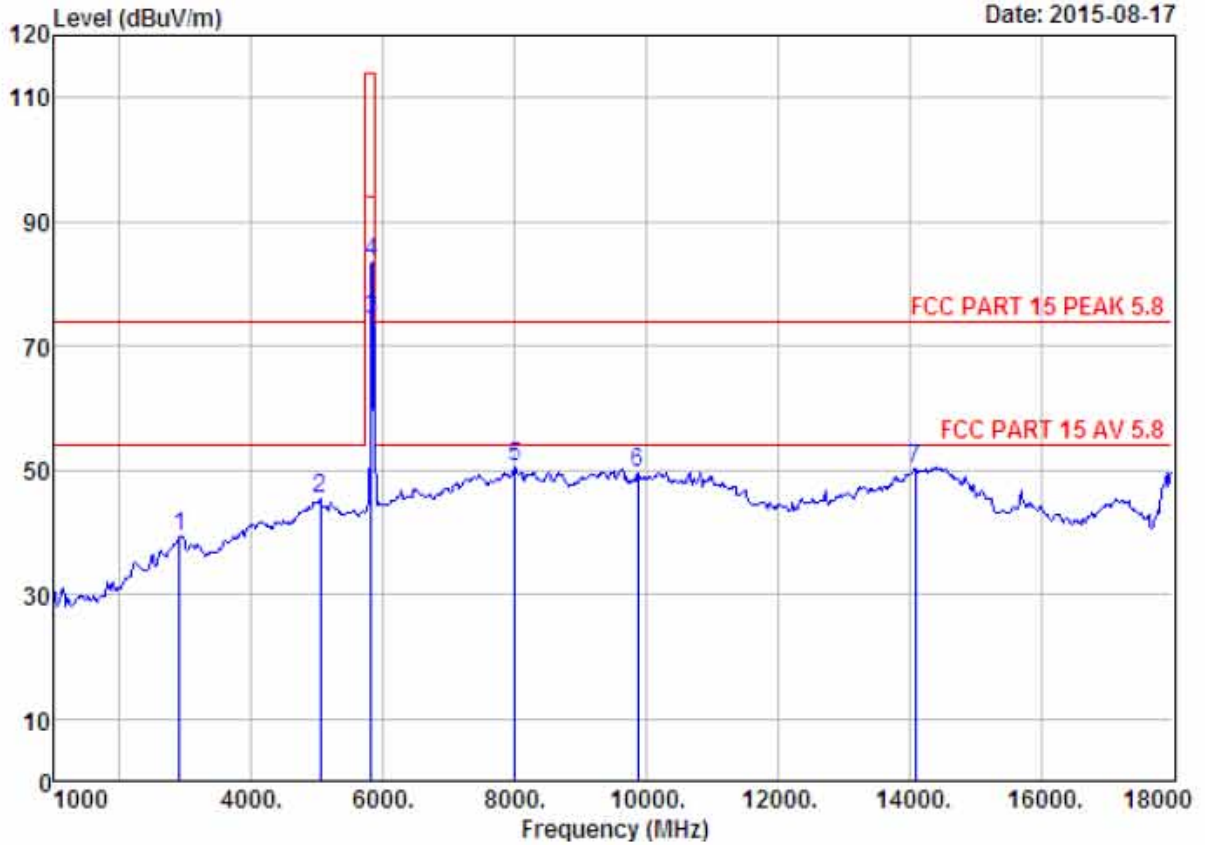

Site no. : 1# 966 chamber Data no. : 103
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2904.00	28.01	8.59	33.66	36.57	39.51	74.00	34.49	Peak
2	5046.00	31.57	12.53	32.08	33.36	45.38	74.00	28.62	Peak
3	5824.00	32.42	12.08	32.42	62.10	74.18	94.00	19.82	Average
4	5824.00	32.42	12.08	32.42	71.51	83.59	114.00	30.41	Peak
5	8004.00	37.01	11.40	31.22	33.35	50.54	74.00	23.46	Peak
6	9874.00	38.15	11.62	31.77	31.75	49.75	74.00	24.25	Peak
7	14090.00	41.54	10.91	33.69	31.59	50.35	74.00	23.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

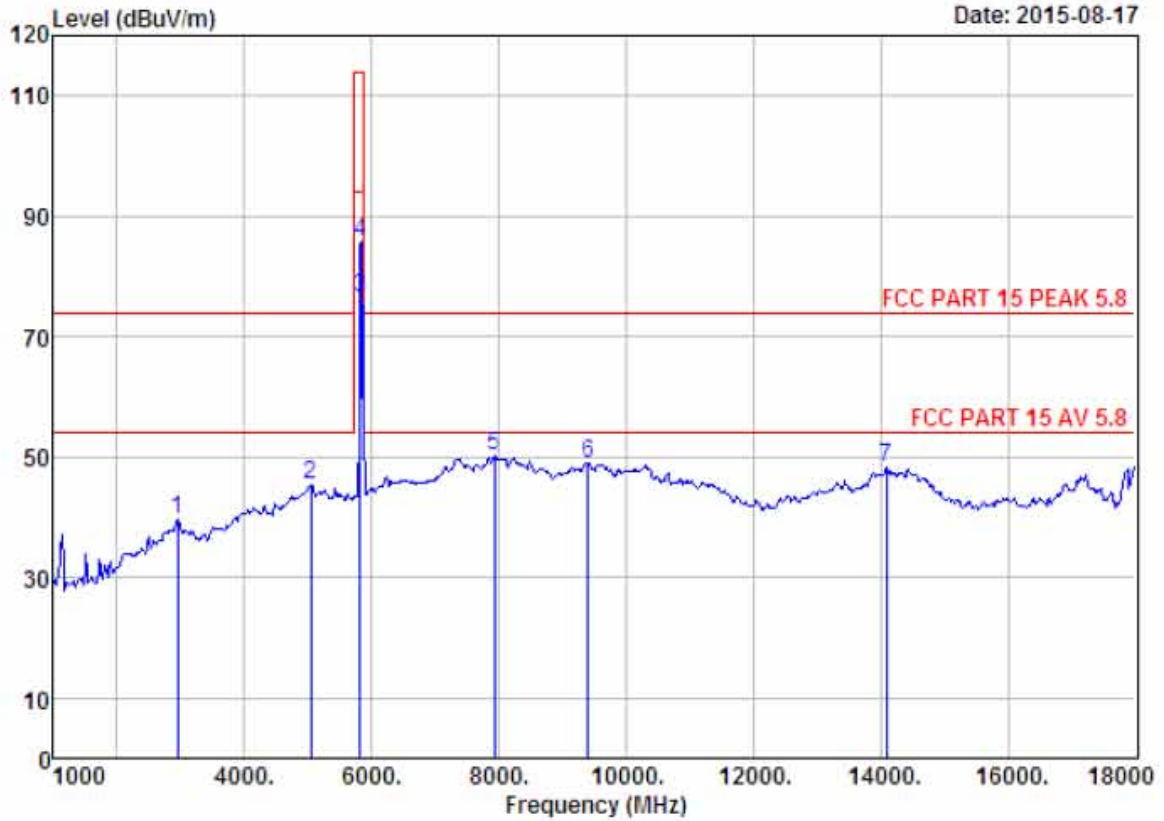

Site no. : 1# 966 chamber Data no. : 104
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2955.00	28.12	8.82	33.61	36.33	39.66	74.00	34.34	Peak
2	5046.00	31.57	12.53	32.08	33.40	45.42	74.00	28.58	Peak
3	5824.00	32.42	12.08	32.42	64.26	76.34	94.00	17.66	Average
4	5824.00	32.42	12.08	32.42	73.73	85.81	114.00	28.19	Peak
5	7936.00	36.88	11.43	31.28	33.24	50.27	74.00	23.73	Peak
6	9398.00	38.08	11.66	32.00	31.15	48.89	74.00	25.11	Peak
7	14090.00	41.54	10.91	33.69	29.42	48.18	74.00	25.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

4. 20 DB BANDWIDTH

4.1. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.2. Test Result


EUT: Levitation Bluetooth Speaker				
M/N: L141				
Test date: 2015-08-22		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
TX	5730	2.486	/	PASS
	5776	2.521	/	PASS
	5824	2.554	/	PASS

4.3. Test Data

GFSK TX 5730 MHz

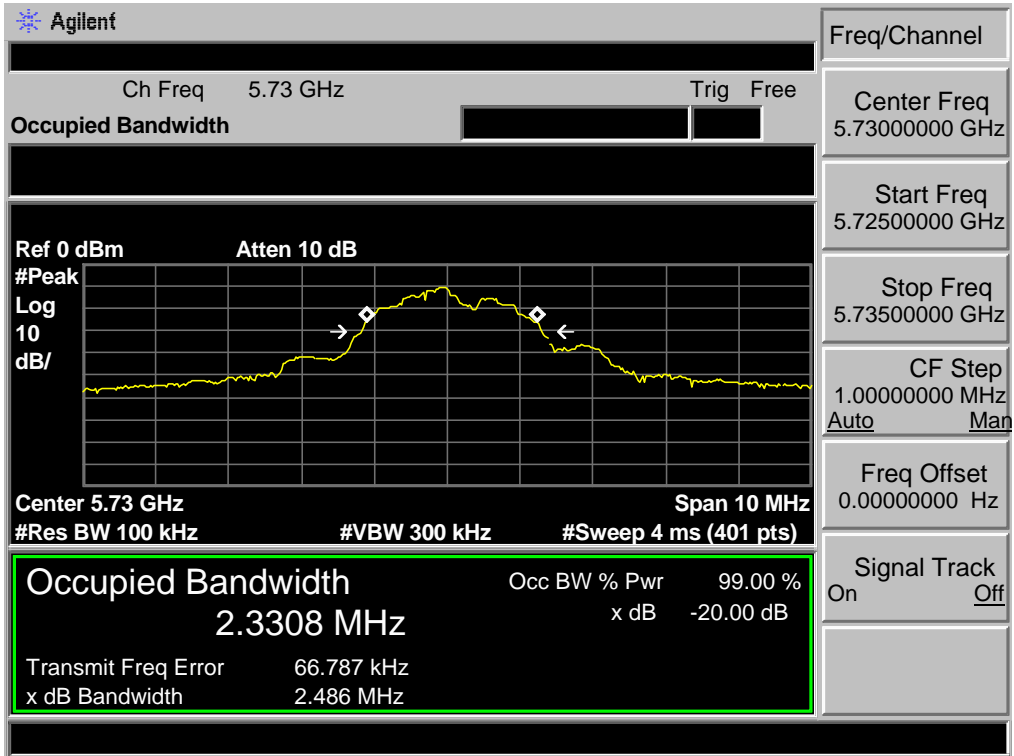

GFSK TX 5776 MHz

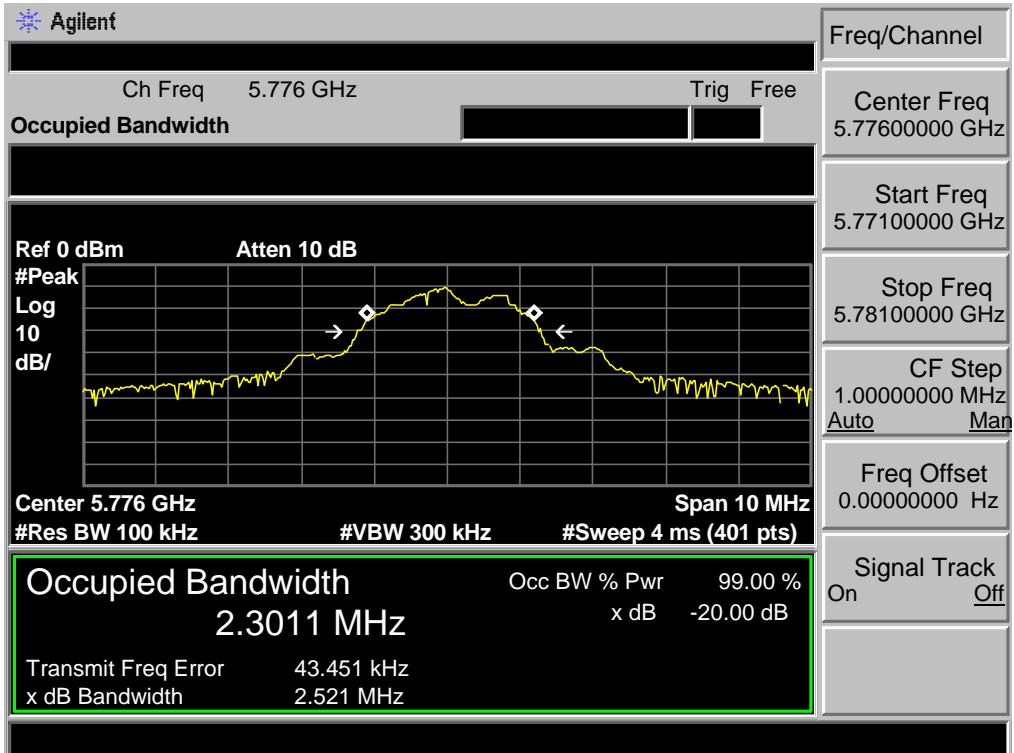

GFSK TX 5776 MHz

Agilent

Freq/Channel
 Center Freq 5.82400000 GHz
 Start Freq 5.81900000 GHz
 Stop Freq 5.82900000 GHz
 CF Step 1.00000000 MHz
 Auto Man
 Freq Offset 0.00000000 Hz
 Signal Track On Off

Ch Freq 5.824 GHz
 Trig Free

Occupied Bandwidth

Ref 0 dBm Atten 10 dB


#Peak
Log
10
dB/

Center 5.824 GHz Span 10 MHz
#Res BW 100 kHz #VBW 300 kHz #Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
2.4001 MHz	x dB	-20.00 dB
Transmit Freq Error	33.197 kHz	
x dB Bandwidth	2.554 MHz	

5. BAND EDGE COMPLIANCE

5.1. Block Diagram of Test setup

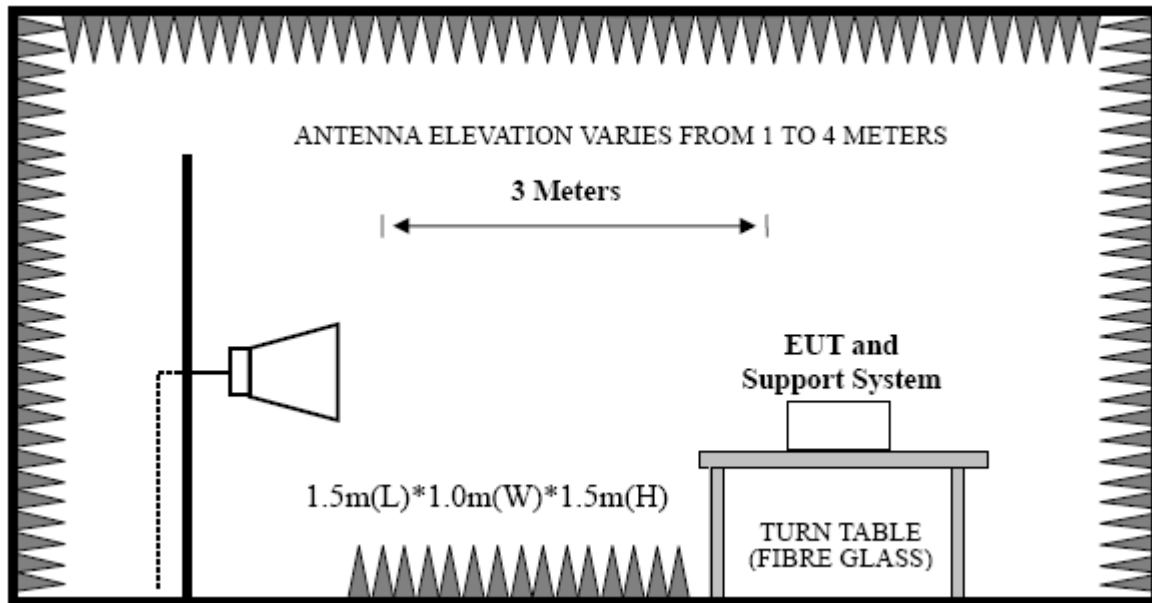

5.2. Test Procedure

EUT was placed on a turn table, which is 1.5 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto .


5.3. Test Result

Pass (The testing data was attached in the next pages.)

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 5730MHz 、 5776MHz and 5824MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

5.4. Test Data

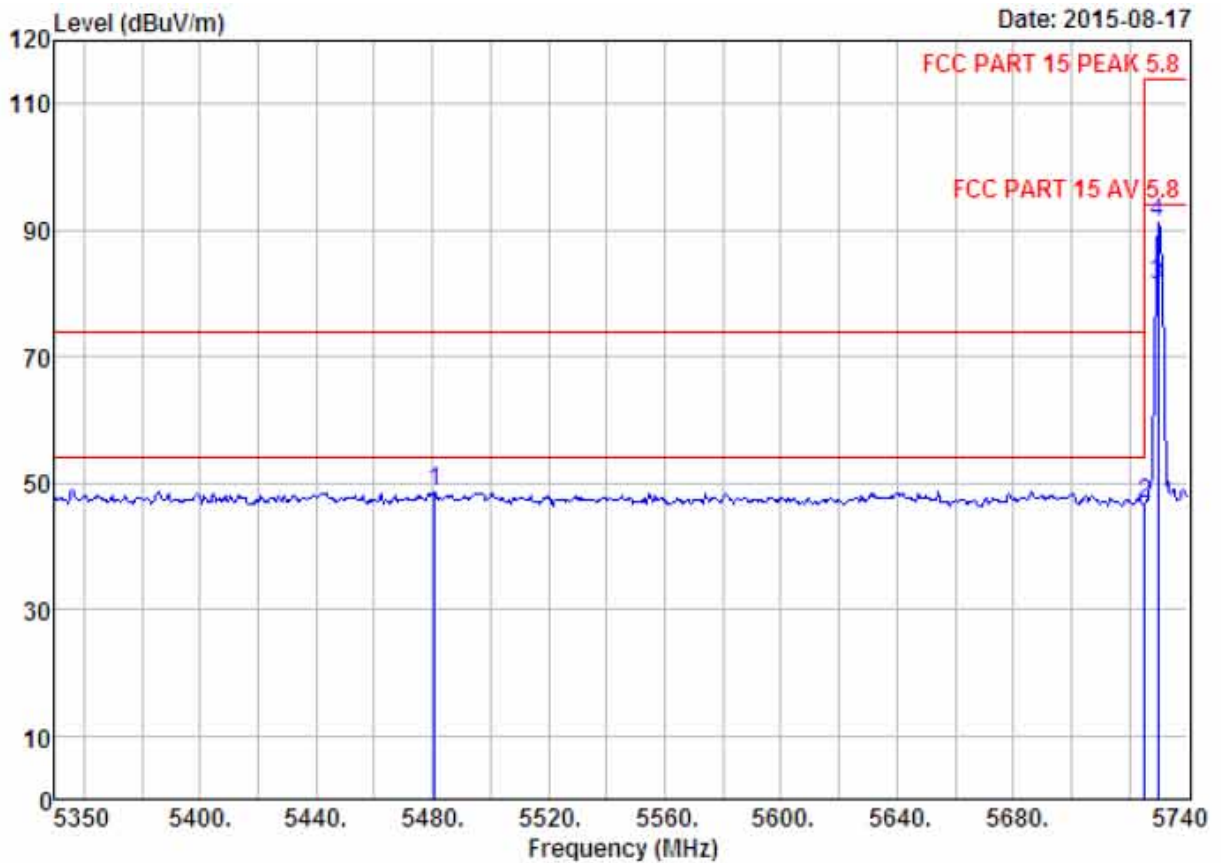


```

Site no.       : 1# 966 chamber           Data no.   : 93
Dis. / Ant.   : 3m ANT 1-18G           Ant. pol.  : VERTICAL
Limit         : FCC PART 15 PEAK 5.8
Env. / Ins.   : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer      : Tony
EUI           : Levitation Bluetooth Speaker
Power         : DC 3.7V
M/N           : L141
Test Mode     : GFSK TX 5730MHz
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5480.65	31.85	12.01	32.55	37.34	48.65	74.00	25.35	Peak
2	5725.18	32.24	12.05	32.56	35.15	46.88	114.00	67.12	Peak
3	5729.86	32.27	12.05	32.54	69.50	81.28	94.00	12.72	Average
4	5729.86	32.27	12.05	32.54	79.44	91.22	114.00	22.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

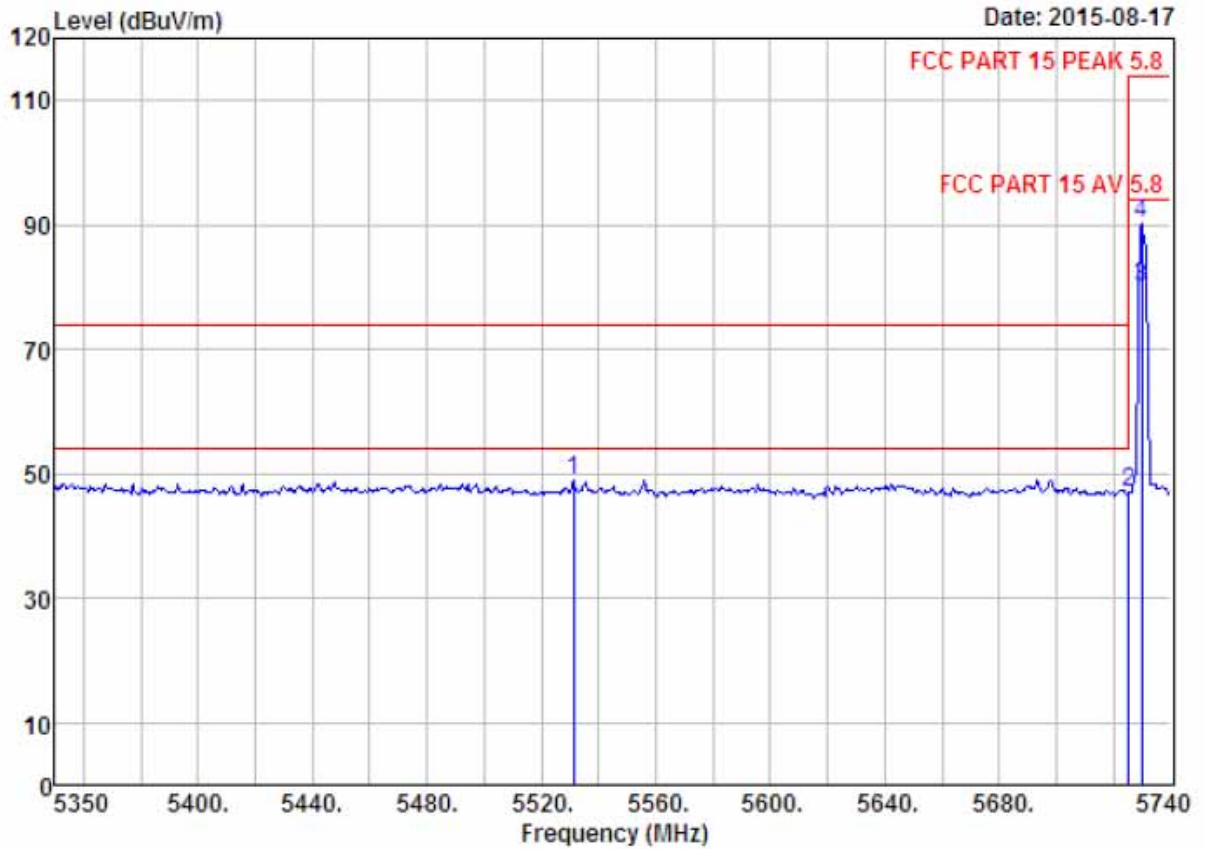

Site no. : 1# 966 chamber Data no. : 94
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUI : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5730MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5531.35	31.92	12.00	32.61	37.58	48.89	74.00	25.11	Peak
2	5725.18	32.24	12.05	32.56	35.40	47.13	114.00	66.87	Peak
3	5729.86	32.27	12.05	32.54	68.32	80.10	94.00	13.90	Average
4	5729.86	32.27	12.05	32.54	78.45	90.23	114.00	23.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

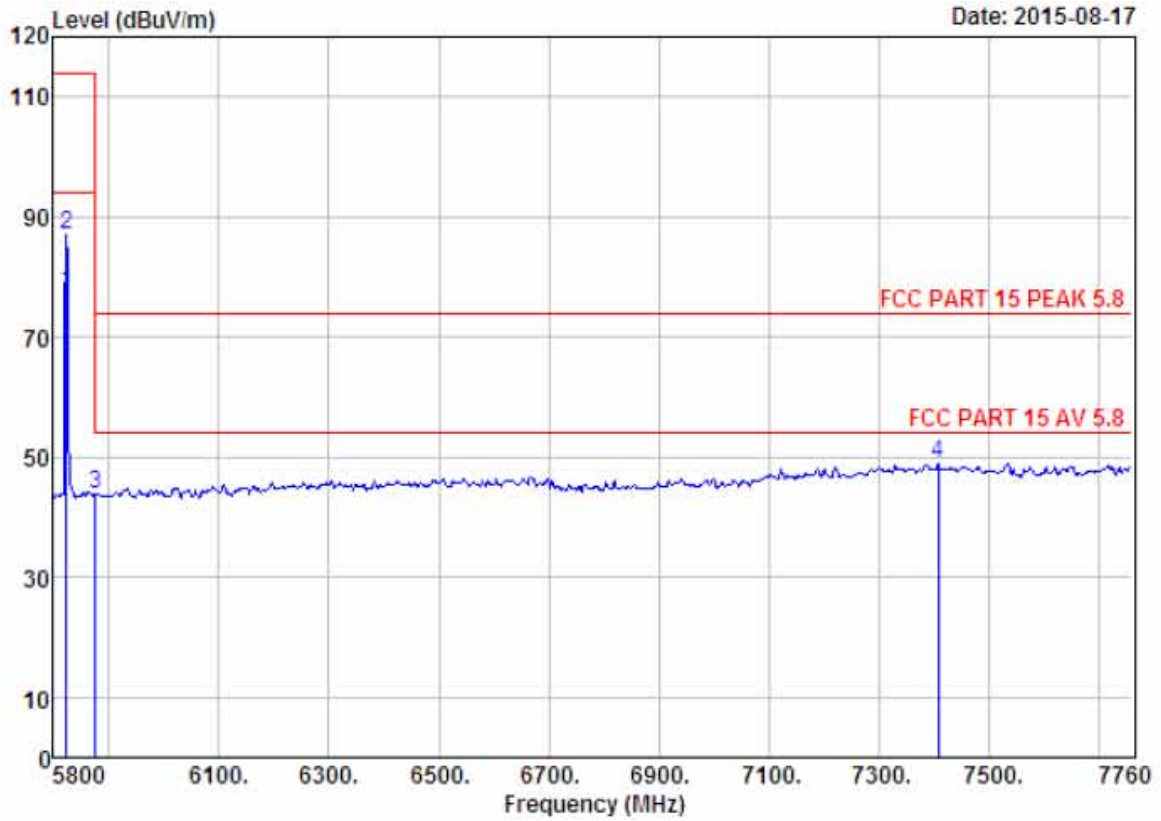

Site no. : 1# 966 chamber Data no. : 105
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5823.52	32.42	12.08	32.42	65.36	77.44	94.00	16.56	Average
2	5823.52	32.42	12.08	32.42	74.93	87.01	114.00	26.99	Peak
3	5876.44	32.53	12.09	32.36	31.43	43.69	74.00	30.31	Peak
4	7407.20	36.58	11.60	31.97	32.68	48.89	74.00	25.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

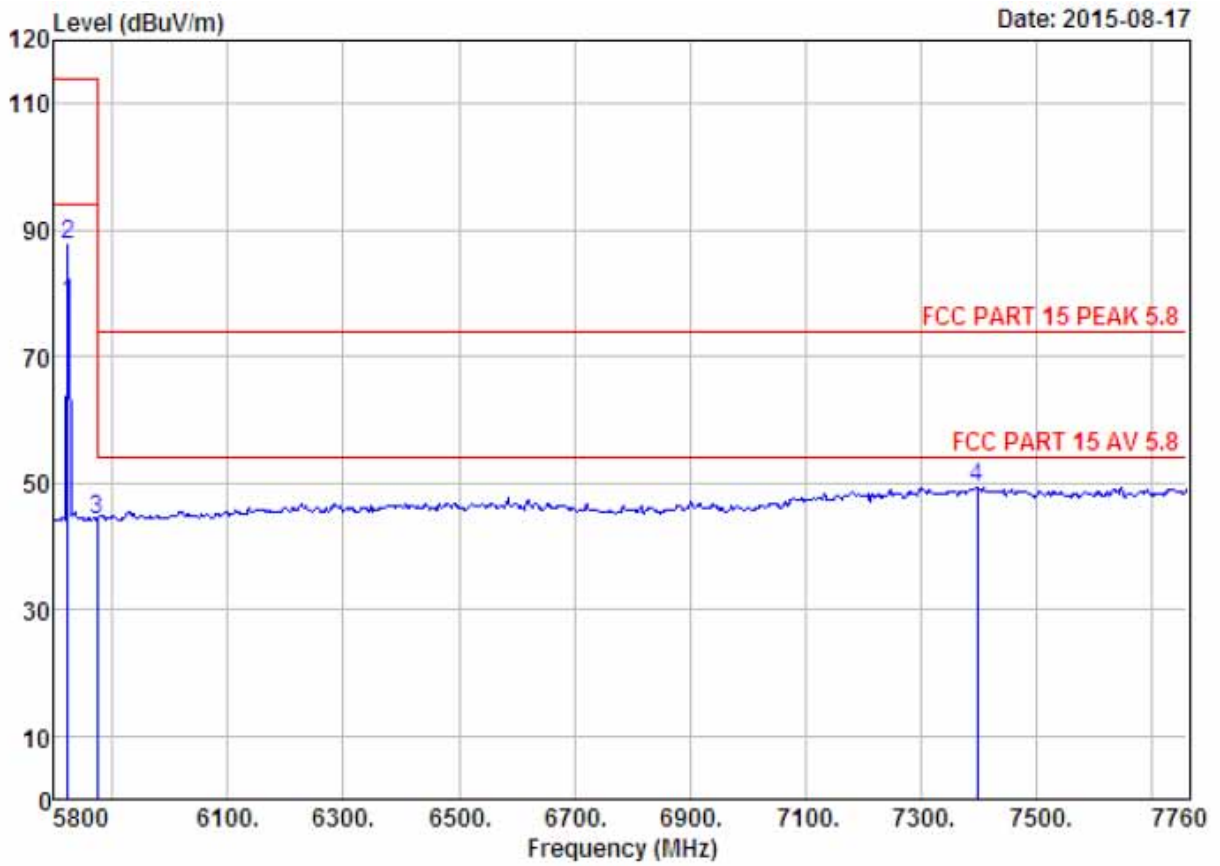

Site no. : 1# 966 chamber Data no. : 106
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 5.8
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Levitation Bluetooth Speaker
 Power : DC 3.7V
 M/N : L141
 Test Mode : GFSK TX 5824MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5823.52	32.42	12.08	32.42	66.36	78.44	94.00	15.56	Average
2	5823.52	32.42	12.08	32.42	75.56	87.64	114.00	26.36	Peak
3	5874.48	32.53	12.09	32.36	31.88	44.14	114.00	69.86	Peak
4	7397.40	36.58	11.59	31.97	33.16	49.36	74.00	24.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

6. ANTENNA REQUIREMENTS

6.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.2. Result


The antennas used for this product are ceramic chip antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 3.05dBi.

7. TEST SETUP PHOTO

Radiated Test (30-1000 MHz)

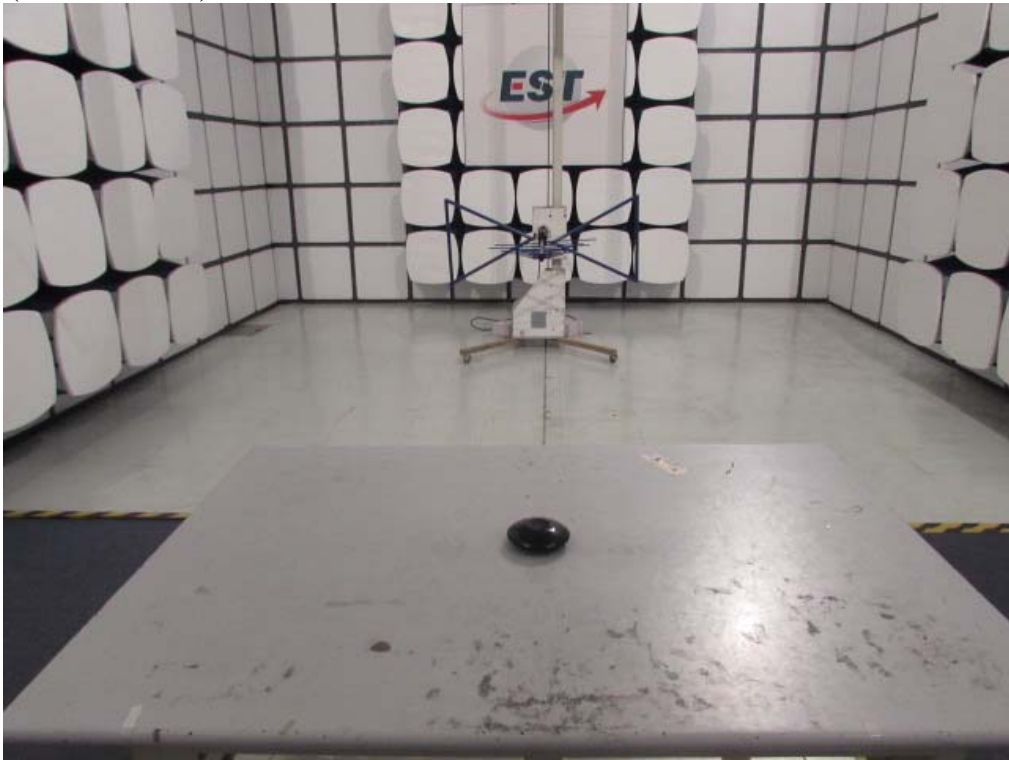


Radiated Test (Above 1GHz)

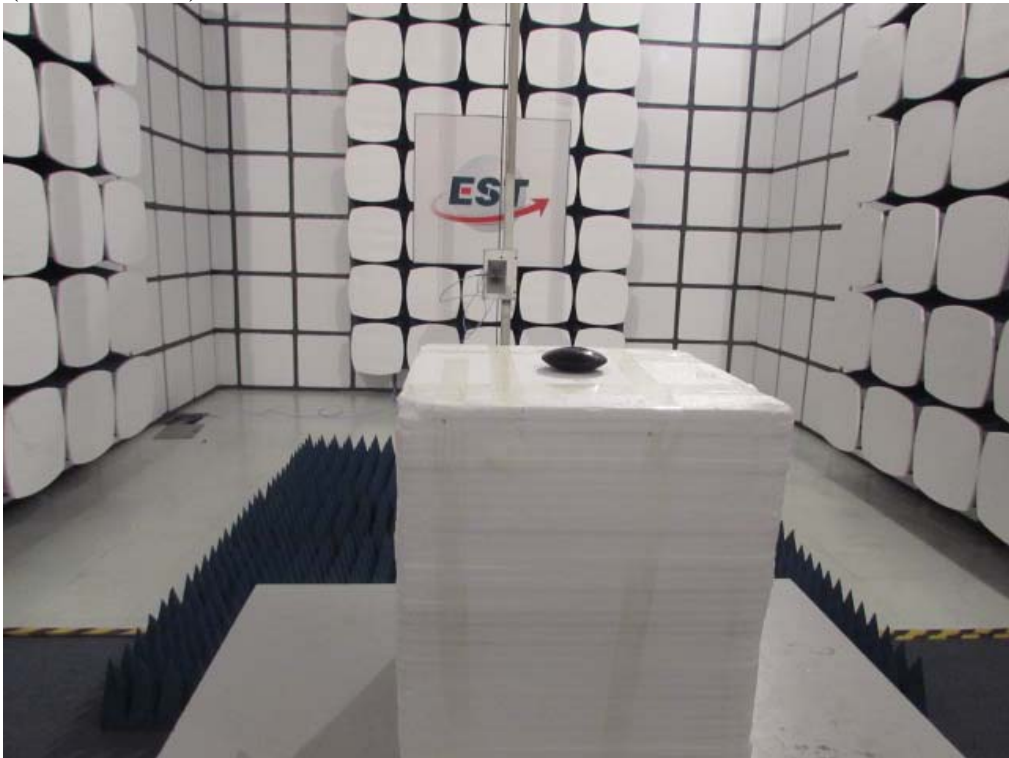

8. PHOTOS OF EUT

External Photos



M/N: L141

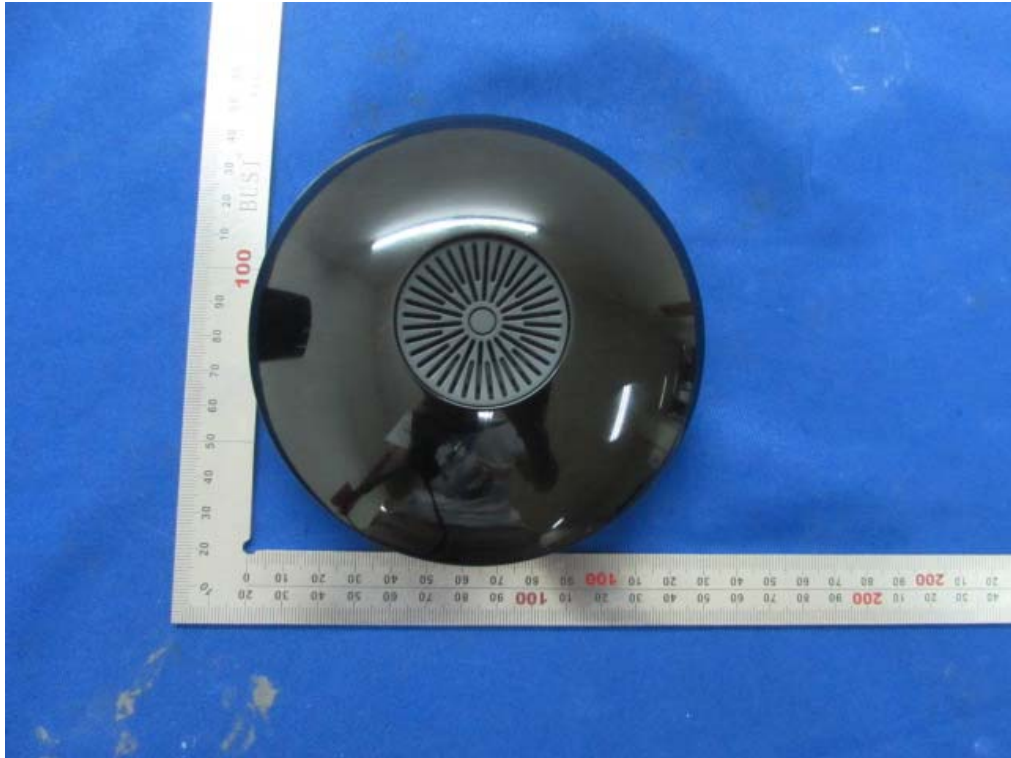



External Photos
M/N: L141




Internal Photos
M/N: L141

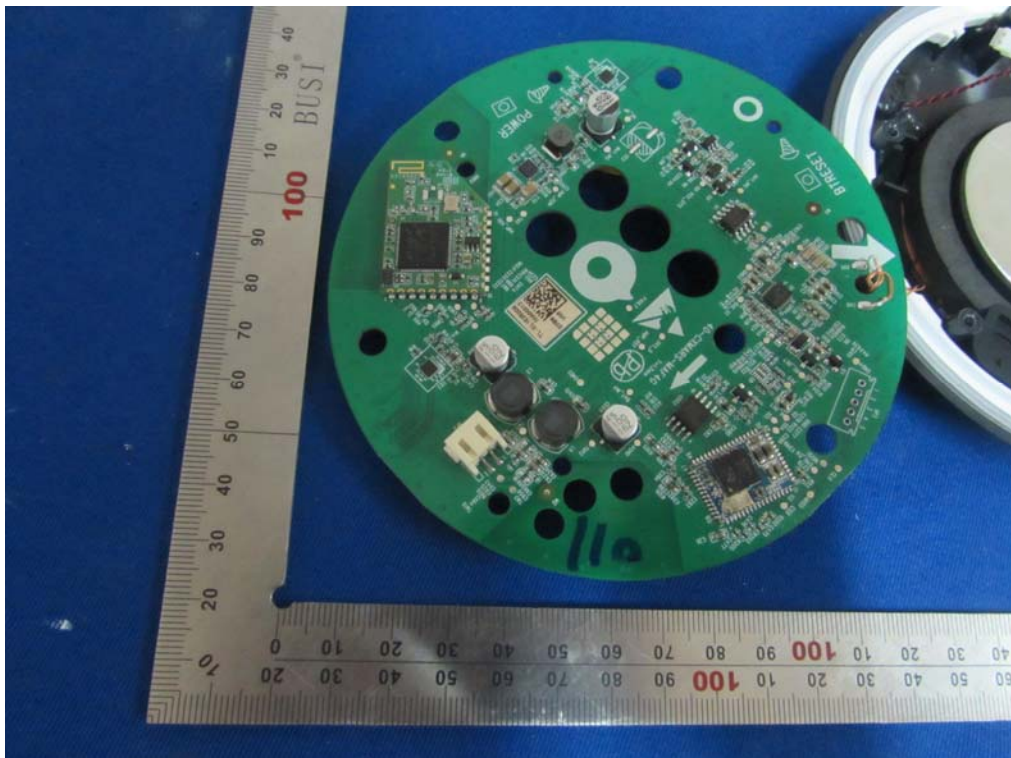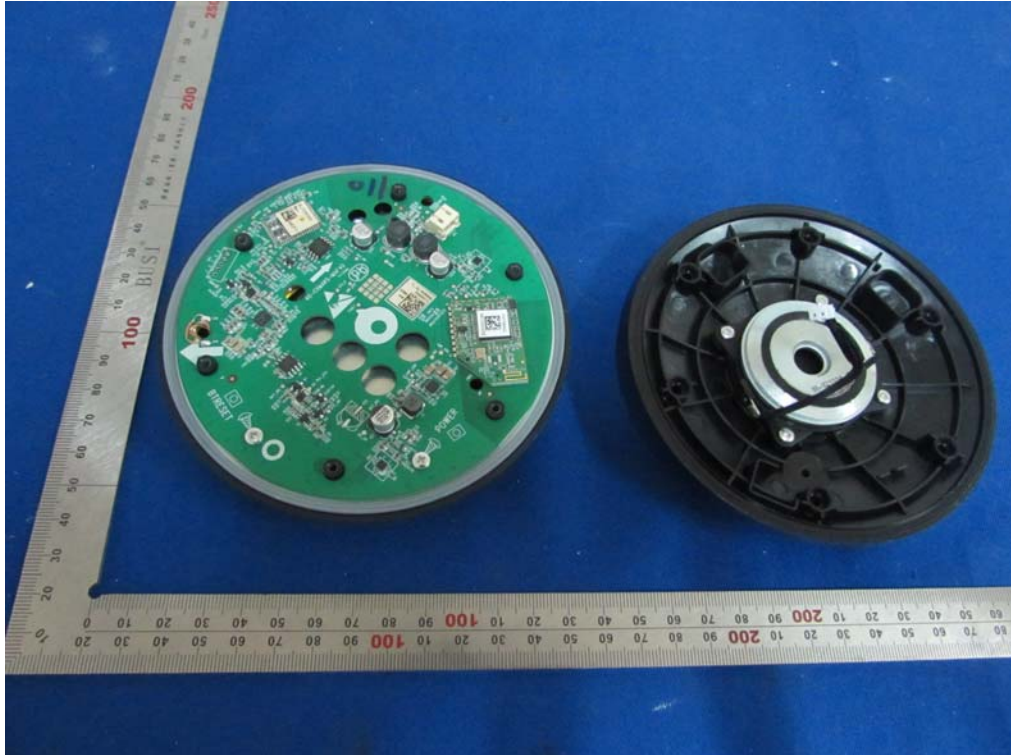


Internal Photos
M/N: L141

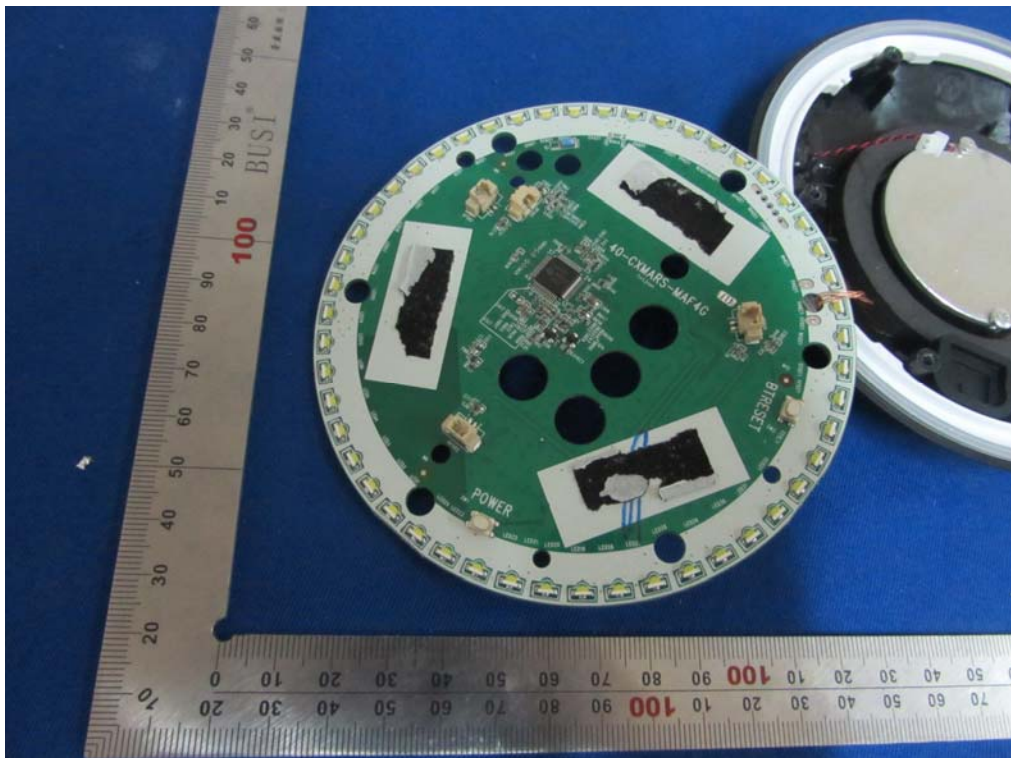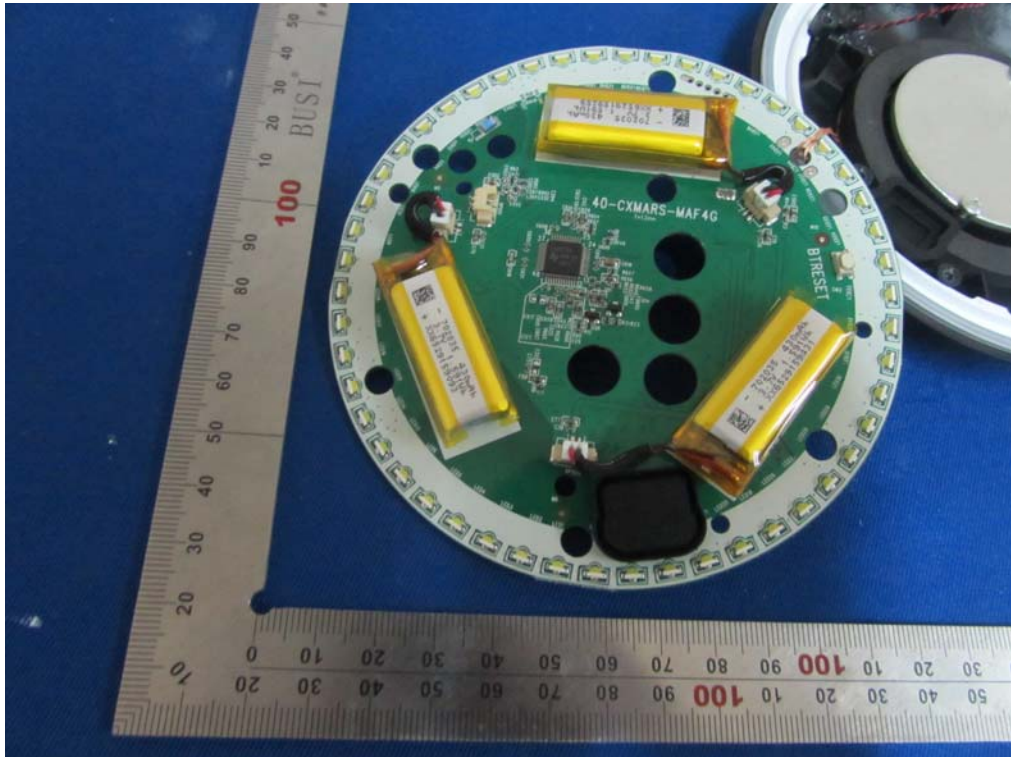


Internal Photos
M/N: L141

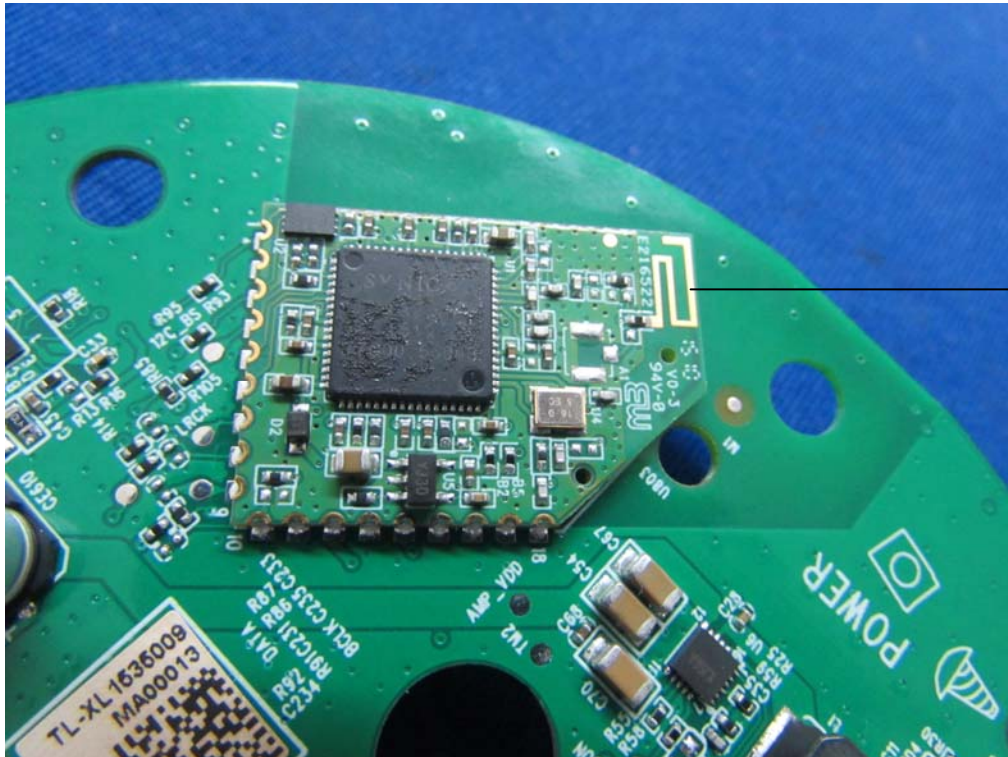

5.8G
Antenna

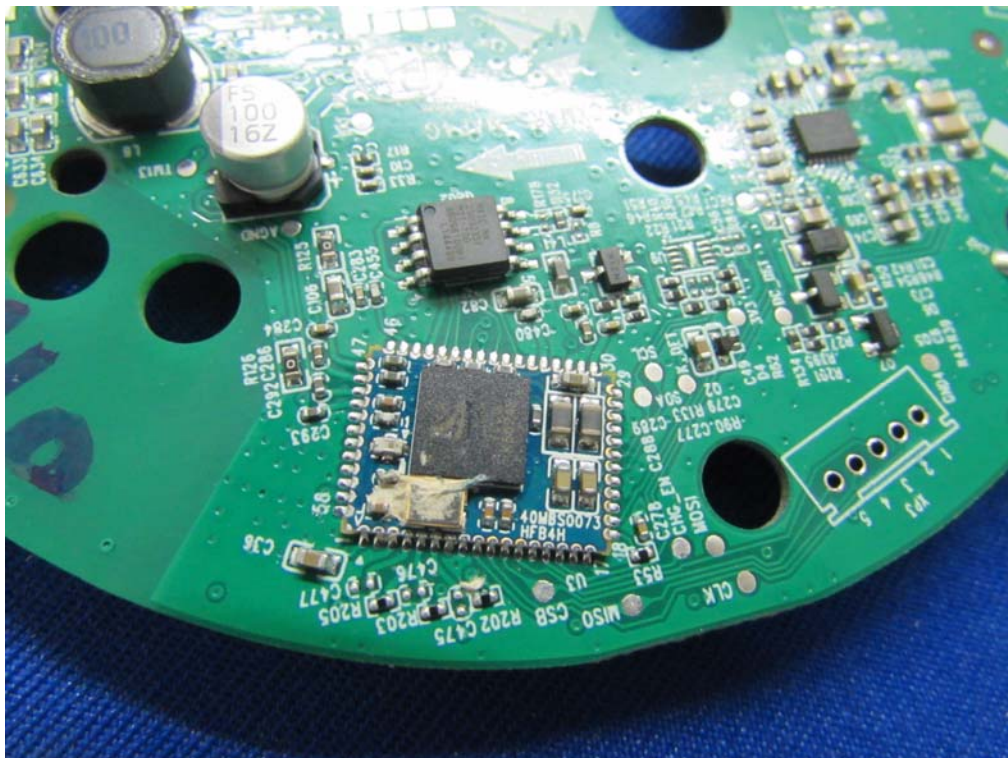

Internal Photos
M/N: L141

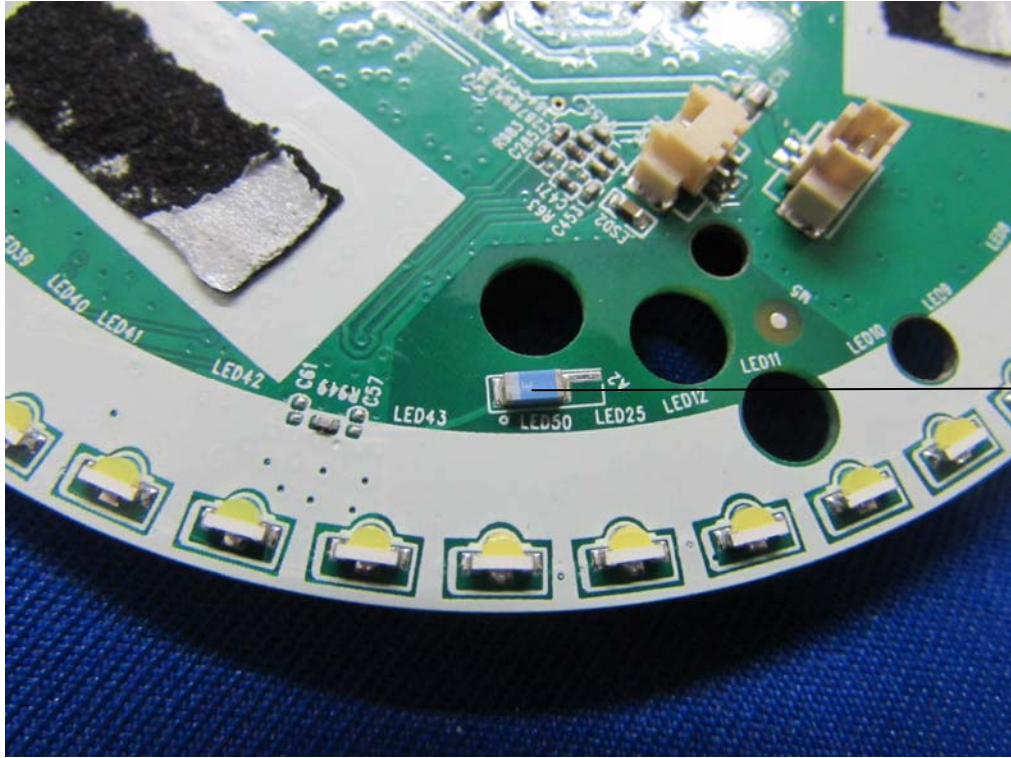

Bluetooth
Ceramic
Chip
Antenna



Internal Photos
M/N: L141

