

FCC PART 15.247
TEST REPORT

For

invoxia

87 rue du Gouverneur General Eboue, Issy-Les-Moulineaux, France

FCC ID: ZVS-E169

Report Type: Original Report	Product Type: Desktop phone (Bluetooth device)
Test Engineer: Gardon Zhang	<i>Gardon Zhang</i>
Report Number: RSZ131209004-00	
Report Date: 2013-12-25	
Reviewed By: Jimmy Xiao RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD.....	9
RESULT.....	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION.....	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	11
APPLICABLE STANDARD.....	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION.....	12
TEST RESULTS SUMMARY.....	13
TEST DATA.....	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD.....	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	17
TEST PROCEDURE.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY.....	18
TEST DATA.....	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST.....	21
APPLICABLE STANDARD.....	21
TEST PROCEDURE.....	21
TEST EQUIPMENT LIST AND DETAILS.....	21

TEST DATA21

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....28

 APPLICABLE STANDARD28

 TEST PROCEDURE28

 TEST EQUIPMENT LIST AND DETAILS.....28

 TEST DATA28

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST34

 APPLICABLE STANDARD34

 TEST PROCEDURE34

 TEST EQUIPMENT LIST AND DETAILS.....34

 TEST DATA34

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....37

 APPLICABLE STANDARD37

 TEST PROCEDURE37

 TEST EQUIPMENT LIST AND DETAILS.....37

 TEST DATA37

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT53

 APPLICABLE STANDARD53

 TEST PROCEDURE53

 TEST EQUIPMENT LIST AND DETAILS.....53

 TEST DATA53

FCC §15.247(d) - BAND EDGES TESTING59

 APPLICABLE STANDARD59

 TEST PROCEDURE59

 TEST EQUIPMENT LIST AND DETAILS.....59

 TEST DATA59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *invoxia*'s product, model number: *E169* (FCC ID: *ZVS-E169*) or the "EUT" in this report was a Desktop phone (Bluetooth device), named as *DTP2* by applicant, which was measured approximately: 29.2 cm (L) x 11.5 cm (W) x 6.0 cm (H), rated with input voltage: DC 12 V from adapter.

Adapter Information: AC ADAPTOR
Model: KSAP0361200300D5
Input: 100-240V~50/60Hz, 0.8A
Output: DC 12.0V, 3.0A

** All measurement and test data in this report was gathered from production sample serial number: YYIEWWDXXXXX (Assigned by applicant). The EUT supplied by the applicant was received on 2013-12-09.*

Objective

This test report is prepared on behalf of *invoxia* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15B JBP submissions with FCC ID: ZVS-E169.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was controlled by the test software.

EUT Exercise Software

Heiko Sommerfeldt, PhonerLite 2.10 provided by manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N750J	Laptop	N750J	N/A
Logitech	Wireless Mouse	M305	N/A
APPLE	iPhone 4	N/A	N/A
NETGEAR Inc	PoE	Prosafe 8 GS108P	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielding Detachable RJ45 Cable	1.5	Laptop	PoE
Unshielding Detachable RJ45 Cable	1.5	PoE	EUT
Shielding Undetachable Adapter Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

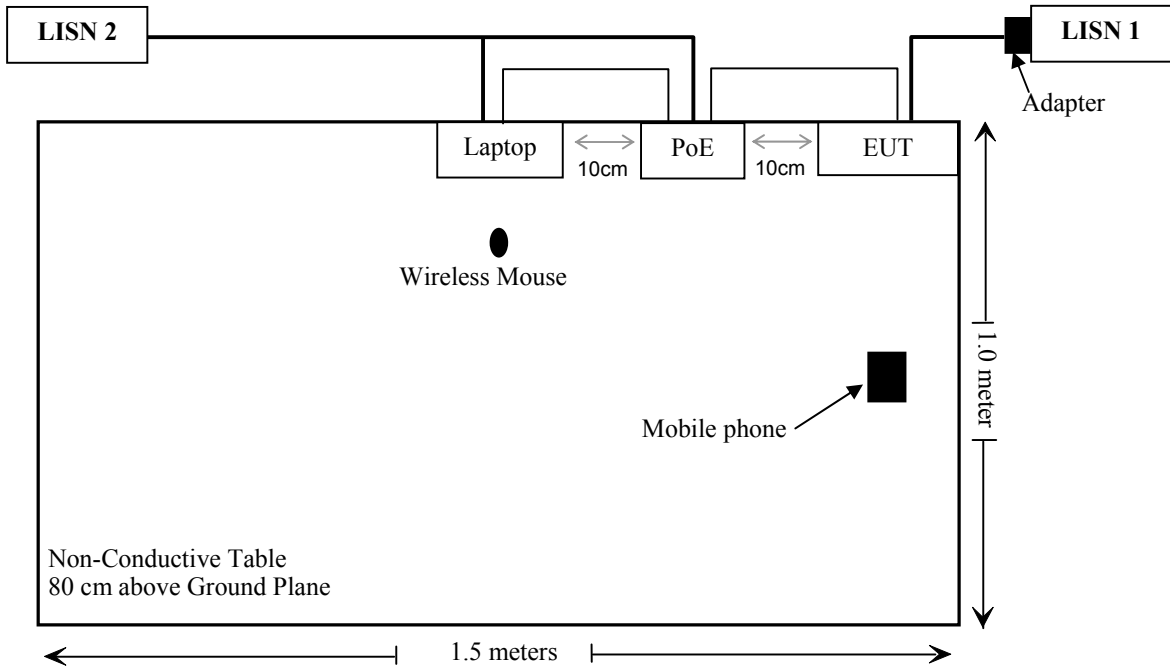

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2441	1.0	1.26	1.15	1.30	20	0.000326	1

Note: To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one monopole antenna arrangement for bluetooth, which was permanently attached and the antenna gain is 1dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

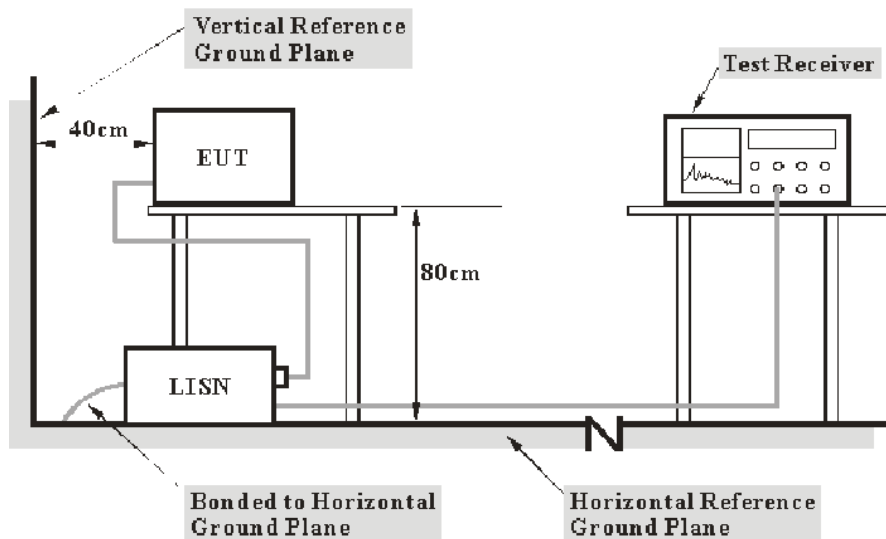

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	1 st LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	2 nd LISN	ESH2-Z5	892107/021	2013-08-22	2014-08-22
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.5 dB at 2.402000 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in BACL., $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Gardon Zhang on 2013-12-11.

EUT operation mode: Transmitting

AC 120 V, 60 Hz, Line:


EMI Auto Test L

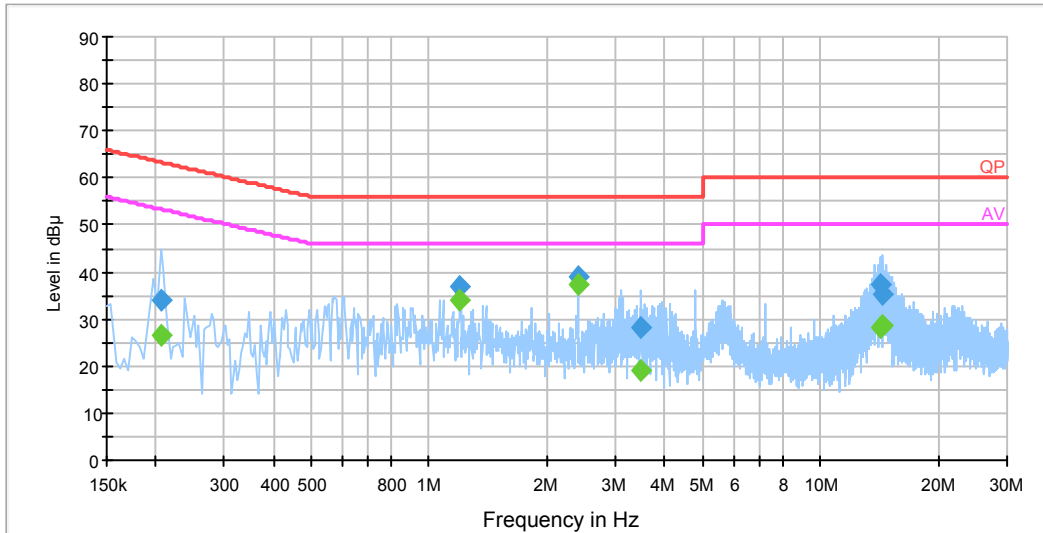

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
2.402000	37.5	19.6	46.0	8.5	Ave.
1.202000	34.0	19.5	46.0	12.0	Ave.
2.402000	39.1	19.6	56.0	16.9	QP
1.202000	36.8	19.5	56.0	19.2	QP
14.466000	28.8	19.8	50.0	21.2	Ave.
14.210000	28.4	19.8	50.0	21.6	Ave.
14.210000	37.5	19.8	60.0	22.5	QP
14.466000	35.2	19.8	60.0	24.8	QP
0.206000	26.6	19.6	53.4	26.8	Ave.
3.490000	18.9	19.7	46.0	27.1	Ave.
3.490000	28.4	19.7	56.0	27.6	QP
0.206000	33.9	19.6	63.4	29.5	QP

AC 120V, 60 Hz, Neutral:

EMI Auto Test N

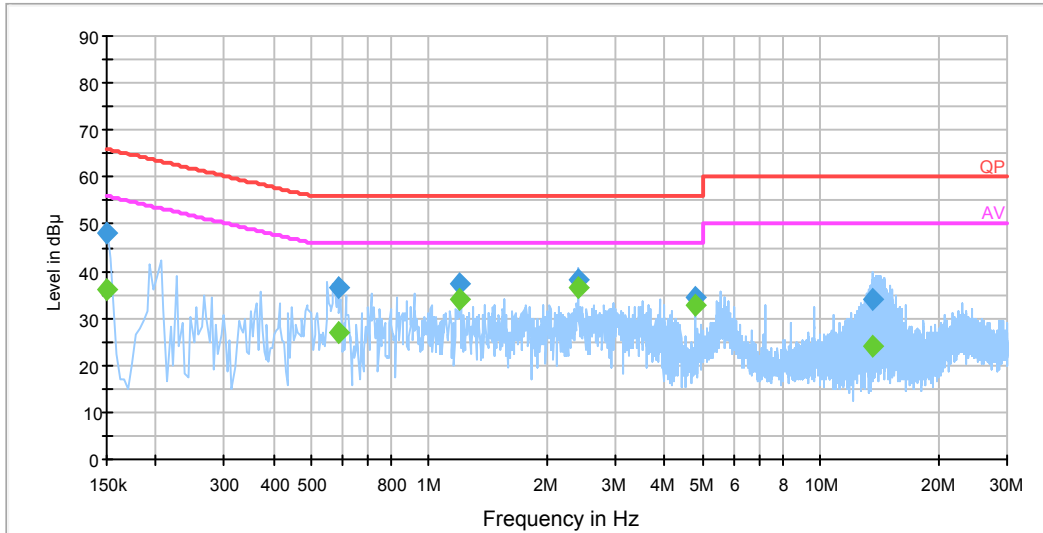

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
2.406000	36.4	19.7	46.0	9.6	Ave.
1.202000	34.0	19.5	46.0	12.0	Ave.
4.806000	32.8	19.7	46.0	13.2	Ave.
0.150000	48.1	19.6	66.0	17.9	QP
2.406000	38.1	19.7	56.0	17.9	QP
1.202000	37.1	19.5	56.0	18.9	QP
0.586000	26.8	19.6	46.0	19.2	Ave.
0.586000	36.4	19.6	56.0	19.6	QP
0.150000	36.2	19.6	56.0	19.8	Ave.
4.806000	34.4	19.7	56.0	21.6	QP
13.626000	34.2	19.8	60.0	25.8	QP
13.626000	24.2	19.8	50.0	25.8	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

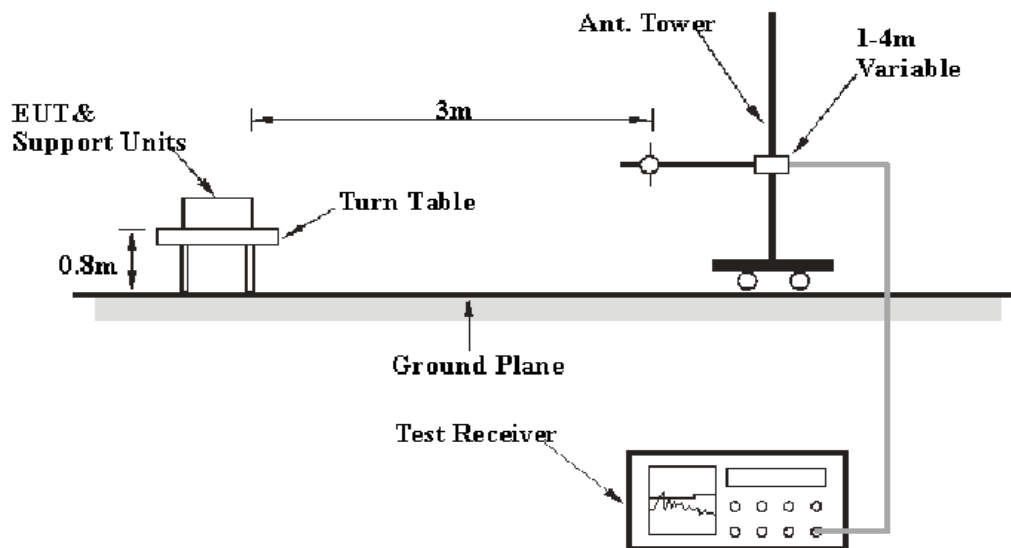

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-17	2014-09-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Amplifier	ZVA-183-S+	5969001149	2013-04-03	2014-04-03
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
R&S	Auto test Software	EMC32	V9.10	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

5.8 dB at 250.0 MHz in the Horizontal polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in BACL., $U_{(L_m)}$ is less than $+ U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Gardon Zhang on 2013-12-11.

EUT operation mode: Transmitting

30 MHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247/205/209	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
250.0	55.2	QP	208	1.2	H	-15.0	40.2	46	5.8
2402.0	87.16	PK	189	1.3	H	6.13	93.29	/	/
2402.0	75.91	Ave.	189	1.3	H	6.13	82.04	/	/
2402.0	90.56	PK	338	1.4	V	6.13	96.69	/	/
2402.0	79.33	Ave.	338	1.4	V	6.13	85.46	/	/
2356.4	35.52	PK	150	1.3	V	5.48	41.00	74	33.00
2356.4	21.41	Ave.	150	1.3	V	5.48	26.89	54	27.11
2379.8	36.14	PK	355	1.5	H	6.13	42.27	74	31.73
2379.8	21.43	Ave.	355	1.5	H	6.13	27.56	54	26.44
2495.1	34.32	PK	17	1.2	H	7.21	41.53	74	32.47
2495.1	20.52	Ave.	17	1.2	H	7.21	27.73	54	26.27
4804.0	35.73	PK	39	1.5	H	12.40	48.13	74	25.87
4804.0	21.46	Ave.	39	1.5	H	12.40	33.86	54	20.14
7206.0	35.04	PK	292	1.3	V	17.06	52.10	74	21.90
7206.0	21.19	Ave.	292	1.3	V	17.06	38.25	54	15.75
9608.0	34.16	PK	38	1.4	V	19.28	53.44	74	20.56
9608.0	20.48	Ave.	38	1.4	V	19.28	39.76	54	14.24
Middle Channel (2441 MHz)									
250.0	54.9	QP	202	1.2	H	-15.0	39.9	46	6.1
2441.0	83.77	PK	347	1.3	H	7.21	90.98	/	/
2441.0	73.09	Ave.	347	1.3	H	7.21	80.30	/	/
2441.0	92.34	PK	15	1.3	V	7.21	99.55	/	/
2441.0	81.20	Ave.	15	1.3	V	7.21	88.41	/	/
2310.5	36.68	PK	30	1.3	V	5.48	42.16	74	31.84
2310.5	24.36	Ave.	30	1.3	V	5.48	29.84	54	24.16
2388.8	37.25	PK	250	1.4	V	5.48	42.73	74	31.27
2388.8	23.71	Ave.	250	1.4	V	5.48	29.19	54	24.81
2493.2	35.26	PK	26	1.4	V	7.21	42.47	74	31.53
2493.2	23.02	Ave.	26	1.4	V	7.21	30.23	54	23.77
4882.0	39.28	PK	45	1.2	H	12.46	51.74	74	22.26
4882.0	26.04	Ave.	45	1.2	H	12.46	38.50	54	15.50
7323.0	38.85	PK	192	1.4	V	16.49	55.34	74	18.66

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
7323.0	25.52	Ave.	192	1.4	V	16.49	42.01	54	11.99
9764.0	36.14	PK	203	1.5	H	19.40	55.54	74	18.46
9764.0	24.30	Ave.	203	1.5	H	19.40	43.70	54	10.30
High Channel (2480 MHz)									
250.0	54.7	QP	213	1.2	H	-15.0	39.7	46	6.3
2480.0	82.52	PK	10	1.3	H	7.21	89.73	/	/
2480.0	71.12	Ave.	10	1.3	H	7.21	78.33	/	/
2480.0	90.01	PK	95	1.3	V	7.21	97.22	/	/
2480.0	78.51	Ave.	95	1.3	V	7.21	85.72	/	/
2349.7	36.53	PK	217	1.4	H	5.48	42.01	74	31.99
2349.7	25.04	Ave.	217	1.4	H	5.48	30.52	54	23.48
2376.2	38.96	PK	8	1.3	V	6.13	45.09	74	28.91
2376.2	26.04	Ave.	8	1.3	V	6.13	32.17	54	21.83
2483.5	48.53	PK	206	1.4	V	7.21	55.74	74	18.26
2483.5	31.54	Ave.	206	1.4	V	7.21	38.75	54	15.25
4960.0	35.75	PK	97	1.4	V	12.50	48.25	74	25.75
4960.0	22.35	Ave.	97	1.4	V	12.50	34.85	54	19.15
7440.0	38.46	PK	319	1.4	H	15.90	54.36	74	19.64
7440.0	23.26	Ave.	319	1.4	H	15.90	39.16	54	14.84
9920.0	35.88	PK	225	1.5	V	19.38	55.26	74	18.74
9920.0	23.76	Ave.	225	1.5	V	19.38	43.14	54	10.86

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Gardon Zhang on 2013-12-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	\geq Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.000	0.621	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.621	Pass
	Adjacent	2442			
	High	2480	1.000	0.621	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.002	0.867	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.867	Pass
	Adjacent	2442			
	High	2480	1.002	0.867	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.002	0.843	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.843	Pass
	Adjacent	2442			
	High	2480	1.002	0.843	Pass
	Adjacent	2479			


Note: Limit = 20 dB bandwidth *2/3

BDR (GFSK): Low Channel

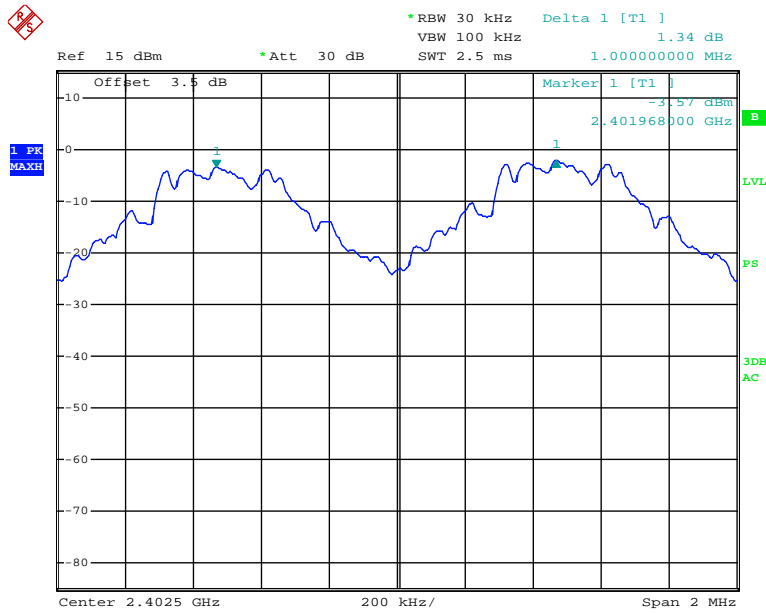


Date: 12.DEC.2013 15:25:10

BDR (GFSK): Middle Channel

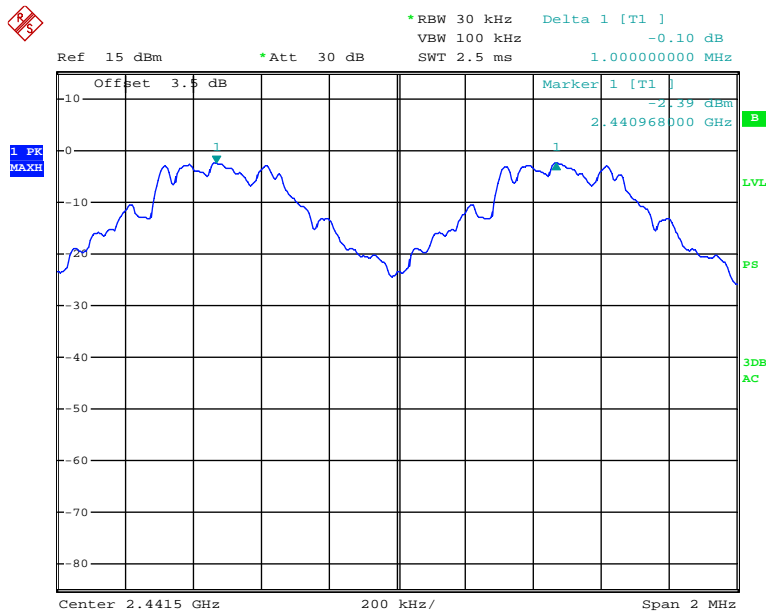


Date: 12.DEC.2013 15:26:52

BDR (GFSK): High Channel

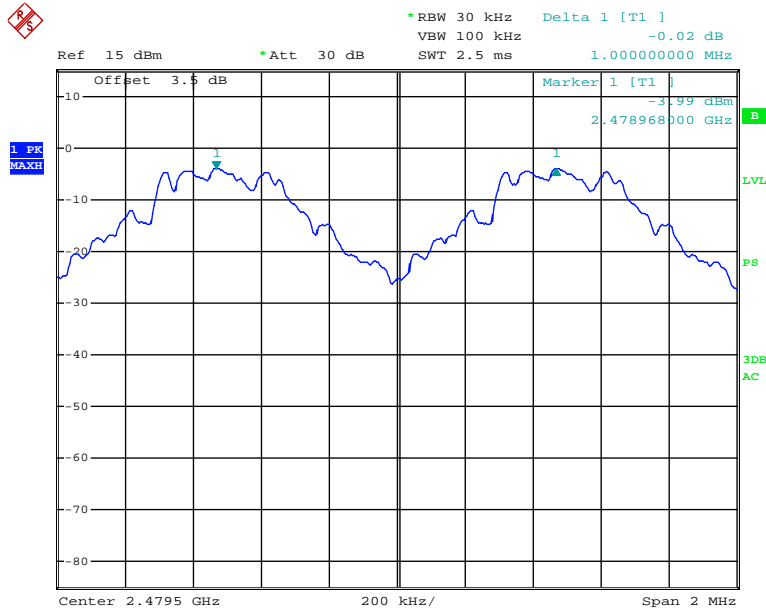


Date: 12.DEC.2013 15:28:49

EDR ($\pi/4$ -DQPSK): Low Channel

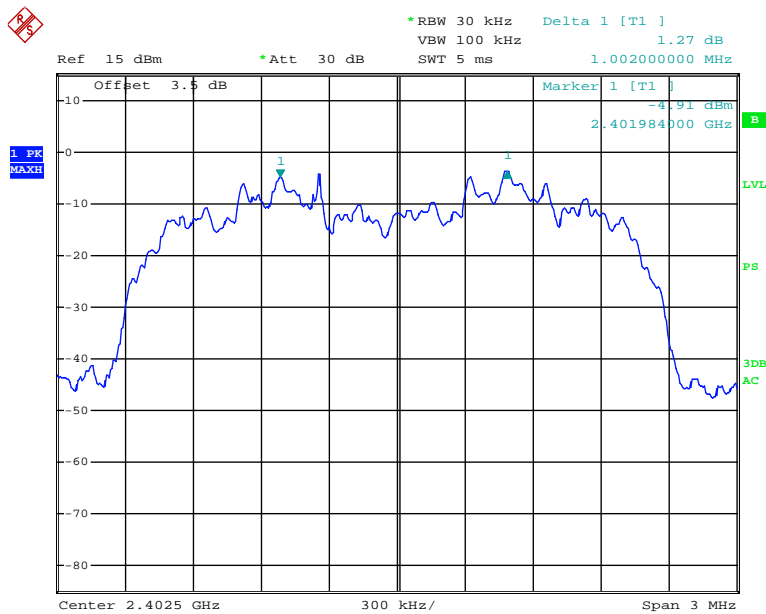


Date: 12.DEC.2013 15:31:36

EDR ($\pi/4$ -DQPSK): Middle Channel

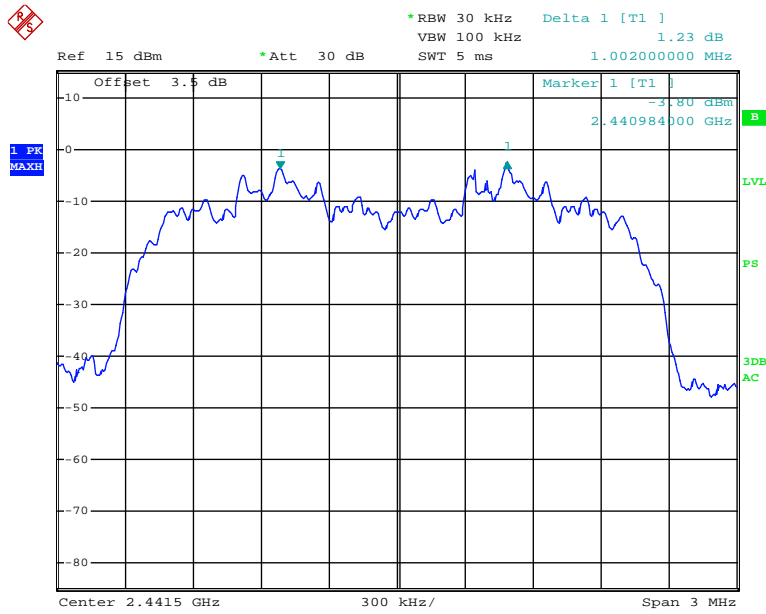


Date: 12.DEC.2013 15:33:19

EDR ($\pi/4$ -DQPSK): High Channel

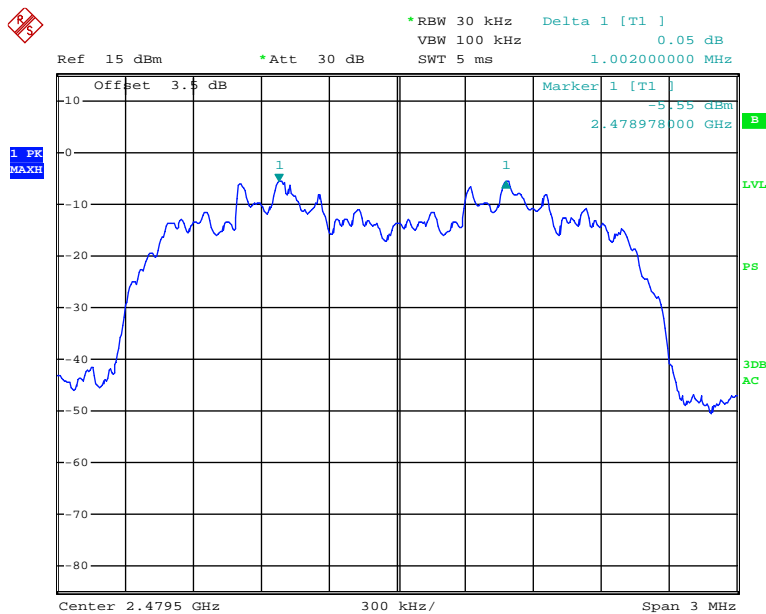


Date: 12.DEC.2013 15:34:53

EDR (8DPSK): Low Channel

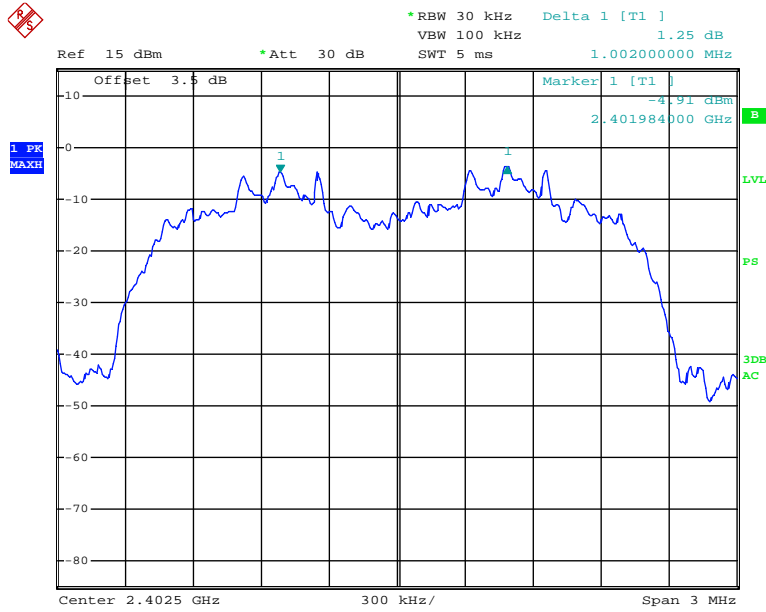


Date: 12.DEC.2013 15:36:21

EDR (8DPSK): Middle Channel

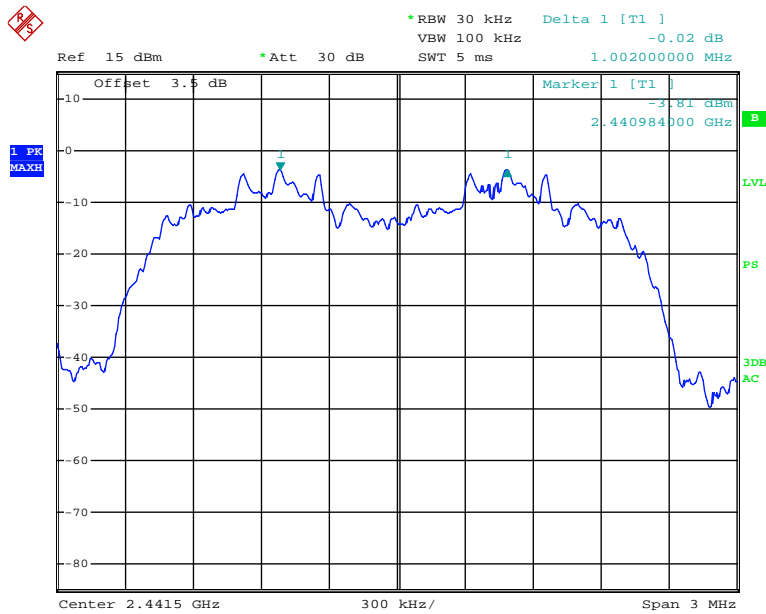

Date: 12.DEC.2013 15:38:04

EDR (8DPSK): High Channel

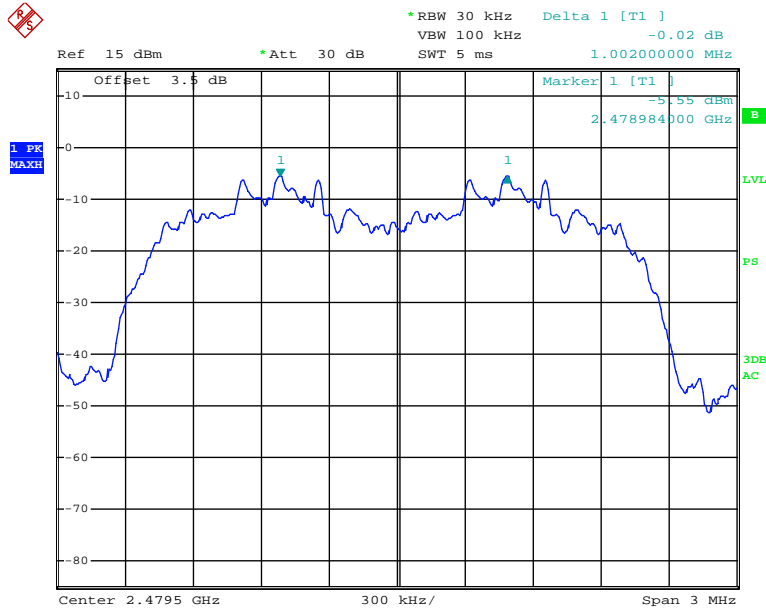

Date: 12.DEC.2013 15:40:38

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Gardon Zhang on 2013-12-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.932
	Middle	2441	0.932
	High	2480	0.932
EDR ($\pi/4$ -DQPSK)	Low	2402	1.300
	Middle	2441	1.300
	High	2480	1.300
EDR (8DPSK)	Low	2402	1.260
	Middle	2441	1.264
	High	2480	1.260

BDR (GFSK): Low Channel

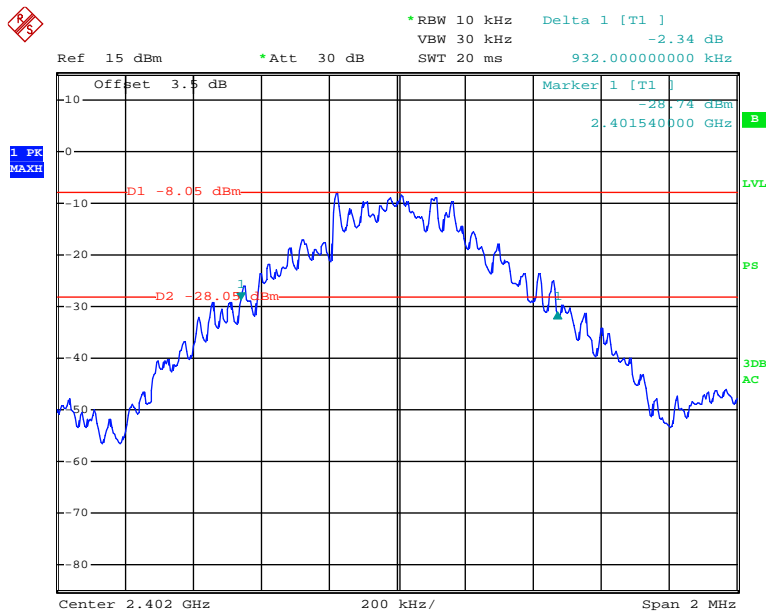


Date: 12.DEC.2013 14:59:29

BDR (GFSK): Middle Channel

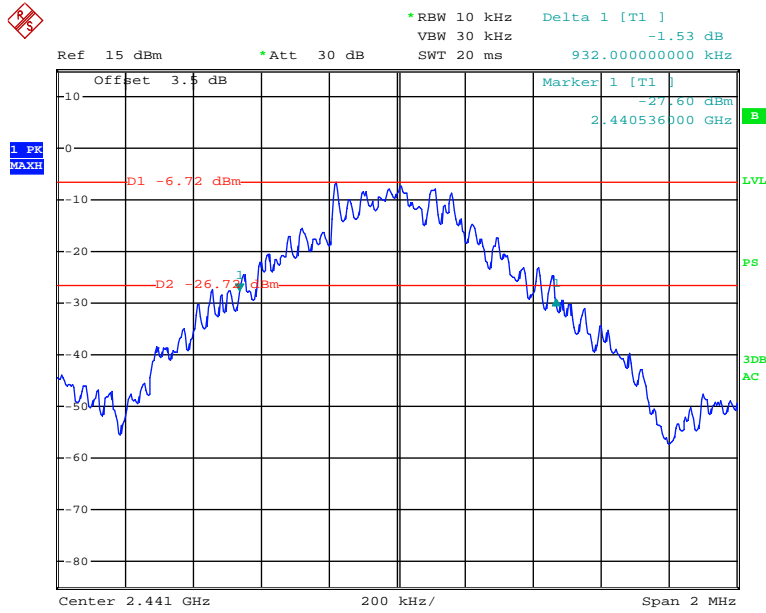


Date: 12.DEC.2013 15:02:27

BDR (GFSK): High Channel

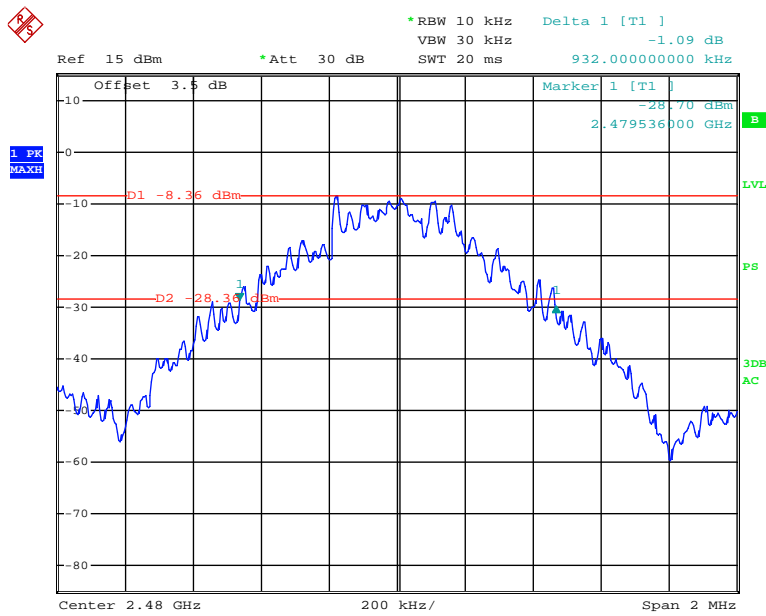


Date: 12.DEC.2013 15:03:21

EDR ($\pi/4$ -DQPSK): Low Channel

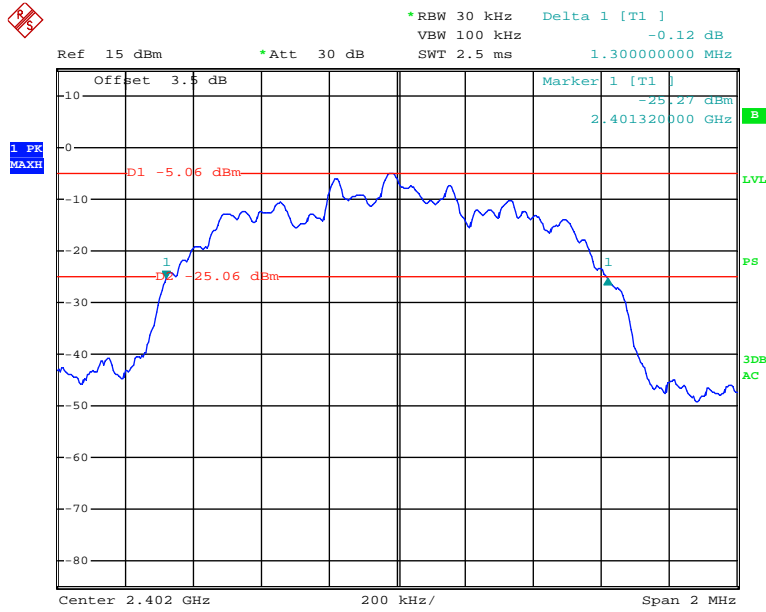


Date: 12.DEC.2013 15:06:40

EDR ($\pi/4$ -DQPSK): Middle Channel

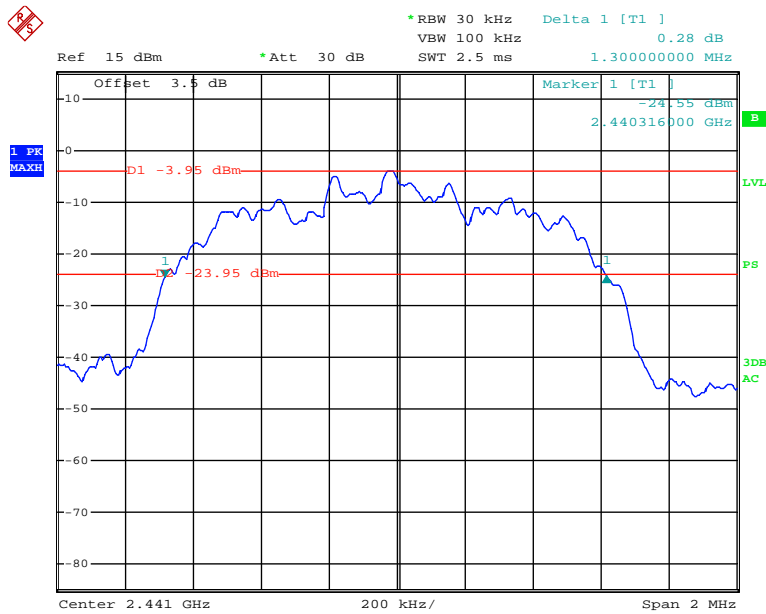


Date: 12.DEC.2013 15:08:47

EDR ($\pi/4$ -DQPSK): High Channel

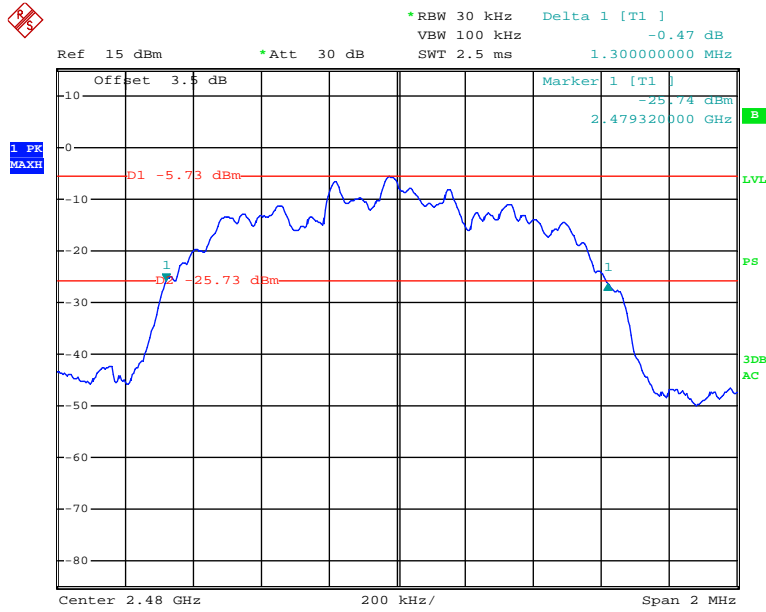


Date: 12.DEC.2013 15:11:58

EDR (8DPSK): Low Channel

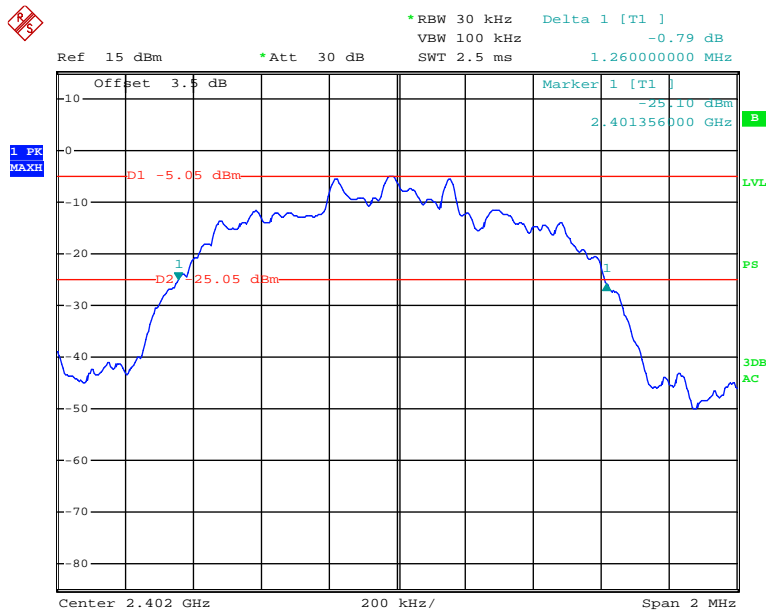


Date: 12.DEC.2013 15:14:20

EDR (8DPSK): Middle Channel

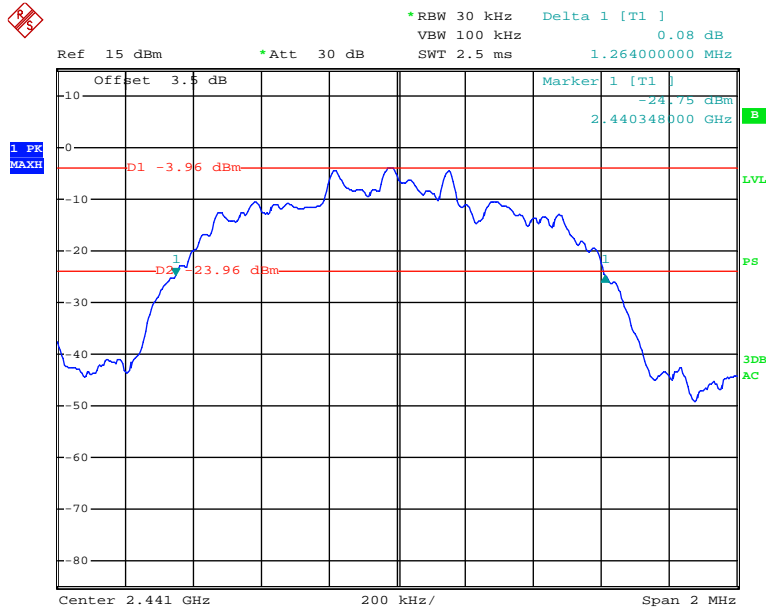

Date: 12.DEC.2013 15:18:21

EDR (8DPSK): High Channel

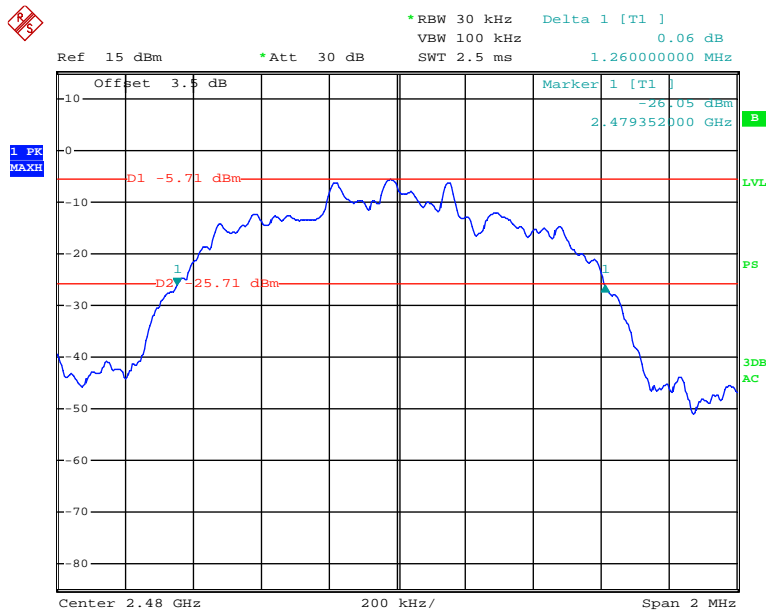

Date: 12.DEC.2013 15:20:08

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Gardon Zhang on 2013-12-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	> 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	> 15
EDR (8DPSK)	2400-2483.5	79	> 15

BDR (GFSK): Number of Hopping Channels

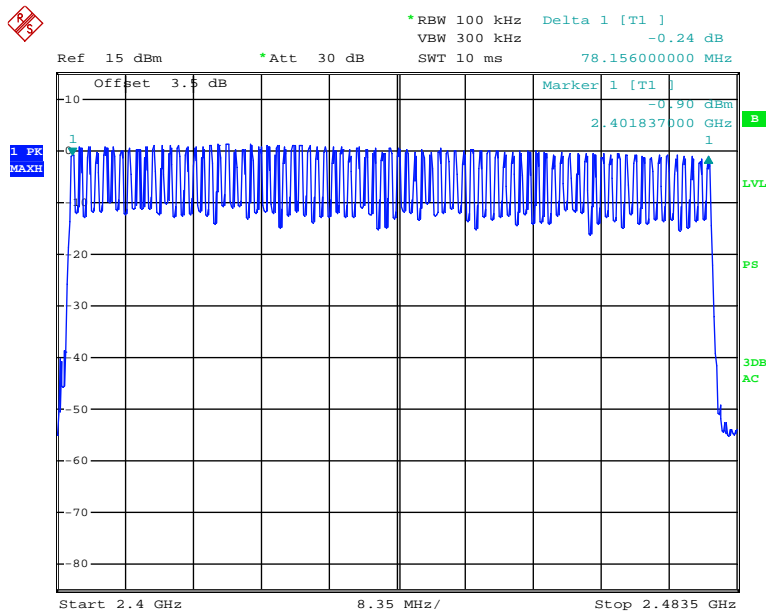


Date: 12.DEC.2013 16:06:24

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

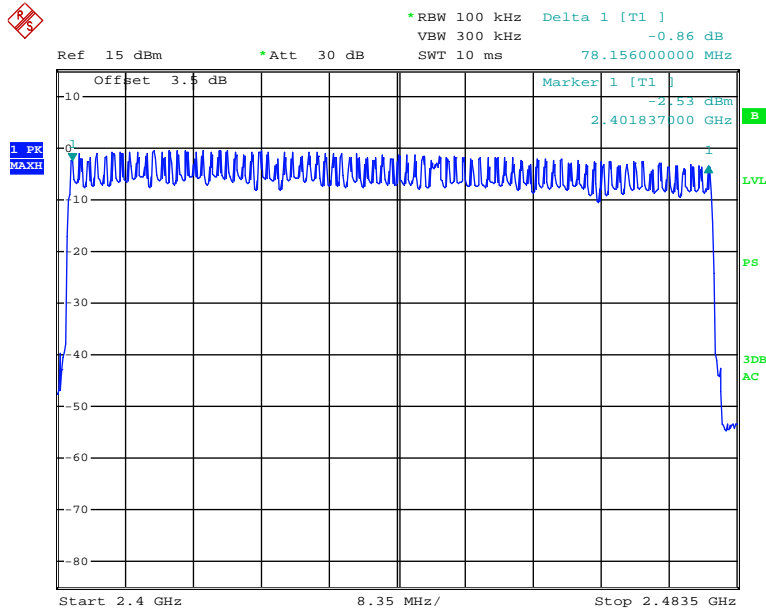

Date: 12.DEC.2013 16:10:13

EDR (8DPSK): Number of Hopping Channels

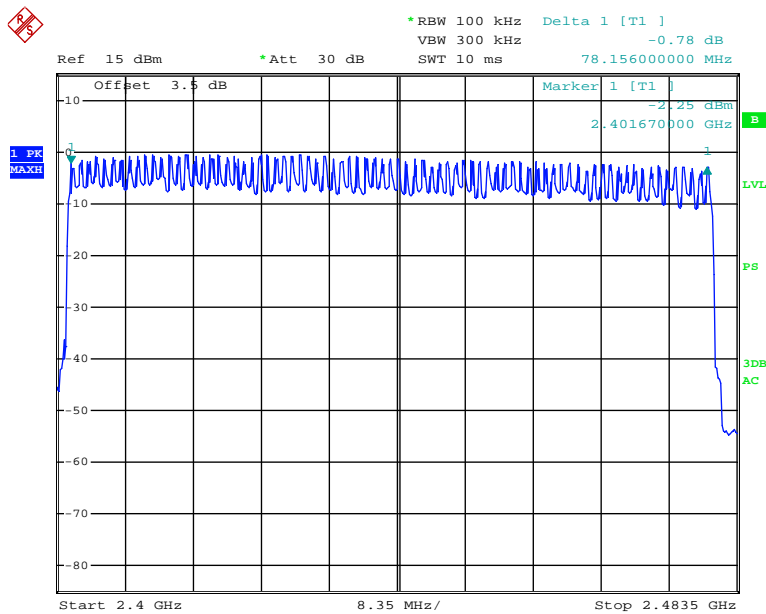

Date: 12.DEC.2013 16:14:09

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Gardon Zhang on 2013-12-12


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.4242	0.1357	0.4	Pass	
		Middle	0.4242	0.1357	0.4	Pass	
		High	0.4242	0.1357	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.7010	0.2722	0.4	Pass	
		Middle	1.7010	0.2722	0.4	Pass	
		High	1.7010	0.2722	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.9452	0.3142	0.4	Pass	
		Middle	2.9452	0.3142	0.4	Pass	
		High	2.9452	0.3142	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR (π/4-DQPSK)	DH 1	Low	0.4410	0.1411	0.4	Pass
Middle			0.4410	0.1411	0.4	Pass	
High			0.4410	0.1411	0.4	Pass	
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
DH 3		Low	1.7122	0.2740	0.4	Pass	
		Middle	1.7122	0.2740	0.4	Pass	
		High	1.7122	0.2740	0.4	Pass	
Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
DH 5		Low	2.9632	0.3161	0.4	Pass	
		Middle	2.9632	0.3161	0.4	Pass	
		High	2.9632	0.3161	0.4	Pass	
Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		DH 1	Low	0.4410	0.1411	0.4	Pass
	Middle		0.4410	0.1411	0.4	Pass	
	High		0.4410	0.1411	0.4	Pass	
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.7122	0.2740	0.4	Pass	
		Middle	1.7122	0.2740	0.4	Pass	
		High	1.7122	0.2740	0.4	Pass	
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.9632	0.3161	0.4	Pass	
		Middle	2.9632	0.3161	0.4	Pass	
		High	2.9632	0.3161	0.4	Pass	
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						


BDR (GFSK):

Pulse time, Low Channel, DH1

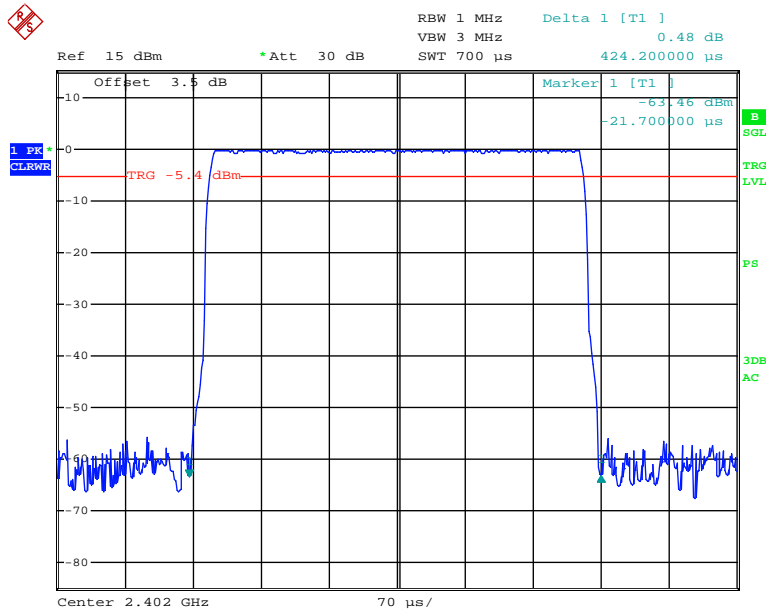


Date: 12.DEC.2013 15:42:48

Pulse time, Middle Channel, DH1

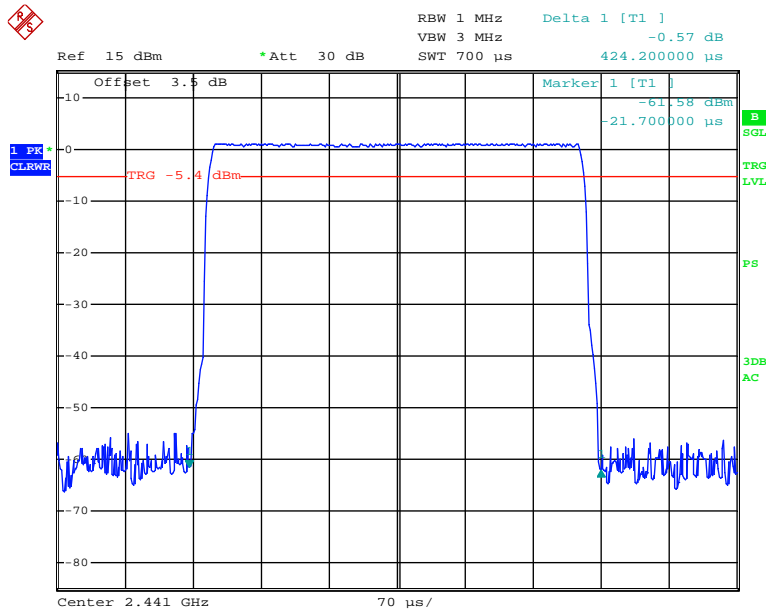


Date: 12.DEC.2013 15:43:54

Pulse time, High Channel, DH1

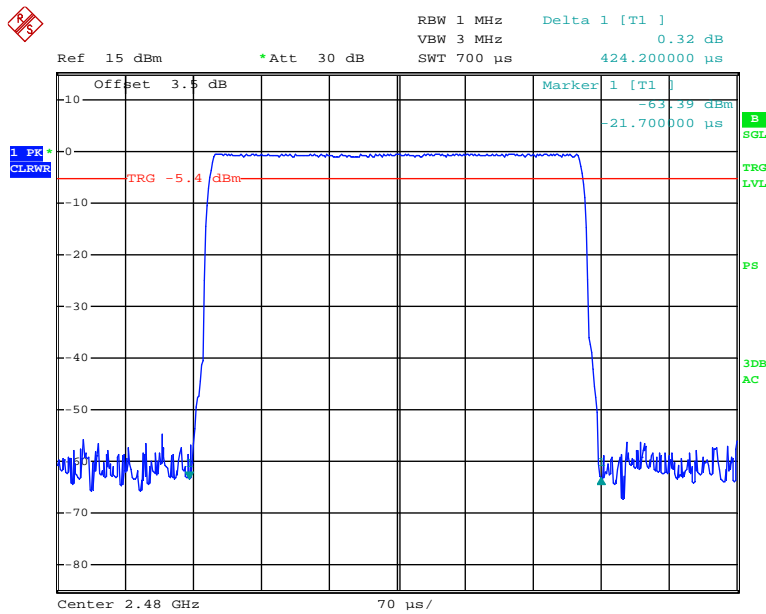


Date: 12.DEC.2013 15:44:15

Pulse time, Low Channel, DH3

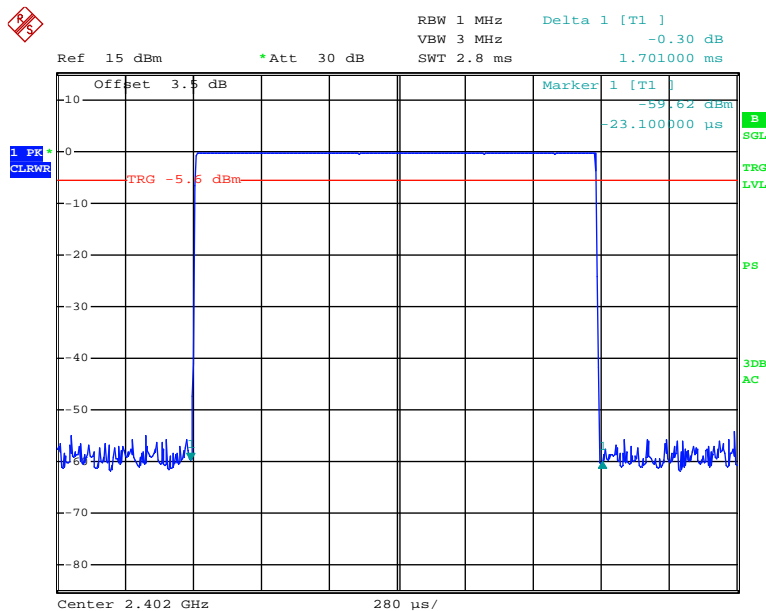


Date: 12.DEC.2013 15:52:43

Pulse time, Middle Channel, DH3

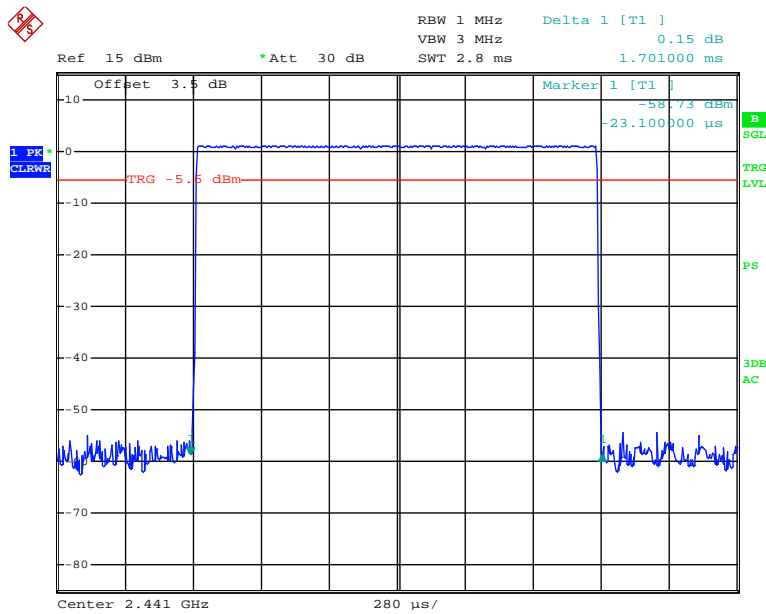


Date: 12.DEC.2013 15:53:07

Pulse time, High Channel, DH3

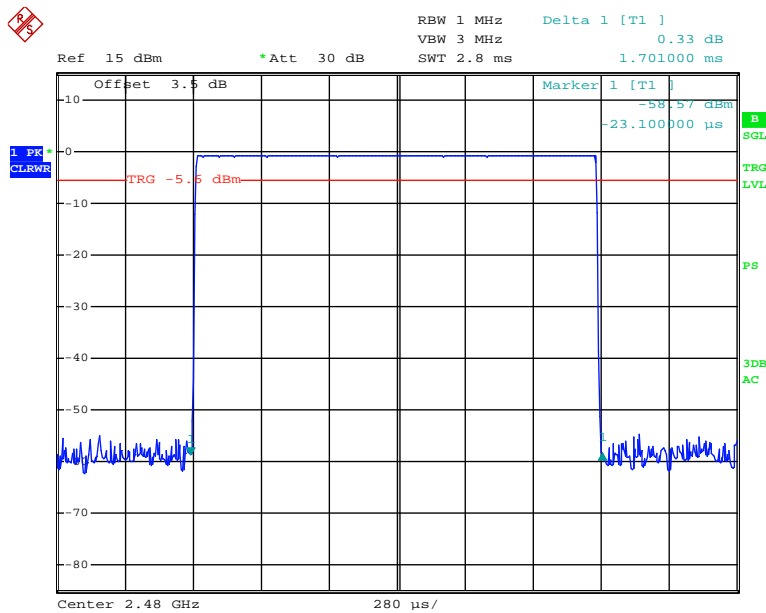


Date: 12.DEC.2013 15:54:03

Pulse time, Low Channel, DH5

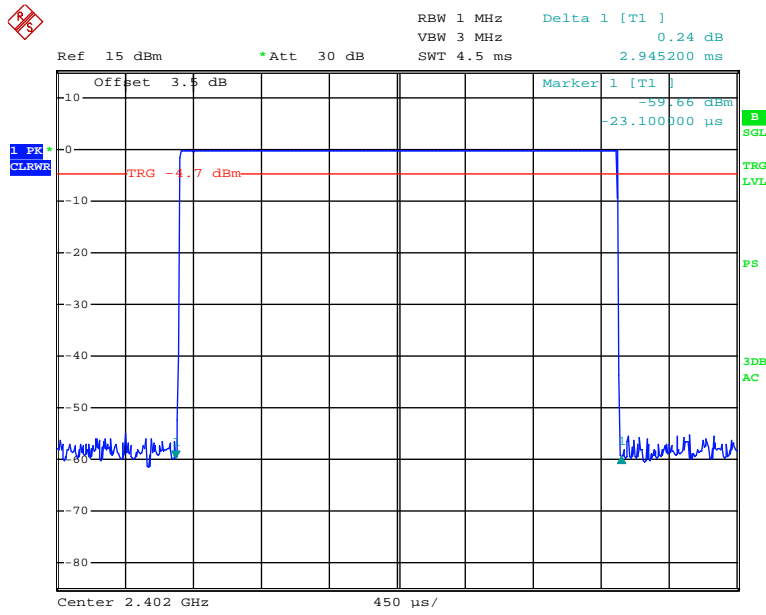


Date: 12.DEC.2013 15:58:15

Pulse time, Middle Channel, DH5

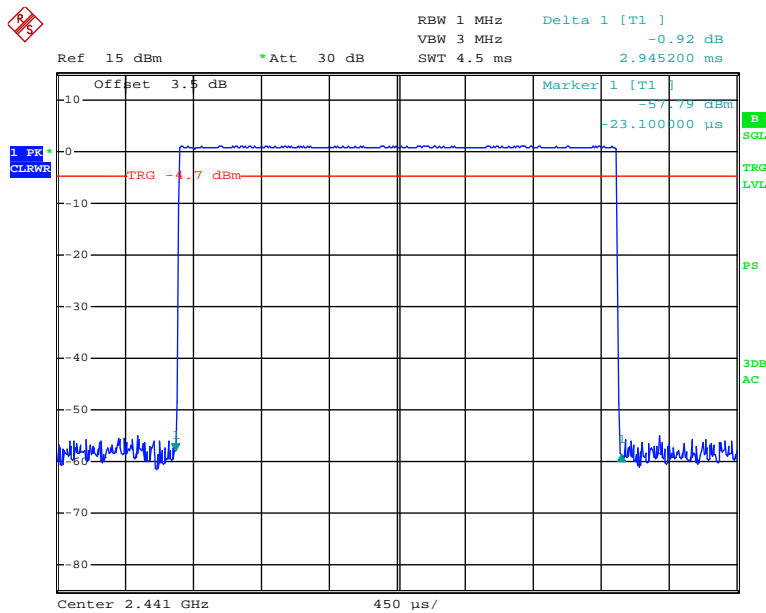

Date: 12.DEC.2013 15:57:55


Pulse time, High Channel, DH5

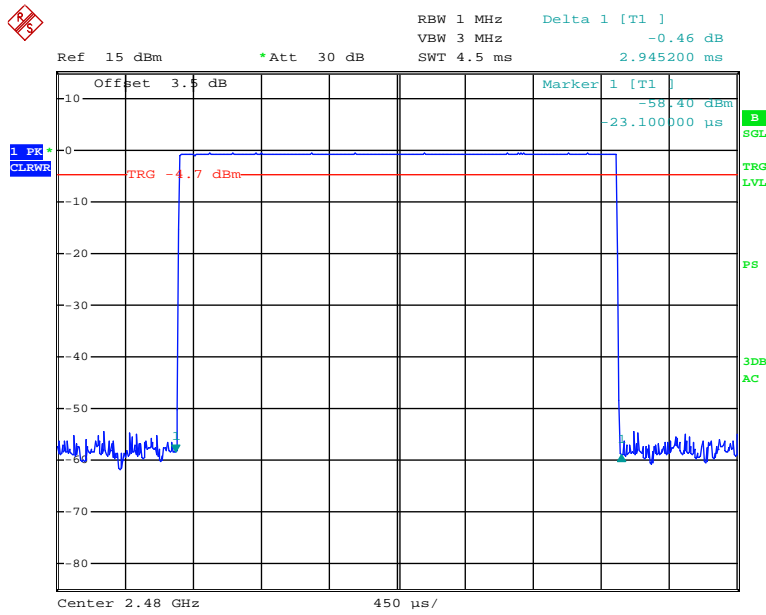

Date: 12.DEC.2013 15:58:05


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

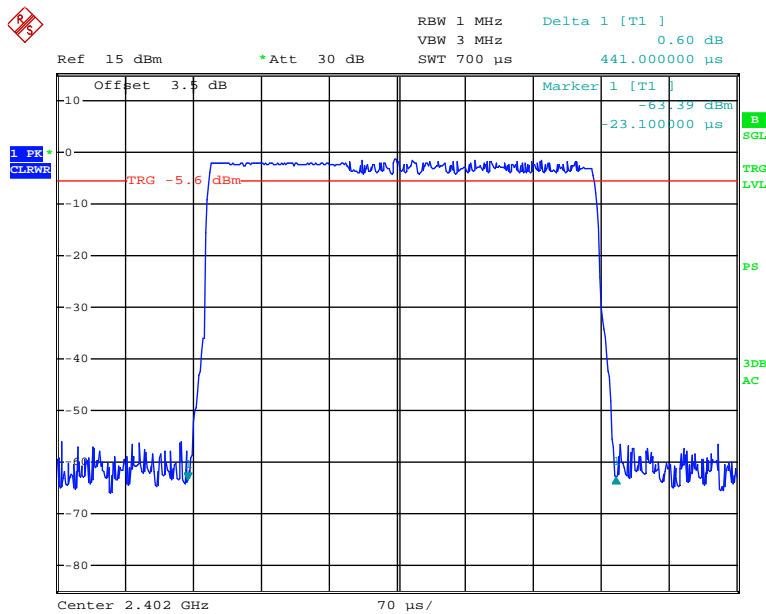


Date: 12.DEC.2013 15:48:25

Pulse time, Middle Channel, 2DH1

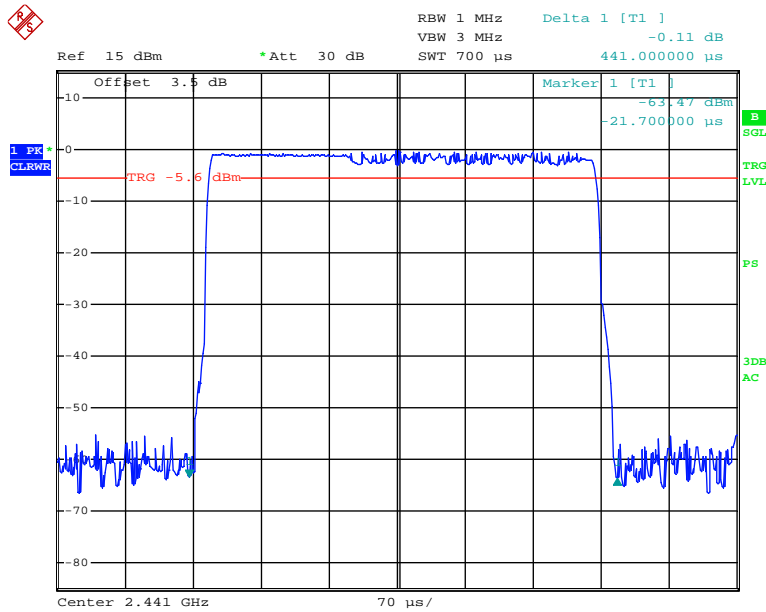


Date: 12.DEC.2013 15:46:16

Pulse time, High Channel, 2DH1

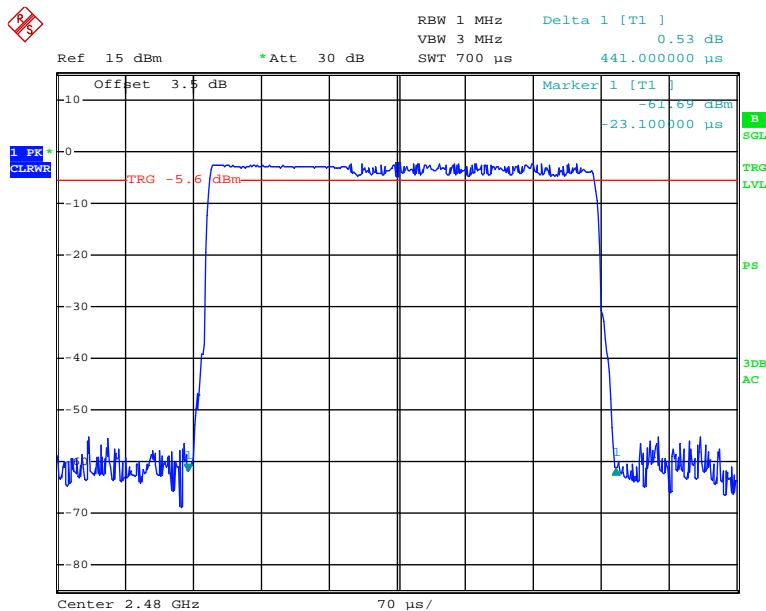


Date: 12.DEC.2013 15:47:58

Pulse time, Low Channel, 2DH3

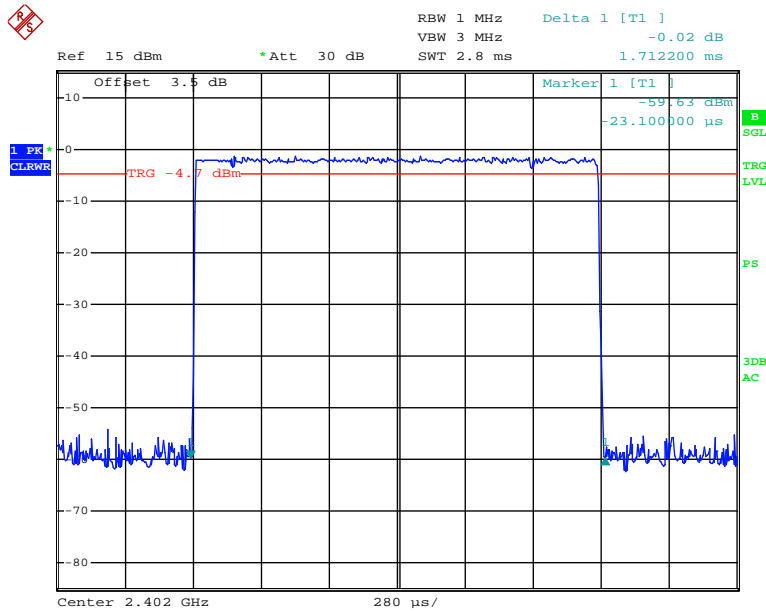


Date: 12.DEC.2013 15:54:47

Pulse time, Middle Channel, 2DH3

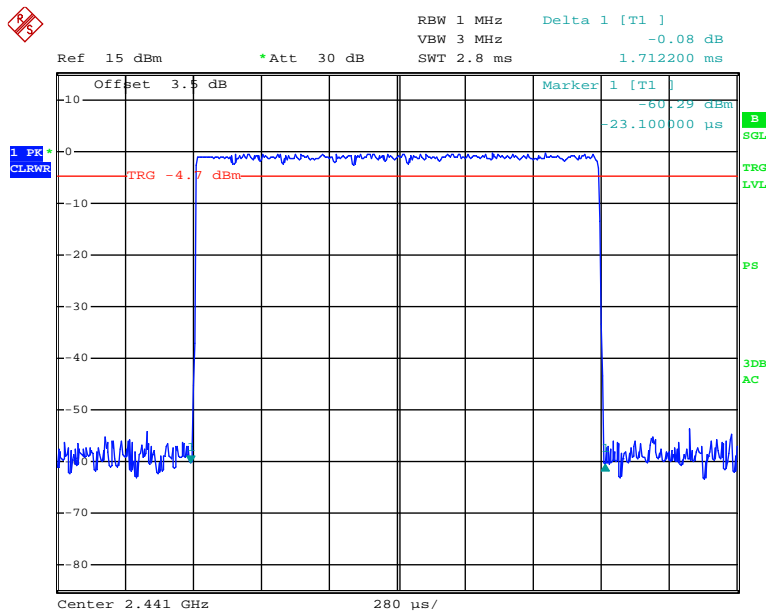


Date: 12.DEC.2013 15:55:13

Pulse time, High Channel, 2DH3

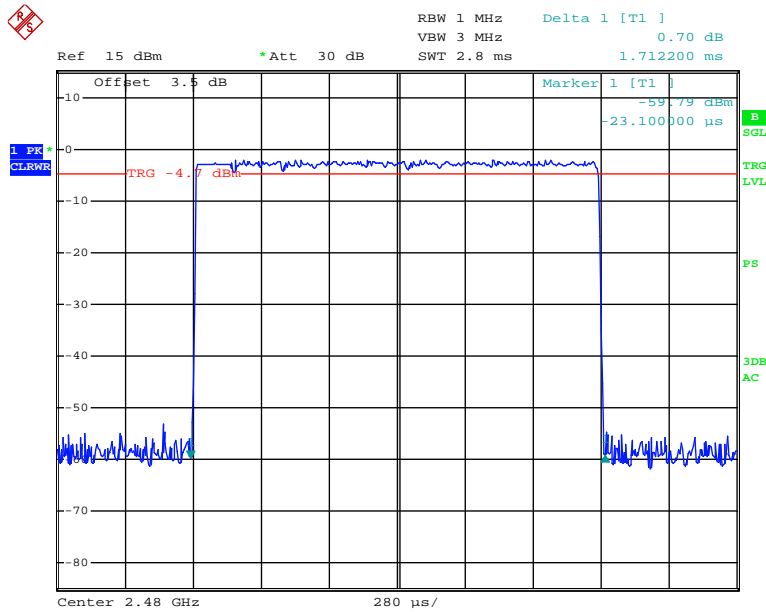


Date: 12.DEC.2013 15:55:29

Pulse time, Low Channel, 2DH5

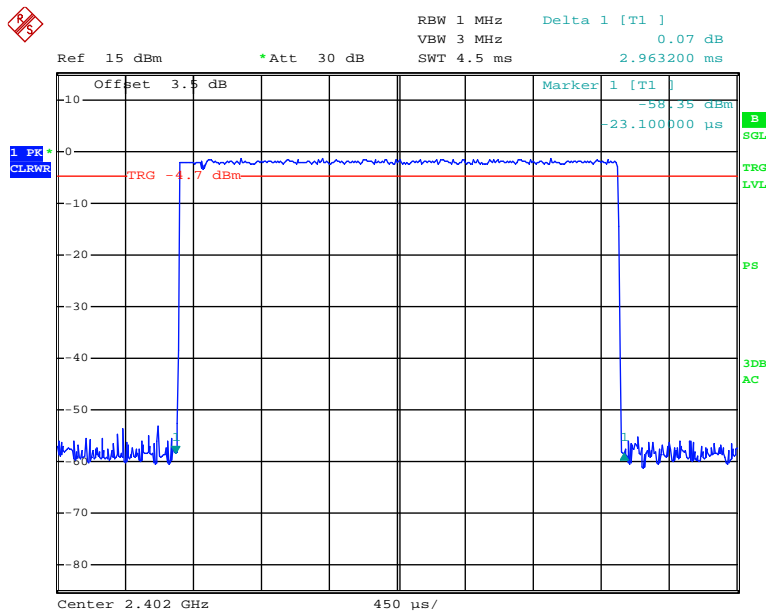


Date: 12.DEC.2013 15:58:51

Pulse time, Middle Channel, 2DH5

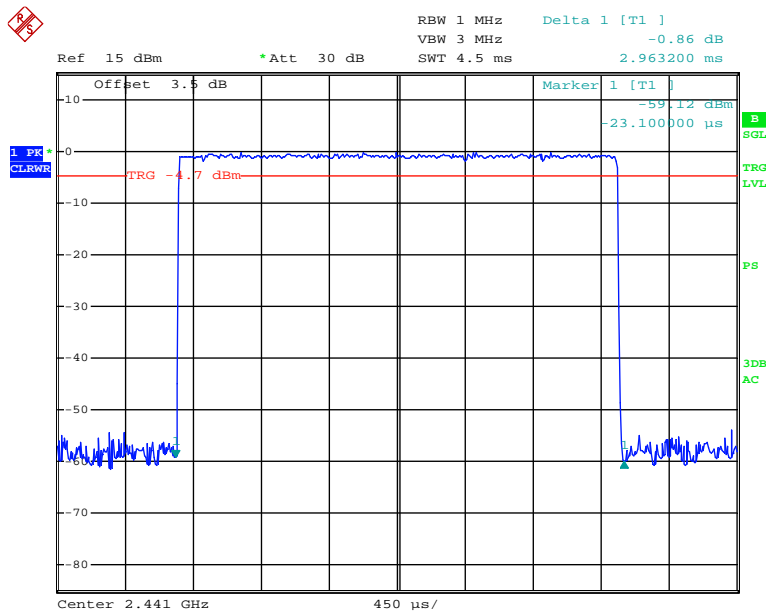

Date: 12.DEC.2013 15:59:09


Pulse time, High Channel, 2DH5

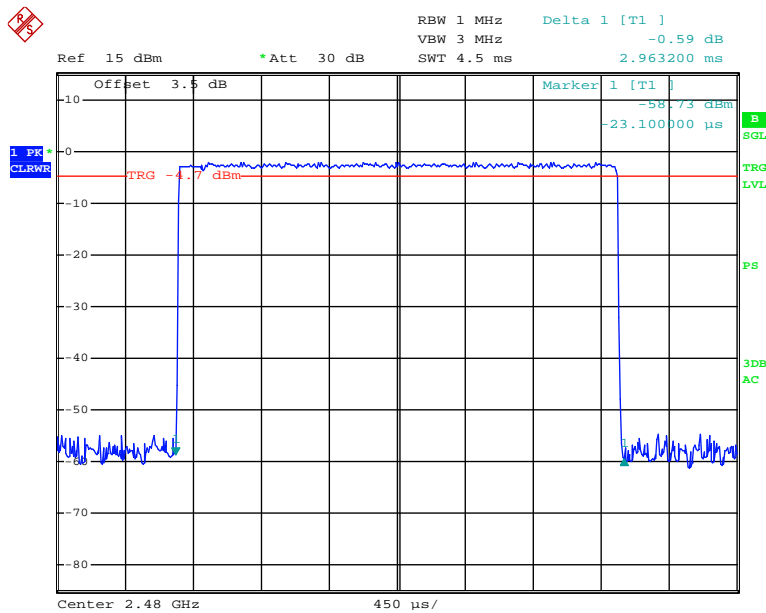

Date: 12.DEC.2013 15:59:50


EDR (8DPSK):

Pulse time, Low Channel, 3DH1

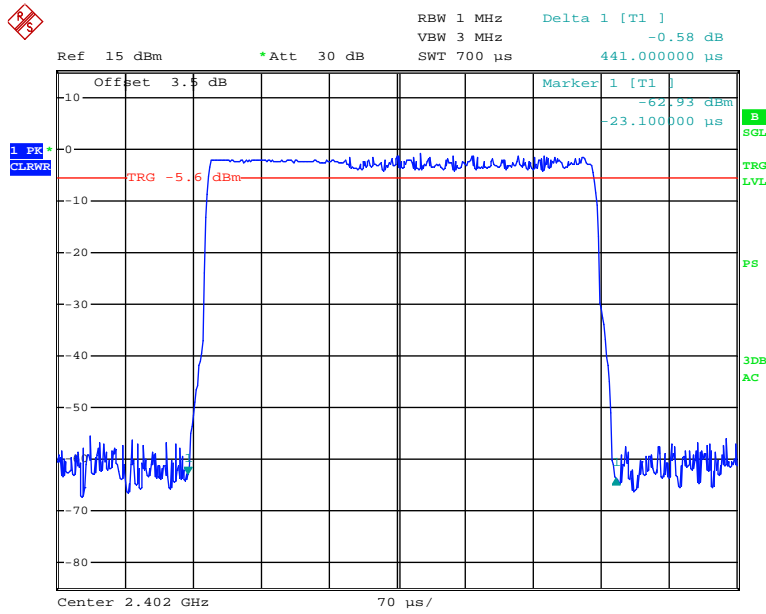


Date: 12.DEC.2013 15:50:02

Pulse time, Middle Channel, 3DH1

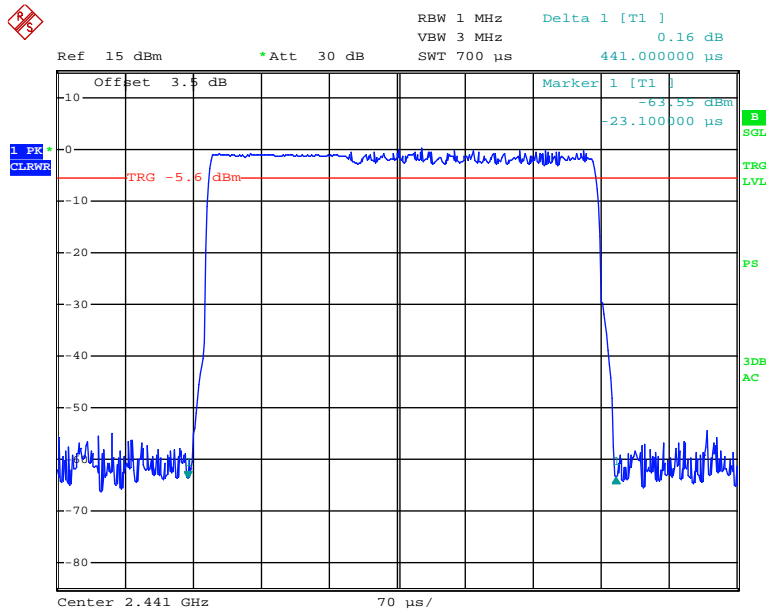


Date: 12.DEC.2013 15:50:30

Pulse time, High Channel, 3DH1

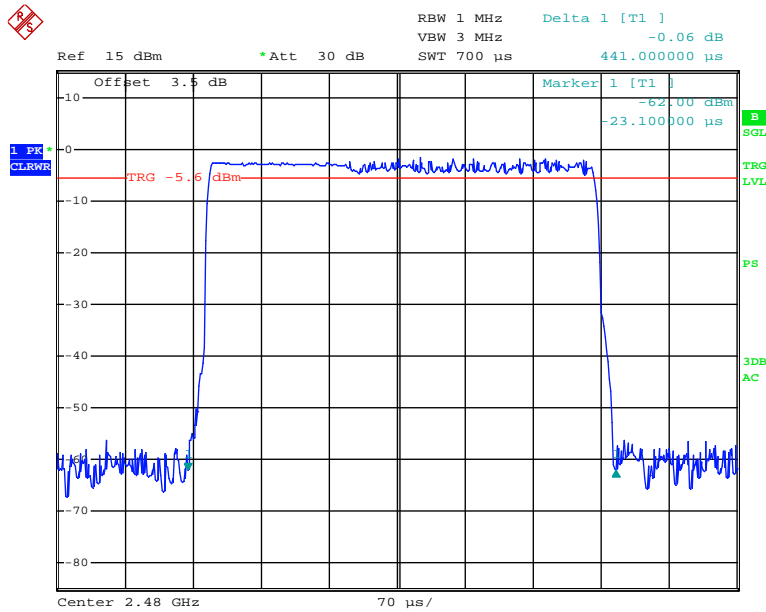


Date: 12.DEC.2013 15:51:40

Pulse time, Low Channel, 3DH3

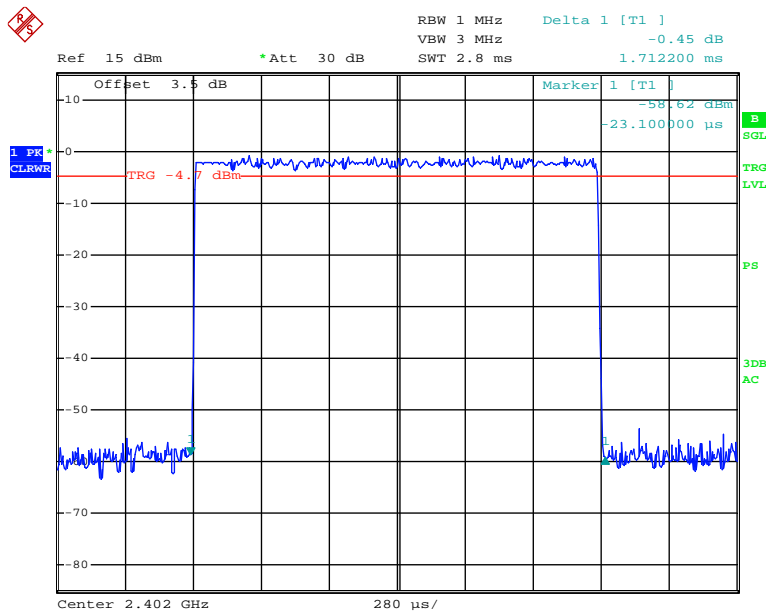


Date: 12.DEC.2013 15:55:57

Pulse time, Middle Channel, 3DH3

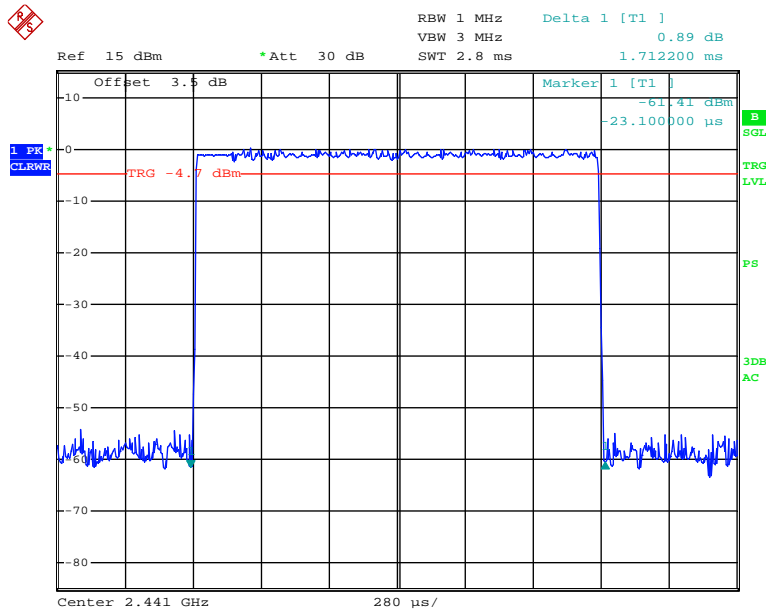


Date: 12.DEC.2013 15:56:17

Pulse time, High Channel, 3DH3

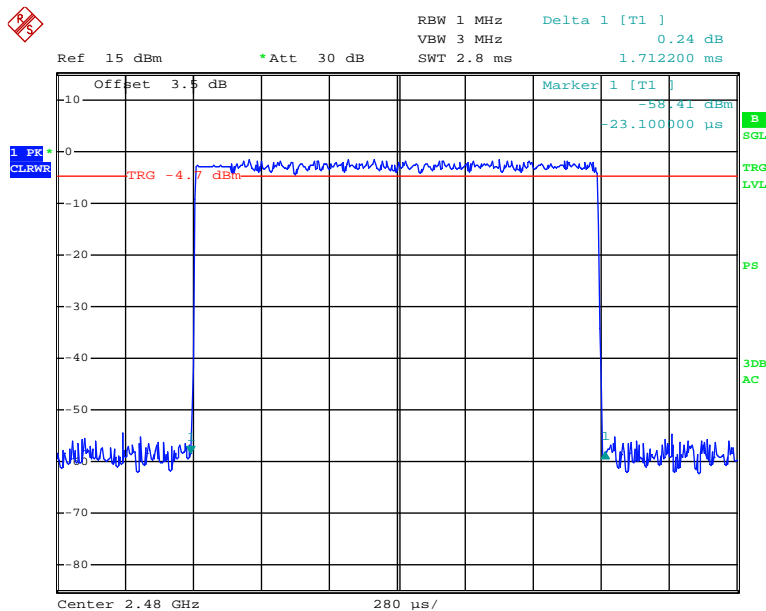


Date: 12.DEC.2013 15:56:32

Pulse time, Low Channel, 3DH5

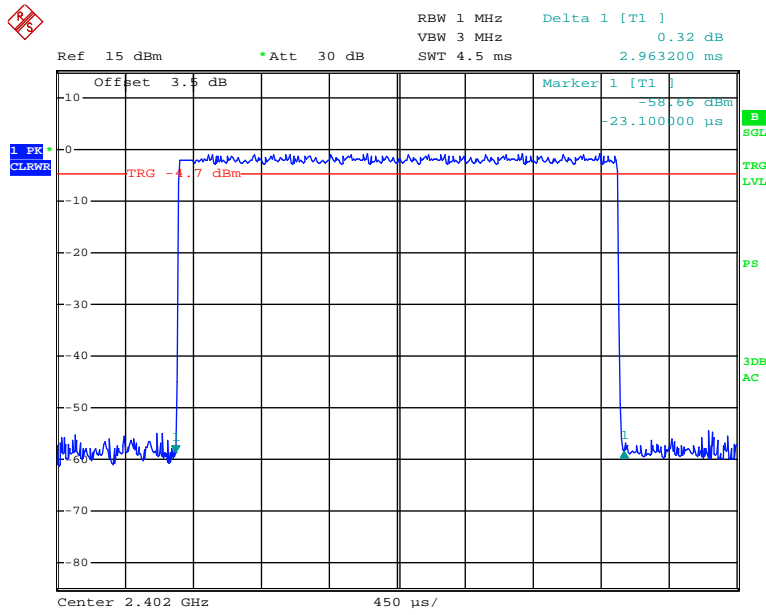


Date: 12.DEC.2013 16:00:19

Pulse time, Middle Channel, 3DH5

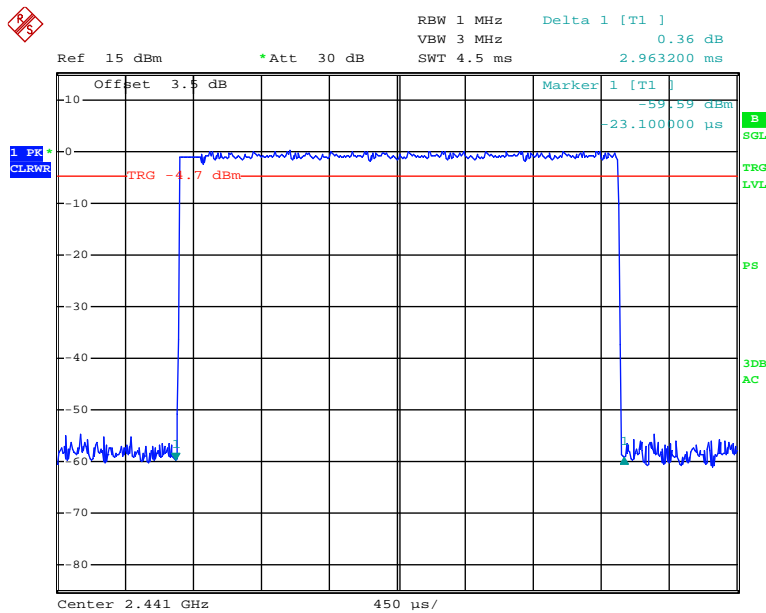

Date: 12.DEC.2013 16:01:04

Pulse time, High Channel, 3DH5

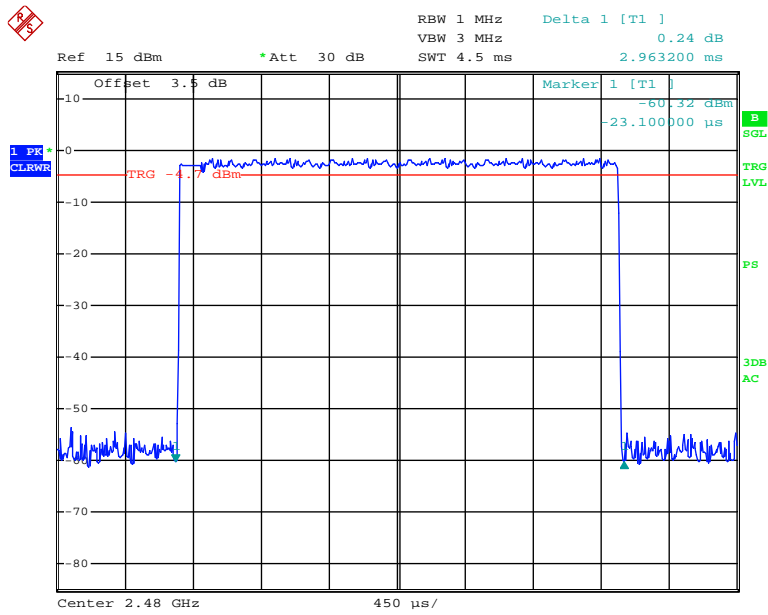

Date: 12.DEC.2013 16:01:23

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Gardon Zhang on 2013-12-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-0.05	0.989	1000
	Middle	2441	1.15	1.303	1000
	High	2480	-0.58	0.875	1000
EDR ($\pi/4$-DQPSK)	Low	2402	-0.78	0.836	1000
	Middle	2441	0.36	1.086	1000
	High	2480	-1.34	0.735	1000
EDR (8DPSK)	Low	2402	-0.31	0.931	1000
	Middle	2441	0.78	1.197	1000
	High	2480	-0.91	0.811	1000

BDR (GFSK): Low Channel

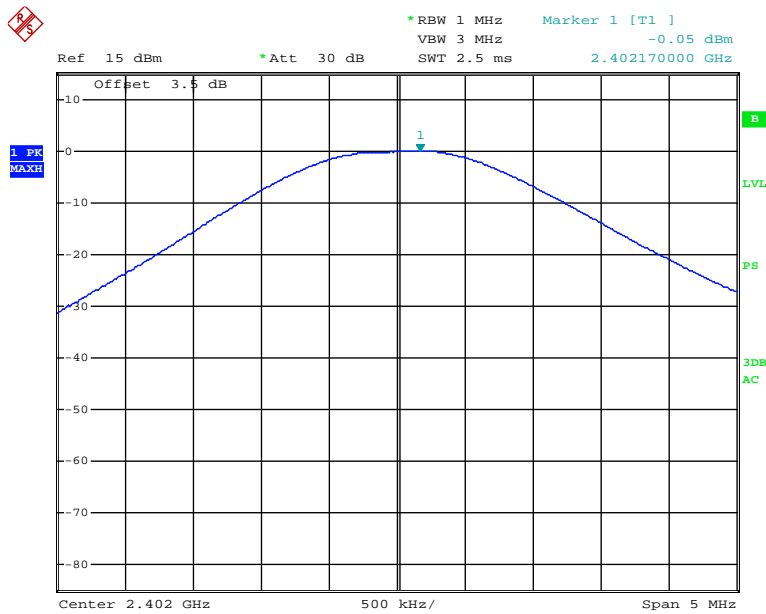


Date: 12.DEC.2013 14:38:49

BDR (GFSK): Middle Channel

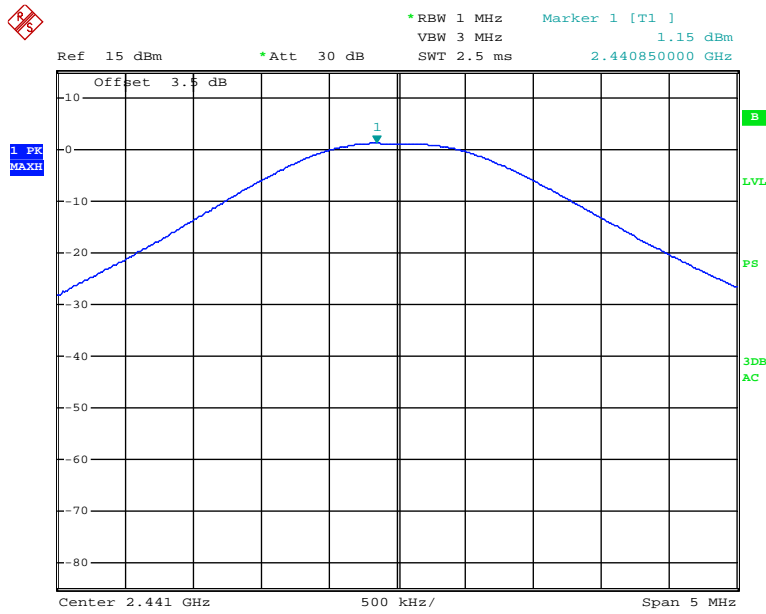


Date: 12.DEC.2013 14:41:40

BDR (GFSK): High Channel

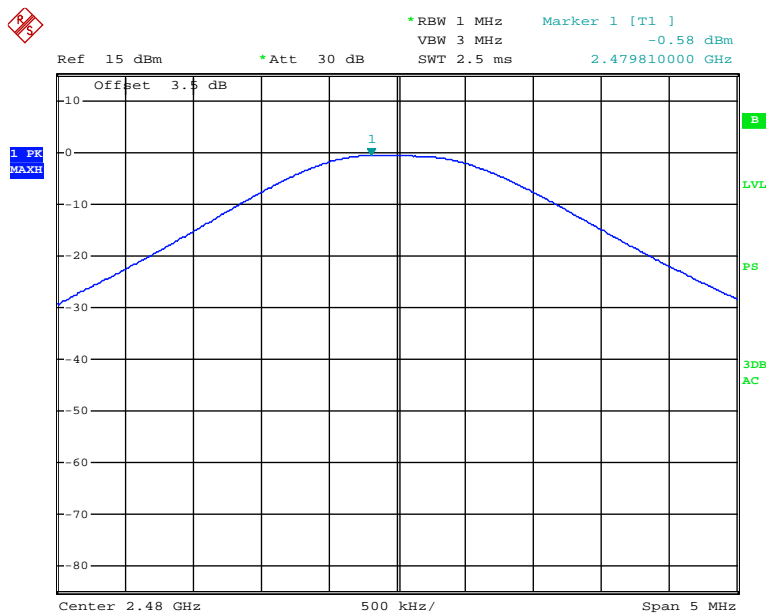


Date: 12.DEC.2013 14:42:23

EDR($\pi/4$ -DQPSK): Low Channel

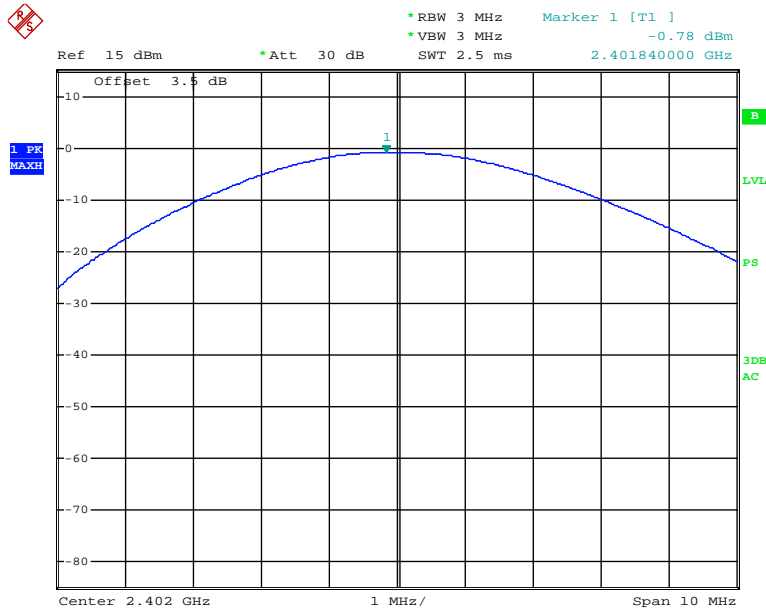


Date: 12.DEC.2013 14:47:22

EDR($\pi/4$ -DQPSK): Middle Channel

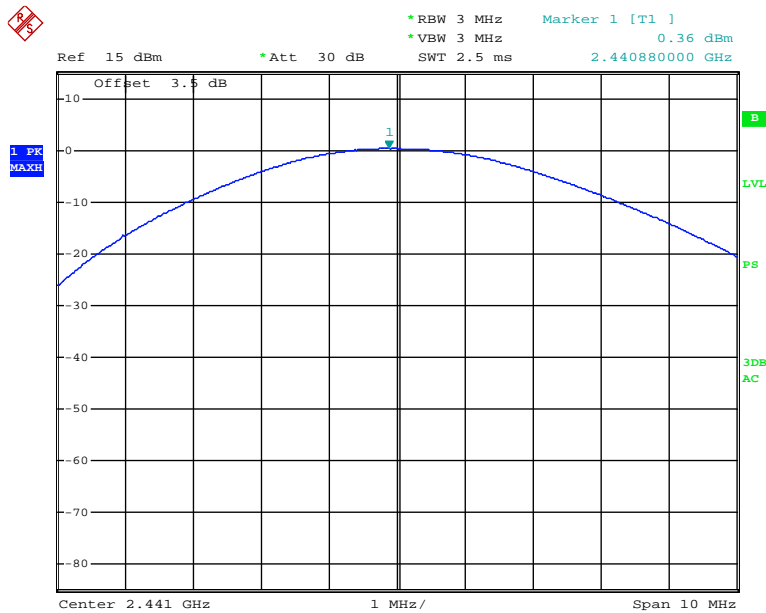


Date: 12.DEC.2013 14:48:57

EDR($\pi/4$ -DQPSK): High Channel

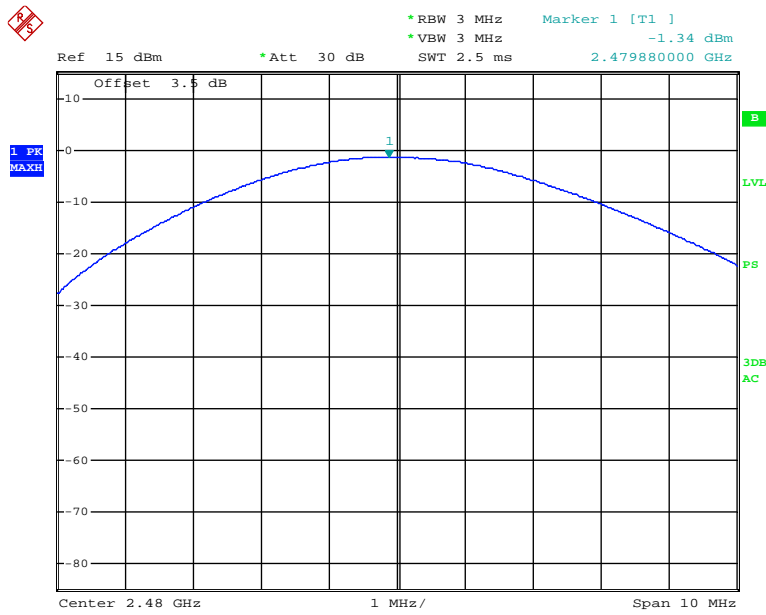


Date: 12.DEC.2013 14:51:40

EDR(8DPSK): Low Channel

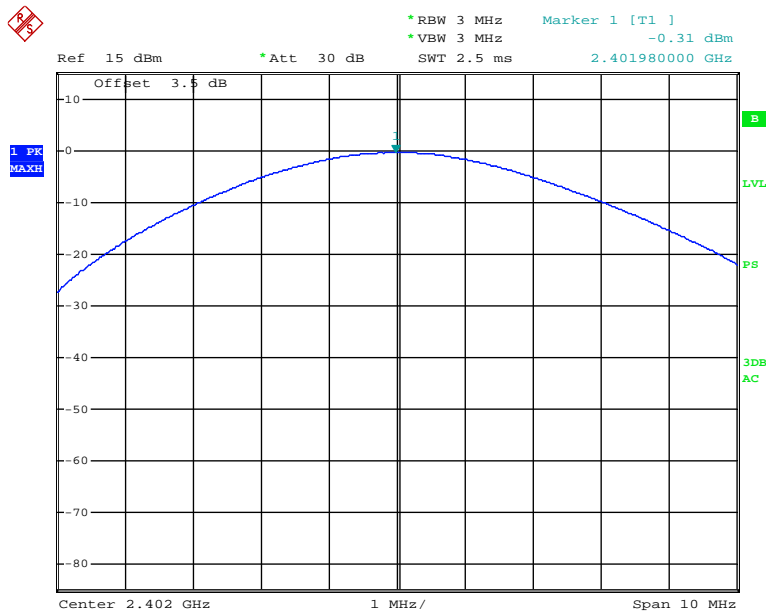


Date: 12.DEC.2013 14:53:10

EDR(8DPSK): Middle Channel

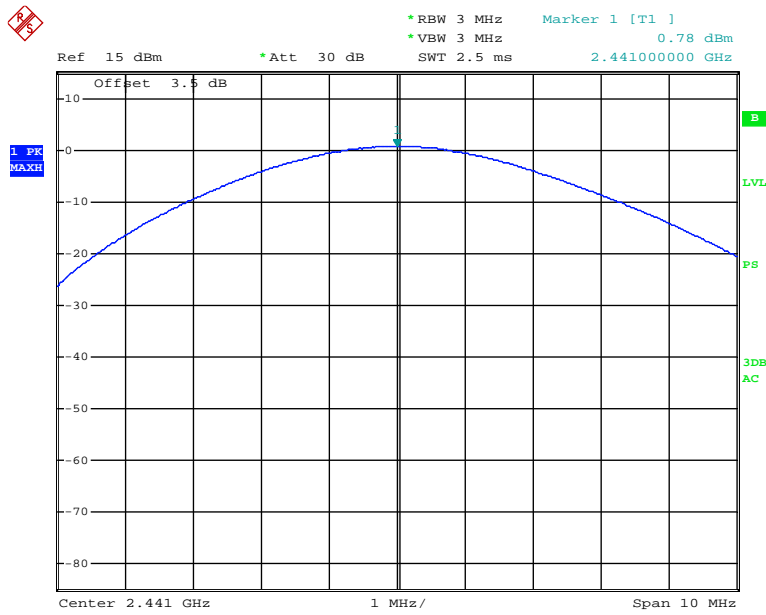

Date: 12.DEC.2013 14:55:38

EDR(8DPSK): High Channel

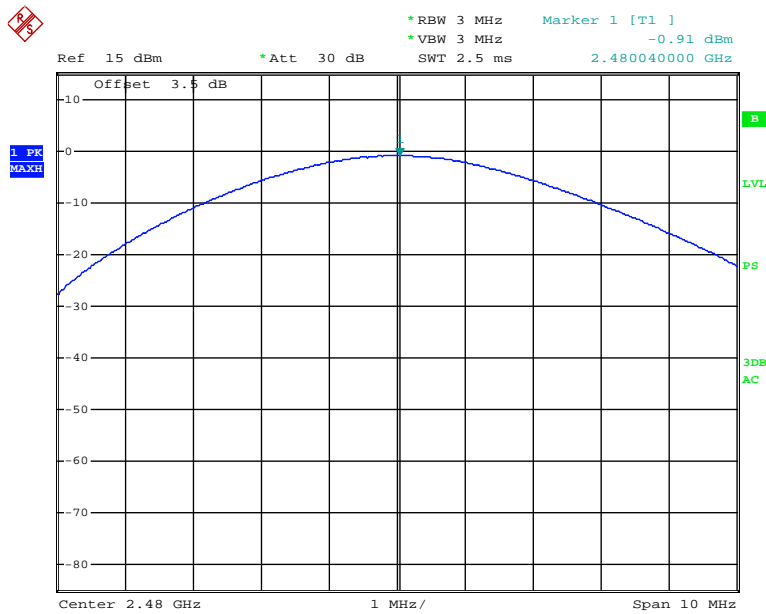

Date: 12.DEC.2013 14:56:39

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Gardon Zhang on 2013-12-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Frequency Band	Delta Peak to band emission (dBc)	Limit (dBc)	Result
BDR mode (GFSK)			
Left-band	48.86	20	Pass
Right-band	52.46	20	Pass
EDR Mode ($\pi/4$ -DQPSK)			
Left-band	40.53	20	Pass
Right-band	50.29	20	Pass
EDR Mode (8 DPSK)			
Left-band	41.25	20	Pass
Right-band	50.06	20	Pass

BDR (GFSK): Band Edge-Left Side

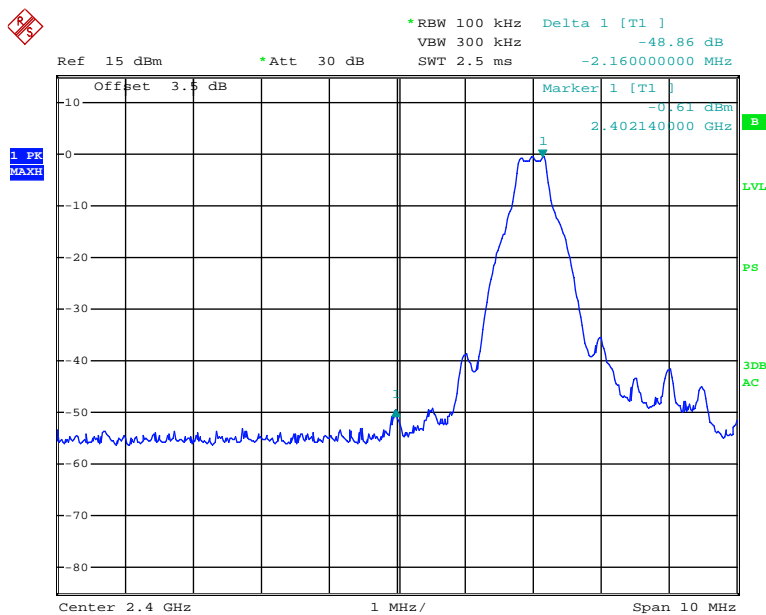


Date: 12.DEC.2013 16:15:52

BDR (GFSK): Band Edge-Right Side

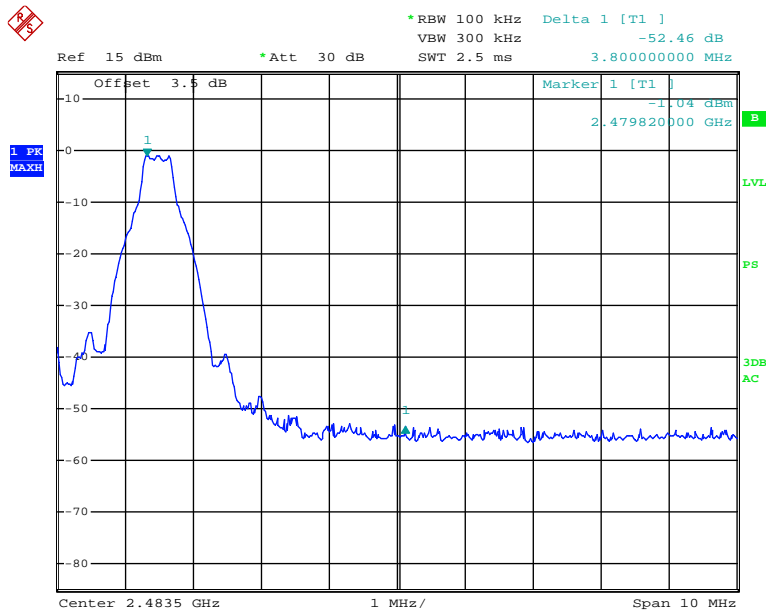


Date: 12.DEC.2013 16:17:08

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

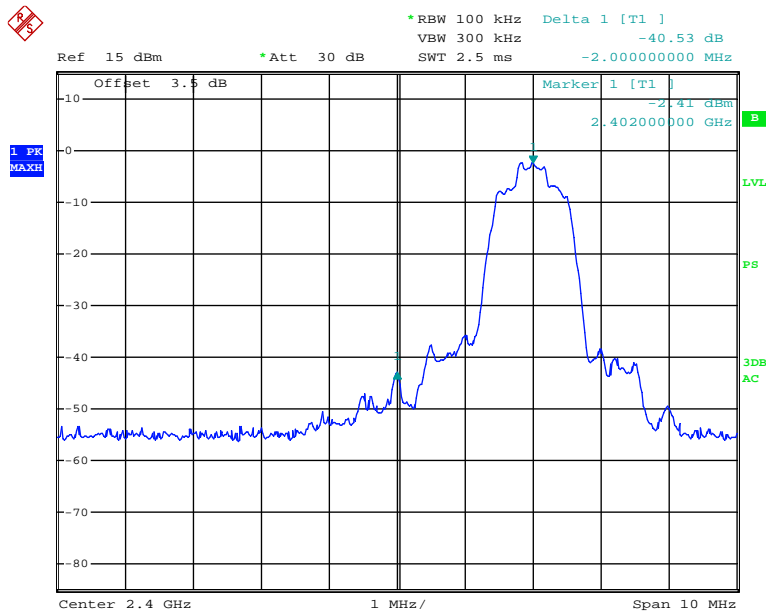


Date: 12.DEC.2013 16:20:15

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

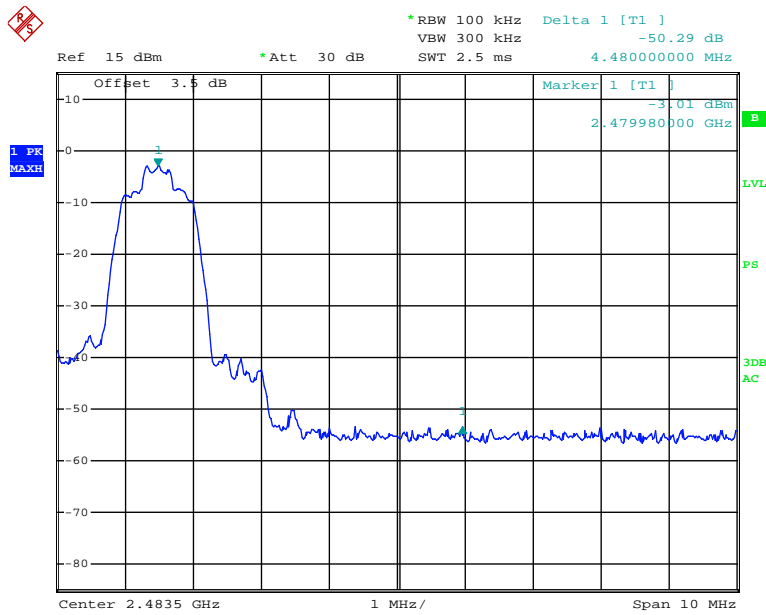


Date: 12.DEC.2013 16:21:22

EDR (8DPSK): Band Edge-Left Side

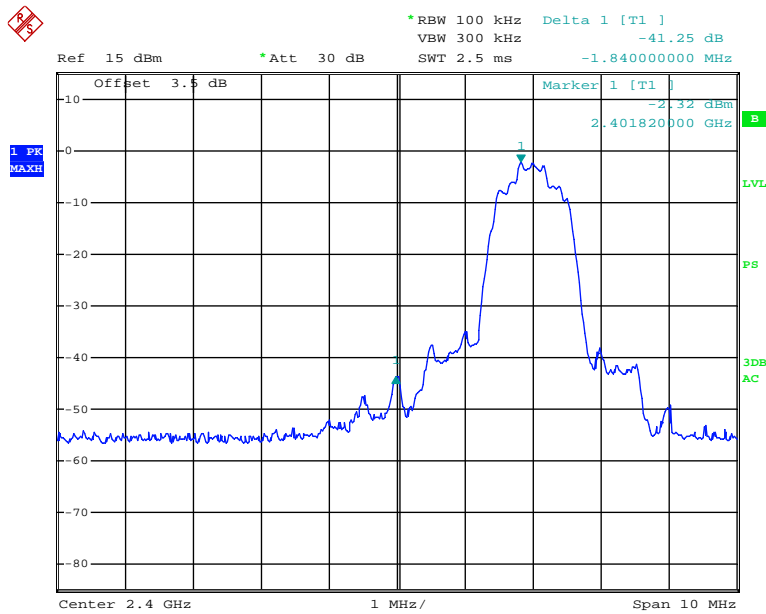

Date: 12.DEC.2013 16:22:46

BDR (8DPSK): Band Edge-Right Side

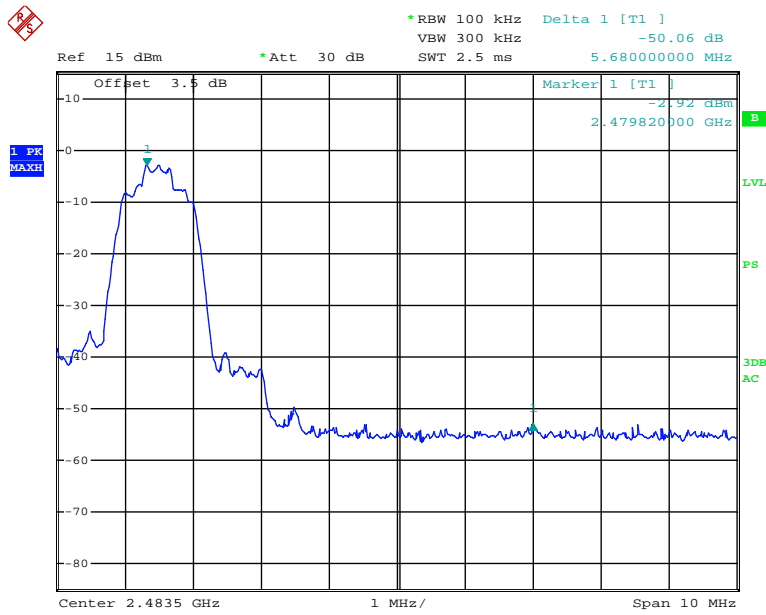

Date: 12.DEC.2013 16:25:55

***** END OF REPORT *****