

TEST REPORT
IC/FCC
IC RSS-Gen Issue 3 and RSS-210 Issue8
FCC 47CFR Part 15/C Section 15.249
Transmitter Intentional Radiator

Report Reference No. : E10415-1104

Date of issue : Revision 5.0 October 13, 2011

Total number of pages..... : 31

Testing Laboratory..... : Quality Auditing Institute

Address..... : 16 – 211 Schoolhouse Street, Coquitlam, BC, V3K 4X9, Canada

Accreditations..... :



IAS ISO17025 Accredited Laboratory No TL-239

This report has been completed in accordance with the requirements of ISO/IEC 17025. Test results contained in this report are with in QAI Laboratories ISO/IEC 17025 accreditation. QAI Laboratories authorizes the applicant to reproduce this report provided it is reproduced entirely and for the use by company's employees only.

Applicant's name : Recon Instruments Inc.

Address..... : 220-1050 Homer St. Vancouver BC, V6B 2W9, Canada

Contact..... : Hamid Adbollahi

hamid@reconinstruments.com

Industry Canada Registration : **9717A-001**

FCC Registration: **ZW5001**

Test specification:

Standard..... : RSS-Gen; RSS-210; FCC Part 15.249

Test procedure..... : RSS-Gen; FCC Part15/C; ANSI C63.4-2009

Non-standard test method..... : N/A



CANADA:

16 - 211 Schoolhouse Street

Coquitlam, British Columbia

Canada V3K 4X9

Test item description :	Bluetooth Remote for Recon-Ready Head-mounted Display system for sports goggles
Trade Mark..... :	N/A
Manufacturer..... :	Recon Instruments Inc.
Model/Type reference	RI-BTR
Ratings..... :	+3Vdc 2032 Coin Cell Lithium Battery



Testing procedure and testing location:

Testing Laboratory: Quality Auditing Institute

Testing location/ address: 16 – 211 Schoolhouse Street, Coquitlam, BC, 3K 4X9, Canada

Associated Laboratory: Quality Auditing Institute (Remote location)

Testing location/ address: 19473 Fraser Way, Pitt Meadows, BC, V3Y 2V4, Canada

FCC Test Site Registration Number (OATS 10m and SAC-3m): 226383

Industry Canada Site Registration Number (SAC-3m).....: 9543B-1

Industry Canada Test Site Registration Number (OATS-10m)...: 9543C-1

Testing procedure:

Tested by (name + signature).....: David Johanson

Approved by (+ signature): Parminder Singh

Testing location/ address: 19473 Fraser Way, Pitt Meadows, BC, V3Y 2V4, Canada

Sample Information:

Model Number.....: RI-BTR

Company:.....: Recon Instruments Inc.

Received Date:.....: August 05, 2011

Received By.....: David Johanson

Sample Log.....: QAI Product Control Log (QM 1301 - Sample Inventory)

Environmental Conditions:

Day 1: Aug 16-2011

Indoor Temperature: 23°C R.H.: 65%

Day 2: Aug 17-2011

Outdoor Temperature: 17°C R.H.: 55%

Day 3: Aug 18-2011

Indoor Temperature: 22°C R.H.: 52%

Day 4: Aug 19-2011

Indoor Temperature: 21°C R.H.: 40%



The following tests demonstrate the testimony to FCC and IC Electromagnetic compatibility testing for this product.

EMISSIONS
North America Regions: <ul style="list-style-type: none">• CFR 47 Part 15 Subpart B and Subpart C, Section 15.249• Industry Canada ICES-003, RSS-Gen and RSS-210

Tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Industry Canada and FCC Regulations for an un-licensed Intentional Radiator. Recon Instruments Inc. is responsible for the tested product configuration, continued product compliance with these standards listed, and for the appropriate auditing of subsequent products, as required.

This is to certify that the following report is true and correct to the best of our knowledge.

X

Tested By
David Johanson RF/EMC Test Engineer

X

Reviewed By
Parminder Singh Senior RF/ EMC Engineer



Measurement Uncertainty

Radio Frequency: $\pm 1,5 \times 10^{-5}$

Total RF power, conducted.....: ± 1 dB

RF power density, conducted.....: ± 2.75 dB

Spurious emissions, conducted.....: ± 3 dB

All emissions, radiated.....: ± 3.5 dB

Temperature.....: $\pm 1^{\circ}\text{C}$

Humidity.....: ± 5 %

DC and low frequency voltages.....: ± 3 %

Test Equipment List

Emissions

Manufacturer	Model	Description	Serial No.	Cal Due Date
ETS Lindgren	S201	3M Chamber 40GHz	1030	N/R
ETS Lindgren	Custom	Mast with Motor	N/R	N/R
ETS Lindgren	Custom	Turntable	N/R	N/R
Sunol Sciences	JB3	Biconilog Antenna 20MHz-3GHz	A120106	28-Oct-2011
Com-Power	AHA-118	Horn Antenna 1- 18GHz	711041	11-Mar-2014
Com-Power	LI-115	LISN	241036	11-Feb-2012
Rohde & Schwarz	ESU	EMI Receiver	100011	29-Mar-2012



Product Description

The Recon Ready Remote is a remote control used to navigate the feature manual on the LCD of the Recon Head-mounted Display (RHD) system. It is normally sold as part of a kit with the RHD.

Operational Description

To navigate through the feature manual on the LCD display, a Bluetooth Low Energy (BLE) wireless transceiver is implemented in the Recon Ready Remote to send control signals to the RHD system. The BLE technology complies with the Bluetooth SIG's Bluetooth Version 4.0 standard.

EUT Testing Configuration

For the purpose of compliance testing, the EUT was powered using an auxiliary +3Vdc power supply since the battery would not have enough power to complete the testing. The Remote was programmed to transmit the maximum output power at the low, mid and high channels of the Bluetooth band (2402, 2441 and 2480 MHz respectively) in a continuous transmission mode, with or without modulation, using a Recon command sender.

The test results for the Recon MOD can be found in a separate document.

The transmitter was set for continuous operation on various frequencies in both C.W. mode and modulated modes of operation.

Manufacturer	Recon Instruments Inc.
Product Name	Bluetooth Recon Ready Remote for the Recon MOD Head Mounted Display System
Model No.	RI-BTR
Serial No.	3C2DB7850A3B
Product Software/Firmware Revision	FCC-01

Auxiliary Equipment

Description	+3Vdc Adjustable DC Power Supply
Manufacturer	Samlex
Model No.	PSA-305
Input	110-130Vac 60Hz 0.2A
Output	+3Vdc
Plug	NEMA 1-15 Un-polarized 2 prong blade Type A

Cables

Description	Length	Connector A	Connector B	Shielded	Ferrites
Temporary power leads (for testing purposes only)	1m	solder	terminal	no	yes



Index

Product Description	6
Operational Description	6
EUT Testing Configuration.....	6
Section I: Requirements for the Canadian Market- IC	8
Part 1 - Digital Circuits Radiated Emission Testing	9
Part 2 - Antenna Requirements	10
Part 3 - Radiated Peak Power of the Fundamental and Harmonics.....	11
Part 4 - Spurious Radiated Emissions Testing	12
Part 5 - Occupied Bandwidth Testing	13
Part 6 - Transmitter Frequency Stability	14
Section II: Requirements for the US Market - FCC.....	15
Part 1 - Digital Circuits Radiated Emission Testing	16
Part 2 - Antenna Requirements	17
Part 3 - Radiated Peak Power of the Fundamental and Harmonics.....	18
Part 4 - Spurious Radiated Emissions and Bandedge Testing	19
Part 5 - Transmitter Frequency Stability	20
Appendix A: Report of Measurements Data and Plots.....	21
Appendix B: Bandwidth and Bandedge Plots.....	25
Appendix C: EUT photos during the testing	30



Section I: Requirements for the Canadian Market- IC (Exigences pour le marché Canadien)

Summary for RSS-Gen issue 3 and RSS-210 Issue 8

Testing was performed pursuant to Industry Canada standards

Test	Standard	Description	Result
Digital Circuits AC Mains Conducted Emissions	RSS-Gen (7.1.4) ICES-003	The AC mains Conducted emissions are measured in the 0.15 to 30MHz range	Not Applicable
Digital Circuits Radiated Emissions	RSS-Gen (7.1.4) ICES-003	The radiated emissions are measured in the 30-1000MHz range	Complies
Antenna Requirement	RSS-GEN(7.1.2)	Replaceable Antenna must use a unique connector	Complies Soldered non-replaceable antenna
Radiated Peak Power and Harmonics	RSS-210 (A2.9)(a)	Peak Power and Harmonics shall be measured at 3meters	Complies
Spurious Emissions outside of the band	RSS-210 (A2.9)(b)	Radiated Spurious emissions shall be 50dBc or 54dBuV in accordance with table 2, whichever is less stringent 30-18000MHz	Complies
Occupied Bandwidth	RSS-GEN (4.6.1)	When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, is measured.	Complies
Transmitter Frequency Stability	RSS-GEN (4.7) and (7.2.6)	Measure the Frequency Stability over Voltage and temperature ranges	Complies



Part 1 - Digital Circuits Radiated Emission Testing

DATE: August 16, 2011

TEST STANDARD: ICES-003 Issue 4

TEST METHOD: RSS-Gen (7.1.4); CAN/CSA – CEI/IEC CISPR 22: 02

TEST VOLTAGE: 3Vdc

MINIMUM STANDARD: Class B Limit:

Frequency (MHz)	Maximum Field Strength (calculated) dB μ V/m at 3 m	Maximum Field Strength dB μ V/m at 10 m
30 - 230	40.45	30.0
230 - 1000	47.45	37.0
Note 1. The lower limit shall apply at the transition frequency Note 2. Additional provisions may be required for cases where interference occurs Note 3. The 3meter calculation is done for measurements performed at 3meters.		

METHOD OF MEASUREMENT: The equipment was set up in 3m Semi Anechoic Chamber for preliminary and final measurements; Radiated Emissions were performed at 3 meters for this unit. A typical application was tested.

Emissions in both horizontal and vertical polarizations were measured while rotating the EUT on a turntable to maximize the emissions signal strength.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

The transmitter was OFF and set for Receive mode for this test.

MODIFICATIONS: The EUT did not require any modifications.

MEASUREMENT DATA: The plots and data are contained in Appendix A.

PERFORMANCE: Complies with Standard



Part 2 - Antenna Requirements

DATE: August 16, 2011

TEST STANDARD: IC RSS-Gen Section 7.1.2

APPLICABLE REGULATIONS : - “An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.”... “the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.”

RESULT : This unit meets this requirement. The antenna is soldered to the circuit board and is not accessible to the end-user.

Bluetooth transceiver – Ethertronics Inc. p/n:M310210



Part 3 - Radiated Peak Power of the Fundamental and Harmonics

DATE: August 17, 2011
TEST STANDARD: IC RSS-210 Annex 2 Section (A2.9)(a)
TEST VOLTAGE: 3Vdc
MINIMUM STANDARD:

(a) The field strengths measured at 3 meters shall not exceed the following:

Fundamental Frequencies (MHz)	Field Strength (millivolts/m)	
	Fundamental	Harmonics
902-928	50 (94dBuV)	0.5 (54dBuV)
2400-2483.5	50 (94dBuV)	0.5 (54dBuV)
5725-5875	50 (94dBuV)	0.5 (54dBuV)

TEST SETUP: The EUT was tested in our 3meter OATS and was positioned on the center of the Turntable and connected to a 3Vdc power supply. The Transmitter was set for Continuous transmission. The lowest, middle and highest channels in the 2400-2483.5MHz band were measured for all radiated emissions 30MHz to 26GHz.

MEASUREMENT METHOD: Measurements were made using an EMI Receiver with 1MHz RBW, Average detector using the appropriate Antennas, amplifiers and filters.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

DEVICE DESCRIPTIONS: As described in the above EUT description and setup Section.

EMISSIONS DATA: No emissions were detected above 7.5GHz using the appropriate antennas and amplifiers. See data in Appendix B

OBSERVATIONS: The EUT performed as expected.

PERFORMANCE: Complies.



Part 4 - Spurious Radiated Emissions Testing

DATE: August 18, 2011

TEST STANDARD: IC RSS-210 Annex 2 Section (A2.9)(b)
RSS-Gen Section (7.2.5)

TEST VOLTAGE: 3Vdc

MINIMUM STANDARD: (b) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

Table 5: General Field Strength Limits for Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength	
	uV/m @ 3-m	Calculated dBµV/m at 3m
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
960 +	500	54.0

TEST SETUP: The EUT was tested in our 3meter OATS and was positioned on the center of the Turntable and connected to a 3Vdc power supply. The Transmitter was set for Continuous transmission. The lowest, middle and highest channels in the 2400-2483.5MHz band were measured for all radiated emissions 30MHz to 26GHz.

MEASUREMENT METHOD: Measurements were made using an EMI Receiver with 120kHz RBW Quasi-Peak or 1MHz RBW Average detector as required using the appropriate Antennas, amplifiers and filters.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

DEVICE DESCRIPTIONS: As described in the above EUT description and setup Section.

EMISSIONS DATA: No emissions were detected above 7.5GHz using the appropriate antennas and amplifiers. See data in Appendix B

OBSERVATIONS: The EUT performed as expected.

PERFORMANCE: Complies.



Part 5 - Occupied Bandwidth Testing

DATE:	August 17, 2011
TEST STANDARD:	RSS-Gen Section (4.6.1)
TEST VOLTAGE:	3Vdc
MINIMUM STANDARD:	When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.
TEST SETUP:	The EUT was tested in our 3meter OATS and was positioned on the center of the Turntable and connected to a 5Vdc power supply. The Transmitter was set for Continuous transmission. The highest power channel was measured.
MEASUREMENT METHOD:	<p>Measurements were made using an EMI Receiver with 100kHz RBW Sample Detector set on maximum hold using the appropriate Antennas, amplifiers and filters.</p> <p>This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.</p>
DEVICE DESCRIPTIONS:	As described in the above EUT description and setup Section.
EMISSIONS DATA:	See Data and Plots in Appendix B
OBSERVATIONS:	<p>Since this product was tested per the requirements of RSS-210 A2.9, there was no reference to a required Bandwidth. It was decided that the 99% bandwidth was the appropriate measurement.</p> <p>The EUT performed as expected.</p>
PERFORMANCE:	Complies.



Part 6 - Transmitter Frequency Stability

DATE:	September 14, 2011
TEST STANDARD:	RSS-Gen Section (4.7) and (7.2.6)
TEST VOLTAGE:	3Vdc from battery
MINIMUM STANDARD:	<p>Not specified.</p> <p>(4.7) With the transmitter installed in an environment test chamber, the unmodulated carrier frequency shall be measured under the conditions specified below:</p> <p>(a) at temperatures of -30°C, +20°C and +50°C, and at the manufacturer's rated supply voltage; and</p> <p>(b) at a temperature of +20°C and at ± 15 percent of the manufacturer's rated supply voltage.</p> <p>(7.2.6) Transmitter frequency stability for licence-exempt radio apparatus shall be measured in accordance with Section 4.7. Also, for licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C, +20°C and +50°C instead of at the temperatures specified in Section 4.7(a). If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable standards, measurement of the frequency stability is not required provided that the occupied bandwidth of the licence-exempt radio apparatus lies entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz.</p>
TEST SETUP:	The EUT was bench tested and in our temperature chamber. Since this is a battery operated device, there was no measurement resulting from the AC voltage variation. The temperature was varied at +50, +20, and -30° Celsius. The transmitter was set for Carrier Wave (CW) mode and the lowest and highest channel Frequency was measured at each Temperature setting, after the Transmitter stabilized at the temperature.
MEASUREMENT METHOD:	Measurements were made using a Spectrum Analyzer with 1kHz RBW Average detector using the appropriate Antennas, amplifiers and filters.
DEVICE DESCRIPTIONS:	As described in the above EUT description and setup Section.
EMISSIONS DATA:	not required. The Occupied bandwidth lies within the 2.4 to 2.4385GHz designated band. See data below in the FCC Transmitter Frequency Stability section.
OBSERVATIONS:	The EUT performed as expected.
PERFORMANCE:	Complies.



Section II: Requirements for the US Market - FCC

General

Tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15 subpart B - Unintentional Radiators, Class B and subpart C – Intentional Radiators

Summary for FCC CFR47, Part 15 Subpart B and Subpart C Section 15.249

Test	Standard	Description	Result
AC Mains Conducted Emissions	15.107	The AC mains Conducted emissions are measured in the 0.15 to 30MHz range	Not Applicable
Digital Circuits Radiated Emissions	15.109	The radiated emissions are measured in the 30-18000MHz range	Complies
Antenna Requirement	15.203	Replaceable Antenna must use a unique connector	Complies
Radiated Fundamental and Harmonics Emissions	15.249(a)	Peak Fundamental and Harmonics shall be measured at 3meters	Complies
Spurious Emissions outside of the band and Bandedge	15.249(d) and (e)	Radiated Spurious emissions shall be 50dBc or the levels in 15.209	Complies
Transmitter Frequency Stability	15.215(c)	The 20dB bandwidth must remain within the designated frequency band over the expected variations in temperature and voltage range	Complies



Part 1 - Digital Circuits Radiated Emission Testing

DATE: August 16, 2011

TEST STANDARD: FCC Part 15/B

TEST VOLTAGE: 3Vdc

MINIMUM STANDARD: Class B Limit:

+Frequency (MHz)	Field Strength	
	uV/m @ 3-m	dBμV/m at 3m
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
960 - 1000	500	54.0

METHOD OF MEASUREMENT: The equipment was set up in 3m Semi Anechoic Chamber for preliminary and final measurements; Radiated Emissions were performed at 3 meters for this unit. A typical application was tested.

Emissions in both horizontal and vertical polarizations were measured while rotating the EUT on a turntable to maximize the emissions signal strength.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

The transmitter was OFF and set for Receive mode for this test.

MODIFICATIONS: The EUT did not require any modifications.

MEASUREMENT DATA: See Appendix A for emissions plots and corresponding data

PERFORMANCE: Complies with Standard



Part 2 - Antenna Requirements

DATE: August 16, 2011

TEST STANDARD: FCC Part 15.203

APPLICABLE REGULATIONS : - "An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited."... "the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded."

RESULT : This unit meets this requirement. The antenna is soldered to the circuit board and is not accessible to the end-user.

Bluetooth transceiver – Ethertronics Inc. p/n:M310210



Part 3 - Radiated Peak Power of the Fundamental and Harmonics

DATE: August 17, 2011
TEST STANDARD: FCC Part 15.249(a)
TEST VOLTAGE: 3Vdc
TEST CONDITIONS: Indoor, Temperature and Humidity: 25°C, 62%
MINIMUM STANDARD:

(a) The field strengths measured at 3 meters shall not exceed the following:

Fundamental Frequencies (MHz)	Field Strength (millivolts/m)	
	Fundamental	Harmonics
902-928	50 (94dBuV)	0.5 (54dBuV)
2400-2483.5	50 (94dBuV)	0.5 (54dBuV)
5725-5875	50 (94dBuV)	0.5 (54dBuV)

TEST SETUP: The EUT was tested in our 3meter SAC and was positioned on the center of the Turntable and connected to a 3Vdc power supply. The Transmitter was set for Continuous transmission. The lowest, middle and highest channels in the 2400-2483.5MHz band were measured for all radiated emissions 30MHz to 26GHz.

MEASUREMENT METHOD: Measurements were made using an EMI Receiver with 1MHz RBW, Average detector, using the appropriate Antennas, amplifiers and filters.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

DEVICE DESCRIPTIONS: As described in the above EUT description and setup Section.

EMISSIONS DATA: No emissions were detected above 7.5GHz using the appropriate antennas and amplifiers. See data in Appendix B

OBSERVATIONS: The EUT performed as expected.

PERFORMANCE: Complies.



Part 4 - Spurious Radiated Emissions and Bandedge Testing

DATE: August 18, 2011

TEST STANDARD: FCC Part 15.249(d) and (e)

TEST VOLTAGE: 3Vdc

MINIMUM STANDARD: (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

15.209 General Field Strength Limits

Frequency (MHz)	Field Strength	
	uV/m @ 3-m	Calculated dBµV/m at 3m
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
960 +	500	54.0

TEST SETUP: The EUT was tested in our 3meter SAC and was positioned on the center of the Turntable and connected to a 3Vdc power supply. The Transmitter was set for Continuous transmission. The lowest, middle and highest channels in the 2400-2483.5MHz band were measured for all radiated emissions 30MHz to 26GHz.

MEASUREMENT METHOD: Measurements were made using an EMI Receiver with 120kHz RBW Quasi-Peak or 1MHz RBW Average detector using the appropriate Antennas, amplifiers and filters.

This product is designed to be worn on the body. The EUT was investigated in 3 orthogonal planes and the worst case data and plots were taken.

DEVICE DESCRIPTIONS: As described in the above EUT description and setup Section.

EMISSIONS DATA: No emissions were detected above 7.5GHz using the appropriate antennas and amplifiers. See data and plots in Appendix A.

OBSERVATIONS: The EUT performed as expected.

PERFORMANCE: Complies.



Part 5 - Transmitter Frequency Stability

DATE: August 19, 2011

TEST STANDARD: FCC Part 15.215(c)

TEST VOLTAGE: 3Vdc

MINIMUM STANDARD: The 20dB bandwidth must remain within the designated frequency band over the expected variations in temperature and voltage range

TEST SETUP: The EUT was bench tested and in our temperature chamber. Since the supplied Coin cell can not operate long enough for the test, the 3Vdc was supplied by an Auxiliary power supply. The temperature was varied at +30, +20, 0, -20 and -30deg. Celsius as per the manufacturers expected temperature range and the Bandwidth measured at 3Vdc for each temperature level at the bandedge. The Transmitter was set for Continuous transmission using the modulation for this product. The lowest, and highest channel bandwidth was measured at each Voltage and Temperature setting.

MEASUREMENT METHOD: Measurements were made using a Spectrum Analyzer with 1MHz RBW Average detector using the appropriate Antennas, amplifiers and filters.

DEVICE DESCRIPTIONS: As described in the above EUT description and setup Section.

EMISSIONS DATA:

Channel 0 – 2.402GHz

Temperature (deg. Celsius)	Voltage (Vdc)	Bandwidth level at band edge (dB from peak emission)
-30	3	-38.34
-20	3	-38.33
0	3	-38.33
20	3	-38.33
30	3	-38.29

Channel 39 – 2.480GHz

Temperature (deg. Celsius)	Voltage (Vac at 60Hz)	Bandwidth level at band edge (dB from peak emission)
-30	3	-50.80
-20	3	-51.30
0	3	-53.80
20	3	-53.80
30	3	-53.02


OBSERVATIONS: The EUT performed as expected.

PERFORMANCE: Complies.



Appendix A: Report of Measurements Data and Plots

Quiescent Mode/Transmitter turned off

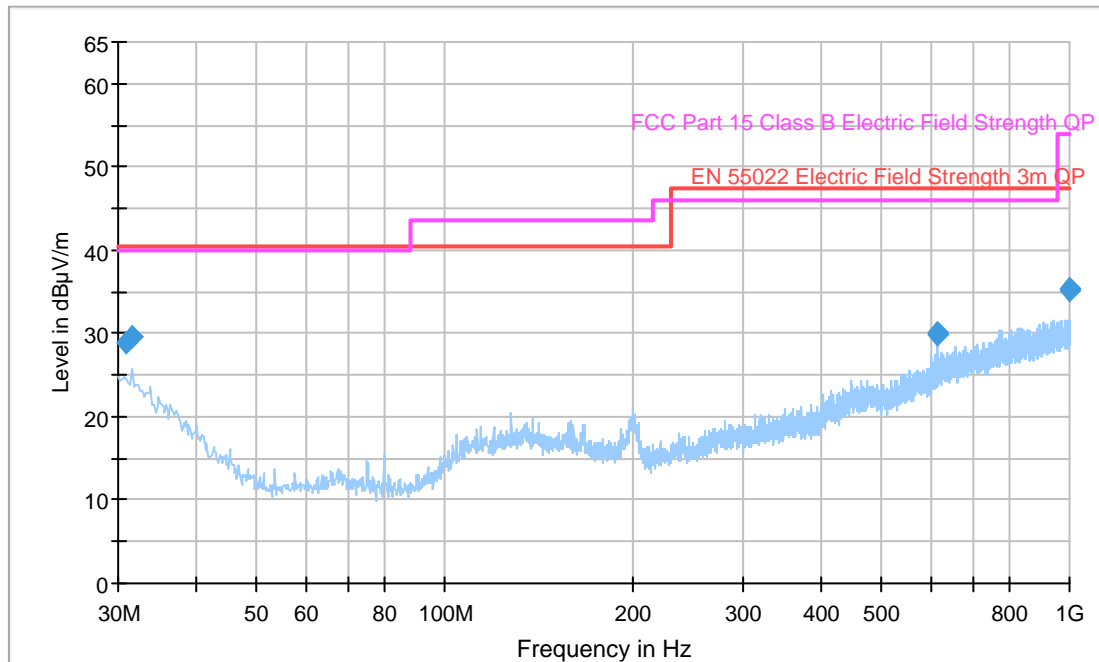


Plot for reference purposes only

Spurious Emissions 30-1000MHz

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time	Bandwidth (kHz)	Antenna height	Polarity	Turntable position	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
31.002880	28.9	1000.00	120.000	300.0	V	240.0	20.3	11.6	40.5
31.693600	29.7	1000.00	120.000	300.0	H	-56.0	21.1	10.8	40.5
615.112240	29.9	1000.00	120.000	176.0	V	-30.0	20.8	17.6	47.5
615.783760	30.2	1000.00	120.000	196.0	H	-16.0	21.1	17.3	47.5
998.629040	35.1	1000.00	120.000	166.0	V	129.0	25.2	12.4	47.5
998.797280	35.5	1000.00	120.000	130.0	H	240.0	25.6	12.0	47.5

No Spurious Emissions detected 1000 to 2.4GHz

Spurious Emissions Transmitter On Channel 0 - 2.402GHz; 20 – 2.441GHz; 2.480GHz

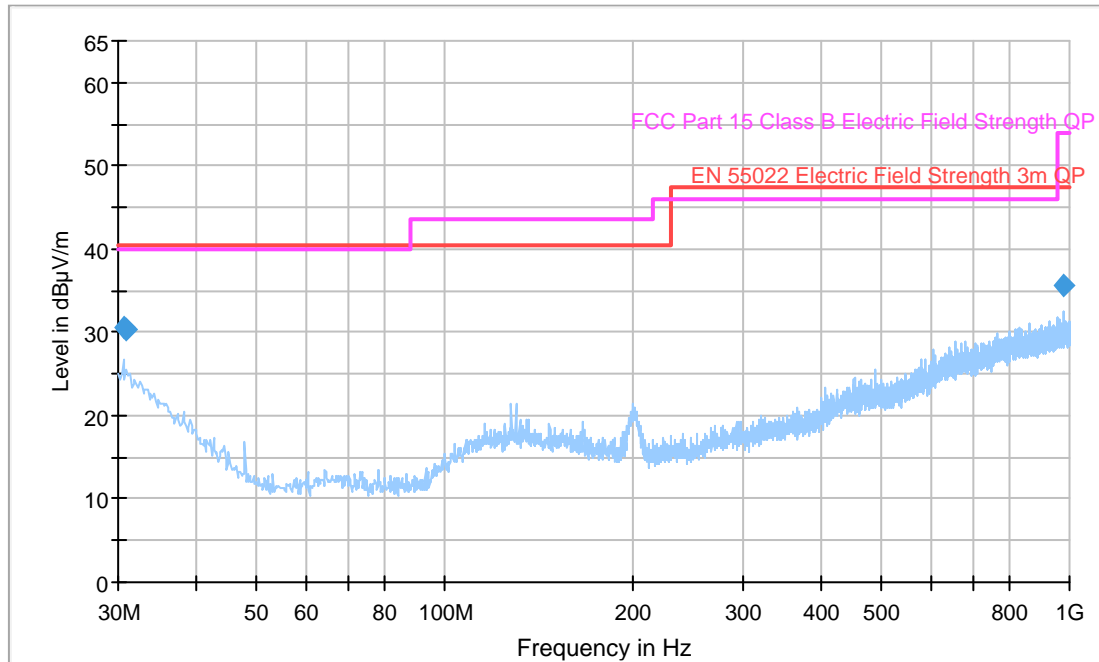


Plot for Reference purposes only

Spurious Emissions 30-1000MHz1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
30.654592	30.6	1000.00	120.000	162.0	H	264.0	21.9	9.9	40.5
30.906400	30.4	1000.00	120.000	259.0	H	189.0	21.7	10.1	40.5
980.435200	35.5	1000.00	120.000	162.0	H	129.0	25.5	12.0	47.5

**Same results for all 3 channels; no channel specific emissions detected.
No Spurious Emissions detected 1000 to 2.4GHz**

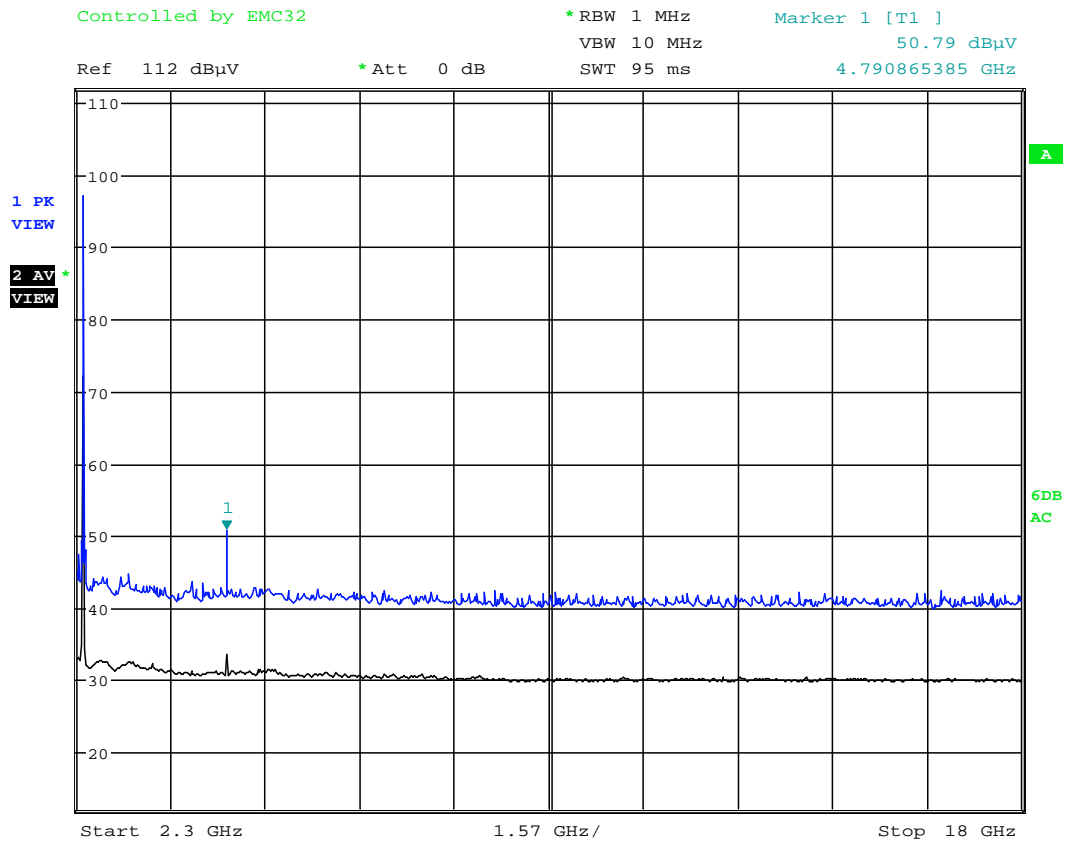

Date: 6.SEP.2011 14:34:38

**Plot: Ch0 harmonic emissions 2.3 to 18GHz – Uncorrected – Reference only
(the other channels are not shown since they have similar plots)**



Channel 0 - 2.402GHz Modulated Fundamental and Harmonics 2.4-25GHz Average

Frequency (GHz)	Corrected Average (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Average Limit (dBµV/m)	Margin (dB)
2.401876	88.4	113	V	143	94.0	7.6
4.80402	39.2	130	V	93	54.0	14.8
7.20601	33.5	100	V	0	54.0	20.5

Channel 0 - 2.402GHz Modulated Fundamental and Harmonics 2.4-25GHz Peak

Frequency (GHz)	Corrected Peak (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Peak Limit (dBµV/m)	Margin (dB)
2.401876	89.4	113	V	143	114.0	24.6
4.80402	44.0	130	V	93	74.0	30.0
7.20601	44.0	100	V	0	74.0	30.0

Channel 20 - 2.441GHz Modulated Fundamental and Harmonics 2.4-25GHz Average

Frequency (GHz)	Corrected Average (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Average Limit (dBµV/m)	Margin (dB)
2.44208	86.6	108	V	49	94.0	7.4
4.88400	44.3	100	V	23	54.0	9.7
7.32601	36.3	116	V	281	54.0	17.7

Channel 20 - 2.441GHz Modulated Fundamental and Harmonics 2.4-25GHz Peak

Frequency (GHz)	Corrected Peak (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Peak Limit (dBµV/m)	Margin (dB)
2.44208	88.0	108	V	49	114.0	26.0
4.88400	48.0	100	V	23	74.0	26.0
7.32601	45.0	116	V	281	74.0	29.0

Channel 39 - 2.480GHz Modulated Fundamental and Harmonics 2.4-25GHz Average

Frequency (GHz)	Corrected Average (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Average Limit (dBµV/m)	Margin (dB)
2.4801	85.5	103	V	330	94.0	8.5
4.9600	39.4	123	V	6	54.0	14.6
7.4400	34.3	120	V	272	54.0	19.7


Channel 39 - 2.480GHz Modulated Fundamental and Harmonics 2.4-25GHz Peak

Frequency (GHz)	Corrected Peak (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Peak Limit (dBµV/m)	Margin (dB)
2.4801	87.4	103	V	330	114.0	26.6
4.9600	43.9	123	V	6	74.0	30.1
7.4400	44.1	120	V	272	74.0	29.9

All other emissions and harmonics were undetectable or 20dB lower than the limit line.




Appendix B: Bandwidth and Bandedge Plots

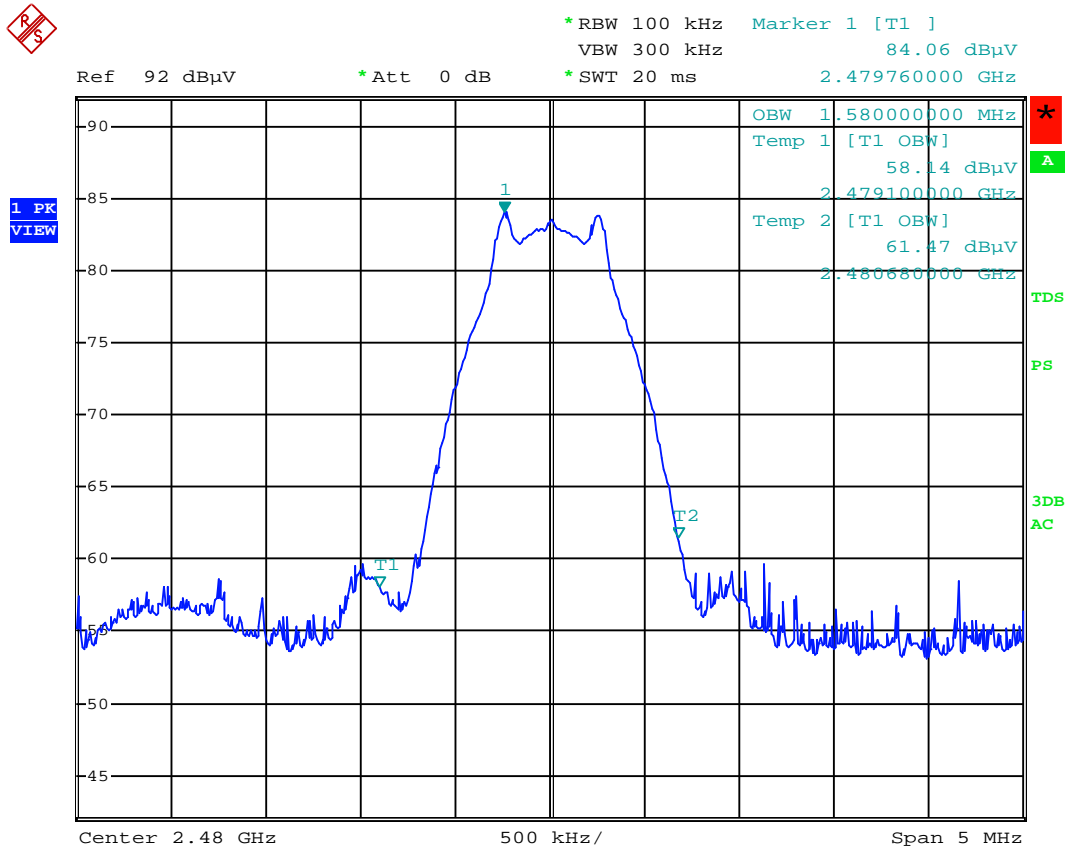


Date: 17.AUG.2011 10:55:27

99% Bandwidth Measurement

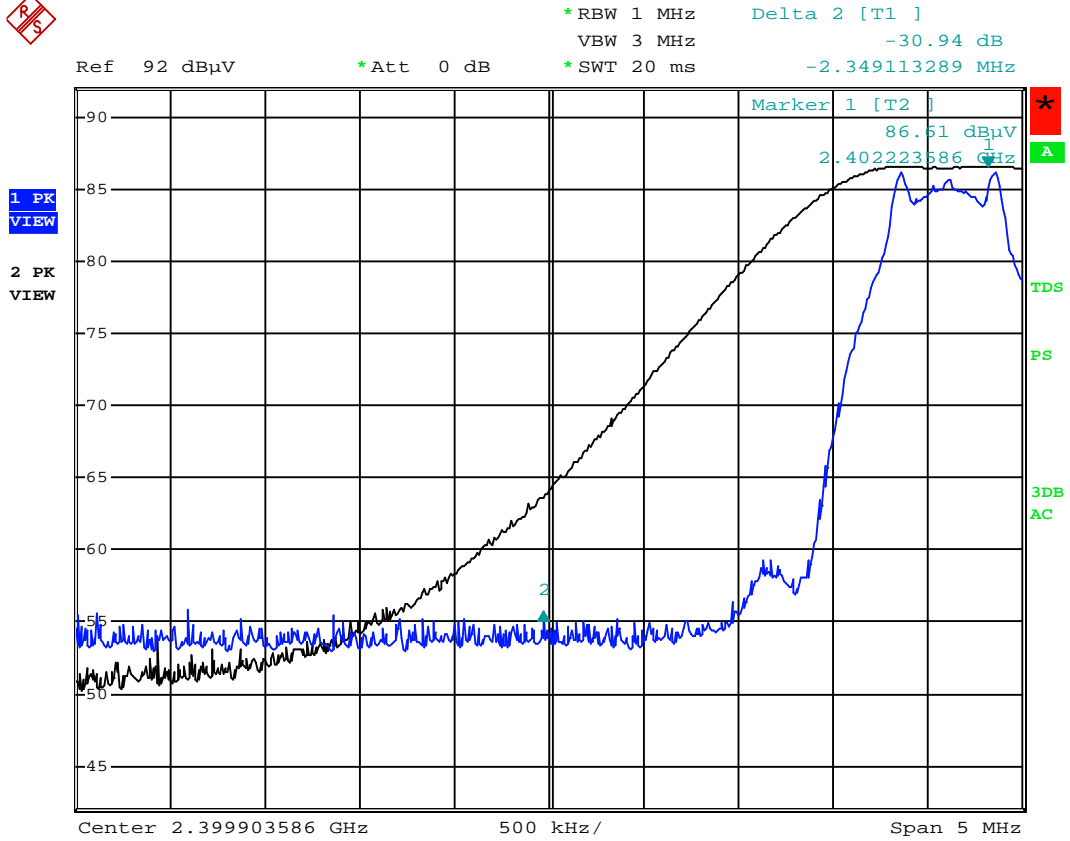

Date: 17.AUG.2011 11:07:58



Low Channel Band Edge

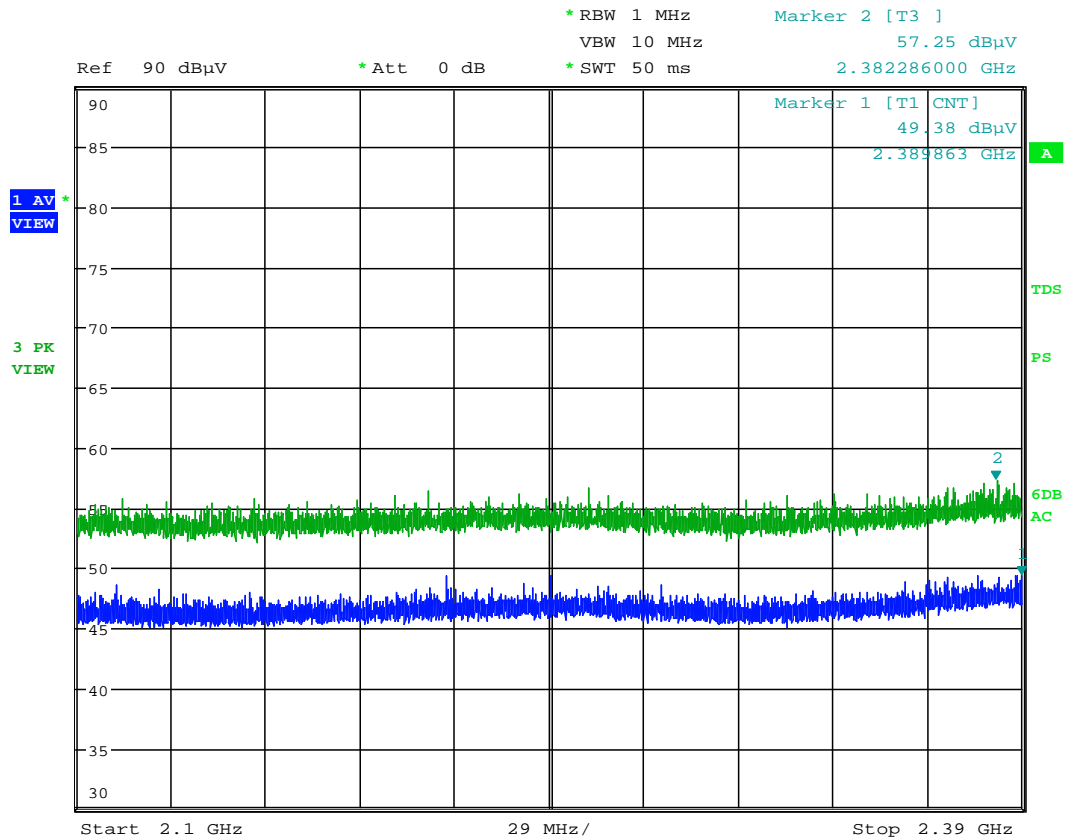


Date: 31.AUG.2011 15:43:14

2.1 to 2.390 GHz restricted band plot.

(all pulses are momentary and are not signals from the product)



Page 28 of 32

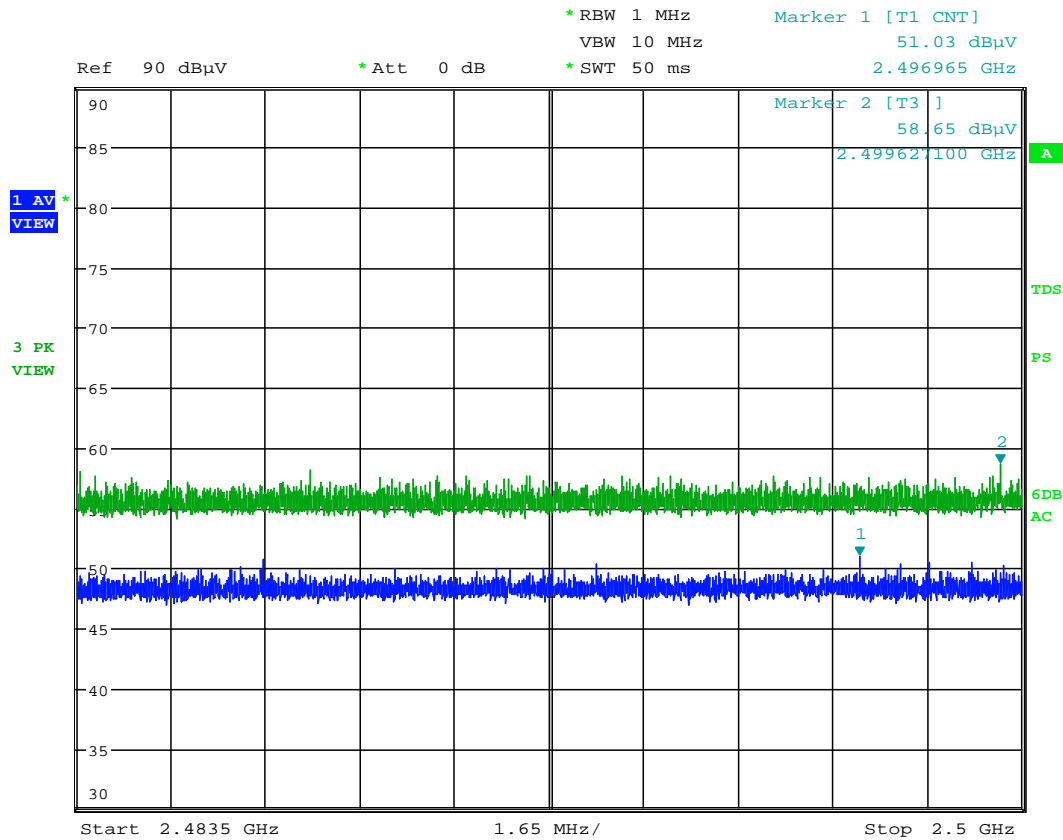

Date: 31.AUG.2011 15:39:51

2.4835 to 2.50 GHz restricted band plot.

(all pulses are momentary and are not signals from the product)

Appendix C: EUT photos during the testing





