

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Amp	HP	8449B	3008A02495	Apr. 28,15	1 Year
2.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Feb.03,15	1 Year
3.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr. 28,15	1 Year
4.	RF Cable	Hubersuhner	Sucoflex102	28610/2	Apr. 28,15	1 Year

5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.


5.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2
Get the final compare with limit.

5.4. Test Results

Pass (The testing data was attached in the next pages.)

5180-5240MHz Band:

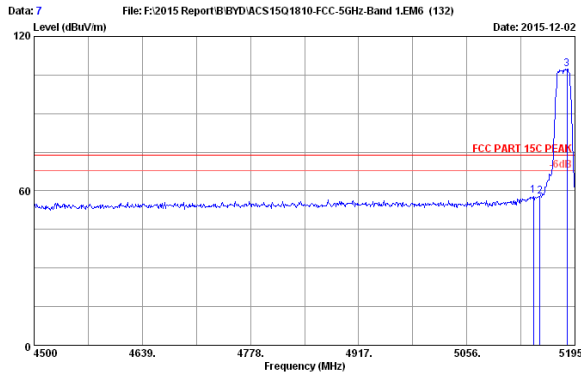


Data: 7 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 1.EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5141.485	33.77	9.61	35.38	50.01	58.01	74.00	15.99	Peak
2	5150.000	33.76	9.62	35.38	49.88	57.88	74.00	16.12	Peak
3	5184.575	33.70	9.63	35.37	99.34	107.30	74.00	-33.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

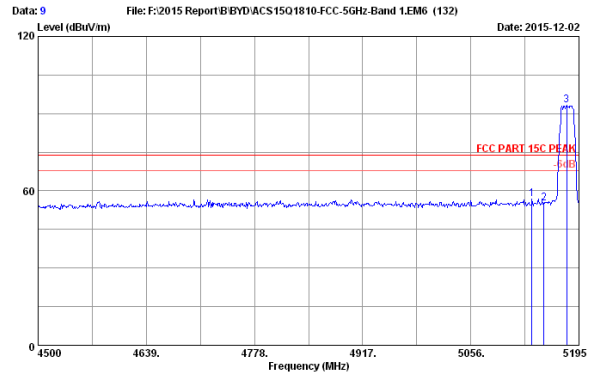


Data: 9 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 1.EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5134.535	33.78	9.61	35.39	48.86	56.86	74.00	17.14	Peak
2	5150.000	33.76	9.62	35.38	47.28	55.28	74.00	18.72	Peak
3	5179.015	33.71	9.63	35.37	85.12	93.09	74.00	-19.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

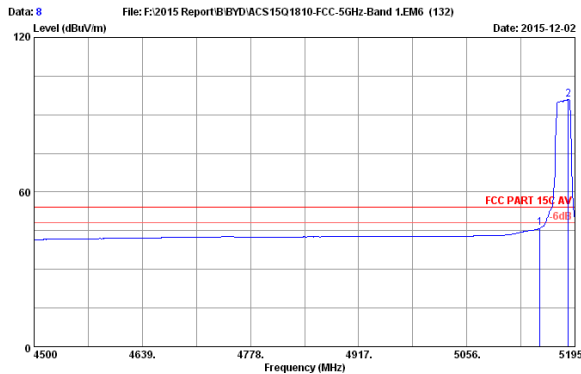


Data: 8 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 1.EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	37.99	45.99	54.00	8.01	Average
2	5186.660	33.70	9.63	35.37	87.99	95.95	54.00	-41.95	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

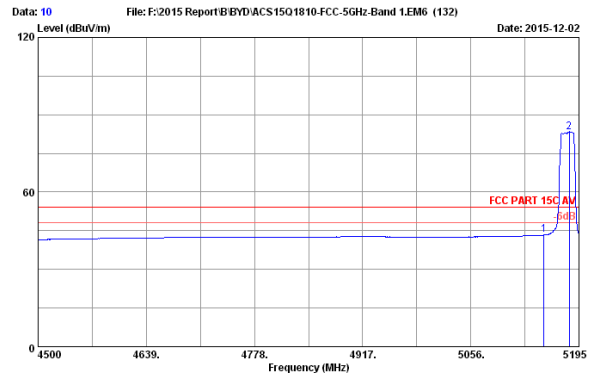


Data: 10 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 1.EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	35.38	43.38	54.00	10.62	Average
2	5182.490	33.71	9.63	35.37	75.40	83.37	54.00	-29.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

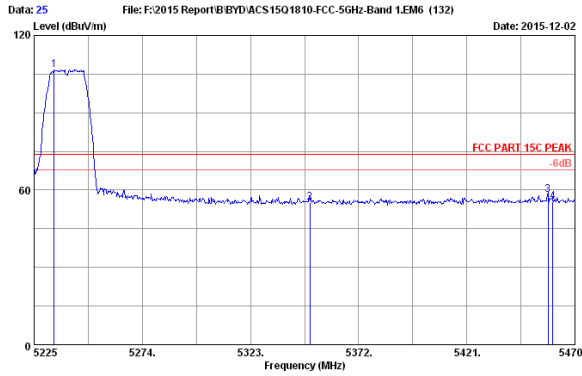

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.065	33.63	9.66	35.35	98.56	106.50	74.00	-32.50	Peak
2	5350.000	33.44	9.71	35.29	47.37	55.23	74.00	18.77	Peak
3	5457.250	33.27	9.76	35.25	50.36	58.14	74.00	15.86	Peak
4	5460.000	33.26	9.76	35.25	47.57	55.34	74.00	18.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

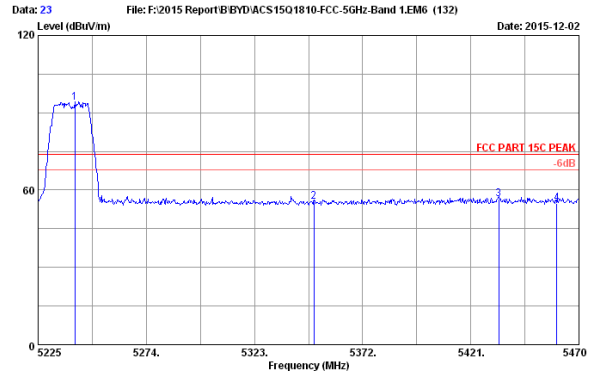

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.660	33.61	9.66	35.34	86.13	94.06	74.00	-20.06	Peak
2	5350.000	33.44	9.71	35.29	47.78	55.64	74.00	18.36	Peak
3	5432.740	33.31	9.75	35.26	48.80	56.60	74.00	17.40	Peak
4	5460.000	33.26	9.76	35.25	47.20	54.97	74.00	19.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

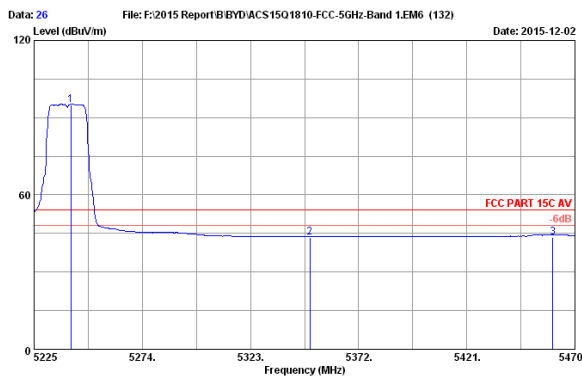

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.660	33.61	9.66	35.34	87.05	94.98	54.00	-40.98	Average
2	5350.000	33.44	9.71	35.29	35.45	43.31	54.00	10.69	Average
3	5460.000	33.26	9.76	35.25	35.63	43.40	54.00	10.60	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

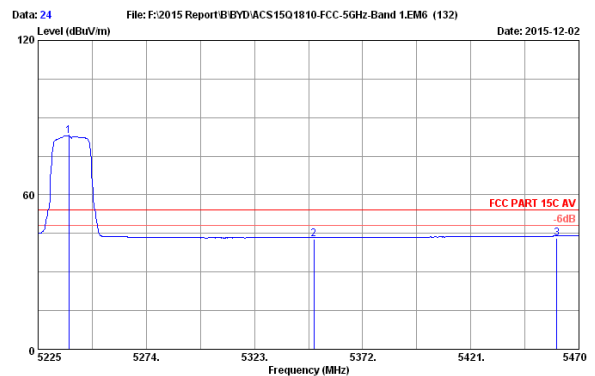

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.965	33.62	9.66	35.34	74.94	82.88	54.00	-28.88	Average
2	5350.000	33.44	9.71	35.29	34.96	42.82	54.00	11.18	Average
3	5460.000	33.26	9.76	35.25	35.23	43.00	54.00	11.00	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

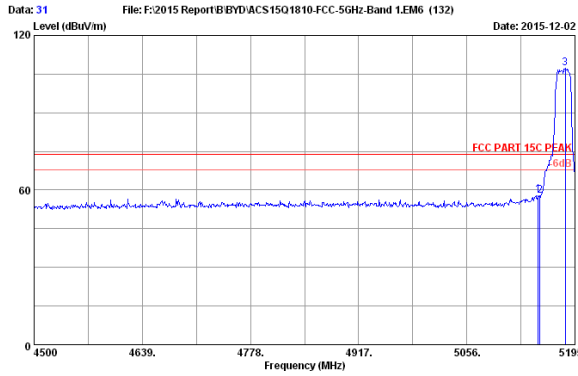

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.740	33.76	9.62	35.38	50.06	58.06	74.00	15.94	Peak
2	5150.000	33.76	9.62	35.38	49.75	57.75	74.00	16.25	Peak
3	5182.490	33.71	9.63	35.37	99.17	107.14	74.00	-33.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

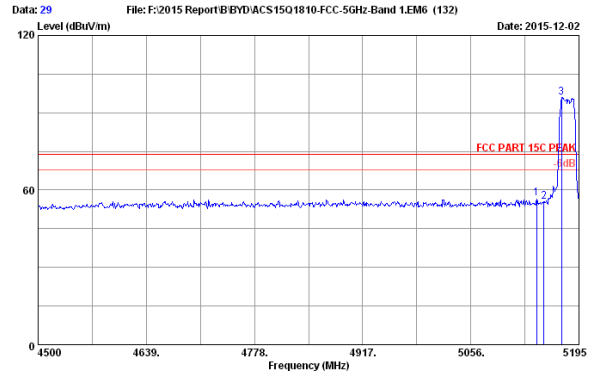

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5140.790	33.77	9.61	35.38	48.73	56.73	74.00	17.27	Peak
2	5150.000	33.76	9.62	35.38	47.49	55.49	74.00	18.51	Peak
3	5172.760	33.72	9.63	35.37	88.06	96.04	74.00	-22.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

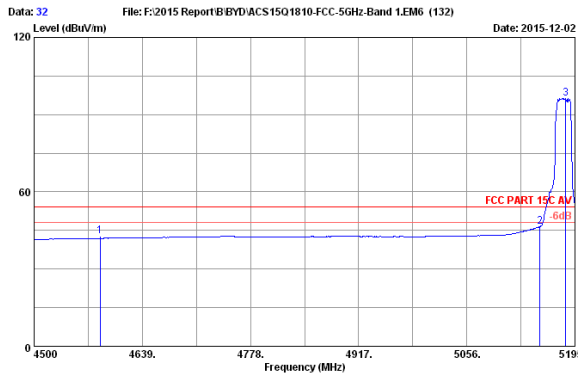

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4585.000	33.34	9.35	35.64	35.66	42.71	54.00	11.29	Average
2	5150.000	33.76	9.62	35.38	38.62	46.62	54.00	7.38	Average
3	5183.185	33.71	9.63	35.37	88.27	96.24	54.00	-42.24	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

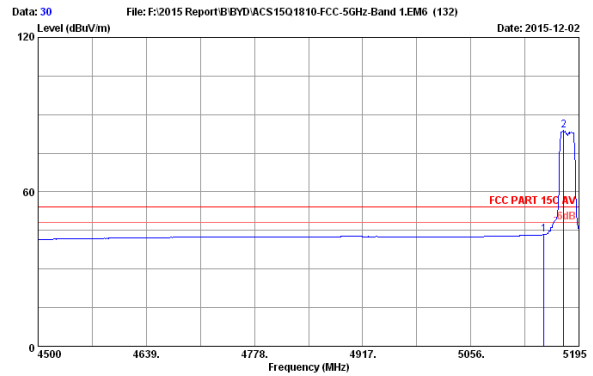

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	35.43	43.43	54.00	10.57	Average
2	5175.540	33.72	9.63	35.37	75.76	83.74	54.00	-29.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

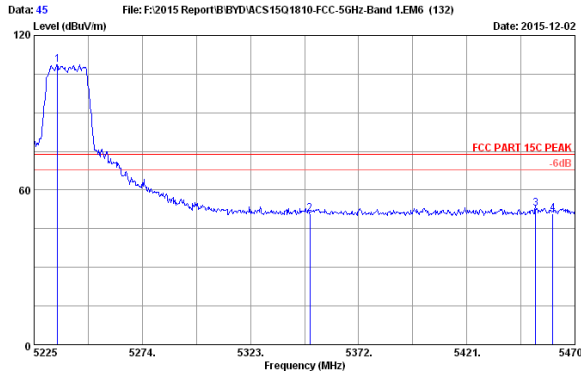

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.535	33.62	9.66	35.35	100.63	108.56	74.00	-34.56	Peak
2	5350.000	33.44	9.71	35.29	43.04	50.90	74.00	23.10	Peak
3	5452.115	33.28	9.76	35.25	44.95	52.74	74.00	21.26	Peak
4	5460.000	33.26	9.76	35.25	43.02	50.79	74.00	23.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

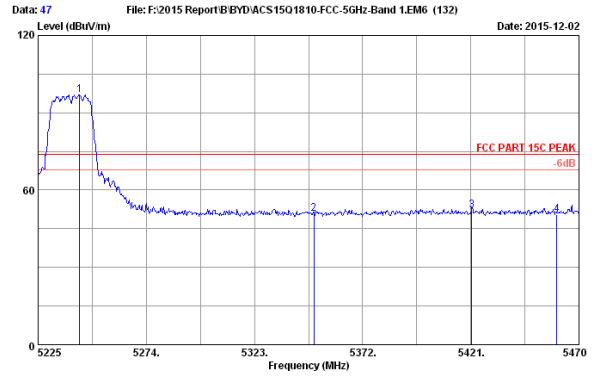

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.865	33.61	9.66	35.34	88.93	96.86	74.00	-22.86	Peak
2	5350.000	33.44	9.71	35.29	42.88	50.74	74.00	23.26	Peak
3	5421.490	33.33	9.74	35.26	44.44	52.23	74.00	21.75	Peak
4	5460.000	33.26	9.76	35.25	42.55	50.32	74.00	23.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

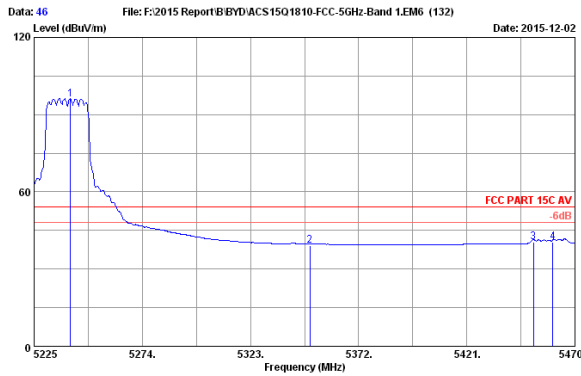

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.415	33.61	9.66	35.34	88.06	95.99	54.00	-41.99	Average
2	5350.000	33.44	9.71	35.29	31.29	39.15	54.00	14.85	Average
3	5451.135	33.28	9.76	35.25	32.71	40.50	54.00	13.50	Average
4	5460.000	33.26	9.76	35.25	32.56	40.33	54.00	13.67	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

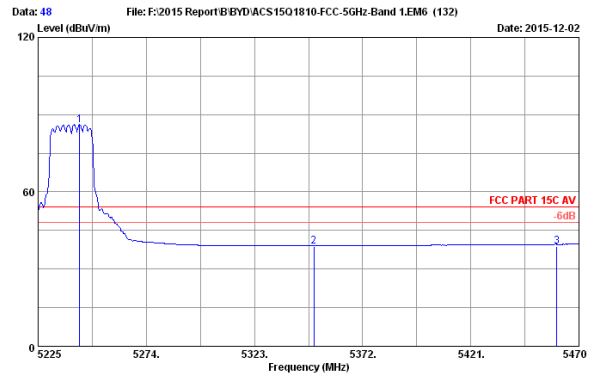

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.865	33.61	9.66	35.34	77.94	85.87	54.00	-31.87	Average
2	5350.000	33.44	9.71	35.29	30.78	38.64	54.00	15.36	Average
3	5460.000	33.26	9.76	35.25	30.87	38.64	54.00	15.36	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

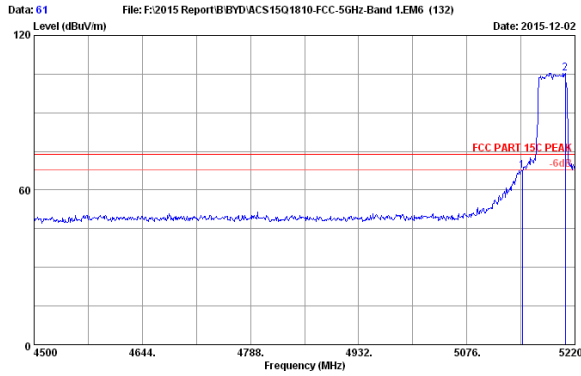

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH38 5190MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	59.37	67.37	74.00	6.63	Peak
2	5207.040	33.67	9.64	35.36	97.36	105.31	74.00	-31.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

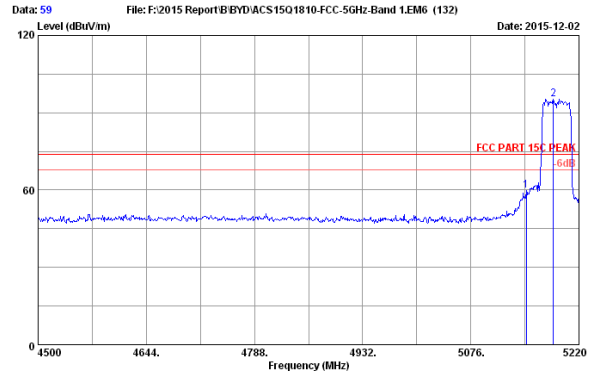

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH38 5190MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	51.91	59.91	74.00	14.09	Peak
2	5186.160	33.70	9.63	35.37	87.24	95.20	74.00	-21.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

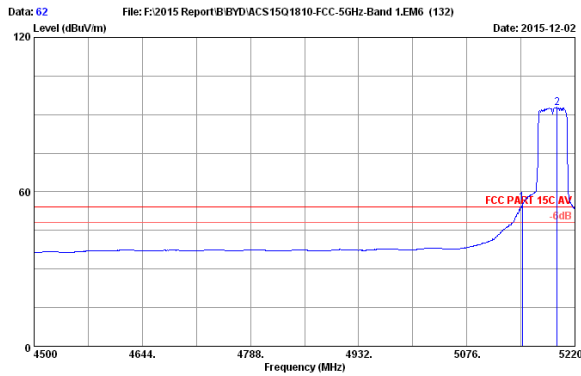

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH38 5190MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	47.72	55.72	54.00	-1.72	Average
2	5196.240	33.69	9.63	35.36	84.74	92.70	54.00	-38.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

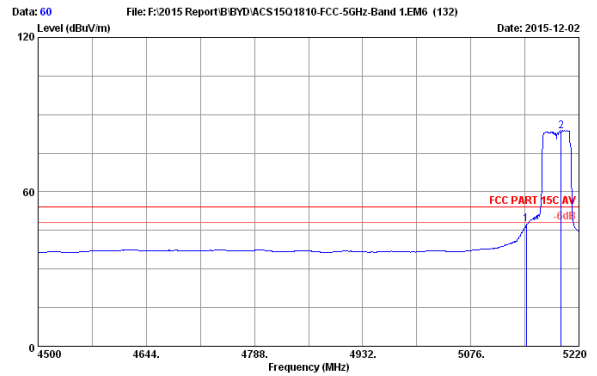

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH38 5190MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	39.40	47.40	54.00	6.60	Average
2	5196.240	33.69	9.63	35.36	75.77	83.73	54.00	-29.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

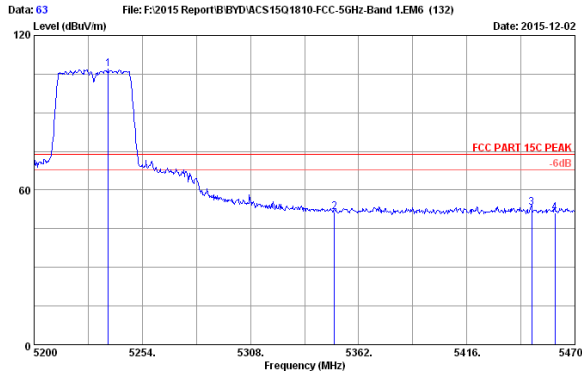

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5236.990	33.62	9.66	35.35	98.87	106.80	74.00	-32.80	Peak
2	5350.000	33.44	9.71	35.29	43.62	51.46	74.00	22.52	Peak
3	5448.400	33.28	9.76	35.25	45.32	53.11	74.00	20.89	Peak
4	5460.000	33.26	9.76	35.25	43.50	51.27	74.00	22.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

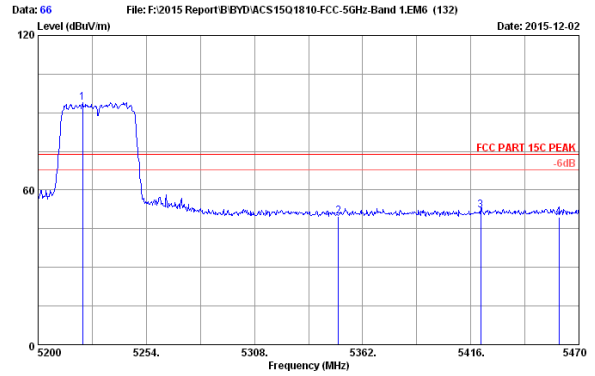

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5222.140	33.64	9.65	35.35	85.87	93.81	74.00	-19.81	Peak
2	5350.000	33.44	9.71	35.29	41.89	49.75	74.00	24.25	Peak
3	5420.860	33.33	9.74	35.26	44.37	52.18	74.00	21.82	Peak
4	5460.000	33.26	9.76	35.25	41.84	49.61	74.00	24.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

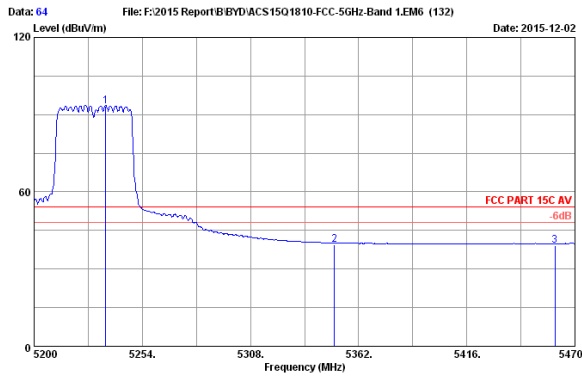

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.640	33.62	9.66	35.35	85.43	93.36	54.00	-39.36	Average
2	5350.000	33.44	9.71	35.29	31.69	39.55	54.00	14.45	Average
3	5460.000	33.26	9.76	35.25	31.20	38.97	54.00	15.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

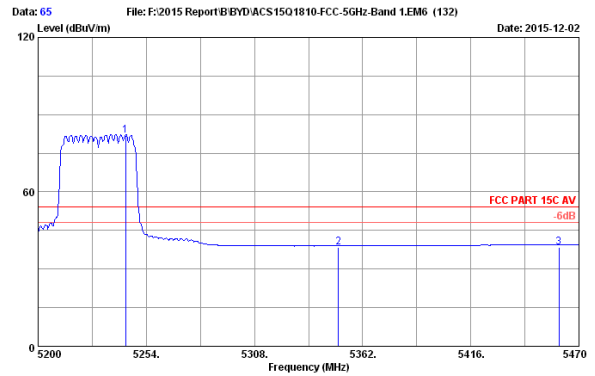

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.740	33.61	9.66	35.34	74.07	82.00	54.00	-28.00	Average
2	5350.000	33.44	9.71	35.29	30.57	38.43	54.00	15.57	Average
3	5460.000	33.26	9.76	35.25	30.69	38.46	54.00	15.54	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

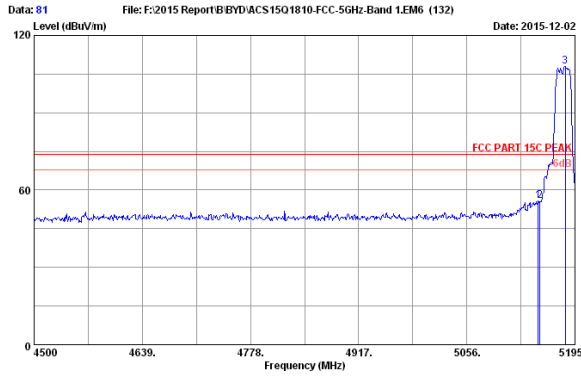


Data: 81 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.740	33.76	9.62	35.38	47.90	55.90	74.00	18.10	Peak
2	5150.000	33.76	9.62	35.38	47.69	55.69	74.00	18.31	Peak
3	5182.490	33.71	9.63	35.37	100.10	108.07	74.00	-34.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

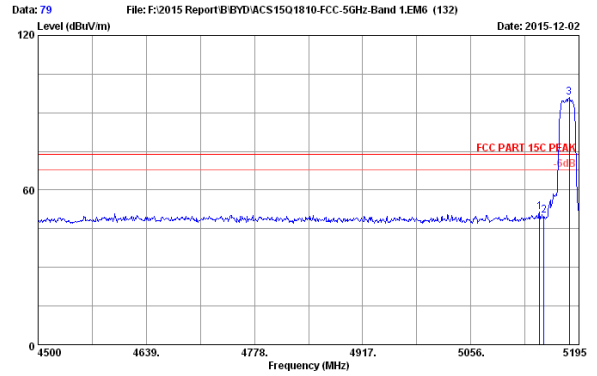


Data: 79 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.265	33.77	9.62	35.38	43.42	51.43	74.00	22.57	Peak
2	5150.000	33.76	9.62	35.38	42.01	50.01	74.00	23.99	Peak
3	5182.490	33.71	9.63	35.37	86.05	96.02	74.00	-22.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

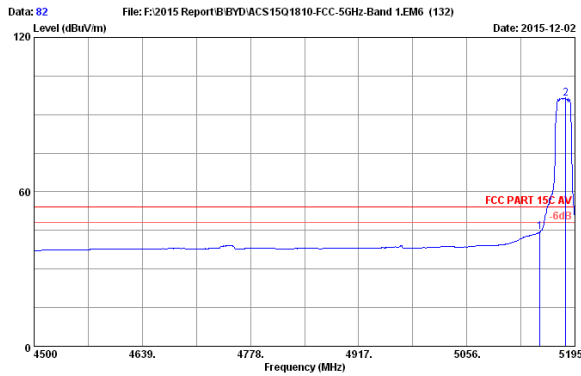


Data: 82 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	36.45	44.45	54.00	9.55	Average
2	5183.185	33.71	9.63	35.37	86.43	96.40	54.00	-42.40	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

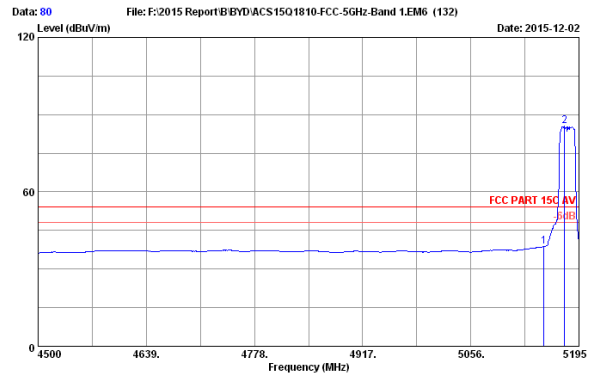


Data: 80 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.70	38.70	54.00	15.30	Average
2	5176.235	33.72	9.63	35.37	77.48	85.46	54.00	-31.46	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

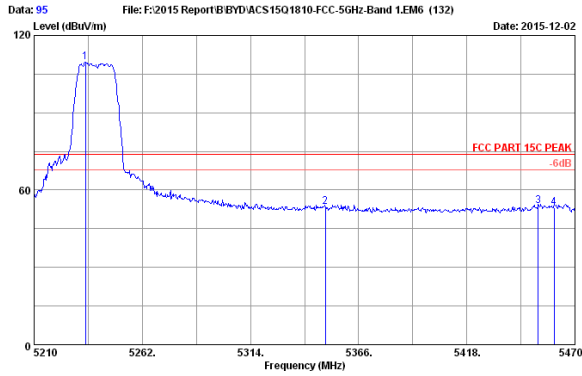

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.700	33.62	9.66	35.35	101.66	109.59	74.00	-35.59	Peak
2	5350.000	33.44	9.71	35.29	45.66	53.52	74.00	20.48	Peak
3	5452.320	33.28	9.76	35.25	45.91	53.70	74.00	20.30	Peak
4	5460.000	33.26	9.76	35.25	45.33	53.10	74.00	20.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

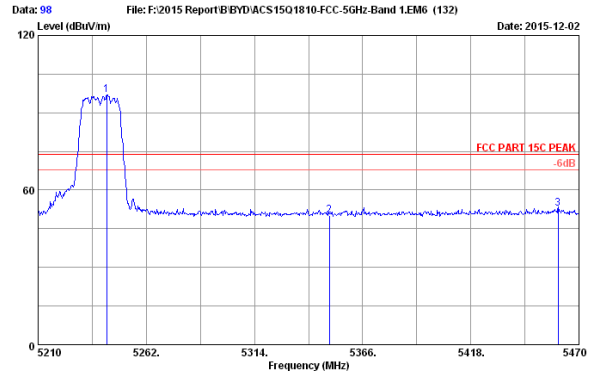

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.020	33.61	9.66	35.34	88.88	96.81	74.00	-22.81	Peak
2	5350.000	33.44	9.71	35.29	42.28	50.14	74.00	23.86	Peak
3	5460.000	33.26	9.76	35.25	44.90	52.57	74.00	21.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

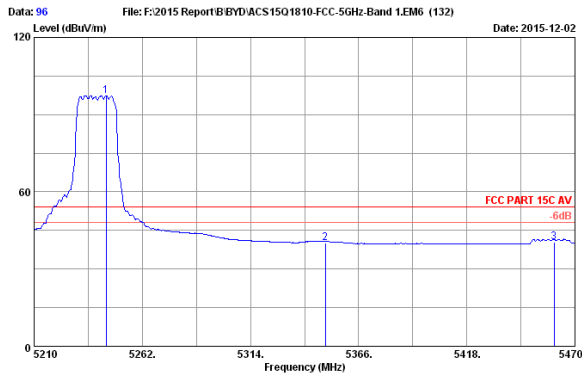

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.580	33.61	9.66	35.34	89.20	97.13	54.00	-43.13	Average
2	5350.000	33.44	9.71	35.29	32.25	40.11	54.00	13.89	Average
3	5460.000	33.26	9.76	35.25	32.75	40.52	54.00	13.48	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

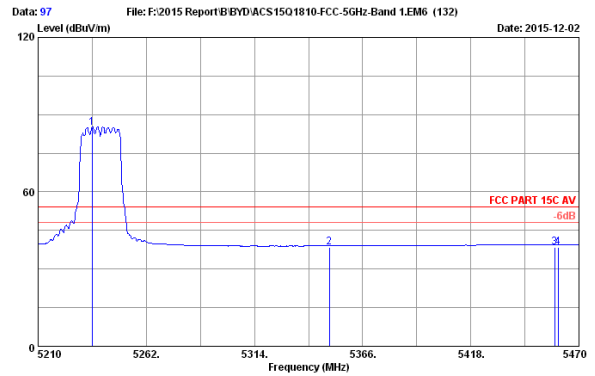

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5236.000	33.62	9.66	35.35	77.07	85.00	54.00	-31.00	Average
2	5350.000	33.44	9.71	35.29	30.60	38.46	54.00	15.54	Average
3	5458.300	33.27	9.76	35.25	30.75	38.53	54.00	15.47	Average
4	5460.000	33.26	9.76	35.25	30.74	38.51	54.00	15.49	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

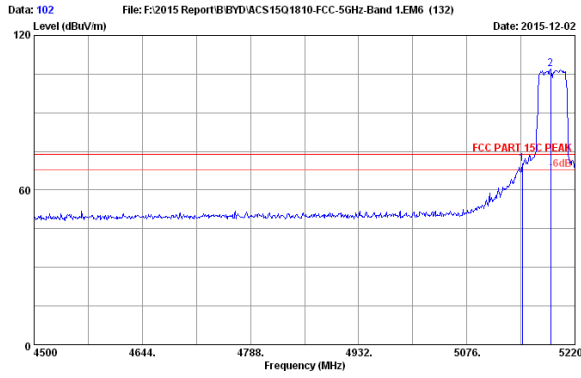

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	62.36	70.36	74.00	3.64	Peak
2	5187.600	33.70	9.63	35.36	96.83	106.80	74.00	-32.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

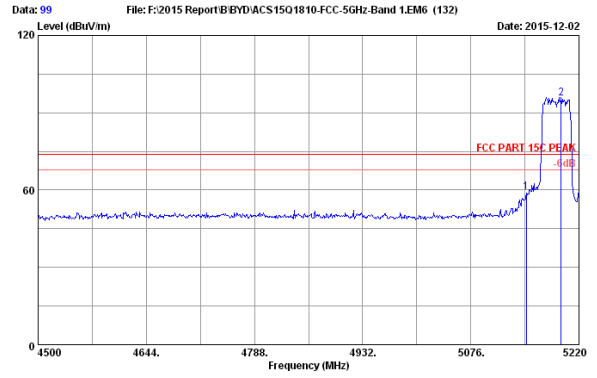

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	51.04	59.04	74.00	14.96	Peak
2	5196.240	33.69	9.63	35.36	87.79	95.75	74.00	-21.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

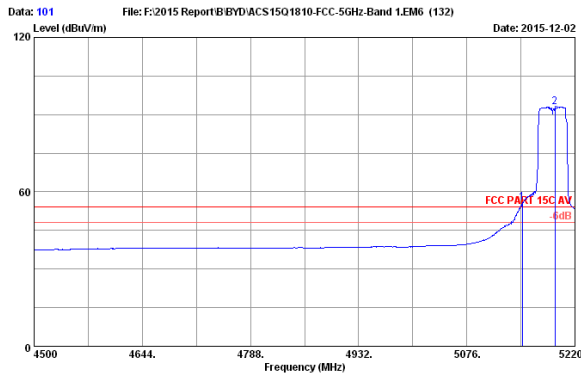

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	47.86	55.86	54.00	-1.86	Average
2	5193.360	33.69	9.63	35.36	85.11	93.07	54.00	-39.07	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

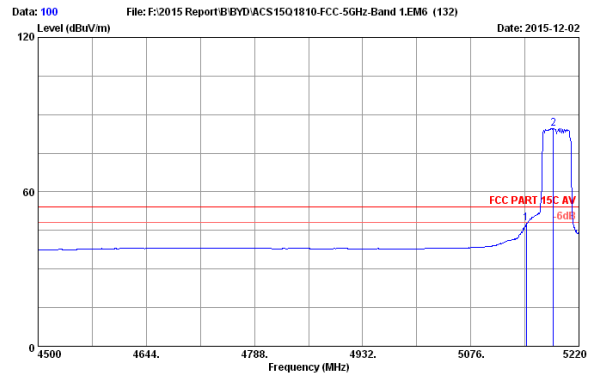

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	39.77	47.77	54.00	6.23	Average
2	5186.160	33.70	9.63	35.37	76.63	84.59	54.00	-30.59	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

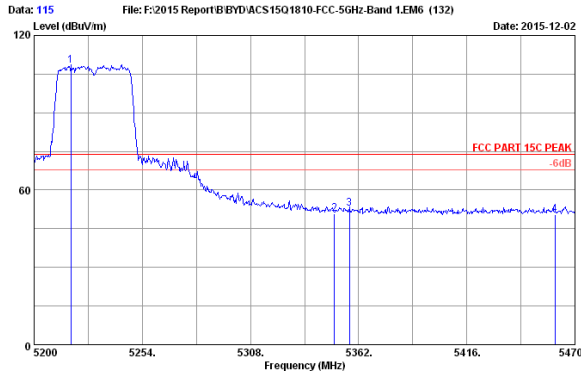

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH46 5230MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.360	33.65	9.65	35.35	100.48	108.43	74.00	-34.43	Peak
2	5350.000	33.44	9.71	35.29	43.07	50.93	74.00	23.07	Peak
3	5357.410	33.43	9.71	35.29	45.12	52.97	74.00	21.03	Peak
4	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

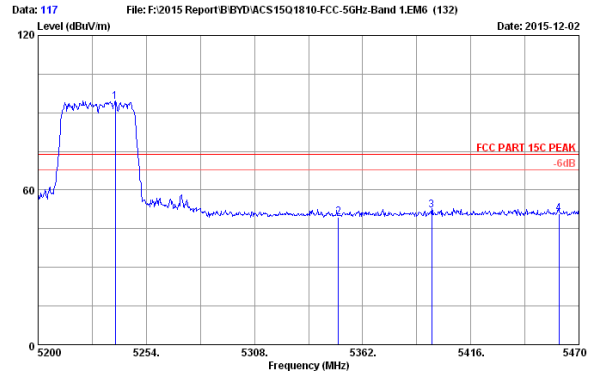

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH46 5230MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.610	33.62	9.66	35.34	86.40	94.34	74.00	-20.34	Peak
2	5350.000	33.44	9.71	35.29	41.71	49.57	74.00	24.43	Peak
3	5396.560	33.37	9.74	35.27	44.24	52.08	74.00	21.92	Peak
4	5460.000	33.26	9.76	35.25	42.97	50.74	74.00	23.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

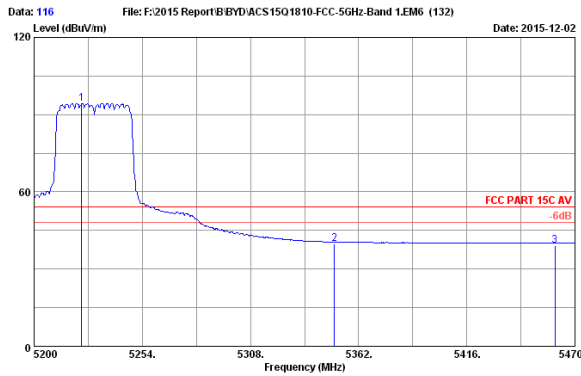

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH46 5230MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5223.760	33.64	9.65	35.35	86.27	94.21	54.00	-40.21	Average
2	5350.000	33.44	9.71	35.29	32.07	39.93	54.00	14.07	Average
3	5460.000	33.26	9.76	35.25	31.46	39.23	54.00	14.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

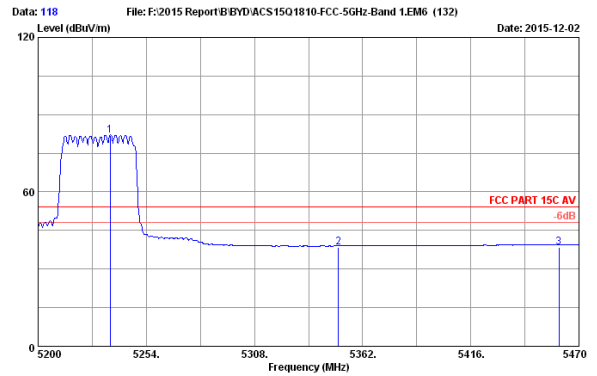

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH46 5230MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.910	33.62	9.66	35.35	73.95	81.88	54.00	-27.88	Average
2	5350.000	33.44	9.71	35.29	30.53	38.39	54.00	15.61	Average
3	5460.000	33.26	9.76	35.25	30.66	38.43	54.00	15.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

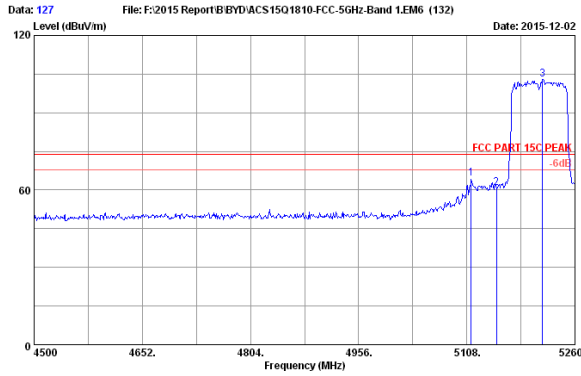

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5114.080	33.82	9.60	35.39	56.34	64.37	74.00	9.63	Peak
2	5150.000	33.76	9.62	35.38	52.87	60.87	74.00	13.13	Peak
3	5214.400	33.66	9.65	35.35	94.92	102.88	74.00	-28.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

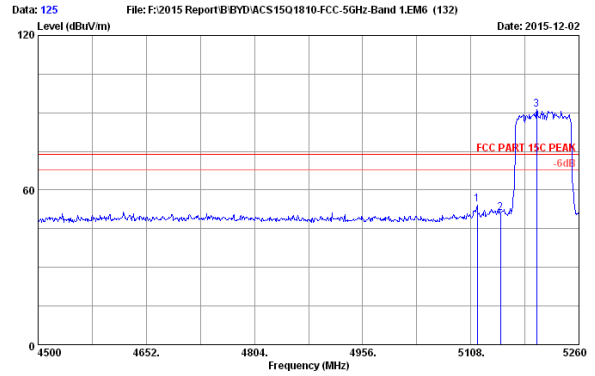

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5117.120	33.81	9.60	35.39	46.30	54.32	74.00	19.68	Peak
2	5150.000	33.76	9.62	35.38	43.27	51.27	74.00	22.73	Peak
3	5200.720	33.68	9.64	35.36	83.20	91.16	74.00	-17.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

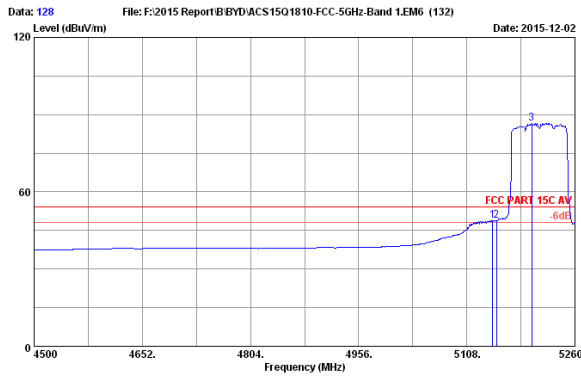

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.480	33.77	9.62	35.38	40.94	48.95	54.00	5.05	Average
2	5150.000	33.76	9.62	35.38	40.84	48.84	54.00	5.16	Average
3	5199.200	33.68	9.64	35.36	78.65	86.61	54.00	-32.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

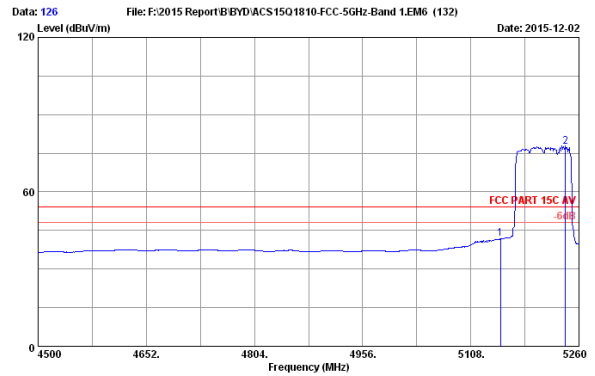

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	33.73	41.73	54.00	12.27	Average
2	5241.000	33.61	9.66	35.34	69.66	77.59	54.00	-23.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

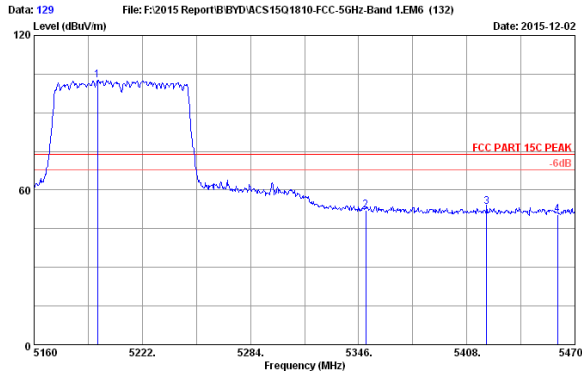


Data: 129 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5196.270	33.69	9.63	35.36	94.69	102.65	74.00	-28.65	Peak
2	5350.000	33.44	9.71	35.29	44.28	52.14	74.00	21.86	Peak
3	5419.470	33.33	9.74	35.25	45.57	53.38	74.00	20.62	Peak
4	5460.000	33.26	9.76	35.25	42.55	50.32	74.00	23.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

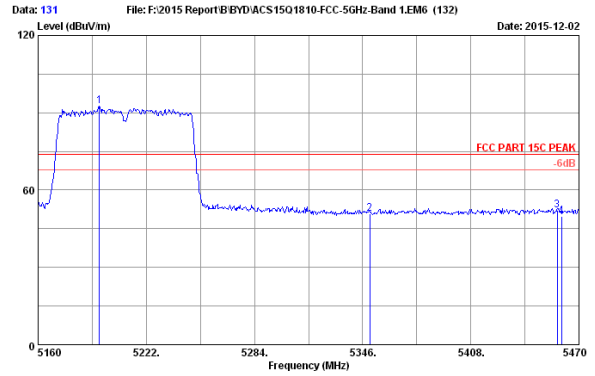


Data: 131 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5195.030	33.69	9.63	35.36	84.58	92.54	74.00	-18.54	Peak
2	5350.000	33.44	9.71	35.29	43.09	50.95	74.00	23.05	Peak
3	5457.600	33.27	9.76	35.25	44.23	52.01	74.00	21.99	Peak
4	5460.000	33.26	9.76	35.25	42.04	49.81	74.00	24.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

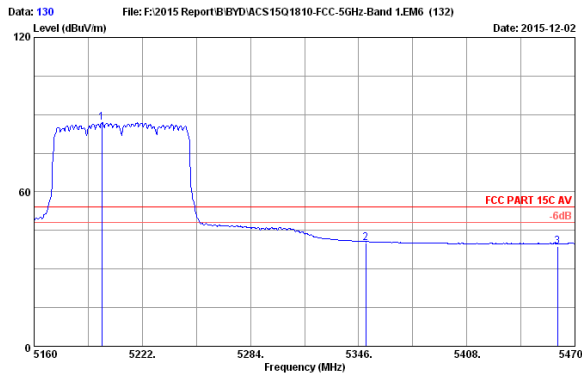


Data: 130 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5198.750	33.68	9.64	35.36	78.87	86.83	54.00	-32.83	Average
2	5350.000	33.44	9.71	35.29	32.15	40.01	54.00	13.99	Average
3	5460.000	33.26	9.76	35.25	31.15	38.92	54.00	15.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

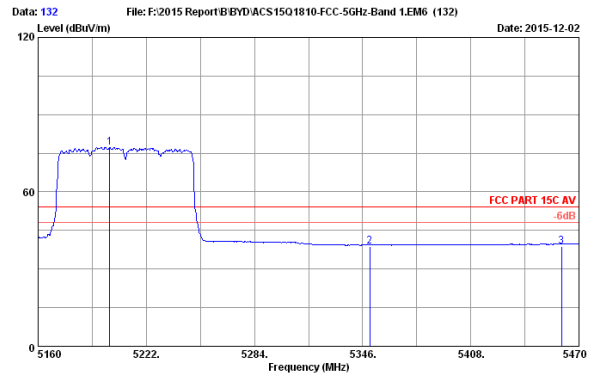


Data: 132 File: F:\2015 Report\B\BYD\ACS1501810-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.920	33.68	9.64	35.36	69.31	77.27	54.00	-23.27	Average
2	5350.000	33.44	9.71	35.29	30.89	38.75	54.00	15.25	Average
3	5460.000	33.26	9.76	35.25	30.96	38.73	54.00	15.27	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5260-5320MHz Band:

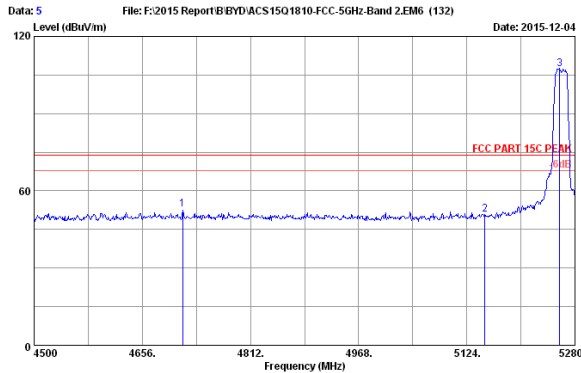


Data: 5 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4714.500	33.54	9.41	35.57	45.33	52.71	74.00	21.29	Peak
2	5150.000	33.76	9.62	35.38	42.88	50.88	74.00	23.12	Peak
3	5258.160	33.59	9.67	35.34	99.30	107.22	74.00	-33.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

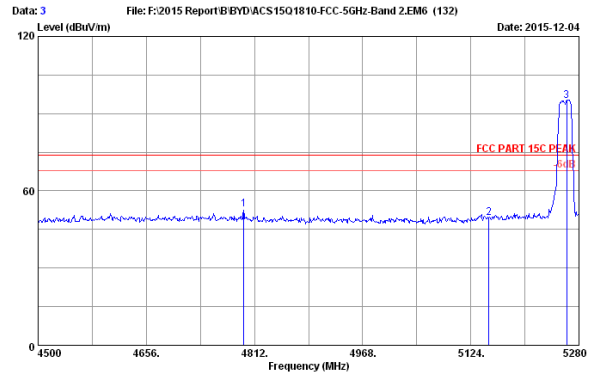


Data: 3 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4796.400	33.67	9.45	35.54	45.10	52.68	74.00	21.32	Peak
2	5150.000	33.76	9.62	35.38	41.43	49.43	74.00	24.57	Peak
3	5262.060	33.58	9.67	35.34	87.19	95.10	74.00	-21.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

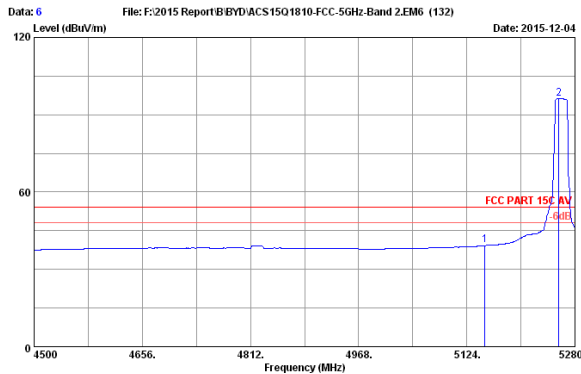


Data: 6 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.31	39.31	54.00	14.69	Average
2	5256.600	33.59	9.67	35.34	88.20	96.12	54.00	-42.12	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

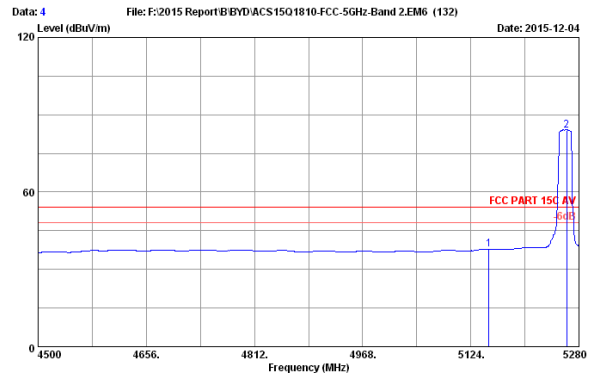


Data: 4 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	29.88	37.88	54.00	16.12	Average
2	5262.060	33.58	9.67	35.34	76.02	83.93	54.00	-29.93	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

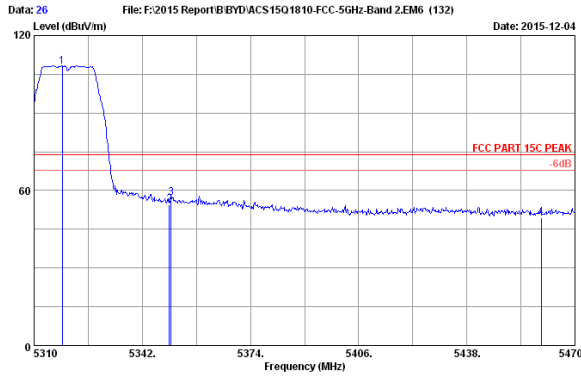

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.320	33.49	9.69	35.30	100.07	107.95	74.00	-33.95	Peak
2	5350.000	33.44	9.71	35.29	46.67	54.53	74.00	19.47	Peak
3	5350.480	33.44	9.71	35.29	49.36	57.22	74.00	16.78	Peak
4	5460.000	33.26	9.76	35.25	41.82	49.59	74.00	24.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

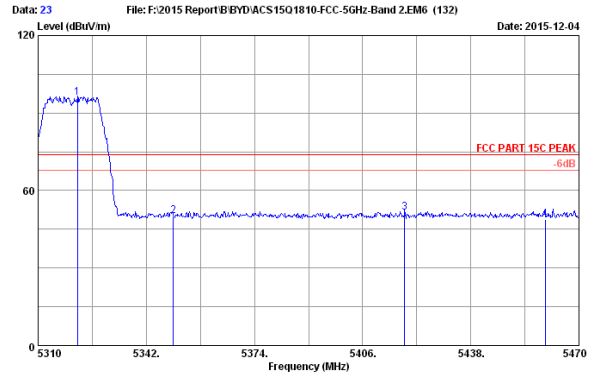

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5321.680	33.49	9.69	35.30	88.15	96.03	74.00	-22.03	Peak
2	5350.000	33.44	9.71	35.29	42.22	50.05	74.00	23.92	Peak
3	5418.480	33.33	9.74	35.26	43.83	51.64	74.00	22.36	Peak
4	5460.000	33.26	9.76	35.25	40.98	48.75	74.00	25.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

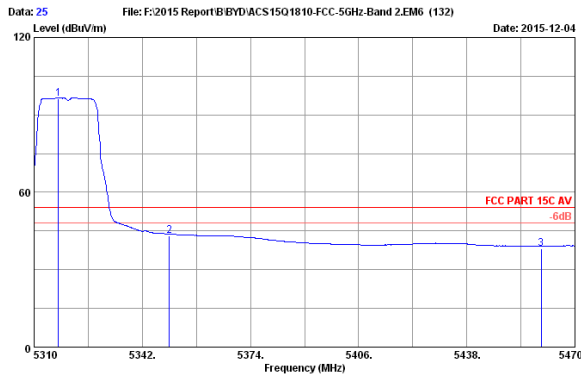

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.200	33.49	9.69	35.30	88.29	96.17	54.00	-42.17	Average
2	5350.000	33.44	9.71	35.29	35.33	43.19	54.00	10.81	Average
3	5460.000	33.26	9.76	35.25	30.41	38.18	54.00	15.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

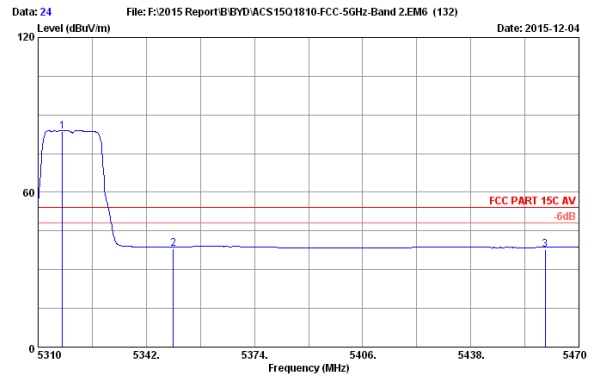

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.200	33.49	9.69	35.30	75.68	83.56	54.00	-29.56	Average
2	5350.000	33.44	9.71	35.29	30.30	38.15	54.00	15.84	Average
3	5460.000	33.26	9.76	35.25	29.88	37.65	54.00	16.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

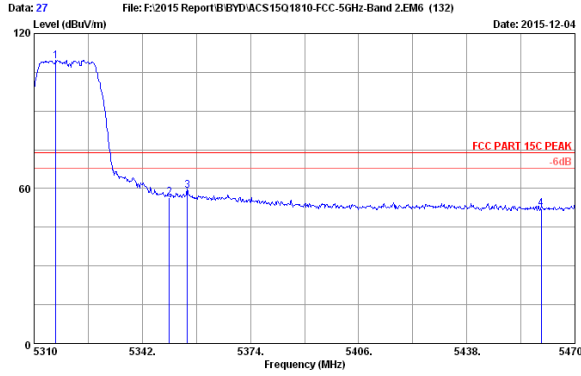

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.400	33.49	9.69	35.30	101.43	109.31	74.00	-35.31	Peak
2	5350.000	33.44	9.71	35.29	48.73	56.59	74.00	17.41	Peak
3	5355.280	33.43	9.71	35.29	51.25	59.10	74.00	14.90	Peak
4	5460.000	33.26	9.76	35.25	44.31	52.08	74.00	21.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

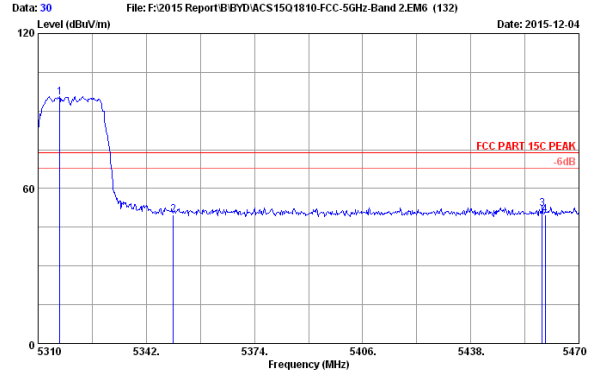

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.400	33.49	9.69	35.30	87.35	95.23	74.00	-21.23	Peak
2	5350.000	33.44	9.71	35.29	41.90	49.76	74.00	24.24	Peak
3	5459.120	33.27	9.76	35.25	44.30	52.08	74.00	21.92	Peak
4	5460.000	33.26	9.76	35.25	42.16	49.93	74.00	24.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

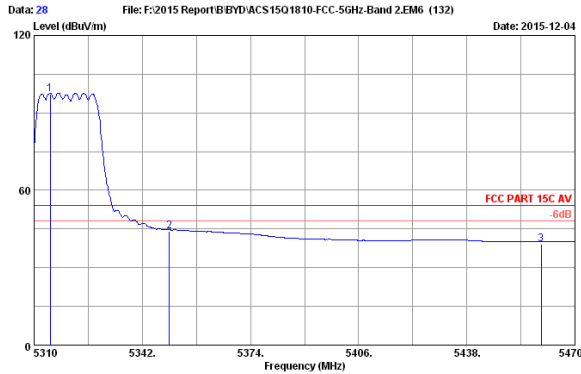

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.800	33.50	9.69	35.30	89.33	97.22	54.00	-43.22	Average
2	5350.000	33.44	9.71	35.29	36.32	44.18	54.00	9.82	Average
3	5460.000	33.26	9.76	35.25	31.38	39.15	54.00	14.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

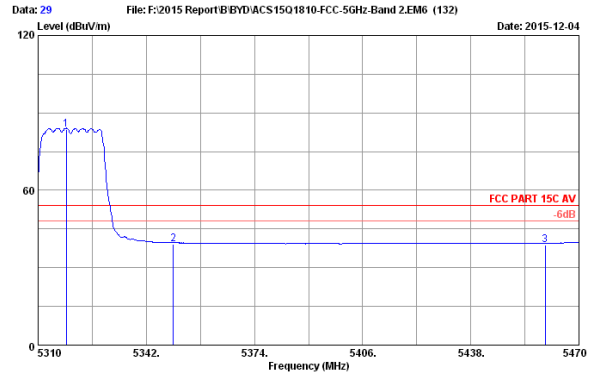

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.320	33.49	9.69	35.30	75.73	83.61	54.00	-29.61	Average
2	5350.000	33.44	9.71	35.29	31.24	39.10	54.00	14.90	Average
3	5460.000	33.26	9.76	35.25	30.85	38.62	54.00	15.38	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

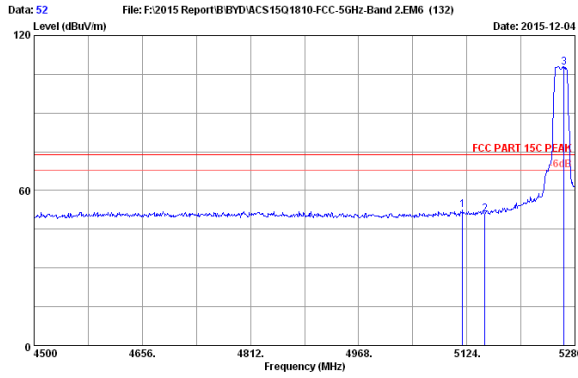

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5117.760	33.81	9.60	35.39	44.55	52.57	74.00	21.43	Peak
2	5150.000	33.76	9.62	35.38	42.85	50.85	74.00	23.15	Peak
3	5264.400	33.58	9.67	35.33	99.81	107.73	74.00	-33.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

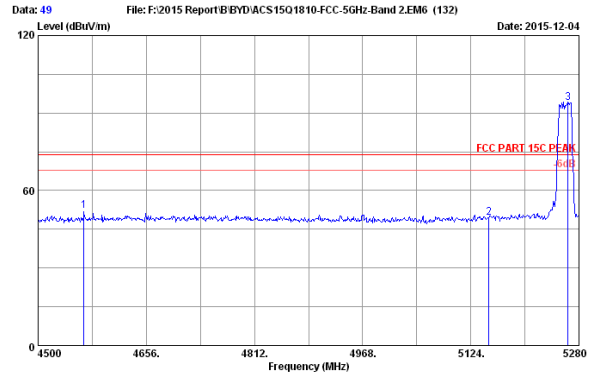

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4566.300	33.31	9.34	35.64	45.07	52.08	74.00	21.92	Peak
2	5150.000	33.76	9.62	35.38	41.58	49.58	74.00	24.42	Peak
3	5264.400	33.58	9.67	35.33	86.02	93.94	74.00	-19.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

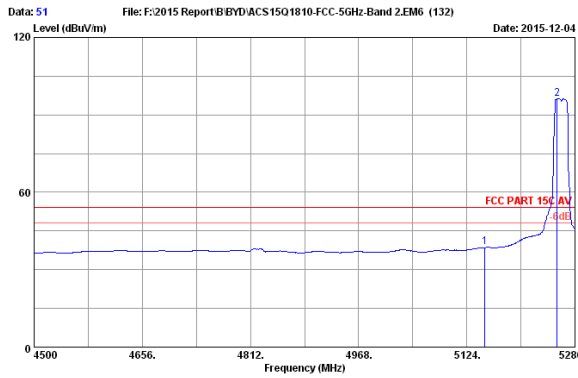

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.68	38.68	54.00	15.32	Average
2	5254.260	33.59	9.67	35.34	88.18	96.10	54.00	-42.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

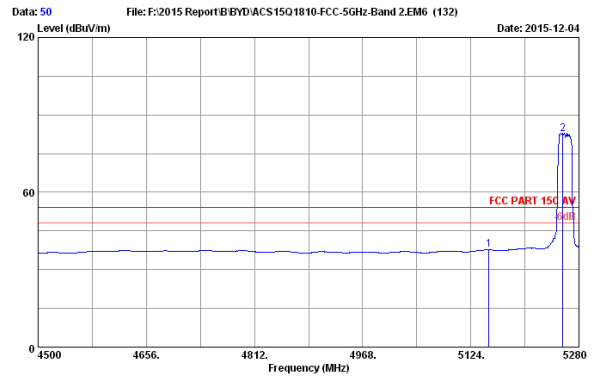

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	29.72	37.72	54.00	16.28	Average
2	5256.600	33.59	9.67	35.34	74.63	82.55	54.00	-28.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

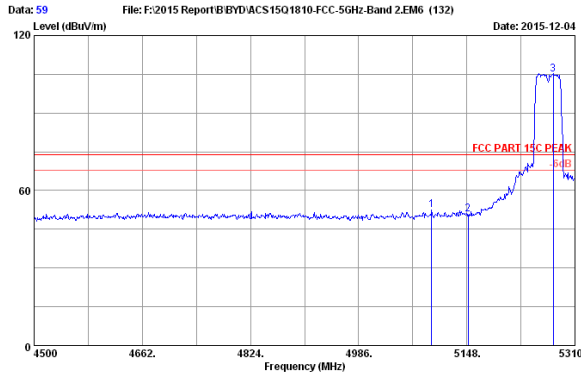

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5095.350	33.85	9.59	35.40	44.59	52.63	74.00	21.37	Peak
2	5150.000	33.76	9.62	35.38	42.89	50.89	74.00	23.11	Peak
3	5277.600	33.56	9.68	35.33	56.99	104.90	74.00	-30.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

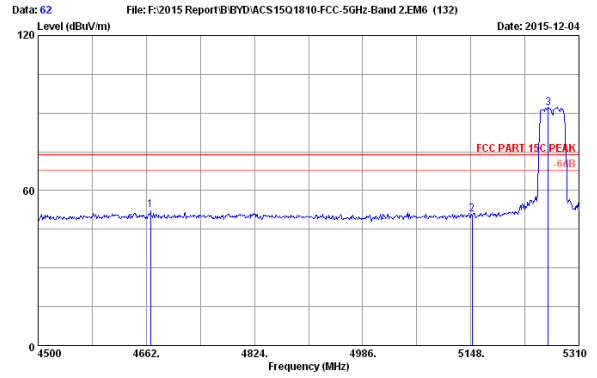

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4668.480	33.47	9.39	35.60	45.06	52.32	74.00	21.68	Peak
2	5150.000	33.76	9.62	35.38	42.80	50.80	74.00	23.20	Peak
3	5263.630	33.58	9.67	35.33	84.09	92.01	74.00	-18.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

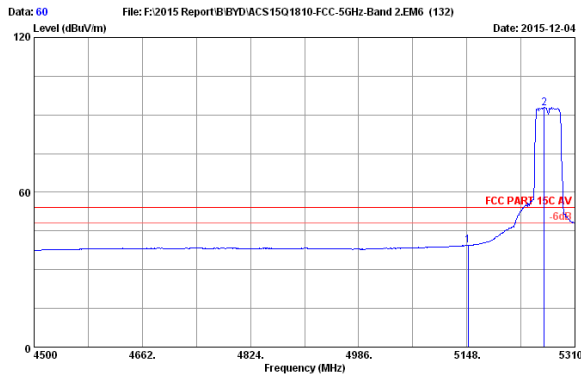

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.40	39.40	54.00	14.60	Average
2	5263.630	33.58	9.67	35.33	84.65	92.57	54.00	-38.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

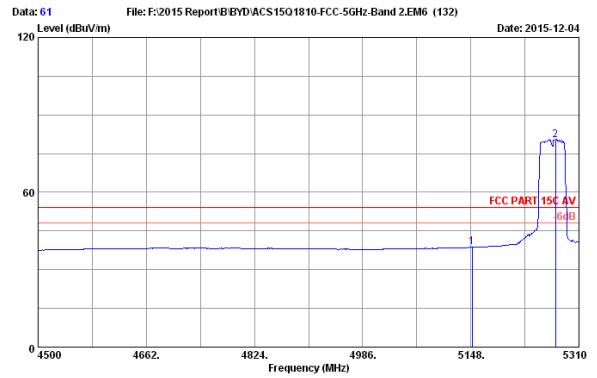

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.74	38.74	54.00	15.26	Average
2	5275.170	33.56	9.68	35.33	72.22	80.13	54.00	-26.13	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

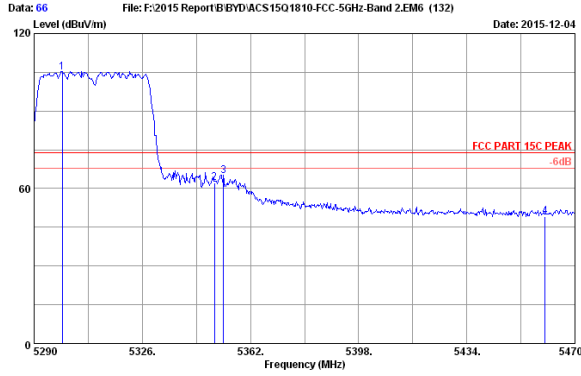

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5299.360	33.52	9.68	35.32	97.00	104.88	74.00	-30.88	Peak
2	5350.000	33.44	9.71	35.29	54.46	62.32	74.00	11.68	Peak
3	5353.000	33.44	9.71	35.29	56.83	64.69	74.00	9.31	Peak
4	5460.000	33.26	9.76	35.25	41.49	49.26	74.00	24.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

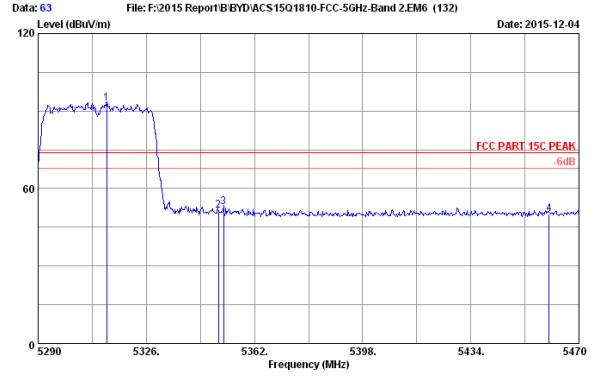

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5312.860	33.50	9.69	35.30	85.15	93.04	74.00	-19.04	Peak
2	5350.000	33.44	9.71	35.29	43.46	51.32	74.00	22.68	Peak
3	5351.740	33.44	9.71	35.29	45.10	52.96	74.00	21.04	Peak
4	5460.000	33.26	9.76	35.25	42.36	50.13	74.00	23.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

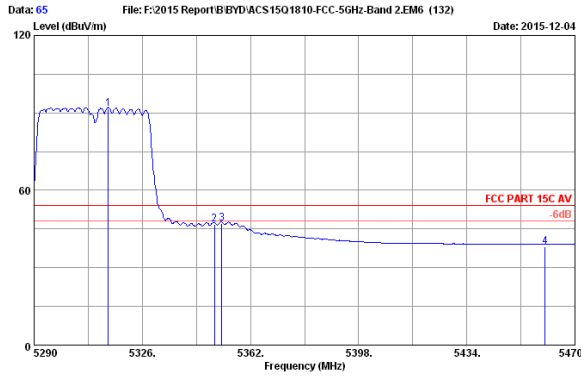

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.660	33.50	9.69	35.30	83.75	91.64	54.00	-37.64	Average
2	5350.000	33.44	9.71	35.29	39.03	46.89	54.00	7.11	Average
3	5352.460	33.44	9.71	35.29	39.20	47.06	54.00	6.94	Average
4	5460.000	33.26	9.76	35.25	30.43	38.20	54.00	15.80	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

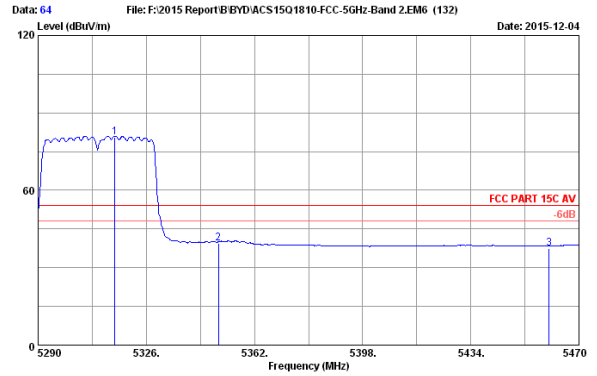

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5315.560	33.50	9.69	35.30	72.62	80.51	54.00	-26.51	Average
2	5350.000	33.44	9.71	35.29	31.58	39.44	54.00	14.56	Average
3	5460.000	33.26	9.76	35.25	29.82	37.59	54.00	16.41	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

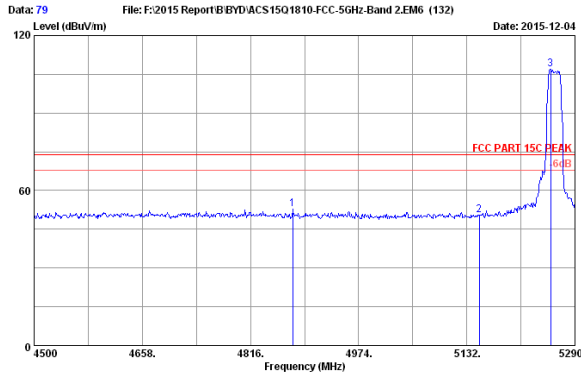

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4877.620	33.80	9.49	35.51	44.87	52.65	74.00	21.35	Peak
2	5150.000	33.76	9.62	35.38	42.52	50.52	74.00	23.48	Peak
3	5254.450	33.59	9.67	35.34	59.12	107.04	74.00	-33.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

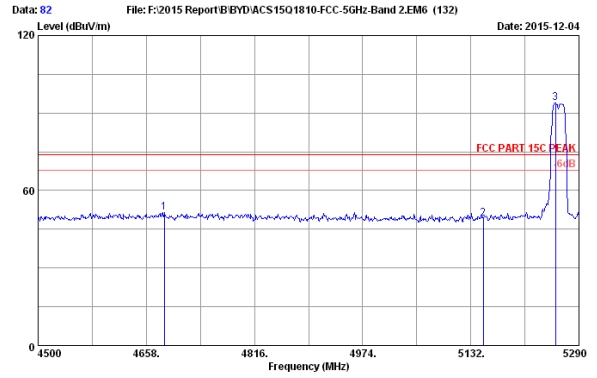

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4684.070	33.49	9.40	35.60	44.34	51.63	74.00	22.37	Peak
2	5150.000	33.76	9.62	35.38	41.05	49.05	74.00	24.95	Peak
3	5256.030	33.59	9.67	35.34	85.90	93.82	74.00	-19.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

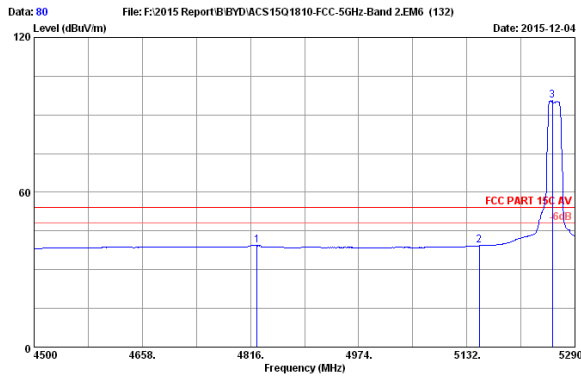

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4825.480	33.72	9.48	35.53	31.81	39.46	54.00	14.54	Average
2	5150.000	33.76	9.62	35.38	31.29	39.29	54.00	14.71	Average
3	5256.820	33.59	9.67	35.34	87.53	95.45	54.00	-41.45	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

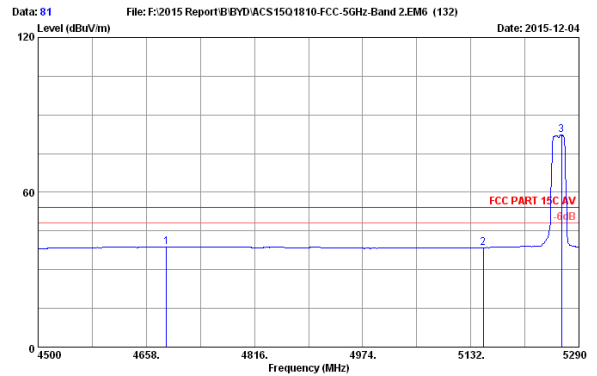

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4687.230	33.50	9.40	35.60	31.55	38.85	54.00	15.15	Average
2	5150.000	33.76	9.62	35.38	30.56	38.56	54.00	15.44	Average
3	5264.720	33.58	9.67	35.33	74.34	82.26	54.00	-28.26	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

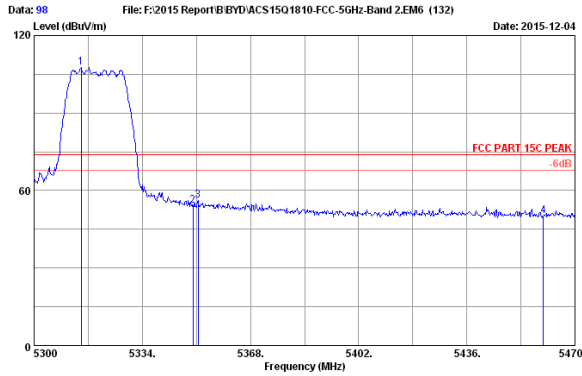

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.790	33.50	9.69	35.30	99.89	107.78	74.00	-33.78	Peak
2	5350.000	33.44	9.71	35.29	46.32	54.18	74.00	19.82	Peak
3	5351.510	33.44	9.71	35.29	48.27	56.13	74.00	17.87	Peak
4	5460.000	33.26	9.76	35.25	42.31	50.08	74.00	23.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

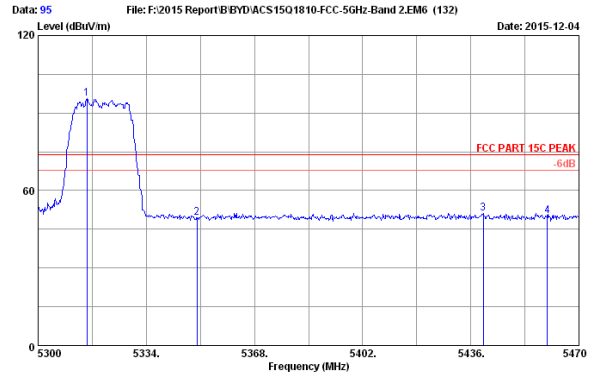

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5315.300	33.50	9.69	35.30	87.60	95.49	74.00	-21.49	Peak
2	5350.000	33.44	9.71	35.29	41.47	49.33	74.00	24.67	Peak
3	5439.910	33.00	9.75	35.25	43.31	51.11	74.00	22.89	Peak
4	5460.000	33.26	9.76	35.25	42.50	50.27	74.00	23.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

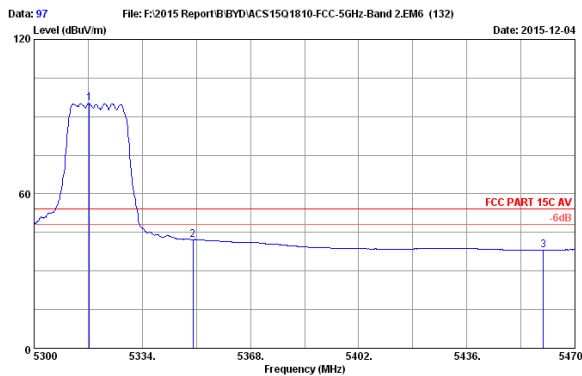

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.340	33.49	9.69	35.30	87.25	95.13	54.00	-41.13	Average
2	5350.000	33.44	9.71	35.29	34.33	42.19	54.00	11.81	Average
3	5460.000	33.26	9.76	35.25	30.37	38.14	54.00	15.86	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

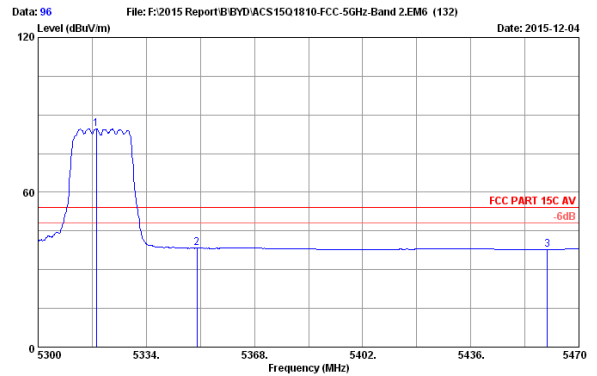

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.360	33.49	9.69	35.30	76.70	84.58	54.00	-30.58	Average
2	5350.000	33.44	9.71	35.29	30.43	38.29	54.00	15.71	Average
3	5460.000	33.26	9.76	35.25	30.10	37.87	54.00	16.13	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

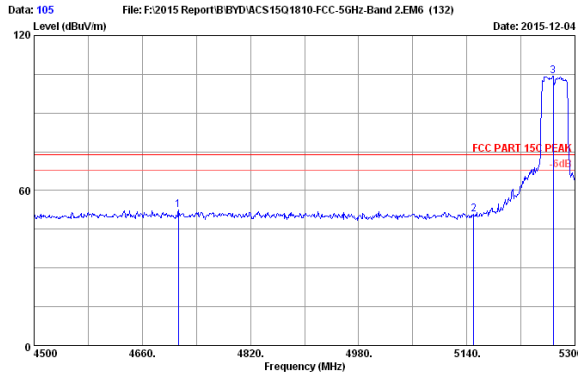

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4713.600	33.54	9.41	35.57	45.22	52.60	74.00	21.40	Peak
2	5150.000	33.76	9.62	35.38	42.87	50.87	74.00	23.13	Peak
3	5260.000	33.57	9.67	35.33	96.44	104.35	74.00	-30.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

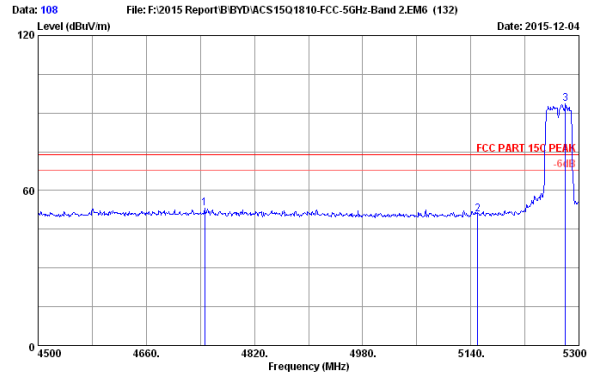

Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4746.400	33.59	9.42	35.56	45.72	53.17	74.00	20.83	Peak
2	5150.000	33.76	9.62	35.38	42.67	50.67	74.00	23.33	Peak
3	5260.000	33.55	9.68	35.33	85.61	93.51	74.00	-19.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

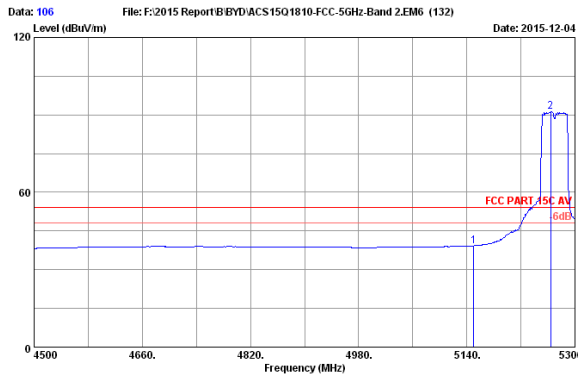

Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.24	39.24	54.00	14.76	Average
2	5264.000	33.58	9.67	35.33	83.26	91.18	54.00	-37.18	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

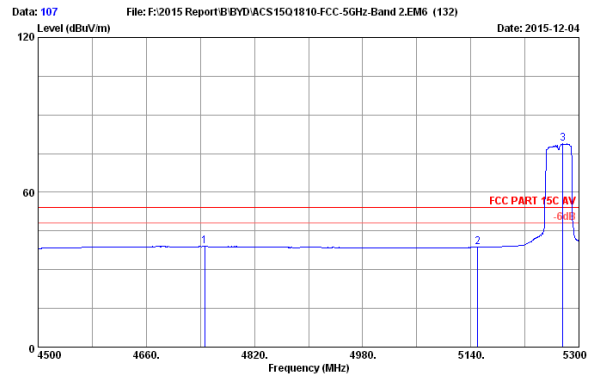

Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4746.400	33.59	9.42	35.56	31.56	39.01	54.00	14.99	Average
2	5150.000	33.76	9.62	35.38	30.53	38.53	54.00	15.37	Average
3	5276.000	33.56	9.68	35.33	70.87	78.78	54.00	-24.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

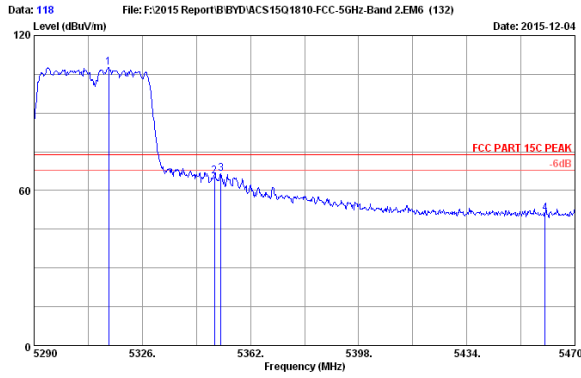

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 S310MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.840	33.50	9.69	35.30	99.69	107.58	74.00	-33.58	Peak
2	5350.000	33.44	9.71	35.29	57.72	65.58	74.00	8.42	Peak
3	5352.100	33.44	9.71	35.29	58.54	66.40	74.00	7.60	Peak
4	5460.000	33.26	9.76	35.25	43.51	51.28	74.00	22.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

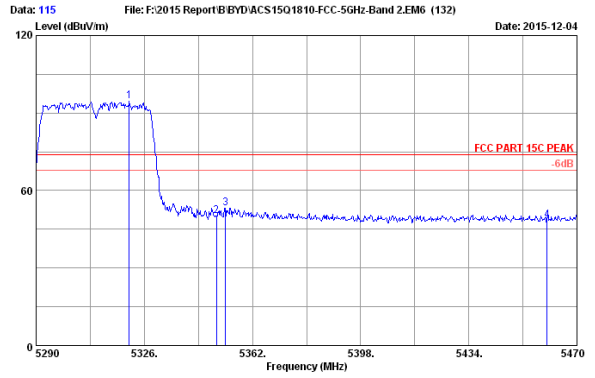

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 S310MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.960	33.49	9.69	35.30	86.60	94.48	74.00	-20.48	Peak
2	5350.000	33.44	9.71	35.29	42.33	50.19	74.00	23.81	Peak
3	5353.000	33.44	9.71	35.29	45.23	53.09	74.00	20.91	Peak
4	5460.000	33.26	9.76	35.25	40.64	48.41	74.00	25.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

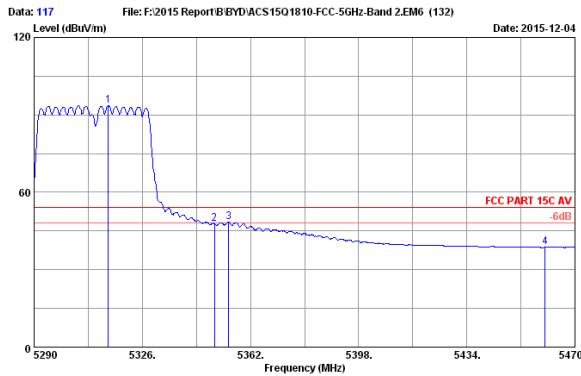

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 S310MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.840	33.50	9.69	35.30	85.76	93.65	54.00	-39.65	Average
2	5350.000	33.44	9.71	35.29	40.10	47.96	54.00	6.04	Average
3	5354.800	33.43	9.71	35.29	40.57	48.42	54.00	5.58	Average
4	5460.000	33.26	9.76	35.25	30.86	38.63	54.00	15.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

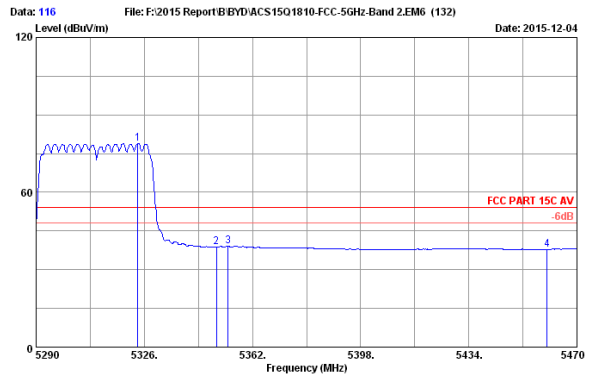

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 S310MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.840	33.48	9.70	35.30	71.12	79.00	54.00	-25.00	Average
2	5350.000	33.44	9.71	35.29	30.76	38.52	54.00	15.38	Average
3	5353.900	33.43	9.71	35.29	31.22	39.07	54.00	14.93	Average
4	5460.000	33.26	9.76	35.25	30.13	37.90	54.00	16.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

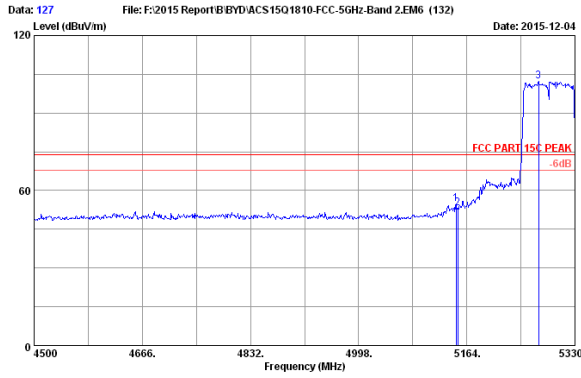

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.400	33.76	9.62	35.38	46.94	54.94	74.00	19.06	Peak
2	5150.000	33.76	9.62	35.38	45.30	53.30	74.00	20.70	Peak
3	5274.390	33.56	9.68	35.33	94.41	102.32	74.00	-28.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

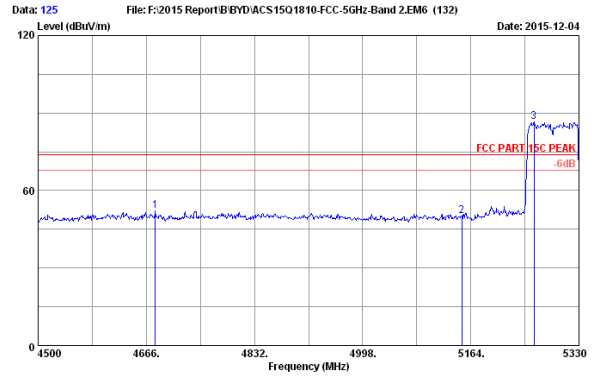

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4680.110	33.49	9.40	35.60	44.75	52.04	74.00	21.96	Peak
2	5150.000	33.76	9.62	35.38	41.99	49.99	74.00	24.01	Peak
3	5261.110	33.58	9.67	35.34	78.65	86.56	74.00	-12.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

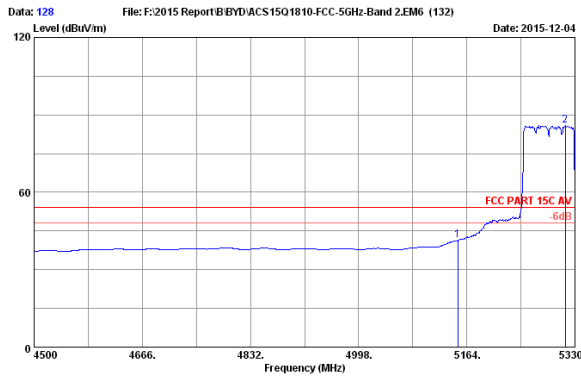

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	33.48	41.48	54.00	12.52	Average
2	5315.060	33.50	9.69	35.30	78.13	86.02	54.00	-32.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

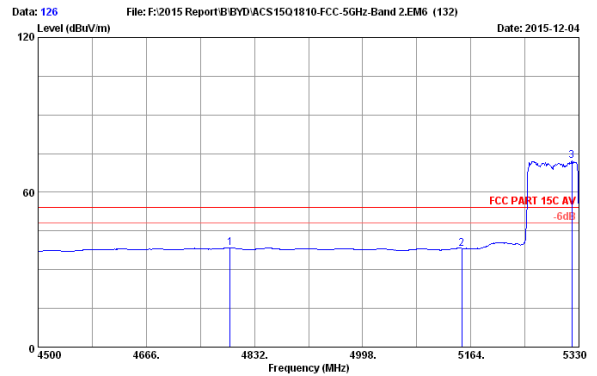

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4794.650	33.67	9.45	35.54	30.80	38.38	54.00	15.62	Average
2	5150.000	33.76	9.62	35.38	30.25	38.25	54.00	15.75	Average
3	5319.210	33.49	9.69	35.30	64.17	72.05	54.00	-18.05	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

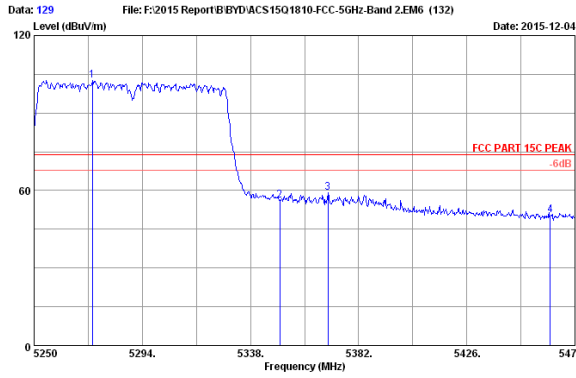

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5273.760	33.56	9.68	35.33	94.57	102.48	74.00	-28.48	Peak
2	5350.000	33.44	9.71	35.29	48.14	56.00	74.00	18.00	Peak
3	5369.480	33.41	9.72	35.28	51.24	59.09	74.00	14.91	Peak
4	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

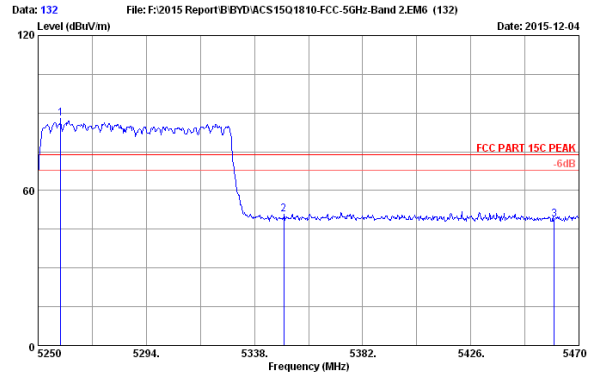

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5259.240	33.59	9.67	35.34	79.89	87.81	74.00	-13.81	Peak
2	5350.000	33.44	9.71	35.29	42.82	50.65	74.00	23.32	Peak
3	5460.000	33.26	9.76	35.25	41.14	48.91	74.00	25.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

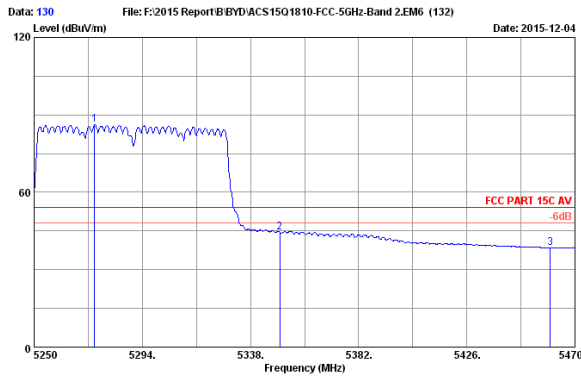

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5274.640	33.56	9.68	35.33	78.23	86.14	54.00	-32.14	Average
2	5350.000	33.44	9.71	35.29	36.50	44.36	54.00	9.64	Average
3	5460.000	33.26	9.76	35.25	30.81	38.58	54.00	15.42	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

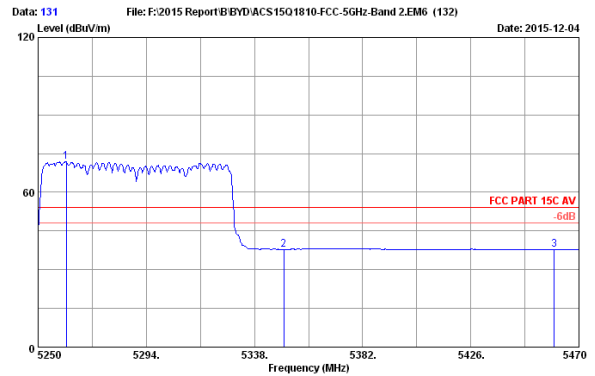


Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5261.440	33.58	9.67	35.34	63.95	71.86	54.00	-17.86	Average
2	5350.000	33.44	9.71	35.29	30.02	37.88	54.00	16.12	Average
3	5460.000	33.26	9.76	35.25	30.00	37.77	54.00	16.23	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5500-5700MHz Band:

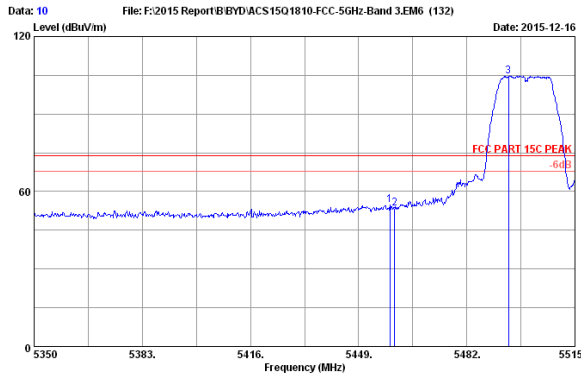


Data: 10 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.570	33.27	9.76	35.25	46.87	54.65	74.00	19.35	Peak
2	5460.000	33.26	9.76	35.25	45.78	53.55	74.00	20.45	Peak
3	5494.705	33.21	9.78	35.22	96.87	104.64	74.00	-30.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

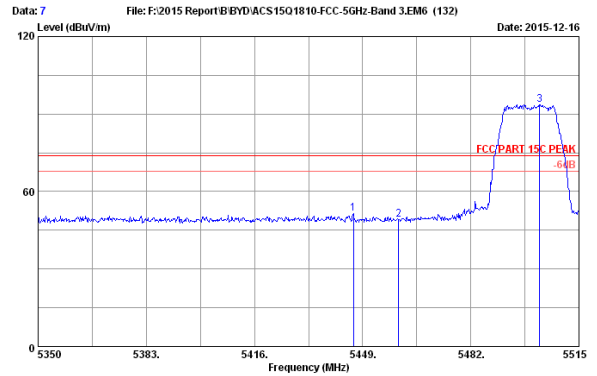


Data: 7 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5446.195	33.29	9.75	35.25	43.60	51.39	74.00	22.61	Peak
2	5460.000	33.26	9.76	35.25	41.30	49.07	74.00	24.93	Peak
3	5502.955	33.20	9.79	35.22	85.89	93.66	74.00	-19.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

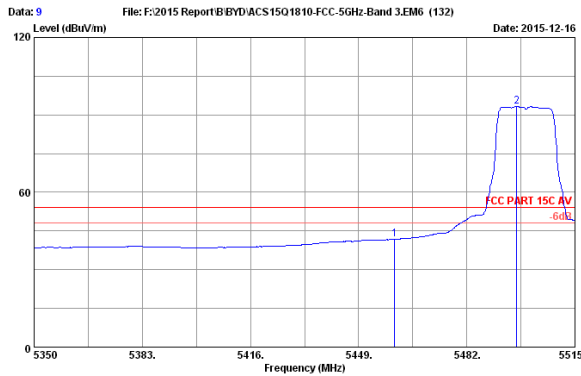


Data: 9 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	34.05	41.82	54.00	12.18	Average
2	5497.180	33.20	9.78	35.22	85.45	93.21	54.00	-39.21	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

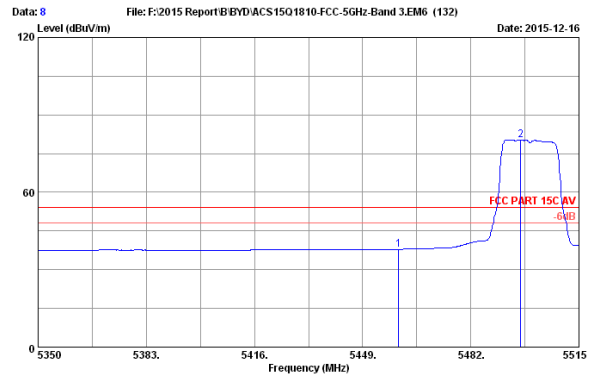


Data: 8 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.09	37.86	54.00	16.14	Average
2	5497.180	33.20	9.78	35.22	72.59	80.35	54.00	-26.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

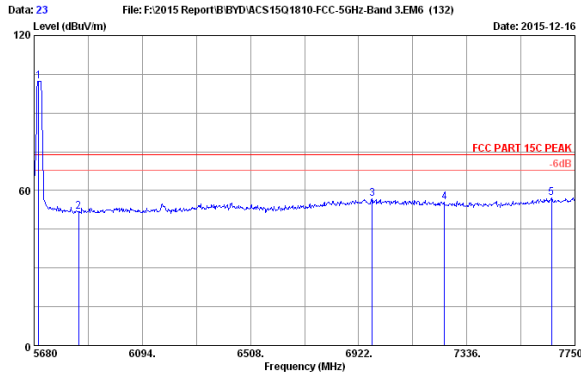

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH140 5700MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	94.23	102.36	74.00	-28.36	Peak
2	5850.000	33.55	9.95	35.07	43.40	51.83	74.00	22.17	Peak
3	6970.750	35.85	10.47	35.39	46.01	56.94	74.00	17.06	Peak
4	7250.000	36.00	10.74	35.50	44.25	55.49	74.00	18.51	Peak
5	7660.990	36.39	11.15	35.66	45.19	57.07	74.00	16.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

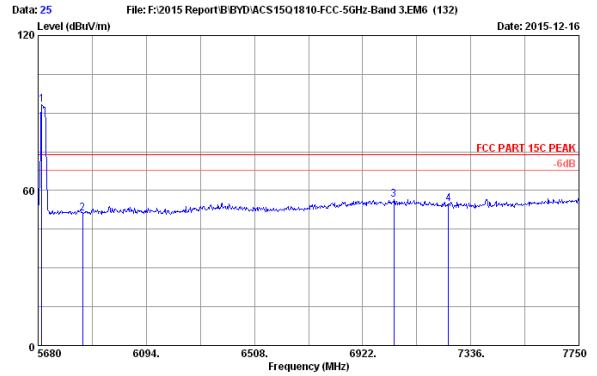

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH140 5700MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.490	33.39	9.87	35.14	85.16	93.28	74.00	-19.28	Peak
2	5850.000	33.55	9.95	35.07	42.77	51.20	74.00	22.80	Peak
3	7042.060	35.92	10.53	35.42	45.62	56.65	74.00	17.35	Peak
4	7250.000	36.00	10.74	35.50	43.62	54.86	74.00	19.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

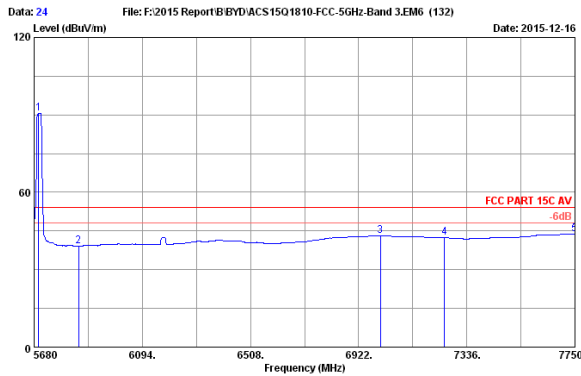

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH140 5700MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	82.48	90.61	54.00	-36.61	Average
2	5850.000	33.55	9.95	35.07	30.66	39.09	54.00	14.91	Average
3	7004.800	35.90	10.49	35.40	32.17	43.16	54.00	10.84	Average
4	7250.000	36.00	10.74	35.50	31.11	42.35	54.00	11.65	Average
5	7750.000	36.55	11.23	35.70	31.78	43.86	54.00	10.14	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

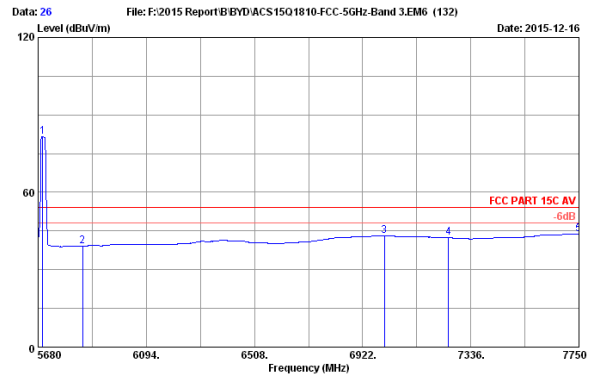

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH140 5700MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	73.59	81.72	54.00	-27.72	Average
2	5850.000	33.55	9.95	35.07	30.62	39.05	54.00	14.95	Average
3	7004.800	35.90	10.49	35.40	32.22	43.21	54.00	10.79	Average
4	7250.000	36.00	10.74	35.50	31.11	42.35	54.00	11.65	Average
5	7750.000	36.55	11.23	35.70	31.80	43.88	54.00	10.12	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

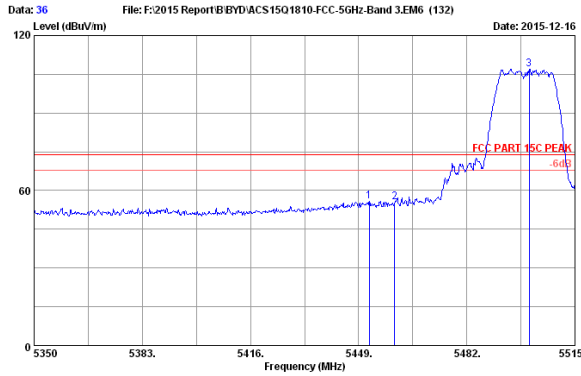

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5452.300	33.28	9.76	35.25	48.04	55.83	74.00	18.17	Peak
2	5460.000	33.26	9.76	35.25	47.84	55.61	74.00	18.39	Peak
3	5500.975	33.20	9.76	35.22	99.34	107.10	74.00	-33.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

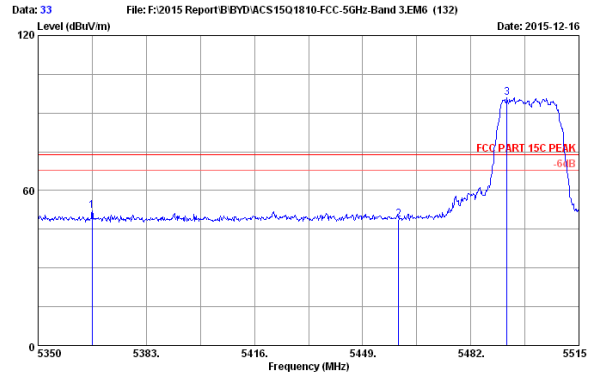

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5366.500	33.41	9.72	35.28	44.42	52.27	74.00	21.73	Peak
2	5460.000	33.26	9.76	35.25	41.13	48.90	74.00	25.10	Peak
3	5499.055	33.21	9.78	35.22	86.01	95.78	74.00	-21.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

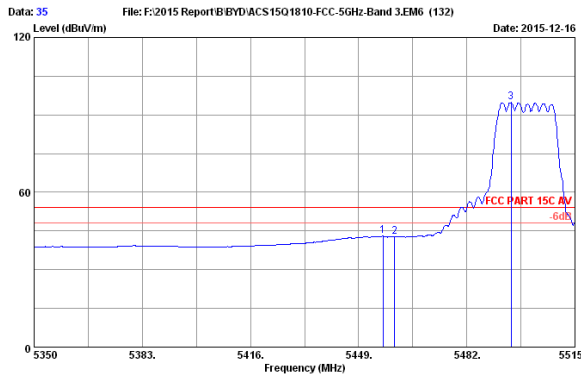

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5456.425	33.27	9.76	35.25	35.22	43.00	54.00	11.00	Average
2	5460.000	33.26	9.76	35.25	34.90	42.67	54.00	11.33	Average
3	5495.530	33.21	9.78	35.22	86.99	94.76	54.00	-40.76	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

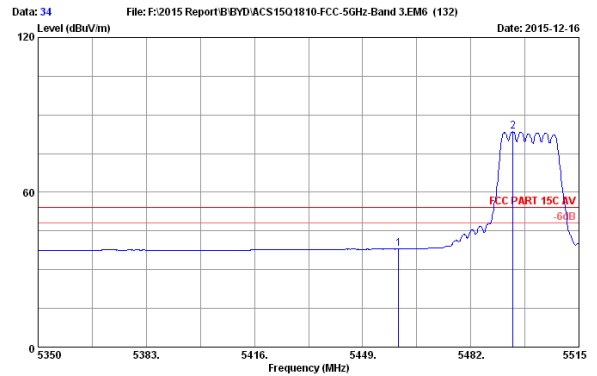

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.28	38.05	54.00	15.95	Average
2	5499.870	33.21	9.78	35.22	75.78	83.55	54.00	-29.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

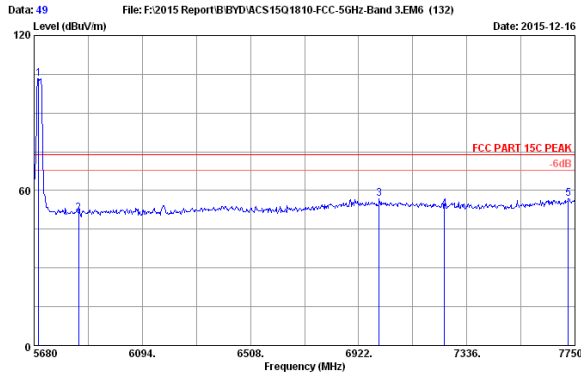

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	95.29	103.42	74.00	-29.42	Peak
2	5850.000	33.55	9.95	35.07	42.63	51.06	74.00	22.94	Peak
3	7000.660	35.90	10.49	35.40	45.77	56.76	74.00	17.24	Peak
4	7250.000	36.00	10.74	35.50	41.46	52.70	74.00	21.30	Peak
5	7725.160	36.51	11.20	35.69	44.72	56.74	74.00	17.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

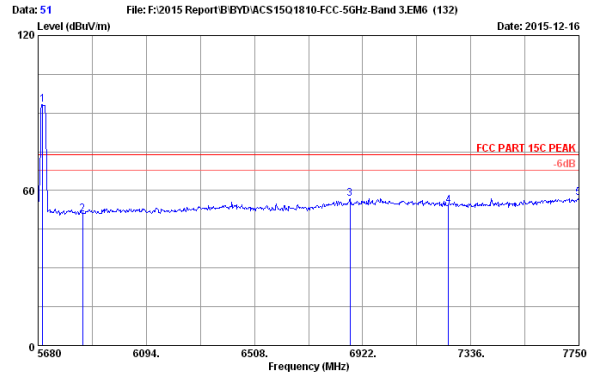

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	85.10	93.23	74.00	-19.23	Peak
2	5850.000	33.55	9.95	35.07	42.50	50.93	74.00	23.07	Peak
3	6874.390	35.65	10.43	35.35	46.07	56.80	74.00	17.20	Peak
4	7250.000	36.00	10.74	35.50	43.05	54.29	74.00	19.71	Peak
5	7750.000	36.55	11.23	35.70	44.98	57.06	74.00	16.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

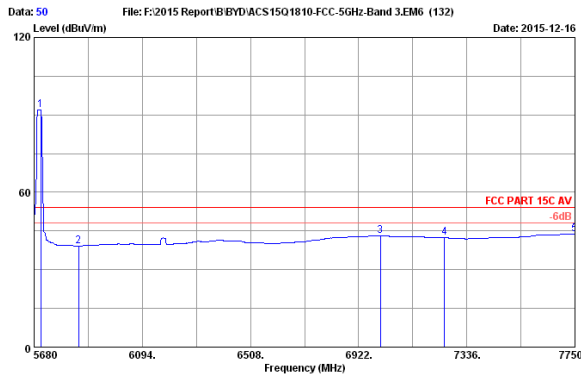

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5704.840	33.40	9.88	35.14	83.89	92.03	54.00	-38.03	Average
2	5850.000	33.55	9.95	35.07	30.67	39.10	54.00	14.90	Average
3	7004.800	35.90	10.49	35.40	32.16	43.15	54.00	10.85	Average
4	7250.000	36.00	10.74	35.50	31.07	42.31	54.00	11.69	Average
5	7750.000	36.55	11.23	35.70	31.73	43.81	54.00	10.19	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

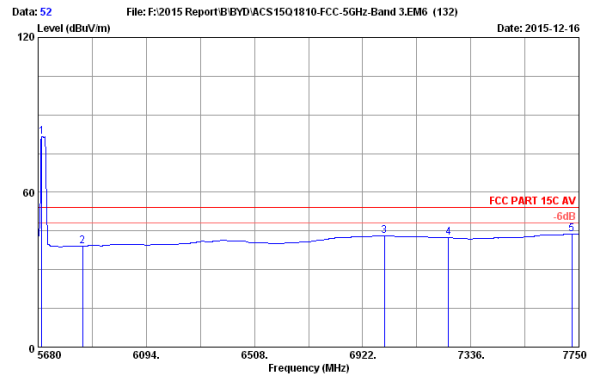

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.490	33.39	9.87	35.14	73.58	81.70	54.00	-27.70	Average
2	5850.000	33.55	9.95	35.07	30.60	39.03	54.00	14.97	Average
3	7004.800	35.90	10.49	35.40	32.21	43.20	54.00	10.80	Average
4	7250.000	36.00	10.74	35.50	31.07	42.31	54.00	11.69	Average
5	7723.090	36.50	11.20	35.69	31.83	43.84	54.00	10.16	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

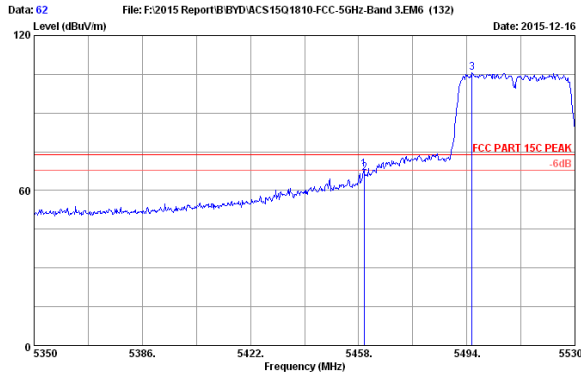

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.800	33.26	9.76	35.25	60.26	68.03	74.00	5.97	Peak
2	5460.000	33.26	9.76	35.25	59.13	66.90	74.00	7.10	Peak
3	5495.800	33.21	9.76	35.22	97.79	105.56	74.00	-31.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

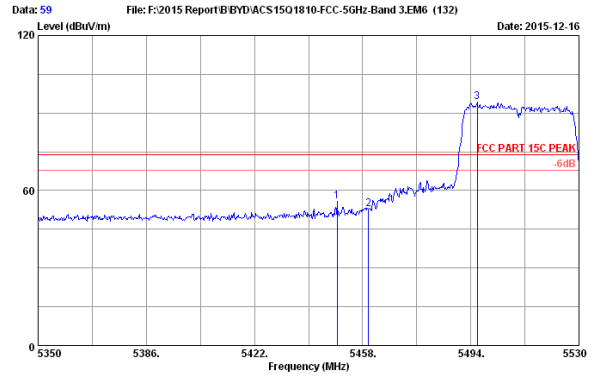

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5449.540	33.28	9.76	35.25	48.07	55.86	74.00	18.14	Peak
2	5460.000	33.26	9.76	35.25	45.07	52.84	74.00	21.16	Peak
3	5496.160	33.21	9.76	35.22	86.35	94.12	74.00	-20.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

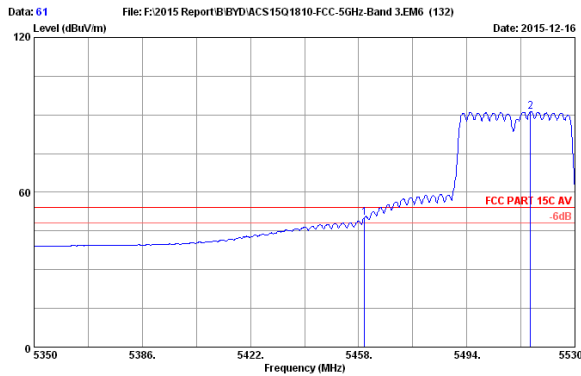

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	42.52	50.29	54.00	3.71	Average
2	5515.240	33.22	9.79	35.21	89.54	91.34	54.00	-37.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

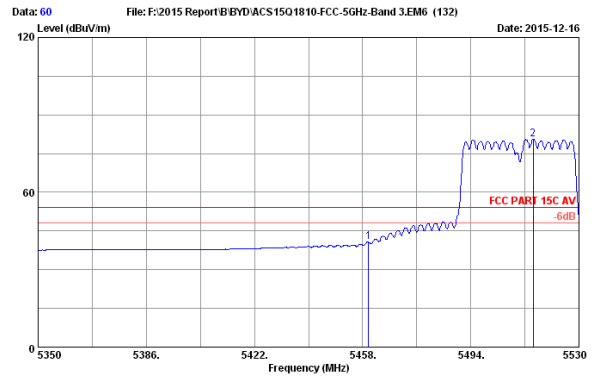

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	32.89	40.66	54.00	13.34	Average
2	5514.700	33.21	9.79	35.21	72.89	80.68	54.00	-26.68	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

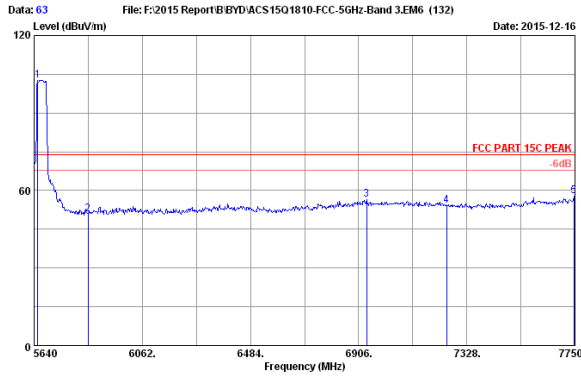


Data: 63 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5654.770	33.35	9.85	35.16	94.55	102.59	74.00	-28.59	Peak
2	5850.000	33.55	9.95	35.07	42.50	50.93	74.00	23.07	Peak
3	6937.650	35.78	10.46	35.38	45.46	56.32	74.00	17.68	Peak
4	7250.000	36.00	10.74	35.50	42.89	54.13	74.00	19.87	Peak
5	7745.780	36.54	11.22	35.70	45.61	57.67	74.00	16.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

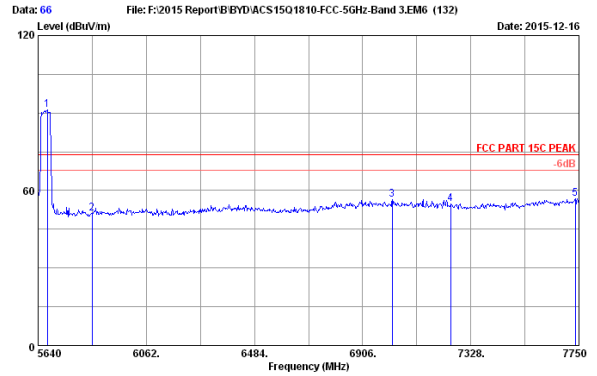


Data: 66 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5675.870	33.38	9.86	35.15	83.18	91.27	74.00	-17.27	Peak
2	5850.000	33.55	9.95	35.07	42.61	51.04	74.00	22.96	Peak
3	7022.050	35.91	10.51	35.41	45.43	56.44	74.00	17.56	Peak
4	7250.000	36.00	10.74	35.50	43.51	54.75	74.00	19.25	Peak
5	7735.230	36.52	11.22	35.69	44.75	56.80	74.00	17.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

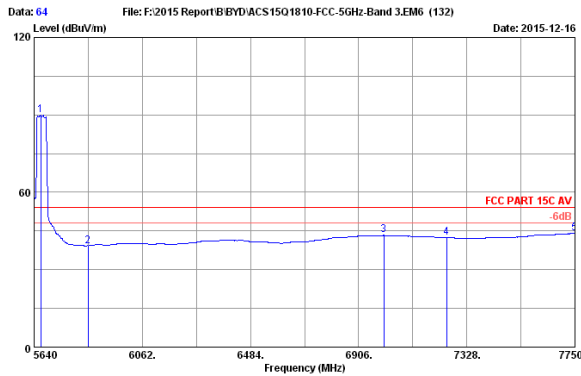


Data: 64 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	81.86	89.94	54.00	-35.94	Average
2	5850.000	33.55	9.95	35.07	30.84	39.27	54.00	14.73	Average
3	7005.170	35.90	10.49	35.40	32.32	43.31	54.00	10.69	Average
4	7250.000	36.00	10.74	35.50	31.23	42.47	54.00	11.53	Average
5	7750.000	36.55	11.23	35.70	31.91	43.99	54.00	10.01	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

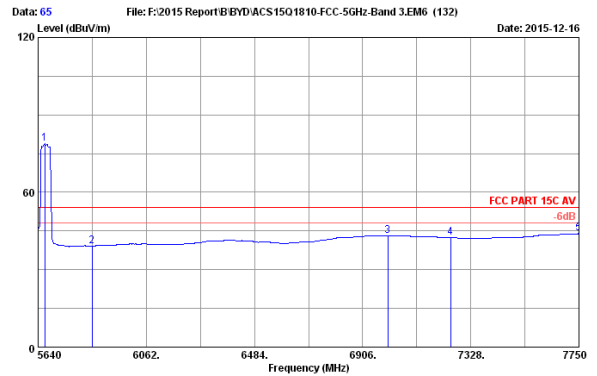


Data: 65 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	70.68	78.76	54.00	-24.76	Average
2	5850.000	33.55	9.95	35.07	30.71	39.14	54.00	14.86	Average
3	7005.170	35.90	10.49	35.40	32.28	43.27	54.00	10.73	Average
4	7250.000	36.00	10.74	35.50	31.19	42.43	54.00	11.57	Average
5	7750.000	36.55	11.23	35.70	31.89	43.97	54.00	10.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

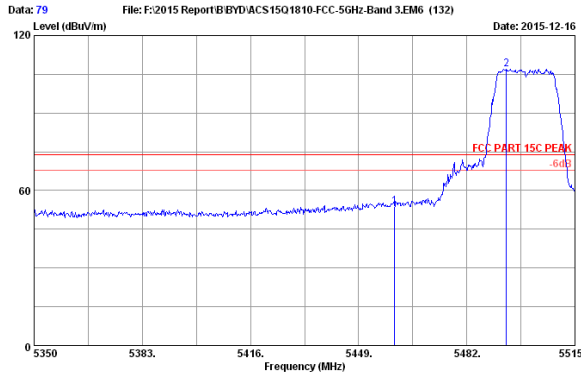

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	46.10	53.87	74.00	20.13	Peak
2	5494.045	33.21	9.78	35.22	99.23	107.00	74.00	-33.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

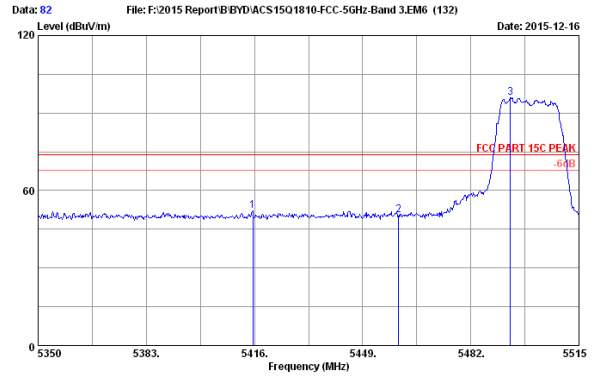

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5415.505	33.34	9.74	35.26	44.26	52.08	74.00	21.92	Peak
2	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak
3	5494.045	33.21	9.78	35.22	86.23	96.00	74.00	-22.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

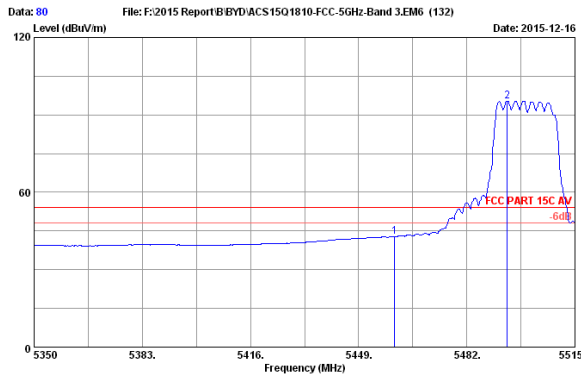

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	35.12	42.89	54.00	11.11	Average
2	5494.375	33.21	9.78	35.22	87.51	95.28	54.00	-41.28	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

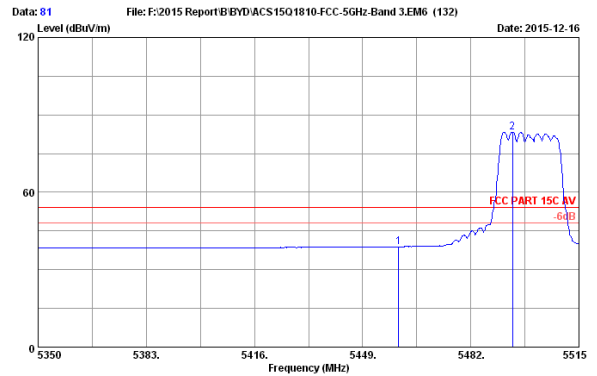

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	31.17	38.94	54.00	15.06	Average
2	5494.705	33.21	9.78	35.22	75.61	83.38	54.00	-29.38	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

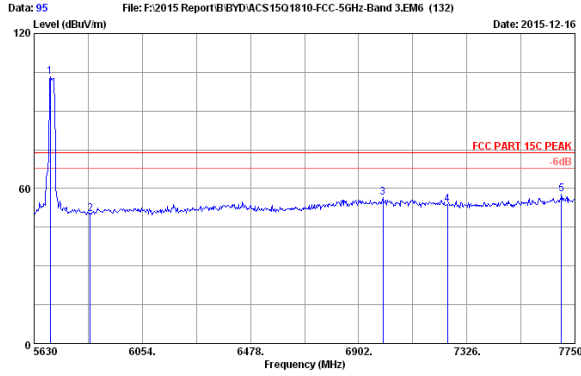

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5693.600	33.39	9.87	35.14	95.08	103.20	74.00	-29.20	Peak
2	5850.000	33.55	9.95	35.07	41.87	50.30	74.00	23.70	Peak
3	6997.400	35.89	10.49	35.40	45.49	56.47	74.00	17.53	Peak
4	7250.000	36.00	10.74	35.50	42.59	53.83	74.00	20.17	Peak
5	7697.000	36.45	11.18	35.68	45.88	57.83	74.00	16.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

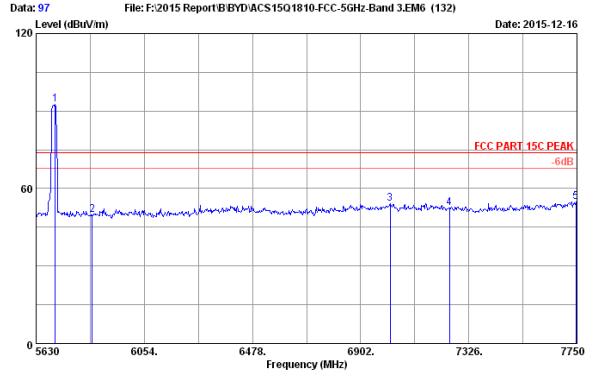

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5704.200	33.40	9.88	35.14	84.52	92.66	74.00	-18.66	Peak
2	5850.000	33.55	9.95	35.07	41.21	49.64	74.00	24.36	Peak
3	7018.600	35.91	10.51	35.41	43.17	54.18	74.00	19.82	Peak
4	7250.000	36.00	10.74	35.50	41.19	52.43	74.00	21.57	Peak
5	7745.760	36.54	11.22	35.70	42.90	54.96	74.00	19.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

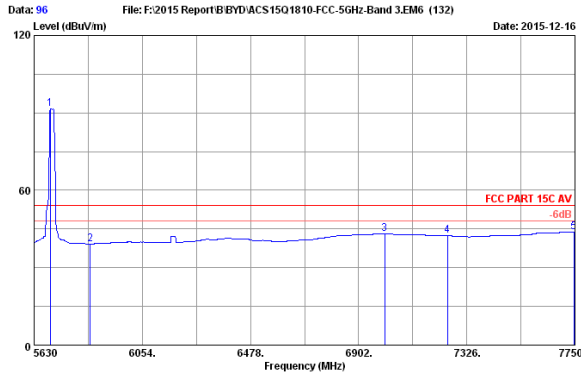

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5693.600	33.39	9.87	35.14	83.34	91.46	54.00	-37.46	Average
2	5850.000	33.55	9.95	35.07	30.71	39.14	54.00	14.86	Average
3	7003.760	35.90	10.49	35.40	32.17	43.16	54.00	10.84	Average
4	7250.000	36.00	10.74	35.50	31.09	42.33	54.00	11.67	Average
5	7745.760	36.54	11.22	35.70	31.76	43.82	54.00	10.18	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

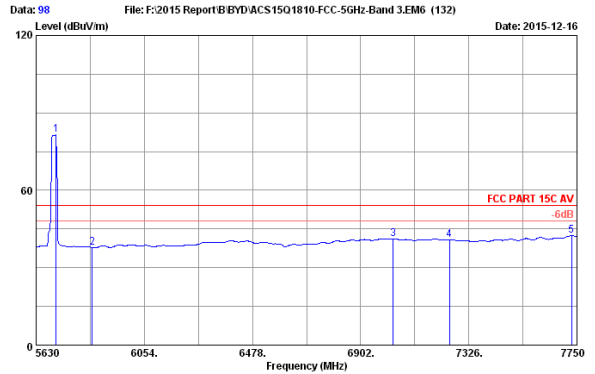

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5708.440	33.41	9.88	35.14	73.27	81.42	54.00	-27.42	Average
2	5850.000	33.55	9.95	35.07	29.37	37.80	54.00	16.20	Average
3	7029.200	35.91	10.51	35.41	30.27	41.28	54.00	12.72	Average
4	7250.000	36.00	10.74	35.50	29.59	40.83	54.00	13.17	Average
5	7728.800	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

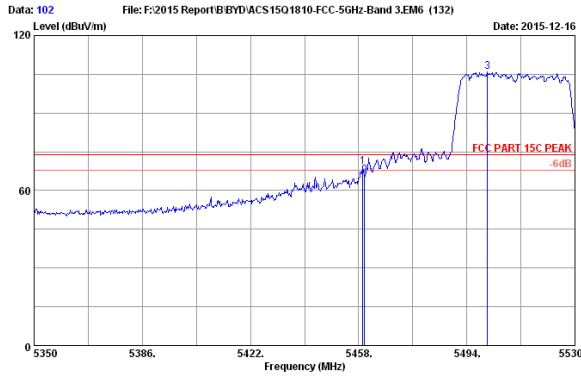

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.440	33.26	9.76	35.25	61.28	69.05	74.00	4.95	Peak
2	5460.000	33.26	9.76	35.25	58.06	65.83	74.00	8.17	Peak
3	5500.840	33.20	9.76	35.22	98.07	105.83	74.00	-31.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

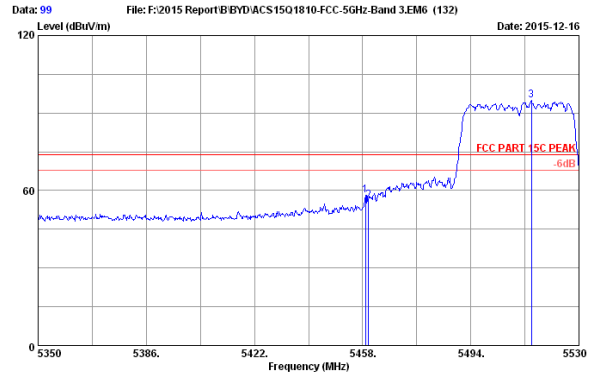

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	50.47	58.25	74.00	15.75	Peak
2	5460.000	33.26	9.76	35.25	48.44	56.21	74.00	17.79	Peak
3	5514.160	33.21	9.79	35.21	87.17	94.96	74.00	-20.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

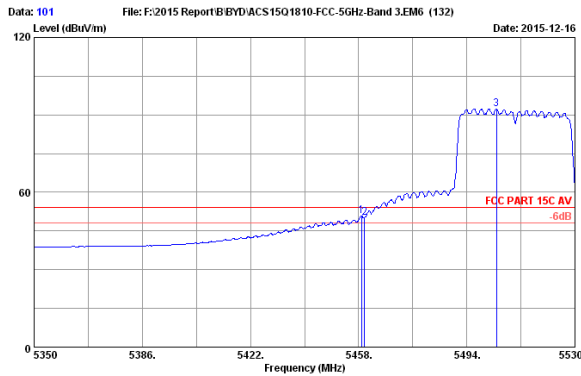

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	43.01	50.79	54.00	3.21	Average
2	5460.000	33.26	9.76	35.25	42.42	50.19	54.00	3.81	Average
3	5503.900	33.20	9.79	35.22	84.43	92.20	54.00	-38.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

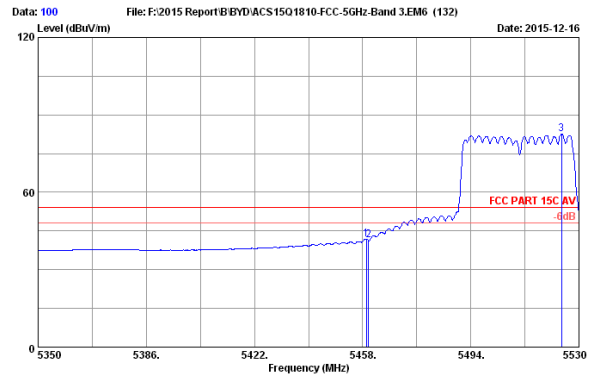

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.260	33.27	9.76	35.25	34.05	41.83	54.00	12.17	Average
2	5460.000	33.26	9.76	35.25	33.64	41.41	54.00	12.59	Average
3	5524.240	33.22	9.80	35.21	74.76	82.57	54.00	-28.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

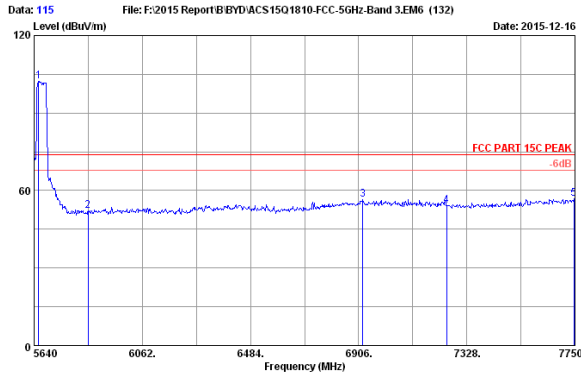

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5656.880	33.36	9.85	35.16	94.23	102.28	74.00	-28.28	Peak
2	5850.000	33.55	9.95	35.07	43.60	52.03	74.00	21.97	Peak
3	6922.880	35.75	10.46	35.37	45.64	56.48	74.00	17.52	Peak
4	7250.000	36.00	10.74	35.50	43.04	54.28	74.00	19.72	Peak
5	7745.780	36.54	11.22	35.70	44.62	56.68	74.00	17.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

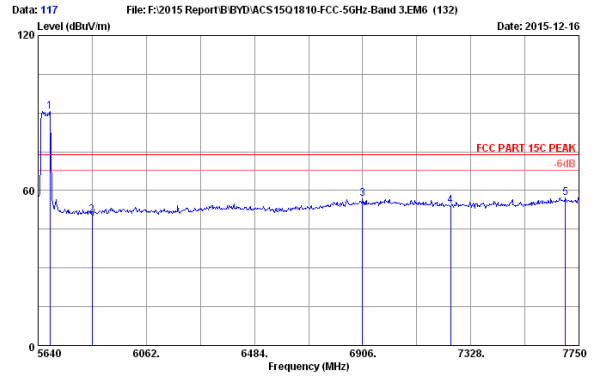

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5686.420	33.39	9.87	35.15	82.50	90.61	74.00	-16.61	Peak
2	5850.000	33.55	9.95	35.07	42.00	50.46	74.00	23.54	Peak
3	6906.000	35.71	10.45	35.36	45.90	56.70	74.00	17.30	Peak
4	7250.000	36.00	10.74	35.50	42.82	54.06	74.00	19.94	Peak
5	7697.250	36.46	11.18	35.68	45.22	57.18	74.00	16.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

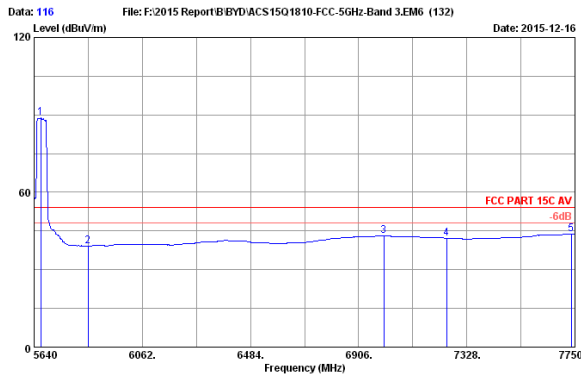

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	80.76	88.84	54.00	-34.84	Average
2	5850.000	33.55	9.95	35.07	30.63	39.06	54.00	14.94	Average
3	7005.170	35.90	10.49	35.40	32.10	43.09	54.00	10.91	Average
4	7250.000	36.00	10.74	35.50	31.01	42.25	54.00	11.75	Average
5	7735.230	36.52	11.22	35.69	31.71	43.76	54.00	10.24	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

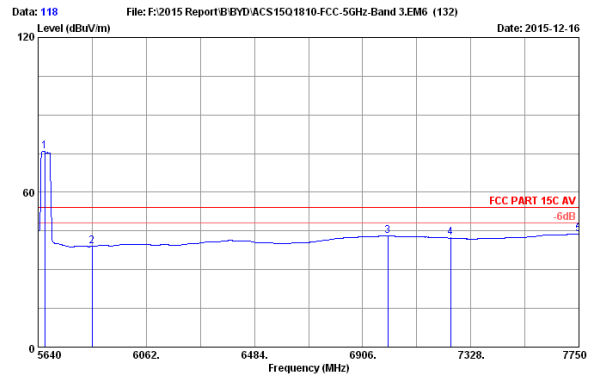

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	67.78	75.86	54.00	-21.86	Average
2	5850.000	33.55	9.95	35.07	30.56	38.99	54.00	15.01	Average
3	7005.170	35.90	10.49	35.40	32.12	43.11	54.00	10.89	Average
4	7250.000	36.00	10.74	35.50	31.05	42.29	54.00	11.71	Average
5	7750.000	36.55	11.23	35.70	31.70	43.78	54.00	10.22	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

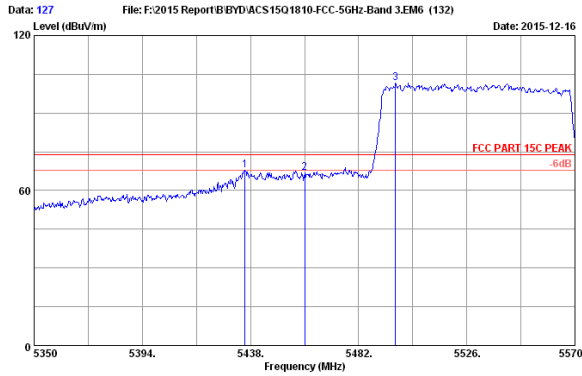

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5435.800	33.30	9.75	35.26	60.03	67.82	74.00	6.18	Peak
2	5460.000	33.26	9.76	35.25	58.95	66.72	74.00	7.28	Peak
3	5496.960	33.20	9.76	35.22	93.99	101.75	74.00	-27.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

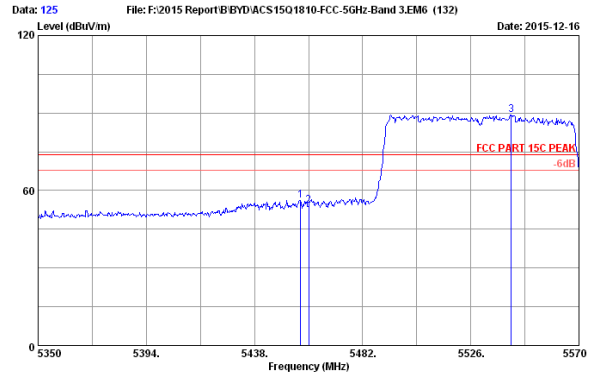

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5456.700	33.27	9.76	35.25	48.34	56.12	74.00	17.88	Peak
2	5460.000	33.26	9.76	35.25	46.26	54.03	74.00	19.97	Peak
3	5542.500	33.24	9.80	35.20	81.54	89.38	74.00	-15.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

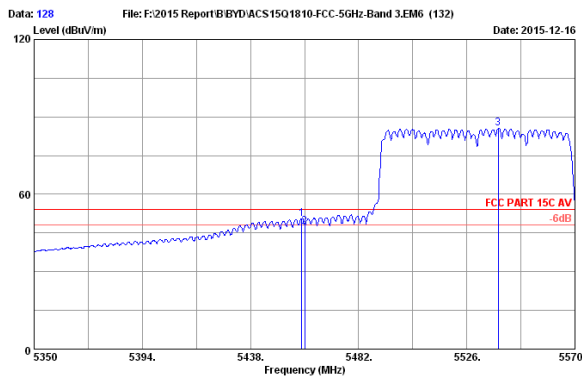

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	42.77	50.55	54.00	3.45	Average
2	5460.000	33.26	9.76	35.25	39.68	47.45	54.00	6.55	Average
3	5538.760	33.24	9.80	35.20	77.86	85.70	54.00	-31.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

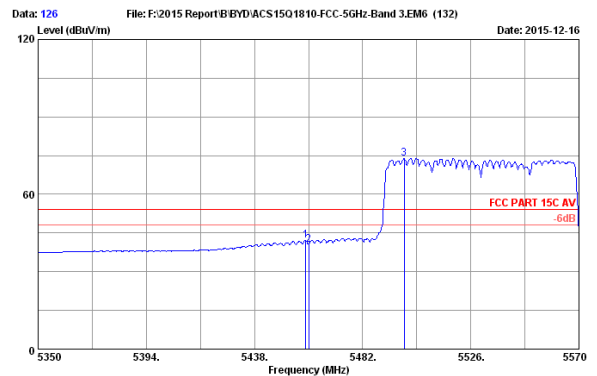

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	34.27	42.05	54.00	11.95	Average
2	5460.000	33.26	9.76	35.25	32.84	40.61	54.00	13.39	Average
3	5498.940	33.20	9.78	35.22	66.19	73.95	54.00	-19.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

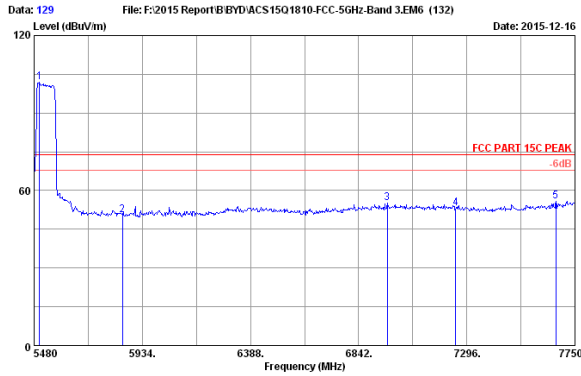

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5502.700	33.20	9.79	35.22	94.15	101.92	74.00	-27.92	Peak
2	5850.000	33.55	9.95	35.07	42.21	50.64	74.00	23.36	Peak
3	6962.310	35.82	10.47	35.38	44.34	55.25	74.00	18.75	Peak
4	7250.000	36.00	10.74	35.50	42.07	53.31	74.00	20.69	Peak
5	7670.550	36.41	11.15	35.67	43.91	55.80	74.00	18.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

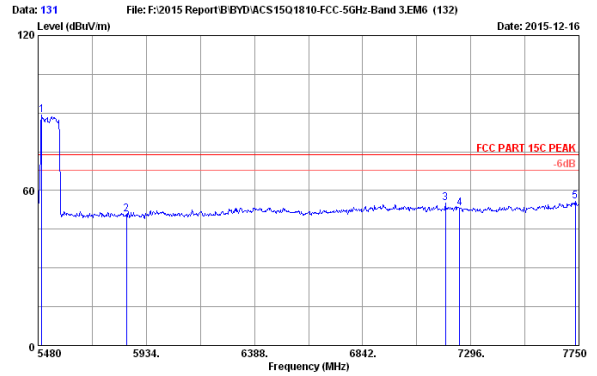

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5495.890	33.21	9.78	35.22	81.52	89.29	74.00	-15.29	Peak
2	5850.000	33.55	9.95	35.07	42.43	50.86	74.00	23.14	Peak
3	7189.310	35.98	10.67	35.48	44.09	55.26	74.00	18.74	Peak
4	7250.000	36.00	10.74	35.50	41.98	53.22	74.00	20.78	Peak
5	7734.110	36.52	11.22	35.69	43.93	55.98	74.00	18.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

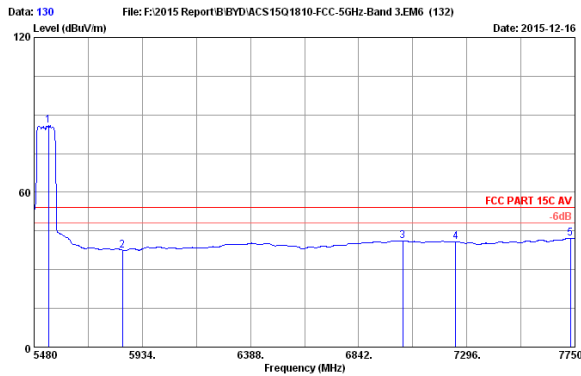

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5541.290	33.24	9.80	35.20	78.10	85.94	54.00	-31.94	Average
2	5850.000	33.55	9.95	35.07	29.16	37.59	54.00	16.41	Average
3	7028.140	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
4	7250.000	36.00	10.74	35.50	29.51	40.75	54.00	13.25	Average
5	7731.840	36.52	11.22	35.69	30.23	42.28	54.00	11.72	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

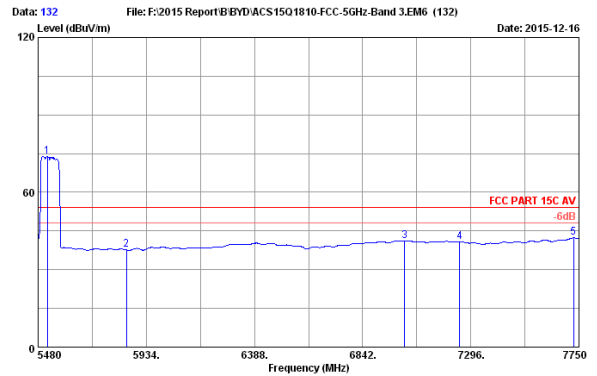


Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5518.590	33.22	9.79	35.21	66.08	73.85	54.00	-19.88	Average
2	5850.000	33.55	9.95	35.07	29.19	37.52	54.00	16.38	Average
3	7019.060	35.91	10.51	35.41	30.24	41.25	54.00	12.75	Average
4	7250.000	36.00	10.74	35.50	29.50	40.74	54.00	13.26	Average
5	7727.300	36.51	11.20	35.69	30.29	42.31	54.00	11.69	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5745-5825MHz Band:

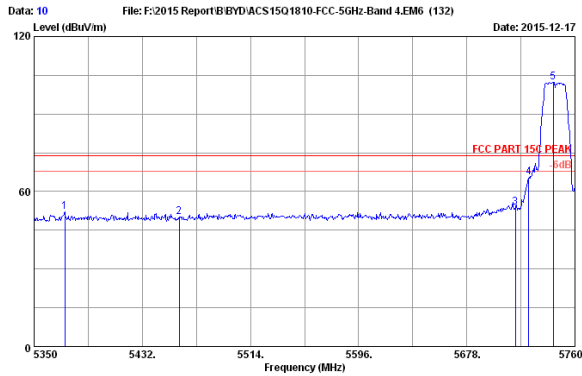


Data: 10 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 4.EM6 (132) Date: 2015-12-17

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5373.370	33.40	9.72	35.28	44.15	51.99	74.00	22.01	Peak
2	5460.000	33.26	9.76	35.25	42.31	50.08	74.00	23.92	Peak
3	5715.000	33.42	9.88	35.12	45.54	53.72	74.00	20.28	Peak
4	5725.000	33.42	9.89	35.12	47.27	55.46	74.00	18.54	Peak
5	5745.600	33.44	9.90	35.11	94.20	102.43	74.00	-28.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

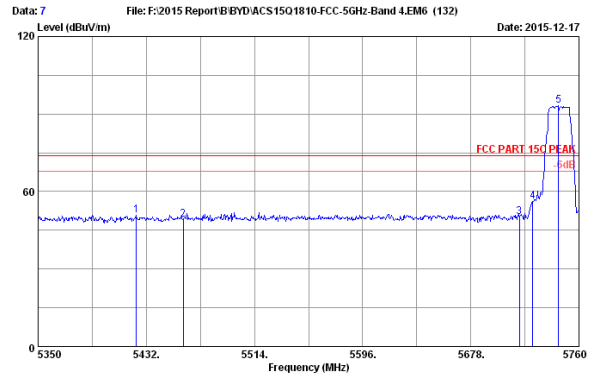


Data: 7 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 4.EM6 (132) Date: 2015-12-17

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5424.620	33.32	9.74	35.26	43.13	50.93	74.00	23.07	Peak
2	5460.000	33.26	9.76	35.25	41.31	49.08	74.00	24.92	Peak
3	5715.000	33.42	9.88	35.12	41.79	49.97	74.00	24.03	Peak
4	5725.000	33.42	9.89	35.12	47.85	56.04	74.00	17.96	Peak
5	5744.420	33.44	9.90	35.11	84.97	93.20	74.00	-19.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

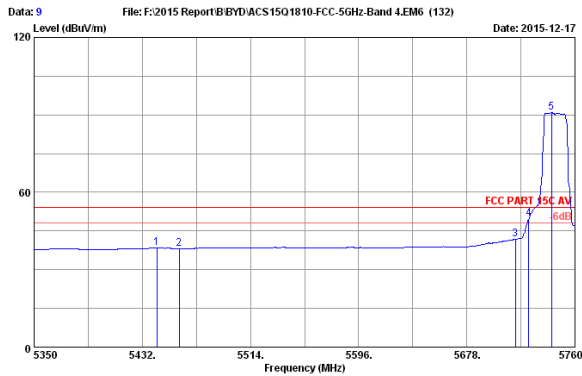


Data: 9 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 4.EM6 (132) Date: 2015-12-17

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5443.070	33.29	9.75	35.25	30.60	38.39	54.00	15.61	Average
2	5460.000	33.26	9.76	35.25	30.30	38.07	54.00	15.93	Average
3	5715.000	33.42	9.88	35.12	33.53	41.71	54.00	12.29	Average
4	5725.000	33.42	9.89	35.12	41.73	49.92	54.00	4.08	Average
5	5742.370	33.44	9.90	35.11	82.64	90.87	54.00	-36.87	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

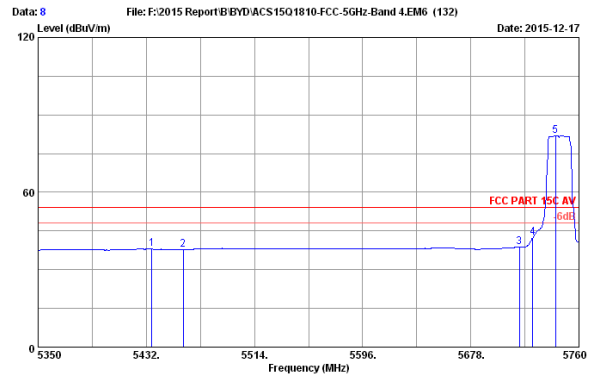


Data: 8 File: F:\2015 Report\BYD\ACS1501810-FCC-5GHz-Band 4.EM6 (132) Date: 2015-12-17

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5436.100	33.30	9.75	35.26	30.20	37.99	54.00	16.01	Average
2	5460.000	33.26	9.76	35.25	30.09	37.86	54.00	16.14	Average
3	5715.000	33.42	9.88	35.12	30.63	38.81	54.00	15.19	Average
4	5725.000	33.42	9.89	35.12	34.34	42.53	54.00	11.47	Average
5	5742.370	33.44	9.90	35.11	73.74	81.97	54.00	-27.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

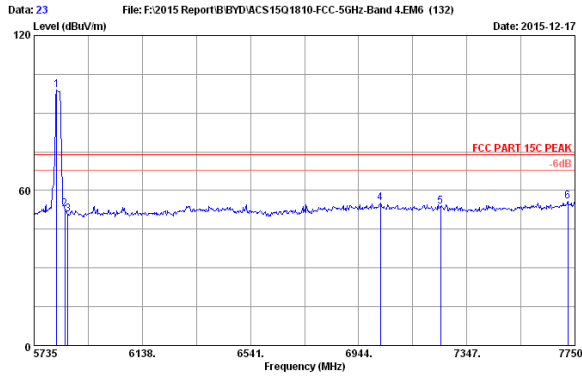

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.630	33.52	9.93	35.08	90.41	98.78	74.00	-24.78	Peak
2	5850.000	33.55	9.95	35.07	44.55	52.98	74.00	21.02	Peak
3	5860.000	33.56	9.95	35.07	42.24	50.68	74.00	23.32	Peak
4	7024.600	35.91	10.51	35.41	44.26	55.27	74.00	18.73	Peak
5	7250.000	36.00	10.74	35.50	42.56	53.80	74.00	20.20	Peak
6	7723.805	36.50	11.20	35.69	43.93	55.94	74.00	18.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

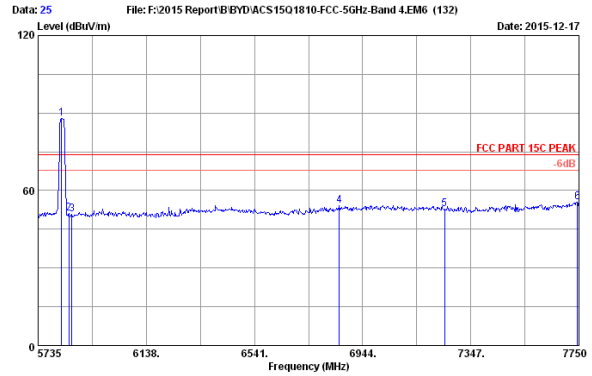

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.645	33.52	9.93	35.08	79.56	87.93	74.00	-13.93	Peak
2	5850.000	33.55	9.95	35.07	42.61	51.04	74.00	22.96	Peak
3	5860.000	33.56	9.95	35.07	42.44	50.88	74.00	23.12	Peak
4	6857.355	35.61	10.42	35.34	43.47	54.16	74.00	19.84	Peak
5	7250.000	36.00	10.74	35.50	41.42	52.66	74.00	21.34	Peak
6	7743.955	36.54	11.22	35.70	43.38	55.44	74.00	18.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

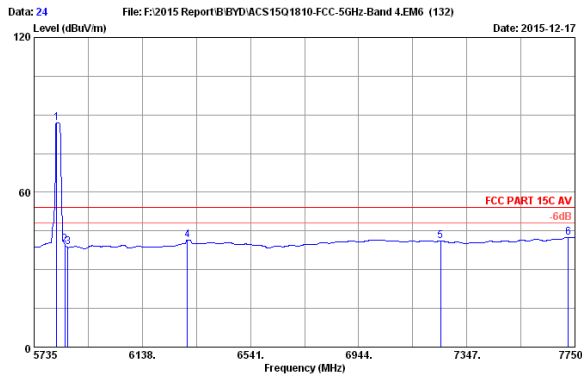

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.630	33.52	9.93	35.08	78.69	87.06	54.00	-33.06	Average
2	5850.000	33.55	9.95	35.07	31.35	39.78	54.00	14.22	Average
3	5860.000	33.56	9.95	35.07	30.38	38.82	54.00	15.18	Average
4	6305.245	34.43	10.16	35.12	32.06	41.53	54.00	12.47	Average
5	7250.000	36.00	10.74	35.50	29.75	40.99	54.00	13.01	Average
6	7725.820	36.51	11.20	35.69	30.56	42.58	54.00	11.42	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

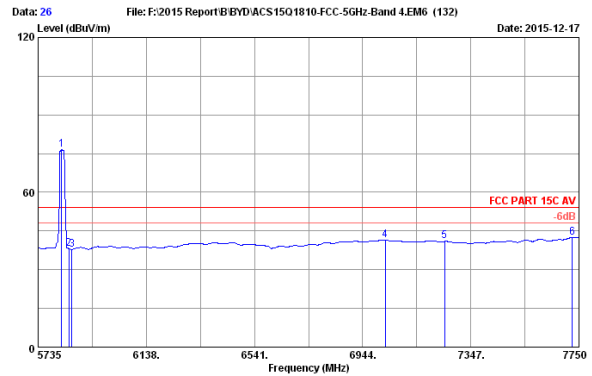

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.645	33.52	9.93	35.08	68.06	76.43	54.00	-22.43	Average
2	5850.000	33.55	9.95	35.07	29.77	38.20	54.00	15.80	Average
3	5860.000	33.56	9.95	35.07	29.47	37.91	54.00	16.09	Average
4	7028.630	35.91	10.51	35.41	30.36	41.37	54.00	12.63	Average
5	7250.000	36.00	10.74	35.50	29.71	40.95	54.00	13.05	Average
6	7725.820	36.51	11.20	35.69	30.48	42.50	54.00	11.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

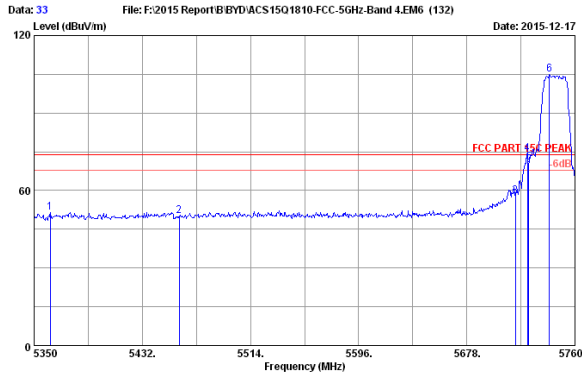

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5362.300	33.42	9.72	35.29	43.61	51.46	74.00	22.54	Peak
2	5460.000	33.26	9.76	35.25	42.36	50.13	74.00	23.87	Peak
3	5715.000	33.42	9.86	35.12	49.59	57.77	74.00	16.23	Peak
4	5723.920	33.42	9.89	35.12	66.17	74.36	74.00	-0.36	Peak
5	5725.000	33.42	9.89	35.12	62.54	70.73	74.00	3.27	Peak
6	5740.730	33.44	9.90	35.11	96.74	104.97	74.00	-30.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

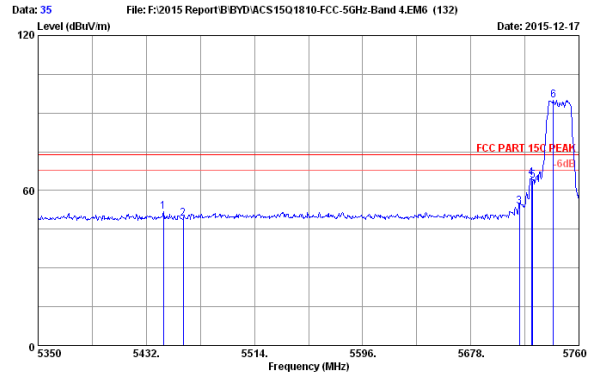

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5445.120	33.29	9.75	35.25	44.04	51.83	74.00	22.17	Peak
2	5460.000	33.26	9.76	35.25	41.32	49.09	74.00	24.91	Peak
3	5715.000	33.42	9.86	35.12	45.55	53.73	74.00	20.27	Peak
4	5723.920	33.42	9.89	35.12	56.49	64.68	74.00	9.32	Peak
5	5725.000	33.42	9.89	35.12	55.78	63.97	74.00	10.03	Peak
6	5740.730	33.44	9.90	35.11	86.72	94.95	74.00	-20.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

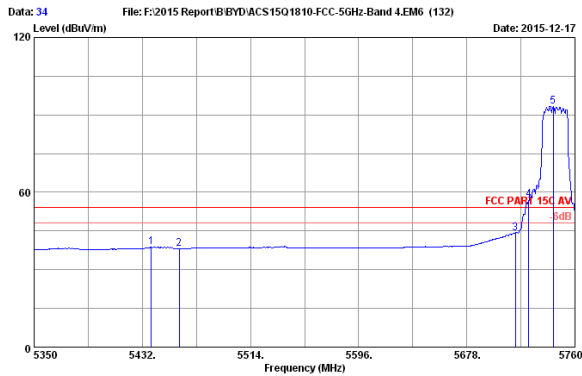

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5438.970	33.30	9.75	35.25	30.98	38.78	54.00	15.22	Average
2	5460.000	33.26	9.76	35.25	30.33	38.10	54.00	15.90	Average
3	5715.000	33.42	9.86	35.12	36.07	44.25	54.00	9.75	Average
4	5725.000	33.42	9.89	35.12	49.06	57.25	54.00	-3.25	Average
5	5743.600	33.44	9.90	35.11	85.02	93.25	54.00	-39.25	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

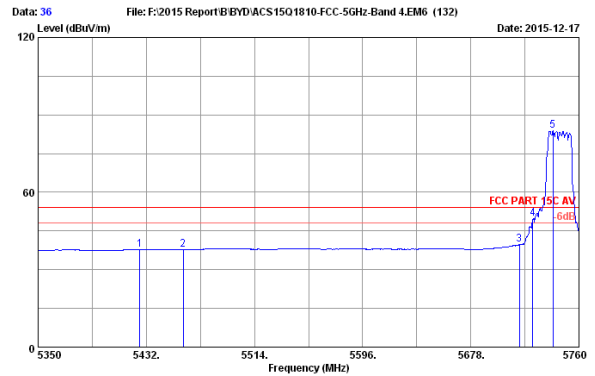

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.080	33.32	9.74	35.26	29.99	37.79	54.00	16.21	Average
2	5460.000	33.26	9.76	35.25	29.85	37.62	54.00	16.38	Average
3	5715.000	33.42	9.86	35.12	31.56	39.74	54.00	14.26	Average
4	5725.000	33.42	9.89	35.12	41.70	49.89	54.00	4.11	Average
5	5743.320	33.44	9.90	35.11	75.62	83.85	54.00	-29.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

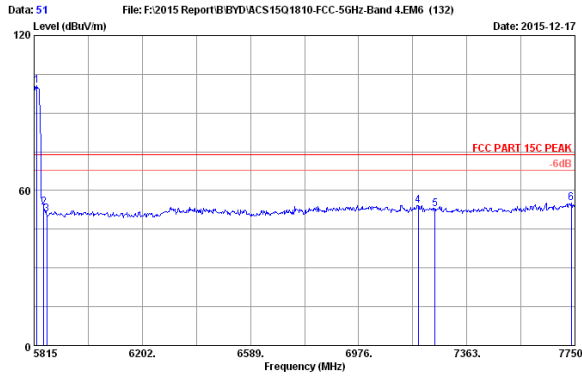

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT20 CH165 5825MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5824.675	33.52	9.93	35.08	92.15	100.52	74.00	-26.52	Peak
2	5850.000	33.55	9.95	35.07	45.05	53.48	74.00	20.52	Peak
3	5860.000	33.56	9.95	35.07	42.47	50.91	74.00	23.09	Peak
4	7188.850	35.98	10.67	35.48	43.12	54.29	74.00	19.71	Peak
5	7250.000	36.00	10.74	35.50	41.50	52.74	74.00	21.26	Peak
6	7736.455	36.53	11.22	35.69	43.09	55.15	74.00	18.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

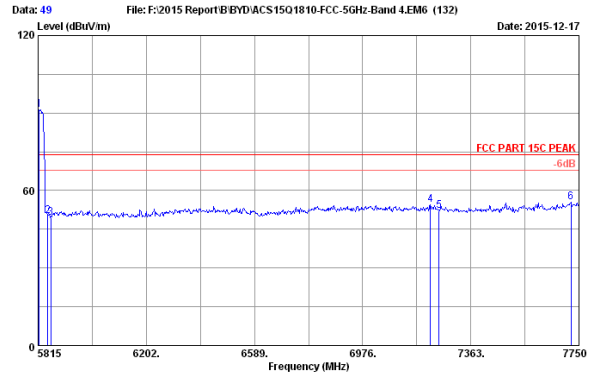

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT20 CH165 5825MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5818.870	33.52	9.93	35.08	82.94	91.31	74.00	-17.31	Peak
2	5850.000	33.55	9.95	35.07	41.86	50.29	74.00	23.71	Peak
3	5860.000	33.56	9.95	35.07	41.16	49.60	74.00	24.40	Peak
4	7217.875	35.99	10.70	35.49	43.22	54.42	74.00	19.58	Peak
5	7250.000	36.00	10.74	35.50	40.97	52.21	74.00	21.79	Peak
6	7720.975	36.50	11.20	35.69	43.63	55.64	74.00	18.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

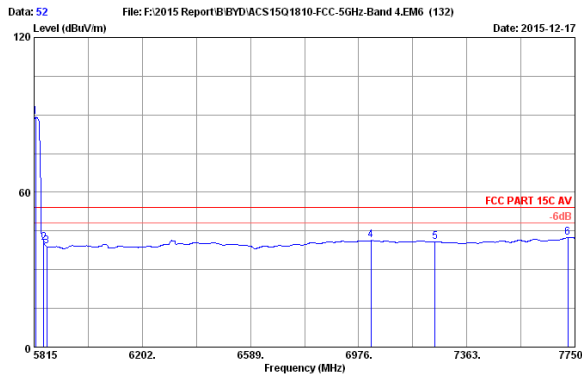

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT20 CH165 5825MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5820.805	33.52	9.93	35.08	80.73	89.10	54.00	-35.10	Average
2	5850.000	33.55	9.95	35.07	32.10	40.53	54.00	13.47	Average
3	5860.000	33.56	9.95	35.07	30.65	39.09	54.00	14.91	Average
4	7020.505	35.91	10.51	35.41	30.29	41.30	54.00	12.70	Average
5	7250.000	36.00	10.74	35.50	29.66	40.90	54.00	13.10	Average
6	7724.845	36.50	11.20	35.69	30.41	42.42	54.00	11.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

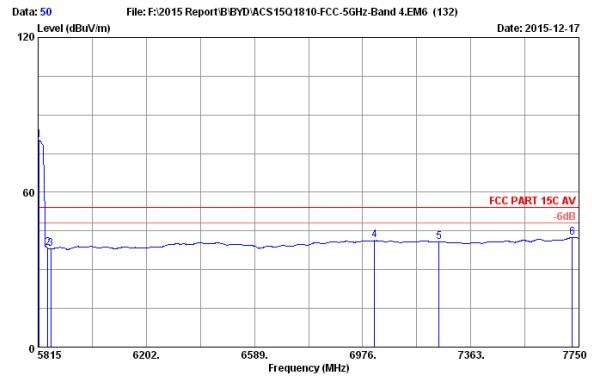

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT20 CH165 5825MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5818.870	33.52	9.93	35.08	71.75	80.12	54.00	-26.12	Average
2	5850.000	33.55	9.95	35.07	29.88	38.31	54.00	15.69	Average
3	5860.000	33.56	9.95	35.07	29.58	38.02	54.00	15.98	Average
4	7018.570	35.91	10.51	35.41	30.28	41.29	54.00	12.71	Average
5	7250.000	36.00	10.74	35.50	29.65	40.89	54.00	13.11	Average
6	7726.780	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

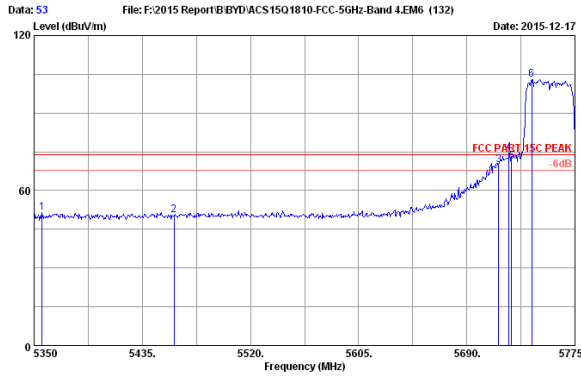

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH151 5755MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5356.375	33.43	9.71	35.29	43.56	51.41	74.00	22.59	Peak
2	5460.000	33.26	9.76	35.25	42.72	50.49	74.00	23.51	Peak
3	5715.000	33.42	9.88	35.12	61.74	69.92	74.00	4.08	Peak
4	5723.150	33.42	9.89	35.12	66.27	74.46	74.00	-0.46	Peak
5	5725.000	33.42	9.89	35.12	63.08	71.27	74.00	2.73	Peak
6	5741.000	33.44	9.90	35.11	94.76	102.99	74.00	-28.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

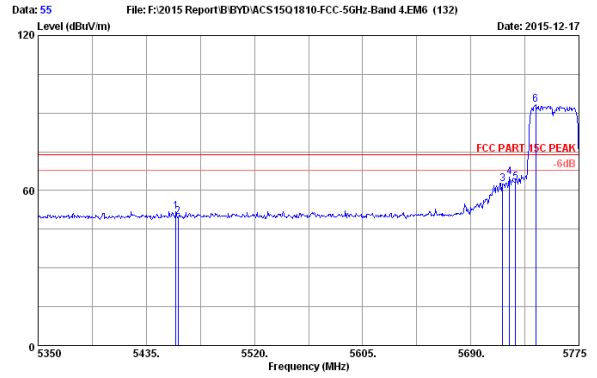

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH151 5755MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.375	33.27	9.76	35.25	44.03	51.81	74.00	22.19	Peak
2	5460.000	33.26	9.76	35.25	42.11	49.88	74.00	24.12	Peak
3	5715.000	33.42	9.88	35.12	54.27	62.45	74.00	11.55	Peak
4	5720.600	33.42	9.89	35.12	56.98	65.17	74.00	8.83	Peak
5	5725.000	33.42	9.89	35.12	55.07	63.26	74.00	10.74	Peak
6	5741.000	33.44	9.90	35.11	84.89	93.12	74.00	-19.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

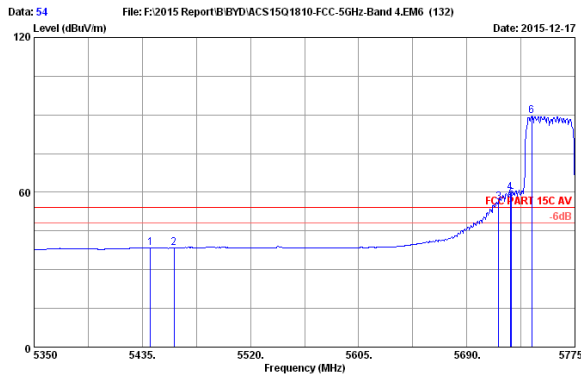

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH151 5755MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5441.375	33.29	9.75	35.25	30.79	38.58	54.00	15.42	Average
2	5460.000	33.26	9.76	35.25	30.67	38.44	54.00	15.56	Average
3	5715.000	33.42	9.88	35.12	47.88	56.06	54.00	-2.06	Average
4	5724.000	33.42	9.89	35.12	51.66	59.85	54.00	-5.85	Average
5	5725.000	33.42	9.89	35.12	49.24	57.43	54.00	-3.43	Average
6	5741.000	33.44	9.90	35.11	81.20	89.43	54.00	-35.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

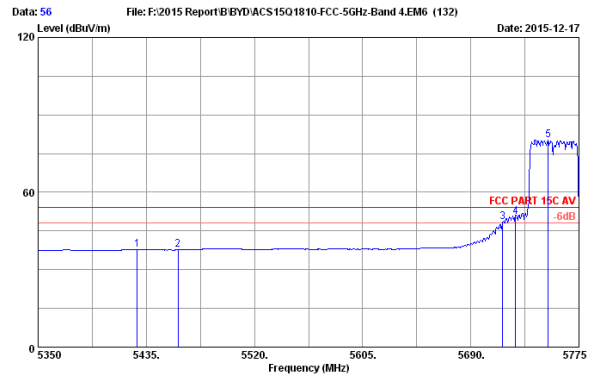

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH151 5755MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.775	33.32	9.74	35.26	30.00	37.80	54.00	16.20	Average
2	5460.000	33.26	9.76	35.25	29.89	37.66	54.00	16.34	Average
3	5715.000	33.42	9.88	35.12	40.21	48.39	54.00	5.61	Average
4	5725.000	33.42	9.89	35.12	42.16	50.35	54.00	3.65	Average
5	5750.775	33.45	9.90	35.11	71.97	80.21	54.00	-26.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

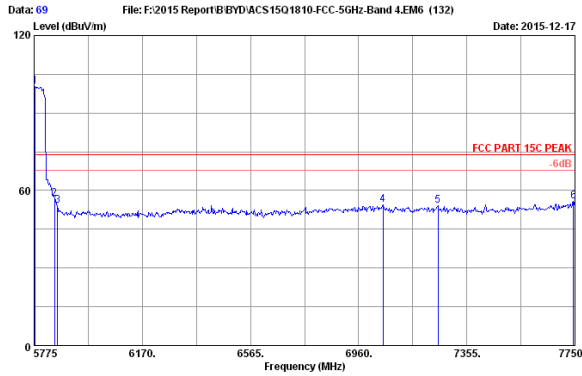

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.950	33.48	9.91	35.10	91.95	100.24	74.00	-26.24	Peak
2	5850.000	33.55	9.95	35.07	48.47	56.90	74.00	17.10	Peak
3	5860.000	33.56	9.95	35.07	45.60	54.04	74.00	19.96	Peak
4	7048.875	35.82	10.54	35.42	43.56	54.60	74.00	19.40	Peak
5	7250.000	36.00	10.74	35.50	42.77	54.01	74.00	19.99	Peak
6	7744.075	36.54	11.22	35.70	43.81	55.87	74.00	18.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

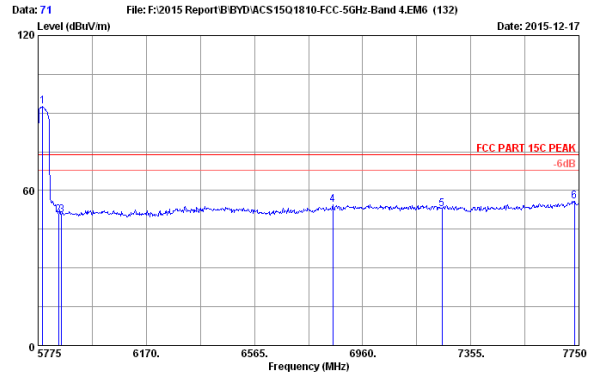

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	84.20	92.52	74.00	-18.52	Peak
2	5850.000	33.55	9.95	35.07	42.00	50.46	74.00	23.54	Peak
3	5860.000	33.56	9.95	35.07	42.00	50.44	74.00	23.56	Peak
4	6851.375	35.60	10.42	35.34	43.75	54.43	74.00	19.57	Peak
5	7250.000	36.00	10.74	35.50	41.61	52.85	74.00	21.15	Peak
6	7734.200	36.52	11.22	35.69	43.87	55.92	74.00	18.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

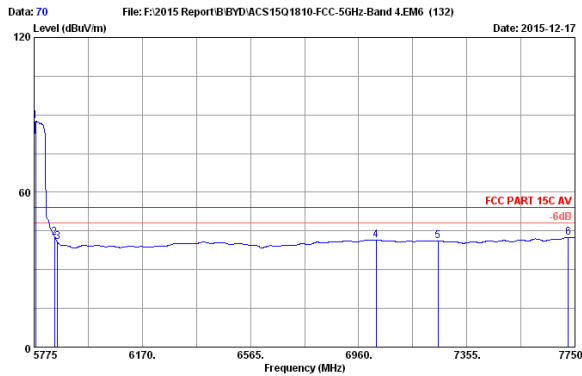

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5780.925	33.48	9.91	35.10	79.36	87.65	54.00	-33.65	Average
2	5850.000	33.55	9.95	35.07	33.92	42.35	54.00	11.65	Average
3	5860.000	33.56	9.95	35.07	32.47	40.91	54.00	13.09	Average
4	7023.200	35.91	10.51	35.41	30.43	41.44	54.00	12.56	Average
5	7250.000	36.00	10.74	35.50	29.84	41.08	54.00	12.92	Average
6	7726.300	36.51	11.20	35.69	30.57	42.59	54.00	11.41	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

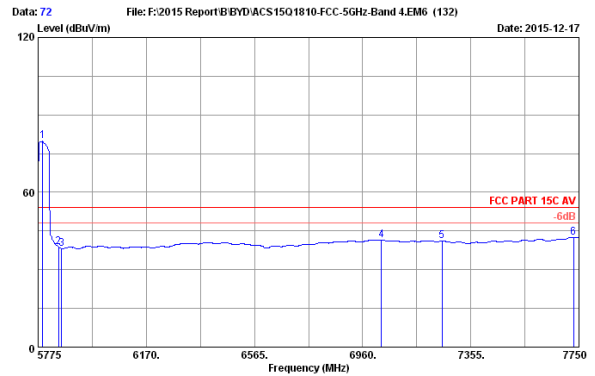

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	71.42	79.74	54.00	-25.74	Average
2	5850.000	33.55	9.95	35.07	30.25	38.68	54.00	15.32	Average
3	5860.000	33.56	9.95	35.07	29.78	38.22	54.00	15.78	Average
4	7029.125	35.91	10.51	35.41	30.40	41.41	54.00	12.59	Average
5	7250.000	36.00	10.74	35.50	29.79	41.03	54.00	12.97	Average
6	7730.250	36.51	11.22	35.69	30.48	42.52	54.00	11.48	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

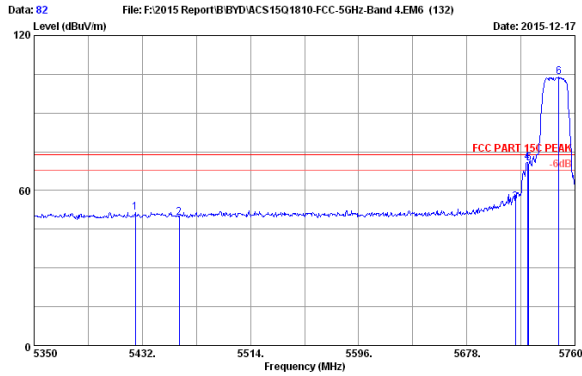

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5426.670	33.32	9.74	35.26	43.72	51.52	74.00	22.48	Peak
2	5460.000	33.26	9.76	35.25	41.77	49.54	74.00	24.46	Peak
3	5715.000	33.42	9.86	35.12	47.27	55.45	74.00	18.55	Peak
4	5723.920	33.42	9.89	35.12	62.79	70.98	74.00	3.02	Peak
5	5725.000	33.42	9.89	35.12	62.32	70.51	74.00	3.49	Peak
6	5747.700	33.45	9.90	35.11	95.56	103.80	74.00	-29.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

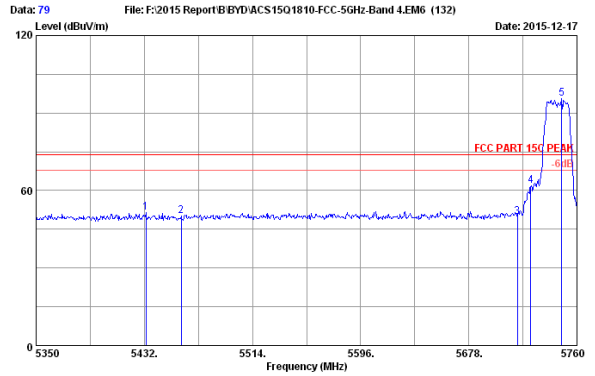


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5433.230	33.31	9.75	35.26	43.62	51.42	74.00	22.58	Peak
2	5460.000	33.26	9.76	35.25	42.37	50.14	74.00	23.86	Peak
3	5715.000	33.42	9.86	35.12	41.70	49.88	74.00	24.12	Peak
4	5725.000	33.42	9.89	35.12	53.81	62.00	74.00	12.00	Peak
5	5748.520	33.45	9.90	35.11	87.40	95.64	74.00	-21.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

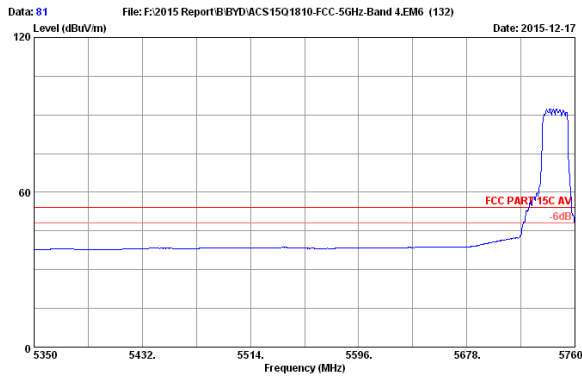


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx AT10-C

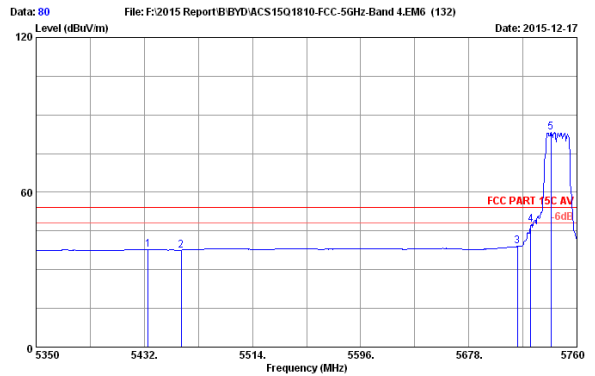

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5434.670	33.30	9.75	35.26	29.99	37.78	54.00	16.22	Average
2	5460.000	33.26	9.76	35.25	29.83	37.60	54.00	16.40	Average
3	5715.000	33.42	9.86	35.12	30.83	39.01	54.00	14.99	Average
4	5725.000	33.42	9.89	35.12	39.18	47.37	54.00	6.63	Average
5	5740.320	33.44	9.90	35.11	75.11	83.34	54.00	-29.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

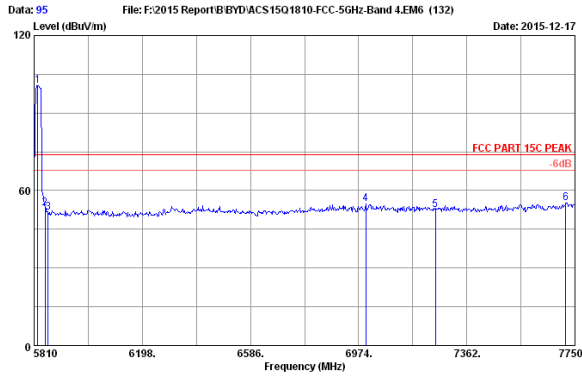

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5625MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	92.30	100.67	74.00	-26.67	Peak
2	5850.000	33.55	9.95	35.07	44.67	53.10	74.00	20.90	Peak
3	5860.000	33.56	9.95	35.07	42.91	51.35	74.00	22.65	Peak
4	6999.220	35.90	10.49	35.40	43.94	54.93	74.00	19.07	Peak
5	7250.000	36.00	10.74	35.50	41.30	52.54	74.00	21.46	Peak
6	7717.020	36.49	11.20	35.69	43.14	55.14	74.00	18.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

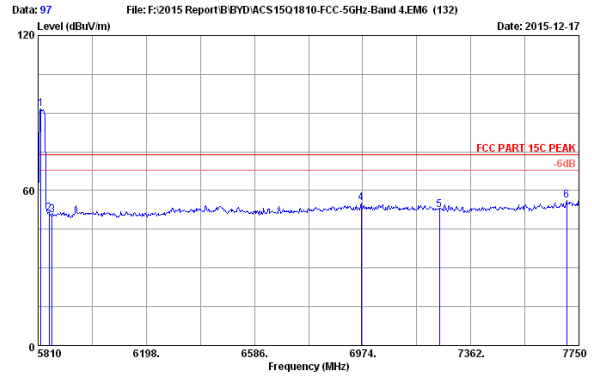

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5625MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	83.17	91.54	74.00	-17.54	Peak
2	5850.000	33.55	9.95	35.07	42.73	51.16	74.00	22.84	Peak
3	5860.000	33.56	9.95	35.07	42.06	50.50	74.00	23.50	Peak
4	6968.180	35.84	10.47	35.39	44.30	55.22	74.00	18.78	Peak
5	7250.000	36.00	10.74	35.50	41.24	52.48	74.00	21.52	Peak
6	7705.380	36.47	11.18	35.68	44.05	56.02	74.00	17.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

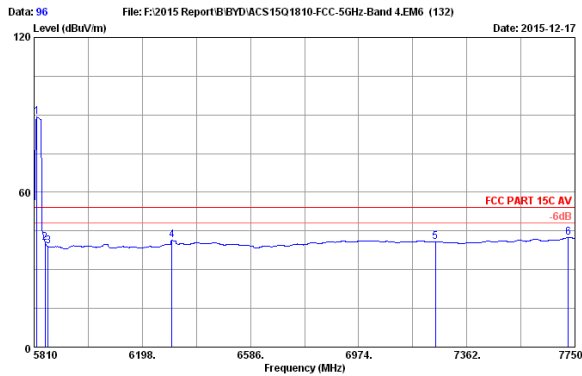

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5625MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	80.71	89.08	54.00	-35.08	Average
2	5850.000	33.55	9.95	35.07	31.87	40.30	54.00	13.70	Average
3	5860.000	33.56	9.95	35.07	30.55	38.99	54.00	15.01	Average
4	6304.700	34.43	10.16	35.12	31.83	41.30	54.00	12.70	Average
5	7250.000	36.00	10.74	35.50	29.65	40.89	54.00	13.11	Average
6	7726.720	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

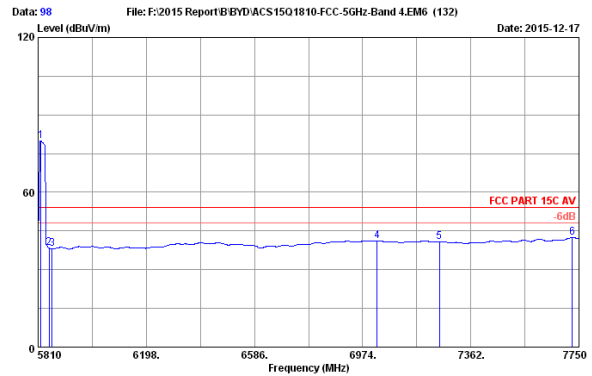

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5625MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	71.59	79.96	54.00	-25.96	Average
2	5850.000	33.55	9.95	35.07	29.85	38.28	54.00	15.72	Average
3	5860.000	33.56	9.95	35.07	29.54	37.98	54.00	16.02	Average
4	7026.380	35.91	10.51	35.41	30.24	41.25	54.00	12.75	Average
5	7250.000	36.00	10.74	35.50	29.67	40.91	54.00	13.09	Average
6	7726.720	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

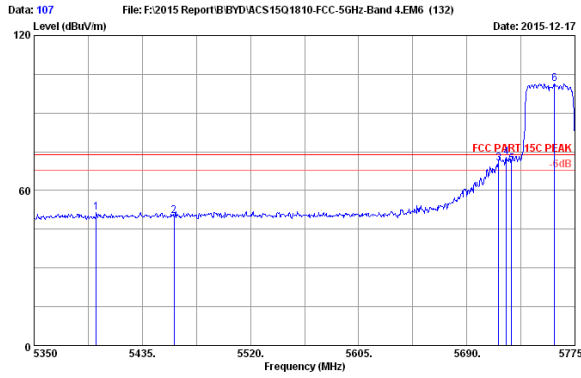

Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5398.875	33.36	9.74	35.27	43.57	51.40	74.00	22.60	Peak
2	5460.000	33.26	9.76	35.25	42.40	50.17	74.00	23.83	Peak
3	5715.000	33.42	9.88	35.12	62.28	70.46	74.00	3.54	Peak
4	5721.025	33.42	9.89	35.12	64.79	72.98	74.00	1.02	Peak
5	5725.000	33.42	9.89	35.12	61.92	70.11	74.00	3.89	Peak
6	5758.850	33.46	9.91	35.11	93.14	101.40	74.00	-27.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

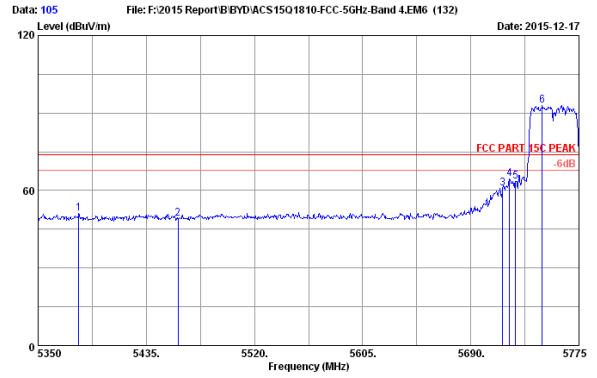

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5381.875	33.39	9.73	35.28	43.44	51.28	74.00	22.72	Peak
2	5460.000	33.26	9.76	35.25	41.32	49.09	74.00	24.91	Peak
3	5715.000	33.42	9.88	35.12	52.58	60.76	74.00	13.24	Peak
4	5720.600	33.42	9.89	35.12	56.18	64.37	74.00	9.63	Peak
5	5725.000	33.42	9.89	35.12	55.42	63.61	74.00	10.39	Peak
6	5746.100	33.45	9.90	35.11	84.78	93.02	74.00	-19.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

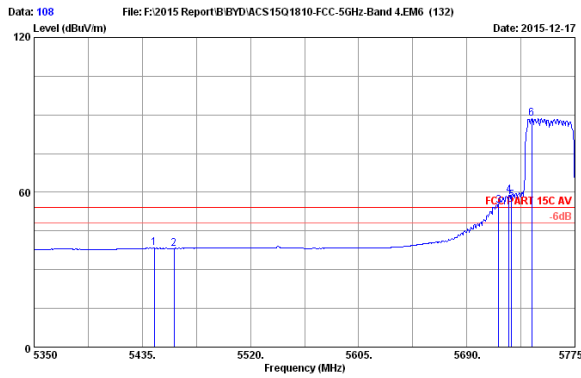

Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5444.350	33.29	9.75	35.25	30.55	38.34	54.00	15.66	Average
2	5460.000	33.26	9.76	35.25	30.43	38.20	54.00	15.80	Average
3	5715.000	33.42	9.88	35.12	46.69	54.87	54.00	-0.87	Average
4	5723.150	33.42	9.89	35.12	50.75	58.94	54.00	-4.94	Average
5	5725.000	33.42	9.89	35.12	48.55	56.74	54.00	-2.74	Average
6	5741.000	33.44	9.90	35.11	80.27	88.50	54.00	-34.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

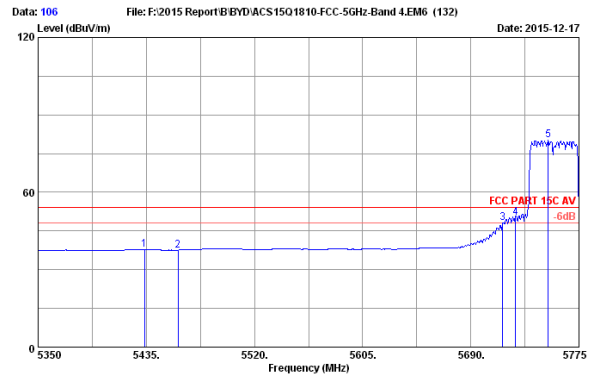

Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5433.725	33.31	9.75	35.26	29.95	37.75	54.00	16.25	Average
2	5460.000	33.26	9.76	35.25	29.89	37.60	54.00	16.40	Average
3	5715.000	33.42	9.88	35.12	39.84	48.02	54.00	5.98	Average
4	5725.000	33.42	9.89	35.12	41.78	49.97	54.00	4.03	Average
5	5750.775	33.45	9.90	35.11	71.83	80.07	54.00	-26.07	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

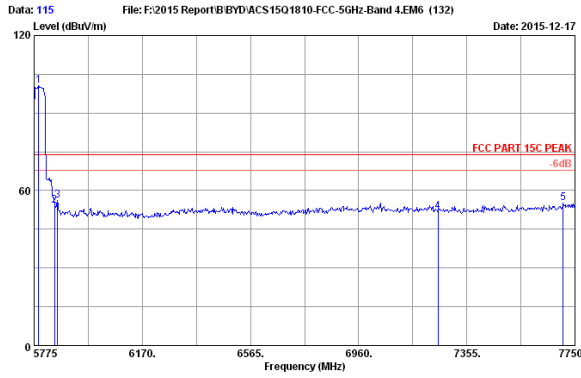

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	92.34	100.66	74.00	-26.66	Peak
2	5850.000	33.55	9.95	35.07	45.84	54.27	74.00	19.73	Peak
3	5860.000	33.56	9.95	35.07	47.70	56.14	74.00	17.86	Peak
4	7250.000	36.00	10.74	35.50	40.52	51.76	74.00	22.24	Peak
5	7706.550	36.47	11.18	35.68	43.11	55.08	74.00	18.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

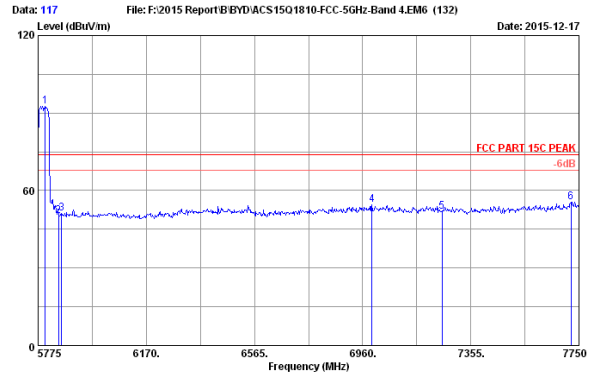

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5800.675	33.50	9.92	35.09	84.38	92.71	74.00	-18.71	Peak
2	5850.000	33.55	9.95	35.07	41.70	50.13	74.00	23.87	Peak
3	5860.000	33.56	9.95	35.07	42.60	51.04	74.00	22.96	Peak
4	6993.575	35.89	10.49	35.40	43.54	54.52	74.00	19.48	Peak
5	7250.000	36.00	10.74	35.50	40.45	51.69	74.00	22.31	Peak
6	7720.375	36.50	11.20	35.69	43.61	55.62	74.00	18.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

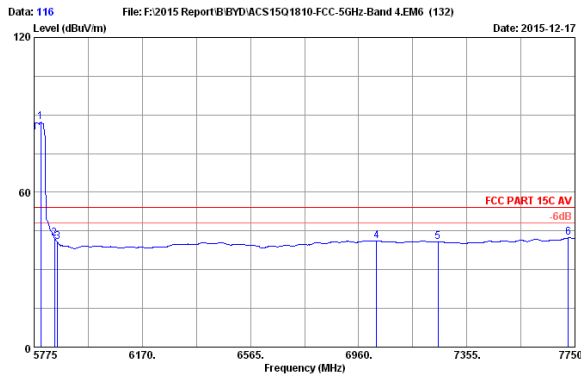

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5798.700	33.50	9.92	35.09	79.00	87.33	54.00	-33.33	Average
2	5850.000	33.55	9.95	35.07	33.71	42.14	54.00	11.86	Average
3	5860.000	33.56	9.95	35.07	32.25	40.69	54.00	13.31	Average
4	7025.175	35.91	10.51	35.41	30.18	41.19	54.00	12.81	Average
5	7250.000	36.00	10.74	35.50	29.59	40.83	54.00	13.17	Average
6	7726.300	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

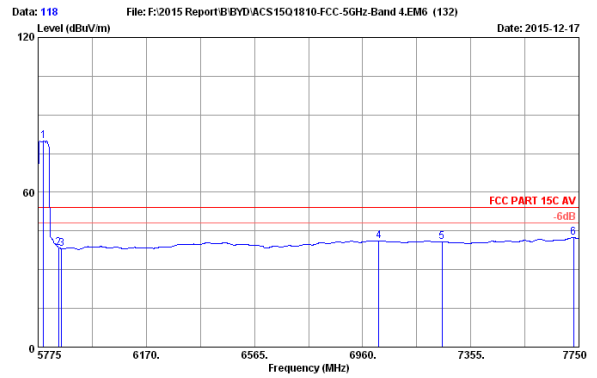

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5798.750	33.49	9.92	35.09	71.69	80.01	54.00	-26.01	Average
2	5850.000	33.55	9.95	35.07	30.10	38.53	54.00	15.47	Average
3	5860.000	33.56	9.95	35.07	29.65	38.09	54.00	15.91	Average
4	7019.250	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.60	40.84	54.00	13.16	Average
6	7720.250	36.51	11.22	35.69	30.29	42.33	54.00	11.67	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

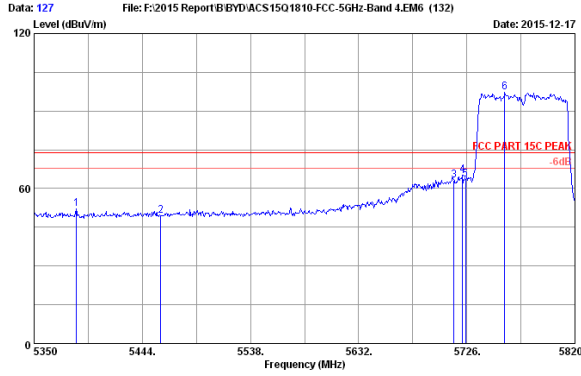

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5386.660	33.38	9.73	35.28	44.19	52.02	74.00	21.98	Peak
2	5460.000	33.26	9.76	35.25	41.69	49.46	74.00	24.54	Peak
3	5715.000	33.42	9.88	35.12	55.11	63.29	74.00	10.71	Peak
4	5722.240	33.42	9.89	35.12	57.01	65.20	74.00	8.80	Peak
5	5725.000	33.42	9.89	35.12	55.43	63.62	74.00	10.38	Peak
6	5758.900	33.46	9.91	35.11	89.02	97.28	74.00	-23.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

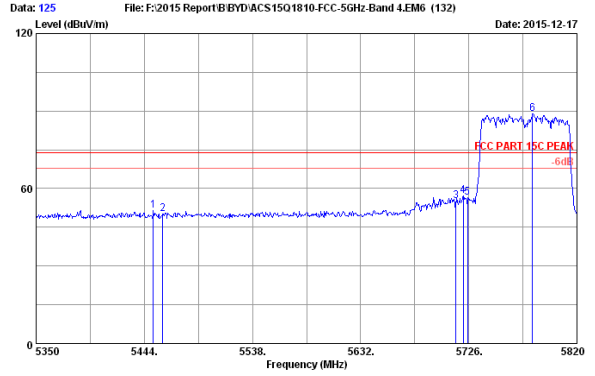

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5451.990	33.28	9.76	35.25	43.84	51.63	74.00	22.37	Peak
2	5460.000	33.26	9.76	35.25	42.21	49.98	74.00	24.02	Peak
3	5715.000	33.42	9.88	35.12	47.12	55.30	74.00	18.70	Peak
4	5721.300	33.42	9.89	35.12	48.90	57.09	74.00	16.91	Peak
5	5725.000	33.42	9.89	35.12	48.16	56.35	74.00	17.65	Peak
6	5781.460	33.48	9.91	35.10	80.68	88.97	74.00	-14.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

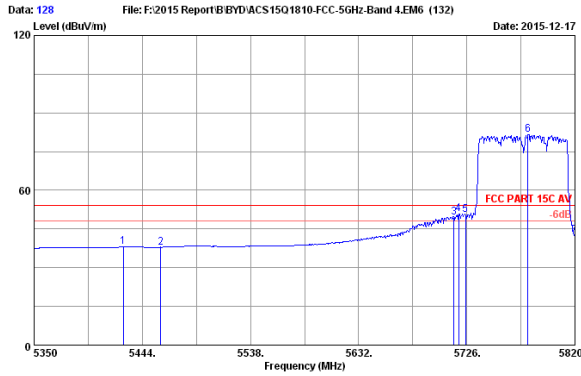

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.550	33.32	9.74	35.26	30.24	38.04	54.00	15.96	Average
2	5460.000	33.26	9.76	35.25	30.16	37.93	54.00	16.07	Average
3	5715.000	33.42	9.88	35.12	41.39	49.57	54.00	4.43	Average
4	5718.950	33.42	9.89	35.12	42.58	50.77	54.00	3.23	Average
5	5725.000	33.42	9.89	35.12	42.14	50.33	54.00	3.67	Average
6	5779.110	33.48	9.91	35.10	73.42	81.71	54.00	-27.71	Average
7	5820.000	33.52	9.93	35.08	33.93	42.30	54.00	11.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

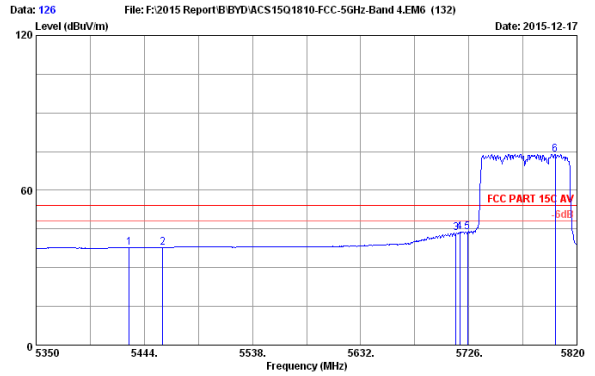

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5430.640	33.31	9.75	35.26	30.12	37.92	54.00	16.08	Average
2	5460.000	33.26	9.76	35.25	29.96	37.73	54.00	16.27	Average
3	5715.000	33.42	9.88	35.12	35.12	43.30	54.00	10.70	Average
4	5718.010	33.42	9.89	35.12	35.75	43.94	54.00	10.06	Average
5	5725.000	33.42	9.89	35.12	35.64	43.83	54.00	10.17	Average
6	5801.200	33.50	9.92	35.09	65.71	74.04	54.00	-20.04	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

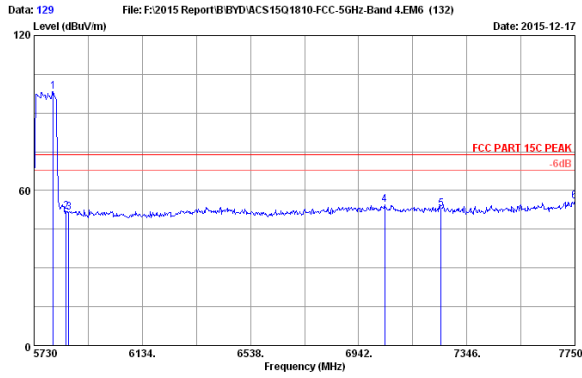

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH155 5775MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5800.700	33.50	9.92	35.09	89.83	98.16	74.00	-24.16	Peak
2	5850.000	33.55	9.95	35.07	43.45	51.88	74.00	22.12	Peak
3	5860.000	33.56	9.95	35.07	43.00	51.44	74.00	22.56	Peak
4	7038.960	35.82	10.53	35.42	43.36	54.39	74.00	19.61	Peak
5	7250.000	36.00	10.74	35.50	41.58	52.82	74.00	21.18	Peak
6	7750.000	36.55	11.23	35.70	43.75	55.83	74.00	18.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

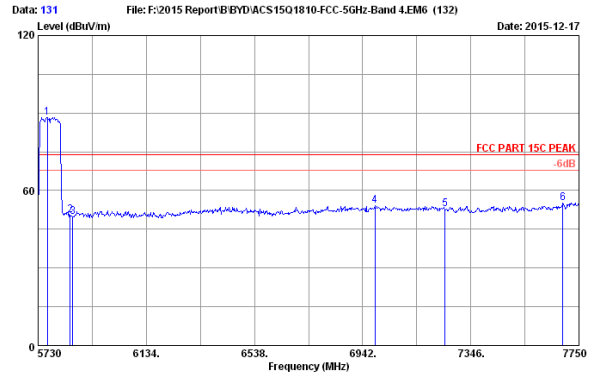

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH155 5775MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5764.340	33.46	9.91	35.10	80.06	88.33	74.00	-14.33	Peak
2	5850.000	33.55	9.95	35.07	42.02	50.45	74.00	23.55	Peak
3	5860.000	33.56	9.95	35.07	41.38	49.82	74.00	24.18	Peak
4	6988.460	35.88	10.48	35.40	43.04	54.00	74.00	20.00	Peak
5	7250.000	36.00	10.74	35.50	41.67	52.91	74.00	21.09	Peak
6	7689.400	36.44	11.16	35.68	43.25	55.17	74.00	18.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

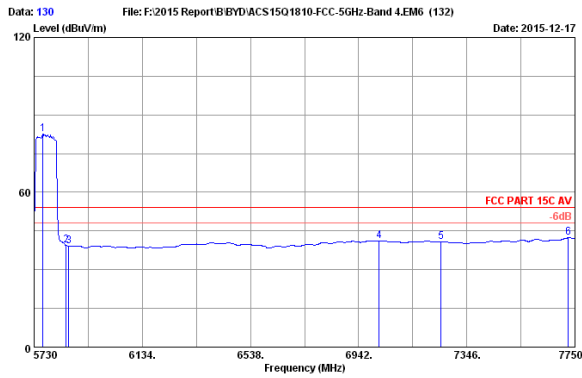

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH155 5775MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5762.320	33.46	9.91	35.11	74.24	82.50	54.00	-28.50	Average
2	5850.000	33.55	9.95	35.07	31.12	39.55	54.00	14.45	Average
3	5860.000	33.56	9.95	35.07	30.67	39.11	54.00	14.89	Average
4	7018.760	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.63	40.87	54.00	13.13	Average
6	7725.760	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

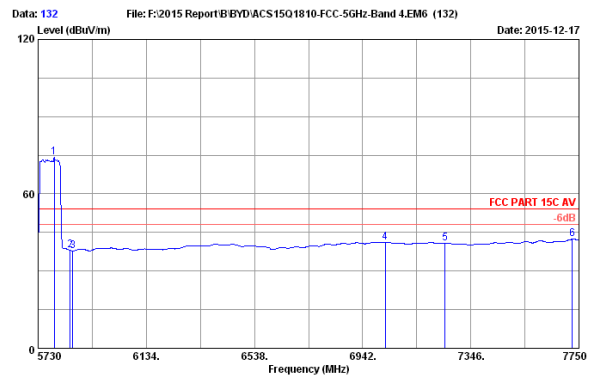

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH155 5775MHz Tx
 AT10-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.600	33.49	9.92	35.09	65.87	74.19	54.00	-20.19	Average
2	5850.000	33.55	9.95	35.07	29.67	38.10	54.00	15.90	Average
3	5860.000	33.56	9.95	35.07	29.44	37.88	54.00	16.12	Average
4	7026.840	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.64	40.88	54.00	13.12	Average
6	7725.760	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.