



Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 WT10PE-C

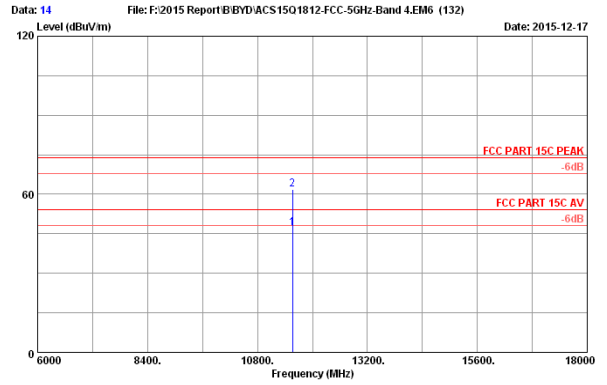


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.26	14.60	35.31	29.64	47.19	54.00	6.81	Average
2	11570.000	38.26	14.60	35.31	48.26	61.81	74.00	12.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

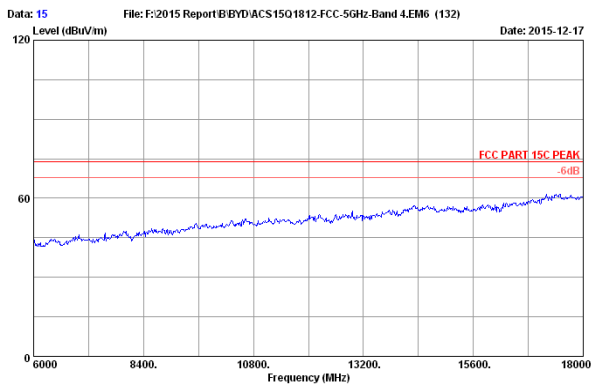


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 WT10PE-C

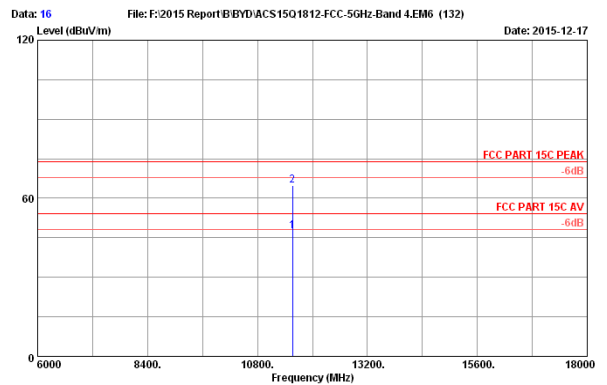


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.26	14.60	35.31	30.05	47.60	54.00	6.40	Average
2	11570.000	38.26	14.60	35.31	47.36	64.91	74.00	9.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

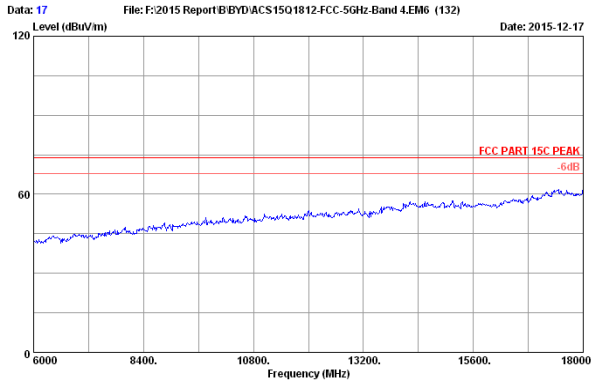


Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

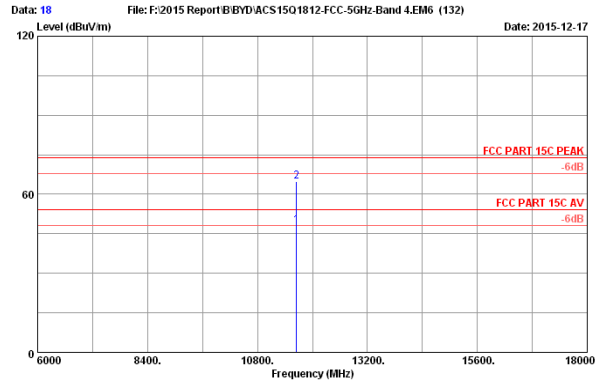


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	30.58	48.16	54.00	5.84	Average
2	11650.000	38.21	14.66	35.29	47.19	64.77	74.00	9.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

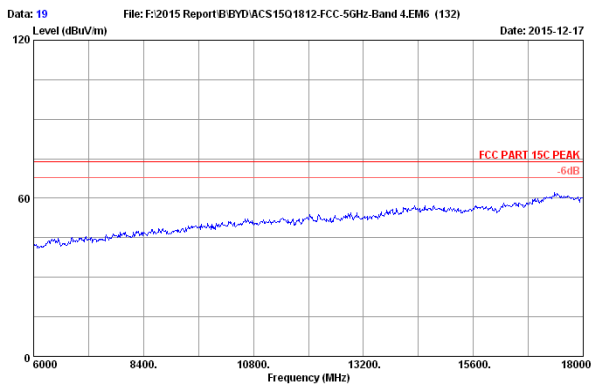


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

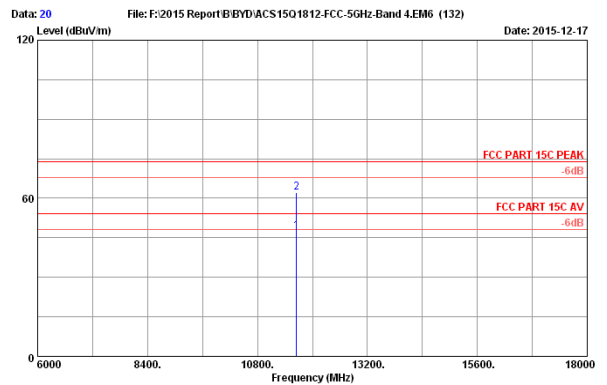

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	29.83	47.41	54.00	6.59	Average
2	11650.000	38.21	14.66	35.29	44.63	62.21	74.00	11.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

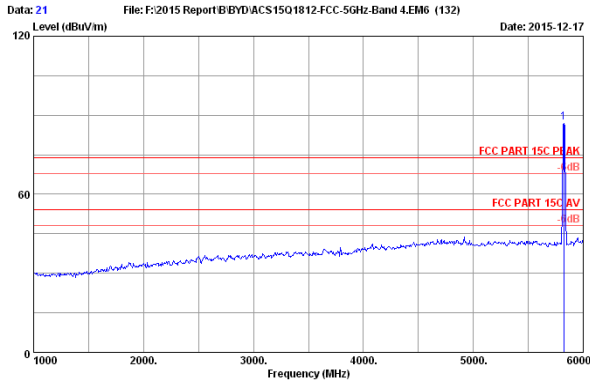

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	78.96	87.34	74.00	-13.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

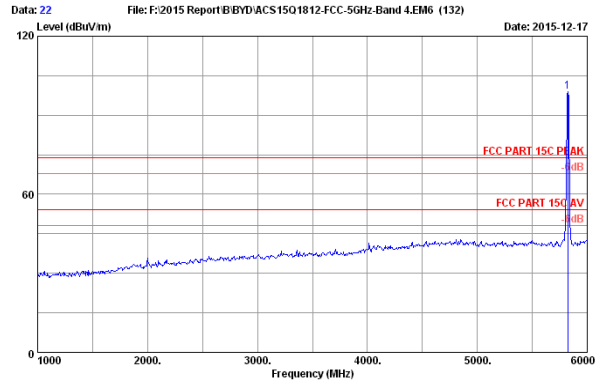

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	90.68	99.06	74.00	-25.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

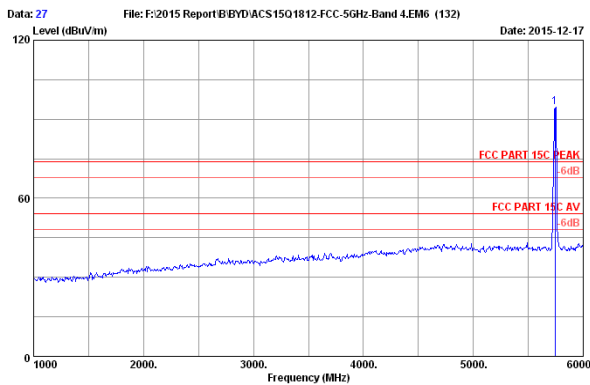

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	86.35	94.58	74.00	-20.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

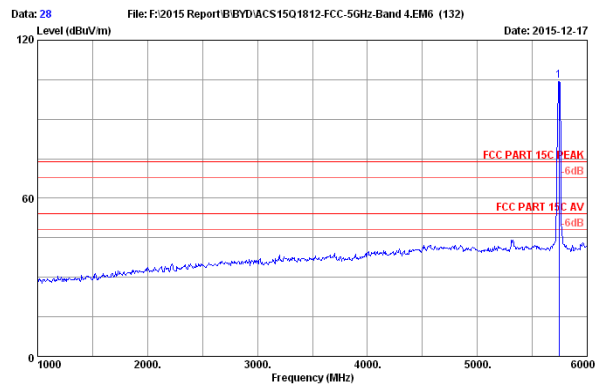


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	96.28	104.51	74.00	-30.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

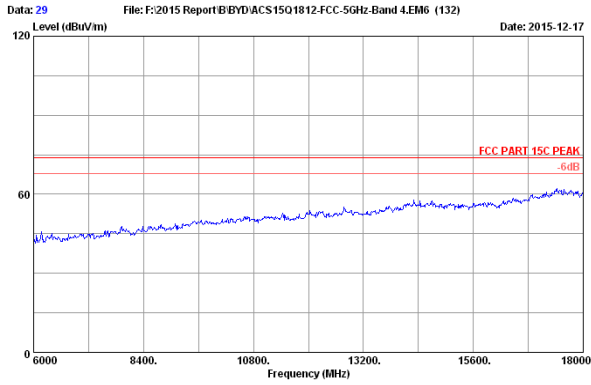


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

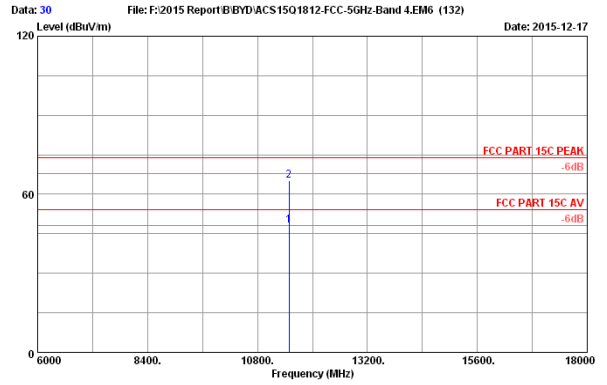


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.31	14.54	35.33	30.46	47.98	54.00	6.02	Average
2	11490.000	38.31	14.54	35.33	47.53	65.05	74.00	8.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

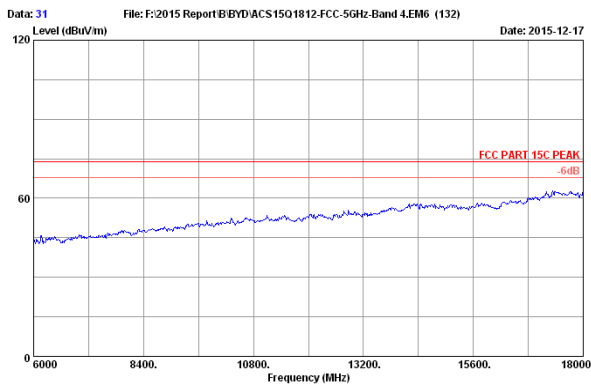


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

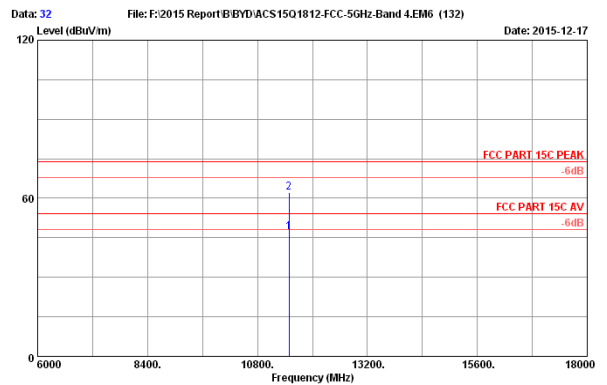

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.31	14.54	35.33	29.57	47.09	54.00	6.91	Average
2	11490.000	38.31	14.54	35.33	44.64	62.16	74.00	11.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

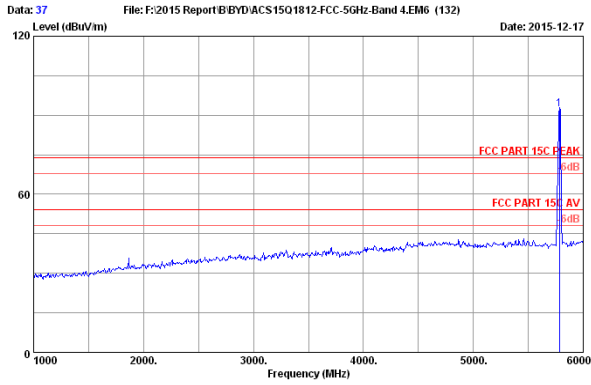

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	84.11	92.41	74.00	-18.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

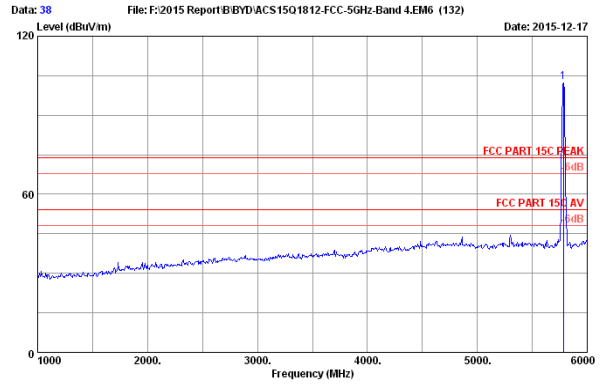


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	94.22	102.52	74.00	-28.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

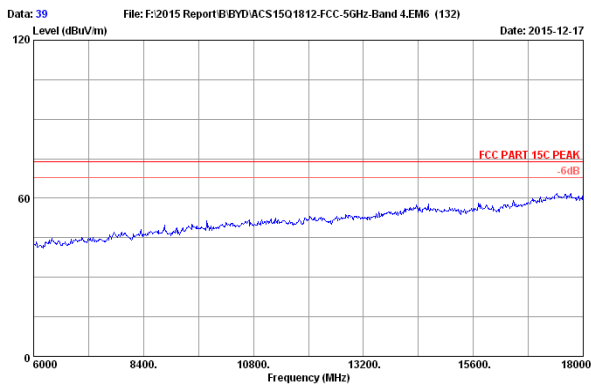


Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx WT10PE-C

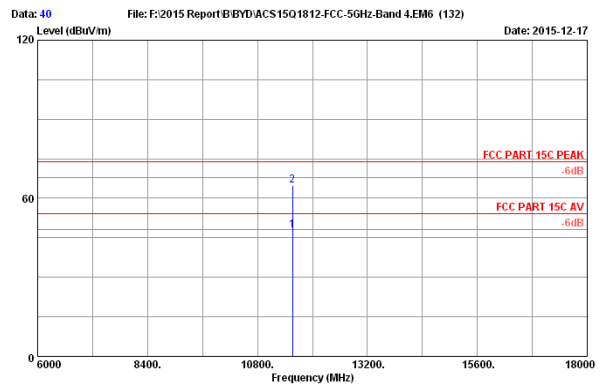


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.26	14.60	35.31	30.29	47.84	54.00	6.16	Average
2	11570.000	38.26	14.60	35.31	47.35	64.90	74.00	9.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

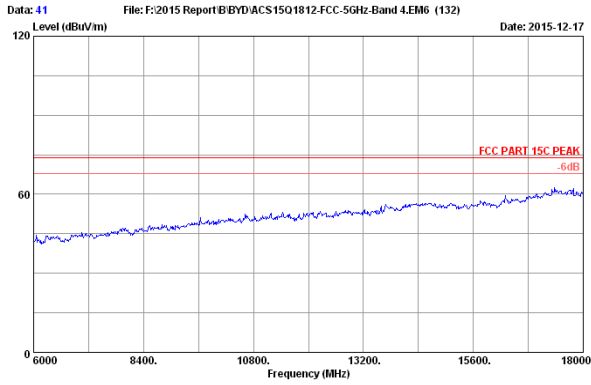


Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5765MHz Tx
 WT10PE-C

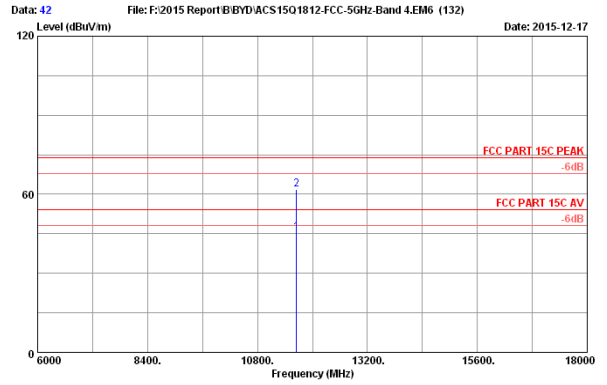


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5765MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	28.02	45.60	54.00	8.40	Average
2	11650.000	38.21	14.66	35.29	44.18	61.76	74.00	12.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

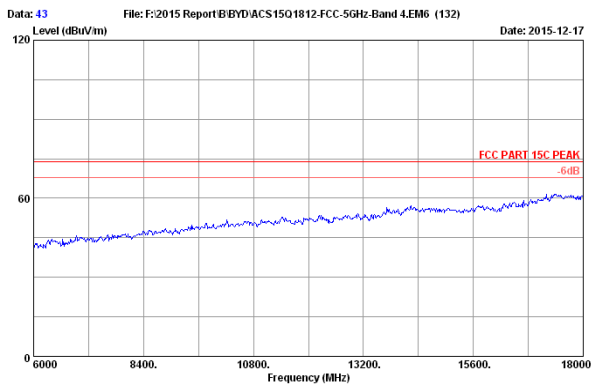


Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

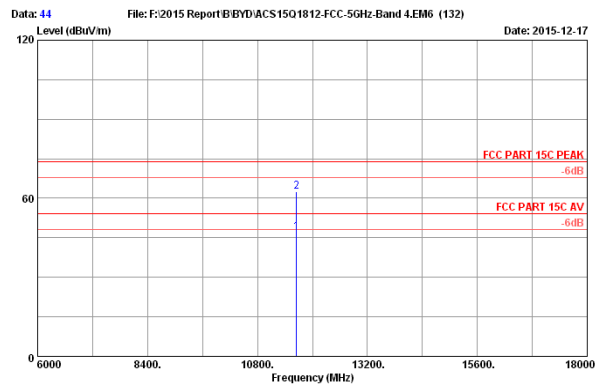


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	29.68	47.26	54.00	6.74	Average
2	11650.000	38.21	14.66	35.29	45.02	62.60	74.00	11.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

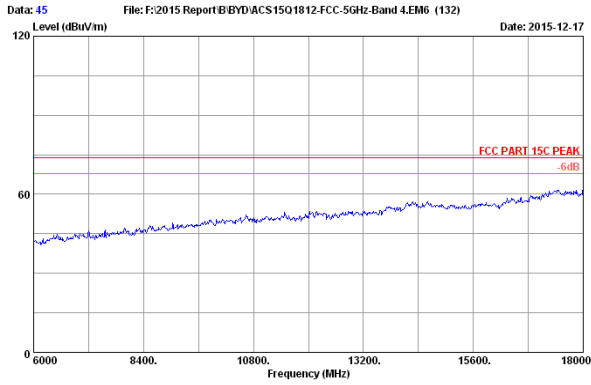


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

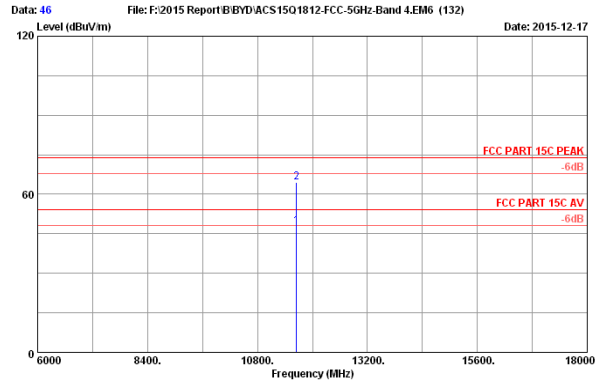

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	30.32	47.90	54.00	6.10	Average
2	11650.000	38.21	14.66	35.29	46.87	64.45	74.00	9.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

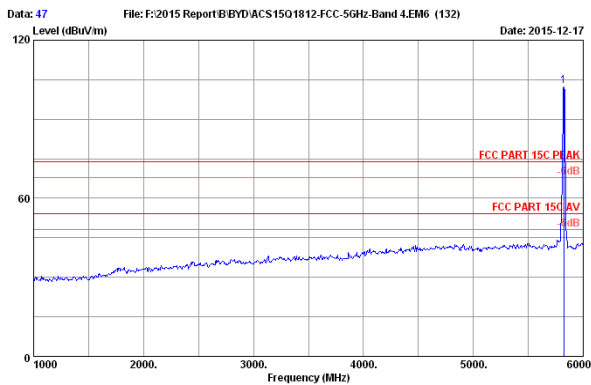

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	94.33	102.71	74.00	-28.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

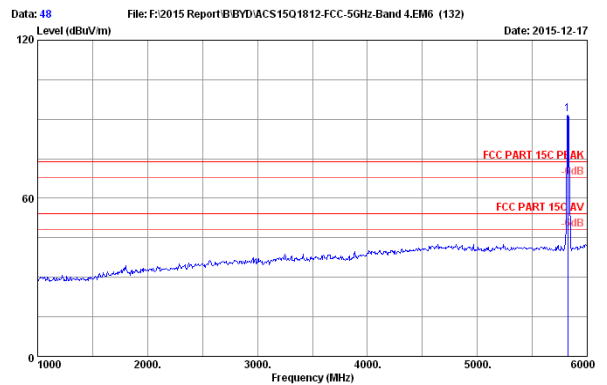

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	83.56	91.94	74.00	-17.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

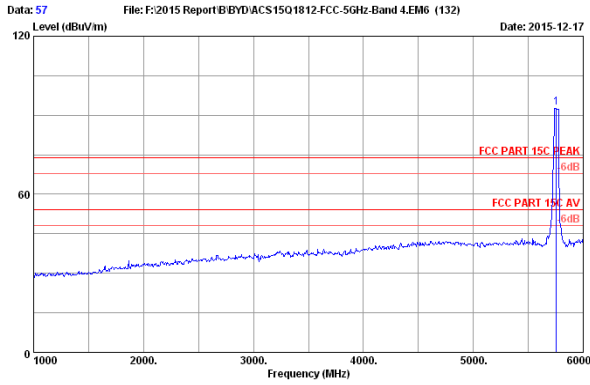

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	94.78	93.04	74.00	-19.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

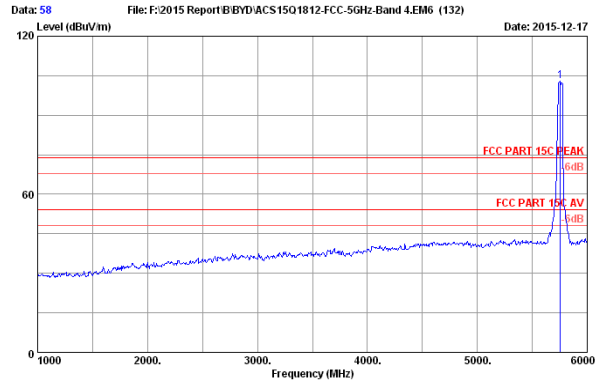


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	94.56	102.82	74.00	-28.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

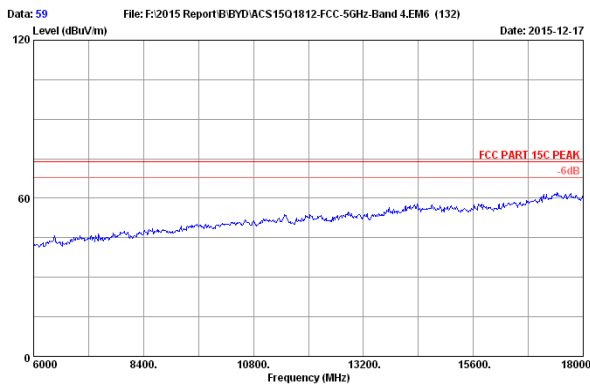


Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx WT10PE-C

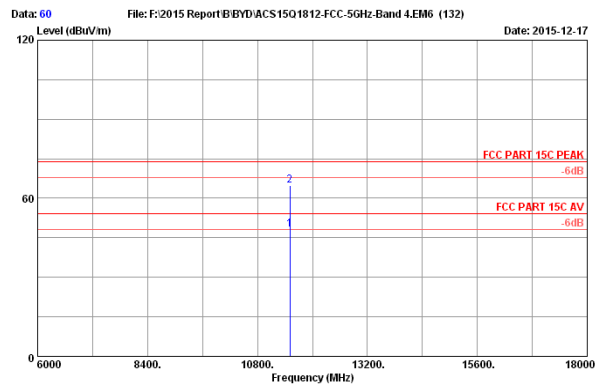


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.29	14.56	35.33	30.52	48.04	54.00	5.96	Average
2	11510.000	38.29	14.56	35.33	47.38	64.90	74.00	9.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

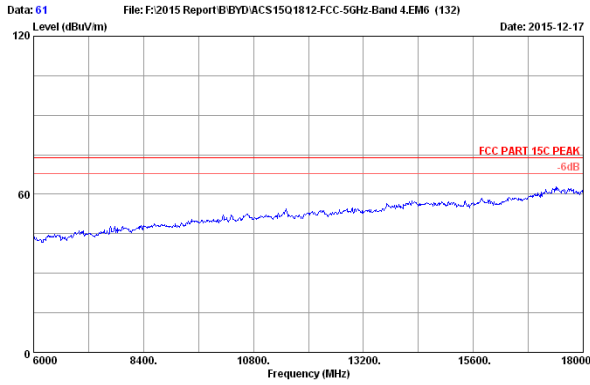


Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

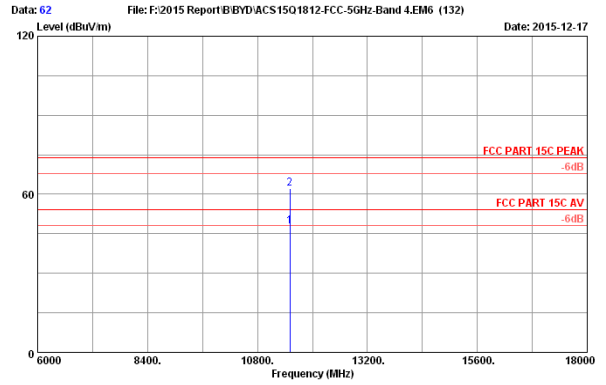


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.29	14.56	35.33	30.14	47.66	54.00	6.34	Average
2	11510.000	38.29	14.56	35.33	44.69	62.21	74.00	11.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

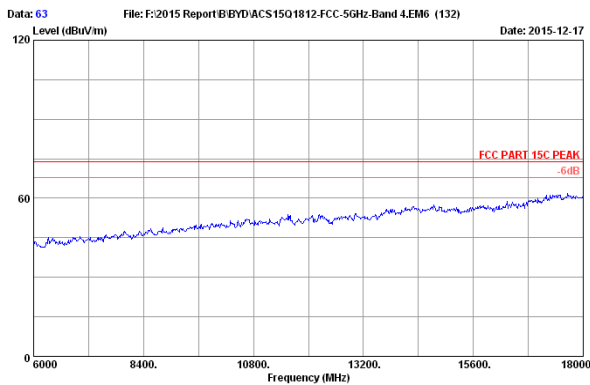


Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

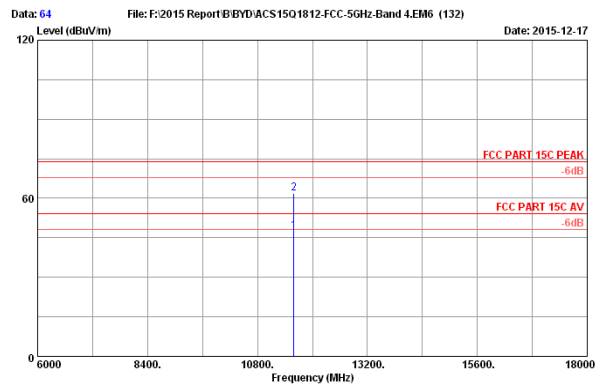


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.25	14.61	35.30	29.84	47.40	54.00	6.60	Average
2	11590.000	38.25	14.61	35.30	44.37	61.93	74.00	12.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

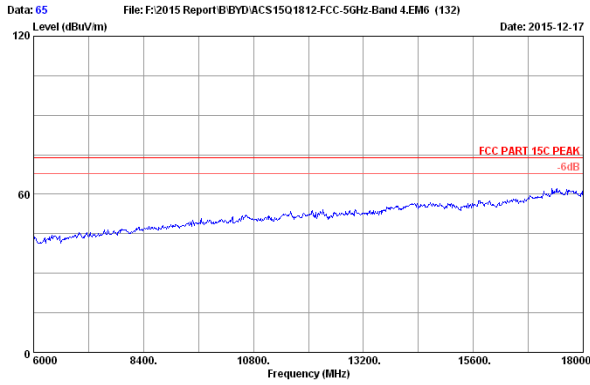


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

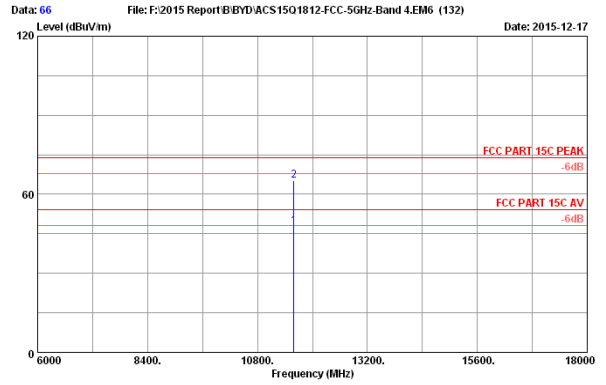

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.25	14.61	35.30	30.11	47.67	54.00	6.33	Average
2	11590.000	38.25	14.61	35.30	47.63	65.19	74.00	8.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

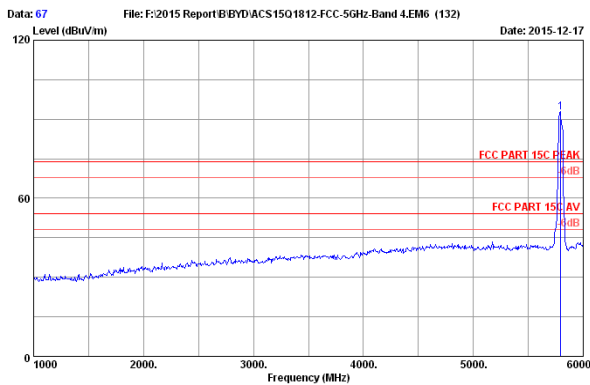

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	84.33	92.65	74.00	-18.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

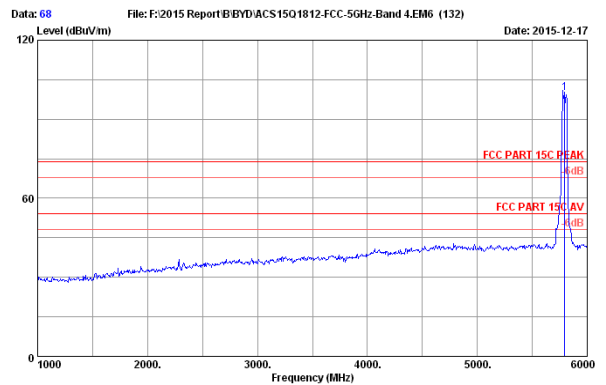

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	91.69	100.01	74.00	-26.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

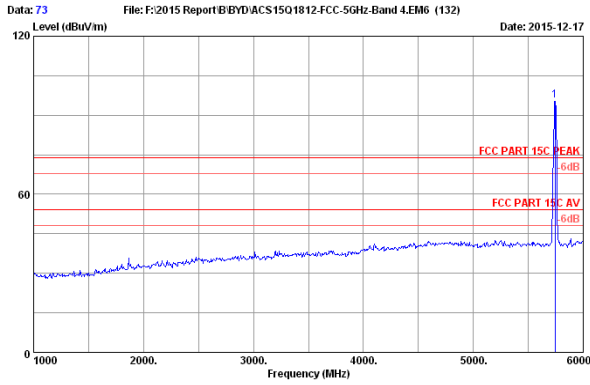

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	87.26	95.49	74.00	-21.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

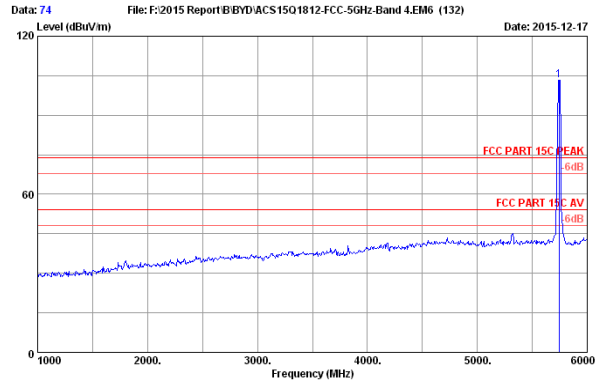

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	95.06	103.29	74.00	-29.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

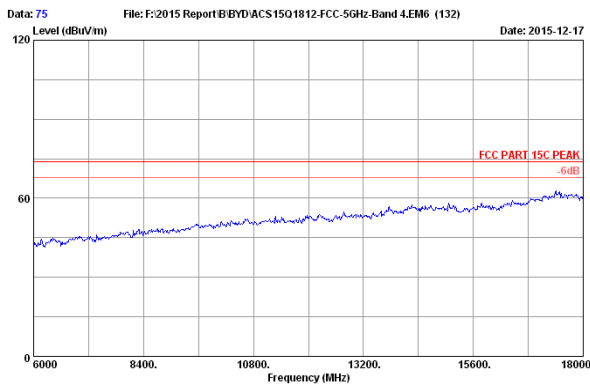

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.31	14.54	35.33	31.86	49.38	54.00	4.62	Average
2	11490.000	38.31	14.54	35.33	45.86	63.38	74.00	10.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

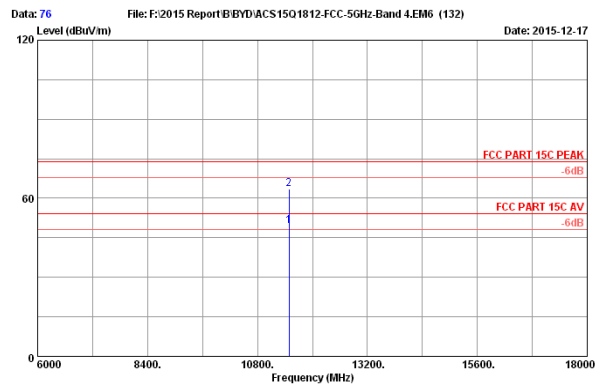


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.31	14.54	35.33	31.86	49.38	54.00	4.62	Average
2	11490.000	38.31	14.54	35.33	45.86	63.38	74.00	10.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

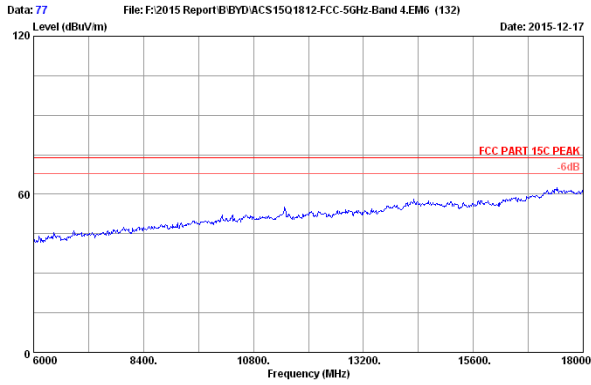


Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

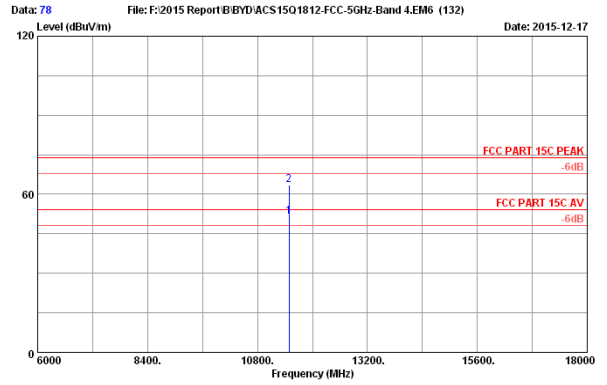

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.31	14.54	35.33	33.86	51.38	54.00	2.62	Average
2	11490.000	38.31	14.54	35.33	45.87	63.39	74.00	10.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

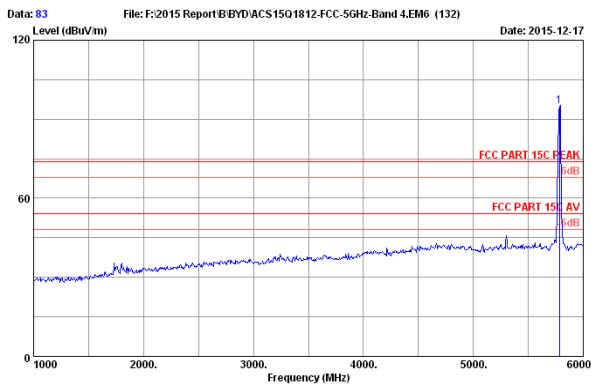

Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	86.56	94.86	74.00	-20.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

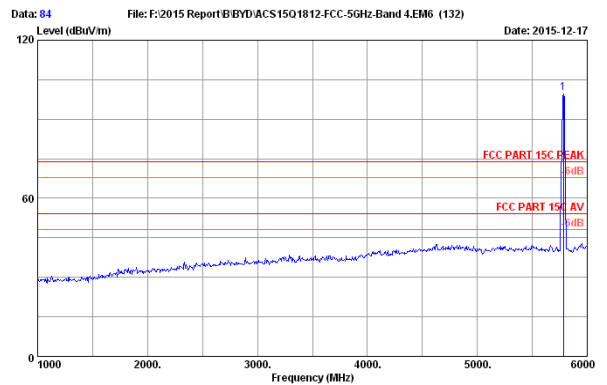


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	91.50	99.80	74.00	-25.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

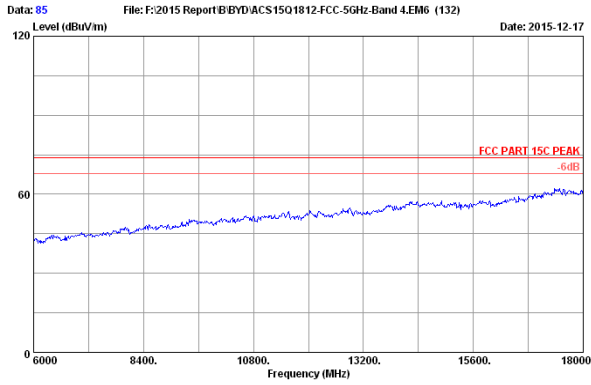


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

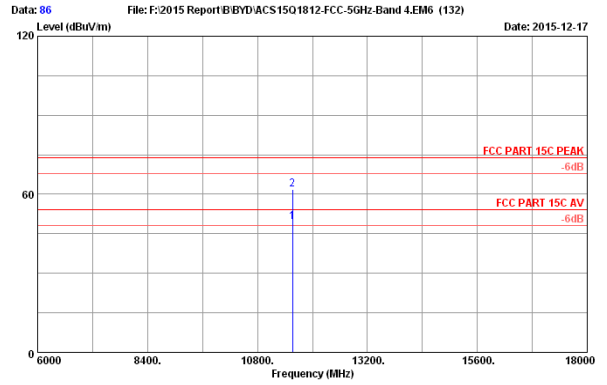


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.26	14.60	35.31	31.86	49.41	54.00	4.59	Average
2	11570.000	38.26	14.60	35.31	44.26	61.81	74.00	12.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

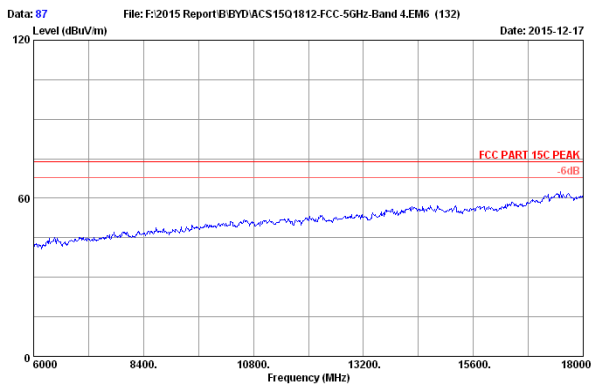


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

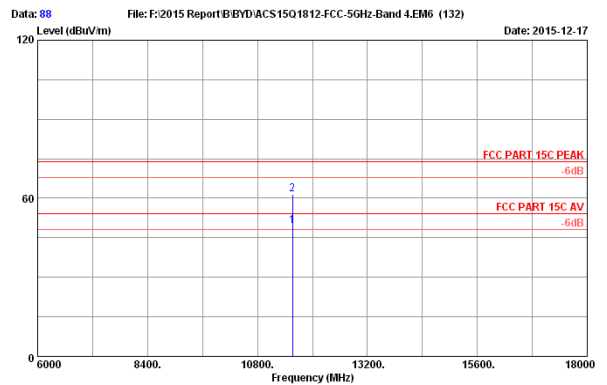


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.26	14.60	35.31	31.98	49.53	54.00	4.47	Average
2	11570.000	38.26	14.60	35.31	43.85	61.40	74.00	12.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

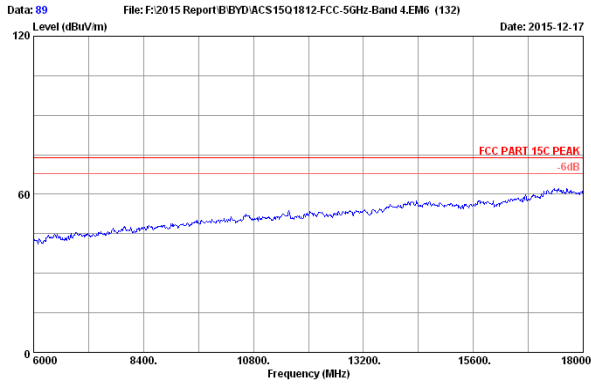


Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

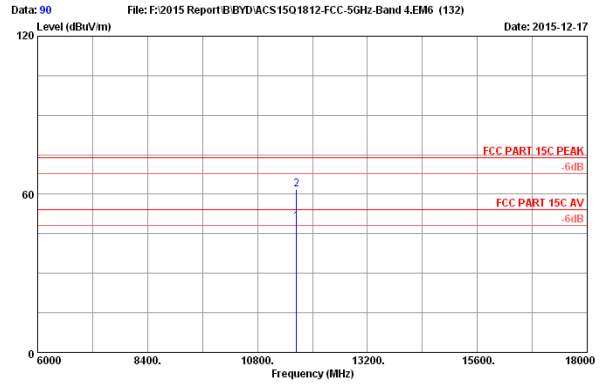


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	31.74	49.32	54.00	4.68	Average
2	11650.000	38.21	14.66	35.29	44.26	61.84	74.00	12.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

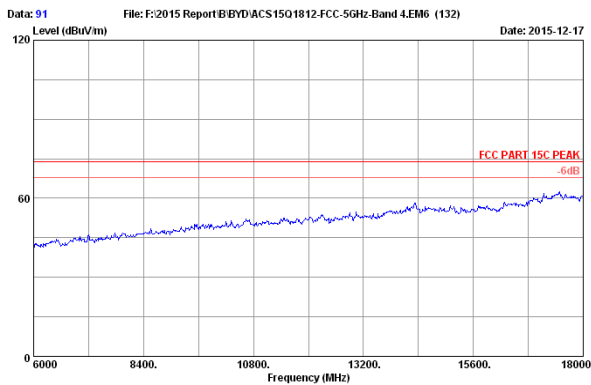


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

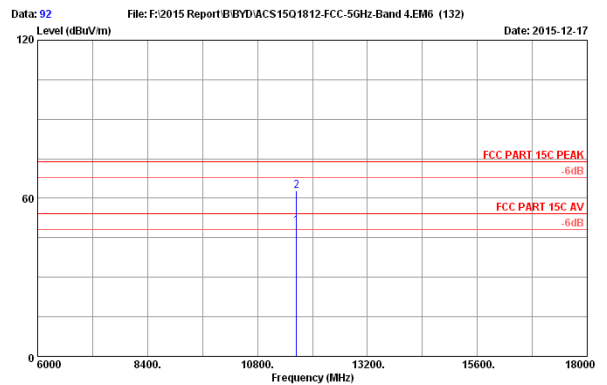

Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.21	14.66	35.29	31.85	49.43	54.00	4.57	Average
2	11650.000	38.21	14.66	35.29	45.25	62.83	74.00	11.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

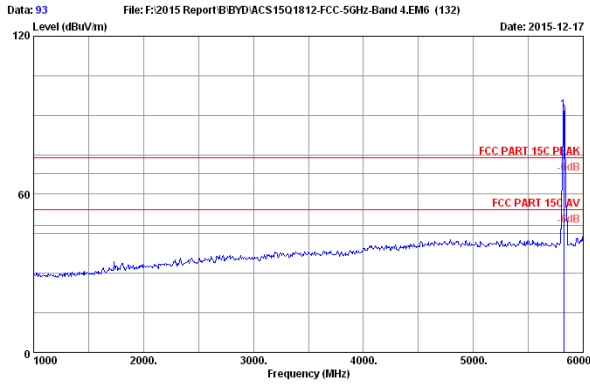

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	83.56	91.94	74.00	-17.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

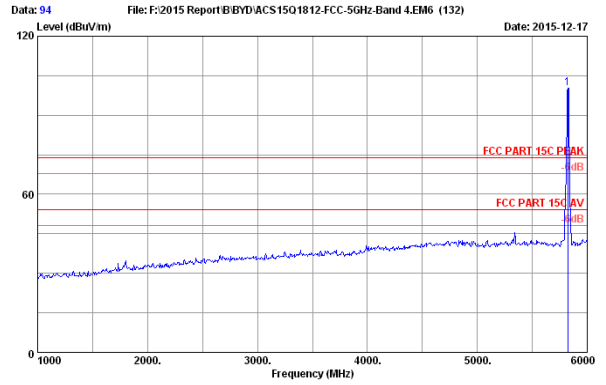

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	92.06	100.44	74.00	-26.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

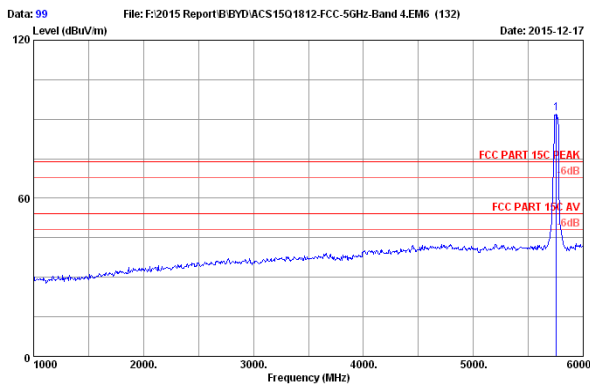

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	84.05	92.31	74.00	-18.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

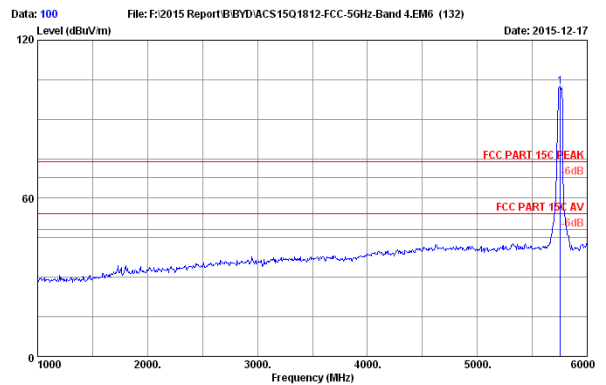


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	94.05	102.31	74.00	-28.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

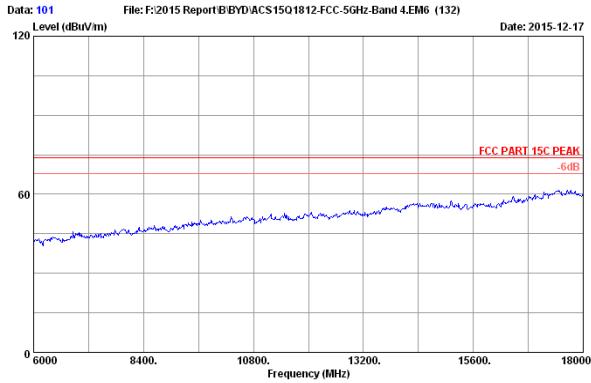


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

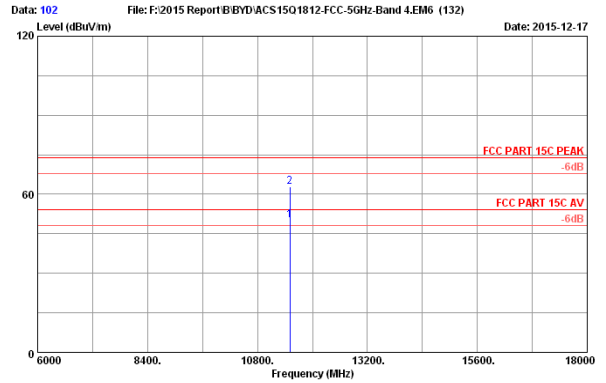


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.29	14.56	35.33	32.65	50.17	54.00	3.83	Average
2	11510.000	38.29	14.56	35.33	45.26	62.78	74.00	11.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

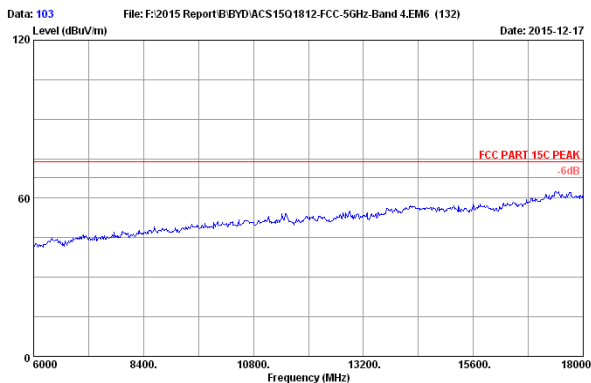


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

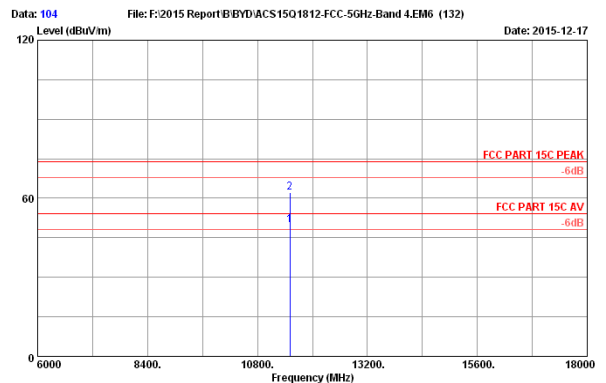

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.29	14.56	35.33	32.26	49.78	54.00	4.22	Average
2	11510.000	38.29	14.56	35.33	44.67	62.19	74.00	11.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

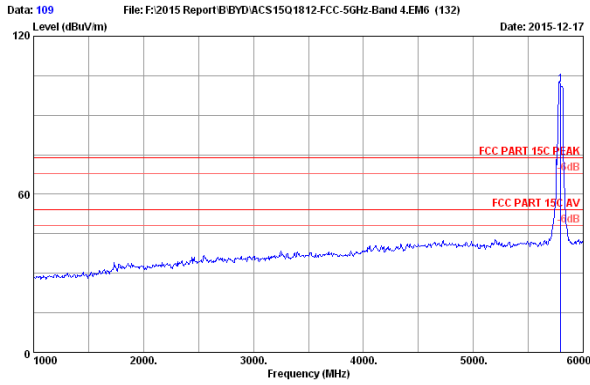

Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	93.27	101.59	74.00	-27.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

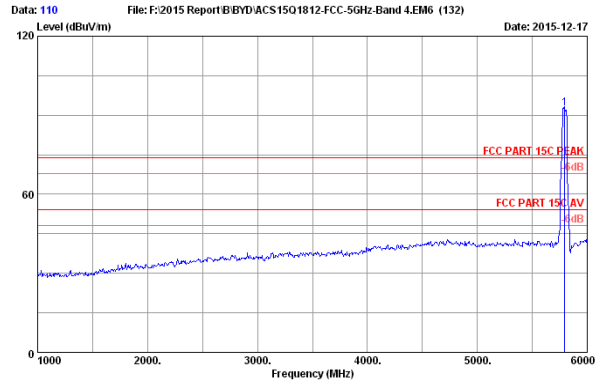

Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	84.27	92.59	74.00	-18.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

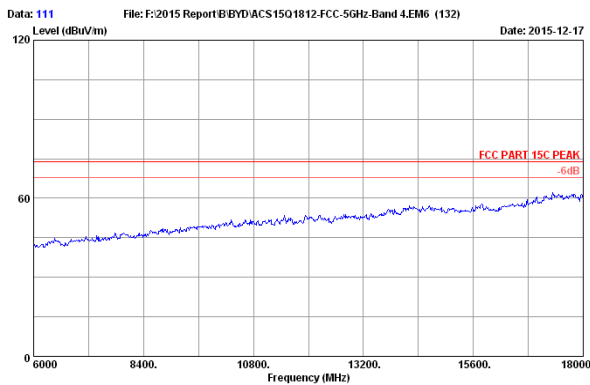

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.25	14.61	35.30	31.83	49.39	54.00	4.61	Average
2	11590.000	38.25	14.61	35.30	43.25	60.81	74.00	13.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

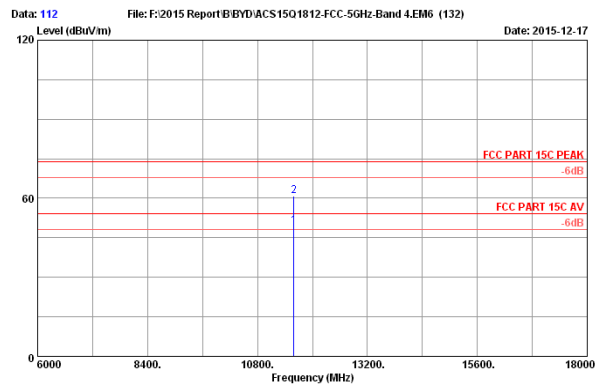


Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.25	14.61	35.30	31.83	49.39	54.00	4.61	Average
2	11590.000	38.25	14.61	35.30	43.25	60.81	74.00	13.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

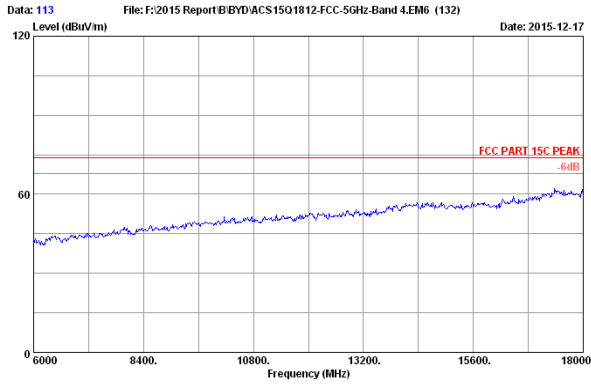


Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

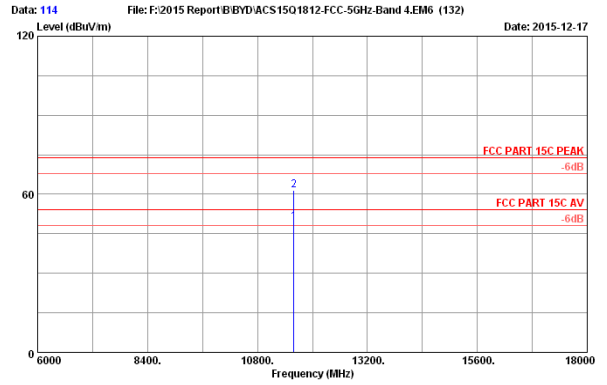

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.25	14.61	35.30	31.84	49.40	54.00	4.60	Average
2	11590.000	38.25	14.61	35.30	43.97	61.53	74.00	12.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

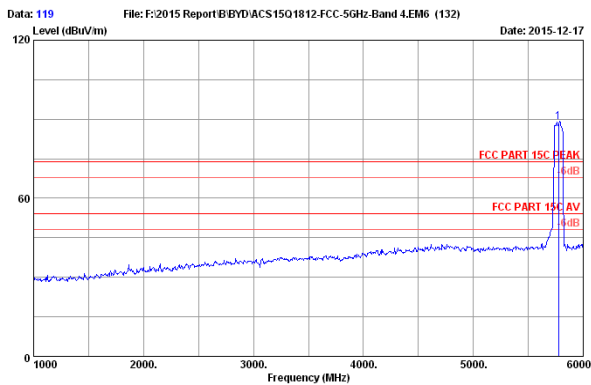

Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	33.48	9.91	35.10	80.65	88.94	74.00	-14.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

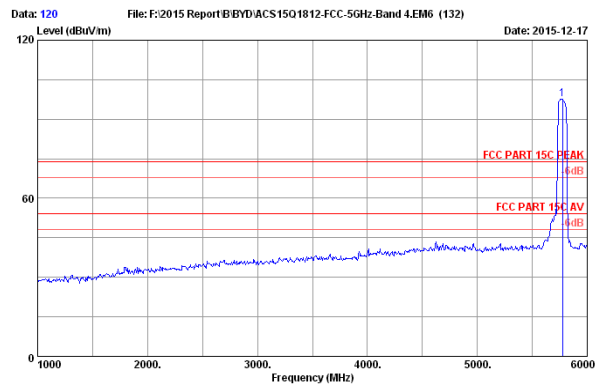


Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	33.48	9.91	35.10	89.26	97.55	74.00	-23.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

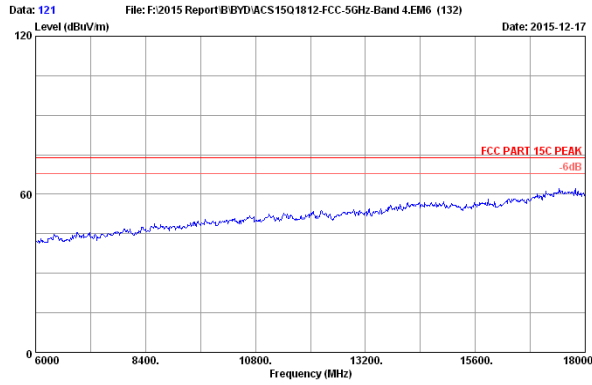


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

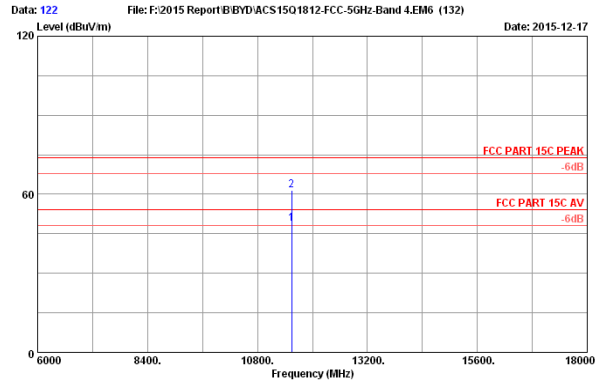


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.000	38.27	14.58	35.31	31.16	48.70	54.00	5.30	Average
2	11550.000	38.27	14.58	35.31	43.86	61.40	74.00	12.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

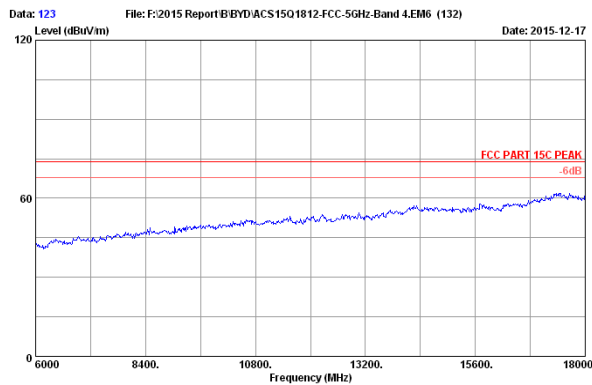

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

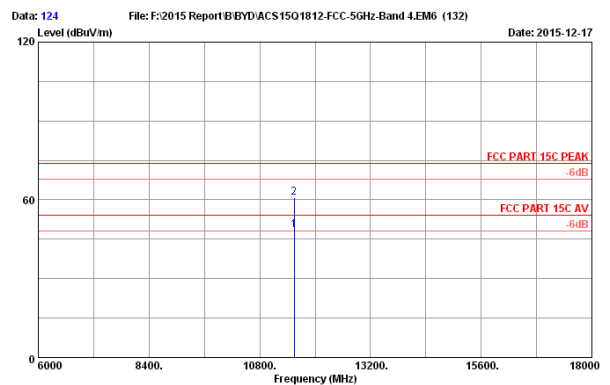

Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.000	38.27	14.58	35.31	31.06	48.60	54.00	5.40	Average
2	11550.000	38.27	14.58	35.31	43.26	60.80	74.00	13.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Amp	HP	8449B	3008A02495	Apr. 28,15	1 Year
2.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Feb.03,15	1 Year
3.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr. 28,15	1 Year
4.	RF Cable	Hubersuhner	Sucoflex102	28610/2	Apr. 28,15	1 Year

5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.


5.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m, the $EIRP(dBm)=E(dBuV/m)-95.2$
Get the final compare with limit.

5.4. Test Results

Pass (The testing data was attached in the next pages.)


5180-5240MHz Band:

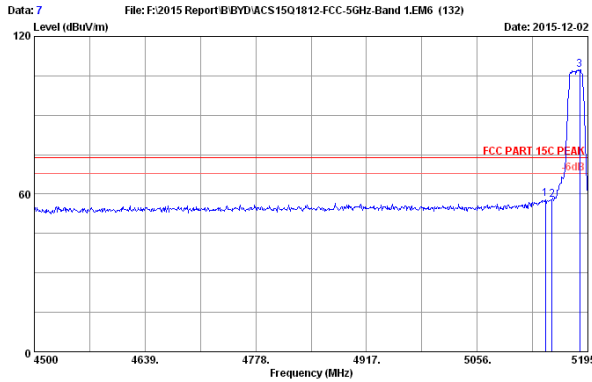

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5141.485	33.77	9.61	35.38	50.01	58.01	74.00	15.99	Peak
2	5150.000	33.76	9.62	35.38	49.88	57.88	74.00	16.12	Peak
3	5184.575	33.70	9.63	35.37	99.34	107.30	74.00	-33.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

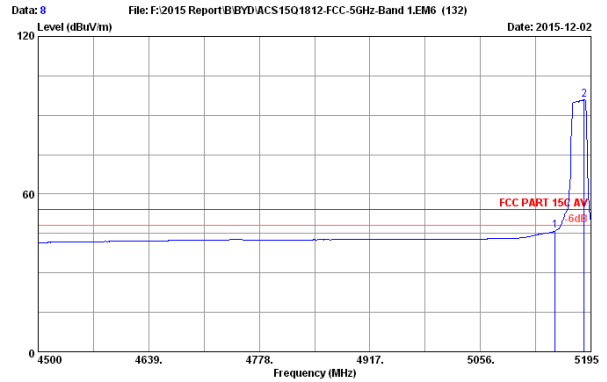

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	37.99	45.99	54.00	8.01	Average
2	5186.660	33.70	9.63	35.37	87.99	95.95	54.00	-41.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

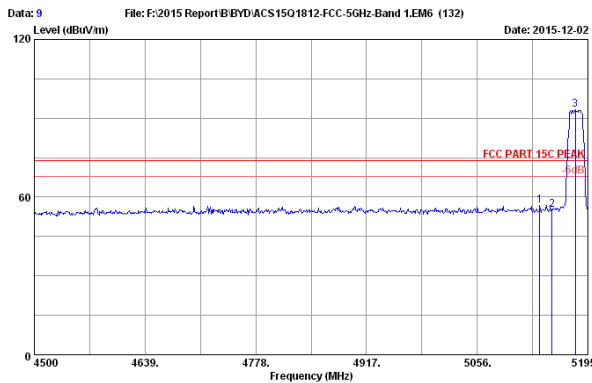

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5134.535	33.78	9.61	35.39	48.86	56.86	74.00	17.14	Peak
2	5150.000	33.76	9.62	35.38	47.28	55.28	74.00	18.72	Peak
3	5179.015	33.71	9.63	35.37	85.12	93.09	74.00	-19.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

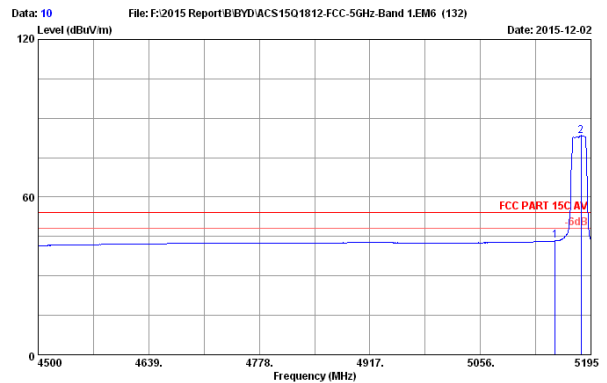

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	35.38	43.38	54.00	10.62	Average
2	5182.490	33.71	9.63	35.37	75.40	83.37	54.00	-29.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

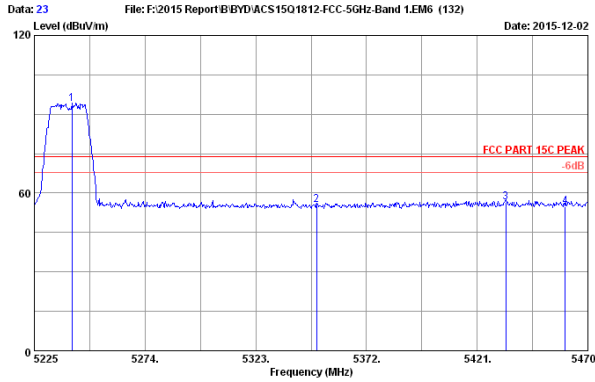

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.660	33.61	9.66	35.34	86.13	94.06	74.00	-20.06	Peak
2	5350.000	33.44	9.71	35.29	47.78	55.64	74.00	18.36	Peak
3	5433.740	33.31	9.75	35.26	48.80	56.60	74.00	17.40	Peak
4	5460.000	33.26	9.76	35.25	47.20	54.97	74.00	19.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

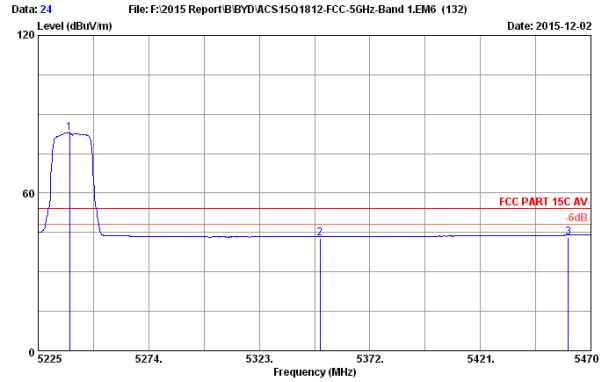

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.965	33.62	9.66	35.34	74.94	82.88	54.00	-28.88	Average
2	5350.000	33.44	9.71	35.29	34.96	42.82	54.00	11.18	Average
3	5460.000	33.26	9.76	35.25	35.23	43.00	54.00	11.00	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

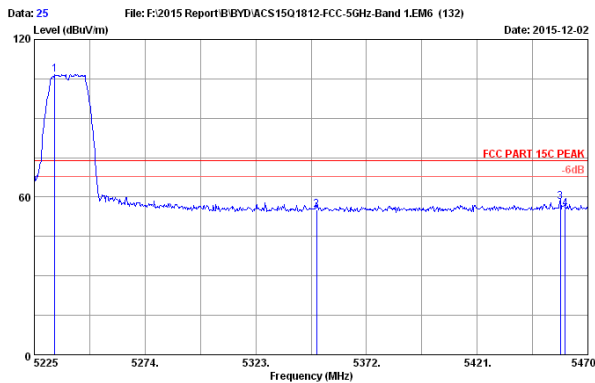

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.065	33.63	9.66	35.35	98.56	106.50	74.00	-32.50	Peak
2	5350.000	33.44	9.71	35.29	47.37	55.23	74.00	18.77	Peak
3	5457.750	33.27	9.76	35.25	50.36	58.14	74.00	15.86	Peak
4	5460.000	33.26	9.76	35.25	47.57	55.34	74.00	18.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

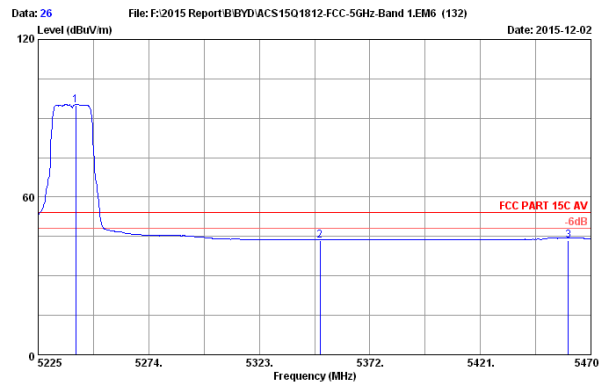

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.660	33.61	9.66	35.34	87.05	94.98	54.00	-40.98	Average
2	5350.000	33.44	9.71	35.29	35.45	43.31	54.00	10.69	Average
3	5460.000	33.26	9.76	35.25	35.63	43.40	54.00	10.60	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

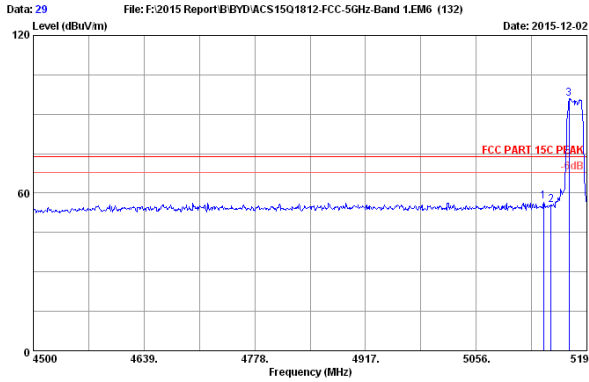

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5140.790	33.77	9.61	35.38	48.73	56.73	74.00	17.27	Peak
2	5150.000	33.76	9.62	35.38	47.49	55.49	74.00	18.51	Peak
3	5172.760	33.72	9.63	35.37	88.06	96.04	74.00	-22.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

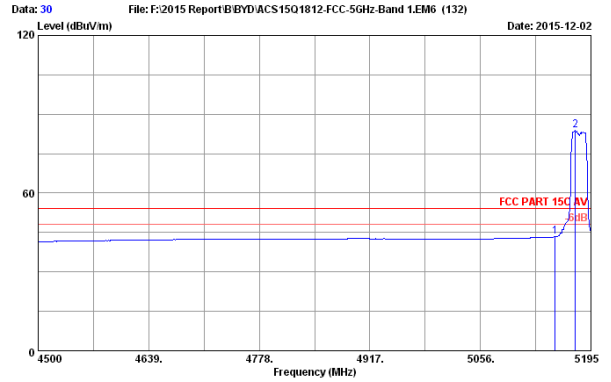

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	35.43	43.43	54.00	10.57	Average
2	5175.540	33.72	9.63	35.37	75.76	83.74	54.00	-29.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

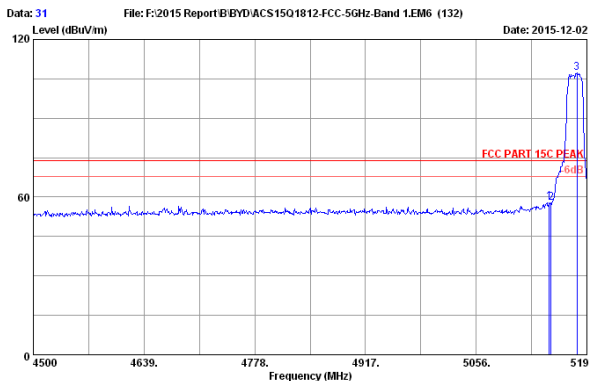

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.740	33.76	9.62	35.38	50.06	58.06	74.00	15.94	Peak
2	5150.000	33.76	9.62	35.38	49.75	57.75	74.00	16.25	Peak
3	5182.490	33.71	9.63	35.37	99.17	107.14	74.00	-33.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

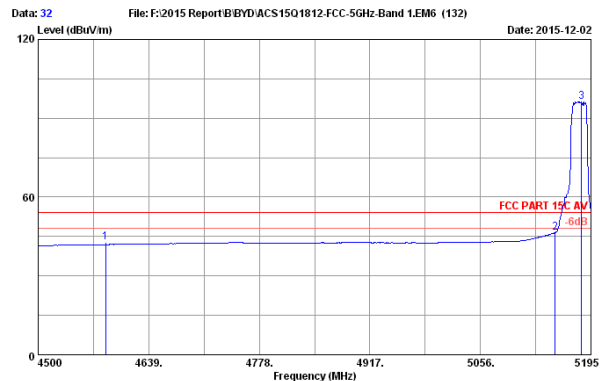

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4585.000	33.34	9.35	35.64	35.66	42.71	54.00	11.29	Average
2	5150.000	33.76	9.62	35.38	38.62	46.62	54.00	7.38	Average
3	5183.185	33.71	9.63	35.37	88.27	96.24	54.00	-42.24	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

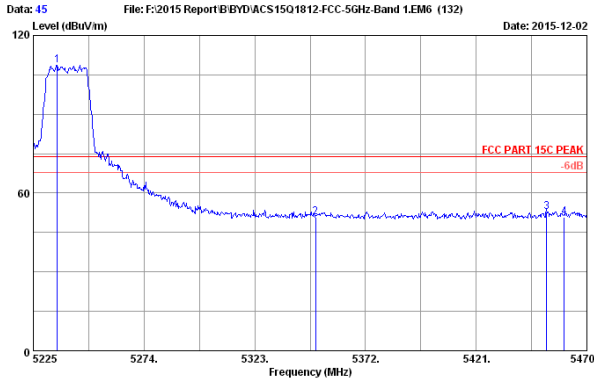


Data: 45 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.535	33.62	9.66	35.35	100.63	108.56	74.00	-34.56	Peak
2	5350.000	33.44	9.71	35.29	43.04	50.90	74.00	23.10	Peak
3	5452.115	33.28	9.76	35.25	44.95	52.74	74.00	21.26	Peak
4	5460.000	33.26	9.76	35.25	43.02	50.79	74.00	23.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

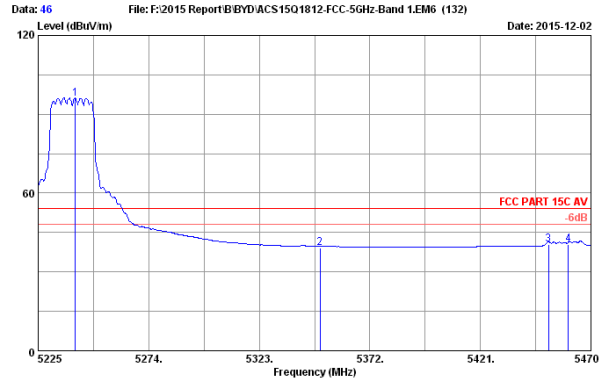


Data: 46 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.415	33.61	9.66	35.34	88.06	95.99	54.00	-41.99	Average
2	5350.000	33.44	9.71	35.29	31.29	39.15	54.00	14.85	Average
3	5451.135	33.28	9.76	35.25	32.71	40.50	54.00	13.50	Average
4	5460.000	33.26	9.76	35.25	32.56	40.33	54.00	13.67	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

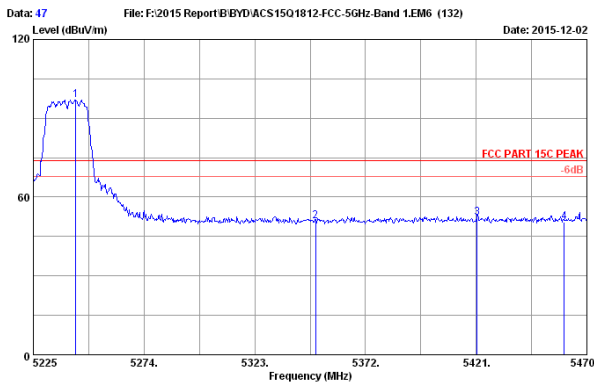


Data: 47 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.865	33.61	9.66	35.34	88.93	96.86	74.00	-22.86	Peak
2	5350.000	33.44	9.71	35.29	42.88	50.74	74.00	23.26	Peak
3	5421.490	33.33	9.74	35.26	44.44	52.25	74.00	21.75	Peak
4	5460.000	33.26	9.76	35.25	42.55	50.32	74.00	23.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

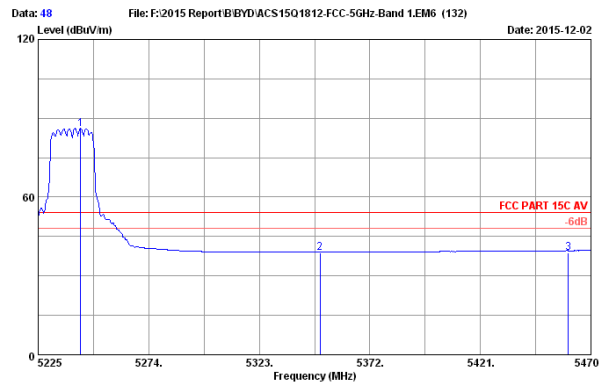


Data: 48 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.865	33.61	9.66	35.34	77.94	85.87	54.00	-31.87	Average
2	5350.000	33.44	9.71	35.29	30.78	38.64	54.00	15.36	Average
3	5460.000	33.26	9.76	35.25	30.87	38.64	54.00	15.36	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

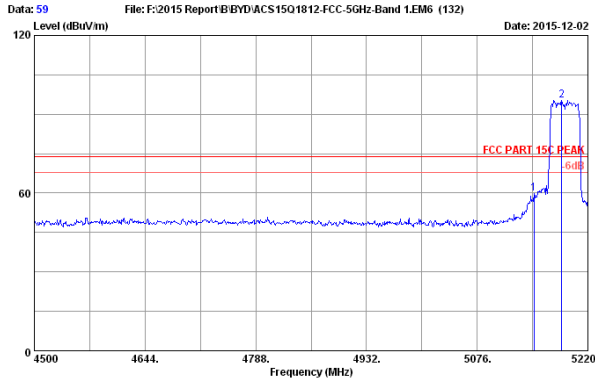

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 HCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	51.91	59.91	74.00	14.09	Peak
2	5186.160	33.70	9.63	35.37	87.24	95.20	74.00	-21.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

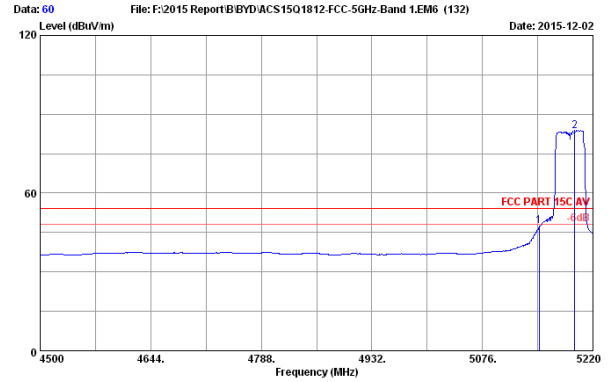

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	39.40	47.40	54.00	6.60	Average
2	5196.240	33.69	9.63	35.36	75.77	83.73	54.00	-29.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

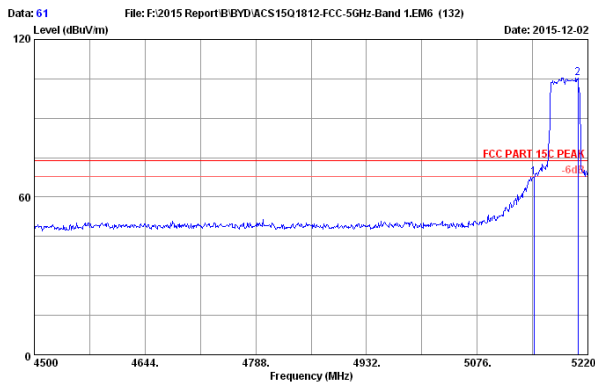

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 HCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	59.37	67.37	74.00	6.63	Peak
2	5207.040	33.67	9.64	35.36	97.36	105.31	74.00	-31.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

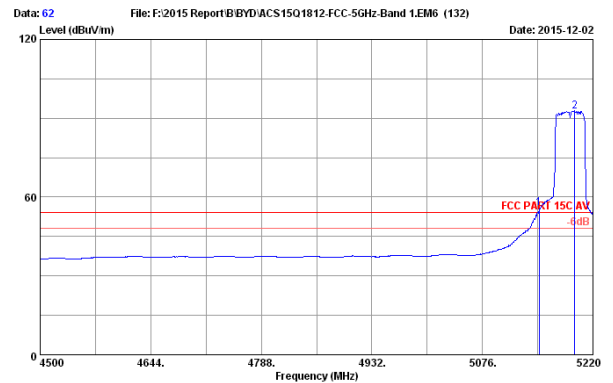

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	47.72	55.72	54.00	-1.72	Average
2	5196.240	33.69	9.63	35.36	84.74	92.70	54.00	-38.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

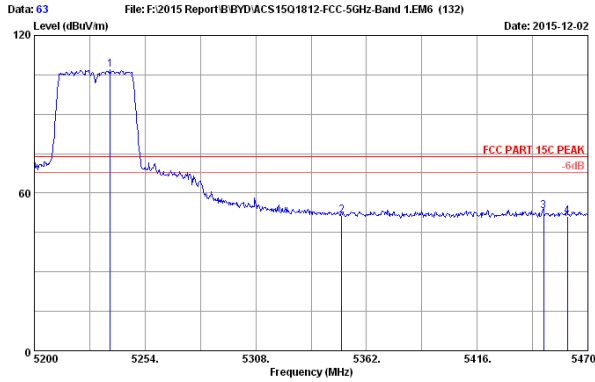

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5236.990	33.62	9.66	35.35	98.87	106.80	74.00	-32.80	Peak
2	5350.000	33.44	9.71	35.29	43.62	51.48	74.00	22.52	Peak
3	5448.400	33.28	9.76	35.25	45.32	53.11	74.00	20.89	Peak
4	5460.000	33.26	9.76	35.25	43.50	51.27	74.00	22.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

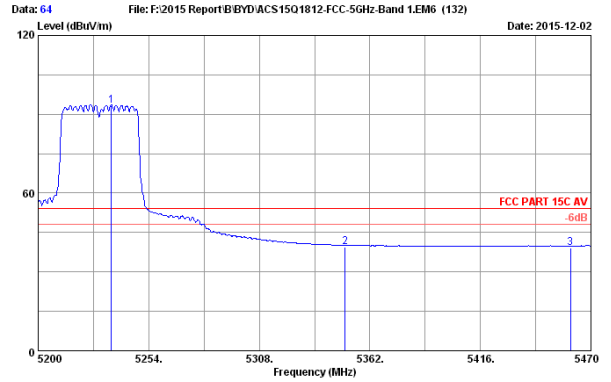

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.640	33.62	9.66	35.35	85.43	93.36	54.00	-39.36	Average
2	5350.000	33.44	9.71	35.29	31.69	39.55	54.00	14.45	Average
3	5460.000	33.26	9.76	35.25	31.20	38.97	54.00	15.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

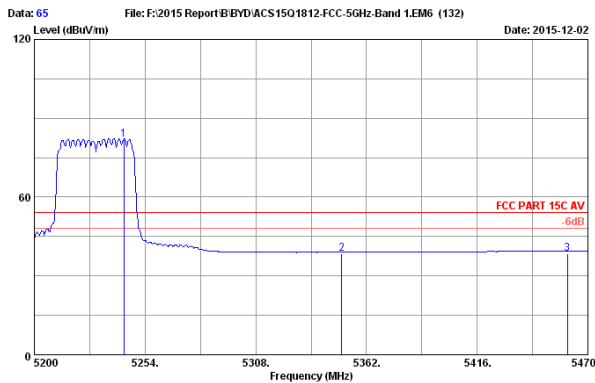

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.740	33.61	9.66	35.34	74.07	82.00	54.00	-28.00	Average
2	5350.000	33.44	9.71	35.29	30.57	38.43	54.00	15.57	Average
3	5460.000	33.26	9.76	35.25	30.69	38.46	54.00	15.54	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

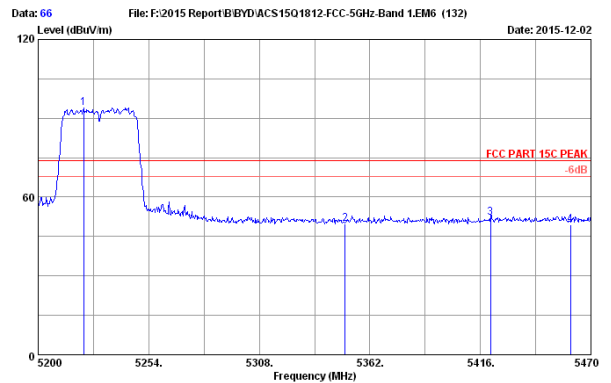

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11nHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5222.140	33.64	9.65	35.35	85.87	93.81	74.00	-19.81	Peak
2	5350.000	33.44	9.71	35.29	41.89	49.75	74.00	24.25	Peak
3	5420.860	33.33	9.74	35.26	44.37	52.18	74.00	21.82	Peak
4	5460.000	33.26	9.76	35.25	41.84	49.61	74.00	24.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

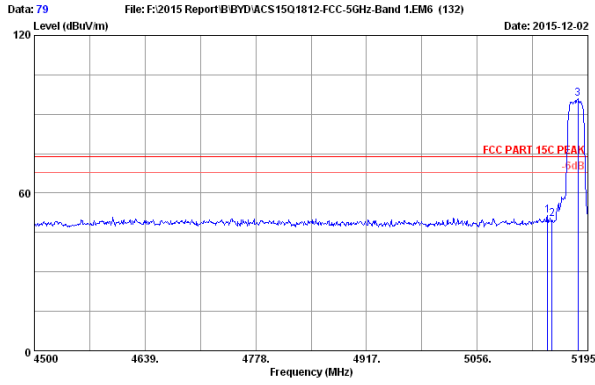

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.265	33.77	9.62	35.38	43.42	51.43	74.00	22.57	Peak
2	5150.000	33.76	9.62	35.38	42.01	50.01	74.00	23.99	Peak
3	5182.490	33.71	9.63	35.37	88.05	96.02	74.00	-22.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

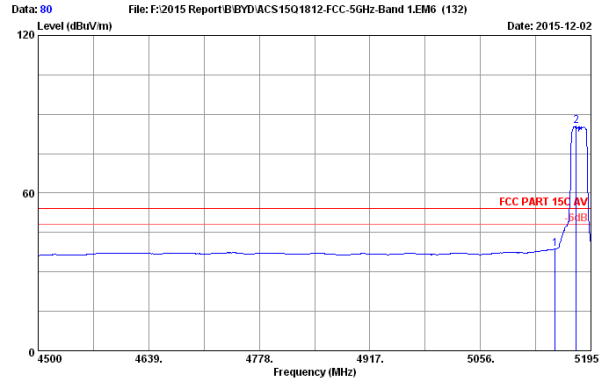

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.70	38.70	54.00	15.30	Average
2	5176.235	33.72	9.63	35.37	77.48	85.46	54.00	-31.46	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

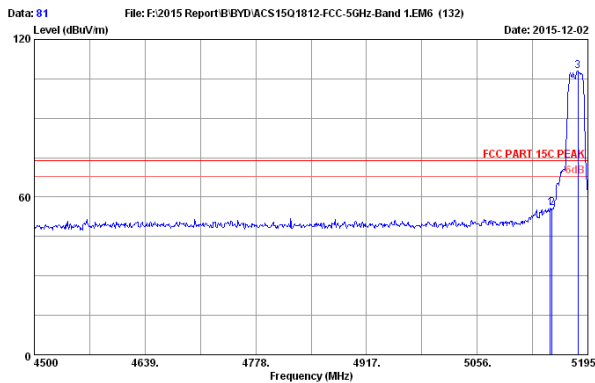

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.740	33.76	9.62	35.38	47.90	55.90	74.00	18.10	Peak
2	5150.000	33.76	9.62	35.38	47.69	55.69	74.00	18.31	Peak
3	5182.490	33.71	9.63	35.37	100.10	108.07	74.00	-34.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

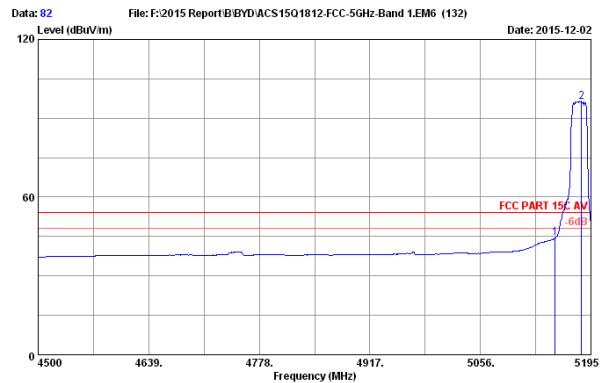

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH36 5180MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	36.45	44.45	54.00	9.55	Average
2	5183.185	33.71	9.63	35.37	88.43	96.40	54.00	-42.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

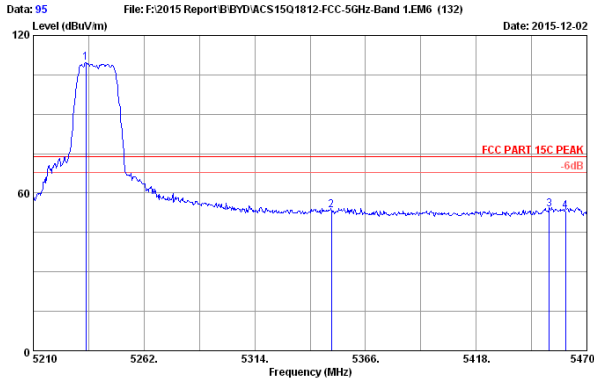

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.700	33.62	9.66	35.35	101.66	109.59	74.00	-35.59	Peak
2	5350.000	33.44	9.71	35.29	45.66	53.52	74.00	20.48	Peak
3	5452.320	33.28	9.76	35.25	45.91	53.70	74.00	20.30	Peak
4	5460.000	33.26	9.76	35.25	45.33	53.10	74.00	20.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

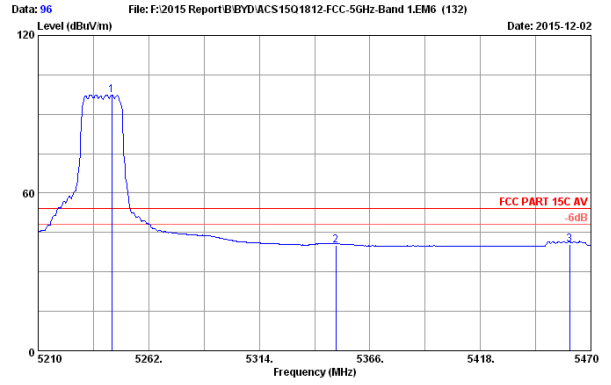

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.580	33.61	9.66	35.34	89.20	97.13	54.00	-43.13	Average
2	5350.000	33.44	9.71	35.29	32.25	40.11	54.00	13.89	Average
3	5460.000	33.26	9.76	35.25	32.75	40.52	54.00	13.48	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

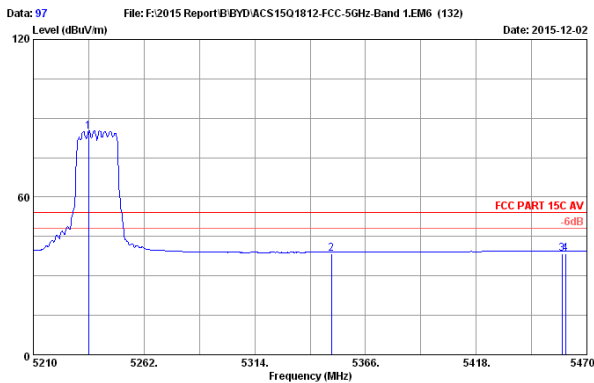

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5236.000	33.62	9.66	35.35	77.07	85.00	54.00	-31.00	Average
2	5350.000	33.44	9.71	35.29	30.60	38.46	54.00	15.54	Average
3	5458.300	33.27	9.76	35.25	30.75	38.53	54.00	15.47	Average
4	5460.000	33.26	9.76	35.25	30.74	38.51	54.00	15.49	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

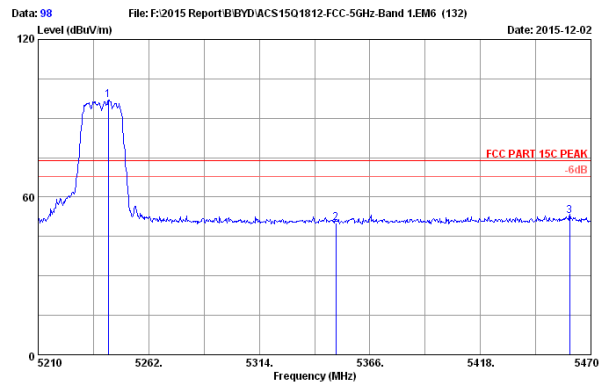

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH48 5240MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.020	33.61	9.66	35.34	88.88	96.81	74.00	-22.81	Peak
2	5350.000	33.44	9.71	35.29	42.28	50.14	74.00	23.86	Peak
3	5460.000	33.26	9.76	35.25	44.90	52.67	74.00	21.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

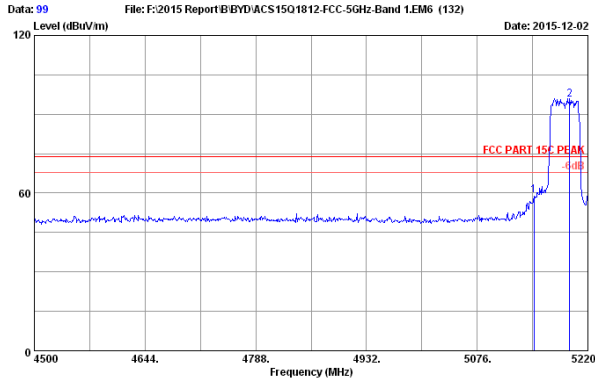

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	51.04	59.04	74.00	14.96	Peak
2	5196.240	33.69	9.63	35.36	87.79	95.75	74.00	-21.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

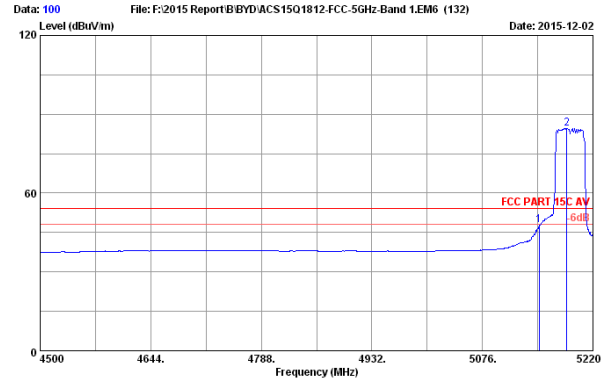

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	39.77	47.77	54.00	6.23	Average
2	5186.160	33.70	9.63	35.37	76.63	84.59	54.00	-30.59	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

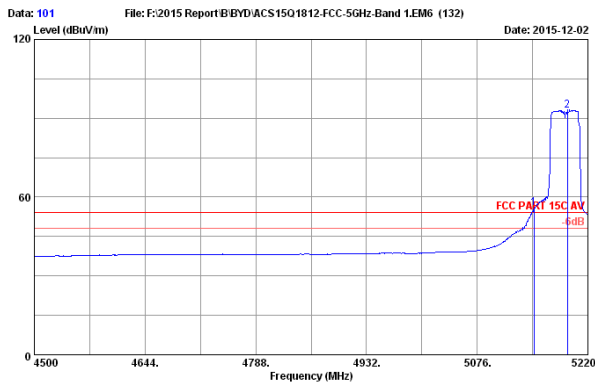

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	47.86	55.86	54.00	-1.86	Average
2	5193.360	33.69	9.63	35.36	85.11	93.07	54.00	-39.07	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

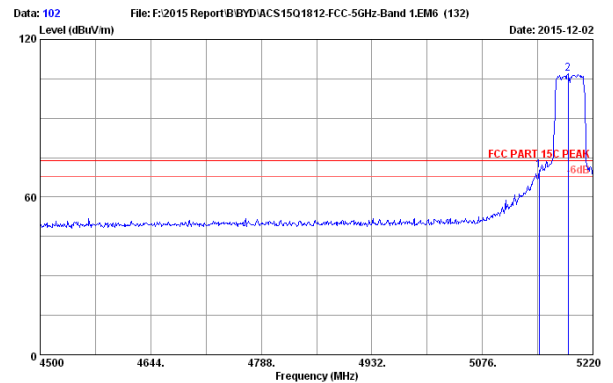

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH38 5190MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	62.36	70.36	74.00	3.64	Peak
2	5187.600	33.70	9.63	35.36	98.83	106.80	74.00	-32.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

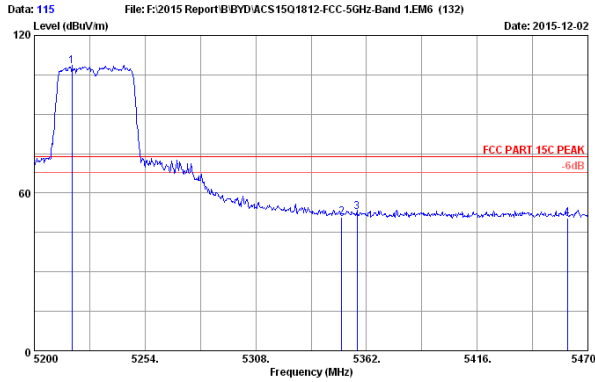

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating: DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.360	33.65	9.65	35.35	100.48	108.43	74.00	-34.43	Peak
2	5350.000	33.44	9.71	35.29	43.07	50.93	74.00	23.07	Peak
3	5357.410	33.43	9.71	35.29	45.12	52.97	74.00	21.03	Peak
4	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

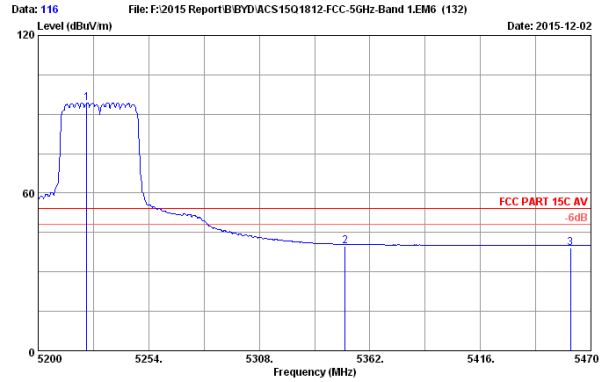

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating: DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5223.760	33.64	9.65	35.35	86.27	94.21	54.00	-40.21	Average
2	5350.000	33.44	9.71	35.29	32.07	39.93	54.00	14.07	Average
3	5460.000	33.26	9.76	35.25	31.46	39.23	54.00	14.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

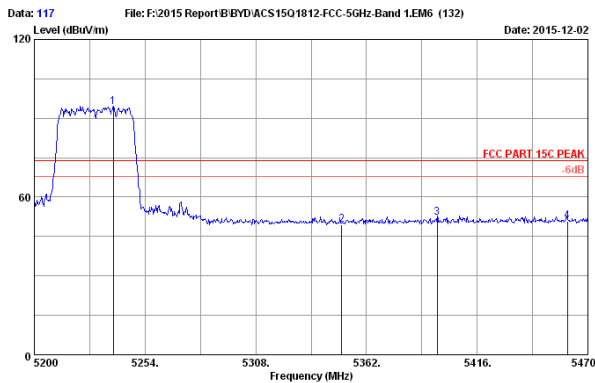

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating: DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.610	33.62	9.66	35.34	86.40	94.34	74.00	-20.34	Peak
2	5350.000	33.44	9.71	35.29	41.71	49.57	74.00	24.43	Peak
3	5396.560	33.37	9.74	35.27	44.24	52.08	74.00	21.92	Peak
4	5460.000	33.26	9.76	35.25	42.97	50.74	74.00	23.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

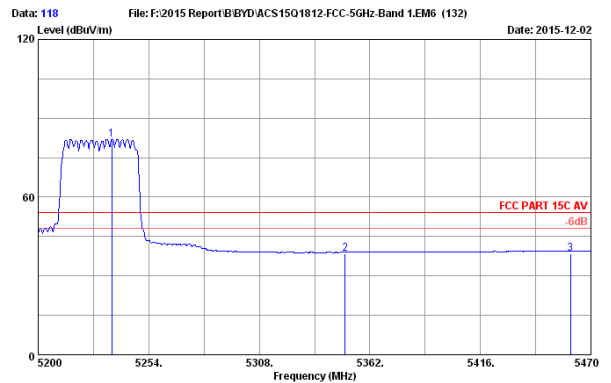

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating: DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT40 CH46 5230MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5235.910	33.62	9.66	35.35	73.95	81.88	54.00	-27.88	Average
2	5350.000	33.44	9.71	35.29	30.53	38.39	54.00	15.61	Average
3	5460.000	33.26	9.76	35.25	30.66	38.43	54.00	15.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

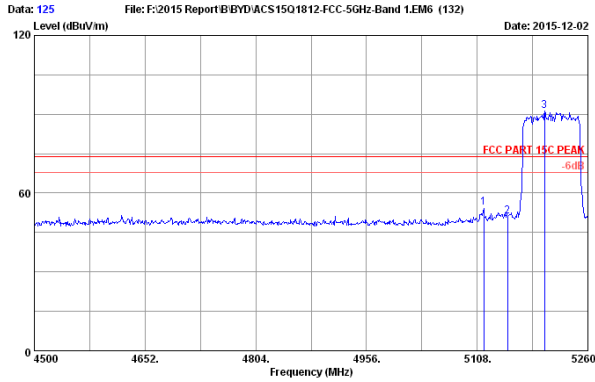

Data: 125 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02
 Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 HCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5117.120	33.81	9.60	35.39	46.30	54.32	74.00	19.68	Peak
2	5150.000	33.76	9.62	35.38	43.27	51.27	74.00	22.73	Peak
3	5200.720	33.68	9.64	35.36	83.20	91.16	74.00	-17.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

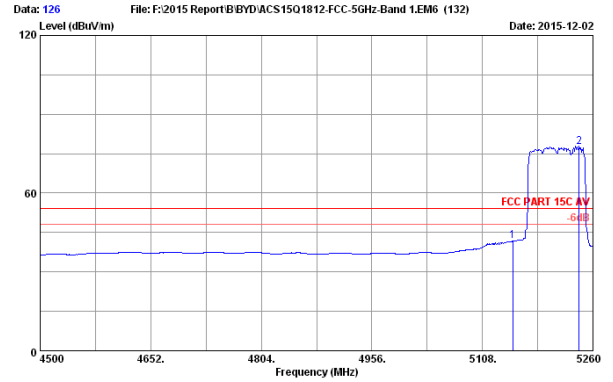

Data: 126 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02
 Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	33.73	41.73	54.00	12.27	Average
2	5241.000	33.61	9.66	35.34	69.66	77.59	54.00	-23.59	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

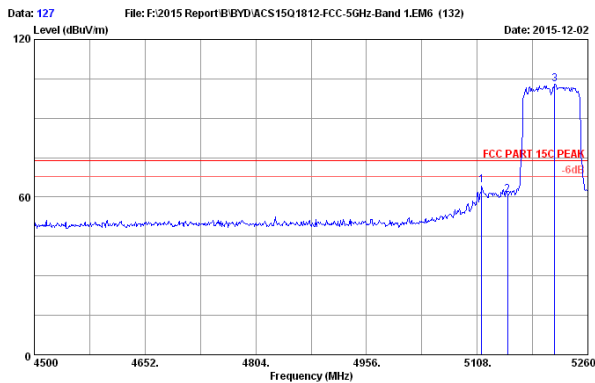

Data: 127 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02
 Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 HCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5114.080	33.82	9.60	35.39	56.34	64.37	74.00	9.63	Peak
2	5150.000	33.76	9.62	35.38	52.87	60.87	74.00	13.13	Peak
3	5214.400	33.66	9.65	35.35	94.92	102.88	74.00	-28.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

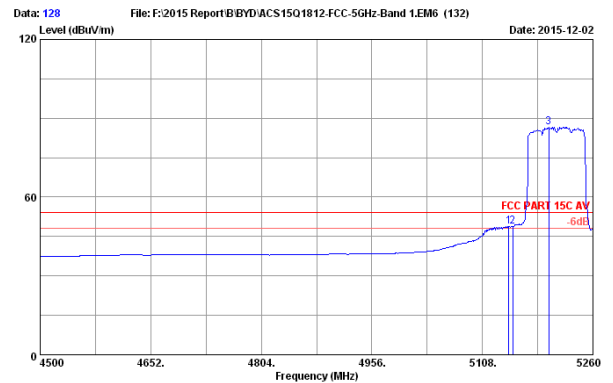

Data: 128 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 1EM6 (132) Date: 2015-12-02
 Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.480	33.77	9.62	35.38	40.94	48.95	54.00	5.05	Average
2	5150.000	33.76	9.62	35.38	40.84	48.84	54.00	5.16	Average
3	5199.200	33.68	9.64	35.36	78.65	86.61	54.00	-32.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

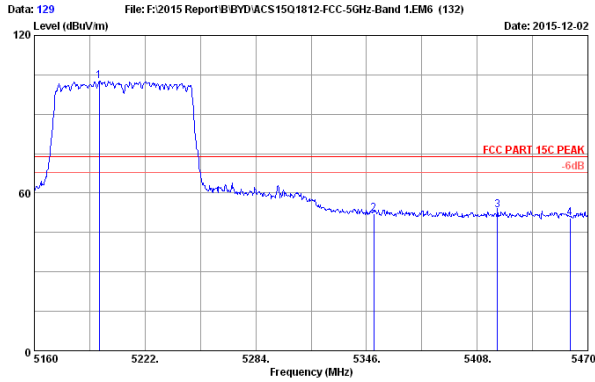

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5196.270	33.69	9.63	35.36	94.69	102.65	74.00	-28.65	Peak
2	5350.000	33.44	9.71	35.29	44.28	52.14	74.00	21.86	Peak
3	5419.470	33.33	9.74	35.26	45.57	53.38	74.00	20.62	Peak
4	5460.000	33.26	9.76	35.25	42.55	50.32	74.00	23.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

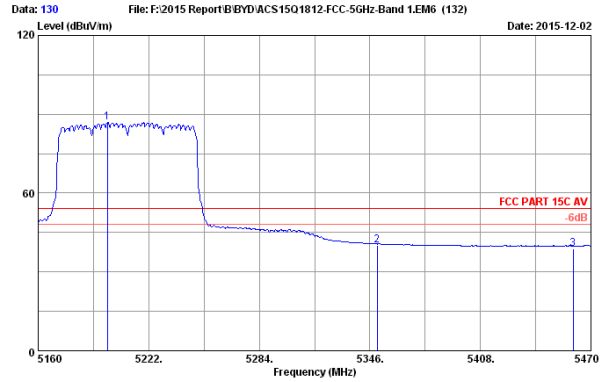

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5198.750	33.68	9.64	35.36	78.87	86.83	54.00	-32.83	Average
2	5350.000	33.44	9.71	35.29	32.15	40.01	54.00	13.99	Average
3	5460.000	33.26	9.76	35.25	31.15	38.92	54.00	15.08	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

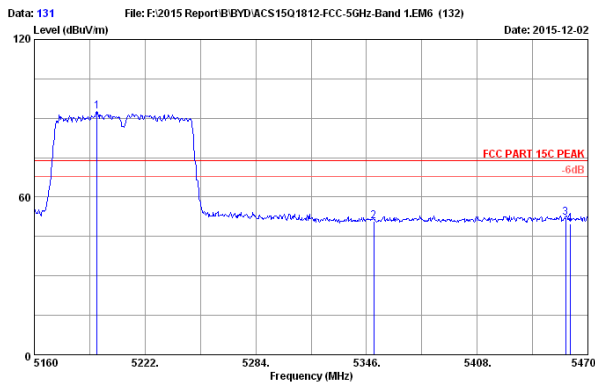

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5195.030	33.69	9.63	35.36	84.58	92.54	74.00	-18.54	Peak
2	5350.000	33.44	9.71	35.29	43.09	50.95	74.00	23.05	Peak
3	5457.600	33.27	9.76	35.25	44.23	52.01	74.00	21.99	Peak
4	5460.000	33.26	9.76	35.25	42.04	49.81	74.00	24.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

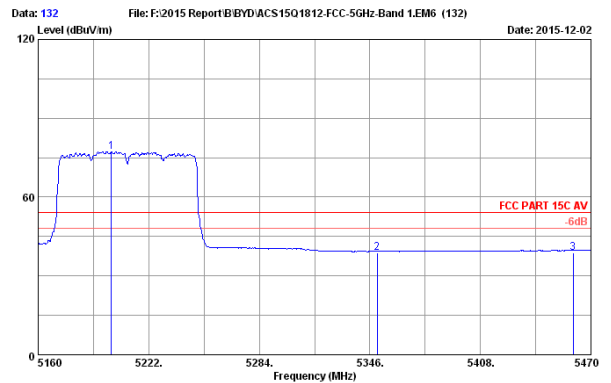


Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH42 5210MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.920	33.68	9.64	35.36	69.31	77.27	54.00	-23.27	Average
2	5350.000	33.44	9.71	35.29	30.89	38.75	54.00	15.25	Average
3	5460.000	33.26	9.76	35.25	30.96	38.73	54.00	15.27	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5260-5320MHz Band:

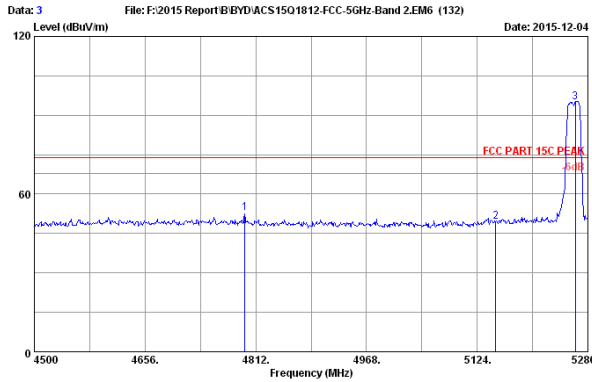

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4796.400	33.67	9.45	35.54	45.10	52.68	74.00	21.32	Peak
2	5150.000	33.76	9.62	35.38	41.43	49.43	74.00	24.57	Peak
3	5262.060	33.58	9.67	35.34	87.19	95.10	74.00	-21.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

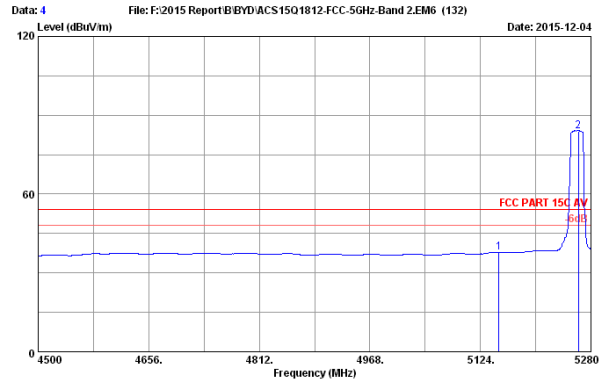

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	29.88	37.88	54.00	16.12	Average
2	5262.060	33.58	9.67	35.34	76.02	83.93	54.00	-29.93	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

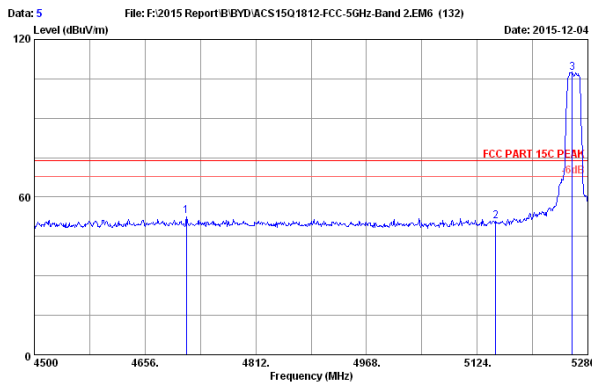

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4714.500	33.54	9.41	35.57	45.33	52.71	74.00	21.29	Peak
2	5150.000	33.76	9.62	35.38	42.88	50.88	74.00	23.12	Peak
3	5258.160	33.59	9.67	35.34	99.30	107.22	74.00	-33.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

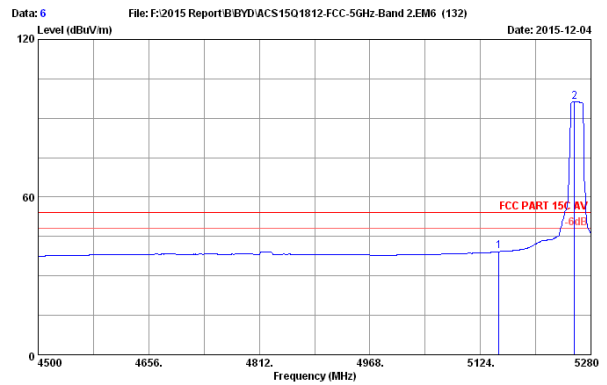

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.31	39.31	54.00	14.69	Average
2	5258.600	33.59	9.67	35.34	88.20	96.12	54.00	-42.12	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

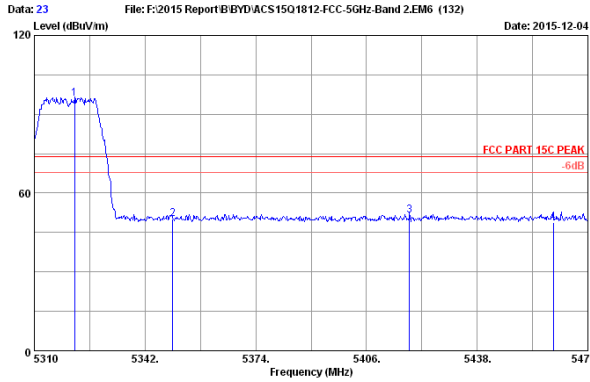

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.200	33.49	9.69	35.30	88.15	96.03	74.00	-22.03	Peak
2	5350.000	33.44	9.71	35.29	42.22	50.08	74.00	23.92	Peak
3	5418.480	33.33	9.74	35.26	43.83	51.64	74.00	22.36	Peak
4	5460.000	33.26	9.76	35.25	40.98	48.75	74.00	25.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

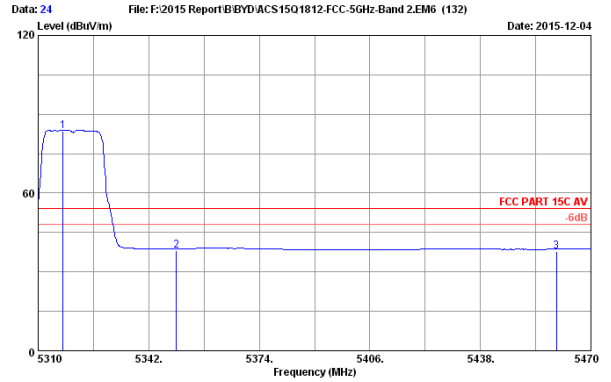

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.200	33.49	9.69	35.30	75.68	83.56	54.00	-29.56	Average
2	5350.000	33.44	9.71	35.29	30.30	38.16	54.00	15.84	Average
3	5460.000	33.26	9.76	35.25	29.88	37.65	54.00	16.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

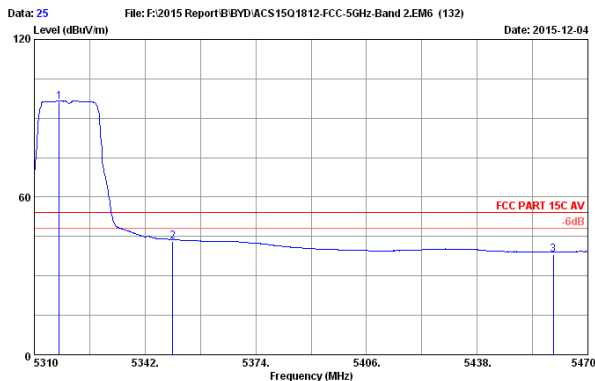

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.200	33.49	9.69	35.30	88.29	96.17	54.00	-42.17	Average
2	5350.000	33.44	9.71	35.29	35.33	43.19	54.00	10.81	Average
3	5460.000	33.26	9.76	35.25	30.41	38.18	54.00	15.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

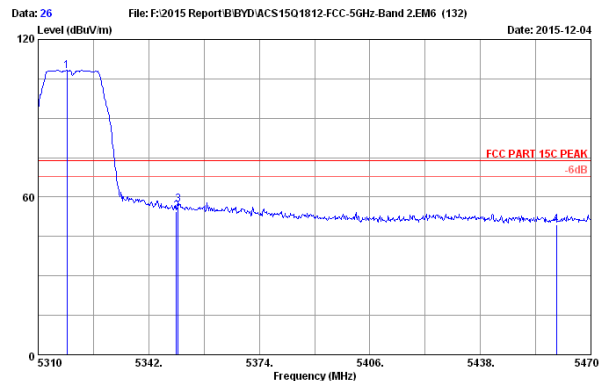

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.320	33.49	9.69	35.30	100.07	107.95	74.00	-33.95	Peak
2	5350.000	33.44	9.71	35.29	46.67	54.53	74.00	19.47	Peak
3	5350.480	33.44	9.71	35.29	49.36	57.22	74.00	16.78	Peak
4	5460.000	33.26	9.76	35.25	41.82	49.59	74.00	24.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

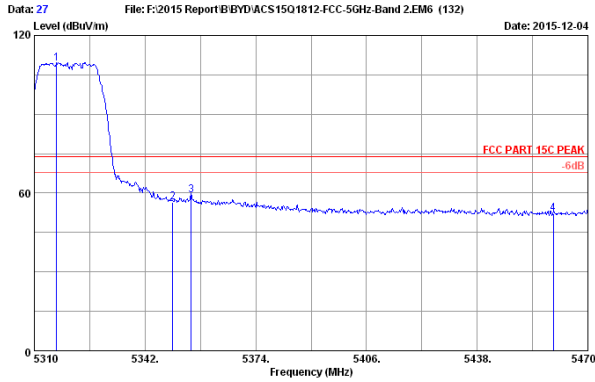

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.400	33.49	9.69	35.30	101.43	109.31	74.00	-35.31	Peak
2	5350.000	33.44	9.71	35.29	48.73	56.59	74.00	17.41	Peak
3	5355.280	33.43	9.71	35.29	51.25	59.10	74.00	14.90	Peak
4	5460.000	33.26	9.76	35.25	44.31	52.08	74.00	21.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

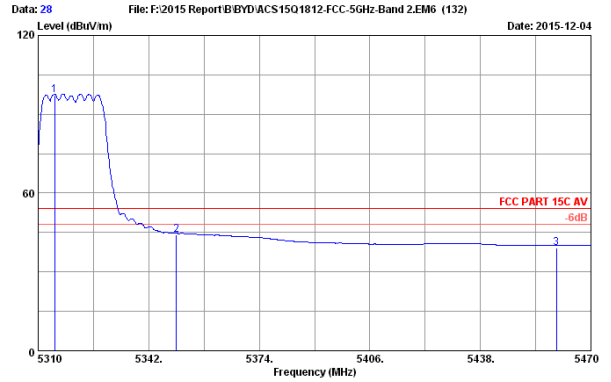

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.800	33.50	9.69	35.30	89.33	97.22	54.00	-43.22	Average
2	5350.000	33.44	9.71	35.29	36.32	44.18	54.00	9.82	Average
3	5460.000	33.26	9.76	35.25	31.38	39.15	54.00	14.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

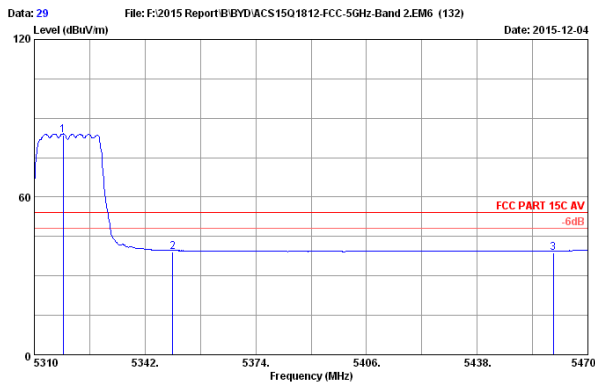

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.320	33.49	9.69	35.30	75.73	83.61	54.00	-29.61	Average
2	5350.000	33.44	9.71	35.29	31.24	39.10	54.00	14.90	Average
3	5460.000	33.26	9.76	35.25	30.85	38.62	54.00	15.38	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

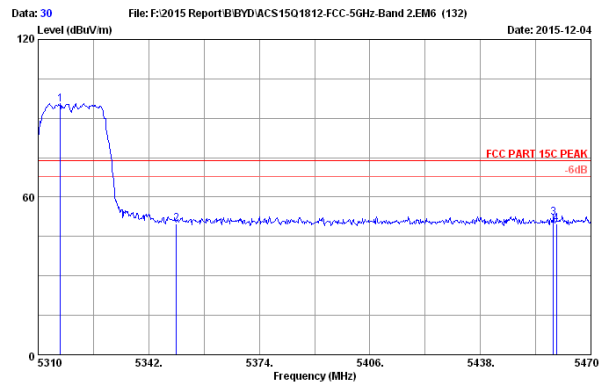

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.400	33.49	9.69	35.30	87.35	95.23	74.00	-21.23	Peak
2	5350.000	33.44	9.71	35.29	41.90	49.76	74.00	24.24	Peak
3	5459.120	33.27	9.76	35.25	44.30	52.08	74.00	21.92	Peak
4	5460.000	33.26	9.76	35.25	42.16	49.93	74.00	24.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

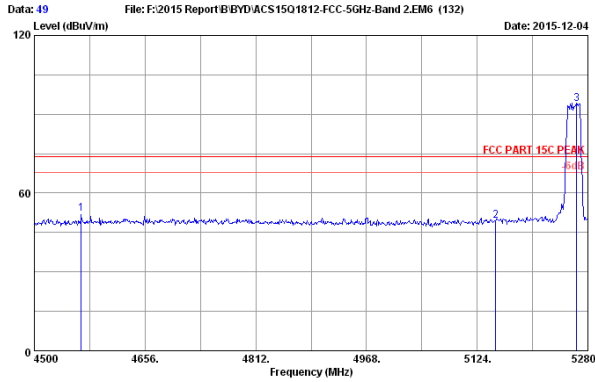

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4566.300	33.31	9.34	35.64	45.07	52.08	74.00	21.92	Peak
2	5150.000	33.76	9.62	35.38	41.58	49.58	74.00	24.42	Peak
3	5264.400	33.58	9.67	35.33	86.02	93.94	74.00	-19.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

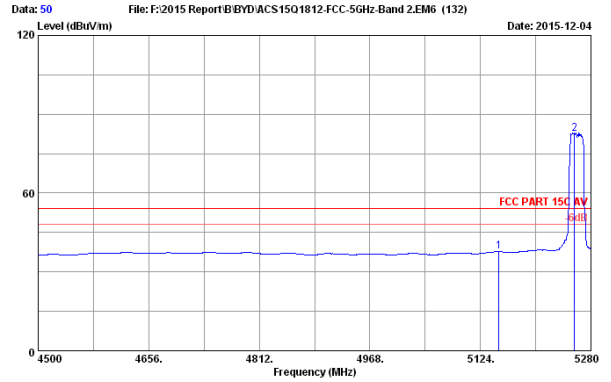

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	29.72	37.72	54.00	16.28	Average
2	5256.600	33.59	9.67	35.34	74.63	82.55	54.00	-28.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

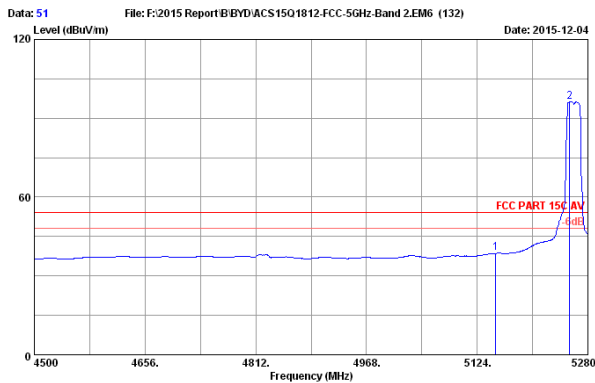

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.68	38.68	54.00	15.32	Average
2	5254.260	33.59	9.67	35.34	88.18	96.10	54.00	-42.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

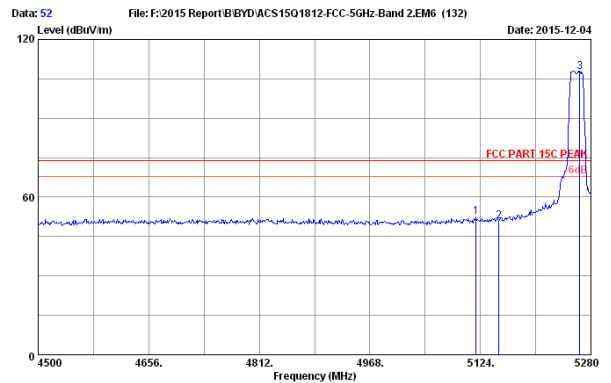

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5117.760	33.81	9.60	35.39	44.55	52.57	74.00	21.43	Peak
2	5150.000	33.76	9.62	35.38	42.85	50.85	74.00	23.15	Peak
3	5264.400	33.58	9.67	35.33	99.81	107.73	74.00	-33.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

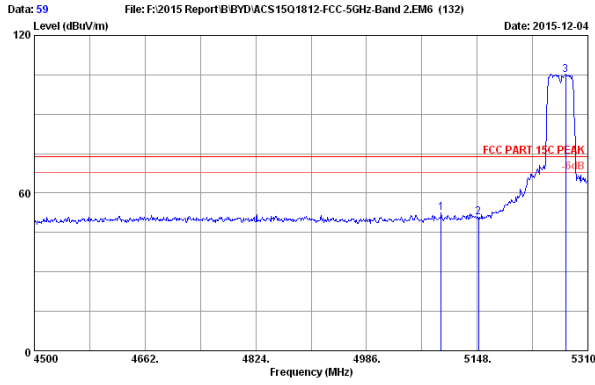

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5095.350	33.85	9.59	35.40	44.59	52.63	74.00	21.37	Peak
2	5150.000	33.76	9.62	35.38	42.89	50.89	74.00	23.11	Peak
3	5277.600	33.56	9.68	35.33	96.99	104.90	74.00	-30.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

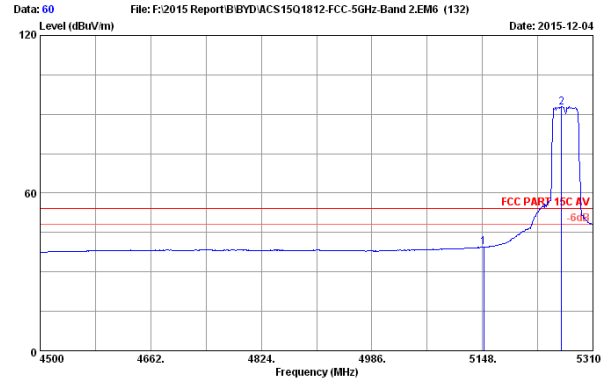

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.40	39.40	54.00	14.60	Average
2	5263.830	33.58	9.67	35.33	84.65	92.57	54.00	-38.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

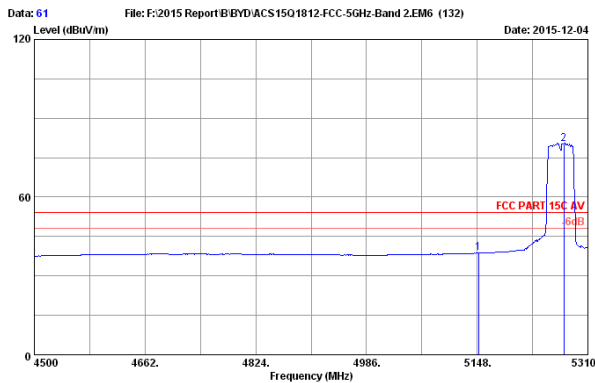

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	30.74	38.74	54.00	15.26	Average
2	5275.170	33.56	9.68	35.33	72.22	80.13	54.00	-26.13	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

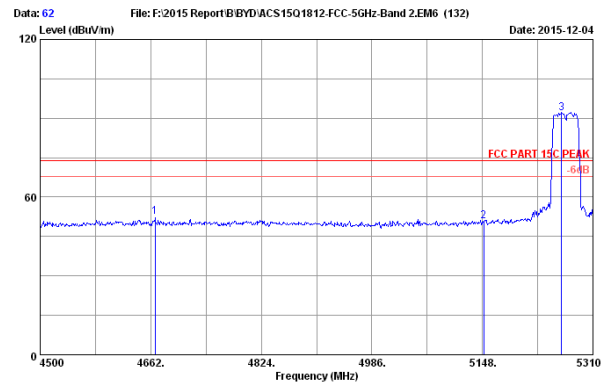

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH54 5270MHz Tx WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4668.480	33.47	9.39	35.60	45.06	52.32	74.00	21.68	Peak
2	5150.000	33.76	9.62	35.38	42.80	50.80	74.00	23.20	Peak
3	5263.830	33.58	9.67	35.33	84.09	92.01	74.00	-18.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

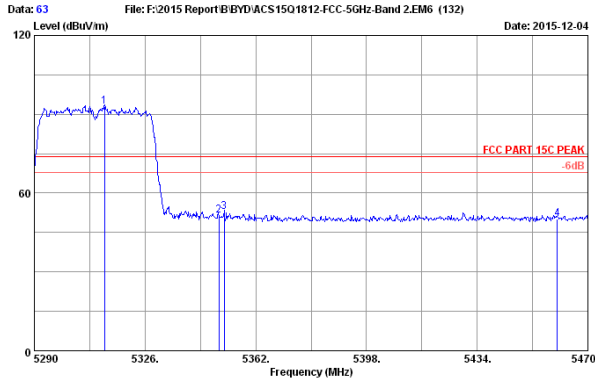

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5312.860	33.50	9.69	35.30	85.15	93.04	74.00	-19.04	Peak
2	5350.000	33.44	9.71	35.29	43.46	51.32	74.00	22.68	Peak
3	5351.740	33.44	9.71	35.29	45.10	52.96	74.00	21.04	Peak
4	5460.000	33.26	9.76	35.25	42.36	50.13	74.00	23.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

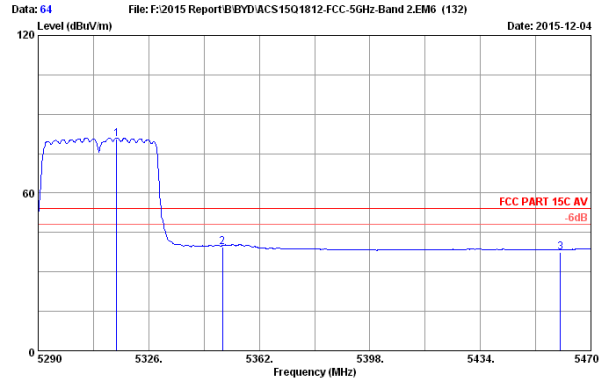

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5315.560	33.50	9.69	35.30	72.62	80.51	54.00	-26.51	Average
2	5350.000	33.44	9.71	35.29	31.58	39.44	54.00	14.56	Average
3	5460.000	33.26	9.76	35.25	29.82	37.59	54.00	16.41	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

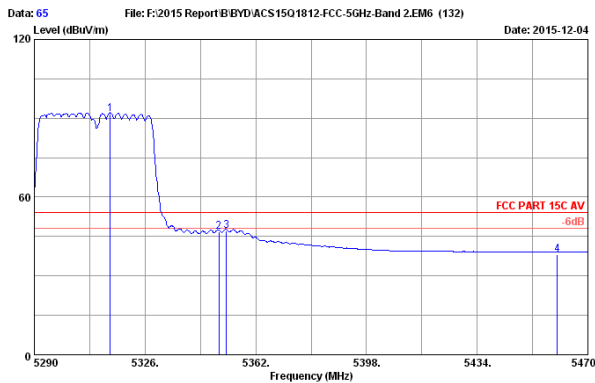

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.660	33.50	9.69	35.30	83.75	91.64	54.00	-37.64	Average
2	5350.000	33.44	9.71	35.29	39.03	46.89	54.00	7.11	Average
3	5352.460	33.44	9.71	35.29	39.20	47.06	54.00	6.94	Average
4	5460.000	33.26	9.76	35.25	30.43	38.20	54.00	15.80	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

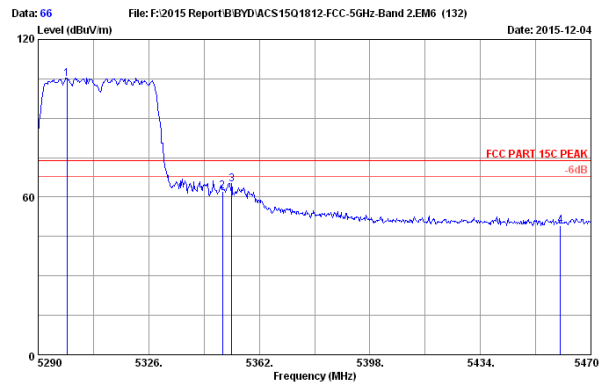

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5299.360	33.52	9.68	35.32	97.00	104.88	74.00	-30.88	Peak
2	5350.000	33.44	9.71	35.29	54.46	62.32	74.00	11.68	Peak
3	5353.000	33.44	9.71	35.29	56.83	64.69	74.00	9.31	Peak
4	5460.000	33.26	9.76	35.25	41.49	49.26	74.00	24.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

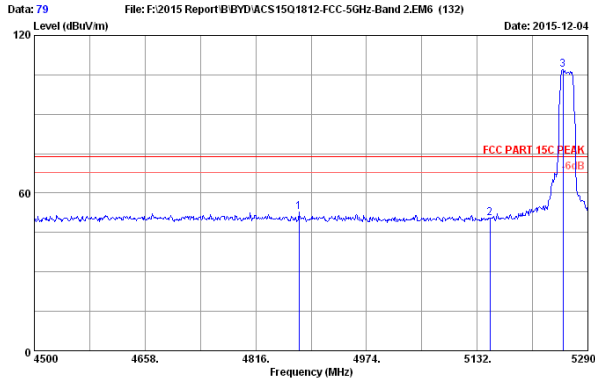

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4877.620	33.80	9.49	35.51	44.87	52.65	74.00	21.35	Peak
2	5150.000	33.76	9.62	35.38	42.52	50.52	74.00	23.48	Peak
3	5254.450	33.59	9.67	35.34	99.12	107.04	74.00	-33.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

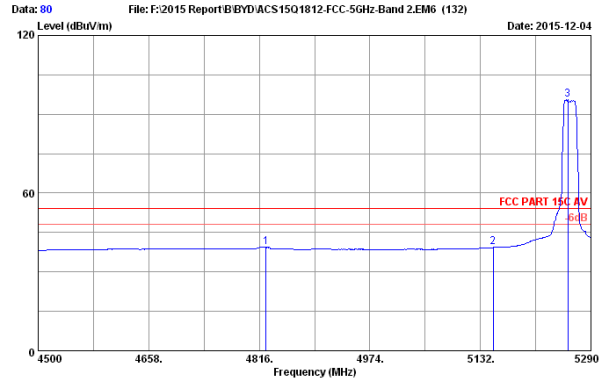

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4825.480	33.72	9.46	35.53	31.81	39.46	54.00	14.54	Average
2	5150.000	33.76	9.62	35.38	31.29	39.29	54.00	14.71	Average
3	5256.820	33.59	9.67	35.34	87.53	95.45	54.00	-41.45	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

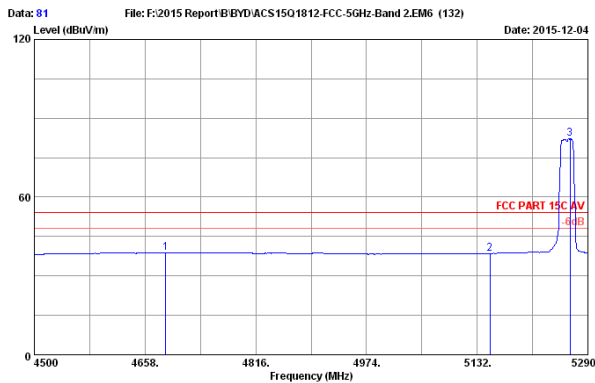

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4687.230	33.50	9.40	35.60	31.55	38.85	54.00	15.15	Average
2	5150.000	33.76	9.62	35.38	30.56	38.56	54.00	15.44	Average
3	5264.720	33.58	9.67	35.33	74.34	82.26	54.00	-28.26	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

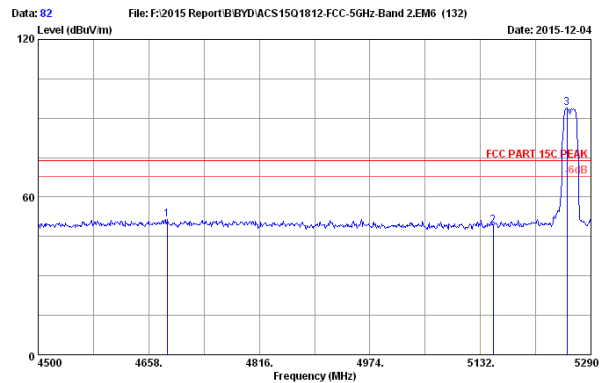

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH52 5260MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4684.070	33.49	9.40	35.60	44.34	51.63	74.00	22.37	Peak
2	5150.000	33.76	9.62	35.38	41.05	49.05	74.00	24.95	Peak
3	5256.030	33.59	9.67	35.34	85.90	93.82	74.00	-19.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

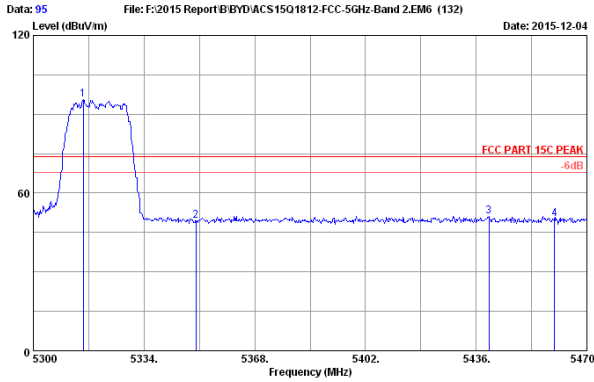

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5315.300	33.50	9.69	35.30	87.60	95.49	74.00	-21.49	Peak
2	5350.000	33.44	9.71	35.29	41.47	49.33	74.00	24.67	Peak
3	5439.910	33.30	9.75	35.25	43.31	51.11	74.00	22.89	Peak
4	5460.000	33.26	9.76	35.25	42.50	50.27	74.00	23.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

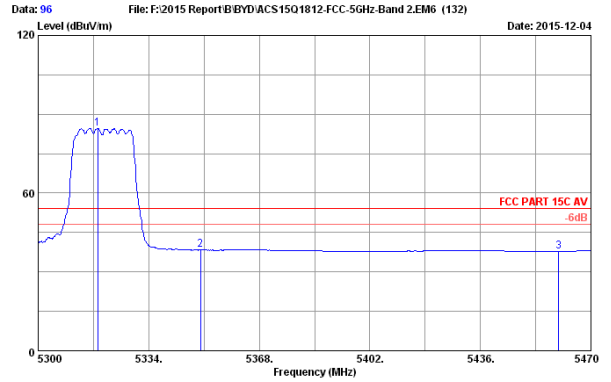

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.360	33.49	9.69	35.30	76.70	84.58	54.00	-30.58	Average
2	5350.000	33.44	9.71	35.29	30.43	38.29	54.00	15.71	Average
3	5460.000	33.26	9.76	35.25	30.10	37.87	54.00	16.13	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

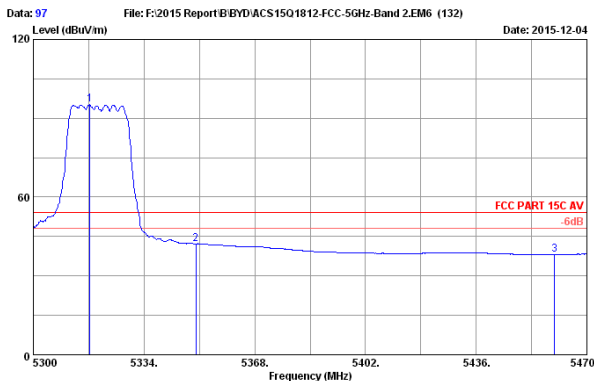

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5317.340	33.49	9.69	35.30	87.25	95.13	54.00	-41.13	Average
2	5350.000	33.44	9.71	35.29	34.33	42.19	54.00	11.81	Average
3	5460.000	33.26	9.76	35.25	30.37	38.14	54.00	15.86	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

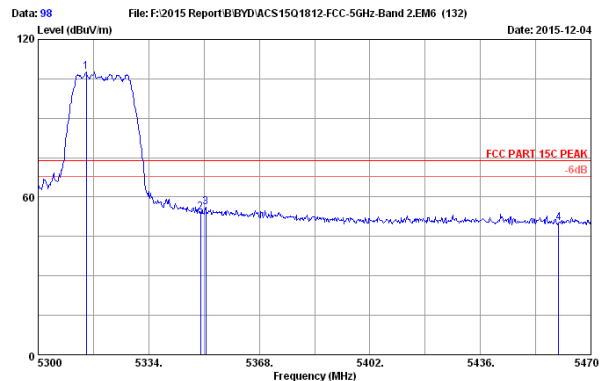

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH64 5320MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.790	33.50	9.69	35.30	99.89	107.78	74.00	-33.78	Peak
2	5350.000	33.44	9.71	35.29	46.32	54.18	74.00	19.82	Peak
3	5351.510	33.44	9.71	35.29	48.27	56.13	74.00	17.87	Peak
4	5460.000	33.26	9.76	35.25	42.31	50.08	74.00	23.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

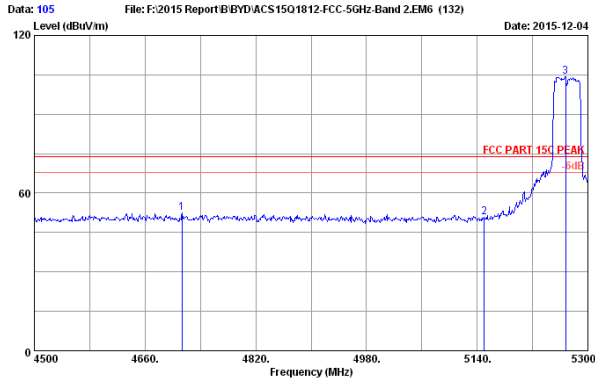

Data: 105 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04
 Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4713.600	33.54	9.41	35.57	45.22	52.60	74.00	21.40	Peak
2	5150.000	33.76	9.62	35.38	42.87	50.87	74.00	23.13	Peak
3	5268.000	33.57	9.67	35.33	96.44	104.35	74.00	-30.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

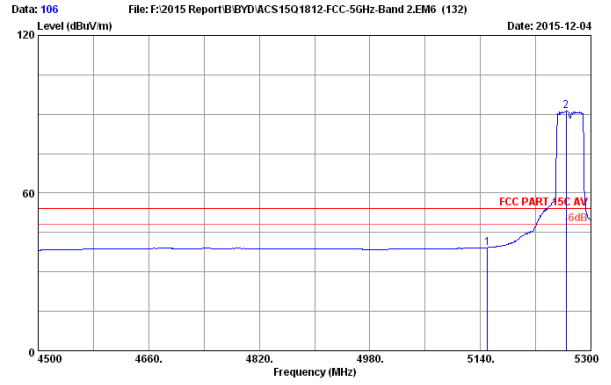

Data: 106 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04
 Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	31.24	39.24	54.00	14.76	Average
2	5264.000	33.58	9.67	35.33	83.26	91.18	54.00	-37.18	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

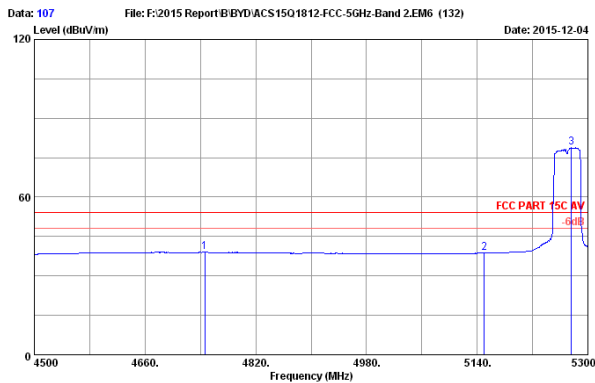

Data: 107 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04
 Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4746.400	33.59	9.42	35.56	31.56	39.01	54.00	14.99	Average
2	5150.000	33.76	9.62	35.38	30.63	38.63	54.00	15.37	Average
3	5276.000	33.56	9.68	35.33	70.87	78.78	54.00	-24.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

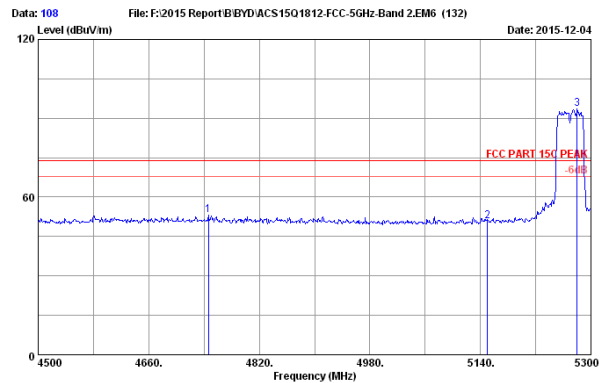

Data: 108 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 2.EM6 (132) Date: 2015-12-04
 Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH54 5270MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4746.400	33.59	9.42	35.56	45.72	53.17	74.00	20.83	Peak
2	5150.000	33.76	9.62	35.38	42.67	50.67	74.00	23.33	Peak
3	5280.000	33.55	9.68	35.33	85.61	93.51	74.00	-19.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

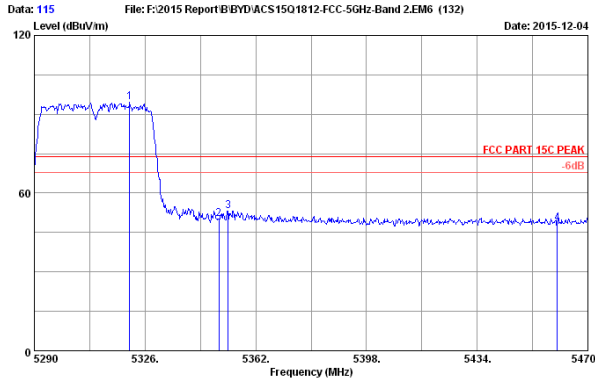

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.960	33.49	9.69	35.30	86.60	94.48	74.00	-20.48	Peak
2	5350.000	33.44	9.71	35.29	42.33	50.19	74.00	23.81	Peak
3	5353.000	33.44	9.71	35.29	45.23	53.09	74.00	20.91	Peak
4	5460.000	33.26	9.76	35.25	40.64	48.41	74.00	25.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

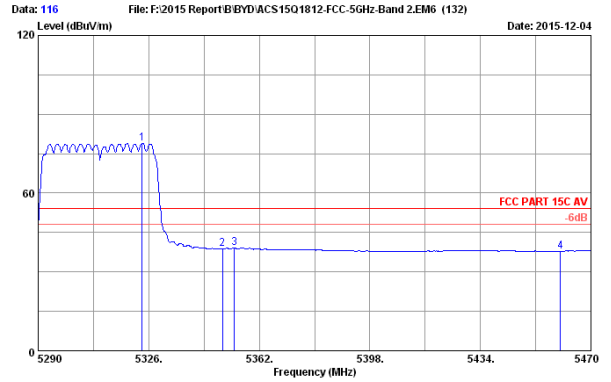

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5323.840	33.48	9.70	35.30	71.12	79.00	54.00	-25.00	Average
2	5350.000	33.44	9.71	35.29	30.76	38.62	54.00	15.38	Average
3	5353.900	33.43	9.71	35.29	31.22	39.07	54.00	14.93	Average
4	5460.000	33.26	9.76	35.25	30.13	37.90	54.00	16.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

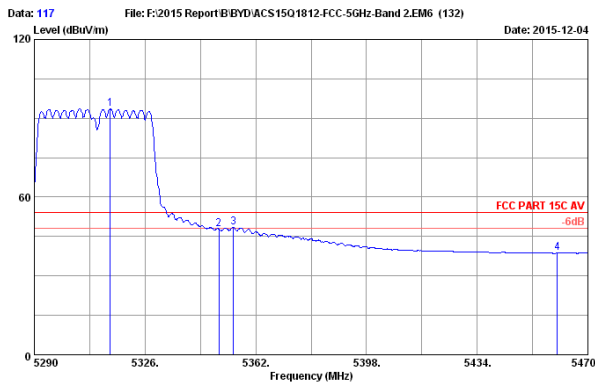

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.660	33.50	9.69	35.30	85.76	93.65	54.00	-39.65	Average
2	5350.000	33.44	9.71	35.29	40.10	47.96	54.00	6.04	Average
3	5354.800	33.43	9.71	35.29	40.57	48.42	54.00	5.58	Average
4	5460.000	33.26	9.76	35.25	30.86	38.63	54.00	15.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

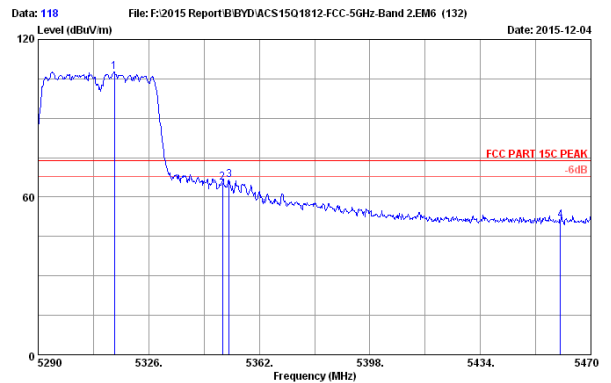

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH62 5310MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5314.840	33.50	9.69	35.30	99.69	107.58	74.00	-33.58	Peak
2	5350.000	33.44	9.71	35.29	57.72	65.58	74.00	8.42	Peak
3	5352.100	33.44	9.71	35.29	58.54	66.40	74.00	7.60	Peak
4	5460.000	33.26	9.76	35.25	43.51	51.28	74.00	22.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

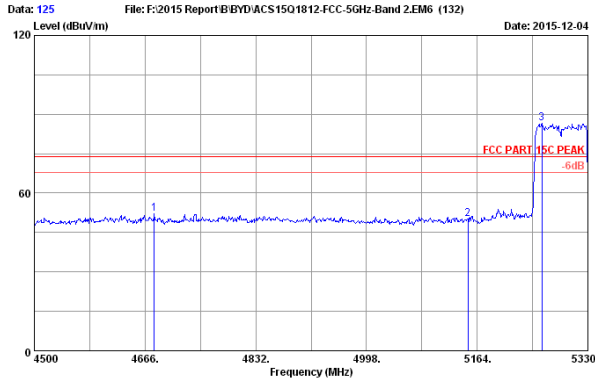

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4680.110	33.49	9.40	35.60	44.75	52.04	74.00	21.96	Peak
2	5150.000	33.76	9.62	35.38	41.99	49.99	74.00	24.01	Peak
3	5261.110	33.58	9.67	35.34	78.65	86.56	74.00	-12.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

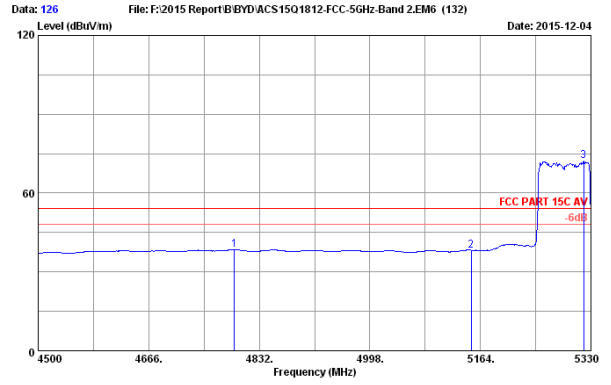

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4794.650	33.67	9.45	35.54	30.80	38.38	54.00	15.62	Average
2	5150.000	33.76	9.62	35.38	30.25	38.25	54.00	15.75	Average
3	5319.210	33.49	9.69	35.30	64.17	72.05	54.00	-18.05	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

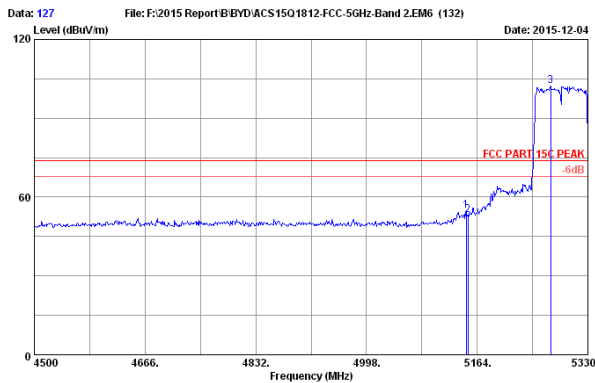

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.400	33.76	9.62	35.38	46.94	54.94	74.00	19.06	Peak
2	5150.000	33.76	9.62	35.38	45.30	53.30	74.00	20.70	Peak
3	5274.390	33.56	9.68	35.33	94.41	102.32	74.00	-28.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

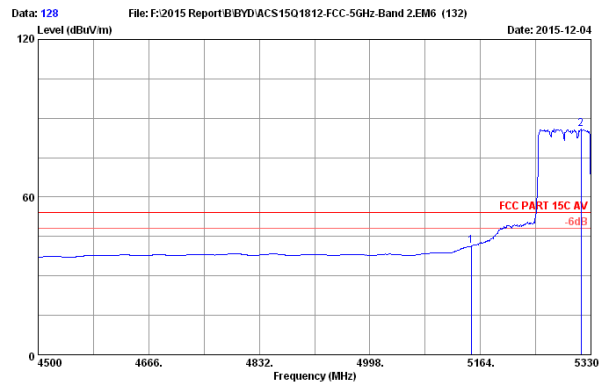

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.76	9.62	35.38	33.48	41.48	54.00	12.52	Average
2	5315.060	33.50	9.69	35.30	78.13	86.02	54.00	-32.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

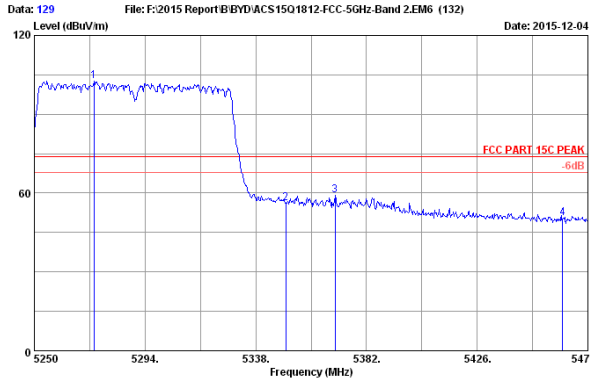

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5273.760	33.56	9.68	35.33	94.57	102.48	74.00	-28.48	Peak
2	5350.000	33.44	9.71	35.29	48.14	56.00	74.00	18.00	Peak
3	5369.460	33.41	9.72	35.28	51.24	59.09	74.00	14.91	Peak
4	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

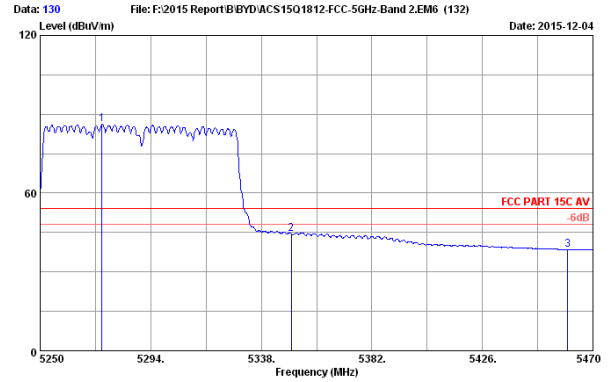

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5274.640	33.56	9.68	35.33	78.23	86.14	54.00	-32.14	Average
2	5350.000	33.44	9.71	35.29	36.50	44.36	54.00	9.64	Average
3	5460.000	33.26	9.76	35.25	30.81	38.58	54.00	15.42	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

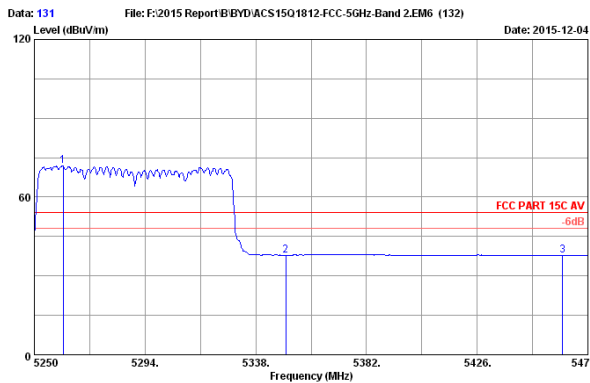

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5261.440	33.58	9.67	35.34	63.95	71.86	54.00	-17.86	Average
2	5350.000	33.44	9.71	35.29	30.02	37.88	54.00	16.12	Average
3	5460.000	33.26	9.76	35.25	30.00	37.77	54.00	16.23	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

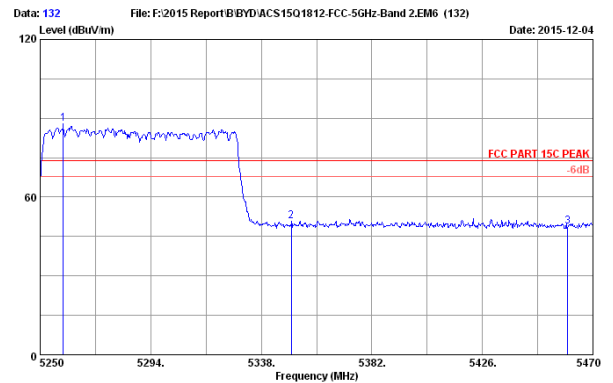


Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH58 5290MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5259.240	33.59	9.67	35.34	79.89	87.81	74.00	-13.81	Peak
2	5350.000	33.44	9.71	35.29	42.82	50.68	74.00	23.32	Peak
3	5460.000	33.26	9.76	35.25	41.14	48.91	74.00	25.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5500-5700MHz Band:

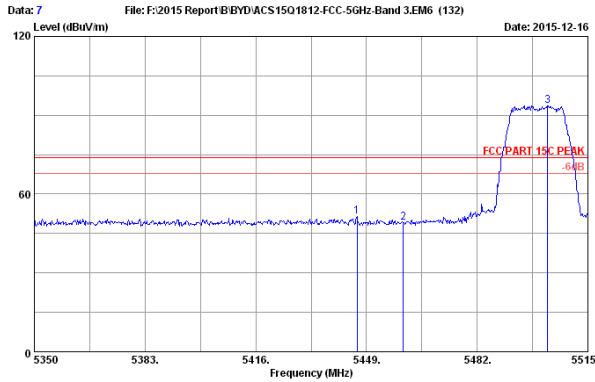

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5446.195	33.29	9.75	35.25	43.60	51.39	74.00	22.61	Peak
2	5460.000	33.26	9.76	35.25	41.30	49.07	74.00	24.93	Peak
3	5502.955	33.20	9.79	35.22	85.89	93.66	74.00	-19.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

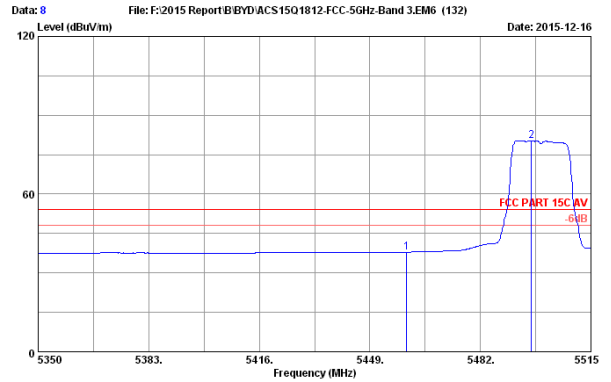

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.09	37.86	54.00	16.14	Average
2	5497.180	33.20	9.78	35.22	72.59	80.35	54.00	-26.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

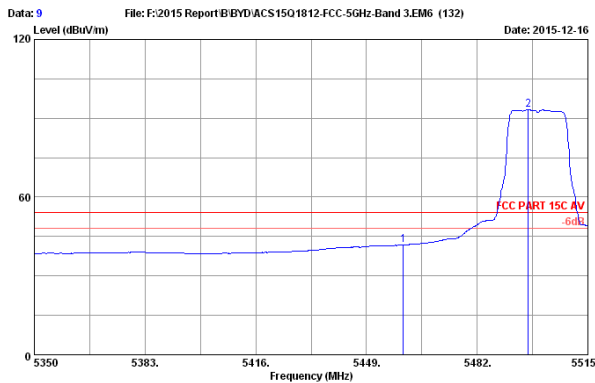

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	34.05	41.82	54.00	12.18	Average
2	5497.180	33.20	9.78	35.22	85.45	93.21	54.00	-39.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

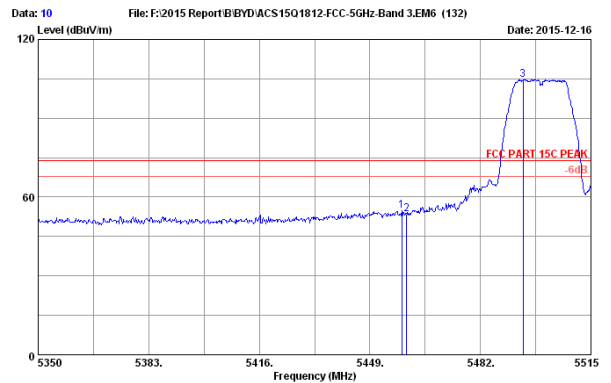

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.570	33.27	9.76	35.25	46.87	54.65	74.00	19.35	Peak
2	5460.000	33.26	9.76	35.25	45.78	53.55	74.00	20.45	Peak
3	5494.705	33.21	9.78	35.22	96.87	104.64	74.00	-30.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

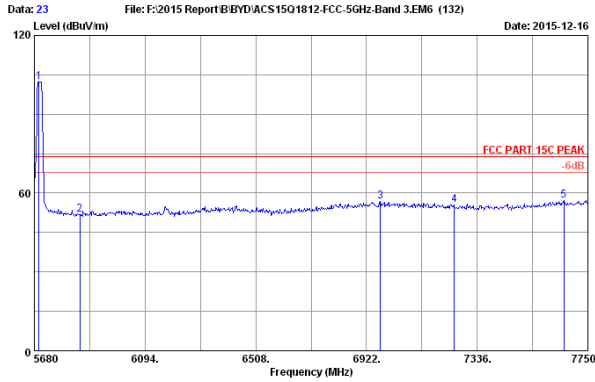

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	94.23	102.36	74.00	-28.36	Peak
2	5850.000	33.55	9.95	35.07	43.40	51.83	74.00	22.17	Peak
3	6973.750	35.85	10.47	35.39	46.01	56.94	74.00	17.06	Peak
4	7250.000	36.00	10.74	35.50	44.25	55.49	74.00	18.51	Peak
5	7660.990	36.39	11.15	35.66	45.19	57.07	74.00	16.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

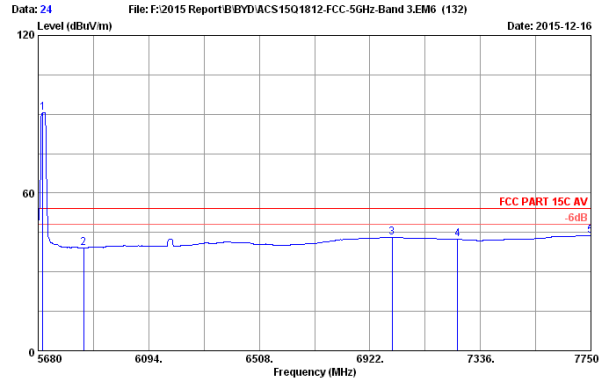

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	82.48	90.61	54.00	-36.61	Average
2	5850.000	33.55	9.95	35.07	30.66	39.09	54.00	14.91	Average
3	7004.800	35.90	10.49	35.40	32.17	43.16	54.00	10.84	Average
4	7250.000	36.00	10.74	35.50	31.11	42.35	54.00	11.65	Average
5	7750.000	36.55	11.23	35.70	31.78	43.86	54.00	10.14	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

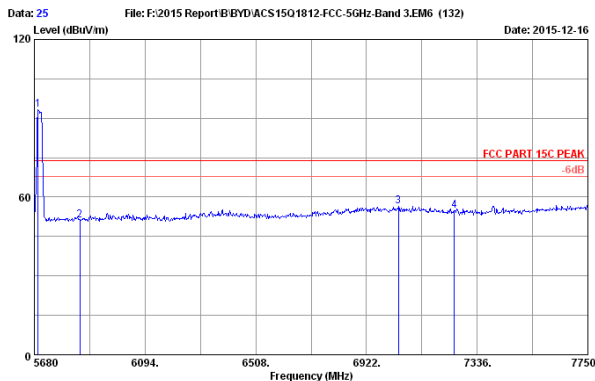

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.490	33.39	9.87	35.14	85.16	93.28	74.00	-19.28	Peak
2	5850.000	33.55	9.95	35.07	42.77	51.20	74.00	22.80	Peak
3	7042.060	35.92	10.53	35.42	45.62	56.65	74.00	17.35	Peak
4	7250.000	36.00	10.74	35.50	43.62	54.86	74.00	19.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

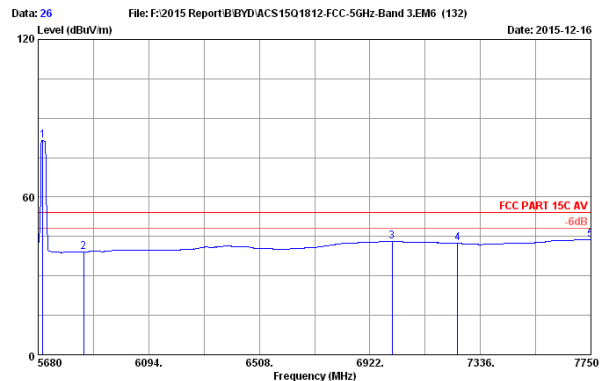


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEES02.11a CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	73.59	81.72	54.00	-27.72	Average
2	5850.000	33.55	9.95	35.07	30.62	39.05	54.00	14.95	Average
3	7004.800	35.90	10.49	35.40	32.22	43.21	54.00	10.79	Average
4	7250.000	36.00	10.74	35.50	31.11	42.35	54.00	11.65	Average
5	7750.000	36.55	11.23	35.70	31.80	43.88	54.00	10.12	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 33 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3EM6 (132) Date: 2015-12-16

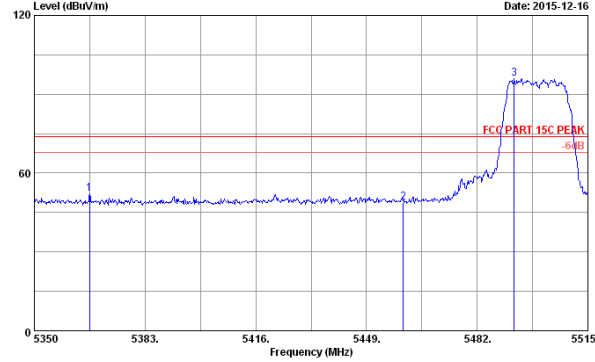


Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5366.500	33.41	9.72	35.28	44.42	52.27	74.00	21.73	Peak
2	5460.000	33.26	9.76	35.25	41.13	48.90	74.00	25.10	Peak
3	5493.055	33.21	9.78	35.22	88.01	95.78	74.00	-21.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 34 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3EM6 (132) Date: 2015-12-16

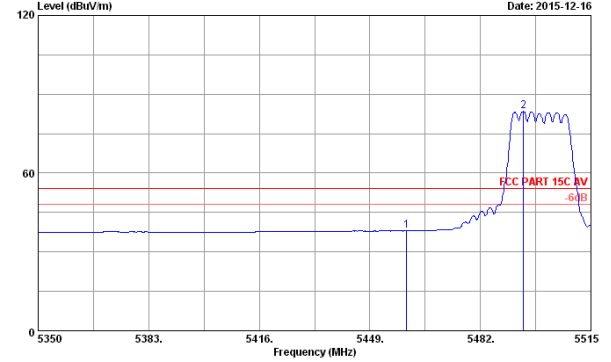


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.28	38.05	54.00	15.95	Average
2	5494.870	33.21	9.78	35.22	75.78	83.55	54.00	-29.55	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 35 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3EM6 (132) Date: 2015-12-16

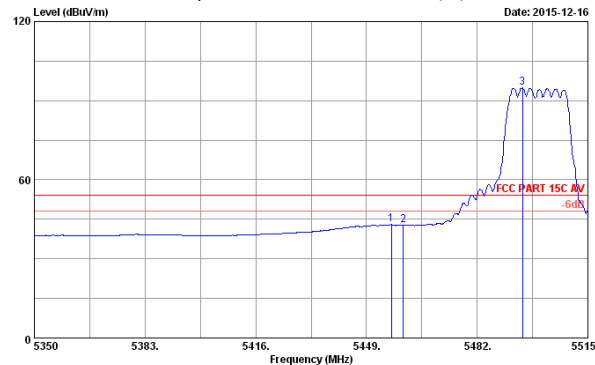


Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5456.425	33.27	9.76	35.25	35.22	43.00	54.00	11.00	Average
2	5460.000	33.26	9.76	35.25	34.90	42.67	54.00	11.33	Average
3	5495.530	33.21	9.78	35.22	86.99	94.76	54.00	-40.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


Data: 36 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3EM6 (132) Date: 2015-12-16

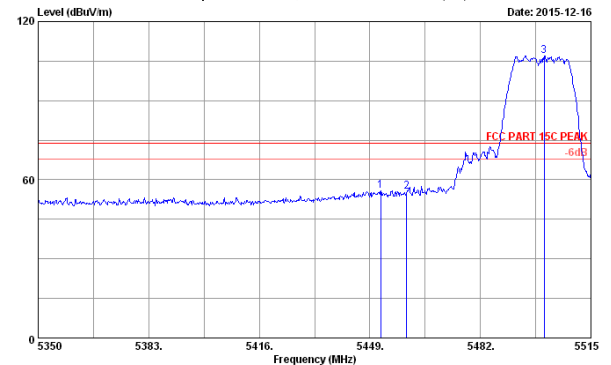

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5452.300	33.28	9.76	35.25	48.04	55.83	74.00	18.17	Peak
2	5460.000	33.26	9.76	35.25	47.84	55.61	74.00	18.39	Peak
3	5500.975	33.20	9.78	35.22	99.34	107.10	74.00	-33.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

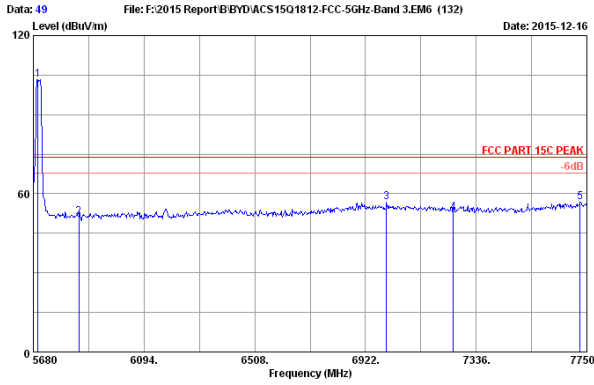

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	95.29	103.42	74.00	-29.42	Peak
2	5850.000	33.55	9.95	35.07	42.63	51.06	74.00	22.94	Peak
3	7000.660	35.90	10.49	35.40	45.77	56.76	74.00	17.24	Peak
4	7250.000	36.00	10.74	35.50	41.46	52.70	74.00	21.30	Peak
5	7725.160	36.51	11.20	35.69	44.72	56.74	74.00	17.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

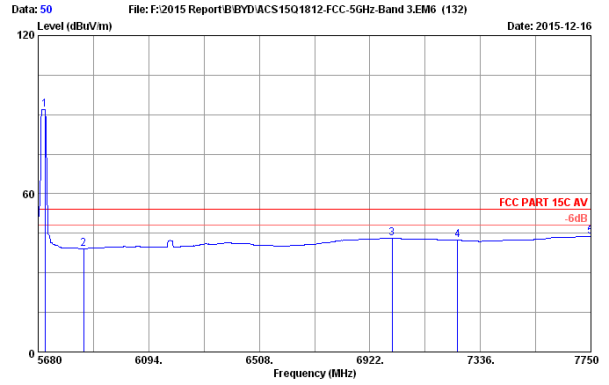

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5704.840	33.40	9.88	35.14	83.89	92.03	54.00	-38.03	Average
2	5850.000	33.55	9.95	35.07	30.67	39.10	54.00	14.90	Average
3	7004.800	35.90	10.49	35.40	32.16	43.15	54.00	10.85	Average
4	7250.000	36.00	10.74	35.50	31.07	42.31	54.00	11.69	Average
5	7750.000	36.55	11.23	35.70	31.73	43.81	54.00	10.19	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

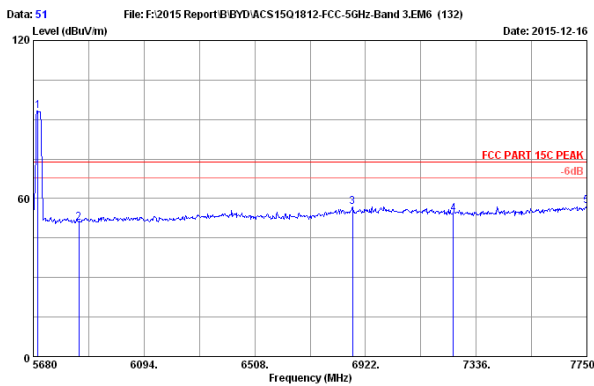

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5696.560	33.40	9.87	35.14	85.10	93.23	74.00	-19.23	Peak
2	5850.000	33.55	9.95	35.07	42.50	50.93	74.00	23.07	Peak
3	6874.390	35.65	10.43	35.35	46.07	56.80	74.00	17.20	Peak
4	7250.000	36.00	10.74	35.50	43.05	54.29	74.00	19.71	Peak
5	7750.000	36.55	11.23	35.70	44.98	57.06	74.00	16.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

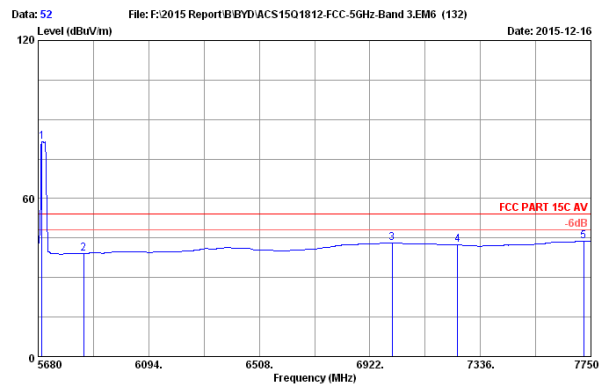

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.490	33.39	9.87	35.14	73.58	81.70	54.00	-27.70	Average
2	5850.000	33.55	9.95	35.07	30.60	39.03	54.00	14.97	Average
3	7004.800	35.90	10.49	35.40	32.21	43.20	54.00	10.80	Average
4	7250.000	36.00	10.74	35.50	31.07	42.31	54.00	11.69	Average
5	7723.090	36.50	11.20	35.69	31.83	43.84	54.00	10.16	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

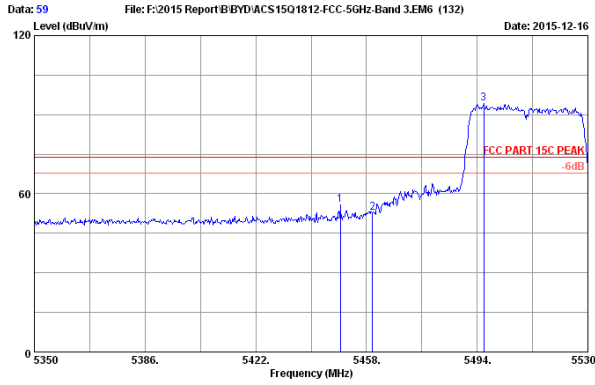

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11nHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5449.540	33.28	9.76	35.25	48.07	55.86	74.00	18.14	Peak
2	5460.000	33.26	9.76	35.25	45.07	52.84	74.00	21.16	Peak
3	5496.160	33.21	9.78	35.22	86.35	94.12	74.00	-20.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

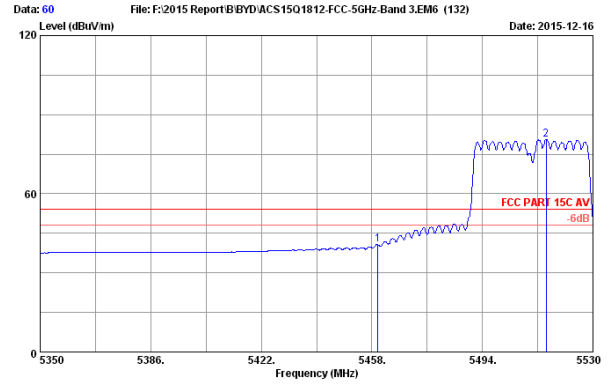

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11nHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	32.89	40.66	54.00	13.34	Average
2	5514.700	33.21	9.79	35.21	72.89	80.68	54.00	-26.68	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

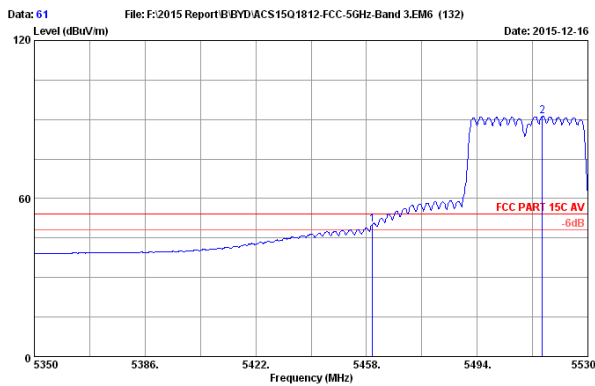

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11nHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	42.52	50.29	54.00	3.71	Average
2	5515.240	33.22	9.79	35.21	83.54	91.34	54.00	-37.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

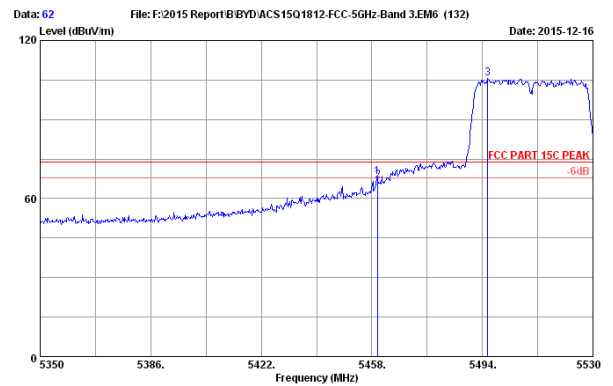

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11nHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.800	33.26	9.76	35.25	60.26	68.03	74.00	5.97	Peak
2	5460.000	33.26	9.76	35.25	59.13	66.90	74.00	7.10	Peak
3	5495.800	33.21	9.78	35.22	97.79	105.56	74.00	-31.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

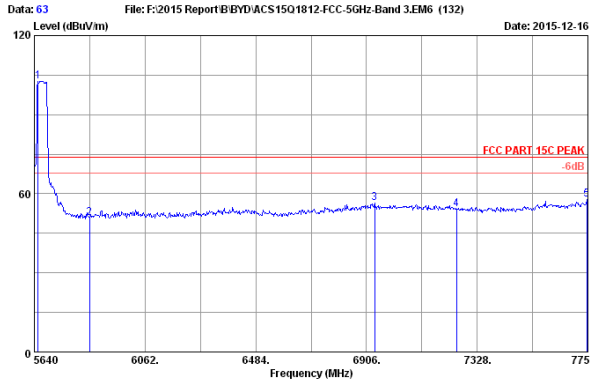

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5654.770	33.35	9.85	35.16	94.55	102.59	74.00	-28.59	Peak
2	5850.000	33.55	9.95	35.07	42.50	50.93	74.00	23.07	Peak
3	6937.650	35.78	10.46	35.38	45.46	56.32	74.00	17.68	Peak
4	7250.000	36.00	10.74	35.50	42.89	54.13	74.00	19.87	Peak
5	7745.780	36.54	11.22	35.70	45.61	57.67	74.00	16.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

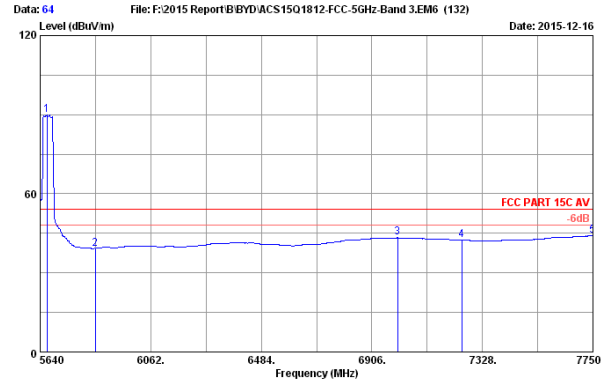

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	81.86	89.94	54.00	-35.94	Average
2	5850.000	33.55	9.95	35.07	30.84	39.27	54.00	14.73	Average
3	7005.170	35.90	10.49	35.40	32.32	43.31	54.00	10.69	Average
4	7250.000	36.00	10.74	35.50	31.23	42.47	54.00	11.53	Average
5	7750.000	36.55	11.23	35.70	31.91	43.99	54.00	10.01	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

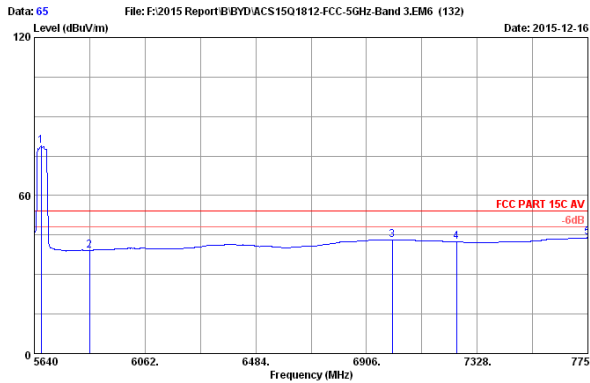

Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	70.68	78.76	54.00	-24.76	Average
2	5850.000	33.55	9.95	35.07	30.71	39.14	54.00	14.86	Average
3	7005.170	35.90	10.49	35.40	32.28	43.27	54.00	10.73	Average
4	7250.000	36.00	10.74	35.50	31.19	42.43	54.00	11.57	Average
5	7750.000	36.55	11.23	35.70	31.89	43.97	54.00	10.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

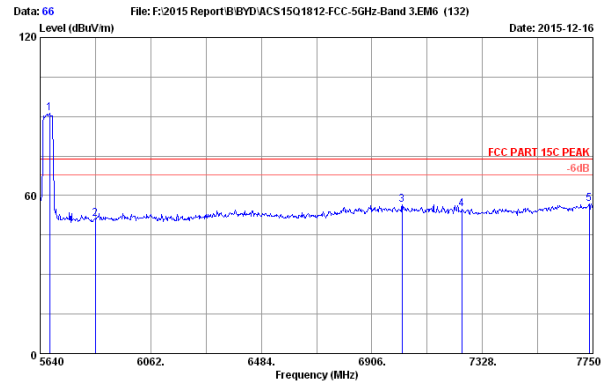

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5675.870	33.38	9.86	35.15	83.18	91.27	74.00	-17.27	Peak
2	5850.000	33.55	9.95	35.07	42.61	51.04	74.00	22.96	Peak
3	7022.050	35.91	10.51	35.41	45.43	56.44	74.00	17.56	Peak
4	7250.000	36.00	10.74	35.50	43.51	54.75	74.00	19.25	Peak
5	7735.230	36.52	11.22	35.69	44.75	56.80	74.00	17.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

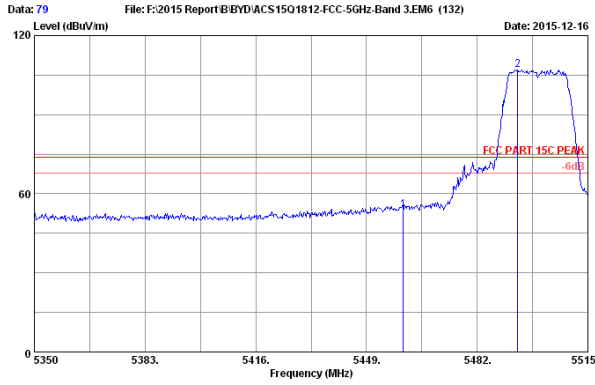

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11ac VHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	46.10	53.87	74.00	20.13	Peak
2	5494.045	33.21	9.78	35.22	99.23	107.00	74.00	-33.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

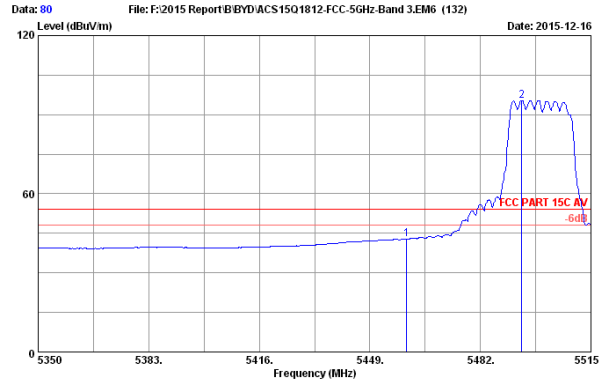

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11ac VHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	35.12	42.89	54.00	11.11	Average
2	5494.375	33.21	9.78	35.22	87.51	95.28	54.00	-41.28	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

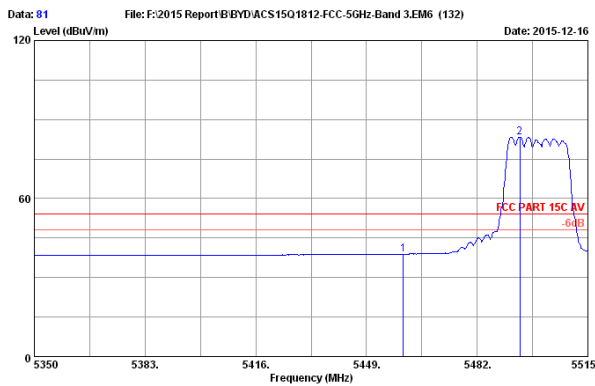

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11ac VHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	31.17	38.94	54.00	15.06	Average
2	5494.705	33.21	9.78	35.22	75.61	83.38	54.00	-29.38	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

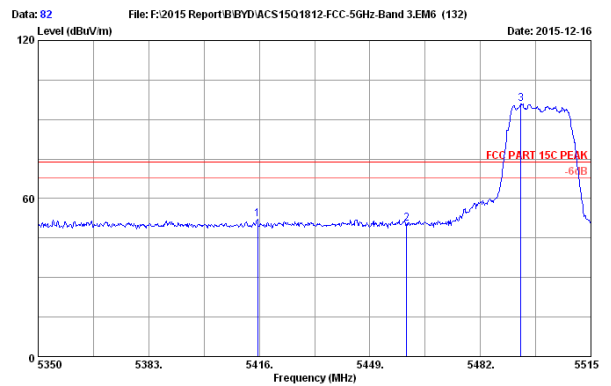

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IIEEE802.11ac VHT20 CH100 5500MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5415.505	33.34	9.74	35.26	44.26	52.08	74.00	21.92	Peak
2	5460.000	33.26	9.76	35.25	42.79	50.56	74.00	23.44	Peak
3	5494.045	33.21	9.78	35.22	88.23	96.00	74.00	-22.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

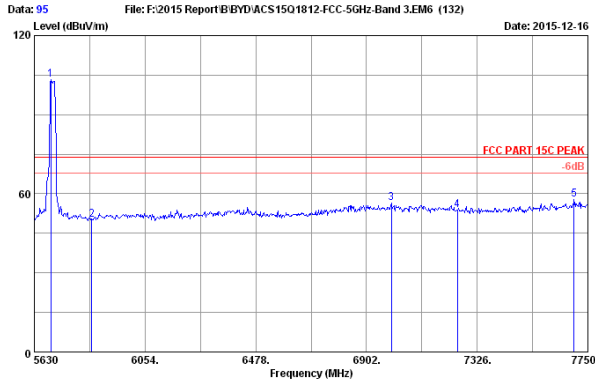


Data: 95 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5693.600	33.39	9.87	35.14	95.08	103.20	74.00	-29.20	Peak
2	5850.000	33.55	9.95	35.07	41.87	50.30	74.00	23.70	Peak
3	6997.400	35.89	10.49	35.40	45.49	56.47	74.00	17.53	Peak
4	7250.000	36.00	10.74	35.50	42.59	53.83	74.00	20.17	Peak
5	7697.000	36.45	11.18	35.68	45.88	57.83	74.00	16.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

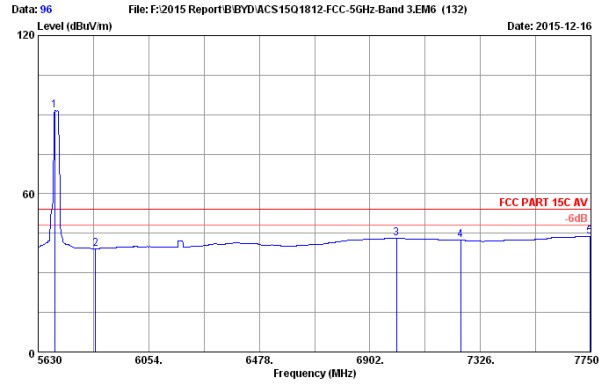


Data: 96 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5693.600	33.39	9.87	35.14	83.34	91.46	54.00	-37.46	Average
2	5850.000	33.55	9.95	35.07	30.71	39.14	54.00	14.86	Average
3	7003.760	35.90	10.49	35.40	32.17	43.16	54.00	10.84	Average
4	7250.000	36.00	10.74	35.50	31.09	42.33	54.00	11.67	Average
5	7745.760	36.54	11.22	35.70	31.76	43.82	54.00	10.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

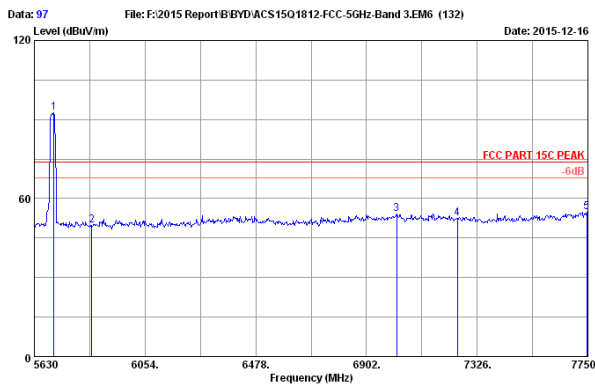


Data: 97 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5704.200	33.40	9.88	35.14	84.52	92.66	74.00	-18.66	Peak
2	5850.000	33.55	9.95	35.07	41.21	49.64	74.00	24.36	Peak
3	7018.600	35.91	10.51	35.41	43.17	54.18	74.00	19.82	Peak
4	7250.000	36.00	10.74	35.50	41.19	52.43	74.00	21.57	Peak
5	7745.760	36.54	11.22	35.70	42.90	54.96	74.00	19.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

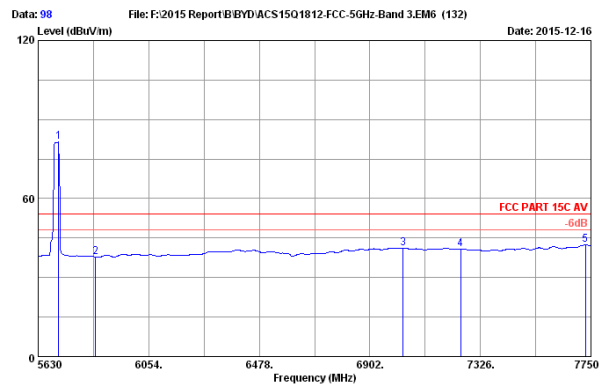


Data: 98 File: F:\2015 Report\B\BYD\ACS1501812-FCC-5GHz-Band 3.EM6 (132) Date: 2015-12-16

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5708.440	33.41	9.88	35.14	73.27	81.42	54.00	-27.42	Average
2	5850.000	33.55	9.95	35.07	29.37	37.80	54.00	16.20	Average
3	7029.200	35.91	10.51	35.41	30.27	41.28	54.00	12.72	Average
4	7250.000	36.00	10.74	35.50	29.59	40.83	54.00	13.17	Average
5	7728.800	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

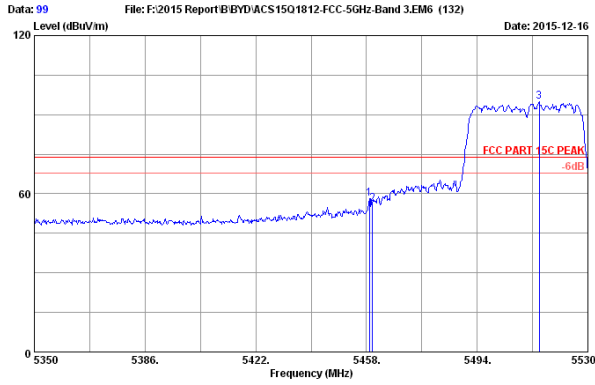

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	50.47	58.25	74.00	15.75	Peak
2	5460.000	33.26	9.76	35.25	48.44	56.21	74.00	17.79	Peak
3	5514.160	33.21	9.79	35.21	87.17	94.96	74.00	-20.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

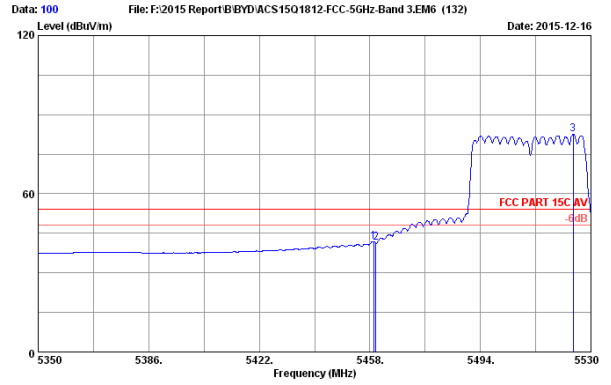

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.260	33.27	9.76	35.25	34.05	41.83	54.00	12.17	Average
2	5460.000	33.26	9.76	35.25	33.64	41.41	54.00	12.59	Average
3	5524.240	33.22	9.80	35.21	74.76	82.57	54.00	-28.57	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

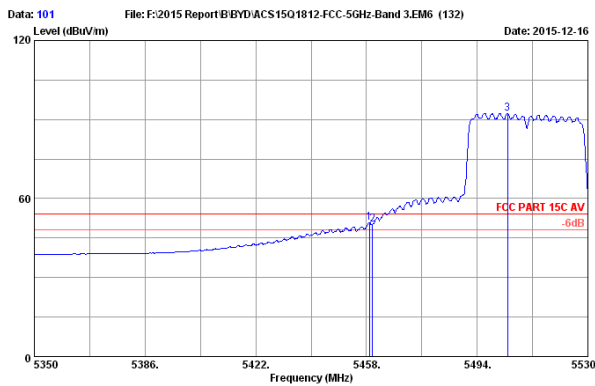

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	43.01	50.79	54.00	3.21	Average
2	5460.000	33.26	9.76	35.25	42.42	50.19	54.00	3.81	Average
3	5503.900	33.20	9.79	35.22	84.43	92.20	54.00	-38.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

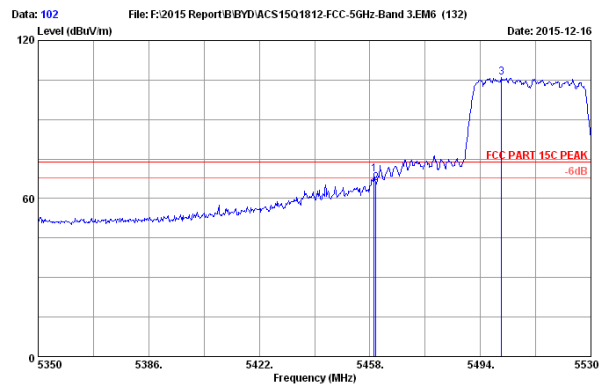

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.440	33.26	9.76	35.25	61.28	69.05	74.00	4.95	Peak
2	5460.000	33.26	9.76	35.25	58.06	65.83	74.00	8.17	Peak
3	5500.840	33.20	9.78	35.22	98.07	105.83	74.00	-31.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

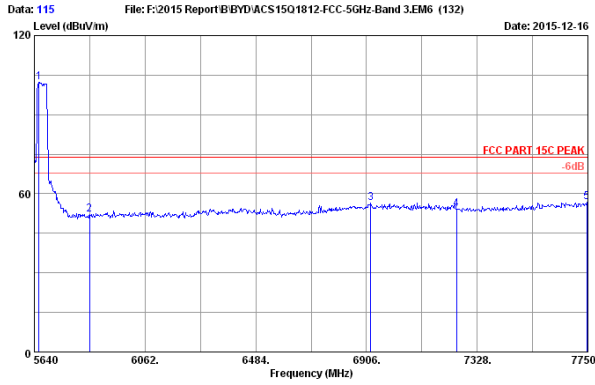

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5656.880	33.36	9.85	35.16	94.23	102.28	74.00	-28.28	Peak
2	5850.000	33.55	9.95	35.07	43.60	52.03	74.00	21.97	Peak
3	6920.880	35.75	10.46	35.37	45.64	56.48	74.00	17.52	Peak
4	7250.000	36.00	10.74	35.50	43.04	54.28	74.00	19.72	Peak
5	7745.780	36.54	11.22	35.70	44.62	56.68	74.00	17.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

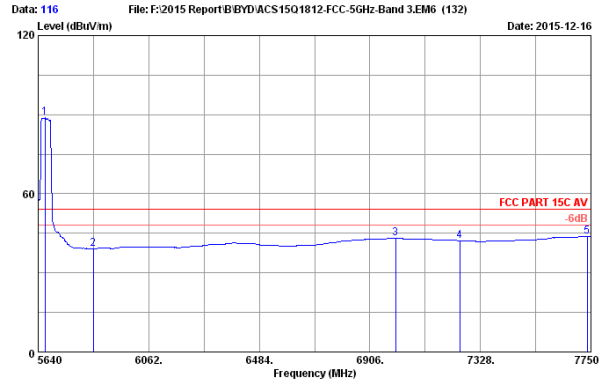

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	80.76	88.84	54.00	-34.84	Average
2	5850.000	33.55	9.95	35.07	30.63	39.06	54.00	14.94	Average
3	7005.170	35.90	10.49	35.40	32.10	43.09	54.00	10.91	Average
4	7250.000	36.00	10.74	35.50	31.01	42.25	54.00	11.75	Average
5	7735.230	36.52	11.22	35.69	31.71	43.76	54.00	10.24	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

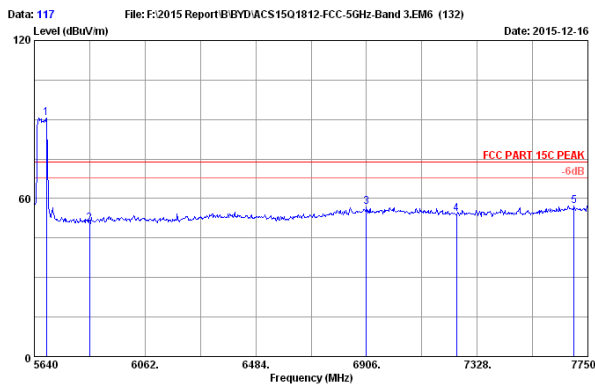

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5686.420	33.39	9.87	35.15	82.50	90.61	74.00	-16.61	Peak
2	5850.000	33.55	9.95	35.07	42.03	50.46	74.00	23.54	Peak
3	6906.000	35.71	10.45	35.36	45.90	56.70	74.00	17.30	Peak
4	7250.000	36.00	10.74	35.50	42.82	54.06	74.00	19.94	Peak
5	7697.250	36.46	11.18	35.68	45.22	57.18	74.00	16.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

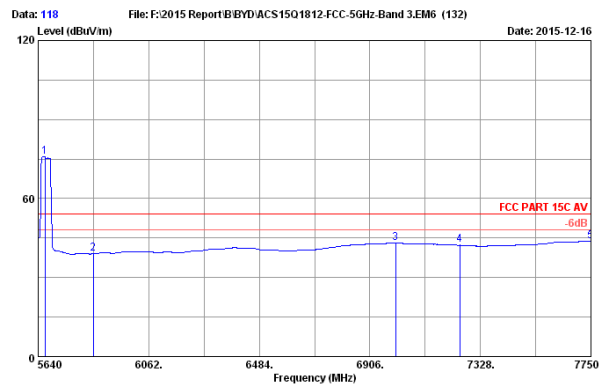

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5665.320	33.37	9.86	35.15	67.78	75.86	54.00	-21.86	Average
2	5850.000	33.55	9.95	35.07	30.56	38.99	54.00	15.01	Average
3	7005.170	35.90	10.49	35.40	32.12	43.11	54.00	10.89	Average
4	7250.000	36.00	10.74	35.50	31.05	42.29	54.00	11.71	Average
5	7750.000	36.55	11.23	35.70	31.70	43.78	54.00	10.22	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

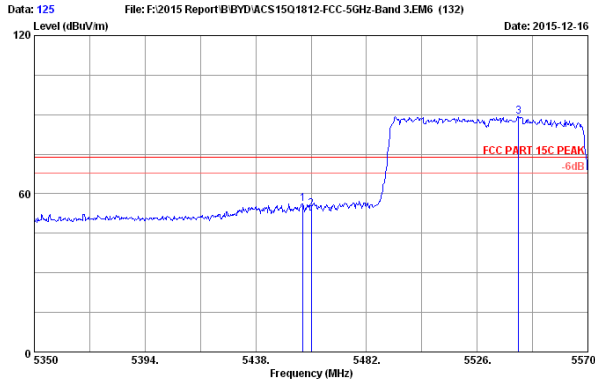

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5456.700	33.27	9.76	35.25	48.34	56.12	74.00	17.88	Peak
2	5460.000	33.26	9.76	35.25	46.26	54.03	74.00	19.97	Peak
3	5542.500	33.24	9.80	35.20	81.54	89.38	74.00	-15.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

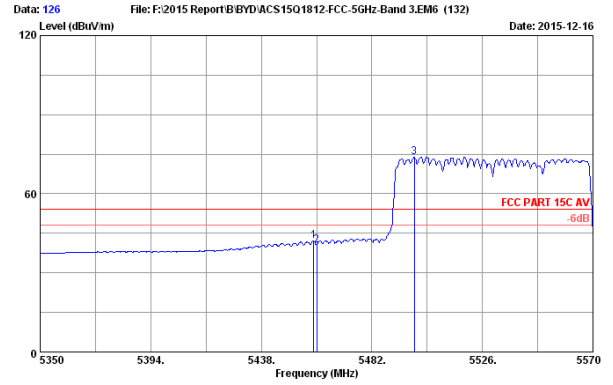

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	34.27	42.05	54.00	11.95	Average
2	5460.000	33.26	9.76	35.25	32.84	40.61	54.00	13.39	Average
3	5498.940	33.20	9.78	35.22	66.19	73.95	54.00	-19.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

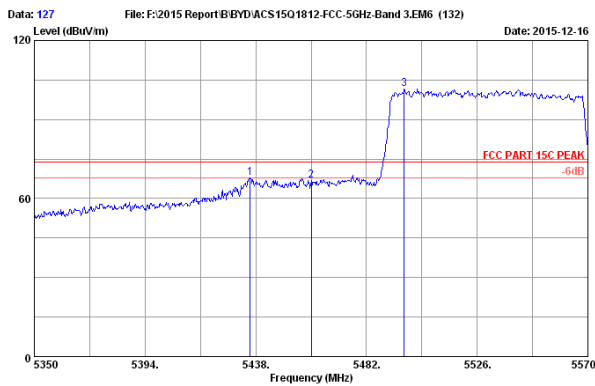

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5435.800	33.30	9.75	35.26	60.03	67.82	74.00	6.18	Peak
2	5460.000	33.26	9.76	35.25	58.95	66.72	74.00	7.28	Peak
3	5496.960	33.20	9.78	35.22	93.99	101.75	74.00	-27.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

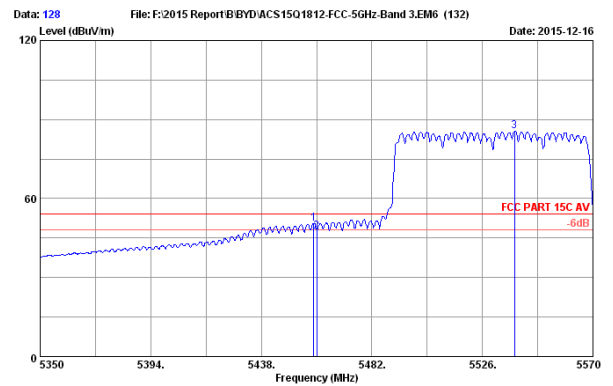

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.900	33.27	9.76	35.25	42.77	50.55	54.00	3.45	Average
2	5460.000	33.26	9.76	35.25	39.68	47.45	54.00	6.55	Average
3	5538.760	33.24	9.80	35.20	77.86	85.70	54.00	-31.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

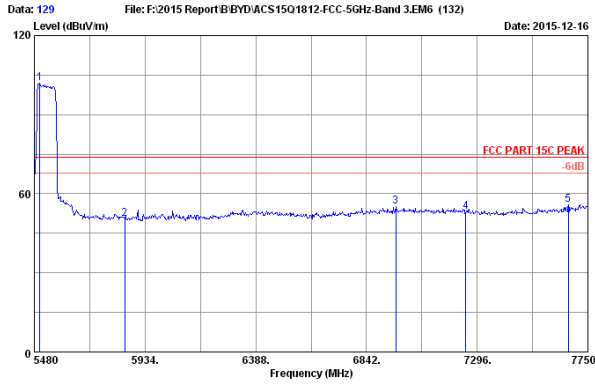

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5502.700	33.20	9.79	35.22	94.15	101.92	74.00	-27.92	Peak
2	5850.000	33.55	9.95	35.07	42.21	50.64	74.00	23.36	Peak
3	6962.310	35.82	10.47	35.38	44.34	55.25	74.00	18.75	Peak
4	7250.000	36.00	10.74	35.50	42.07	53.31	74.00	20.69	Peak
5	7670.550	36.41	11.15	35.67	43.91	55.80	74.00	18.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

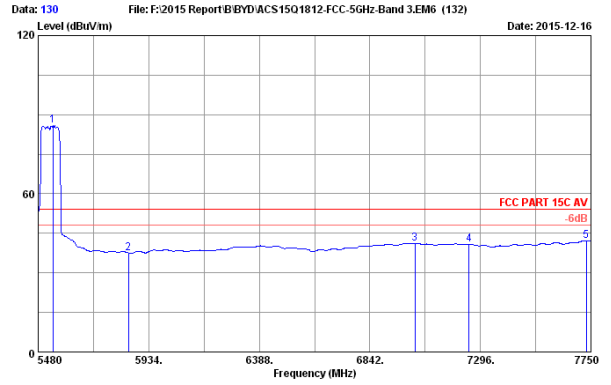

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5541.290	33.24	9.80	35.20	78.10	85.94	54.00	-31.94	Average
2	5850.000	33.55	9.95	35.07	29.16	37.59	54.00	16.41	Average
3	7028.140	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
4	7250.000	36.00	10.74	35.50	29.51	40.75	54.00	13.25	Average
5	7731.840	36.52	11.22	35.69	30.23	42.28	54.00	11.72	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

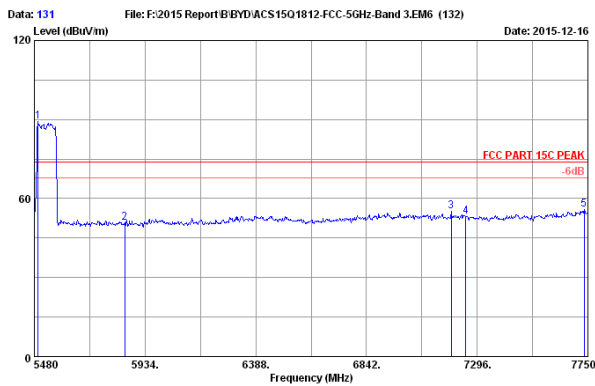

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5495.890	33.21	9.78	35.22	81.52	89.29	74.00	-15.29	Peak
2	5850.000	33.55	9.95	35.07	42.43	50.86	74.00	23.14	Peak
3	7189.310	35.98	10.67	35.48	44.09	55.26	74.00	18.74	Peak
4	7250.000	36.00	10.74	35.50	41.98	53.22	74.00	20.78	Peak
5	7734.110	36.52	11.22	35.69	43.93	55.98	74.00	18.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

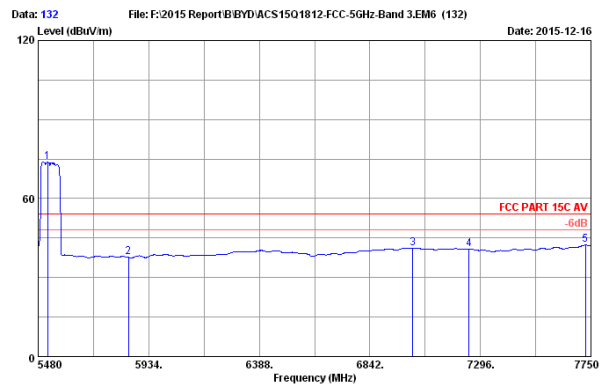


Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5518.590	33.22	9.79	35.21	66.08	73.88	54.00	-19.88	Average
2	5850.000	33.55	9.95	35.07	29.19	37.62	54.00	16.38	Average
3	7019.060	35.91	10.51	35.41	30.24	41.25	54.00	12.75	Average
4	7250.000	36.00	10.74	35.50	29.50	40.74	54.00	13.26	Average
5	7727.300	36.51	11.20	35.69	30.29	42.31	54.00	11.69	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5745-5825MHz Band:

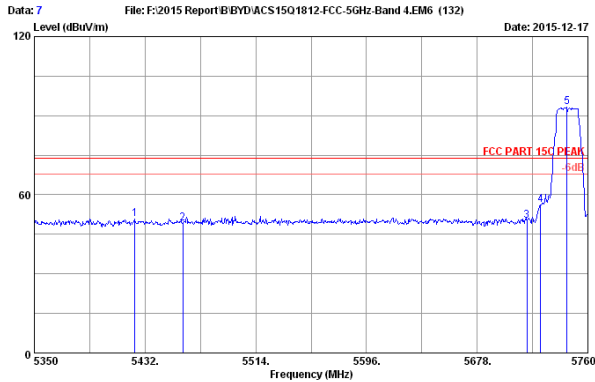

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5424.620	33.32	9.74	35.26	43.13	50.93	74.00	23.07	Peak
2	5460.000	33.26	9.76	35.25	41.31	49.08	74.00	24.92	Peak
3	5715.000	33.42	9.88	35.12	41.79	49.97	74.00	24.03	Peak
4	5725.000	33.42	9.89	35.12	47.85	56.04	74.00	17.96	Peak
5	5744.420	33.44	9.90	35.11	84.97	93.20	74.00	-19.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

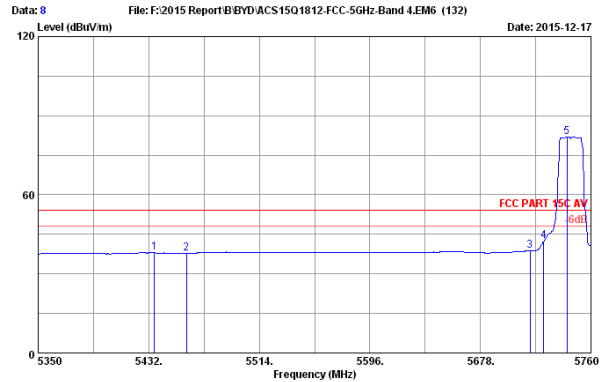

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5436.100	33.30	9.75	35.26	30.20	37.99	54.00	16.01	Average
2	5460.000	33.26	9.76	35.25	30.09	37.86	54.00	16.14	Average
3	5715.000	33.42	9.88	35.12	30.63	38.81	54.00	15.19	Average
4	5725.000	33.42	9.89	35.12	34.34	42.53	54.00	11.47	Average
5	5742.370	33.44	9.90	35.11	73.74	81.97	54.00	-27.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

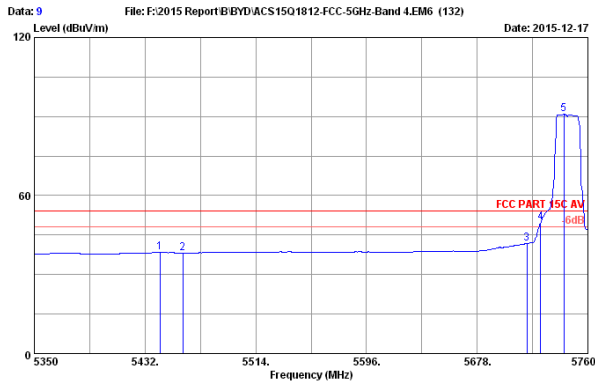

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5443.070	33.29	9.75	35.25	30.60	38.39	54.00	15.61	Average
2	5460.000	33.26	9.76	35.25	30.30	38.07	54.00	15.93	Average
3	5715.000	33.42	9.88	35.12	33.53	41.71	54.00	12.29	Average
4	5725.000	33.42	9.89	35.12	41.73	49.92	54.00	4.08	Average
5	5742.370	33.44	9.90	35.11	82.64	90.87	54.00	-36.87	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

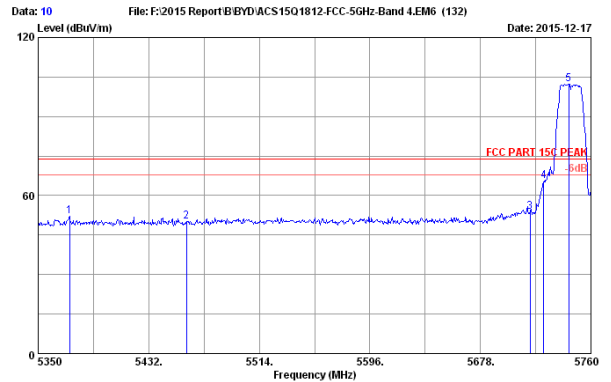

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 NCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-Li
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Loss factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5373.370	33.40	9.72	35.28	44.15	51.99	74.00	22.01	Peak
2	5460.000	33.26	9.76	35.25	42.31	50.08	74.00	23.92	Peak
3	5715.000	33.42	9.88	35.12	45.54	53.72	74.00	20.28	Peak
4	5725.000	33.42	9.89	35.12	57.27	65.46	74.00	8.54	Peak
5	5743.600	33.44	9.90	35.11	94.20	102.49	74.00	-28.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

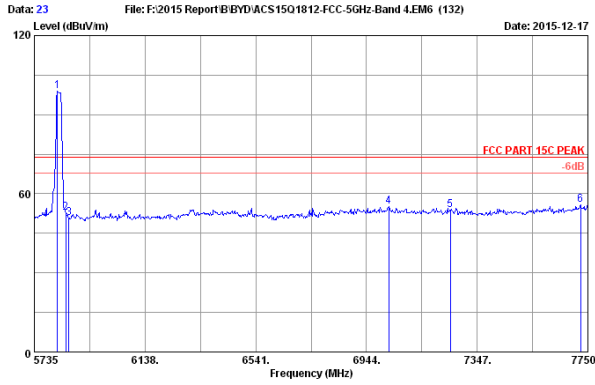

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.630	33.52	9.93	35.08	90.41	98.78	74.00	-24.78	Peak
2	5850.000	33.55	9.95	35.07	44.55	52.98	74.00	21.02	Peak
3	5860.000	33.56	9.95	35.07	42.24	50.68	74.00	23.32	Peak
4	7024.600	35.91	10.51	35.41	44.26	55.27	74.00	18.73	Peak
5	7250.000	36.00	10.74	35.50	42.56	53.80	74.00	20.20	Peak
6	7723.805	36.50	11.20	35.69	43.93	55.94	74.00	18.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

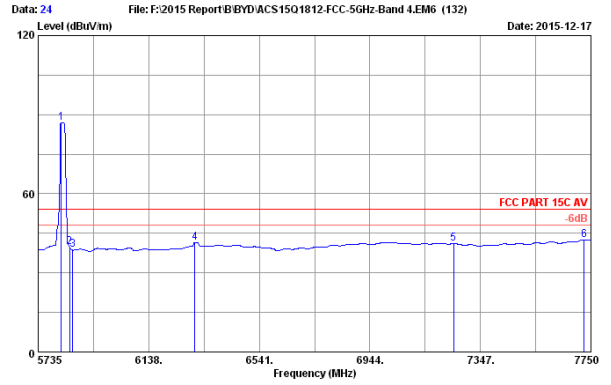

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.630	33.52	9.93	35.08	78.69	87.06	54.00	-33.06	Average
2	5850.000	33.55	9.95	35.07	31.35	39.78	54.00	14.22	Average
3	5860.000	33.56	9.95	35.07	30.38	38.82	54.00	15.18	Average
4	6205.245	34.43	10.16	35.12	32.06	41.53	54.00	12.47	Average
5	7250.000	36.00	10.74	35.50	29.75	40.99	54.00	13.01	Average
6	7725.820	36.51	11.20	35.69	30.56	42.58	54.00	11.42	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

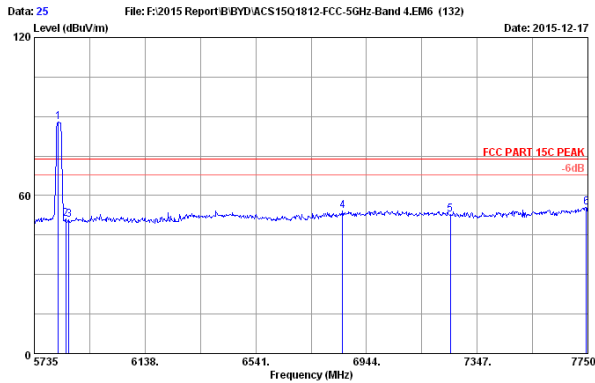

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.645	33.52	9.93	35.08	79.56	87.93	74.00	-13.93	Peak
2	5850.000	33.55	9.95	35.07	42.61	51.04	74.00	22.96	Peak
3	5860.000	33.56	9.95	35.07	42.44	50.88	74.00	23.12	Peak
4	6857.355	35.61	10.42	35.34	43.47	54.16	74.00	19.84	Peak
5	7250.000	36.00	10.74	35.50	41.42	52.66	74.00	21.34	Peak
6	7743.955	36.54	11.22	35.70	43.38	55.44	74.00	18.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

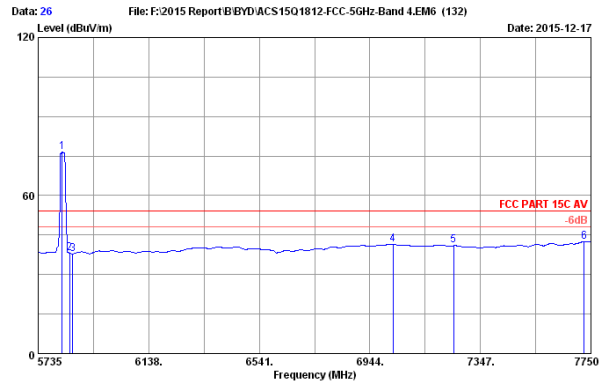

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5821.645	33.52	9.93	35.08	68.06	76.43	54.00	-22.43	Average
2	5850.000	33.55	9.95	35.07	29.77	38.20	54.00	15.80	Average
3	5860.000	33.56	9.95	35.07	29.47	37.91	54.00	16.09	Average
4	7028.630	35.91	10.51	35.41	30.36	41.37	54.00	12.63	Average
5	7250.000	36.00	10.74	35.50	29.71	40.95	54.00	13.05	Average
6	7725.820	36.51	11.20	35.69	30.48	42.50	54.00	11.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

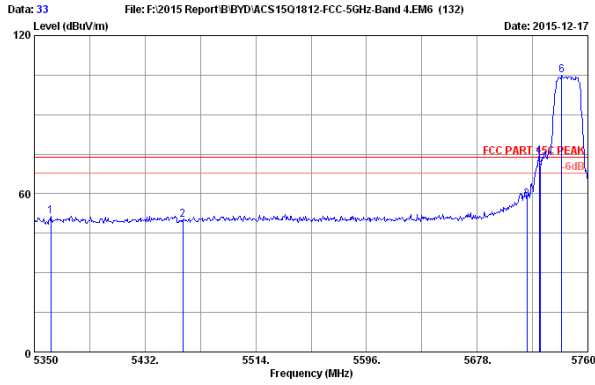

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5362.300	33.42	9.72	35.25	43.61	51.46	74.00	22.54	Peak
2	5460.000	33.26	9.76	35.25	42.36	50.13	74.00	23.87	Peak
3	5715.000	33.42	9.88	35.12	49.59	57.77	74.00	16.23	Peak
4	5723.920	33.42	9.89	35.12	66.17	74.36	74.00	-0.36	Peak
5	5725.000	33.42	9.89	35.12	62.54	70.73	74.00	3.27	Peak
6	5740.730	33.44	9.90	35.11	96.74	104.97	74.00	-30.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

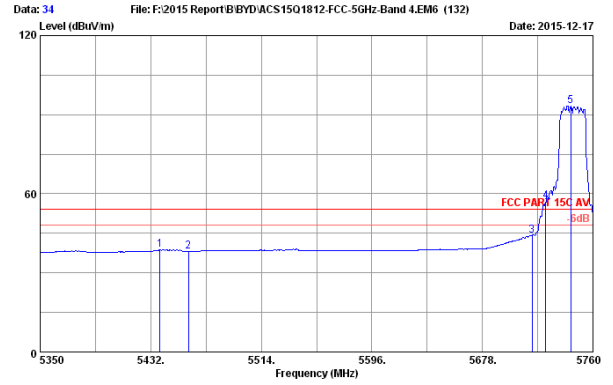

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5438.970	33.30	9.75	35.25	30.98	38.78	54.00	15.22	Average
2	5460.000	33.26	9.76	35.25	30.33	38.10	54.00	15.90	Average
3	5715.000	33.42	9.88	35.12	36.07	44.25	54.00	9.75	Average
4	5725.000	33.42	9.89	35.12	49.66	57.25	54.00	-3.25	Average
5	5743.600	33.44	9.90	35.11	85.02	93.25	54.00	-39.25	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

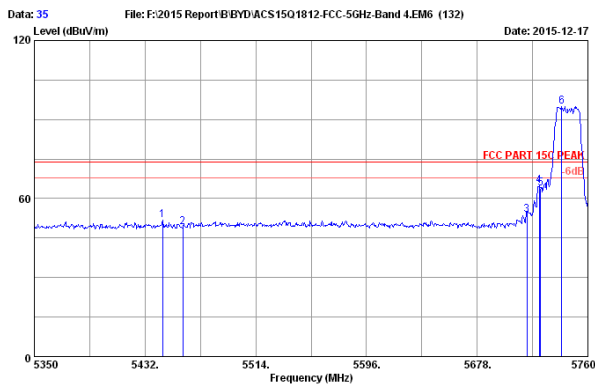

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5445.120	33.29	9.75	35.25	44.04	51.83	74.00	22.17	Peak
2	5460.000	33.26	9.76	35.25	41.32	49.09	74.00	24.91	Peak
3	5715.000	33.42	9.88	35.12	45.55	53.73	74.00	20.27	Peak
4	5723.920	33.42	9.89	35.12	56.49	64.68	74.00	9.32	Peak
5	5725.000	33.42	9.89	35.12	55.78	63.97	74.00	10.03	Peak
6	5740.730	33.44	9.90	35.11	86.72	94.95	74.00	-20.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

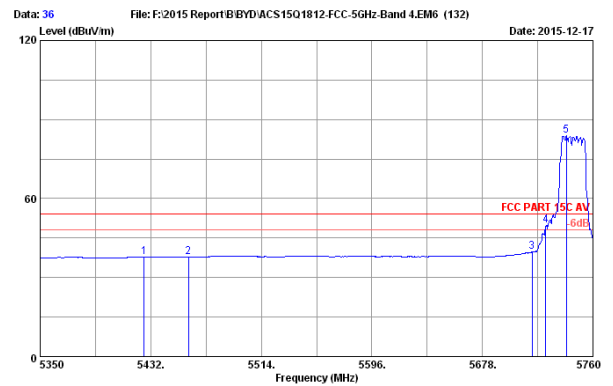

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.080	33.32	9.74	35.26	29.99	37.79	54.00	16.21	Average
2	5460.000	33.26	9.76	35.25	29.85	37.62	54.00	16.38	Average
3	5715.000	33.42	9.88	35.12	31.56	39.74	54.00	14.26	Average
4	5725.000	33.42	9.89	35.12	41.70	49.89	54.00	4.11	Average
5	5740.320	33.44	9.90	35.11	75.62	83.85	54.00	-29.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

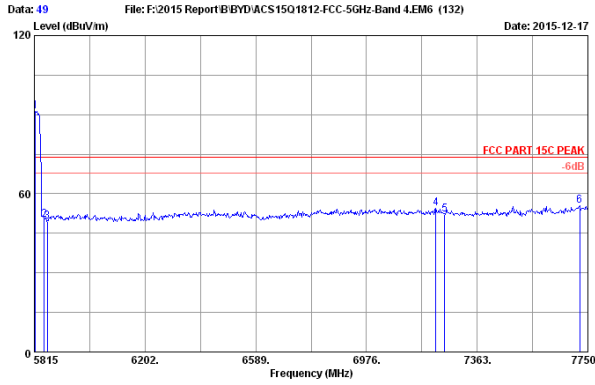

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5818.870	33.52	9.93	35.08	82.94	91.31	74.00	-17.31	Peak
2	5850.000	33.55	9.95	35.07	41.86	50.29	74.00	23.71	Peak
3	5860.000	33.56	9.95	35.07	41.16	49.60	74.00	24.40	Peak
4	7217.875	35.99	10.70	35.49	43.22	54.42	74.00	19.58	Peak
5	7250.000	36.00	10.74	35.50	40.97	52.21	74.00	21.79	Peak
6	7720.975	36.50	11.20	35.69	43.63	55.64	74.00	18.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

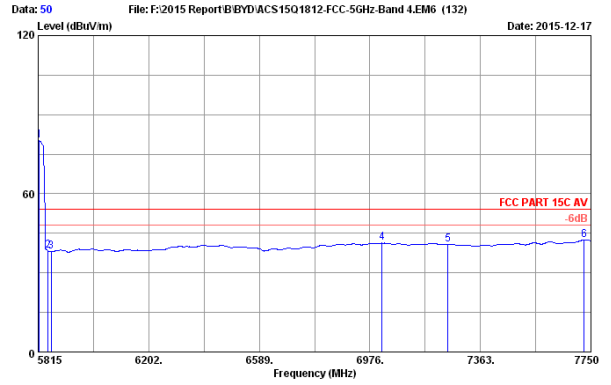

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5818.870	33.52	9.93	35.08	71.75	80.12	54.00	-26.12	Average
2	5850.000	33.55	9.95	35.07	29.88	38.31	54.00	15.69	Average
3	5860.000	33.56	9.95	35.07	29.88	38.02	54.00	15.98	Average
4	7018.570	35.91	10.51	35.41	30.28	41.29	54.00	12.71	Average
5	7250.000	36.00	10.74	35.50	29.65	40.89	54.00	13.11	Average
6	7726.780	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

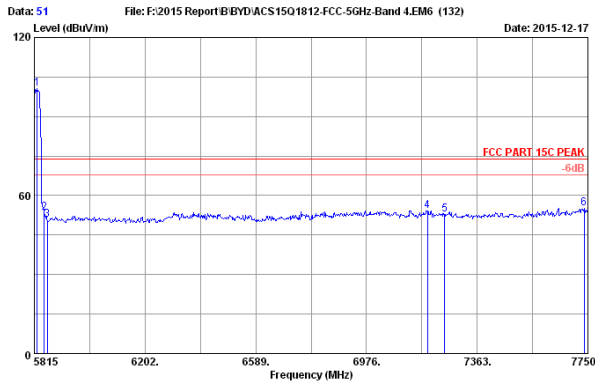

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5824.675	33.52	9.93	35.08	92.15	100.52	74.00	-26.52	Peak
2	5850.000	33.55	9.95	35.07	45.05	53.48	74.00	20.52	Peak
3	5860.000	33.56	9.95	35.07	42.47	50.91	74.00	23.09	Peak
4	7188.850	35.98	10.67	35.48	43.12	54.29	74.00	19.71	Peak
5	7250.000	36.00	10.74	35.50	41.50	52.74	74.00	21.26	Peak
6	7736.455	36.53	11.22	35.69	43.09	55.15	74.00	18.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

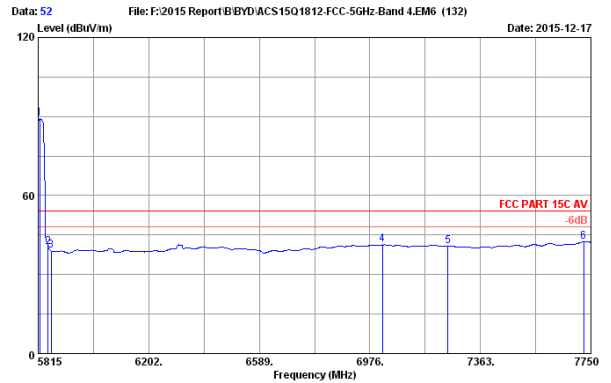

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5820.805	33.52	9.93	35.08	80.73	89.10	54.00	-35.10	Average
2	5850.000	33.55	9.95	35.07	32.10	40.53	54.00	13.47	Average
3	5860.000	33.56	9.95	35.07	30.65	39.09	54.00	14.91	Average
4	7020.505	35.91	10.51	35.41	30.29	41.30	54.00	12.70	Average
5	7250.000	36.00	10.74	35.50	29.66	40.90	54.00	13.10	Average
6	7724.845	36.50	11.20	35.69	30.41	42.42	54.00	11.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

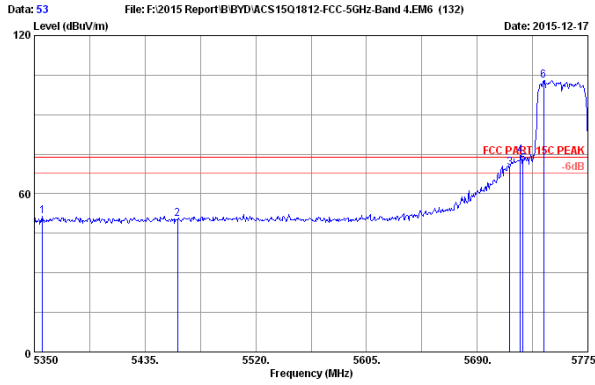

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5356.375	33.43	9.71	35.29	43.56	51.41	74.00	22.59	Peak
2	5460.000	33.26	9.76	35.25	42.72	50.49	74.00	23.51	Peak
3	5715.000	33.42	9.88	35.12	61.74	69.92	74.00	4.08	Peak
4	5723.150	33.42	9.89	35.12	66.27	74.46	74.00	-0.46	Peak
5	5725.000	33.42	9.89	35.12	63.08	71.27	74.00	2.73	Peak
6	5741.000	33.44	9.90	35.11	94.76	102.99	74.00	-28.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

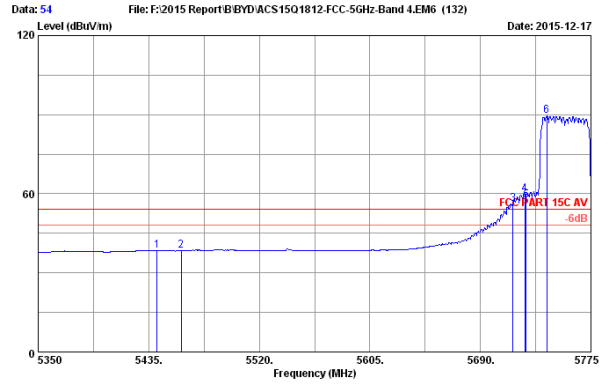

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5441.375	33.29	9.75	35.25	30.79	38.58	54.00	15.42	Average
2	5460.000	33.26	9.76	35.25	30.67	38.44	54.00	15.56	Average
3	5715.000	33.42	9.88	35.12	47.88	56.06	54.00	-2.06	Average
4	5724.000	33.42	9.89	35.12	51.66	59.85	54.00	-5.85	Average
5	5725.000	33.42	9.89	35.12	49.24	57.43	54.00	-3.43	Average
6	5741.000	33.44	9.90	35.11	81.20	89.43	54.00	-35.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

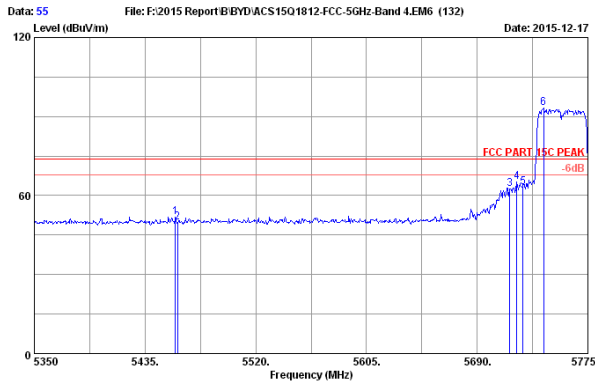

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5458.375	33.27	9.76	35.25	44.03	51.81	74.00	22.19	Peak
2	5460.000	33.26	9.76	35.25	42.11	49.88	74.00	24.12	Peak
3	5715.000	33.42	9.88	35.12	54.27	62.45	74.00	11.55	Peak
4	5720.600	33.42	9.89	35.12	56.98	65.17	74.00	8.83	Peak
5	5725.000	33.42	9.89	35.12	55.07	63.26	74.00	10.74	Peak
6	5741.000	33.44	9.90	35.11	84.89	93.12	74.00	-19.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

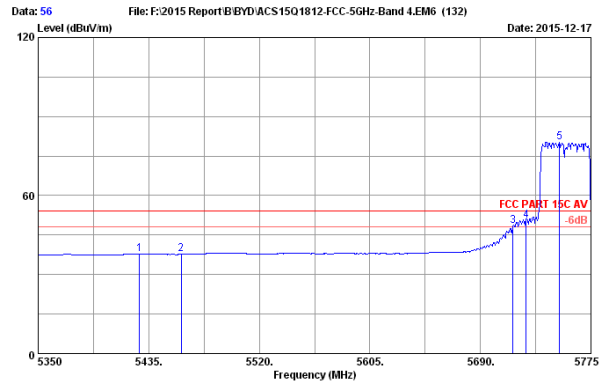

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.775	33.32	9.74	35.26	30.00	37.80	54.00	16.20	Average
2	5460.000	33.26	9.76	35.25	29.89	37.66	54.00	16.34	Average
3	5715.000	33.42	9.88	35.12	40.21	48.39	54.00	5.61	Average
4	5725.000	33.42	9.89	35.12	42.16	50.35	54.00	3.65	Average
5	5750.775	33.45	9.90	35.11	71.97	80.21	54.00	-26.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

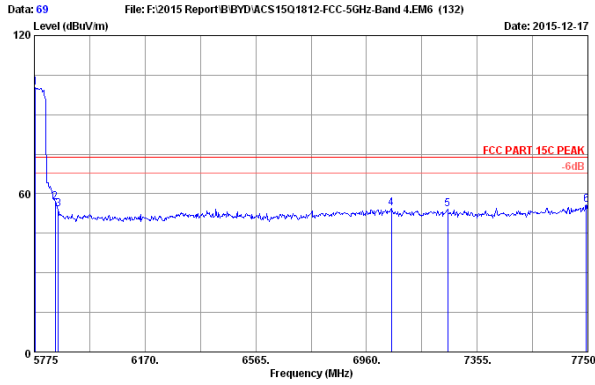

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5778.950	33.48	9.91	35.10	91.95	100.24	74.00	-26.24	Peak
2	5850.000	33.55	9.95	35.07	48.47	56.90	74.00	17.10	Peak
3	5860.000	33.56	9.95	35.07	45.60	54.04	74.00	19.96	Peak
4	7048.875	35.92	10.54	35.42	43.56	54.60	74.00	19.40	Peak
5	7250.000	36.00	10.74	35.50	42.77	54.01	74.00	19.99	Peak
6	7744.075	36.54	11.22	35.70	43.81	55.87	74.00	18.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

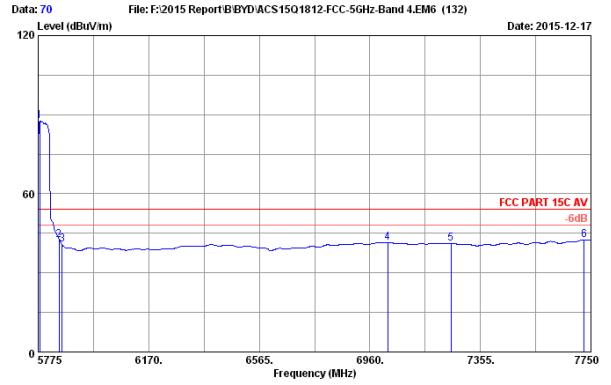

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5780.925	33.48	9.91	35.10	79.36	87.65	54.00	-33.65	Average
2	5850.000	33.55	9.95	35.07	33.92	42.35	54.00	11.65	Average
3	5860.000	33.56	9.95	35.07	32.47	40.91	54.00	13.09	Average
4	7023.200	35.91	10.51	35.41	30.43	41.44	54.00	12.56	Average
5	7250.000	36.00	10.74	35.50	29.84	41.08	54.00	12.92	Average
6	7726.300	36.51	11.20	35.69	30.57	42.59	54.00	11.41	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

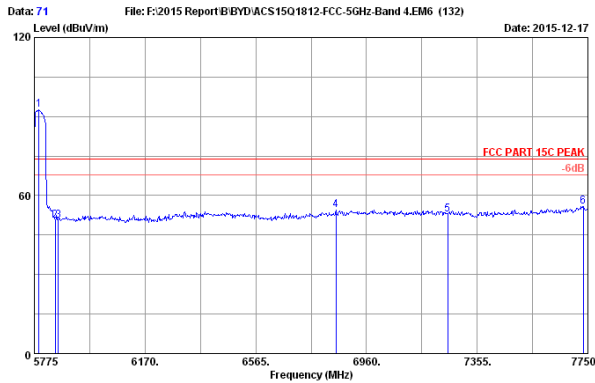

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	84.20	92.52	74.00	-18.52	Peak
2	5850.000	33.55	9.95	35.07	42.03	50.46	74.00	23.54	Peak
3	5860.000	33.56	9.95	35.07	42.00	50.44	74.00	23.56	Peak
4	6851.375	35.60	10.42	35.34	43.75	54.43	74.00	19.57	Peak
5	7250.000	36.00	10.74	35.50	41.61	52.85	74.00	21.15	Peak
6	7734.200	36.52	11.22	35.69	43.87	55.92	74.00	18.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

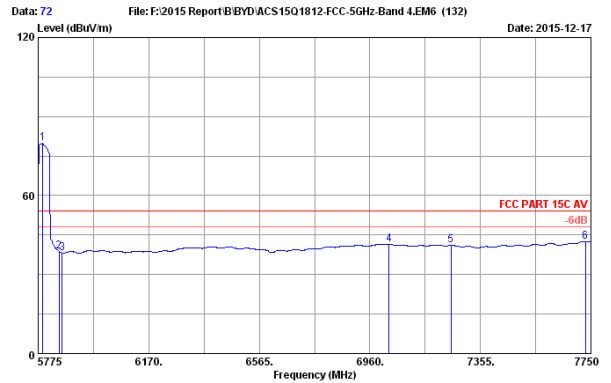

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	71.42	79.74	54.00	-25.74	Average
2	5850.000	33.55	9.95	35.07	30.25	38.68	54.00	15.32	Average
3	5860.000	33.56	9.95	35.07	29.78	38.22	54.00	15.78	Average
4	7029.125	35.91	10.51	35.41	30.40	41.41	54.00	12.59	Average
5	7250.000	36.00	10.74	35.50	29.79	41.03	54.00	12.97	Average
6	7730.250	36.51	11.22	35.69	30.48	42.52	54.00	11.48	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

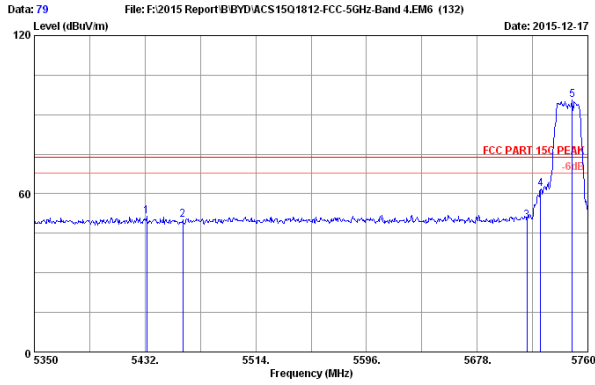

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5433.230	33.31	9.75	35.26	43.62	51.42	74.00	22.58	Peak
2	5460.000	33.26	9.76	35.25	42.37	50.14	74.00	23.86	Peak
3	5715.000	33.42	9.88	35.12	41.70	49.88	74.00	24.12	Peak
4	5725.000	33.42	9.89	35.12	53.81	62.00	74.00	12.00	Peak
5	5748.520	33.45	9.90	35.11	87.40	95.64	74.00	-21.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

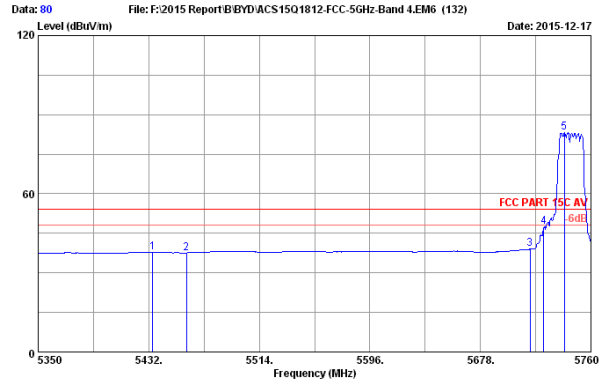


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5434.870	33.30	9.75	35.26	29.99	37.78	54.00	16.22	Average
2	5460.000	33.26	9.76	35.25	29.83	37.60	54.00	16.40	Average
3	5715.000	33.42	9.88	35.12	30.83	39.01	54.00	14.99	Average
4	5725.000	33.42	9.89	35.12	39.18	47.37	54.00	6.63	Average
5	5740.320	33.44	9.90	35.11	75.11	83.34	54.00	-29.34	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

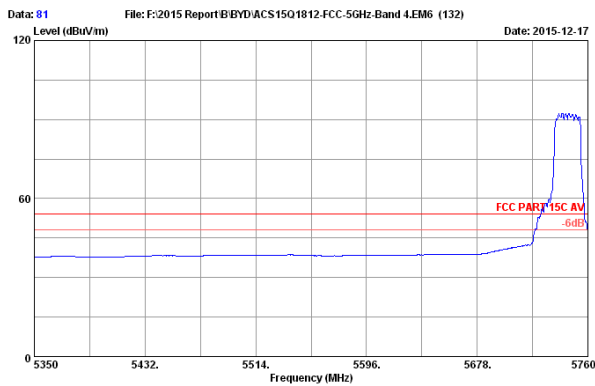


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

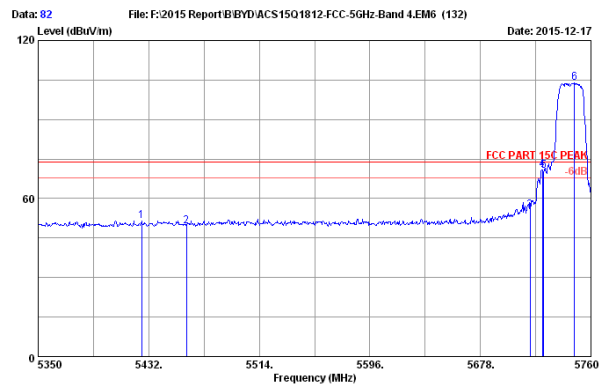

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 CH149 5745MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5426.670	33.32	9.74	35.26	43.72	51.52	74.00	22.48	Peak
2	5460.000	33.26	9.76	35.25	41.77	49.54	74.00	24.46	Peak
3	5715.000	33.42	9.88	35.12	47.27	55.45	74.00	18.55	Peak
4	5723.920	33.42	9.89	35.12	62.79	70.98	74.00	3.02	Peak
5	5725.000	33.42	9.89	35.12	62.32	70.51	74.00	3.49	Peak
6	5747.700	33.45	9.90	35.11	95.56	103.80	74.00	-29.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

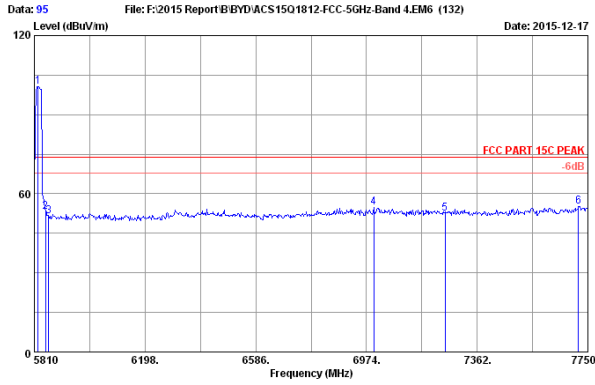

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	92.30	100.67	74.00	-26.67	Peak
2	5850.000	33.55	9.95	35.07	44.67	53.10	74.00	20.90	Peak
3	5860.000	33.56	9.95	35.07	42.91	51.35	74.00	22.65	Peak
4	6999.220	35.90	10.49	35.40	43.94	54.93	74.00	19.07	Peak
5	7250.000	36.00	10.74	35.50	41.30	52.54	74.00	21.46	Peak
6	7717.020	36.49	11.20	35.69	43.14	55.14	74.00	18.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

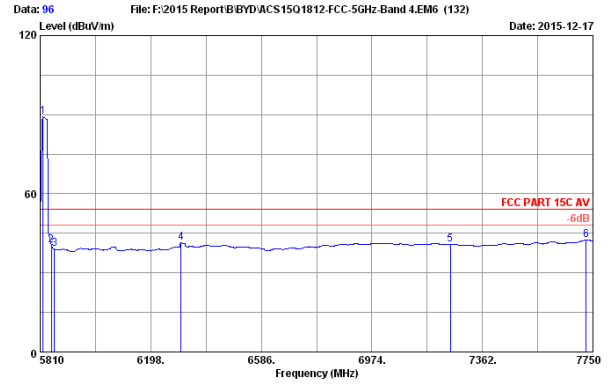

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	80.71	89.08	54.00	-35.08	Average
2	5850.000	33.55	9.95	35.07	31.87	40.30	54.00	13.70	Average
3	5860.000	33.56	9.95	35.07	30.55	38.99	54.00	15.01	Average
4	6304.700	34.43	10.16	35.12	31.83	41.30	54.00	12.70	Average
5	7250.000	36.00	10.74	35.50	29.65	40.89	54.00	13.11	Average
6	7726.720	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

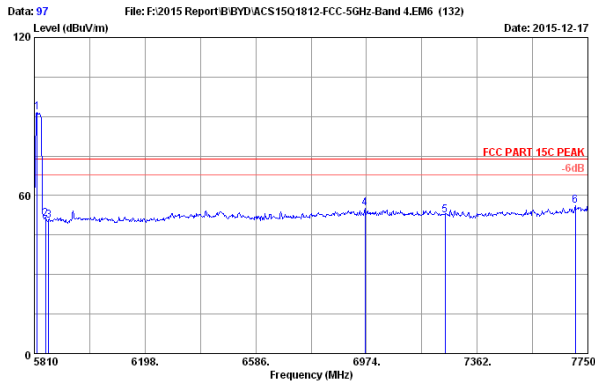

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	83.17	91.54	74.00	-17.54	Peak
2	5850.000	33.55	9.95	35.07	42.73	51.16	74.00	22.84	Peak
3	5860.000	33.56	9.95	35.07	42.06	50.50	74.00	23.50	Peak
4	6988.180	35.84	10.47	35.39	44.30	55.22	74.00	18.78	Peak
5	7250.000	36.00	10.74	35.50	41.24	52.48	74.00	21.52	Peak
6	7705.380	36.47	11.18	35.68	44.05	56.02	74.00	17.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

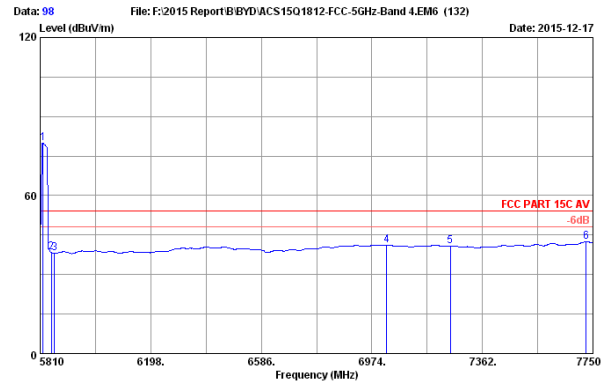

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	71.59	79.96	54.00	-25.96	Average
2	5850.000	33.55	9.95	35.07	29.85	38.28	54.00	15.72	Average
3	5860.000	33.56	9.95	35.07	29.54	37.98	54.00	16.02	Average
4	7026.380	35.91	10.51	35.41	30.24	41.25	54.00	12.75	Average
5	7250.000	36.00	10.74	35.50	29.67	40.91	54.00	13.09	Average
6	7726.720	36.51	11.20	35.69	30.37	42.39	54.00	11.61	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

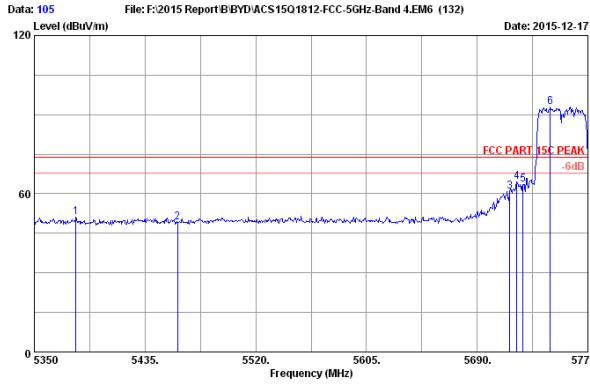

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5381.875	33.39	9.73	35.28	43.44	51.28	74.00	22.72	Peak
2	5460.000	33.26	9.76	35.25	41.32	49.09	74.00	24.91	Peak
3	5715.000	33.42	9.88	35.12	52.58	60.76	74.00	13.24	Peak
4	5720.600	33.42	9.89	35.12	56.18	64.37	74.00	9.63	Peak
5	5725.000	33.42	9.89	35.12	55.42	63.61	74.00	10.39	Peak
6	5746.100	33.45	9.90	35.11	84.78	93.02	74.00	-19.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

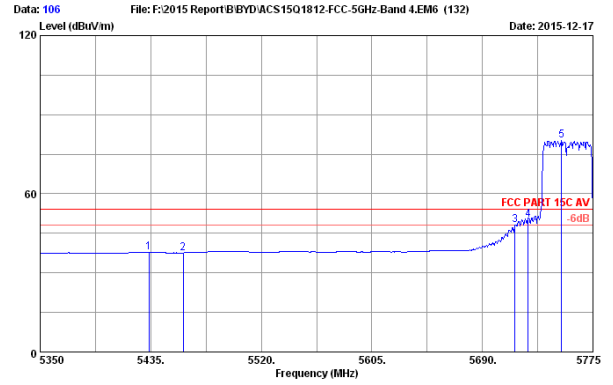

Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5433.725	33.31	9.75	35.26	29.95	37.75	54.00	16.25	Average
2	5460.000	33.26	9.76	35.25	29.83	37.60	54.00	16.40	Average
3	5715.000	33.42	9.88	35.12	39.84	48.02	54.00	5.98	Average
4	5725.000	33.42	9.89	35.12	41.78	49.97	54.00	4.03	Average
5	5750.775	33.45	9.90	35.11	71.83	80.07	54.00	-26.07	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

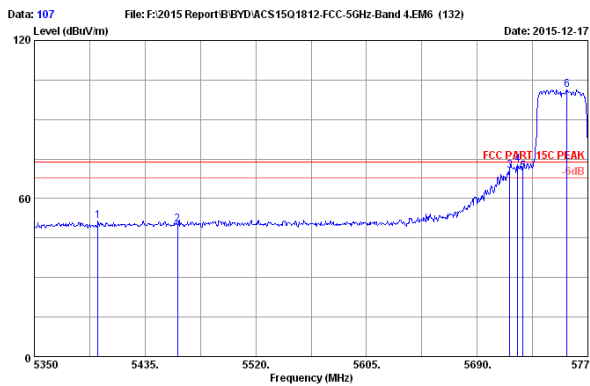

Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5398.875	33.36	9.74	35.27	43.57	51.40	74.00	22.60	Peak
2	5460.000	33.26	9.76	35.25	42.40	50.17	74.00	23.83	Peak
3	5715.000	33.42	9.88	35.12	62.28	70.46	74.00	3.54	Peak
4	5721.025	33.42	9.89	35.12	64.79	72.98	74.00	1.02	Peak
5	5725.000	33.42	9.89	35.12	61.92	70.11	74.00	3.89	Peak
6	5758.850	33.46	9.91	35.11	93.14	101.40	74.00	-27.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

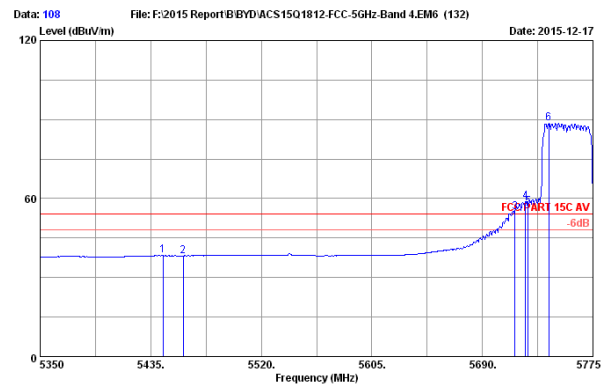

Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5444.350	33.29	9.75	35.25	30.55	38.34	54.00	15.66	Average
2	5460.000	33.26	9.76	35.25	30.43	38.20	54.00	15.80	Average
3	5715.000	33.42	9.88	35.12	46.69	54.87	54.00	-0.87	Average
4	5723.150	33.42	9.89	35.12	50.75	58.94	54.00	-4.94	Average
5	5725.000	33.42	9.89	35.12	48.55	56.74	54.00	-2.74	Average
6	5741.000	33.44	9.90	35.11	80.27	88.50	54.00	-34.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

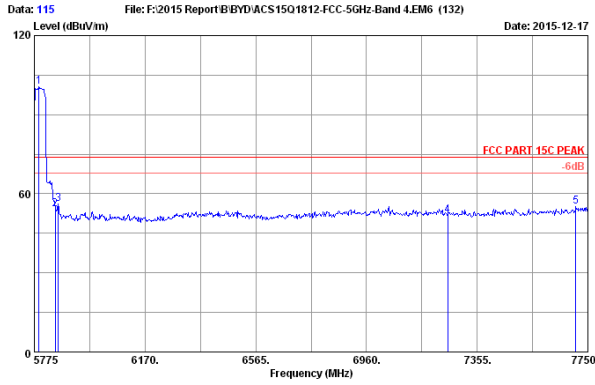

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.800	33.49	9.92	35.09	92.34	100.66	74.00	-26.66	Peak
2	5850.000	33.55	9.95	35.07	45.84	54.27	74.00	19.73	Peak
3	5860.000	33.56	9.95	35.07	47.70	56.14	74.00	17.86	Peak
4	7250.000	36.00	10.74	35.50	40.52	51.76	74.00	22.24	Peak
5	7706.550	36.47	11.18	35.68	43.11	55.08	74.00	18.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

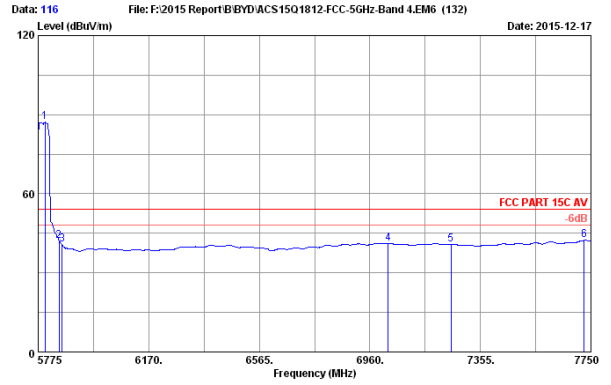

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5798.700	33.50	9.92	35.09	79.00	87.33	54.00	-33.33	Average
2	5850.000	33.55	9.95	35.07	33.71	42.14	54.00	11.86	Average
3	5860.000	33.56	9.95	35.07	32.25	40.69	54.00	13.31	Average
4	7255.175	35.91	10.51	35.41	30.18	41.19	54.00	12.81	Average
5	7250.000	36.00	10.74	35.50	29.59	40.83	54.00	13.17	Average
6	7726.300	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

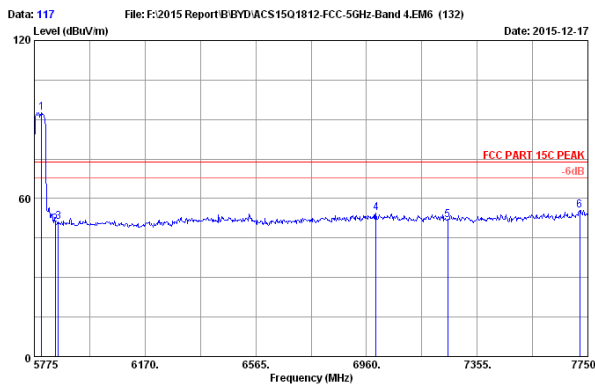

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5800.675	33.50	9.92	35.09	84.38	92.71	74.00	-18.71	Peak
2	5850.000	33.55	9.95	35.07	41.70	50.13	74.00	23.87	Peak
3	5860.000	33.56	9.95	35.07	42.60	51.04	74.00	22.96	Peak
4	6993.575	35.89	10.49	35.40	43.54	54.52	74.00	19.48	Peak
5	7250.000	36.00	10.74	35.50	40.45	51.69	74.00	22.31	Peak
6	7720.375	36.50	11.20	35.69	43.61	55.62	74.00	18.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

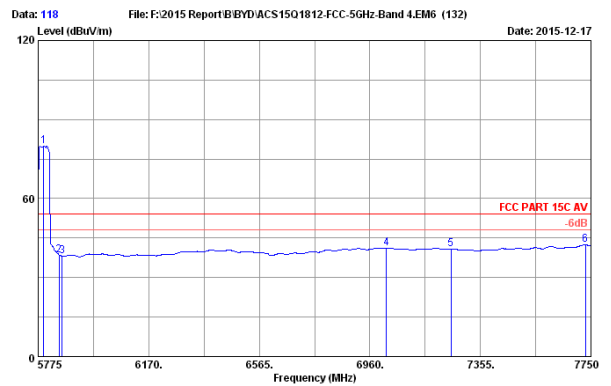

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 CH159 5795MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5794.750	33.49	9.92	35.09	71.69	80.01	54.00	-26.01	Average
2	5850.000	33.55	9.95	35.07	30.10	38.53	54.00	15.47	Average
3	5860.000	33.56	9.95	35.07	29.65	38.09	54.00	15.91	Average
4	7019.250	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.60	40.84	54.00	13.16	Average
6	7730.250	36.51	11.22	35.69	30.29	42.33	54.00	11.67	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

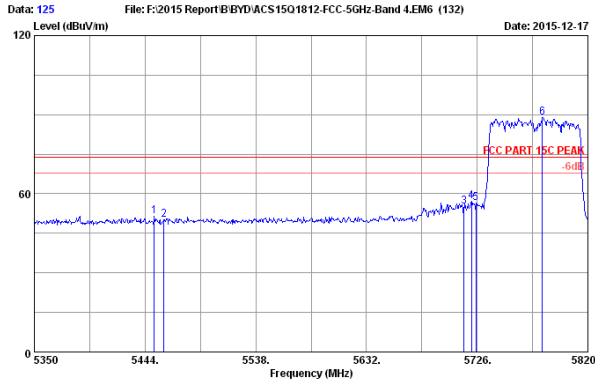

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5451.990	33.28	9.76	35.25	43.84	51.63	74.00	22.37	Peak
2	5460.000	33.26	9.76	35.25	42.21	49.98	74.00	24.02	Peak
3	5715.000	33.42	9.88	35.12	47.12	55.30	74.00	18.70	Peak
4	5721.300	33.42	9.89	35.12	48.90	57.09	74.00	16.91	Peak
5	5725.000	33.42	9.89	35.12	48.16	56.35	74.00	17.65	Peak
6	5781.460	33.48	9.91	35.10	80.68	88.97	74.00	-14.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

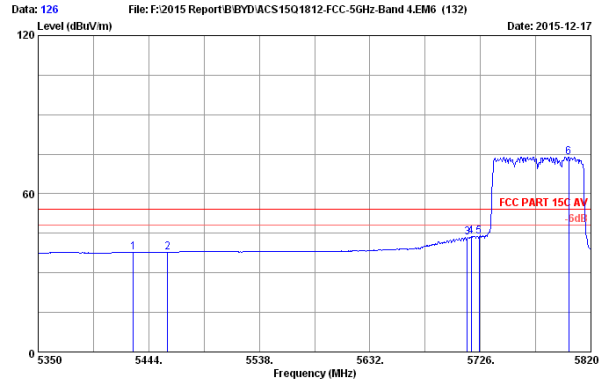

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5430.840	33.31	9.75	35.26	30.12	37.92	54.00	16.08	Average
2	5460.000	33.26	9.76	35.25	29.96	37.73	54.00	16.27	Average
3	5715.000	33.42	9.88	35.12	35.12	43.30	54.00	10.70	Average
4	5718.010	33.42	9.89	35.12	35.75	43.94	54.00	10.06	Average
5	5725.000	33.42	9.89	35.12	35.64	43.83	54.00	10.17	Average
6	5801.200	33.50	9.92	35.09	65.71	74.04	54.00	-20.04	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

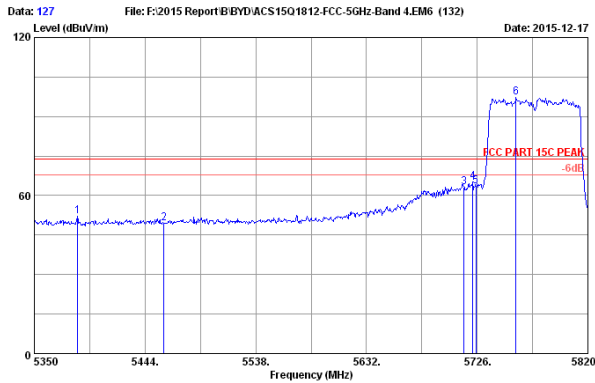

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5386.660	33.38	9.73	35.28	44.19	52.02	74.00	21.98	Peak
2	5460.000	33.26	9.76	35.25	41.69	49.46	74.00	24.54	Peak
3	5715.000	33.42	9.88	35.12	55.11	63.29	74.00	10.71	Peak
4	5722.240	33.42	9.89	35.12	57.01	65.20	74.00	8.80	Peak
5	5725.000	33.42	9.89	35.12	55.43	63.62	74.00	10.38	Peak
6	5758.900	33.46	9.91	35.11	89.02	97.28	74.00	-23.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

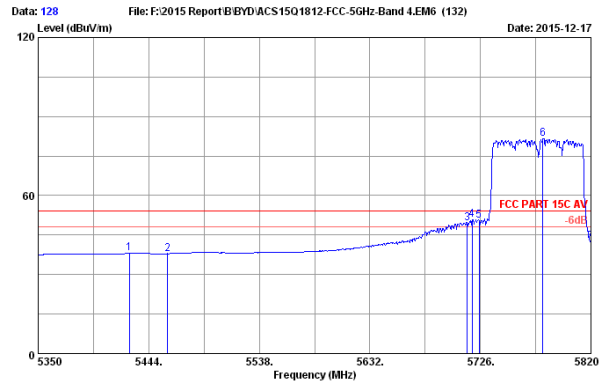

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5427.550	33.32	9.74	35.26	30.24	38.04	54.00	15.96	Average
2	5460.000	33.26	9.76	35.25	30.16	37.93	54.00	16.07	Average
3	5715.000	33.42	9.88	35.12	41.39	49.57	54.00	4.43	Average
4	5718.950	33.42	9.89	35.12	42.58	50.77	54.00	3.23	Average
5	5725.000	33.42	9.89	35.12	42.14	50.33	54.00	3.67	Average
6	5779.110	33.48	9.91	35.10	73.42	81.71	54.00	-27.71	Average
7	5820.000	33.52	9.93	35.08	33.93	42.30	54.00	11.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

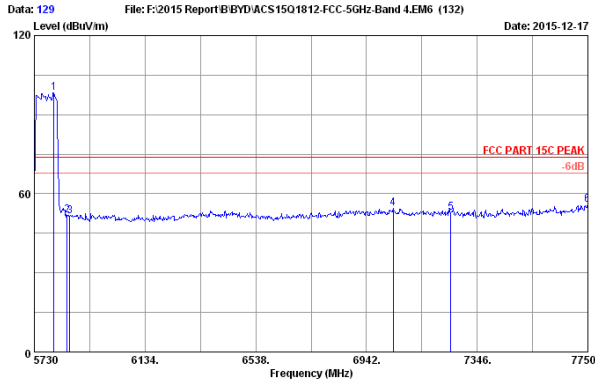

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5800.700	33.50	9.92	35.09	89.83	98.16	74.00	-24.16	Peak
2	5850.000	33.55	9.95	35.07	43.45	51.88	74.00	22.12	Peak
3	5860.000	33.56	9.95	35.07	43.00	51.44	74.00	22.56	Peak
4	7038.960	35.92	10.53	35.42	43.36	54.39	74.00	19.61	Peak
5	7250.000	36.00	10.74	35.50	41.58	52.82	74.00	21.18	Peak
6	7750.000	36.55	11.23	35.70	43.75	55.83	74.00	18.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

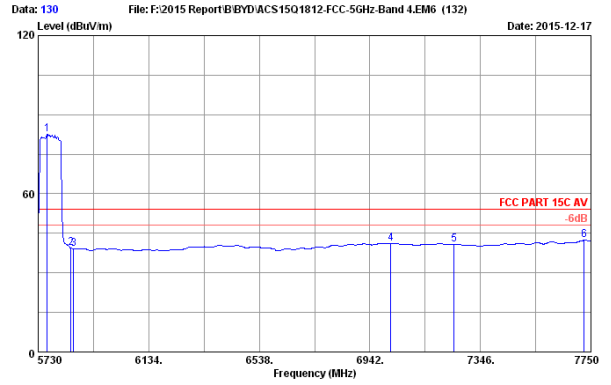

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5762.320	33.46	9.91	35.11	74.24	82.50	54.00	-28.50	Average
2	5850.000	33.55	9.95	35.07	31.12	39.55	54.00	14.45	Average
3	5860.000	33.56	9.95	35.07	30.67	39.11	54.00	14.89	Average
4	7018.760	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.63	40.87	54.00	13.13	Average
6	7725.760	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

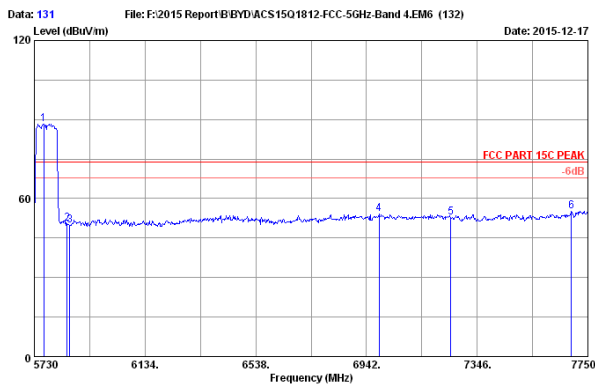

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5764.340	33.46	9.91	35.10	80.06	88.33	74.00	-14.33	Peak
2	5850.000	33.55	9.95	35.07	42.02	50.45	74.00	23.55	Peak
3	5860.000	33.56	9.95	35.07	41.38	49.82	74.00	24.18	Peak
4	6988.460	35.88	10.48	35.40	43.04	54.00	74.00	20.00	Peak
5	7250.000	36.00	10.74	35.50	41.67	52.91	74.00	21.09	Peak
6	7689.400	36.44	11.16	35.68	43.25	55.17	74.00	18.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

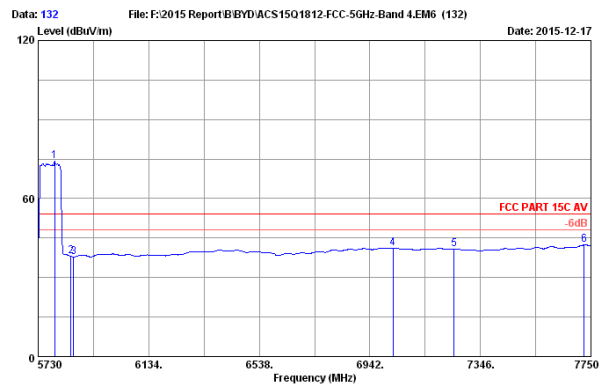

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.4°C/53.8%
 Engineer : Leo-L1
 EUT : Tablet PC
 Power rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH155 5775MHz Tx
 WT10PE-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.600	33.49	9.92	35.09	65.87	74.19	54.00	-20.19	Average
2	5850.000	33.55	9.95	35.07	29.67	38.10	54.00	15.90	Average
3	5860.000	33.56	9.95	35.07	29.44	37.88	54.00	16.12	Average
4	7026.840	35.91	10.51	35.41	30.20	41.21	54.00	12.79	Average
5	7250.000	36.00	10.74	35.50	29.64	40.88	54.00	13.12	Average
6	7725.760	36.51	11.20	35.69	30.32	42.34	54.00	11.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6dB&26dB Bandwidth Test

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.18,15	1Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr. 28,15	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Apr. 28,15	1 Year

6.2. Limit

6dB Bandwidth should be not less than 500kHz

6.3. Test Procedure

6dB Bandwidth:

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 KHz VBW for signal width below 20MHz and 300KHz RBW ,1MHz VBW for Above 20MHz signal Bandwidth.

26dB Bandwidth:

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 KHz VBW The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

6.4. Test Results

**5180-5240MHz Band:
6dB bandwidth**

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	6dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH36	16.36	16.38	≥ 500
	CH40	16.37	16.38	≥ 500
	CH48	16.39	16.38	≥ 500
11n HT20	CH36	17.60	17.65	≥ 500
	CH40	17.60	17.64	≥ 500
	CH48	17.57	17.61	≥ 500
11n HT40	CH38	36.33	36.40	≥ 500
	CH46	36.39	36.42	≥ 500
11ac VHT20	CH36	17.60	17.64	≥ 500
	CH40	17.60	17.64	≥ 500
	CH48	17.59	17.62	≥ 500
11ac VHT40	CH38	36.36	36.37	≥ 500
	CH46	36.32	36.39	≥ 500
11ac VHT80	CH42	75.93	76.34	≥ 500

Conclusion : PASS

26dB bandwidth

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	26dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH36	20.77	20.74	N/A
	CH40	20.72	20.82	N/A
	CH48	20.71	20.73	N/A
11n HT20	CH36	21.04	21.42	N/A
	CH40	21.30	21.23	N/A
	CH48	21.32	21.33	N/A
11n HT40	CH38	39.03	38.93	N/A
	CH46	38.67	39.04	N/A
11ac VHT20	CH36	21.23	21.30	N/A
	CH40	21.27	21.29	N/A
	CH48	21.23	21.33	N/A
11ac VHT40	CH38	39.05	39.07	N/A
	CH46	39.02	38.93	N/A
11ac VHT80	CH42	79.60	80.11	N/A
Conclusion : PASS				

**5260-5320MHz Band:
6dB bandwidth**

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature:23.8±0.6 °C

Test Mode	CH	6dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH52	16.36	16.38	≥ 500
	CH60	16.40	16.37	≥ 500
	CH64	16.40	16.39	≥ 500
11n HT20	CH52	17.58	17.64	≥ 500
	CH60	17.61	17.65	≥ 500
	CH64	17.59	17.65	≥ 500
11n HT40	CH54	36.38	36.40	≥ 500
	CH62	36.36	36.40	≥ 500
11ac VHT20	CH52	17.59	17.63	≥ 500
	CH60	17.60	17.63	≥ 500
	CH64	17.61	17.67	≥ 500
11ac VHT40	CH54	36.38	36.41	≥ 500
	CH62	36.39	36.41	≥ 500
11ac VHT80	CH58	75.87	76.14	≥ 500
Conclusion : PASS				

26dB bandwidth

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	26dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH52	20.73	20.77	N/A
	CH60	20.76	20.77	N/A
	CH64	20.77	20.78	N/A
11n HT20	CH52	21.29	21.32	N/A
	CH60	21.12	21.32	N/A
	CH64	21.04	21.36	N/A
11n HT40	CH54	39.10	39.11	N/A
	CH62	38.99	39.14	N/A
11ac VHT20	CH52	21.24	21.29	N/A
	CH60	21.37	21.34	N/A
	CH64	21.24	21.37	N/A
11ac VHT40	CH54	39.20	39.07	N/A
	CH62	38.97	38.95	N/A
11ac VHT80	CH58	79.54	79.79	N/A

Conclusion : PASS

**5500-5700MHz Band:
6dB bandwidth**

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	6dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH100	16.39	16.40	≥ 500
	CH120	16.39	16.43	≥ 500
	CH140	16.38	16.38	≥ 500
11n HT20	CH100	17.61	17.63	≥ 500
	CH120	17.63	17.64	≥ 500
	CH140	17.64	17.64	≥ 500
11n HT40	CH102	36.40	36.41	≥ 500
	CH118	36.37	36.38	≥ 500
	CH134	36.41	36.42	≥ 500
11ac VHT20	CH100	17.61	17.65	≥ 500
	CH120	17.63	17.65	≥ 500
	CH140	17.61	17.62	≥ 500
11ac VHT40	CH102	36.40	36.39	≥ 500
	CH118	36.35	36.37	≥ 500
	CH134	36.40	36.38	≥ 500
11ac VHT80	CH106	75.85	75.51	≥ 500
Conclusion : PASS				

26dB bandwidth

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	26dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH100	20.78	21.00	N/A
	CH120	20.74	21.04	N/A
	CH140	20.55	20.76	N/A
11n HT20	CH100	21.23	21.32	N/A
	CH120	21.24	21.34	N/A
	CH140	21.29	21.33	N/A
11n HT40	CH102	39.05	38.92	N/A
	CH118	38.99	39.12	N/A
	CH134	38.99	38.85	N/A
11ac VHT20	CH100	21.28	21.07	N/A
	CH120	21.22	21.20	N/A
	CH140	21.33	21.30	N/A
11ac VHT40	CH102	39.08	38.78	N/A
	CH118	39.03	38.91	N/A
	CH134	38.89	38.69	N/A
11ac VHT80	CH106	79.58	79.59	N/A
Conclusion : PASS				

**5745-5825MHz Band:
6dB bandwidth**

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	6dB bandwidth (MHz)		Limit (KHz)
		ANT1	ANT2	
11a	CH149	16.38	16.37	≥ 500
	CH157	16.36	16.38	≥ 500
	CH165	16.38	16.37	≥ 500
11n HT20	CH149	17.61	17.64	≥ 500
	CH157	17.64	17.66	≥ 500
	CH165	17.63	17.65	≥ 500
11n HT40	CH151	36.39	36.40	≥ 500
	CH159	36.41	36.37	≥ 500
11ac VHT20	CH149	17.63	17.62	≥ 500
	CH157	17.62	17.61	≥ 500
	CH165	17.64	17.64	≥ 500
11ac VHT40	CH151	36.39	36.37	≥ 500
	CH159	36.41	36.40	≥ 500
11ac VHT80	CH155	75.84	75.87	≥ 500

Conclusion : PASS

26dB bandwidth

EUT: Tablet PC		
M/N: WT10PE-C		
Test date: 2015-11-26	Pressure: 101.8±1.0kpa	Humidity: 52.4±3.0%
Tested by: Alice_Yang	Test site: RF site	Temperature: 23.8±0.6 °C

Test Mode	CH	26dB bandwidth (MHz)		Limit (KHz)
		ANT0	ANT1	
11a	CH149	20.72	20.77	N/A
	CH157	20.77	20.66	N/A
	CH165	20.77	20.73	N/A
11n HT20	CH149	21.29	21.33	N/A
	CH157	21.23	21.19	N/A
	CH165	21.59	21.20	N/A
11n HT40	CH151	38.97	38.93	N/A
	CH159	39.18	38.93	N/A
11ac VHT20	CH149	21.37	21.03	N/A
	CH157	21.34	21.33	N/A
	CH165	21.32	21.07	N/A
11ac VHT40	CH151	38.98	38.93	N/A
	CH159	39.01	38.63	N/A
11ac VHT80	CH155	79.51	79.29	N/A
Conclusion : PASS				


5180-5240MHz Band: 6dB bandwidth ANT 0	
11a 5180MHz	11n HT20 5180MHz
5200MHz	5200MHz
5240MHz	5240MHz

<p>11n HT40 5190MHz</p>	<p>5200MHz</p>
<p>Center Freq 5.19000000 GHz</p> <p>Center Freq 5.19000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.170 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error 16.183 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.33 MHz</p> <p>x dB -6.00 dB</p>	<p>Center Freq 5.20000000 GHz</p> <p>Center Freq 5.20000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.2 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.740 MHz</p> <p>Total Power 18.5 dBm</p> <p>Transmit Freq Error 15.723 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.60 MHz</p> <p>x dB -6.00 dB</p>
<p>5230MHz</p> <p>Center Freq 5.23000000 GHz</p> <p>Center Freq 5.23000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.23 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.168 MHz</p> <p>Total Power 20.5 dBm</p> <p>Transmit Freq Error 25.527 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.39 MHz</p> <p>x dB -6.00 dB</p>	<p>5240MHz</p> <p>Center Freq 5.24000000 GHz</p> <p>Center Freq 5.24000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.24 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.728 MHz</p> <p>Total Power 19.2 dBm</p> <p>Transmit Freq Error 18.078 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.59 MHz</p> <p>x dB -6.00 dB</p>
<p>11ac VHT20 5180MHz</p>	<p>11ac VHT40 5190MHz</p>
<p>Center Freq 5.18000000 GHz</p> <p>Center Freq 5.18000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.18 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.748 MHz</p> <p>Total Power 19.3 dBm</p> <p>Transmit Freq Error 9.318 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.60 MHz</p> <p>x dB -6.00 dB</p>	<p>Center Freq 5.19000000 GHz</p> <p>Center Freq 5.19000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.181 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error 18.121 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.36 MHz</p> <p>x dB -6.00 dB</p>

5230MHz




11ac VHT80
5210MHz

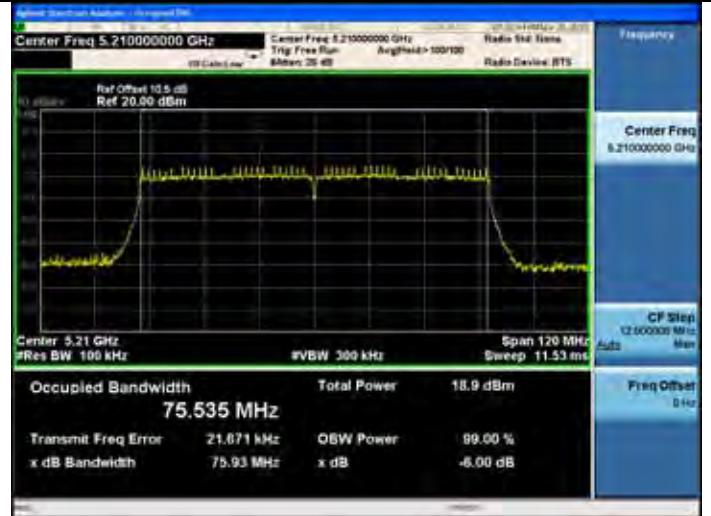


5180-5240MHz Band: 6dB bandwidth ANT 1	
11a 5180MHz	11n HT20 5180MHz
5200MHz	5200MHz
5240MHz	5240MHz

<p>11n HT40 5190MHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 36.170 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error 16.183 kHz</p> <p>x dB Bandwidth 36.33 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>	<p>5200MHz</p> <p>Center Freq 5.200000000 GHz</p> <p>Center Freq 5.200000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.2 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 17.740 MHz</p> <p>Total Power 18.5 dBm</p> <p>Transmit Freq Error 15.723 kHz</p> <p>x dB Bandwidth 17.60 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>5230MHz</p> <p>Center Freq 5.230000000 GHz</p> <p>Center Freq 5.230000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.23 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 36.168 MHz</p> <p>Total Power 20.5 dBm</p> <p>Transmit Freq Error 25.527 kHz</p> <p>x dB Bandwidth 36.39 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>	<p>5240MHz</p> <p>Center Freq 5.240000000 GHz</p> <p>Center Freq 5.240000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.24 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 17.728 MHz</p> <p>Total Power 19.2 dBm</p> <p>Transmit Freq Error 18.078 kHz</p> <p>x dB Bandwidth 17.59 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11ac VHT20 5180MHz</p> <p>Center Freq 5.180000000 GHz</p> <p>Center Freq 5.180000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.18 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 17.748 MHz</p> <p>Total Power 19.3 dBm</p> <p>Transmit Freq Error 9.318 kHz</p> <p>x dB Bandwidth 17.60 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>	<p>11ac VHT40 5190MHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>CF Step 3.000000 MHz</p> <p>Occupied Bandwidth 36.181 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error 18.121 kHz</p> <p>x dB Bandwidth 36.36 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

5230MHz

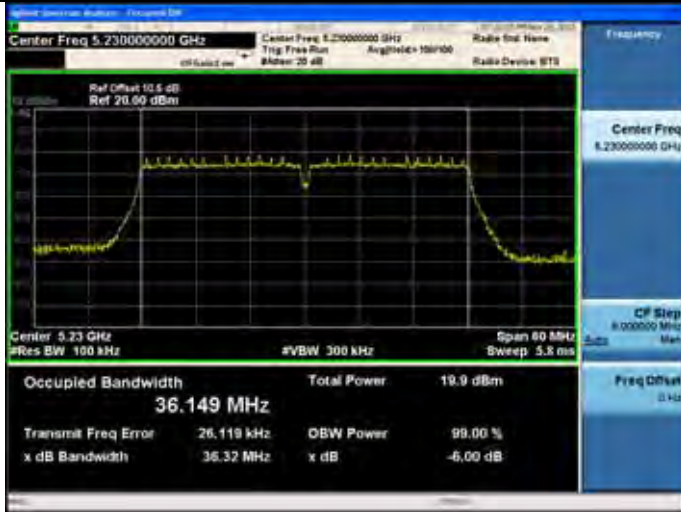

11ac VHT80
5210MHz

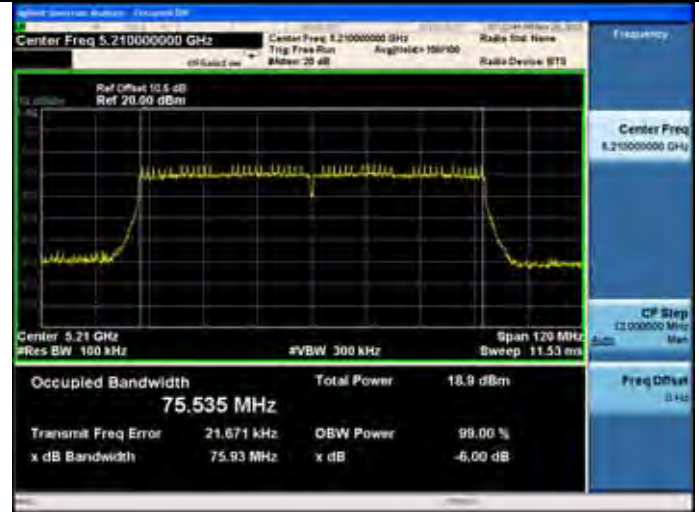

5180-5240MHz Band:
26dB bandwidth
ANT 0


11a

5180MHz




11n HT20


5180MHz

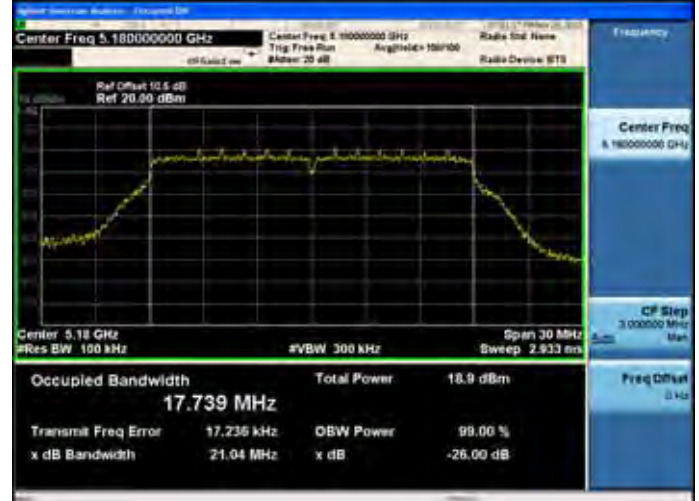

5200MHz

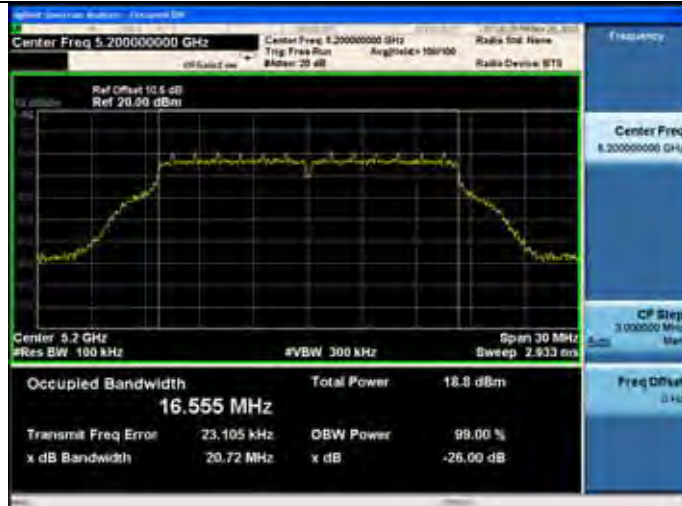


5200MHz

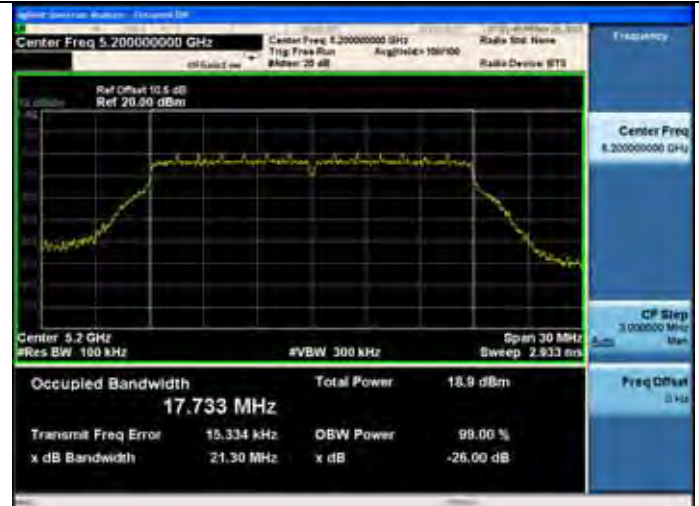

5240MHz




5240MHz

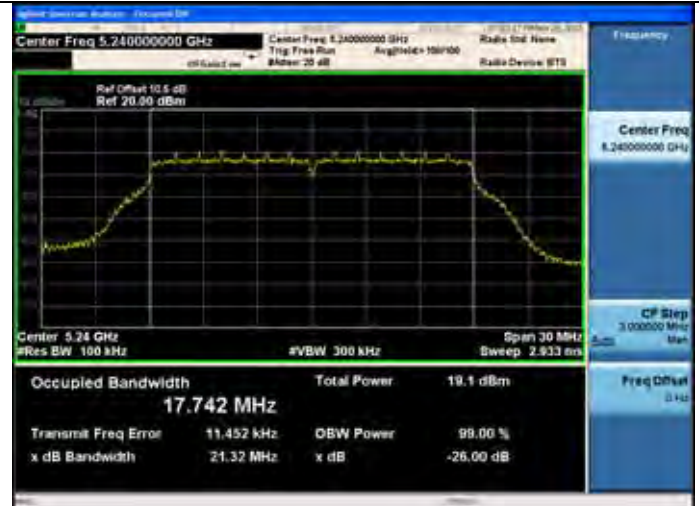


<p>11n HT40 5190MHz</p>	<p>5200MHz</p>
<p>Center Freq 5.190000000 GHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.162 MHz</p> <p>Total Power 19.9 dBm</p> <p>Transmit Freq Error 4.139 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 39.03 MHz</p> <p>x dB -26.00 dB</p>	<p>Center Freq 5.200000000 GHz</p> <p>Center Freq 5.200000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.2 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.742 MHz</p> <p>Total Power 19.0 dBm</p> <p>Transmit Freq Error 12.167 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 21.27 MHz</p> <p>x dB -26.00 dB</p>
<p>5230MHz</p>	<p>5240MHz</p>
<p>11ac VHT20 5180MHz</p>	<p>11ac VHT40 5190MHz</p>
<p>Center Freq 5.180000000 GHz</p> <p>Center Freq 5.180000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.18 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.752 MHz</p> <p>Total Power 18.8 dBm</p> <p>Transmit Freq Error 11.313 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 21.23 MHz</p> <p>x dB -26.00 dB</p>	<p>Center Freq 5.190000000 GHz</p> <p>Center Freq 5.190000000 GHz</p> <p>Ref Offset 10.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center Freq 5.19 GHz</p> <p>Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.177 MHz</p> <p>Total Power 20.0 dBm</p> <p>Transmit Freq Error 19.061 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 39.05 MHz</p> <p>x dB -26.00 dB</p>

5230MHz

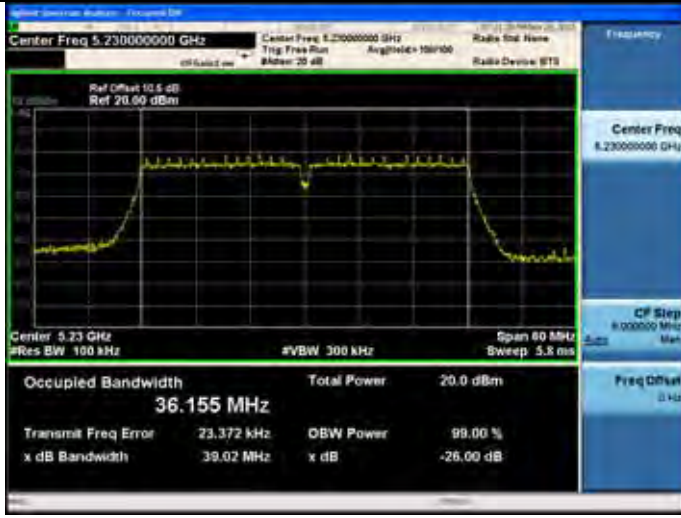

11ac VHT80
5210MHz

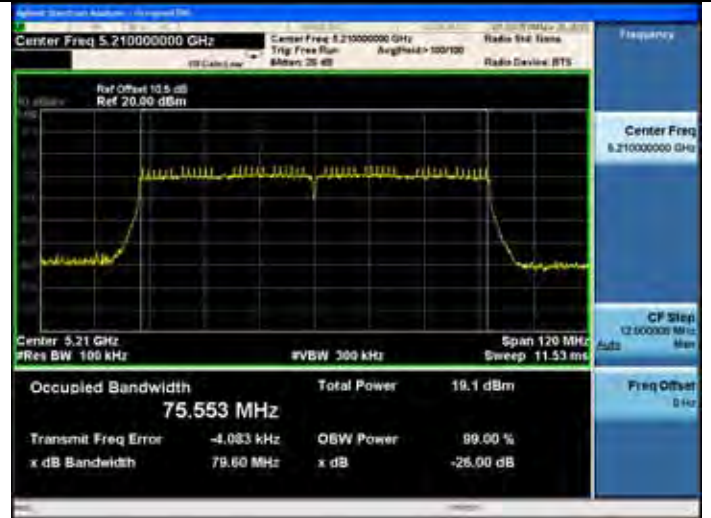


5180-5240MHz Band:

26dB bandwidth

ANT 1

11a

5180MHz

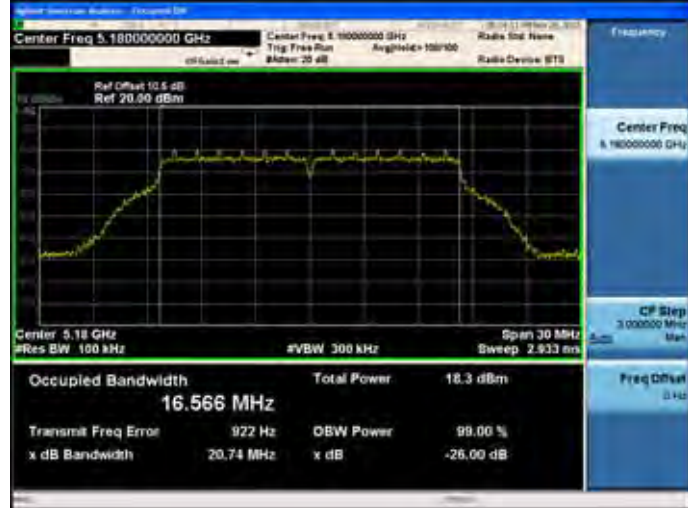


11n HT20


5180MHz



5200MHz

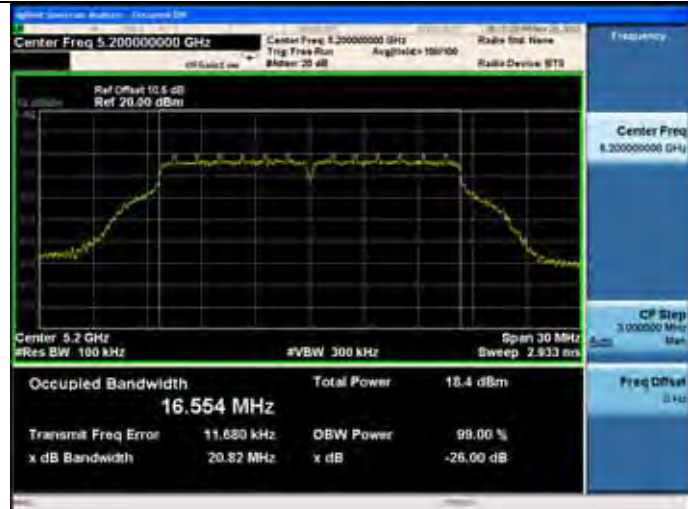

5200MHz

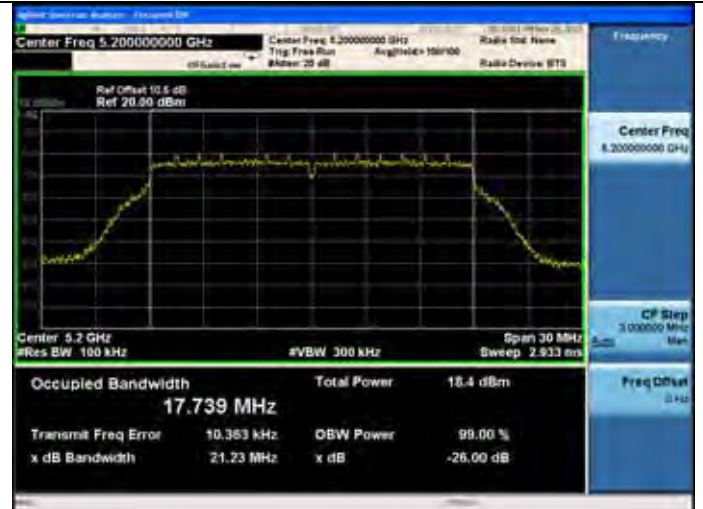

5240MHz



5240MHz




11n HT40


5190MHz




5200MHz

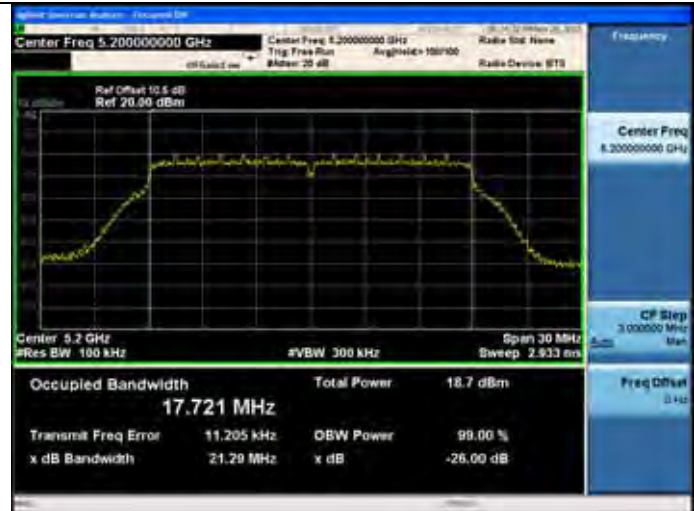

5230MHz

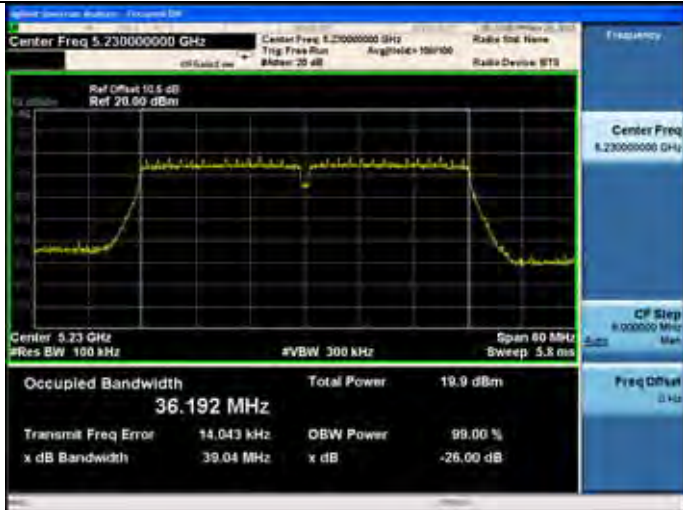


5240MHz

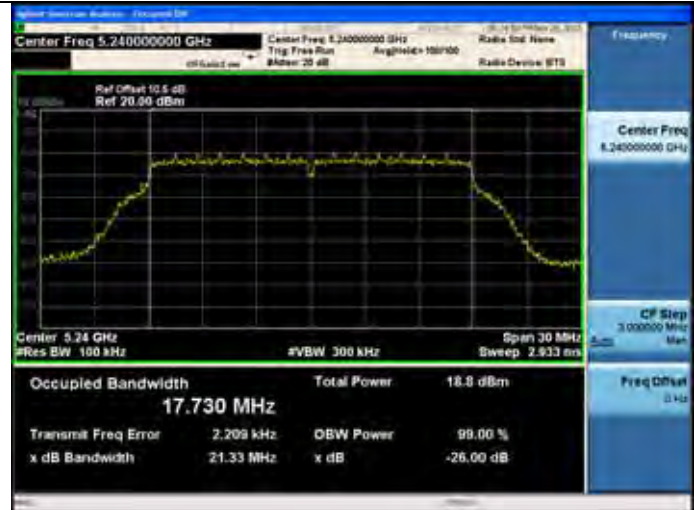

11ac VHT20

5180MHz

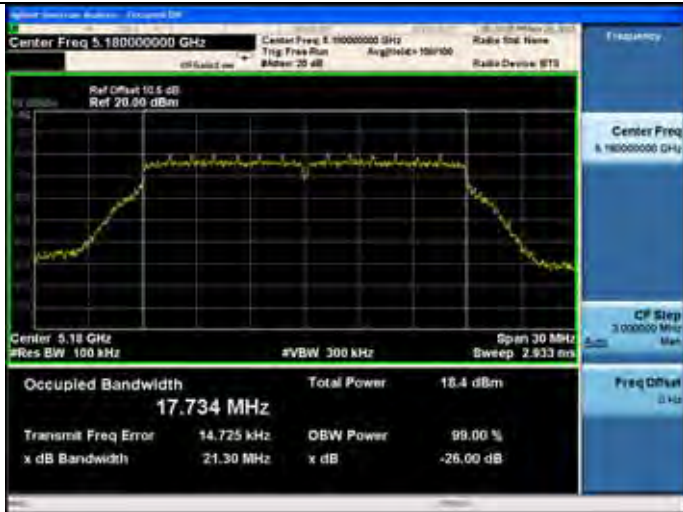


11ac VHT40

5190MHz



5230MHz

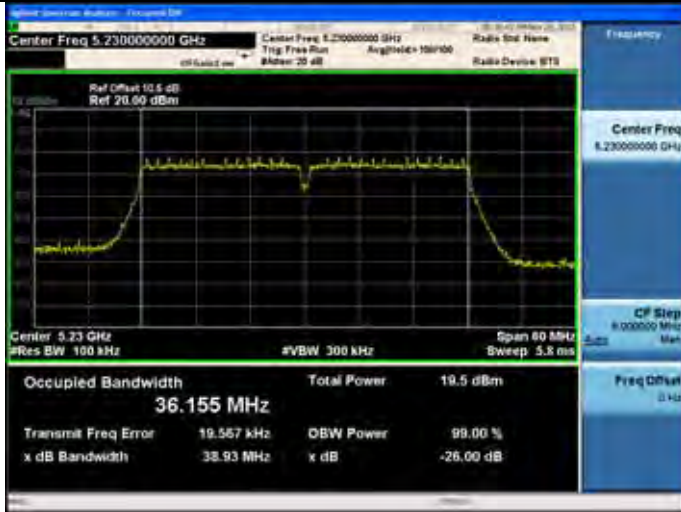

11ac VHT80
5210MHz

