

TEST REPORT

Product Name	: Car Kit Bluetooth Module
Brand Mark	: Shinwa
Model No.	: BT-MQ38-JK1, BT-MQ38-1A BT-MQ38-JK1A, BT-MQ38-JK1B BT-MQ38-JK1C
FCC ID	: ZWY3008X
Report Number	: BLA-EMC-202010-A0401
Date of Sample Receipt	: 2020/10/10
Date of Test	: 2020/10/13 to 2020/10/30
Date of Issue	: 2020/12/08
Test Standard	: 47 CFR Part 15, Subpart C 15.247
Test Result	: Pass

Prepared for:

Shinwa industries(China)ltd.

No.26,HuiFeng West 2 Road,Zhongkai High-Tech Park,Huizhou, Guangdong, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sweet. Liang

Approved by:

Jmen li

Date:

2020/12/08



REPORT REVISE RECORD

Version No.	Date	Description
00	2020/12/08	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.....	7
4 TEST ENVIRONMENT	8
5 TEST MODE	8
6 MEASUREMENT UNCERTAINTY	8
7 DESCRIPTION OF SUPPORT UNIT.....	9
8 LABORATORY LOCATION.....	9
9 TEST INSTRUMENTS LIST.....	10
1 ANTENNA REQUIREMENT	13
1.1 CONCLUSION	13
2 DWELL TIME.....	14
2.1 LIMITS	14
2.2 BLOCK DIAGRAM OF TEST SETUP	14
2.3 EST DATA	14
3 HOPPING CHANNEL NUMBER	15
3.1 LIMITS	15
3.2 BLOCK DIAGRAM OF TEST SETUP	15
3.3 TEST DATA	15
4 CARRIER FREQUENCIES SEPARATION	16
4.1 LIMITS	16
4.2 BLOCK DIAGRAM OF TEST SETUP	16
4.3 TEST DATA	16
5 20DB BANDWIDTH.....	17
5.1 BLOCK DIAGRAM OF TEST SETUP	17
5.2 TEST DATA	17
6 CONDUCTED PEAK OUTPUT POWER	18
6.1 LIMITS	18
6.2 BLOCK DIAGRAM OF TEST SETUP	18

6.3 EST DATA	18
7 RADIATED SPURIOUS EMISSIONS.....	19
7.1 LIMITS	19
7.2 BLOCK DIAGRAM OF TEST SETUP	20
7.3 PROCEDURE	20
7.4 TEST DATA	22
8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	30
8.1 LIMITS	30
8.2 BLOCK DIAGRAM OF TEST SETUP	31
8.3 PROCEDURE	31
8.4 TEST DATA	33
9 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	37
LIMITS.....	37
BLOCK DIAGRAM OF TEST SETUP.....	37
PROCEDURE	37
10 CONDUCTED SPURIOUS EMISSIONS	41
10.1 LIMITS	41
10.2 BLOCK DIAGRAM OF TEST SETUP	41
10.3 TEST DATA.....	42
11 CONDUCTED BAND EDGES MEASUREMENT.....	42
11.1 LIMITS	42
11.2 BLOCK DIAGRAM OF TEST SETUP	43
11.3 TEST DATA.....	43
10 APPENDIX.....	44
10.1 APPENDIX: 20dBEMISSION BANDWIDTH.....	44
<i>Test Result.....</i>	44
<i>Test Graphs.....</i>	45
10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER	48
<i>Test Result.....</i>	48
<i>Test Graphs.....</i>	49
10.3 APPENDIX: CARRIER FREQUENCY SEPARATION	52
<i>Test Result.....</i>	52
<i>Test Graphs.....</i>	53

10.4 APPENDIXE: TIME OF OCCUPANCY.....	54
<i>Test Result</i>	54
<i>Test Graphs</i>	55
10.5 APPENDIX: NUMBER OF HOPPING CHANNELS.....	57
<i>Test Result</i>	57
<i>Test Graphs</i>	58
10.6 APPENDIX:BAND EDGE MEASUREMENTS.....	59
<i>Test Result</i>	59
<i>Test Graphs</i>	60
10.7 APPENDIX:CONDUCTED SPURIOUS EMISSION.....	64
<i>Test Result</i>	64
<i>Test Graphs</i>	65
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	74
APPENDIX B: PHOTOGRAPHS OF EUT	76

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	Shinwa industries(China)ltd.
Address	No.26,HuiFeng West 2 Road,Zhongkai High-Tech Park,Huizhou, Guangdong,China
Manufacturer	Shinwa industries(China)ltd.
Address	No.26,HuiFeng West 2 Road,Zhongkai High-Tech Park,Huizhou, Guangdong,China
Factory	Shinwa industries(China)ltd.
Address	No.26,HuiFeng West 2 Road,Zhongkai High-Tech Park,Huizhou, Guangdong,China
Product Name	Car Kit Bluetooth Module
Test Model No.	BT-MQ38-JK1

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.1
Software Version	08.E4.XX
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	0.49 dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	3.3Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	<i>Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)</i>
<i>Remark: DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned Only the worst mode would be recorded in this report.</i>	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Tests were sub-contracted:

Radiation test is conducted by Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

FCC —Registration No.: 381383

Job No.: GTS20202010000030

9 TEST INSTRUMENTS LIST

Test Equipment Of Dwell Time					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Hopping Channel Number					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Carrier Frequencies Separation					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of 20dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Radiated Emission:

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021

19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2020	Oct. 18 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2020	Oct. 18 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2020	Oct. 18 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/1/2020	6/30/2021
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

1 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


1.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.49dBi.

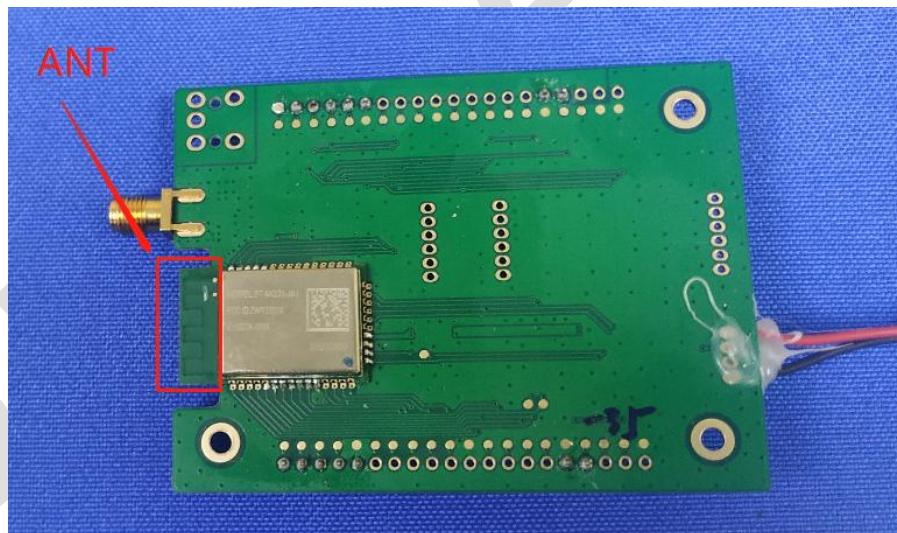


2 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

2.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4Smultiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

2.2 BLOCK DIAGRAM OF TEST SETUP

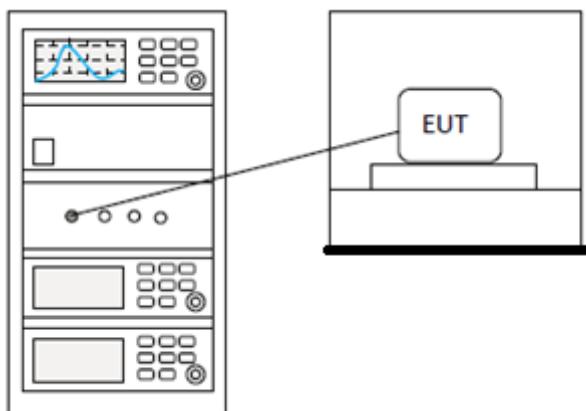

2.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


3 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

3.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

3.2 BLOCK DIAGRAM OF TEST SETUP

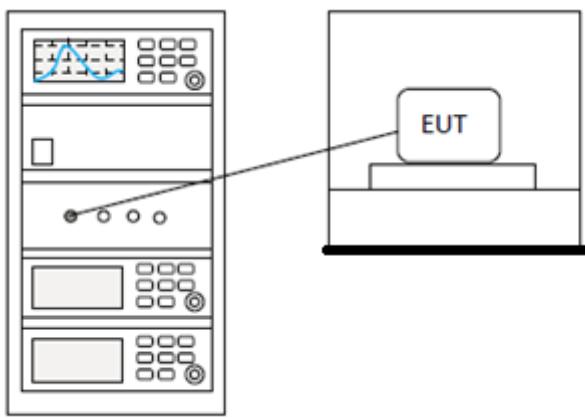

3.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


4 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

4.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

4.2 BLOCK DIAGRAM OF TEST SETUP

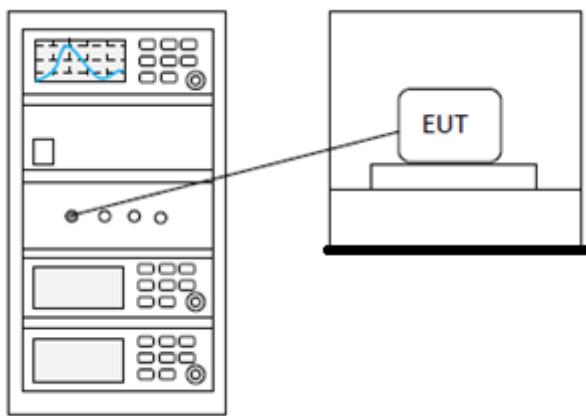


4.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

5 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

5.1 BLOCK DIAGRAM OF TEST SETUP

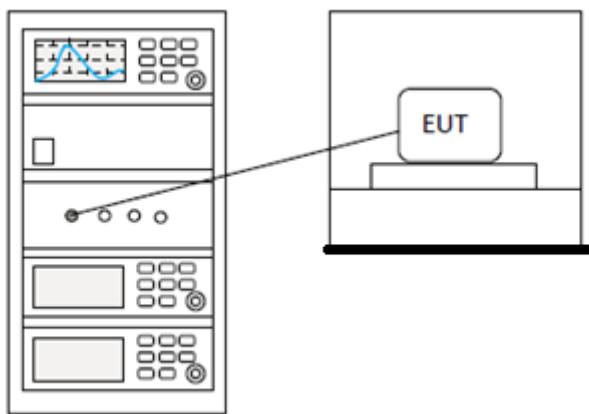

5.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


6 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

6.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.2 BLOCK DIAGRAM OF TEST SETUP

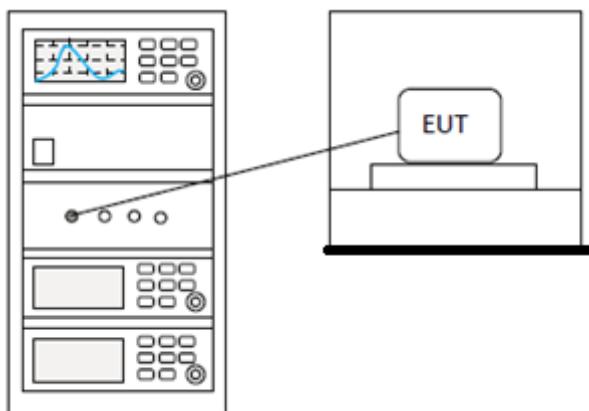

6.3 EST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

7 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G; TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) below 1G; TX mode (SE) Above 1G
Tester	Jozu
Temperature	25 °C
Humidity	60%

7.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2 BLOCK DIAGRAM OF TEST SETUP

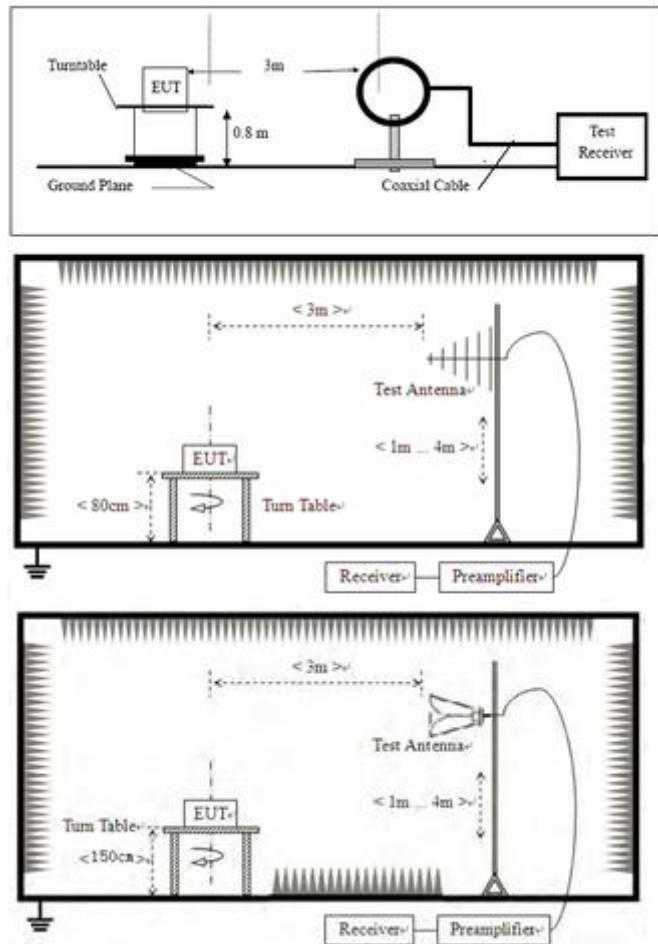

7.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor "C Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter ,and only suprious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


7.4 TEST DATA

[Test Mode: TX mode (SE) below 1G]; [Polarity: Horizontal]

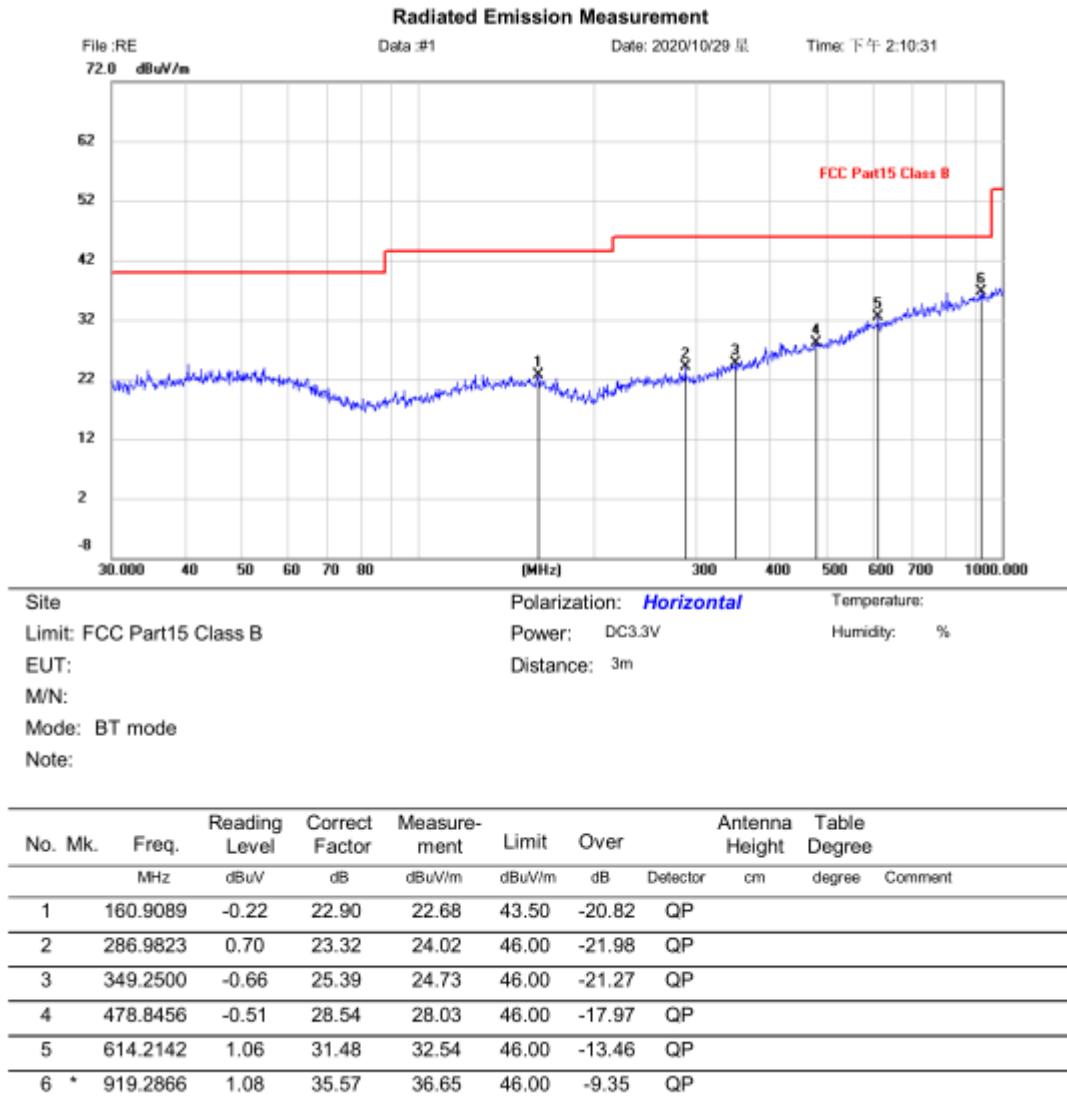

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

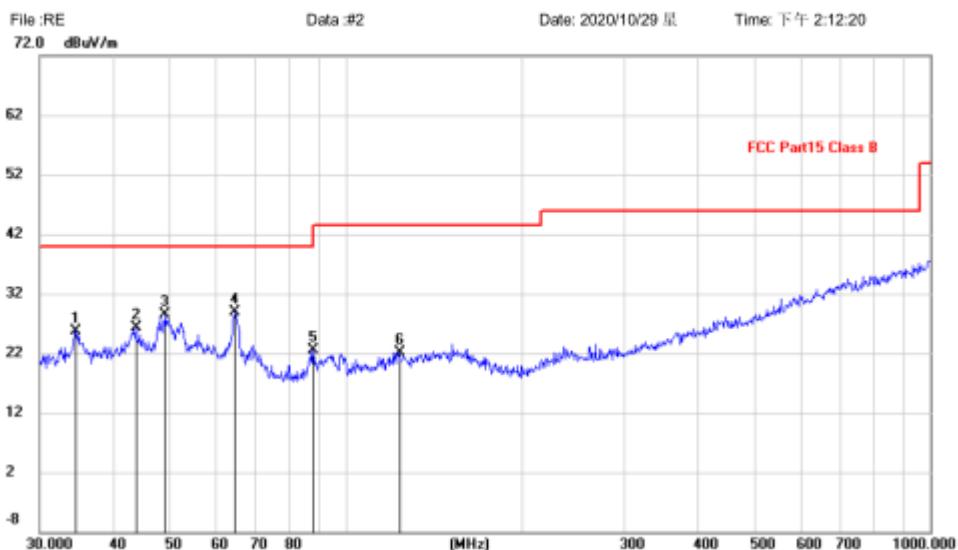Radiated Emission Measurement


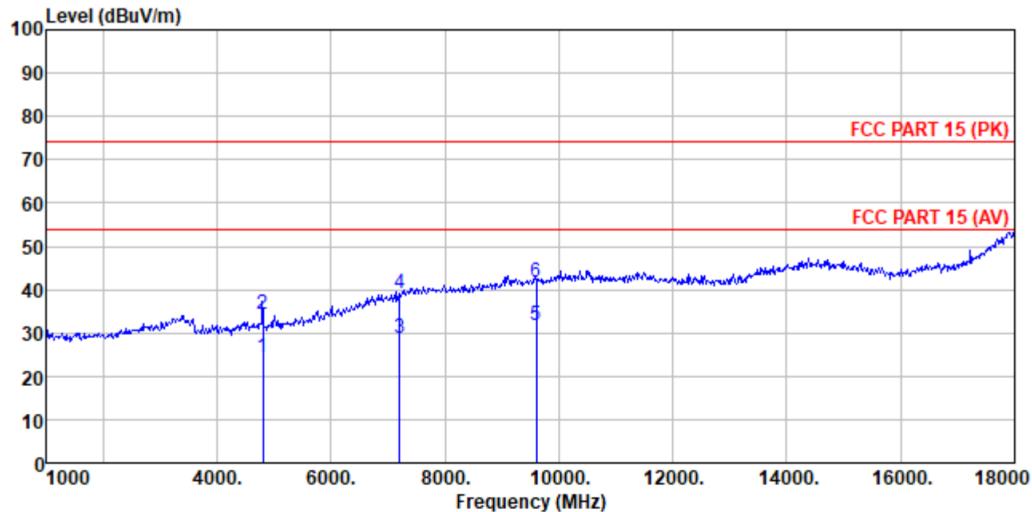
Site: Polarization: **Vertical** Temperature:
Limit: FCC Part15 Class B Power: DC3.3V Humidity: %
EUT: Distance: 3m
M/N:
Mode: BT mode
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	34.5173	3.06	22.73	25.79	40.00	-14.21	QP				
2	43.8119	2.09	24.13	26.22	40.00	-13.78	QP				
3	49.1865	4.17	24.25	28.42	40.00	-11.58	QP				
4	*	64.6594	6.72	22.13	28.85	40.00	-11.15	QP			
5	88.0329	3.36	19.24	22.60	43.50	-20.90	QP				
6	123.2655	-0.39	22.57	22.18	43.50	-21.32	QP				

Test Result: Pass

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]



Condition : FCC PART 15 (PK) 3m HORIZONTAL

Job.No : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2402

Freq MHz	Read	Antenna	Preamp	Cable	Limit	Over	Remark
	Level	Factor	Factor	Cable Loss	Level	Line	
1 4804.000	26.27	31.20	37.73	4.61	24.35	54.00	-29.65 Average
2 4804.000	36.19	31.20	37.73	4.61	34.27	74.00	-39.73 Peak
3 7206.000	21.77	36.16	35.63	6.48	28.78	54.00	-25.22 Average
4 7206.000	31.99	36.16	35.63	6.48	39.00	74.00	-35.00 Peak
5 9608.000	20.85	37.93	34.94	7.97	31.81	54.00	-22.19 Average
6 9608.000	30.85	37.93	34.94	7.97	41.81	74.00	-32.19 Peak

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

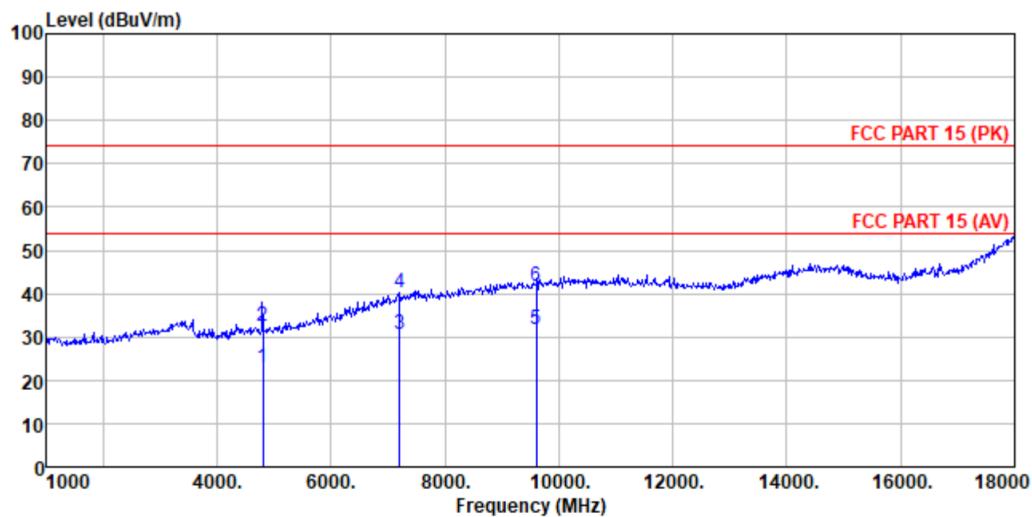


Condition : FCC PART 15 (PK) 3m VERTICAL
Job.No : GTS202010000030
Test Mode : TX mode
Test Engineer: hans
Remark : 2402

Freq	Read	Antenna	Preamplifier	Cable	Loss	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	4804.000	24.69	31.20	37.73	4.61	22.77	54.00	-31.23 Average
2	4804.000	34.22	31.20	37.73	4.61	32.30	74.00	-41.70 Peak
3	7206.000	23.49	36.16	35.63	6.48	30.50	54.00	-23.50 Average
4	7206.000	33.23	36.16	35.63	6.48	40.24	74.00	-33.76 Peak
5	9608.000	20.69	37.93	34.94	7.97	31.65	54.00	-22.35 Average
6	9608.000	30.74	37.93	34.94	7.97	41.70	74.00	-32.30 Peak

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

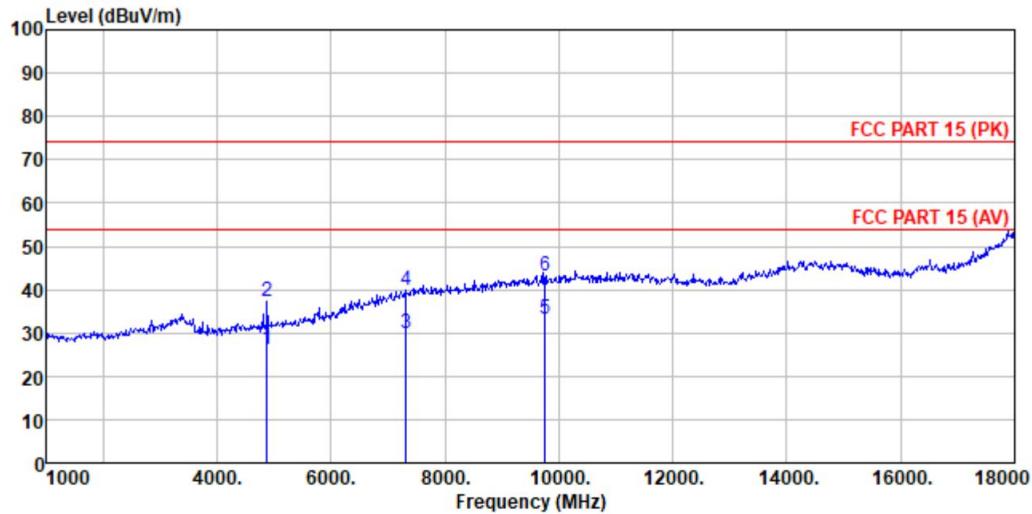

Condition : FCC PART 15 (PK) 3m HORIZONTAL

Job.No : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2441

	Read	Antenna	Preamp	Cable	Limit	Over	
Freq	Level	Factor	Factor	Loss	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4882.000	28.12	31.33	37.76	4.69	26.38	54.00 -27.62 Average
2	4882.000	38.99	31.33	37.76	4.69	37.25	74.00 -36.75 Peak
3	7323.000	22.28	36.43	35.60	6.63	29.74	54.00 -24.26 Average
4	7323.000	32.23	36.43	35.60	6.63	39.69	74.00 -34.31 Peak
5	9764.000	22.20	38.10	35.03	8.03	33.30	54.00 -20.70 Average
6	9764.000	32.01	38.10	35.03	8.03	43.11	74.00 -30.89 Peak

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

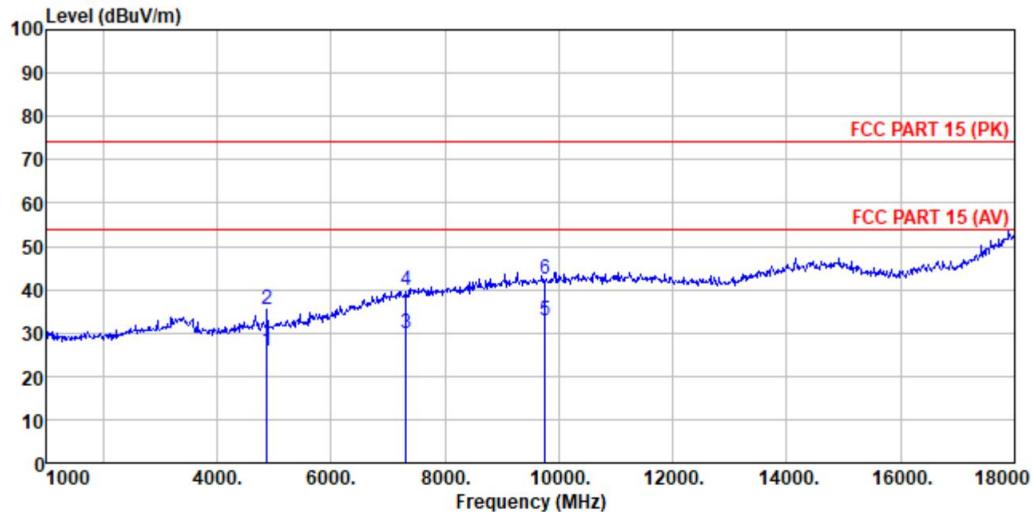

Condition : FCC PART 15 (PK) 3m VERTICAL

Job.No : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2441

	Read	Antenna	Preamp	Cable	Limit	Over		
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
MHz	dB _{UV}	dB _{/m}	dB	dB	dB _{UV/m}	dB _{UV/m}	dB	
1	4882.000	27.58	31.33	37.76	4.69	25.84	54.00	-28.16 Average
2	4882.000	37.33	31.33	37.76	4.69	35.59	74.00	-38.41 Peak
3	7323.000	22.46	36.43	35.60	6.63	29.92	54.00	-24.08 Average
4	7323.000	32.55	36.43	35.60	6.63	40.01	74.00	-33.99 Peak
5	9764.000	21.68	38.10	35.03	8.03	32.78	54.00	-21.22 Average
6	9764.000	31.17	38.10	35.03	8.03	42.27	74.00	-31.73 Peak

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

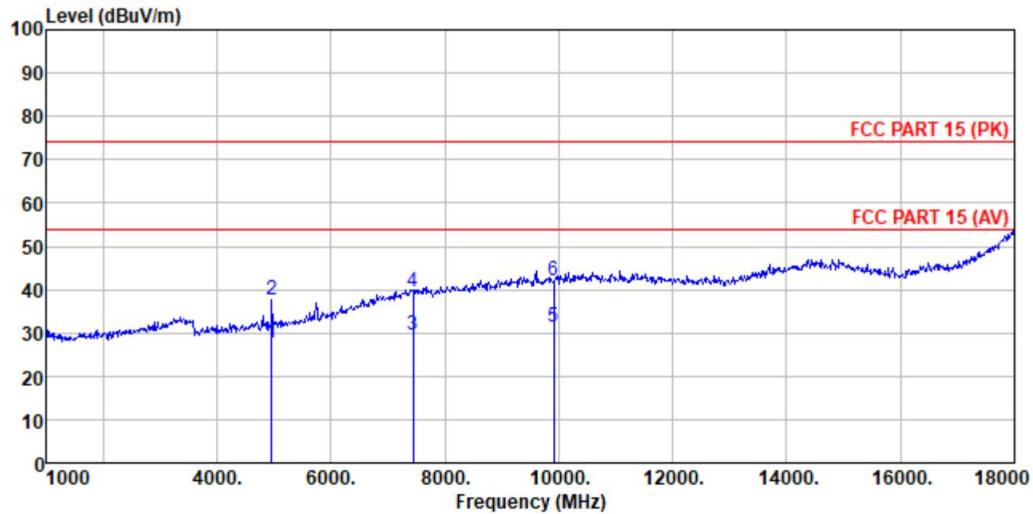

Condition : FCC PART 15 (PK) 3m HORIZONTAL

Job. No. : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2480

	Read	Antenna	Preamp	Cable	Limit	Over		
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
MHz	dB _{BuV}	dB _{/m}	dB	dB	dB _{BuV/m}	dB _{BuV/m}	dB	
1 4960.000	29.36	31.44	37.78	4.79	27.81	54.00	-26.19	Average
2 4960.000	39.03	31.44	37.78	4.79	37.48	74.00	-36.52	Peak
3 7440.000	21.64	36.66	35.56	6.77	29.51	54.00	-24.49	Average
4 7440.000	31.54	36.66	35.56	6.77	39.41	74.00	-34.59	Peak
5 9920.000	20.10	38.30	35.14	8.09	31.35	54.00	-22.65	Average
6 9920.000	30.99	38.30	35.14	8.09	42.24	74.00	-31.76	Peak

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

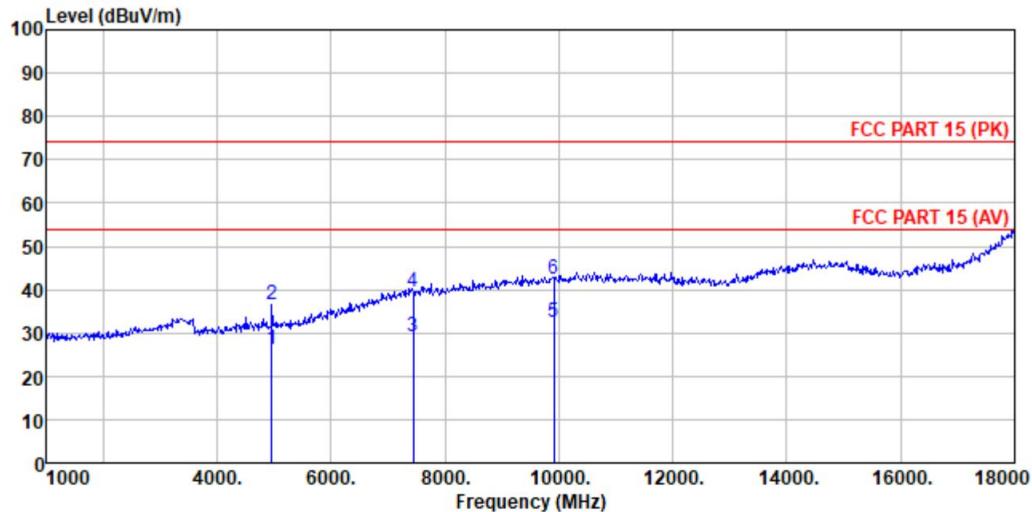

Condition : FCC PART 15 (PK) 3m VERTICAL

Job.No : GTS202010000030

Test Mode : TX mode

Test Engineer: hans

Remark : 2480

	Read	Antenna	Preamp	Cable	Limit	Over	Remark
Freq	Level	Factor	Factor	Loss	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 4960.000	27.66	31.44	37.78	4.79	26.11	54.00	-27.89 Average
2 4960.000	37.92	31.44	37.78	4.79	36.37	74.00	-37.63 Peak
3 7440.000	21.11	36.66	35.56	6.77	28.98	54.00	-25.02 Average
4 7440.000	31.52	36.66	35.56	6.77	39.39	74.00	-34.61 Peak
5 9920.000	21.37	38.30	35.14	8.09	32.62	54.00	-21.38 Average
6 9920.000	31.34	38.30	35.14	8.09	42.59	74.00	-31.41 Peak

Test Result: Pass

8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

8.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

8.2 BLOCK DIAGRAM OF TEST SETUP

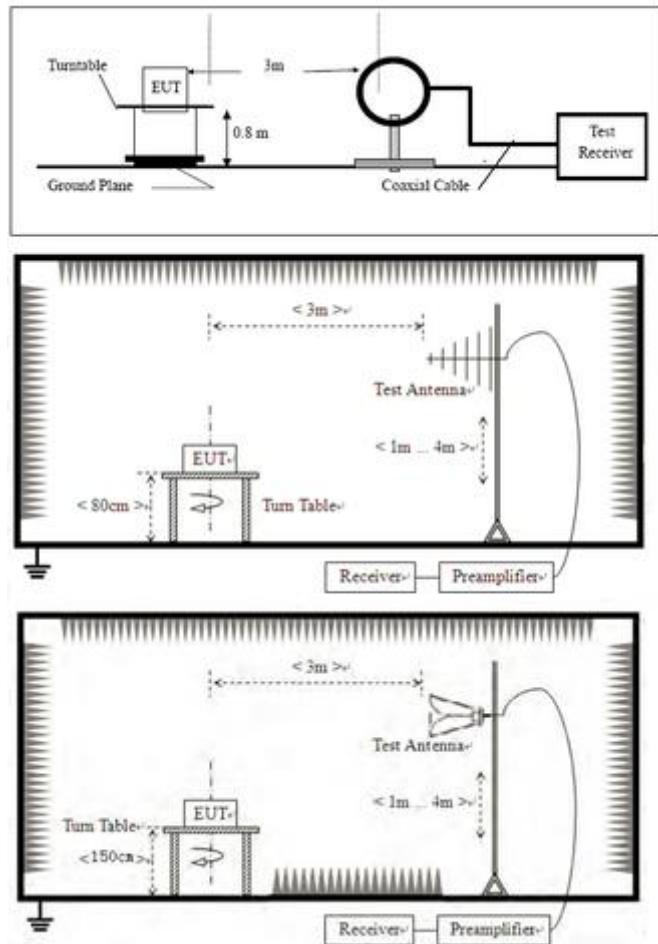

8.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

8.4 TEST DATA

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

[TestMode: TX]; [Polarity: Vertical]

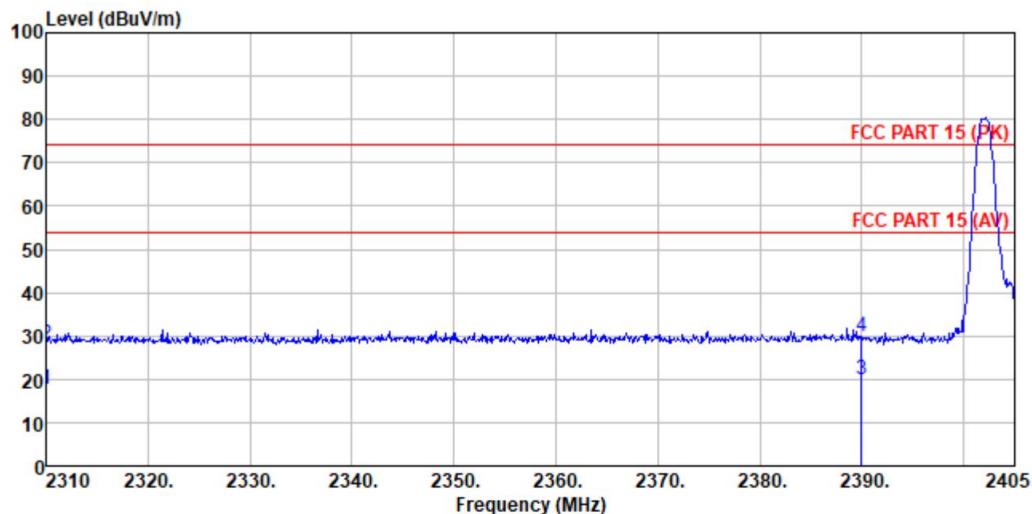

Condition : FCC PART 15 (PK) 3m VERTICAL

Job.No : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2402

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	
1	2310.000	24.49	27.14	36.79	2.81	17.65	54.00 -36.35 Average
2	2310.000	34.94	27.14	36.79	2.81	28.10	74.00 -45.90 Peak
3	2390.000	26.51	27.37	36.85	2.91	19.94	54.00 -34.06 Average
4	2390.000	36.29	27.37	36.85	2.91	29.72	74.00 -44.28 Peak

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]

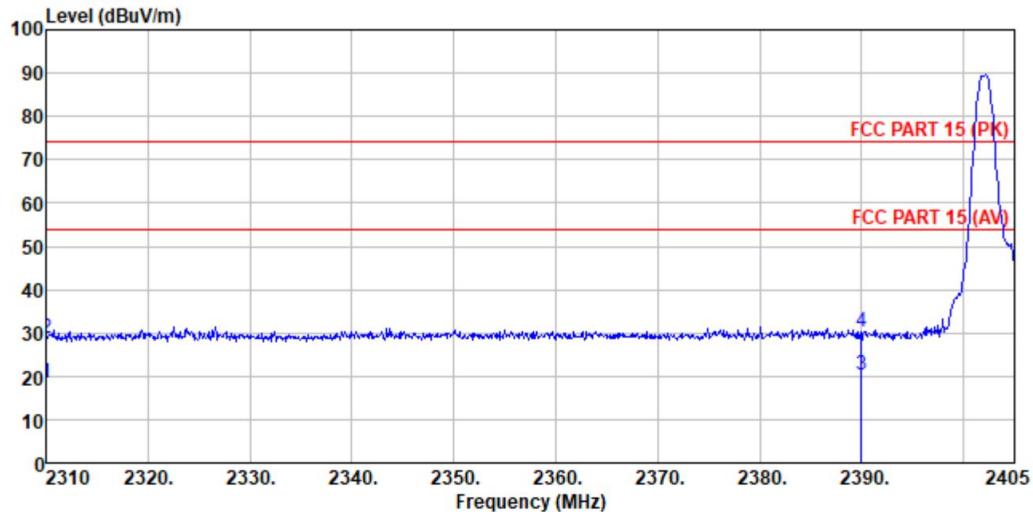

Condition : FCC PART 15 (PK) 3m HORIZONTAL

Job. No. : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2402

	Read	Antenna	Preamp	Cable	Limit	Over	
Freq	Level	Factor	Factor	Cable Loss	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2310.000	25.35	27.14	36.79	2.81	18.51	54.00	-35.49 Average
2 2310.000	35.77	27.14	36.79	2.81	28.93	74.00	-45.07 Peak
3 2390.000	26.69	27.37	36.85	2.91	20.12	54.00	-33.88 Average
4 2390.000	36.89	27.37	36.85	2.91	30.32	74.00	-43.68 Peak

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

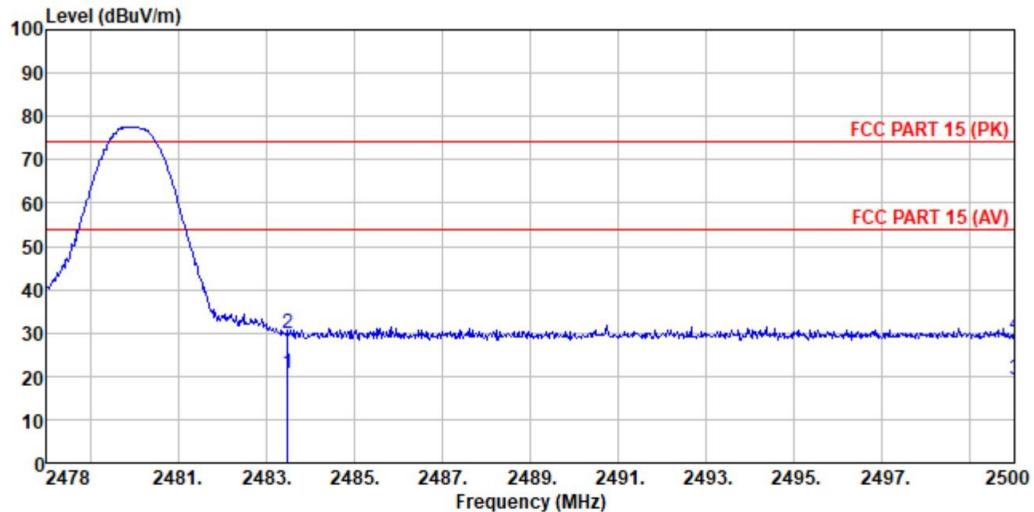

Condition : FCC PART 15 (PK) 3m VERTICAL

Job. No. : GTS202010000030

Test Mode : TX mode


Test Engineer: hans

Remark : 2480

	Read	Antenna	Preamp	Cable	Limit	Over		
Freq	Level	Factor	Factor	Cable Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	26.77	27.66	36.93	2.99	20.49	54.00	-33.51	Average
2 2483.500	36.25	27.66	36.93	2.99	29.97	74.00	-44.03	Peak
3 2500.000	25.34	27.70	36.94	3.01	19.11	54.00	-34.89	Average
4 2500.000	35.79	27.70	36.94	3.01	29.56	74.00	-44.44	Peak

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]

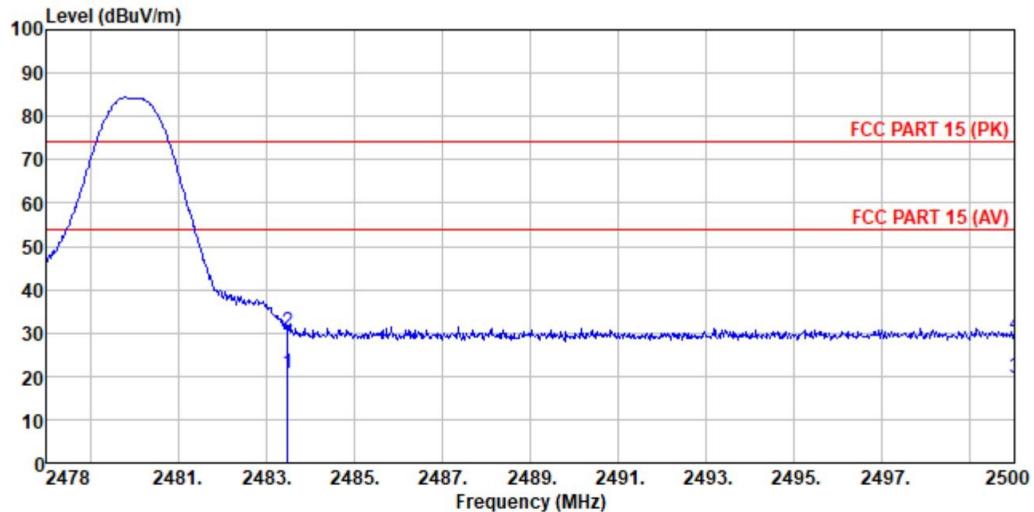

Condition : FCC PART 15 (PK) 3m HORIZONTAL

Job. No. : GTS202010000030

Test Mode : TX mode

Test Engineer: hans

Remark : 2480

	Read	Antenna	Preamp	Cable	Limit	Over		
Freq	Level	Factor	Factor	Cable Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	26.95	27.66	36.93	2.99	20.67	54.00	-33.33	Average
2 2483.500	36.67	27.66	36.93	2.99	30.39	74.00	-43.61	Peak
3 2500.000	25.82	27.70	36.94	3.01	19.59	54.00	-34.41	Average
4 2500.000	35.82	27.70	36.94	3.01	29.59	74.00	-44.41	Peak

Test Result: Pass

9 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX mode
Test Mode (Final Test)	TX mode
Tester	Jozu
Temperature	25 °C
Humidity	58%

LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

BLOCK DIAGRAM OF TEST SETUP

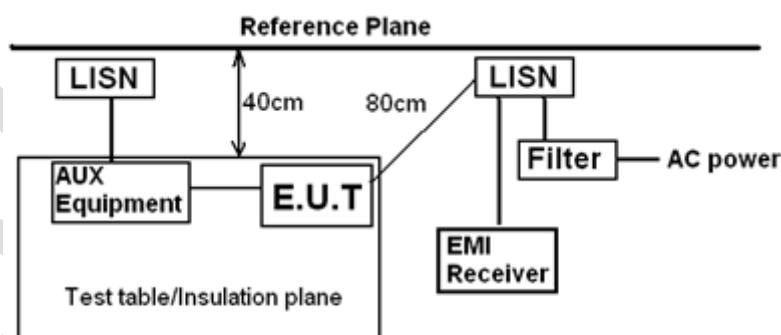

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 Ω H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

[TestMode: TX mode]; [Line: Neutral]

Conducted Emission Measurement

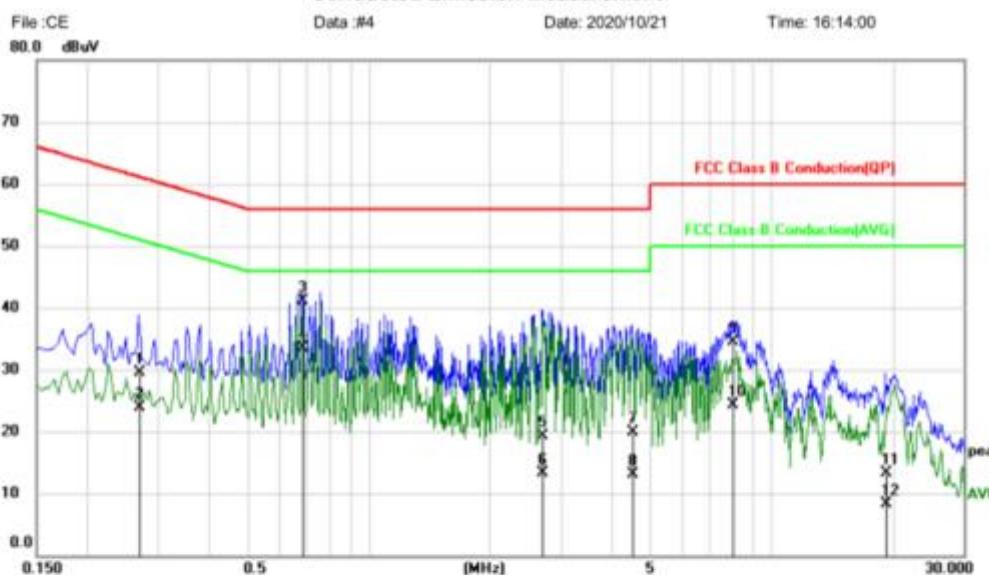


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over	Detector	Comment
1		0.2700	19.67	9.75	29.42	61.12	-31.70	QP	
2		0.2700	14.24	9.75	23.99	51.12	-27.13	AVG	
3		0.6860	31.42	9.65	41.07	56.00	-14.93	QP	
4 *		0.6860	23.76	9.65	33.41	46.00	-12.59	AVG	
5		2.6940	9.57	9.76	19.33	56.00	-36.67	QP	
6		2.6940	3.61	9.76	13.37	46.00	-32.63	AVG	
7		4.5220	10.23	9.77	20.00	56.00	-36.00	QP	
8		4.5220	3.32	9.77	13.09	46.00	-32.91	AVG	
9		7.9820	24.79	9.75	34.54	60.00	-25.46	QP	
10		7.9820	14.51	9.75	24.26	50.00	-25.74	AVG	
11		19.2099	3.50	9.88	13.38	60.00	-46.62	QP	
12		19.2099	-1.57	9.88	8.31	50.00	-41.69	AVG	

Test Result: Pass

[TestMode: TX mode]; [Line: Line]

Conducted Emission Measurement

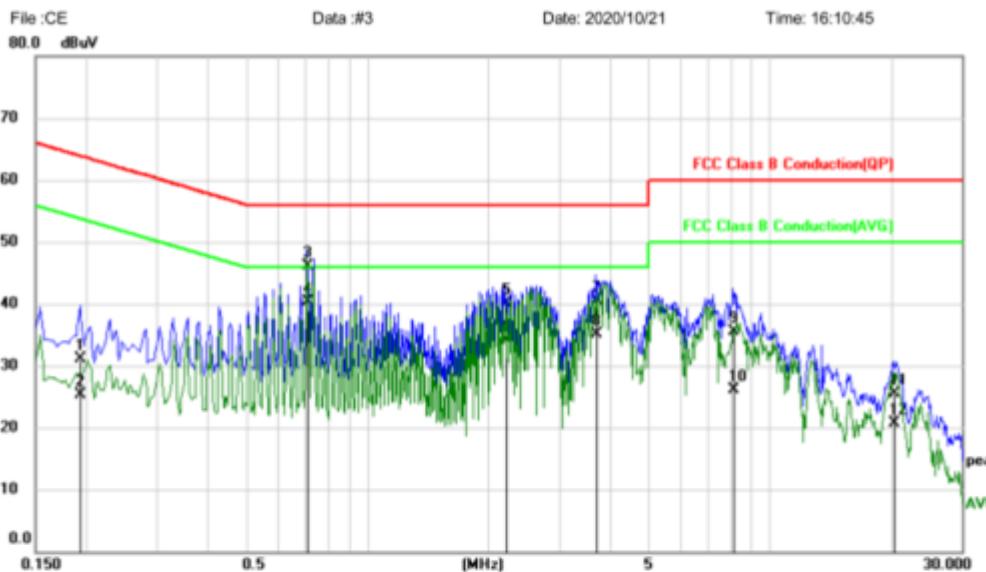
Site Phase: **L1** Temperature:

Limit: FCC Class B Conduction(QP)

Power: AC120V/60Hz

Humidity: %

EUT: Car Kit Bluetooth Module

M/N: BT-MQ38-JK1

Mode: BT mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	
1		0.1940	21.32	9.81	31.13	63.86	-32.73	QP
2		0.1940	15.48	9.81	25.29	53.86	-28.57	AVG
3		0.7100	36.55	9.59	46.14	56.00	-9.86	QP
4 *		0.7100	30.62	9.59	40.21	46.00	-5.79	AVG
5		2.2100	30.43	9.71	40.14	56.00	-15.86	QP
6		2.2100	24.38	9.71	34.09	46.00	-11.91	AVG
7		3.7100	30.83	9.74	40.57	56.00	-15.43	QP
8		3.7100	25.45	9.74	35.19	46.00	-10.81	AVG
9		8.1300	25.81	9.76	35.57	60.00	-24.43	QP
10		8.1300	16.36	9.76	26.12	50.00	-23.88	AVG
11		20.3340	15.60	9.83	25.43	60.00	-34.57	QP
12		20.3340	10.90	9.83	20.73	50.00	-29.27	AVG

Test Result: Pass


10 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

10.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

10.2 BLOCK DIAGRAM OF TEST SETUP

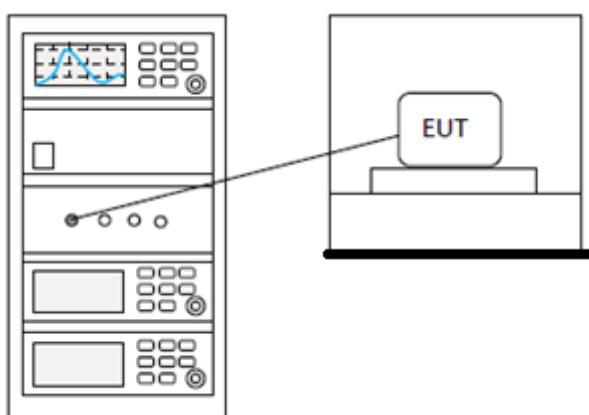

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

11.2 BLOCK DIAGRAM OF TEST SETUP

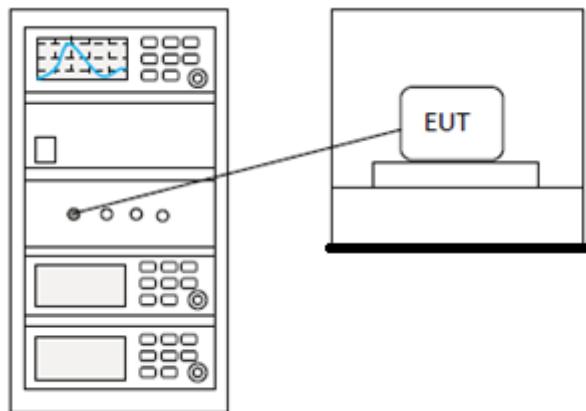

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details