



# **FCC TEST REPORT**

## **FCC PART 15 SUBPART C 15.249**

**Test report**  
**On Behalf of**  
**Dayton Audio division of Parts Express**  
**For**  
**Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote**

**Model No.: WBA31**

**FCC ID: ZXZWBA31**

**Prepared for :** Dayton Audio division of Parts Express  
725 Pleasant Valley Dr. Springboro, OH 45066, USA

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai  
Street, Bao'an District, Shenzhen City, China

**Date of Test:** Sep. 20, 2018 ~ Sep. 28, 2018

**Date of Report:** Sep. 28, 2018

**Report Number:** HK1809271169E



### TEST RESULT CERTIFICATION

**Applicant's name**..... Dayton Audio division of Parts Express  
 Address ..... 725 Pleasant Valley Dr. Springboro, OH 45066, USA  
**Manufacture's Name** ..... Dayton Audio division of Parts Express  
 Address ..... 725 Pleasant Valley Dr. Springboro, OH 45066, USA  
**Factory's Name**..... Shenzhen IDER Technology Co., Ltd  
 Address ..... Block B, WEI PENG DA Industry Park, Dalang, Longhua District, Shenzhen, China

**Product description**

Trade Mark: DAYTON  
 Product name ..... Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote  
 Model and/or type reference ... WBA31  
**Standards** ..... FCC Rules and Regulations Part 15 Subpart C Section 15.249  
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test**..... :  
 Date (s) of performance of tests..... : Sep. 20, 2018 ~ Sep. 28, 2018  
 Date of Issue..... : Sep. 28, 2018  
 Test Result..... : **Pass**

Testing Engineer : Gary Qian  
 (Gary Qian)

Technical Manager : Eden Hu  
 (Eden Hu)

Authorized Signatory : Jason Zhou  
 (Jason Zhou)



<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1. MEASUREMENT PROCEDURE	8
3.2. TEST SETUP	10
3.3. TEST RESULT	11
4. BAND EDGE EMISSION	25
4.1. MEASUREMENT PROCEDURE	25
4.2 TEST SETUP	25
4.3 RADIATED TEST RESULT	25
5. BANDWIDTH	34
5.1. MEASUREMENT PROCEDURE	34
5.2. TEST SETUP	34
5.3. TEST RESULT	35
6. FCC LINE CONDUCTED EMISSION TEST	43
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	43
6.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	43
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	45
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	47
APPENDIX B: PHOTOGRAPHS OF EUT	49



## 1. TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249&15.209	Band Edges Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

### 1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>Maximum field strength</b>	92.09dBuV/m(AV)@3m
<b>Bluetooth Version</b>	V4.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR GFSK for BLE
<b>Number of channels</b>	79 for BR/EDR, 40 for BLE
<b>Antenna Gain</b>	2dBi
<b>Antenna Designation</b>	Fixed Antenna (Met 15.203 Antenna requirement)
<b>Hardware Version</b>	V1.1
<b>Software Version</b>	V1.0
<b>Power Supply</b>	DC5V by adapter

#### BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

#### BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ




## 2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Low channel for BLE
11	Middle channel for BLE
12	High channel for BLE

Note:  
1. Only the data of the worst case recorded in the test report.  
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

## 2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during Radiation and Above1GHz Radiation testing:



Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	WBA31	<b>ZXZWBA31</b>	EUT
2	Adapter	DLN-0501000E1-US	DC5V/1A	Marketed



## 2.4 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
14.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year



### 3. RADIATED EMISSION

#### 3.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.





The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/5MHz for Peak, 1.5MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

**Test limit for Standard FCC15.249**

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500


**Test limit for Standard FCC 15.209**

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Remark: (1) Emission level  $dB\mu V = 20 \log$  Emission level  $\mu V/m$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

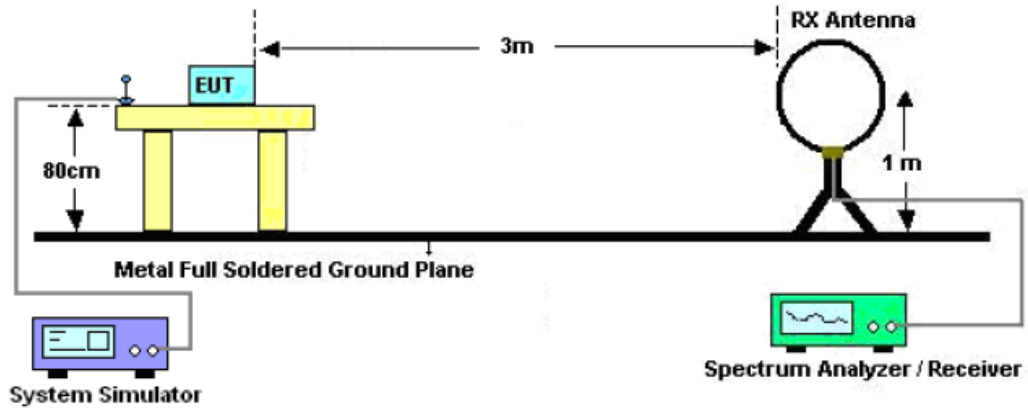

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

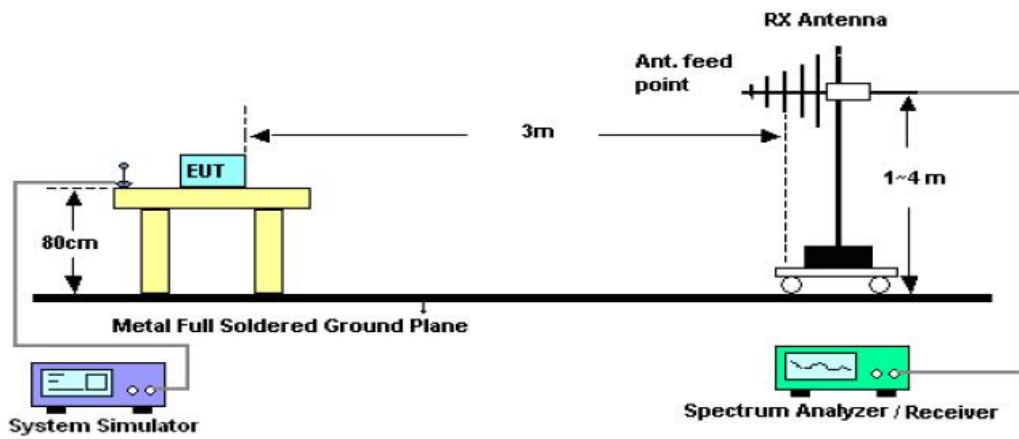

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

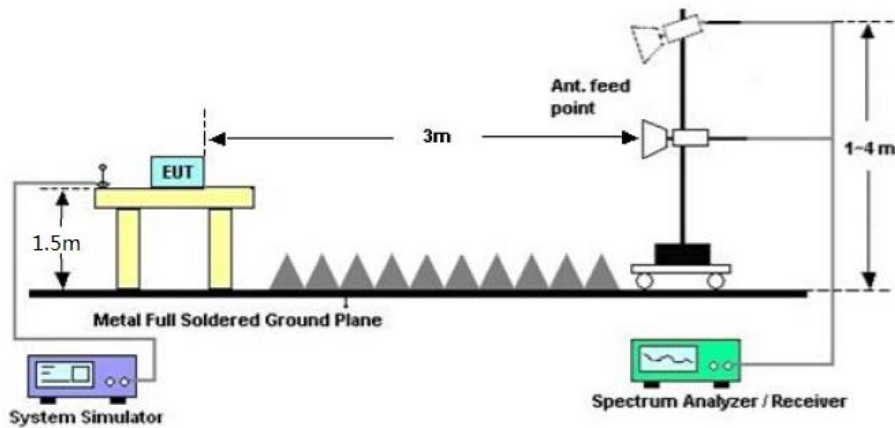



### 3.3. TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION 30MHZ- 1GHZ FOR BR/EDR

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	51.0167	16.46	10.15	26.61	40.00	-13.39	peak			
2		99.5167	15.84	10.00	25.84	43.50	-17.66	peak			
3		193.2833	6.28	11.69	17.97	43.50	-25.53	peak			
4		293.5167	10.01	14.31	24.32	46.00	-21.68	peak			
5		387.2833	13.27	18.99	32.26	46.00	-13.74	peak			
6		966.0500	1.94	29.85	31.79	54.00	-22.21	peak			



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	28.51	8.81	37.32	40.00	-2.68	peak			
2		89.8167	19.17	5.31	24.48	43.50	-19.02	peak			
3		133.4667	22.37	12.48	34.85	43.50	-8.65	peak			
4		299.9833	5.81	15.41	21.22	46.00	-24.78	peak			
5		387.2833	13.41	18.99	32.40	46.00	-13.60	peak			
6		966.0500	3.50	29.85	33.35	54.00	-20.65	peak			

**RESULT: PASS**

**Note:**

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.


The “Factor” value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.



**RADIATED EMISSION 30MHz- 1GHZ FOR BLE**

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Horizontal

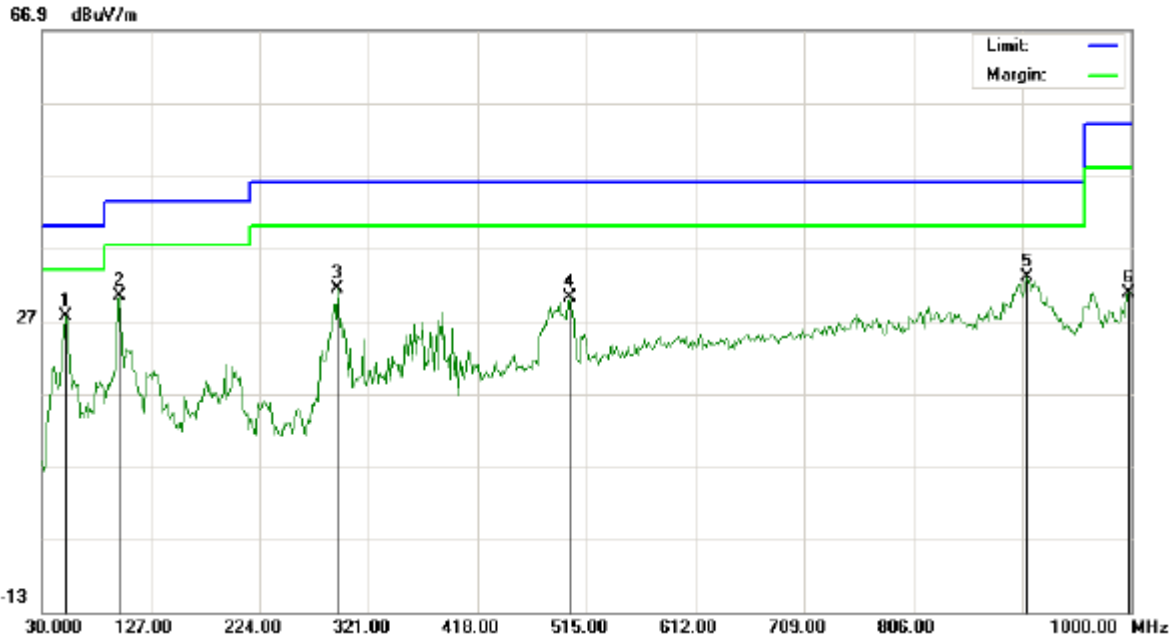

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	51.0167	17.46	10.15	27.61	40.00	-12.39	peak			
2		99.5167	20.34	10.00	30.34	43.50	-13.16	peak			
3		293.5167	17.01	14.31	31.32	46.00	-14.68	peak			
4		500.4500	9.14	21.14	30.28	46.00	-15.72	peak			
5		907.8500	4.12	28.83	32.95	46.00	-13.05	peak			
6		998.3833	1.35	29.54	30.89	54.00	-23.11	peak			



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	26.51	8.81	35.32	40.00	-4.68	peak			
2		89.8167	24.67	5.31	29.98	43.50	-13.52	peak			
3		133.4667	23.37	12.48	35.85	43.50	-7.65	peak			
4		170.6500	6.86	14.66	21.52	43.50	-21.98	peak			
5		387.2833	10.91	18.99	29.90	46.00	-16.10	peak			
6		966.0500	6.00	29.85	35.85	54.00	-18.15	peak			

**RESULT: PASS**

**Note:**

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The mode 10 is the worst case, and only the data of the worst case recorded in this test report.

**FIELD STRENGTH OF FUNDAMENTAL FOR BR/EDR**

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	GFSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	91.24	2.45	93.69	114	-20.31	peak
2402.013	89.33	2.45	91.78	94	-2.22	AVG
2441.016	91.25	2.88	94.13	114	-19.87	peak
2441.016	89.21	2.88	92.09	94	-1.91	AVG
2480.021	90.98	3.14	94.12	114	-19.88	peak
2480.021	88.74	3.14	91.88	94	-2.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	GFSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	89.53	2.45	91.98	114	-22.02	peak
2402.013	87.15	2.45	89.6	94	-4.4	AVG
2441.016	89.42	2.88	92.3	114	-21.7	peak
2441.016	86.85	2.88	89.73	94	-4.27	AVG
2480.021	88.97	3.14	92.11	114	-21.89	peak
2480.021	86.74	3.14	89.88	94	-4.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	$\pi$ /4-DQPSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	89.74	2.45	92.19	114	-21.81	peak
2402.013	87.58	2.45	90.03	94	-3.97	AVG
2441.016	89.38	2.88	92.26	114	-21.74	peak
2441.016	87.42	2.88	90.3	94	-3.7	AVG
2480.021	89.75	3.14	92.89	114	-21.11	peak
2480.021	87.41	3.14	90.55	94	-3.45	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	$\pi$ /4-DQPSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	87.78	2.45	90.23	114	-23.77	peak
2402.013	85.54	2.45	87.99	94	-6.01	AVG
2441.016	87.72	2.88	90.6	114	-23.4	peak
2441.016	85.64	2.88	88.52	94	-5.48	AVG
2480.021	87.81	3.14	90.95	114	-23.05	peak
2480.021	85.56	3.14	88.7	94	-5.3	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.





EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	8DPSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	89.19	2.45	91.64	114	-22.36	peak
2402.013	87.04	2.45	89.49	94	-4.51	AVG
2441.016	89.28	2.88	92.16	114	-21.84	peak
2441.016	87.11	2.88	89.99	94	-4.01	AVG
2480.021	89.41	3.14	92.55	114	-21.45	peak
2480.021	87.25	3.14	90.39	94	-3.61	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	8DPSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	87.44	2.45	89.89	114	-24.11	peak
2402.013	85.12	2.45	87.57	94	-6.43	AVG
2441.016	87.52	2.88	90.4	114	-23.6	peak
2441.016	85.38	2.88	88.26	94	-5.74	AVG
2480.021	87.47	3.14	90.61	114	-23.39	peak
2480.021	85.36	3.14	88.5	94	-5.5	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**FIELD STRENGTH OF FUNDAMENTAL FOR BLE**

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	GFSK for BLE	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	88.52	2.45	90.97	114	-23.03	peak
2402.013	84.11	2.45	86.56	94	-7.44	AVG
2440.016	88.15	2.88	91.03	114	-22.97	peak
2440.016	84.04	2.88	86.92	94	-7.08	AVG
2480.021	87.85	3.14	90.99	114	-23.01	peak
2480.021	83.78	3.14	86.92	94	-7.08	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Modulation :	GFSK for BLE	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
2402.013	85.85	2.45	88.3	114	-25.7	peak
2402.013	81.74	2.45	84.19	94	-9.81	AVG
2440.016	85.98	2.88	88.86	114	-25.14	peak
2440.016	81.72	2.88	84.6	94	-9.4	AVG
2480.021	85.74	3.14	88.88	114	-25.12	peak
2480.021	81.65	3.14	84.79	94	-9.21	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR**

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4804.026	42.18	7.12	49.3	74	-24.7	peak
4804.026	39.25	7.12	46.37	54	-7.63	AVG
7206.039	37.44	9.84	47.28	74	-26.72	peak
7206.039	34.05	9.84	43.89	54	-10.11	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4804.026	41.72	7.12	48.84	74	-25.16	peak
4804.026	38.18	7.12	45.3	54	-8.7	AVG
7206.039	36.42	9.84	46.26	74	-27.74	peak
7206.039	34.15	9.84	43.99	54	-10.01	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4882.032	42.72	7.12	49.84	74	-24.16	peak
4882.032	39.45	7.12	46.57	54	-7.43	AVG
7323.048	37.51	9.84	47.35	74	-26.65	peak
7323.048	34.12	9.84	43.96	54	-10.04	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4882.032	41.18	7.12	48.3	74	-25.7	peak
4882.032	38.24	7.12	45.36	54	-8.64	AVG
7323.048	38.54	9.84	48.38	74	-25.62	peak
7323.048	35.13	9.84	44.97	54	-9.03	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4960.042	43.78	7.12	50.9	74	-23.1	peak
4960.042	39.42	7.12	46.54	54	-7.46	AVG
7440.063	38.58	9.84	48.42	74	-25.58	peak
7440.063	35.42	9.84	45.26	54	-8.74	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4960.042	42.15	7.12	49.27	74	-24.73	peak
4960.042	38.47	7.12	45.59	54	-8.41	AVG
7440.063	37.74	9.84	47.58	74	-26.42	peak
7440.063	34.52	9.84	44.36	54	-9.64	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**RADIATED EMISSION ABOVE 1GHZ FOR BLE**

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4804.026	44.58	7.12	51.7	74	-22.3	peak
4804.026	40.27	7.12	47.39	54	-6.61	AVG
7206.039	40.74	9.84	50.58	74	-23.42	peak
7206.039	36.54	9.84	46.38	54	-7.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Value Type
4804.026	43.52	7.12	50.64	74	-23.36	peak
4804.026	39.71	7.12	46.83	54	-7.17	AVG
7206.039	39.68	9.84	49.52	74	-24.48	peak
7206.039	35.74	9.84	45.58	54	-8.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 11	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
4880.032	44.85	7.12	51.97	74	-22.03	peak
4880.032	41.14	7.12	48.26	54	-5.74	AVG
7320.048	40.72	9.84	50.56	74	-23.44	peak
7320.048	36.85	9.84	46.69	54	-7.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 11	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
4880.032	44.57	7.12	51.69	74	-22.31	peak
4880.032	40.33	7.12	47.45	54	-6.55	AVG
7320.048	39.15	9.84	48.99	74	-25.01	peak
7320.048	35.08	9.84	44.92	54	-9.08	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 12	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.042	47.38	7.12	54.5	74	-19.5	peak
4960.042	42.27	7.12	49.39	54	-4.61	AVG
7440.063	40.18	9.84	50.02	74	-23.98	peak
7440.063	36.25	9.84	46.09	54	-7.91	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 12	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.042	46.54	7.12	53.66	74	-20.34	peak
4960.042	41.38	7.12	48.5	54	-5.5	AVG
7440.063	40.74	9.84	50.58	74	-23.42	peak
7440.063	36.61	9.84	46.45	54	-7.55	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Note:** Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The GFSK modulation was the worst case and only the data of worst recorded in this report.




## 4. BAND EDGE EMISSION

### 4.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz , Sweep=AUTO  
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1kHz), Sweep=AUTO
3. Other procedures refer to clause 3.1.

### 4.2 TEST SETUP

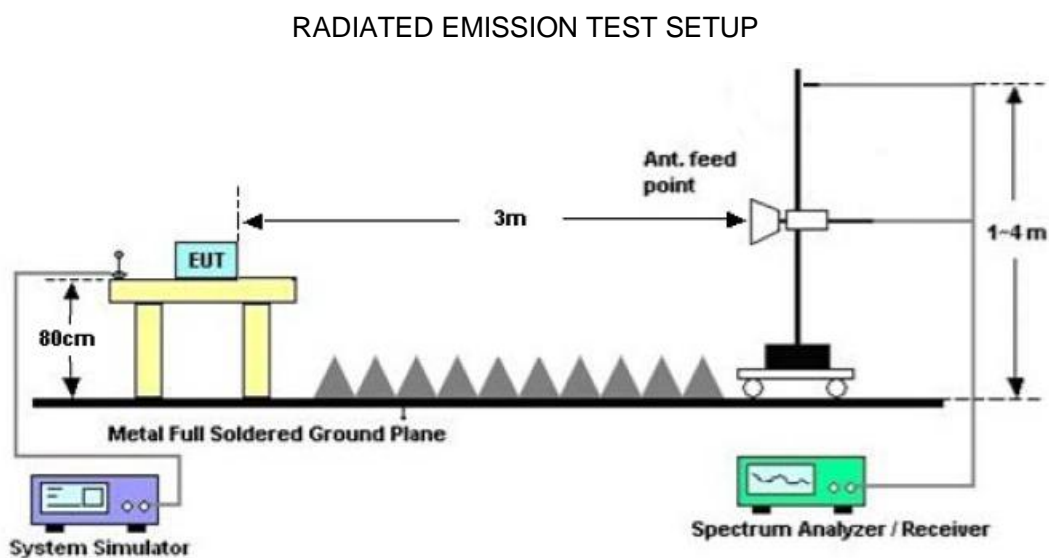

### 4.3 RADIATED TEST RESULT

**Note:**


1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V/m) to represent the Field Strength. So A=F.




FOR BR/EDR:

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

PK Value

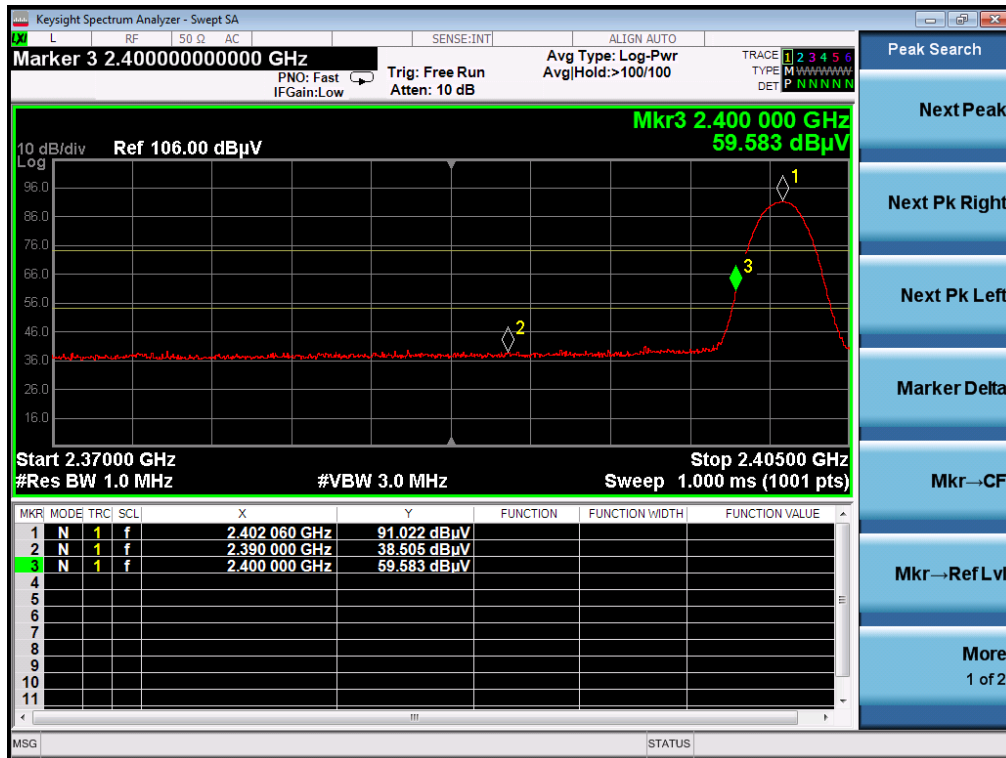

AV Value

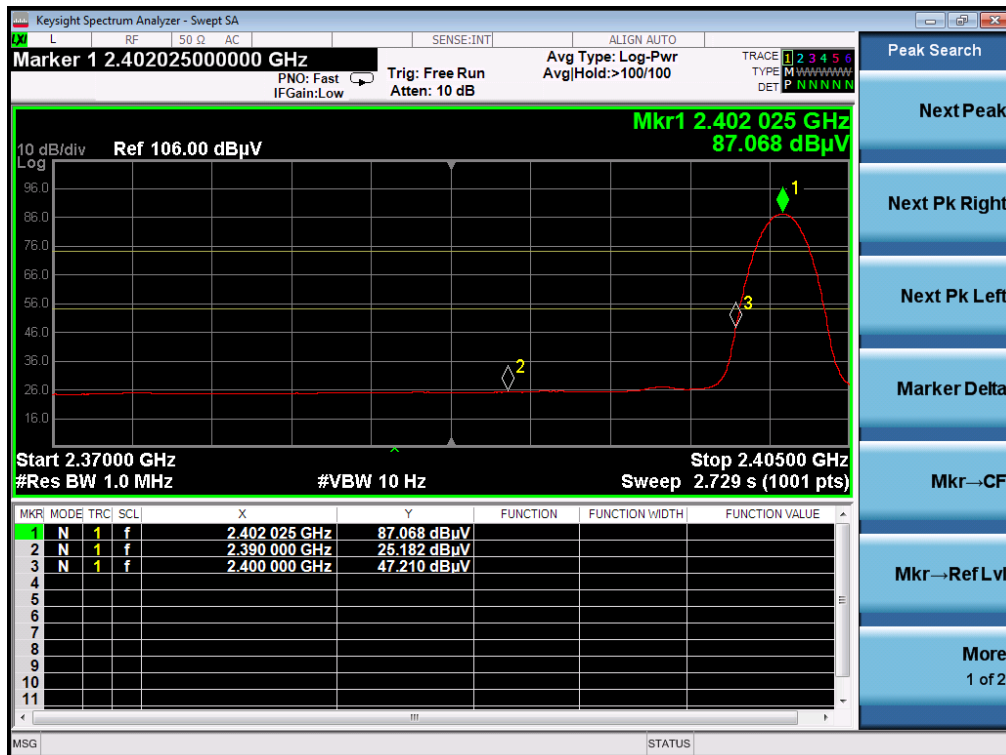




EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

PK Value




AV Value

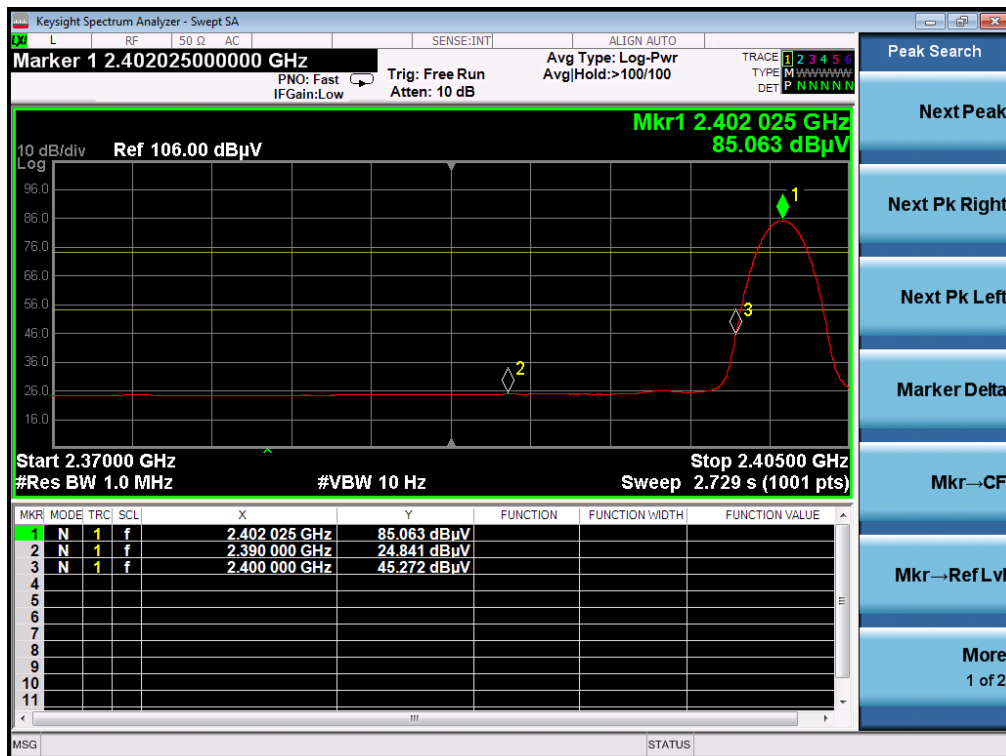




EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Horizontal

PK Value

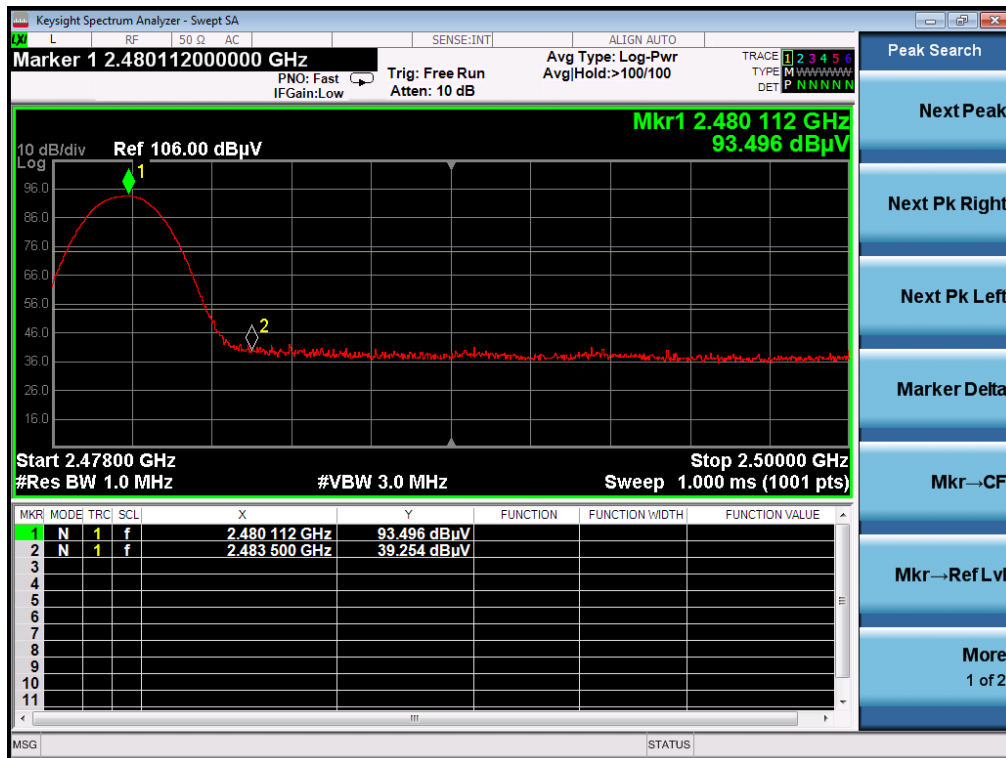


AV Value

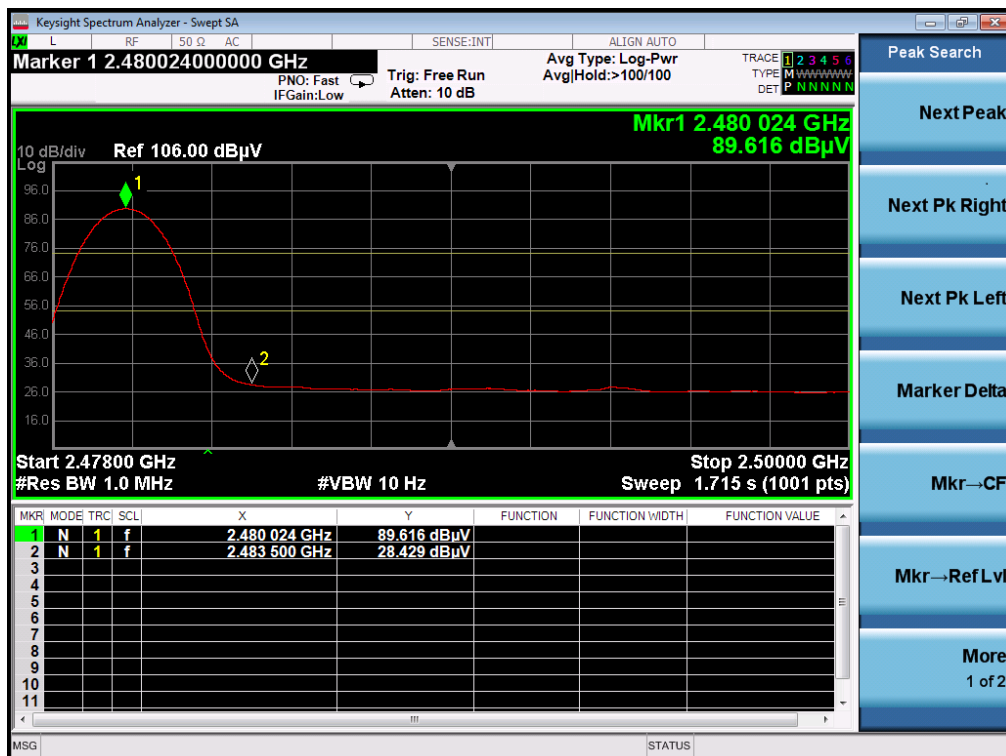




EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Vertical

PK Value

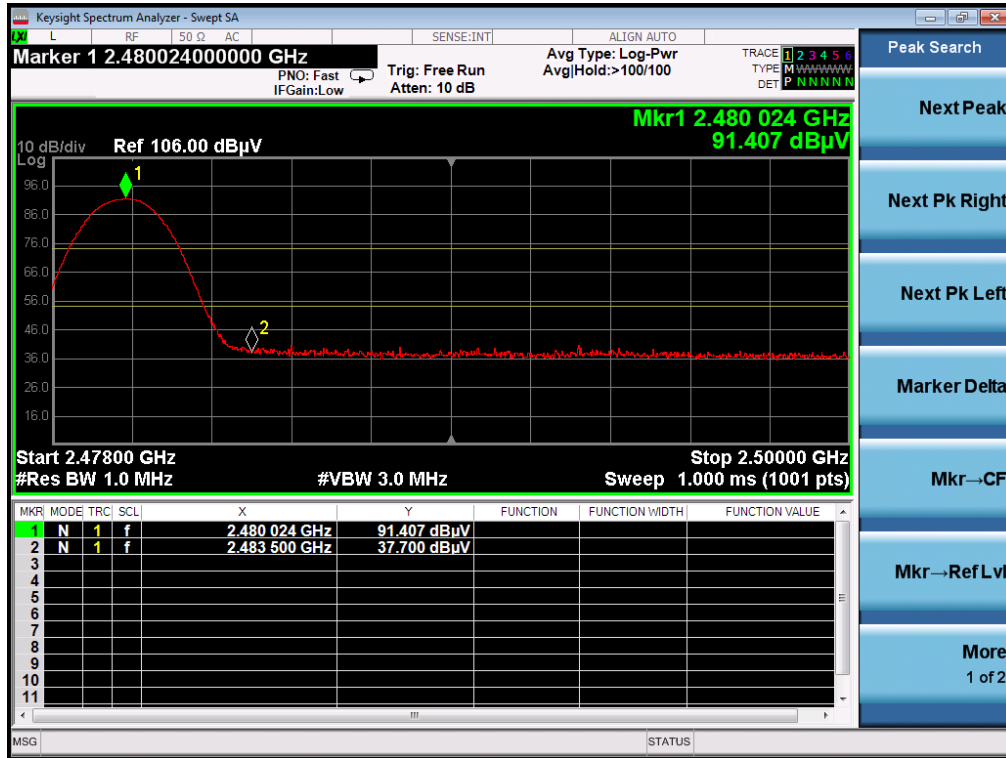

AV Value

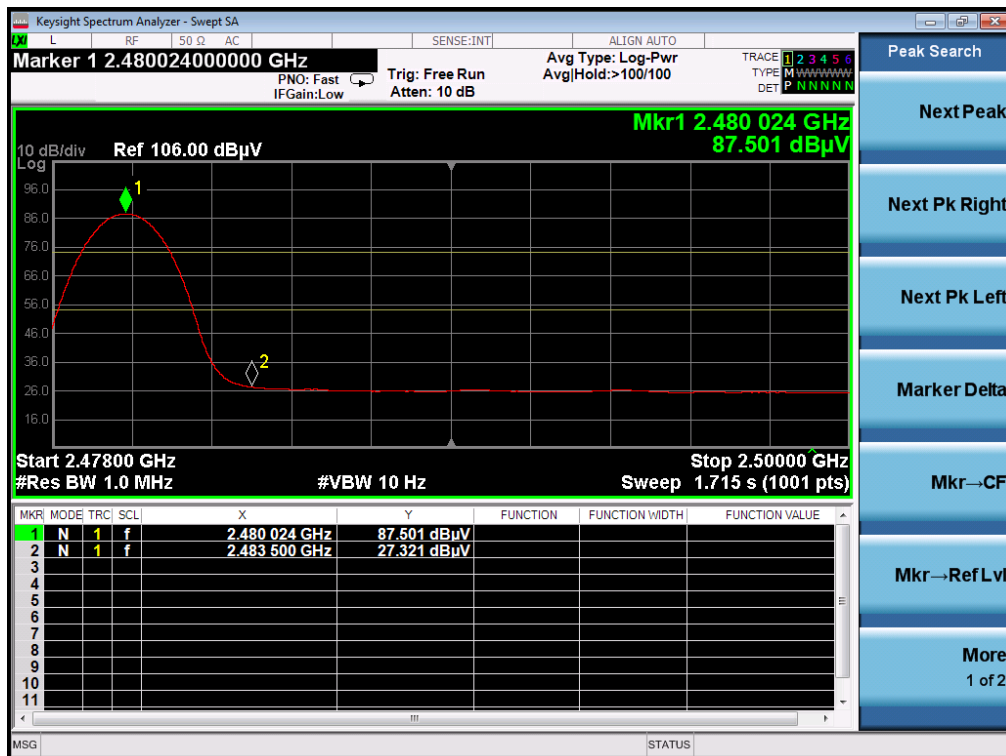

Note: The GFSK modulation was the worst case and only the data of worst recorded in this report.



FOR BLE

EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Horizontal

PK Value



AV Value






EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 10	Polarization :	Vertical

PK Value




AV Value

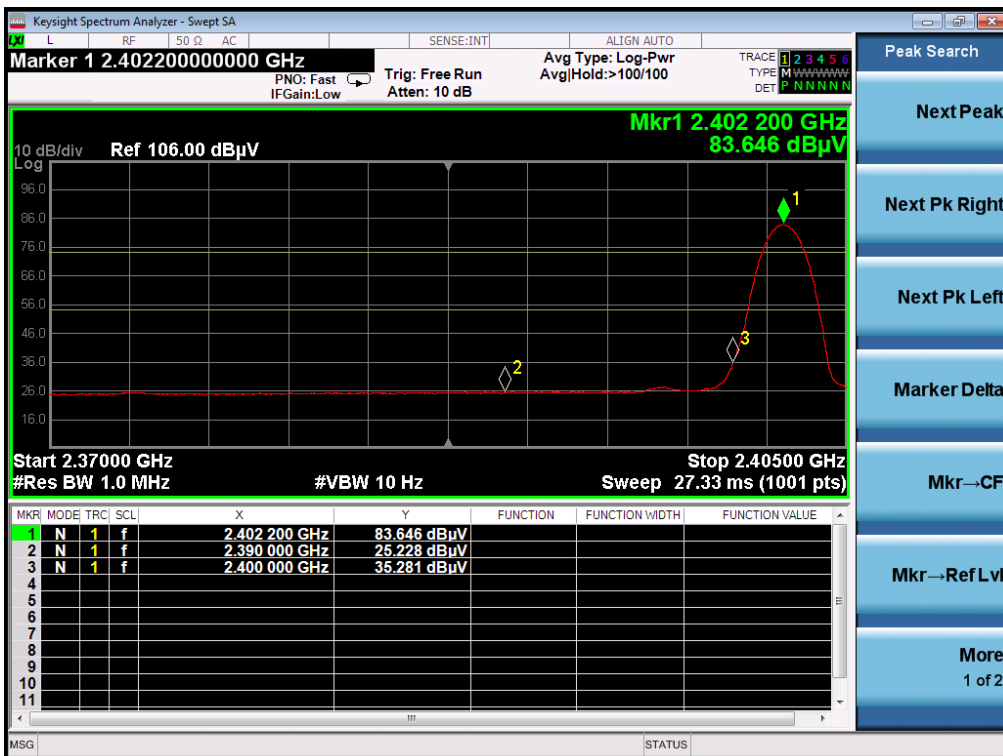




EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 12	Polarization :	Horizontal

PK Value

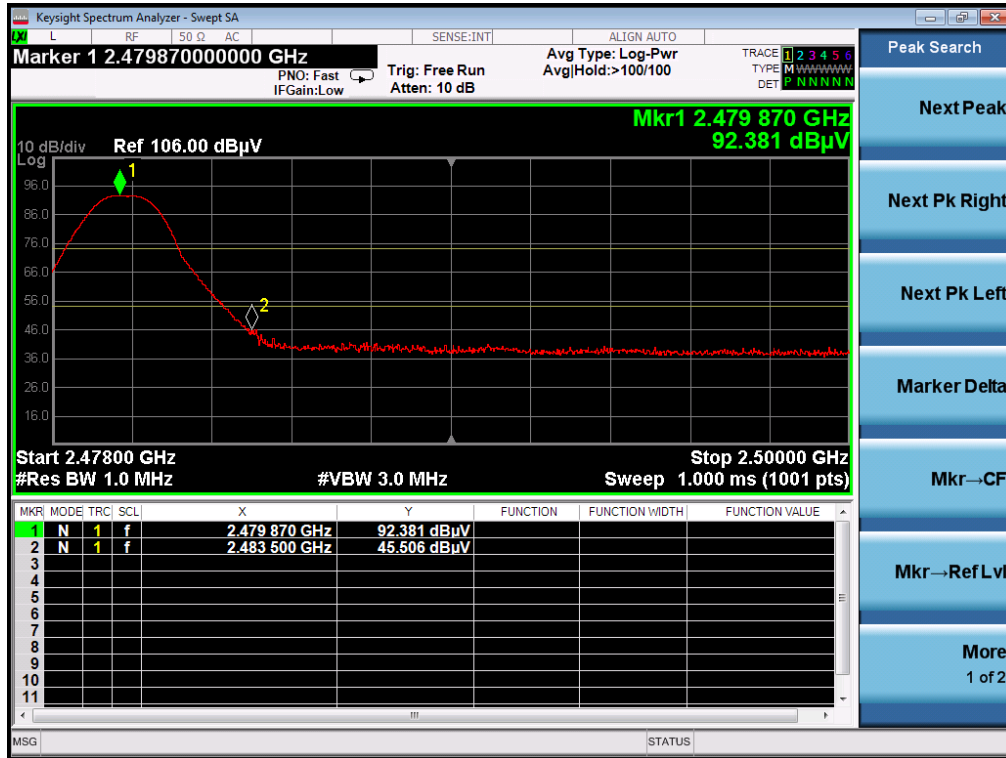

AV Value

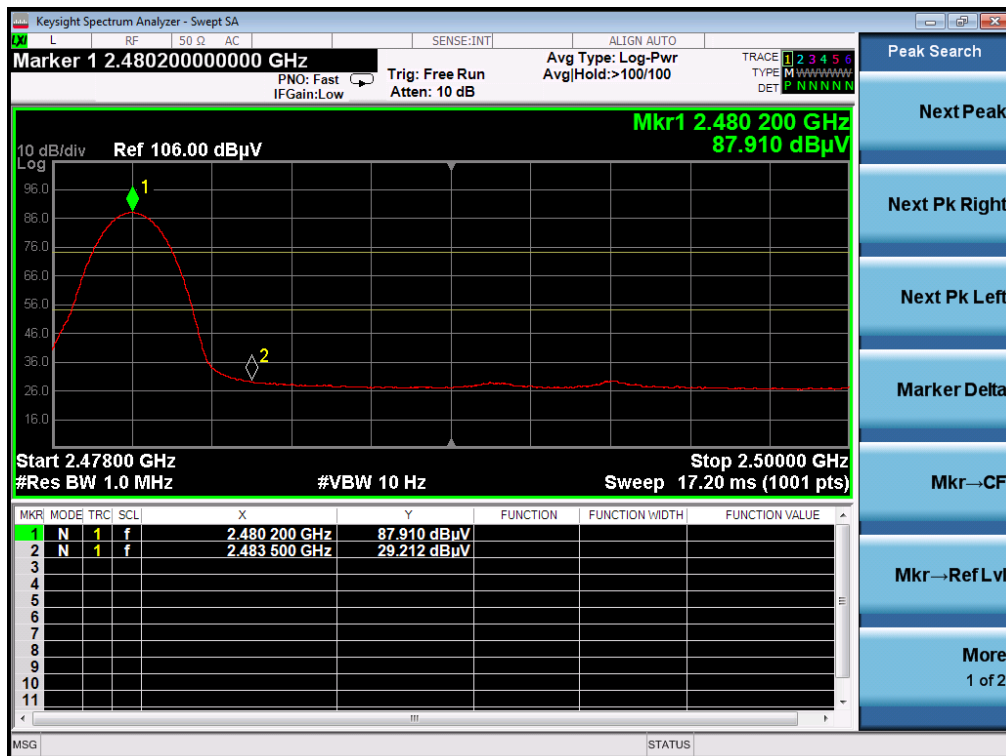







EUT :	Wireless Wi-Fi & Bluetooth Audio Receiver with IR Remote	Model Name. :	WBA31
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 12	Polarization :	Vertical

PK Value

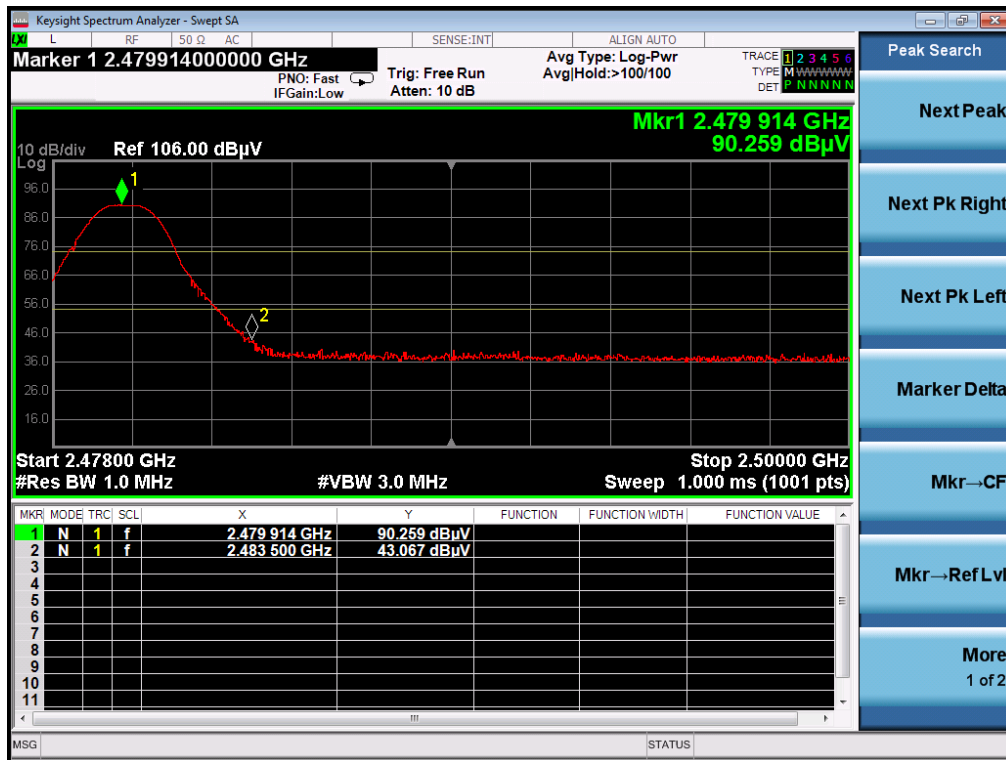

AV Value

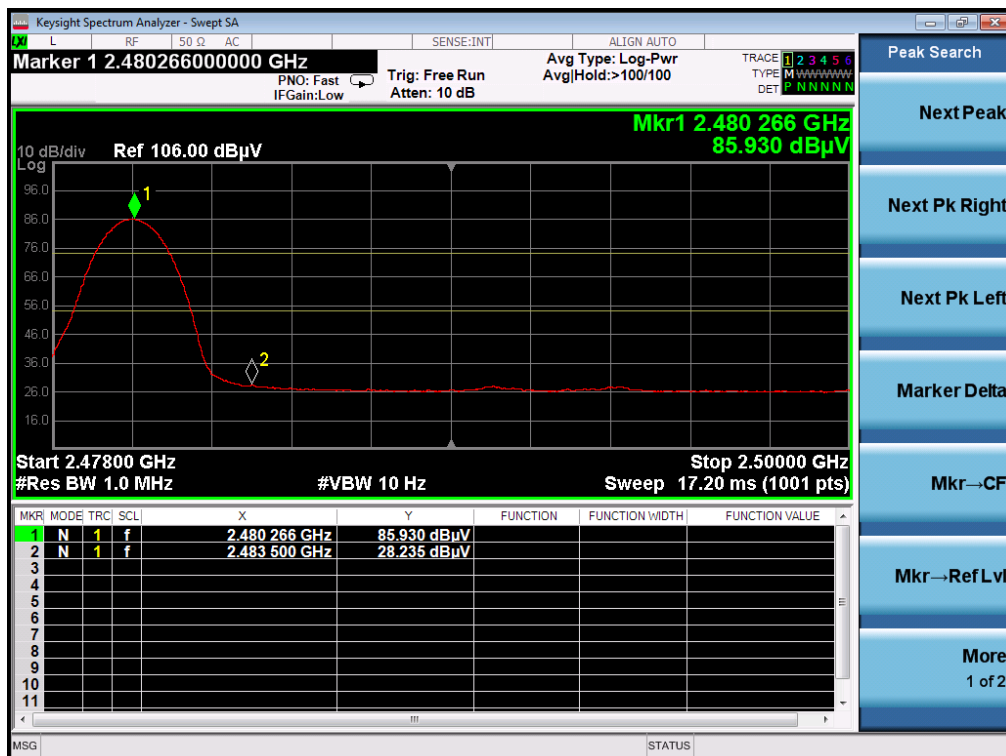




## 5. BANDWIDTH

### 5.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Set the EUT Work on the operation frequency individually.
3. Set Span = approximately 2 to 5 times the OBW, centered on a hopping channel  
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately 3\* RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 5.2. TEST SETUP

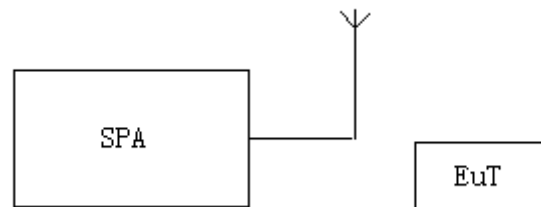



### 5.3. TEST RESULT

<b>TEST ITEM</b>	20DB BANDWIDTH
<b>TEST MODULATION</b>	GFSK for BR/EDR

Test Data (MHz)		Criteria
Low Channel	1.038	PASS
Middle Channel	1.040	PASS
High Channel	1.038	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL






<b>TEST ITEM</b>	20DB BANDWIDTH
<b>TEST MODULATION</b>	$\pi$ /4-DQPSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.343	PASS
Middle Channel	1.343	PASS
High Channel	1.343	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

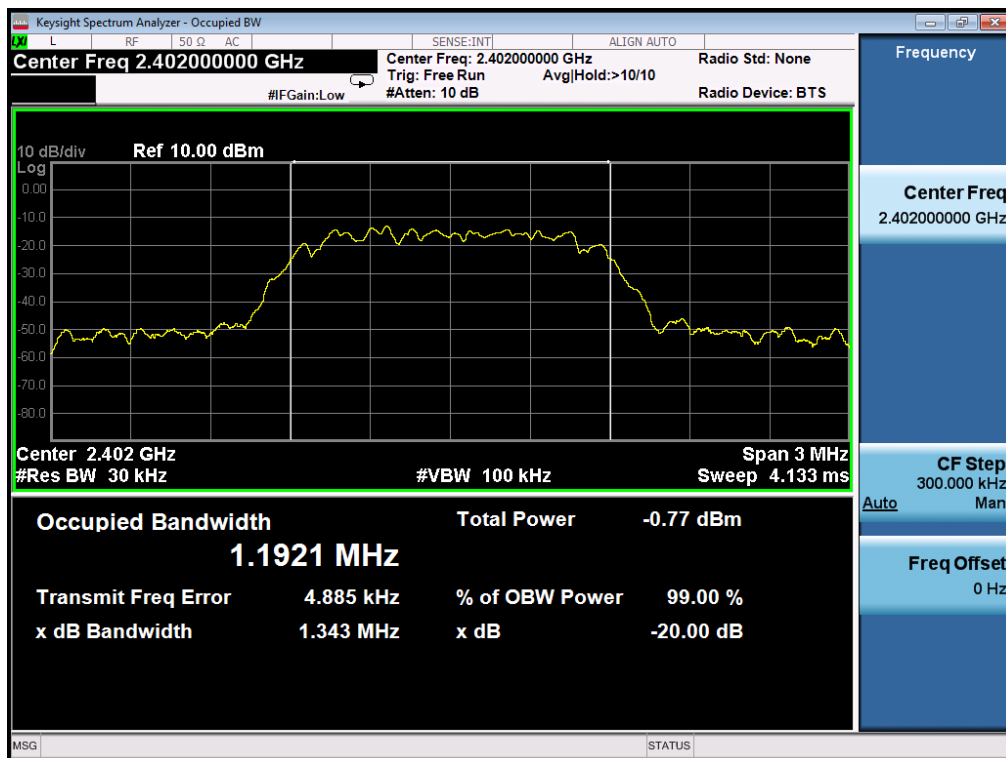




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

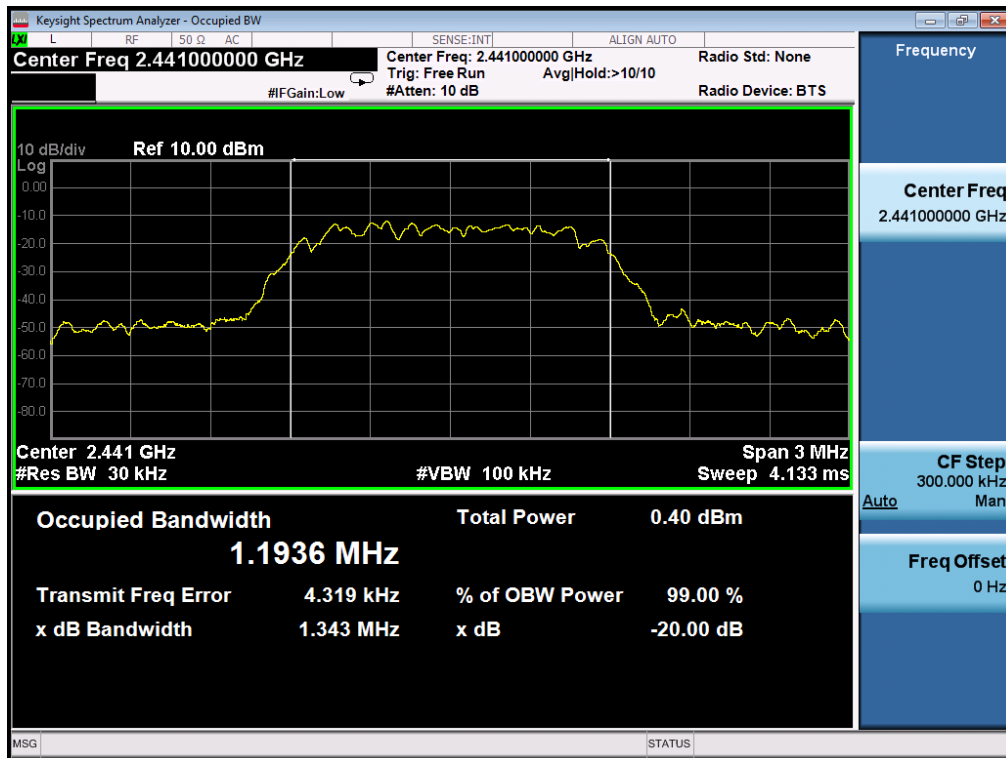

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

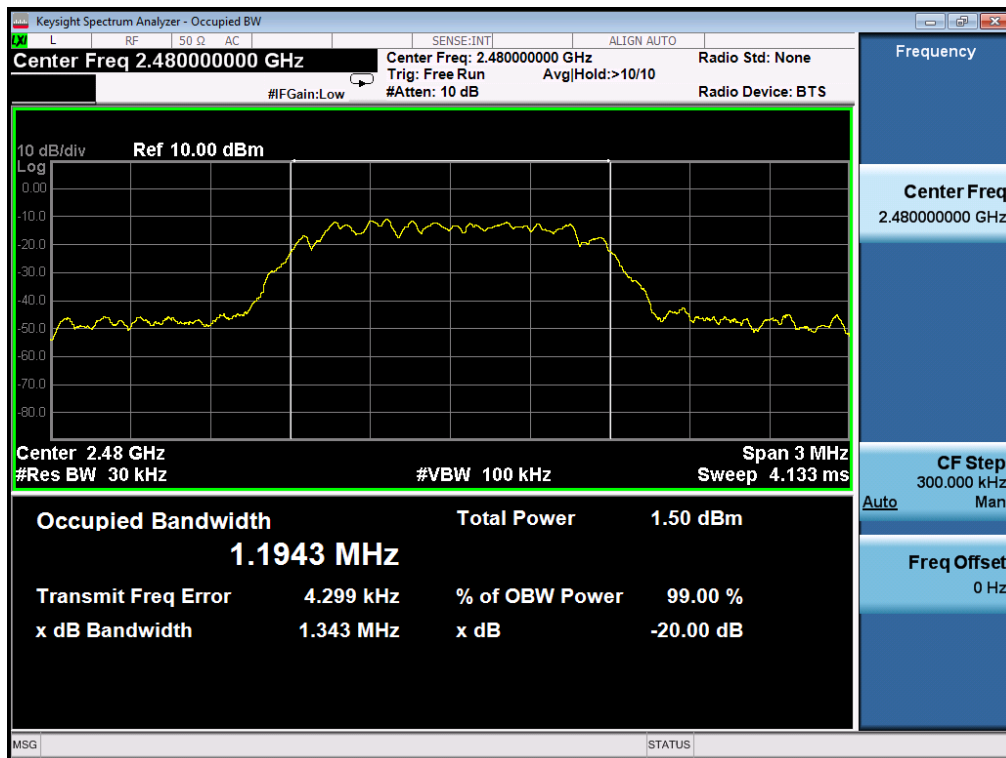




<b>TEST ITEM</b>	20DB BANDWIDTH
<b>TEST MODULATION</b>	8DPSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.362	PASS
Middle Channel	1.363	PASS
High Channel	1.365	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

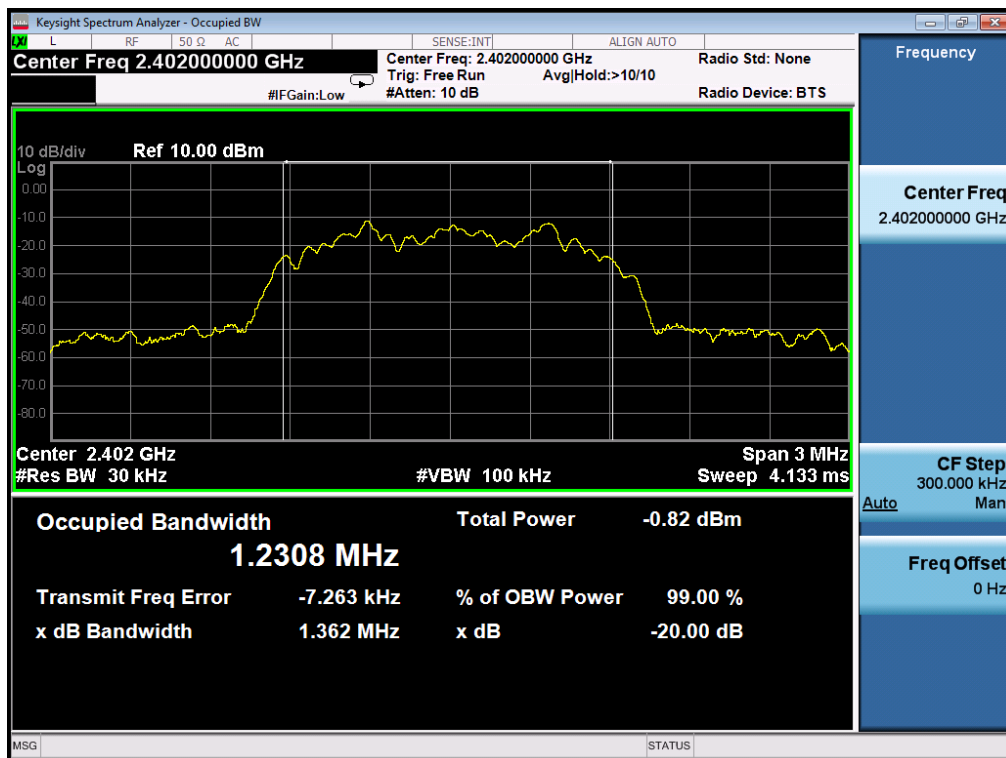




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

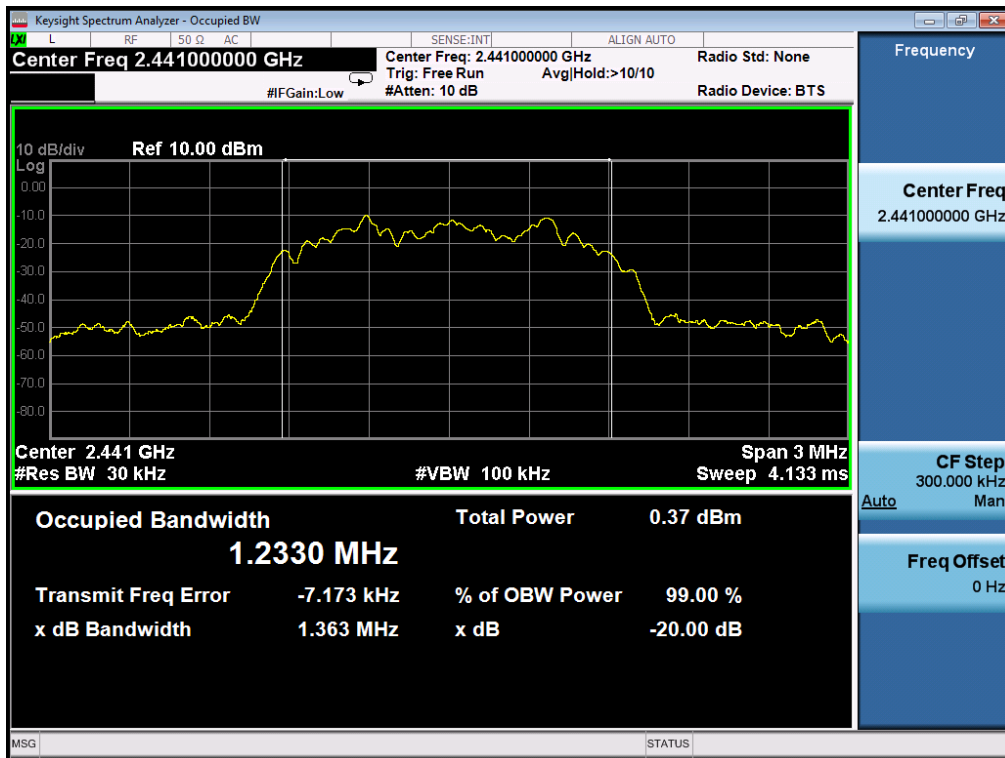

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

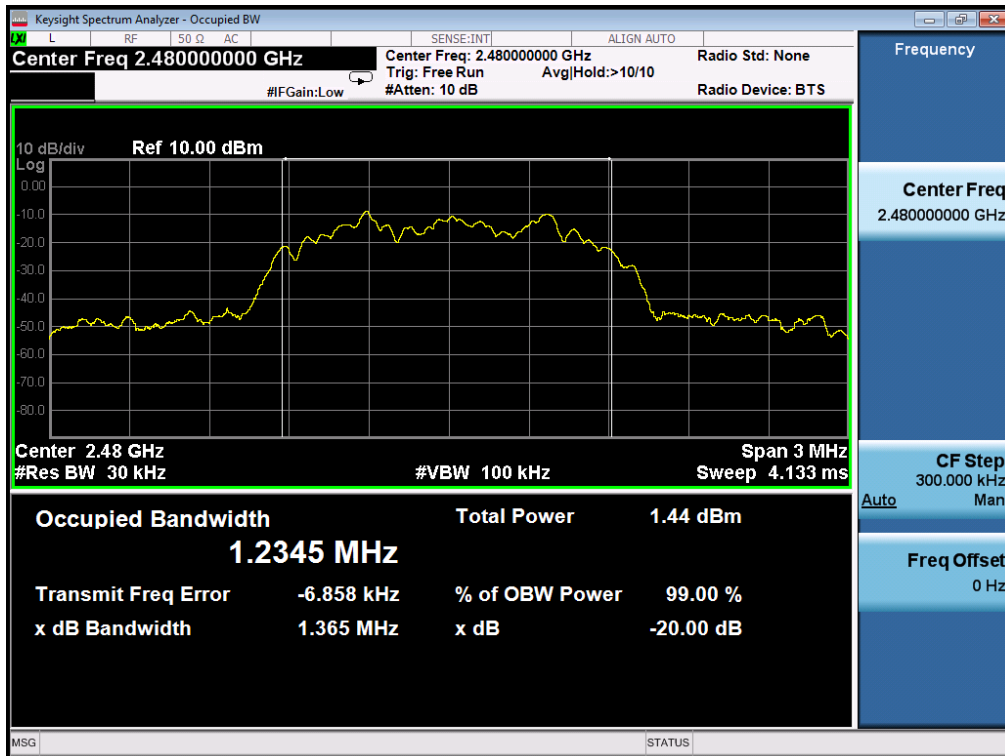





<b>TEST ITEM</b>	20DB BANDWIDTH
<b>TEST MODULATION</b>	GFSK for BLE


Test Data (MHz)		Criteria
Low Channel	1.109	PASS
Middle Channel	1.108	PASS
High Channel	1.106	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL






### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

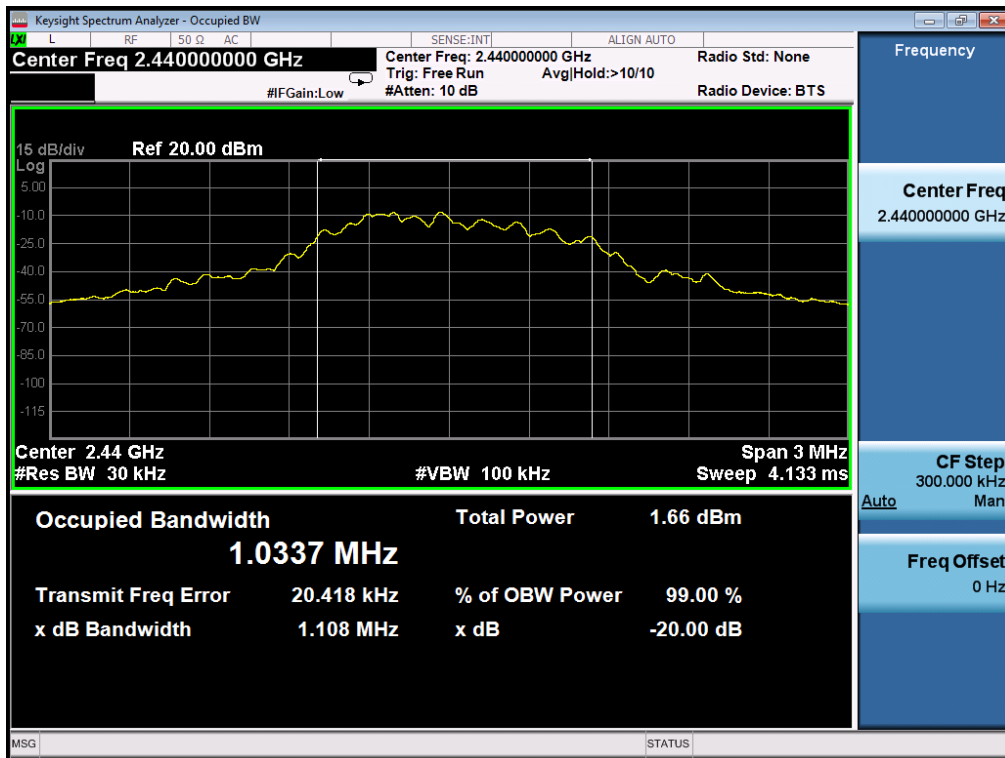

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

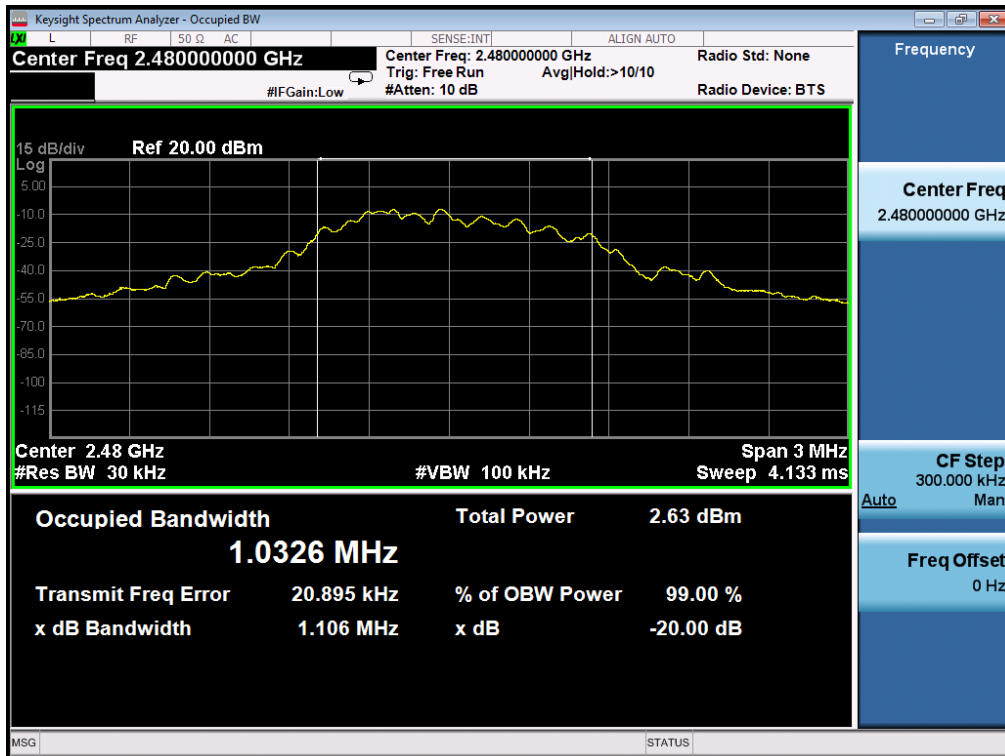

## 6. FCC LINE CONDUCTED EMISSION TEST


### 6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 6.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

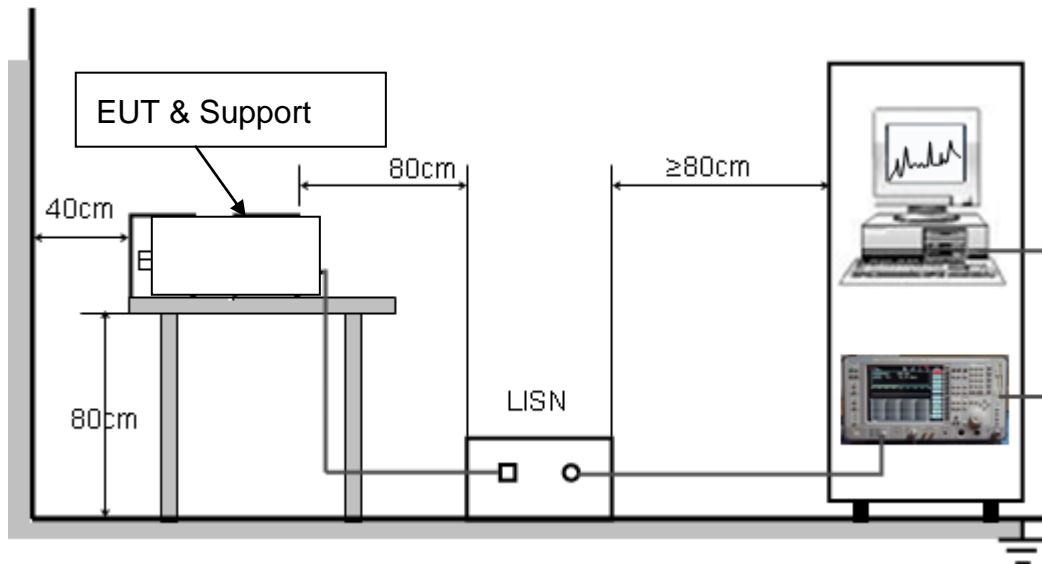



### **6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received DC5V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received DC5V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### **6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less  $-2\text{dB}$  to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.



### 6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

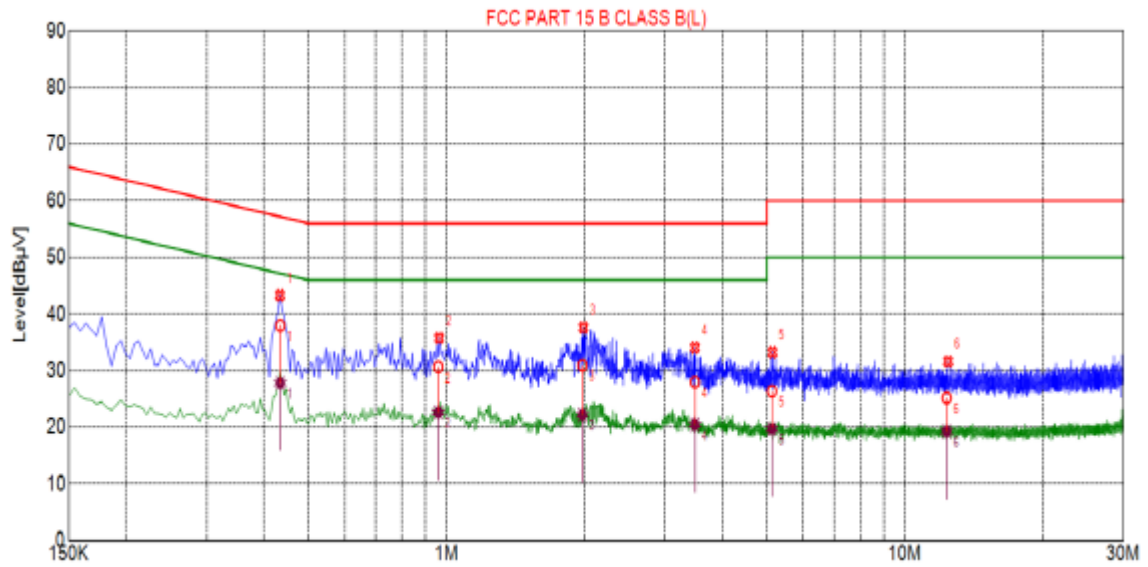


Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.4335	43.30	10.05	57.19	13.89	PK
2	0.9645	35.74	10.06	56.00	20.26	PK
3	1.9905	37.61	10.14	56.00	18.39	PK
4	3.4845	34.04	10.25	56.00	21.96	PK
5	5.1450	33.24	10.26	60.00	26.76	PK
6	12.4305	31.64	9.98	60.00	28.36	PK

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]
1	0.4341	10.05	37.98	57.17	19.19	27.81	47.17	19.36
2	0.9600	10.06	30.64	56.00	25.36	22.60	46.00	23.40
3	1.9802	10.14	30.93	56.00	25.07	22.18	46.00	23.82
4	3.4847	10.25	27.99	56.00	28.01	20.43	46.00	25.57
5	5.1297	10.26	26.38	60.00	33.62	19.70	50.00	30.30
6	12.3420	9.98	25.20	60.00	34.80	19.25	50.00	30.75



Line Conducted Emission Test Line 2-N

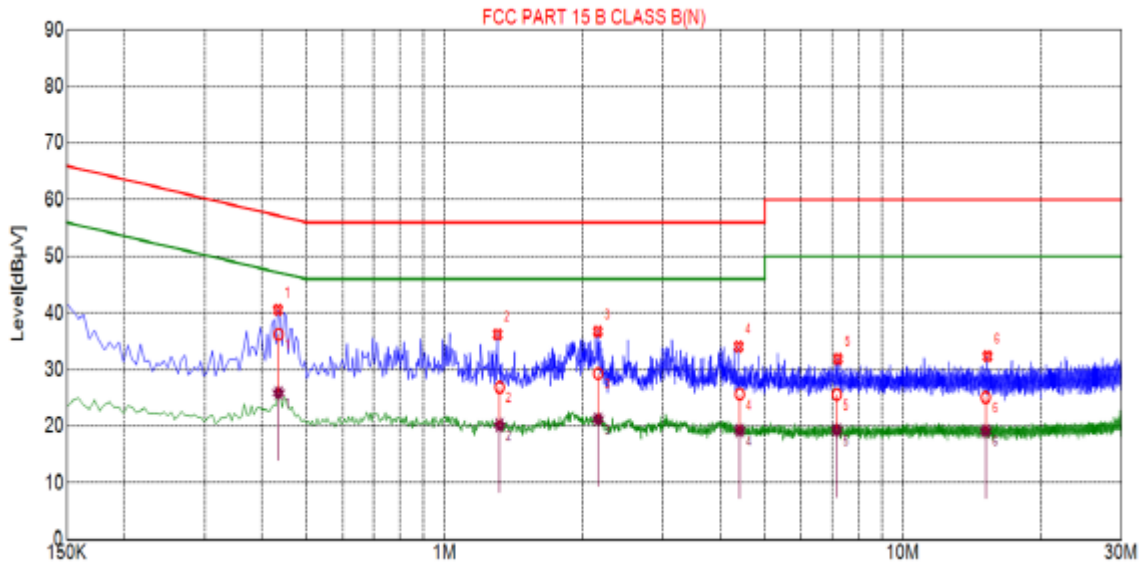

Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.4335	40.52	10.05	57.19	16.67	PK
2	1.3065	36.23	10.10	56.00	19.77	PK
3	2.1615	36.76	10.16	56.00	19.24	PK
4	4.3845	34.04	10.25	56.00	21.96	PK
5	7.2195	31.91	10.19	60.00	28.09	PK
6	15.3015	32.33	9.96	60.00	27.67	PK


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]
1	0.4348	10.05	36.25	57.16	20.91	25.87	47.16	21.29
2	1.3195	10.10	26.88	56.00	29.12	20.20	46.00	25.80
3	2.1639	10.16	29.29	56.00	26.71	21.27	46.00	24.73
4	4.4080	10.25	25.63	56.00	30.37	19.24	46.00	26.76
5	7.1779	10.19	25.57	60.00	34.43	19.31	50.00	30.69
6	15.1620	9.96	25.10	60.00	34.90	19.17	50.00	30.83

**RESULT: PASS**

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

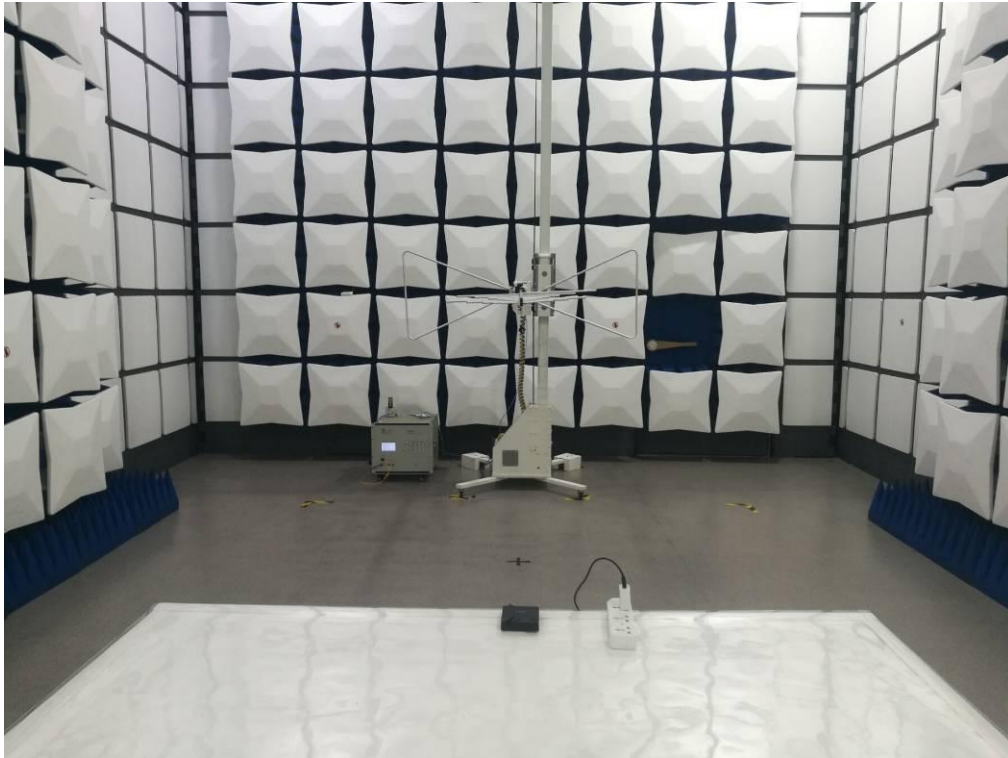

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ





### FCC LINE CONDUCTED EMISSION TEST SETUP







# APPENDIX B: PHOTOGRAPHS OF EUT

## ALL VEIW OF EUT





TOP VIEW OF EUT



BOTTOM VIEW OF EUT






FRONT VIEW OF EUT




BACK VIEW OF EUT

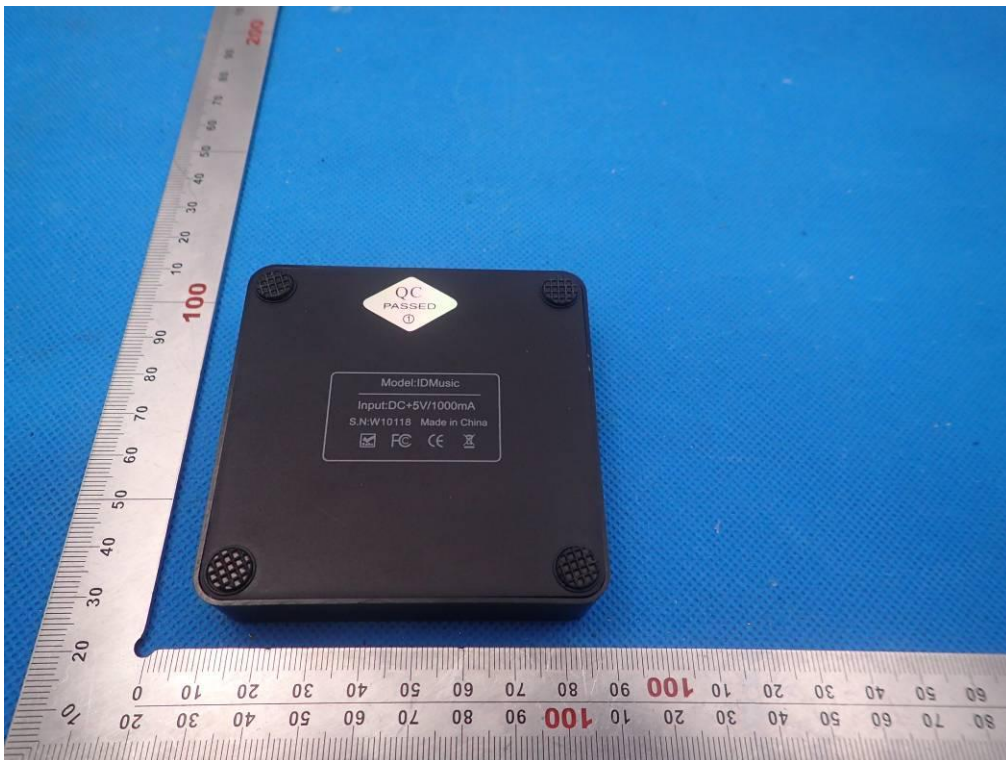




LEFT VIEW OF EUT

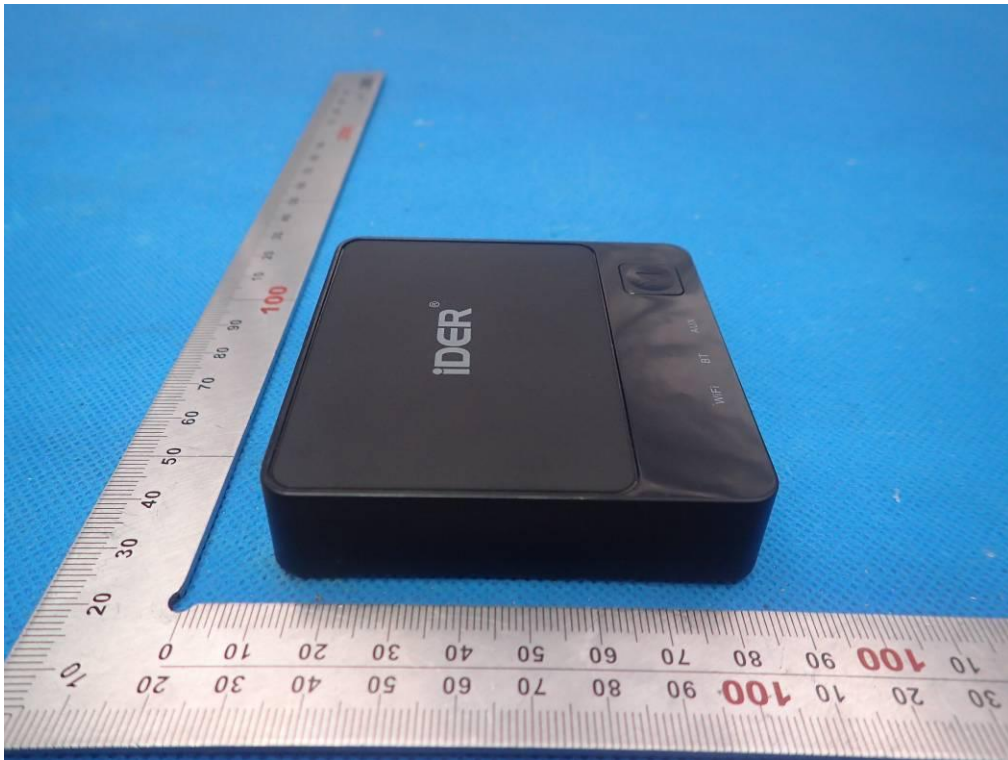


RIGHT VIEW OF EUT




### OPEN VIEW OF EUT

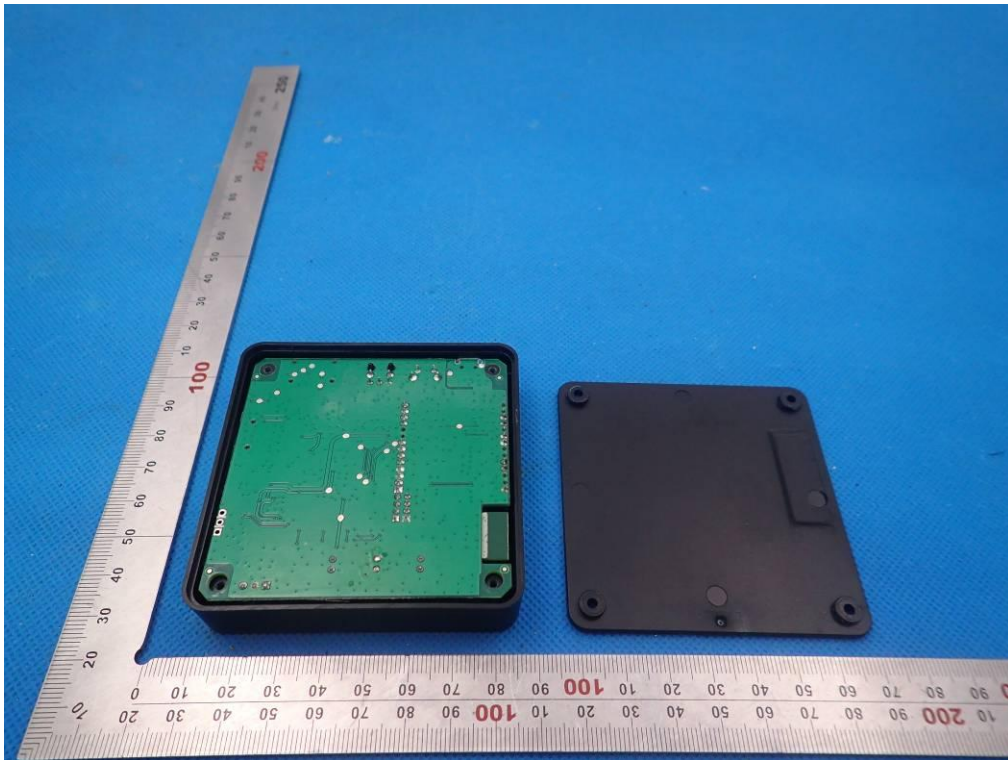


### INTERNAL VIEW OF EUT-1

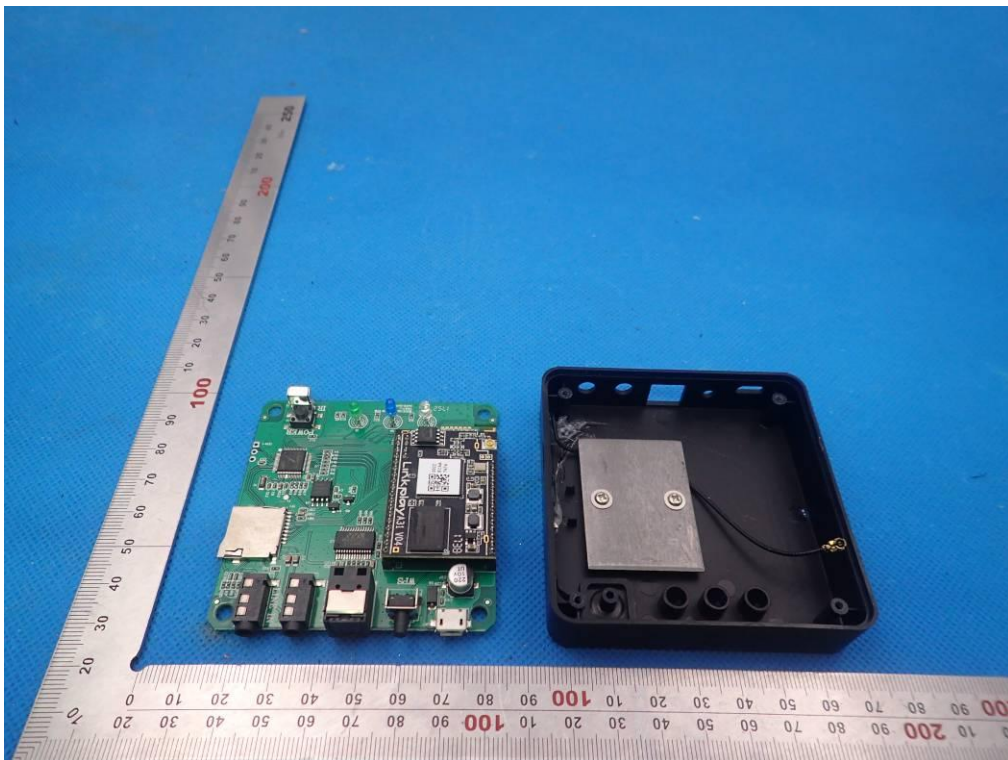

### INTERNAL VIEW OF EUT-2

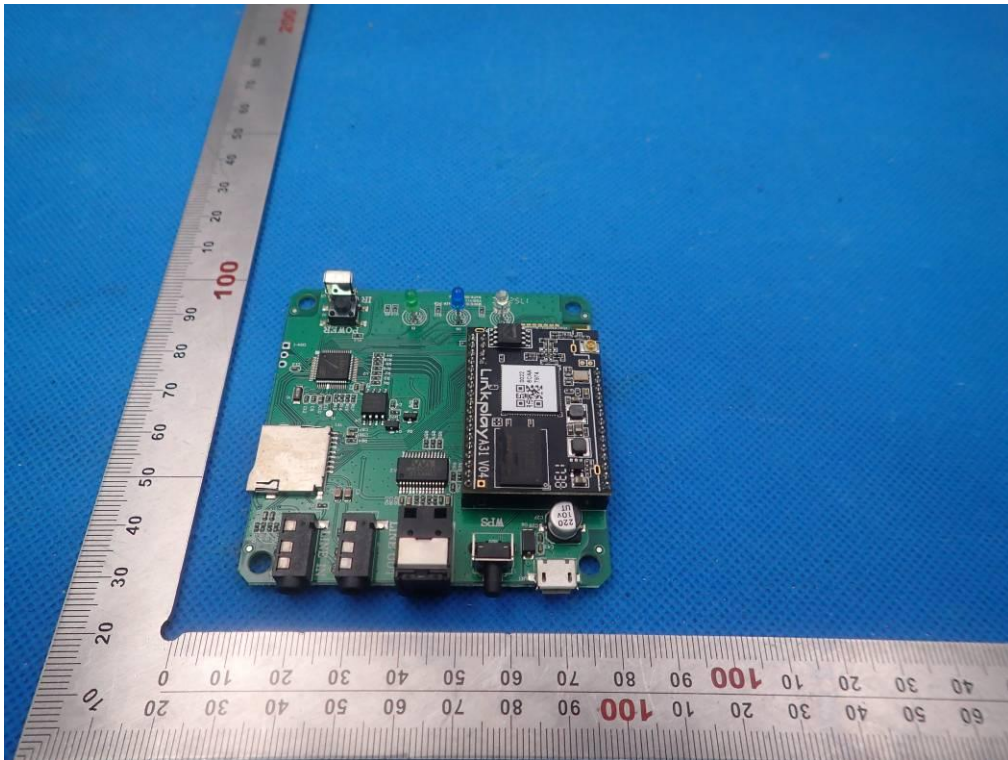


### INTERNAL VIEW OF EUT-3

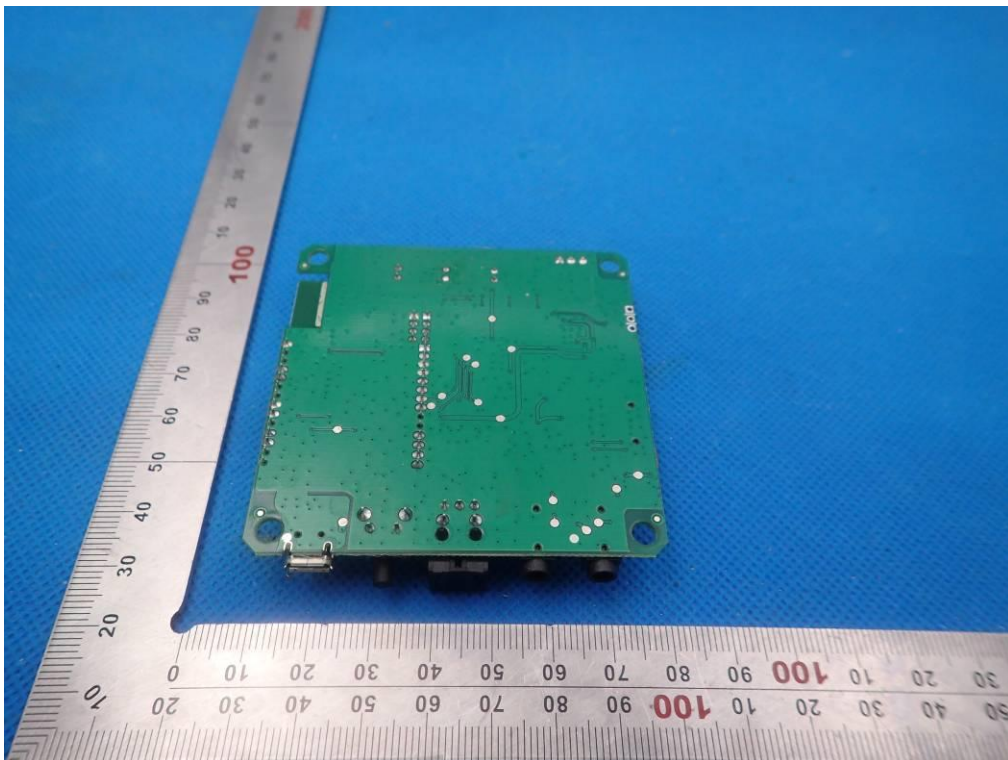





INTERNAL VIEW OF EUT-4

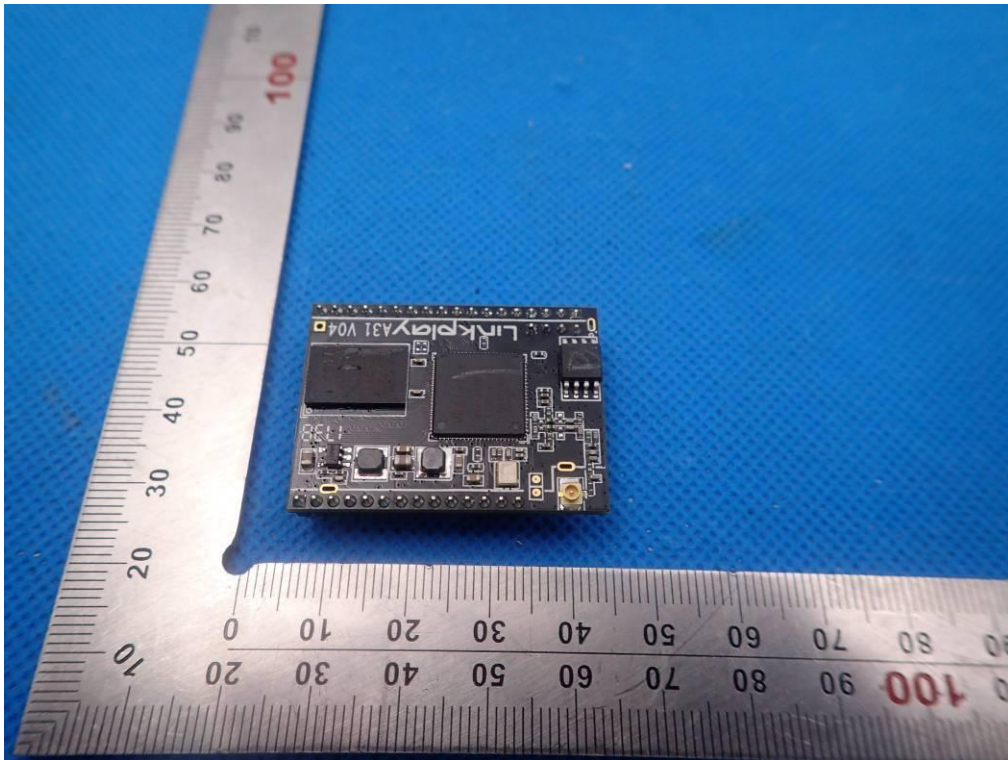


INTERNAL VIEW OF EUT-5

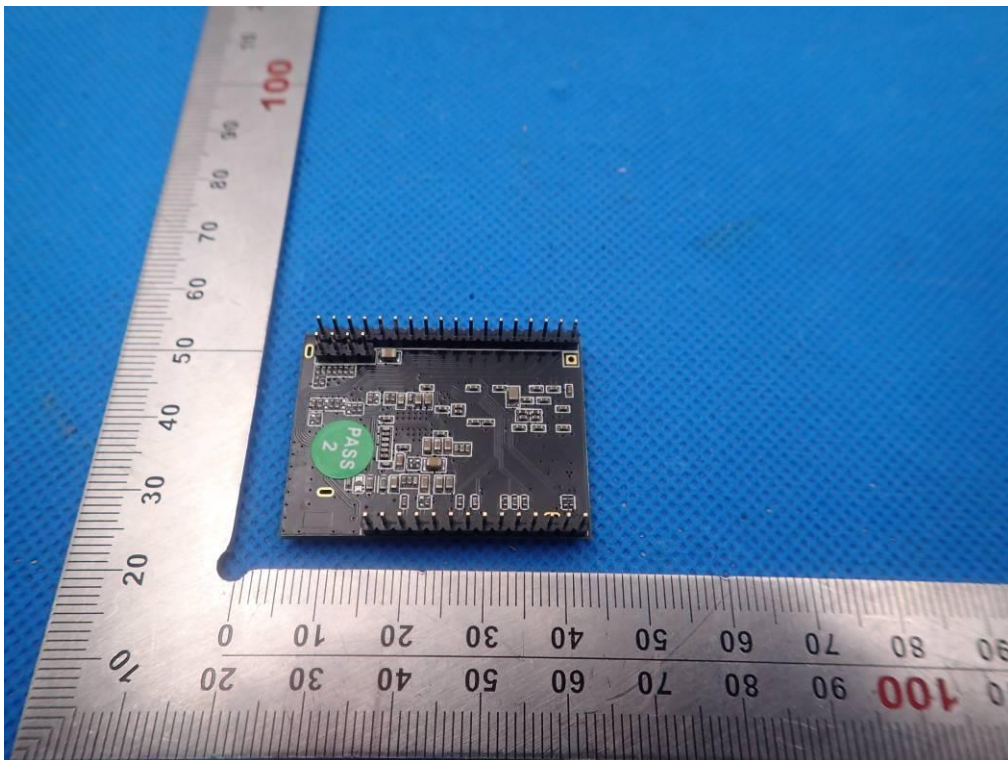

INTERNAL VIEW OF EUT-6

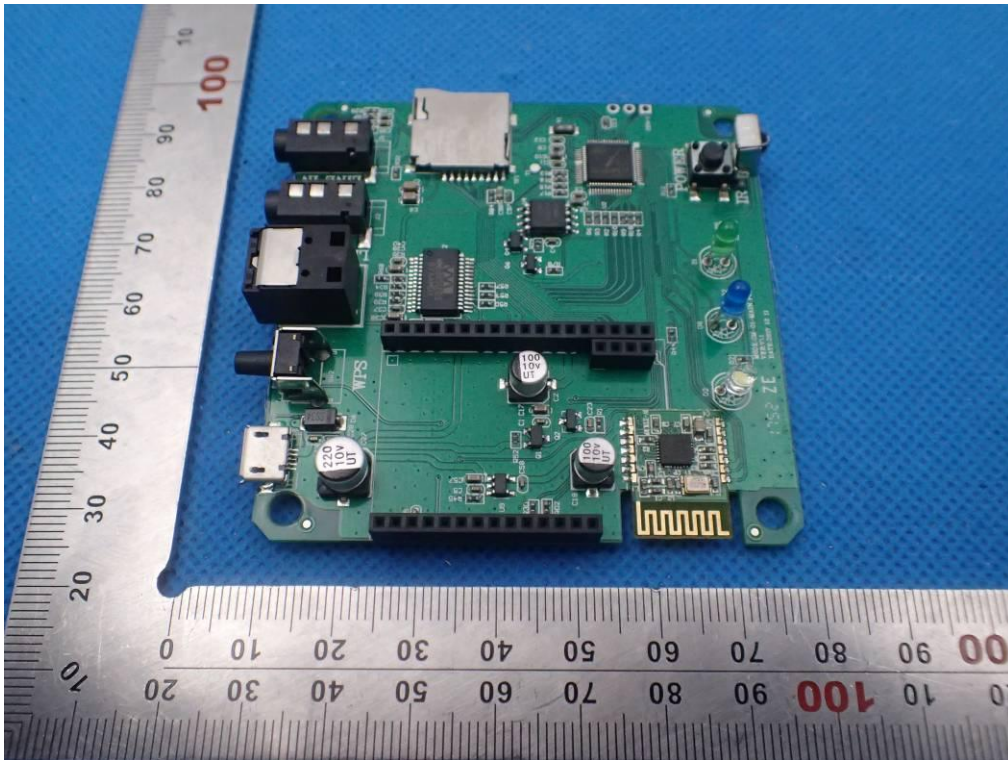


INTERNAL VIEW OF EUT-7

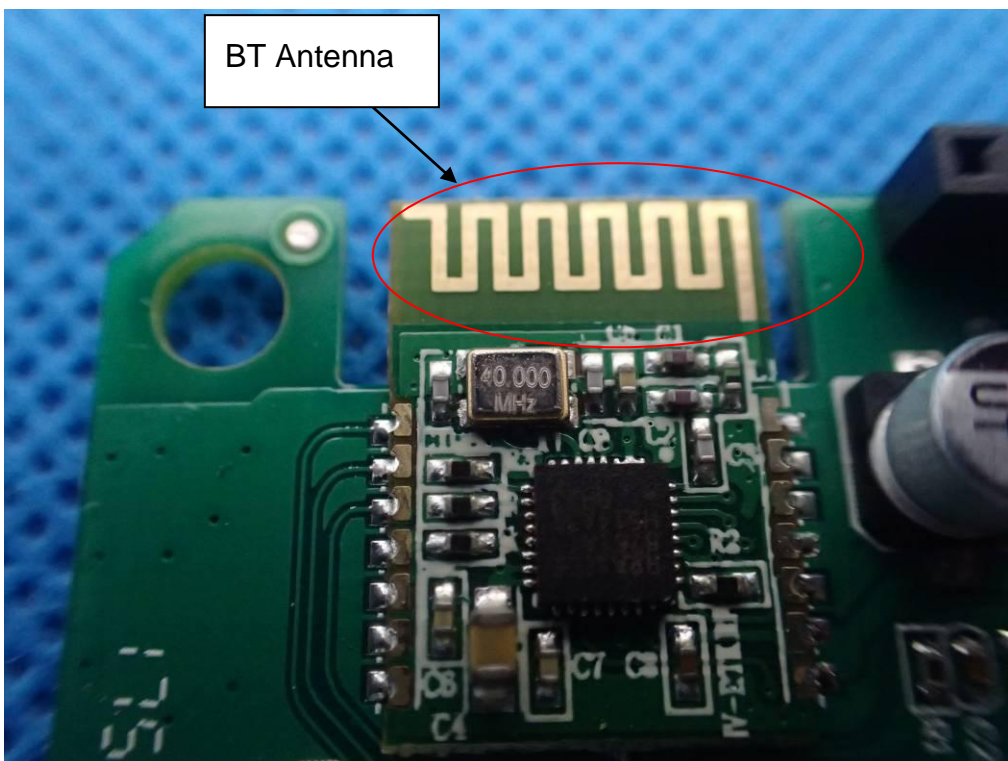





INTERNAL VIEW OF EUT-8

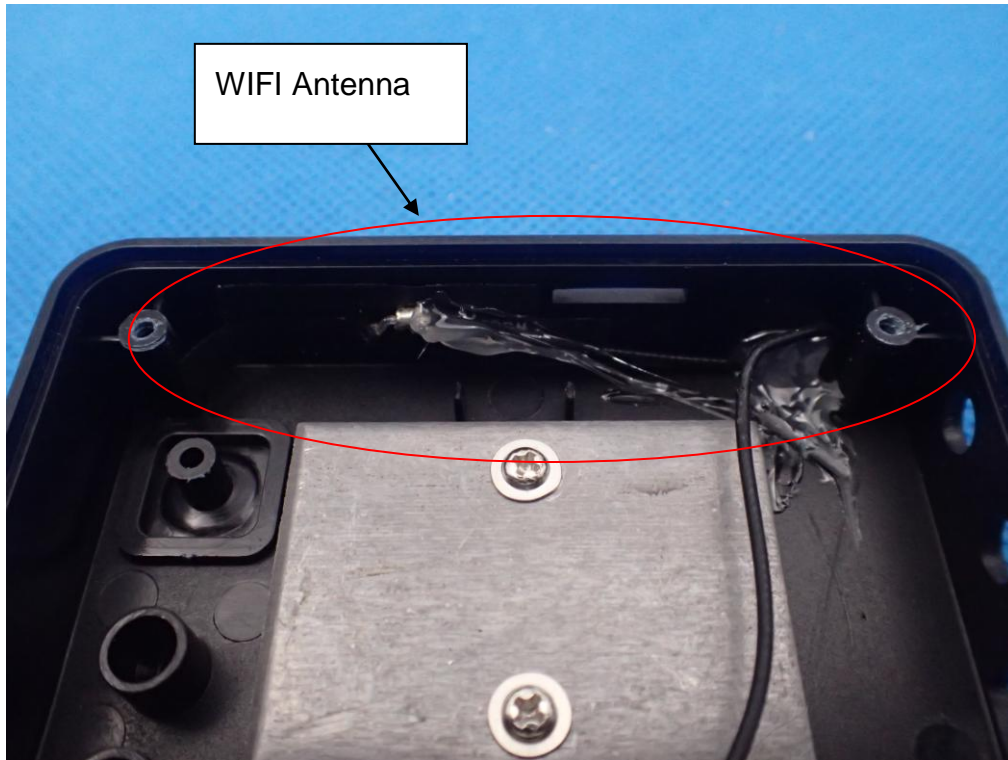

----END OF REPORT----