



# SPORTON International Inc.

No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.  
Ph: 886-3-656-9065 / FAX: 886-3-656-9085 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Coulisse B.V.
Applicant Address	Vonderweg 48 7468 DC Enter, The Netherlands
FCC ID	ZY4ABC04
Manufacturer's company	Santa Monica Co., Ltd
Manufacturer Address	18F., No.67, Sec.2, Tun-Hwa South Rd. Taipei, Taiwan

Product Name	Motor for drive a panel blind by RF remote control
Brand Name	Coulisse
Model Name	ABC-04
Marketing Name	Coulisse
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2402 ~ 2480MHz
Received Date	Jan. 18, 2012
Final Test Date	Mar. 16, 2012
Submission Type	Original Equipment



### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory  
1190

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Carrier Frequencies .....	3
3.4. Table for Test Modes .....	4
3.5. Table for Testing Locations.....	4
3.6. Table for Supporting Units .....	4
3.7. Test Configurations .....	5
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Field Strength of Fundamental Emissions Measurement .....	12
4.3. 20dB Spectrum Bandwidth Measurement .....	17
4.4. Radiated Emissions Measurement .....	20
4.5. Band Edge Emissions Measurement .....	29
4.6. Antenna Requirements .....	32
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>33</b>
<b>6. TEST LOCATION.....</b>	<b>35</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>36</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A6</b>



### History of This Test Report


REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR211834	Rev. 01	Initial issue of report	Apr. 05, 2012
FR211834	Rev. 02	Modify product Name.	May 07, 2012



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Motor for drive a panel blind by RF remote control  
Brand Name : Coulisse  
Model Name : ABC-04  
Applicant : Coulisse B.V.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 18, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

  
\_\_\_\_\_

Reviewed By:

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	22.03 dB
4.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	17.42 dB
4.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.249(a)/(d)	Radiated Emissions	Complies	9.46 dB
4.5	15.249(d)	Band Edge Emissions	Complies	2.28 dB
4.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From AC adaptor and Battery tube
Modulation	GFSK
Frequency Range	2402 ~ 2480MHz
Channel Number	79
Channel Space	1MHz non-overlapping channel spacing at 250Kbps
Channel Band Width (99%)	1.446 MHz
Max. Field Strength	76.58 dBuV/m
Carrier Frequencies	Please refer to section 3.3
Antenna	Internal Antenna (Without any antenna connector)
Note: The system uses normally only the 2.402GHz channel, no hopping is used, but the device must be certified such that it is possible to use other channels. The data-rate is 250Kbps, and information is send by packages, there is no continuous carrier during operation.	

#### 3.2. Accessories

N/A

#### 3.3. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2402 ~ 2480MHz	1	2402 MHz
	2	2403 MHz
	:	:
	39	2440 MHz
	40	2441 MHz
	41	2442 MHz
	:	:
	78	2479 MHz
	79	2480 MHz

### 3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Normal Link	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1/40/79
Radiated Emissions 30MHz ~ 1GHz	Normal Link	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	1/40/79
Band Edge Emissions	CTX	1/79

Note: CTX=continuously transmitting

The following test modes were performed for all tests:

**For Radiated Emission test:**

Mode 1. : AC Power supply (Adapter)

Mode 2. : DC Power supply (Battery Tube)

Due to Mode 1 generated the worst test result, it was recorded in this report.

### 3.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.


### 3.6. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
CONTROLLER	Coulisse	ABC-01-S	ZY4ABC01

### 3.7. Test Configurations

#### 3.7.1. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz / Mode 1

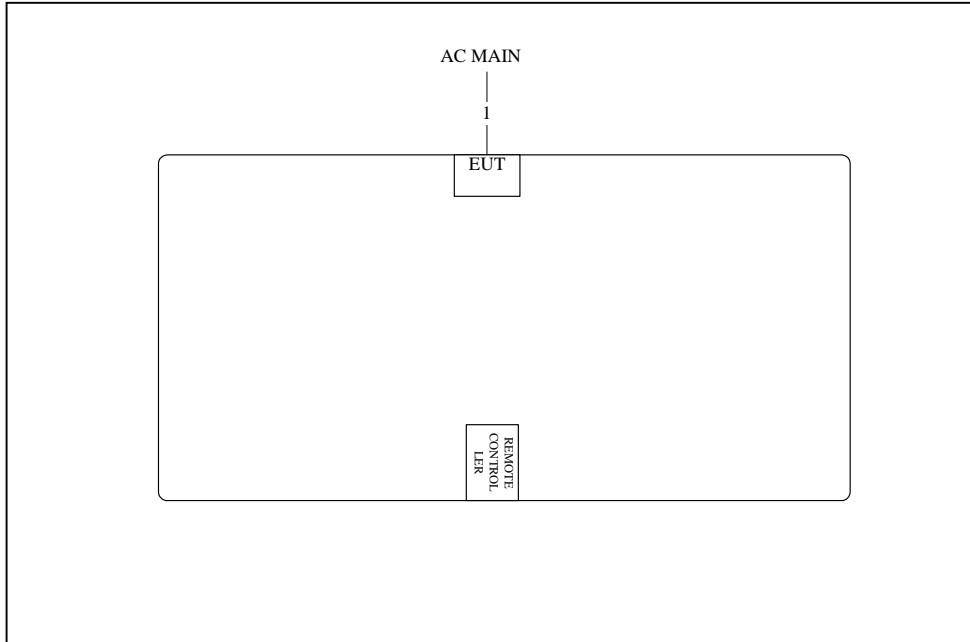

Item	Cable	Shield	Length
1	Power Cable	No	4.6M




Test Configuration: Above 1GHz / Mode 1

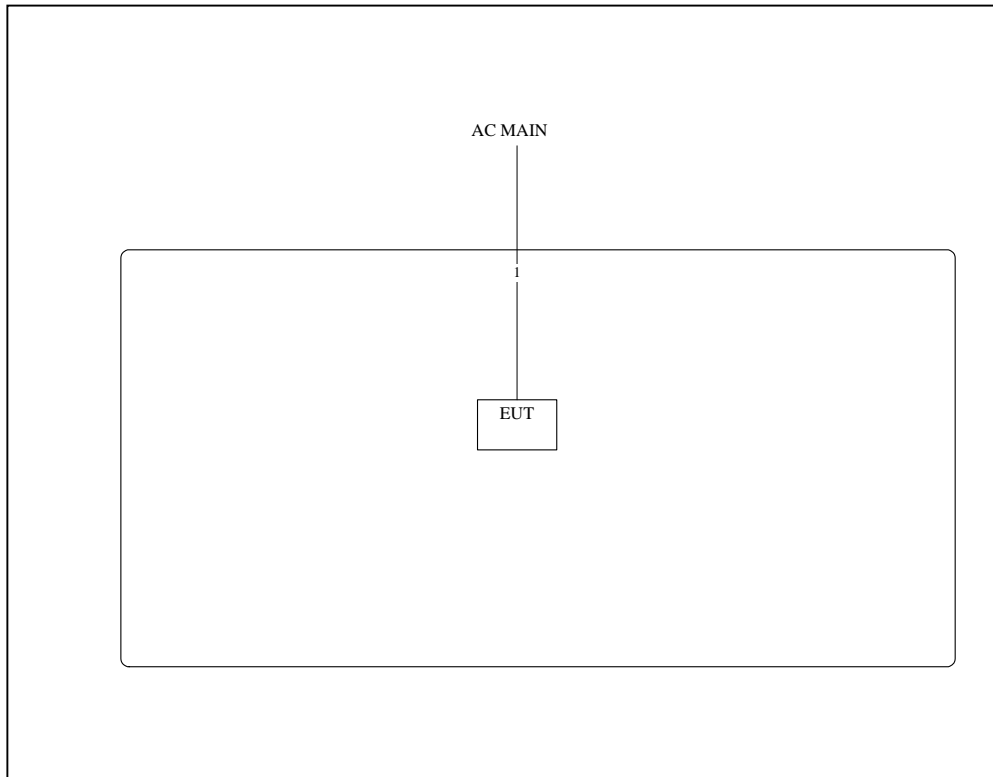

Item	Cable	Shield	Length
1	Power Cable	No	4.6M

### 3.7.2. AC Power Line Conduction Emissions Test Configuration

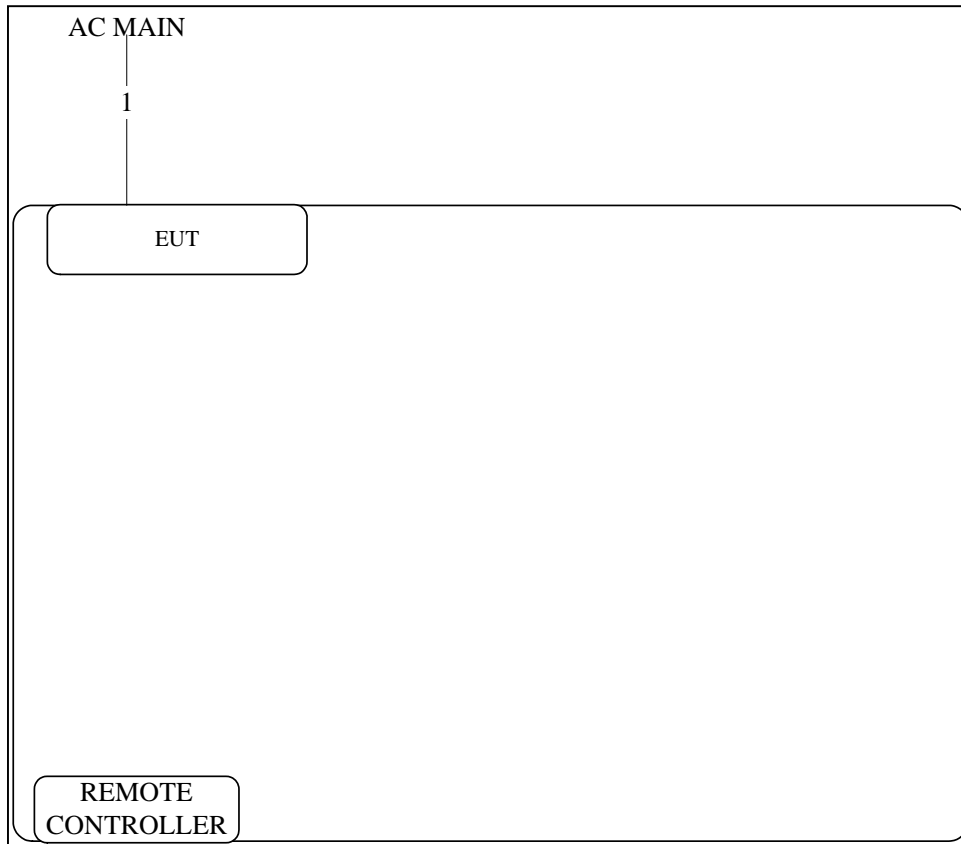

Item	Cable	Shield	Length
1	Power Cable	No	4.6M

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

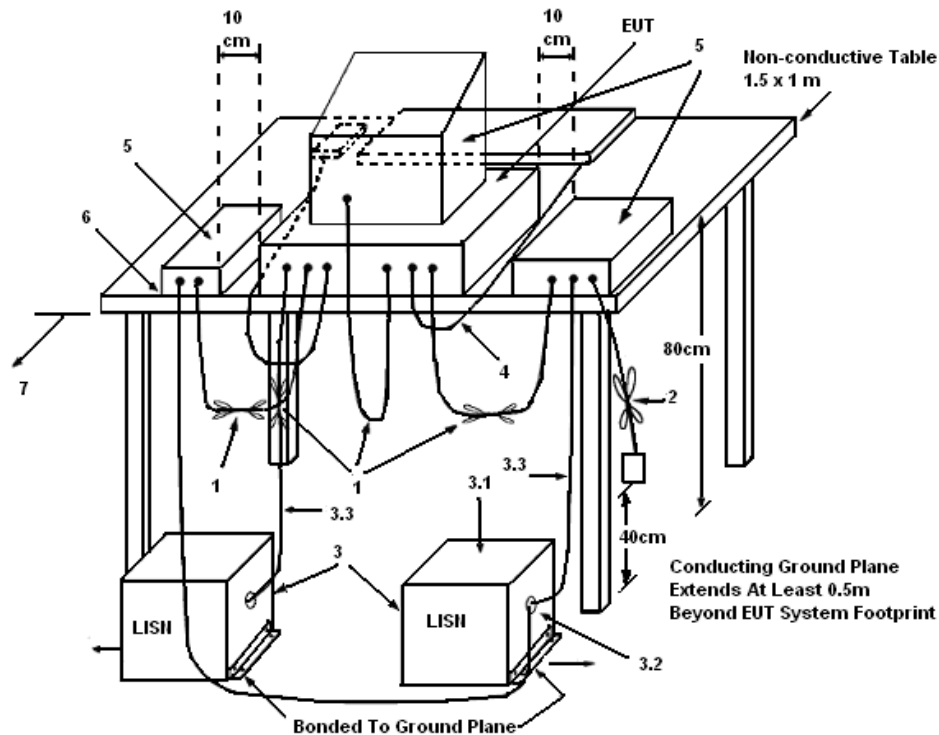

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	65%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link		

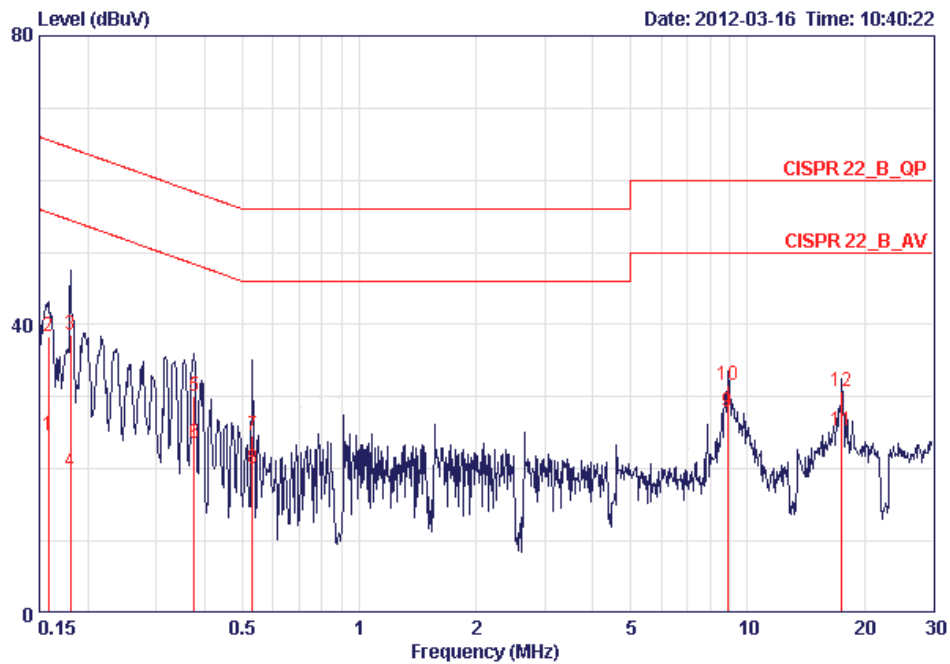

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15816	24.69	-30.87	55.56	24.42	0.07	0.20	AVERAGE
2	0.15816	38.45	-27.11	65.56	38.18	0.07	0.20	QP
3	0.18056	38.55	-25.91	64.46	38.29	0.06	0.20	QP
4	0.18056	19.72	-34.74	54.46	19.46	0.06	0.20	AVERAGE
5	0.37512	29.99	-28.39	58.39	29.76	0.03	0.20	QP
6	0.37512	23.52	-24.86	48.39	23.29	0.03	0.20	AVERAGE
7	0.53159	24.61	-31.39	56.00	24.38	0.03	0.20	QP
8	0.53159	20.00	-26.00	46.00	19.77	0.03	0.20	AVERAGE
9	8.869	27.97	-22.03	50.00	27.35	0.32	0.30	AVERAGE
10	8.869	31.58	-28.42	60.00	30.96	0.32	0.30	QP
11	17.475	25.35	-24.65	50.00	24.15	0.70	0.50	AVERAGE
12	17.475	30.84	-29.16	60.00	29.64	0.70	0.50	QP

Temperature	25°C	Humidity	65%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link		

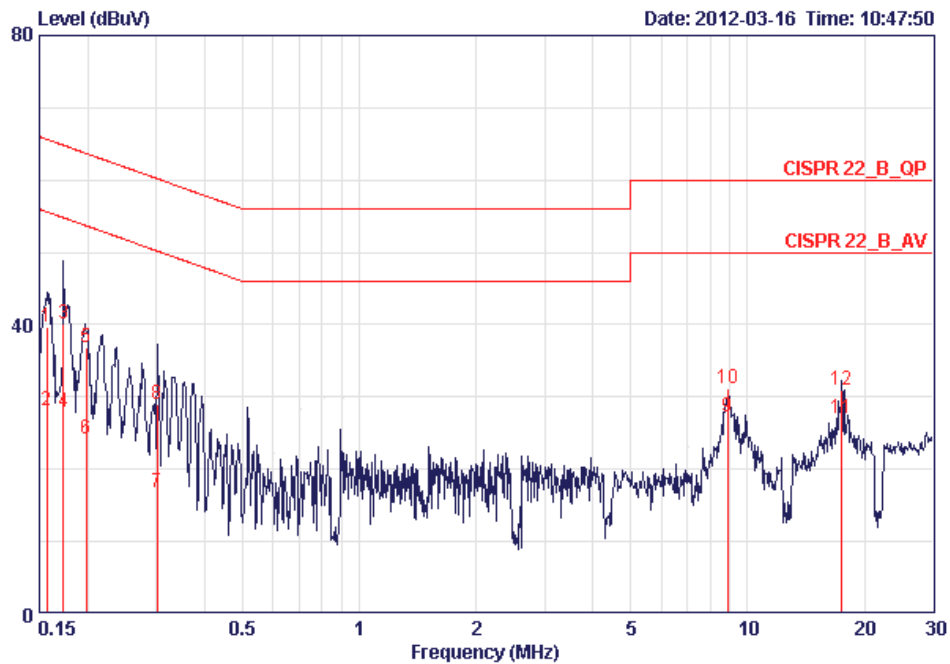

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15650	39.75	-25.90	65.65	39.45	0.10	0.20	QP
2	0.15650	28.06	-27.59	55.65	27.76	0.10	0.20	AVERAGE
3	0.17307	40.13	-24.68	64.81	39.84	0.09	0.20	QP
4	0.17307	27.83	-26.98	54.81	27.54	0.09	0.20	AVERAGE
5	0.19766	36.84	-26.87	63.71	36.56	0.08	0.20	QP
6	0.19766	24.30	-29.41	53.71	24.02	0.08	0.20	AVERAGE
7	0.30188	16.79	-33.40	50.19	16.52	0.07	0.20	AVERAGE
8	0.30188	28.97	-31.22	60.19	28.70	0.07	0.20	QP
9	8.869	27.27	-22.73	50.00	26.61	0.36	0.30	AVERAGE
10	8.869	31.13	-28.87	60.00	30.47	0.36	0.30	QP
11	17.475	27.11	-22.89	50.00	25.91	0.70	0.50	AVERAGE
12	17.475	30.98	-29.02	60.00	29.78	0.70	0.50	QP

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

## 4.2. Field Strength of Fundamental Emissions Measurement

### 4.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94 (Average)
	114 (Peak)

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 3MHz Peak
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

#### 4.2.4. Test Setup Layout

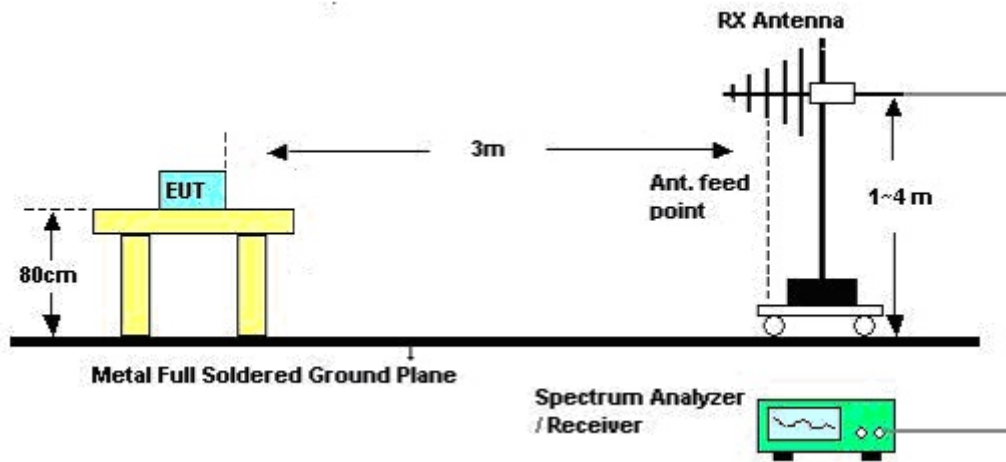

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 4.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	22°C	Humidity	65%
Test Engineer	Serway Li	Configurations	Channel 1
Test Date	Mar. 14, 2012		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2401.82	76.58	94.00	-17.42	46.15	2.22	28.21	0.00	Average	132	220	HORIZONTAL
2	2401.82	83.52	114.00	-30.48	53.09	2.22	28.21	0.00	Peak	132	220	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2401.80	74.87	94.00	-19.13	44.44	2.22	28.21	0.00	Average	100	224	VERTICAL
2	2401.80	81.81	114.00	-32.19	51.38	2.22	28.21	0.00	Peak	100	224	VERTICAL

Note:

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor} = \text{Level}$$

<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Channel 40
<b>Test Date</b>	Mar. 14, 2012		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2440.84	76.53	94.00	-17.47	46.00	2.24	28.29	0.00	Average	101	244	HORIZONTAL
2	2440.84	83.74	114.00	-30.26	53.21	2.24	28.29	0.00	Peak	101	244	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2440.82	72.91	94.00	-21.09	42.38	2.24	28.29	0.00	Average	100	286	VERTICAL
2	2440.82	79.85	114.00	-34.15	49.32	2.24	28.29	0.00	Peak	100	286	VERTICAL

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Channel 79
<b>Test Date</b>	Mar. 14, 2012		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2479.80	76.42	94.00	-17.58	45.78	2.26	28.38	0.00	Average	100	243	HORIZONTAL
2	2479.80	83.36	114.00	-30.64	52.72	2.26	28.38	0.00	Peak	100	243	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2479.95	74.35	94.00	-19.65	43.72	2.26	28.37	0.00	Average	100	155	VERTICAL
2	2479.95	81.29	114.00	-32.71	50.66	2.26	28.37	0.00	Peak	100	155	VERTICAL

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 4.3. 20dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2402 ~ 2480MHz).

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

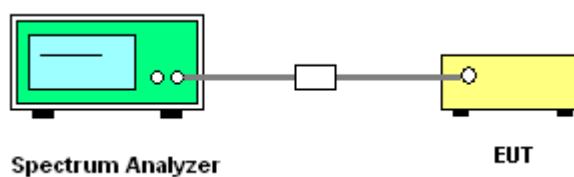

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	22°C	Humidity	65%
Test Engineer	Satoshi Yang	Configurations	Channel 1/40/79


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2402 MHz	1.578	1.446	2401.2260	-	Complies
2441 MHz	1.500	1.410	-	-	Complies
2480 MHz	1.320	1.212	-	2480.6840	Complies

#### 20 dB/99% Bandwidth Plot on 2402 MHz

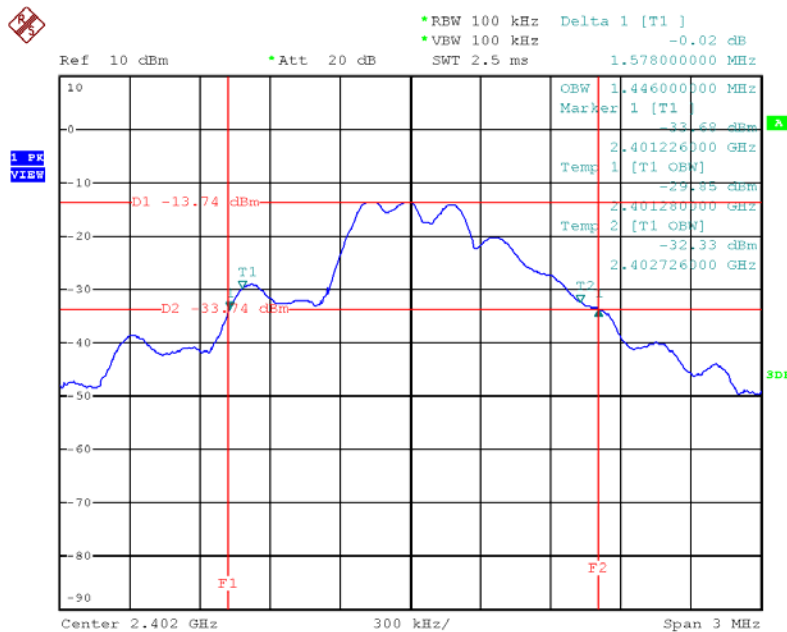


Date: 15.MAR.2012 11:41:44

### 20 dB/99% Bandwidth Plot on 2441 MHz

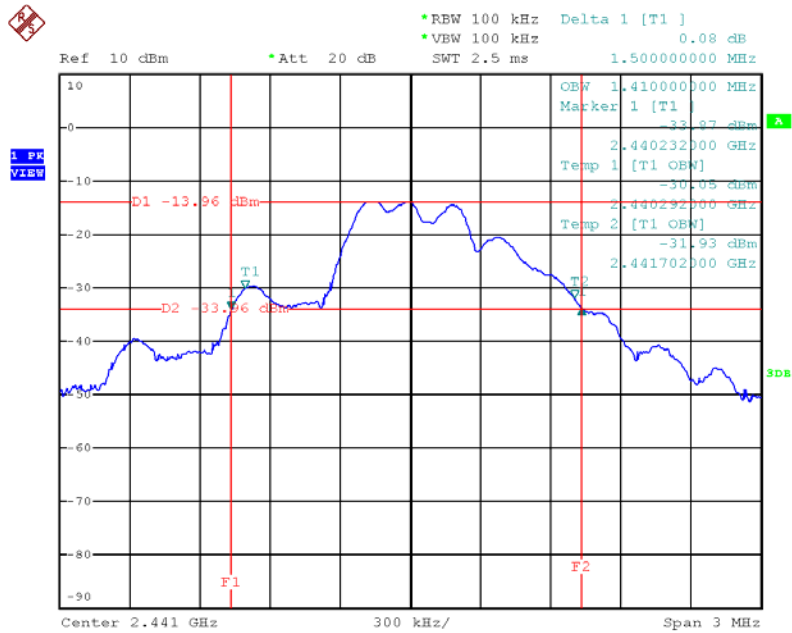

Date: 15.MAR.2012 11:44:25

### 20 dB/99% Bandwidth Plot on 2480 MHz

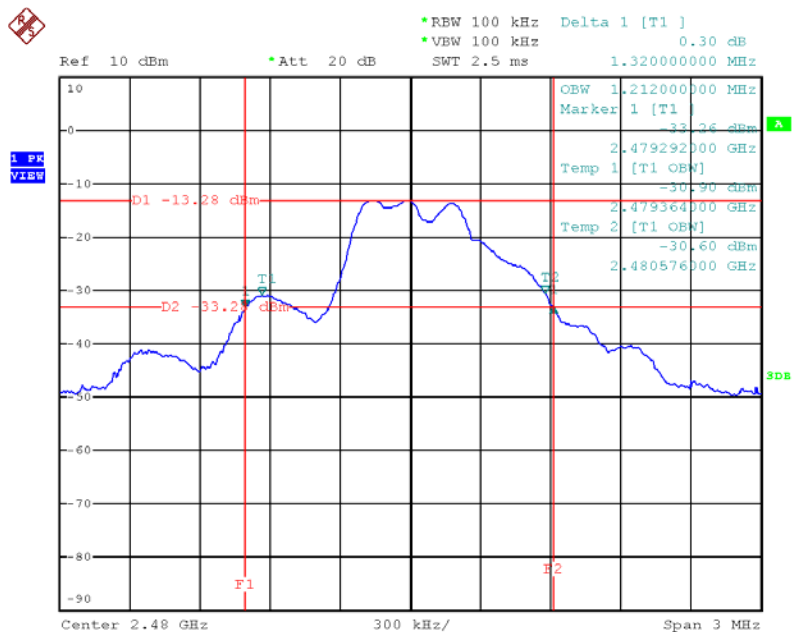

Date: 15.MAR.2012 11:47:39

## 4.4. Radiated Emissions Measurement

### 4.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


#### 4.4.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.4.4. Test Setup Layout

For radiated emissions below 1GHz

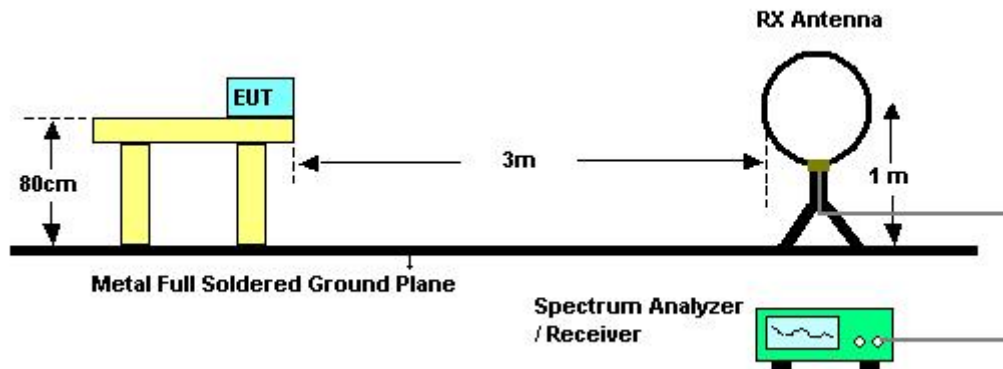

For radiated emissions above 1GHz

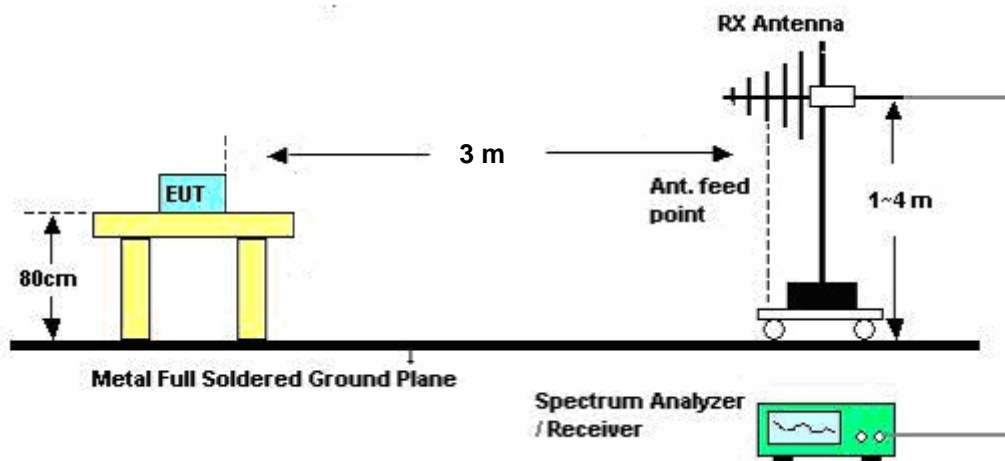

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Mar. 15, 2012		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.4.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	65%
Test Engineer	Serway Li	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

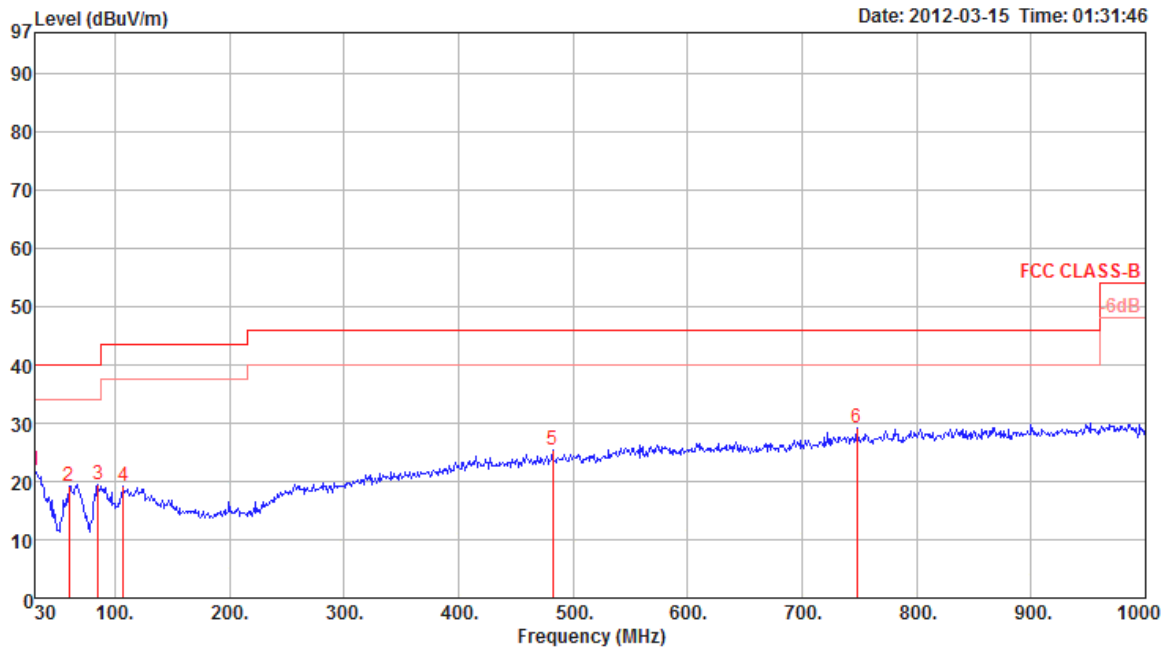

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	30.00	21.82	40.00	-18.18	31.54	0.83	27.80	17.25	0	400	Peak	HORIZONTAL
2	60.07	19.20	40.00	-20.80	39.44	1.17	27.76	6.35	0	400	Peak	HORIZONTAL
3	85.29	19.48	40.00	-20.52	37.21	1.38	27.66	8.55	0	400	Peak	HORIZONTAL
4	107.60	19.06	43.50	-24.44	33.00	1.55	27.56	12.07	0	400	Peak	HORIZONTAL
5	482.02	25.32	46.00	-20.68	32.05	3.33	28.01	17.95	0	400	Peak	HORIZONTAL
6 p	747.80	29.13	46.00	-16.87	32.01	4.21	27.81	20.72	0	400	Peak	HORIZONTAL

**Vertical**

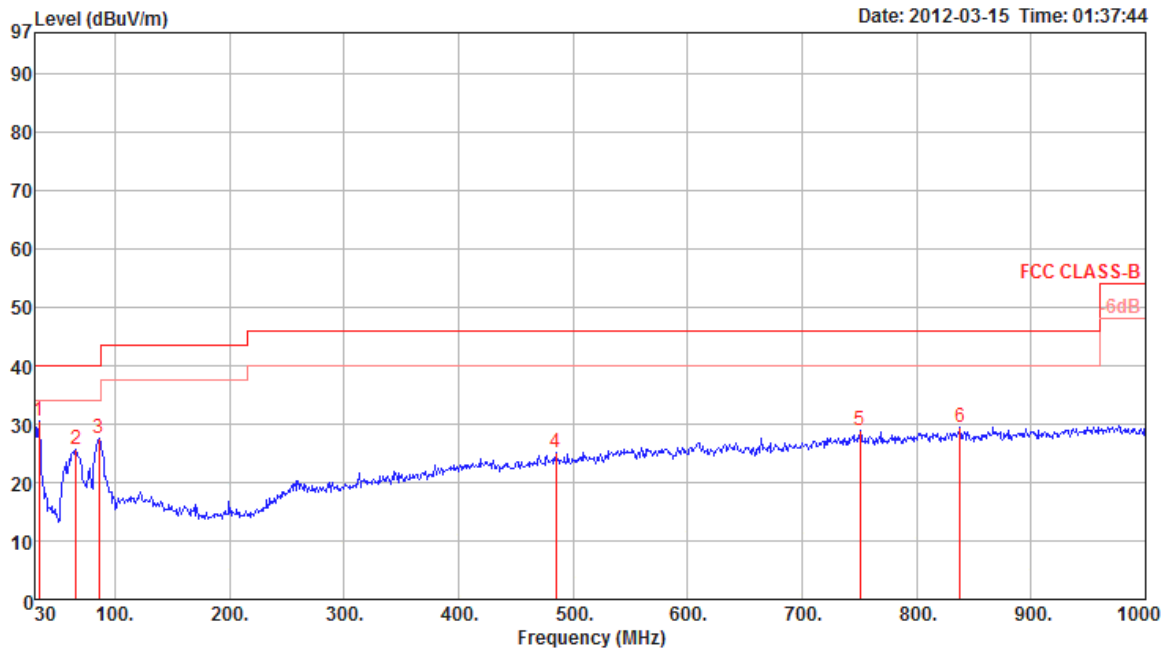

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	33.88	30.54	40.00	-9.46	41.34	0.90	27.80	16.10	0	100	Peak	VERTICAL
2	65.89	25.74	40.00	-14.26	46.41	1.22	27.74	5.85	0	100	Peak	VERTICAL
3	86.26	27.65	40.00	-12.35	44.94	1.39	27.66	8.98	0	100	Peak	VERTICAL
4	484.93	25.15	46.00	-20.85	31.82	3.34	28.02	18.01	0	100	Peak	VERTICAL
5	750.71	28.96	46.00	-17.04	31.85	4.21	27.80	20.70	0	100	Peak	VERTICAL
6	838.01	29.39	46.00	-16.61	31.45	4.41	27.52	21.05	0	100	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20Db below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (Uv/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level.

4.4.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Channel 1
<b>Test Date</b>	Mar. 14, 2012	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.62	44.28	54.00	-9.72	43.01	3.29	33.02	35.04	Average	139	192	HORIZONTAL
2	4803.62	51.22	74.00	-22.78	49.95	3.29	33.02	35.04	Peak	139	192	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.65	42.50	54.00	-11.50	41.23	3.29	33.02	35.04	Average	148	279	VERTICAL
2	4803.65	49.44	74.00	-24.56	48.17	3.29	33.02	35.04	Peak	148	279	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Channel 40
<b>Test Date</b>	Mar. 14, 2012	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.73	43.63	54.00	-10.37	42.17	3.33	33.16	35.03	Average	136	247	HORIZONTAL
2	4881.73	50.57	74.00	-23.43	49.11	3.33	33.16	35.03	Peak	136	247	HORIZONTAL
3	7322.42	42.58	54.00	-11.42	37.96	4.06	35.96	35.40	Average	140	160	HORIZONTAL
4	7322.42	49.52	74.00	-24.48	44.90	4.06	35.96	35.40	Peak	140	160	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.64	41.72	54.00	-12.28	40.26	3.33	33.16	35.03	Average	116	281	VERTICAL
2	4881.64	48.66	74.00	-25.34	47.20	3.33	33.16	35.03	Peak	116	281	VERTICAL
3	7322.50	40.59	54.00	-13.41	35.97	4.06	35.96	35.40	Average	111	24	VERTICAL
4	7322.50	47.53	74.00	-26.47	42.91	4.06	35.96	35.40	Peak	111	24	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Channel 79
<b>Test Date</b>	Mar. 14, 2012	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.73	41.93	54.00	-12.07	40.24	3.37	33.33	35.01	Average	148	222	HORIZONTAL
2	4959.73	48.87	74.00	-25.13	47.18	3.37	33.33	35.01	Peak	148	222	HORIZONTAL
3	7439.65	41.64	54.00	-12.36	36.77	4.07	36.20	35.40	Average	129	92	HORIZONTAL
4	7439.65	48.58	74.00	-25.42	43.71	4.07	36.20	35.40	Peak	129	92	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.55	41.50	54.00	-12.50	39.81	3.37	33.33	35.01	Average	143	282	VERTICAL
2	4959.55	48.44	74.00	-25.56	46.75	3.37	33.33	35.01	Peak	143	282	VERTICAL
3	7439.37	40.81	54.00	-13.19	35.94	4.07	36.20	35.40	Average	100	96	VERTICAL
4	7439.37	47.75	74.00	-26.25	42.88	4.07	36.20	35.40	Peak	100	96	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5. Band Edge Emissions Measurement

### 4.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.2.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 4.5.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	65%
Test Engineer	Serway Li	Configurations	Channel 1, 40, 79
Test Date	Mar. 14, 2012		

## Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2385.99	51.34	54.00	-2.66	20.96	2.21	28.17	0.00	Average	132	220	HORIZONTAL
2	2385.99	58.29	74.00	-15.71	27.91	2.21	28.17	0.00	Peak	132	220	HORIZONTAL
3	2401.84	76.01				2.22	28.21	0.00	Average	132	220	HORIZONTAL
4	2401.84	82.95				2.22	28.21	0.00	Peak	132	220	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

## Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.62	50.85	54.00	-3.15	20.47	2.21	28.17	0.00	Average	125	236	HORIZONTAL
2	2389.62	57.79	74.00	-16.21	27.41	2.21	28.17	0.00	Peak	125	236	HORIZONTAL
3	2441.00	76.86				2.24	28.29	0.00	Average	125	236	HORIZONTAL
4	2441.00	83.80				2.24	28.29	0.00	Peak	125	236	HORIZONTAL
5	2483.50	50.82	54.00	-3.18	20.18	2.26	28.38	0.00	Average	125	236	HORIZONTAL
6	2483.50	57.76	74.00	-16.24	27.12	2.26	28.38	0.00	Peak	125	236	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441MHz.

## Channel 79

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2479.84	74.26				2.26	28.37	0.00	Average	100	155	VERTICAL
2	2479.84	81.20				2.26	28.37	0.00	Peak	100	155	VERTICAL
3	2505.30	51.72	54.00	-2.28	21.00	2.27	28.45	0.00	Average	100	155	VERTICAL
4	2505.30	58.66	74.00	-15.34	27.94	2.27	28.45	0.00	Peak	100	155	VERTICAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### Low Band Edge Plot on 2402 MHz

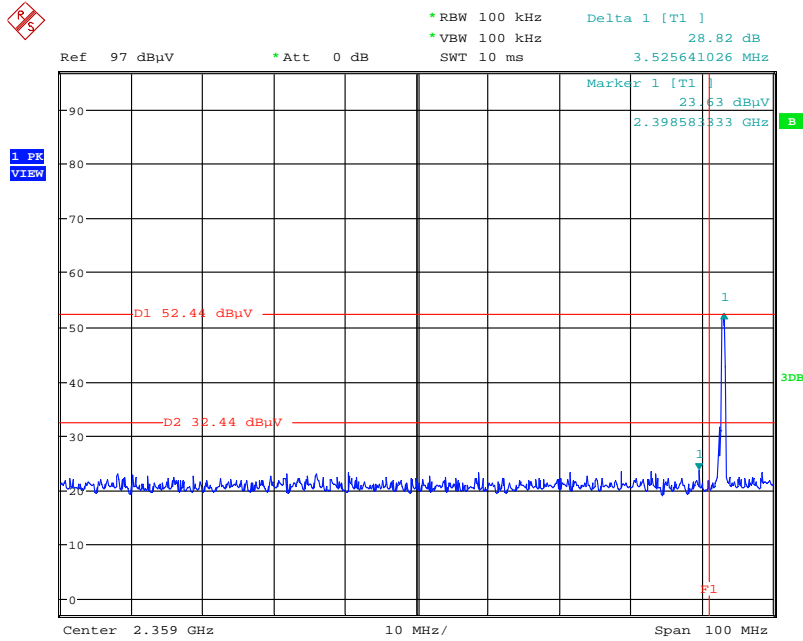

Date: 14.MAR.2012 18:52:12

### High Band Edge Plot on 2480 MHz

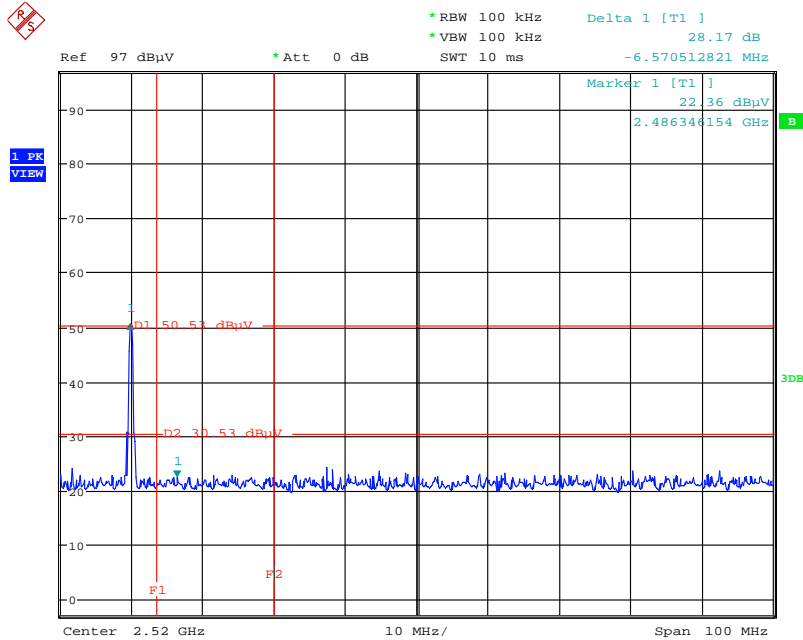

Date: 14.MAR.2012 18:40:17

## 4.6. Antenna Requirements

### 4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.6.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K-30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 22, 2011	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: "\*" Calibration Interval of instruments listed above is two years.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix