



China

Report Number: 709502228915-00C

# FCC - TEST REPORT

Report Number : **709502228915-00C** Date of Issue: February 2, 2023

Model : CM-09-C120, CM-09-QC120, CM-10-QC120

Product Type : TUBULAR MOTOR

Applicant : Coulisse B.V.

Address : Vonderweg 48, 7468 DC Enter, THE NETHERLANDS

Manufacturer : Coulisse B.V.

Address : Vonderweg 48, 7468 DC Enter, THE NETHERLANDS

Test Result :  **Positive**       **Negative**

Total pages including Appendices : 55



*TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*

## 1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups .....	8
8	Systems test configuration .....	11
9	Technical Requirement.....	12
9.1	Conducted Emission .....	12
9.2	Conducted peak output power.....	21
9.3	6dB bandwidth .....	24
9.4	Power spectral density .....	27
9.5	Spurious RF conducted emissions.....	30
9.6	Band edge.....	37
9.7	Spurious radiated emissions for transmitter .....	40
10	Test Equipment List.....	52
11	System Measurement Uncertainty .....	53
12	Photographs of Test Set-ups .....	54
13	Photographs of EUT .....	55



China

Report Number: 709502228915-00C

## 2 Details about the Test Laboratory

### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch  
No.16 Lane, 1951 Du Hui Road,  
Shanghai 201108,  
P.R. China

Test Firm FCC  
Registration  
Number: 820234

Designation  
number: CN1183

IC Company  
Number: 25988

CAB identifier: CN0101

Telephone: +86 21 6141 0123  
Fax: +86 21 6140 8600

### 3 Description of the Equipment under Test

#### Description of the Equipment Under Test

Product: TUBULAR MOTOR  
 Model no.: CM-09-C120, CM-09-QC120, CM-10-QC120  
 FCC ID: ZY4CM0910B  
 Rating: 120V~,60Hz  
 RF Transmission Frequency: Bluetooth LE:2402~2480MHz;  
 433.92MHz  
 No. of Operated Channel: Bluetooth LE:40  
 Modulation: For 2.4GHz BLE: GFSK; 433.92MHz: GFSK

Channel list:

Bluetooth Low Energy							
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Antenna Type: Integral antenna for BLE; Spring antenna for 433.92MHz

Antenna Gain: For 2.4GHz: 1.0dBi; For 433.92MHz: 0dBi

Description of the EUT: The Equipment Under Test (EUT) is a TUBULAR MOTOR which have 2.4GHz BLE (support 1Mbps and 2Mbps data rate) and 433.92MHz transceiver. There are 3 models in all, they have same electrical construction except for different motor and torque. We chose model CM-09-QC120 to perform all tests, CM-09-C120 to only perform radiate emission below 1GHz and conducted emission.

Model	Difference
CM-09-QC120, CM-10-QC120	Same electrical construction except for torque and mechanical structure
CM-09-C120	Only motor different from CM-09-QC120 and CM-10-QC120

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



China

Report Number: 709502228915-00C

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements						
Test Condition	Pages	Test Site	Test Result			
			Pass	Fail	N/A	
§15.207	Conducted emission AC power port	12-20	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (3)	Conducted peak output power	21-23	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB bandwidth	24-26	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	27-29	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	30-36	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	37-39	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209	Spurious radiated emissions for transmitter	40-51	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses an Integral antenna (BLE) and spring antenna (433.92MHz), which gain is 1.0dBi for 2.4GHz and 0dBi for 433.92MHz. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: ZY4CM0910B, complies with Section 15.207,15.209,15.231,15.247 of the FCC Part 15, Subpart C Rules.

This report is only for the 2.4GHz BLE test report, for the 433.92MHz test report please refer to 709502228915-00B.

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 10, 2022

Testing Start Date: June 11, 2022

Testing End Date: January 11, 2023

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:



Hui TONG  
Review Engineer




Jiayi XU  
Project Engineer



Cheng Huali  
Test Engineer


## 7 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

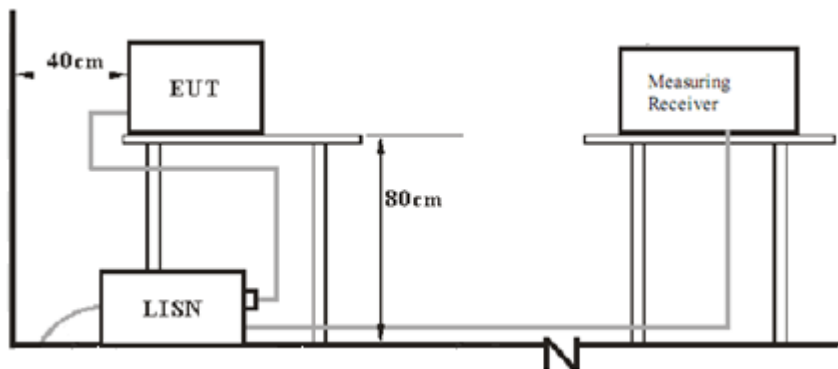

### 7.2 Radiated test setups


#### 9kHz ~ 30MHz Test Setup:

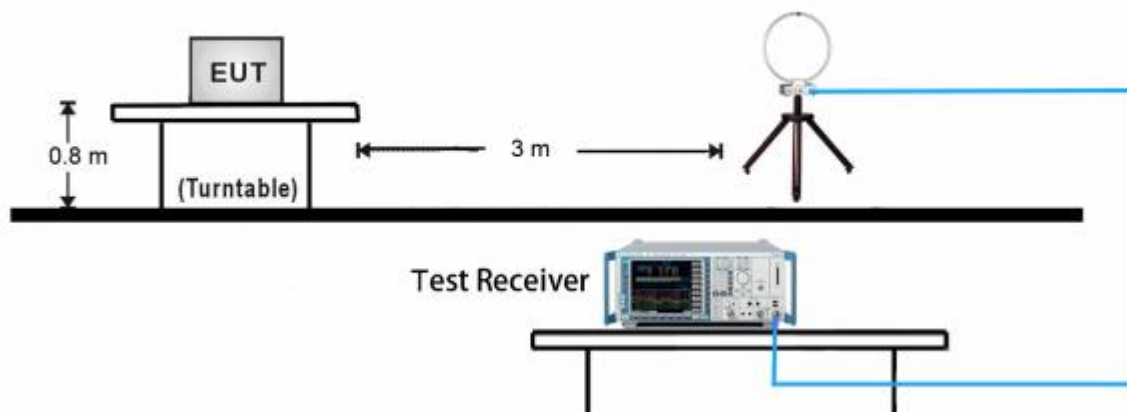




Report Number: 709502228915-00C


30MHz ~ 1GHz Test Setup:

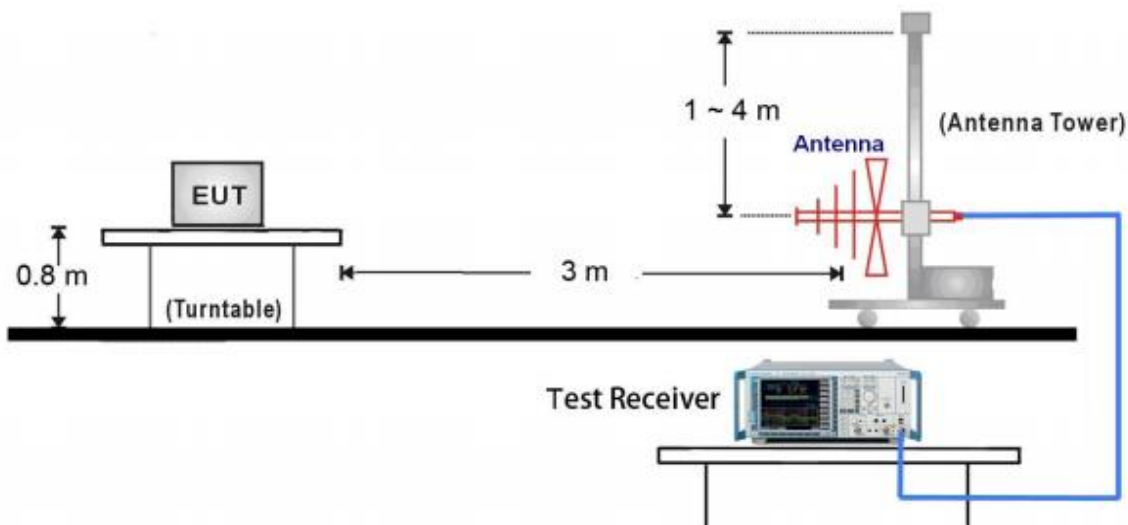


1GHz ~ 18GHz Test Setup:

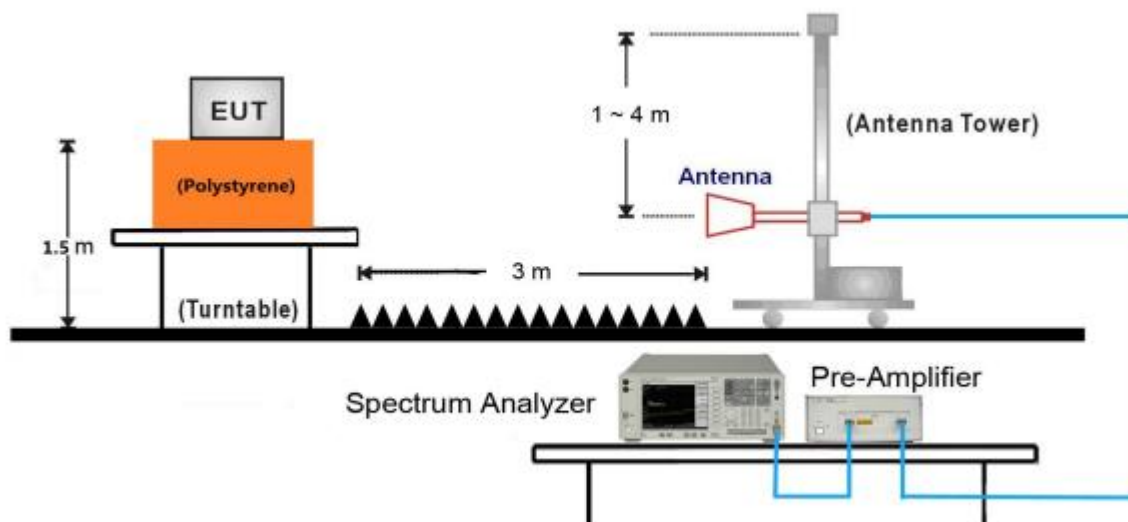

18GHz ~ 40GHz Test Setup:

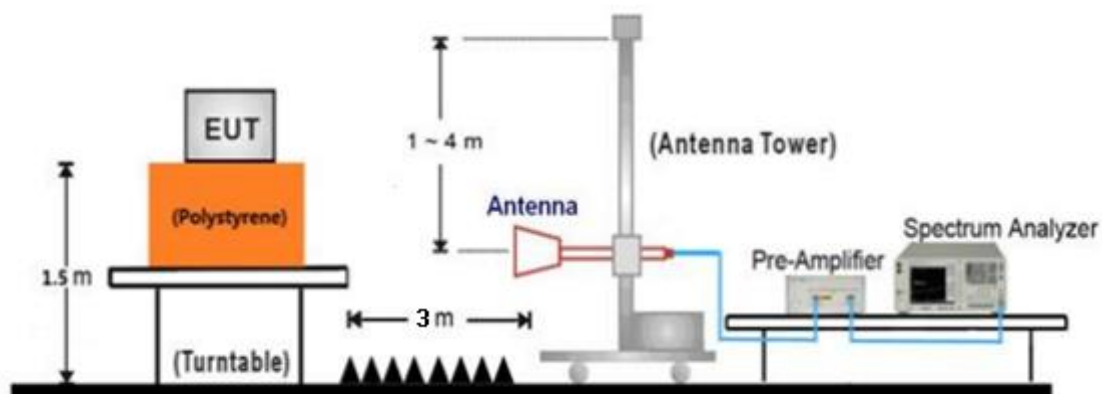

7.3 Conducted RF test setups



## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenove	E470	PF-OU5TS7 17/09

Test software: BlueNRG GUI v4.0.0

The system was configured to channel 0, 19, and 39 for the test.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

**Conducted Emission**

# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name:	TUBULAR MOTOR
Model:	CM-09-QC120
Client:	Coulisse B.V.
Op Cond:	Power on, TX_2402MHz at 1Mbps, AC 120V/60Hz, T21.3, H56.3%, P100.9kPa
Operator:	Cheng Huali
Standard:	FCC 15.207(a)
Comment:	Phase L
Sample No.:	SHA- 653704-4

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

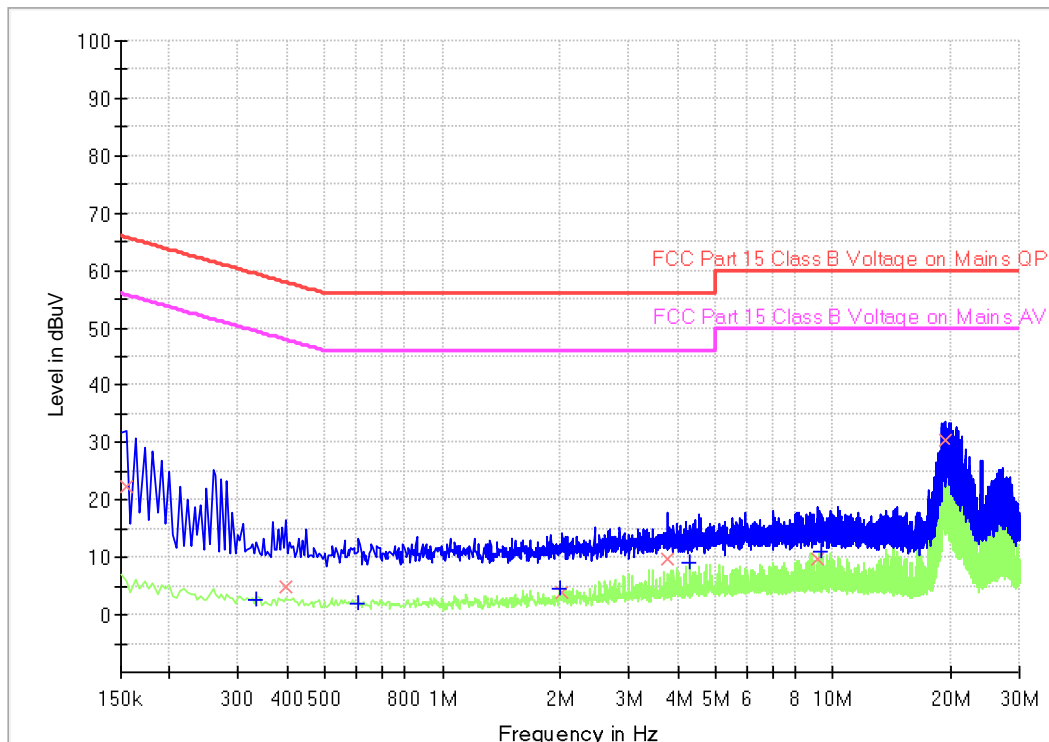

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	22.39	---	65.75	43.36	1000.0	9.000	L1	19.5
0.334500	---	2.57	49.34	46.77	1000.0	9.000	L1	19.5
0.397500	4.97	---	57.91	52.94	1000.0	9.000	L1	19.5
0.609000	---	2.08	46.00	43.92	1000.0	9.000	L1	19.5
1.990500	---	4.59	46.00	41.41	1000.0	9.000	L1	19.5
2.026500	4.06	---	56.00	51.94	1000.0	9.000	L1	19.5
3.754500	9.89	---	56.00	46.11	1000.0	9.000	L1	19.6
4.290000	---	9.17	46.00	36.83	1000.0	9.000	L1	19.6
9.123000	9.61	---	60.00	50.39	1000.0	9.000	L1	19.7
9.321000	---	11.09	50.00	38.91	1000.0	9.000	L1	19.7
19.441500	30.50	---	60.00	29.50	1000.0	9.000	L1	19.8
20.080500	---	29.37	50.00	20.63	1000.0	9.000	L1	19.8

# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name:	TUBULAR MOTOR
Model:	CM-09-QC120
Client:	Coulisse B.V.
Op Cond:	Power on, TX_2402MHz at 1Mbps, AC 120V/60Hz, T21.3, H56.3%, P100.9kPa
Operator:	Cheng Huali
Standard:	FCC 15.207(a)
Comment:	Phase N
Sample No.:	SHA- 653704-4

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

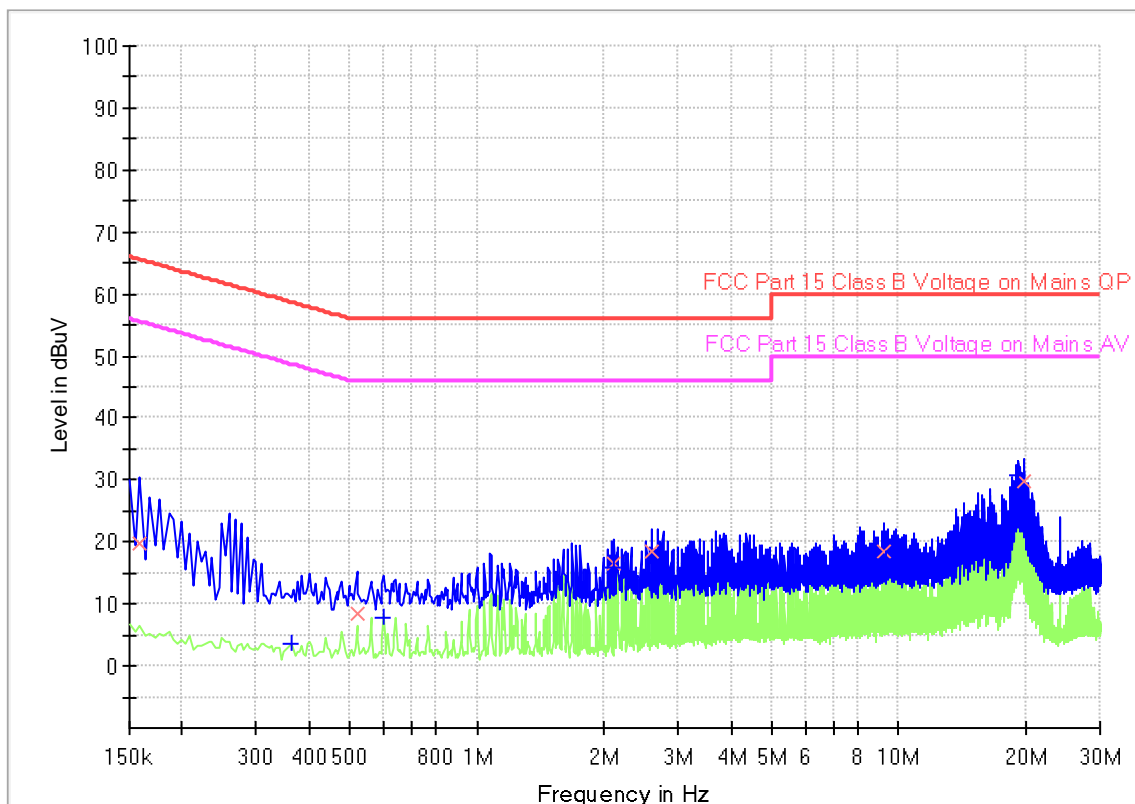

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.159000	19.73	---	65.52	45.79	1000.0	9.000	N	19.5
0.361500	---	3.60	48.69	45.09	1000.0	9.000	N	19.5
0.519000	8.45	---	56.00	47.55	1000.0	9.000	N	19.5
0.600000	---	7.89	46.00	38.11	1000.0	9.000	N	19.5
2.121000	---	15.86	46.00	30.14	1000.0	9.000	N	19.5
2.121000	16.43	---	56.00	39.57	1000.0	9.000	N	19.5
2.602500	18.40	---	56.00	37.60	1000.0	9.000	N	19.5
3.201000	---	16.68	46.00	29.32	1000.0	9.000	N	19.5
9.240000	18.50	---	60.00	41.50	1000.0	9.000	N	19.7
9.321000	---	17.21	50.00	32.79	1000.0	9.000	N	19.7
19.081500	---	30.63	50.00	19.37	1000.0	9.000	N	19.8
19.720500	29.71	---	60.00	30.29	1000.0	9.000	N	19.8



# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name: Tubular motor  
 Model: CM-09-C120  
 Client: Coulisse B.V.  
 Op Cond: Power on, reverse, AC 120V/60Hz, T20.3, H40.1%, P103.5kPa  
 Operator: Cheng Huali  
 Standard: FCC 15.207(a)  
 Comment: Phase L  
 Sample No.: SHA-703502-1

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN  
 Receiver: [ESR 3]  
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

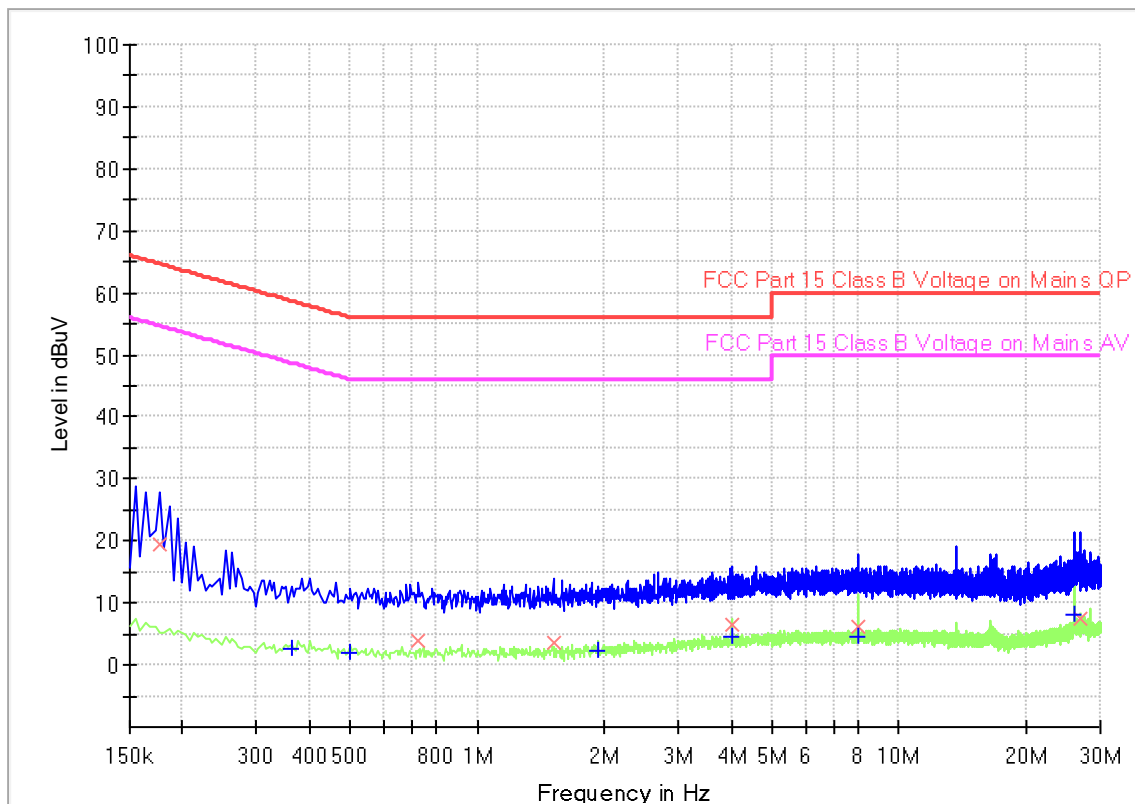

### Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.177000	19.45	---	64.63	45.18	1000.0	9.000	L1	19.6
0.361500	---	2.46	48.69	46.23	1000.0	9.000	L1	19.6
0.501000	---	2.12	46.00	43.88	1000.0	9.000	L1	19.6
0.726000	4.01	---	56.00	51.99	1000.0	9.000	L1	19.6
1.513500	3.67	---	56.00	52.33	1000.0	9.000	L1	19.6
1.927500	---	2.45	46.00	43.55	1000.0	9.000	L1	19.6
3.997500	6.59	---	56.00	49.41	1000.0	9.000	L1	19.6
4.002000	---	4.72	46.00	41.28	1000.0	9.000	L1	19.6
7.998000	6.23	---	60.00	53.77	1000.0	9.000	L1	19.7
7.998000	---	4.56	50.00	45.44	1000.0	9.000	L1	19.7
25.998000	---	8.00	50.00	42.00	1000.0	9.000	L1	20.3
26.812500	7.41	---	60.00	52.59	1000.0	9.000	L1	20.3

# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name: Tubular motor  
 Model: CM-09-C120  
 Client: Coulisse B.V.  
 Op Cond: Power on, reverse, AC 120V/60Hz, T20.3, H40.1%, P103.5kPa  
 Operator: Cheng Huali  
 Standard: FCC 15.207(a)  
 Comment: Phase N  
 Sample No.: SHA-703502-1

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN  
 Receiver: [ESR 3]  
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

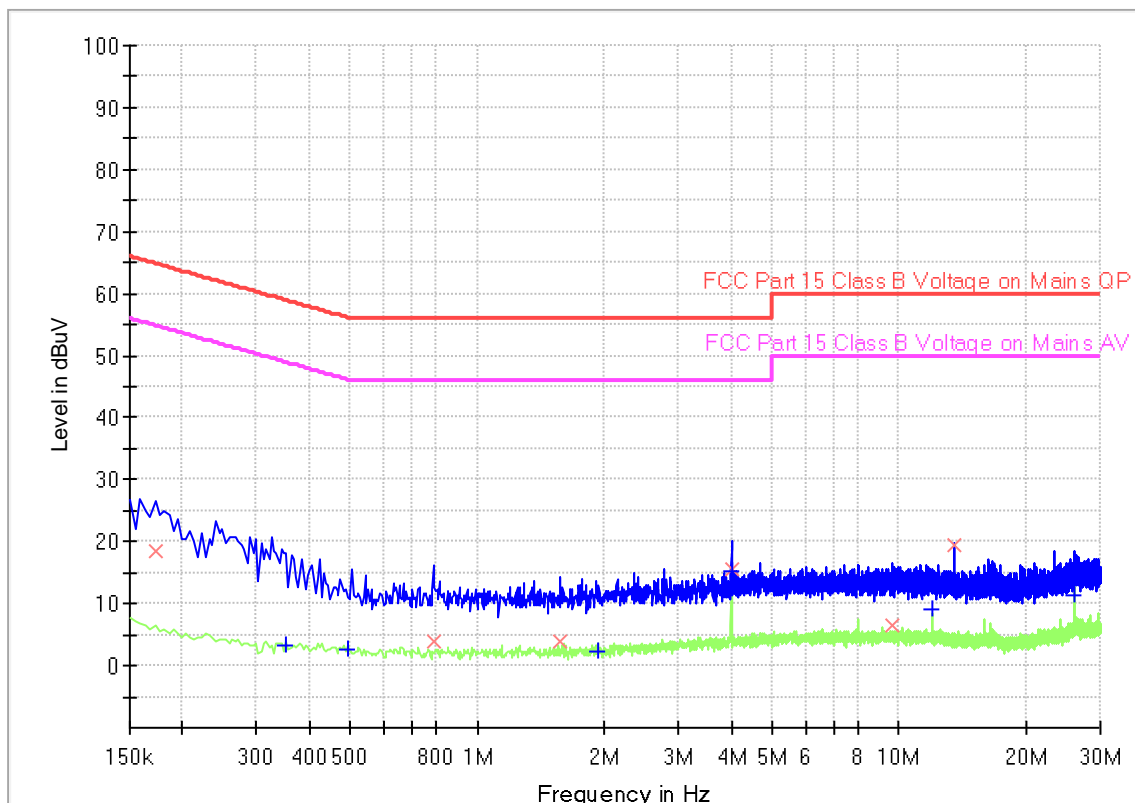

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.172500	18.49	---	64.84	46.35	1000.0	9.000	N	19.6
0.352500	---	3.18	48.90	45.72	1000.0	9.000	N	19.6
0.492000	---	2.46	46.13	43.67	1000.0	9.000	N	19.6
0.789000	3.98	---	56.00	52.02	1000.0	9.000	N	19.6
1.572000	4.03	---	56.00	51.97	1000.0	9.000	N	19.6
1.927500	---	2.43	46.00	43.57	1000.0	9.000	N	19.6
4.002000	15.68	---	56.00	40.32	1000.0	9.000	N	19.7
4.002000	---	15.13	46.00	30.87	1000.0	9.000	N	19.7
9.591000	6.40	---	60.00	53.60	1000.0	9.000	N	19.8
11.998500	---	9.09	50.00	40.91	1000.0	9.000	N	19.9
13.560000	19.48	---	60.00	40.52	1000.0	9.000	N	19.9
25.998000	---	11.33	50.00	38.67	1000.0	9.000	N	20.2

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)  
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

## 9.2 Conducted peak output power

### Test Method

1. Use the following spectrum analyzer settings:  
 RBW > the 6 dB bandwidth of the emission being measured, VBW $\geq$ 3RBW, Span $\geq$ 3RBW  
 Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Use a power meter to measure the conducted peak output power.

### Limits


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	$\leq 1$	$\leq 30$

Test result as below table


Data transmission Rate	Frequency (MHz)	Conducted Peak Output Power (dBm) §15.247 (b) (1)		
		Result	limit	Verdict
1Mbps	2402MHz	-5.07	$\leq 30$	Pass
	2440MHz	-5.07	$\leq 30$	Pass
	2480MHz	-5.22	$\leq 30$	Pass
2Mbps	2402MHz	-5.16	$\leq 30$	Pass
	2440MHz	-5.16	$\leq 30$	Pass
	2480MHz	-5.33	$\leq 30$	Pass

Peak output power (1Mbps)


Channel 0 (2402MHz)

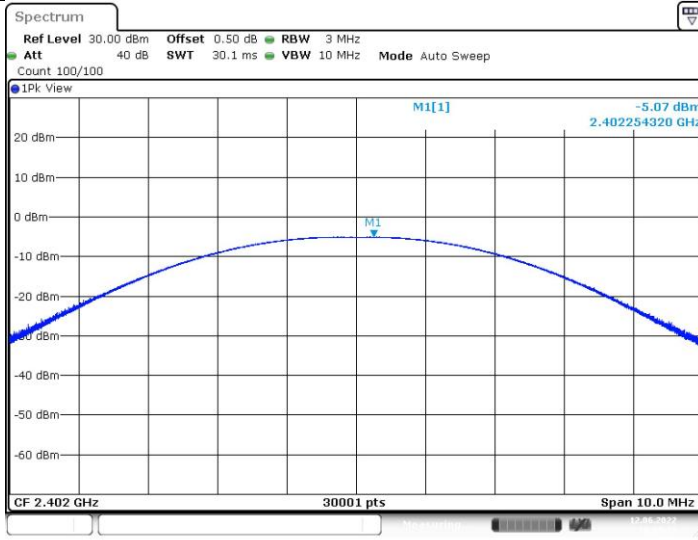

Channel 19 (2440MHz)

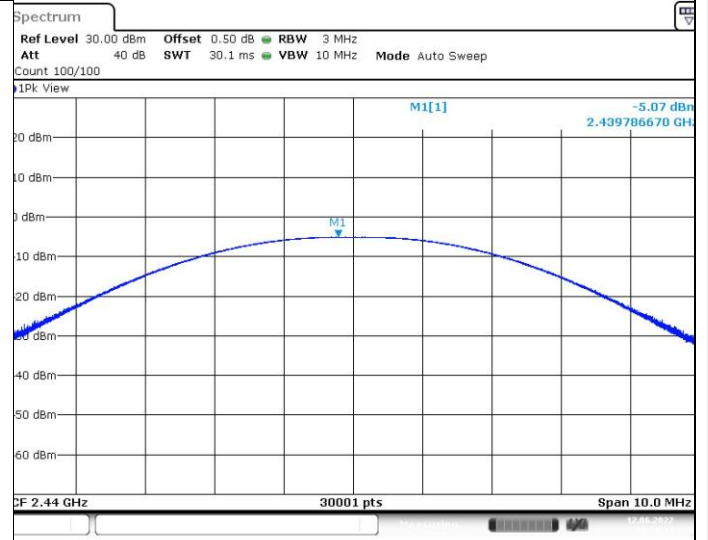

Channel 39 (2480MHz)

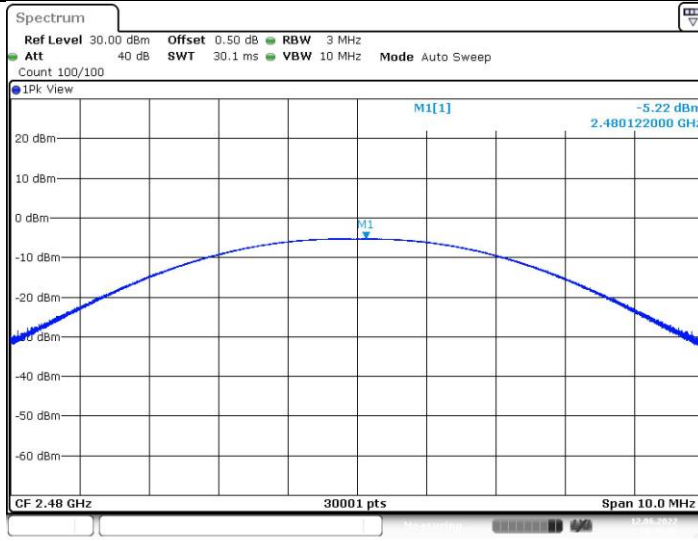

Peak output power (2Mbps)

Channel 0 (2402MHz)

Channel 19 (2440MHz)



Date: 12 JUN 2022 10:43:26

Date: 12 JUN 2022 10:45:23

Channel 39 (2480MHz)



Date: 12 JUN 2022 10:47:06

### 9.3 6dB bandwidth

#### Test Method

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit

Limit [kHz]

---




≥500

#### Test result


Data transmission rate	Frequency MHz	6dB bandwidth (MHz)		Result
		result	limit	verdict
1Mbps	2402	0.668	≥0.5	Pass
	2440	0.667	≥0.5	Pass
	2480	0.664	≥0.5	Pass
2Mbps	2402	1.124	≥0.5	Pass
	2440	1.124	≥0.5	Pass
	2480	1.130	≥0.5	Pass



6dB Bandwidth

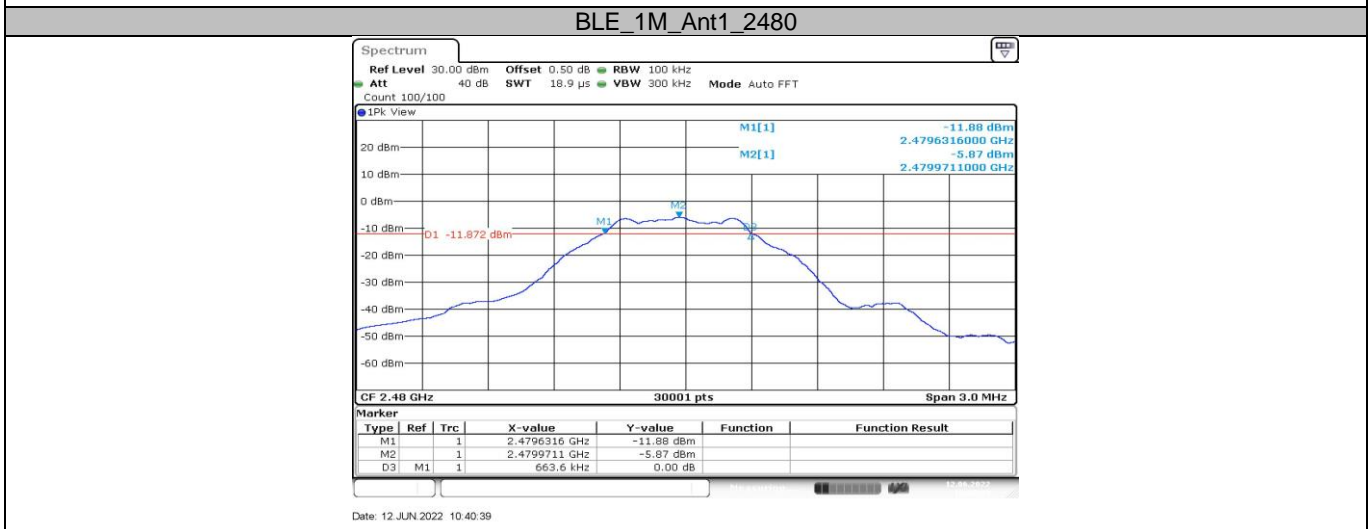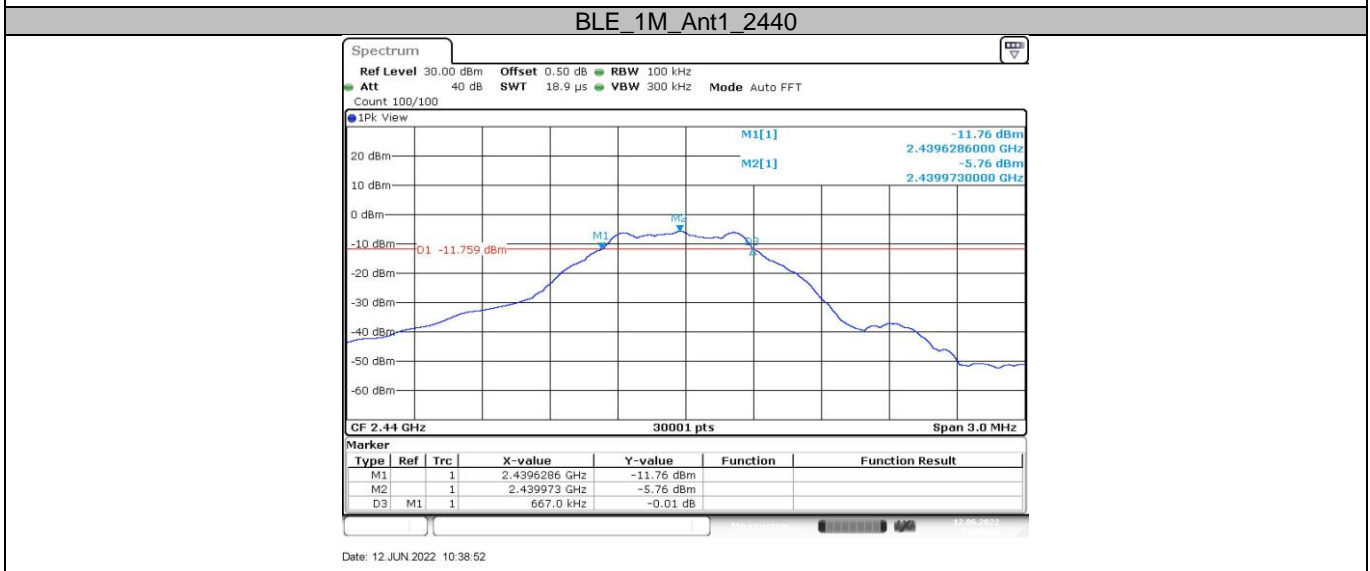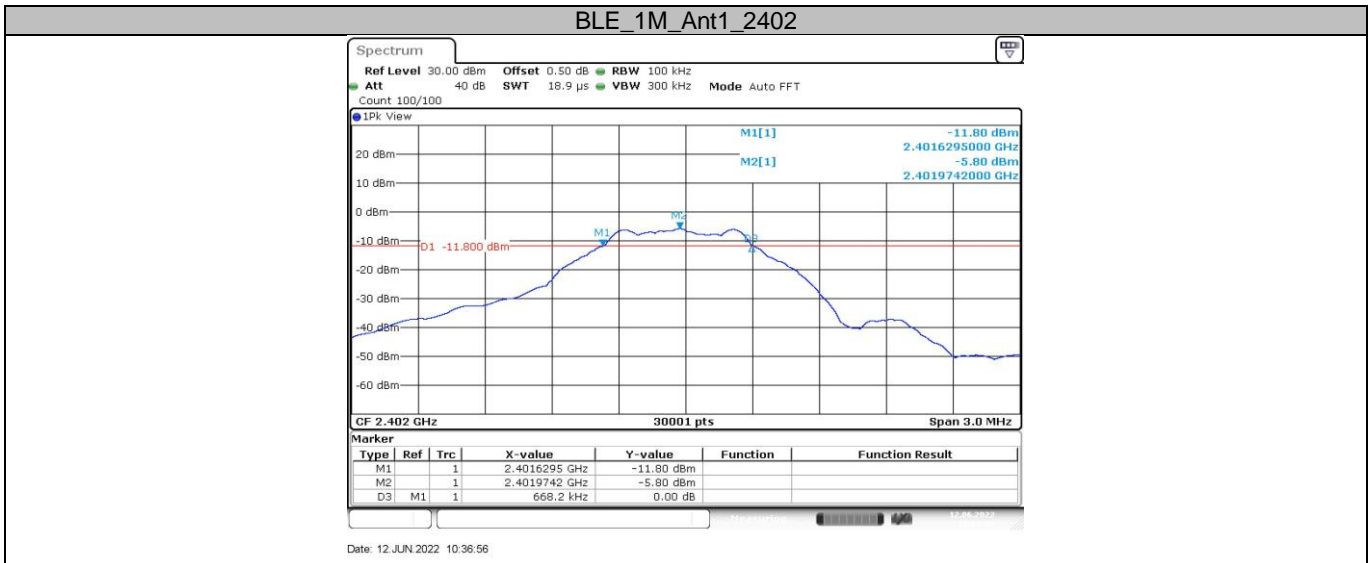


BLE\_2M\_Ant1\_2402

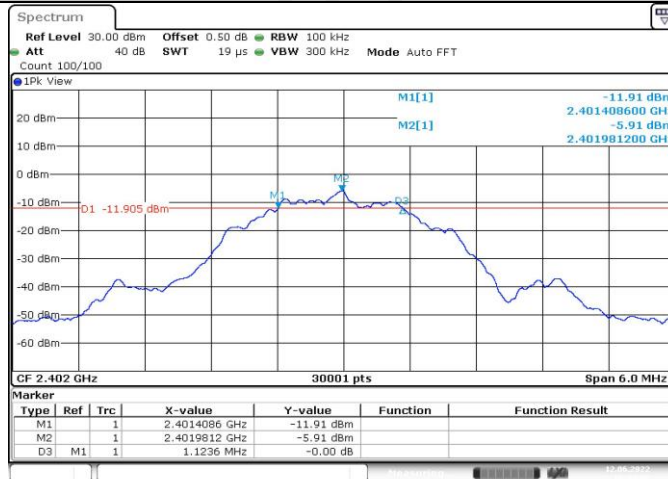


Date: 12 JUN 2022 10:43:07

BLE\_2M\_Ant1\_2440

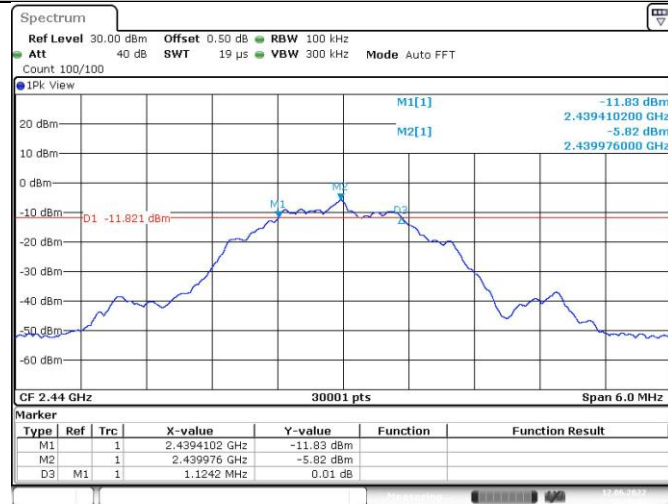

Date: 12 JUN 2022 10:45:04

BLE\_2M\_Ant1\_2480

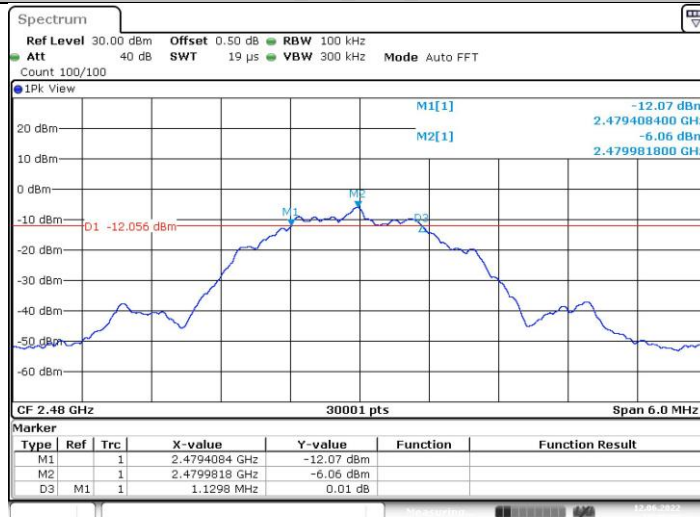

Date: 12 JUN 2022 10:46:47

## 9.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.  
RBW=3kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

### Limit

**Limit [dBm/3kHz]**


-----  
≤8

### Test result

Data transmission rate	Frequency	Power spectral density	Result
1Mbps	MHz	dBm/3kHz	
	Top channel 2402MHz	-20.35	Pass
	Middle channel 2440MHz	-20.42	Pass
	Bottom channel 2480MHz	-20.30	Pass
2Mbps	Top channel 2402MHz	-23.63	Pass
	Middle channel 2440MHz	-23.80	Pass
	Bottom channel 2480MHz	-23.93	Pass


PK PSD (1Mbps)

Channel 0 (2402MHz)

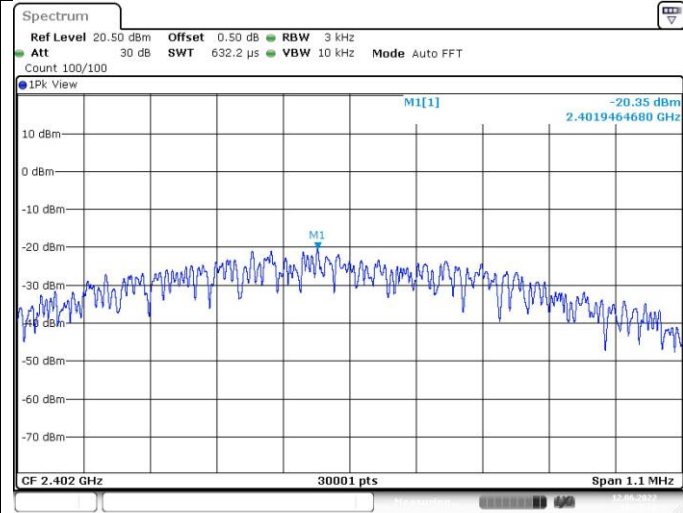


Date: 12 JUN 2022 10:37:20

Channel 19 (2440MHz)

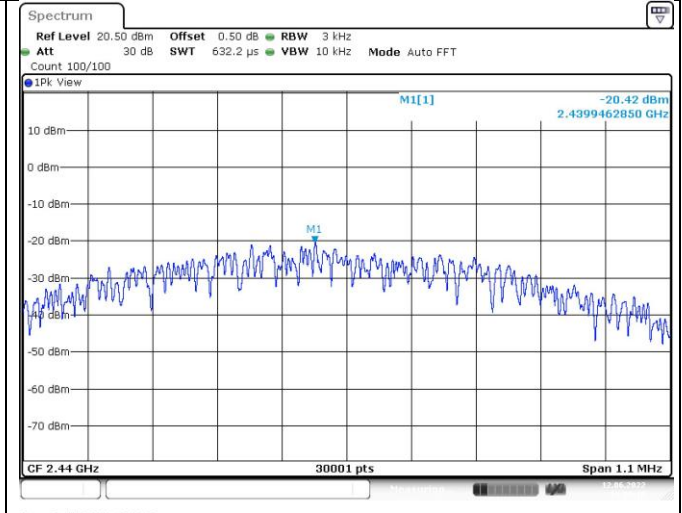

Date: 12 JUN 2022 10:39:17


Channel 39 (2480MHz)

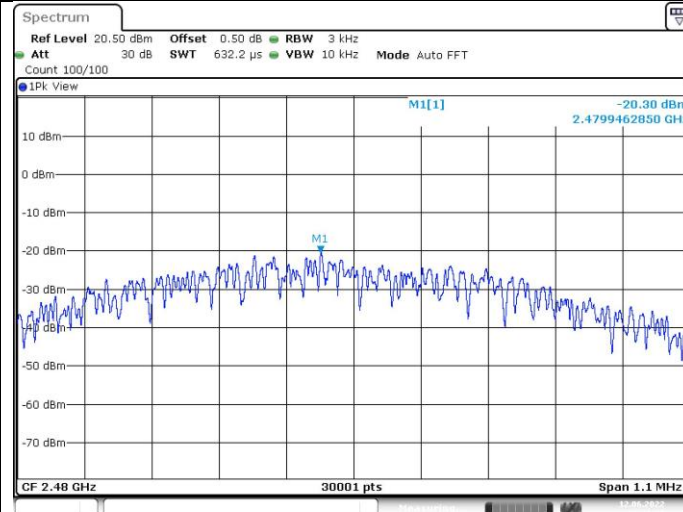

Date: 12 JUN 2022 10:41:03


PK PSD (2Mbps)

Channel 0 (2402MHz)

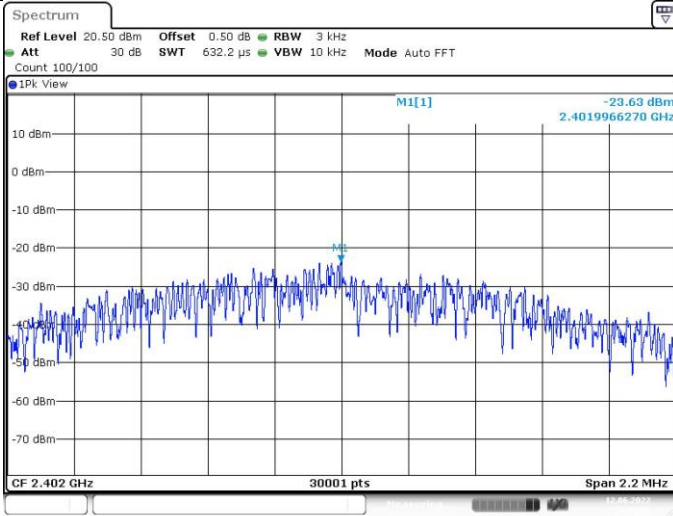


Date: 12 JUN 2022 10:43:32

Channel 19 (2440MHz)

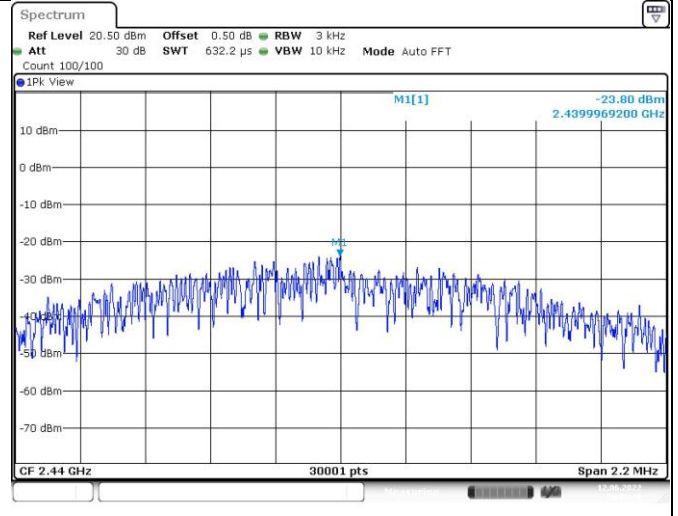

Date: 12 JUN 2022 10:45:29

Channel 39 (2480MHz)

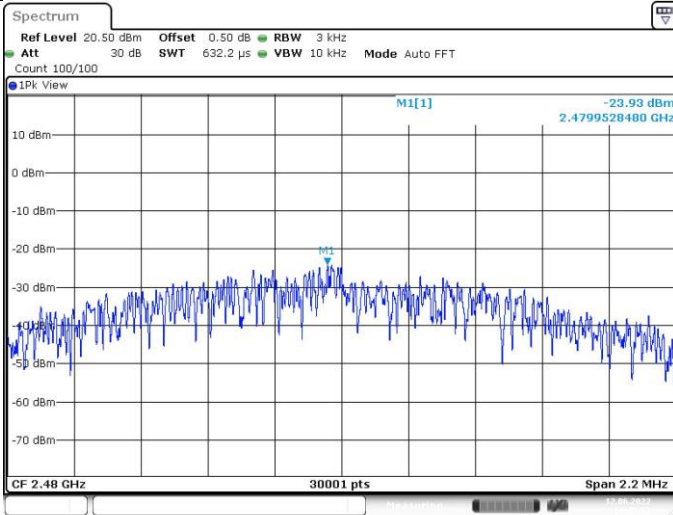

Date: 12 JUN 2022 10:47:12

## 9.5 Spurious RF conducted emissions

### Test Method

1. Establish a reference level by using the following procedure:
  - a. Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
  - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
  - a. Set the center frequency and span to encompass frequency range to be measured.
  - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

### Limit



Frequency Range MHz	Limit (dBc)
30-25000	-20

**Spurious RF conducted emissions**

**Out-of-Band Emissions (1Mbps)  
Channel 0 (2402MHz)**

**Reference point**

**Spurious Emission (30MHz – 1GHz)**

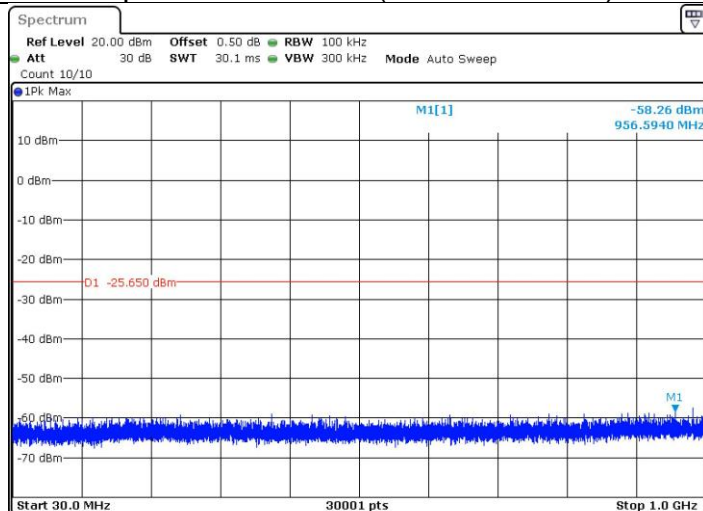
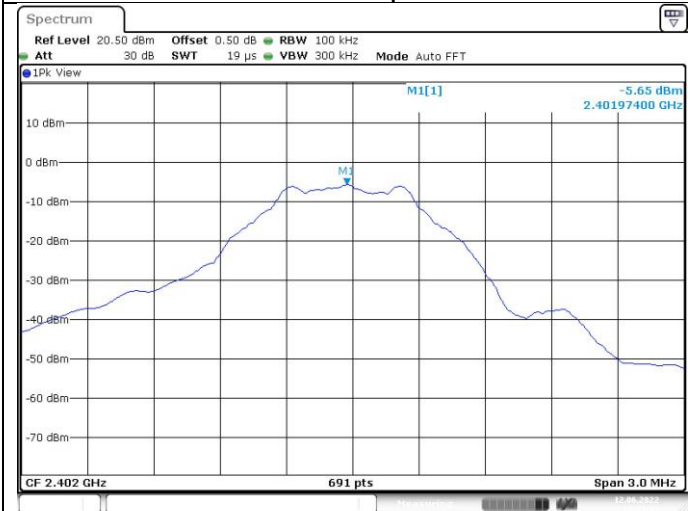


Date: 12 JUN 2022 10:37:35

Date: 12 JUN 2022 10:37:39

**Spurious Emission (1GHz – 5GHz)**





**Spurious Emission (5GHz – 26.5GHz)**

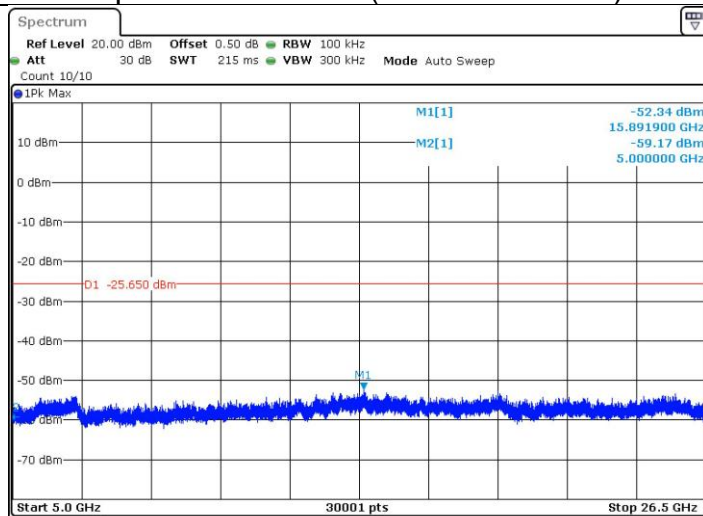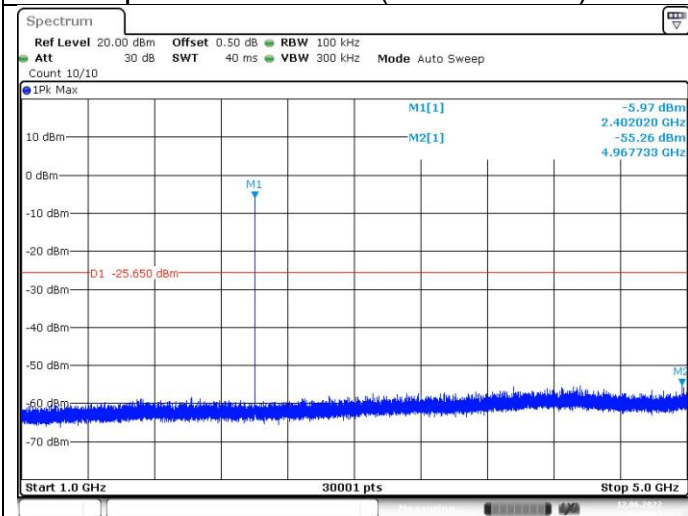

Date: 12 JUN 2022 10:37:51

Date: 12 JUN 2022 10:38:23

Out-of-Band Emissions (1Mbps)  
Channel 19 (2440MHz)

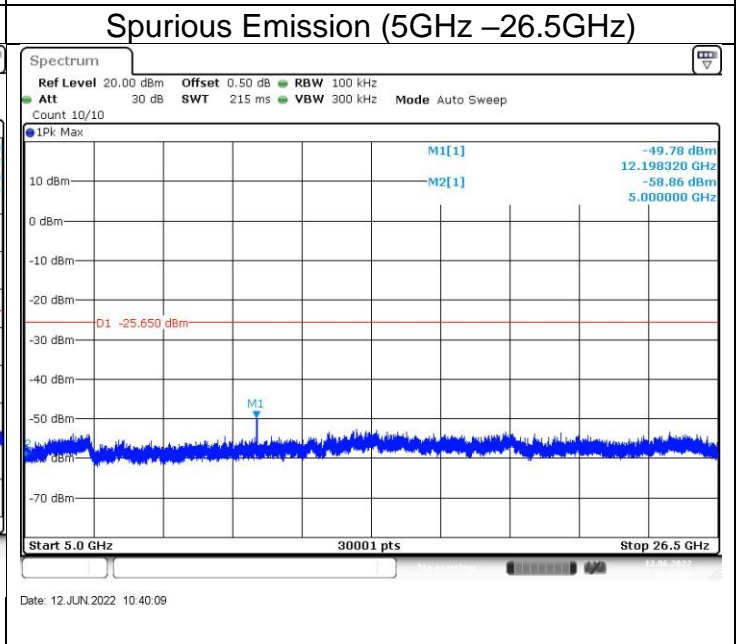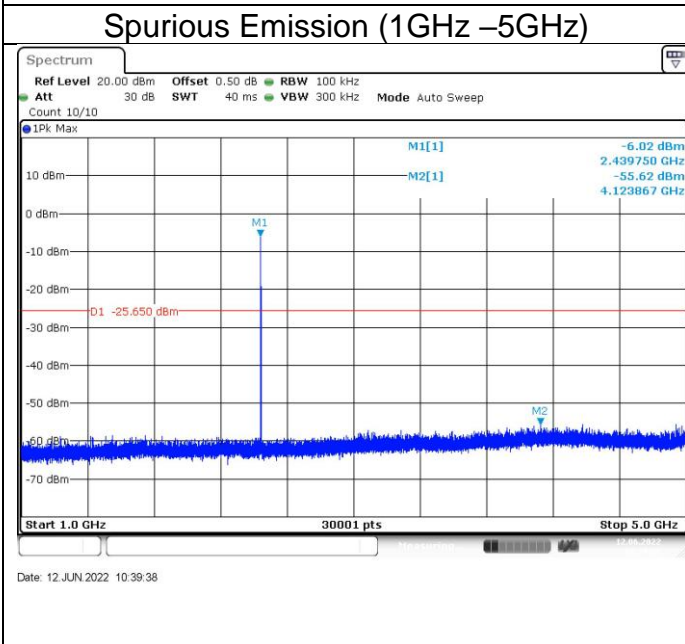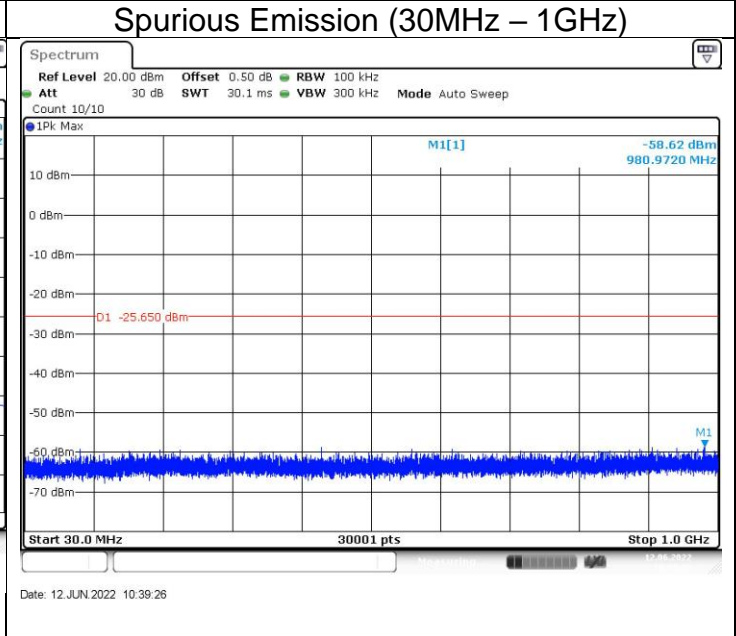
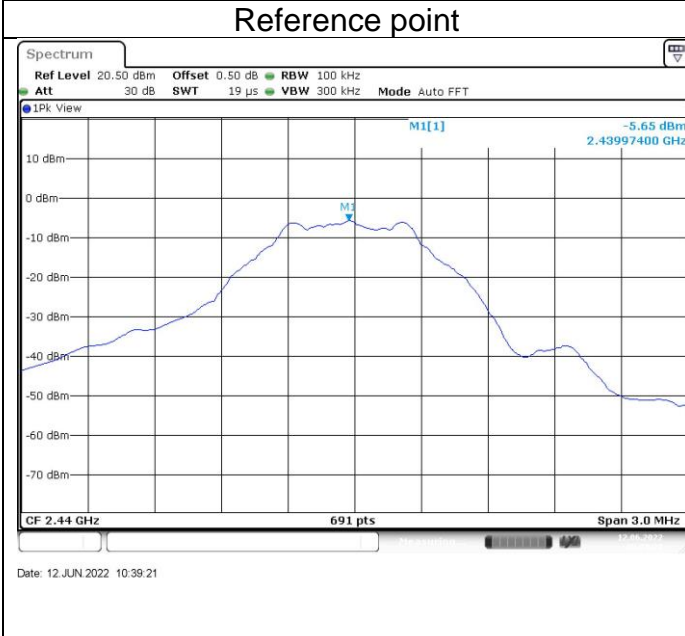




Out-of-Band Emissions (1Mbps)  
Channel 39 (2480MHz)

Reference point

Spurious Emission (30MHz – 1GHz)

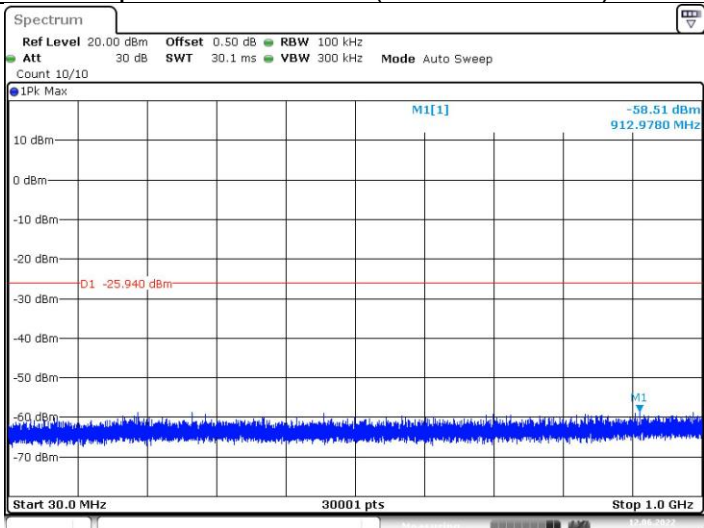
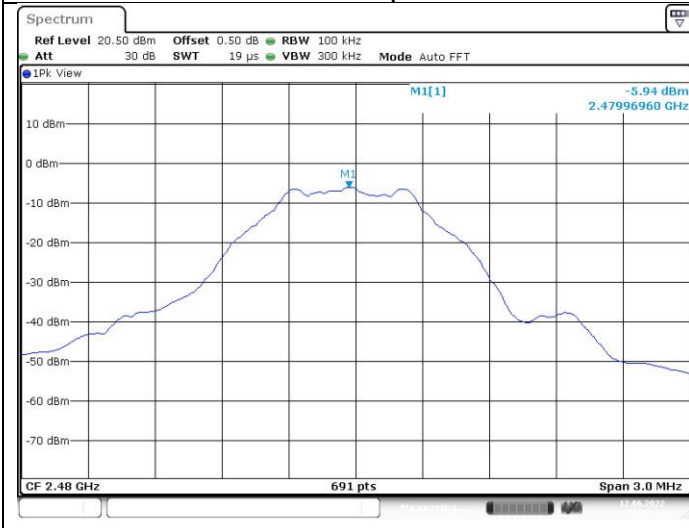


Date: 12 JUN 2022 10:41:17

Date: 12 JUN 2022 10:41:22

Spurious Emission (1GHz –5GHz)





Spurious Emission (5GHz –26.5GHz)

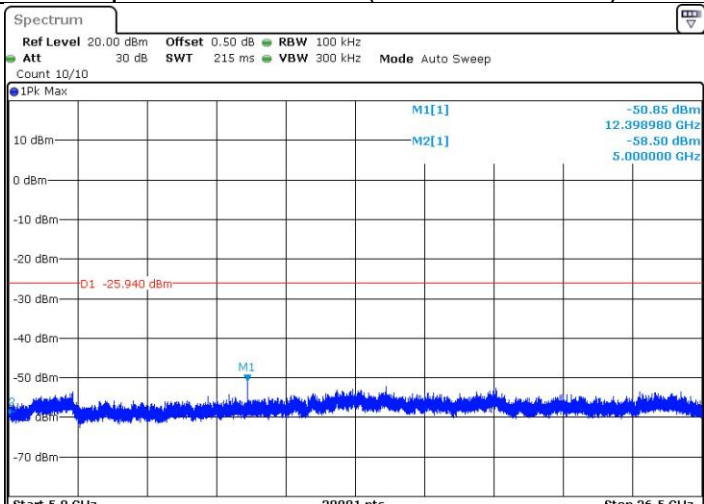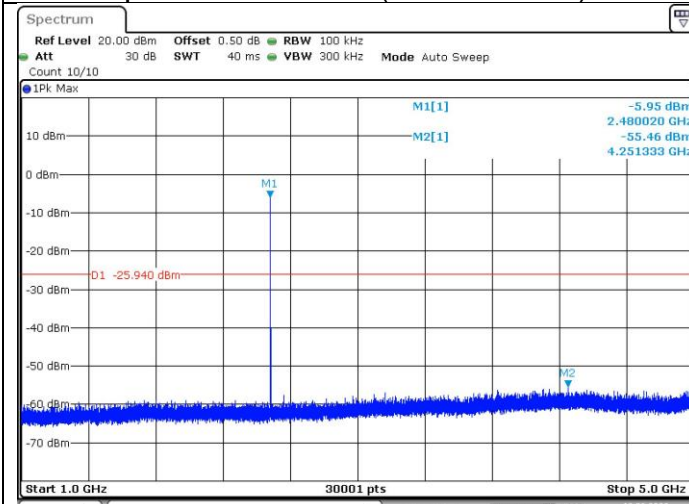



Date: 12 JUN 2022 10:41:34

Date: 12 JUN 2022 10:42:05

### Out-of-Band Emissions (2Mbps) Channel 0 (2402MHz)

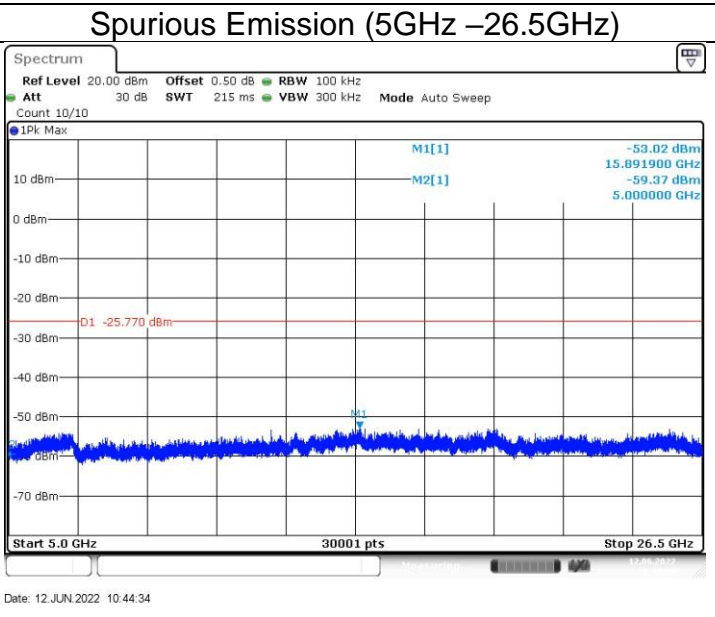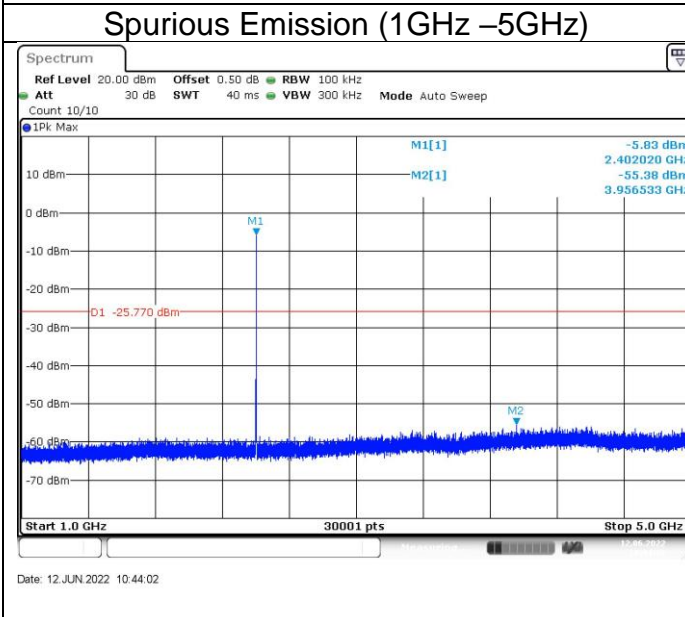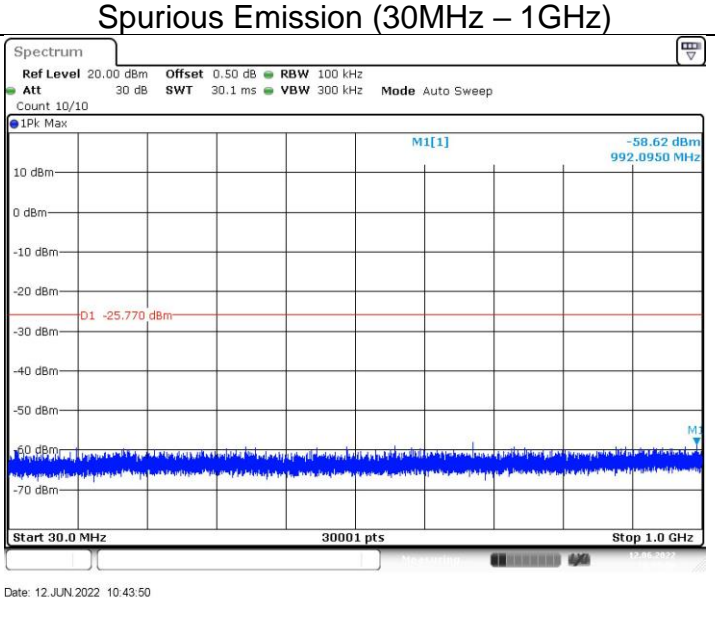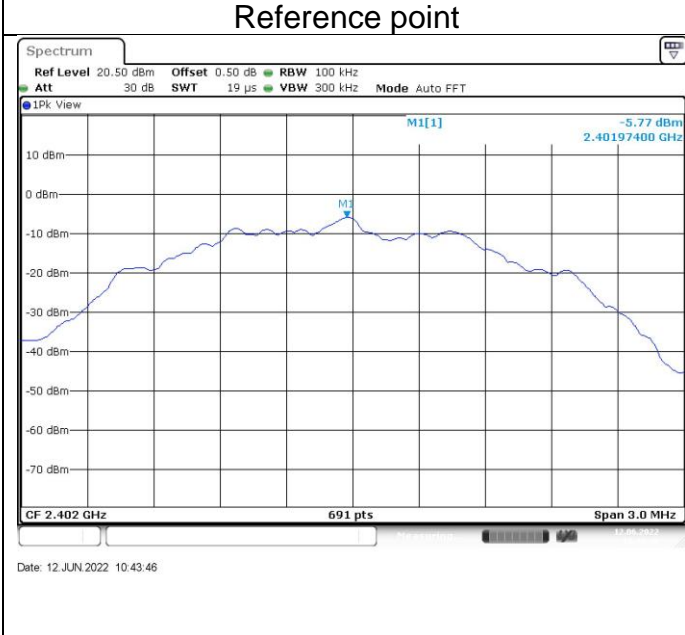



### Out-of-Band Emissions (2Mbps) Channel 19 (2440MHz)

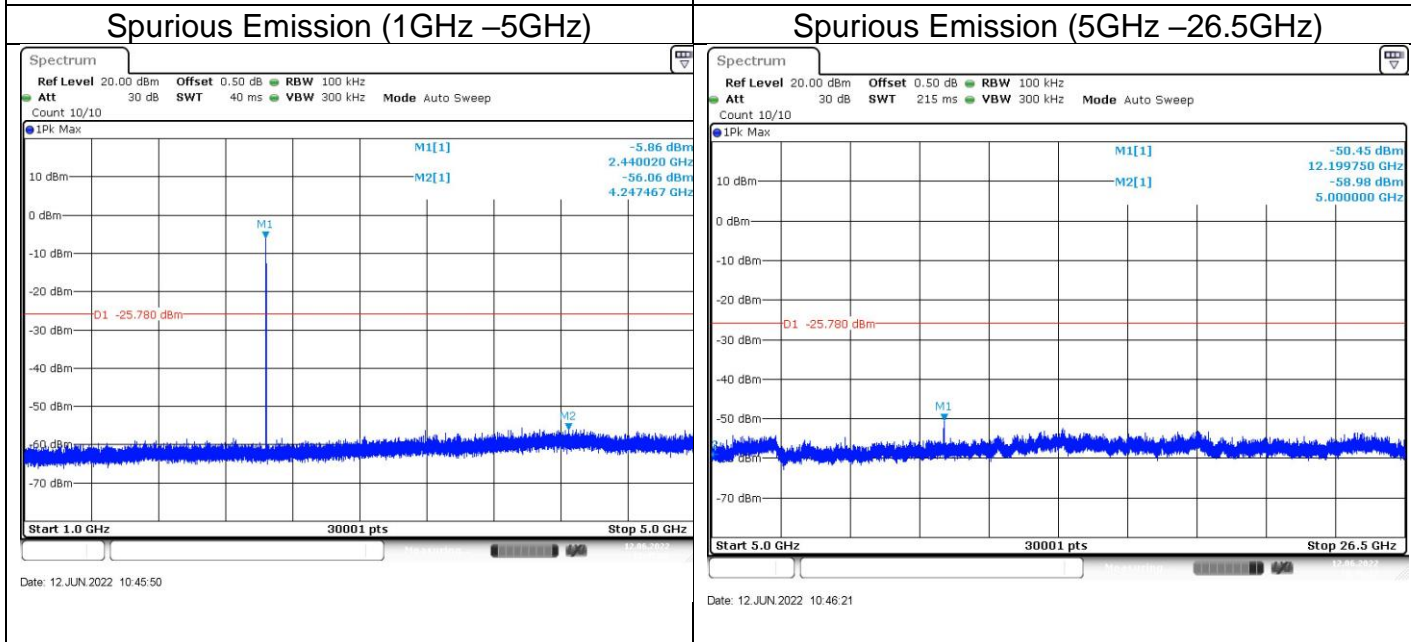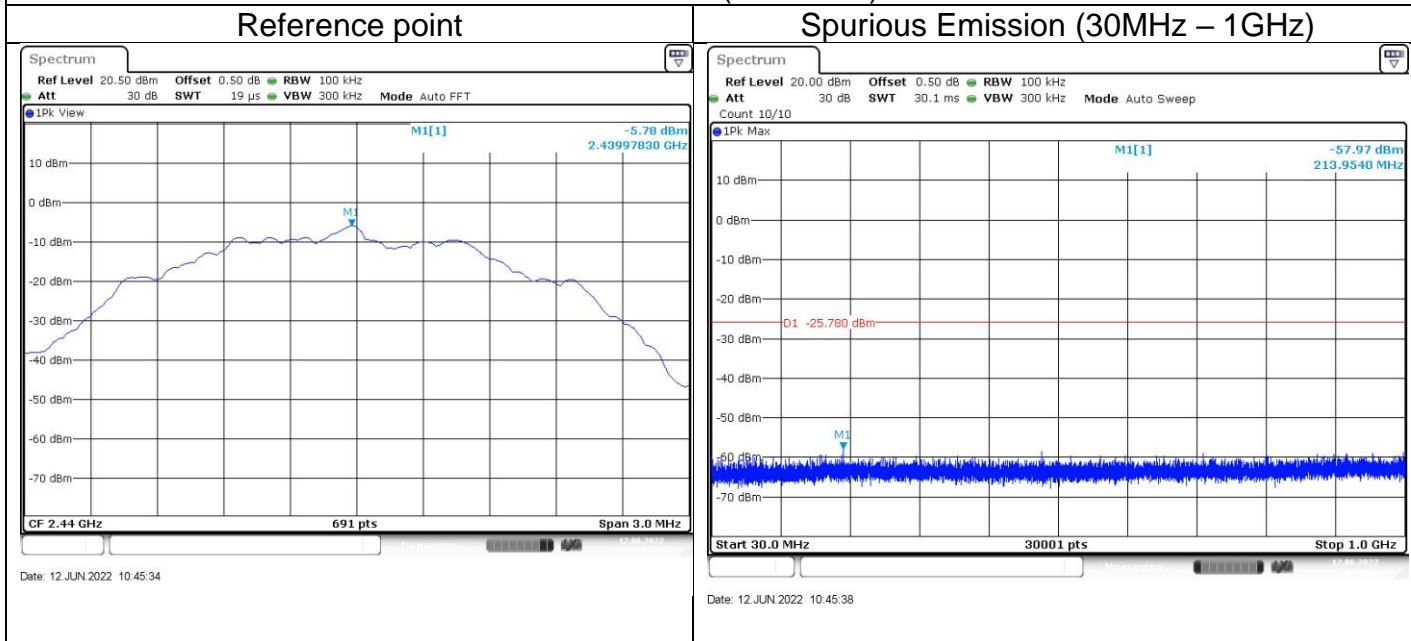

Out-of-Band Emissions (2Mbps)  
Channel 39 (2480MHz)



Reference point

Spurious Emission (30MHz – 1GHz)

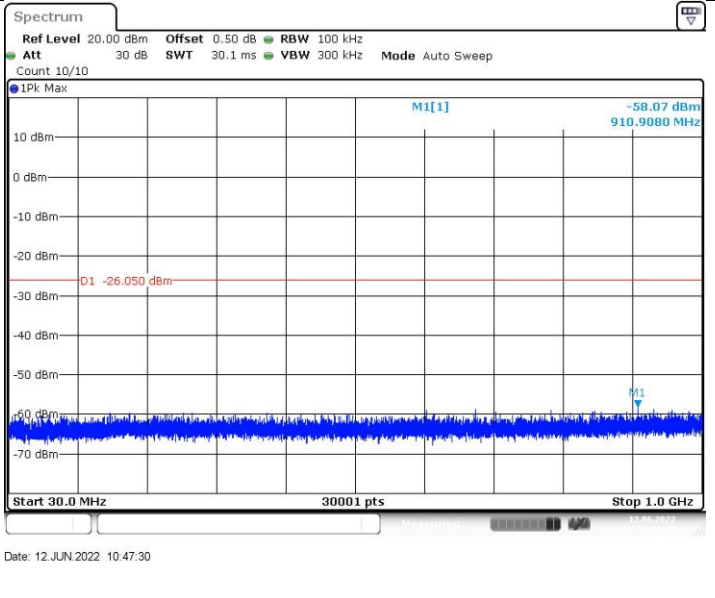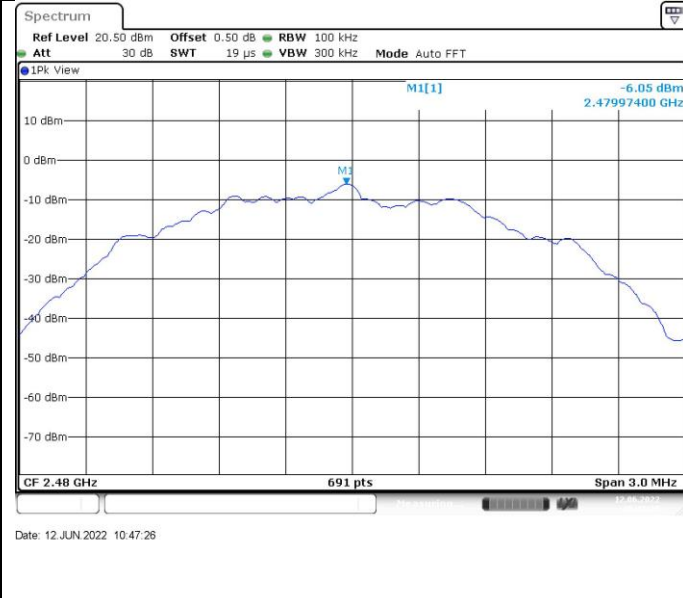

Spurious Emission (1GHz – 5GHz)

Spurious Emission (5GHz – 26.5GHz)

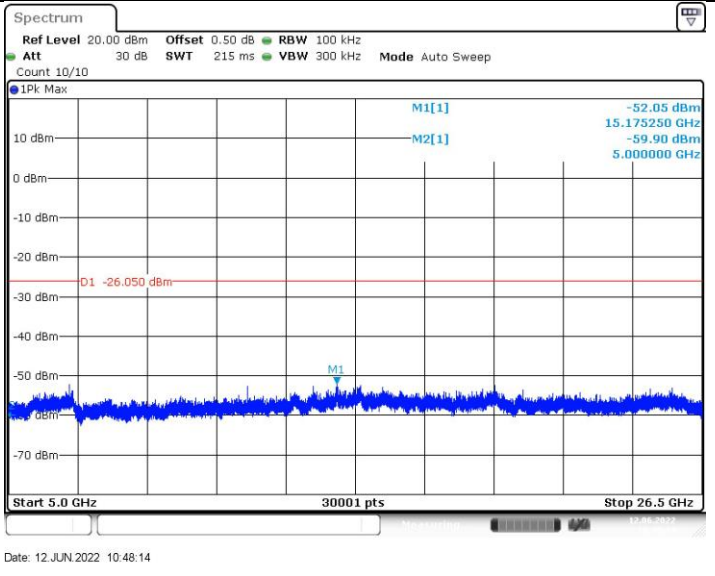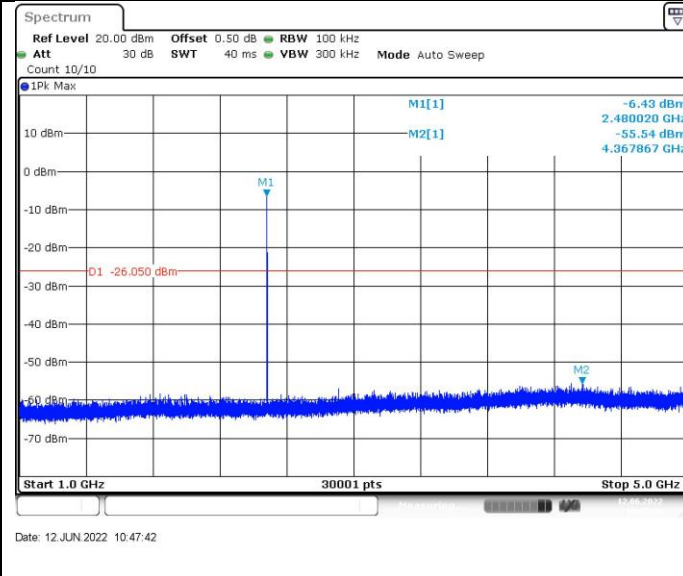

## 9.6 Band edge

### Test Method

- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.


### Limit

According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.

Test result


1Mbps

2402

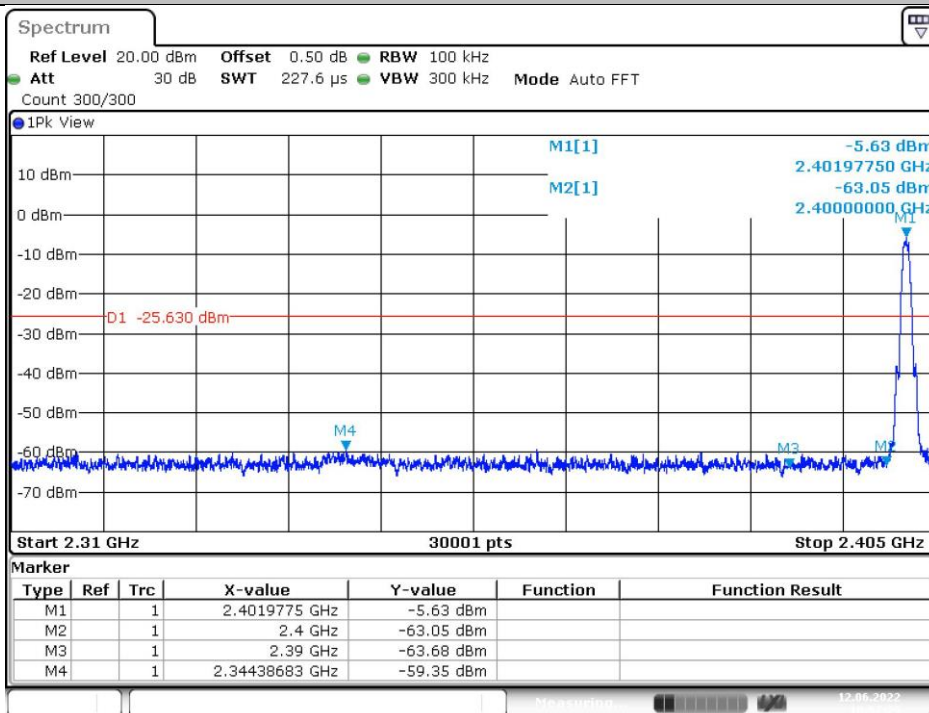


Date: 12.JUN.2022 10:37:29

2480

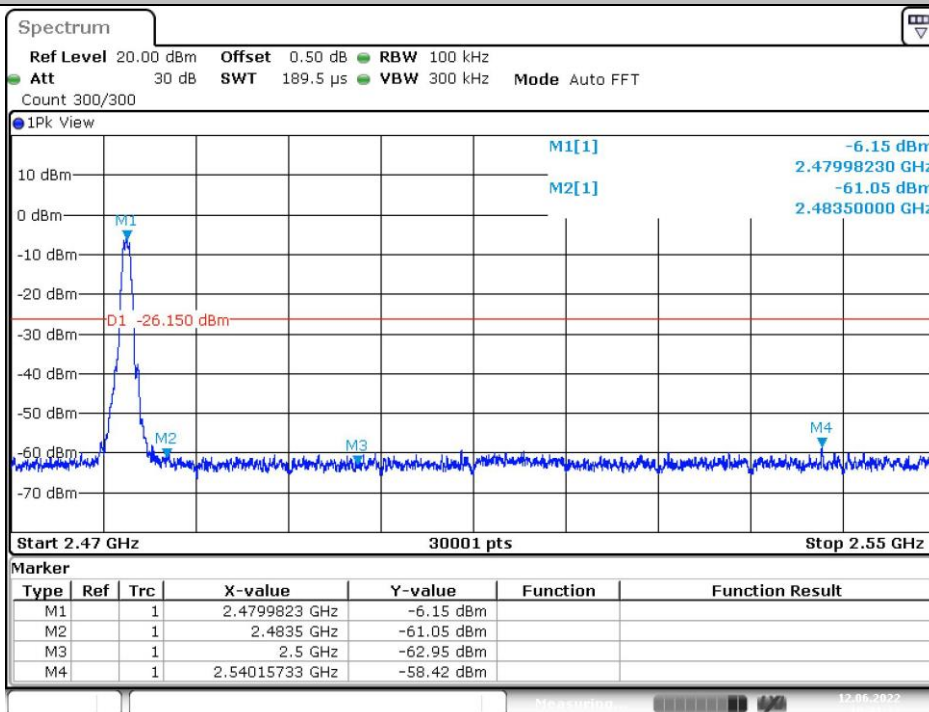


Date: 12.JUN.2022 10:41:12

2Mbps  
2402

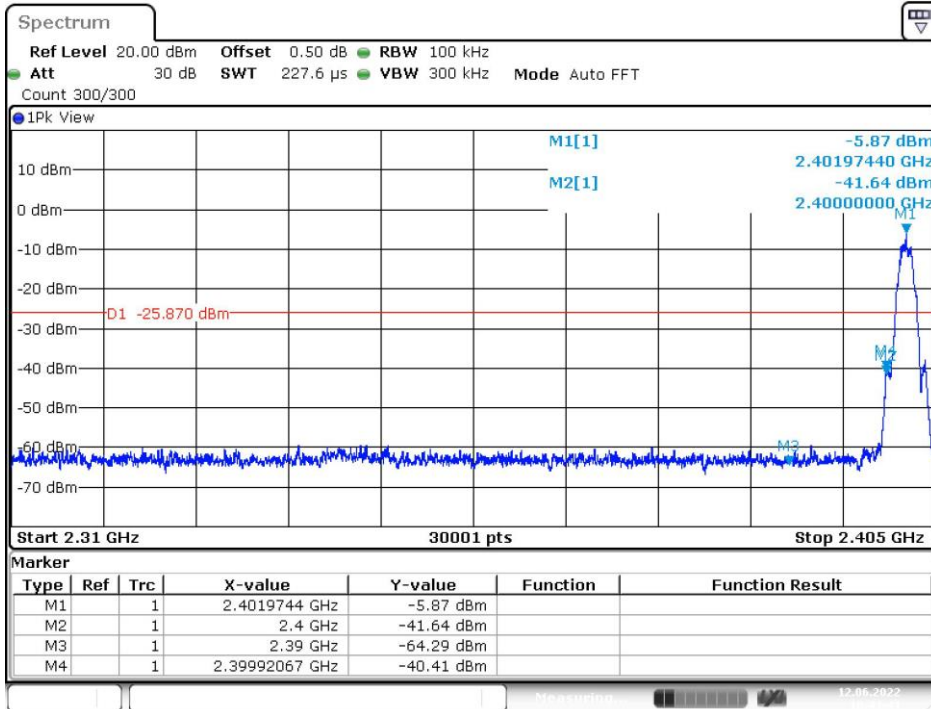

Date: 12.JUN.2022 10:43:41

2480

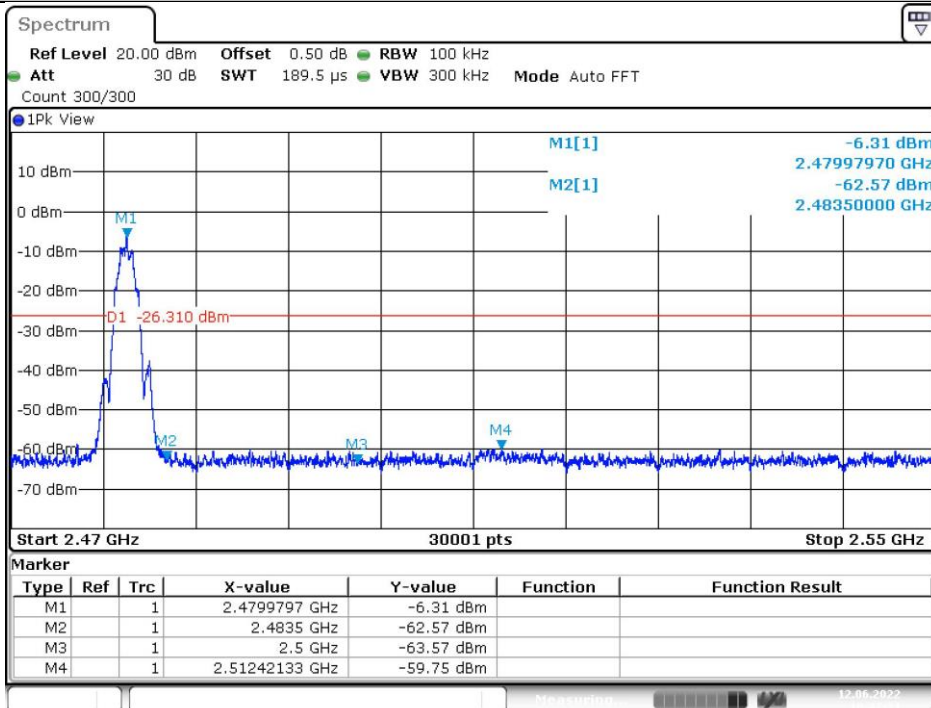

Date: 12.JUN.2022 10:47:21

## 9.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz to 120 kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) VBW ≥ [3 × RBW].
- c) Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$ . Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:



- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

### Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205 and RSS-GEN 8.10 must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Measured Distance Meters
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30	30	30

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

**Spurious radiated emissions for transmitter**

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit. The only worse case test result is listed in the report.

**Test result**

Test mode:GFSK 1Mbps (2402MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2383.12	43.62	74.00	30.38	PK	Horiznotal
4804.03	48.71	74.00	25.29	PK	Horiznotal
2384.43	43.34	74.00	30.66	PK	Vertical
4804.00	45.71	74.00	28.29	PK	Vertical

Test mode:GFSK 1Mbps (2440MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4879.96	43.66	74.00	30.34	PK	Horiznotal
7320.60	50.19	74.00	23.81	PK	Vertical

Test mode:GFSK 1Mbps (2480MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.60	46.24	74.00	27.76	PK	Horiznotal
7490.33	49.87	74.00	24.13	PK	Horiznotal
2483.56	45.78	74.00	28.22	PK	Vertical
7440.73	51.84	74.00	22.16	PK	Vertical

Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading

Test mode:GFSK 2Mbps (2402MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2384.53	43.19	74.00	30.81	PK	Horiznotal
4803.46	46.62	74.00	27.38	PK	Horiznotal
2382.70	42.94	74.00	31.06	PK	Vertical
4804.00	44.18	74.00	29.82	PK	Vertical

Test mode:GFSK 2Mbps (2440MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4879.96	44.85	74.00	29.15	PK	Horiznotal
7318.33	49.61	74.00	24.39	PK	Vertical

Test mode:GFSK 2Mbps (2480MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.52	45.50	74.00	28.50	PK	Horiznotal
7438.46	48.79	74.00	25.21	PK	Horiznotal
2483.54	45.67	74.00	28.33	PK	Vertical
7438.46	49.63	74.00	24.37	PK	Vertical

Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading

The worst case of Radiated Emission below 1GHz:

## 30-1000MHz Radiated Emission

### EUT Information


EUT Name: TUBULAR MOTOR  
 Model: M-09-QC120  
 Client: INVENTRONICS  
 Op Cond: Power on, AC 120V, TX\_2402MHz at 1Mbps, T20, H52%, P100.9kPa  
 Operator: Cheng Huali  
 Test Spec: FCC\_Part15.209  
 Comment: Horizontal  
 Sample No: SHA-653704-4

### Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.005 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

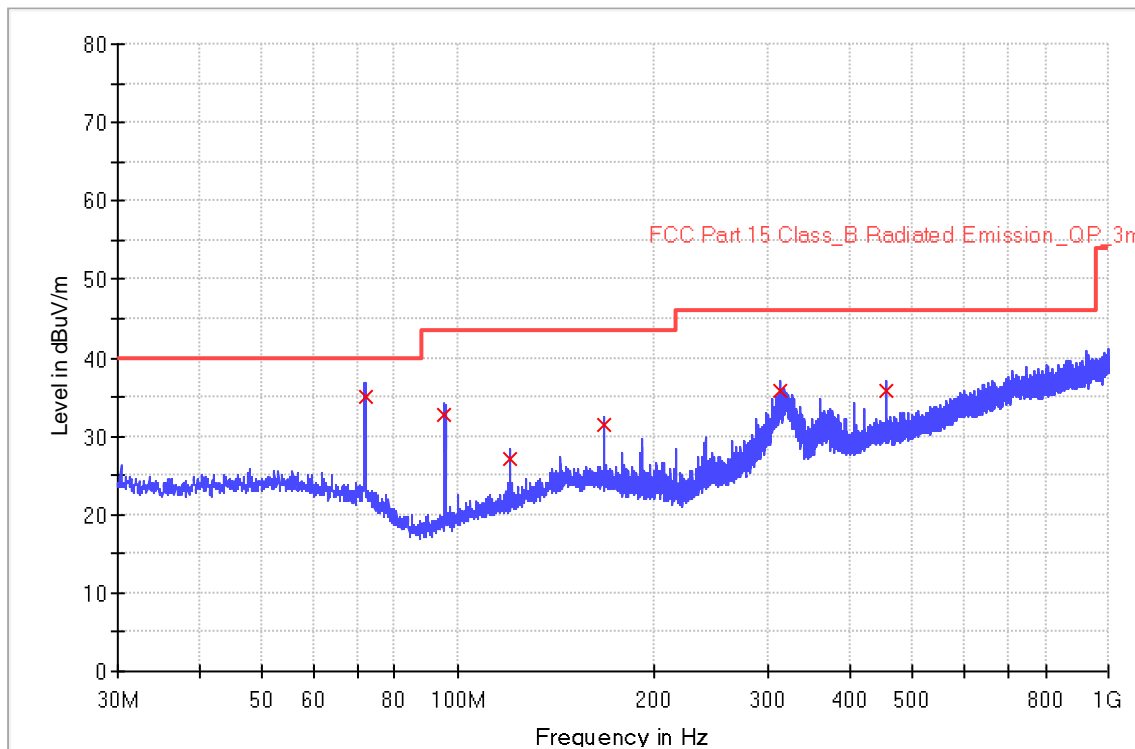

## Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
71.960000	35.0	1000.0	120.000	150.0	H	78.0	18.2	5.0	40.0
95.520000	32.8	1000.0	120.000	100.0	H	118.0	15.6	10.7	43.5
119.960000	27.0	1000.0	120.000	200.0	H	359.0	18.1	16.5	43.5
168.000000	31.5	1000.0	120.000	200.0	H	184.0	20.4	12.0	43.5
312.040000	35.7	1000.0	120.000	150.0	H	258.0	21.9	10.3	46.0
456.040000	35.7	1000.0	120.000	100.0	H	311.0	25.9	10.3	46.0

# 30-1000MHz Radiated Emission

## EUT Information


EUT Name: TUBULAR MOTOR  
 Model: M-09-QC120  
 Client: INVENTRONICS  
 Op Cond: Power on, AC 120V, TX\_2402MHz at 1Mbps, T20, H52%, P100.9kPa  
 Operator: Cheng Huali  
 Test Spec: FCC\_Part15.209  
 Comment: Vertical  
 Sample No: SHA- 653704-4

## Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.005 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

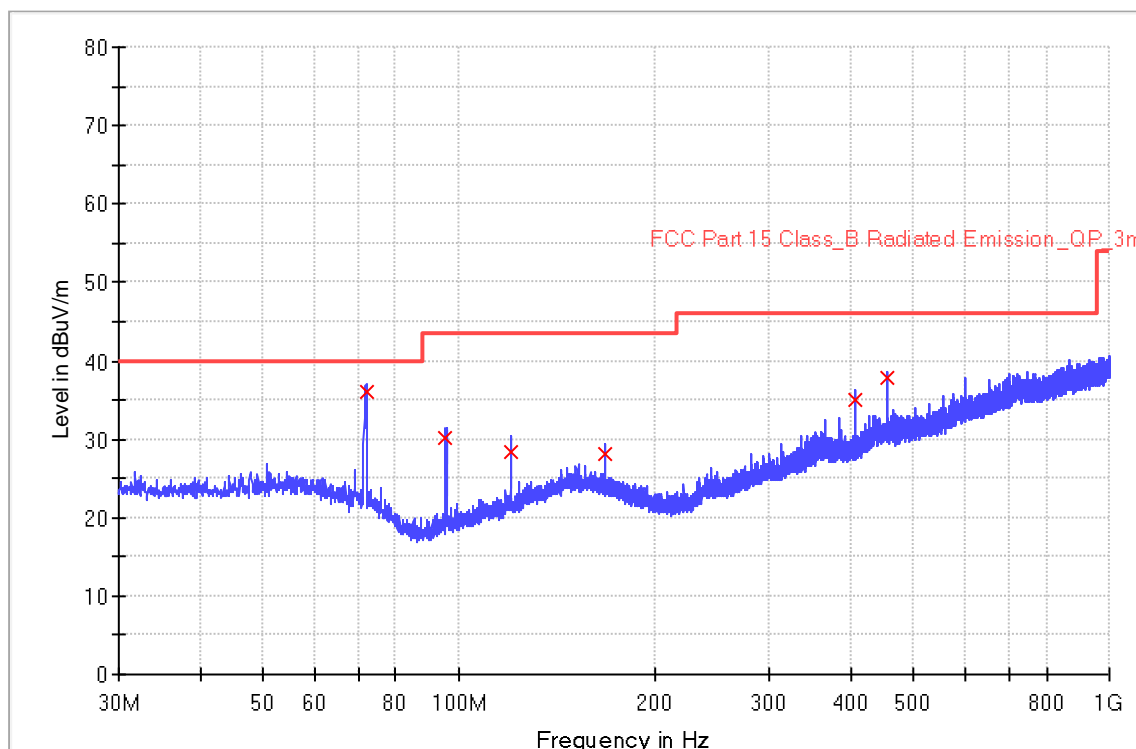

### Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
71.960000	36.0	1000.0	120.000	100.0	V	50.0	18.2	4.0	40.0
95.520000	30.1	1000.0	120.000	150.0	V	157.0	15.6	13.4	43.5
119.960000	28.3	1000.0	120.000	150.0	V	193.0	18.1	15.2	43.5
168.000000	28.1	1000.0	120.000	200.0	V	318.0	20.4	15.4	43.5
407.960000	35.0	1000.0	120.000	200.0	V	278.0	24.2	11.0	46.0
455.960000	37.8	1000.0	120.000	100.0	V	108.0	25.9	8.2	46.0

# 30-1000MHz Radiated Emission

## EUT Information


EUT Name: Tubular Motor  
 Model: CM-09-C120  
 Client: Coulisse B.V.  
 Op Cond: Power on, forward, AC 120V/50Hz, T21.3, H56.7%, P103.3kPa  
 Operator: Cheng Huali  
 Test Spec: FCC\_Part15.209  
 Comment: Horizontal  
 Sample No: SHA-703502-1

## Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

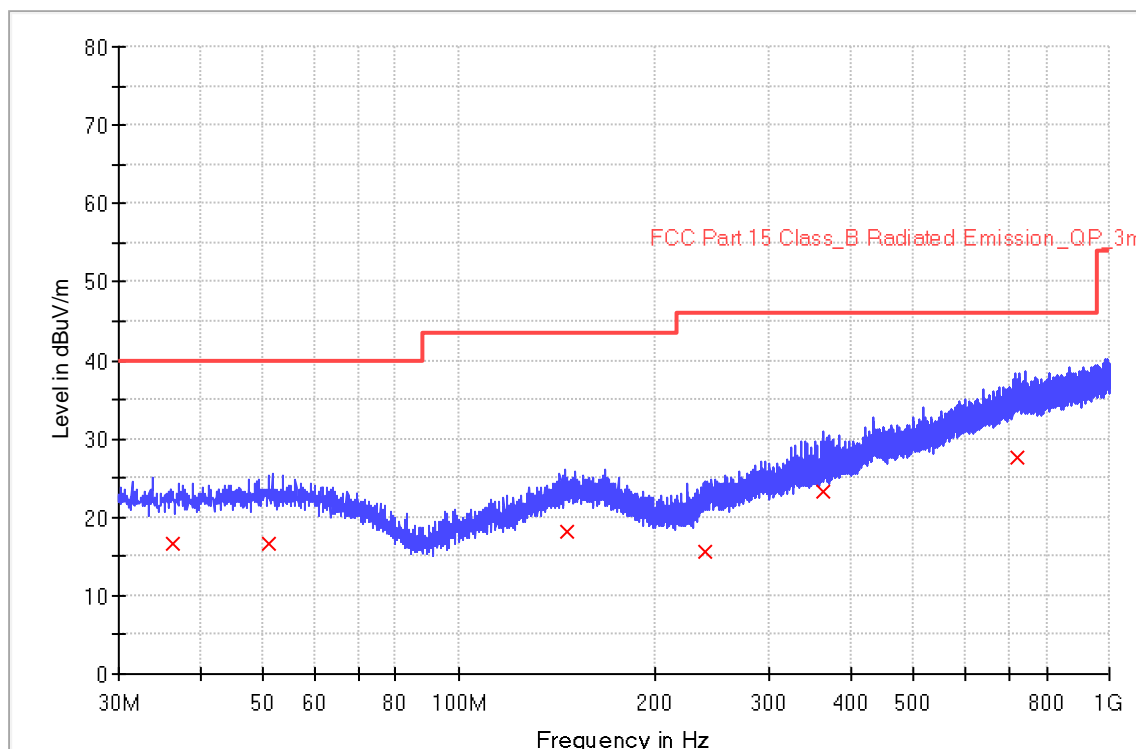



### Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
36.200000	16.5	1000.0	120.000	102.0	H	105.0	19.7	23.5	40.0
51.000000	16.6	1000.0	120.000	100.0	H	236.0	20.6	23.4	40.0
147.000000	18.1	1000.0	120.000	153.0	H	150.0	20.9	25.4	43.5
239.360000	15.5	1000.0	120.000	100.0	H	95.0	19.5	30.5	46.0
363.960000	23.2	1000.0	120.000	100.0	H	19.0	23.1	22.9	46.0
719.760000	27.6	1000.0	120.000	198.0	H	341.0	31.0	18.4	46.0

# 30-1000MHz Radiated Emission

## EUT Information


EUT Name: Tubular Motor  
 Model: CM-09-C120  
 Client: Coulisse B.V.  
 Op Cond: Power on, forward, AC 120V/50Hz, T21.3, H56.7%, P103.3kPa  
 Operator: Cheng Huali  
 Test Spec: FCC\_Part15.209  
 Comment: Vertical  
 Sample No: SHA-703502-1

## Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

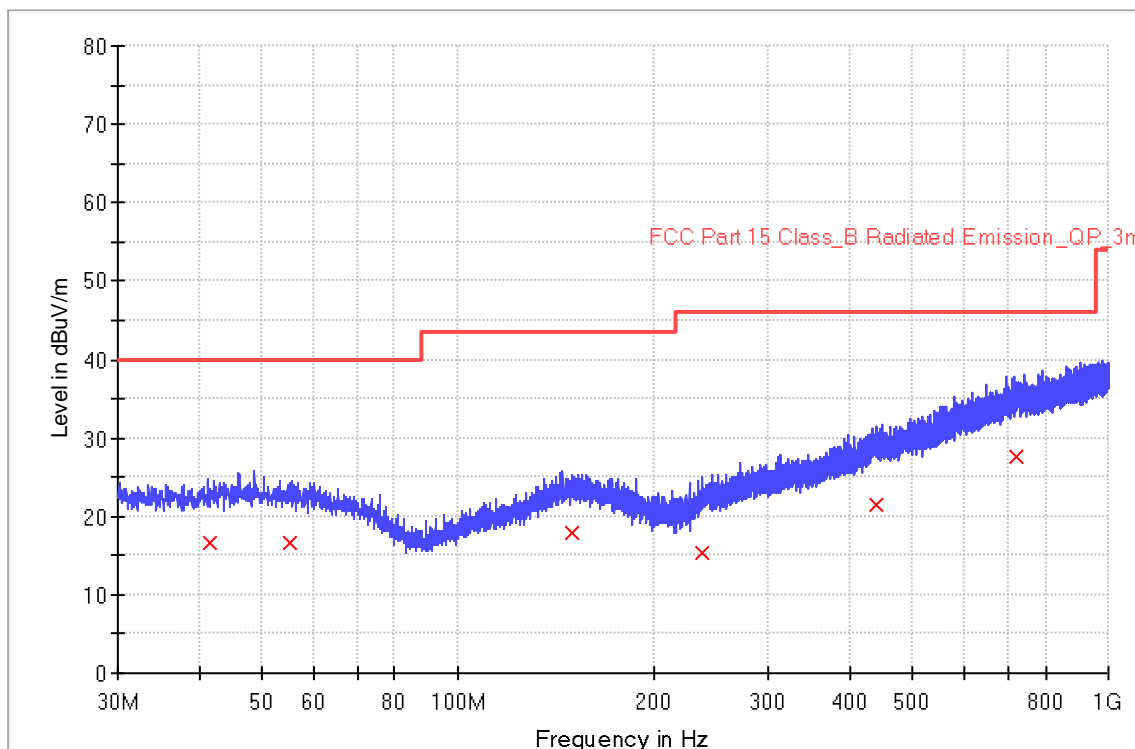

### Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
41.560000	16.5	1000.0	120.000	102.0	V	159.0	20.1	23.5	40.0
55.200000	16.6	1000.0	120.000	123.0	V	326.0	20.4	23.4	40.0
149.680000	17.9	1000.0	120.000	100.0	V	15.0	20.9	25.6	43.5
237.400000	15.4	1000.0	120.000	100.0	V	74.0	19.2	30.6	46.0
438.520000	21.5	1000.0	120.000	100.0	V	115.0	25.6	24.5	46.0
722.320000	27.7	1000.0	120.000	156.0	V	205.0	31.1	18.3	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 10 Test Equipment List

List of Test Instruments  
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2021-8-2	2022-8-1
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2021-8-2	2022-8-1
	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2022-8-1	2023-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2021-8-2	2022-8-1
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2021-9-23	2024-9-22
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-3-15	2024-3-14
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2021-8-2	2022-8-1
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2022-5-20	2023-5-19
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	002222727	2020-9-23	2023-9-22
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-8	2024-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2021-8-2	2022-8-1
	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2022-8-1	2023-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2021-8-2	2022-8-1
	LISN	Rohde & Schwarz	ENV216	101924	2022-8-01	2023-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	Bluetooth and WiFi Test System	Shenzhen JS tonscond co.,ltd	2.6.77.0518
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

### C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density\*
- Spurious RF conducted emissions
- Band edge

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance	9kHz to 30MHz, 3.16dB (AMN)
Radiated Disturbance	9kHz to 30MHz, 3.52dB 30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB
RF Conducted Measurement	Power related: 1.16dB Frequency related: $6.00 \times 10^{-8}$

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.



China

Report Number: 709502228915-00C

## 12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



China

Report Number: 709502228915-00C

## 13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----