



# FCC 47 CFR PART 15 SUBPART C

## TEST REPORT

*For*

**Applicant :** Shenzhen Great Power Enterprise Co., Ltd

**Address :** Building E, Xin Xulong Lndustrial Area, Kukeng Village, Guanlan  
Town, Baoan District, Shenzhen, China

**Product Name :** RF LCD CLOCK

**Model Name :** SPC711, A02096

**Brand Name :** SHARP

**FCC ID :** ZY9-SPC711

**Report No. :** MOST111203F2

**Date of Issue :** December. 21, 2011

**Issued by :** Most Technology Service Co., Ltd.

**Address :** No.5, Langshan 2nd Road, North District, Hi-tech Industrial  
Park, Nanshan, Shenzhen, Guangdong, China

**Tel :** 86-755-8617 0306

**Fax :** 86-755-8617 0310

*The report consists 27 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY.....</b>	<b>3</b>
<b>2. GENERAL INFORMATION.....</b>	<b>4</b>
2.1 Product Information.....	4
2.2 Objective.....	5
2.3 Test Standards and Results.....	5
2.4 Environmental Conditions.....	5
<b>3. TEST METHODOLOGY.....</b>	<b>6</b>
3.1 TEST FACILITY.....	6
3.2 GENERAL TEST PROCEDURES.....	6
<b>4 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
4.1 SETUP CONFIGURATION OF EUT.....	7
4.2 SUPPORT EQUIPMENT.....	7
4.3 TEST EQUIPMENT LIST.....	8
<b>5. 47 CFR Part 15 C Requirements.....</b>	<b>9</b>
5.1 Radiated Emission.....	9
5.2 20dB Bandwidth.....	15
5.3 Transmission Cease Time.....	16
5.4 Antenna Requirement.....	18
<b>APPENDIX 1.....</b>	<b>19</b>
<b>PHOTOGRAPHS OF TEST SETUP.....</b>	<b>19</b>
<b>APPENDIX 2.....</b>	<b>21</b>
<b>PHOTOGRAPHS OF EUT.....</b>	<b>21</b>


**1. VERIFICATION OF CONFORMITY**

**Equipment Under Test:** RF LCD CLOCK  
**Brand Name:** SHARP  
**Model Number:** SPC711  
**FCC ID:** ZY9-SPC711  
**Applicant:** Shenzhen Great Power Enterprise Co., Ltd  
Building E,Xin Xulong Lndustrial Area, Kukeng Village, Guanlan Town,Baoan District,Shenzhen,China  
**Manufacturer:** Shenzhen Great Power Enterprise Co., Ltd  
Building E,Xin Xulong Lndustrial Area, Kukeng Village, Guanlan Town,Baoan District,Shenzhen,China  
**Technical Standards:** 47 CFR Part 15 Subpart C  
**File Number:** MOST111203F2  
**Date of test:** December. 06, 2011– December. 20, 2011  
**Deviation:** None  
**Condition of Test Sample:** Normal  
**Test Result:** PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):



Zhang Ling

December. 20, 2011


Review by (+ signature):



July Wen

December. 20, 2011

Approved by (+ signature):



Terry Yang

December. 20, 2011

## 2. GENERAL INFORMATION

### 2.1 Product Information

<b>Product</b>	RF LCD CLOCK
<b>Brand Name</b>	SHARP
<b>Model Number</b>	SPC711
<b>Series Model Name:</b>	A02096
<b>Difference description:</b>	Only the appearance is different.
<b>Power Supply</b>	DC 3V by battery
<b>Frequency Range</b>	433.92 MHz
<b>Channel Number:</b>	1
<b>Modulation Technique</b>	FSK
<b>Temperature Range</b>	-10°C - 50°C

**NOTE:**

1. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

## 2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

## 2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.231	Radiated Emission	PASS	2011-12-15
2	15.231	20dB Bandwidth	PASS	2011-12-20
3	15.231	Transmission Cease Time	PASS	2011-12-20
4	15.203	Antenna Requirement	PASS	2011-12-20

*Note:* 1. The test result judgment is decided by the limit of measurement standard  
2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST METHODOLOGY

#### 3.1 TEST FACILITY

Test Site: Most Technology Service Co., Ltd.

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park , Nanshan, Shenzhen, Guangdong ,China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

#### 3.2 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2009, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2009.

**4 SETUP OF EQUIPMENT UNDER TEST****4.1 SETUP CONFIGURATION OF EUT**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

**4.2 SUPPORT EQUIPMENT**

Device Type	Brand	Model	FCC ID	Series No.	Audio Cable	Power Cord
N/A						

*Remark:*

*All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

### 4.3 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2012/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2012/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2012/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2012/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2012/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C	--	2012/03/14
9	Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	--	2012/03/14
10	Cable	Resenberger	N/A	NO.1	2012/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2012/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2012/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2012/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2012/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2012/03/14
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2012/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2012/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2012/03/14
21	Line Impedence Network	Kikusui	LIN40MA-PCR-L	LM002352	2012/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2012/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2012/03/14
24	Signal Generator	IFR	2032	203002/100	2012/03/14
25	Amplifier	A&R	150W1000	301584	2012/03/14
26	CDN	FCC	FCC-801-M2-25	47	2012/03/14
27	CDN	FCC	FCC-801-M3-25	107	2012/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2012/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2012/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2012/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2012/03/14

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.

## 5. 47 CFR Part 15 C Requirements

### 5.1 Radiated Emission

#### 5.1.1 Definition

The field strength of any emission within this band shall not exceed 10000 micro volts /meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(Intentional Radiators general limit), as below.

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Test Distance (m)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30	3	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54
Fundamental	12500	3	82
Spurious	1250	3	62


### 5.1.2 Test Configuration

#### Test Setup:

##### Below 1GHz:

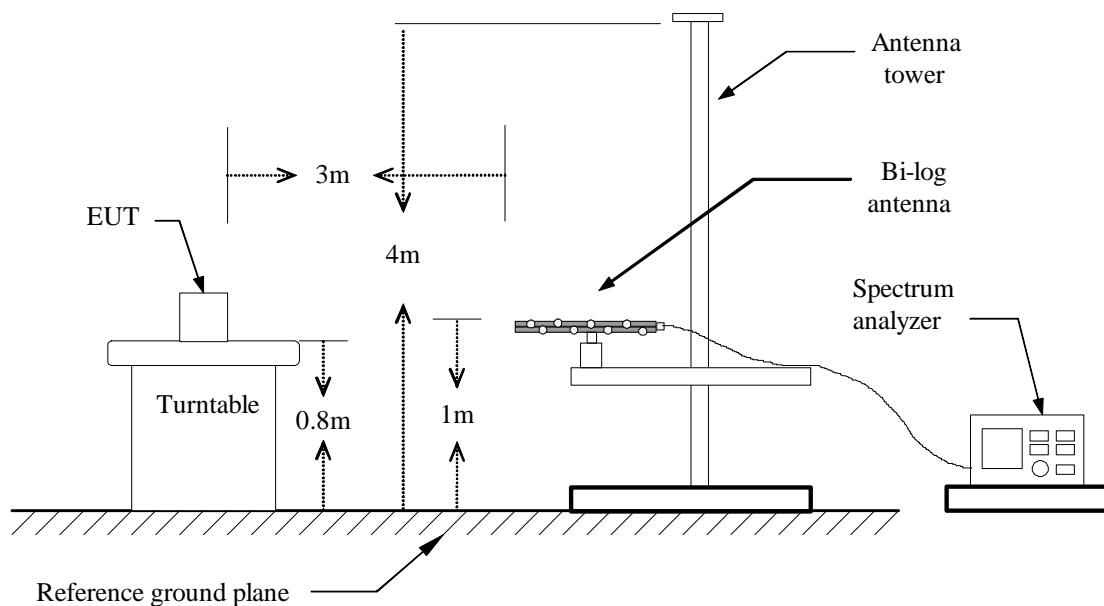

##### Above 1GHz:

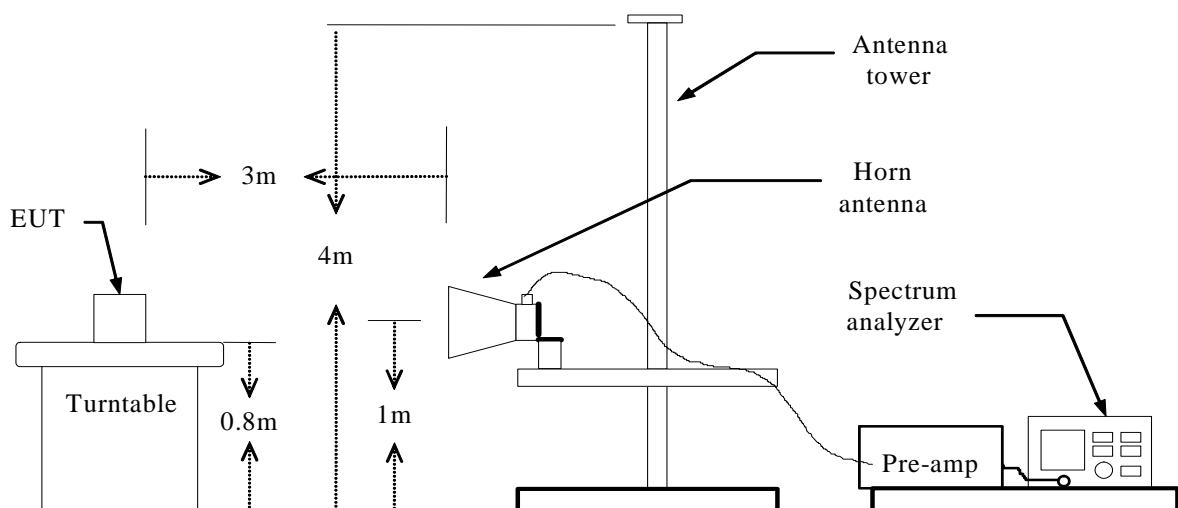

### 5.1.3 Test Description

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO  
Above 1GHz :( a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

### 5.1.4 Test Result

<b>Operation Mode:</b>	TX mode	<b>Test Date:</b>	2011-12-15
<b>Temperature:</b>	20°C	<b>Tested by:</b>	Habby Guo
<b>Humidity:</b>	70 % RH	<b>Polarity:</b>	Ver. / Hor.

Form 9 KHz to 30MHz:


Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
N/A	H								>20
<hr/>									
N/A	V								>20

*-Note: No test data was detected in below 30M*

## Form 30MHz to 1000MHz:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

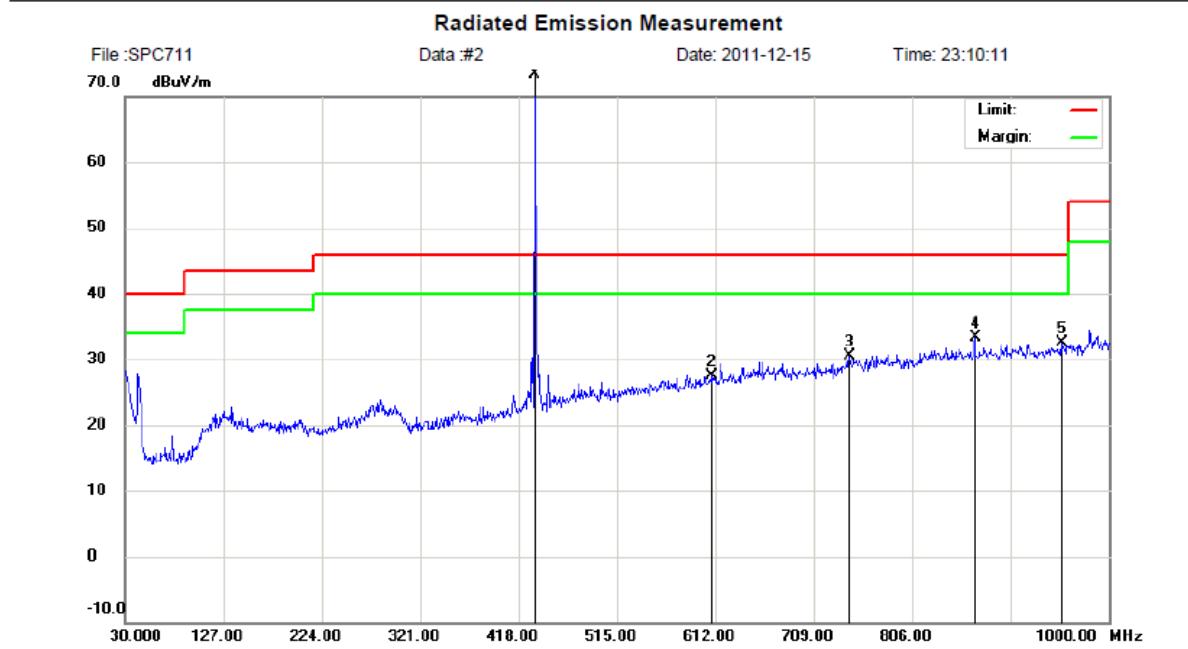

Site: site MOST 3M

Limit: FCC Part15 B 3M Radiation

Polarization: **Vertical**

Temperature: 26

EUT: RF LCD CLOCK

Power: DC 3V

Humidity: 61 %

M/N: SPC711

Distance:

Mode: TX

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	433.9200	53.10	20.34	73.44	92.80	-19.36	peak			
2		609.0900	4.24	23.20	27.44	46.00	-18.56	peak			
3		743.9200	4.79	25.74	30.53	46.00	-15.47	peak			
4		868.0800	6.21	27.02	33.23	46.00	-12.77	peak			
5		953.4400	4.55	28.00	32.55	46.00	-13.45	peak			

\*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86170306 Fax: 0755-86170310

### Radiated Emission Measurement

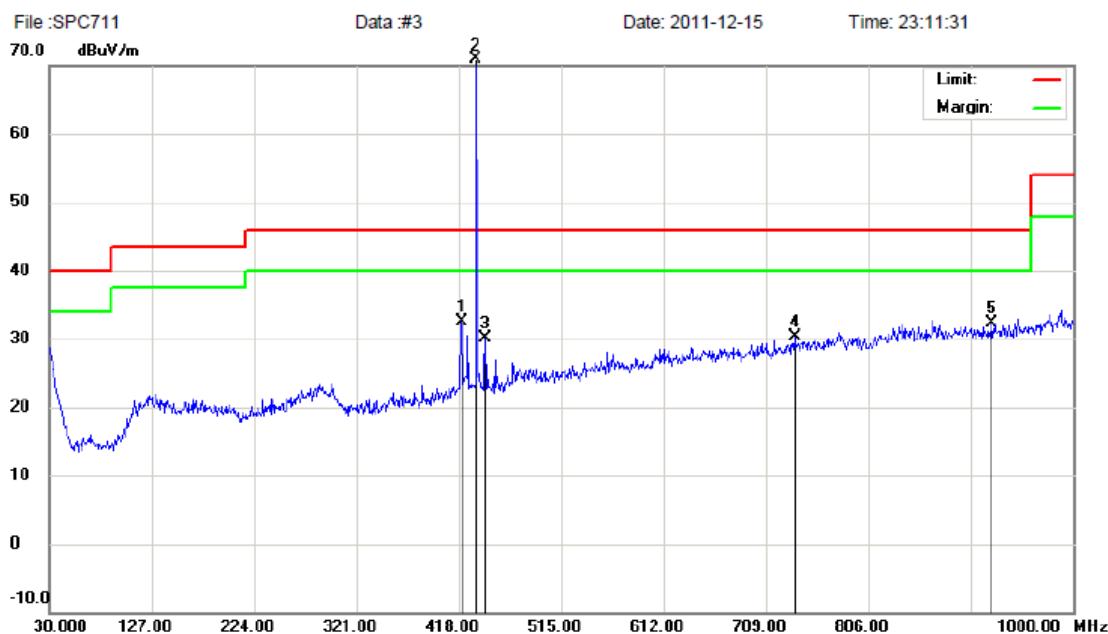

Site: site MOST 3M

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 3V

Humidity: 61 %

EUT: RF LCD CLOCK

Distance:

M/N: SPC711

Mode: TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		419.9400	12.56	19.99	32.55	46.00	-13.45	peak		
2	*	433.9200	50.55	20.34	70.89	92.80	-21.91	peak		
3		443.2200	9.81	20.24	30.05	46.00	-15.95	peak		
4		736.1599	5.04	25.23	30.27	46.00	-15.73	peak		
5		923.3700	4.73	27.53	32.26	46.00	-13.74	peak		

\*:Maximum data x:Over limit !:over margin

## Above 1 GHz

Freq. (MHz)	Ant. Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
1301.76	V	Peak	22.87	27.35	50.22	54.00	-3.78
--	--	--	--	--	--	--	>10
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
1301.76	H	Peak	21.61	27.35	49.02	54.00	-4.98
--	--	--	--	--	--	--	>10
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

**Notes:**


*Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.*

## 5.2 20dB Bandwidth

### 5.2.1 Requirement


According to FCC section 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.2.2 Test Description

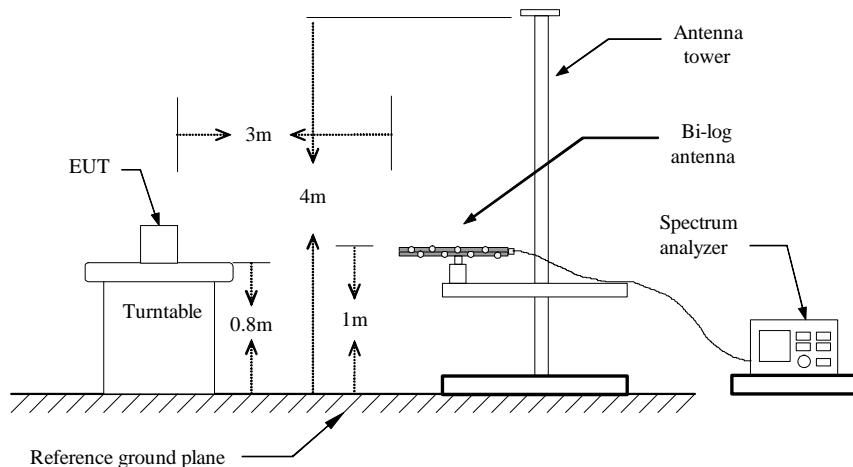

### 5.2.3 Test Result

#### Test Plot:

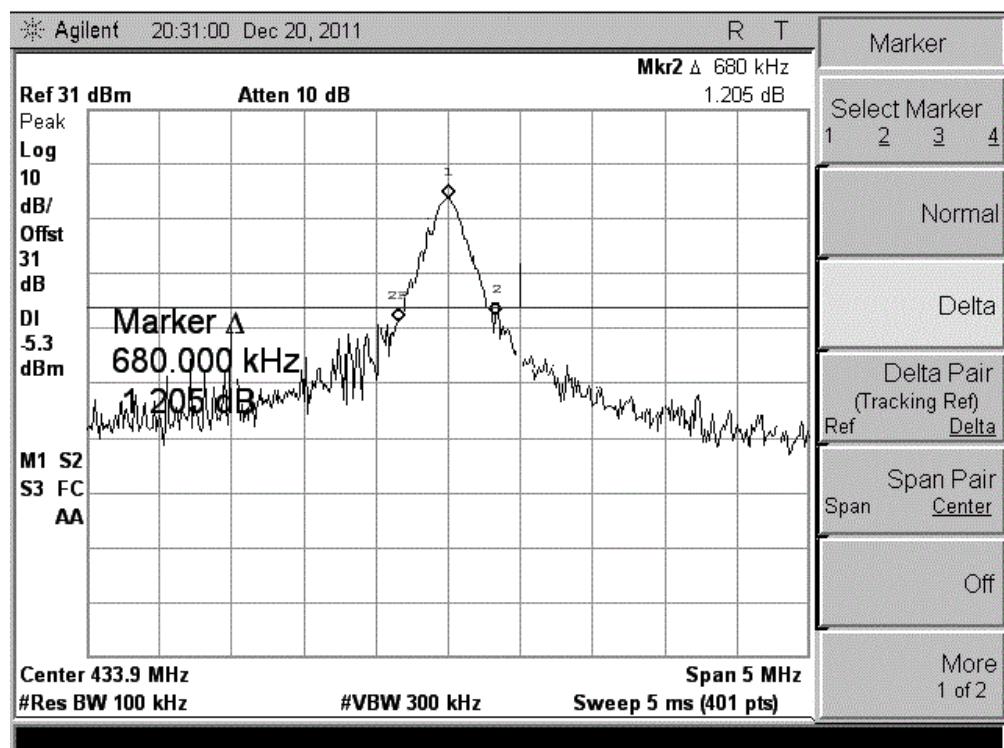


## 5.3 Transmission Cease Time

### 5.3.1 Requirement


According to FCC Part 15 Section 15.231(e), in addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 5.3.2 Test Description

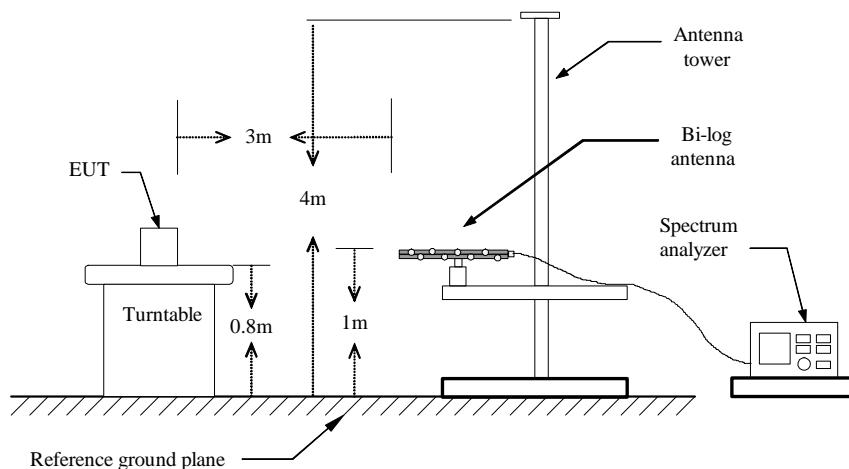


### 5.3.3 Test Result

The duration of the transmission time = 830 ms < 1s, the Silent period = 56.6s > 10s > 30 times the duration of the transmission. This time complies with the FCC requirement.

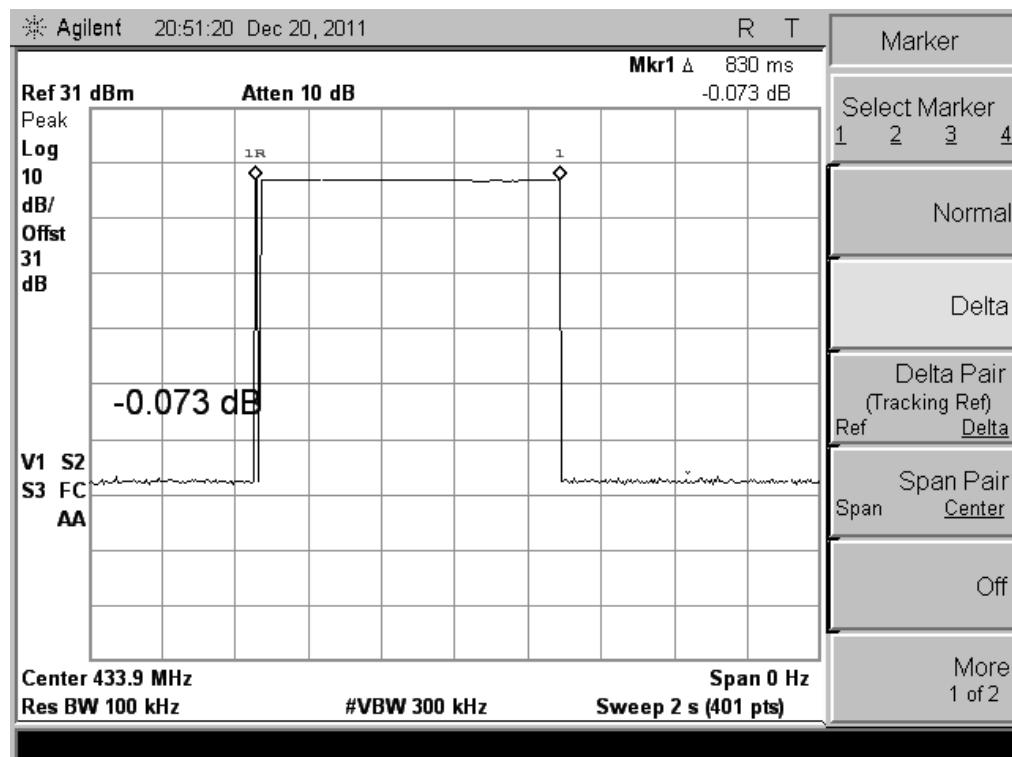**Test Plot:**

The above plot shows the duration of “on” signal, duration of the transmission time = 830 ms

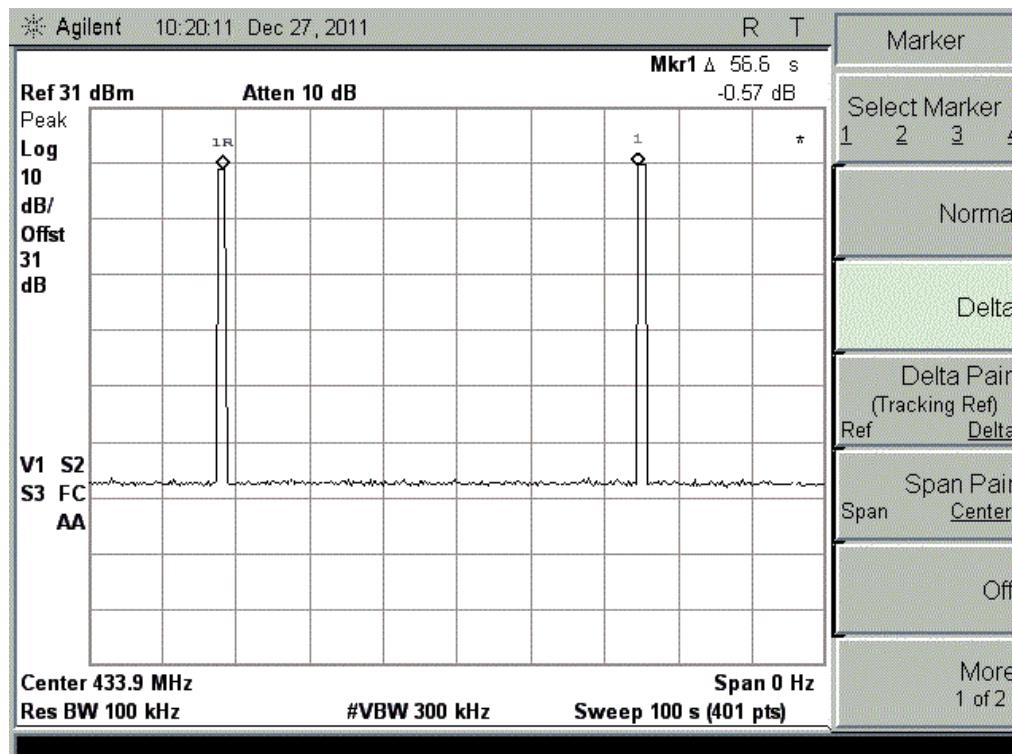

The above plot shows the silent period of “off” signal, silent period = 56.6s.

## 5.4 Antenna Requirement

### 5.4.1 Definition

An analysis of the SPC711 was performed to determine compliance with FCC Section 15.203. This section requires specific handling and control of antennas used for devices subject to regulations.

### 5.4.2 Evaluation Procedure

The structure and application of the SPC711 was analyzed with respect to the rules. The antenna is an internal antenna, and is not accessible to the user. An auxiliary antenna port is not present.

### 5.4.3 Evaluation Criteria

Section 15.203 of the rules states that the subject device must meet at least one of the following criteria:

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.



### 5.4.4 Evaluation Results

The SPC711 meets the criteria of this rule by virtue of having an internal antenna inaccessible to the user.

The EUT is therefore compliant.

**APPENDIX 1**  
**PHOTOGRAPHS OF TEST SETUP**

Radiated Emission Test Setup

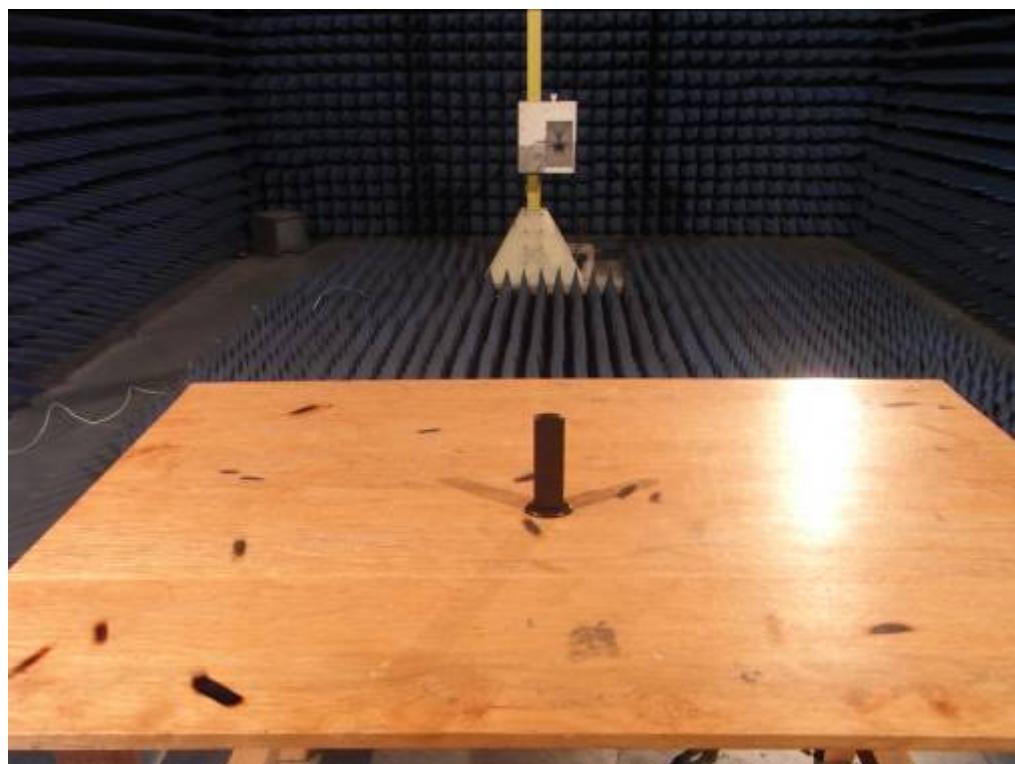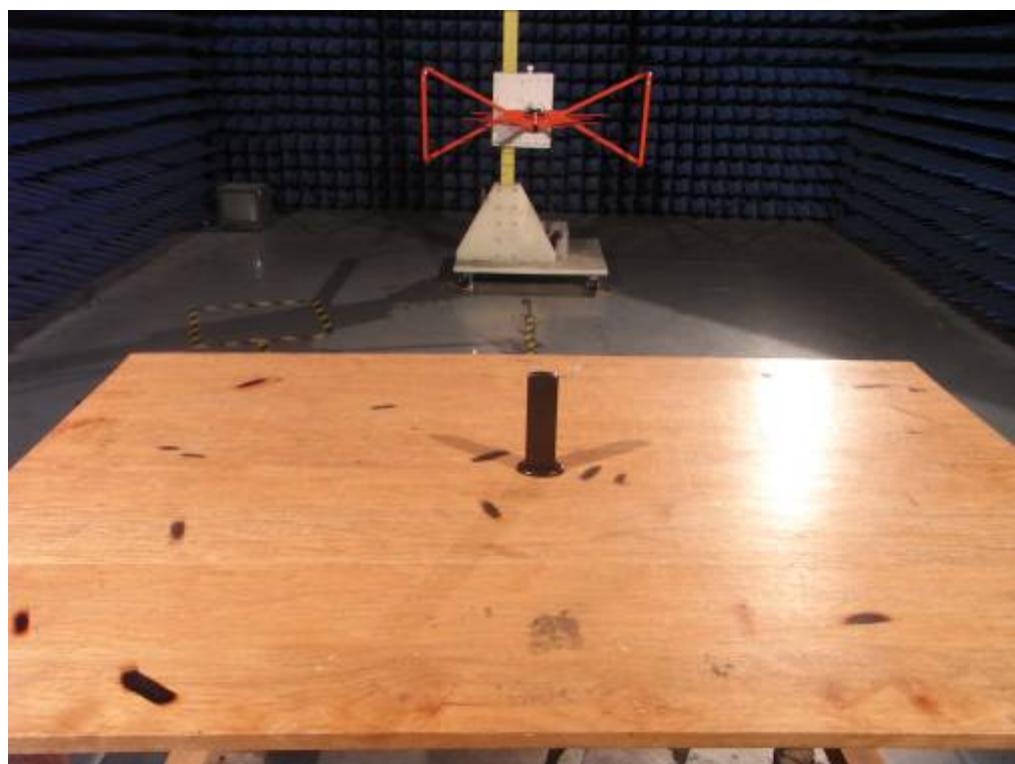

**APPENDIX 2**  
**PHOTOGRAPHS OF EUT**

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PEDESTAL VIEW OF SAMPLE




PHOTO OF THE ENTIRE SAMPLE




INTERNAL PHOTO OF SAMPLE - 1



INTERNAL PHOTO OF SAMPLE - 2

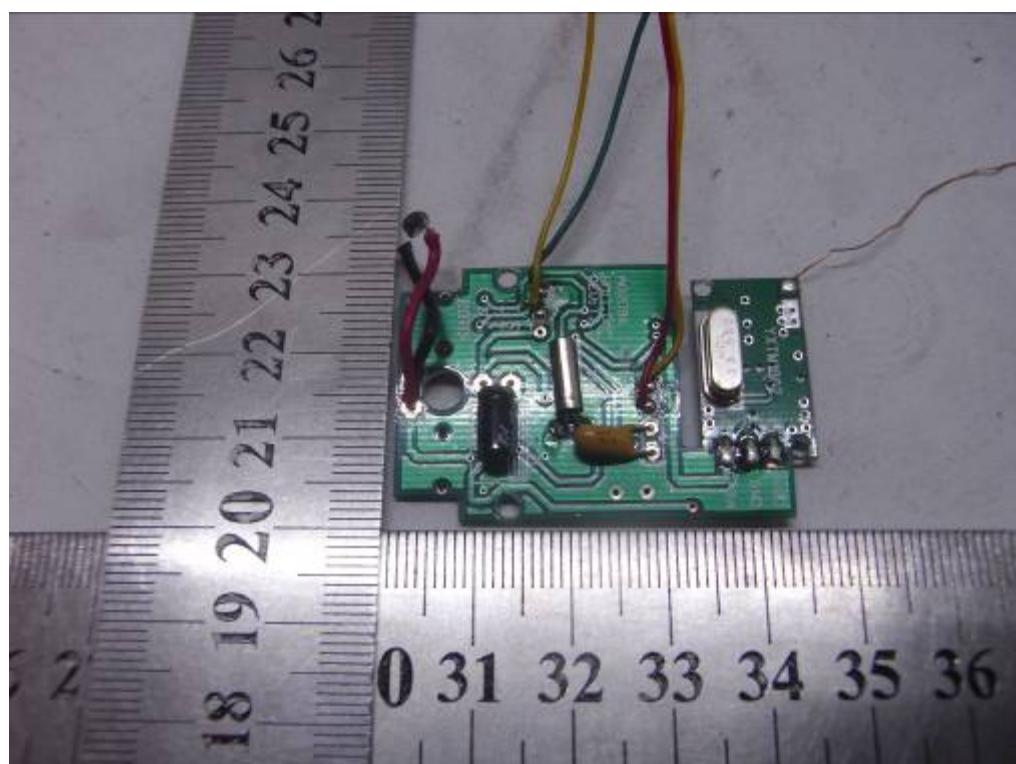

INTERNAL PHOTO OF SAMPLE - 3

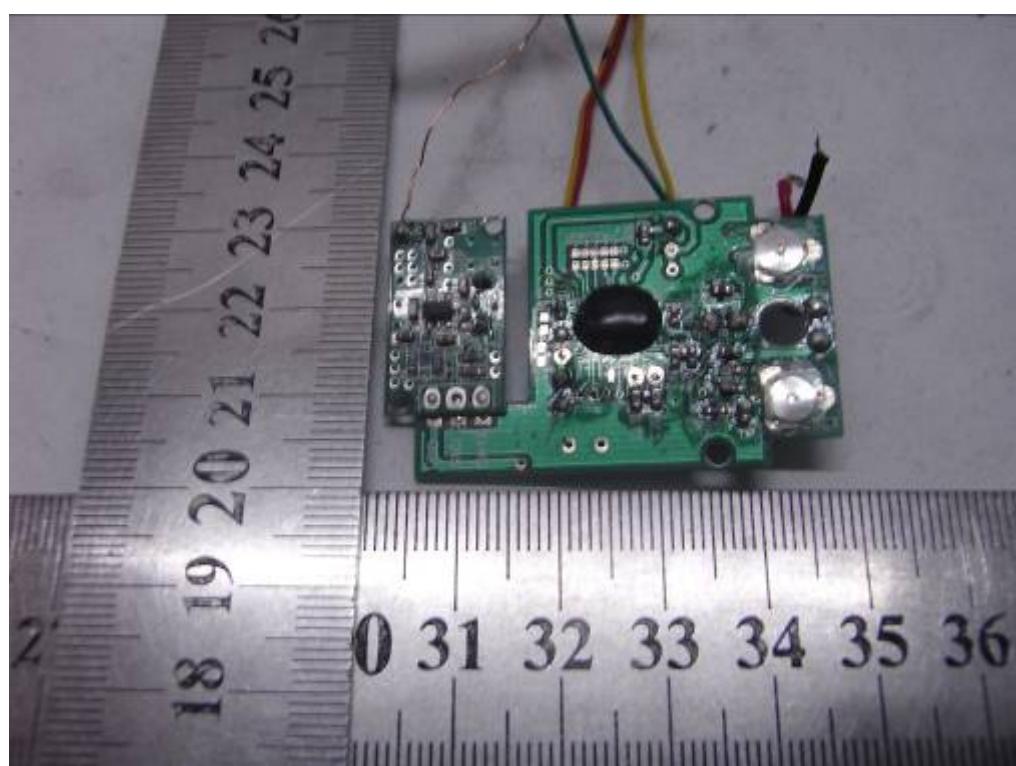

-----END OF REPORT-----