



MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 WLAN 802.11b/g/n

FCC ID: ZZ2AMC043AMC043
IC: 21923-AMC043043
APPLICANT: Amcrest Technologies LLC
Application Type: Certification
Product: Speed Dome Camera (1080P WiFi PTZ)
Model No.: IP2M-858W, IP4M-1058W
Brand Name: Amcrest
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
IC Rule(s): RSS-247 Issue 2, RSS-GEN Issue 4
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v04
Test Date: December 13, 2017 ~ January 23, 2018

Reviewed By : *Sunny Sun*
(Sunny Sun)

Approved By : *Marlin Chen*
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1712RSU02901	Rev. 01	Initial Report	03-07-2018	Valid

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel List.....	8
2.4. Description of Test Software	8
2.5. Device Capabilities.....	9
2.6. Test Configuration	10
2.7. EMI Suppression Device(s)/Modifications	10
2.8. Labeling Requirements	10
3. DESCRIPTION OF TEST	11
3.1. Evaluation Procedure	11
3.2. AC Line Conducted Emissions.....	11
3.3. Radiated Emissions.....	12
4. ANTENNA REQUIREMENTS	13
5. TEST EQUIPMENT CALIBRATION DATE	14
6. MEASUREMENT UNCERTAINTY	15
7. TEST RESULT	16
7.1. Summary	16
7.2. 6dB Bandwidth Measurement	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup	17
7.2.5. Test Result.....	18
7.3. Output Power Measurement	23
7.3.1. Test Limit	23
7.3.2. Test Procedure Used.....	23
7.3.3. Test Setting.....	23
7.3.4. Test Setup	23

7.3.5.	Test Result of Output Power.....	24
7.4.	Power Spectral Density Measurement	25
7.4.1.	Test Limit	25
7.4.2.	Test Procedure Used.....	25
7.4.3.	Test Setting.....	25
7.4.4.	Test Setup	26
7.4.5.	Test Result.....	27
7.5.	Conducted Band Edge and Out-of-Band Emissions	32
7.5.1.	Test Limit	32
7.5.2.	Test Procedure Used.....	32
7.5.3.	Test Setting.....	32
7.5.4.	Test Setup	33
7.5.5.	Test Result.....	34
7.6.	Radiated Spurious Emission Measurement	43
7.6.1.	Test Limit	43
7.6.2.	Test Procedure Used.....	43
7.6.3.	Test Setting.....	44
7.6.4.	Test Setup	45
7.6.5.	Test Result.....	46
7.7.	Radiated Restricted Band Edge Measurement.....	60
7.7.1.	Test Limit	60
7.7.2.	Test Procedure Used.....	63
7.7.3.	Test Setting.....	63
7.7.4.	Test Setup	64
7.7.5.	Test Result.....	65
7.8.	AC Conducted Emissions Measurement.....	97
7.8.1.	Test Limit	97
7.8.2.	Test Setup	97
7.8.3.	Test Result.....	98
8.	CONCLUSION.....	100

§2.1033 General Information

Applicant:	Amcrest Technologies LLC
Applicant Address:	16727 Park Row Dr. Houston, TX 77084
Manufacturer:	Amcrest Technologies LLC
Manufacturer Address:	16727 Park Row Dr. Houston, TX 77084
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	893164
MRT IC Registration No.:	11384A-1
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name	Speed Dome Camera (1080P WiFi PTZ)
Model No.	IP2M-858W; IP4M-1058W
Wi-Fi Specification	802.11a/b/g/n/ac
Accessories	
Power Type	SWITCHING ADAPTER MODEL: ADS-40FSI-12 12036EPCU INPUT AC: 100-240V~50/60Hz, Max. 1.0A OUTPUT DC: 12V, 3A

Note: Here are different market requirement between each model.

2.2. Product Specification Subjective to this Report

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz 802.11n-HT40: 2422 ~ 2452 MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n-HT20: up to 72.2Mbps 802.11n-HT40: up to 150Mbps
Maximum Average Output Power	802.11b: 24.86dBm; 802.11g: 20.36dBm 802.11n-HT20: 20.14dBm; 802.11n-HT40: 19.47dBm
Antenna Type	Dipole Antenna
Antenna Gain	2.56dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel List

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Test Software

The test utility software used during testing was "SecureCRT 7.3".

Power Parameter Value

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11b	01	2412	51.0
	06	2437	55.0
	11	2462	49.0
802.11g	01	2412	51.0
	06	2437	55.0
	11	2462	54.0
802.11 n-HT20	01	2412	51.0
	06	2437	55.0
	11	2462	53.0
802.11 n-HT40	03	2422	49.0
	06	2437	55.0
	09	2452	52.0


2.5. Device Capabilities

This device contains the following capabilities:

5GHz WLAN (NII), 2.4GHz WLAN (DTS)

Note: 2.4GHz WLAN (DTS) operation is possible in 40MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	99.20%
802.11g	97.31%
802.11n-HT20	93.51%
802.11n-HT40	90.97%

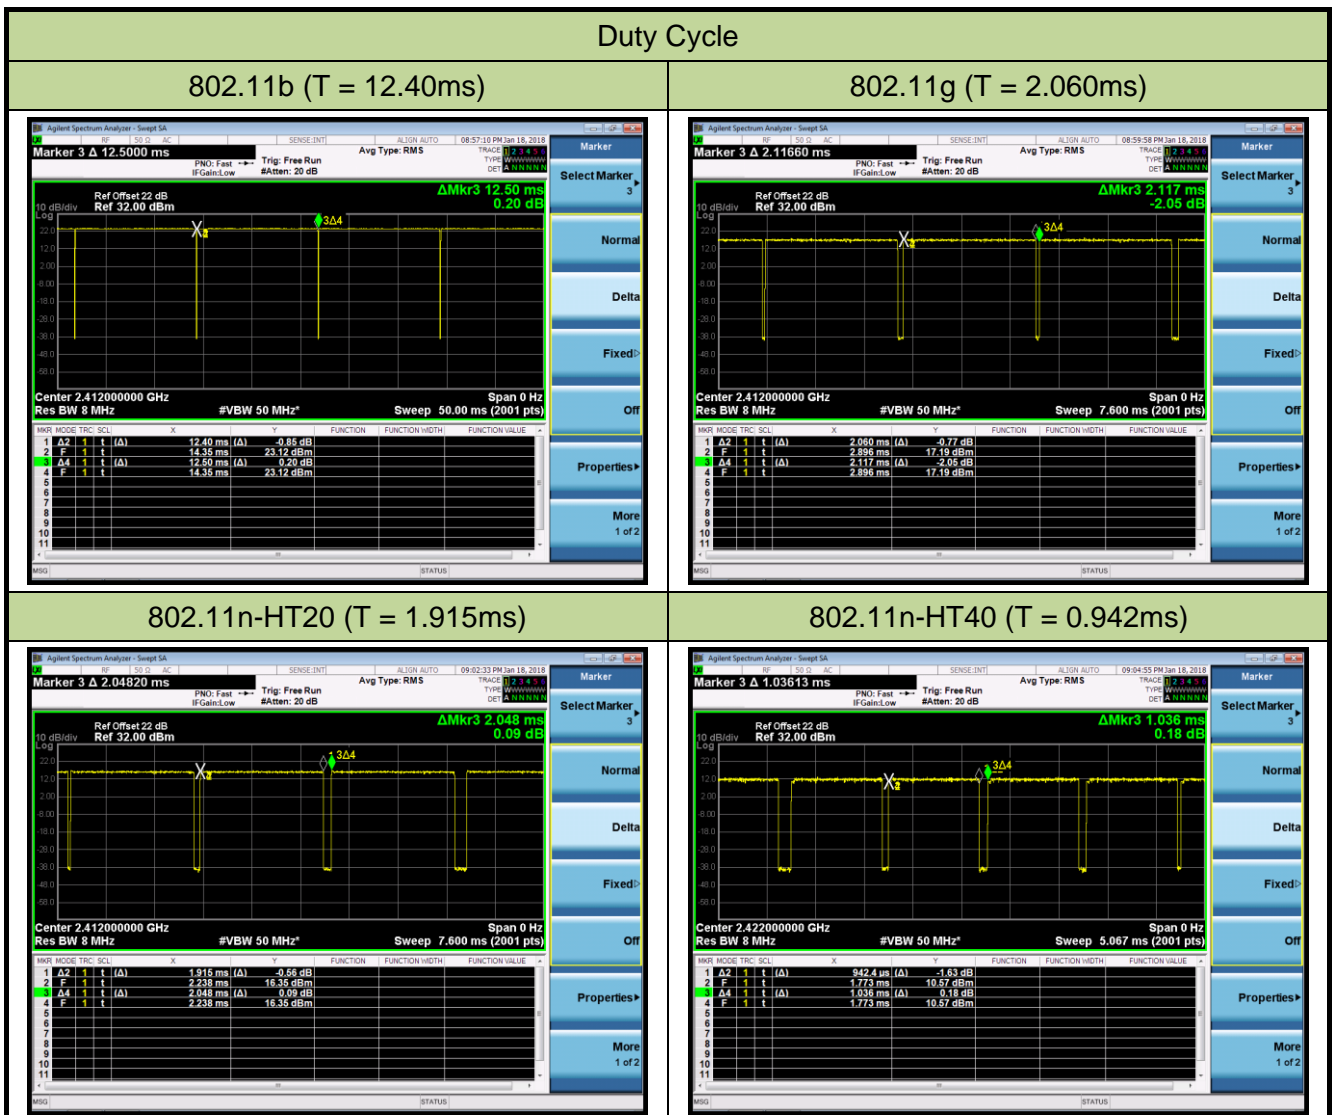

2.6. Test Configuration

The device was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014-DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Speed Dome Camera (1080P WiFi PTZ)** is **attached with unconventional (inverted) SMA connector.**

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2018/08/18
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2018/06/21
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2018/06/21
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2018/08/14
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2018/08/18
EXA Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2018/04/22
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2018/11/20
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2018/10/21
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2018/11/18
Broadband Coaxial Preamp	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2018/11/17
Digital Thermometer & Hygrometer	MingGao	ETH529	MRTSUE06170	1 year	2018/12/12
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2018/05/09

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2018/12/06
Temperature Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2018/12/06
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
Thermohygrometer	Testo	608-H1	MRTSUE06401	1 year	2018/08/14

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Company Name: Amcrest Technologies LLC

FCC ID: ZZ2AMC043AMC043

IC: 21923-AMC043043

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc(Average)}$		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Note: The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

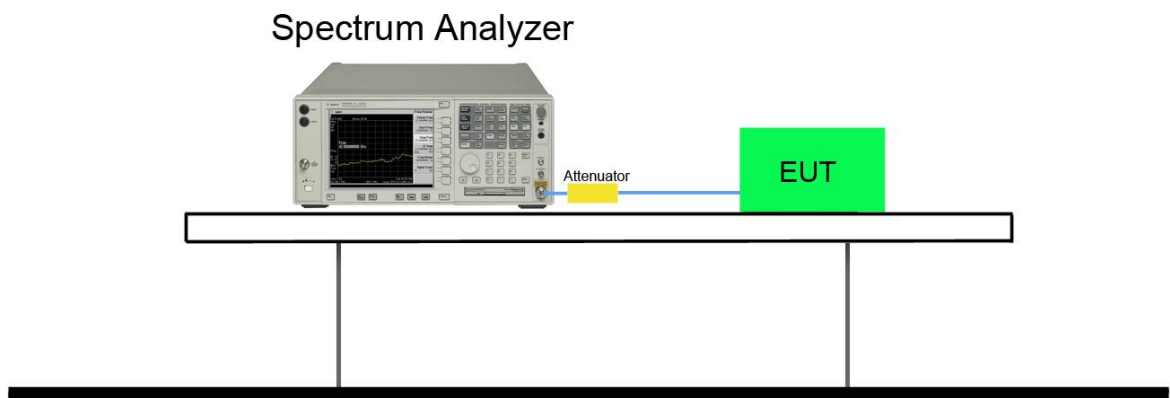


7.2.5. Test Result

Product	Speed Dome Camera (1080P WiFi PTZ)	Temperature	24°C
Test Engineer	Hunk Li	Relative Humidity	51%
Test Site	TR3	Test Date	2018/01/18


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
11b	1Mbps	01	2412	10.12	≥ 0.5	Pass
11b	1Mbps	06	2437	10.12	≥ 0.5	Pass
11b	1Mbps	11	2462	10.12	≥ 0.5	Pass
11g	6Mbps	01	2412	16.36	≥ 0.5	Pass
11g	6Mbps	06	2437	16.35	≥ 0.5	Pass
11g	6Mbps	11	2462	16.36	≥ 0.5	Pass
11n-HT20	MCS0	01	2412	17.54	≥ 0.5	Pass
11n-HT20	MCS0	06	2437	17.09	≥ 0.5	Pass
11n-HT20	MCS0	11	2462	17.10	≥ 0.5	Pass
11n-HT40	MCS0	03	2422	36.33	≥ 0.5	Pass
11n-HT40	MCS0	06	2437	35.89	≥ 0.5	Pass
11n-HT40	MCS0	09	2452	36.13	≥ 0.5	Pass

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

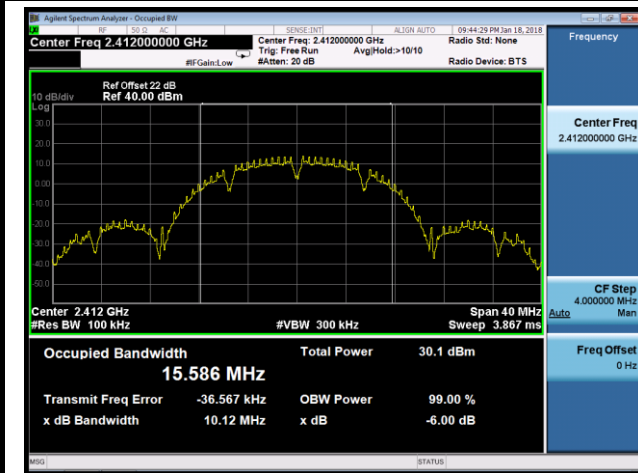

Channel 06 (2437MHz)

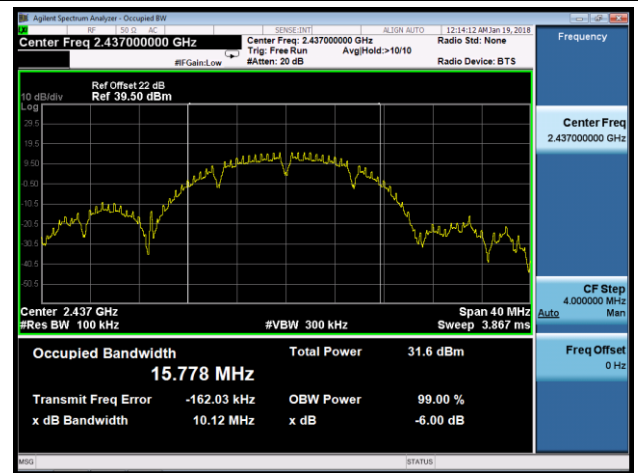


Channel 11 (2462MHz)

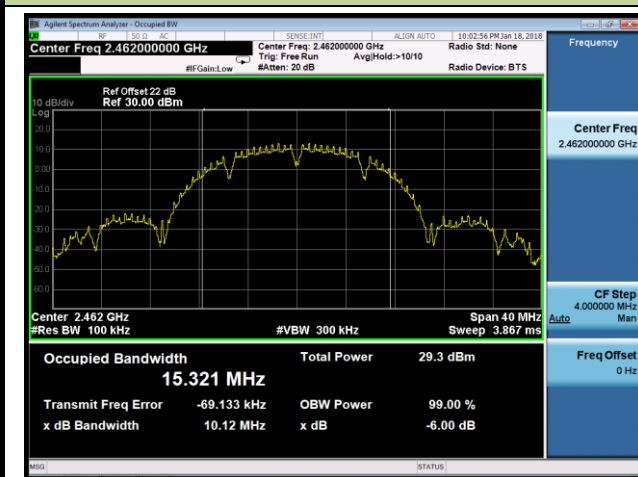


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

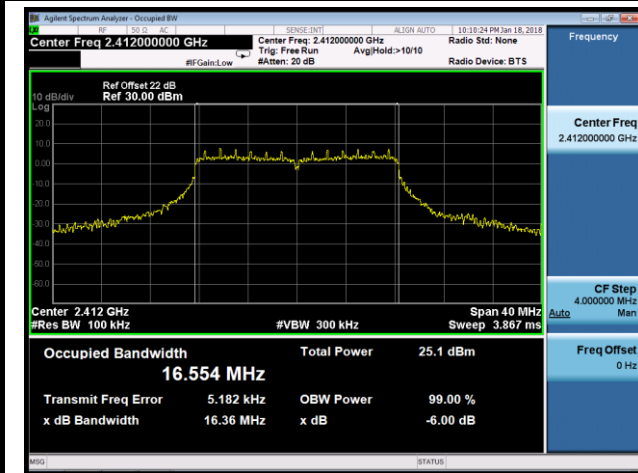

Channel 06 (2437MHz)

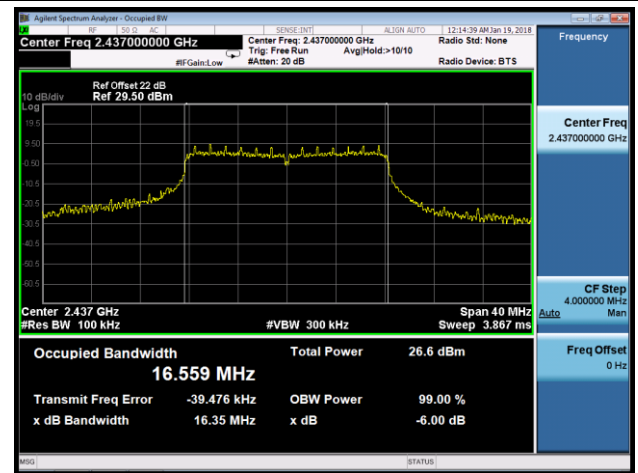


Channel 11 (2462MHz)

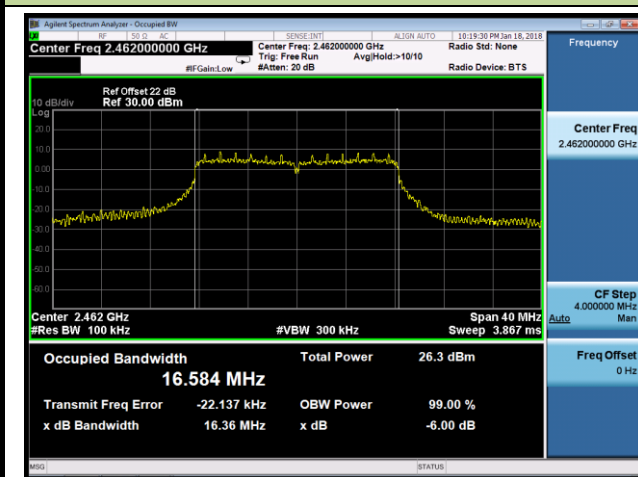


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

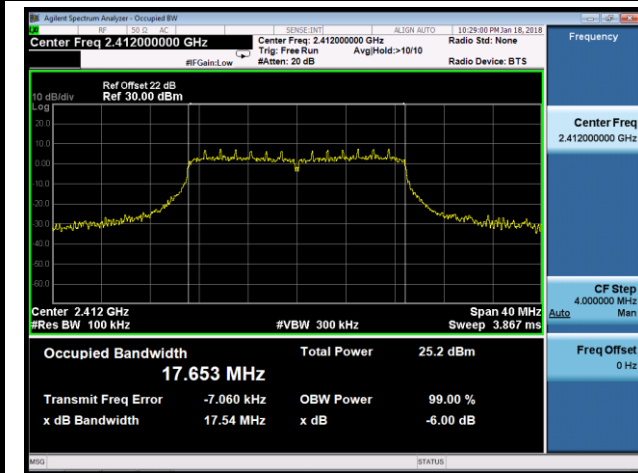

Channel 06 (2437MHz)

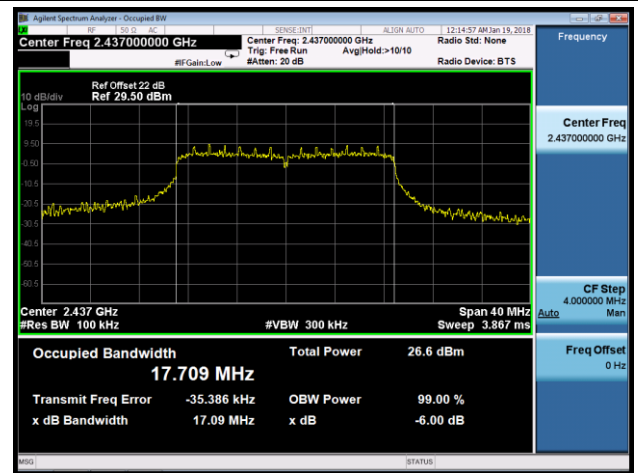


Channel 11 (2462MHz)

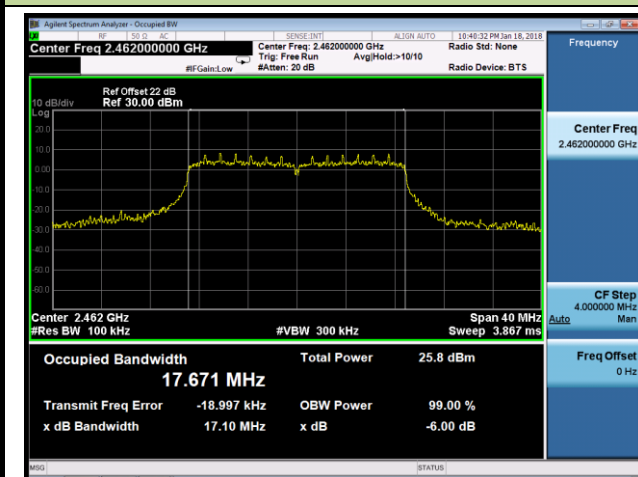


802.11n-HT40 6dB Bandwidth


Channel 03 (2422MHz)

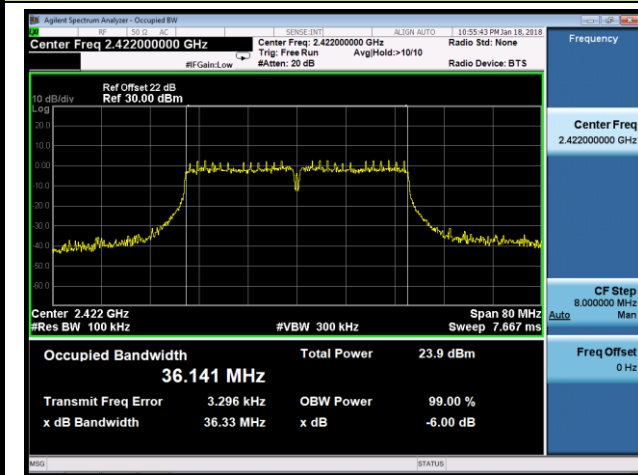

Channel 06 (2437MHz)

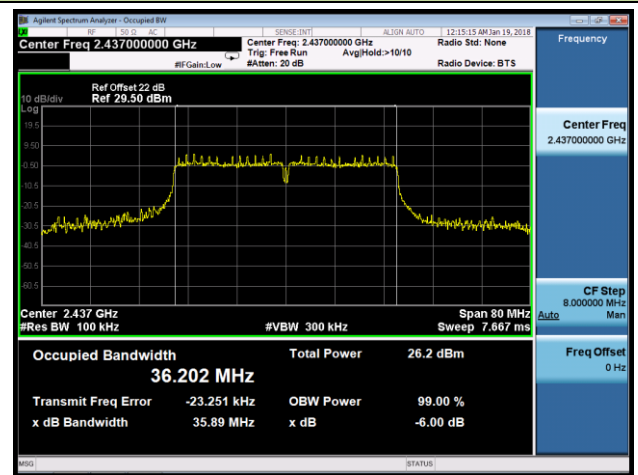

Channel 09 (2452MHz)

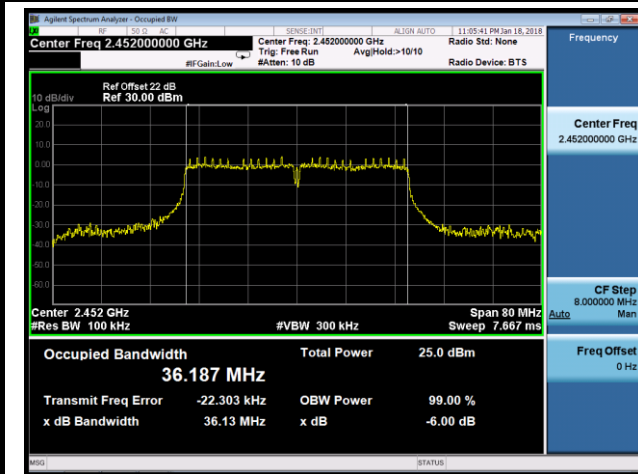

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum conducted output power shall be exceed 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v04 - Section 9.2.3.2 Method AVGPM-G

7.3.3. Test Setting

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

7.3.4. Test Setup

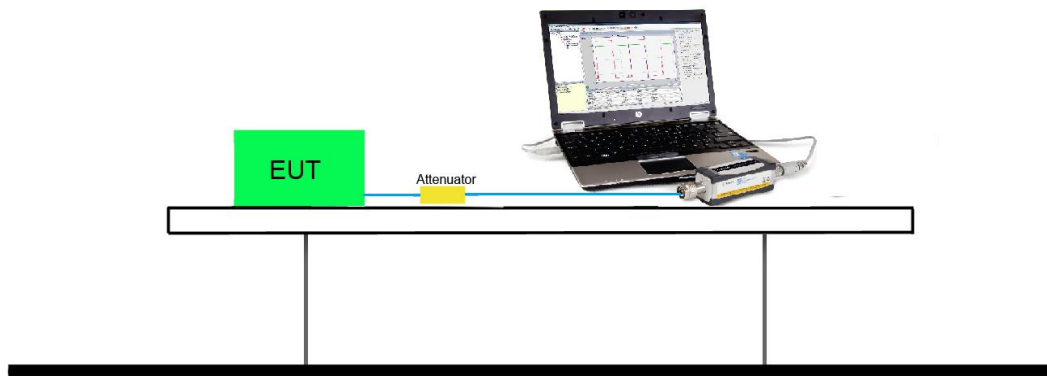

7.3.5. Test Result of Output Power

Product	Speed Dome Camera (1080P WiFi PTZ)	Temperature	24°C
Test Engineer	Hunk Li	Relative Humidity	51%
Test Site	TR3	Test Date	2018/01/18

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	23.46	≤ 30	Pass
11b	1Mbps	06	2437	24.86	≤ 30	Pass
11b	1Mbps	11	2462	22.59	≤ 30	Pass
11g	6Mbps	01	2412	18.34	≤ 30	Pass
11g	6Mbps	06	2437	20.36	≤ 30	Pass
11g	6Mbps	11	2462	19.49	≤ 30	Pass
11n-HT20	MCS0	01	2412	18.45	≤ 30	Pass
11n-HT20	MCS0	06	2437	20.14	≤ 30	Pass
11n-HT20	MCS0	11	2462	19.10	≤ 30	Pass
11n-HT40	MCS0	01	2422	17.18	≤ 30	Pass
11n-HT40	MCS0	06	2437	19.47	≤ 30	Pass
11n-HT40	MCS0	11	2452	17.85	≤ 30	Pass

Note 1: EIRP (dBm) = Conducted Power (dBm) + Antenna Gain (dBi), Antenna Gain = 2.56 dBi.

Note 2: Max EIRP (dBm) = 24.86 dBm + 2.56 dBi = 27.42 dBm < 36 dBm.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01v04 - Section 10.3 Method AVGPSD

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 30kHz
5. Detector = RMS
6. Sweep time = auto couple
7. Sweep point ≥ 2 span/RBW
8. Trace averaging (RMS) over 100 traces

Sweep triggering gating must be implemented for duty cycle < 98% mode to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

7.4.4. Test Setup

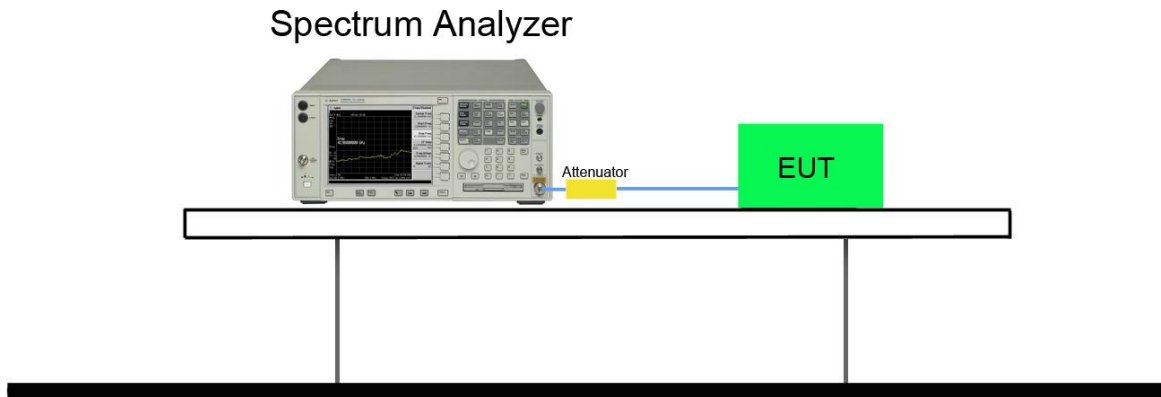


7.4.5. Test Result

Product	Speed Dome Camera (1080P WiFi PTZ)	Temperature	23°C
Test Engineer	Ben Zhu	Relative Humidity	50%
Test Site	TR3	Test Date	2018/01/18

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/10kHz)	Constant Factor	Final PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
11b	1Mbps	01	2412	-4.85	-5.23	-10.08	≤ 8.0	Pass
11b	1Mbps	06	2437	-2.69	-5.23	-7.92	≤ 8.0	Pass
11b	1Mbps	11	2462	-5.08	-5.23	-10.31	≤ 8.0	Pass
11g	6Mbps	01	2412	-7.15	-5.23	-12.38	≤ 8.0	Pass
11g	6Mbps	06	2437	1.01	-5.23	-4.22	≤ 8.0	Pass
11g	6Mbps	11	2462	-4.17	-5.23	-9.40	≤ 8.0	Pass
11n-HT20	MCS0	01	2412	-6.85	-5.23	-12.08	≤ 8.0	Pass
11n-HT20	MCS0	06	2437	-0.92	-5.23	-6.15	≤ 8.0	Pass
11n-HT20	MCS0	11	2462	-4.38	-5.23	-9.61	≤ 8.0	Pass
11n-HT40	MCS0	03	2422	-7.75	-5.23	-12.98	≤ 8.0	Pass
11n-HT40	MCS0	06	2437	-3.85	-5.23	-9.08	≤ 8.0	Pass
11n-HT40	MCS0	09	2452	-4.53	-5.23	-9.76	≤ 8.0	Pass

802.11b AVGPDS

Channel 01 (2412MHz)

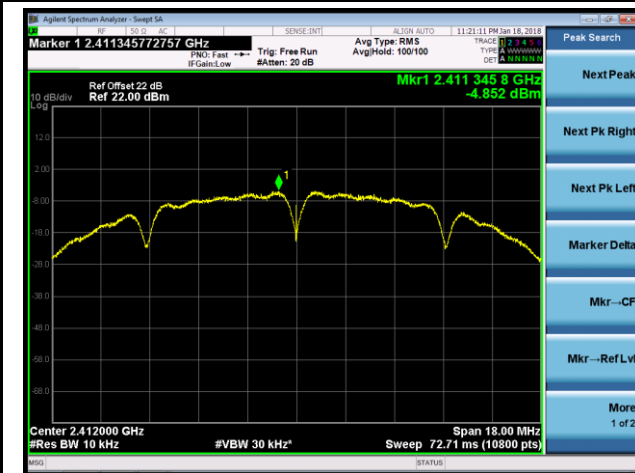

Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g AVGPSSD


Channel 01 (2412MHz)

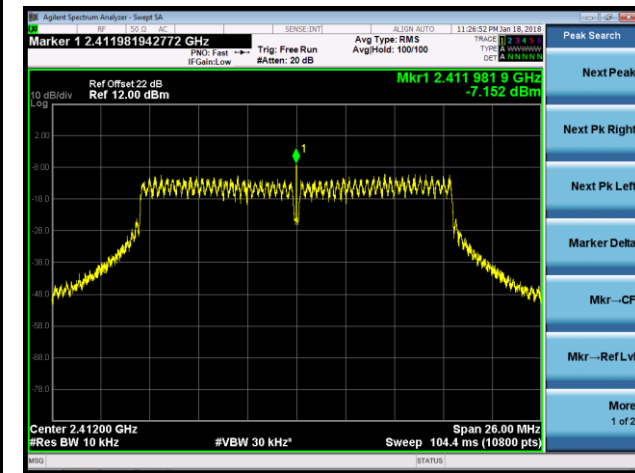

Channel 06 (2437MHz)

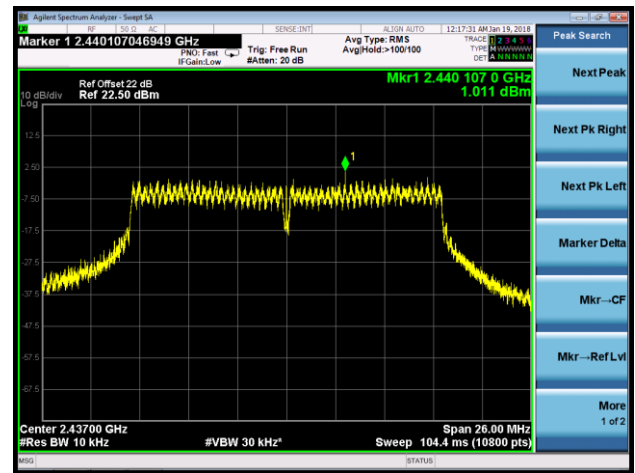


Channel 11 (2462MHz)

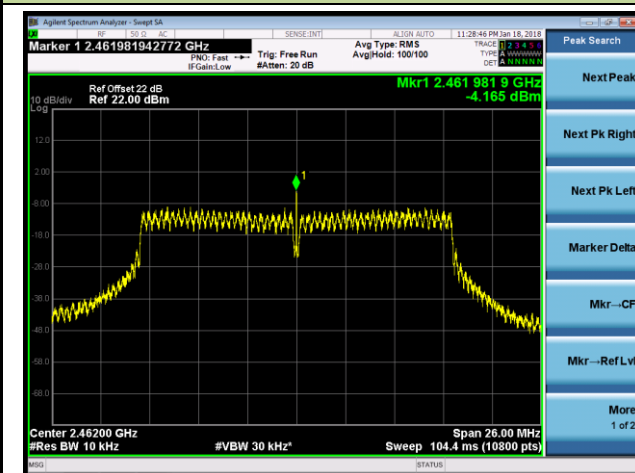


802.11n-HT20 AVGPSPD


Channel 01 (2412MHz)

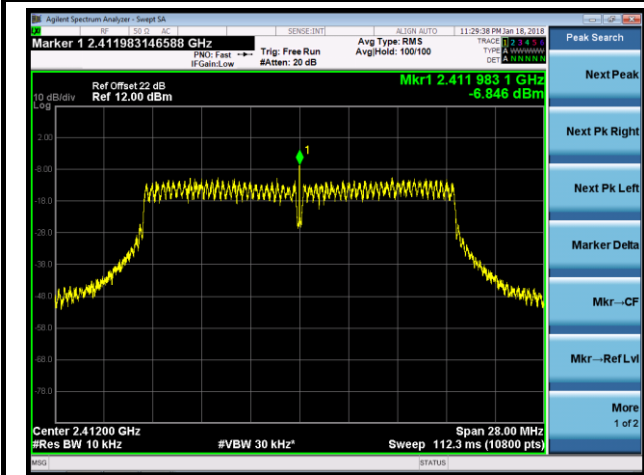

Channel 06 (2437MHz)

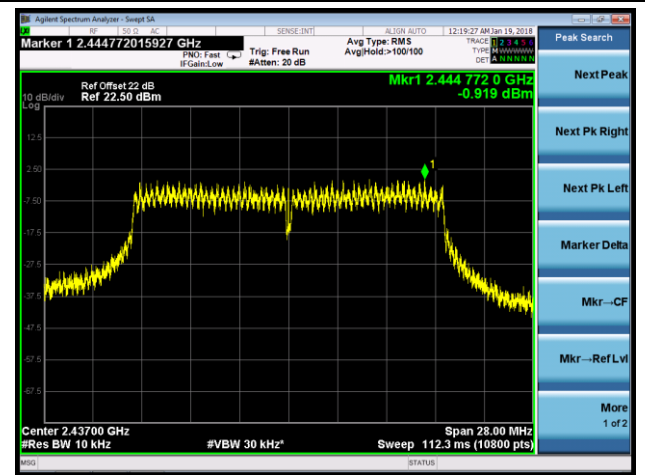


Channel 11 (2462MHz)

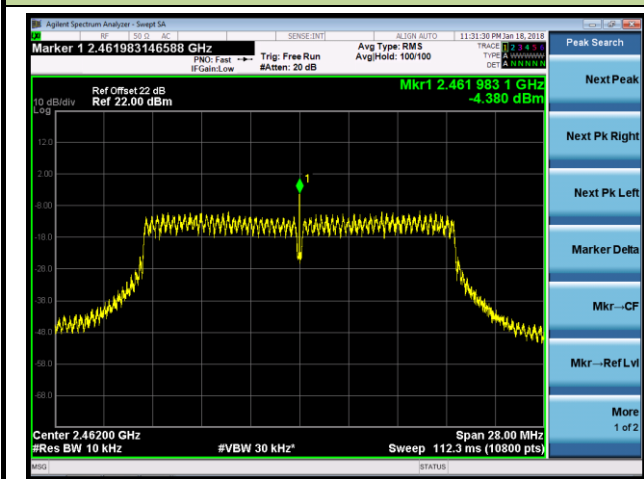


802.11n-HT40 AVGPSPD


Channel 03 (2422MHz)

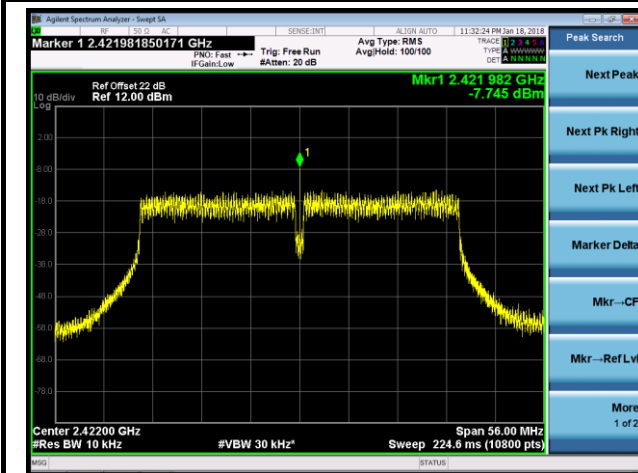

Channel 06 (2437MHz)

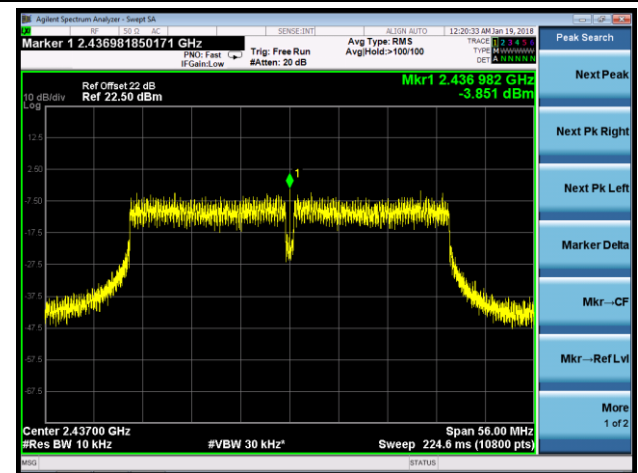

Channel 09 (2452MHz)

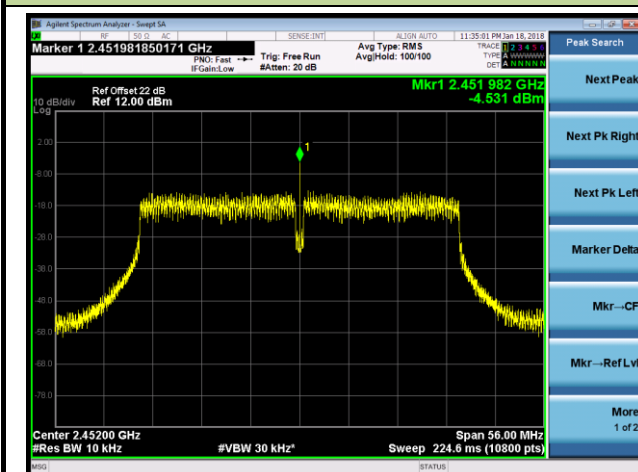

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

7.5.2. Test Procedure Used

KDB 558074 D01v04 - Section 11.2 & Section 11.3

7.5.3. Test Setting

1. Reference level measurement


- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple

(g) The trace was allowed to stabilize

7.5.4. Test Setup

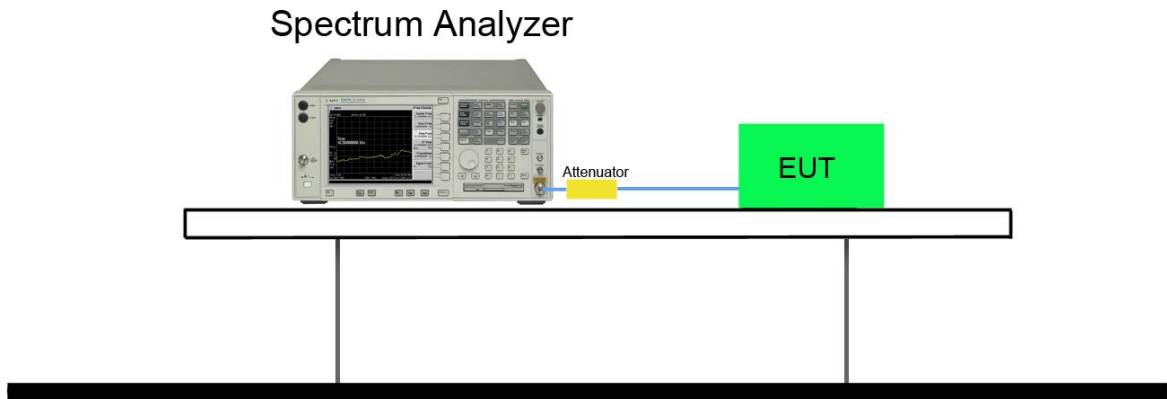

7.5.5. Test Result

Product	Speed Dome Camera (1080P WiFi PTZ)	Temperature	23°C
Test Engineer	Ben Zhu	Relative Humidity	50%
Test Site	TR3	Test Date	2018/01/18

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Max. Result (dBm)	Limit (dBc to dBm)	Result
11b	1Mbps	01	2412	-18.29	-16.35	Pass
11b	1Mbps	06	2437	-33.14	-14.73	Pass
11b	1Mbps	11	2462	-32.38	-16.91	Pass
11g	6Mbps	01	2412	-23.90	-22.44	Pass
11g	6Mbps	06	2437	-35.22	-20.82	Pass
11g	6Mbps	11	2462	-26.20	-20.78	Pass
11n-HT20	MCS0	01	2412	-24.20	-22.55	Pass
11n-HT20	MCS0	06	2437	-36.05	-20.74	Pass
11n-HT20	MCS0	11	2462	-28.56	-21.65	Pass
11n-HT40	MCS0	03	2422	-28.59	-26.84	Pass
11n-HT40	MCS0	06	2437	-41.65	-24.63	Pass
11n-HT40	MCS0	09	2452	-29.23	-26.17	Pass

802.11b Out-of-Band Emissions

Channel 01 (2412MHz)


100kHz PSD Reference Level



Low Band Edge



Spurious Emission

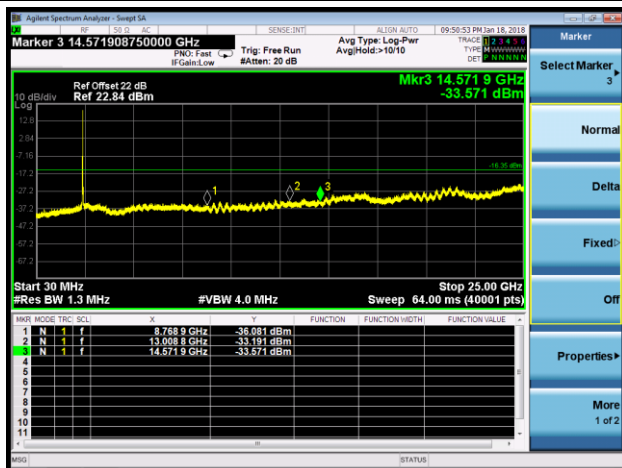


Channel 06 (2437MHz)

100kHz PSD Reference Level



Spurious Emission

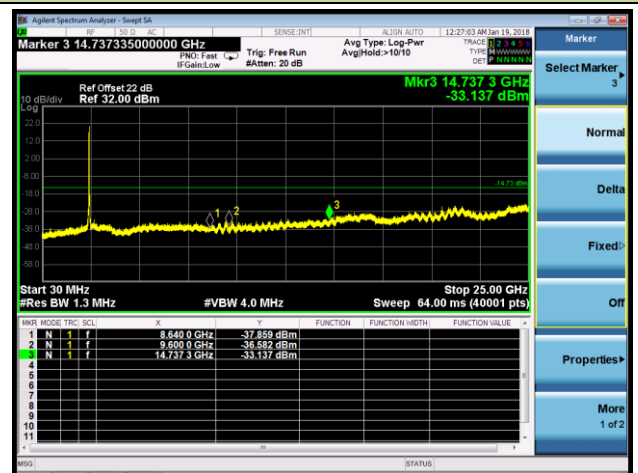

Channel 11 (2462MHz)


100kHz PSD Reference Level



High Band Edge




Spurious Emission

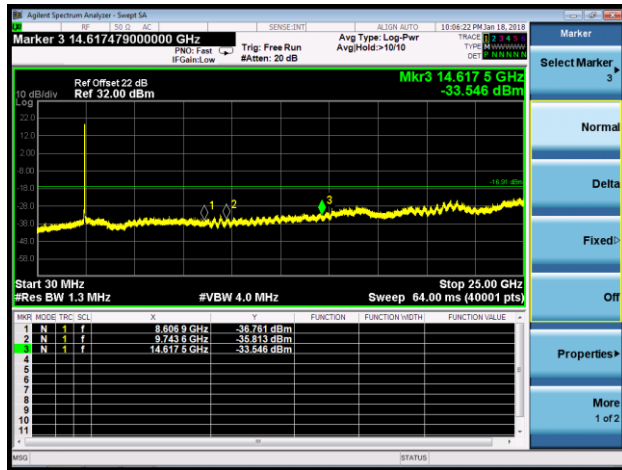


802.11g Out-of-Band Emissions

Channel 01 (2412MHz)


100kHz PSD Reference Level

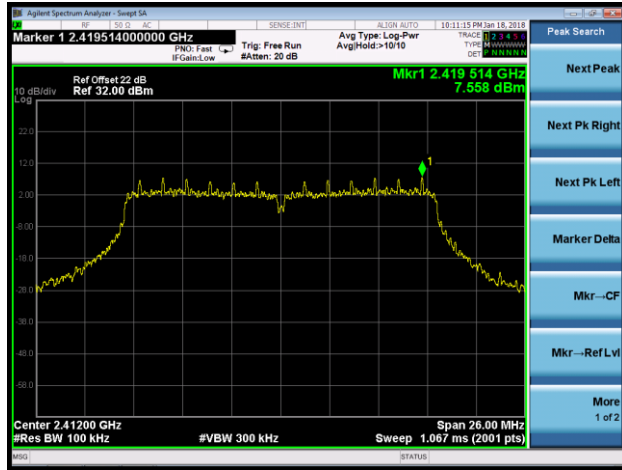

Low Band Edge

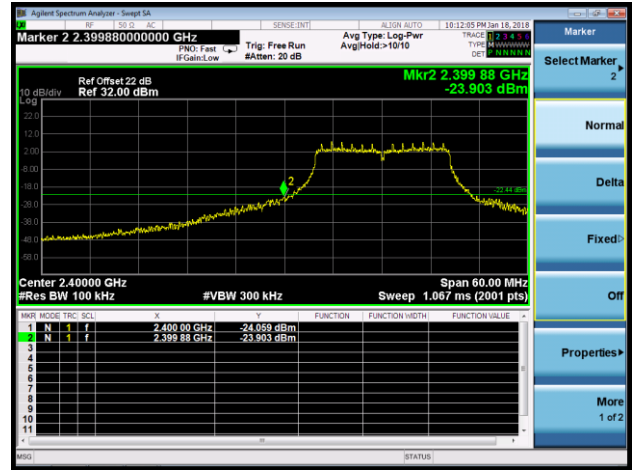

Spurious Emission

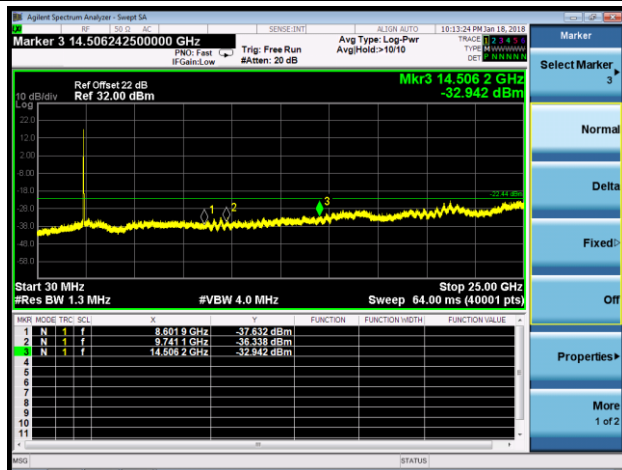


Channel 06 (2437MHz)

100kHz PSD Reference Level




Spurious Emission

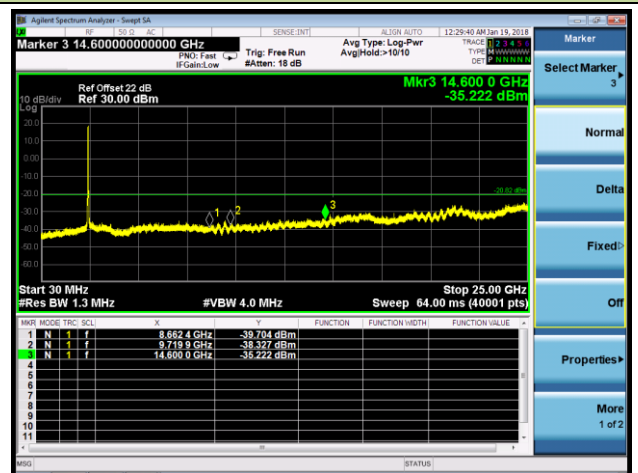


Channel 11 (2462MHz)


100kHz PSD Reference Level

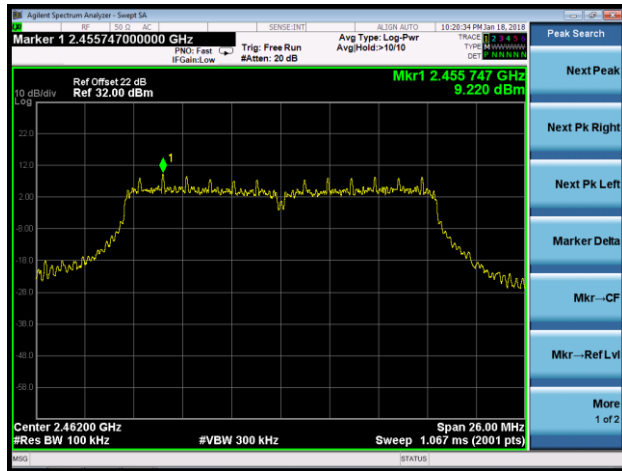

High Band Edge

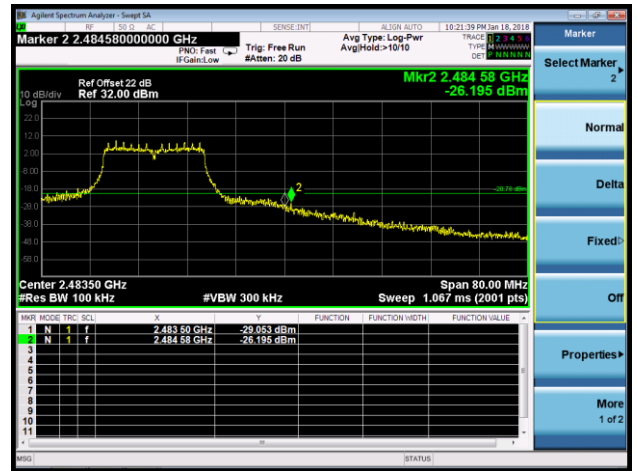


Spurious Emission

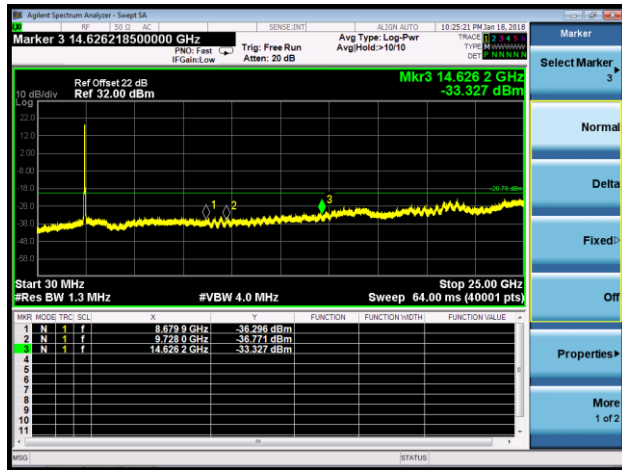


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)


100kHz PSD Reference Level

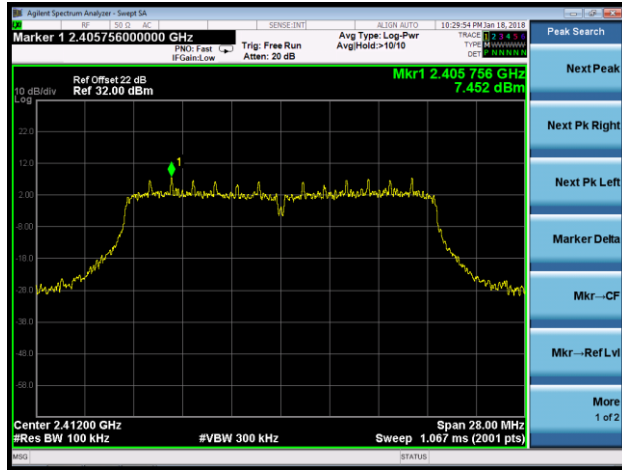

Low Band Edge

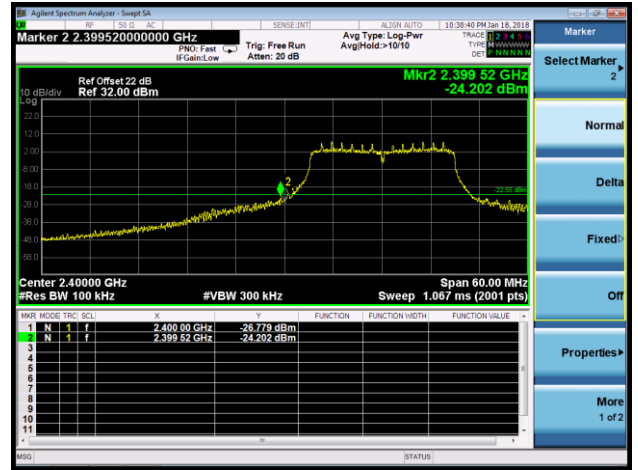


Spurious Emission

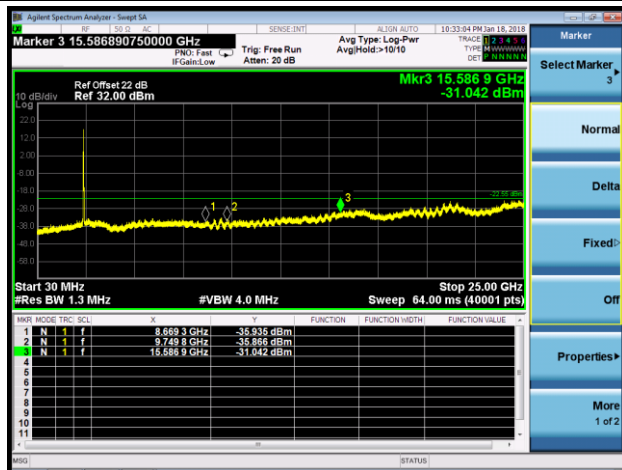


Channel 06 (2437MHz)

100kHz PSD Reference Level

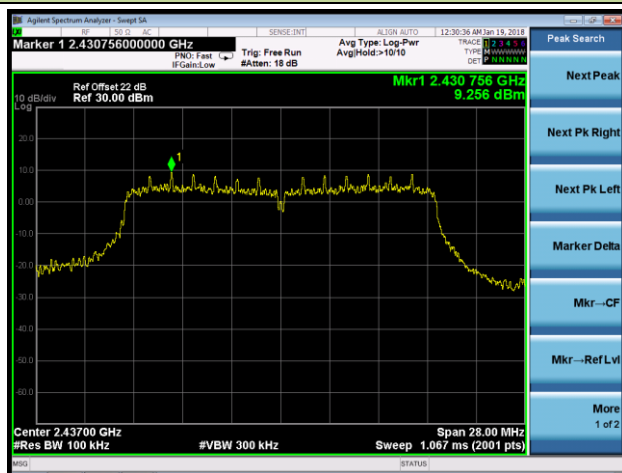

Spurious Emission

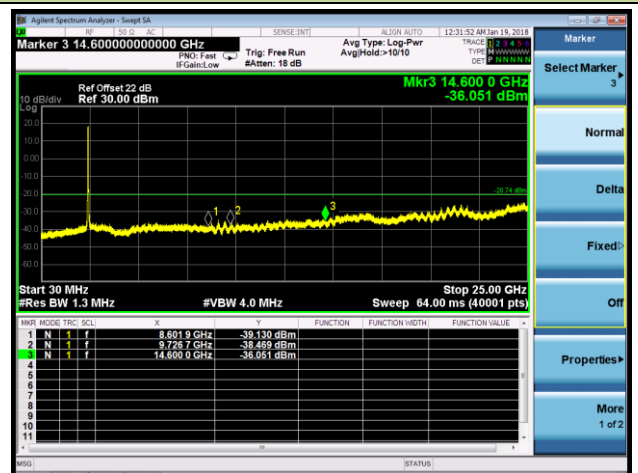


Channel 11 (2462MHz)

100kHz PSD Reference Level



High Band Edge

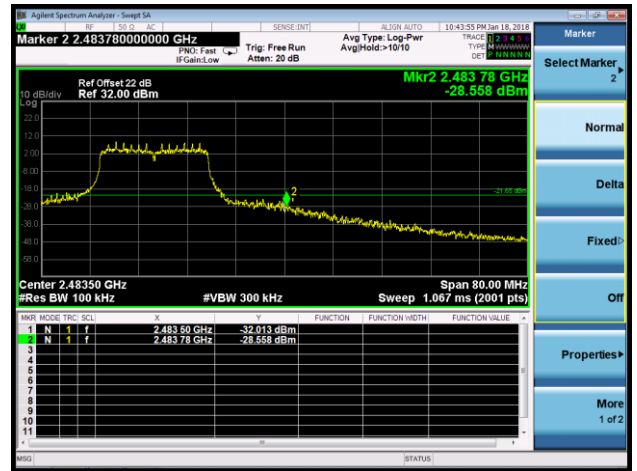

Spurious Emission

