



FCC RADIO TEST REPORT

Applicant : WENZHOU MTLC ELECTRIC APPLIANCES CO., LTD.
Address : Tiancheng Industrial Zone ,Yueqing, Zhejiang, China
Equipment : WIFI Smart Plug Outlet
Model No. : WF15PM
Trade Name : N/A
FCC ID : ZZH-WF15PM

I HEREBY CERTIFY THAT :

The sample was received on Sept. 13, 2018 and the testing was carried out on Sept. 26, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Tested by:

Mark Liao / Assistant Manager

Amos / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory

TAF LAB Code:	1439
---------------	------



CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards.....	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software.....	6
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty.....	9
2.7 Duty cycle.....	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements	12
4.1 Standard Applicable.....	12
4.2 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit.....	13
5.2 Test Procedures.....	13
5.3 Typical Test Setup.....	13
5.4 Test Result and Data.....	14
6. Test of Spurious Emission (Radiated)	16
6.1 Test Limit.....	16
6.2 Test Procedures.....	16
6.3 Typical Test Setup.....	17
6.4 Test Result and Data (9KHz ~ 30MHz).....	18
6.5 Test Result and Data (30MHz ~ 1GHz).....	18
6.6 Test Result and Data (1GHz ~ 25GHz).....	20
6.7 Restricted Bands of Operation.....	38
6.8 Restrict Band Emission Measurement Data.....	39
7. Test of Spurious Emission (Conducted)	51
7.1 Test Limit.....	51
7.2 Test Procedure.....	51
7.3 Test Setup Layout.....	51
7.4 Test Result and Data.....	52
8. 6dB Bandwidth Measurement Data	56
8.1 Test Limit.....	56
8.2 Test Procedures.....	56
8.3 Test Setup Layout.....	56
8.4 Test Result and Data.....	56
9. Maximum Peak Output Power	59
9.1 Test Limit.....	59
9.2 Test Procedures.....	59
9.3 Test Setup Layout.....	59
9.4 Test Result and Data.....	60
10. Power Spectral Density	61
10.1 Test Limit.....	61



10.2 Test Procedures 61
10.3 Test Setup Layout..... 61
10.4 Test Result and Data 62



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10: 2013

KDB 558074 D01 DTS Meas Guidance V05

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
FCC CFR Title 47 Part 15 Subpart C: Section 15.203/15.247 (b)	. Antenna Requirement	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.207	. AC Power Line Conducted Emission	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.205/15.209; Part2 section 2.1051, 2.1053, 2.1057	. Spurious Emission(Radiated)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(d); Part2 section 2.1051 and 2.1057	. Spurious Emission(Conducted)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(a)(2); Part2 section 2.1049	. 6dB Bandwidth	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(b); Part2 section 2.1046	. Maximum Peak Output Power	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(e)	. Power Spectral Density	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	WIFI Smart Plug Outlet
Model No.	WF15PM
Model Discrepancy	N/A
Spreading	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: BPSK, QPSK, 16QAM, 64QAM
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz
Number of Channels	802.11b/g/n (20MHz):11
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: Up to MCS7

Note: for more details, please refer to the User's manual of the EUT.

2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

Note: Channels remarked * are selected to perform test.

2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included support units and EUT for the RF test.
- An executive program, "**SecureCRT.exe**" which transmits and receives data through Wireless.
- The EUT had been tested under operating condition
After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.
EUT staying in continuous transmitting mode was programmed.
- Test modes:
 - Mode 1: IEEE 802.11b
 - Mode 2: IEEE 802.11g
 - Mode 3: IEEE 802.11n HT20



2.4 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	Notebook	SONY	PCG-71811P	R33021

Cable:

No.	Cable	Quantity	Description
A	USB Cable	1	1.0m Non Shielding



2.5 General Information of Test

☒	Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:		Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25000MHz
Test Distance:		The test distance of radiated emission from antenna to EUT is 3 M.



2.6 Measurement Uncertainty


Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	±2.71 dB
Radiated Emission	9 kHz ~ 30 MHz	Vertical	±3.65dB
		Horizontal	±3.89dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	±4.11 dB
		Horizontal	±4.10 dB
Occupied Bandwidth	---	---	±7500 Hz
Maximum Peak Output Power	---	---	±1.4 dB
Power Spectral Density	---	---	±2.2 dB



2.7 Duty cycle

Test Item	Duty cycle
Test Date	Sept. 15, 2018

Mode	Frequency (MHz)	Measurement (%)
802.11b	2412	88.74
802.11g	2412	87.15
802.11n(20MHz)	2412	86.81

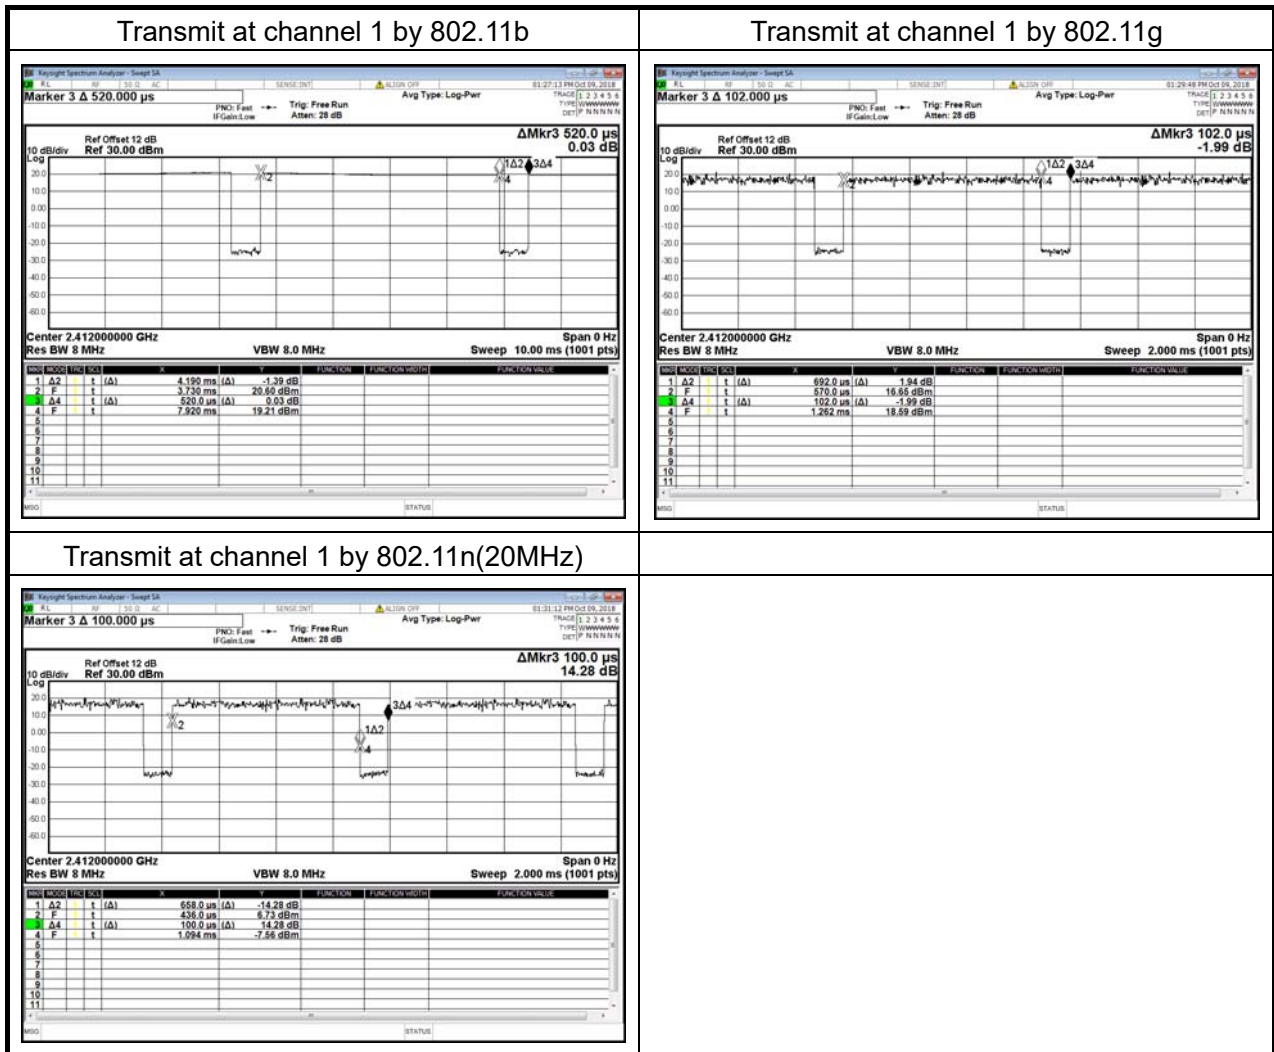



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2018/3/15	2019/3/14
LISN	Schwarzbeck	NSLK 8127	8127-568	2018/02/26	2019/02/25
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	369	2018/03/23	2019/03/22
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31601	2017/09/11	2018/09/10
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60659	2018/03/20	2019/03/19
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2017/09/20	2018/09/19
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

No.	Antenna Type	Antenna Gain
1	PCB Antenna	2.5dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

5.2 Test Procedures

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of Oct 2014 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


5.3 Typical Test Setup

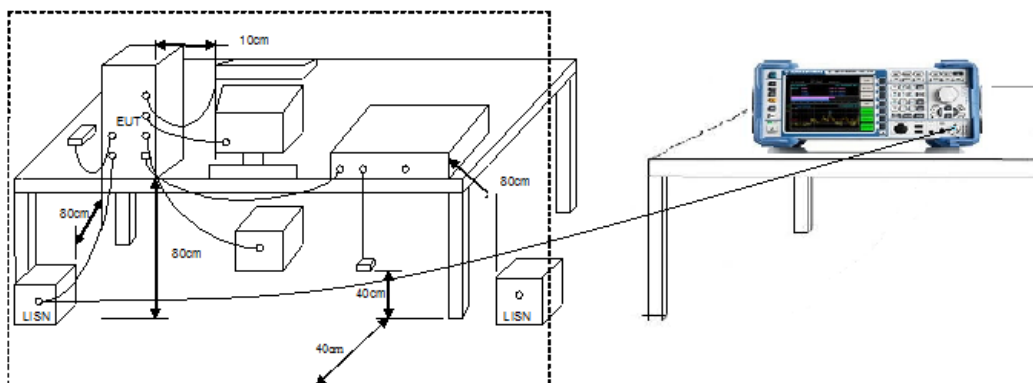



5.4 Test Result and Data

Test Mode :	Normal Link	Phase :	Line
Temperature :	20°C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Sept. 15, 2018

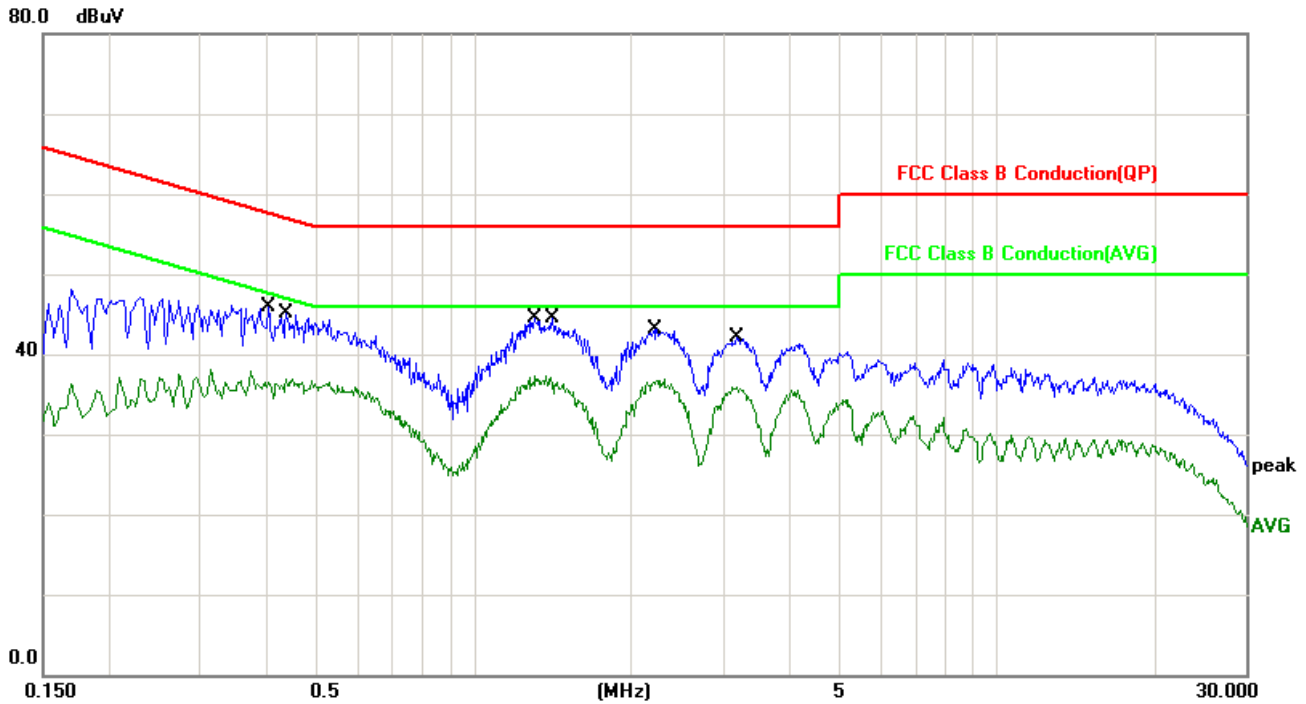


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	9.94	31.01	40.95	57.73	-16.78	QP
2	0.4060	9.94	26.32	36.26	47.73	-11.47	AVG
3	0.4380	9.93	30.35	40.28	57.10	-16.82	QP
4	0.4380	9.93	25.61	35.54	47.10	-11.56	AVG
5	1.3060	10.42	30.64	41.06	56.00	-14.94	QP
6	1.3060	10.42	26.11	36.53	46.00	-9.47	AVG
7	1.4180	10.52	29.97	40.49	56.00	-15.51	QP
8	1.4180	10.52	25.76	36.28	46.00	-9.72	AVG
9	2.2139	11.00	29.17	40.17	56.00	-15.83	QP
10	2.2139	11.00	25.04	36.04	46.00	-9.96	AVG
11	3.1820	10.74	28.73	39.47	56.00	-16.53	QP
12	3.1820	10.74	24.69	35.43	46.00	-10.57	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



Test Mode :	Normal Link	Phase :	Neutral
Temperature :	20°C	Humidity :	51%
Pressur(mbar) :	1002	Date :	Sept. 15, 2018

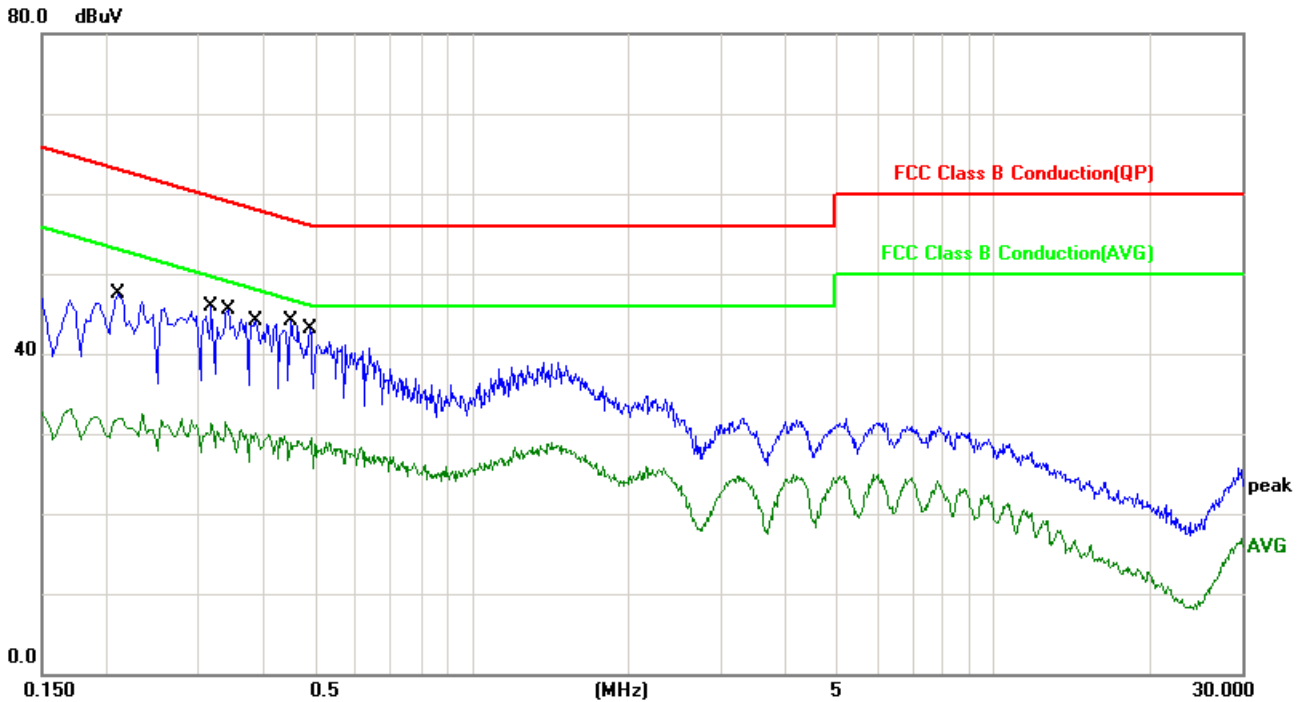

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2100	10.05	33.77	43.82	63.20	-19.38	QP
2	0.2100	10.05	21.64	31.69	53.20	-21.51	AVG
3	0.3180	9.99	31.18	41.17	59.76	-18.59	QP
4	0.3180	9.99	19.76	29.75	49.76	-20.01	AVG
5	0.3420	9.98	30.85	40.83	59.15	-18.32	QP
6	0.3420	9.98	19.52	29.50	49.15	-19.65	AVG
7	0.3860	9.95	29.75	39.70	58.15	-18.45	QP
8	0.3860	9.95	18.82	28.77	48.15	-19.38	AVG
9	0.4500	9.92	28.53	38.45	56.87	-18.42	QP
10	0.4500	9.92	18.29	28.21	46.87	-18.66	AVG
11	0.4900	9.90	29.11	39.01	56.17	-17.16	QP
12	0.4900	9.90	22.87	32.77	46.17	-13.40	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter for frequency below 1GHz and 1.5meter for frequency above 1GHz above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than AVG limit (that means the emission level in peak mode also complies with the limit in AVG mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in AVG mode again and reported.




6.3 Typical Test Setup


Below 30MHz Test Setup

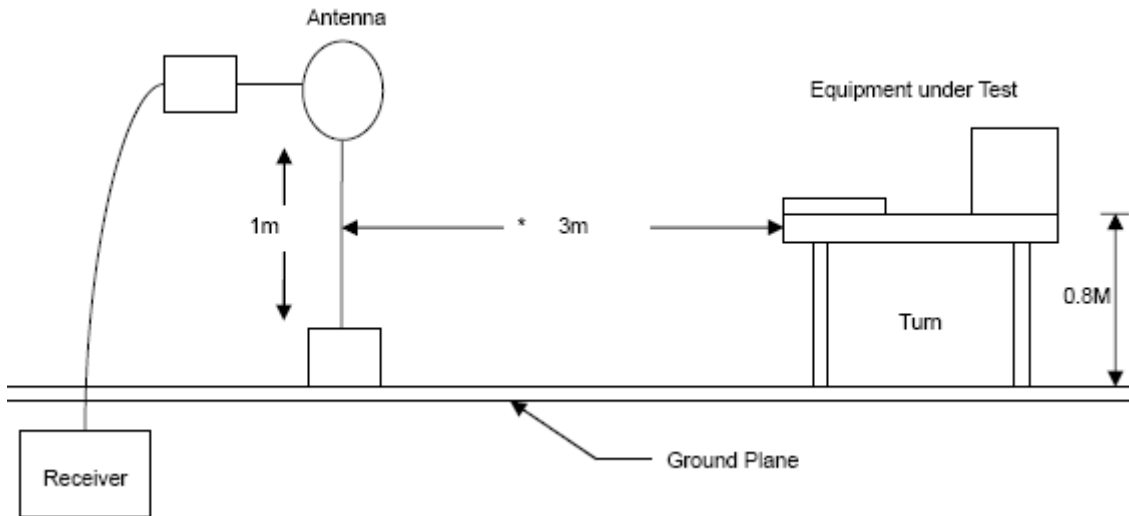

30M - 1GHz Test Setup

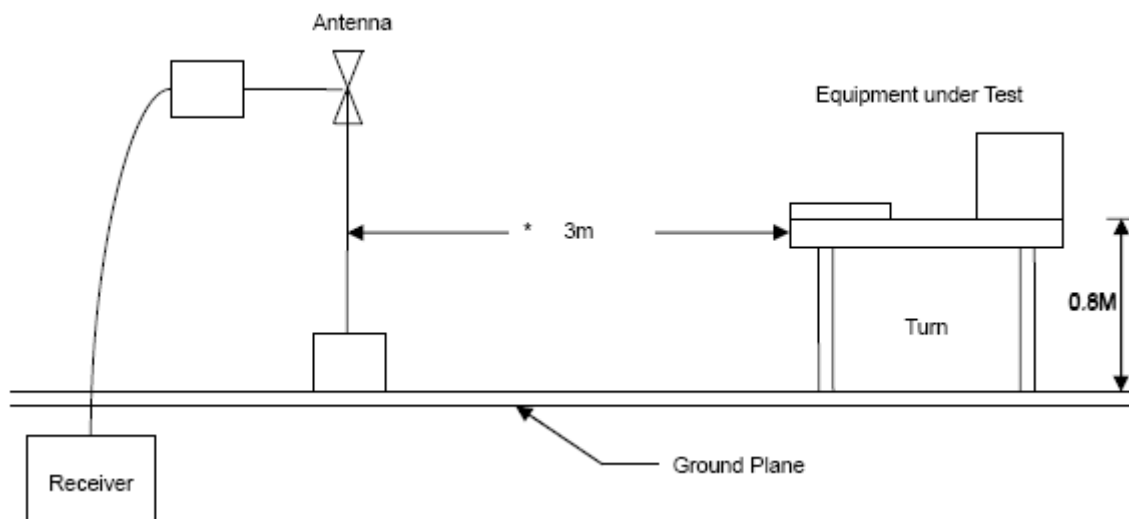

Above 1GHz Test Setup

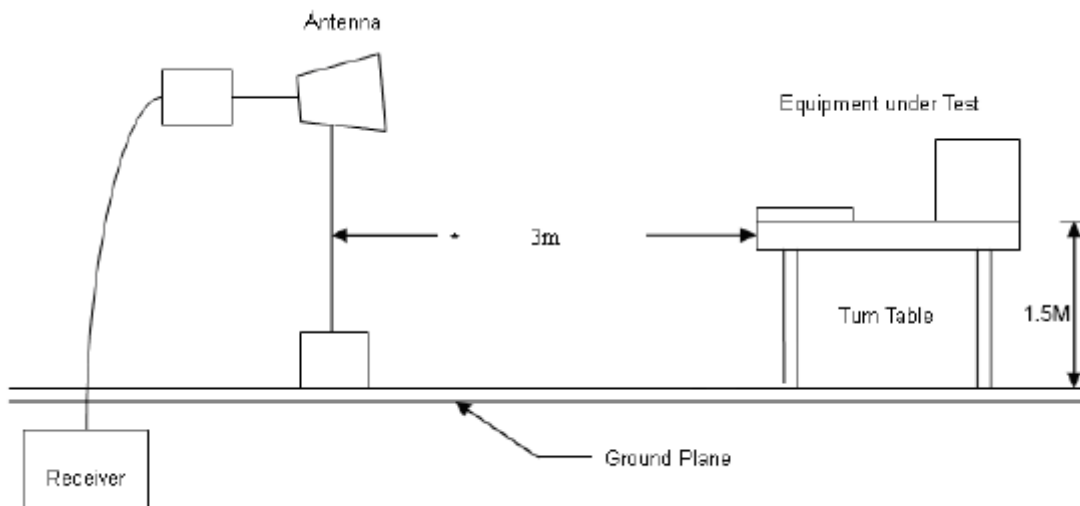




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	:	Atmospheric Pressure	: 1008 hpa

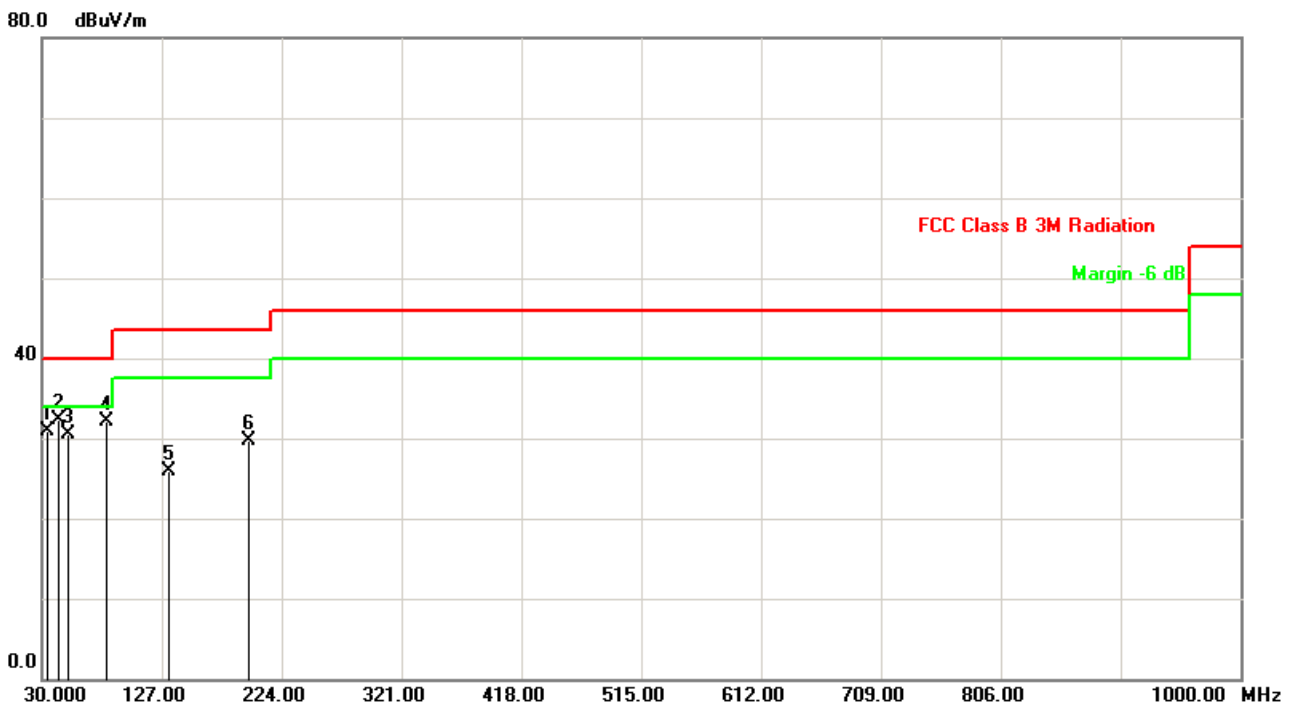


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	33.8800	-3.89	34.89	31.00	40.00	-9.00	peak	100	310
2	43.5800	-8.65	40.99	32.34	40.00	-7.66	peak	100	124
3	51.3400	-10.03	40.48	30.45	40.00	-9.55	peak	100	61
4	82.3800	-9.96	42.10	32.14	40.00	-7.86	peak	100	0
5	132.8200	-6.60	32.42	25.82	43.50	-17.68	peak	100	327
6	197.8100	-8.13	37.86	29.73	43.50	-13.77	peak	100	56

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	:	Atmospheric Pressure	: 1008 hpa

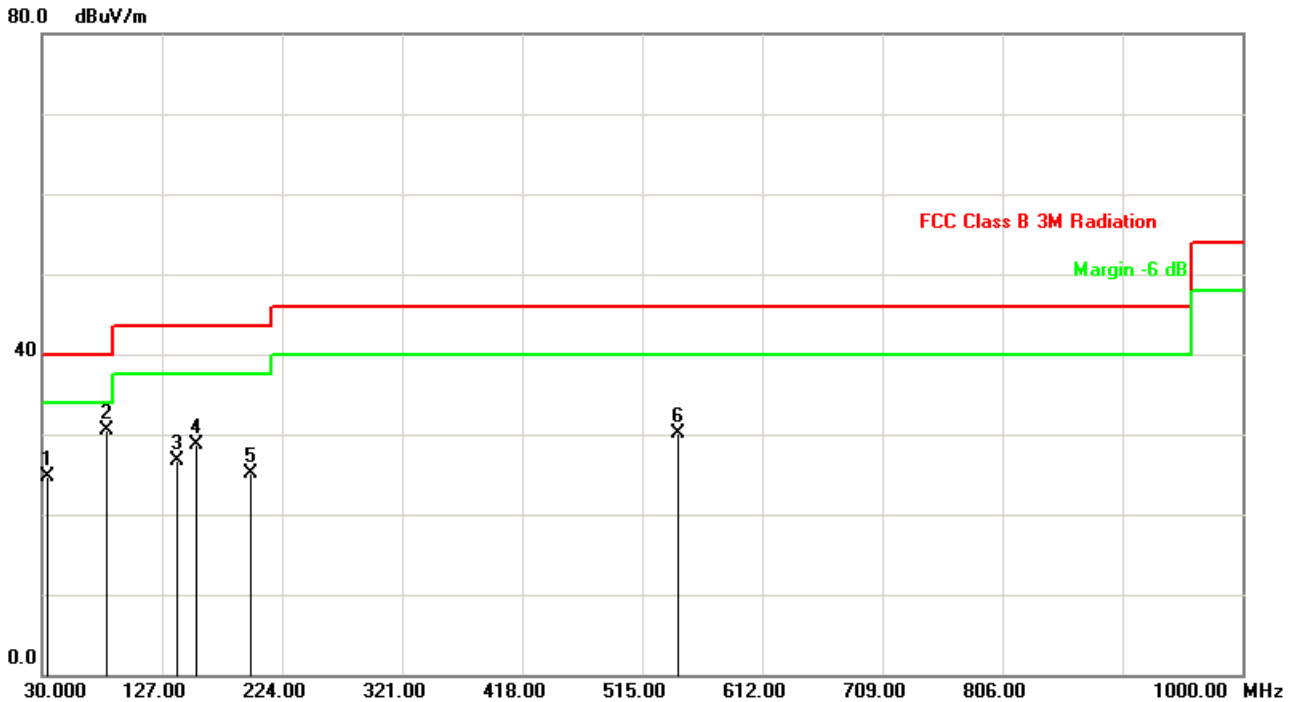


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	33.8800	-5.00	29.78	24.78	40.00	-15.22	peak	100	74
2	82.3800	-12.33	42.81	30.48	40.00	-9.52	peak	200	116
3	139.6100	-4.78	31.48	26.70	43.50	-16.80	peak	100	21
4	154.1600	-5.87	34.67	28.80	43.50	-14.70	peak	200	304
5	198.7800	-10.08	35.23	25.15	43.50	-18.35	peak	300	57
6	544.1000	7.68	22.37	30.05	46.00	-15.95	peak	200	228

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11b (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

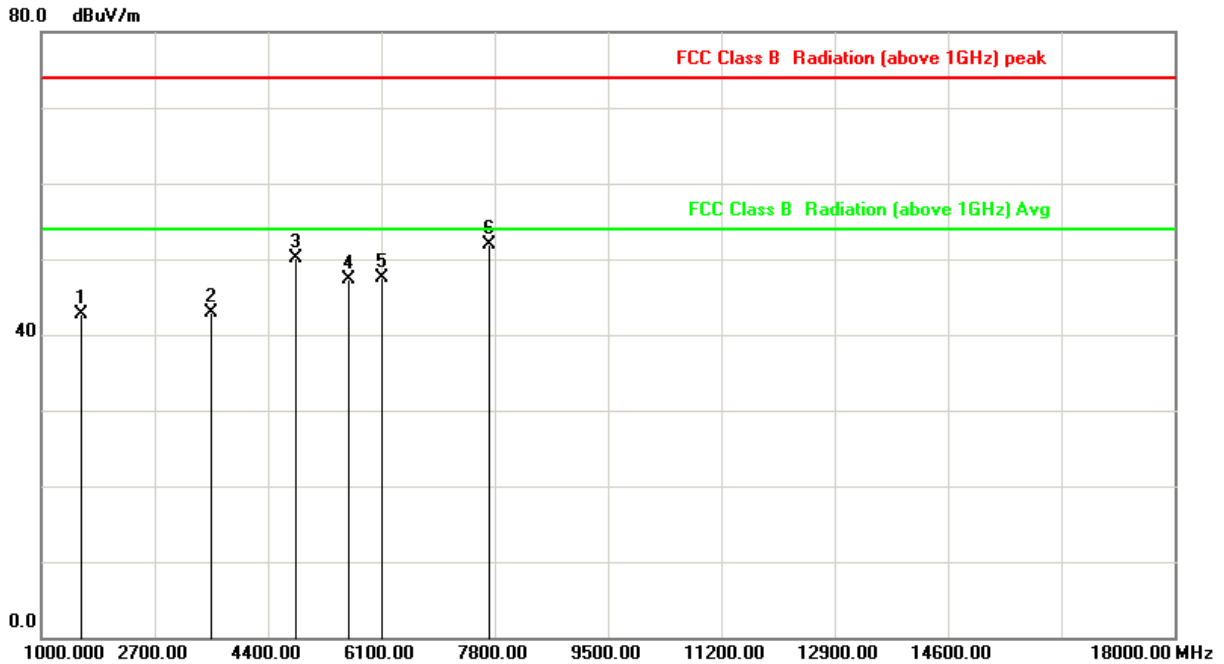


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	-1.06	43.85	42.79	74.00	-31.21	peak
2	3550.000	9.57	33.26	42.83	74.00	-31.17	peak
3	4825.000	14.27	35.75	50.02	74.00	-23.98	peak
4	5618.333	15.31	31.94	47.25	74.00	-26.75	peak
5	6100.000	16.30	31.13	47.43	74.00	-26.57	peak
6	7715.000	20.13	31.72	51.85	74.00	-22.15	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

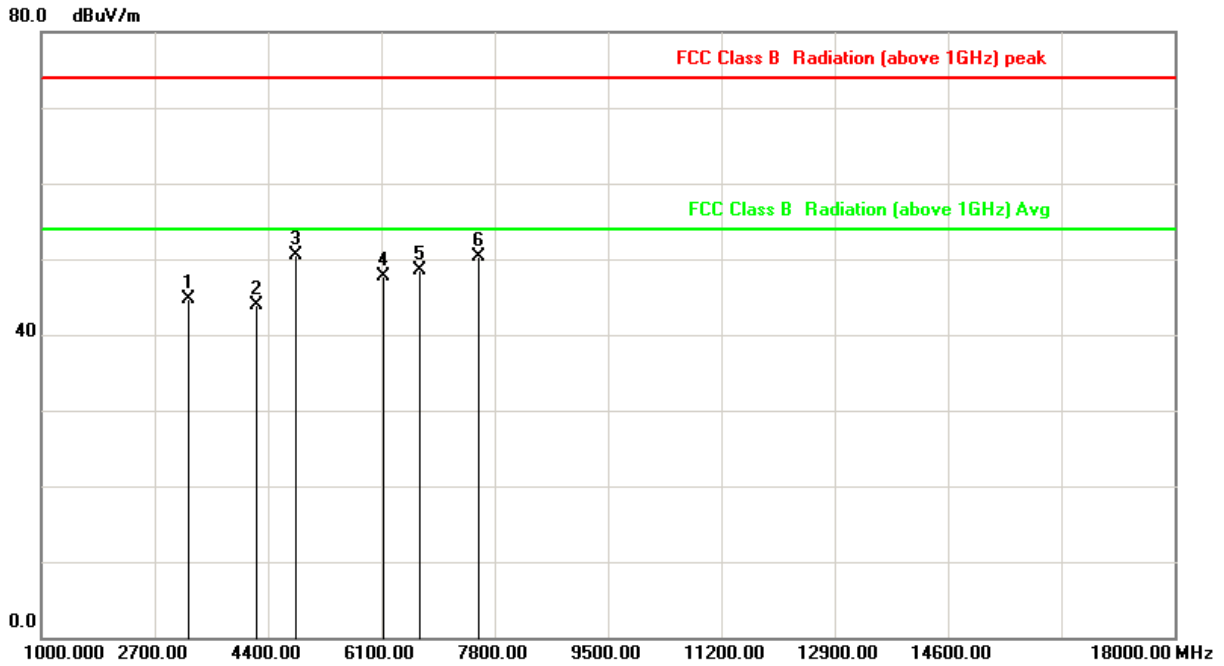


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3210.000	7.87	36.77	44.64	74.00	-29.36	peak
2	4230.000	12.28	31.53	43.81	74.00	-30.19	peak
3	4825.000	14.27	36.29	50.56	74.00	-23.44	peak
4	6128.333	16.31	31.49	47.80	74.00	-26.20	peak
5	6666.667	17.00	31.50	48.50	74.00	-25.50	peak
6	7573.333	20.07	30.23	50.30	74.00	-23.70	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11b (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

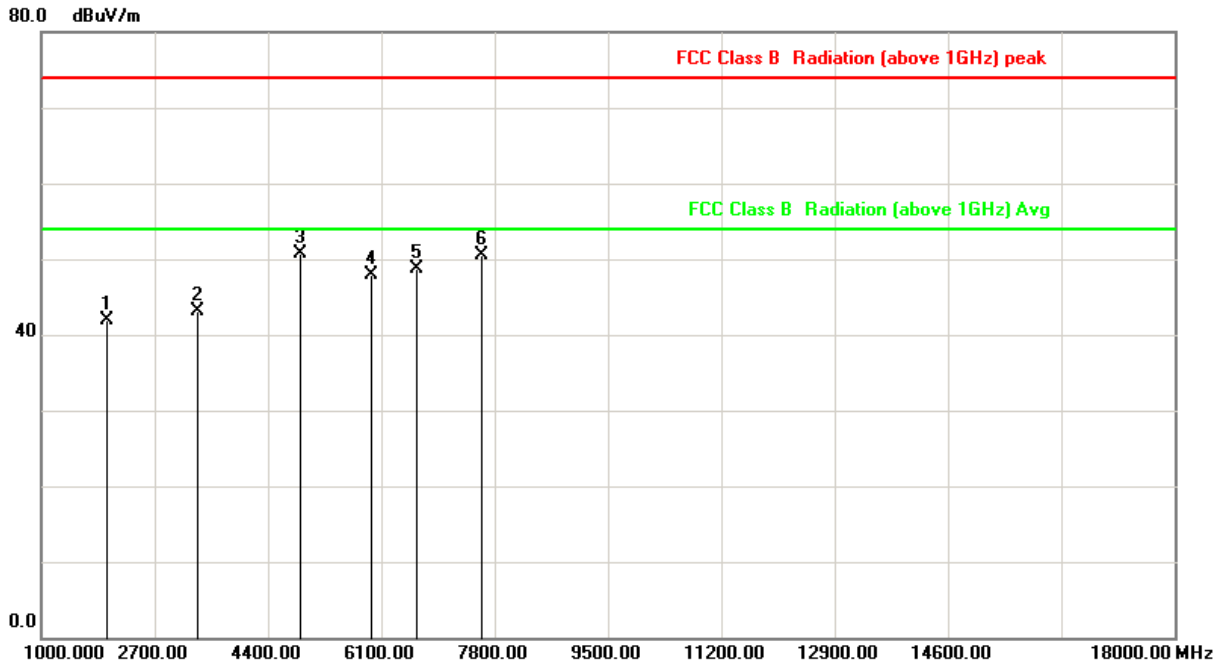


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1991.667	1.22	40.71	41.93	74.00	-32.07	peak
2	3351.667	8.62	34.57	43.19	74.00	-30.81	peak
3	4881.667	14.38	36.27	50.65	74.00	-23.35	peak
4	5958.333	16.16	31.83	47.99	74.00	-26.01	peak
5	6638.333	16.91	31.88	48.79	74.00	-25.21	peak
6	7601.667	20.08	30.51	50.59	74.00	-23.41	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

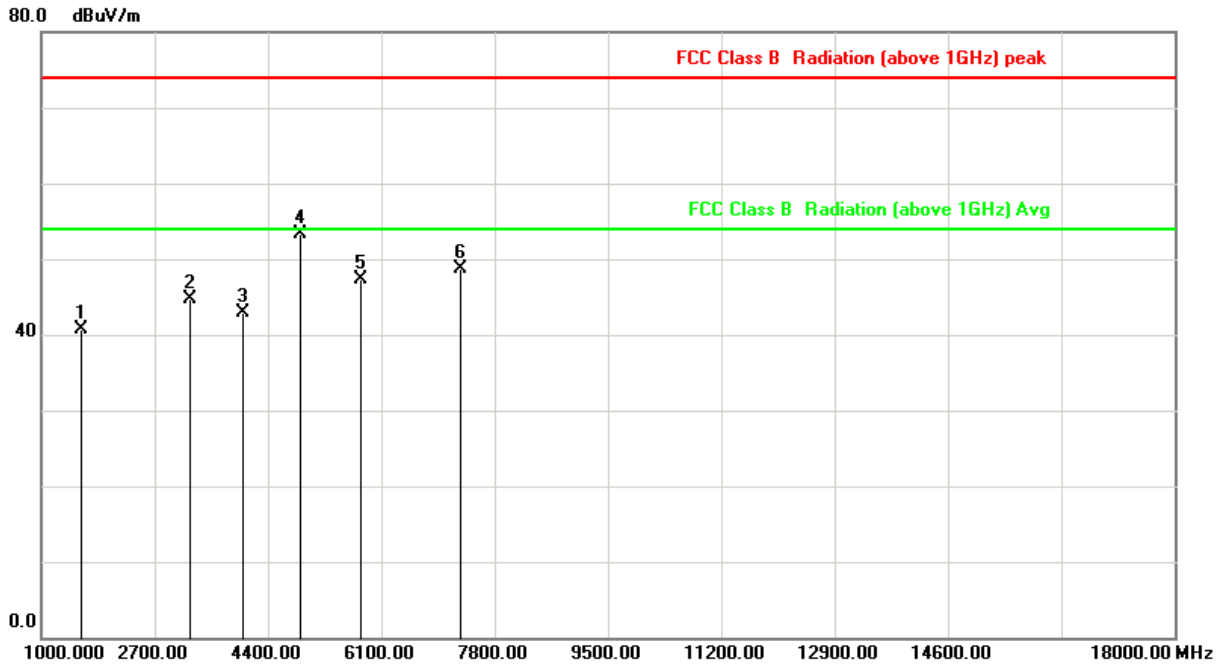


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	-1.06	41.72	40.66	74.00	-33.34	peak
2	3238.333	8.02	36.69	44.71	74.00	-29.29	peak
3	4031.667	11.27	31.70	42.97	74.00	-31.03	peak
4	4881.667	14.38	38.93	53.31	74.00	-20.69	peak
5	5788.333	15.74	31.55	47.29	74.00	-26.71	peak
6	7290.000	19.21	29.55	48.76	74.00	-25.24	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11b (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

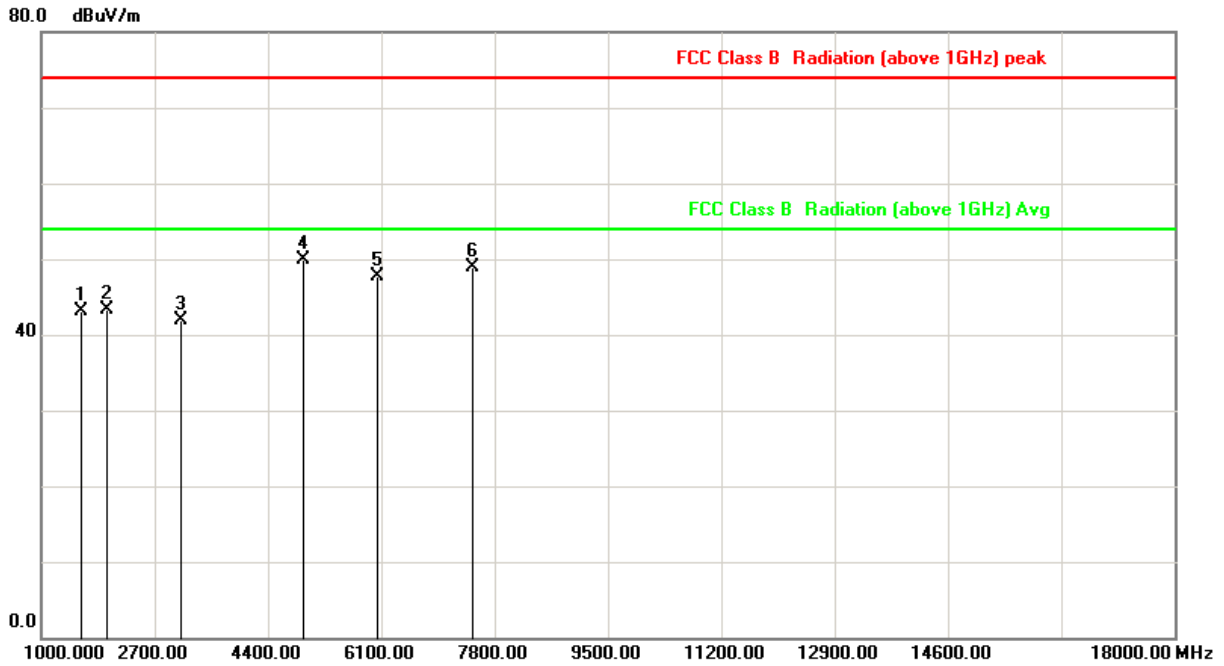


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	-1.06	44.15	43.09	74.00	-30.91	peak
2	1991.667	1.22	42.15	43.37	74.00	-30.63	peak
3	3096.667	7.28	34.54	41.82	74.00	-32.18	peak
4	4938.333	14.48	35.44	49.92	74.00	-24.08	peak
5	6043.333	16.28	31.38	47.66	74.00	-26.34	peak
6	7460.000	19.87	29.13	49.00	74.00	-25.00	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

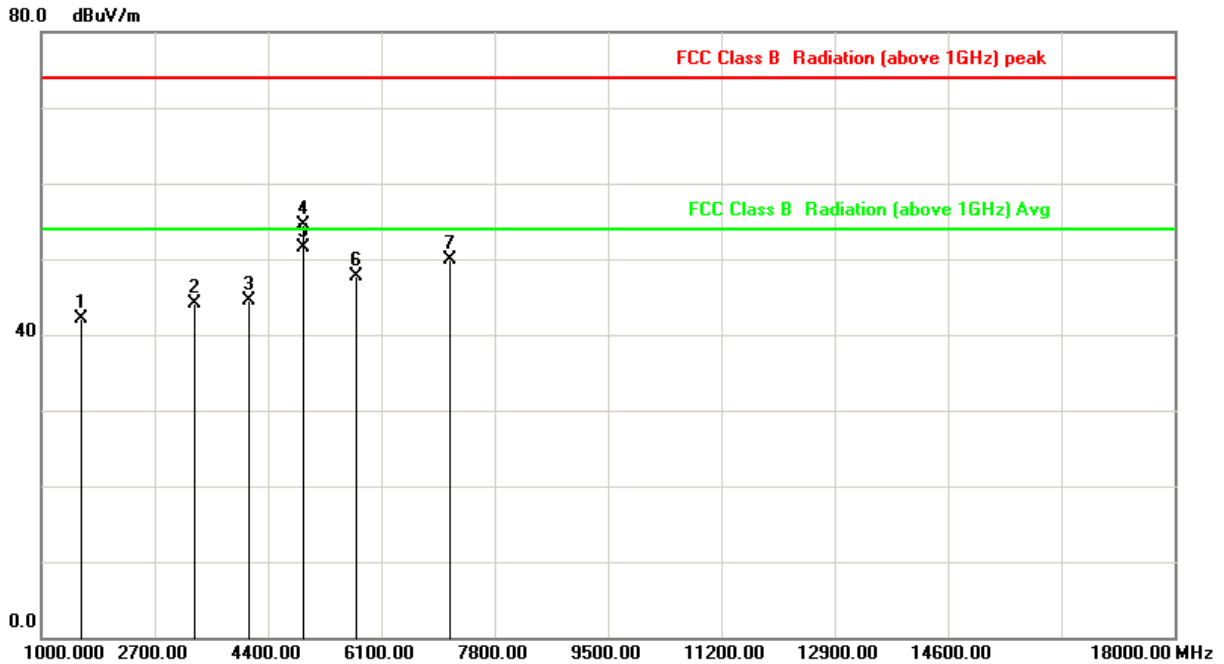


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	-1.06	43.13	42.07	74.00	-31.93	peak
2	3295.000	8.32	35.69	44.01	74.00	-29.99	peak
3	4116.667	11.71	32.72	44.43	74.00	-29.57	peak
4	4938.333	14.48	39.97	54.45	74.00	-19.55	peak
5	4938.333	14.48	37.02	51.50	54.00	-2.50	AVG
6	5731.667	15.59	32.21	47.80	74.00	-26.20	peak
7	7120.000	18.55	31.31	49.86	74.00	-24.14	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11g (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

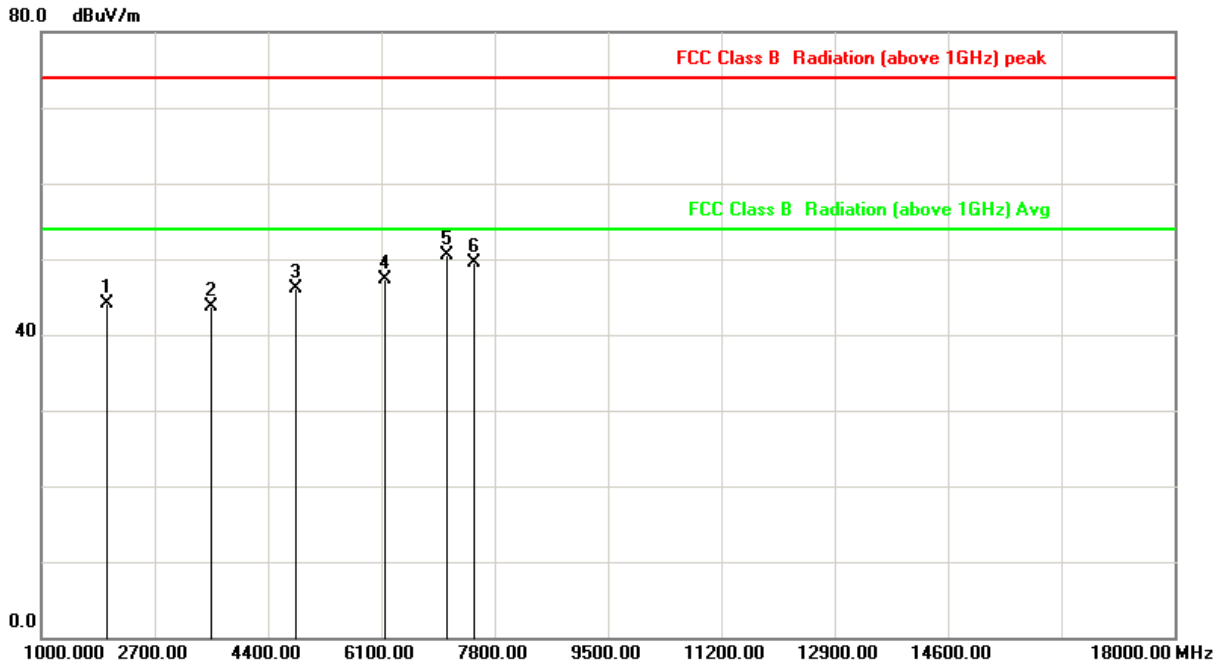


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1991.667	1.22	42.82	44.04	74.00	-29.96	peak
2	3550.000	9.57	34.09	43.66	74.00	-30.34	peak
3	4825.000	14.27	31.84	46.11	74.00	-27.89	peak
4	6156.667	16.32	31.00	47.32	74.00	-26.68	peak
5	7091.667	18.44	31.98	50.42	74.00	-23.58	peak
6	7488.333	19.98	29.53	49.51	74.00	-24.49	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

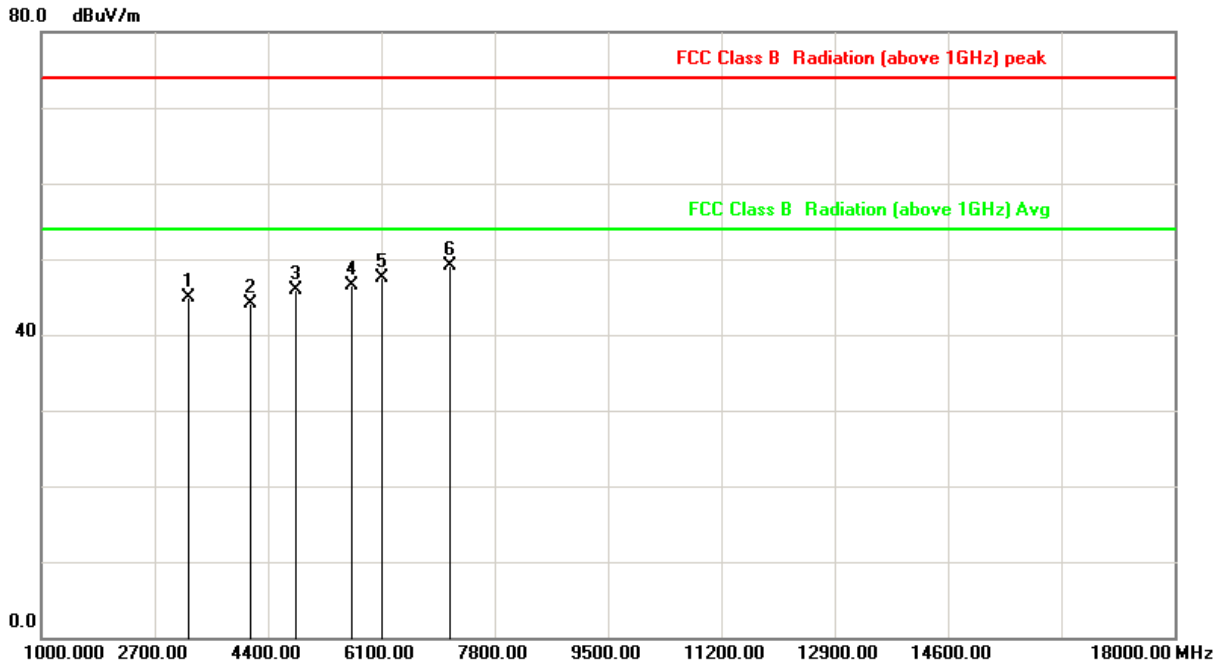


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3210.000	7.87	37.03	44.90	74.00	-29.10	peak
2	4145.000	11.85	32.19	44.04	74.00	-29.96	peak
3	4825.000	14.27	31.71	45.98	74.00	-28.02	peak
4	5646.667	15.38	31.17	46.55	74.00	-27.45	peak
5	6100.000	16.30	31.28	47.58	74.00	-26.42	peak
6	7120.000	18.55	30.49	49.04	74.00	-24.96	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11g (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

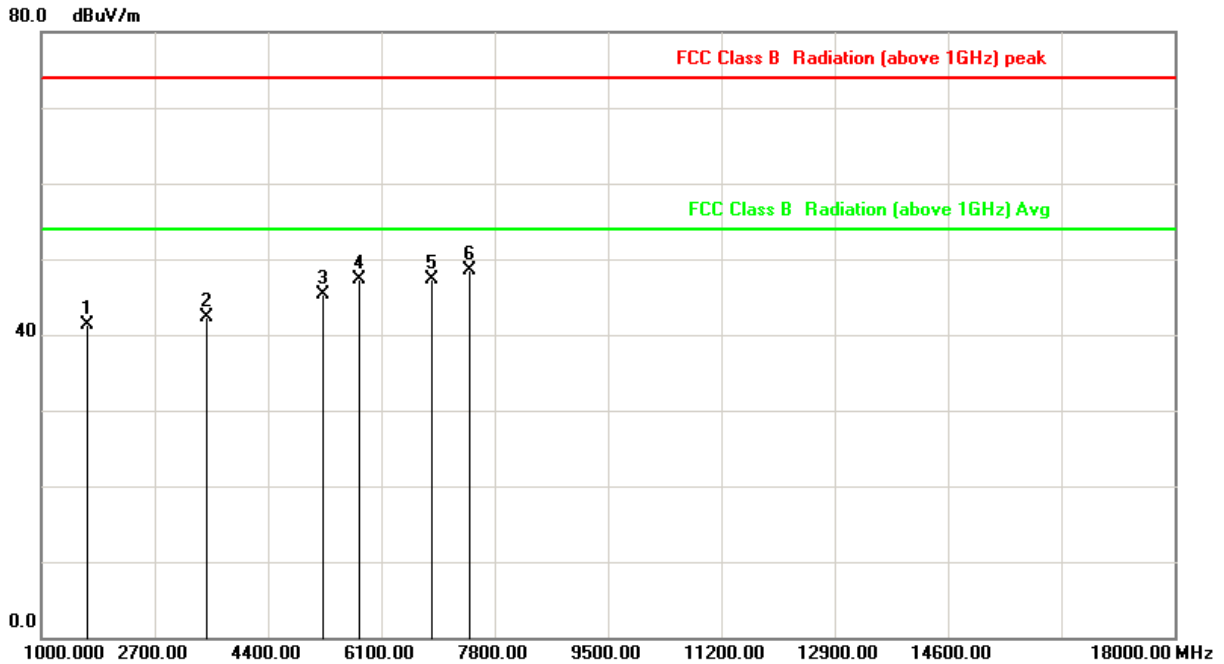


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1680.000	-0.57	41.87	41.30	74.00	-32.70	peak
2	3493.333	9.36	32.95	42.31	74.00	-31.69	peak
3	5221.667	14.79	30.55	45.34	74.00	-28.66	peak
4	5760.000	15.66	31.74	47.40	74.00	-26.60	peak
5	6865.000	17.64	29.66	47.30	74.00	-26.70	peak
6	7431.667	19.76	28.68	48.44	74.00	-25.56	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

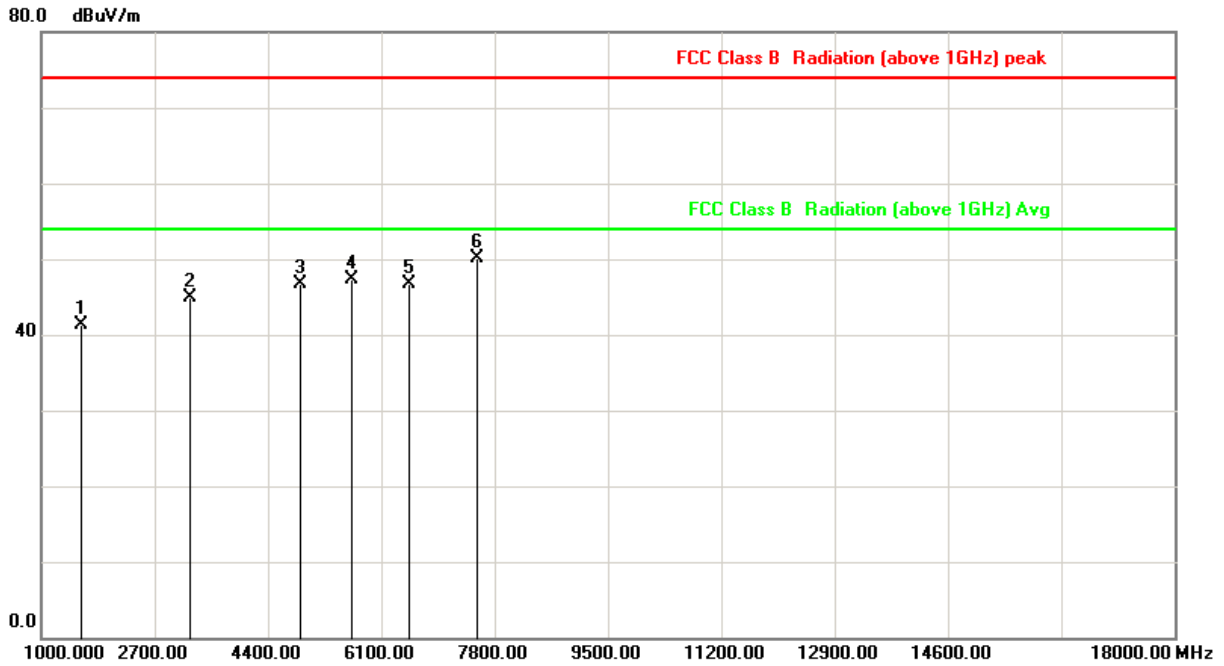


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	-1.06	42.40	41.34	74.00	-32.66	peak
2	3238.333	8.02	36.92	44.94	74.00	-29.06	peak
3	4881.667	14.38	32.38	46.76	74.00	-27.24	peak
4	5646.667	15.38	31.95	47.33	74.00	-26.67	peak
5	6525.000	16.54	30.09	46.63	74.00	-27.37	peak
6	7545.000	20.05	30.06	50.11	74.00	-23.89	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11g (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

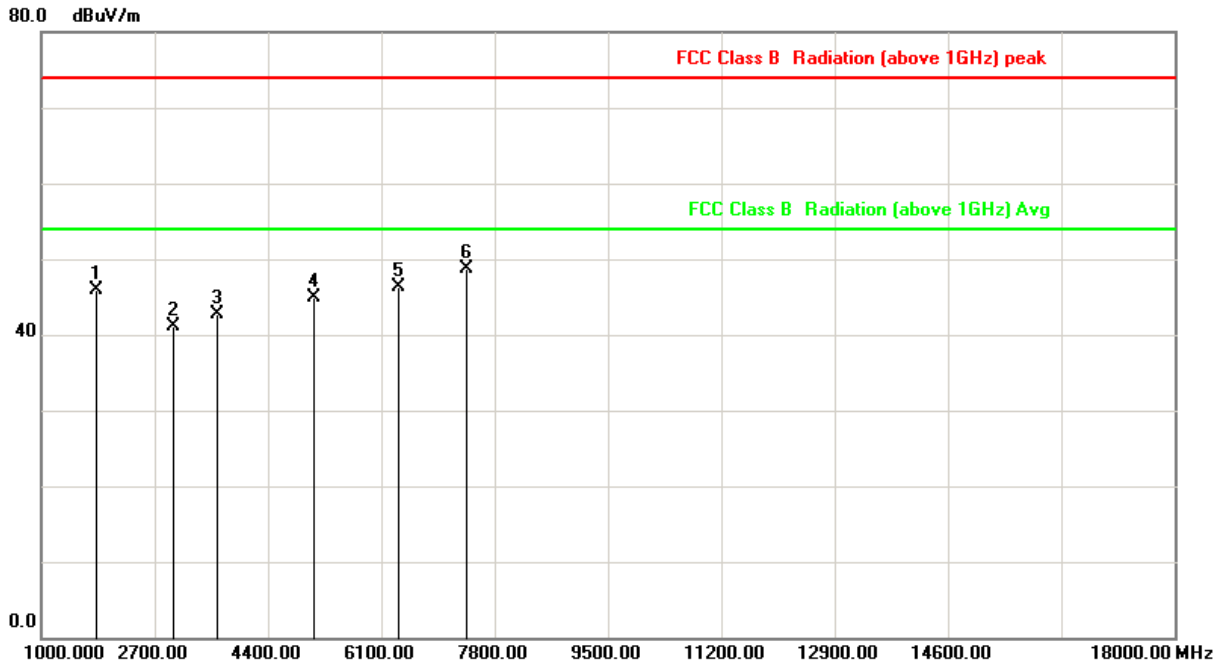


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1821.667	0.24	45.67	45.91	74.00	-28.09	peak
2	2983.333	6.66	34.36	41.02	74.00	-32.98	peak
3	3635.000	9.86	32.78	42.64	74.00	-31.36	peak
4	5080.000	14.67	30.30	44.97	74.00	-29.03	peak
5	6355.000	16.40	29.88	46.28	74.00	-27.72	peak
6	7375.000	19.54	29.25	48.79	74.00	-25.21	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

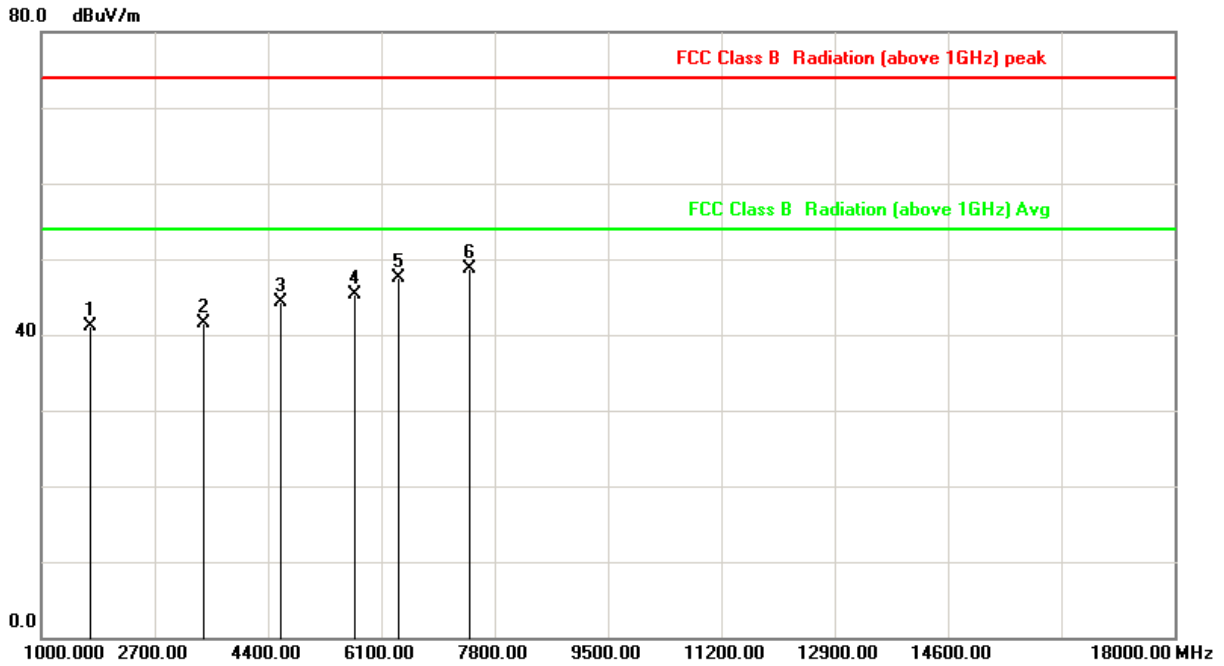


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1736.667	-0.25	41.39	41.14	74.00	-32.86	peak
2	3436.667	9.07	32.50	41.57	74.00	-32.43	peak
3	4598.333	13.84	30.43	44.27	74.00	-29.73	peak
4	5703.333	15.52	29.75	45.27	74.00	-28.73	peak
5	6355.000	16.40	31.01	47.41	74.00	-26.59	peak
6	7431.667	19.76	29.02	48.78	74.00	-25.22	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11nHT20 (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

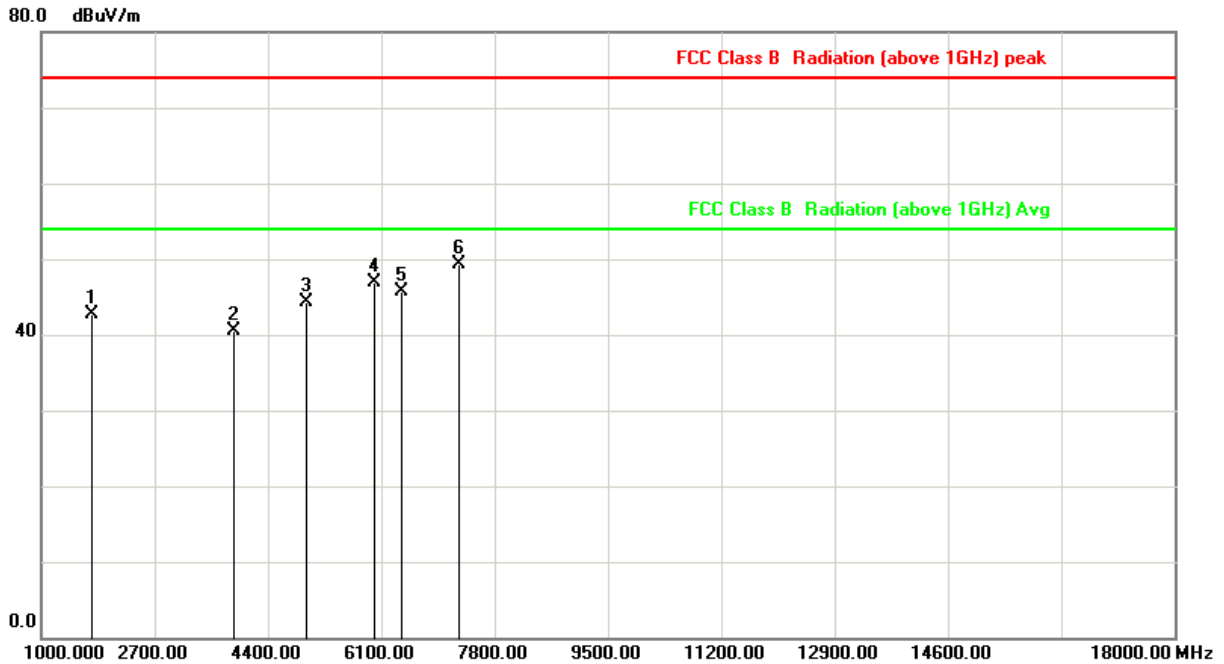


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1765.000	-0.08	42.76	42.68	74.00	-31.32	peak
2	3890.000	10.73	29.72	40.45	74.00	-33.55	peak
3	4966.667	14.54	29.73	44.27	74.00	-29.73	peak
4	5986.667	16.23	30.77	47.00	74.00	-27.00	peak
5	6411.667	16.42	29.28	45.70	74.00	-28.30	peak
6	7261.667	19.10	30.18	49.28	74.00	-24.72	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11nHT20 (2412MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 01	Atmospheric Pressure	: 1008 hpa

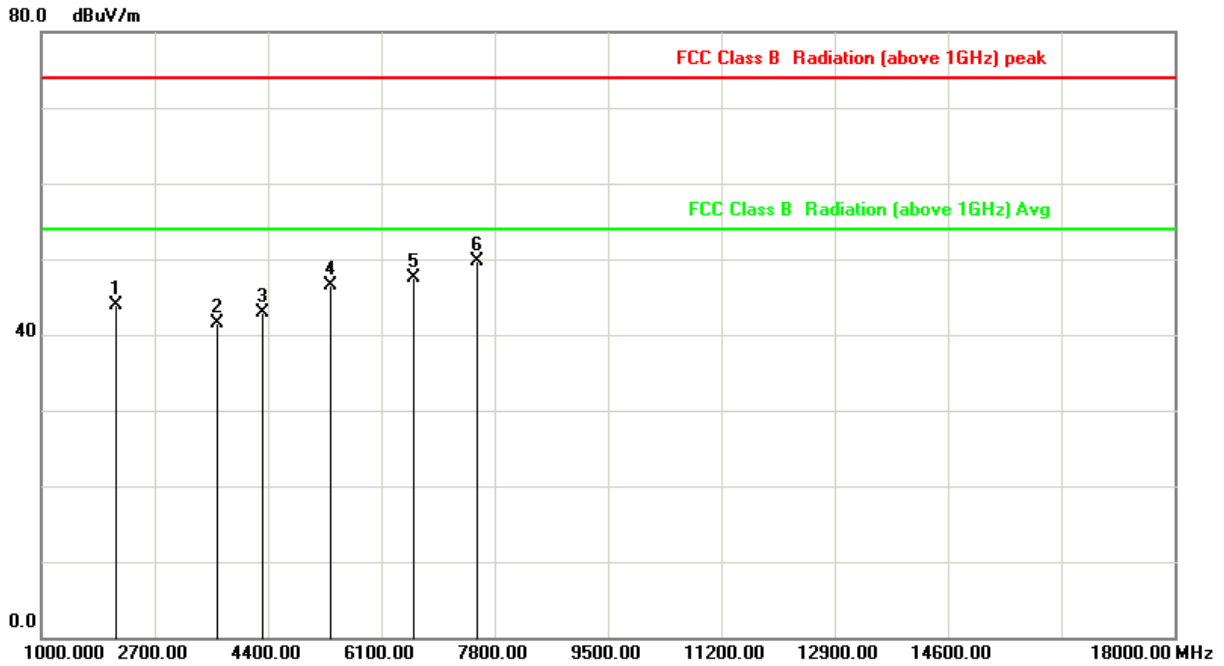


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2133.333	1.84	42.13	43.97	74.00	-30.03	peak
2	3635.000	9.86	31.71	41.57	74.00	-32.43	peak
3	4315.000	12.72	30.22	42.94	74.00	-31.06	peak
4	5335.000	14.88	31.65	46.53	74.00	-27.47	peak
5	6581.667	16.72	30.70	47.42	74.00	-26.58	peak
6	7545.000	20.05	29.56	49.61	74.00	-24.39	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11nHT20 (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

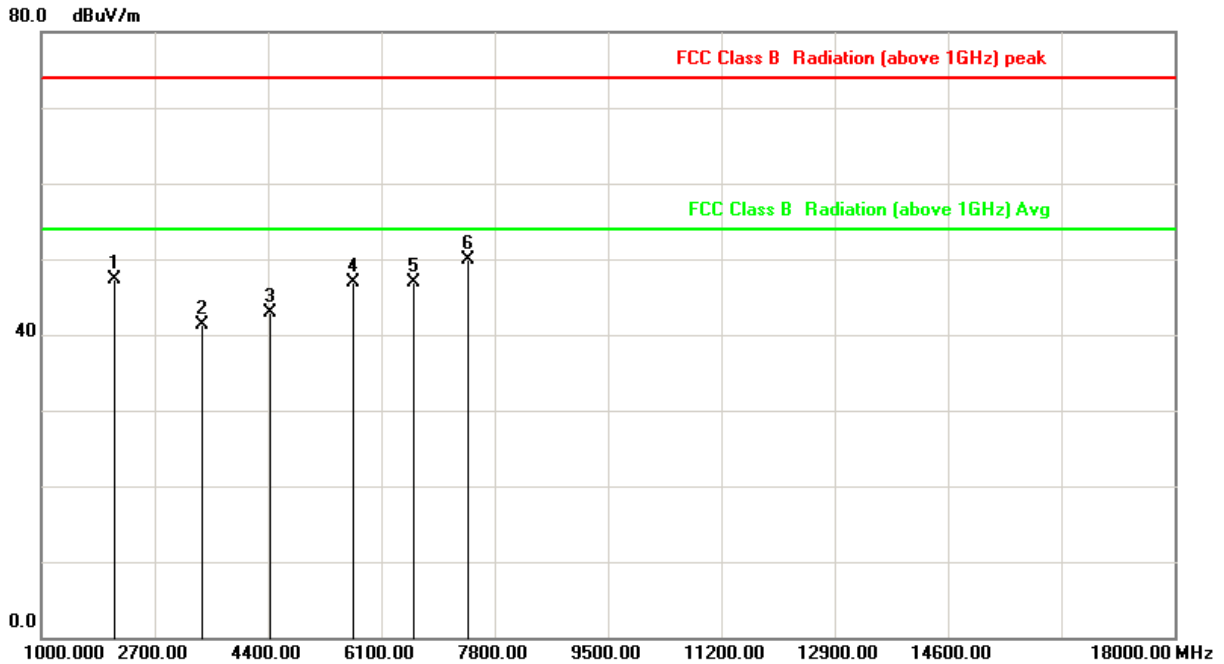


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2105.000	1.72	45.56	47.28	74.00	-26.72	peak
2	3408.333	8.92	32.40	41.32	74.00	-32.68	peak
3	4428.333	13.29	29.66	42.95	74.00	-31.05	peak
4	5675.000	15.45	31.36	46.81	74.00	-27.19	peak
5	6581.667	16.72	30.20	46.92	74.00	-27.08	peak
6	7403.333	19.65	30.19	49.84	74.00	-24.16	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11nHT20 (2437MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 06	Atmospheric Pressure	: 1008 hpa

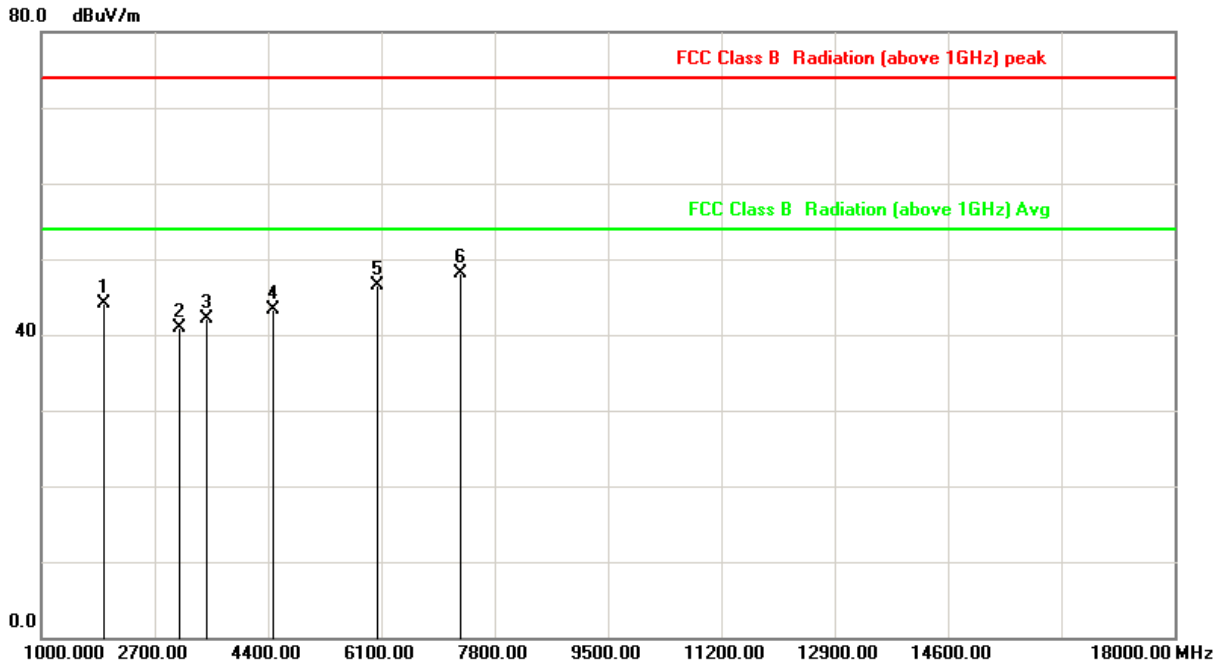


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1935.000	0.90	43.18	44.08	74.00	-29.92	peak
2	3068.333	7.13	33.68	40.81	74.00	-33.19	peak
3	3493.333	9.36	32.69	42.05	74.00	-31.95	peak
4	4485.000	13.58	29.79	43.37	74.00	-30.63	peak
5	6043.333	16.28	30.17	46.45	74.00	-27.55	peak
6	7290.000	19.21	28.93	48.14	74.00	-25.86	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11nHT20 (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

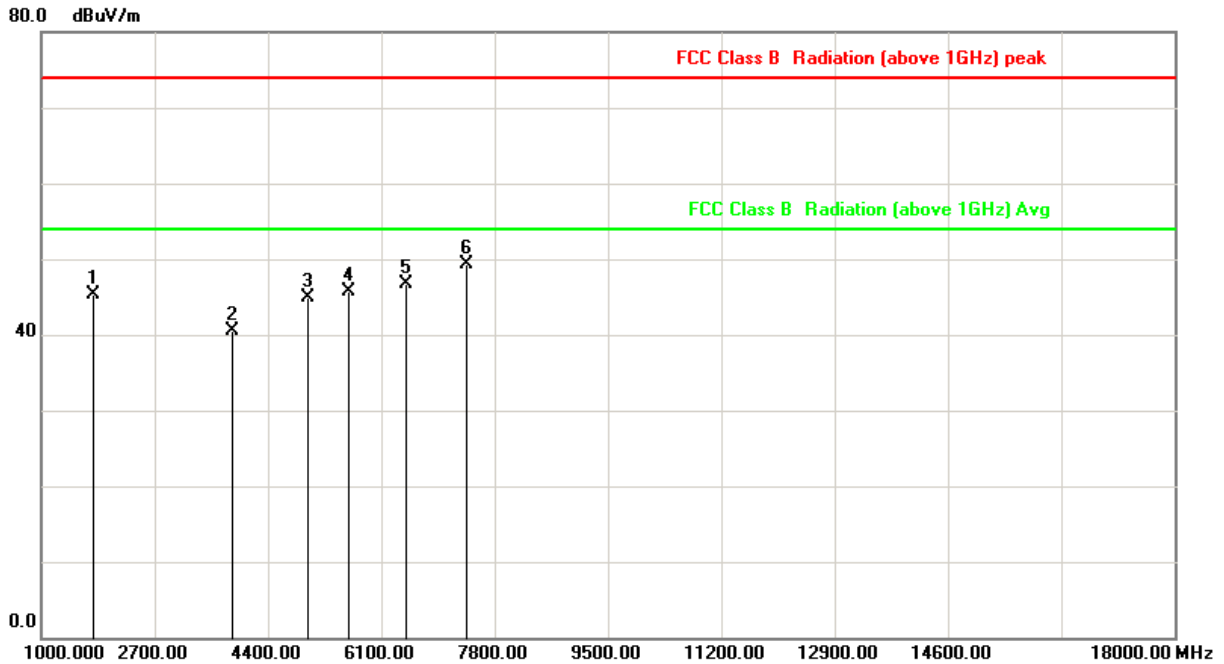


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1793.333	0.08	45.29	45.37	74.00	-28.63	peak
2	3861.667	10.64	29.94	40.58	74.00	-33.42	peak
3	4995.000	14.59	30.39	44.98	74.00	-29.02	peak
4	5618.333	15.31	30.30	45.61	74.00	-28.39	peak
5	6468.333	16.45	30.22	46.67	74.00	-27.33	peak
6	7375.000	19.54	29.75	49.29	74.00	-24.71	peak

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11nHT20 (2462MHz)	Temperature	: 18 °C
Test Date	: Sept. 15, 2018	Humidity	: 49 %
Memo	: CH 11	Atmospheric Pressure	: 1008 hpa

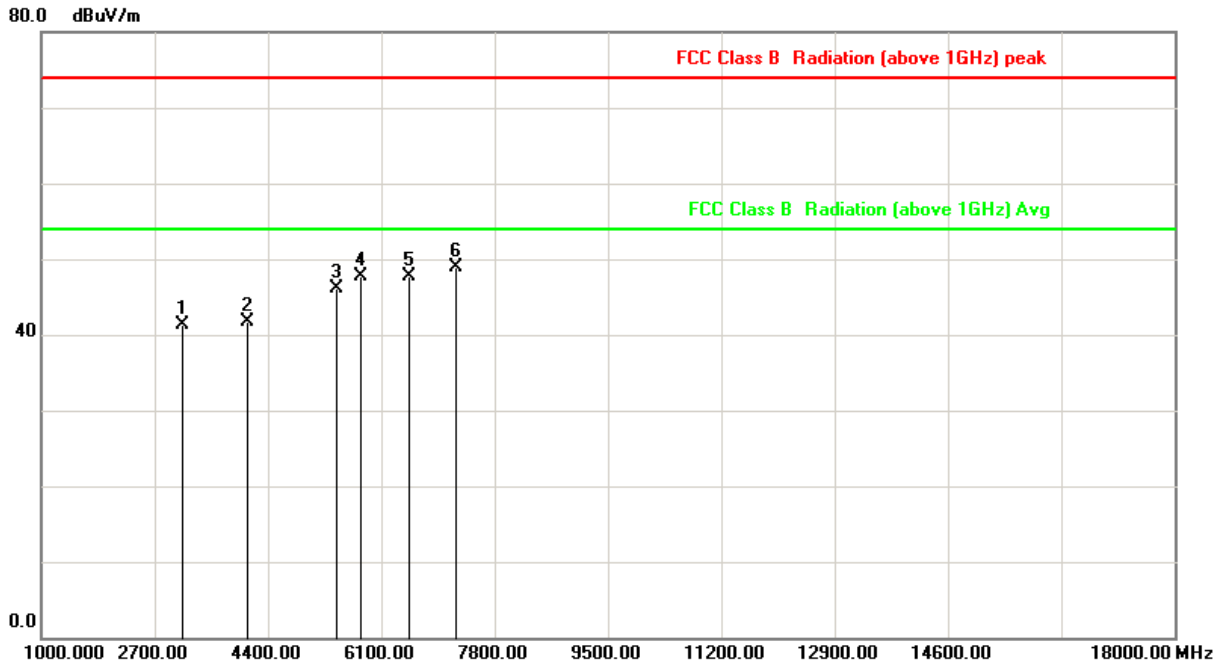

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3125.000	7.43	33.79	41.22	74.00	-32.78	peak
2	4088.333	11.56	30.17	41.73	74.00	-32.27	peak
3	5420.000	14.95	31.09	46.04	74.00	-27.96	peak
4	5788.333	15.74	31.91	47.65	74.00	-26.35	peak
5	6525.000	16.54	31.09	47.63	74.00	-26.37	peak
6	7233.333	18.99	30.01	49.00	74.00	-25.00	peak

Note: Level = Reading + Factor
Margin = Level – Limit
Factor= Antenna Factor + Cable Loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



6.8 Restrict Band Emission Measurement Data

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11b, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

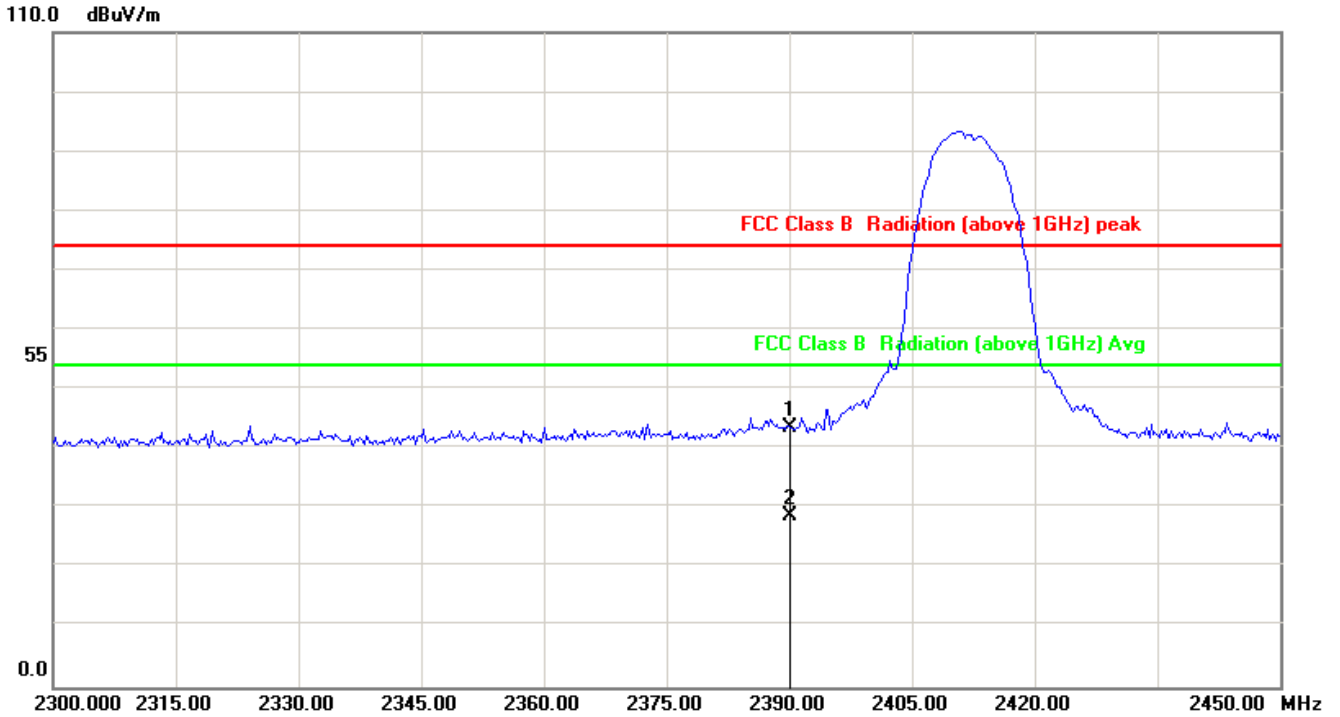


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	40.64	43.59	74.00	-30.41	peak
2	2390.000	2.95	25.67	28.62	54.00	-25.38	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

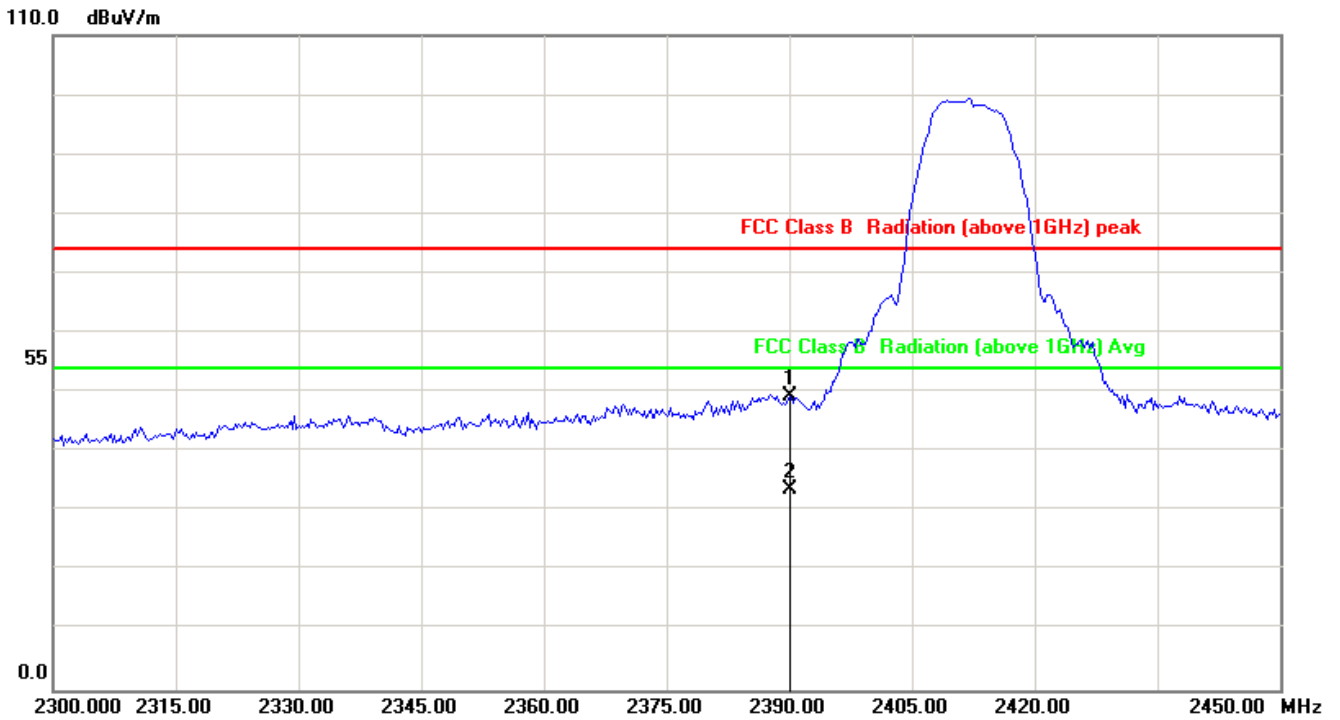


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	46.28	49.23	74.00	-24.77	peak
2	2390.000	2.95	30.76	33.71	54.00	-20.29	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11b, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

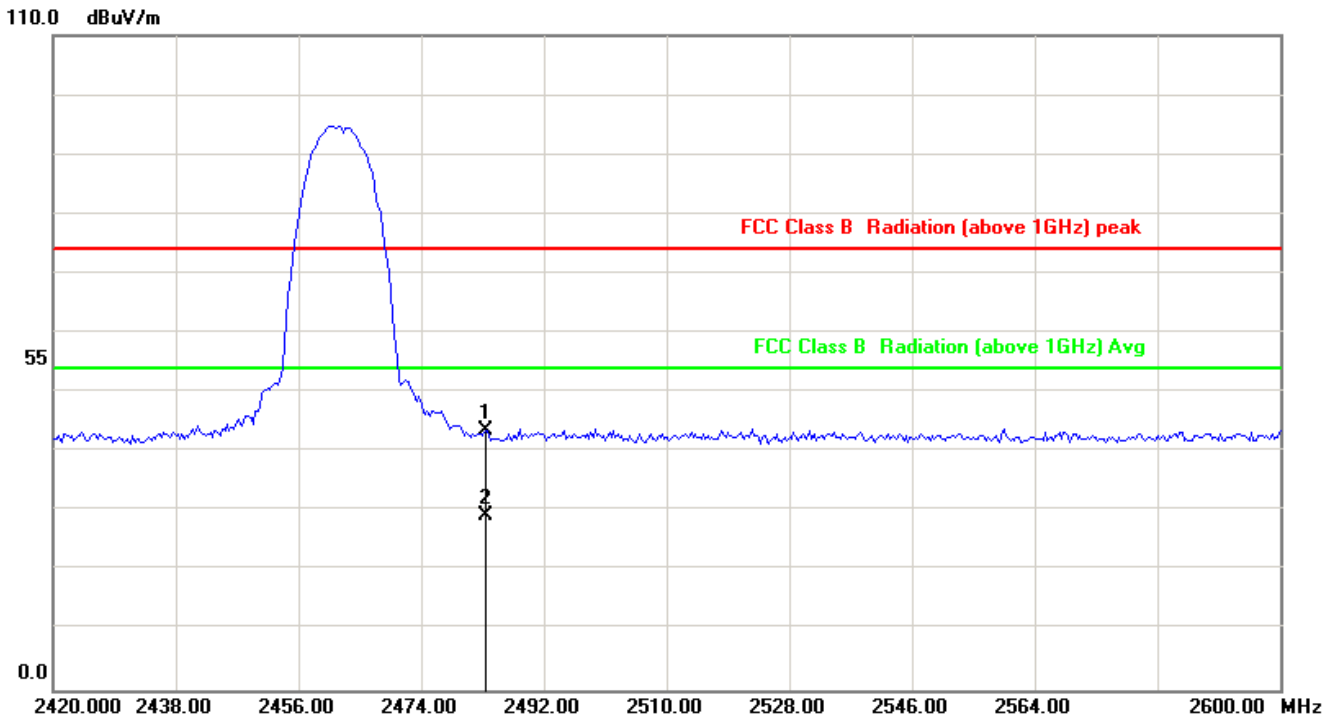


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	40.37	43.72	74.00	-30.28	peak
2	2483.500	3.35	25.89	29.24	54.00	-24.76	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

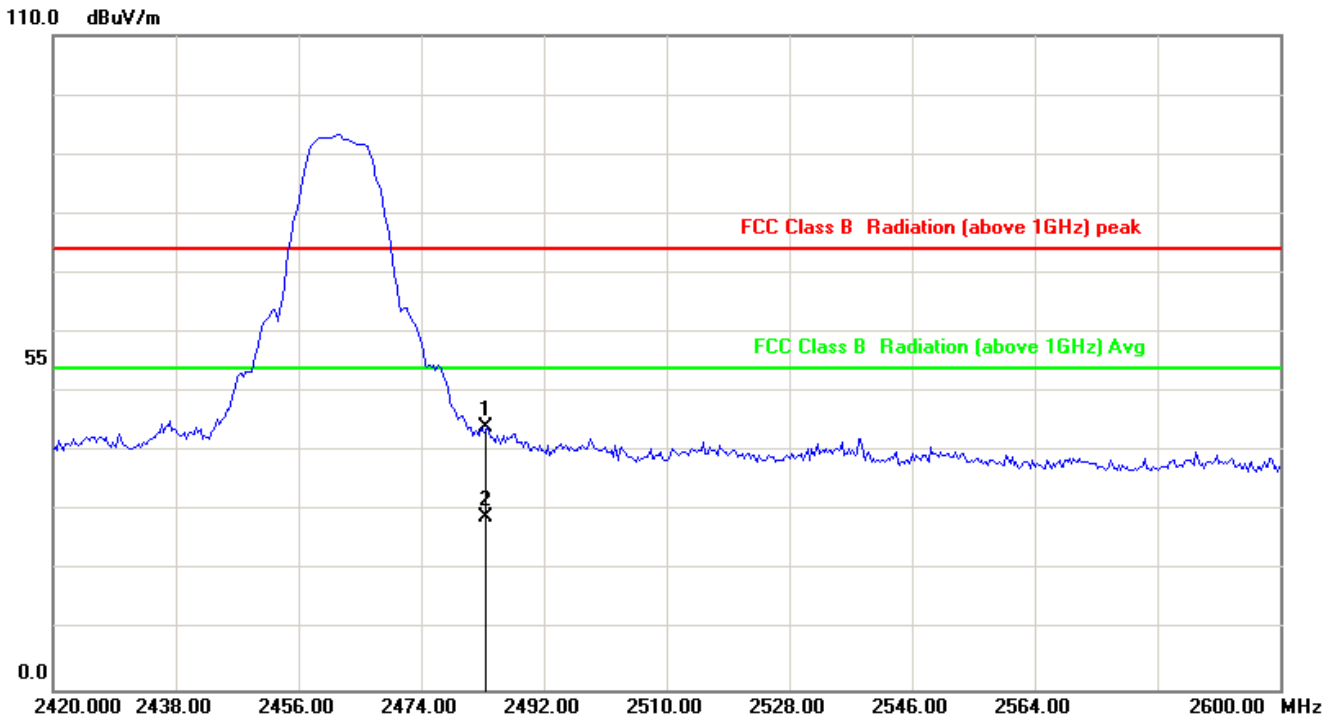


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	40.76	44.11	74.00	-29.89	peak
2	2483.500	3.35	25.67	29.02	54.00	-24.98	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

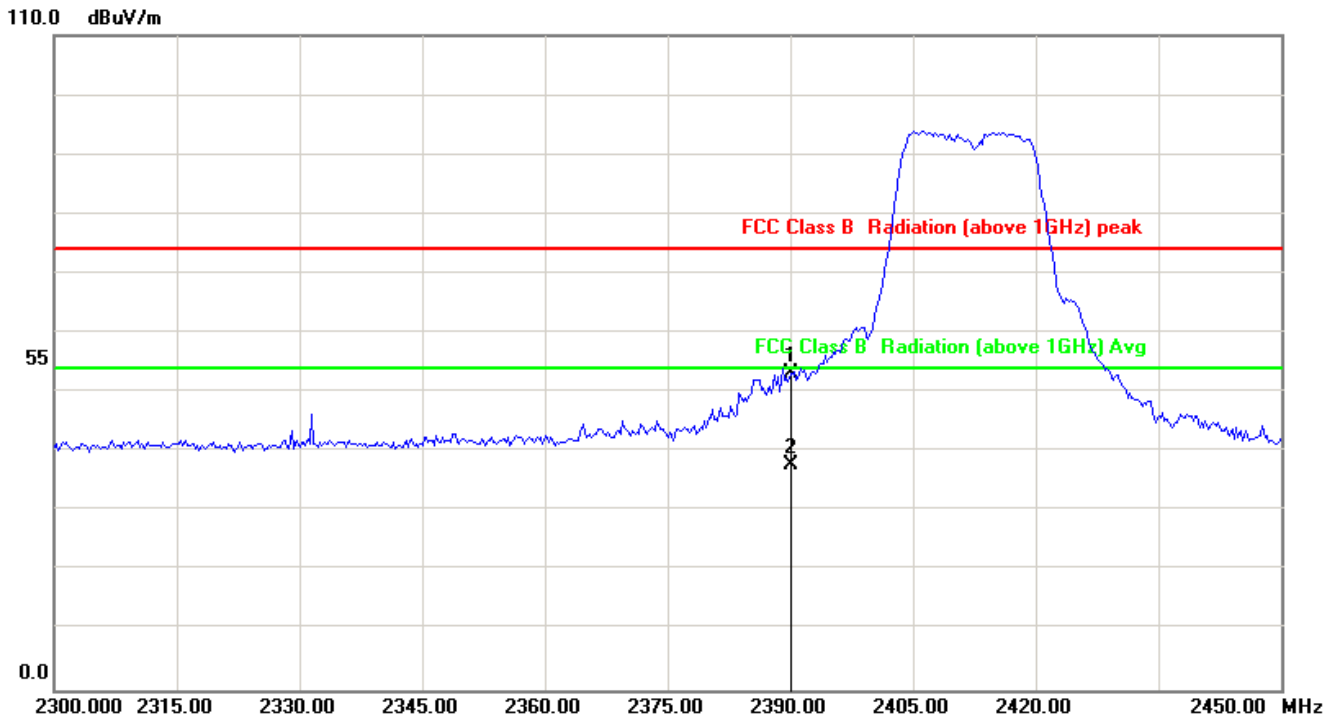


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	50.36	53.31	74.00	-20.69	peak
2	2390.000	2.95	34.84	37.79	54.00	-16.21	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

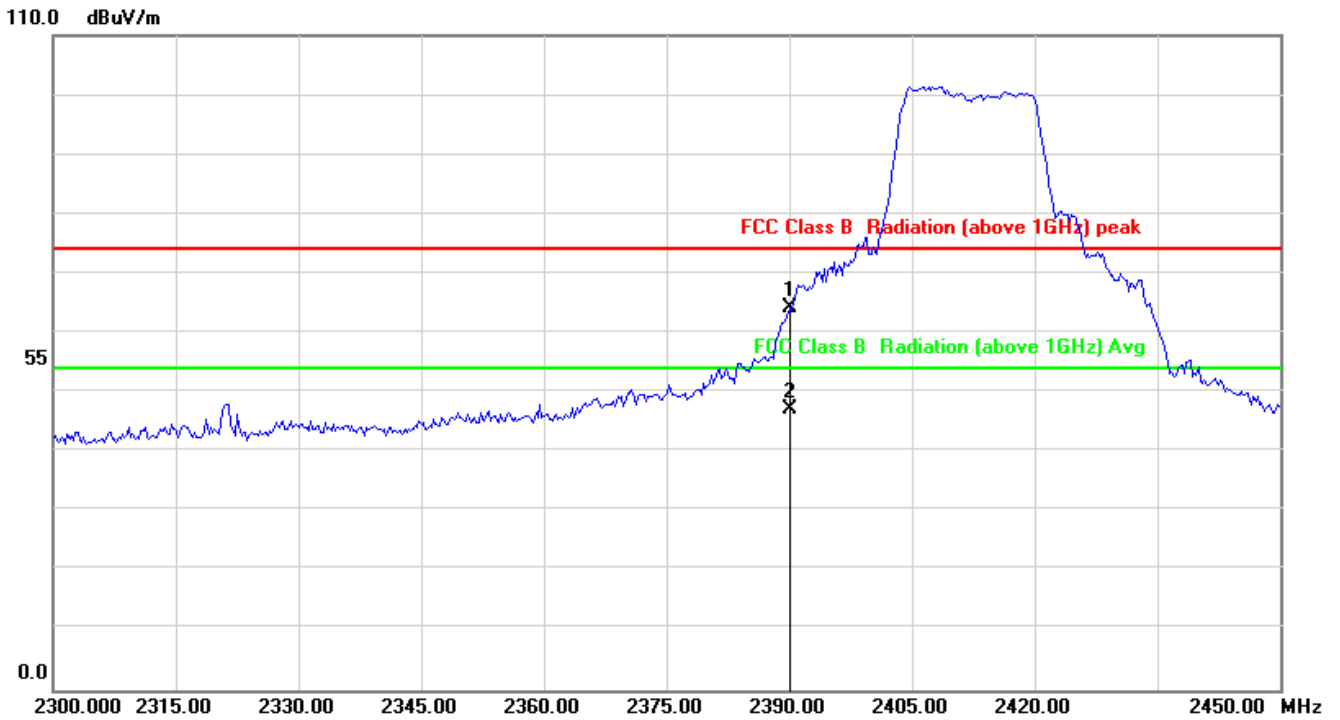


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	61.29	64.24	74.00	-9.76	peak
2	2390.000	2.95	44.13	47.08	54.00	-6.92	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11g, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

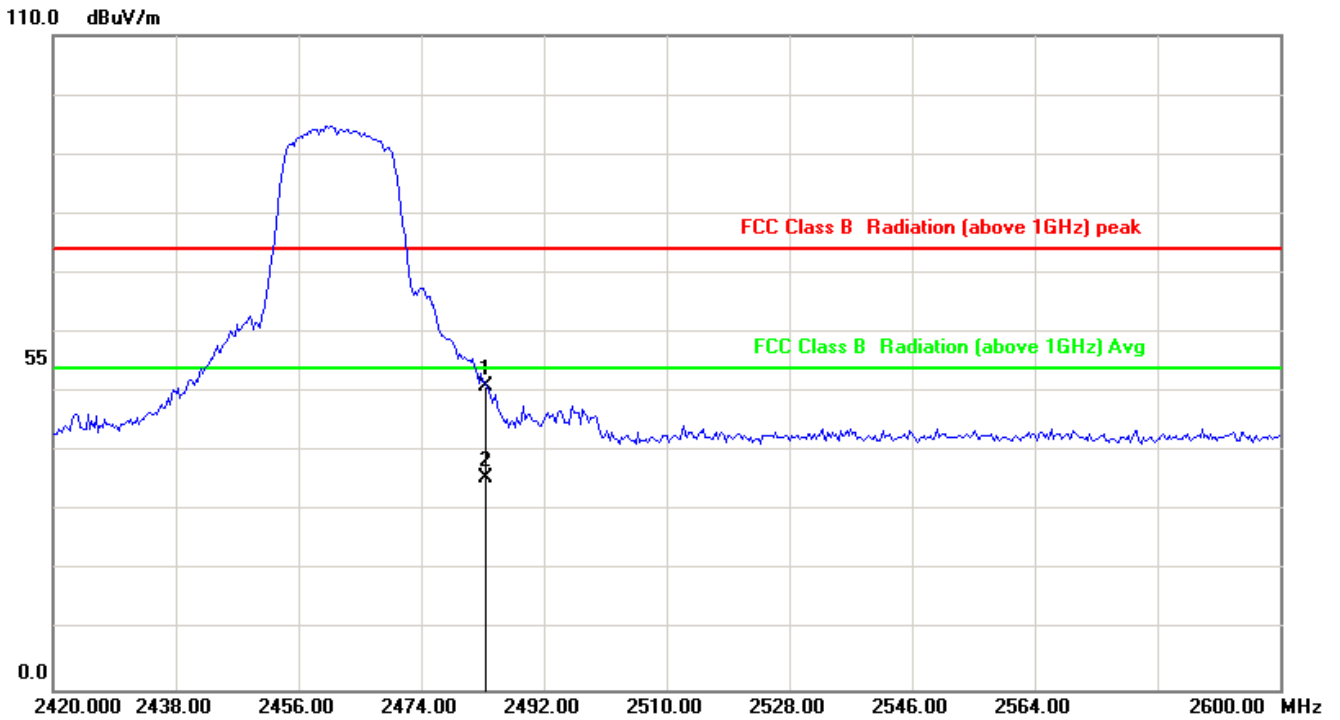


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	47.62	50.97	74.00	-23.03	peak
2	2483.500	3.35	32.17	35.52	54.00	-18.48	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

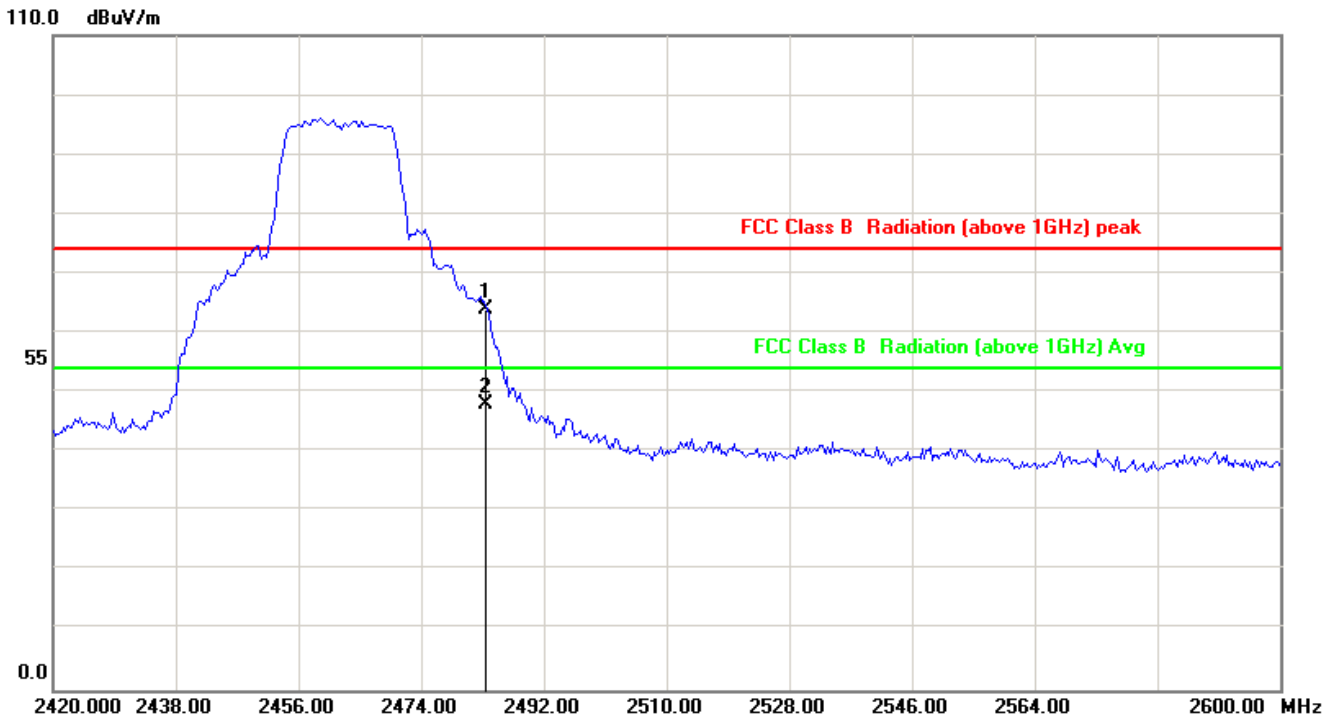


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	60.68	64.03	74.00	-9.97	peak
2	2483.500	3.35	44.67	48.02	54.00	-5.98	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

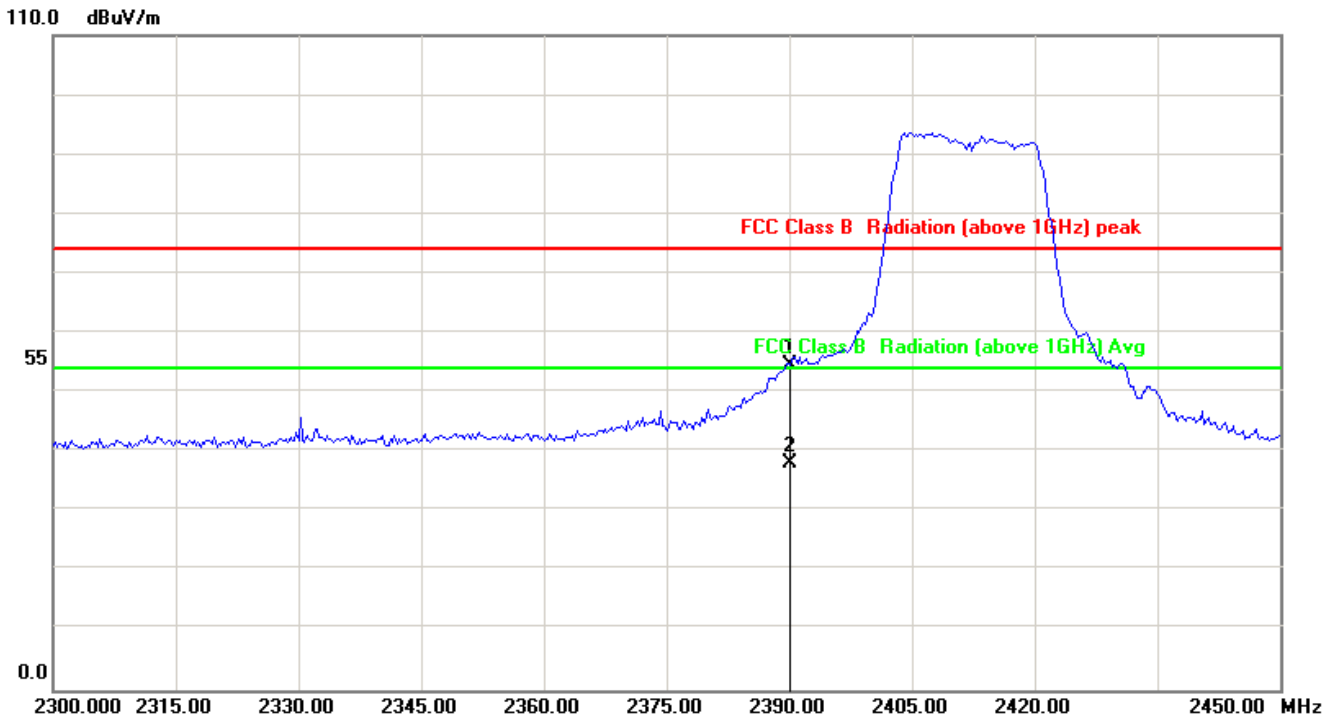


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	51.55	54.50	74.00	-19.50	peak
2	2390.000	2.95	35.12	38.07	54.00	-15.93	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

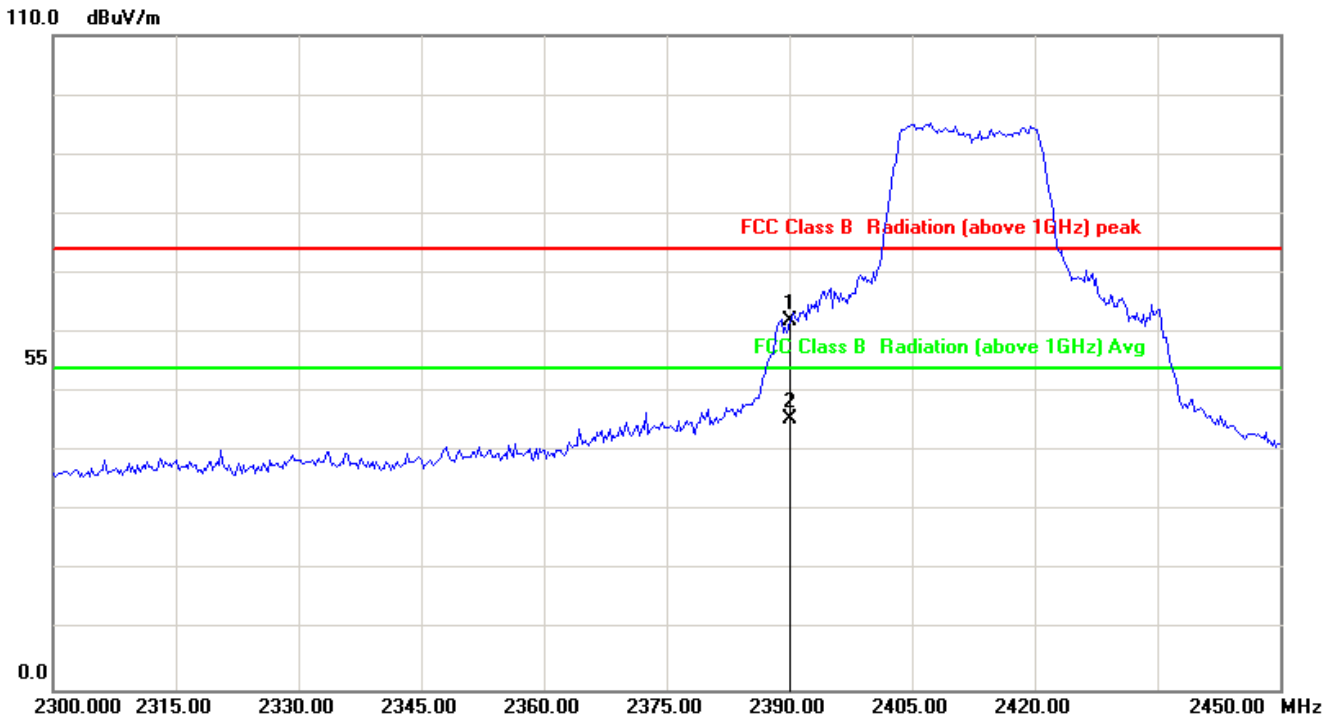


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	58.98	61.93	74.00	-12.07	peak
2	2390.000	2.95	42.48	45.43	54.00	-8.57	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

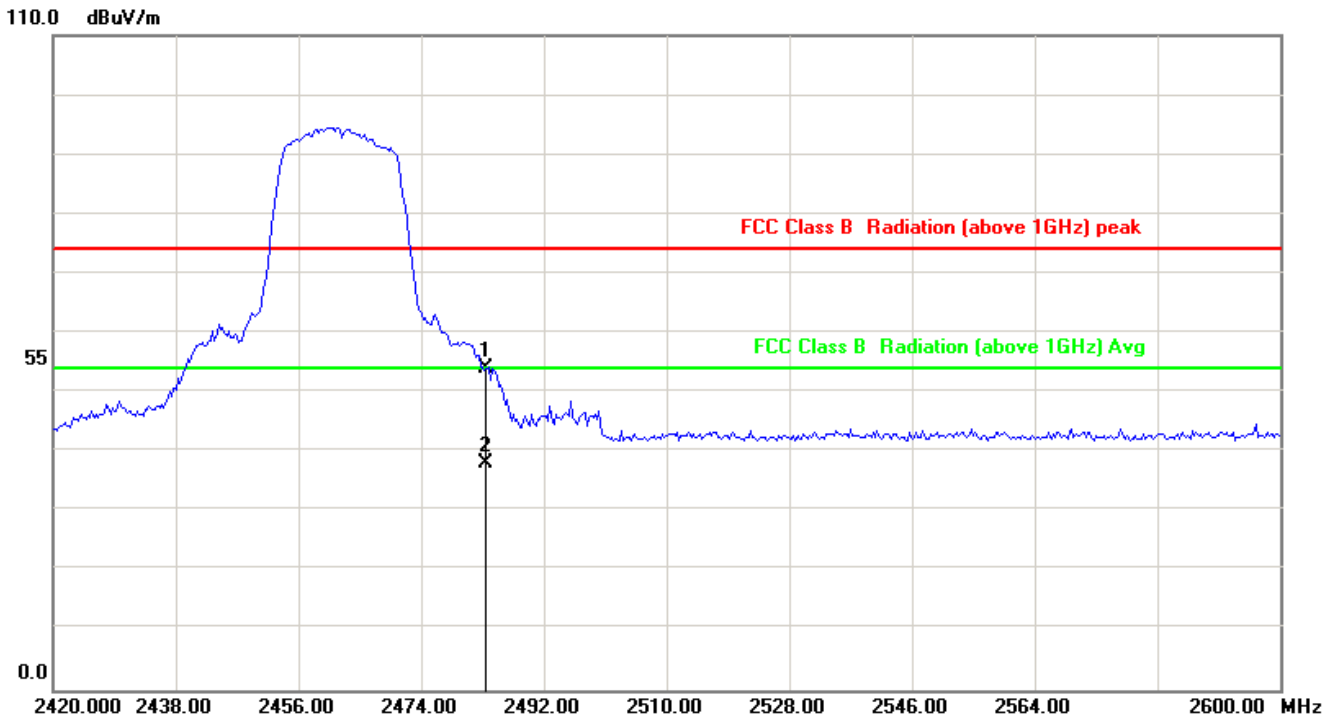


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	50.69	54.04	74.00	-19.96	peak
2	2483.500	3.35	34.75	38.10	54.00	-15.90	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20, CH11	Temperature	: 24 °C
Test Date	: Sept. 15, 2018	Humidity	: 61 %

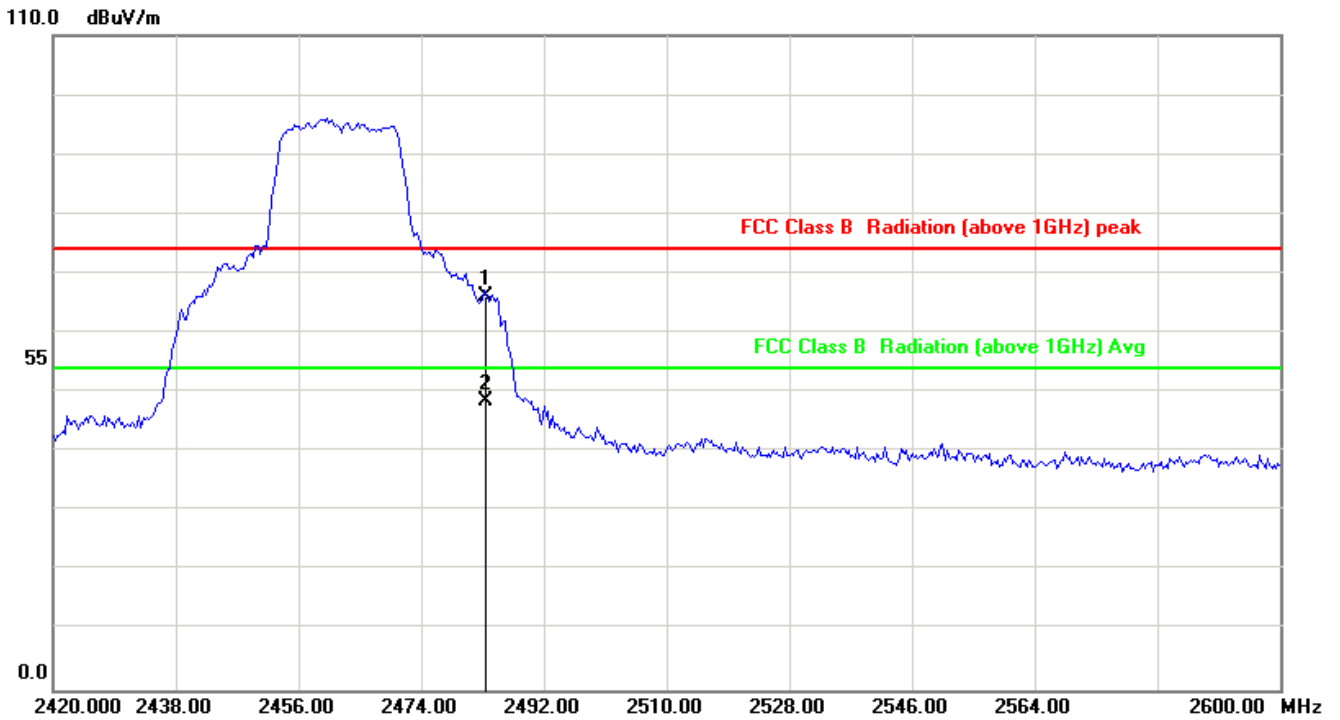

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	62.88	66.23	74.00	-7.77	peak
2	2483.500	3.35	45.12	48.47	54.00	-5.53	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

Below 30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

KDB 558074 D01v03r02 - Section 11.2 & Section 11.3


1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

7.3 Test Setup Layout





7.4 Test Result and Data

Test Date: Sept. 15, 2018

Temperature: 24°C

Atmospheric pressure: 1014 hPa



Humidity: 47%

Modulation Standard	Frequency (MHz)	Test Result
802.11b	2412	Pass
	2437	Pass
	2462	Pass
802.11g	2412	Pass
	2437	Pass
	2462	Pass
802.11n HT20	2412	Pass
	2437	Pass
	2462	Pass



Note: Test plots refer to the following pages.





Modulation Type: 802.11b
CH01

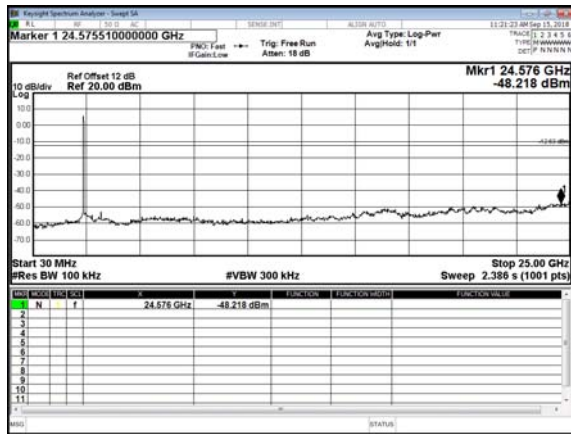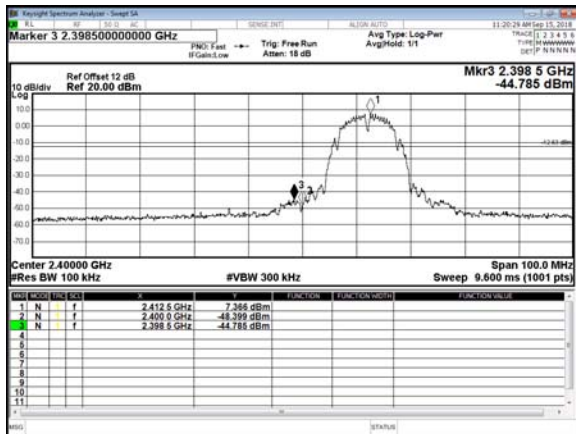

CH06

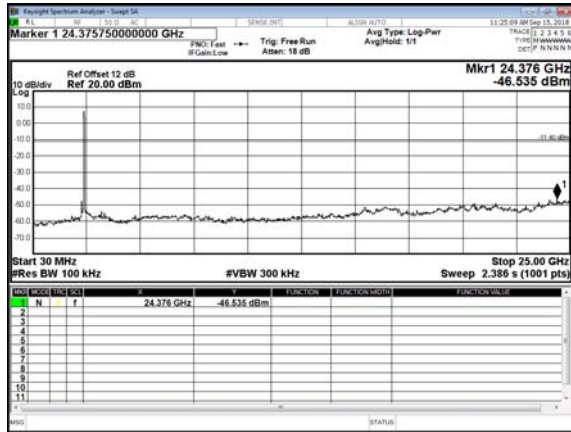
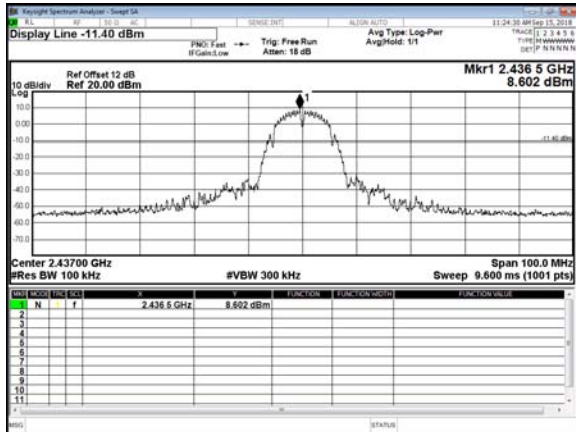


CH11

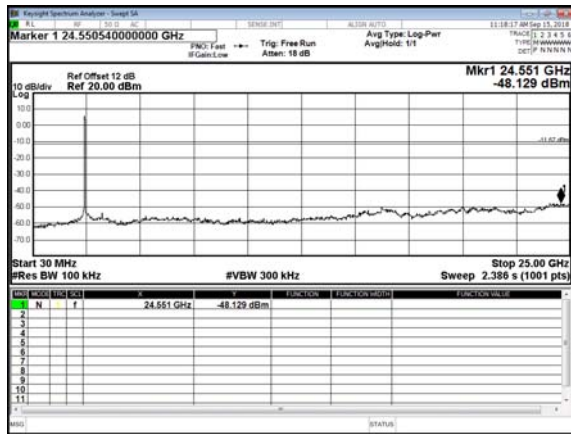
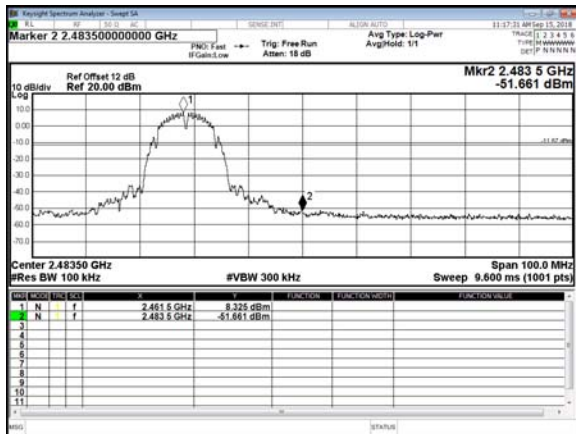






Modulation Type: 802.11g
CH01

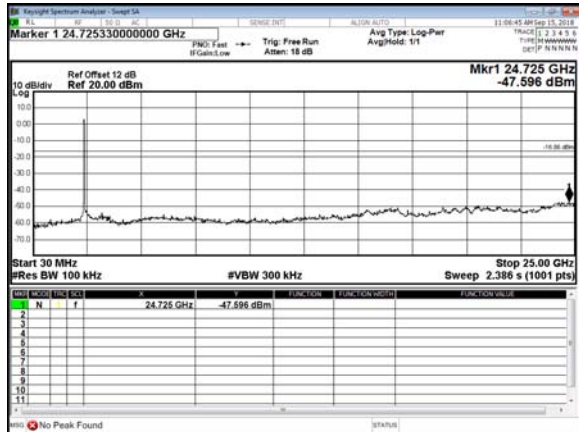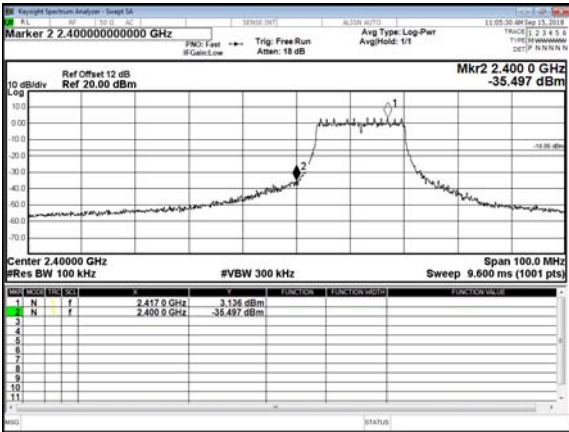

CH06

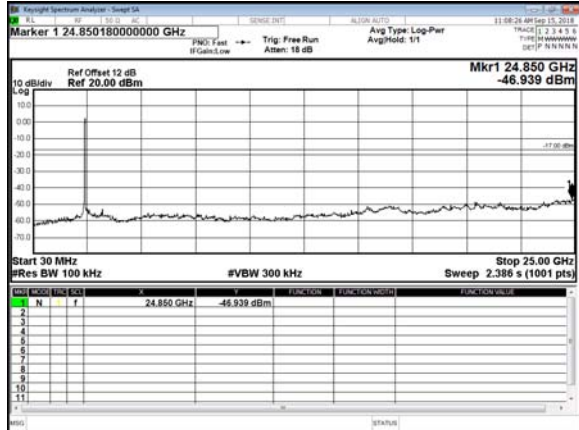
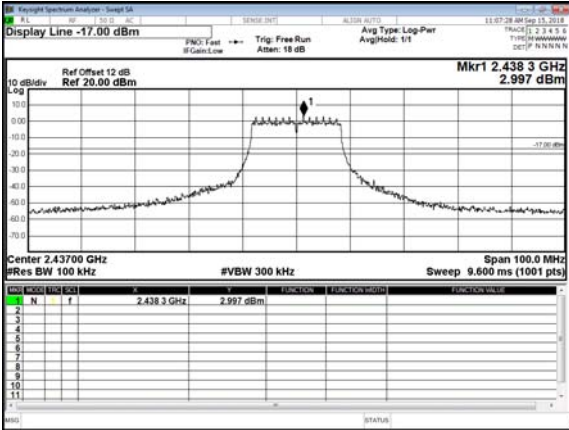


CH11

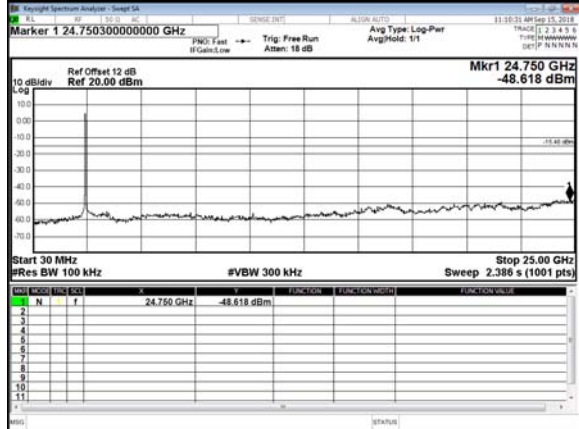
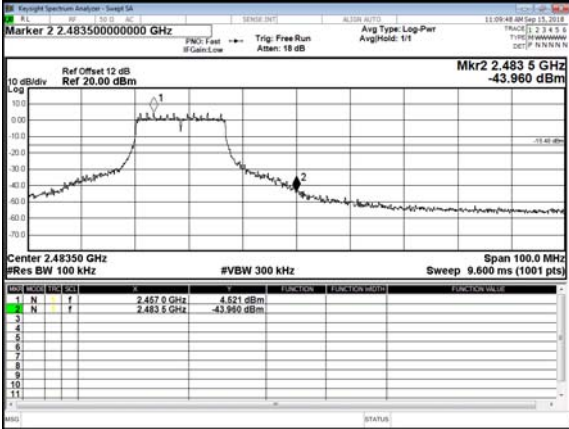






Modulation Type: 802.11n HT20
CH01

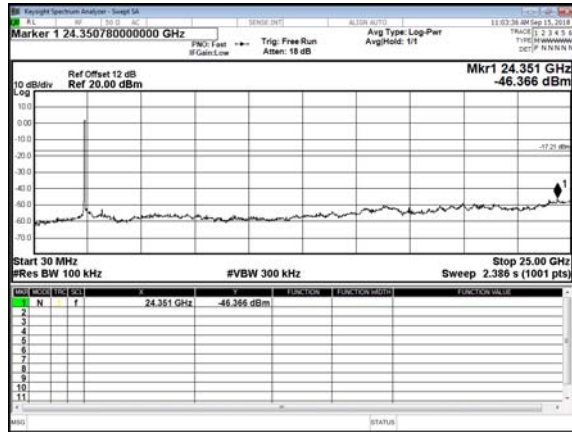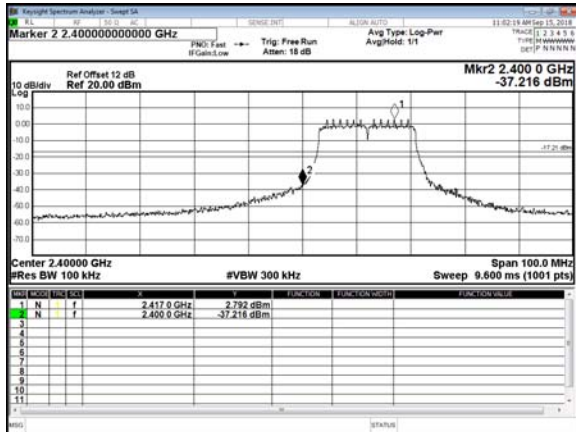

CH06

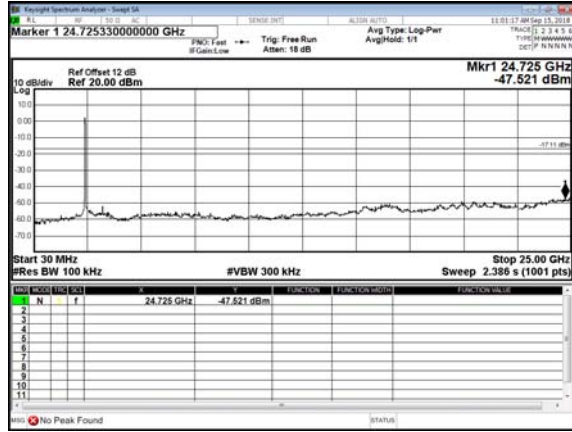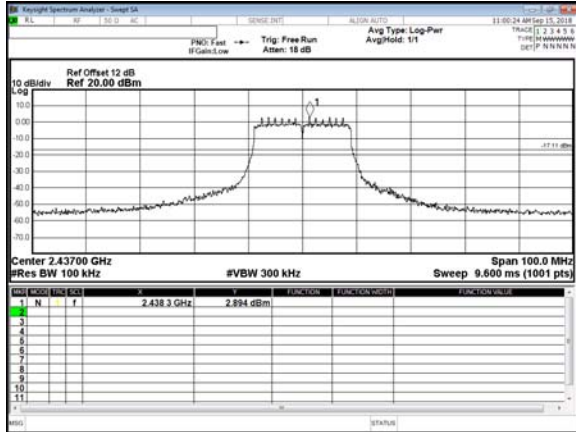

CH11

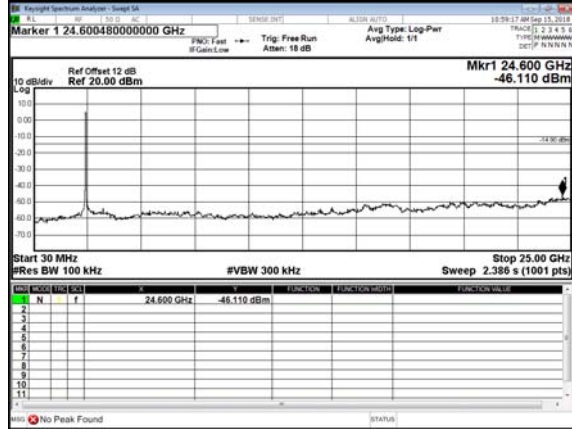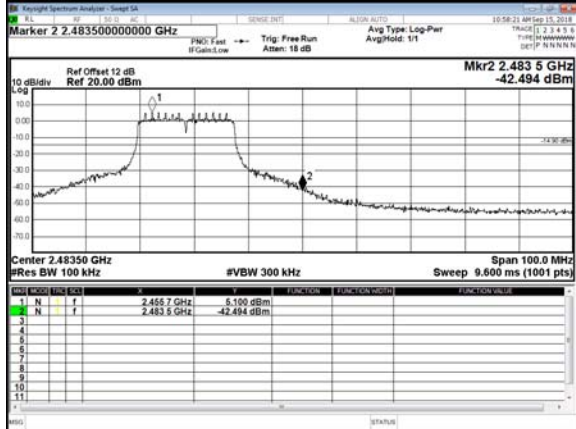



8. 6dB Bandwidth Measurement Data

8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. Set spectrum analyzer X dB to 6 dB.
- d. Set spectrum analyzer peak detector with maximum hold.

8.3 Test Setup Layout



8.4 Test Result and Data

Test Date: Sept. 15, 2018

Temperature: 24°C


Atmospheric pressure: 1016 hPa

Humidity: 46%


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11b	01	2412	8.15
	06	2437	8.13
	11	2462	8.15
IEEE 802.11g	01	2412	16.39
	06	2437	16.39
	11	2462	16.39
IEEE 802.11n HT20	01	2412	17.08
	06	2437	17.31
	11	2462	17.52




Modulation Type: 802.11b
CH01

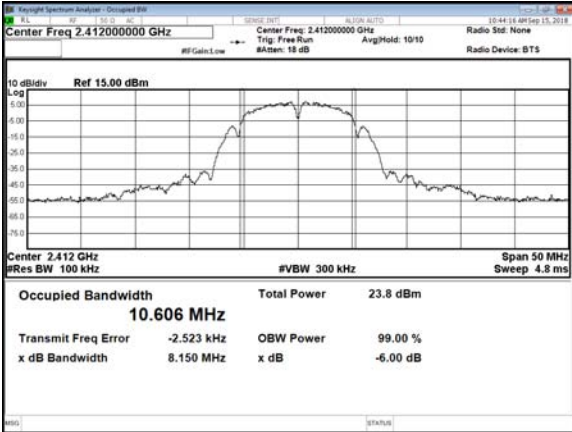


CH06

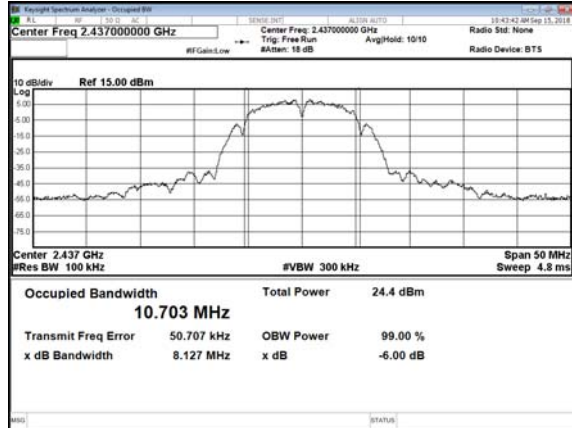


CH11

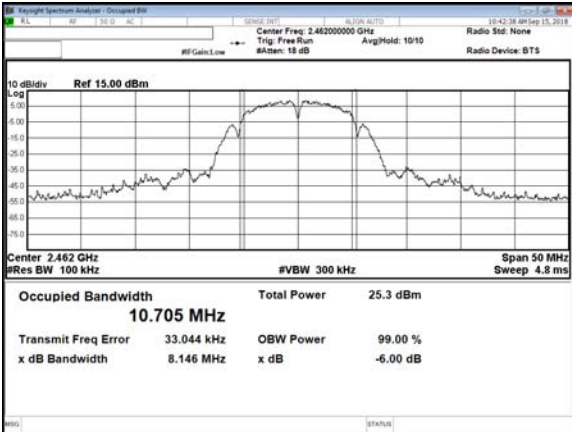


Modulation Type: 802.11g
CH01

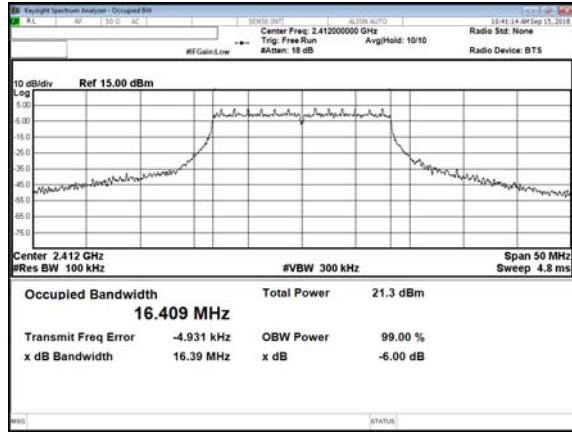

CH06

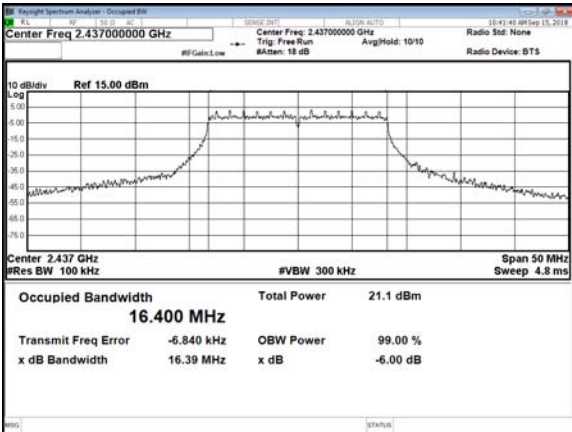


CH11

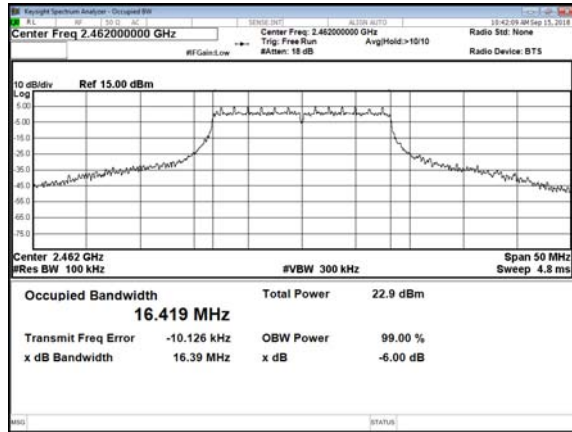





Modulation Type: 802.11n HT20
CH01

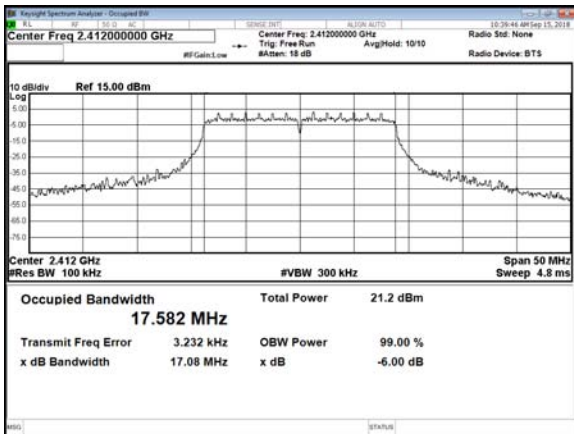

CH06

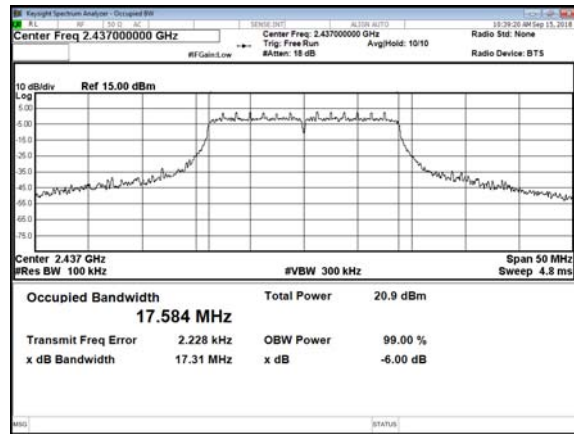

CH11

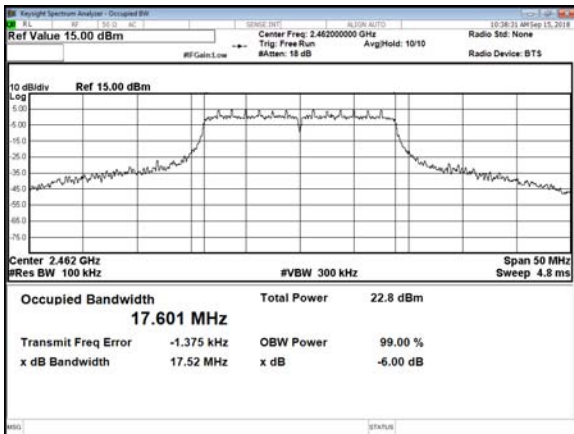



9. Maximum Peak Output Power

9.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

9.2 Test Procedures

Test procedure refers to KDB558074 D01v03r05, section 9.1.2 PKPM1 Peak power meter method.

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout

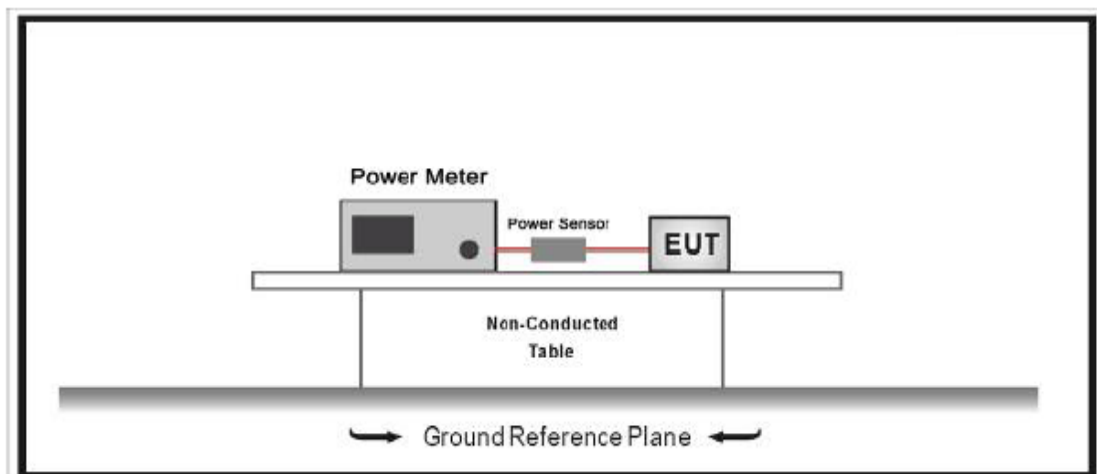



9.4 Test Result and Data

Test Date: Sept. 15, 2018

Temperature: 24°C

Atmospheric pressure: 1016 hPa

Humidity: 46%

Modulation Type	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
IEEE 802.11b	01	2412	19.46	88.308
	06	2437	20.26	106.170
	11	2462	20.70	117.490
IEEE 802.11g	01	2412	23.50	223.872
	06	2437	23.15	206.538
	11	2462	24.73	297.167
IEEE 802.11n HT20	01	2412	23.27	212.324
	06	2437	22.95	197.242
	11	2462	24.62	289.734



10. Power Spectral Density

10.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

10.2 Test Procedures

Test procedure refers to section 10.3 Method AVGPSD-1.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

10.3 Test Setup Layout





10.4 Test Result and Data

Test Date: Sept. 15, 2018

Temperature: 24°C


Atmospheric pressure: 1014 hPa

Humidity: 47%


Modulation Type	Frequency (MHz)	Power Spectral Density (dBm)
IEEE 802.11b	2412	-7.563
	2437	-7.461
	2462	-6.071
IEEE 802.11g	2412	-11.701
	2437	-11.942
	2462	-9.909
IEEE 802.11n HT20	2412	-12.559
	2437	-12.773
	2462	-10.951




Modulation Type: 802.11b
CH01

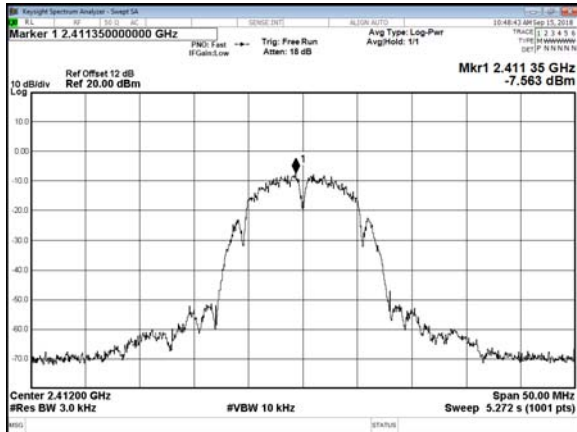


CH06

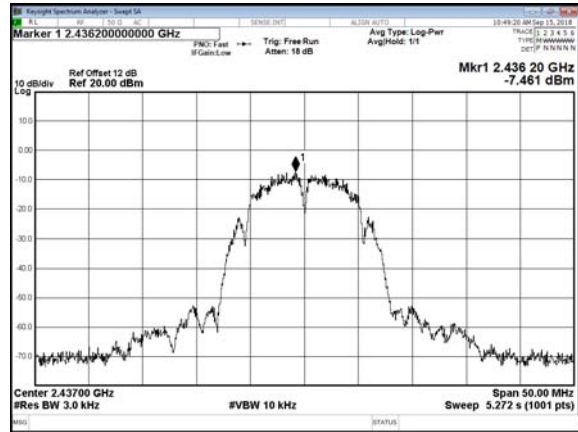


CH11

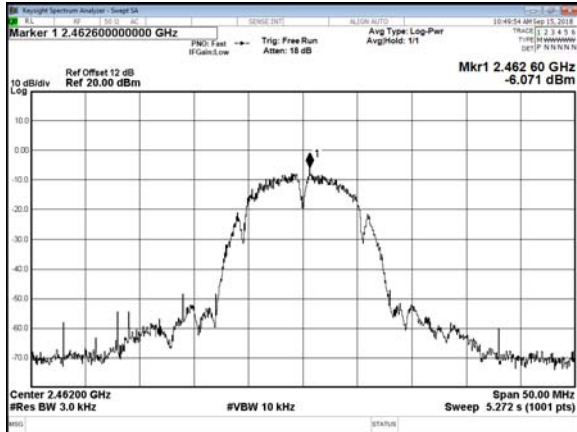


Modulation Type: 802.11g
CH01

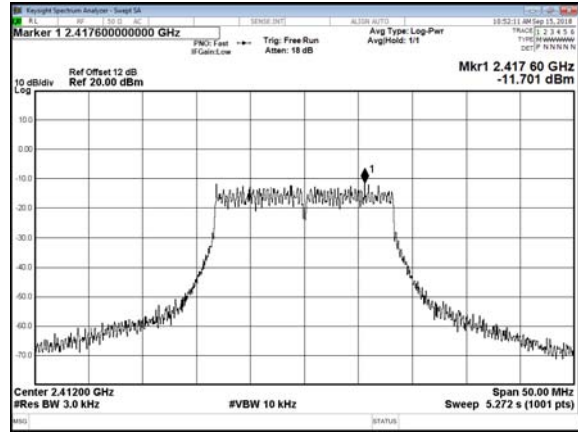

CH06

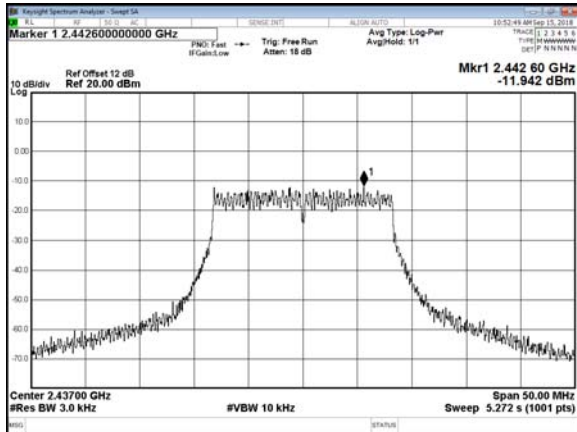


CH11

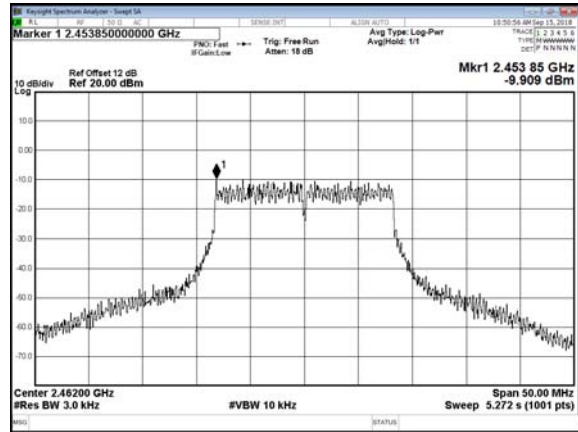




Modulation Type: 802.11n HT20
CH01

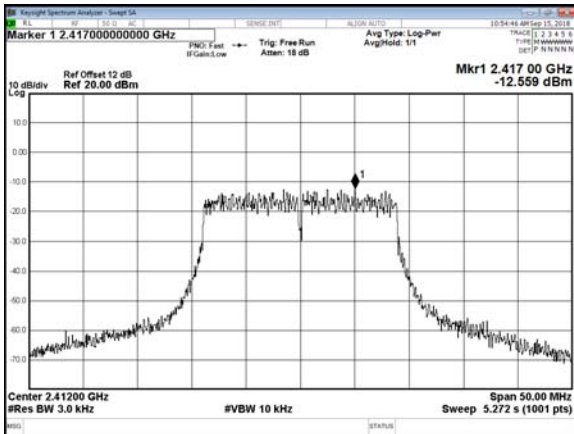

CH06

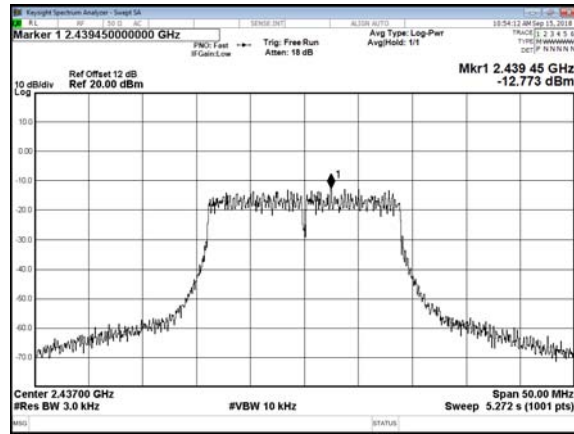

CH11

