

Date : 2017-10-06 No. : HM170882			Page 1 of 22			
Applicant:		logy (Hong Kong) Limited oment Center, Hong Kong Sci	ence Park, Shatin			
Manufacturer:		Electric Appliances Co., Ltd rial Zone, Yueqing, Zhejiang,	China			
Description of Sample(s):	Product: Brand Name: Model Number: FCC ID:	Appliance Control N/A ZZH-ZW15RM ZZH-ZW15RM				
Date Sample(s) Received:	2017-08-14					
Date Tested:	2017-09-01 to 2017-09-18					
Investigation Requested:	with FCC 47CFR	lagnetic Interference measures [Codes of Federal Regulation 3 for FCC Certification.				
Conclusion(s):	The submitted product <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.					
Remark(s):			NG KONG SA			

The Hong Kong Standards and Testing Centre Limited Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

CHEUNG, Chi Kenneth

Authorized Signatory ElectroMagnetic Compatibility Department For and on behalf of The Hong Kong Standards and Testing Centre Ltd.



Date : 2017-10-06 No. : HM170882

CONTENT

Page 2 of 22

CON	12141.	
	Cover Content	Page 1 of 22 Page 2 of 22
<u>1.0</u>	<u>General Details</u>	
1.1	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 22
1.2	Description of EUT Operation	
1.3	Date of Order	Page 3 of 22
1.4	Submitted Sample	Page 3 of 22
1.5	Test Duration	Page 3 of 22
1.6	Country of Origin	Page 3 of 22
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 4 of 22
2.2	Test Standards and Results Summary	Page 4 of 22
<u>3.0</u>	Test Results	
3.1	Emission	Page 5-16 of 22
	Appendix A	
	List of Measurement Equipment	Page 17 of 22
	Appendix B	
	Photographs	Page 18-22 of 22

The Hong Kong Standards and Testing Centre Limited



Date : 2017-10-06

No. : HM170882

Page 3 of 22

1.0 General Details

1.1 Equipment Under Test [EUT] Description of Sample(s)

Product:	Appliance Control
Manufacturer:	Wenzhou MTLC Electric Appliances Co., Ltd
	Tiancheng Industrial Zone, Yueqing, Zhejiang, China
Brand Name:	N/A
Model Number:	ZZH-ZW15RM
Rating:	120Va.c

1.2 Description of EUT Operation

The Equipment Under Test (EUT) is an Appliance Control of Wenzhou MTLC Electric Appliances Co., Ltd, it consists of one 900MHz transmitter that is able to transmit RF signal in 908.4MHz while the EUT has been triggered, after that the EUT will transmit RF signal once in every hour.

1.3 Date of Order

2017-08-14

1.4 Submitted Sample(s):

2 Sample(s)

1.5 Test Duration

2017-09-01 to 2017-09-18

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06

No. : HM170882

Page 4 of 22

<u>2.0</u> Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 Regulations and ANSI C63.10:2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

		EMISSION ults Summary			
Test Condition	Test Requirement	Test Method	Class /	Test I	Result
			Severity	Pass	Fail
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.231	ANSI C63.10:2013	N/A	\boxtimes	
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	\boxtimes	
AC power-line conducted emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	\boxtimes	

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06

No. : HM170882

Page 5 of 22

- 3.0 Test Results
- 3.1 Emission

3.1.1 Field Strength of Fundamental & Harmonics Emissions

Test Requirement:	FCC 47CFR 15.231, (a) (1) FCC 47CFR 15.231, (a) (3)
Test Method:	ANSI C63.10:2013
Test Date:	2017-09-01
Mode of Operation:	Tx Test Mode (operating continuously for Radiated emission test) ON/OFF remote control / ON/OFF manual control (15.231, (a) (1) Energy usage measurement mode (15.231, (a) (3) Tx mode with Lamp load

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

Remark: 3 orthogonal axis apply to hand-held device only. Tx Test Mode is the worst case for radiated emission, since the EUT has been set to transmit RF signal continuously, and the peak level of the RF carrier output and modulation is no difference in listed modes.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC Designation Number <u>HK0001</u>.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 6 of 22


: HM170882 **Spectrum Analyzer Setting:**

Date : 2017-10-06

No.

9KHz – 30MHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	10kHz 30kHz Auto Fully capture the emissions being measured Max. hold
30MHz – 1GHz (QP)	RBW: VBW: Sweep: Span: Trace:	120kHz 120kHz Auto Fully capture the emissions being measured Max. hold
Above 1GHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	3MHz 3MHz Auto Fully capture the emissions being measured Max. hold

Test Setup:

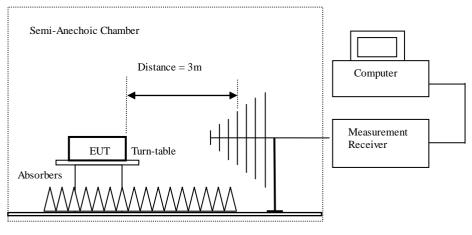

Ground Plane

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

The Hong Kong Standards and Testing Centre Limited Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Date : 2017-10-06 No. : HM170882 Page 7 of 22

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.231]:

Fundamental frequency [MHz]	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to $3,750^{-1}$	125 to 375 ¹
174-260	3,750	375
260-470	$3,750$ to $12,500^{-1}$	375 to 1250 ¹
Above 470	12,500	1250

¹Linear interpolations

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Result of Tx Test Mode: Pass

Date : 2017-10-06

No. : HM170882

	Field Str	ength of Fund	lamental and	Harmonics E	missions				
Peak Value									
Frequency	Measured	Correction	n Field Field		Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	$dB\mu V/m$	dBµV/m	dBµV/m	$\mu V/m$	$\mu V/m$				
908.4	55.3	24.3	79.6	9,549.9	125,000	Vertical			
1816.8	12.3	24.6	36.9	70.0	12,500	Vertical			
* 2752.2	10.1	29.3	39.4	93.3	5,000	Vertical			
* 3633.6					5,000	Vertical			
* 4542.0	1				5,000	Vertical			
* 5450.4	1		5,000	Vertical					
6358.8	E	5,000	Vertical						
* 7267.2]	20 dB below	the FCC Lim	its	5,000	Vertical			
* 8175.6]				5,000	Vertical			
* 9084.0]			5,000	Vertical				

Field Strength of Fundamental and Harmonics Emissions									
Average Value (Calculated by duty cycle factor)									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	$dB\mu V/m$	dBµV/m	dBµV/m	$\mu V/m$	$\mu V/m$				
908.4	N/A	N/A	68.4	2,630.3	12,500	Vertical			
1816.8	N/A	N/A	25.7	19.3	1,250	Vertical			
* 2752.2	N/A	N/A	23.2	14.5	500	Vertical			
* 3633.6					500	Vertical			
* 4542.0					500	Vertical			
* 5450.4					500	Vertical			
6358.8	E	missions detec	500	Vertical					
* 7267.2]	20 dB below	the FCC Lin	iits	500	Vertical			
* 8175.6]				500	Vertical			
* 9084.0				500	Vertical				

Note: Field Strength adjusted by Duty Cycle Correction Factor Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

- *: Denotes restricted band of operation.
 - Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty	:	9kHz to 30MHz	3.7dB
		30MHz to 18GHz	5.0dB

Pulse Averaging Measurement

The Hong Kong Standards and Testing Centre Limited



Date : 2017-10-06 No. : HM170882

Pulse Train ΔMkr1 7.800 ms -0.04 dB Ref 0.00 dBm 10 dB/div -10.0 -20.0 1Δ2 -30.0 0 RIGLVI -40.0 -50.0 -60.1 -70.0 -80.1 -90.1 Center 908.000000 MHz Res BW 3.0 MHz Span 0 Hz Sweep 100.0 ms (1001 pts) VBW 3.0 MHz ∆Mkr1 -4.200 ms 0.00 dB 10 dB/div Log — Ref 0.00 dBm -10. -20.0 ∮∆2 -30.0 40.0 -50.0 -60.0 -70.0 -80.0 -90.0

3.54 pulse within 100ms Duty cycle of TX = ((7.8 x3) + 4.2)/100 = 0.276Duty cycle correction factor = 20 log (0.276) = -11.2dB

VBW 3.0 MHz

Center 908.000000 MHz

Res BW 3.0 MHz

The Hong Kong Standards and Testing Centre Limited

Span 0 Hz

Sweep 100.0 ms (1001 pts)

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Page 9 of 22



Date : 2017-10-06 No. : HM170882 Page 10 of 22

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency	20dB Bandwidth	Limit
[MHz]	[kHz]	[kHz]
908.4	96.7	0.5% *908.4 MHz = 4542.0

Tx mode

		1	l Emission	amenta	nda	n of Fu	idth	IB Bandwi	20d			
									Bm	ef -10.00 d	3/div R	
												og :0.0 -
						h a						0.0
					L).0
						ľ						
				Land _			\checkmark).0
			hA.	$-\nabla$			-	$\Lambda \Lambda'$				0.0
A.			V W					$\mu \sim$	$\Delta \Delta$	~ ^ .~		.0
Www. April Why	M WWW								V Y	MM VY	$M \sim A$.0
												00
Span 1 Mi						-40 (7					ter 908.4 I	
veep 12.4 m	Swee			30 kHz	311	#VE				HZ	5 BW 10 k	les
		Зm	-23.3 dE	er	'ow	Total P	٦		dth	Bandwid	ccupied	0
								kHz	88.669	:		
)%	99.00	er	' 0%	OBW P	C	48 kHz	-22.6	eq Error	ansmit F	Tr
		dB	-20.00			k dB	,	71 kHz	96.	vidth	dB Bandv	x
				er	, 0%					-		

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.





Date : 2017-10-06 No. : HM170882

Page 11 of 22

Transmitter deactivation Measurement:

Devices operated under the 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

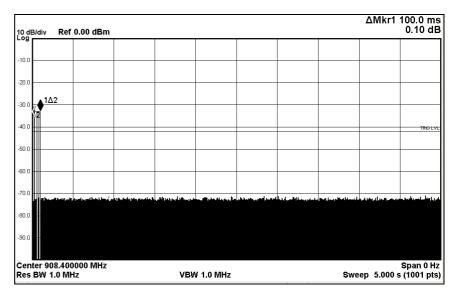

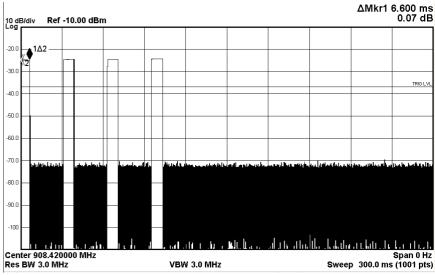

Transmission will cease within 5s

The Hong Kong Standards and Testing Centre Limited





Date : 2017-10-06 No. : HM170882

Page 12 of 22

Transmitter deactivation Measurement:

Devices operated under the 15.231(a)(3), periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

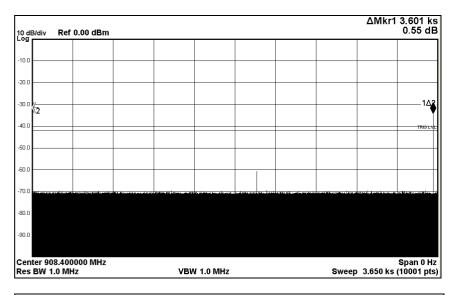

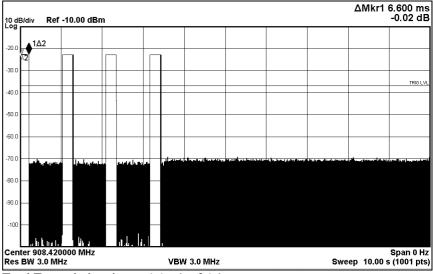

Total Transmission time = $6.6 \times 4 = 26.4 \text{ms}$ Total transmit time < 2×10^{-1} hour observed period

The Hong Kong Standards and Testing Centre Limited



Date : 2017-10-06 No. : HM170882 Page 13 of 22

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode with Lamp load, (9kHz - 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

Result of Tx mode with Lamp load, (30MHz – IGHz): PASS								
Field Strength of Fundamental and Harmonics Emissions								
	Quasi-Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV/m	dBµV/m	dBµV/m	$\mu V/m$	$\mu V/m$			
88.5	15.8	7.7	23.5	15.0	100	Vertical		
124.3	22.6	7.1	29.7	30.5	150	Horizontal		
179.0	19.7	10.4	30.1	32.0	150	Horizontal		
183.6	18.8	10.1	28.9	27.9	200	Vertical		
340.3	1.2	18.6	19.8	9.8	200	Horizontal		
423.5	1.9	21.1	23.0	14.1	200	Horizontal		

Result of Tx mode with Lamp load, (30MHz – 1GHz): PASS

Result of Tx mode with Lamp load, (1GHz – 18GHz): PASS Emissions detected are more than 20 dB below the FCC Limits

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06 No. : HM170882

Page 14 of 22


3.1.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.10:2013
Test Date:	2017-09-18

Mode of Operation: Tx mode with Lamp load

Test Method:

The test was performed in accordance with ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

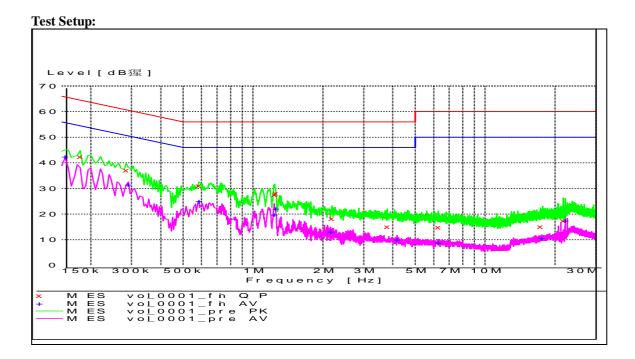

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06 No. : HM170882

Page 15 of 22


Limit for Conducted Emissions (FCC 47CFR 15.207):

Frequency Range [MHz]	Quasi-Peak Limits [dBuV]	Average [dBuV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Tx mode with Lamp load – Live and Neutral: PASS

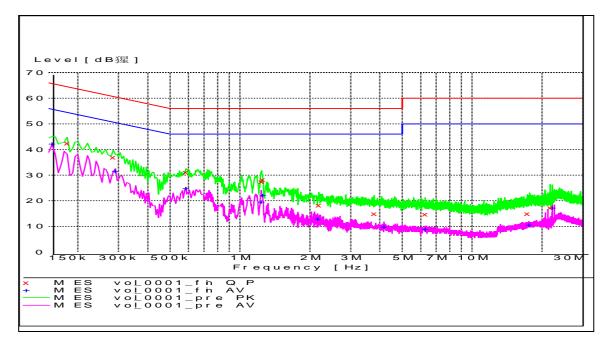

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06 No. : HM170882 Page 16 of 22

MEASUREMENT RESULT: "vol_0001_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	42.40	9.9	65	22.0	L1	GND
0.285000	37.10	9.9	61	23.5	N	GND
0.585000	31.10	9.9	56	24.9	L1	GND
1.240000	27.50	9.9	56	28.5	N	GND
1.250000	28.10	9.9	56	27.9	N	GND
2.185000	18.20	10.2	56	37.8	L1	GND
3.785000	15.00	10.5	56	41.0	L1	GND
6.280000	14.80	10.6	60	45.2	N	GND
17.300000	15.00	10.7	60	45.0	N	GND
21.680000	17.30	10.8	60	42.7	N	GND

MEASUREMENT RESULT: "vol_0001_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.155000	42.30	9.9	56	13.4	L1	GND
0.290000	31.50	9.9	51	19.0	N	GND
0.585000	25.00	9.9	46	21.0	N	GND
1.235000	19.70	9.9	46	26.3	N	GND
1.250000	22.20	9.9	46	23.8	N	GND
2.160000	13.00	10.1	46	33.0	L1	GND
4.175000	9.90	10.5	46	36.1	N	GND
6.290000	8.80	10.6	50	41.2	L1	GND
17.590000	10.70	10.7	50	39.3	L1	GND
22.155000	17.30	10.8	50	32.7	L1	GND

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2017-10-06 No. : HM170882

Appendix A

LIST OF MEASUREMENT EQUIPMENT

Radiated Emission EQP NO. DESCRIPTION MANUFACTURER MODEL NO. SERIAL NO. DUE CAL EM215 MULTIDEVICE CONTROLLER EMCO 2090 00024676 N/A EM216 MINI MAST SYSTEM EMCO 2075 00026842 N/A ELECTRIC POWERED EM217 00029144 EMCO 2088 N/A TURNTABLE EM218 ANECHOIC CHAMBER ETS-LINDGREN FACT-3 2018/04/24 EM355 **BICONILOG ANTENNA** ETS-LINDGREN 3143B 00094856 2018/03/03 EM229 EMI TEST RECEIVER ESIB40 100248 2018/06/01 R&S DOUBLE-RIDGED WAVEGUIDE EM299 ETS-LINDGREN 3115 00114120 2018/04/27 HORN ANTENNA EM302 PRECISION SEIBERSDORF POD 16 161806/L 2018/05/11 OMNIDIRECTIONAL DIPOLE LABORATORIES (1 - 6 GHZ)PRECISION SEIBERSDORF 6181908/L EM303 POD 618 2018/05/11 OMNIDIRECTIONAL DIPOLE LABORATORIES (6 - 18GHZ)

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	DUE CAL
EM232	LISN	SCHAFFNER	NNB41	04/100082	2018/03/03
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	2018/06/01
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2018/01/11
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2022/02/03

Remarks:

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Page 17 of 22



Date : 2017-10-06 No. : HM170882 Page 18 of 22

Appendix B

Photographs of EUT

Front View of the product



Inner Circuit Top View



Inner Circuit Bottom View








Date : 2017-10-06 No. : HM170882 Page 19 of 22

Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz to 30MHz)

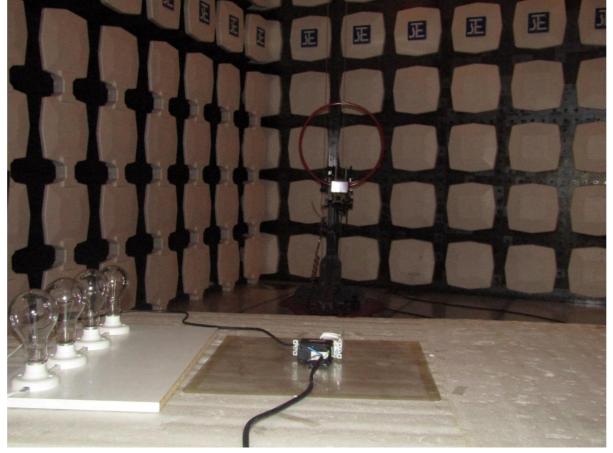



Date : 2017-10-06 No. : HM170882 Page 20 of 22

Measurement of Radiated Emission Test Set Up (30MHz to 1000MHz)






Date : 2017-10-06 No. : HM170882 Page 21 of 22

Photographs of EUT

Measurement of Radiated Emission Test Set Up (Above 1000MHz)

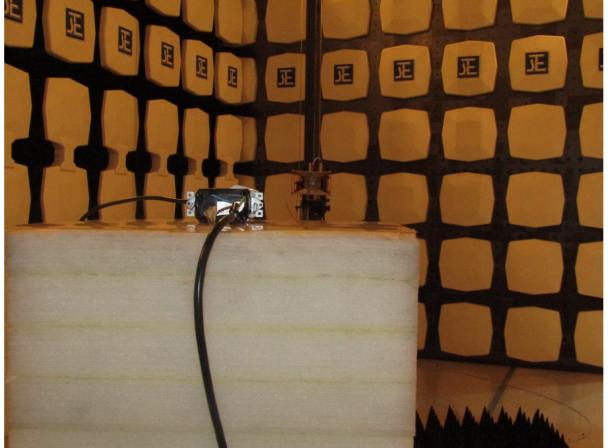



Date : 2017-10-06 No. : HM170882

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Limited Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Measurement of Conducted Emission Test Set Up

Page 22 of 22

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at www.stc-group.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.