

FCC PART 15.249  
EMI MEASUREMENT AND TEST REPORT  
For

WENZHOU MTLC ELECTRIC APPLIANCES CO., LTD.  
Tiancheng Industrial Zone, Yueqing, Zhejiang 325608, China

**FCC ID: ZZH-ZW2P**

September 13, 2011

This Report Concerns: Original Report	Equipment Type: Wireless Switch
Test Engineer:	Eric Li <i>Eric Li</i>
Report No.:	SHBST2011083107Y-1ER-3
Receive EUT Date/Test Date:	September 7, 2011/ September 8-12, 2011
Reviewed By:	Christina <i>Christina Dong</i>
Prepared By:	 <b>Shenzhen BST Technology Co.,Ltd.</b> 3F, Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District, Shenzhen, Guangdong, China Tel: 0755-26747751 ~ 3 Fax: 0755-26747751 ~ 3 ext.826

**Note:** The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>3</b>
	1.1. Report information .....	3
	1.2. Measurement Uncertainty .....	3
<b>2.</b>	<b>PRODUCT DESCRIPTION .....</b>	<b>4</b>
	2.1. EUT Description .....	4
	2.2. Block Diagram of EUT Configuration.....	4
	2.3. Support Equipment List .....	4
	2.4. Test Conditions .....	4
<b>3.</b>	<b>FCC ID LABEL.....</b>	<b>5</b>
<b>4.</b>	<b>TEST RESULTS SUMMARY .....</b>	<b>6</b>
	Modifications .....	6
<b>5.</b>	<b>TEST EQUIPMENT USED .....</b>	<b>7</b>
<b>6.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>8</b>
	6.1. STANDARD APPLICABLE.....	8
	6.2. ANTENNA CONNECTED CONSTRUCTION .....	8
	6.3. Result .....	8
<b>7.</b>	<b>CONDUCTED POWER LINE TEST .....</b>	<b>9</b>
	7.1. Test Equipment .....	9
	7.2. Test Procedure .....	9
	7.3. Test Setup.....	9
	7.4. Conducted Power line Emission Limits.....	9
	7.5. Conducted Power Line Test Result.....	10
<b>8.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>12</b>
	8.1. Test Equipment .....	12
	8.2. Test Procedure .....	12
	8.3. Radiated Test Setup .....	12
	8.4. Radiated Emission Limit.....	13
	8.5. Radiated Emission Test Result .....	14
<b>9.</b>	<b>BAND EDGE .....</b>	<b>17</b>
	9.1. Test Equipment .....	17
	9.2. Test Procedure .....	17
	9.3. Band Edge FCC 15.249(d) Limit.....	17
	9.4. Band Edge Test Result.....	17

## **1. GENERAL INFORMATION**

### **1.1. Report information**

1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.

1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of

SinTek Laboratory Co.,Ltd.

(FCC Registered Test Site Number: 963441) on

No.7, Xinshidai Industrial, Guantian Village, Shiyan Town, Baoan District, Shenzhen, Guangdong 518108, China

The Test Site is constructed and calibrated to meet the FCC requirements.

### **1.2. Measurement Uncertainty**

Available upon request.

## 2. PRODUCT DESCRIPTION

### 2.1. EUT Description

Description : Wireless Switch

Applicant : WENZHOU MTLC ELECTRIC APPLIANCES CO., LTD.  
Tiancheng Industrial Zone, Yueqing, Zhejiang 325608, China

Model Number : ZW2P, ZWN-RS3AA, ZWN-NS3AAA, ZWN-RS1,  
ZWN-RS2, ZWN-RS3, ZWNP-R, ZW15S, ZW15R,  
MWS-RSC

Trade Name : MTLC

Frequency : 908.42MHz

Number of Channels : 1

Power Supply : AC 120V/60Hz

### 2.2. Block Diagram of EUT Configuration




Figure 1 EUT Setup

### 2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used “ ”
--				

### 2.4. Test Conditions

Temperature: 20~25  
Relative Humidity: 50~63 %


### 3. FCC ID LABEL

**FCC ID: ZZH-ZW2P**

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference, and 2. This device must accept any interference received, including interference that may cause undesired operation.**

#### Label Location on EUT

#### EUT View/ FCC ID Label Location

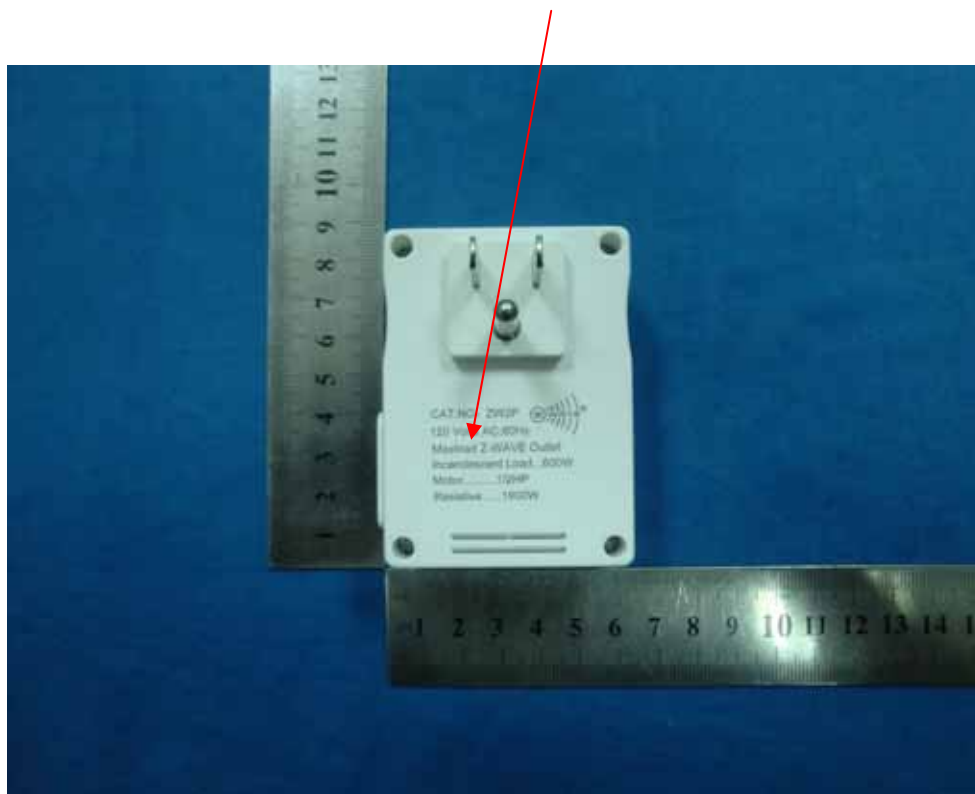

#### 4. TEST RESULTS SUMMARY

##### FCC 15 Subpart C, Paragraph 15.249

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	Compliant
Section 15.249(a)	The fundamental field strength and the harmonics	Compliant
Section 15.209 Section 15.249(d)	Radiated Emission	Compliant
Section 15.249(d)	Band Edge	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: "N/A" means "Not applicable".

Statement: All testing was performed using the test procedures found in ANSI C63.4 20003.

##### Modifications

No modification was made.

## 5. TEST EQUIPMENT USED

Equipment/Facilities	Manufacturer	Model #	Serial no.	Date of Cal.	Cal. Interval
Cable	Resenberger	N/A	NO.1	Mar 10 , 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10 , 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10 , 2011	1 Year
LISN	Rohde & Schwarz	ESH3-Z5	100305	Mar 10 , 2011	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10 , 2011	1 Year
EMI Test Receiver	Rohde & Schwarz	ESP13	100180	Oct.11,2010	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Sep.10,2011	1 Year
3m Semi-Anechoic Chamber	Albatross Projects	9m×6m×6m	N/A	Feb.20,2011	1 Year
Signal Generator	FLUKE	PM5418 + Y/C	LO747012	Feb.20,2011	1 Year
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.20,2011	1 Year
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan.30,2011	1 Year
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.22,2010	1 Year
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-564	Sep.22,2010	1 Year
Ultra Broadband Antenna	Rohde & Schwarz	HL-562	100110	June.15,2011	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct.11,2010	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct.11,2010	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.20,2011	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb.20,2011	1 Year
Coaxial Cable with N-connectors	SCHWARZBECK	AK9515H	95549	Sep.22,2010	1 Year
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.20,2011	1 Year
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.20,2011	1 Year
Absorbing clamp	Rohde & Schwarz	MDS-21	N/A	Oct.11,2010	1 Year

## **6. ANTENNA REQUIREMENT**

### **6.1. STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2. ANTENNA CONNECTED CONSTRUCTION**

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The antenna used in this product is PCB antenna. The antenna is permanently attached. Refer to the product photo.

### **6.3. Result**

Compliance



## 7. CONDUCTED POWER LINE TEST

### 7.1. Test Equipment


Please refer to section 5 this report.

### 7.2. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uh coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uh coupling impedance with 50ohm termination.

Both sides of A.C. Line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ASIN C63.4:2003 on conducted measurement. Conducted emissions were measured over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9KHz.

### 7.3. Test Setup

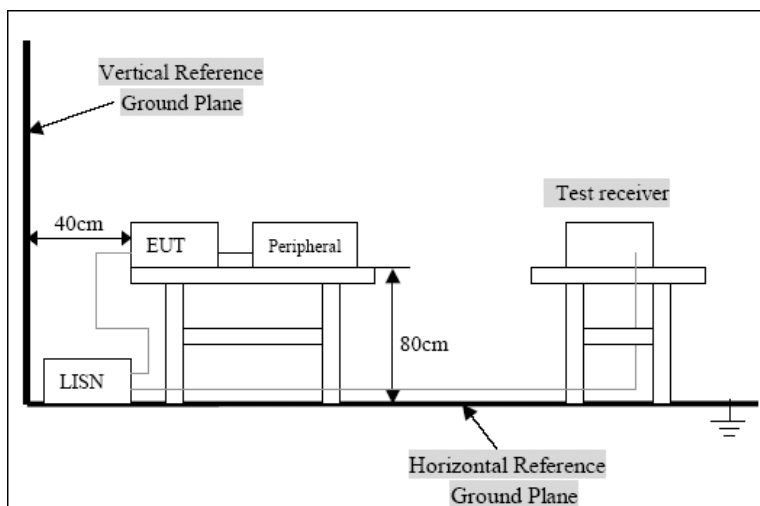

For the actual test configuration, please refer to the related items-Photos of testing


### 7.4. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHZ)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-3.0	73/60	60-50

**Note:** In the above table, the tighter limit applies at the band edges.

### 7.5. Conducted Power Line Test Result

Pass

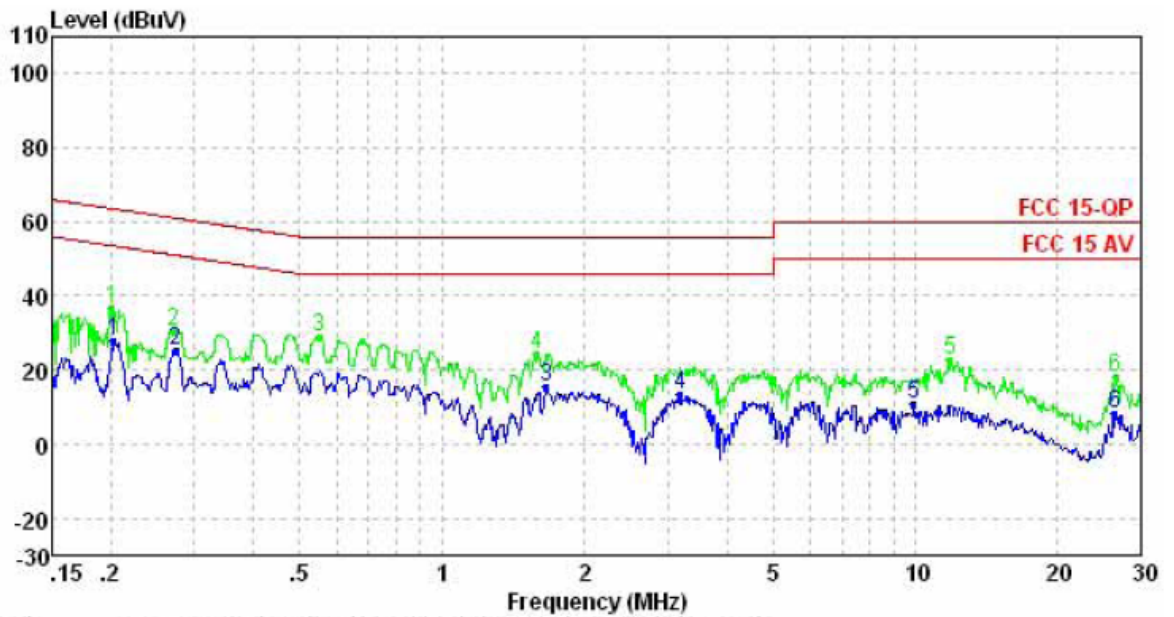

Condition:


: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.20	27.87	53.49	-25.62	Average	LINE
2	0.27	25.51	50.98	-25.47	Average	LINE
3	1.66	15.24	46.00	-30.76	Average	LINE
4	3.19	13.21	46.00	-32.79	Average	LINE
5	9.91	10.55	50.00	-39.45	Average	LINE
6	26.42	8.46	50.00	-41.54	Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.20	36.68	63.58	-26.90	Peak	LINE
2	0.27	30.59	61.07	-30.48	Peak	LINE
3	0.55	28.84	56.00	-27.16	Peak	LINE
4	1.59	24.35	56.00	-31.65	Peak	LINE
5	11.87	22.48	60.00	-37.52	Peak	LINE
6	26.56	18.19	60.00	-41.81	Peak	LINE

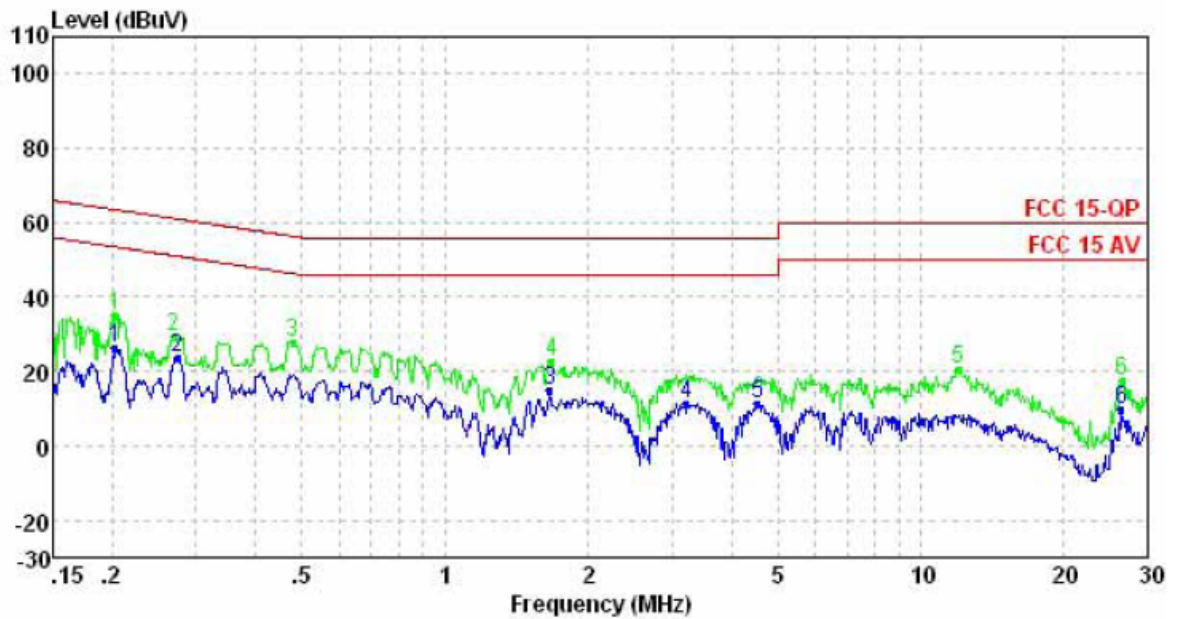

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.20	26.55	53.49	-26.94	Average	NEUTRAL
2	0.27	23.96	50.98	-27.02	Average	NEUTRAL
3	1.66	14.89	46.00	-31.11	Average	NEUTRAL
4	3.22	11.57	46.00	-34.43	Average	NEUTRAL
5	4.55	11.29	46.00	-34.71	Average	NEUTRAL
6	26.42	9.92	50.00	-40.08	Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.20	35.33	63.49	-28.16	Peak	NEUTRAL
2	0.27	29.41	61.16	-31.75	Peak	NEUTRAL
3	0.48	27.88	56.36	-28.48	Peak	NEUTRAL
4	1.68	22.72	56.00	-33.28	Peak	NEUTRAL
5	12.00	20.40	60.00	-39.60	Peak	NEUTRAL
6	26.56	17.57	60.00	-42.43	Peak	NEUTRAL

## 8. RADIATED EMISSION TEST


### 8.1. Test Equipment

Please refer to section 5 this report.

### 8.2. Test Procedure

1. The EUT was tested according C63.4-2003.The radiated test was performed at FCC Registration laboratory .
2. The EUT,peripherals were put on the turntable which table size od 1m×1.5m,table high 0.8m.All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 30MHZ to 1 GHZ was investigated.All readings from 30MHZ to 1 GHZ are quasi-peak values with a resolution bandwidth of 120 KHZ. All readings are above 1GHZ ,prak values with a resolution bandwidth of 1 MHZ.Measurements were made at 3 merers.
4. The antenna high is varied from 1m to 4m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the six(6)highest emissions to ensure EUT compliance is with all installation combinations.All data was recorded in the peak detection mode.Quasi-peak readings was performed only when an emission was found to be marginal (within -4 Db of specification limit),and are distinguished with a “QP”in the data table.
6. The antenna polarization:Vertical polarization and Horizontal polarization.
7. Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit.

### 8.3. Radiated Test Setup

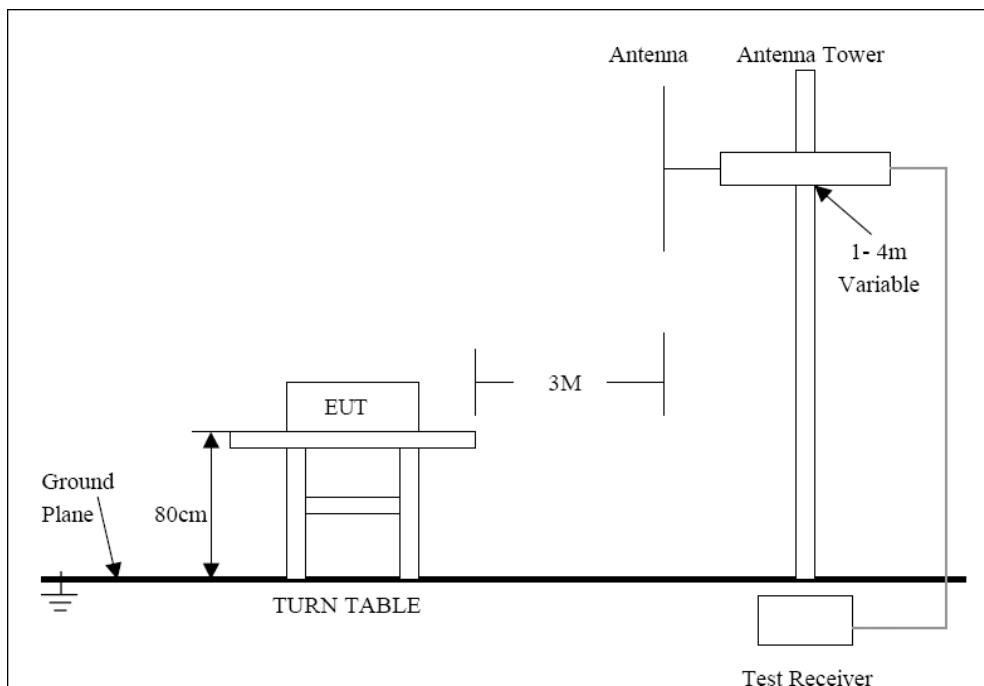

For the accrual test configuration, please refer to the related items-photos of Testing.

**8.4. Radiated Emission Limit**

All emission from a digital device,including any network of conductors and apparatus connected thereto,shall not exceed the level of field strength specified below :

**A . FCC Part 15 Subpart C Paragraph 15.249(a) Limit**

Frequency (MHZ)	Distance (m)	Field Strength (dBuV/m)
30-88	3	40.0
88-*216	3	43.5
216-960	3	46.0
ABOVE 960	3	54.0

- Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)  
 (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.  
 (3) The emission limit in this paragraph os based on measurement instrumentation employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.

**B.Frequencies in restricted band are complied to limit on Paragraph 15.209.**

Fundamental Frequency (MHZ)	Field as trength of Fundamental(3m)			Field as trength of Harmonics(3m)		
	mV/m	dBuV/m		uV/m	dBuV/m	
902~928	50	94(AV)	114(Peak )	500	54(AV)	74(Peak)
2400~2483.5	50	94(AV)	114(Peak )	500	54(AV)	74(Peak)

- Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)  
 (2) In the Above Table,the tighter limit applies at the band edges.  
 (3) Distaqnce refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

**8.5. Radiated Emission Test Result****Pass****A. Fundamental Radiated Emissions Data**

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
908.420	6.054	82.230	88.284	-25.716	114.000
Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Vertical</b>					
<b>Peak Detector:</b>					
908.420	0.507	90.640	91.147	-22.853	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

## B.Harmonics Radiated Emissions Data

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
1816.840	-4.025	49.860	45.835	-28.165	74.000
2725.260	0.525	43.380	43.905	-30.095	74.000
3633.680	0.488	44.450	44.938	-29.062	74.000
4542.100	3.020	43.490	46.509	-27.491	74.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
1816.840	-3.025	50.530	47.505	-26.495	74.000
2725.260	-0.018	44.960	44.942	-29.058	74.000
3633.680	0.617	44.160	44.777	-29.223	74.000
4542.100	3.765	43.200	46.965	-27.035	74.000

## Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. Emissions attenuated more than 20 dB below the permissible value are not reported.

## C. General Radiated Emissions Data

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
41.640	-6.267	34.255	27.988	-12.012	40.000
107.600	-7.700	30.996	23.296	-20.204	43.500
319.060	-4.653	29.005	24.352	-21.648	46.000
352.040	-1.342	28.358	27.016	-18.984	46.000
472.320	2.790	28.070	30.860	-15.140	46.000
511.120	2.961	27.674	30.635	-15.365	46.000
<b>Vertical</b>					
49.400	-12.362	41.587	29.225	-10.775	40.000
88.200	-3.976	32.038	28.062	-15.438	43.500
179.380	-1.048	23.717	22.669	-20.831	43.500
383.080	-0.100	25.526	25.426	-20.574	46.000
511.120	0.571	28.734	29.305	-16.695	46.000
544.100	1.281	26.323	27.604	-18.396	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Emissions attenuated more than 20 dB below the permissible value are not reported.



## **9. BAND EDGE**

### **9.1. Test Equipment**

Please refer to Section 5 this report.

### **9.2. Test Procedure**

1. The EUT was tested according C63.4-2003.The radiated test was performed at FCC Registration laboratory .
2. The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.
- 3.As the radiation test ,set the Lowest and Highest Transmitting Channel,observed the outside band of 2400MHz to 2438.5MHz,than mark the higher-level emission for comparing with the FCC rules.

### **9.3. Band Edge FCC 15.249(d) Limit**

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating,the radio frequency power that is produced by the intentional radiator shall be at least 50dB

below that in the 100kHz bandwidth within the band that contains the desired power,based on either an RF conducted or a radited measurement,Attenuation below the general limits specified in Section 15.209(a) is not required. In addition,radiated emissions which fall in the restricted bands as defined in Section 15.205(a),must also comply with the radiated emission limits specitfied in Section 15.209(a) (see Section 15.205(c)).


### **9.4. Band Edge Test Result**

**Pass**

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	5.169	23.797	28.966	46.000	Pass
01(Quasi-Peak)	928.000	6.365	23.177	29.542	46.000	Pass

**Figure Channel 01: Horizontal (Quasi-Peak)**

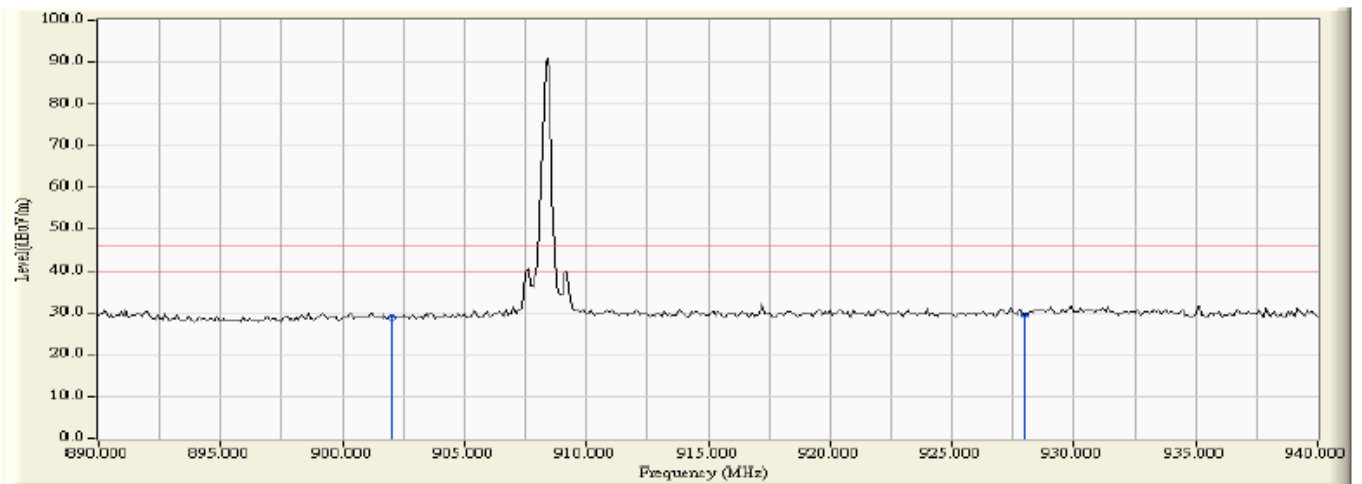


**Note:**

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. Measurement Level = Reading Level + Correct Factor.

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	2.696	23.763	26.459	46.000	Pass
01(Quasi-Peak)	928.000	5.677	23.267	28.944	46.000	Pass

**Figure Channel 01: Vertical (Quasi-Peak)**

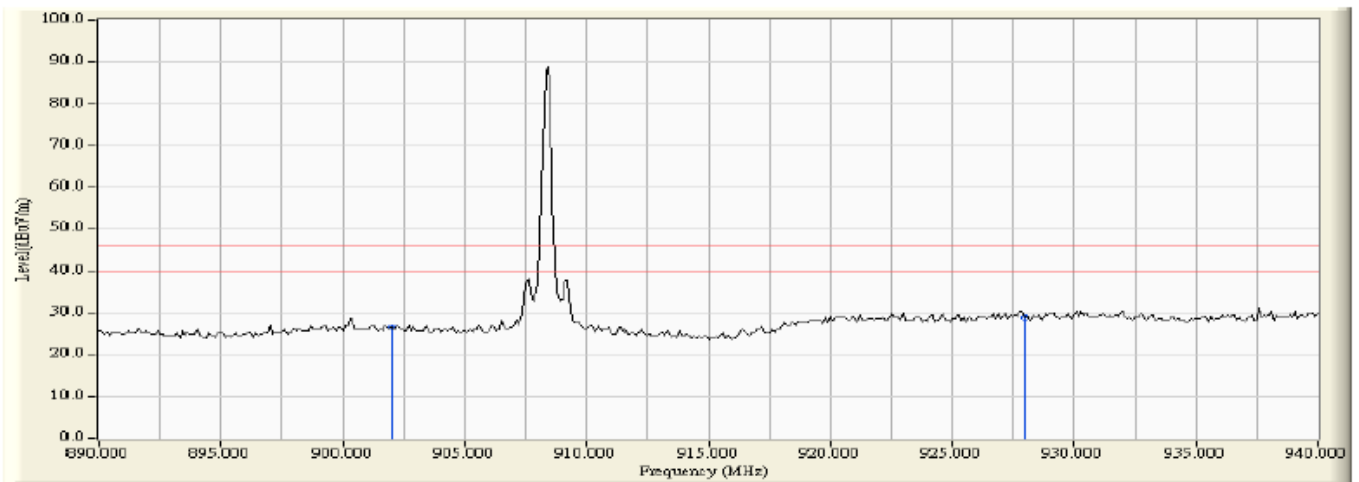

**Note:**

1. Quasi-Peak measurements: RBW=100kHz, VBW=1MHz, Sweep: Auto.
2. Measurement Level = Reading Level + Correct Factor.