

EMI TEST REPORT

Test report No.: EMC- FCC- 0296

Type of equipment: DLP TV

Model Name: AT67L6

FCC ID.: A3LAT67L6D

Applicant: SAMSUNG ELECTRONICS CO., LTD.

Test standards: FCC part 15 subpart B, Class B

Test Procedure and Items :

AC Power Line Conducted Emissions Measurement: ANSI C63.4-2001
Radiated Emissions Measurement : ANSI C63.4-2001

Test result : Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of test: 2005. 06. 16

Date of Issue: 2005. 06. 17

Tested by: 

SEO, JUNG-HUN

Reviewed by: 

CHUNG, MIN-SEOK

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, 449-825 KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

[Contents]

1. Client information	3
2. Laboratory information.....	4
3. Test system configuration.....	5
3.1 Operation Environment.....	5
3.2 Measurement Uncertainty	5
3.3 Sample calculation	6
4. Description of EUT	7
4.1 Product description	7
4.2 Peripherals	7
4.3 Used cables.....	8
4.4 E.U.T. test configuration	8
4.5 Operating conditions.....	8
5. Summary of test results	9
5.1 Modification to the E.U.T.....	9
5.2 Standards & results.....	9
6. Test results	10
6.1 Conducted emission	10
6.1.1 Measurement procedure	10
6.1.2 Used equipments.....	10
6.1.3 Measurement uncertainty.....	11
6.1.4 Test data.....	11
6.1.5 Result	11
6.2 Radiated emission	12
6.2.1 Measurement procedure	12
6.2.2 Used equipments.....	12
6.2.3 Measurement uncertainty.....	12
6.2.4 Test data.....	13
6.2.5. Result.....	13
7. Test photographs	14
8. Test Graphs.....	16

1. Client information

Applicant: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Yeongtong-Gu, Suwon City,
Gyeonggi-Do, Korea 442-742
Telephone number: + 82-31-200-5419
Facsimile number: + 82-31-200-5402
Contact Person: Chang-young, Choi

Manufacturer: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Yeongtong-gu, Suwon City,
Gyeonggi-Do, Korea 442-742

2. Laboratory information

Address

EMC compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

Telephone Number : 82 31 336 9919


Facsimile Number : 82 31 336 4767

FCC Filing No. : 793334

VCCI Registration No. : C-1713, R-1606

KOLAS NO.: 231

SITE MAP

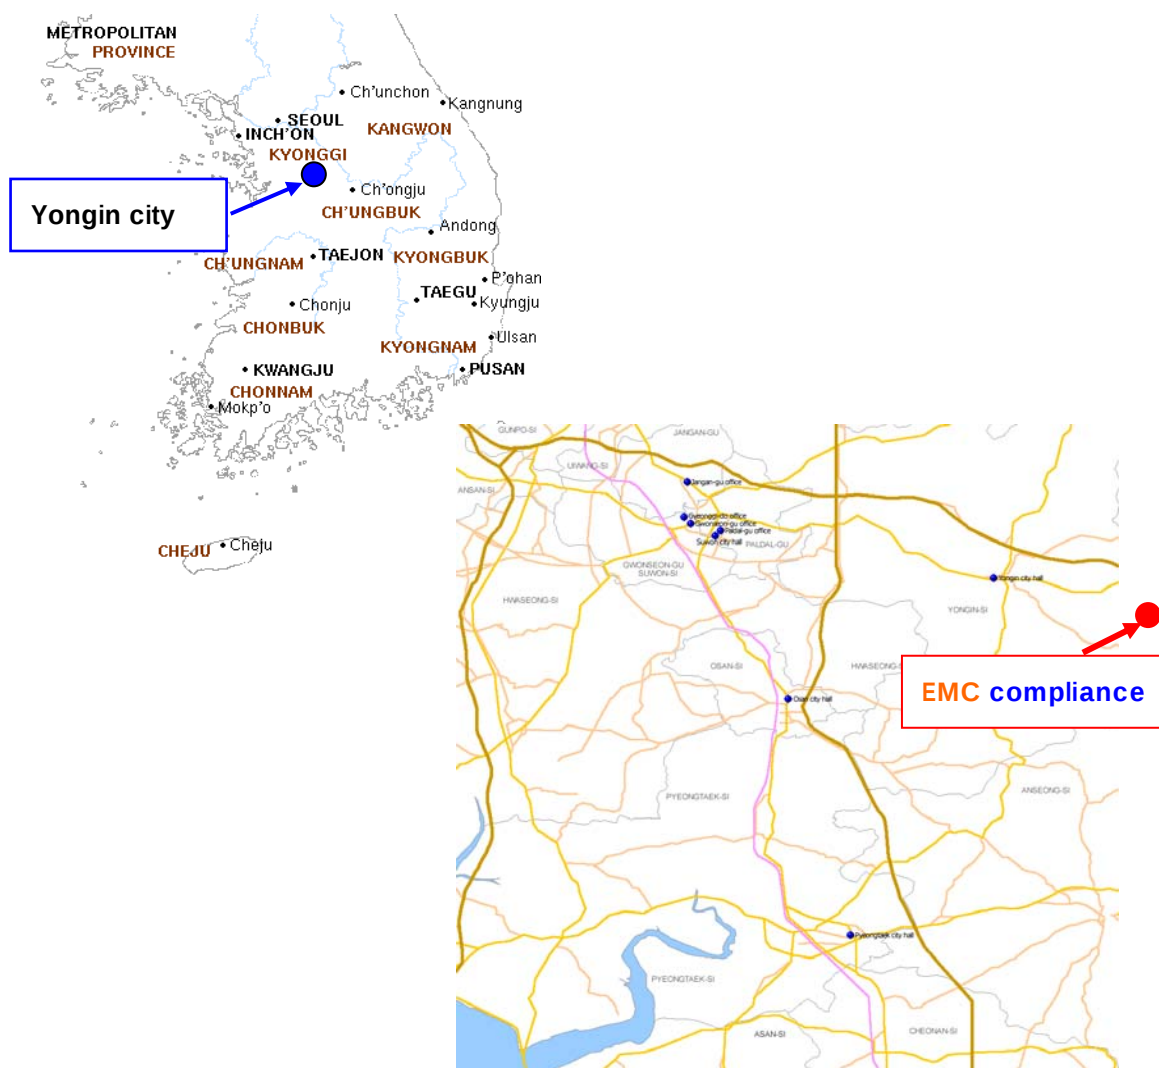

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, 449-825 KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

3. Test system configuration

3.1 Operation Environment

	Temperature	Humidity	Pressure
OATS :	25 °C	38 %	1004 hPa
Shielded room :	26 °C	40 %	1006 hPa

Test site

These testing were performed following locations;

Shielded room: Conducted emission

OATS (3m) : Radiated emission

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are test receiver, Cable Loss, antenna factor calibration, Antenna directivity, antenna factor Variation with height, antenna phase center variation, antenna Frequency interpolation, measurement distance variation, Site imperfection, mismatching, and system repeatability.

Based on NIS 80, 81, the measurement uncertainty level with a 95% confidence level was applied.

3.3 Sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows :

$$\begin{aligned} \text{FS} &= \text{MR} + \text{LF} + \text{CL} & \text{MR} &= \text{Meter Reading} \\ & & \text{LF} &= \text{LISN Factor} \\ & & \text{CL} &= \text{Cable Loss} \end{aligned}$$

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

Radiated emission

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follows :

$$\begin{aligned} \text{FS} &= \text{MR} + \text{AF} + \text{CL} + \text{AT} - \text{AG} \\ \text{MR} &= \text{Meter Reading} \\ \text{AF} &= \text{Antenna Factor} \\ \text{CL} &= \text{Cable Loss} \\ \text{AP} &= \text{Antenna Pad} \\ \text{AG} &= \text{Amplifier Gain} \end{aligned}$$

If MR is 30dB, AF 12dB, CL 5dB, AP 10dB, AG 35dB

The result (MR) is

$$30 + 12 + 5 + 10 - 35 = 22\text{dBuV/m}$$

4. Description of EUT

4.1 Product description

Applicant/ Manufacturer:	SAMSUNG ELECTRONICS CO., LTD
Address of Applicant:	416, Maetan-3Dong, Yeongtong-Gu, Suwon City, Gyeonggi-Do, Korea 442-742
Kind of product:	DLP TV MONITOR
Basic Model:	AT67L6
Rating:	AC 110-120V, 60Hz
Maximum Resolution:	1920 × 1080, 60Hz


4.2 Peripherals

Description	Model / Part #	Serial number	Manufacturer	FCC
PC	M5330	490092EN50337	SAMSUNG	DOC
PRINTER	EPSON STYLUS C60	DR5K015097	EPSON	DOC
KEYBOARD	SK-8110	MY-04N729- 71619-53E- 0680	DELL	DOC
MOUSE	0F2854	501039651	DELL	DOC

4.3 Used cables

Start		END		Cable Spec.	
Name	I / O Port	Name	I / O Port	Length	Shield
EUT	D-SUB	PC	D-SUB	2.0	Shield
	Component in	OPEN	-	3.0	Shield
	Audio in	OPEN	-	3.0	Shield
	SUB-WOOFER	OPEN	-	3.0	Shield
	Audio/PC in	OPEN	-	3.0	Shield
	Audio/DVI in	OPEN	-	3.0	Shield
	AV out	OPEN	-	3.0	Shield
	Video/Audio in	OPEN	-	3.0	Shield
	HDM 1,2	OPEN	-	3.0	Shield
	Anynet	OPEN	-	3.0	Shield
	RS232	OPEN	-	3.0	Shield
	Digital Audio out	OPEN	-	3.0	Shield
	ANT1,2	OPEN	-	3.0	Shield
	G-Link	OPEN	-	3.0	Shield

4.4 E.U.T. test configuration

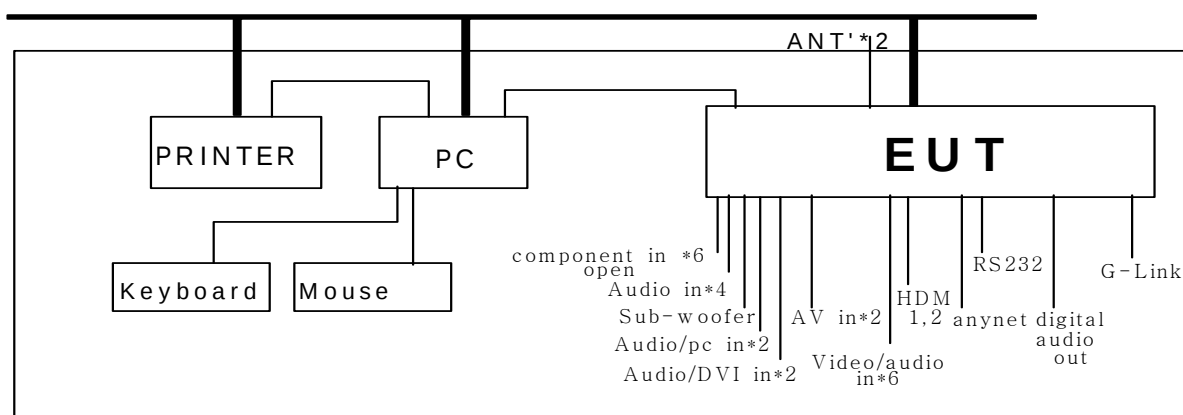

4.5 Operating conditions

Operating : "H" pattern scrolling test mode. (1920X1080, 60Hz)

5. Summary of test results

5.1 Modification to the E.U.T.

- None

5.2 Standards & results

FCC Part 15 Subpart B (Class B)

ANSI C63.4 – 2001

Test items	Test methods	Result
Conducted emission	ANSI C63.4-2001	Pass
Radiated emission	ANSI C63.4-2001	Pass

6. Test results

6.1 Conducted emission

6.1.1 Measurement procedure

Mains

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.1m above the reference ground plane.

The rear of tabletop was located 0.4m to the vertical conducted plane.

All other surfaces of tabletop were at least 0.8m away from any other grounded conducting surface.

Cables were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral were measured.

6.1.2 Used equipments

Equipment	Model	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESHS10	843276/003	R&S	06.05.13	☒
L.I.S.N.	ESH3-Z5	100267	R&S	06.06.14	☒
	L3-32A	0120J20305	PMM	06.04.03	☒
Test site	Shield room	-	-	-	☒

6.1.3 Measurement uncertainty

Conducted emission measurement : (K=2)

9kHz-150 kHz : ± 3.48

150kHz-300 MHz : ± 3.05

6.1.4 Test data

Frequency [MHz]	Correction Factor		Line	Quasi-peak			Average		
	LISN	Cable		Limit	Reading	Result	Limit	Reading	Result
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.201	0.03	0.2	N	63.57	42.29	42.52	53.57	37.99	38.22
0.270	0.03	0.2	H	61.12	38.54	38.77	51.12	33.62	33.85
0.336	0.09	0.2	N	59.30	39.28	39.57	49.30	36.68	36.97
0.339	0.08	0.2	H	59.23	38.67	38.95	49.23	35.75	36.03
0.387	0.10	0.2	N	58.13	32.07	32.37	48.13	28.28	28.58
0.405	0.08	0.2	H	57.75	32.70	32.98	47.75	31.34	31.62
0.540	0.09	0.3	H	56.00	22.56	22.95	46.00	20.76	21.15
2.853	0.14	0.4	H		21.48	22.02		19.55	20.09
6.070	0.19	0.5	H	60.00	25.65	26.34	50.00	21.13	21.82
6.610	0.21	0.5	H		24.63	25.34		20.76	21.47
6.740	0.22	0.5	N		24.89	25.61		19.78	20.50
14.250	0.60	0.5	N		22.34	23.44		8.01	9.11
19.240	0.84	0.5	N		17.88	19.22		7.11	8.45
23.400	0.99	0.7	H		33.60	35.29		24.49	26.18

- Note. QP = Quasi-Peak, AV= Average / LINE(N) : NEUTRAL, LINE(H) : HOT
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

6.1.5 Result

Complied

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, 449-825 KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.2 Radiated emission

6.2.1 Measurement procedure

A pretest was performed at 3m distance in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.1m above the reference ground plane.

Cables were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next cal. date	Used
Test receiver	ESVS10	82786/006	R&S	06.05.14	☒
TRILOG Broadband Antenna	VULB 9160	3138	SCHWARZBECK	06.04.10	☒
Antenna Mast	A109	N/A	DEAIL	-	☒
Turn Table	TS14	N/A	DEAIL	-	☒
10m OATS	-	-	EMC Compliance	-	☒

6.2.3 Measurement uncertainty

Radiated Emission measurement : (K=2)

30-300 MHz ; 3 m: ±3.56, 10 m: ±3.50

300-1000 MHz ; 3 m: ±4.47, 10 m: ±2.64

6.2.4 Test data

* 3 m OATS

* Note : Reading = Test Receiver meter,

P = Polarization → POL H = Horizontal, POL V = Vertical

* Result = Field Strength (Antenna factor + Cable factor + Reading)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	angle	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
					Antenna	Cable			
64.01	23.2	V	1.0	125	11.68	1.00	40.0	35.88	4.12
96.32	22.2	V	1.0	202	9.11	1.40	43.5	32.71	10.79
97.53	25.3	V	1.0	261	9.21	1.40	43.5	35.91	7.59
97.69	23.3	V	1.0	67	9.21	1.40	43.5	33.91	9.59
187.24	26.3	H	4.0	234	10.83	2.20	43.5	39.33	4.17
337.47	9.2	V	1.2	281	14.01	3.30	46.0	26.51	19.49
412.50	11.9	V	1.0	0	15.70	3.80	46.0	31.40	14.60
732.09	12.9	V	1.0	11	21.30	6.10	46.0	40.30	5.70
732.54	8.2	V	1.0	292	21.30	6.10	46.0	35.60	10.40
964.27	13.8	V	1.0	186	24.03	7.50	54.0	45.33	8.67

6.2.5. Result

Complied

7. Test photographs

Conducted emission



Radiated Emission



8. Test Graphs

Conducted Emission test graph


EUT: HLR6768WX/XAA
Manuf: SAMSUNG
Op Cond: HOT
Operator:
Test Spec: FCC Class B Conducted Emission
Comment:

Result File: hlr6778h.dat : SAMSUNG DLP TV

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

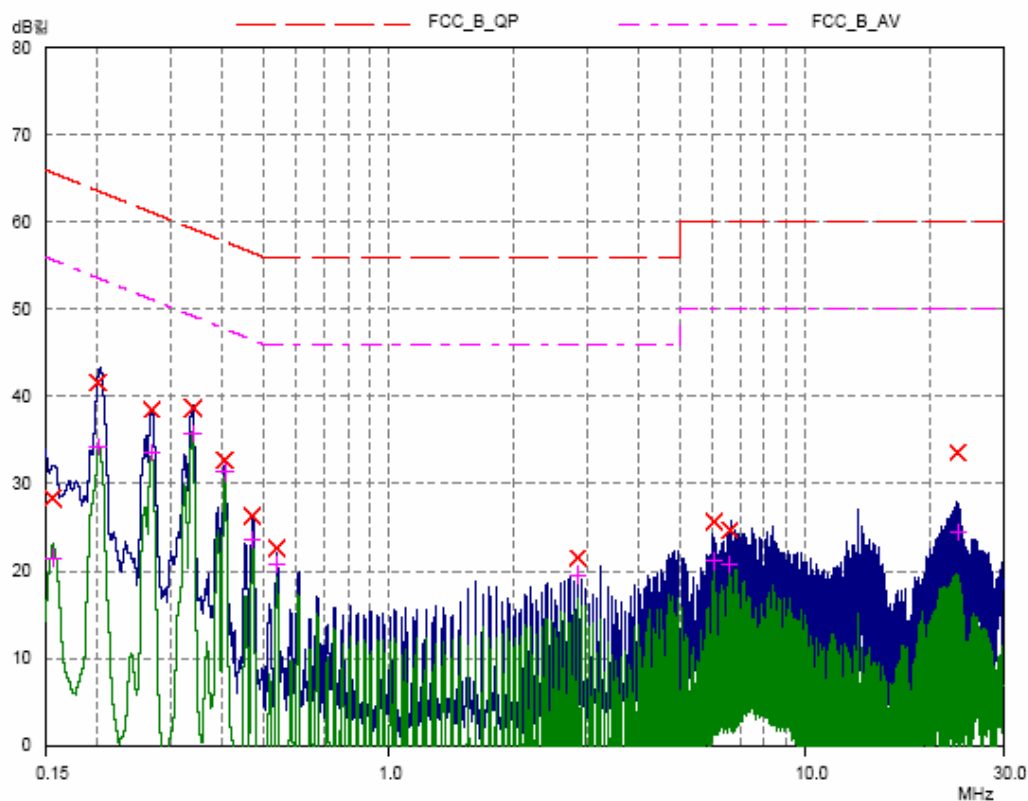

EUT: HLR6768WX/XAA
Manuf: SAMSUNG
Op Cond: NEUTRAL
Operator:
Test Spec: FCC Class B Conducted Emission
Comment:

Result File: hlr6778n.dat : SAMSUNG DLP TV

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

