



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center

416, Maetan-3dong,
Yeongtong-gu, Suwon-si,
Gyeonggi-do, Korea 443-742

TEST REPORT ON SAR

Model Tested: GT-S7250
FCC ID (Requested): A3LGTS7250
Job No: FI-171
Report No: FI-171-S1

- Abstract -

This document reports on SAR Tests carried out in accordance with FCC/OET Bulletin 65, Supplement C(June 2001).

Prepared By

JR LEE - Test Engineer

Authorized By

JD JANG - Technical Manager

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	1 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Contents

1. GENERAL INFORMATION	3
2. DESCRIPTION OF DEVICE	3
3. DESCRIPTION OF TEST EQUIPMENT	4
3.1 SAR Measurement Setup	4
3.2 E-field Probe	5
3.3 Phantom.....	7
3.4 Brain Simulating Mixture Characterization	9
3.5 Device Holder for Transmitters.....	9
3.6 Validation Dipole	10
3.7 Equipment Calibration.....	11
4. SAR MEASUREMENT PROCEDURE	12
5. DESCRIPTION OF TEST POSITION	13
5.1 SAM Phantom Shape.....	13
5.2 “cheek” Position	13
5.3 “tilted” Position	15
5.4 Body Holster/Belt Clip Configurations	16
6. MEASUREMENT UNCERTAINTY	18
7. SYSTEM VERIFICATION.....	21
7.1 Tissue Verification	21
7.2 Test System Validation	21
8. SAR MEASUREMENT RESULTS.....	22
8.1 GSM850 Head SAR Results	26
8.2 GPRS850 Body SAR Results(Without Holster).....	27
8.3 GSM1900 Head SAR Results	28
8.4 GPRS1900 Body SAR Results(Without Holster).....	29
8.5 WLAN Head SAR Results.....	30
8.6 WLAN Body SAR Results(Without Holster)	31
9. CONCLUSION	32
10. REFERENCES	33
APPENDIX A SAR Definition	35
APPENDIX B Probe Calibration Process	36
APPENDIX C ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS.....	37
APPENDIX D Test Setup Photographs	38
APPENDIX E The Validation Measurements	38
APPENDIX F Plots of The SAR Measurements.....	45
APPENDIX G Probe Calibration	78
APPENDIX H Calibration of The Validation Dipole	90

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	2 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

1. GENERAL INFORMATION

Test Dates : Aug.08, 2011 ~ Aug.11, 2011
Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.
Address : 416 Maetan3-Dong, Suwon City, Korea
Test Standard : §2.1093; FCC/OET Bulletin 65, Supplement C(June 2001)
FCC Classification : Licensed Transmitter Held to Ear (PCE)
Digital Transmitter System (DTS)
Tested for : FCC/TCB Certification

2. DESCRIPTION OF DEVICE

Test Sample : GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID
and EDGE Rx only
Model Number : GT-S7250
Serial Number : Identical prototype (S/N : # FI-171-G)
Tx Freq. Range : 824.2 ~ 848.8 MHz (GSM850)
1850.20 ~ 1909.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Rx Freq. Range : 869.2 ~ 893.8 MHz (GSM850)
1930.20 ~ 1989.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Antenna Manufacturer : Galtronics
Model No.: 02036160-04908
GSM Class B
GPRS Class 12
DTM Multislot N/A
Antenna Dimensions : 61.53 X 13.37 X 4.14 (mm)
Separation distance between
Main and Bluetooth antenna : 62mm

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	3 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR Measurement Setup

Robotic System

Measurements are performed using the DASY4 (or DASY5) automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, Samsung computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

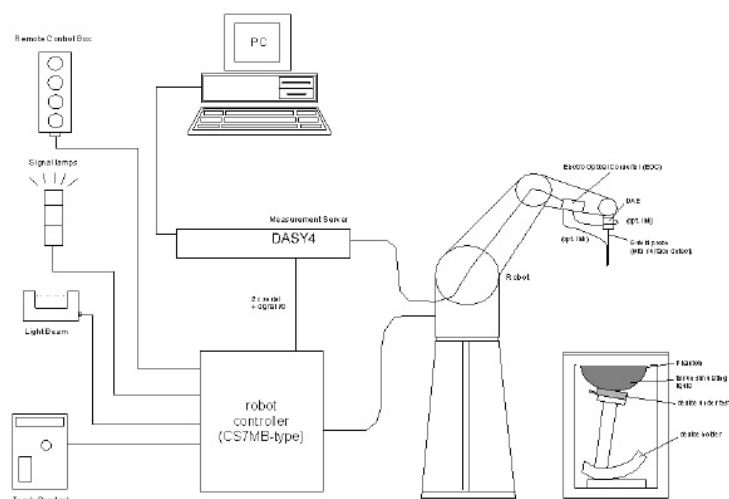


Figure 3.1 SAR Measurement System Setup

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the Samsung computer with Windows XP system and SAR Measurement Software DASY4 (or DASY5), LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	4 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

3.2 E-field Probe



The SAR measurement were conducted with the dosimetric probe ES3DV2, ES3DV3, EX3DV4 and ET3DV6, designed in the classical triangular configuration (see Fig.3.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.2). The approach is

Figure 3.2 DAE System stopped at reaching the maximum.

Probe Specifications

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration Basic Broad Band Calibration in air: 10-3000 MHz
 Conversion Factors (CF) for HSL 900 and HSL 1800

Additional CF for other liquids and frequencies upon request




Figure 3.3 Triangular Probe Configuration

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	5 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity **[ES3DV3], [ET3DV6]**
 ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.3 dB in tissue material (rotation normal to probe axis)
[EX3DV4]
 ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range **[ES3DV3], [ET3DV6]**
 $5\mu\text{W/g}$ to $> 100\text{mW/g}$; Linearity: $\pm 0.2\text{dB}$
[EX3DV4]
 $10\mu\text{W/g}$ to $> 100\text{ mW/g}$; Linearity: ± 0.2 dB

Dimensions **[ES3DV3], [ES3DV2]**
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 3.9 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.1 mm
[EX3DV4]
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm
[ET3DV6]
Overall length: 330mm
Tip length: 16mm
Body diameter: 12mm
Tip diameter: 6.8mm
Distance from probe tip to dipole centers: 2.7mm



[ES3DV3] ,[ES3DV2]



[EX3DV4]


FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	6 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Application **[ES3DV3], [ES3DV2]**

General dosimetry up to 5 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

[EX3DV4]

High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30 %.



[ET3DV6]

[ET3DV6]

General dosimetry up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms

Optical

[ET3DV6]

Surface

± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Detection

3.3 Phantom

SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.5)



Figure3.5 SAM Twin Phantom

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	7 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

SAM Twin Phantom Specification

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Height: 810 mm; Length: 1000 mm; Width: 500 mm

Modular Flat Phantom

The Modular Flat Phantom V5.1 is constructed of a fiberglass shell integrated in a wooden table. Also It consists of three identical flat phantoms (modules) which can be installed and removed separately without emptying the liquid, as well as a wooden support.. It enables the dosimetric evaluation of body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.6)



Figure 3.6 Modular Flat Phantom

Modular Flat Phantom Specification

Construction	The shell corresponds to the specifications of IEEE 1528-2003. It enables the dosimetric evaluation of body mounted usage above 800 MHz at the flat phantom region. A cover prevents evaporation of the liquid		
Shell Thickness	2 ± 0.2 mm		
Filling Volume	Approx. 10 liters		
Dimension	Wooden support -	Height: 810 mm; Length: 830 mm; Width: 500 mm	
	Each Module -	Height:190 mm; Length: 200 mm; width: 300 mm	

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	8 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

3.4 Brain Simulating Mixture Characterization

The brain mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

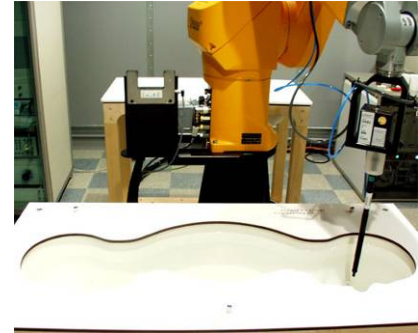


Figure 3.7 Simulated Tissue

Table 3.1 Composition of the Brain Tissue Equivalent Matter

INGREDIENTS	835MHz Brain	835MHz Muscle	1900MHz Brain	1900MHz Muscle	2450MHz Brain	2450MHz Muscle
WATER	40.19%	50.75%	55.24%	70.23%	71.88%	73.4%
SUGAR	57.90%	48.21%	-	-	-	-
SALT	1.48%	0.94%	0.31%	0.29%	0.16%	0.06%
DGBE	-	-	44.45%	29.48%	7.99%	26.54%
Triton X-100	-	-	-	-	19.97%	-
BACTERIACIDE	0.18%	0.10%	-	-	-	-
HEC	0.25%	-	-	-	-	-
Dielectric Constant Target	41.5	55.2	40	53.3	39.2	52.7
Conductivity Target (S/m)	0.9	0.97	1.4	1.52	1.8	1.95

3.5 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0, the Mounting Device (see Fig. 3.7) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is




Figure 3.8 Device Holder

the ear opening. The devices can be easily, accurately and repeatedly be positioned according to the EN 50360:2001 and FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

*Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configuration. To produce worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	9 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

3.6 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Frequency	835, 1900, 2450 MHz
Return Loss	< -20 dB at specified validation position
Dimensions	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm D2450V2: dipole length: 51.8 mm; overall height: 300 mm

Note:

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibration in KDB 450824

D2450V2 S/N:807	Parameters			
Date of Cal	Return loss (dB)	Deviation (%)	Impedance (Ω)	Deviation (Ω)
2010.02.04	-26.8	0	54.4	0
2011.03.31	-26.6	0.75	50.1	-4.3

- End of page -

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	10 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

3.7 Equipment Calibration

Table 3.2 Test Equipment Calibration

Type	Calibration Due Date	Serial No.
SPEAG E-Field Probe EX3DV4	Mar.22, 2012	3520
SPEAG DAE4	Mar.18, 2012	686
SPEAG Validation Dipole D835V2	Feb.23, 2013	4d050
SPEAG Validation Dipole D1900V2	Feb.23, 2013	5d082
SPEAG Validation Dipole D2450V2	Feb.04, 2012	807
Stäubli Robot TX90XL	Not Required	F06/546ZA1/A/01
SPEAG SAM Twin Phantom	Not Required	TP-1247
SPEAG SAM Twin Phantom	Not Required	TP-1248
Modular Phantom	Not Required	MP-1003
E4438C Signal Generator	Jan.26, 2012	MY45094010
NRVD Dual Channel Power Meter	Feb.07, 2012	836416/028
NRV-Z53 Thermal Power Sensor	Feb.07, 2012	835324/001
NRV-Z53 Thermal Power Sensor	Feb.07, 2012	835324/006
E4419B Power Meter	Nov.30, 2011	GB43312299
E9300B Power Sensor	Jan.28, 2012	MY41495557
BBS3Q7ECK Power Amp	Jan.20, 2012	1052
HP-8753ES Network Analyzer	Apr.27, 2012	US39173712
HP85070C Dielectric Probe Kit	Not Required	US99360087
DASY5 S/W (ver 5.0)	Not Required	-
E4440A Spectrum Analyzer	Feb.24, 2012	MY45304704
778D Dual Directional Coupler	May.20, 2012	18862
777D Dual Directional Coupler	Mar.24, 2012	07526
Base Station Simulator	Dec.08, 2011	GB46490113

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Samsung Lab. before each test. (see § 7.2) The brain simulating material is calibrated by Samsung using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. (see § 7.1)

- End of page -

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	11 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure.

STEP 1

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

STEP 2

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm x 20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

STEP 3

Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

STEP 4

The SAR value at the same location as in step 1 was again measured.

(If the value changed by more than 5%, the evaluation is repeated.)

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	12 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

5. DESCRIPTION OF TEST POSITION

5.1 SAM Phantom Shape

Figure 5.1 shows the front, back and side views of SAM. The point “M” is the reference point for the center of mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.2.



Figure 5.1 Front, back and side view of SAM

The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines should be marked on the external phantom shell to facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs.

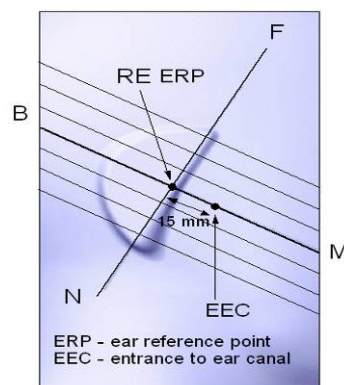


Figure 5.2 Close up side view

5.2 “cheek” Position

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 5.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its tip and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point

FCC ID: A3LGT57250	Report Number: FI-171-S1		Page :	13 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011




Figure 5.4 Handset vertical and horizontal reference lines





Figure 5.3 Side view of the phantom showing relevant markings

Step 1

The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5.5), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom

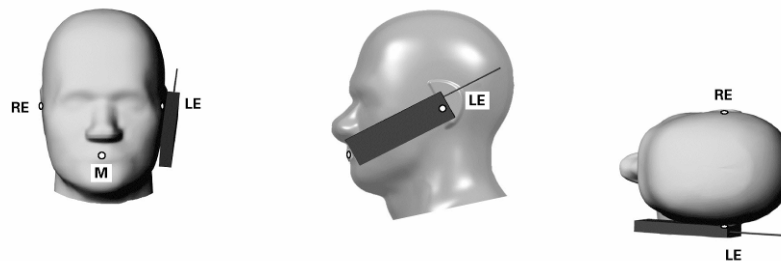


Figure 5.5 Front, Side and Top View of Cheek/Touch Position

Step 2

The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.

Step 3

While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).

Step 4

Rotate the handset around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	14 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Step 5

While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 5.2.

5.3 “tilted” Position

With the test device aligned in the “cheek” position :

Step 1

Repeat steps 1 to 5 of 5.2 to place the device in the “Cheek/Touch Position”

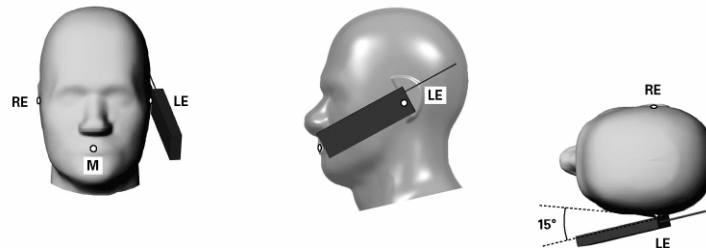


Figure 5.6 Front, side and Top View of Ear/Tilt 15° Position

Step 2

While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.

Step 3

The phone was then rotated around the horizontal line by 15 degree.

Step 4

While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	15 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

5.4 Body Configurations for Single TX SAR considerations

5.4.1 SAR Test Configurations

Mode	Back	Front	Side A	Side B	Side C	Side D
GPRS850	Yes	Yes	Yes	Yes	Yes	No
GPRS1900	Yes	Yes	Yes	Yes	Yes	No
WIFI	Yes	Yes	No	Yes	No	Yes

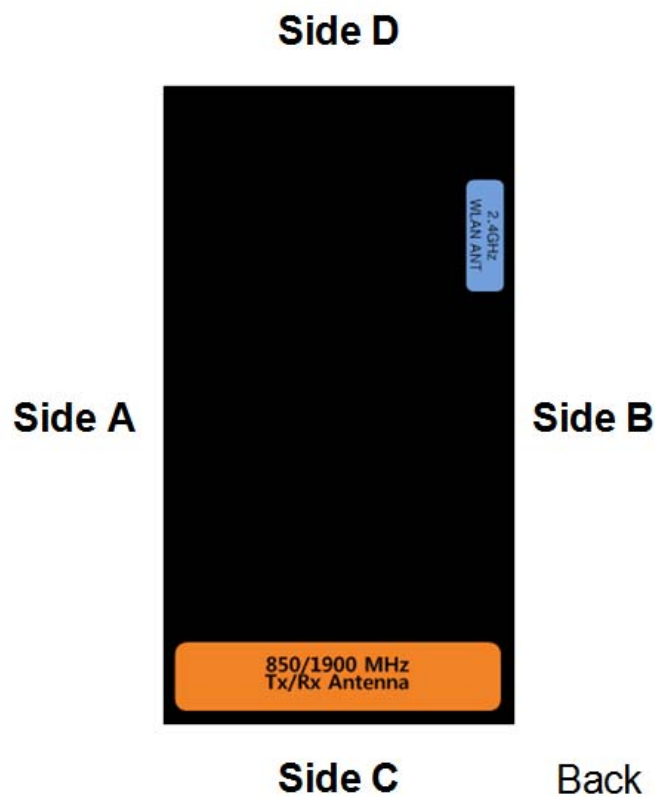


Figure 5.7 Identification of Sides for SAR Testing

Note : Per Oct 2010 TCB FCC Workshop, the edges with antennas within 2.5 cm are required to be evaluated for SAR. See Figure 5.8 distances of the actual device.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	16 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

5.4.2 Transmit Antenna Separation Distances

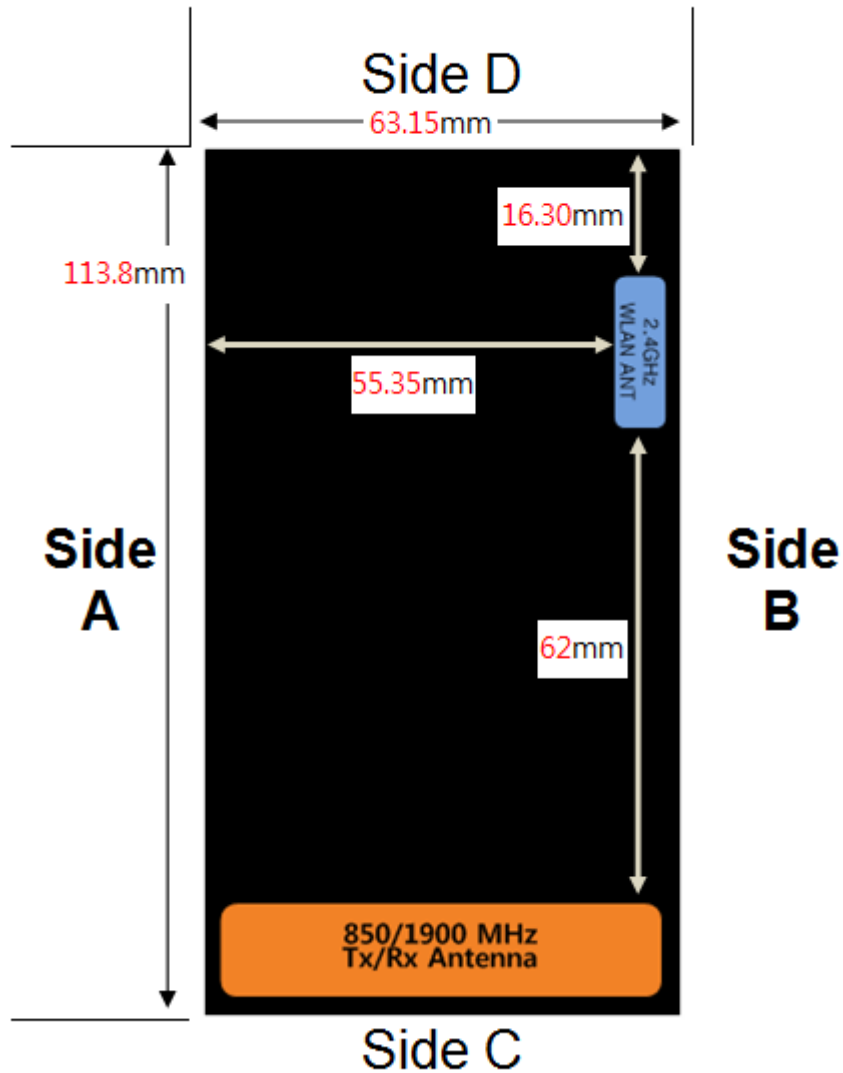


Figure 5.8 Antenna Locations, as viewed from back of device

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	17 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

6. MEASUREMENT UNCERTAINTY

Table 6.1 Uncertainty Budget at 835MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	1.73	rectangular	1.732	1	1.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.12	normal	1.000	1	1.12	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	5.62	normal	1.000	1	5.62	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	0.38	normal	1.000	0.64	0.24	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	5.44	normal	1.000	0.6	3.26	∞
Combined Standard Uncertainty		Normal	-	-	11.84	172776
Extended Standard Uncertainty(K=2.00)					23.69	172776

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	18 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Table 6.2 Uncertainty Budget at 1900MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.50	normal	1.000	1	1.50	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	6.02	normal	1.000	1	6.02	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	1.84	normal	1.000	0.64	1.18	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.54	normal	1.000	0.6	2.73	∞
Combined Standard Uncertainty		Normal	-	-	12.00	60176
Extended Standard Uncertainty(K=2.00)					24.00	60176

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	19 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Table 6.3 Uncertainty Budget at 2450MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v_i^2 or v_{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.00	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	4.22	normal	1.000	1	4.22	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	2.32	Normal	1.0001	1	2.32	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	2.04	normal	1.000	0.64	1.30	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.27	normal	1.000	0.6	2.56	∞
Combined Standard Uncertainty		Normal	-	-	11.32	728
Extended Standard Uncertainty(K=2.00)					22.64	728

7. SYSTEM VERIFICATION

7.1 Tissue Verification

Table 7.1 MEASURED TISSUE PARAMETERS

	835MHz Head		835MHz Body		1900MHz Head		1900MHz Body		2450MHz Head		2450MHz Body	
	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Date	Aug.10,2011		Aug.10,2011		Aug.11,2011		Aug.11,2011		Aug.08,2011		Aug.08,2011	
Liquid Temperature(°C)	22.0		22.1		21.8		22.1		21.6		21.5	
Dielectric Constant: ϵ'	41.5	41.3	55.2	54.5	40	39	53.3	53.8	39.2	38.6	52.7	52.1
Conductivity:	0.9	0.9	0.97	0.96	1.4	1.41	1.52	1.51	1.8	1.85	1.95	1.99
Tissue Batch Number	835DF2001K		835B2001K		1900F2001T		1900B2002H		2450MF3001B		2450B1001U	

The measured value must be within $\pm 5\%$ of the target value.

7.2 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specification at 835MHz, 1900MHz and 2450MHz by using the system validation kit(s). (see Appendix D, Graphic Plot Attached)

Table 7.2 System Validation Results

System Validation Kit	Tissue	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Normalized SAR _{1g} (mW/g)	Deviation (%)	Date	Liquid Temperature(°C)	Ambient Temperature(°C)	Input Power (mW)
4d050	835MHz Brain	9.61	2.51	10.04	4.47	Aug.10, 2011	22.0	22.3	250
4d050	835MHz Body	10.0	2.36	9.44	-5.60	Aug.10, 2011	22.1	22.5	250
5d082	1900MHz Brain	41.4	4.31	43.1	4.11	Aug.11, 2011	21.8	22.2	100
5d082	1900MHz Body	40.7	3.85	38.5	-5.41	Aug.11, 2011	22.1	22.4	100
807	2450MHz Brain	54.4	5.7	57	4.78	Aug.08, 2011	21.6	21.9	100
807	2450MHz Body	51.1	5.14	51.4	0.59	Aug.08, 2011	21.5	22.0	100

*Validation was measured with input power 100mW, 250 mW and normalized to 1W.

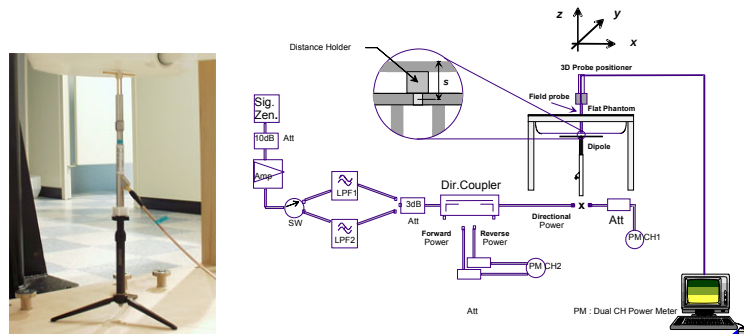


Figure 7.1 Dipole Validation Test Setup

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	21 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8. SAR MEASUREMENT RESULTS

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode using base station simulator. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated. And all Tx(1~4Tx) conducted power were also investigated for Body-Worn SAR Measurement

Table 8.1 GPRS Power Table for GT-S7250

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850	128	32.72	32.72	31.17	29.15	27.12
	190	32.6	32.6	31.05	29	26.99
	251	32.5	32.5	30.97	28.96	26.91
1900	512	30.02	30.02	28.45	26.4	24.43
	661	30.1	30.1	28.52	26.55	24.52
	810	30.07	30.07	28.48	26.53	24.51

Table 8.2 Calculated Frame-Averaged Output Power

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850	128	23.69	23.69	25.15	24.89	24.11
	190	23.57	23.57	25.03	24.74	23.98
	251	23.47	23.47	24.95	24.70	23.90
1900	512	20.99	20.99	22.43	22.14	21.42
	661	21.07	21.07	22.50	22.29	21.51
	810	21.04	21.04	22.46	22.27	21.50

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	22 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Table 8.3 802.11b Conducted Output Power

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	1	18.08	20.84
		2	18.07	20.86
		5.5	18.11	20.92
		11	18.14	20.87
2437	6	1	18.46	21.12
		2	18.53	21.16
		5.5	18.56	21.14
		11	18.49	21.13
2462	11	1	18.68	21.34
		2	18.49	21.23
		5.5	18.56	21.25
		11	18.58	21.31

Table 8.4 802.11g Conducted Output Power Table 8.5 802.11n Conducted Output Power

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	6	14.31	21.38
		9	14.42	21.42
		12	14.36	21.46
		18	14.51	21.62
		24	14.53	21.55
		36	14.48	21.49
		48	14.43	21.53
		54	14.46	21.48
2437	6	6	14.62	21.73
		9	14.42	21.09
		12	14.53	21.46
		18	14.54	21.77
		24	14.57	21.68
		36	14.53	21.82
		48	14.67	21.74
		54	14.69	21.82
2462	11	6	14.73	21.74
		9	14.71	21.87
		12	14.74	21.49
		18	14.72	21.56
		24	14.68	21.48
		36	14.77	21.63
		48	14.74	21.59
		54	14.62	21.47

Freq [MHz]	Channel	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	0	6.5/7.2	13.23	20.31
		1	13/14.4	13.17	20.14
		2	19.5/21.7	13.24	20.21
		3	26/28.9	13.18	20.05
		4	30/43.3	13.07	20.14
		5	52/57.8	13.12	20.13
		6	58.5/65	13.17	20.07
		7	65/72.2	13.24	20.16
2437	6	0	6.5/7.2	13.76	20.89
		1	13/14.4	13.64	20.48
		2	19.5/21.7	13.58	20.43
		3	26/28.9	13.62	20.36
		4	30/43.3	13.71	20.51
		5	52/57.8	13.63	20.41
		6	58.5/65	13.71	20.46
		7	65/72.2	13.66	20.53
2462	11	0	6.5/7.2	13.66	21.09
		1	13/14.4	13.54	21.33
		2	19.5/21.7	13.61	20.53
		3	26/28.9	13.74	20.76
		4	30/43.3	13.63	20.73
		5	52/57.8	13.52	20.84
		6	58.5/65	13.67	20.91
		7	65/72.2	13.63	20.75

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	23 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Simultaneous Transmission

Refer to the FCC OET document, 'SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas' (Feb 2008)

Table 8.6 Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P Ref	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table				

Table 8.7 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> o when stand-alone 1-g SAR is not required and antenna is > 5 cm from other antennas <u>Licensed & Unlicensed</u> o when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas o when SAR to antenna separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to antenna separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – o output < 60/f: SAR not required o output ≥ 60/f: stand-alone SAR required When there is simultaneous transmission – <u>Stand-alone SAR not required when</u> O output ≤ 2.P_{Ref} and antenna is > 5.0 cm from other antennas O output ≤ P_{Ref} and antenna is ≥ 2.5 cm from other antennas O output ≤ P_{Ref} and antenna is < 2.5 cm from other antennas, each with either output power ≤ P_{Ref} or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> When stand-alone SAR is required o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	24 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

Table 8.8 Simultaneous Transmission Summation for Held to Ear Voice Call

Simult Tx	Configuration	GSM850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GSM1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Head SAR	Right Cheek	0.109	0.108	0.217	Head SAR	Right Cheek	0.433	0.108	0.541
	Right Tilt	0.061	0.054	0.115		Right Tilt	0.298	0.054	0.352
	Left Cheek	0.11	0.051	0.161		Left Cheek	0.962	0.051	1.013
	Left Tilt	0.068	0.053	0.121		Left Tilt	0.347	0.053	0.400

Table 8.9 Simultaneous Transmission Summation for 2G Data and WIFI

Simult Tx	Configuration	GPRS850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GPRS1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Body SAR	Back	0.383	0.228	0.611	Body SAR	Back	0.925	0.228	1.153
	Front	0.173	0.037	0.210		Front	0.76	0.037	0.797
	SideA	0.180	—	0.180		SideA	0.154	—	0.154
	SideB	0.152	0.143	0.295		SideB	0.38	0.143	0.523
	SideC	0.023	—	0.023		SideC	0.266	—	0.266
	SideD	—	0.05	0.050		SideD	—	0.05	0.050

Multiple Antenna/Transmission Information for GT-S7250

The separation between the main antenna and the Bluetooth and WLAN antennas is 62mm.

RF Conducted Power of Bluetooth Tx is 9.856 mW. RF Conducted Power of WLAN is 73.79mW

Conclusion

The above tables represent the worst-case simultaneous transmission scenarios possible with this device.

The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. Therefore, no volumetric SAR summation is required since the numerical sums are below the limit

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	25 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.1 GSM850 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End						
836.6	190	GSM850	32.52	32.56	Right	Cheek/Touch	Intenna	Standard	0.043	0.109
836.6	190	GSM850	32.70	32.54	Right	Ear/Tilt 15°	Intenna	Standard	-0.01	0.061
836.6	190	GSM850	32.51	32.65	Left	Cheek/Touch	Intenna	Standard	-0.019	0.110
836.6	190	GSM850	32.56	32.70	Left	Ear/Tilt 15°	Intenna	Standard	0.029	0.068
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	26 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.2 GPRS850 Body SAR Results

Frequency		Mode	Conducted		Test Position	Side	Antenna Type	Battery	Tx GPRS Slots	Drift (Db)	SAR Level (W/kg)
MHz	Ch		Start	End							
836.6	190	GPRS850	31.08	31.12	1.0 cm	Back	Intenna	Standard	2	-0.049	0.378
836.6	190	GPRS850	29.00	29.03	1.0 cm	Back	Intenna	Standard	3	0.001	0.383
836.6	190	GPRS850	26.93	26.97	1.0 cm	Back	Intenna	Standard	4	0.174	0.348
836.6	190	GPRS850	29.02	29.06	1.0 cm	Front	Intenna	Standard	3	-0.014	0.173
836.6	190	GPRS850	29.03	29.03	1.0 cm	SideA	Intenna	Standard	3	0.053	0.180
836.6	190	GPRS850	28.96	29.00	1.0 cm	SideB	Intenna	Standard	3	-0.029	0.152
836.6	190	GPRS850	29.01	28.92	1.0 cm	SideC	Intenna	Standard	3	0.177	0.023
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (Mw/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2Db higher in GPRS mode than in GSM850 mode. Hence, the GSM850 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 Db lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideD' was not tested because antenna distance was $>2.5\text{cm}$.
- The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	27 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.3 GSM1900 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (Db)	SAR Level (W/kg)
MHz	Ch		Start	End						
1880	661	GSM1900	30.06	30.09	Right	Cheek/Touch	Intenna	Standard	-0.058	0.433
1880	661	GSM1900	30.08	30.12	Right	Ear/Tilt 15°	Intenna	Standard	-0.059	0.298
1850.2	512	GSM1900	30.08	30.03	Left	Cheek/Touch	Intenna	Standard	-0.054	0.962
1880	661	GSM1900	30.01	30.12	Left	Cheek/Touch	Intenna	Standard	-0.152	0.960
1909.8	810	GSM1900	30.07	29.98	Left	Cheek/Touch	Intenna	Standard	-0.048	0.812
1880	661	GSM1900	30.04	30.14	Left	Ear/Tilt 15°	Intenna	Standard	-0.001	0.347
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (Mw/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. All modes of operation were investigated, and the worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plot.
4. Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
5. Battery is fully charged for all readings.
6. Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
7. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 Db lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
8. The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	28 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.4 GPRS1900 Body SAR Results

Frequency		Mode	Conducted		Test Position	Side	Antenna Type	Battery	Tx GPRS Slots	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
1850.2	512	GPRS1900	28.52	28.52	1.0 cm	Back	Intenna	Standard	2	-0.028	0.925
1880	661	GPRS1900	28.49	28.60	1.0 cm	Back	Intenna	Standard	2	-0.05	0.916
1909.8	810	GPRS1900	28.42	28.53	1.0 cm	Back	Intenna	Standard	2	-0.028	0.841
1880	661	GPRS1900	26.48	26.57	1.0 cm	Back	Intenna	Standard	3	-0.07	0.839
1880	661	GPRS1900	24.56	24.47	1.0 cm	Back	Intenna	Standard	4	0.076	0.681
1880	661	GPRS1900	28.56	28.57	1.0 cm	Front	Intenna	Standard	2	-0.148	0.760
1880	661	GPRS1900	28.54	28.45	1.0 cm	SideA	Intenna	Standard	2	-0.05	0.154
1880	661	GPRS1900	28.54	28.56	1.0 cm	SideB	Intenna	Standard	2	-0.053	0.380
1880	661	GPRS1900	28.43	28.54	1.0 cm	SideC	Intenna	Standard	2	0.004	0.266
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM1900 mode. Hence, the GSM1900 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideD' was not tested because antenna distance was $>2.5\text{cm}$.
- The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	29 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.5 WLAN Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
2462	11	WLAN	18.65	18.68	Right	Cheek/Touch	Intenna	Standard	1	0.067	0.108
2462	11	WLAN	18.60	18.64	Right	Ear/Tilt 15°	Intenna	Standard	1	0.161	0.054
2462	11	WLAN	18.69	18.63	Left	Cheek/Touch	Intenna	Standard	1	-0.109	0.051
2462	11	WLAN	18.69	18.62	Left	Ear/Tilt 15°	Intenna	Standard	1	0.022	0.053
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
- Justification for reduced test configurations for WIFI channels per KDB 941225 D06 : Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- WLAN Transmission was verified using a spectrum analyzer.
- The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	30 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

8.6 WLAN Body SAR Results

Frequency		Mode	Conducted		Test Position	Side	Antenna Type	Battery	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
2462	11	WLAN	18.63	18.60	1.0 cm	Back	Intenna	Standard	1	-0.038	0.228
2462	11	WLAN	18.69	18.65	1.0 cm	Front	Intenna	Standard	1	0.133	0.037
2462	11	WLAN	18.63	18.69	1.0 cm	SideB	Intenna	Standard	1	-0.058	0.143
2462	11	WLAN	18.61	18.64	1.0 cm	SideD	Intenna	Standard	1	-0.137	0.050
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
- Justification for reduced test configurations for WIFI channels per KDB 941225 D06 : Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideA,C' was not tested because antenna distance was >2.5cm.
- WLAN Transmission was verified using a spectrum analyzer.
- The standard battery cover contains a near field communications (NFC) antenna, and is the only battery cover that comes with the device. All tests were performed using the standard RFID cover. The technical description contains detailed information about the near field communications antenna.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	31 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

9. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

The highest reported SAR values are as follows:

GSM850: Head: 0.110W/Kg : Body-worn: 0.383W/Kg

GSM1900: Head: 0.962W/Kg : Body-worn: 0.925W/Kg

WLAN: Head: 0.108W/Kg : Body-worn: 0.228W/Kg

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	32 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

10. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	33 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225

FCC ID: A3LGTS7250	Report Number: FI-171-S1		Page :	34 of 34
 SAMSUNG Electronics CO. LTD	EUT Type:	GSM/GPRS 850/1900 Phone with Bluetooth, WLAN, RFID and EDGE Rx only	Issue Date :	Aug.13, 2011

APPENDIX A

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (p). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. A.1) .

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{p dv} \right)$$

Figure A.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / p$$

Where :

- σ = conductivity of the tissue-simulant material (S/m)
- p = mass density of the tissue-simulant material (kg/m³)
- E = Total RMS electric field strength (V/m)

Note: The primary factors that control rate or energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

APPENDIX B

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in **K. Pokovic, T.Schmid, N. Kuster, *Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies*, ICECOM97, Oct. 1997, pp. 120-124** with an accuracy better than +/-10%. The spherical isotropy was evaluated with the procedure described in **K. Pokovic, T.Schmid, N. Kuster, *E-field Probe with improved isotropy in brain simulating liquids*, Proceedings of the ELMAR, Zadar, June 23-25, 1996, pp. 172-175** and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. B.1), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe (see Fig. B.2).

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{p}$$

where:

Δt = exposure time (30 seconds)

C = heat capacity of tissue (brain or muscle).

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

where:

σ = simulated tissue conductivity

p = Tissue density (1.25 g/cm³ for brain tissue)

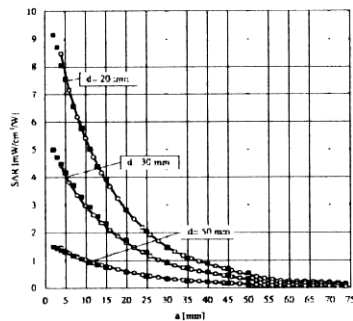


Figure B.1. E-Field and Temperature measurements at 900MHz

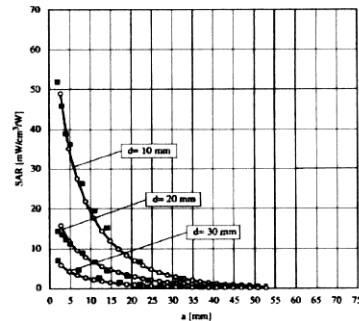


Figure B.2. E-Field and temperature measurements at 1.9GHz

APPENDIX C

ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is the exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table C.1 Safety Limits for Partial Body Exposure

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL PEAK SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

APPENDIX D

The Validation Measurements

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.08.10

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (interpolated) = 2.75 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.9 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 2.70 mW/g

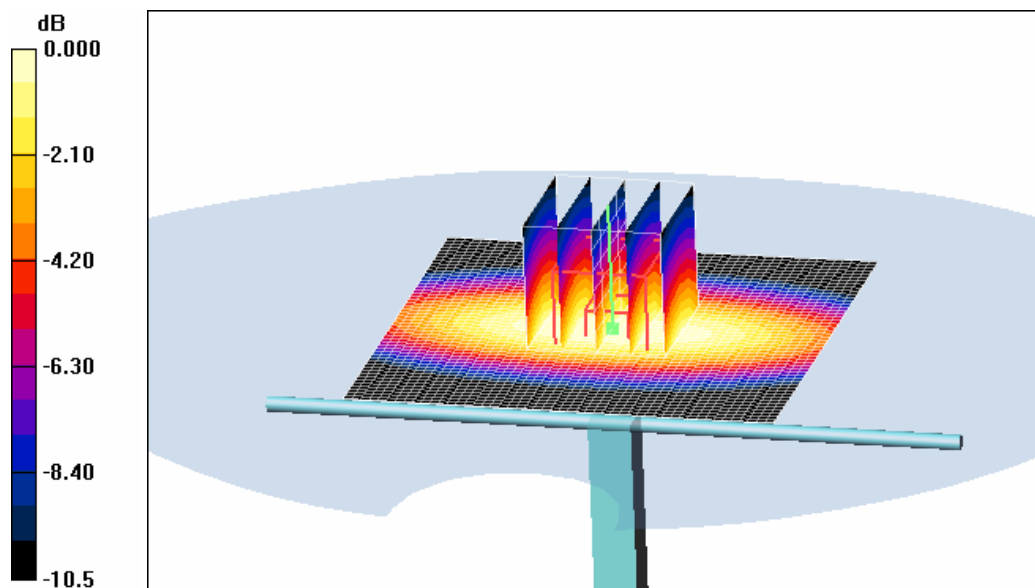

0 dB = 2.70mW/g

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.08.10

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 2.64 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.3 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.55 mW/g

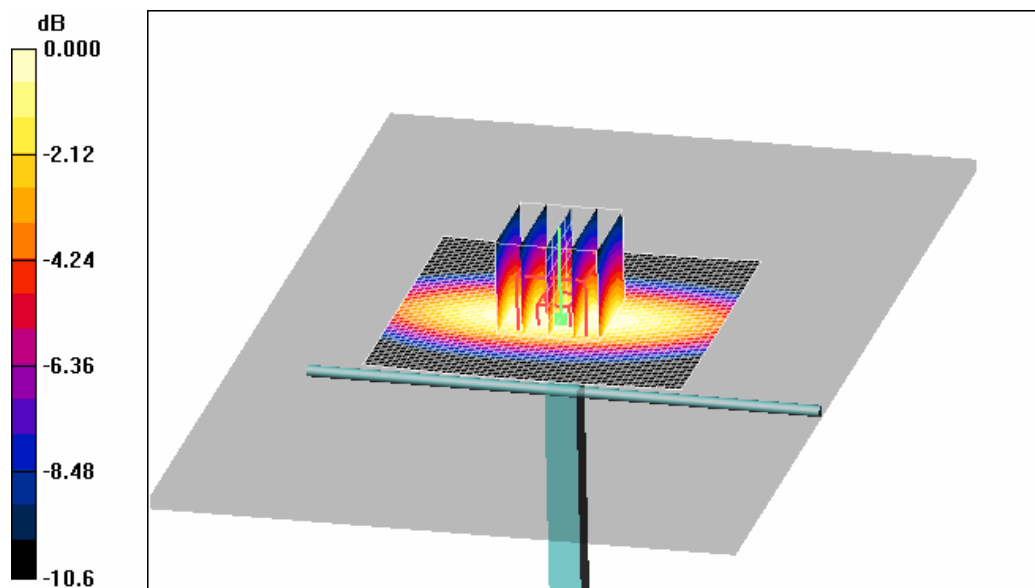

0 dB = 2.55mW/g

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.08.11

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 5.63 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.7 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 7.88 W/kg

SAR(1 g) = 4.31 mW/g; SAR(10 g) = 2.26 mW/g

Maximum value of SAR (measured) = 4.83 mW/g

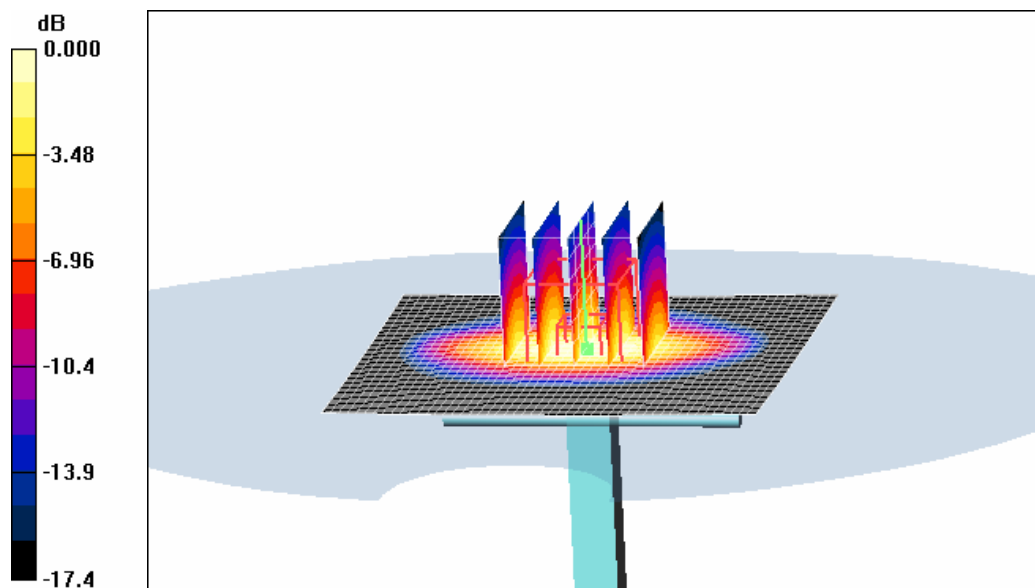

0 dB = 4.83mW/g

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.08.11

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 5.43 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.3 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.85 mW/g; SAR(10 g) = 2.03 mW/g

Maximum value of SAR (measured) = 4.29 mW/g

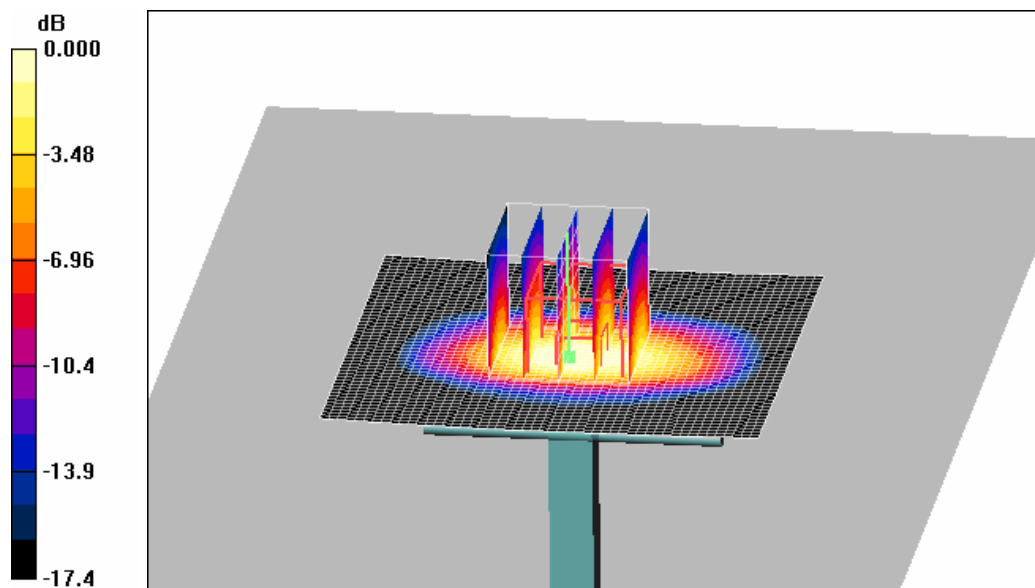

0 dB = 4.29mW/g

DUT: Dipole 2450 MHz; Serial: 807

Program Name: 2450MHz Dipole Validation 2011.08.08

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 7.40 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.7 mW/g; SAR(10 g) = 2.61 mW/g

Maximum value of SAR (measured) = 6.46 mW/g

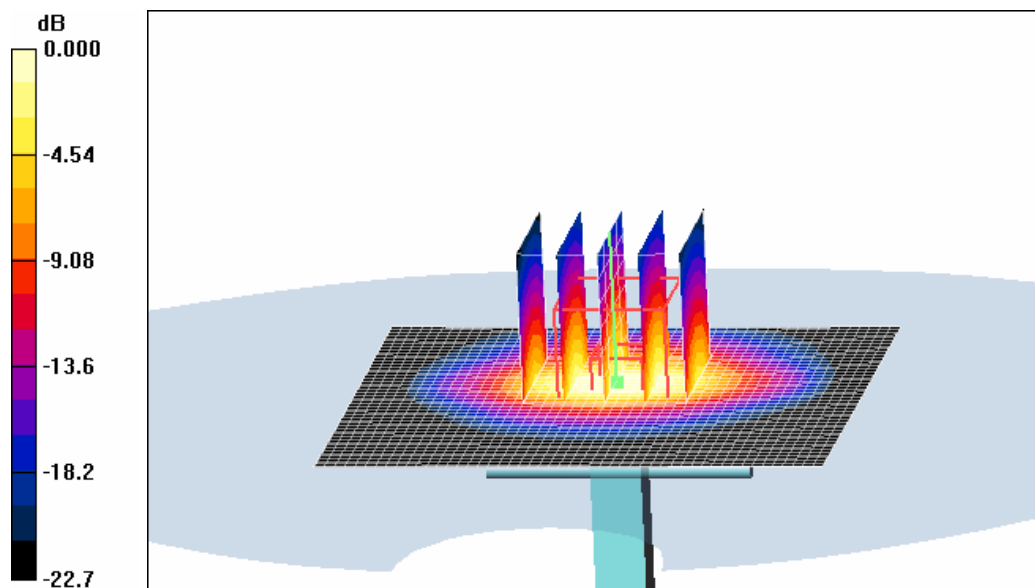

0 dB = 6.46mW/g

DUT: Dipole 2450 MHz; Serial: 807

Program Name: 2450MHz Dipole Validation 2011.08.08

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 6.31 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.4 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.14 mW/g; SAR(10 g) = 2.41 mW/g

Maximum value of SAR (measured) = 5.73 mW/g

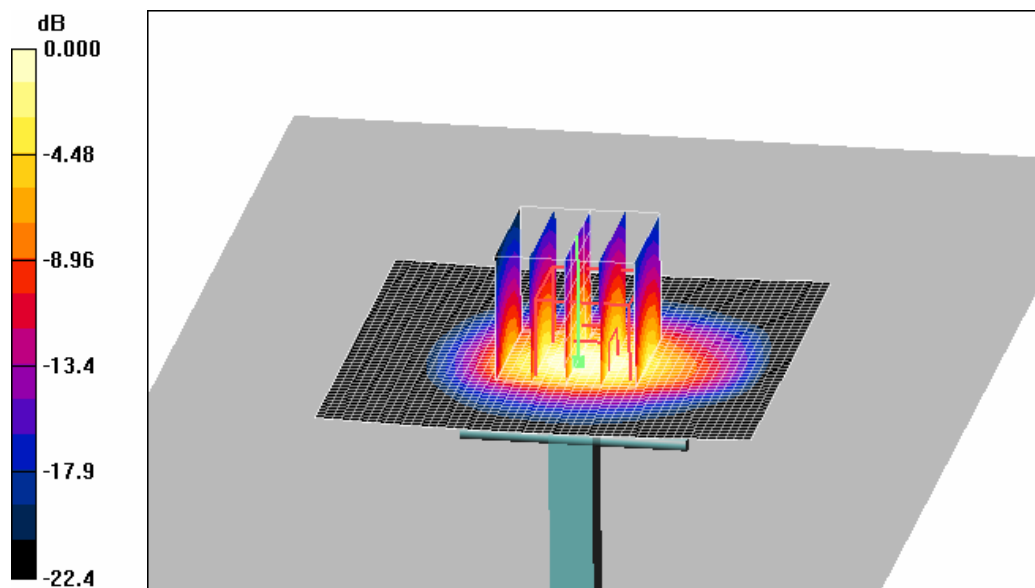

0 dB = 5.73mW/g

APPENDIX E

Plots of The SAR Measurements

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM850 Right (Job No. : FI-171)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.116 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

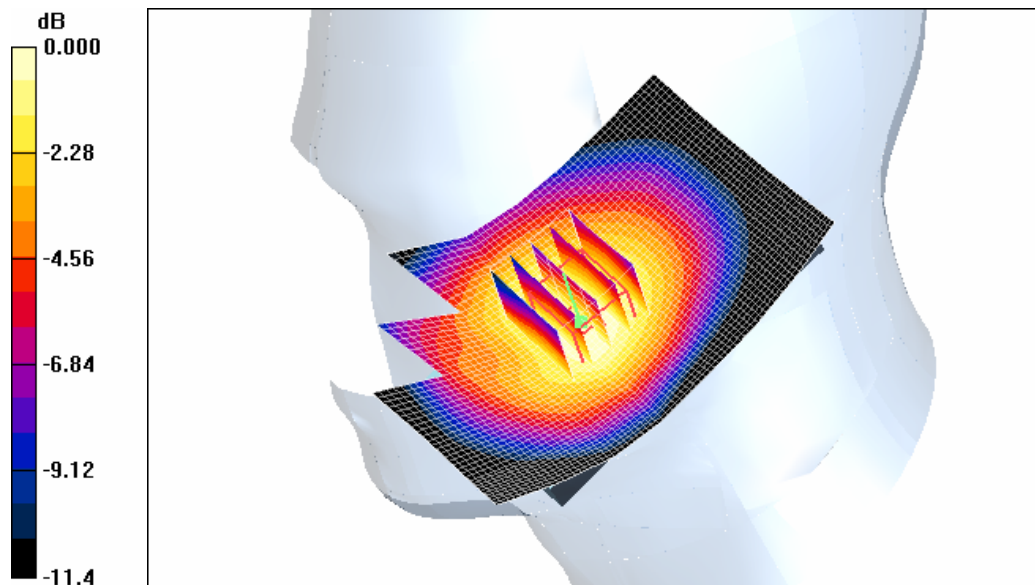

0 dB = 0.114mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM850 Right (Job No. : FI-171)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.064 mW/g

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.95 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.064 mW/g

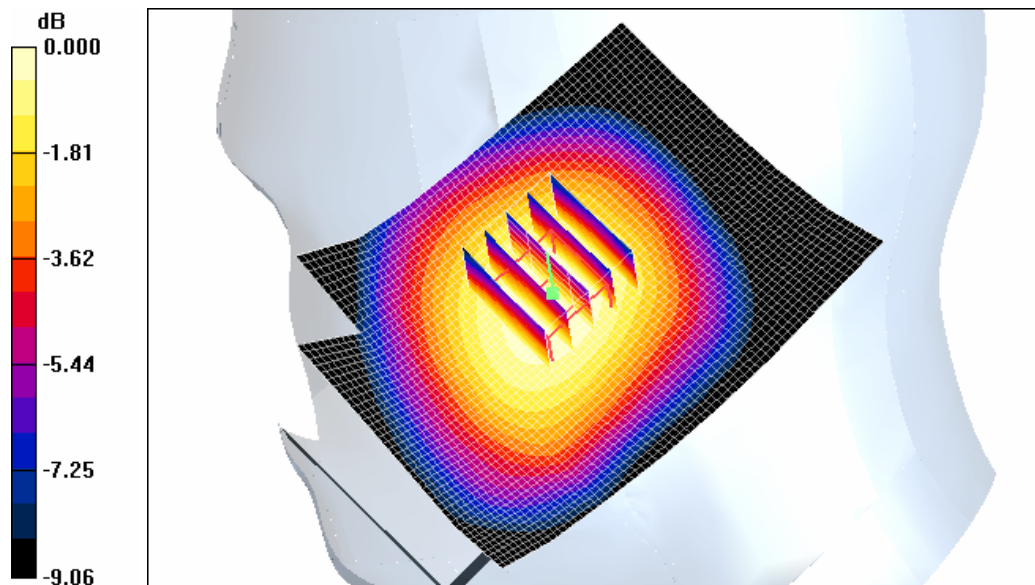

0 dB = 0.064mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM850 Left (Job No. : FI-171)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.121 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

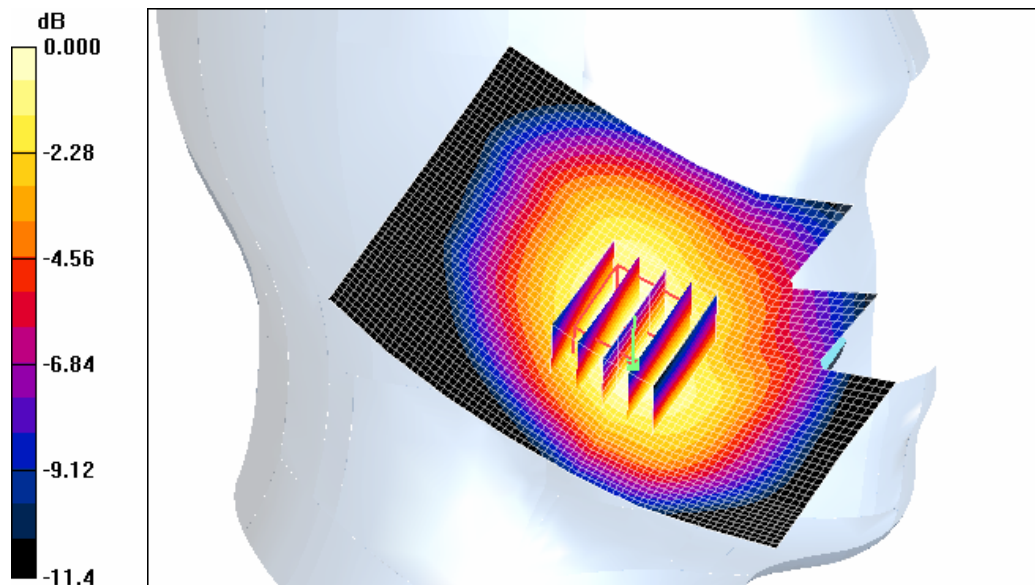

0 dB = 0.117mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM850 Left (Job No. : FI-171)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.071 mW/g

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.05 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.085 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.071 mW/g

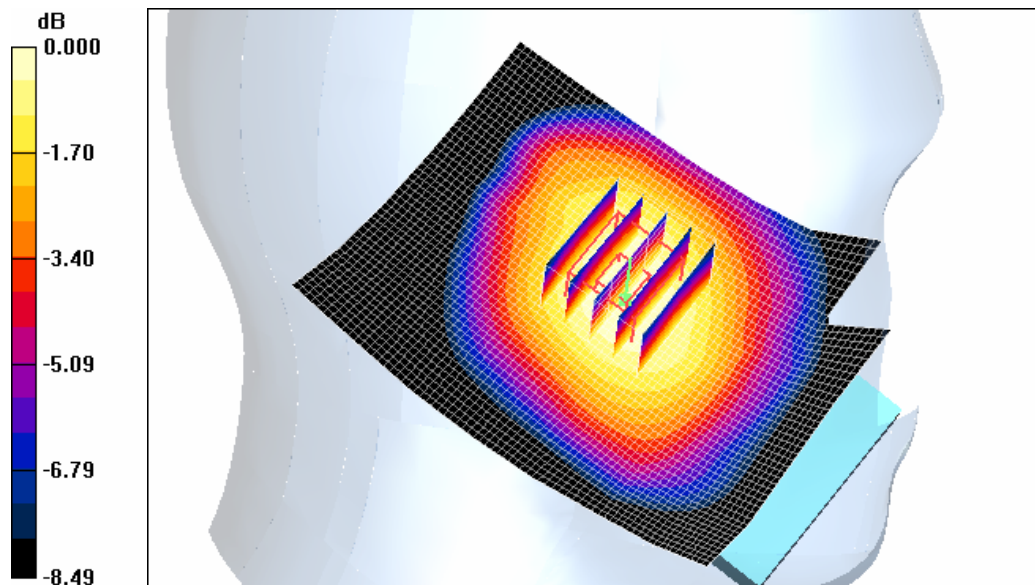

0 dB = 0.071mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM850 Left (Job No. : FI-171)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.3,Tissue Temp(celsius)-22.0;Test Date-10/Aug/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #1; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.121 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

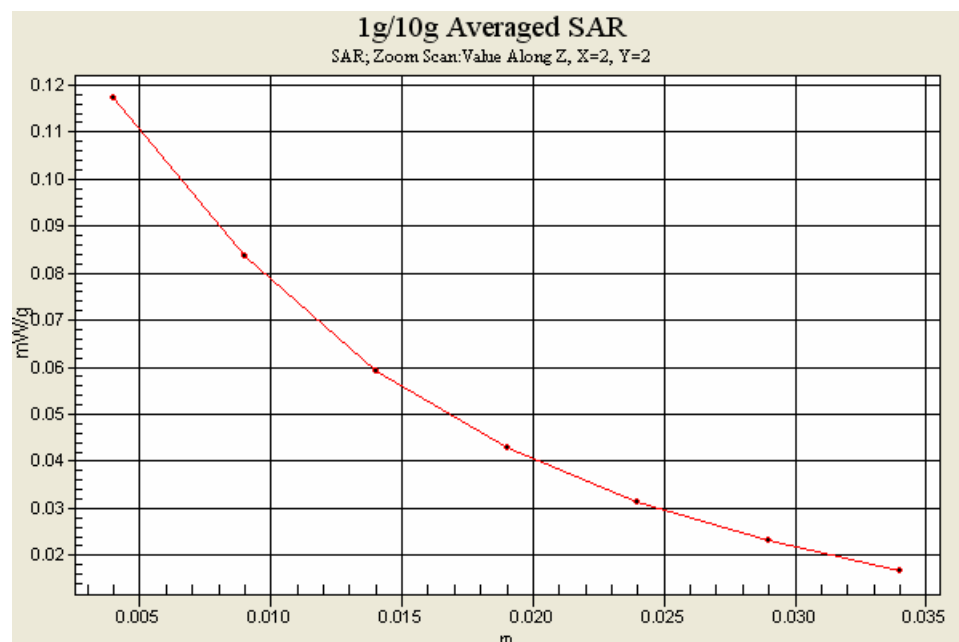

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.387 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

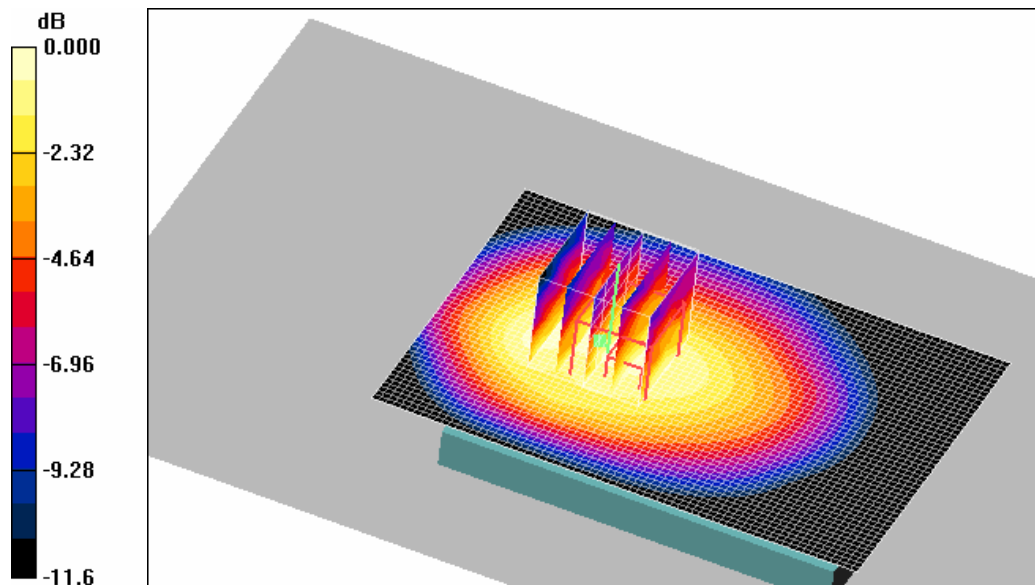

0 dB = 0.426mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Front_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard Front_3Tx/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.208 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Front_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.1 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

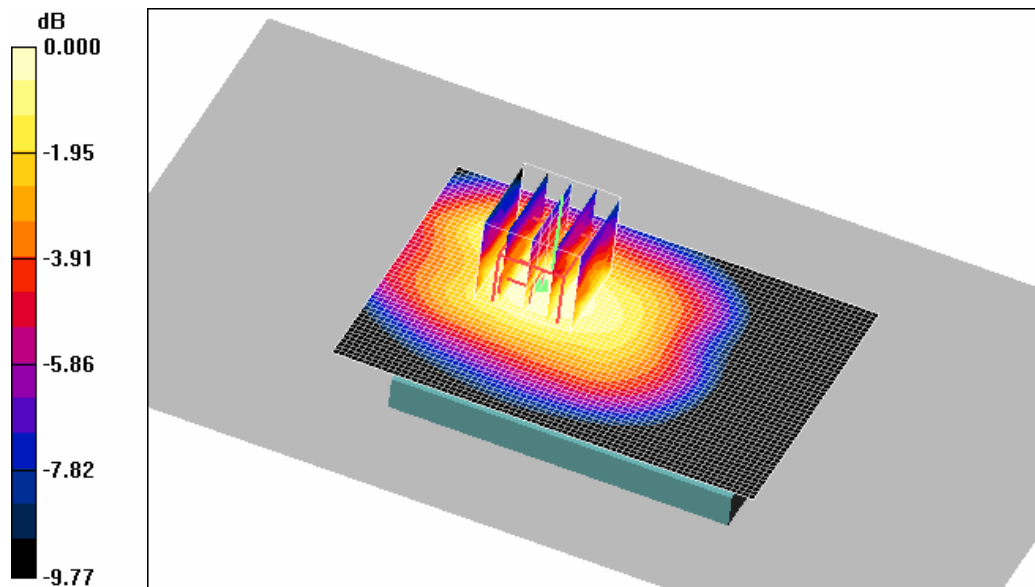

0 dB = 0.194mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard SideA_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard SideA_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.200 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard SideA_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

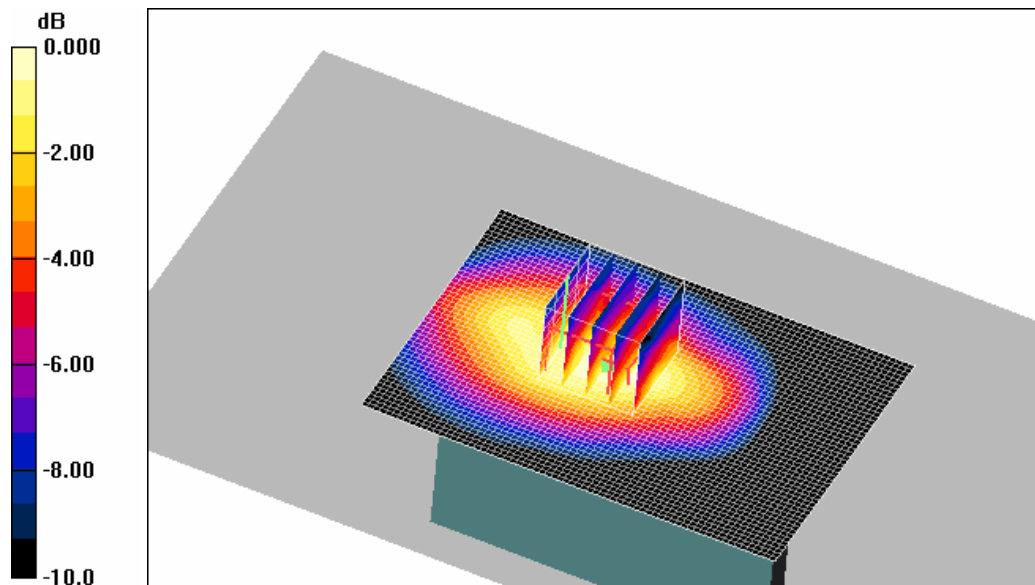

0 dB = 0.205mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard SideB_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard SideB_3Tx/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.157 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard SideB_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.7 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.166 mW/g

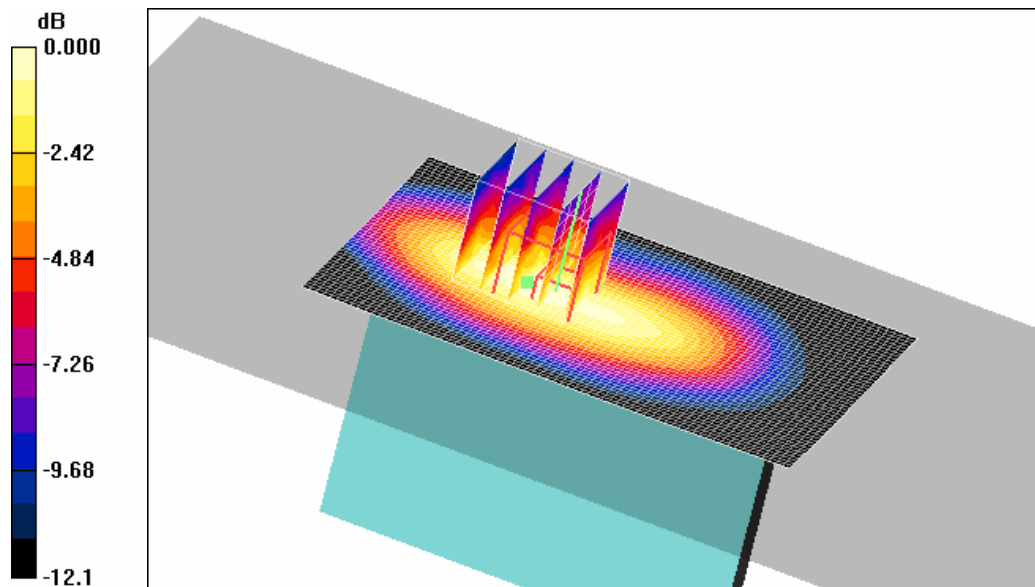

0 dB = 0.166mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard SideC_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard SideC_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.022 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard SideC_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.15 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 0.038 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

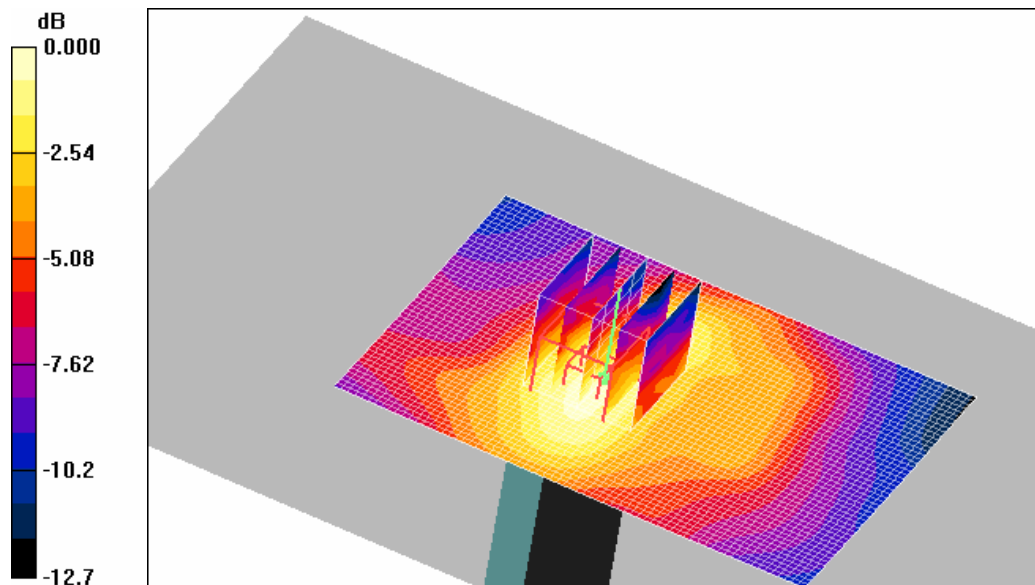

0 dB = 0.025mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS850 Body (Job No. : FI-171)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-10/Aug/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.387 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

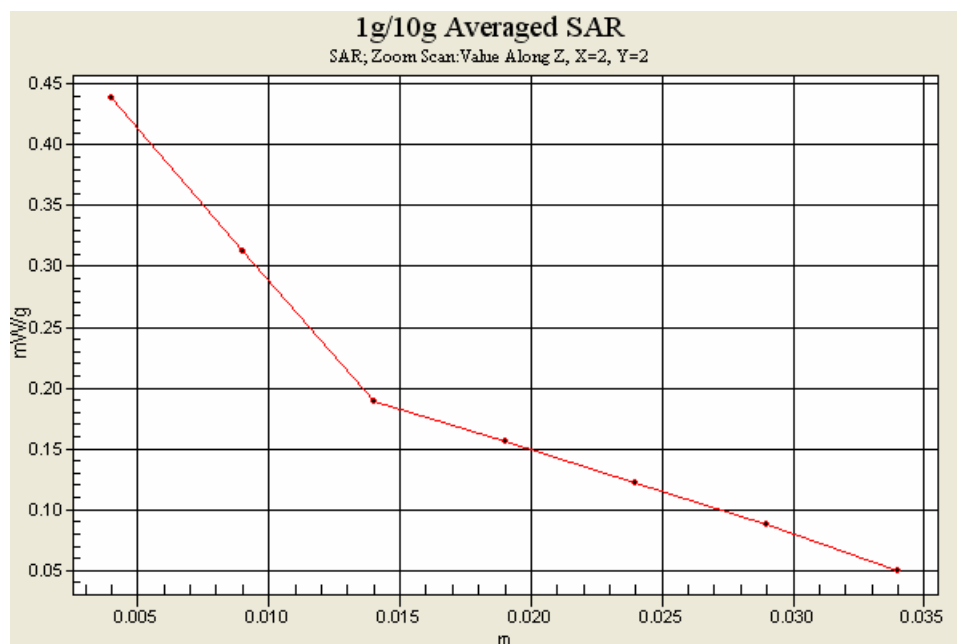

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM1900 Right (Job No. : FI-171)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.507 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.473 mW/g

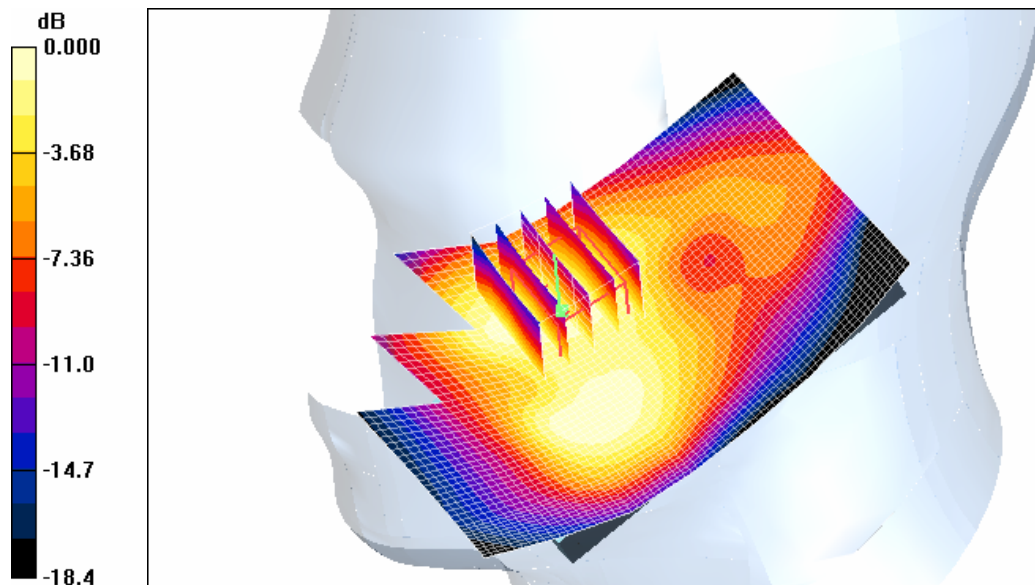

0 dB = 0.473mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM1900 Right (Job No. : FI-171)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.307 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.329 mW/g

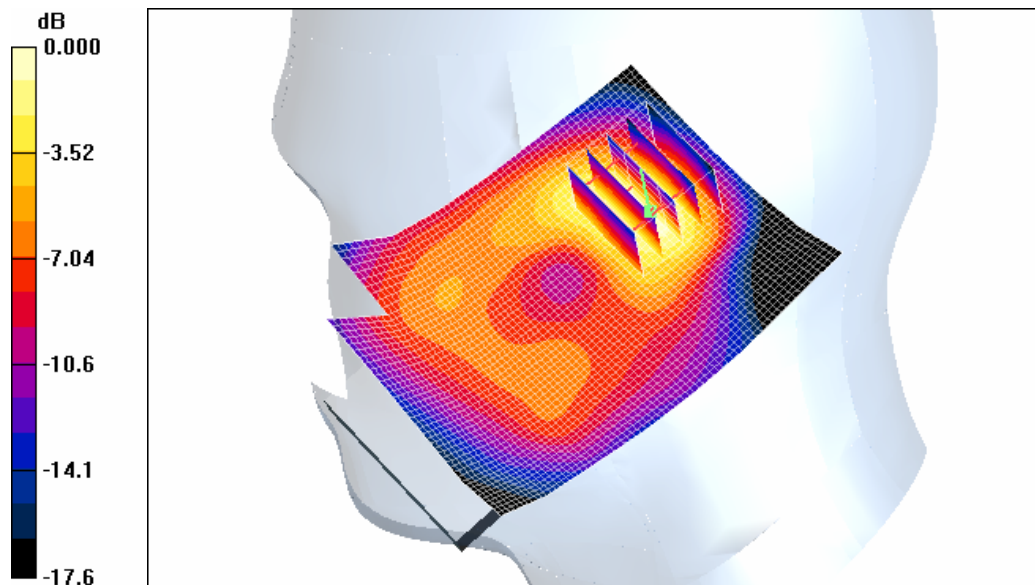

0 dB = 0.329mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM1900 Left (Job No. : FI-171)

Procedure Name: Cheek, Ch.512, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.512, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.971 mW/g

Cheek, Ch.512, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.962 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

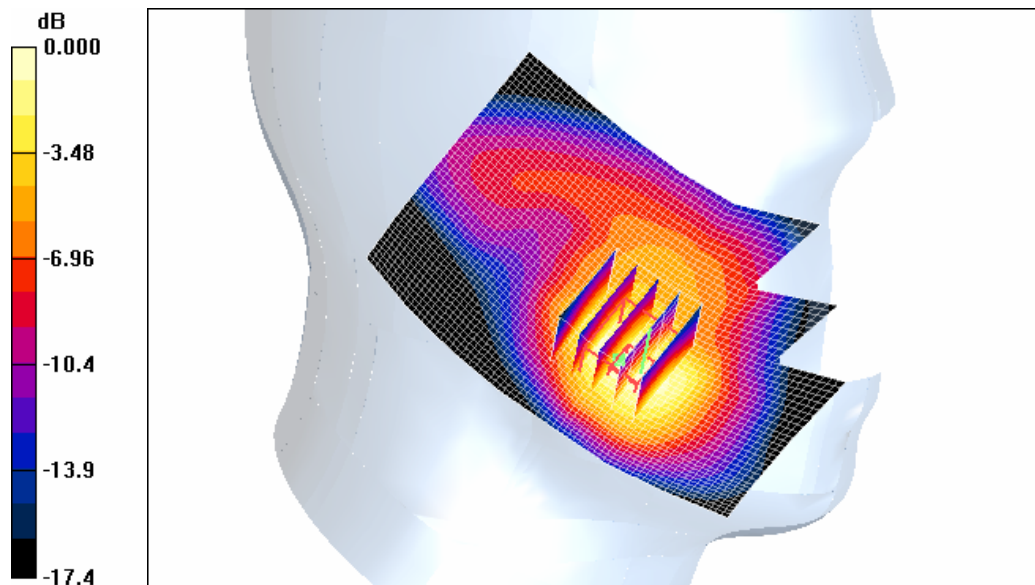

0 dB = 1.05mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM1900 Left (Job No. : FI-171)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.330 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

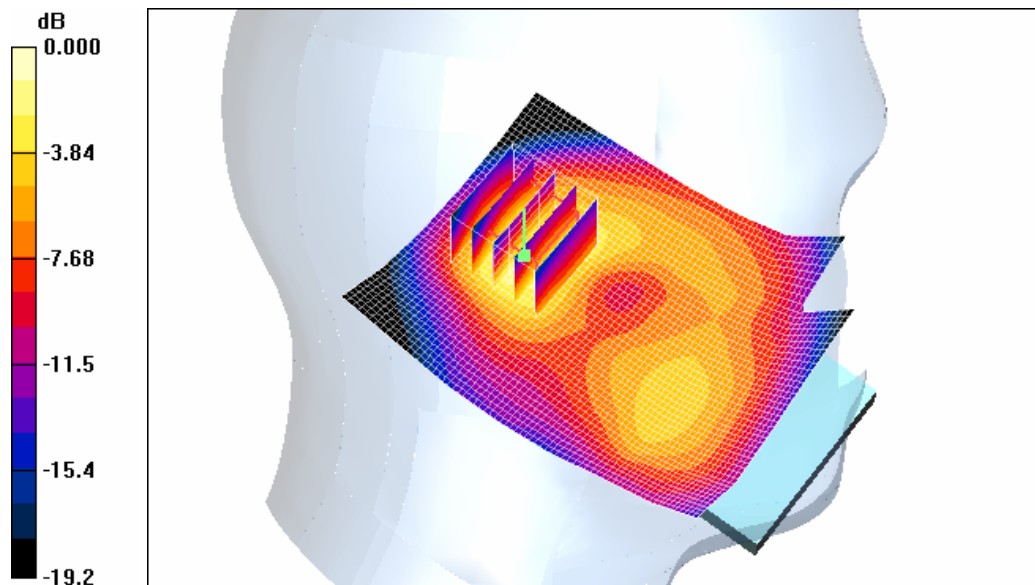

0 dB = 0.380mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GSM1900 Left (Job No. : FI-171)

Procedure Name: Cheek, Ch.512, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.8;Test Date-11/Aug/2011

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.512, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.971 mW/g

Cheek, Ch.512, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.962 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

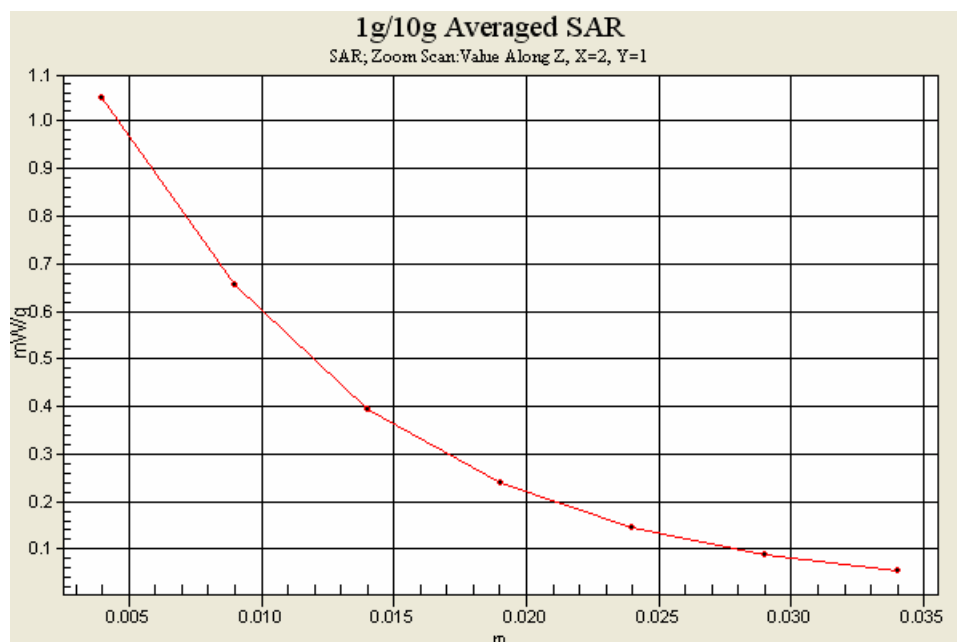

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1850.2 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.973 mW/g

Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.17 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

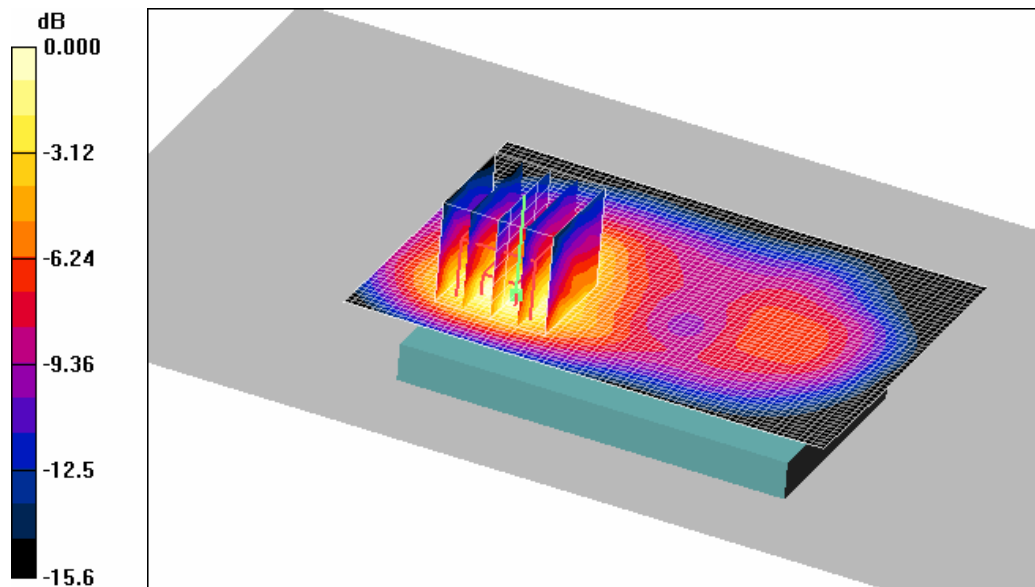

0 dB = 1.06mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.776 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

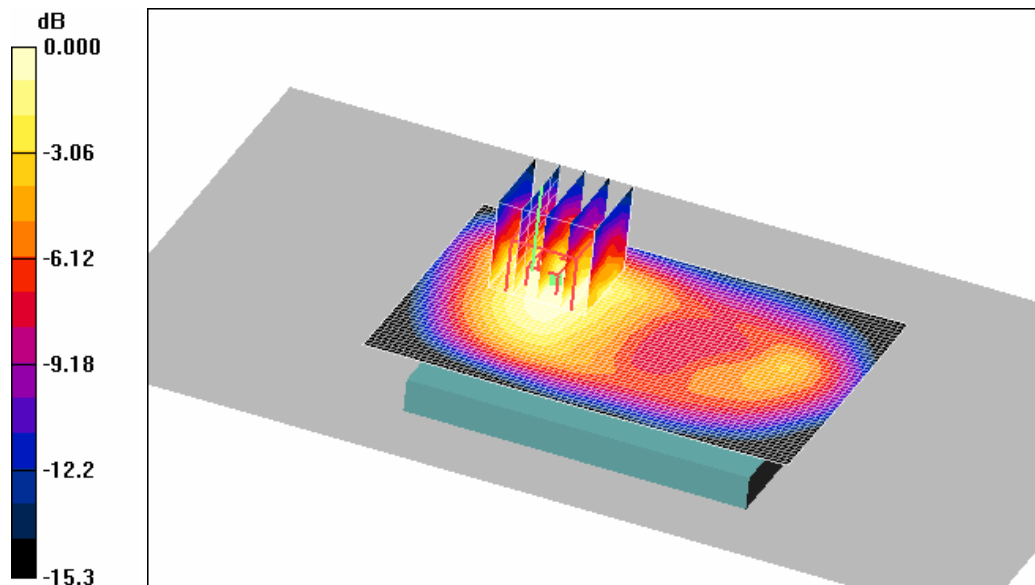

0 dB = 0.808mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard SideA_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.661, Ant.Intenna, Bat.Standard SideA_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.199 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard SideA_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

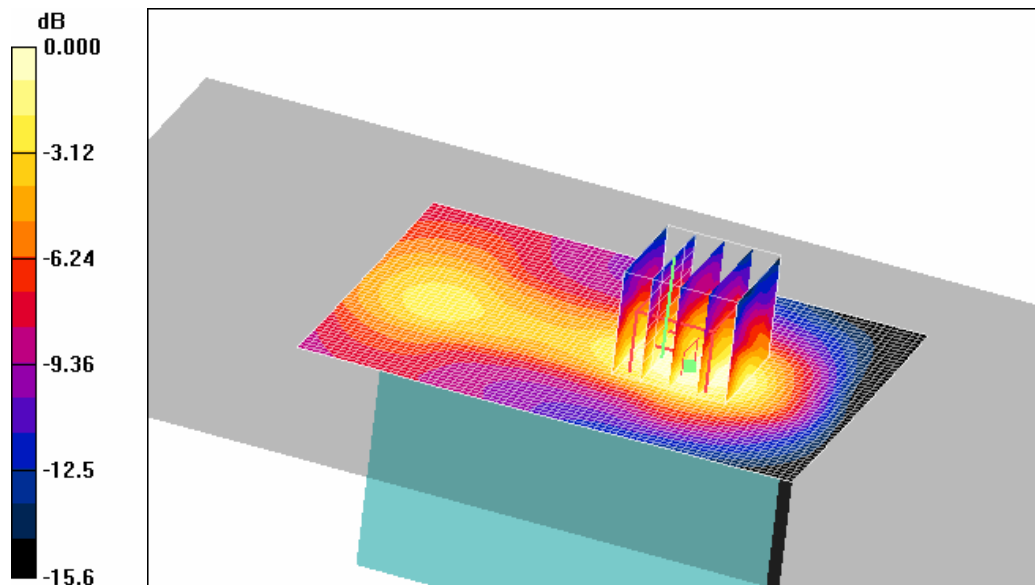

0 dB = 0.168mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard SideB_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.661, Ant.Intenna, Bat.Standard SideB_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.413 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard SideB_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

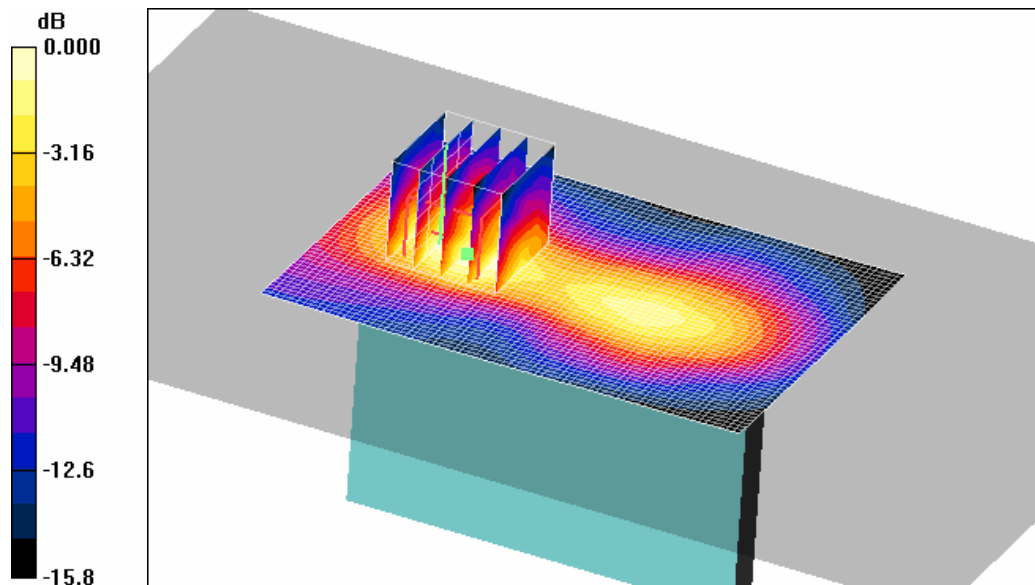

0 dB = 0.425mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard SideC_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.661, Ant.Intenna, Bat.Standard SideC_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.293 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard SideC_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.296 mW/g

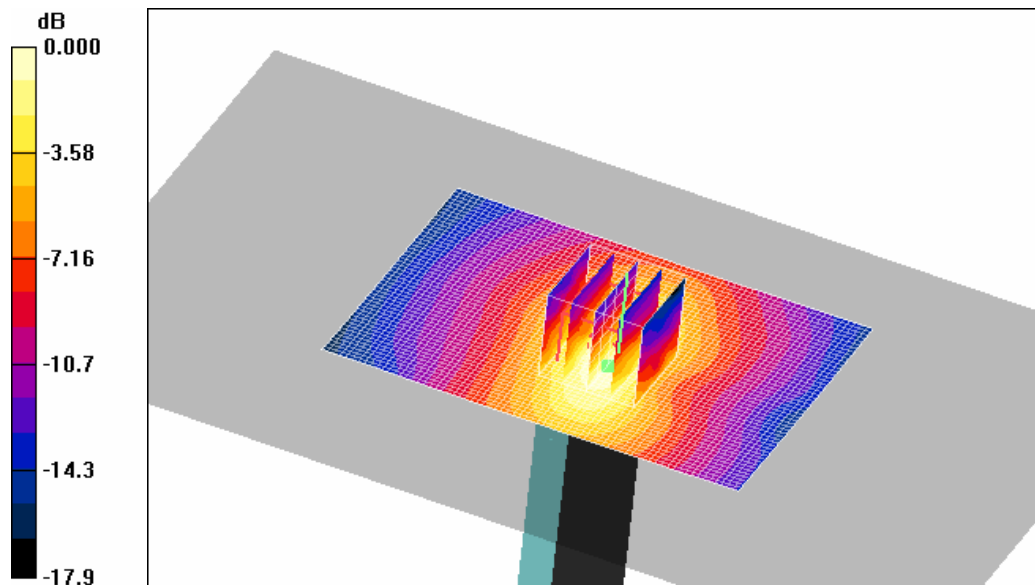

0 dB = 0.296mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 GPRS1900 Body (Job No. : FI-171)

Procedure Name: Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx

Meas. Ambient Temp(celsius)-22.4,Tissue Temp(celsius)-22.1;Test Date-11/Aug/2011

Communication System: Body GPRS ; Frequency: 1850.2 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.973 mW/g

Body, Ch.512, Ant.Intenna, Bat.Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.17 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

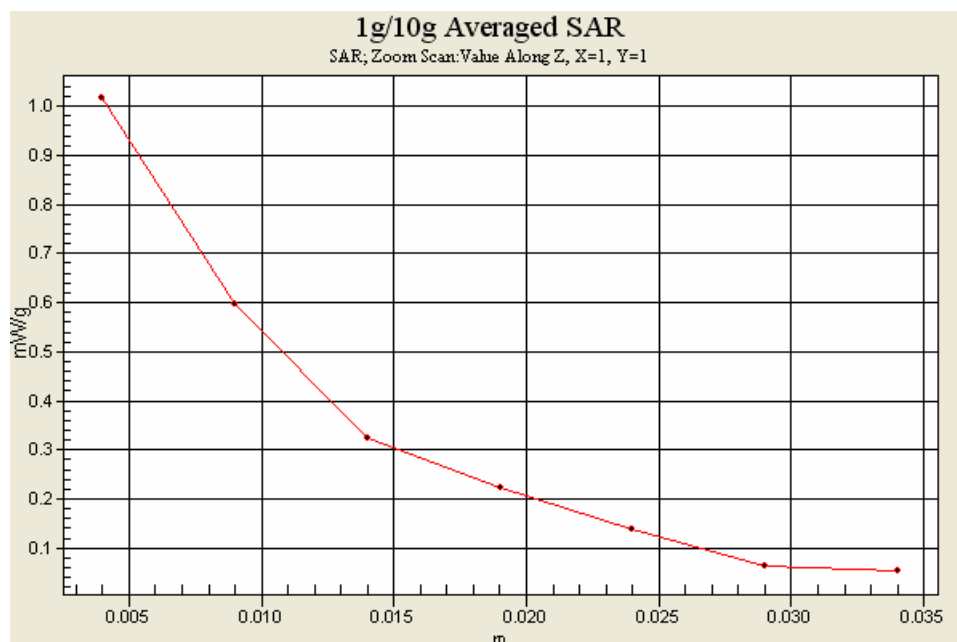

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Right(Job No. : FI-171)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.096 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.82 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

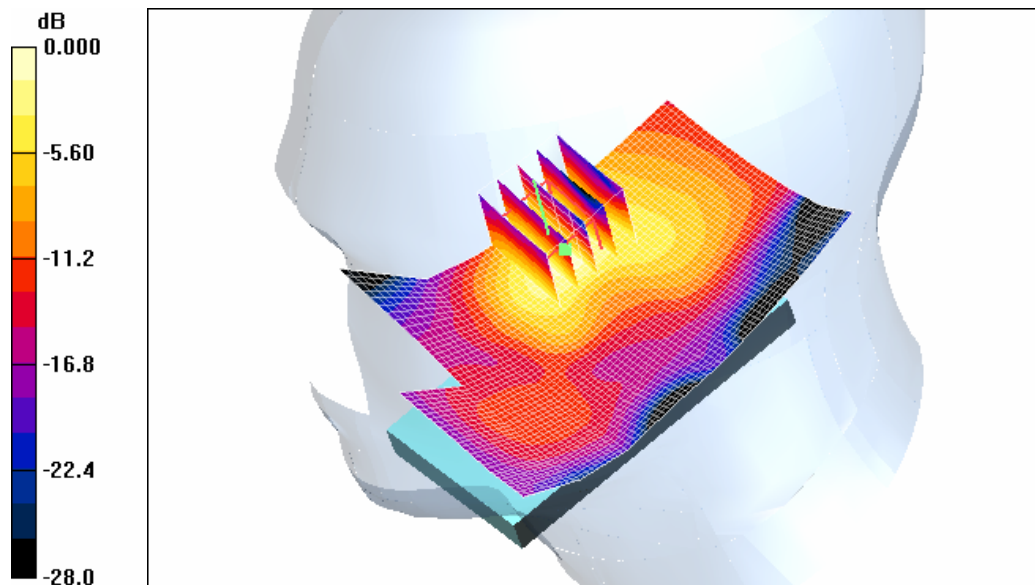

0 dB = 0.114mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Right(Job No. : FI-171)

Procedure Name: Tilted, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.85 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.042 mW/g

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.70 V/m; Power Drift = 0.161 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

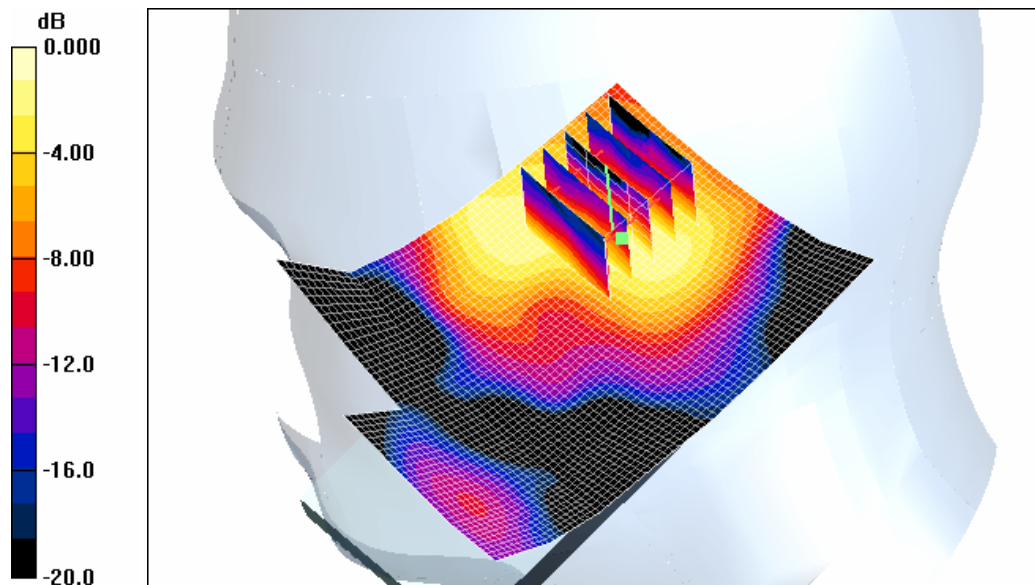

0 dB = 0.060mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Left(Job No. : FI-171)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.24 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.094 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

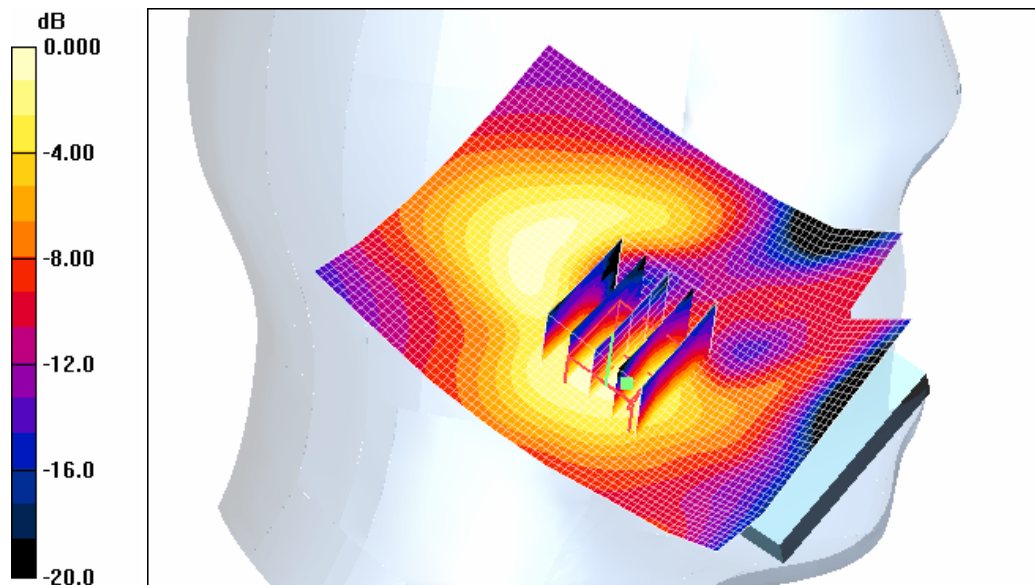

0 dB = 0.055mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Left(Job No. : FI-171)

Procedure Name: Tilted, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.85 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.054 mW/g

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.59 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.096 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

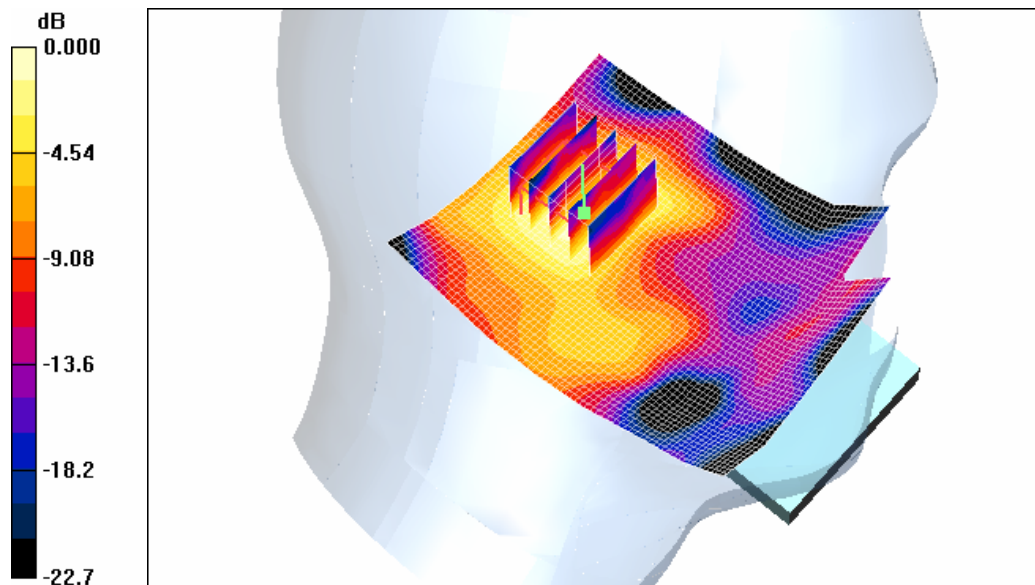

0 dB = 0.057mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Right(Job No. : FI-171)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.9,Tissue Temp(celsius)-21.6;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: SAM PHANTOM #2; Type: SAM; Serial: TP-1247
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.096 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.82 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

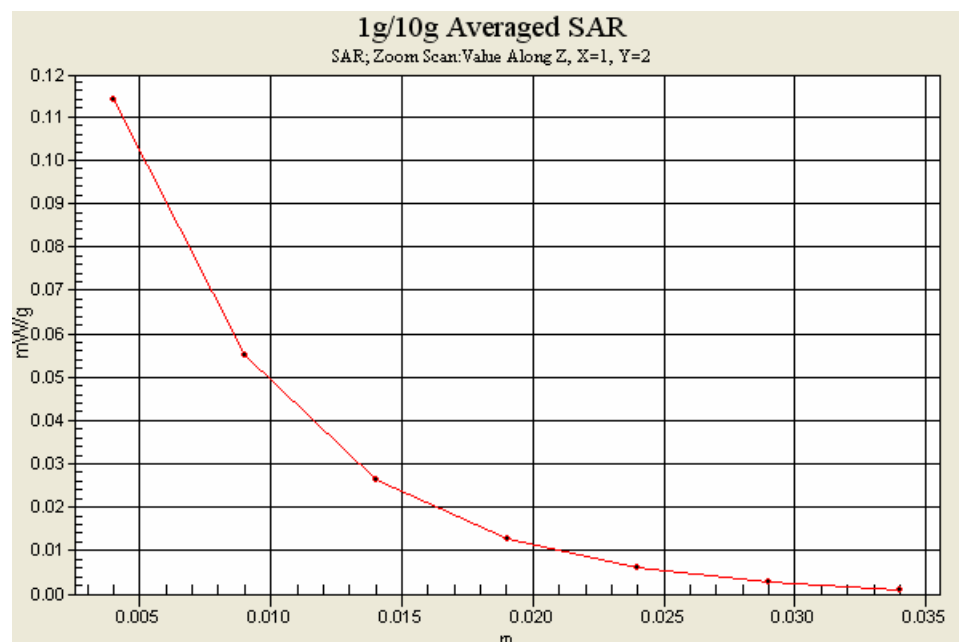

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Body (Job No. : FI-171)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.212 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.20 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

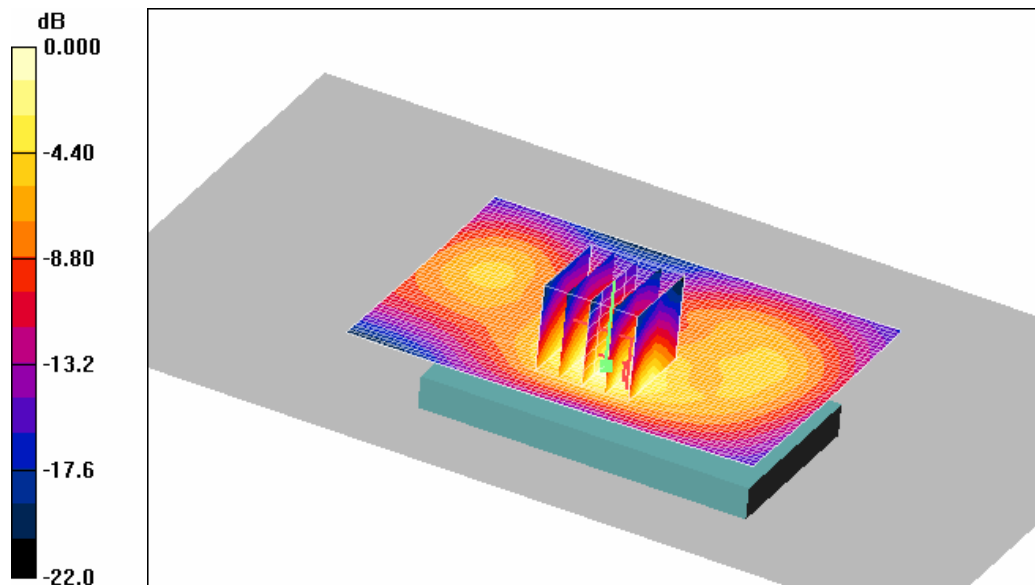

0 dB = 0.249mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Body (Job No. : FI-171)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.99 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.042 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.54 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.067 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

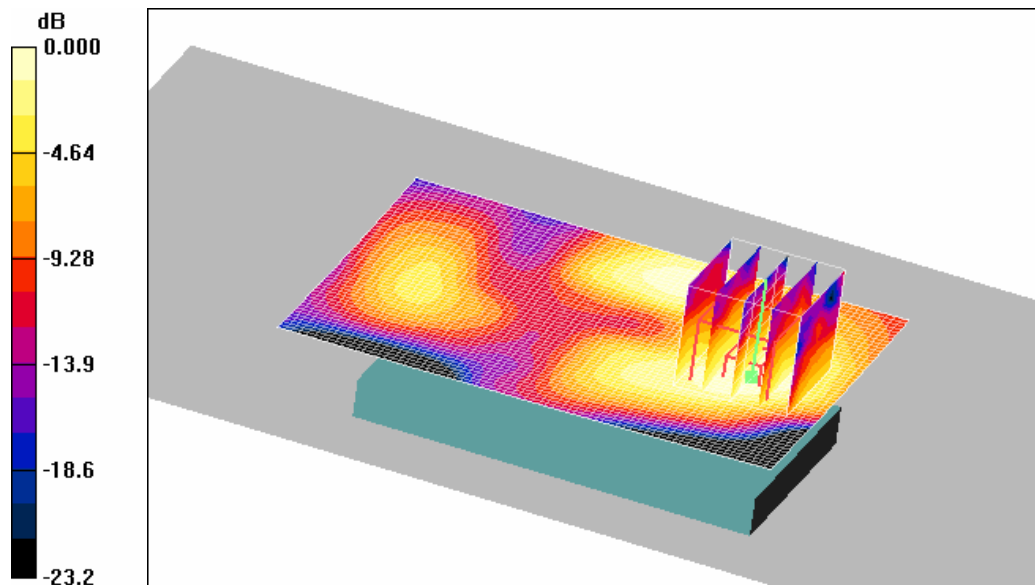

0 dB = 0.039mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Body (Job No. : FI-171)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard SideB 1Mbps

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.11, Ant.Intenna, Bat.Standard SideB 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.162 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard SideB 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.23 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.157 mW/g

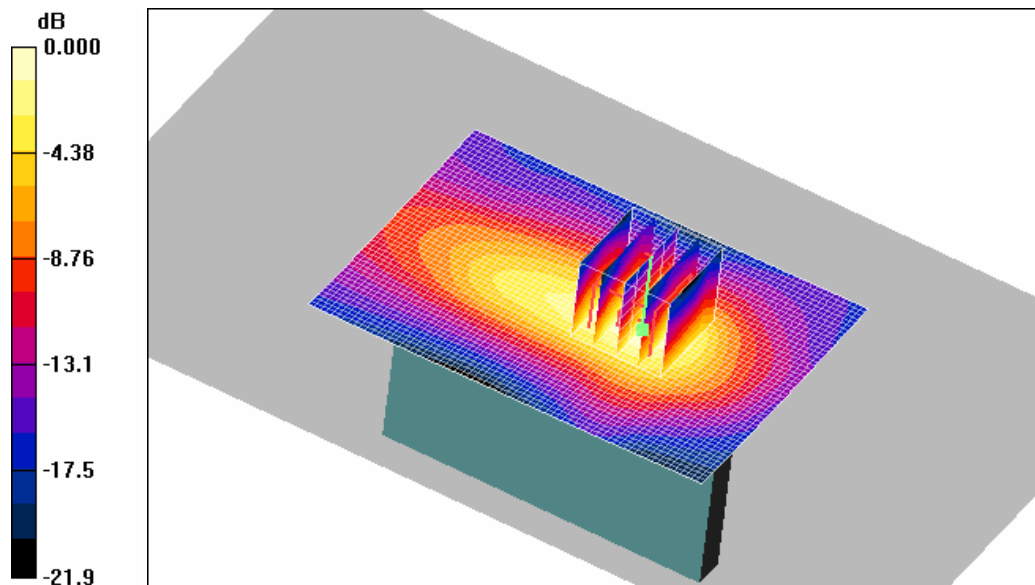

0 dB = 0.157mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Body (Job No. : FI-171)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard SideD 1Mbps

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.11, Ant.Intenna, Bat.Standard SideD 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard SideD 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

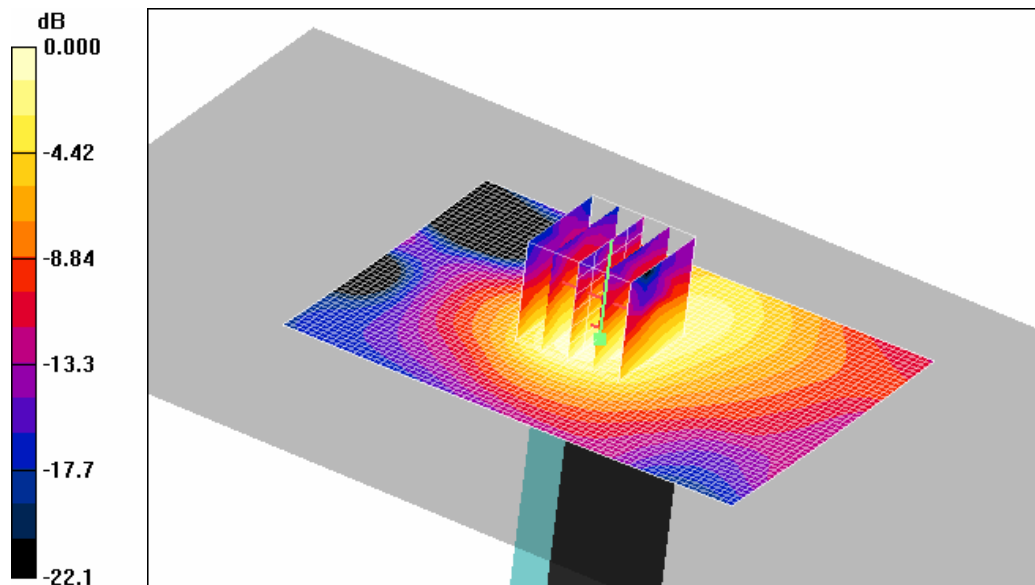

0 dB = 0.054mW/g

DUT: GT-S7250; Serial: FI-171-G

Program Name: GT-S7250 WLAN Body (Job No. : FI-171)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.5;Test Date-08/Aug/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.99 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: 1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.212 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.20 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

