



Antenna B / 4cc / 16QAM / Low




Antenna B / 4cc / 64QAM / Low

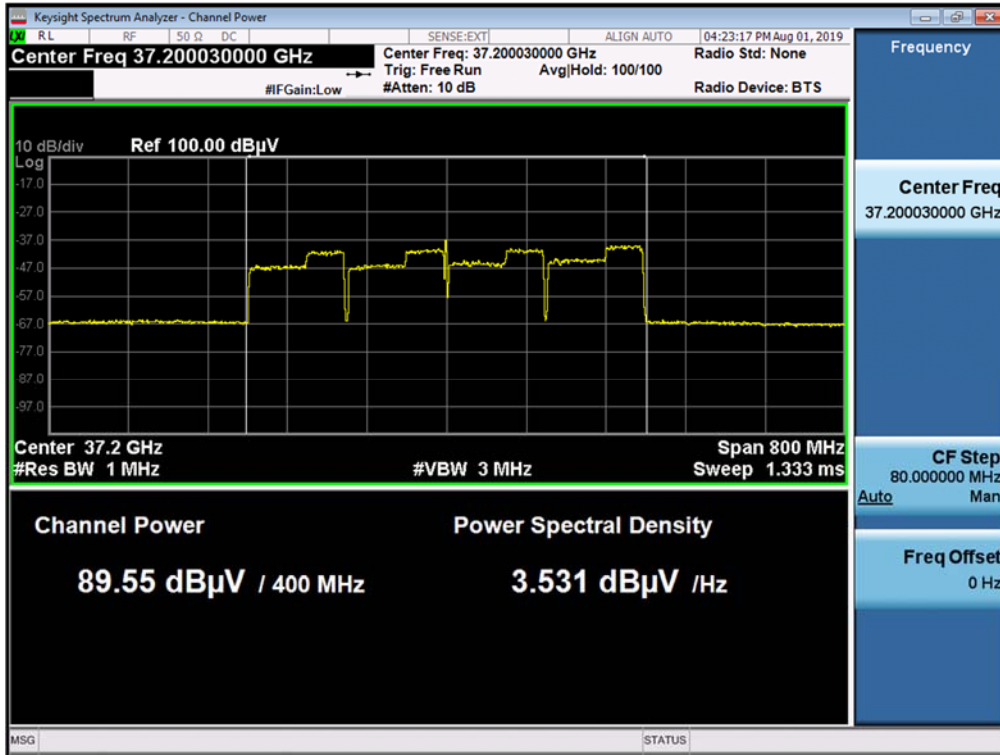


Antenna B / 4cc / QPSK / Middle

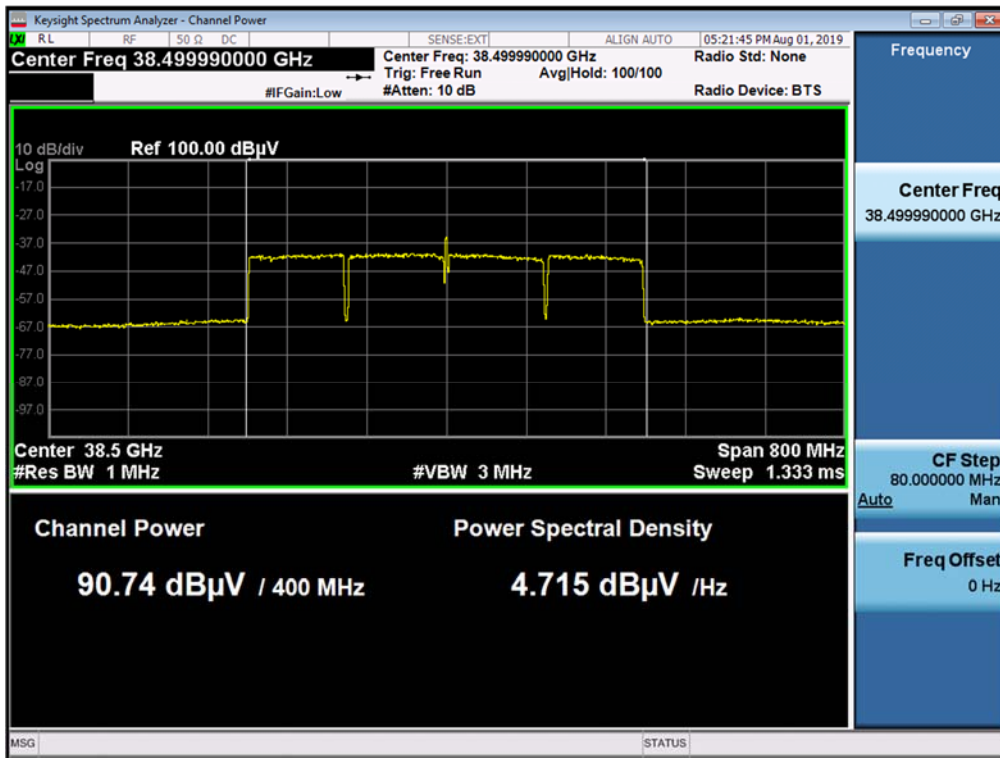


Antenna B / 4cc / 16QAM / Middle

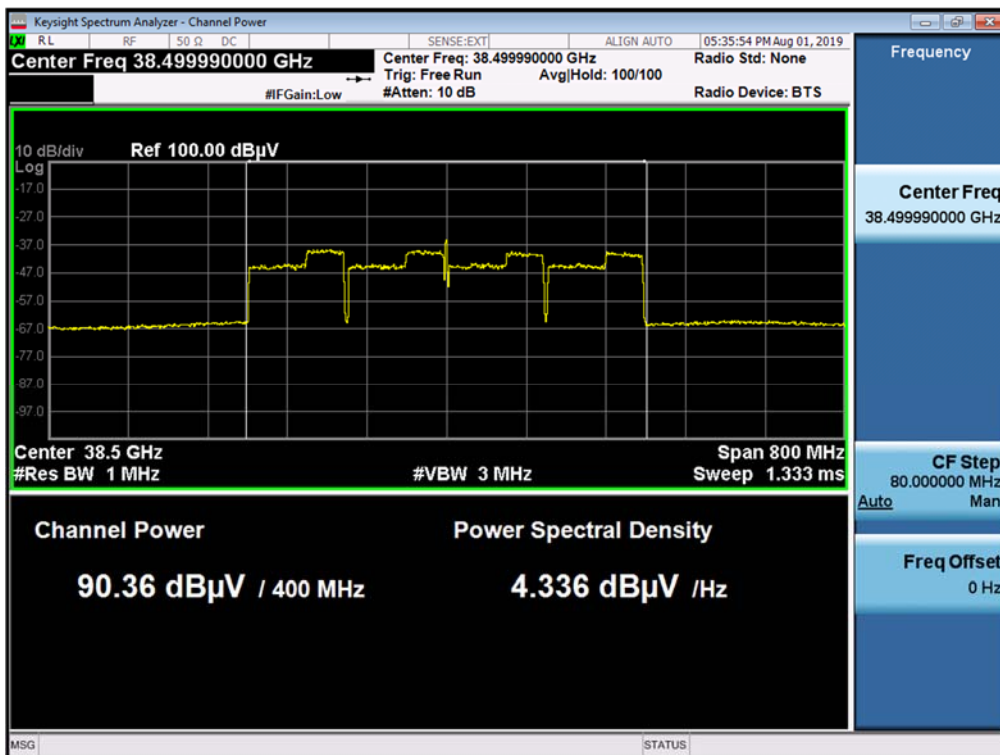


Antenna B / 4cc / 64QAM / Middle

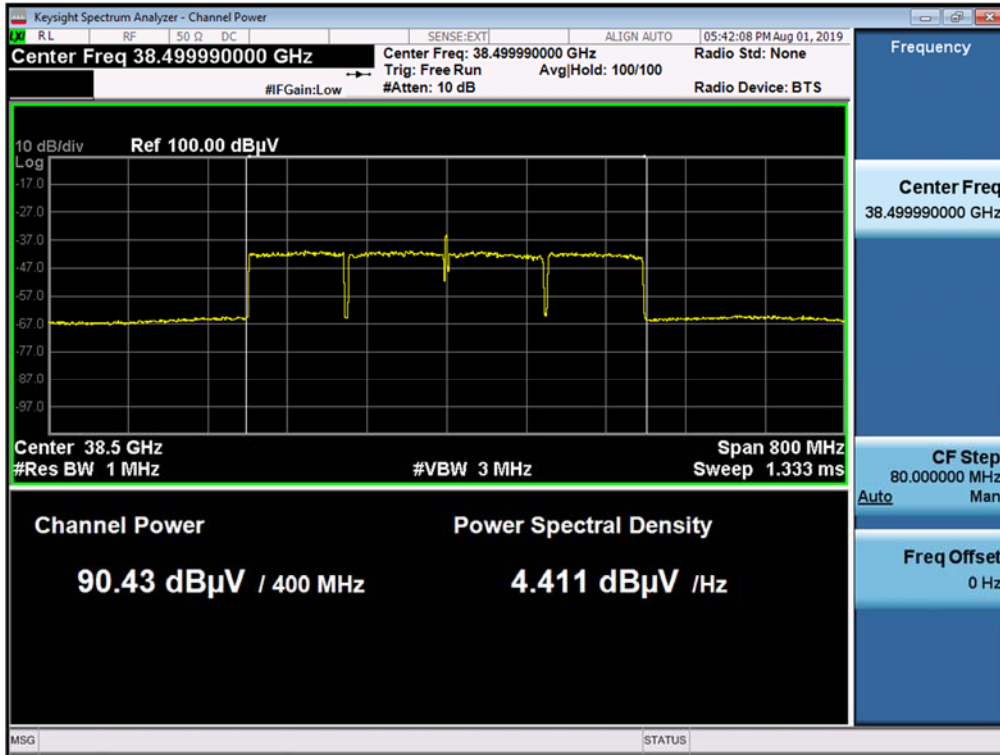


Antenna B / 4cc / QPSK / High

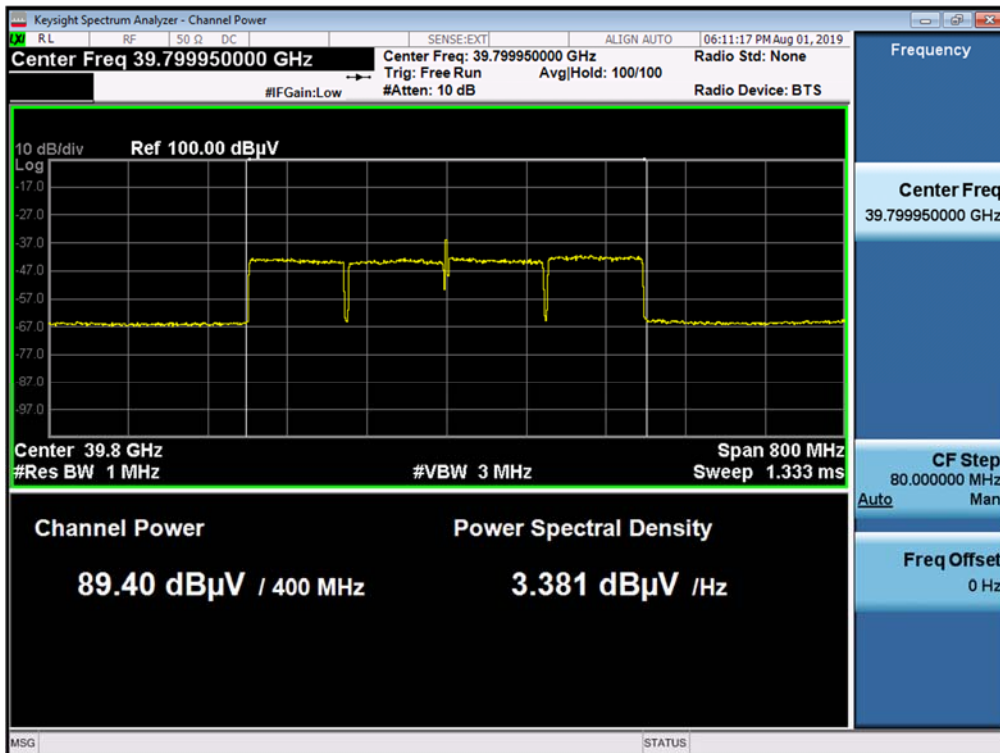

Antenna B / 4cc / 16QAM / High

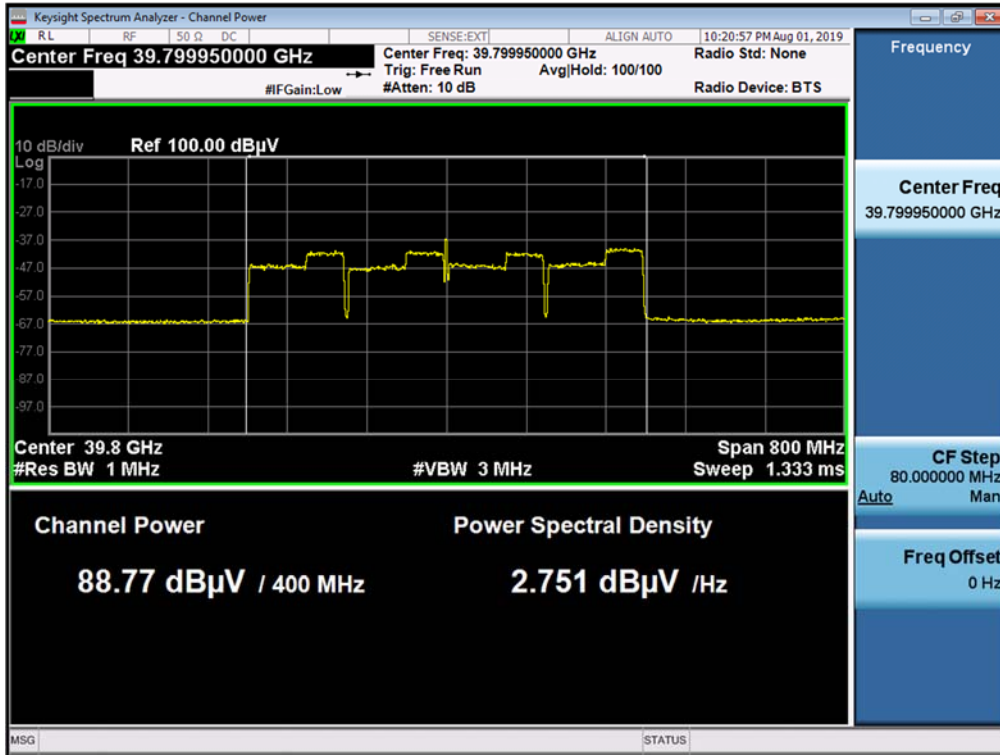

Antenna B / 4cc / 64QAM / High

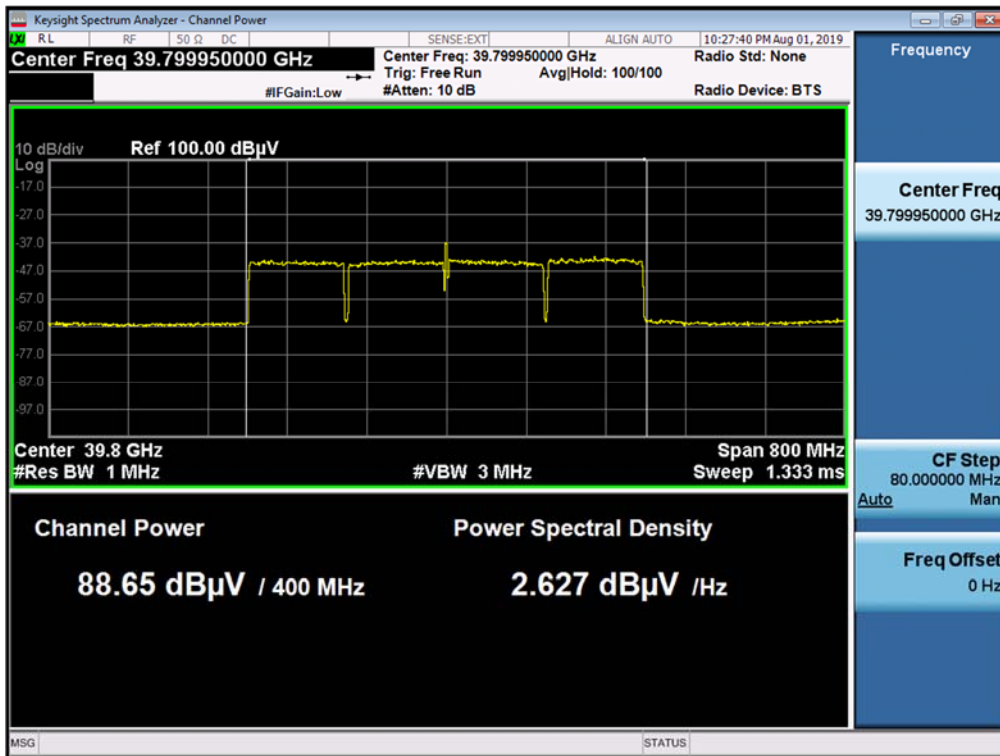

5.4. BAND EDGE

FCC Rules

Test Requirements:

§ 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 30.203 Emission limits.

- (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.
- (b)(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges as the design permits.
- (3) The measurements of emission power can be expressed in peak or average values.

Test Procedures:

The measurement is performed in accordance with Section 5.7.3 of ANSI C63.26.

5.7.3 Out-of-band unwanted emissions measurements

- a) Set the spectrum analyzer center frequency to the block, band, or channel edge frequency.
- b) Set the span wide enough to capture the fundamental emission closest to the authorized block or band edge, and to include all modulation products that spill into the immediately adjacent frequency band. In some cases, it may be possible to set the center frequency and span so as to encompass the fundamental emission and the unwanted out-of-band (band-edge) emissions on either side of the authorized block, band, or channel. This can be accomplished with a single (slow) sweep, if adequate overload protection and sufficient dynamic range can be maintained.
- c) Set the number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
- d) Sweep time should be auto for peak detection. For rms detection the sweep time should be set as follows:
 - 1), 2) Omitted
 - 3) If the device cannot be configured to transmit continuously (duty cycle $< 98\%$) and a free running sweep must be used, set the sweep time so that the averaging is performed over multiple on/off cycles by setting the sweep time $> (\text{number of points in sweep}) \times (\text{transmitter period})$ (i.e., the transmit on-time + the off-time). The spectrum analyzer readings shall subsequently be corrected by $[10 \log (1/\text{duty cycle})]$. This assumes that the transmission period and duty cycle is relatively constant (duty cycle variation $\leq \pm 2\%$).
 - 4) Omitted
- e) The test report shall include the plots of the measuring instrument display and the measured data.

f) See Annex I for example emission mask plots.

Note:

- 1) Basic test conditions are same as EIRP test on page 24.
- 2) In the band edge test of antenna A, path A, B are individually operated and measured at the maximum emission position of antenna A, and the respective measurement results are summed.
- 3) For measurement of antenna B repeat 2) at the maximum emission position of antenna B.
- 4) Band edge value is calculated as follows.

$$\text{Low Band Edge} = \text{Measured Value} + 20\log(D) - 104.77 + \text{AFCL} + \text{Duty} - \text{Ant. Gain}$$

$$\text{High Band Edge} = \text{Measured Value (EIRP (dBm)} + 107) + 20\log(D) - 104.77 + \text{AFCL} + \text{Duty} - \text{Ant. Gain}$$

- 5) Antenna Gain of the above formula was applied from actual measurement data of the radiation pattern document.
- 6) Sample calculation

Maximum Antenna A, 1cc, Low, QPSK:

Antenna A

$$\begin{aligned} &27.844 \text{ dB}\mu\text{V (measured)} + 11.48 \text{ (distance)} - 104.77 + 48.19 \text{ (AFCL)} + 2.214 \text{ (Duty)} \\ &= -15.041 \text{ dBm (Antenna A Edge)} \end{aligned}$$

Total edge result

Conversion and sum

$$0.0313256 \text{ mW (Ant.A)} + 0.0308461 \text{ mW (Ant.B)} = 0.0621717 \text{ mW}$$

Conversion mW to dBm

$$10\text{LOG} (0.0621717 \text{ mW}) - 24.80 \text{ (Antenna gain)} = -36.86 \text{ dBm}$$

Sum each antenna power

$$(-36.86 \text{ dBm}) \text{ (Ant.A)} + (-36.44 \text{ dBm}) \text{ (Ant.B)} = -33.63 \text{ dBm}$$

Test Results:
Tabular Data of Band Edge

Pos.	Ant.	Distance	cc	Edge	Mod.	Ant	Measured Level (dBuV)	EIRP (dBm)	Ant Gain (dBi)	Result
	Angle	(m)								(dBm)
MAX Ant. A	135°	3.75	1	Low	QPSK	A	27.844	-15.041	24.8	-39.841
						B	27.777	-15.108		-39.908
					16QAM	A	27.329	-15.556		-40.356
						B	27.061	-15.824		-40.624
					64QAM	A	33.484	-9.401		-34.201
						B	26.892	-15.993		-40.793
				High	QPSK	A	41.120	-7.676	24.9	-32.576
						B	35.330	-13.886		-38.786
					16QAM	A	40.440	-8.356		-33.256
						B	35.070	-14.146		-39.046
					64QAM	A	41.400	-7.396		-32.296
						B	35.350	-13.866		-38.766
			4	Low	QPSK	A	31.266	-11.619	24.8	-36.419
						B	26.721	-16.164		-40.964
					16QAM	A	31.607	-11.278		-36.078
						B	26.958	-15.927		-40.727
					64QAM	A	29.548	-13.337		-38.137
						B	26.614	-16.271		-41.071
				High	QPSK	A	40.060	-8.736	24.9	-33.636
						B	35.320	-14.616		-39.516
					16QAM	A	41.230	-7.566		-32.466
						B	35.110	-14.106		-39.006
					64QAM	A	42.500	-6.296		-31.196
						B	35.110	-14.106		-39.006


Pos.	Ant.	Distance	cc	Edge	Mod.	Ant	Measured Level (dBuV)	EIRP (dBm)	Ant Gain (dBi)	Result
	Angle	(m)								(dBm)
MAX Ant. B	45°	3.75	1	Low	QPSK	A	26.656	-16.229	24.8	-41.029
						B	29.398	-13.487		-38.287
					16QAM	A	27.169	-15.716		-40.516
						B	27.478	-15.407		-40.207
					64QAM	A	26.807	-16.078		-40.878
						B	32.441	-10.444		-35.244
				High	QPSK	A	35.150	-14.066	24.9	-38.966
						B	42.990	-5.806		-30.706
					16QAM	A	35.270	-13.946		-38.846
						B	42.260	-6.536		-31.436
					64QAM	A	35.130	-14.086		-38.986
						B	39.860	-8.936		-33.836
			4	Low	QPKS	A	26.275	-16.610	24.8	-41.410
						B	32.618	-10.267		-35.067
					16QAM	A	26.752	-16.133		-40.933
						B	30.762	-12.123		-36.923
					64QAM	A	26.968	-15.917		-40.717
						B	31.607	-11.278		-36.078
				High	QPKS	A	35.100	-14.116	24.9	-39.016
						B	41.720	-7.076		-31.976
					16QAM	A	35.350	-13.866		-38.766
						B	41.520	-7.276		-32.176
					64QAM	A	35.150	-14.066		-38.966
						B	40.590	-8.206		-33.106

MIMO Data of Band Edge


Antenna	cc	Edge	Modulation	Result (dBm)
A+B	1	Low	QPSK	-33.63
			16QAM	-34.40
			64QAM	-30.74
		High	QPSK	-27.79
			16QAM	-28.40
			64QAM	-28.99
	4	Low	QPSK	-31.60
			16QAM	-32.11
			64QAM	-32.49
		High	QPSK	-28.85
			16QAM	-28.44
			64QAM	-28.24

Plot data of Band Edge


MAX Ant. A Position / 1cc / Low / QPSK / Ant. A

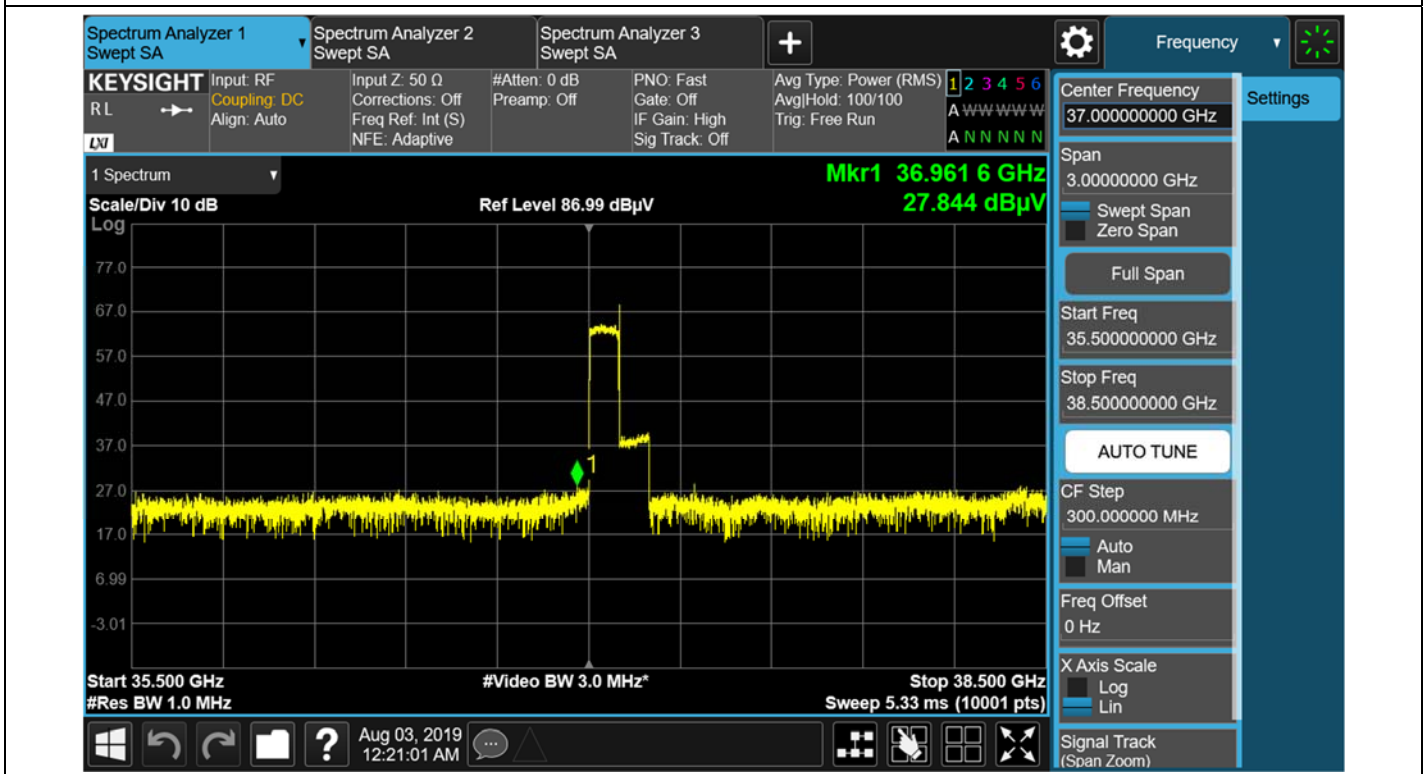


MAX Ant. A Position / 1cc / Low / QPSK / Ant. B

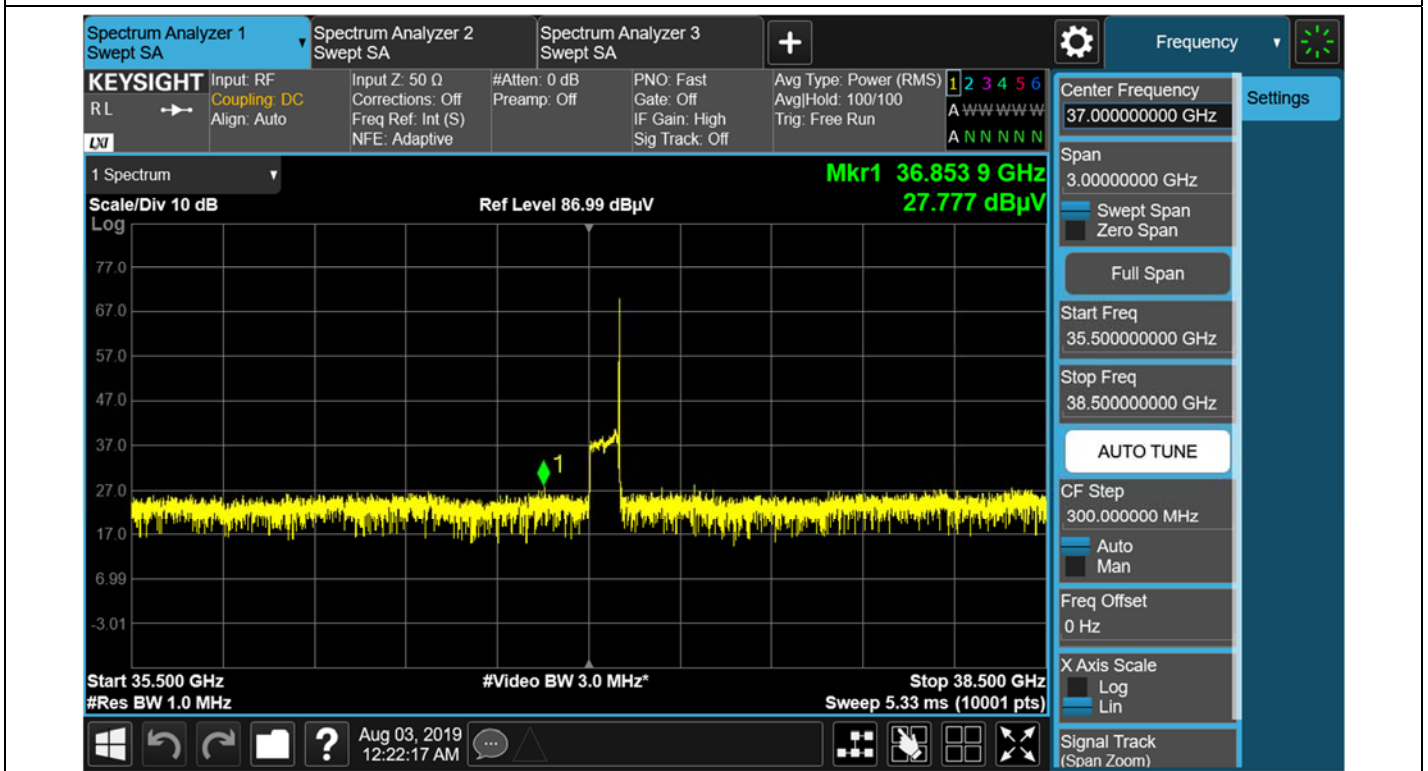


MAX Ant. A Position / 1cc / Low / 16QAM / Ant. A

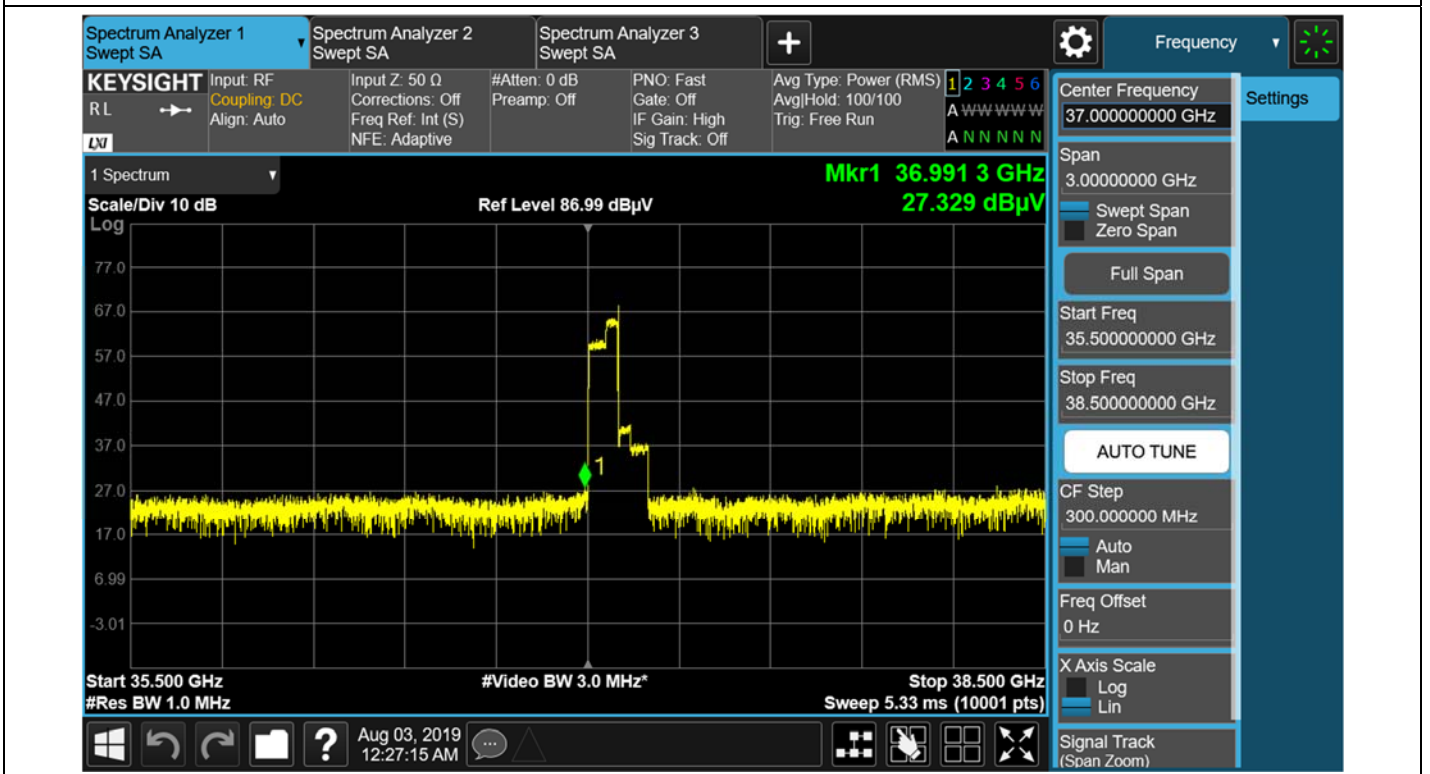


MAX Ant. A Position / 1cc / Low / 16QAM / Ant. B

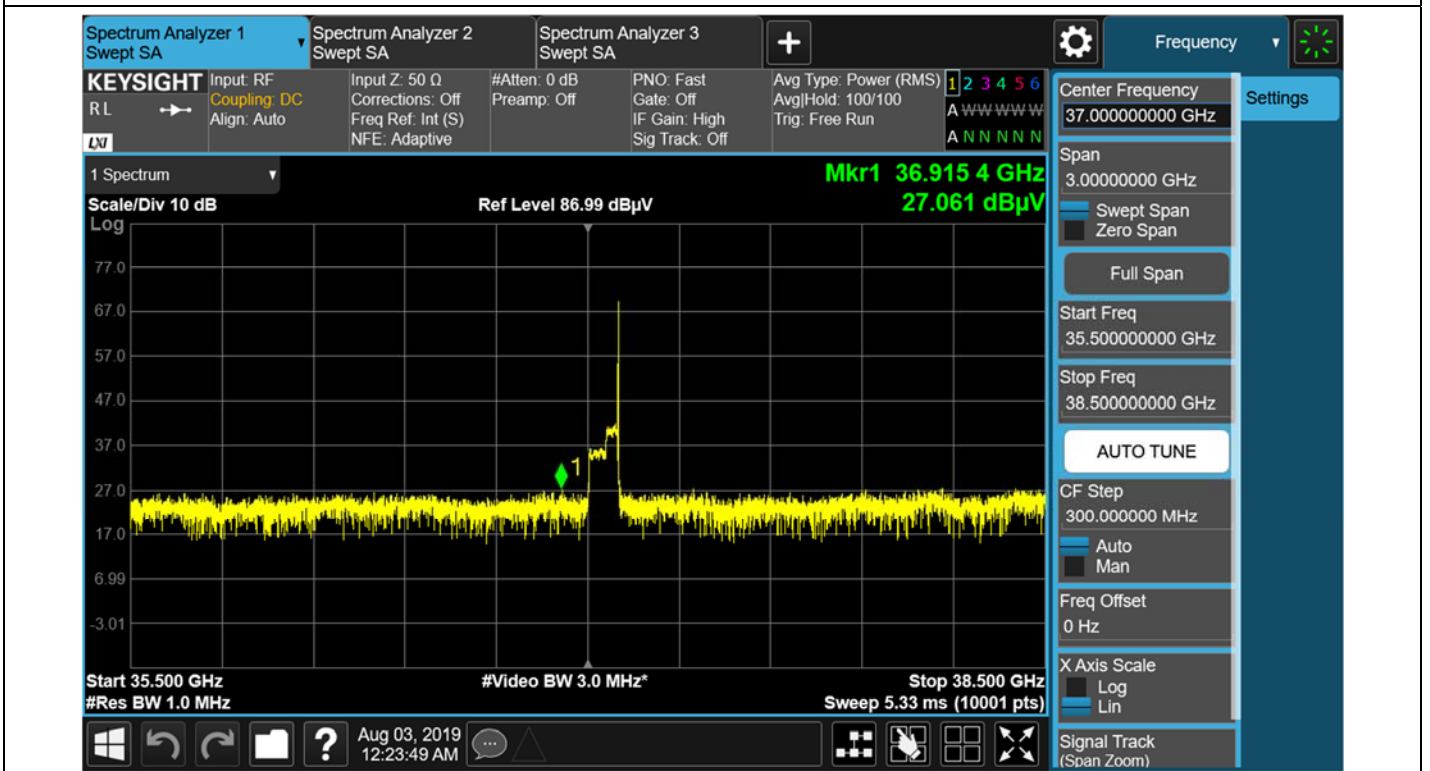


MAX Ant. A Position / 1cc / Low / 64QAM / Ant. A

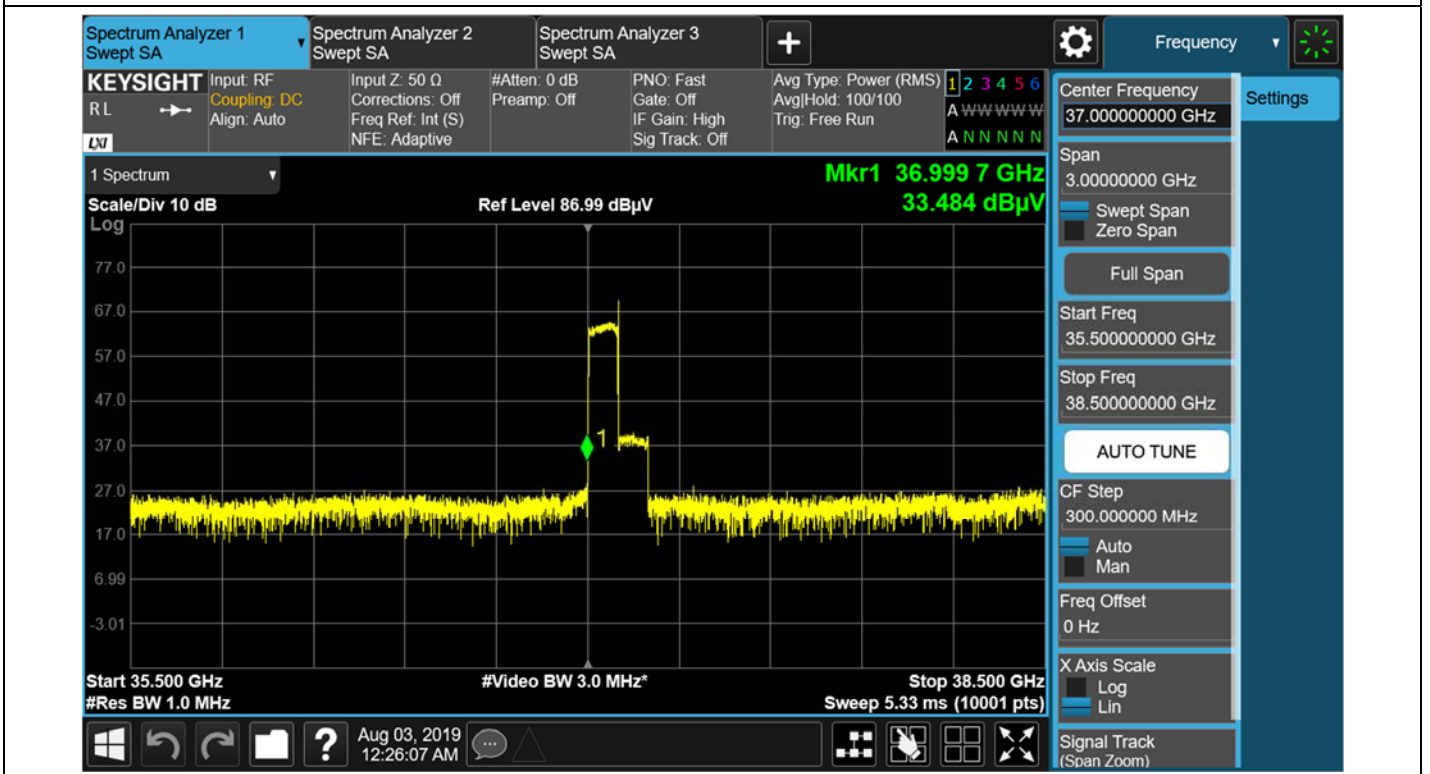


MAX Ant. A Position / 1cc / Low / 64QAM / Ant. B

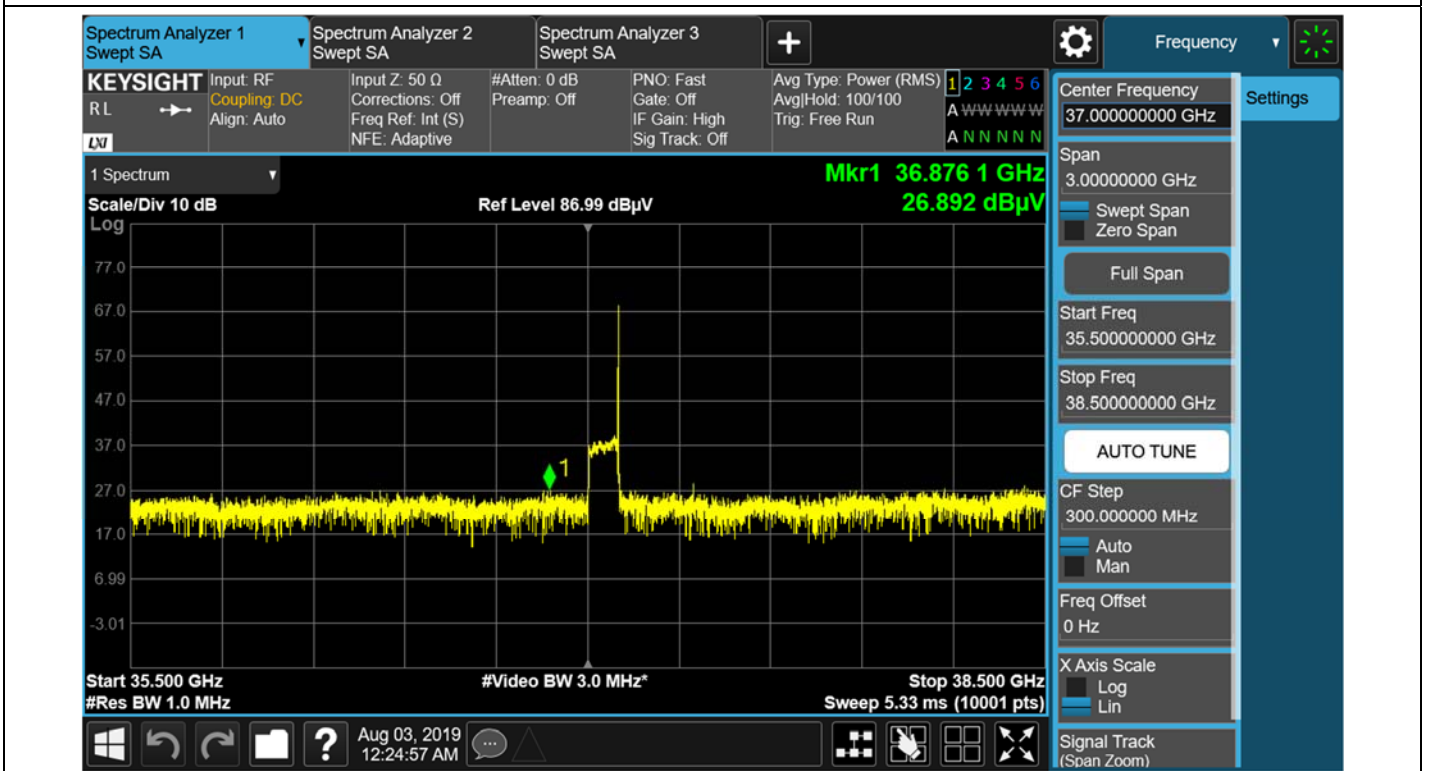


MAX Ant. A Position / 1cc / High / QPSK / Ant. A

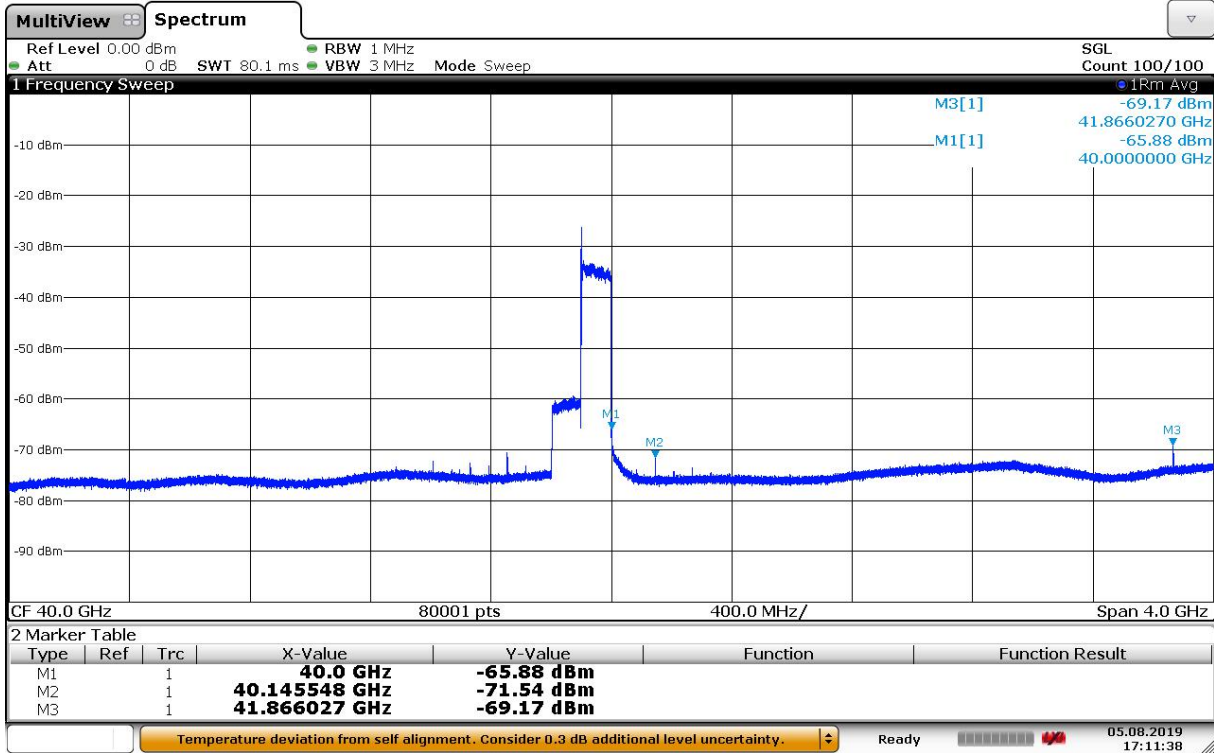


MAX Ant. A Position / 1cc / High / QPSK / Ant. B

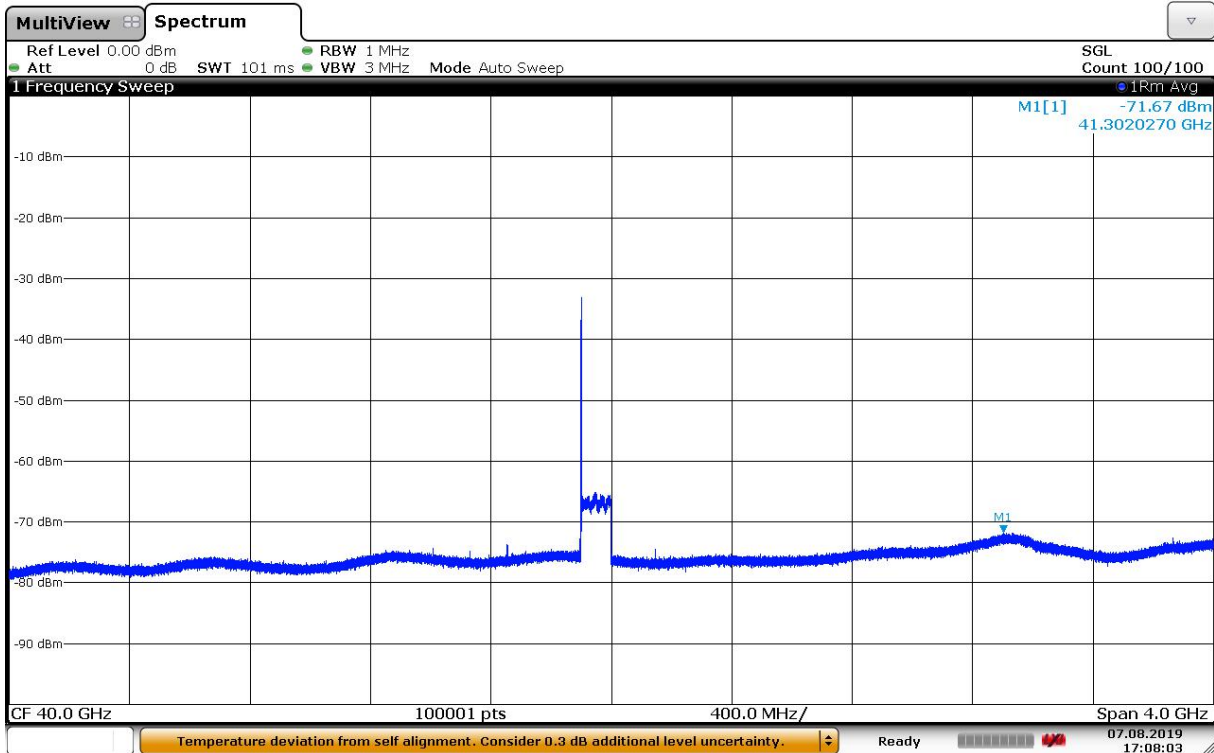


MAX Ant. A Position / 1cc / High / 16QAM / Ant. A

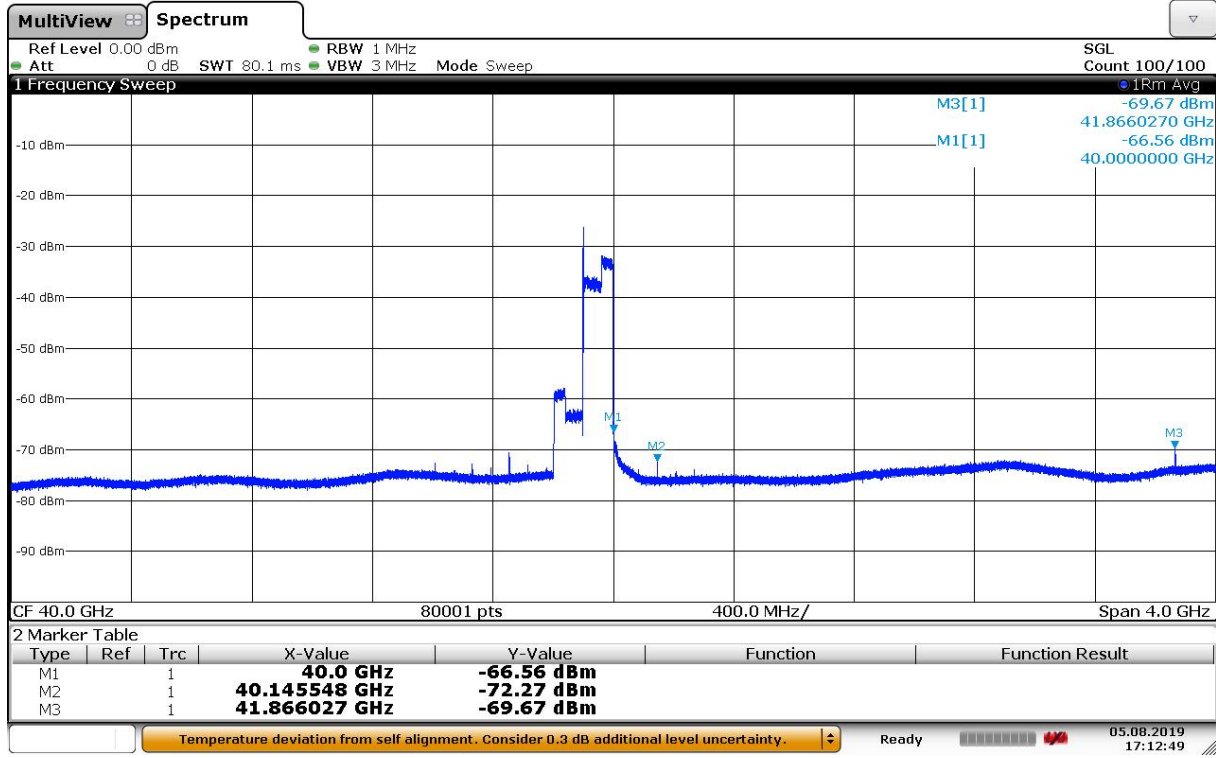


MAX Ant. A Position / 1cc / High / 16QAM / Ant. B

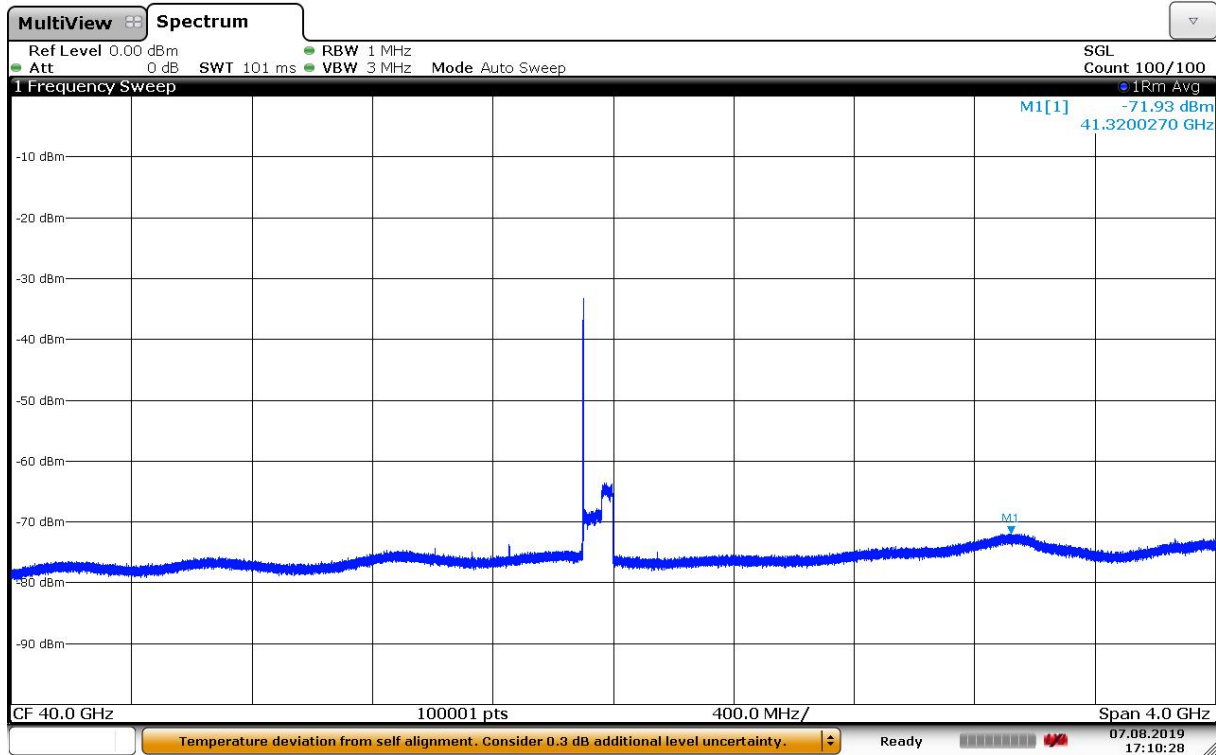


MAX Ant. A Position / 1cc / High / 64QAM / Ant. A

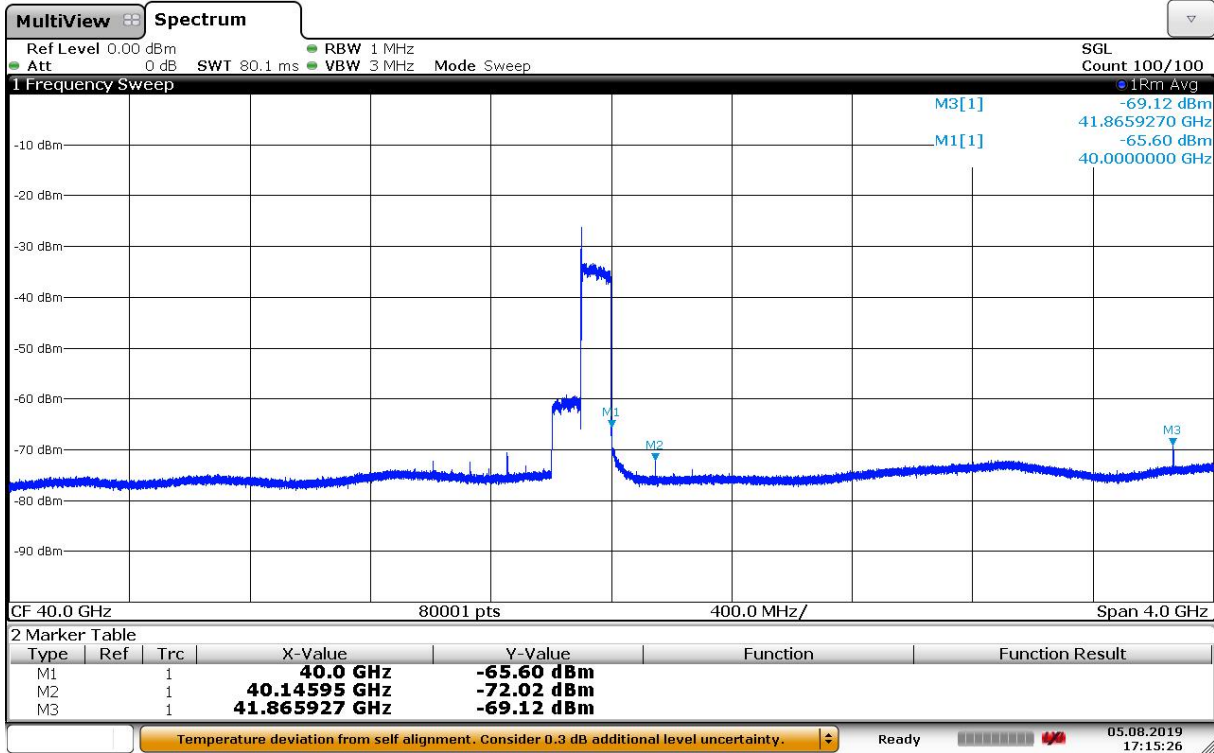


MAX Ant. A Position / 1cc / High / 64QAM / Ant. B

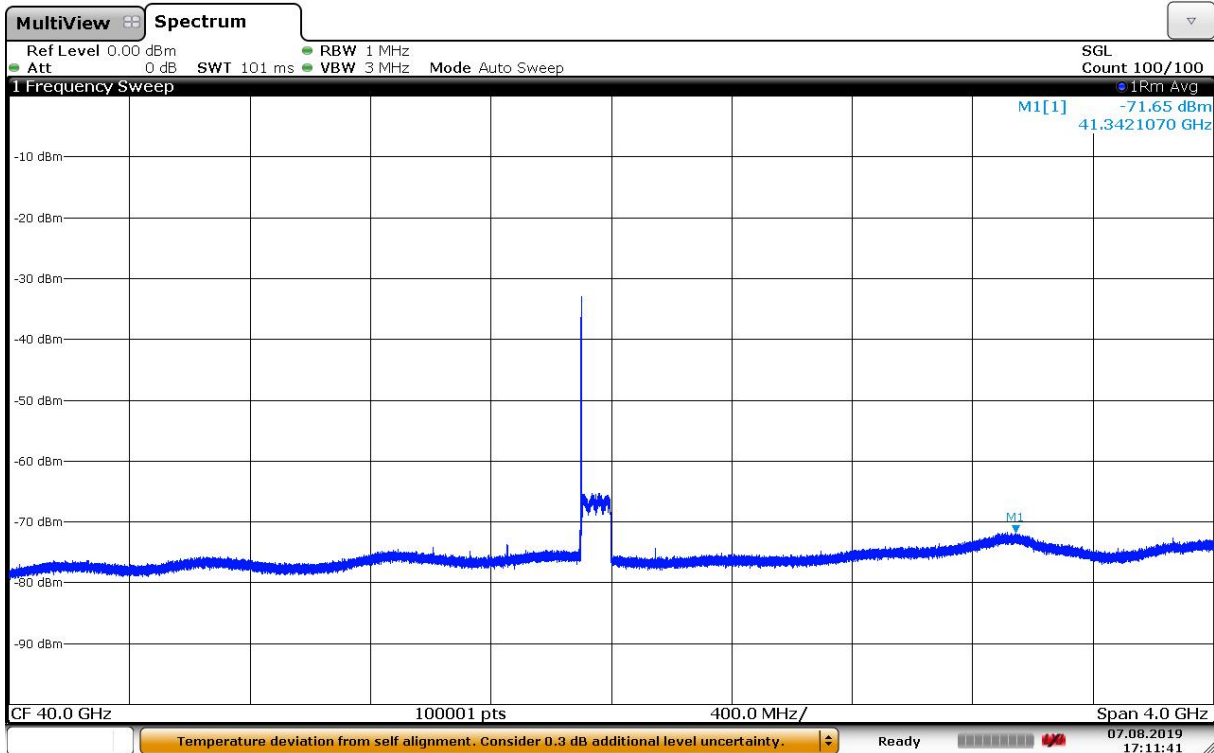


MAX Ant. A Position / 4cc / Low / QPSK / Ant. A

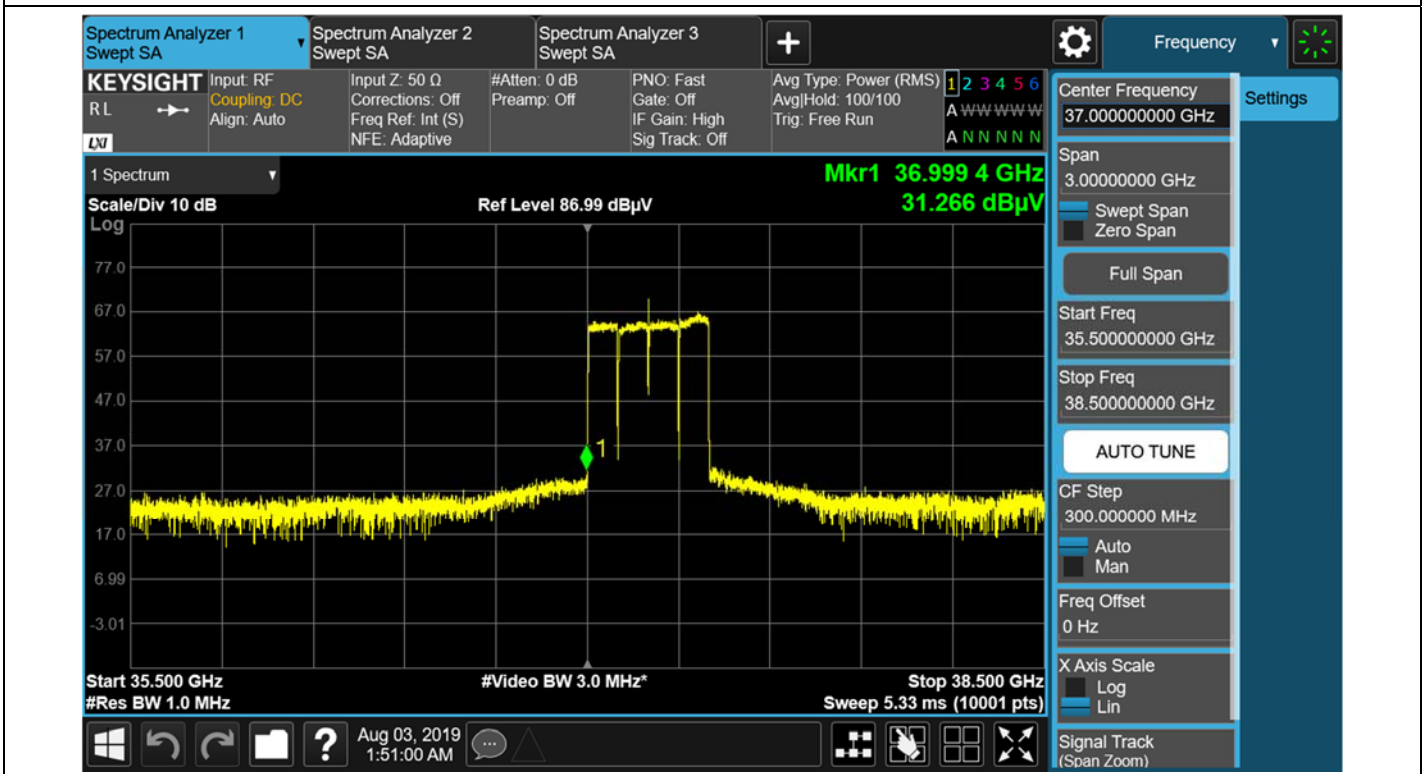


MAX Ant. A Position / 4cc / Low / QPSK / Ant. B

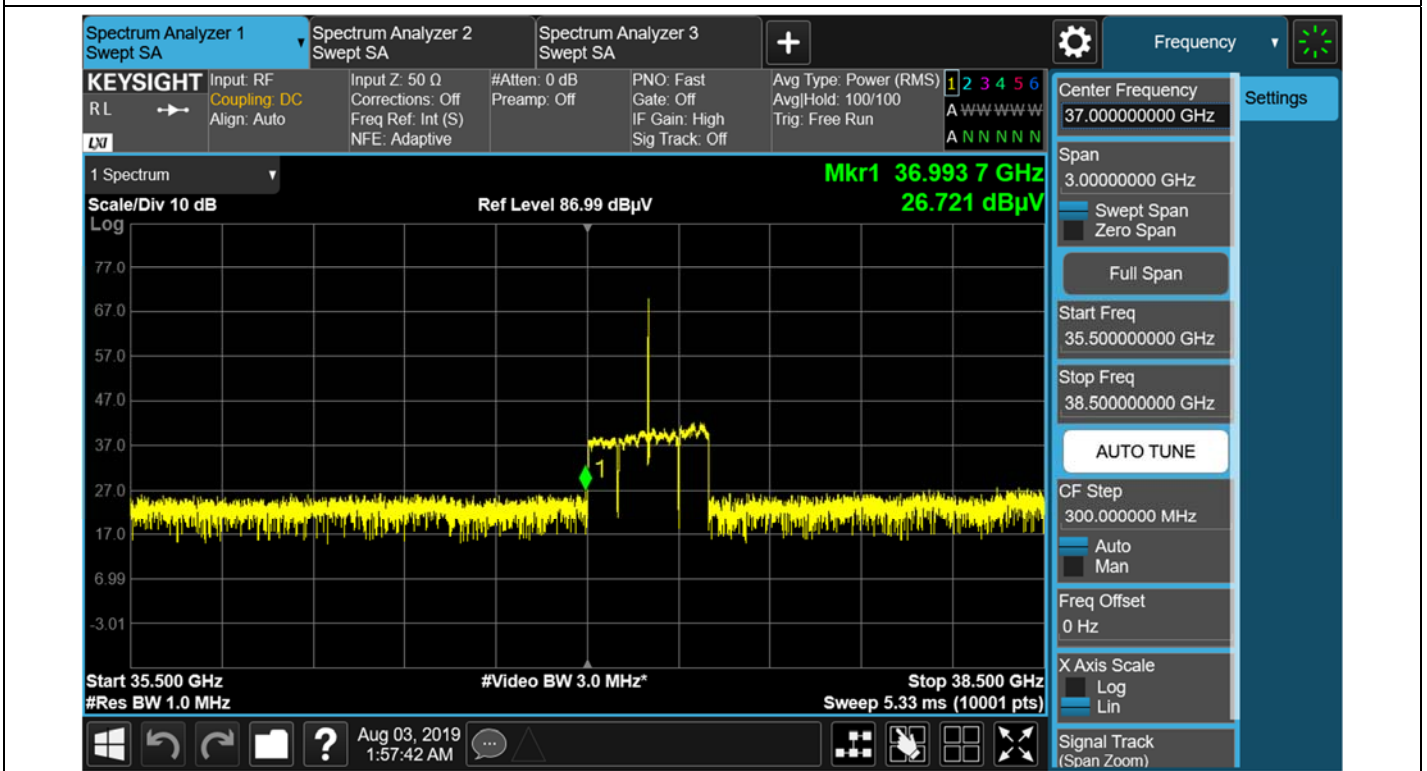


MAX Ant. A Position / 4cc / Low / 16QAM / Ant. A

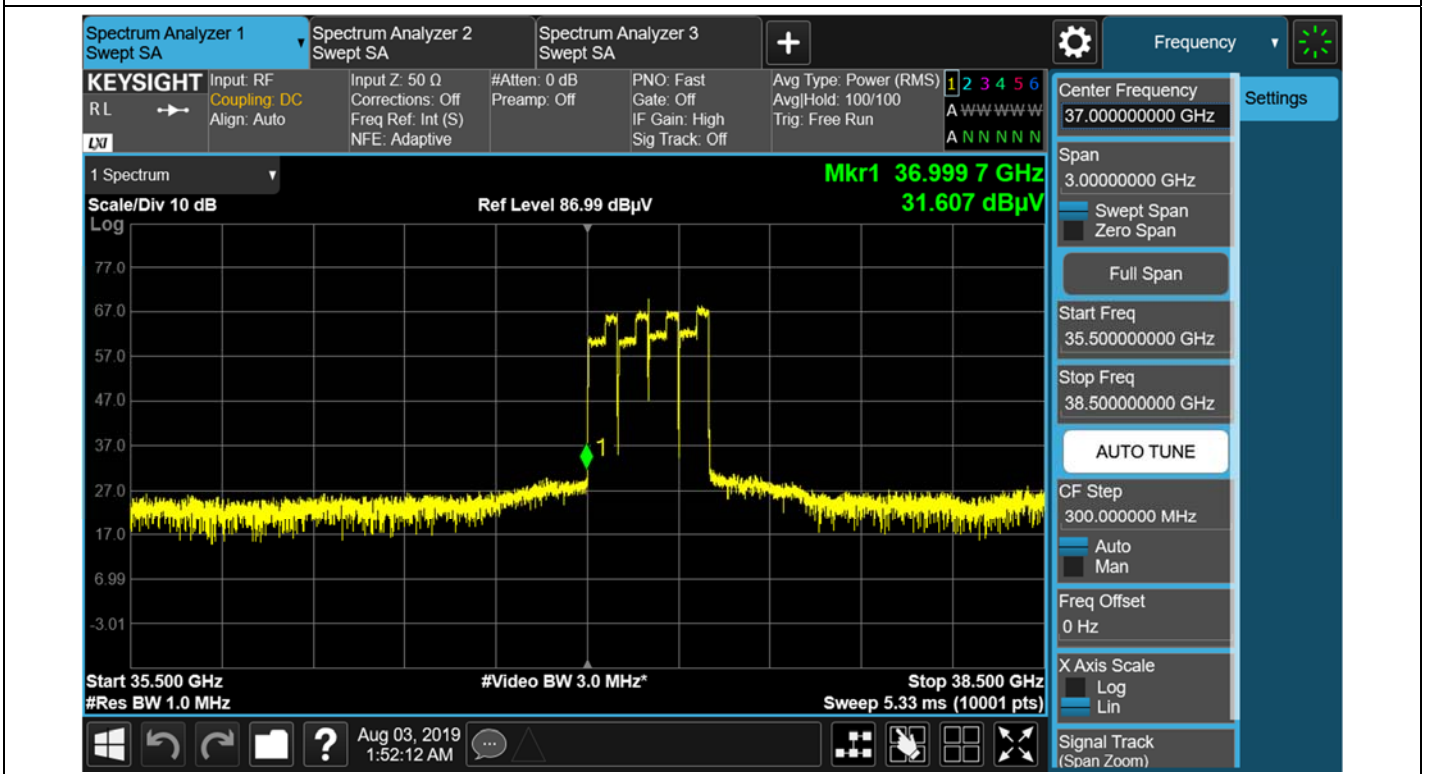

MAX Ant. A Position / 4cc / Low / 16QAM / Ant. B

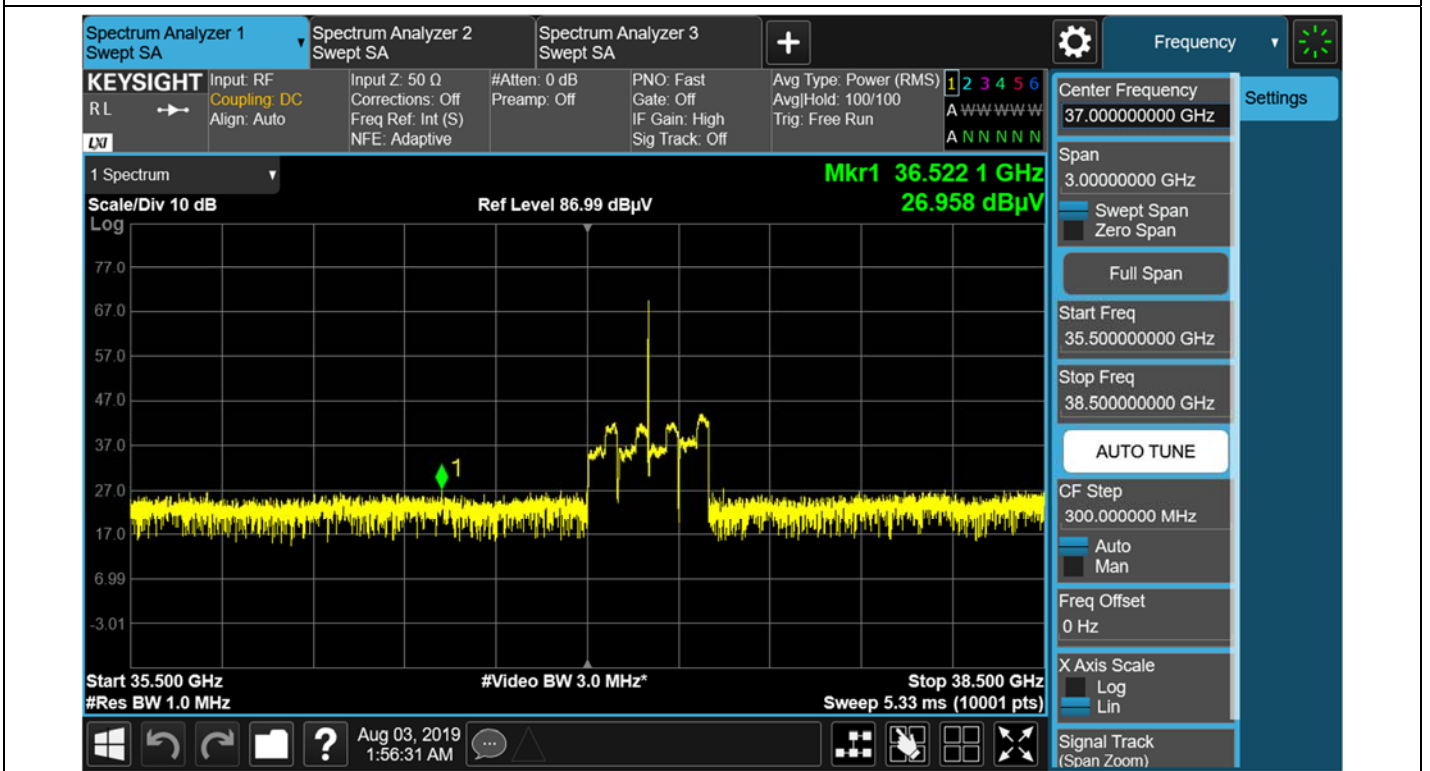

MAX Ant. A Position / 4cc / Low / 64QAM / Ant. A

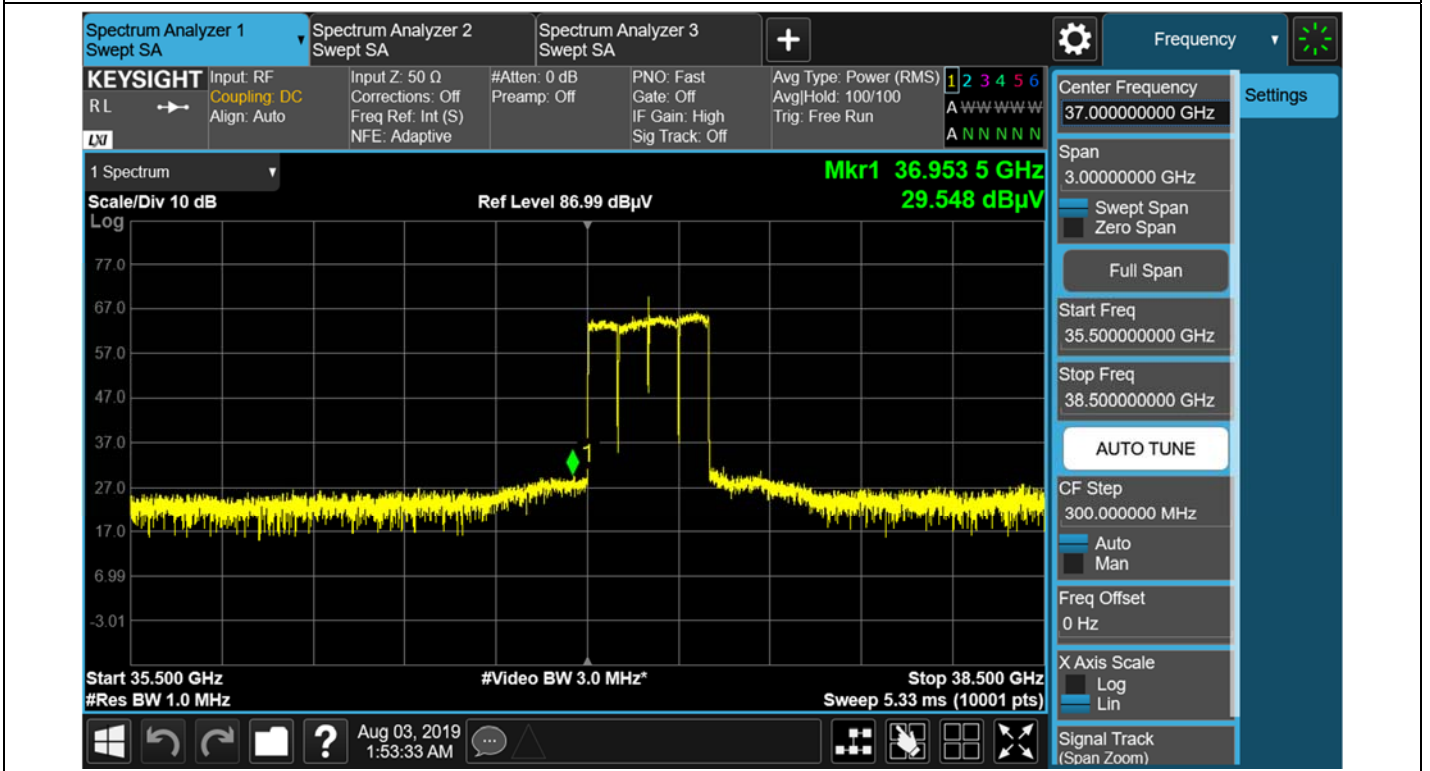

MAX Ant. A Position / 4cc / Low / 64QAM / Ant. B

