




EMC TEST REPORT

| | | | |
|--|--|--|------|
| Project No. | LBE20146232 | Revision No. | None |
| FCC ID | A3LLS22E360 | | |
| Applicant | Name of organization | Samsung Electronics Co., Ltd. | |
| | Address | 19 Chapin Rd. Building D Pine Brook NJ 07058 | |
| | Date of application | 2014.12.19 | |
| EUT Equipment Under Test | Type of device | Class B personal computers and peripherals | |
| | Equipment authorization | <input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification | |
| | Kind of product | LCD MONITOR | |
| | Model No. | LS22E36* (The character "*" may be 0-9,A-Z or blank ,it means different color) | |
| | | Variant Model No. | None |
| Manufacturer | Samsung Electronics Co.,Ltd 129,Samsung-ro,Yeongtong-gu,Suwon-si, Gyeonggi-do,443-742, Rep. of Korea | | |
| Applied Standards | FCC Part 15, Subpart B class B | | |
| | ANSI C63.4-2009 | | |
| Test period | 2014.12.22~2014.12.24 | | |
| Issue date | 2014.12.26 | | |
| Test result : Complied | | | |
| The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.) | | | |
| Tested by : Songnan Yang  | | Reviewed by : Rui Zhang  | |
| The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CSQAL | | | |
|  <p>TSEC Wei 4 Road, Microelectronics Industrial Park, Jingang High way, Tianjin, China Tel: 86 22 23961234, Fax: 86 22 23961234-5214</p> | | | |

According to Sec. 2.1077, 47 CFR of the FCC Rules.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

| | |
|---------------------------|---|
| Equipment EUT Type | Class B personal computers and peripherals |
| Kind of product | LCD Monitor |
| Trade Name | Samsung Electronics |
| Model | LS22E36* (The character "*" may be 0-9,A-Z or blank ,it means different color) |
| Applied Rules | FCC Part 15, Subpart B Class B |
| | ANSI C63.4-2009 |
| Manufacturer | Tianjin Samsung Electronics Co., LTD. Weisi Rd. Micro-Electronic Industrial Park, Jingang Rd. Xiqing Dist, Tianjin,300385 China No.20 Jiangtai Road, the West Zone of TEDA ,Tianjin, People's Republic of China |

We hereby *declare that* the equipment bearing the trade name and model number specified above was tested conforming to the applicable FCC Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the Commission's requirements.


| | |
|-------------------------------|--|
| U.S. RESPONSIBLE PARTY | Samsung Electronics America QA Lab 19 Chapin Rd. Building D Pine Brook NJ 07058 |
| CONTACT PERSON |  <hr/> Mr. Chan-ho Youn, Manager E-Mail : jjano.youn@samsung.com Tel : 1-973-808-6362 Fax : 1-973-808-6361 |

Table of contents

1. Summary of test results

1.1 Emission

2. General Information

2.1 Test facility

3. Test configuration

3.1 Test Peripherals

3.2 EUT operating mode

3.3 Details of Sampling

3.4 Used cable description

3.5 EUT Description

3.6 Description of the EUT exercising method

3.7 Measurement uncertainty

4. Result of individual tests

4.1 Conducted disturbance

4.2 Radiated disturbance

Appendix – EUT photography

1. Summary of test results

The EUT has been tested according to the following specifications:

| Applied | Test type | Applied standard | Result | Remarks |
|-------------------------------------|-----------------------|--------------------------|-----------------|---------------------|
| <input checked="" type="checkbox"/> | Conducted Disturbance | FCC Part 15 Subpart B | Complied | Meets Class B Limit |
| <input checked="" type="checkbox"/> | Radiated Disturbance | | ANSI C63.4-2009 | Complied |

- Note : These results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations.

2. General Information

2.1 Test facility

The following firm has submitted the information required by Section 2.948 of the FCC Rules for measuring devices subject to Certification under Parts 15 & 18. The FCC takes no responsibility regarding the capability of this firm for performing the required measurements. Accordingly, this firm should not advertise or otherwise imply FCC approval of CSQAL.

CHINA SAMSUNG QUALITY ASSURANCE LABORATORY is LOCATED ON Block D, 17 - 19, Wei 4 Road, Microelectronics Industrial Park, Jingang Highway, Tianjin China.

Registration Number: 745769

E-mail Address: zhongyuan.gao@samsung.com

Phone Number:86-22-2396-1234-5211

All testing are performed in Semi-anechoic chambers conforming to the site attenuation Characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2 and Shielded rooms.

CSQAL is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

3. Test Setup configuration

3.1 Test Peripherals

The peripherals which were interconnected to the EUT during the test are as follows:

| Item | Model No. | Serial No. | Manufacturer | Note |
|--------------|--------------|--------------------------|--------------|------|
| LCD Monitor | LS22E360 | - | Samsung | EUT |
| Adapter | A2514_DNP | CN07BN440019BSK28FBBI958 | Powernet | |
| PC | DM-V200-PA15 | ZLPZ9WAZ600123A | Samsung | - |
| Printer | CLP-315 | Z0CEBAZZ500252J | Samsung | - |
| USB Keyboard | SK-8185 | OY526K | Dell | - |
| USB Mouse | MOC5UO | J0G00G9L | Dell | - |
| PC | DM-G600 | 501099K | Samsung | Test |

3.2 EUT operating mode(s)

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

| | |
|------------------|---------|
| Operating Mode 1 | VGA IN |
| Operating Mode 2 | HDMI IN |

3.3 Details of Sampling

Customer selected, single unit.

3.4 Cable description

The type(s) of cables which were connected to the ports (of the EUT) are as follows:

| No | Connect Cable | Length [m] | Ferrite core [Y/N] | Remark |
|----|---------------|------------|--------------------|---------|
| 1 | VGA in | 1.5 | Y | To PC |
| 2 | HDMI in | 1.5 | Y | To PC |
| 3 | POWER | 1.8 | N | FOR EUT |

3.5 EUT Description

The following features describe EUT represented by this report:

Test model: LS22E360


Test Voltage:110V 60Hz

| Model Name | | S22E360H / S22E391H | S24E360HL / S24E391HL | S27E360H / S27E391H S27E360F |
|---------------------------------------|----------------------|--|---|--|
| Panel | Size | 21.5 Inches (54 cm) | 23.6 Inches (59 cm) | 27 Inches (68 cm) |
| | Display area | 476.64 mm (H) x 268.11 mm (V) 18.77 Inches (H) x 10.56 Inches (V) | 521.28 mm (H) x 293.22 mm (V) 20.52 Inches (H) x 11.54 Inches (V) | 597.89 mm (H) x 336.31 mm (V) 23.54 Inches (H) x 13.24 Inches (V) |
| | Pixel Pitch | 0.24825 mm (H) x 0.24825 mm (V) 0.00977 Inches (H) x 0.00977 Inches (V) | 0.2715 mm (H) x 0.2715 mm (V) 0.0107 Inches (H) x 0.0107 Inches (V) | 0.3114 mm (H) x 0.3114 mm (V) 0.0123 Inches (H) x 0.0123 Inches (V) |
| Power Supply | | This product supports 100-240 V. Since the standard voltage may differ from country to country, please check the label on the back of the product. | | |
| Dimensions (W x H x D) / Weight | Without Stand | 513.7 x 322.8 x 81.7 mm 20.2 x 12.7 x 3.2 Inches | 547.3 x 332 x 80.1 mm 21.5 x 13.1 x 3.2 Inches | 624.7 x 375.8 x 79.6 mm 24.6 x 14.8 x 3.1 Inches |
| | With Stand | 513.7 x 389.4 x 209 mm / 3.15 kg 20.2 x 15.3 x 8.2 Inches / 6.9 lbs | 547.3 x 400.9 x 243.4 mm / 3.7 Kg 21.5 x 15.8 x 9.6 Inches / 8.2 lbs | 624.7 x 444.7 x 243.4 mm / 4.7 kg 24.6 x 17.5 x 9.6 Inches / 10.4 lbs |
| Environmental Consideration | Operating | Temperature : 50°F ~ 104°F (10°C ~ 40°C) Humidity : 10 % – 80 %, non-condensing | | |
| | Storage | Temperature : -4°F ~ 113°F (-20°C ~ 45°C) Humidity : 5 % – 95 %, non-condensing | | |
| Synchronization | Horizontal Frequency | 30 ~ 81 kHz | | |
| | Vertical Frequency | 56 ~ 75 Hz | | |
| Resolution | Optimum Resolution | 1920 x 1080 @ 60 Hz | | |
| | Maximum Resolution | 1920 x 1080 @ 60 Hz | | |

3.6 Description of the EUT exercising method

The EUT exercise program used during EMI testing was CSQAL standardized test program for MS Windows. The program repetitively sends a screen of H – Character to the display. Connect video output of computer on EUT's PC IN (D-sub), HDMI IN , and scrolled H – character continuously on EUT's screen.

The EUT system includes a monitor, the operational conditions shown as follows, within the selected area.

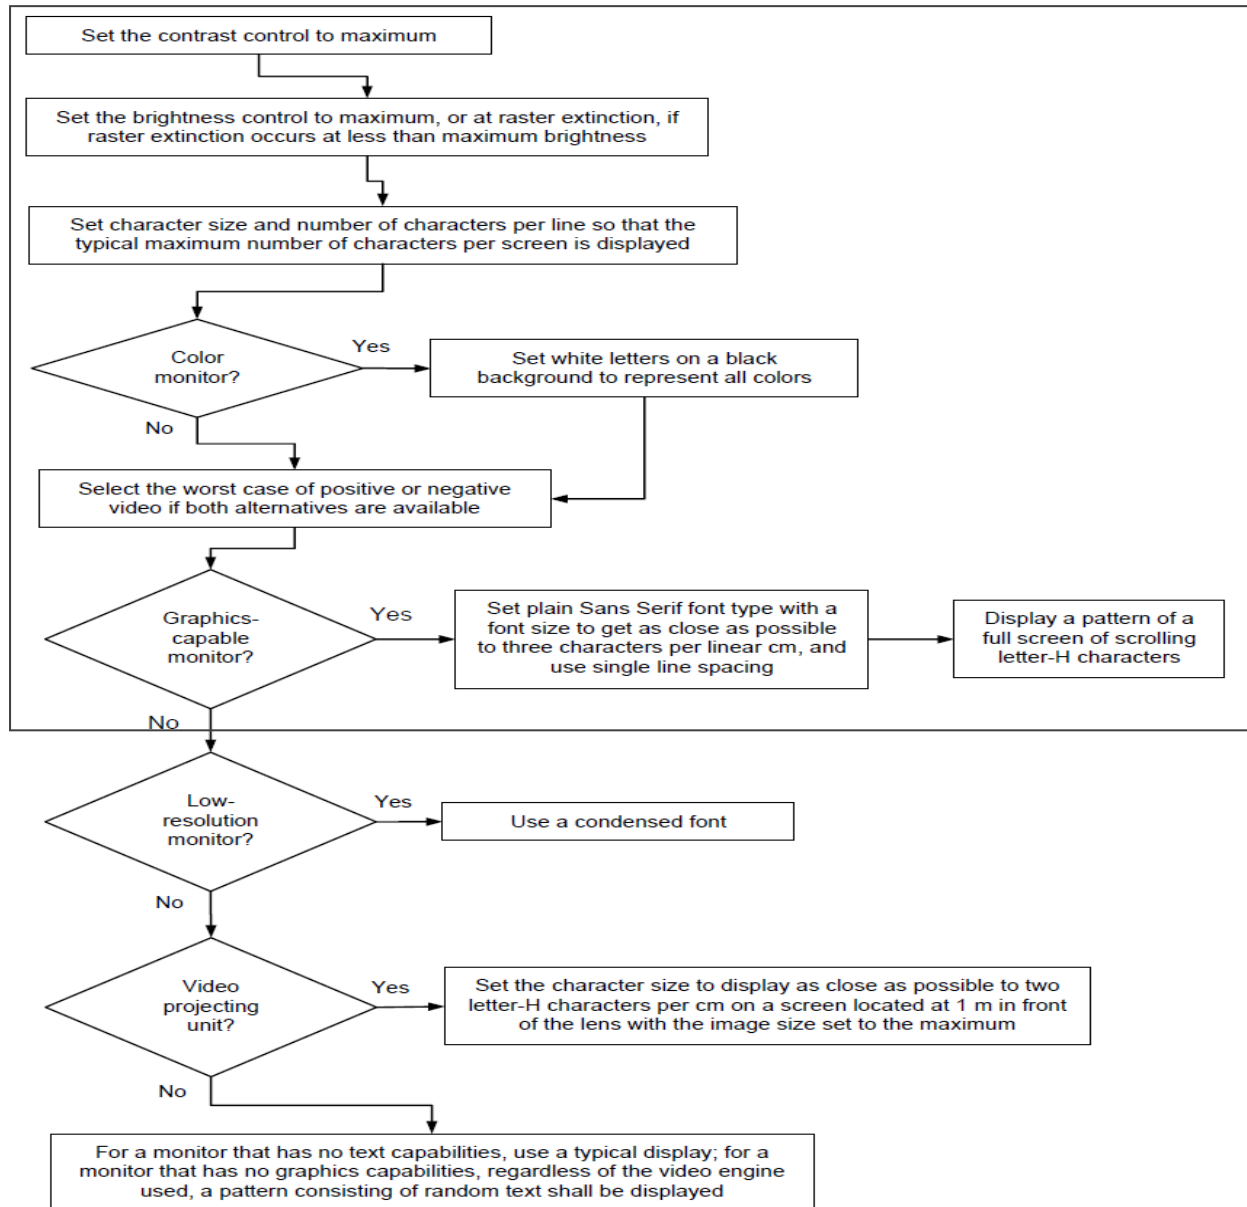

- Notes:**
1. Set the brightness control to maximum
 2. Set the contrast control to maximum
 3. Display a pattern of a full screen of scrolling letter-H characters with a font size to get as close as possible to three characters per linear cm and use single line spacing

3.7 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

| Test type | | | Measurement uncertainty (C.L. 95 %, k = 2) |
|--|------------|----------------|---|
| Disturbance voltage at the mains terminals | | | 3.0 dB |
| Radiated Disturbance | Horizontal | 30 MHz - 1 GHz | 4.4 dB |
| | Vertical | 30 MHz - 1 GHz | 4.4 dB |
| | Horizontal | 1GHz - 6 GHz | 3.7 dB |
| | Vertical | 1GHz - 6 GHz | 3.7 dB |

4. Results of individual test

4.1 Conducted disturbance

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.

The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of class B ITE

| Frequency range Limits MHz | Limits dB(μ V) | |
|-------------------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0,15 to 0,50 | 66 to 56 | 56 to 46 |
| 0,50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note 1: 1 μ V is regarded as 0 dB.
 Note 2: The limits shall decrease linearly with the logarithm of the frequency in the range 150 – 500 kHz.
 Note 3: If the average limit is met in the measurement with quasi-peak detector, the measurement with average detector is unnecessary.
 Note 4: The lower limit shall apply at the transition frequency.

If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 seconds at each measurement frequency, the highest reading shall be recorded, with the exception of any brief isolated high reading (which shall be ignored).

4.1.1 Test instrumentation

Test instrumentation used in the Conducted disturbance test was as follows:

| Test instrumentation | Model name | Manufacturer | Serial or Firmware (No./Ver.) | Calibration | |
|--------------------------|------------|--------------|-------------------------------|-------------|------------------|
| | | | | Date | Interval (Month) |
| Test Software | EP5CE | TOYO | V 4.7.10 | N/A | N/A |
| Measuring receiver | ESCI | R&S | 101027 | 2014.03.02 | 12 |
| Artificial mains network | ENV216 | R&S | 101123 | 2014.08.18 | 12 |
| Artificial mains network | ENV216 | R&S | 101059 | 2014.08.18 | 12 |

4.1.2 Photograph of the test Configuration

(Front)



(Rear)




4.1.3 Test results

| | | | | | | |
|--------------------------|----------------------------|------------------------------------|--------------------------|--------|-----------------------------|-----------|
| Test date | 2014.12.23 | | Test engineer | | Songnan Yang | |
| Climate condition | Ambient temperature | 20±1℃ | Relative humidity | 36±1 % | Atmospheric pressure | 101±0 kPa |
| | | Test place Shielded Room #2 | | | | |

4.1.4 Test data

■ Operating Mode: D-Sub (PC Video IN or Analog) IN Display

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then choose the worst one (1920*1080@60Hz) for final evaluation.

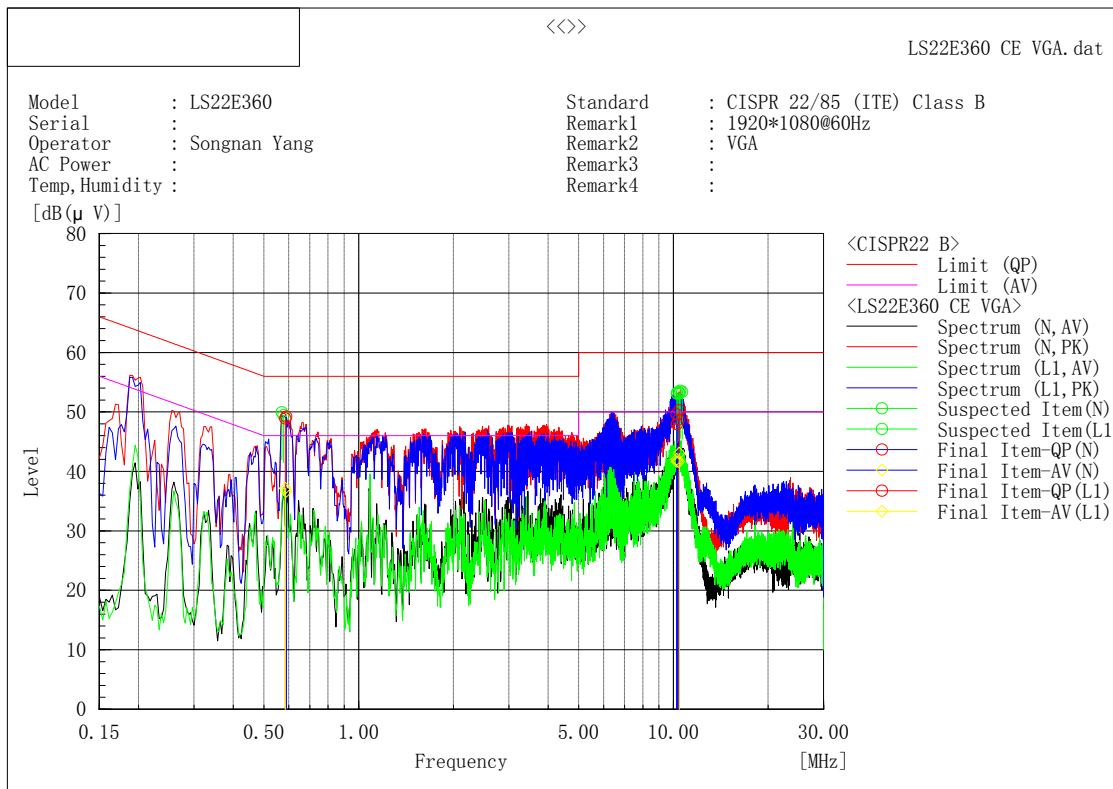

Final Result

--- N Phase ---


| No. | Frequency [MHz] | Reading QP [dB(μV)] | Reading AV [dB(μV)] | c.f [dB] | Result QP [dB(μV)] | Result AV [dB(μV)] | Limit QP [dB(μV)] | Limit AV [dB(μV)] | Margin QP [dB] | Margin AV [dB] | Remark |
|-----|-----------------|---------------------|---------------------|----------|--------------------|--------------------|-------------------|-------------------|----------------|----------------|--------|
| 1 | 0.58961 | 39.2 | 26.6 | 10.0 | 49.2 | 36.6 | 56.0 | 46.0 | 6.8 | 9.4 | |
| 2 | 10.2505 | 39.6 | 32.0 | 10.0 | 49.6 | 42.0 | 60.0 | 50.0 | 10.4 | 8.0 | |
| 3 | 10.39804 | 38.7 | 31.6 | 10.0 | 48.7 | 41.6 | 60.0 | 50.0 | 11.3 | 8.4 | |
| 4 | 10.27851 | 38.0 | 31.6 | 10.0 | 48.0 | 41.6 | 60.0 | 50.0 | 12.0 | 8.4 | |

--- L1 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(μV)] | Reading AV [dB(μV)] | c.f [dB] | Result QP [dB(μV)] | Result AV [dB(μV)] | Limit QP [dB(μV)] | Limit AV [dB(μV)] | Margin QP [dB] | Margin AV [dB] | Remark |
|-----|-----------------|---------------------|---------------------|----------|--------------------|--------------------|-------------------|-------------------|----------------|----------------|--------|
| 1 | 0.58449 | 38.9 | 27.2 | 10.0 | 48.9 | 37.2 | 56.0 | 46.0 | 7.1 | 8.8 | |
| 2 | 10.43832 | 40.3 | 33.0 | 10.0 | 50.3 | 43.0 | 60.0 | 50.0 | 9.7 | 7.0 | |

Operating Mode: HDMI IN Display

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then
 choose the worst one (1920*1080@60Hz) for final evaluation.

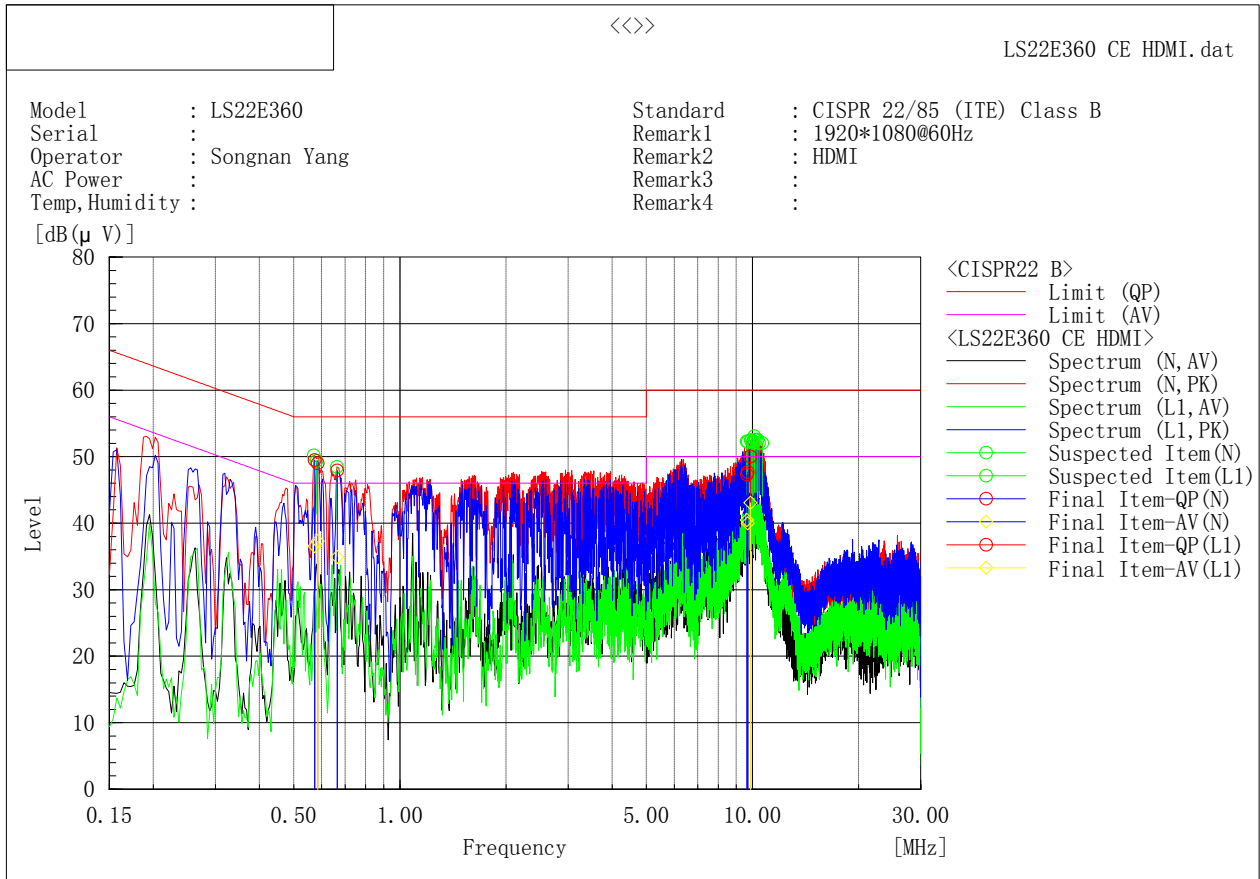

Final Result

| --- N Phase --- | | | | | | | | | | | |
|-----------------|-----------|------------|------------|------|-----------|-----------|----------|----------|-----------|-----------|--------|
| No. | Frequency | Reading QP | Reading AV | c. f | Result QP | Result AV | Limit QP | Limit AV | Margin QP | Margin AV | Remark |
| | [MHz] | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB] | [dB] | |
| 1 | 0.5733 | 39.5 | 26.6 | 10.0 | 49.5 | 36.6 | 56.0 | 46.0 | 6.5 | 9.4 | |
| 2 | 0.66457 | 37.9 | 24.9 | 10.0 | 47.9 | 34.9 | 56.0 | 46.0 | 8.1 | 11.1 | |
| 3 | 9.6414 | 37.3 | 30.5 | 10.0 | 47.3 | 40.5 | 60.0 | 50.0 | 12.7 | 9.5 | |
| 4 | 9.70592 | 37.7 | 30.0 | 10.0 | 47.7 | 40.0 | 60.0 | 50.0 | 12.3 | 10.0 | |

| --- L1 Phase --- | | | | | | | | | | | |
|------------------|-----------|------------|------------|------|-----------|-----------|----------|----------|-----------|-----------|--------|
| No. | Frequency | Reading QP | Reading AV | c. f | Result QP | Result AV | Limit QP | Limit AV | Margin QP | Margin AV | Remark |
| | [MHz] | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB] | [dB] | |
| 1 | 0.58457 | 39.0 | 27.3 | 10.0 | 49.0 | 37.3 | 56.0 | 46.0 | 7.0 | 8.7 | |
| 2 | 9.87239 | 40.0 | 33.0 | 10.0 | 50.0 | 43.0 | 60.0 | 50.0 | 10.0 | 7.0 | |

Note) Level (Quasi-Peak and/or Average) = Meter Reading (Quasi-Peak and/or Average) + Factor (LISN Insertion Loss + Cable Loss)

Margin = Limit – Level (Quasi-Peak and/or Average)

4.2 Radiated disturbance

Of those disturbances above ($L - 20\text{dB}$), where L is the limit level in logarithmic units, record at least the disturbance levels and the frequencies of the six highest disturbances.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin. All measurements were taken utilizing quasi-peak detection unless stated otherwise.

Measurements were performed at an antenna to EUT distance of 3 meters and elevated between 1 and 4 meters. Both vertical and horizontal antenna polarizations were measured.

Above 1GHz, peak detector function mode was used with resolution bandwidth of 1 MHz and a video bandwidth of 1 MHz. If the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency range Limits MHz | Quasi-peak Limits (microvolts/meter) |
|-------------------------------|--------------------------------------|
| | Class B |
| 30 to 88 | 100 |
| 88 to 216 | 150 |
| 216 to 960 | 200 |
| Above 960 | 500 |

Note 1: The lower limit shall apply at the transition frequency.
 Note 2: Additional provisions may be required for cases where interference occurs.
 Note 3: 1 $\mu\text{V/m}$ is regarded as 0 dB.

Measurements above 1GHz were performed at an antenna to EUT distance of 3 meters and elevated 1 to 4 meters in FAC. Both vertical and horizontal antenna polarizations were measured.

The test is performed in a semi-anechoic chamber, use of absorbing material to cover part of the metal ground plane, the dimension of the absorbing material is: 3 x 3 x 0.3 m (W x D x H)

Limits for radiated disturbance of ITE at a measuring distance of 3 m

| Frequency range Limits MHz | Class A | | Class B | |
|-------------------------------|-------------------------------|----------------------------------|-------------------------------|----------------------------------|
| | Peak dB($\mu\text{V/m}$) | Average dB($\mu\text{V/m}$) | Peak dB($\mu\text{V/m}$) | Average dB($\mu\text{V/m}$) |
| 1000 to 3000 | 76 | 56 | 70 | 50 |
| 3000 to 6000 | 80 | 60 | 74 | 54 |

Note 1: The lower limit shall apply at the transition frequency.

4.2.1 Test instrumentation

Test instrumentation used in the Radiated disturbance was as follows:

30MHz~1GHz

| Test instrumentation | Model name | Manufacturer | Serial or Firmware (No./Ver.) | Calibration | |
|----------------------|------------|--------------|-------------------------------|-------------|------------------|
| | | | | Date | Interval (Month) |
| Test Software | EP5/RE | TOYO | V 4.7.10 | N/A | N/A |
| Bi-con Antenna | CBL6112D | SCHAFFNER | 30998 | 2013.04.03 | 24 |
| EMI Receiver | ESCI | R&S | 101026 | 2014.03.02 | 12 |
| AMPLIFIER | 310N | SONOMA | 300911 | 2014.07.05 | 12 |
| Ant Mast | MA4000 | INN CO | - | N/A | N/A |
| Mast Controller | CO2000 | INN CO | - | N/A | N/A |
| RF Selector | NS4900N | TOYO | - | N/A | N/A |

1GHz-2GHz

| Test instrumentation | Model name | Manufacturer | Serial or Firmware (No./Ver.) | Calibration | |
|-------------------------|------------------------|--------------|-------------------------------|-------------|------------------|
| | | | | Date | Interval (Month) |
| Test Software | e3 | AUDIX | 6.110709d | N/A | N/A |
| Broad-Band Horn Antenna | BBHA9120B | Schwarzbeck | 520 | 2014.02.19 | 24 |
| EMI Receiver | ESU26 | R&S | 100243 | 2014.03.02 | 12 |
| AMPLIFIER | AMF-4D-00500800-18-13P | TOYO | 0934 | 2014.07.05 | 12 |
| Ant Mast | AUDIX | AUDIX | - | N/A | N/A |

4.2.2 Photograph of the test Configuration


30MHz~1GHz
(Front)



(Rear)



**1GHz-2GHz
(Front)**

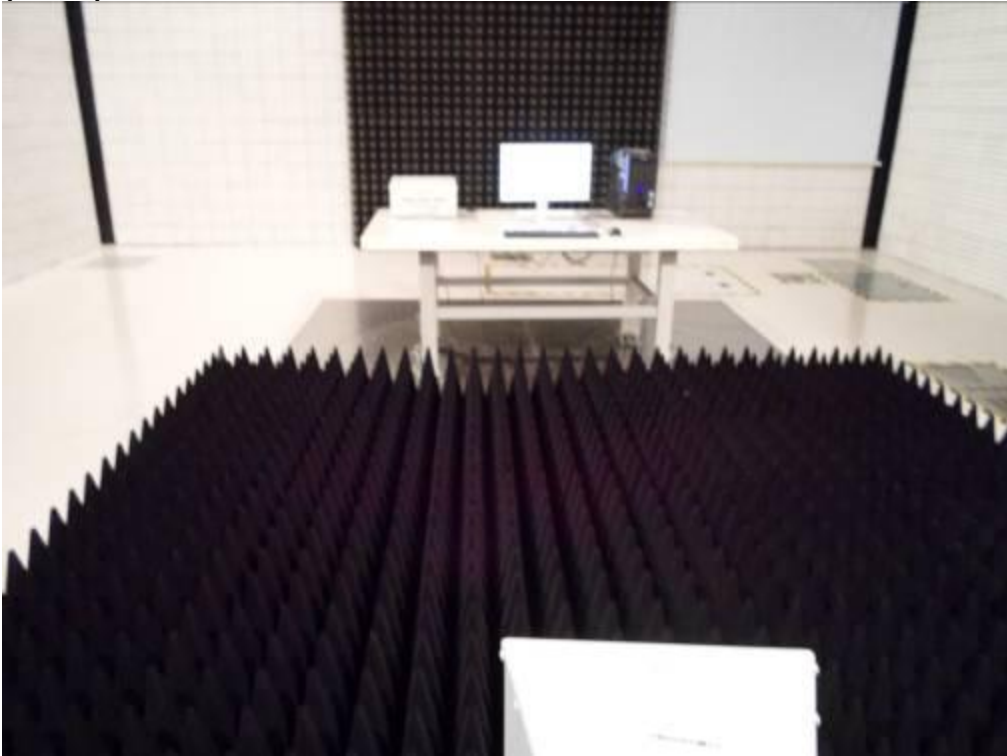

(Rear)



4.2.3 Test results

30MHz~1GHz


| | | | | | | |
|--------------------------|----------------------------|--------------------------|--------------------------|--------|-----------------------------|-----------|
| Test date | 2014.12.23 | | Test engineer | | Songnan Yang | |
| Climate condition | Ambient temperature | 20±1℃ | Relative humidity | 36±1 % | Atmospheric pressure | 101±0 kPa |
| | Test place | 3m Semi-Anechoic Chamber | | | | |

■ Operating Mode: D-Sub (PC Video IN or Analog) IN Display

Set the brightness control to maximum

Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then choose the worst one (1920*1080@60Hz) for final evaluation.

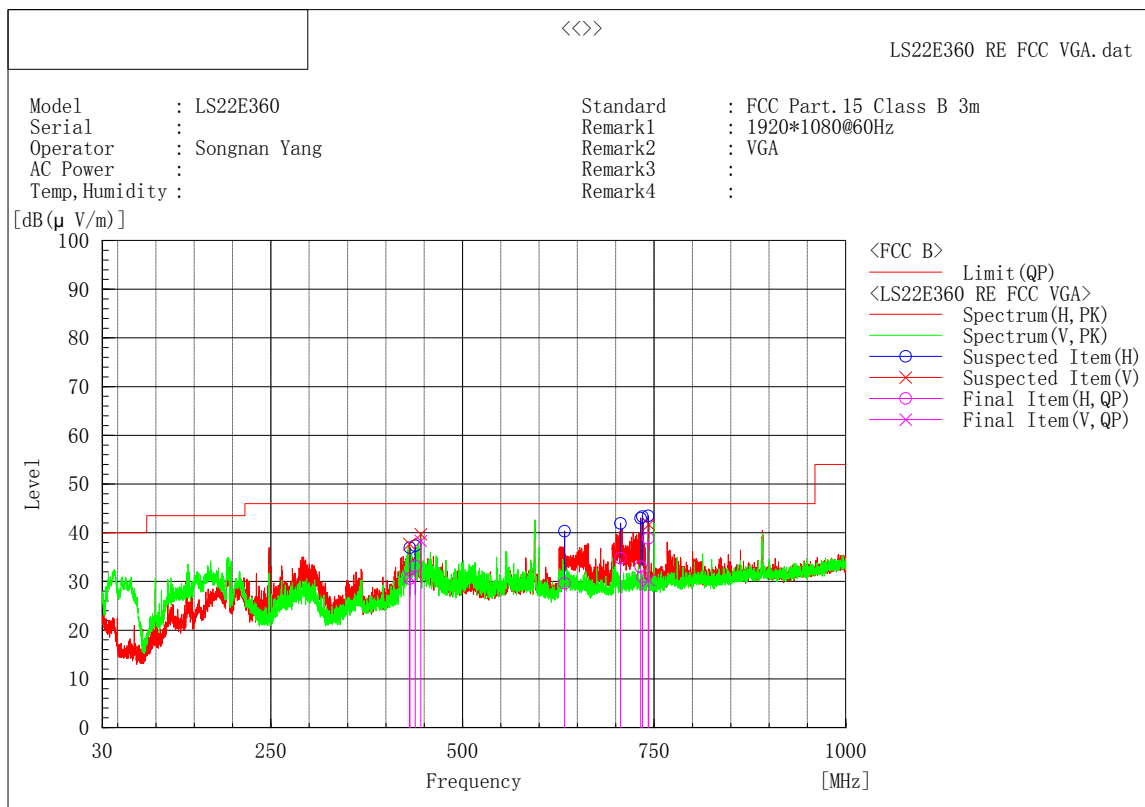

Final Result


| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c. f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1 | 742.223 | H | 37.9 | 0.9 | 38.8 | 46.0 | 7.2 | 100.0 | 194.2 | |
| 2 | 445.524 | V | 41.9 | -3.6 | 38.3 | 46.0 | 7.7 | 100.0 | 186.1 | |
| 3 | 706.211 | H | 34.8 | 0.0 | 34.8 | 46.0 | 11.2 | 100.0 | 209.2 | |
| 4 | 438.249 | H | 36.8 | -3.7 | 33.1 | 46.0 | 12.9 | 100.0 | 146.8 | |
| 5 | 732.523 | H | 31.9 | 1.1 | 33.0 | 46.0 | 13.0 | 100.0 | 187.1 | |
| 6 | 734.584 | H | 29.9 | 1.1 | 31.0 | 46.0 | 15.0 | 100.0 | 187.0 | |
| 7 | 430.610 | V | 34.5 | -3.5 | 31.0 | 46.0 | 15.0 | 100.0 | 193.3 | |
| 8 | 431.216 | H | 34.1 | -3.5 | 30.6 | 46.0 | 15.4 | 100.0 | 132.1 | |
| 9 | 742.950 | V | 29.4 | 0.9 | 30.3 | 46.0 | 15.7 | 183.0 | 173.6 | |
| 10 | 633.219 | H | 29.6 | 0.0 | 29.6 | 46.0 | 16.4 | 273.0 | 117.9 | |

■ Operating Mode: HDMI IN Display

Set the brightness control to maximum

Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then choose the worst one (1920*1080@60Hz) for final evaluation.

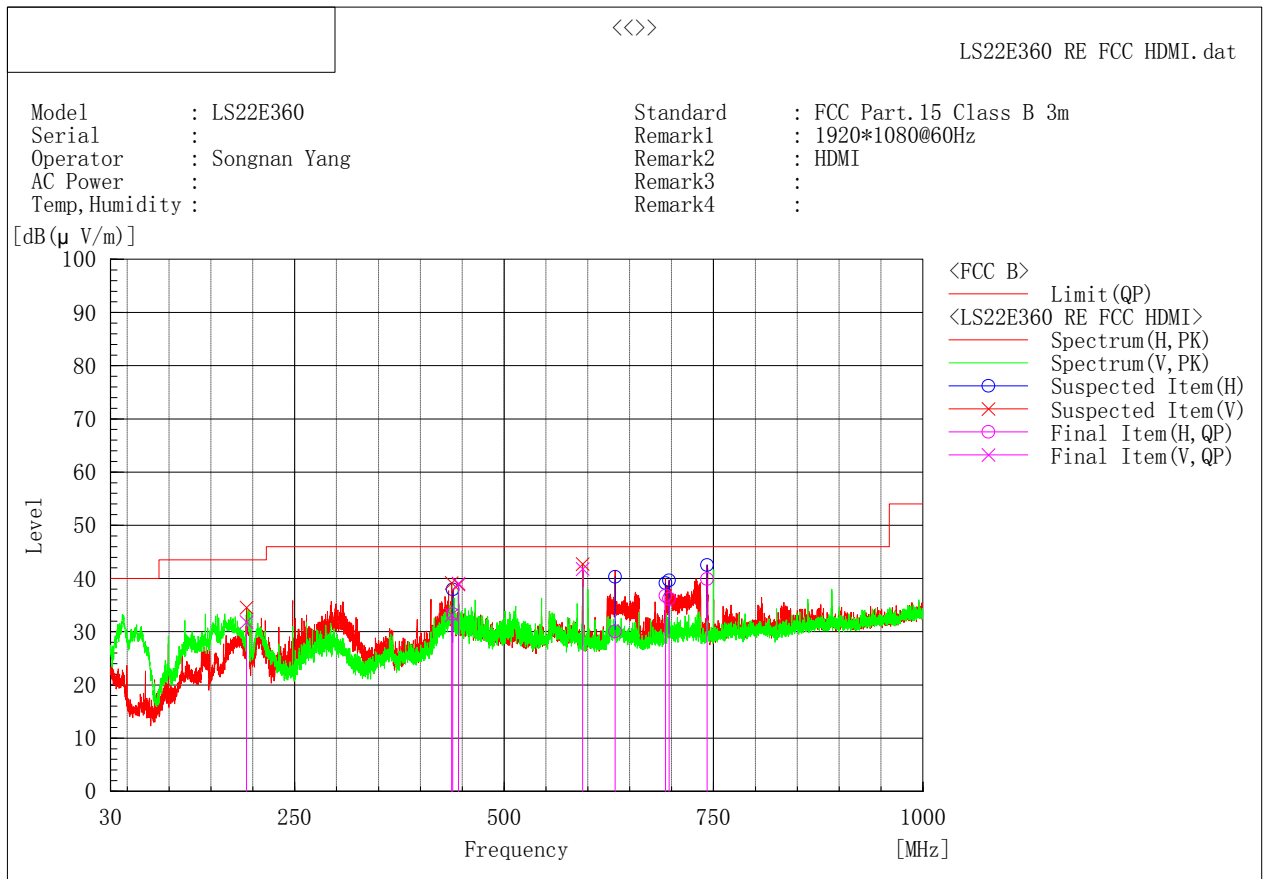

Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μ V)] | c. f [dB(1/m)] | Result QP [dB(μ V/m)] | Limit QP [dB(μ V/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|----------------------|----------------|-----------------------|----------------------|----------------|-------------|-----------|--------|
| 1 | 593.691 | V | 42.3 | -0.5 | 41.8 | 46.0 | 4.2 | 100.0 | 163.7 | |
| 2 | 742.223 | H | 39.0 | 0.9 | 39.9 | 46.0 | 6.1 | 100.0 | 202.1 | |
| 3 | 445.524 | V | 42.7 | -3.6 | 39.1 | 46.0 | 6.9 | 100.0 | 184.7 | |
| 4 | 692.631 | H | 36.6 | 0.2 | 36.8 | 46.0 | 9.2 | 100.0 | 216.8 | |
| 5 | 696.875 | H | 36.2 | 0.0 | 36.2 | 46.0 | 9.8 | 100.0 | 216.7 | |
| 6 | 192.354 | V | 44.9 | -13.1 | 31.8 | 43.5 | 11.7 | 100.0 | 219.1 | |
| 7 | 438.734 | H | 37.0 | -3.7 | 33.3 | 46.0 | 12.7 | 100.0 | 153.1 | |
| 8 | 437.400 | V | 36.8 | -3.7 | 33.1 | 46.0 | 12.9 | 100.0 | 199.7 | |
| 9 | 632.491 | H | 30.1 | 0.0 | 30.1 | 46.0 | 15.9 | 100.0 | 89.8 | |

Note) Receiving antenna polarization : Horizontal and/or Vertical

Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Quasi-Peak) = Reading QP + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit - Level QP


1GHz-2GHz

| | | | | | | |
|--------------------------|----------------------------|--|--------------------------|------|-----------------------------|-----------|
| Test date | 2014.12.23 | | Test engineer | | Songnan Yang | |
| Climate condition | Ambient temperature | 23 °C | Relative humidity | 41 % | Atmospheric pressure | 100.0 kPa |
| | | Test place 3m Semi-Anechoic Chamber | | | | |

■ **Operating Mode: D-Sub (PC Video IN or Analog) IN Display**

Set the brightness control to maximum, set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then choose the worst one (1920*1080@60Hz) for final evaluation.

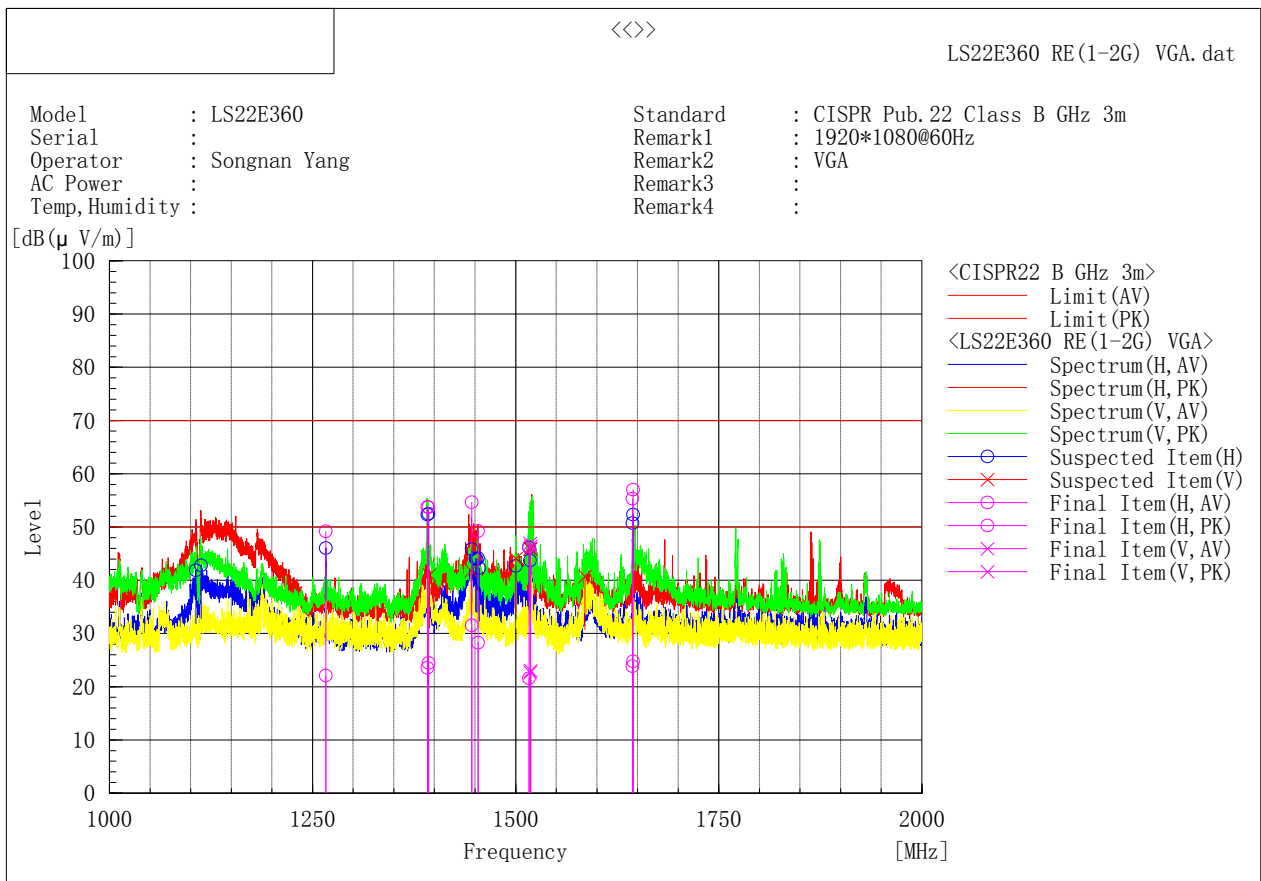


Final Result

| No. | Frequency [MHz] | (P) | Reading AV [dB(μV)] | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result AV [dB(μV/m)] | Result PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin AV [dB] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1 | 1644.625 | H | 40.5 | 72.7 | -15.7 | 24.8 | 57.0 | 50.0 | 70.0 | 25.2 | 13.0 | 100.0 | 202.0 | |
| 2 | 1643.875 | H | 39.6 | 71.0 | -15.7 | 23.9 | 55.3 | 50.0 | 70.0 | 26.1 | 14.7 | 100.0 | 202.0 | |
| 3 | 1446.000 | H | 48.9 | 72.0 | -17.4 | 31.5 | 54.6 | 50.0 | 70.0 | 18.5 | 15.4 | 100.0 | 175.5 | |
| 4 | 1391.250 | H | 41.2 | 71.5 | -17.7 | 23.5 | 53.8 | 50.0 | 70.0 | 26.5 | 16.2 | 100.0 | 255.4 | |
| 5 | 1392.625 | H | 42.1 | 71.3 | -17.6 | 24.5 | 53.7 | 50.0 | 70.0 | 25.5 | 16.3 | 100.0 | 255.4 | |
| 6 | 1453.750 | H | 45.6 | 66.5 | -17.3 | 28.3 | 49.2 | 50.0 | 70.0 | 21.7 | 20.8 | 100.0 | 175.5 | |
| 7 | 1266.250 | H | 38.9 | 66.0 | -16.8 | 22.1 | 49.2 | 50.0 | 70.0 | 27.9 | 20.8 | 163.0 | 93.7 | |
| 8 | 1517.750 | V | 39.6 | 63.8 | -16.9 | 22.7 | 46.9 | 50.0 | 70.0 | 27.3 | 23.1 | 283.0 | 153.6 | |
| 9 | 1518.500 | V | 39.9 | 63.3 | -16.9 | 23.0 | 46.4 | 50.0 | 70.0 | 27.0 | 23.6 | 269.0 | 153.6 | |
| 10 | 1516.375 | H | 38.5 | 63.2 | -16.9 | 21.6 | 46.3 | 50.0 | 70.0 | 28.4 | 23.7 | 242.0 | 348.4 | |

■ Operating Mode: HDMI IN Display

Set the brightness control to maximum, set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1680*1050@60Hz, 1920*1080@60Hz), then choose the worst one (1920*1080@60Hz) for final evaluation.

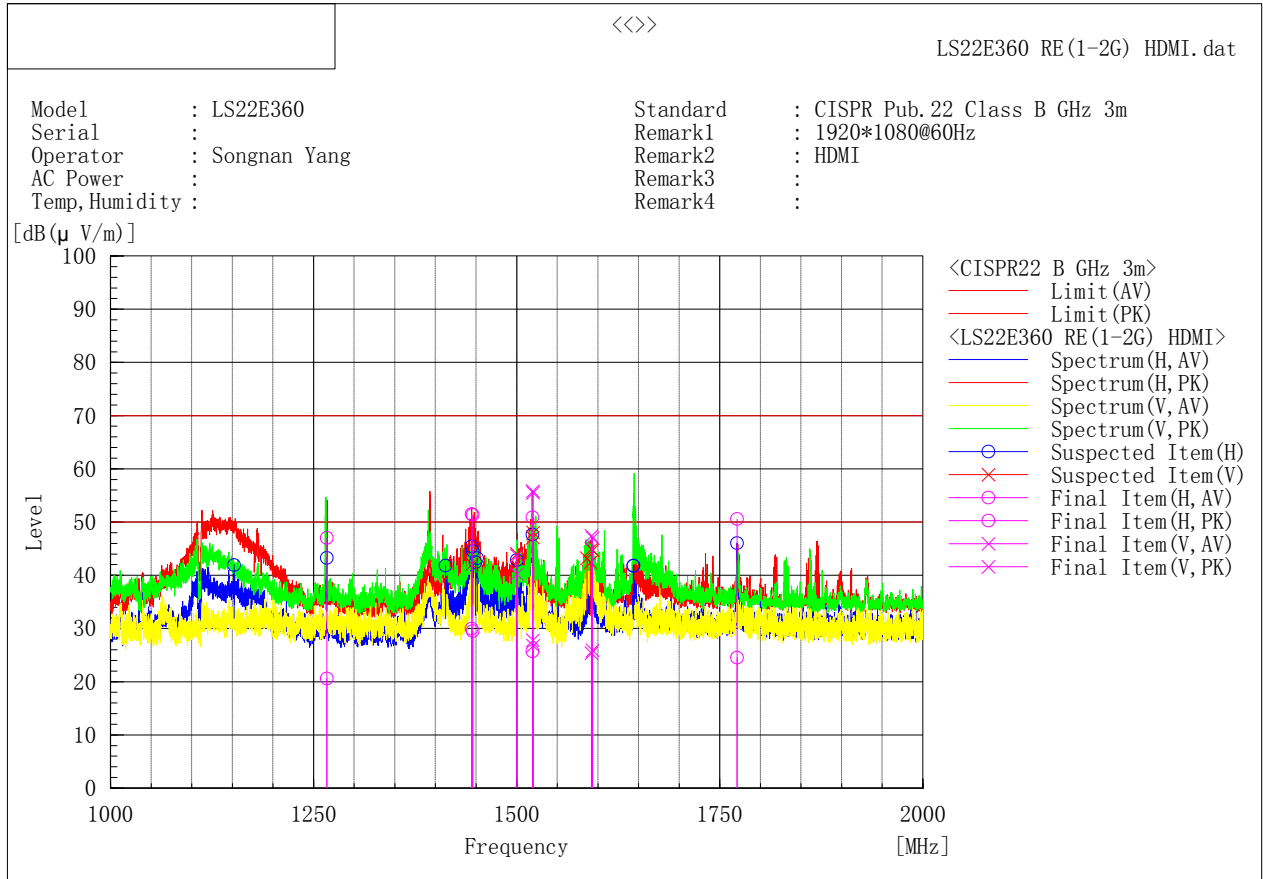

Final Result

| No. | Frequency [MHz] | (P) | Reading AV [dB(μ V)] | Reading PK [dB(μ V)] | c. f [dB(1/m)] | Result AV [dB(μ V/m)] | Result PK [dB(μ V/m)] | Limit AV [dB(μ V/m)] | Limit PK [dB(μ V/m)] | Margin AV [dB] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|----------------------|----------------------|----------------|-----------------------|-----------------------|----------------------|----------------------|----------------|----------------|-------------|-----------|--------|
| 1 | 1500.250 | V | 57.2 | 60.7 | -17.0 | 40.2 | 43.7 | 50.0 | 70.0 | 9.8 | 26.3 | 282.0 | 348.2 | |
| 2 | 1444.500 | H | 47.3 | 68.9 | -17.4 | 29.9 | 51.5 | 50.0 | 70.0 | 20.1 | 18.5 | 100.0 | 158.3 | |
| 3 | 1446.000 | H | 46.9 | 68.8 | -17.4 | 29.5 | 51.4 | 50.0 | 70.0 | 20.5 | 18.6 | 100.0 | 158.3 | |
| 4 | 1519.750 | V | 44.7 | 72.7 | -16.9 | 27.8 | 55.8 | 50.0 | 70.0 | 22.2 | 14.2 | 273.0 | 21.5 | |
| 5 | 1520.000 | V | 43.7 | 72.4 | -16.9 | 26.8 | 55.5 | 50.0 | 70.0 | 23.2 | 14.5 | 276.0 | 22.6 | |
| 6 | 1593.375 | V | 41.6 | 62.7 | -15.7 | 25.9 | 47.0 | 50.0 | 70.0 | 24.1 | 23.0 | 232.0 | 348.0 | |
| 7 | 1519.375 | H | 42.6 | 67.8 | -16.9 | 25.7 | 50.9 | 50.0 | 70.0 | 24.3 | 19.1 | 191.0 | 155.0 | |
| 8 | 1592.000 | V | 41.1 | 63.1 | -15.7 | 25.4 | 47.4 | 50.0 | 70.0 | 24.6 | 22.6 | 256.0 | 348.0 | |
| 9 | 1771.125 | H | 39.0 | 65.0 | -14.5 | 24.5 | 50.5 | 50.0 | 70.0 | 25.5 | 19.5 | 198.0 | 198.8 | |
| 10 | 1266.500 | H | 37.4 | 63.8 | -16.8 | 20.6 | 47.0 | 50.0 | 70.0 | 29.4 | 23.0 | 246.0 | 143.5 | |

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Average) = Reading AV + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin AV (Average) = Limit - Result AV

Appendix A – EUT photography
(Front)



(Rear)



(Left)



(Right)



(Top)



(Bottom)



(Panel)



(Board)



(Board)



(Adapter)



(Adapter)



(Crystal Main Board)

