




EMC TEST REPORT

Project No.	LBE20140521	Revision No.	NONE
FCC ID	A3LLU28D590		
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	18600 Broad wick St. Rancho Dominguez CA 90220	
	Date of application	2014.01.21	
EUT Equipment Under Test	Type of device	Class B personal computers and peripherals	
	Equipment authorization	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	Kind of product	LCD Monitor	
	Model No.	LU28D59*	
		(The character "*" may be 0-9, A-Z or blank, it means different color)	
	Variant Model No.	None	
Manufacturer	Tianjin Samsung Electronics Co., LTD. Weisi Rd. Micro-Electronic Industrial Park, Jingang Rd. Xiqing Dist, Tianjin, 300385 China No.20 Jiangtai Road, the West Zone of TEDA, Tianjin, People's Republic of China		
Applied Standards	FCC Part 15, Subpart B class B		
	ANSI C63.4-2009		
Test period	2014.01.22		
Issue date	2014.01.28		
Test result : Complied			
The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
Tested by : Tong Gao		Reviewed by : Hesong Jin	
			
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CSQAL			
			
TSEC Wei 4 Road, Microelectronics Industrial Park, Jingang High way, Tianjin, China Tel: 86 22 23961234, Fax: 86 22 23961234-5214			

According to Sec. 2.1077, 47 CFR of the FCC Rules.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Equipment EUT Type	Class B personal computers and peripherals
Kind of product	LCD Monitor
Trade Name	Samsung Electronics
Model	LU28D59*
Applied Rules	FCC Part 15, Subpart B Class B
	ANSI C63.4-2009
Manufacturer	Tianjin Samsung Electronics Co., LTD. Weisi Rd. Micro-Electronic Industrial Park, Jingang Rd. Xiqing Dist, Tianjin,300385 China

We hereby *declare that* the equipment bearing the trade name and model number specified above was tested conforming to the applicable FCC Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the Commission's requirements.


U.S. RESPONSIBLE PARTY	Samsung Electronics America QA Lab 18600 Broad wick St. Rancho Dominguez CA 90220
CONTACT PERSON	 <u>Mr. Peter Ra, Manager</u> E-Mail : raaaa@samsung.com Tel : 1-310-900-5250 Fax : 1-310-537-5500

Table of contents

1. Summary of test results

1.1 Emission

2. General Information

2.1 Test facility

3. Test configuration

3.1 Test Peripherals

3.2 EUT operating mode

3.3 Details of Sampling

3.4 Used cable description

3.5 EUT Description

3.6 Description of the EUT exercising method

3.7 Measurement uncertainty

4. Result of individual tests

4.1 Conducted disturbance

4.2 Radiated disturbance

Appendix – EUT photography

1. Summary of test results

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result	Remarks
<input checked="" type="checkbox"/>	Conducted Disturbance	FCC Part 15 Subpart B	Complied	Meets Class B Limit
<input checked="" type="checkbox"/>	Radiated Disturbance	ANSI C63.4-2009	Complied	Meets Class B Limit

- Note : These results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations.

2. General Information

2.1 Test facility

The following firm has submitted the information required by Section 2.948 of the FCC Rules for measuring devices subject to Certification under Parts 15 & 18. The FCC takes no responsibility regarding the capability of this firm for performing the required measurements. Accordingly, this firm should not advertise or otherwise imply FCC approval of CSQAL.

CHINA SAMSUNG QUALITY ASSURANCE LABORATORY is LOCATED ON Block D, 17 - 19, Wei 4 Road, Microelectronics Industrial Park, Jingang Highway, Tianjin China.

Registration Number: 745769

E-mail Address: xiaoli@samsung.com

Phone Number: 86-22-2396-1234-5211

All testing are performed in Semi-anechoic chambers conforming to the site attenuation Characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2 and Shielded rooms.

CSQAL is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

3. Test Setup configuration

3.1 Test Peripherals

The peripherals which were interconnected to the EUT during the test are as follows:

Item	Model No.	Serial No.	Manufacturer	Note
LCD Monitor	LU28D590	-	Samsung	EUT
Adapter	SVD5614V	CN07BN4400461ADC07DCT0997	Samsung	-
PC	-	-	-	-
Printer	ML-2545/XAA	Z6FJBACB600011N	Samsung	-
USB Keyboard	SK-8185	OY526K	Dell	-
USB Mouse	SNJ-B138	Z164146	Dell	-
				-

3.2 EUT operating mode(s)

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	DP IN
Operating Mode 2	HDMI1 IN
Operating Mode 2	HDMI2 IN

3.3 Details of Sampling

Customer selected, single unit.

3.4 Cable description

The type(s) of cables which were connected to the ports (of the EUT) are as follows:

No	Connect Cable	Length [m]	Ferrite core [Y/N]	Remark
1	DP in	1.5	Y	To PC
2	HDMI in	1.5	Y	To PC
3	Earphone	1.5	N	FOR EUT
4	POWER	1.8	N	FOR EUT

3.5 EUT Description

The following features describe EUT represented by this report:

Model Name:LU28D590

Maximum Clock Frequency:533MHz


Panel	Size	28 Inches (70 cm)
	Display area	620.93 mm (H) x 341.28 mm (V) 24.44 Inches (H) x 13.44 Inches (V)
	Pixel Pitch	0.16 mm (H) x 0.16 mm (V) 0.006299 Inches (H) x 0.006299 Inches (V)
Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz ± 3 Hz
Dimensions (WxHxD) / Weight	Without Stand	660.9 x 410.0 x 64.7 mm 26.02 x 16.14 x 2.55 inches
	With Stand	660.9 x 486.3 x 169.4 mm / 5.65 kg 26.02 x 19.15 x 6.67 inches / 12.5 lbs
Environmental considerations	Operating	Temperature : 50°F ~ 104°F (10°C ~ 40°C) Humidity : 10 % – 80 %, non-condensing
	Storage	Temperature : -4°F ~ 113°F (-20°C ~ 45°C) Humidity : 5 % – 95 %, non-condensing

Synchronization	Horizontal Frequency	30 ~ 134 kHz (DisplayPort) 30 ~ 90 kHz (HDMI)
	Vertical Frequency	56 ~ 75 Hz (DisplayPort) 24 ~ 75 Hz (HDMI)
Resolution	Optimum Resolution	3840 x 2160 @ 60Hz (DisplayPort) 3840 x 2160 @ 30Hz (HDMI)
	Maximum Resolution	3840 x 2160 @ 60Hz (DisplayPort) 3840 x 2160 @ 30Hz (HDMI)

3.6 Description of the EUT exercising method

The EUT exercise program used during EMI testing was CSQAL standardized test program for MS Windows. The program repetitively sends a screen of H – Character to the display. Connect video output of computer on EUT's PC IN (D-sub),DVI port, DP port and scrolled H – character continuously on EUT's screen.

The EUT system includes a monitor, the operational conditions shown as follows, within the selected area.

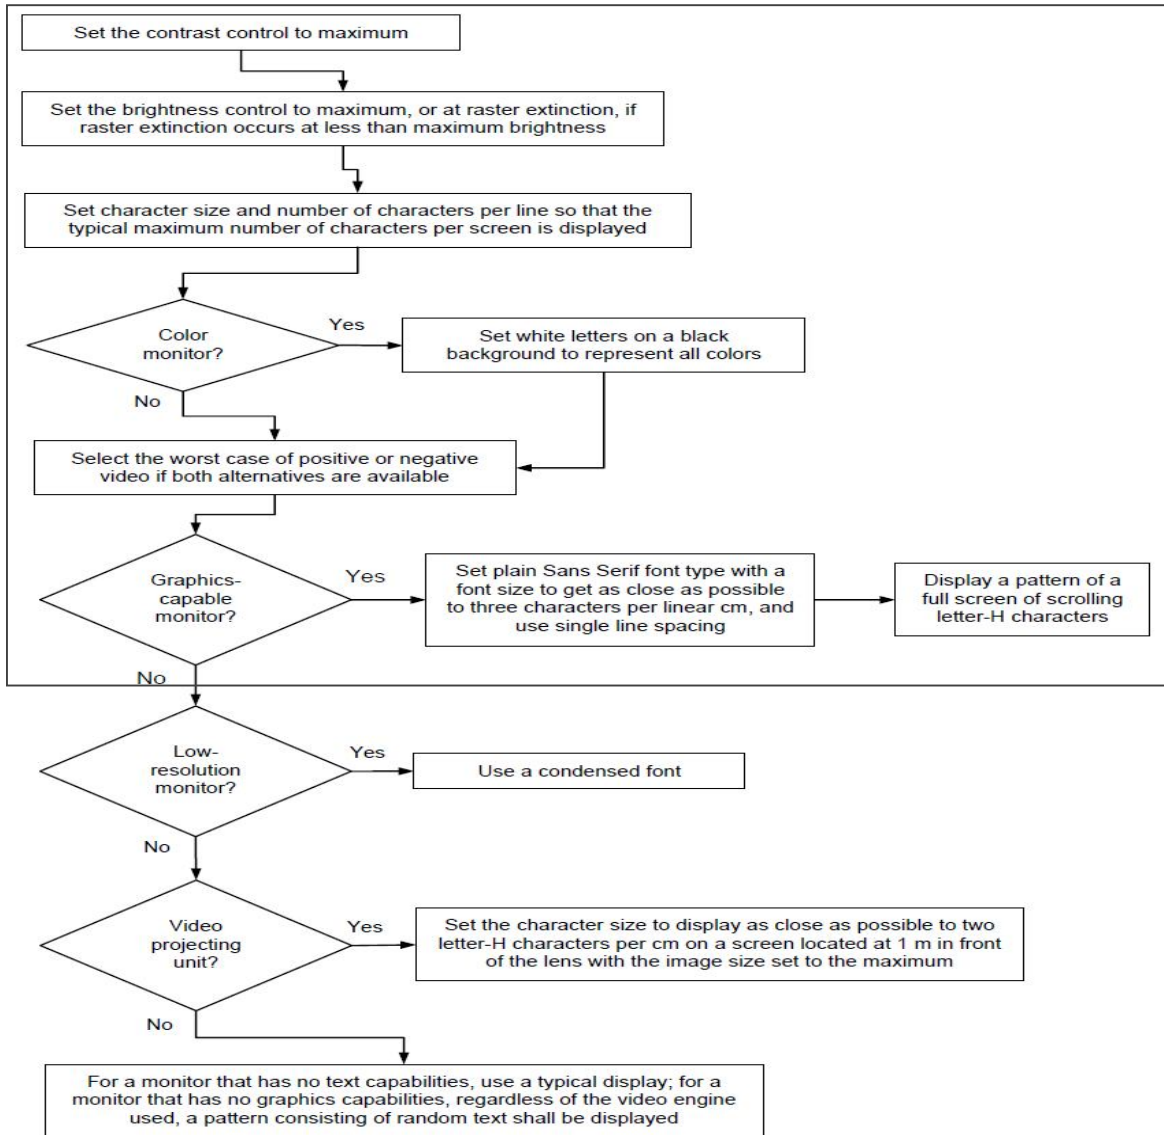

- Notes:**
1. Set the brightness control to maximum
 2. Set the contrast control to maximum
 3. Display a pattern of a full screen of scrolling letter-H characters with a font size to get as close as possible to three characters per linear cm and use single line spacing

3.7 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

Test type			Measurement uncertainty (C.L. 95 %, k = 2)
Disturbance voltage at the mains terminals			2.8 dB
Radiated Disturbance	Horizontal	30 MHz - 1 GHz	4.4 dB
	Vertical	30 MHz - 1 GHz	4.4 dB
	Horizontal	1GHz - 6 GHz	3.7 dB
	Vertical	1GHz - 6 GHz	3.7 dB

4. Results of individual test

4.1 Conducted disturbance

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.

The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range Limits MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Note 1: 1 μ V is regarded as 0 dB.
 Note 2: The limits shall decrease linearly with the logarithm of the frequency in the range 150 – 500 kHz.
 Note 3: If the average limit is met in the measurement with quasi-peak detector, the measurement with average detector is unnecessary.
 Note 4: The lower limit shall apply at the transition frequency.

If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 seconds at each measurement frequency, the highest reading shall be recorded, with the exception of any brief isolated high reading (which shall be ignored).

4.1.1 Test instrumentation

Test instrumentation used in the Conducted disturbance test was as follows:


Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	EP5CE	TOYO	V 4.7.10	N/A	N/A
Measuring receiver	ESCI	R&S	101027	2013.03.02	12
Artificial mains network	ENV216	R&S	101122	2013.08.22	12
Artificial mains network	ENV216	R&S	101059	2013.08.22	12
ISN	ISN T800	TESEQ	28602	2013.08.22	12
ISN	ISN T8-CAT6	TESEQ	27286	2013.03.02	12
Test software	EP5/CE	TOYO	V4.7.010	-	-

4.1.2 Photograph of the test Configuration

(Front)



(Rear)

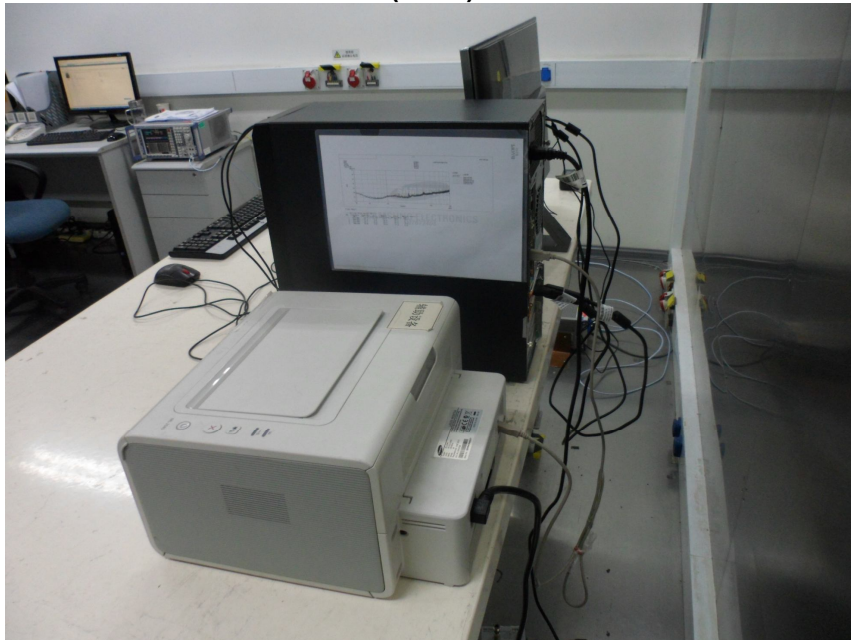


4.1.3 Test results

Test date	2014.01.22		Test engineer		Tong Gao	
Climate condition	Ambient temperature	22±1 °C	Relative humidity	24±0%	Atmospheric pressure	102±0 kPa
	Test place Shielded Room #2					

4.1.4 Test data

■ Operating Mode: DP IN

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@60Hz), then choose the worst one (3840*2160@60Hz) for final evaluation.

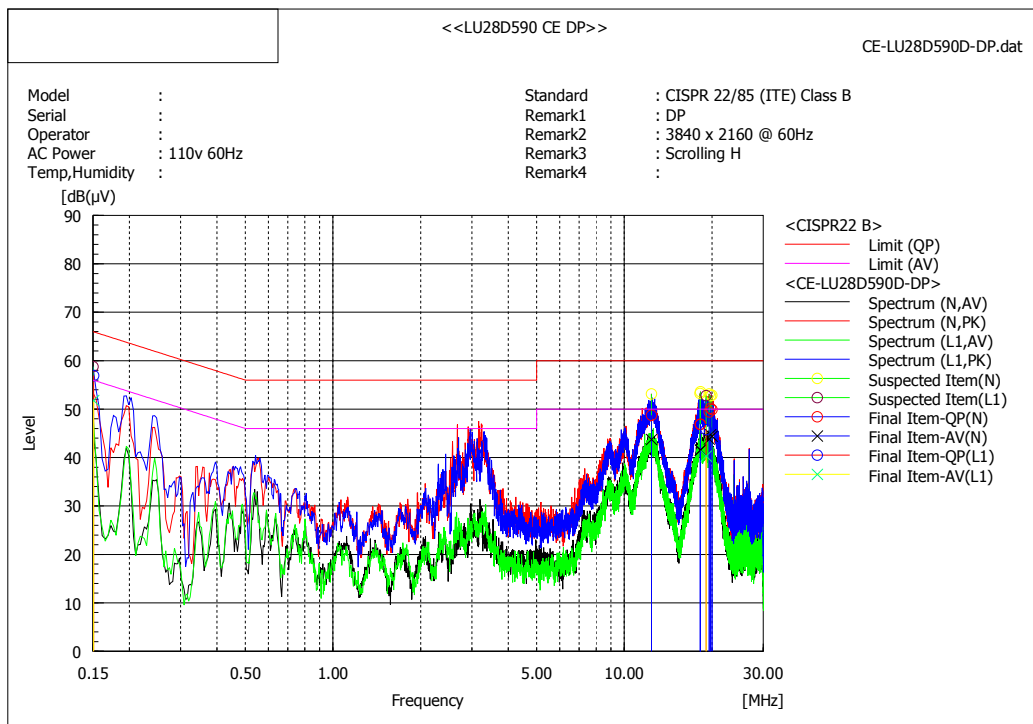


Final Result

--- N Phase ---											
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB(μV)]	Margin AV [dB(μV)]	Remark [dB]
1	18.25892	37.0	31.7	9.9	46.9	41.6	60.0	50.0	13.1	8.4	
2	18.2296	36.9	31.7	9.9	46.8	41.6	60.0	50.0	13.2	8.4	
3	12.40737	39.1	34.0	9.7	48.8	43.7	60.0	50.0	11.2	6.3	
4	19.57652	39.4	33.8	10.0	49.4	43.8	60.0	50.0	10.6	6.2	
5	20.00454	39.9	34.4	10.0	49.9	44.4	60.0	50.0	10.1	5.6	
6	19.78953	40.2	34.7	10.0	50.2	44.7	60.0	50.0	9.8	5.3	

--- L1 Phase ---											
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB(μV)]	Margin AV [dB(μV)]	Remark [dB]
1	0.15066	47.3	42.2	9.6	56.9	51.8	66.0	56.0	9.1	4.2	
2	19.1061	36.3	30.9	9.4	45.7	40.3	60.0	50.0	14.3	9.7	

■ Operating Mode: HDMI1 IN

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

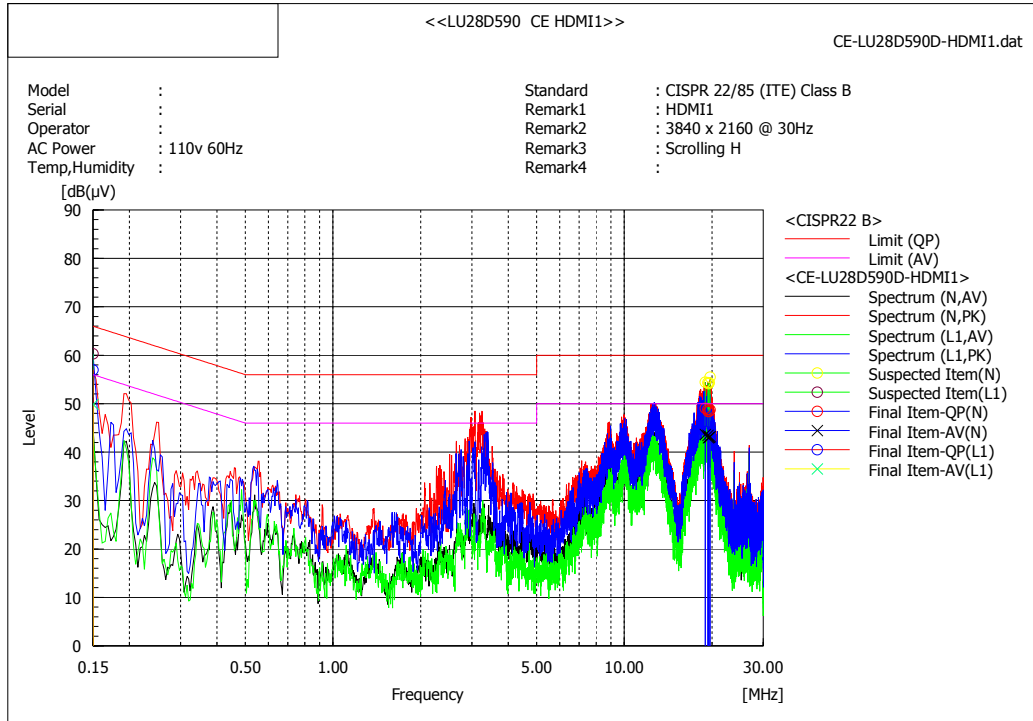


Final Result

--- N Phase ---											
No.	Frequency [MHz]	Reading QP [dB(µV)]	Reading AV [dB(µV)]	c.f [dB]	Result QP [dB(µV)]	Result AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB(µV)]	Margin AV [dB(µV)]	Remark [dB]
1	19.70835	38.7	33.2	10.0	48.7	43.2	60.0	50.0	11.3	6.8	
2	18.97117	39.0	33.7	10.0	49.0	43.7	60.0	50.0	11.0	6.3	
3	19.35566	38.8	33.5	10.0	48.8	43.5	60.0	50.0	11.2	6.5	
4	19.5594	38.5	33.0	10.0	48.5	43.0	60.0	50.0	11.5	7.0	
5	19.43792	38.4	33.0	10.0	48.4	43.0	60.0	50.0	11.6	7.0	

--- L1 Phase ---											
No.	Frequency [MHz]	Reading QP [dB(µV)]	Reading AV [dB(µV)]	c.f [dB]	Result QP [dB(µV)]	Result AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB(µV)]	Margin AV [dB(µV)]	Remark [dB]
1	0.15007	47.4	40.2	9.6	57.0	49.8	66.0	56.0	9.0	6.2	

■ Operating Mode: HDMI2 IN

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

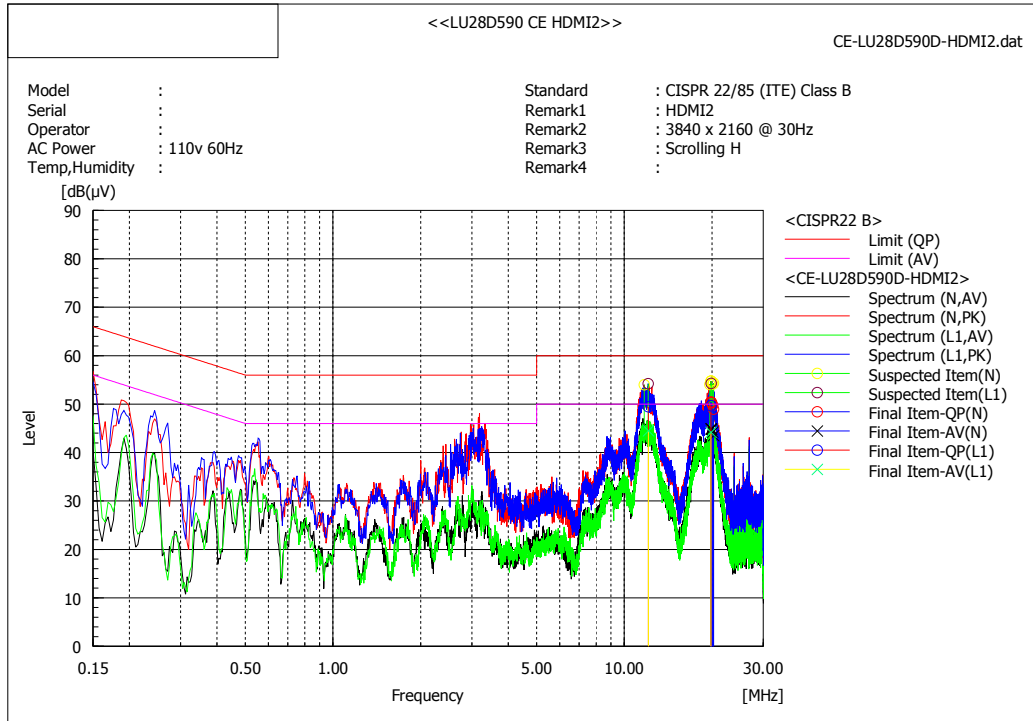

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	19.83314	40.4	34.9	10.0	50.4	44.9	60.0	50.0	9.6	5.1	
2	19.8661	40.4	34.9	10.0	50.4	44.9	60.0	50.0	9.6	5.1	
3	20.25802	39.0	33.5	10.0	49.0	43.5	60.0	50.0	11.0	6.5	
4	19.95664	40.3	34.8	10.0	50.3	44.8	60.0	50.0	9.7	5.2	
5	20.12485	39.8	34.2	10.0	49.8	44.2	60.0	50.0	10.2	5.8	

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	19.85541	40.2	34.7	9.5	49.7	44.2	60.0	50.0	10.3	5.8	
2	12.09978	40.3	35.3	9.2	49.5	44.5	60.0	50.0	10.5	5.5	

Note) Level (Quasi-Peak and/or Average) = Meter Reading (Quasi-Peak and/or Average) + Factor (LISN Insertion Loss + Cable Loss)

Margin = Limit – Level (Quasi-Peak and/or Average)

4.2 Radiated disturbance

Of those disturbances above ($L - 20\text{dB}$), where L is the limit level in logarithmic units, record at least the disturbance levels and the frequencies of the six highest disturbances.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin. All measurements were taken utilizing quasi-peak detection unless stated otherwise.

Measurements were performed at an antenna to EUT distance of 3 meters and elevated between 1 and 4 meters. Both vertical and horizontal antenna polarizations were measured.

Above 1GHz, peak detector function mode was used with resolution bandwidth of 1 MHz and a video bandwidth of 1 MHz. If the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range Limits MHz	Quasi-peak Limits (microvolts/meter)
	Class B
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Note 1: The lower limit shall apply at the transition frequency.
 Note 2: Additional provisions may be required for cases where interference occurs.
 Note 3: 1 $\mu\text{V}/\text{m}$ is regarded as 0 dB.

Measurements above 1GHz were performed at an antenna to EUT distance of 3 meters and elevated 1 to 4 meters in FAC. Both vertical and horizontal antenna polarizations were measured.

The test is performed in a semi-anechoic chamber, use of absorbing material to cover part of the metal ground plane, the dimension of the absorbing material is: 3 x 3 x 0.3 m (W x D x H)

Limits for radiated disturbance of ITE at a measuring distance of 3 m

Frequency range Limits MHz	Class A		Class B	
	Peak dB($\mu\text{V}/\text{m}$)	Average dB($\mu\text{V}/\text{m}$)	Peak dB($\mu\text{V}/\text{m}$)	Average dB($\mu\text{V}/\text{m}$)
1000 to 3000	76	56	70	50
3000 to 6000	80	60	74	54

Note 1: The lower limit shall apply at the transition frequency.

4.2.1 Test instrumentation

Test instrumentation used in the Radiated disturbance was as follows:

30MHz~1GHz

Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	EP5/RE	TOYO	V 4.7.10	N/A	N/A
Bi-con Antenna	CBL6112D	TESEQ	30998	2013.04.03	24
EMI Receiver	ESCI	R&S	101026	2013.03.02	12
AMPLIFIER	310N	SONOMA	300911	2013.08.23	12
Ant Mast	MA4000	INN CO	-	N/A	N/A
Mast Controller	CO2000	INN CO	-	N/A	N/A
RF Selector	NS4900N	TOYO	-	N/A	N/A
Test software	EP5/RE	TOYO	V4.7.010	-	-

1GHz-5GHz

Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	e3	AUDIX	6.110709d	N/A	N/A
Broad-Band Horn Antenna	BBHA9120B	Schwarzbeck	521	2012.03.05	24
EMI Receiver	ESU26	R&S	100243	2013.03.02	12
AMPLIFIER	AMF-4D-00500800-18-13P	TOYO	0934	2013.08.23	12
Ant Mast	AUDIX	AUDIX	-	N/A	N/A
Test software	EP5/RE	TOYO	V4.7.010	-	-


4.2.2 Photograph of the test Configuration

30MHz~1GHz

(Front)




(Rear)

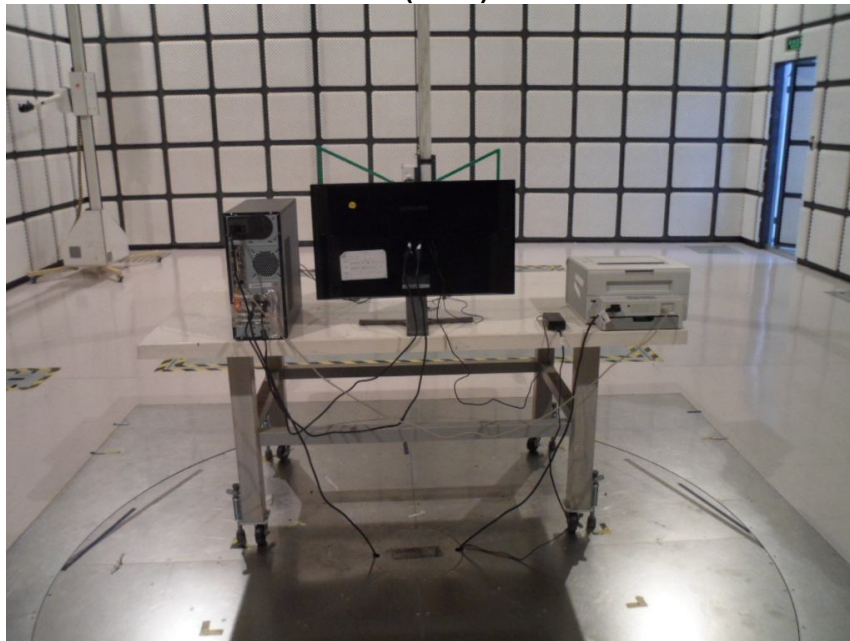


1GHz-5GHz

(Front)

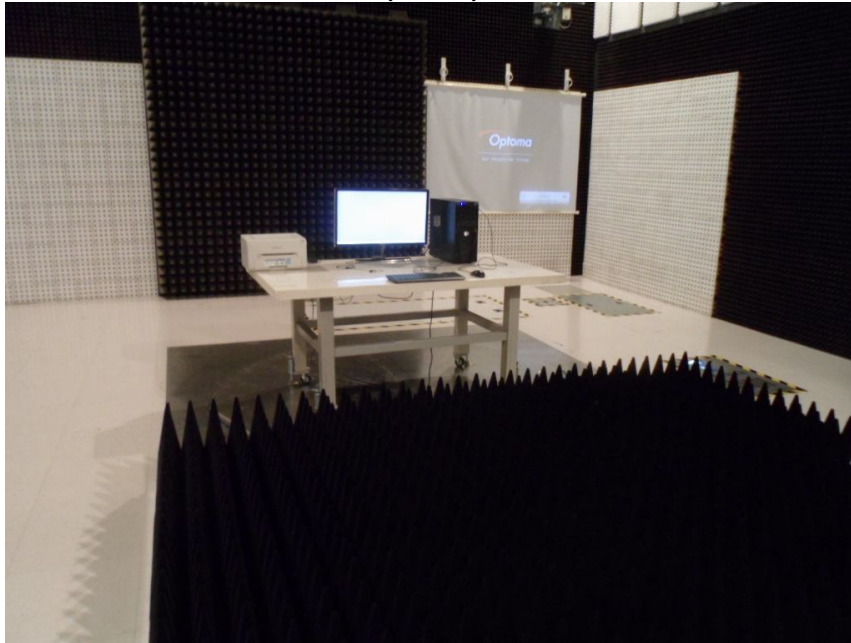

(Rear)

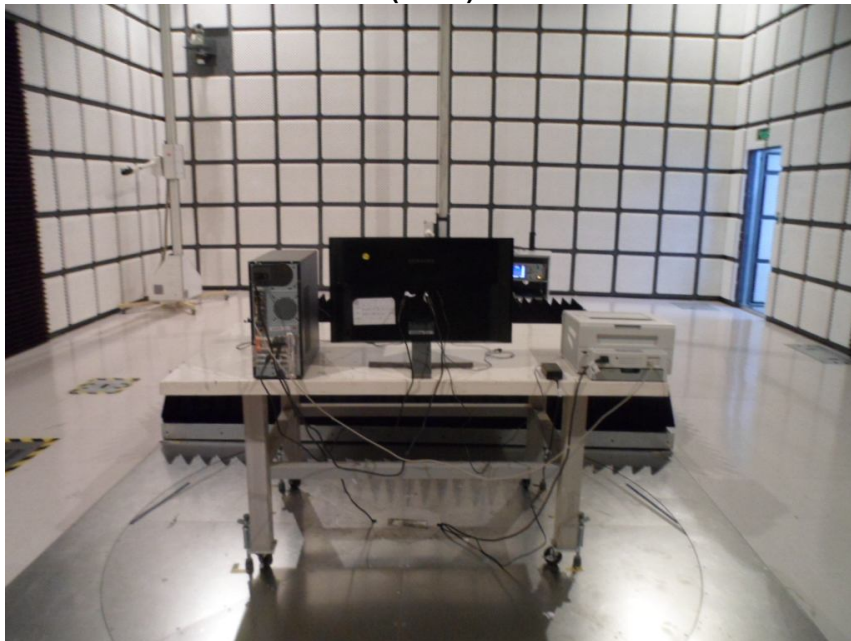

4.2.3 Test results


30MHz~1GHz

Test date	2014.01.22		Test engineer		Tong Gao	
Climate condition	Ambient temperature	22±1℃	Relative humidity	20±0 %	Atmospheric pressure	102±0 kPa
	Test place					
3m Semi-Anechoic Chamber						

■ Operating Mode: D-Sub (PC Video IN or Analog) IN Display

Set the brightness control to maximum, Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@60Hz), then choose the worst one (3840*2160@60Hz) for final evaluation.

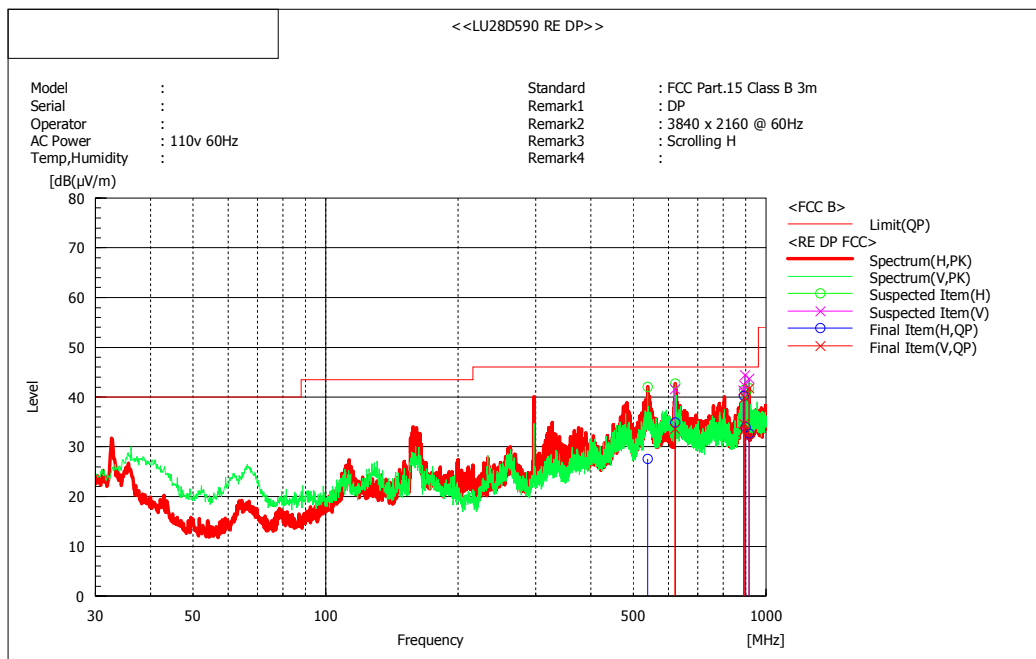


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	896.009	V	36.6	3.3	39.9	46.0	6.1	202.0	164.9
2	914.429	V	38.4	3.4	41.8	46.0	4.2	193.0	166.2
3	621.996	H	35.7	-0.8	34.9	46.0	11.1	100.0	135.3
4	890.754	V	31.4	3.2	34.6	46.0	11.4	230.0	166.2
5	538.280	H	29.1	-1.6	27.5	46.0	18.5	100.0	285.6
6	914.519	H	29.3	3.4	32.7	46.0	13.3	209.0	137.0
7	620.973	V	34.5	-0.9	33.6	46.0	12.4	100.0	122.4
8	890.996	H	37.1	3.2	40.3	46.0	5.7	100.0	250.5
9	887.722	V	29.8	3.2	33.0	46.0	13.0	132.0	173.3
10	899.241	H	30.7	3.3	34.0	46.0	12.0	190.0	123.7

■ Operating Mode: HDMI1 IN Display

Set the brightness control to maximum, Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

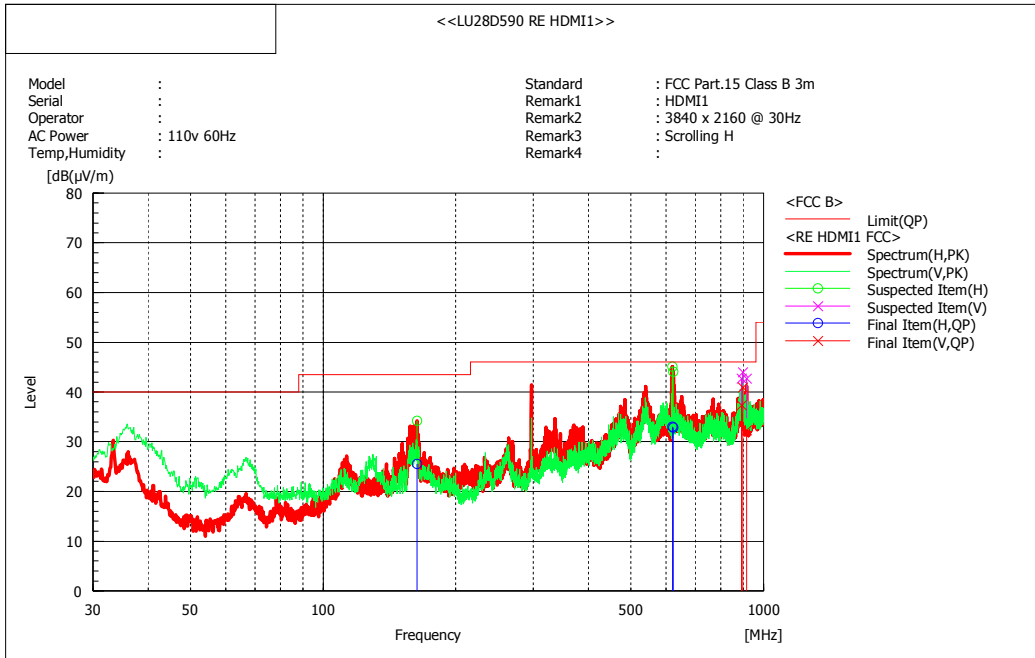


Final Result

No.	Frequency [MHz]	(P)	Reading [dB(µ V)]	c. f [dB(1/m)]	Result [dB(µ V/m)]	Limit [dB(µ V/m)]	Margin [dB]	Height [cm]	Angle [°]
1	621.179	H	33.9	-0.9	33.0	46.0	13.0	101.0	89.2
2	897.618	V	37.6	3.3	40.9	46.0	5.1	193.0	165.5
3	163.254	H	38.0	-12.5	25.5	43.5	18.0	400.0	214.5
4	624.125	H	33.6	-0.7	32.9	46.0	13.1	101.0	236.0
5	890.996	V	34.2	3.2	37.4	46.0	8.6	237.0	183.1
6	914.519	V	28.9	3.4	32.3	46.0	13.7	175.0	176.6

■ Operating Mode: HDMI2 IN Display

Set the brightness control to maximum, Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

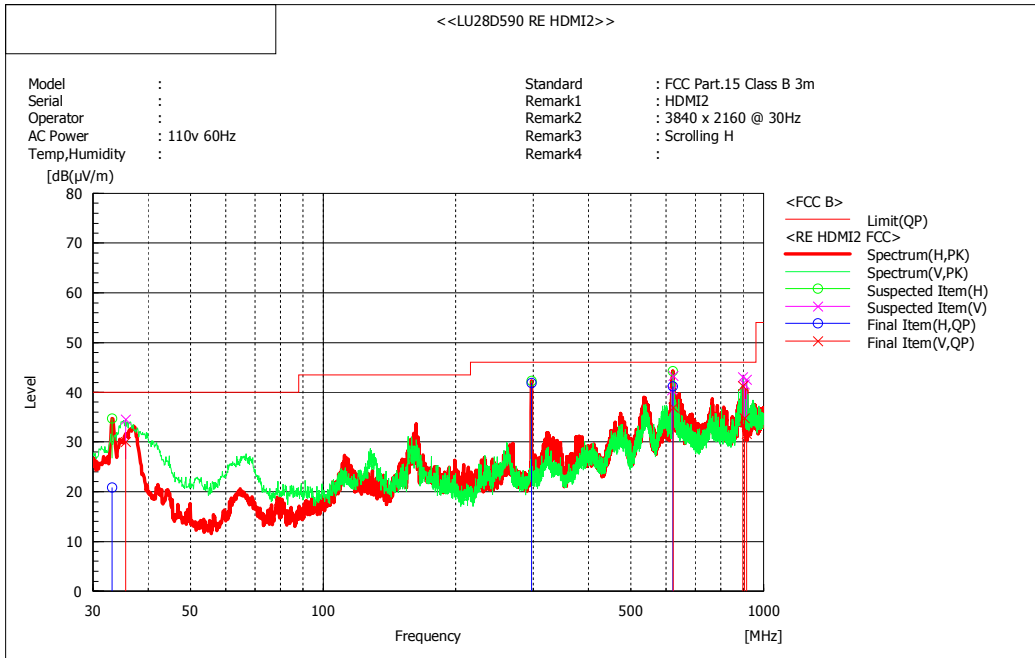

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	622.108	H	42.0	-0.8	41.2	46.0	4.8	100.0	87.1
2	897.624	V	38.0	3.3	41.3	46.0	4.7	196.0	166.9
3	297.001	H	49.7	-7.8	41.9	46.0	4.1	103.0	266.2
4	623.761	V	37.6	-0.7	36.9	46.0	9.1	100.0	129.6
5	914.519	V	28.3	3.4	31.7	46.0	14.3	100.0	181.9
6	904.940	V	31.5	3.3	34.8	46.0	11.2	101.0	158.1
7	33.153	H	28.0	-7.1	20.9	40.0	19.1	101.0	116.1
8	35.578	V	38.5	-8.4	30.1	40.0	9.9	101.0	54.8

Note) Receiving antenna polarization : Horizontal and/or Vertical

Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Quasi-Peak) = Reading QP + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit – Level QP


1GHz-5GHz

Test date	2014.01.22		Test engineer		Tong Gao	
Climate condition	Ambient temperature	22±1℃	Relative humidity	22+0 %	Atmospheric pressure	102±0 kPa
	Test place 3m Semi-Anechoic Chamber					

■ Operating Mode: D-Sub (PC Video IN or Analog) IN Display

Set the brightness control to maximum, Set the contrast control to maximum

Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@60Hz), then choose the worst one (3840*2160@60Hz) for final evaluation.

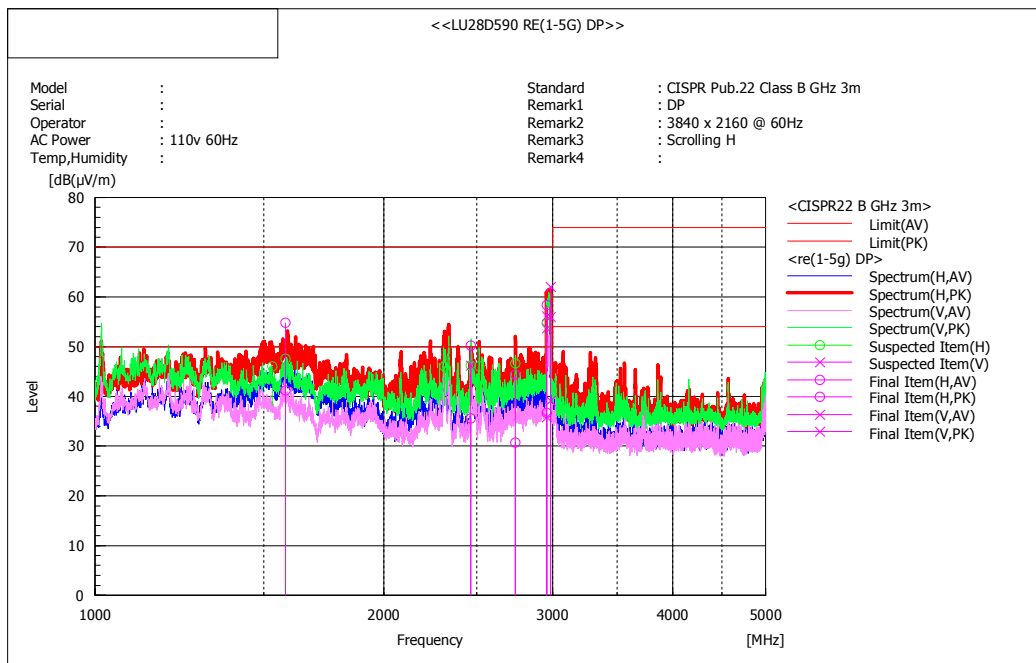


Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(µV)]	Reading PK [dB(µV)]	c. f [dB(1/m)]	Result AV [dB(µV/m)]	Result PK [dB(µV/m)]	Limit AV [dB(µV/m)]	Limit PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [dB]	Angle [°]
1	2984.587	V	51.2	74.2	-12.1	39.1	62.1	50.0	70.0	10.9	7.9	101.0	166.4
2	1579.391	H	56.2	69.8	-15.0	41.2	54.8	50.0	70.0	8.8	15.2	117.0	212.6
3	2956.301	H	48.9	70.6	-12.2	36.7	58.4	50.0	70.0	13.3	11.6	100.0	171.8
4	2956.871	V	48.0	68.4	-12.2	35.8	56.2	50.0	70.0	14.2	13.8	100.0	154.9
5	2743.500	H	43.5	57.2	-12.8	30.7	44.4	50.0	70.0	19.3	25.6	100.0	146.2
6	2465.000	H	49.3	63.9	-13.7	35.6	50.2	50.0	70.0	14.4	19.8	144.0	146.2

■ Operating Mode: HDMI1 IN Display

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

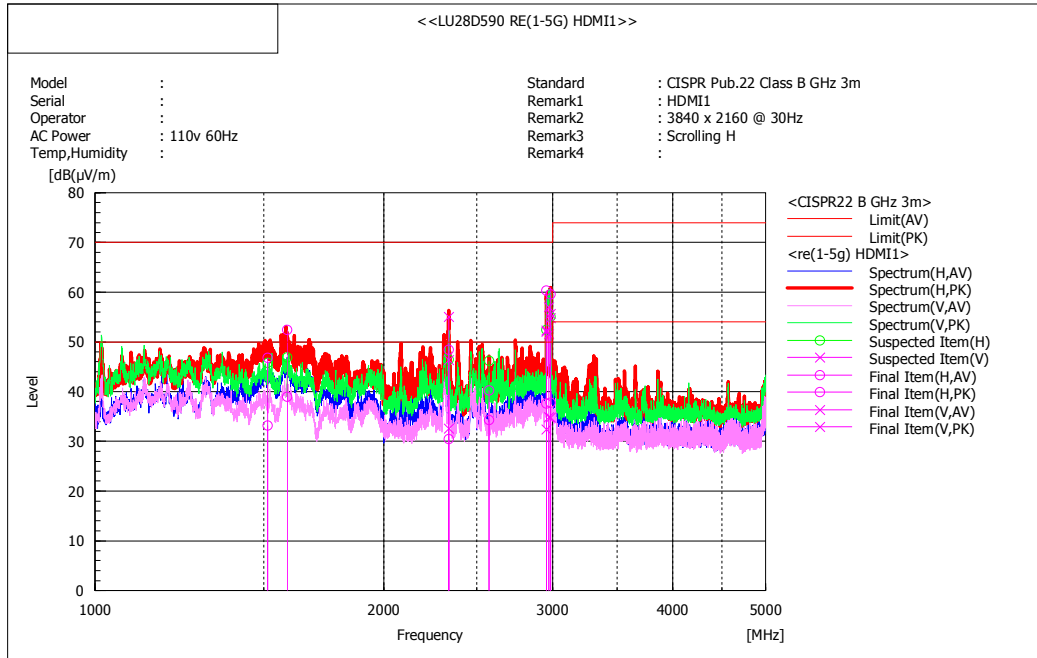


Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [dB]	Angle [°]
1	2984.536	H	49.9	71.7	-12.1	37.8	59.6	50.0	70.0	12.2	10.4	100.0	171.0
2	2984.500	V	46.9	67.7	-12.1	34.8	55.6	50.0	70.0	15.2	14.4	100.0	191.9
3	2955.032	H	49.8	72.5	-12.2	37.6	60.3	50.0	70.0	12.4	9.7	100.0	187.4
4	2955.065	V	44.6	64.5	-12.2	32.4	52.3	50.0	70.0	17.6	17.7	100.0	191.8
5	2971.000	V	47.1	69.3	-12.2	34.9	57.1	50.0	70.0	15.1	12.9	100.0	155.5
6	1586.003	H	53.9	67.3	-14.9	39.0	52.4	50.0	70.0	11.0	17.6	100.0	205.8
7	2336.500	H	44.2	62.2	-13.8	30.4	48.4	50.0	70.0	19.6	21.6	100.0	213.6
8	2337.461	V	46.4	68.9	-13.8	32.6	55.1	50.0	70.0	17.4	14.9	122.0	206.8
9	2575.500	H	47.7	53.6	-13.4	34.3	40.2	50.0	70.0	15.7	29.8	100.0	291.6
10	1513.337	H	48.5	62.1	-15.3	33.2	46.8	50.0	70.0	16.8	23.2	100.0	229.0

■ Operating Mode: HDMI2 IN Display

Set the brightness control to maximum, Set the contrast control to maximum
 Scan three resolutions (800*600@60Hz, 1280*720@60Hz, 3840*2160@30Hz), then choose the worst one (3840*2160@30Hz) for final evaluation.

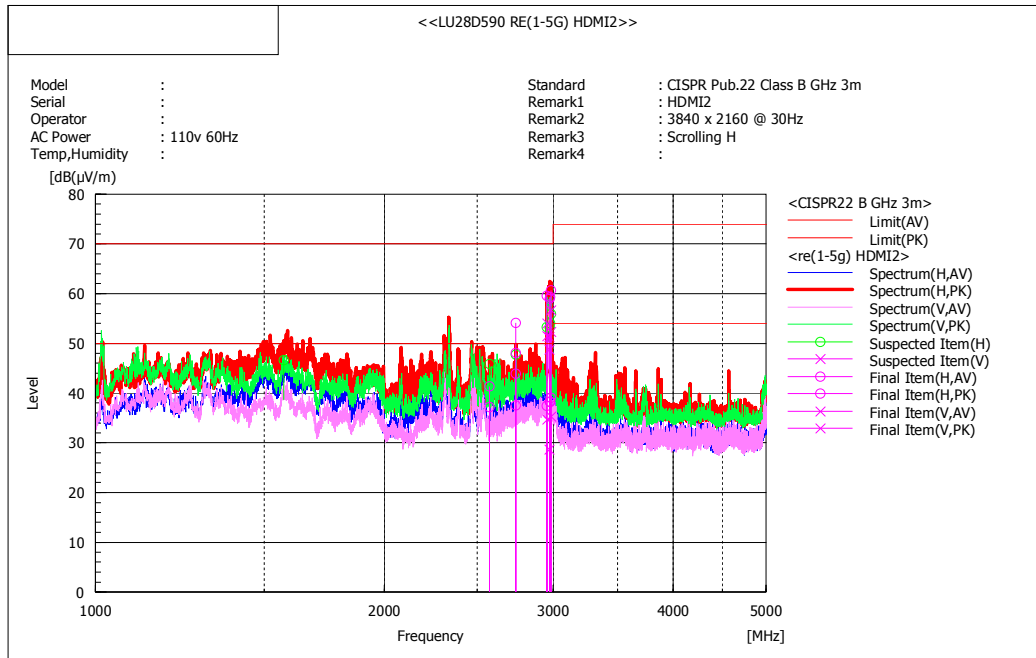

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [dB]	Angle [°]
1	2743.233	H	56.7	66.9	-12.8	43.9	54.1	50.0	70.0	6.1	15.9	100.0	211.6
2	2984.412	H	51.2	72.8	-12.1	39.1	60.7	50.0	70.0	10.9	9.3	100.0	188.4
3	2978.500	H	50.4	71.5	-12.2	38.2	59.3	50.0	70.0	11.8	10.7	120.0	215.2
4	2955.000	H	49.6	71.7	-12.2	37.4	59.5	50.0	70.0	12.6	10.5	100.0	188.4
5	2974.357	H	50.5	71.2	-12.2	38.3	59.0	50.0	70.0	11.7	11.0	100.0	180.2
6	2985.641	V	47.4	68.8	-12.1	35.3	56.7	50.0	70.0	14.7	13.3	100.0	179.3
7	2956.412	V	46.9	66.2	-12.2	34.7	54.0	50.0	70.0	15.3	16.0	100.0	183.6
8	2971.000	V	40.9	60.9	-12.2	28.7	48.7	50.0	70.0	21.3	21.3	100.0	224.6
9	2743.337	H	50.3	60.9	-12.8	37.5	48.1	50.0	70.0	12.5	21.9	100.0	242.0
10	2575.500	H	50.6	54.7	-13.4	37.2	41.3	50.0	70.0	12.8	28.7	100.0	311.5

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Average) = Reading AV + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin AV (Average) = Limit – Result AV

Appendix A – EUT photography

(Front)



(Rear)



(Up)




(Down)




(Right)




(Left)

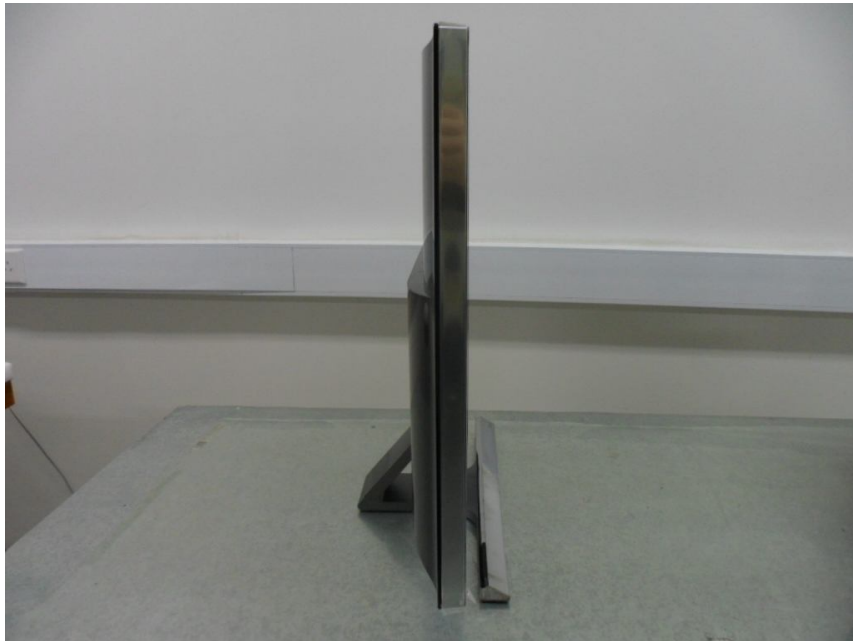


(Panel)

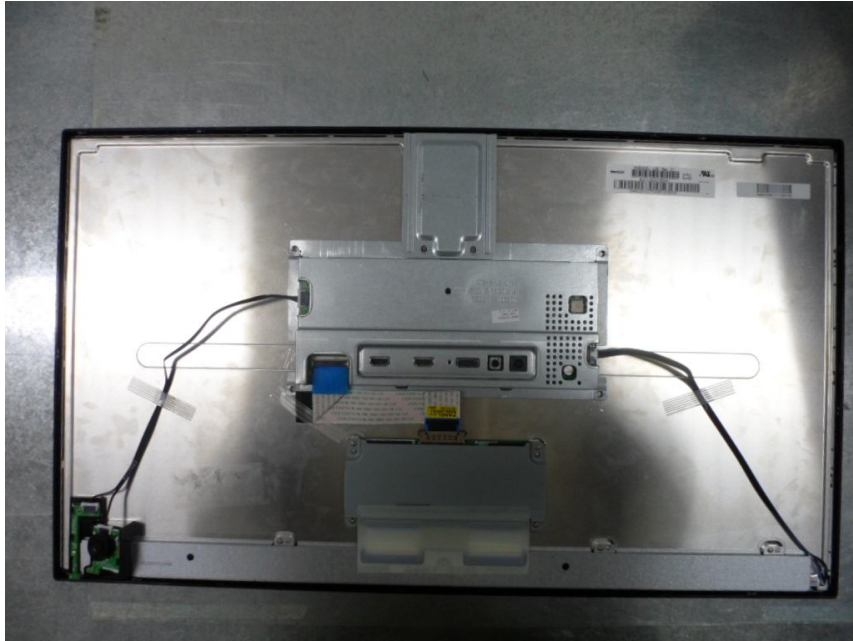


(Main Board)

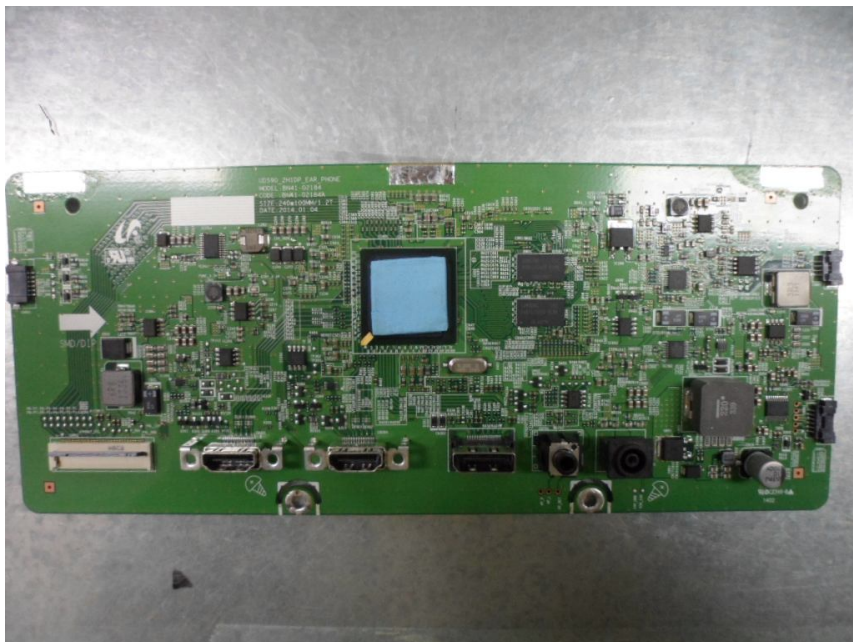

(MAIN Board)

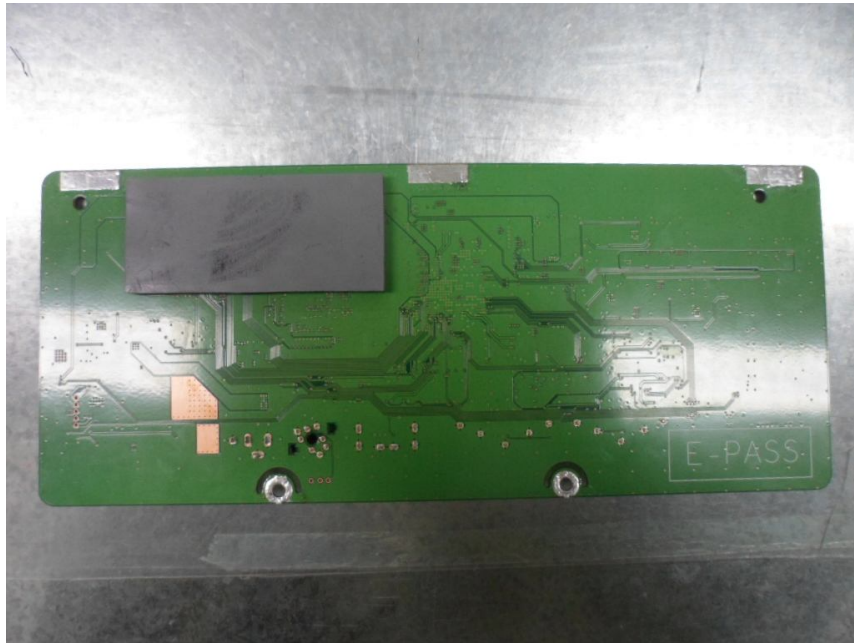

(Crystal Main Board)

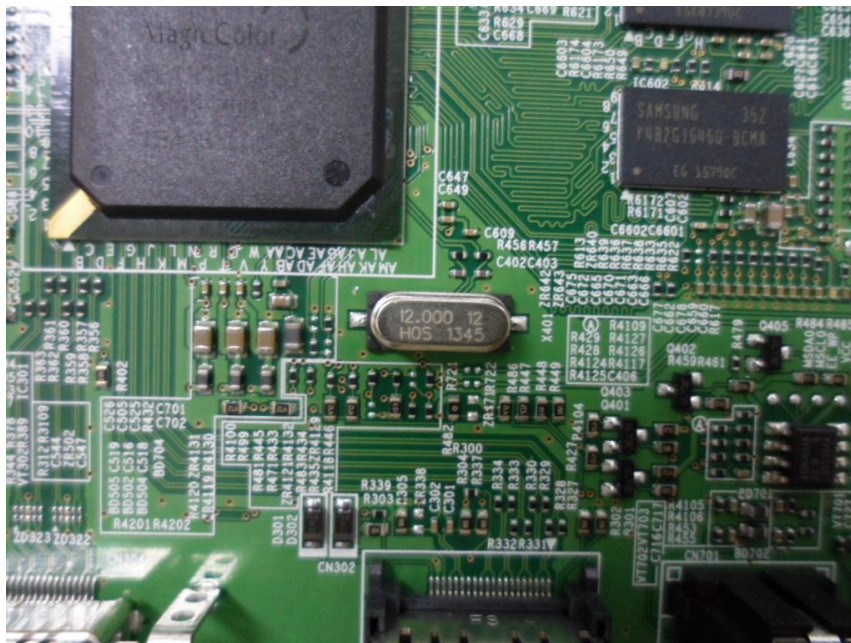

(Adapter)



(Adapter)



(Shield Cover)



(Shield Cover)

