



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

MODEL NUMBER: SM-A137F/DSN

FCC ID: A3LSMA137F

REPORT NUMBER: 4790360891-S1V3

ISSUE DATE: 5/4/2022

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Testing Laboratory

TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	4/22/2022	Initial Issue	--
V2	4/25/2022	Revised tune-up limit in Sec. 6.3, 9.4 and 9.5 Added explain in Sec. 10.6 & 10.7 Revised Appendix G. Added Appendix H.	Juyeon Choi
V3	5/4/2022	Revised NFC function in Sec.6.2.	Juyeon Choi

Table of Contents

1.	Attestation of Test Results	5
1.1.	<i>The Highest Reported SAR for RF exposure conditions for each bands</i>	<i>6</i>
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	7
4.	SAR Measurement System & Test Equipment	8
4.1.	<i>SAR Measurement System.....</i>	<i>8</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>9</i>
4.3.	<i>Test Equipment.....</i>	<i>11</i>
5.	Measurement Uncertainty.....	12
5.1.	<i>DECISION RULE.....</i>	<i>12</i>
6.	Device Under Test (DUT) Information	12
6.1.	<i>DUT Description</i>	<i>12</i>
6.2.	<i>Wireless Technologies.....</i>	<i>13</i>
6.3.	<i>Nominal and Maximum Output Power.....</i>	<i>14</i>
6.4.	<i>Power Back-off Operation.....</i>	<i>16</i>
6.5.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>17</i>
6.6.	<i>LTE (TDD) Considerations.....</i>	<i>18</i>
7.	RF Exposure Conditions (Test Configurations)	19
8.	Dielectric Property Measurements & System Check	20
8.1.	<i>Dielectric Property Measurements</i>	<i>20</i>
8.2.	<i>System Check.....</i>	<i>23</i>
9.	Conducted Output Power Measurements.....	25
9.1.	<i>GSM.....</i>	<i>25</i>
9.2.	<i>W-CDMA</i>	<i>27</i>
9.3.	<i>LTE.....</i>	<i>31</i>
9.4.	<i>Wi-Fi 2.4 GHz (DTS Band).....</i>	<i>40</i>
9.5.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>41</i>
9.6.	<i>Bluetooth</i>	<i>42</i>
10.	Measured and Reported (Scaled) SAR Results.....	43
10.1.	<i>GSM 850.....</i>	<i>45</i>
10.2.	<i>GSM 1900.....</i>	<i>45</i>
10.3.	<i>WCDMA Band V</i>	<i>45</i>
10.4.	<i>LTE Band 5 (10MHz Bandwidth)</i>	<i>46</i>

10.5.	<i>LTE Band 41 (20MHz Bandwidth)</i>	46
10.6.	<i>Wi-Fi (DTS Band)</i>	47
10.7.	<i>Wi-Fi (U-NII Bands)</i>	47
10.8.	<i>Bluetooth</i>	48
11.	SAR Measurement Variability	49
12.	Simultaneous Transmission SAR Analysis	50
12.1.	<i>Sum of the SAR for GSM850 & Wi-Fi & BT</i>	52
12.2.	<i>Sum of the SAR for GSM1900 & Wi-Fi & BT</i>	52
12.3.	<i>Sum of the SAR for WCDMA Band V & Wi-Fi & BT</i>	52
12.4.	<i>Sum of the SAR for LTE Band 5 & Wi-Fi & BT</i>	53
12.5.	<i>Sum of the SAR for LTE Band 41 & Wi-Fi & BT</i>	53
Appendixes		55
	<i>4790360891-S1 FCC Report SAR_App A_Photos & Ant. Locations</i>	55
	<i>4790360891-S1 FCC Report SAR_App B_Highest SAR Test Plots</i>	55
	<i>4790360891-S1 FCC Report SAR_App C_System Check Plots</i>	55
	<i>4790360891-S1 FCC Report SAR_App D_SAR Tissue Ingredients</i>	55
	<i>4790360891-S1 FCC Report SAR_App E_Probe Cal. Certificates</i>	55
	<i>4790360891-S1 FCC Report SAR_App F_Dipole Cal. Certificates</i>	55
	<i>4790360891-S1 FCC Report SAR_App G_Proximity Sensor feature</i>	55
	<i>4790360891-S1 FCC Report SAR_App H_RCV Back-off Validation Test Data</i>	55

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMA137F			
Model Number		SM-A137F/DSN			
Applicable Standards		FCC 47 CFR § 2.1093 IEEE Std 1528-2013 Published RF exposure KDB procedures			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Product Specific 10g (10g of tissue)	
General population / Uncontrolled exposure		1.6		4.0	
RF Exposure Conditions		Equipment Class - The Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.50	0.31	0.45	<0.10
Body-worn		0.53	0.21	0.70	<0.10
Hotspot		0.77	0.48	0.74	<0.10
Product Specific 10g		2.39	N/A	2.54	N/A
Simultaneous TX	Head	1.01	0.81	1.01	1.01
	Body-worn	1.25	0.74	1.25	1.25
	Hotspot	1.57	1.25	1.57	1.57
	Product Specific 10g	N/A	N/A	N/A	N/A
Date Tested		4/7/2022 to 4/22/2022			
Test Results		Pass			
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.					
Approved & Released By:			Prepared By:		
					
Justin Park Operations Leader UL Korea, Ltd. Suwon Laboratory			Juyeon Choi Laboratory Technician UL Korea, Ltd. Suwon Laboratory		

1.1. The Highest Reported SAR for RF exposure conditions for each bands

Equipment Class	Band	The Highest Reported SAR (W/kg)			
		1g of tissue			10g of tissue
		Head Exposure condition	Body-worn Exposure condition	Hotspot Exposure condition	Product Specific Exposure condition
PCE	GSM 850	0.345	0.532	0.577	N/A
	GSM 1900	0.163	0.266	0.231	N/A
	WCDMA Band V	0.370	0.526	0.766	2.392
	LTE Band 5	0.379	0.417	0.720	N/A
	LTE Band 41	0.497	0.494	0.371	N/A
DTS	2.4GHz WLAN	0.311	0.206	0.479	N/A
UNII	5GHz WLAN	0.446	0.696	0.742	2.539
DSS	Bluetooth	0.071	0.017	0.062	N/A

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02
- 971168 D01 Power Meas License Digital System v03r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October, 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) May, 2017; RF Exposure Procedures (LTE Test Conditions)
- [TCB workshop](#) April, 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 2 Room
SAR 3 Room
SAR 4 Room
SAR 5 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

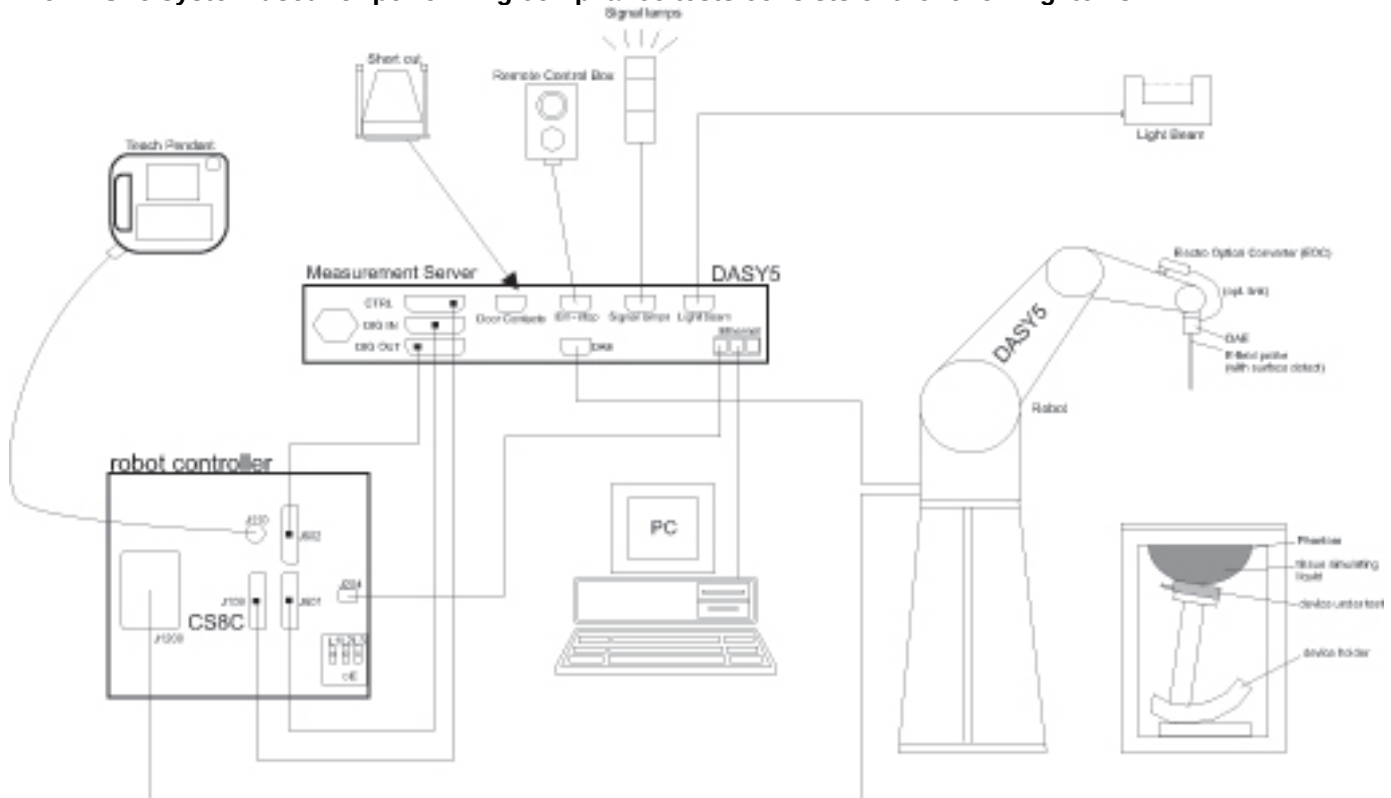

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	R&S	ZNB 20	102256	8-6-2022
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	7-21-2022
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3851	8-4-2022

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-4-2022
Power Sensor	Agilent	U2000A	MY54260007	8-4-2022
Power Sensor	Agilent	U2000A	MY60180020	8-4-2022
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-4-2022
Directional Coupler	Agilent	772D	MY52180193	8-3-2022
Directional Coupler	Agilent	778D	MY52180432	8-3-2022
Low Pass Filter	MINI-CIRCUITS	NLP-1200	VUU19301915	8-4-2022
Low Pass Filter	MICROLAB	LA-15N	3943	8-3-2022
Low Pass Filter	FILTRON	L14012FL	1410003S	8-3-2022
Low Pass Filter	MICROLAB	LA-60N	3942	8-4-2022
Attenuator	MINI-CIRCUITS	BW-N3W5+	N/A	8-4-2022
Attenuator	Agilent	8491B/003	MY39272275	8-17-2022
Attenuator	Agilent	8491B/010	MY39272011	8-4-2022
Attenuator	Agilent	8491B/020	MY39271973	8-4-2022
E-Field Probe	SPEAG	EX3DV4	7330	1-28-2023
E-Field Probe	SPEAG	EX3DV4	7651	5-18-2022
E-Field Probe	SPEAG	EX3DV4	7646	3-29-2023
E-Field Probe	SPEAG	EX3DV4	7313	3-2-2023
E-Field Probe	SPEAG	EX3DV4	7545	8-26-2022
Data Acquisition Electronics	SPEAG	DAE4	1447	3-25-2023
Data Acquisition Electronics	SPEAG	DAE4	1591	3-24-2023
Data Acquisition Electronics	SPEAG	DAE4	1671	5-6-2022
Data Acquisition Electronics	SPEAG	DAE4	1343	8-23-2022
Data Acquisition Electronics	SPEAG	DAE4	1468	9-27-2022
Data Acquisition Electronics	SPEAG	DAE4	1494	7-27-2022
System Validation Dipole	SPEAG	D835V2	4d194	3-24-2024
System Validation Dipole	SPEAG	D835V2	4d174	3-17-2023
System Validation Dipole	SPEAG	D1900V2	5d190	11-24-2022
System Validation Dipole	SPEAG	D2450V2	939	7-21-2023
System Validation Dipole	SPEAG	D2450V2	960	3-24-2024
System Validation Dipole	SPEAG	D2600V2	1178	4-23-2023
System Validation Dipole	SPEAG	D5GHzV2	1184	12-3-2022
System Validation Dipole	SPEAG	D5GHzV2	1209	11-24-2023
Thermometer	Lutron	MHB-382SD	AH.50213	8-4-2022
Thermometer	Lutron	MHB-382SD	AJ.45903	8-3-2022
Thermometer	Lutron	MHB-382SD	AH.50215	8-3-2022
Thermometer	Lutron	MHB-382SD	AK.12123	8-3-2022
Thermometer	Lutron	MHB-382SD	AK.18789	8-3-2022

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	169801	8-3-2022
Base Station Simulator	R & S	CMW500	169799	8-3-2022
Base Station Simulator	R & S	CMW500	169800	8-3-2022
Base Station Simulator	R & S	CMW500	169798	8-3-2022
Base Station Simulator	R & S	CMW500	169797	8-3-2022
Base Station Simulator	R & S	CMW500	150313	8-3-2022
Base Station Simulator	R & S	CMW500	150314	8-4-2022
Base Station Simulator	R & S	CMW500	162790	8-3-2022

Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations. (for blue box items)
3. All equipments were used until Cal.Due date.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5.1. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedures 1, Clause 4.4.2 in IEC Guide 115:2007.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer to Appendix A.		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5.8 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5.2 GHz_UNII-1, Wi-Fi 5.8 GHz_UNII-3)		
Test Sample Information	No.	S/N	Notes
	1	42009c3cca54c817	Main Conducted
	2	42009c3ccab9c871	Main Conducted
	3	R38T4001XBK	SAR
	4	R38T400231T	SAR
	5	R38T4001X6M	SAR
	6	R38T4001WXV	SAR
	7	R38T4000ZAB	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Category 24) HSUPA (Category 6) DC-HSDPA (Category 24) HSPA+ (DL only)		100%
LTE	FDD Band 5 TDD Band 41	QPSK 16QAM 64QAM		100% (FDD) 63.3% (TDD)
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		SISO mode 99.5% (802.11b)
	5 GHz	802.11a 802.11n (HT20) & (HT40) 802.11ac (VHT20) & (VHT40) & (VHT80)		SISO mode 98.2% (802.11n(HT 40)) 96.2% (802.11ac (VHT80))
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		76.7% (DH5)
NFC	13.56 MHz	Type A/B/F		N/A ³

Notes:

1. The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.7% and was considered and used for SAR Testing.
2. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.
3. Measured Duty Cycle is not required due to SAR test exemption.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Antenna	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power (Hotspot back-off) (dBm)		Reduced. RF Output Power (Proximity sensor & Earjack back-off) (dBm)	
				Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr
GSM850	Main 1 Ant.	Voice	1	34.50	25.47	31.00	21.97		
		GPRS	1	34.50	25.47	31.00	21.97		
		GPRS	2	33.00	26.98	30.00	23.98		
		GPRS	3	31.00	26.74	27.50	23.24		
		GPRS	4	30.00	26.99	26.00	22.99		
		EGPRS	1	27.00	17.97	27.00	17.97		
		EGPRS	2	26.00	19.98	26.00	19.98		
		EGPRS	3	24.00	19.74	24.00	19.74		
GSM1900	Main 2 Ant.	EGPRS	4	22.00	18.99	22.00	18.99		
		Voice	1	31.00	21.97	26.50	17.47	26.50	17.47
		GPRS	1	31.00	21.97	26.50	17.47	26.50	17.47
		GPRS	2	29.00	22.98	25.00	18.98	25.00	18.98
		GPRS	3	27.50	23.24	21.50	17.24	21.50	17.24
		GPRS	4	26.00	22.99	18.50	15.49	18.50	15.49
		EGPRS	1	26.00	16.97	25.50	16.47	25.50	16.47
		EGPRS	2	25.00	18.98	24.50	18.48	24.50	18.48
		EGPRS	3	24.00	19.74	22.00	17.74	22.00	17.74
		EGPRS	4	21.00	17.99	20.50	17.49	20.50	17.49

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (Hotspot back-off) (dBm)	Reduced. RF Output Power (Proximity sensor & Earjack back-off) (dBm)
W-CDMA Band V	Main 1 Ant.	R99	25.50	23.50	
		HSDPA	24.00	22.50	
		HSUPA	23.00	21.50	
		DC-HSDPA	24.00	22.50	

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)	
				(Hotspot back-off) (dBm)	(Proximity sensor & Ear-jack back-off) (dBm)
LTE Band 5	Main 1 Ant.	QPSK	24.00	22.50	
LTE Band 41	Main 2 Ant.	QPSK	24.50	22.50	

Normal WLAN

Band	Mode	Max (dBm)	Reduce (dBm)	Max (dBm)				Reduce (dBm)			
		b	b	a	g	n	ac	a	g	n	ac
2.4GHz	1Ch	17.00	17.00		17.00	16.00			17.00	17.00	
	2-3Ch	17.00	17.00		18.00	18.00			17.00	17.00	
	4-10Ch	19.00	17.00		18.00	18.00			17.00	17.00	
	11Ch	19.00	17.00		17.00	17.00			17.00	17.00	
	12Ch	6.00	6.00		6.00	6.00			6.00	6.00	
5GHz (20MHz)	13Ch	2.00	2.00		2.00	2.00			2.00	2.00	
	UNII-1			15.00		15.00	15.00	12.00		12.00	12.00
	UNII-2A			15.00		15.00	15.00	12.00		12.00	12.00
	UNII-2C			15.00 (ch.140 : 14)		15.00 (ch.100 : 14.5 ch.140 : 14)	15.00 (ch.100 : 14.5 ch.140 : 14)	12.00		12.00	12.00
5GHz (40MHz)	UNII-3			14.00		14.00	14.00	12.00		12.00	12.00
	UNII-1					15.00	15.00			12.00	12.00
	UNII-2A					15.00	15.00			12.00	12.00
	UNII-2C					15.00 (ch.102 : 13.5)	15.00 (ch.102 : 13.5)			12.00	12.00
5GHz (80MHz)	UNII-3					14.00	14.00			12.00	12.00
	UNII-1						14.50				12.00
	UNII-2A						14.50				12.00
	UNII-2C						15.00 (ch.106 : 12)				12.00
5GHz (80MHz)	UNII-3						13.00				12.00

Note :

- This device uses an independent fixed level power reduction mechanism for WLAN mode operations during RCV operation. Detailed descriptions of the power reduction mechanism are included in the operational description.

Bluetooth-Maximum power

Band	Mode	Maximum output power (dBm)
2.4GHz	Bluetooth_GFSK	10.50
2.4GHz	Bluetooth_EDR	8.50
2.4GHz	Bluetooth_1LE	7.50
2.4GHz	Bluetooth_2LE	7.50

6.4. Power Back-off Operation

This device supports multiple power back-off modes: WWAN (Hotspot), WWAN (Proximity sensor), WWAN (ear-jack) and WLAN (RCV). Each of the power back-off operates within specific exposure conditions for certain technologies. For full details on how each power back-off mode operates, refer to the Operational Description.

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Product Specific 10-g
WWAN (Hotspot)	GSM 850 & 1900 WCDMA V LTE Band 5 & 41	N/A	N/A	✓	✓
WWAN (Proximity sensor)	GSM 1900	N/A	N/A	N/A	✓
WWAN (Ear-jack)	GSM 1900	N/A	✓	N/A	✓
WLAN (RCV)	2.4GHz/5GHz WLAN	✓	N/A	N/A	N/A

Note(s):

1. Tune-up Limits for WWAN (Hotspot) and WWAN (Proximity Sensor) are all Reduced Average Powers. Please refer to Sec.9 for all conducted power measurements.
2. WWAN Back-off priority: RCV → Hotspot → Ear-jack → Proximity Sensor
3. Body-worn SAR with ear-jack connected is not required due to Body-worn measured at max power is not over 1.2 W/kg.

Product Specific 10g Adjusted SAR Calculation

Wireless technologies	Max Tune-up Limit (dBm)	Reduced Tune-Up Limit (dBm)	Power Factor	Reported SAR Limit (W/kg)
GSM 1900	23.24	18.98	2.67	0.450

Note(s):

1. Tune-up limit powers for GSM 1900 is frame power(dBm).
2. Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b. Refer to §10 for Reported SAR results. If the Reported SAR 1g value in §10 is less than the Reported SAR Limit listed above, then Extremity SAR is not required.
3. For Reported SAR limit in above table, it was calculated using Max tune-up Limit & Reduced Tune-up limit & Reported SAR 1.2 W/kg.
(Reported SAR Limit = 1.2 W/kg / Power factor, Power factor = $10^{((\text{Max tune-up limit} - \text{Reduced tune-up limit})/10)}$)

6.5. General LTE SAR Test and Reporting Considerations

Item	Description							
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7	
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5	
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3	
	Band 41	Frequency range: 2496 - 2690 MHz						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low	39750 / 2506.0						
	Low-Mid	40185 / 2549.5						
	Mid	40620 / 2593.0						
	Mid-High	41055 / 2636.5						
	High	41490 / 2680.0						
LTE transmitter and antenna implementation	Refer to Appendix A.							
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
	MPR Built-in by design							
The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.								
A-MPR (additional MPR) was disabled during SAR testing								
Power reduction	Yes							
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports Overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE devices.
- LTE Band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	Antennas	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	All Main Antennas	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	All Main Antennas	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
	Hotspot	Main 1 Ant.	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
				Edge 4 (Left)	< 25 mm	Yes	
		Main 2 Ant.	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	< 25 mm	Yes	
				Edge 4 (Left)	< 25 mm	Yes	
	Product Specific 10-g	All Main Antennas	0 mm	Rear	Refer to notes 2 & 3		
				Front			
				Edge 1 (Top)			
				Edge 2 (Right)			
				Edge 3 (Bottom)			
				Edge 4 (Left)			
WLAN/BT&BLE	Head	WiFi/BT 2.4G & WiFi 5G	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body		15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
	Hotspot	WiFi/BT 2.4G & WiFi 5G	10 mm	Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
				Edge 1 (Top)	< 25 mm	Yes	
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	> 25 mm	No	1
				Edge 4 (Left)	< 25 mm	Yes	
	Product Specific 10-g	WiFi/BT 2.4G & WiFi 5G	0 mm	Rear	Refer to notes 2 & 4		
				Front			
				Edge 1 (Top)			
				Edge 2 (Right)			
				Edge 3 (Bottom)			
				Edge 4 (Left)			

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: When hotspot mode applies, Product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices: When hotspot mode applies and power reduction applies to hotspot mode, Product specific 10-g SAR is required for each test position that has an adjusted SAR to maximum power that is > 1.2 W/kg.
- For Phablet devices: When hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5100	36.1	4.55
5200	36.0	4.66
5300	35.9	4.76
5400	35.8	4.86
5500	35.6	4.96
5600	35.5	5.07
5700	35.4	5.17
5800	35.3	5.27
6000	35.1	5.48

NOTE: For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

SAR test were performed in All RF exposure conditions using Head tissue according to TCB workshop note of April. 2019.

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 2 Room**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
2022-04-13	Head 5250	e'	36.6700	Relative Permittivity (ϵ_r):	36.67	35.93	2.05	5
		e''	15.6600	Conductivity (σ):	4.57	4.70	-2.78	5
	Head 5260	e'	36.6400	Relative Permittivity (ϵ_r):	36.64	35.92	2.00	5
		e''	15.7000	Conductivity (σ):	4.59	4.71	-2.56	5
	Head 5600	e'	35.9500	Relative Permittivity (ϵ_r):	35.95	35.53	1.17	5
		e''	16.0300	Conductivity (σ):	4.99	5.06	-1.36	5
	Head 5800	e'	35.6200	Relative Permittivity (ϵ_r):	35.62	35.30	0.91	5
		e''	16.0100	Conductivity (σ):	5.16	5.27	-2.03	5
	Head 5925	e'	35.3100	Relative Permittivity (ϵ_r):	35.31	35.20	0.31	5
		e''	15.9700	Conductivity (σ):	5.26	5.40	-2.57	5
2022-04-18	Head 5250	e'	36.9600	Relative Permittivity (ϵ_r):	36.96	35.93	2.86	5
		e''	16.0200	Conductivity (σ):	4.68	4.70	-0.55	5
	Head 5260	e'	36.9600	Relative Permittivity (ϵ_r):	36.96	35.92	2.89	5
		e''	16.0400	Conductivity (σ):	4.69	4.71	-0.45	5
	Head 5600	e'	36.7300	Relative Permittivity (ϵ_r):	36.73	35.53	3.37	5
		e''	16.2600	Conductivity (σ):	5.06	5.06	0.05	5
	Head 5800	e'	36.5000	Relative Permittivity (ϵ_r):	36.50	35.30	3.40	5
		e''	16.2600	Conductivity (σ):	5.24	5.27	-0.50	5
	Head 5825	e'	36.4700	Relative Permittivity (ϵ_r):	36.47	35.30	3.31	5
		e''	16.2600	Conductivity (σ):	5.27	5.27	-0.07	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2022-04-11	Head 1900	e'	40.8100	Relative Permittivity (ϵ_r):	40.81	40.00	2.03	5
		e''	13.2300	Conductivity (σ):	1.40	1.40	-0.16	5
	Head 1850	e'	40.9600	Relative Permittivity (ϵ_r):	40.96	40.00	2.40	5
		e''	13.3000	Conductivity (σ):	1.37	1.40	-2.28	5
	Head 1910	e'	40.7900	Relative Permittivity (ϵ_r):	40.79	40.00	1.98	5
		e''	13.2200	Conductivity (σ):	1.40	1.40	0.28	5
2022-04-13	Head 835	e'	40.7600	Relative Permittivity (ϵ_r):	40.76	41.50	-1.78	5
		e''	19.6800	Conductivity (σ):	0.91	0.90	1.52	5
	Head 820	e'	40.7300	Relative Permittivity (ϵ_r):	40.73	41.60	-2.10	5
		e''	19.9900	Conductivity (σ):	0.91	0.90	1.44	5
	Head 850	e'	40.7800	Relative Permittivity (ϵ_r):	40.78	41.50	-1.73	5
		e''	19.3700	Conductivity (σ):	0.92	0.92	0.05	5
2022-04-13	Head 1900	e'	41.0000	Relative Permittivity (ϵ_r):	41.00	40.00	2.50	5
		e''	13.3400	Conductivity (σ):	1.41	1.40	0.67	5
	Head 1850	e'	41.1200	Relative Permittivity (ϵ_r):	41.12	40.00	2.80	5
		e''	13.4400	Conductivity (σ):	1.38	1.40	-1.25	5
	Head 1910	e'	41.0000	Relative Permittivity (ϵ_r):	41.00	40.00	2.50	5
		e''	13.3400	Conductivity (σ):	1.42	1.40	1.20	5
2022-04-18	Head 2450	e'	38.9200	Relative Permittivity (ϵ_r):	38.92	39.20	-0.71	5
		e''	13.3400	Conductivity (σ):	1.82	1.80	0.96	5
	Head 2400	e'	39.3200	Relative Permittivity (ϵ_r):	39.32	39.30	0.06	5
		e''	13.4900	Conductivity (σ):	1.80	1.75	2.77	5
	Head 2480	e'	38.5000	Relative Permittivity (ϵ_r):	38.50	39.16	-1.69	5
		e''	13.2000	Conductivity (σ):	1.82	1.83	-0.67	5

SAR 4 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
2022-04-11	Head 2450	e'	38.8300	Relative Permittivity (ϵ_r):	38.83	39.20	-0.94	5
		e''	13.8100	Conductivity (σ):	1.88	1.80	4.52	5
	Head 2400	e'	39.0100	Relative Permittivity (ϵ_r):	39.01	39.30	-0.73	5
		e''	13.7500	Conductivity (σ):	1.83	1.75	4.75	5
	Head 2480	e'	38.7300	Relative Permittivity (ϵ_r):	38.73	39.16	-1.10	5
		e''	13.8100	Conductivity (σ):	1.90	1.83	3.92	5
2022-04-11	Head 2600	e'	38.4500	Relative Permittivity (ϵ_r):	38.45	39.01	-1.44	5
		e''	13.8400	Conductivity (σ):	2.00	1.96	1.97	5
	Head 2500	e'	38.6900	Relative Permittivity (ϵ_r):	38.69	39.14	-1.14	5
		e''	13.8200	Conductivity (σ):	1.92	1.85	3.62	5
	Head 2700	e'	38.2000	Relative Permittivity (ϵ_r):	38.20	38.88	-1.76	5
		e''	13.8300	Conductivity (σ):	2.08	2.07	0.29	5
2022-04-14	Head 2600	e'	38.7700	Relative Permittivity (ϵ_r):	38.77	39.01	-0.62	5
		e''	13.5900	Conductivity (σ):	1.96	1.96	0.13	5
	Head 2500	e'	38.8900	Relative Permittivity (ϵ_r):	38.89	39.14	-0.63	5
		e''	13.5600	Conductivity (σ):	1.88	1.85	1.67	5
	Head 2700	e'	38.6200	Relative Permittivity (ϵ_r):	38.62	38.88	-0.68	5
		e''	13.6700	Conductivity (σ):	2.05	2.07	-0.87	5

SAR 5 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
2022-04-11	Head 835	e'	41.4100	Relative Permittivity (ϵ_r):	41.41	41.50	-0.22	5
		e''	18.8400	Conductivity (σ):	0.87	0.90	-2.81	5
	Head 820	e'	41.4200	Relative Permittivity (ϵ_r):	41.42	41.60	-0.44	5
		e''	19.0400	Conductivity (σ):	0.87	0.90	-3.38	5
	Head 850	e'	41.3900	Relative Permittivity (ϵ_r):	41.39	41.50	-0.27	5
		e''	18.6400	Conductivity (σ):	0.88	0.92	-3.72	5
2022-04-14	Head 835	e'	40.6500	Relative Permittivity (ϵ_r):	40.65	41.50	-2.05	5
		e''	20.1100	Conductivity (σ):	0.93	0.90	3.74	5
	Head 820	e'	40.6800	Relative Permittivity (ϵ_r):	40.68	41.60	-2.22	5
		e''	20.3700	Conductivity (σ):	0.93	0.90	3.37	5
	Head 850	e'	40.6300	Relative Permittivity (ϵ_r):	40.63	41.50	-2.10	5
		e''	19.8600	Conductivity (σ):	0.94	0.92	2.58	5
2022-04-18	Head 835	e'	41.6800	Relative Permittivity (ϵ_r):	41.68	41.50	0.43	5
		e''	20.0800	Conductivity (σ):	0.93	0.90	3.59	5
	Head 820	e'	41.8400	Relative Permittivity (ϵ_r):	41.84	41.60	0.57	5
		e''	20.3700	Conductivity (σ):	0.93	0.90	3.37	5
	Head 850	e'	41.5200	Relative Permittivity (ϵ_r):	41.52	41.50	0.05	5
		e''	19.7800	Conductivity (σ):	0.93	0.92	2.17	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be $\geq$ 15.0 cm for SAR measurements $\leq$ 3 GHz and $\geq$ 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Cal. Due Date	Target SAR Values (W/kg)	
				1g/10g	Head
D835V2	4d174	3-17-2021	3-17-2023	1g	9.70
				10g	6.29
D835V2	4d194	3-24-2022	3-24-2024	1g	9.77
				10g	6.39
D1900V2	5d190	11-24-2020	11-24-2022	1g	40.10
				10g	20.70
D2450V2	939	7-21-2021	7-21-2023	1g	53.00
				10g	24.70
D2450V2	960	3-24-2022	3-24-2024	1g	51.90
				10g	24.00
D2600V2	1178	4-23-2021	4-21-2023	1g	56.60
				10g	25.40
D5GHzV2	1184	12-3-2020	12-3-2022	1g	79.10
				10g	22.70
				1g	82.40
				10g	23.30
D5GHzV2	1209	11-24-2021	11-24-2023	1g	79.00
				10g	22.40

Note(s):

1. For System Validation Dipole, Calibration interval applied every 2 years according to referencing KDB 865664 guidance.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations.
3. All equipments were used until Cal.Due data.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2022-04-13	D5GHzV2 (5250)	1184	Head	1g	8.24	82.4	79.10	4.17
				10g	2.45	24.5	22.70	7.93
2022-04-13	D5GHzV2 (5600)	1184	Head	1g	8.61	86.1	82.40	4.49
				10g	2.49	24.9	23.30	6.87
2022-04-13	D5GHzV2 (5800)	1209	Head	1g	8.31	83.1	79.00	5.19
				10g	2.40	24.0	22.40	7.14
2022-04-18	D5GHzV2 (5250)	1184	Head	1g	8.25	82.5	79.10	4.30
				10g	2.42	24.2	22.70	6.61
2022-04-18	D5GHzV2 (5600)	1184	Head	1g	8.56	85.6	82.40	3.88
				10g	2.48	24.8	23.30	6.44

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2022-04-11	D1900V2	5d190	Head	1g	3.87	38.7	40.10	-3.49
				10g	2.04	20.4	20.70	-1.45
2022-04-13	D835V2	4d174	Head	1g	0.99	9.9	9.70	1.55
				10g	0.66	6.6	6.29	4.29
2022-04-13	D1900V2	5d190	Head	1g	3.70	37.0	40.10	-7.73
				10g	1.96	19.6	20.70	-5.31
2022-04-18	D2450V2	960	Head	1g	5.23	52.3	51.90	0.77
				10g	2.42	24.2	24.00	0.83

SAR 4 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2022-04-11	D2450V2	939	Head	1g	5.18	51.8	53.00	-2.26
				10g	2.36	23.6	24.70	-4.45
2022-04-11	D2600V2	1178	Head	1g	5.44	54.4	56.60	-3.89
				10g	2.42	24.2	25.40	-4.72
2022-04-14	D2600V2	1178	Head	1g	5.73	57.3	56.60	1.24
				10g	2.54	25.4	25.40	0.00

SAR 5 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2022-04-11	D835V2	4d174	Head	1g	0.90	9.0	9.70	-7.32
				10g	0.60	6.0	6.29	-5.25
2022-04-14	D835V2	4d194	Head	1g	1.00	10.0	9.77	2.35
				10g	0.66	6.6	6.39	2.97
2022-04-18	D835V2	4d194	Head	1g	1.04	10.4	9.77	6.45
				10g	0.69	6.9	6.39	7.67

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Reduced Average Power (dBm) Hotspot back-off			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	128	824.2	32.22	23.19	34.50	25.47	29.52	20.49	31.00	21.97
			190	836.6	32.58	23.55			30.22	21.19		
			251	848.8	32.56	23.53			30.60	21.57		
GPRS (GMSK)	CS1	1	128	824.2	32.25	23.22	34.50	25.47	29.55	20.52	31.00	21.97
			190	836.6	32.57	23.54			30.23	21.20		
			251	848.8	32.52	23.49			30.62	21.59		
		2	128	824.2	31.44	25.42	33.00	26.98	28.49	22.47	30.00	23.98
			190	836.6	31.90	25.88			29.24	23.22		
			251	848.8	32.11	26.09			29.28	23.26		
		3	128	824.2	29.69	25.43	31.00	26.74	25.87	21.61	27.50	23.24
			190	836.6	30.16	25.90			26.72	22.46		
			251	848.8	30.40	26.14			27.25	22.99		
		4	128	824.2	28.56	25.55	30.00	26.99	24.12	21.11	26.00	22.99
			190	836.6	29.06	26.05			24.99	21.98		
			251	848.8	29.30	26.29			25.57	22.56		
EGPRS (8PSK)	MCS5	1	128	824.2	26.16	17.13	27.00	17.97	26.09	17.06	27.00	17.97
			190	836.6	26.36	17.33			26.24	17.21		
			251	848.8	26.46	17.43			26.33	17.30		
		2	128	824.2	25.23	19.21	26.00	19.98	25.09	19.07	26.00	19.98
			190	836.6	25.33	19.31			25.21	19.19		
			251	848.8	25.46	19.44			25.32	19.30		
		3	128	824.2	23.12	18.86	24.00	19.74	22.83	18.57	24.00	19.74
			190	836.6	23.21	18.96			22.92	18.66		
			251	848.8	23.16	18.90			23.12	18.86		
		4	128	824.2	21.66	18.65	22.00	18.99	21.39	18.38	22.00	18.99
			190	836.6	21.79	18.78			21.50	18.49		
			251	848.8	21.92	18.91			21.62	18.61		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- GMSK (GPRS) mode with 2 time slots for Reduce power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Reduced Average Power (dBm) Hotspot back-off				Reduced Average Power (dBm) Proximity sensor back-off			
					Measured		Tune-up Limit		Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	512	1850.2	29.74	20.71	31.00	21.97	25.59	16.56	26.50	17.47	25.65	16.62	26.50	17.47
			661	1880.0	29.71	20.68			25.55	16.52			25.60	16.57		
			810	1909.8	29.70	20.67			25.53	16.50			25.59	16.56		
GPRS (GMSK)	CS1	1	512	1850.2	29.72	20.69	31.00	21.97	25.65	16.62	26.50	17.47	25.69	16.66	26.50	17.47
			661	1880.0	29.65	20.62			25.60	16.57			25.64	16.61		
			810	1909.8	29.63	20.60			25.56	16.53			25.62	16.59		
		2	512	1850.2	28.85	22.83	29.00	22.98	24.14	18.12	25.00	18.98	24.24	18.22	25.00	18.98
			661	1880.0	28.78	22.76			24.04	18.02			24.14	18.12		
			810	1909.8	28.79	22.77			24.07	18.05			24.14	18.12		
		3	512	1850.2	27.02	22.76	27.50	23.24	20.48	16.22	21.50	17.24	20.59	16.33	21.50	17.24
			661	1880.0	26.93	22.67			20.26	16.00			20.41	16.15		
			810	1909.8	26.96	22.70			20.33	16.07			20.43	16.17		
		4	512	1850.2	25.78	22.77	26.00	22.99	17.74	14.73	18.50	15.49	17.73	14.72	18.50	15.49
			661	1880.0	25.68	22.67			17.61	14.60			17.58	14.57		
			810	1909.8	25.70	22.69			17.68	14.67			17.66	14.65		
EGPRS (8PSK)	MCS5	1	512	1850.2	25.51	16.48	26.00	16.97	24.93	15.90	25.50	16.47	25.04	16.01	25.50	16.47
			661	1880.0	25.22	16.19			24.70	15.67			24.80	15.77		
			810	1909.8	25.15	16.12			24.58	15.55			24.68	15.65		
		2	512	1850.2	24.31	18.29	25.00	18.98	23.72	17.70	24.50	18.48	23.79	17.77	24.50	18.48
			661	1880.0	23.99	17.97			23.39	17.37			23.50	17.48		
			810	1909.8	23.86	17.84			23.21	17.19			23.36	17.34		
		3	512	1850.2	22.12	17.86	24.00	19.74	21.47	17.21	22.00	17.74	21.62	17.36	22.00	17.74
			661	1880.0	21.76	17.50			21.09	16.83			21.23	16.97		
			810	1909.8	21.58	17.32			20.92	16.66			21.04	16.78		
		4	512	1850.2	20.75	17.74	21.00	17.99	20.06	17.05	20.50	17.49	20.18	17.17	20.50	17.49
			661	1880.0	20.34	17.33			19.63	16.62			19.77	16.76		
			810	1909.8	20.18	17.17			19.39	16.38			19.58	16.57		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- GMSK (GPRS) mode with 2 time slots for Reduce power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1 v13.
A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
	E-DPDCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

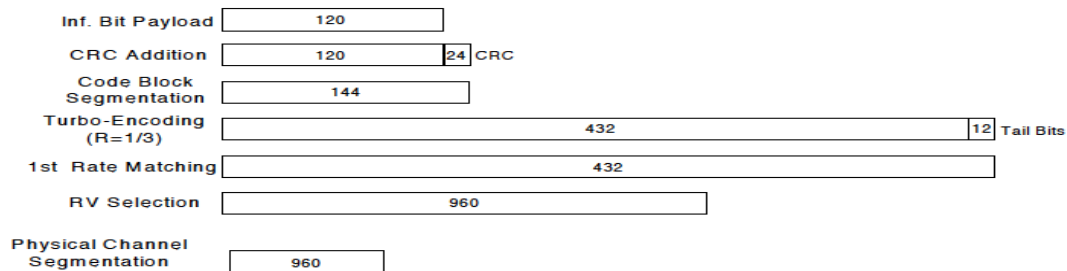**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A _{hs} = β_{hs}/β_c	30/15			

HSPA+

HSPA+ is only supported to down link. Therefore, the RF conducted power is not measured.

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm) Hotspot back-off		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.07	N/A	25.50	22.47	N/A	23.50
		4183	836.6	24.29			22.65		
		4233	846.6	24.13			22.67		
HSDPA	Subtest 1	4132	826.4	22.96	0.0	24.00	21.51	0.0	22.50
		4183	836.6	23.19			21.68		
		4233	846.6	23.18			21.70		
	Subtest 2	4132	826.4	22.93	0.0	24.00	21.47	0.0	22.50
		4183	836.6	23.15			21.65		
		4233	846.6	23.14			21.67		
	Subtest 3	4132	826.4	22.52	0.5	23.50	21.01	0.5	22.00
		4183	836.6	22.68			21.24		
		4233	846.6	22.68			21.22		
	Subtest 4	4132	826.4	22.46	0.5	23.50	21.02	0.5	22.00
		4183	836.6	22.65			21.16		
		4233	846.6	22.69			21.18		
HSUPA	Subtest 1	4132	826.4	20.65	0.0	23.00	19.53	0.0	21.50
		4183	836.6	20.76			19.71		
		4233	846.6	20.84			19.73		
	Subtest 2	4132	826.4	20.91	1.0	22.00	19.49	1.0	20.50
		4183	836.6	21.10			19.70		
		4233	846.6	21.13			19.70		
	Subtest 3	4132	826.4	21.93	0.0	23.00	20.51	0.0	21.50
		4183	836.6	22.13			20.68		
		4233	846.6	22.11			20.67		
	Subtest 4	4132	826.4	20.61	2.0	21.00	19.02	2.0	19.50
		4183	836.6	20.76			19.20		
		4233	846.6	20.82			19.22		
	Subtest 5	4132	826.4	22.02	0.0	23.00	20.52	0.0	21.50
		4183	836.6	22.22			20.67		
		4233	846.6	22.23			20.65		
DC-HSDPA	Subtest 1	4132	826.4	22.99	0.0	24.00	21.50	0.0	22.50
		4183	836.6	23.19			21.71		
		4233	846.6	23.15			21.67		
	Subtest 2	4132	826.4	22.99	0.0	24.00	21.49	0.0	22.50
		4183	836.6	23.18			21.68		
		4233	846.6	23.19			21.69		
	Subtest 3	4132	826.4	22.49	0.5	23.50	20.98	0.5	22.00
		4183	836.6	22.68			21.17		
		4233	846.6	22.64			21.15		
	Subtest 4	4132	826.4	22.50	0.5	23.50	20.98	0.5	22.00
		4183	836.6	22.71			21.20		
		4233	846.6	22.67			21.18		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths.

When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for Higher order modulations. When the highest maximum output power for Higher order modulations are ≤ 0.5 dB higher than the QPSK or when the reported SAR for QPSK configuration is ≤ 1.45 W/kg.

1. Max power**LTE Band 5 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20450	20525	20600		
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0		22.69		0.0	24.00
		1	25		22.94		0.0	24.00
		1	49		22.85		0.0	24.00
		25	0		21.87		1.0	23.00
		25	12		21.94		1.0	23.00
		25	25		21.89		1.0	23.00
		50	0		21.90		1.0	23.00
	16QAM	1	0		21.79		1.0	23.00
		1	25		22.02		1.0	23.00
		1	49		21.99		1.0	23.00
		25	0		21.02		2.0	22.00
		25	12		21.08		2.0	22.00
		25	25		21.04		2.0	22.00
		50	0		20.98		2.0	22.00
	64QAM	1	0		21.07		2.0	22.00
		1	25		21.28		2.0	22.00
		1	49		21.23		2.0	22.00
		25	0		19.90		3.0	21.00
		25	12		20.00		3.0	21.00
		25	25		20.00		3.0	21.00
		50	0		19.91		3.0	21.00
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	22.56	22.78	22.90	0.0	24.00
		1	12	22.86	23.12	23.25	0.0	24.00
		1	24	22.60	22.85	22.94	0.0	24.00
		12	0	21.65	21.93	22.02	1.0	23.00
		12	7	21.73	22.00	22.09	1.0	23.00
		12	13	21.73	21.97	22.03	1.0	23.00
		25	0	21.70	21.95	22.01	1.0	23.00
	16QAM	1	0	22.10	21.90	22.03	1.0	23.00
		1	12	22.38	22.23	22.34	1.0	23.00
		1	24	22.13	21.98	22.01	1.0	23.00
		12	0	20.80	20.98	21.10	2.0	22.00
		12	7	20.89	21.06	21.17	2.0	22.00
		12	13	20.88	21.03	21.11	2.0	22.00
		25	0	20.81	20.93	21.04	2.0	22.00
	64QAM	1	0	20.77	20.99	20.78	2.0	22.00
		1	12	21.00	21.31	21.08	2.0	22.00
		1	24	20.82	21.04	20.79	2.0	22.00
		12	0	19.52	19.93	20.01	3.0	21.00
		12	7	19.62	20.00	20.05	3.0	21.00
		12	13	19.58	19.97	19.98	3.0	21.00
		25	0	19.60	19.86	19.95	3.0	21.00

LTE Band 5 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	22.62	22.82	23.01	0.0	24.00
		1	8	22.79	23.02	23.16	0.0	24.00
		1	14	22.61	22.90	23.00	0.0	24.00
		8	0	21.65	21.91	22.04	1.0	23.00
		8	4	21.67	21.97	22.10	1.0	23.00
		8	7	21.69	21.95	22.05	1.0	23.00
		15	0	21.66	21.94	22.04	1.0	23.00
	16QAM	1	0	21.74	21.86	22.31	1.0	23.00
		1	8	21.91	22.01	22.50	1.0	23.00
		1	14	21.69	21.87	22.34	1.0	23.00
		8	0	20.73	21.06	21.13	2.0	22.00
		8	4	20.77	21.10	21.19	2.0	22.00
		8	7	20.80	21.08	21.16	2.0	22.00
		15	0	20.66	20.99	21.08	2.0	22.00
	64QAM	1	0	20.82	21.14	21.08	2.0	22.00
		1	8	20.91	21.37	21.22	2.0	22.00
		1	14	20.76	21.23	21.12	2.0	22.00
		8	0	19.54	19.94	20.02	3.0	21.00
		8	4	19.60	19.98	20.07	3.0	21.00
		8	7	19.59	19.95	20.04	3.0	21.00
		15	0	19.64	19.86	20.00	3.0	21.00
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	22.60	22.86	22.86	0.0	24.00
		1	3	22.70	23.01	23.03	0.0	24.00
		1	5	22.58	22.91	22.89	0.0	24.00
		3	0	22.72	22.96	23.02	0.0	24.00
		3	1	22.77	23.05	23.08	0.0	24.00
		3	3	22.74	23.03	23.08	0.0	24.00
		6	0	21.62	21.94	22.05	1.0	23.00
	16QAM	1	0	21.77	22.24	21.95	1.0	23.00
		1	3	21.89	22.40	22.07	1.0	23.00
		1	5	21.78	22.27	21.95	1.0	23.00
		3	0	21.81	22.17	22.22	1.0	23.00
		3	1	21.84	22.24	22.28	1.0	23.00
		3	3	21.80	22.22	22.27	1.0	23.00
		6	0	20.83	20.88	21.20	2.0	22.00
	64QAM	1	0	20.94	21.04	21.29	2.0	22.00
		1	3	21.09	21.11	21.51	2.0	22.00
		1	5	20.96	21.08	21.32	2.0	22.00
		3	0	20.95	20.87	21.33	2.0	22.00
		3	1	21.00	20.90	21.36	2.0	22.00
		3	3	20.94	20.88	21.34	2.0	22.00
		6	0	19.53	19.94	19.93	3.0	21.00

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	22.53	22.46	22.95	22.57	22.55	0.0	24.50
		1	49	22.97	22.88	23.41	22.84	23.00	0.0	24.50
		1	99	22.49	22.41	22.91	22.39	22.79	0.0	24.50
		50	0	21.62	21.57	22.07	21.52	21.70	1.0	23.50
		50	24	21.62	21.67	22.17	21.60	21.80	1.0	23.50
		50	50	21.61	21.58	22.10	21.57	21.76	1.0	23.50
		100	0	21.62	21.63	22.06	21.51	21.75	1.0	23.50
	16QAM	1	0	21.54	21.41	21.74	21.57	21.49	1.0	23.50
		1	49	22.01	21.85	22.21	21.87	22.00	1.0	23.50
		1	99	21.55	21.38	21.75	21.43	21.76	1.0	23.50
		50	0	20.69	20.54	21.04	20.55	20.67	2.0	22.50
		50	24	20.71	20.64	21.14	20.57	20.81	2.0	22.50
		50	50	20.66	20.55	21.05	20.58	20.74	2.0	22.50
		100	0	20.65	20.55	21.05	20.52	20.72	2.0	22.50
	64QAM	1	0	20.93	20.59	20.83	20.90	20.59	2.0	22.50
		1	49	21.36	20.97	21.32	21.18	21.13	2.0	22.50
		1	99	20.90	20.49	20.89	20.73	20.86	2.0	22.50
		50	0	19.64	19.62	20.06	19.54	19.72	3.0	21.50
		50	24	19.67	19.74	20.16	19.59	19.80	3.0	21.50
		50	50	19.66	19.62	20.10	19.59	19.76	3.0	21.50
		100	0	19.62	19.63	20.08	19.58	19.76	3.0	21.50
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	22.53	22.45	23.04	22.51	22.51	0.0	24.50
		1	37	22.49	22.44	23.05	22.40	22.60	0.0	24.50
		1	74	22.51	22.39	23.01	22.39	22.75	0.0	24.50
		36	0	21.67	21.64	22.18	21.56	21.81	1.0	23.50
		36	20	21.66	21.69	22.19	21.56	21.82	1.0	23.50
		36	39	21.67	21.69	22.22	21.59	21.93	1.0	23.50
		75	0	21.68	21.63	22.19	21.55	21.86	1.0	23.50
	16QAM	1	0	21.54	21.43	21.93	21.50	21.52	1.0	23.50
		1	37	21.54	21.40	21.97	21.43	21.58	1.0	23.50
		1	74	21.55	21.35	21.94	21.40	21.67	1.0	23.50
		36	0	20.66	20.56	21.10	20.53	20.73	2.0	22.50
		36	20	20.69	20.63	21.12	20.54	20.78	2.0	22.50
		36	39	20.71	20.67	21.13	20.61	20.83	2.0	22.50
		75	0	20.69	20.60	21.13	20.52	20.80	2.0	22.50
	64QAM	1	0	20.27	20.42	21.23	20.18	20.49	2.0	22.50
		1	37	20.23	20.43	21.33	20.05	20.55	2.0	22.50
		1	74	20.21	20.36	21.27	20.04	20.67	2.0	22.50
		36	0	19.72	19.59	20.22	19.62	19.70	3.0	21.50
		36	20	19.70	19.64	20.20	19.62	19.75	3.0	21.50
		36	39	19.75	19.68	20.24	19.66	19.82	3.0	21.50
		75	0	19.70	19.66	20.20	19.58	19.81	3.0	21.50

LTE Band 41 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	22.52	22.50	23.16	22.54	22.60	0.0	24.50
		1	25	22.85	22.81	23.40	22.74	22.94	0.0	24.50
		1	49	22.49	22.49	23.11	22.45	22.74	0.0	24.50
		25	0	21.63	21.62	22.17	21.56	21.81	1.0	23.50
		25	12	21.64	21.63	22.16	21.57	21.85	1.0	23.50
		25	25	21.62	21.62	22.14	21.59	21.76	1.0	23.50
		50	0	21.59	21.64	22.15	21.56	21.78	1.0	23.50
	16QAM	1	0	21.66	21.44	22.02	21.61	21.56	1.0	23.50
		1	25	21.97	21.77	22.31	21.87	21.93	1.0	23.50
		1	49	21.61	21.47	22.04	21.57	21.68	1.0	23.50
		25	0	20.66	20.67	21.16	20.55	20.75	2.0	22.50
		25	12	20.69	20.61	21.13	20.56	20.75	2.0	22.50
		25	25	20.64	20.64	21.13	20.57	20.73	2.0	22.50
		50	0	20.65	20.67	21.17	20.61	20.75	2.0	22.50
	64QAM	1	0	20.76	20.95	20.78	20.66	20.96	2.0	22.50
		1	25	21.07	21.19	21.08	20.94	21.35	2.0	22.50
		1	49	20.75	20.91	20.82	20.60	21.05	2.0	22.50
		25	0	19.65	19.69	20.23	19.59	19.78	3.0	21.50
		25	12	19.62	19.70	20.24	19.53	19.81	3.0	21.50
		25	25	19.63	19.70	20.24	19.55	19.73	3.0	21.50
		50	0	19.67	19.71	20.25	19.65	19.73	3.0	21.50
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	22.47	22.43	22.97	22.36	22.62	0.0	24.50
		1	12	22.49	22.41	23.02	22.36	22.67	0.0	24.50
		1	24	22.42	22.51	22.94	22.34	22.68	0.0	24.50
		12	0	21.55	21.55	22.03	21.47	21.78	1.0	23.50
		12	7	21.67	21.63	22.25	21.58	21.84	1.0	23.50
		12	13	21.60	21.64	22.19	21.55	21.75	1.0	23.50
		25	0	21.53	21.57	22.17	21.48	21.73	1.0	23.50
	16QAM	1	0	21.38	21.47	22.14	21.31	21.58	1.0	23.50
		1	12	21.41	21.48	22.18	21.29	21.59	1.0	23.50
		1	24	21.40	21.60	22.11	21.30	21.60	1.0	23.50
		12	0	20.52	20.54	21.16	20.46	20.65	2.0	22.50
		12	7	20.59	20.65	21.24	20.57	20.76	2.0	22.50
		12	13	20.55	20.60	21.18	20.58	20.74	2.0	22.50
		25	0	20.58	20.59	21.11	20.52	20.78	2.0	22.50
	64QAM	1	0	20.50	21.04	21.28	20.27	21.04	2.0	22.50
		1	12	20.53	21.13	21.40	20.31	21.12	2.0	22.50
		1	24	20.42	21.02	21.30	20.24	21.10	2.0	22.50
		12	0	19.76	19.80	20.09	19.57	19.80	3.0	21.50
		12	7	19.79	19.92	20.18	19.66	19.88	3.0	21.50
		12	13	19.79	19.87	20.14	19.66	19.85	3.0	21.50
		25	0	19.82	19.74	20.12	19.65	19.72	3.0	21.50

2. Reduce power

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Reduced Average Power (dBm) Hotspot back-off				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20450	20525	20600		
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0		21.21		0.0	22.50
		1	25		21.49		0.0	22.50
		1	49		21.40		0.0	22.50
		25	0		21.37		0.0	22.50
		25	12		21.44		0.0	22.50
		25	25		21.39		0.0	22.50
		50	0		21.39		0.0	22.50
	16QAM	1	0		21.34		0.0	22.50
		1	25		21.64		0.0	22.50
		1	49		21.51		0.0	22.50
		25	0		21.01		0.5	22.00
		25	12		21.08		0.5	22.00
		25	25		21.03		0.5	22.00
		50	0		20.96		0.5	22.00
	64QAM	1	0		20.95		0.5	22.00
		1	25		21.17		0.5	22.00
		1	49		21.11		0.5	22.00
		25	0		19.90		1.5	21.00
		25	12		19.96		1.5	21.00
		25	25		19.98		1.5	21.00
		50	0		19.90		1.5	21.00
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	21.13	21.35	21.42	0.0	22.50
		1	12	21.38	21.67	21.70	0.0	22.50
		1	24	21.22	21.40	21.44	0.0	22.50
		12	0	21.23	21.47	21.50	0.0	22.50
		12	7	21.32	21.48	21.61	0.0	22.50
		12	13	21.28	21.46	21.54	0.0	22.50
		25	0	21.28	21.42	21.52	0.0	22.50
	16QAM	1	0	21.28	21.52	21.84	0.0	22.50
		1	12	21.58	21.79	21.84	0.0	22.50
		1	24	21.33	21.52	21.93	0.0	22.50
		12	0	20.79	20.93	21.10	0.5	22.00
		12	7	20.85	21.06	21.15	0.5	22.00
		12	13	20.84	21.03	21.10	0.5	22.00
		25	0	20.77	20.86	21.02	0.5	22.00
	64QAM	1	0	20.75	20.74	20.19	0.5	22.00
		1	12	20.99	21.02	21.02	0.5	22.00
		1	24	20.81	20.76	20.74	0.5	22.00
		12	0	19.51	19.90	19.93	1.5	21.00
		12	7	19.61	19.98	19.99	1.5	21.00
		12	13	19.58	19.97	19.94	1.5	21.00
		25	0	19.60	19.83	19.95	1.5	21.00

LTE Band 5 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	21.18	21.37	21.47	0.0	22.50
		1	8	21.38	21.57	21.57	0.0	22.50
		1	14	21.25	21.40	21.53	0.0	22.50
		8	0	21.15	21.42	21.55	0.0	22.50
		8	4	21.23	21.47	21.59	0.0	22.50
		8	7	21.19	21.44	21.59	0.0	22.50
		15	0	21.19	21.42	21.55	0.0	22.50
	16QAM	1	0	21.57	21.47	21.47	0.0	22.50
		1	8	21.77	21.67	21.56	0.0	22.50
		1	14	21.63	21.49	21.42	0.0	22.50
		8	0	20.71	20.99	21.12	0.5	22.00
		8	4	20.77	21.02	21.19	0.5	22.00
		8	7	20.74	21.02	21.15	0.5	22.00
		15	0	20.63	20.89	21.08	0.5	22.00
	64QAM	1	0	20.77	21.13	21.02	0.5	22.00
		1	8	20.90	21.36	21.21	0.5	22.00
		1	14	20.75	21.22	21.11	0.5	22.00
		8	0	19.53	19.94	20.02	1.5	21.00
		8	4	19.59	19.97	20.06	1.5	21.00
		8	7	19.58	19.94	20.03	1.5	21.00
		15	0	19.64	19.86	19.93	1.5	21.00
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	21.05	21.37	21.18	0.0	22.50
		1	3	21.16	21.45	21.38	0.0	22.50
		1	5	21.08	21.38	21.25	0.0	22.50
		3	0	21.18	21.45	21.15	0.0	22.50
		3	1	21.25	21.50	21.23	0.0	22.50
		3	3	21.30	21.47	21.19	0.0	22.50
		6	0	21.12	21.40	21.19	0.0	22.50
	16QAM	1	0	21.20	21.52	21.57	0.0	22.50
		1	3	21.28	21.61	21.77	0.0	22.50
		1	5	21.25	21.54	21.63	0.0	22.50
		3	0	21.42	21.54	20.81	0.0	22.50
		3	1	21.51	21.56	20.87	0.0	22.50
		3	3	21.44	21.53	20.84	0.0	22.50
		6	0	20.82	20.84	20.77	0.5	22.00
	64QAM	1	0	20.93	21.00	21.12	0.5	22.00
		1	3	21.08	21.10	21.22	0.5	22.00
		1	5	20.81	20.97	21.15	0.5	22.00
		3	0	20.93	20.03	20.99	0.5	22.00
		3	1	21.00	20.77	21.00	0.5	22.00
		3	3	20.93	20.80	21.01	0.5	22.00
		6	0	19.53	19.85	19.86	1.5	21.00

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Reduced Average Power (dBm) Hotspot back-off						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	20.89	20.93	21.40	20.97	21.01	0.0	22.50
		1	49	21.35	21.34	21.92	21.30	21.54	0.0	22.50
		1	99	20.89	20.88	21.41	20.84	21.42	0.0	22.50
		50	0	21.82	21.02	21.56	20.98	21.18	0.0	22.50
		50	24	21.06	21.07	21.86	20.99	21.25	0.0	22.50
		50	50	21.01	21.02	21.57	21.01	21.24	0.0	22.50
		100	0	21.05	21.03	21.55	21.00	21.20	0.0	22.50
	16QAM	1	0	21.10	20.92	21.27	21.07	20.97	0.0	22.50
		1	49	21.54	21.33	21.76	21.41	21.48	0.0	22.50
		1	99	21.05	20.87	21.30	21.02	21.25	0.0	22.50
		50	0	20.59	20.53	21.01	20.53	20.66	0.0	22.50
		50	24	20.71	20.62	21.12	20.51	20.72	0.0	22.50
		50	50	20.57	20.53	20.94	20.49	20.71	0.0	22.50
		100	0	20.64	20.53	20.95	20.44	20.70	0.0	22.50
	64QAM	1	0	20.81	20.52	20.77	20.07	20.55	0.0	22.50
		1	49	21.24	20.93	21.26	21.12	21.11	0.0	22.50
		1	99	20.85	20.47	20.80	20.69	20.79	0.0	22.50
		50	0	19.59	19.53	20.04	19.53	19.66	1.0	21.50
		50	24	19.65	19.62	20.15	19.54	19.72	1.0	21.50
		50	50	19.64	19.53	20.09	19.59	19.71	1.0	21.50
		100	0	19.61	19.53	20.05	19.54	19.70	1.0	21.50
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	21.00	21.01	21.51	21.06	21.16	0.0	22.50
		1	37	20.98	20.97	21.56	20.97	21.18	0.0	22.50
		1	74	21.00	20.94	21.53	20.96	21.35	0.0	22.50
		36	0	21.13	21.11	21.67	21.12	21.31	0.0	22.50
		36	20	21.11	21.15	21.70	21.15	21.38	0.0	22.50
		36	39	21.12	21.17	21.73	21.18	21.44	0.0	22.50
		75	0	21.11	21.10	21.68	21.08	21.40	0.0	22.50
	16QAM	1	0	21.01	21.03	21.53	21.06	21.17	0.0	22.50
		1	37	21.01	21.02	21.54	20.98	21.22	0.0	22.50
		1	74	21.01	21.00	21.55	20.96	21.33	0.0	22.50
		36	0	20.61	20.51	21.09	20.53	20.72	0.0	22.50
		36	20	20.58	20.62	21.11	20.53	20.77	0.0	22.50
		36	39	20.63	20.66	21.11	20.60	20.83	0.0	22.50
		75	0	20.65	20.59	21.13	20.51	20.80	0.0	22.50
	64QAM	1	0	20.09	20.10	20.61	20.13	20.23	0.0	22.50
		1	37	20.08	20.11	20.67	20.00	20.28	0.0	22.50
		1	74	20.07	20.06	20.65	20.00	20.40	0.0	22.50
		36	0	19.60	19.53	20.15	19.61	19.70	1.0	21.50
		36	20	19.59	19.63	20.19	19.59	19.71	1.0	21.50
		36	39	19.66	19.64	20.24	19.65	19.80	1.0	21.50
		75	0	19.58	19.61	20.14	19.56	19.75	1.0	21.50

LTE Band 41 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	21.03	21.03	21.59	21.08	21.17	0.0	22.50
		1	25	21.33	21.37	21.89	21.30	21.50	0.0	22.50
		1	49	20.96	21.01	21.56	20.99	21.29	0.0	22.50
		25	0	21.13	21.16	21.70	21.08	21.32	0.0	22.50
		25	12	21.09	21.16	21.69	21.12	21.32	0.0	22.50
		25	25	21.12	21.17	21.71	21.11	21.33	0.0	22.50
		50	0	21.12	21.14	21.72	21.09	21.31	0.0	22.50
	16QAM	1	0	21.11	21.17	21.71	21.18	21.30	0.0	22.50
		1	25	21.45	21.50	21.99	21.43	21.64	0.0	22.50
		1	49	21.14	21.17	21.69	21.11	21.40	0.0	22.50
		25	0	20.66	20.66	21.15	20.54	20.74	0.0	22.50
		25	12	20.63	20.61	21.13	20.55	20.74	0.0	22.50
		25	25	20.64	20.63	21.13	20.56	20.73	0.0	22.50
		50	0	20.65	20.66	21.16	20.61	20.74	0.0	22.50
	64QAM	1	0	20.18	20.18	20.70	20.20	20.74	0.0	22.50
		1	25	20.47	20.51	21.03	20.40	21.06	0.0	22.50
		1	49	20.14	20.15	20.69	20.11	20.85	0.0	22.50
		25	0	19.61	19.68	20.22	19.52	19.71	1.0	21.50
		25	12	19.60	19.68	20.21	19.51	19.69	1.0	21.50
		25	25	19.62	19.70	20.18	19.55	19.66	1.0	21.50
		50	0	19.56	19.66	20.14	19.58	19.70	1.0	21.50
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	21.21	21.19	21.62	21.03	21.19	0.0	22.50
		1	12	21.23	21.18	21.64	21.00	21.22	0.0	22.50
		1	24	21.21	21.17	21.58	20.99	21.21	0.0	22.50
		12	0	21.23	21.22	21.69	21.09	21.28	0.0	22.50
		12	7	21.31	21.32	21.79	21.16	21.40	0.0	22.50
		12	13	21.24	21.29	21.73	21.16	21.33	0.0	22.50
		25	0	21.18	21.21	21.68	21.07	21.27	0.0	22.50
	16QAM	1	0	21.04	21.17	21.64	21.03	21.20	0.0	22.50
		1	12	21.08	21.18	21.64	21.04	21.23	0.0	22.50
		1	24	21.04	21.15	21.65	21.00	21.26	0.0	22.50
		12	0	20.52	20.53	21.15	20.45	20.64	0.0	22.50
		12	7	20.57	20.63	21.23	20.55	20.75	0.0	22.50
		12	13	20.55	20.57	21.17	20.57	20.73	0.0	22.50
		25	0	20.57	20.58	21.11	20.52	20.76	0.0	22.50
	64QAM	1	0	20.33	20.35	21.26	20.20	20.38	0.0	22.50
		1	12	20.38	20.35	21.23	20.20	20.41	0.0	22.50
		1	24	20.29	20.34	21.23	20.19	21.10	0.0	22.50
		12	0	19.65	19.66	20.03	19.54	19.78	1.0	21.50
		12	7	19.68	19.77	20.14	19.60	19.83	1.0	21.50
		12	13	19.65	19.71	20.09	19.58	19.75	1.0	21.50
		25	0	19.59	19.73	20.06	19.60	19.69	1.0	21.50

9.4. Wi-Fi 2.4 GHz (DTS Band)

WLAN output power results

Antenna	Mode	Data Rate	Ch #	Freq. (MHz)	WLAN mode power					
					Max.Average Power			Reduced Average Power		
					Meas. Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	Meas. Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)
WiFi 2.4G Ant	802.11b	1 Mbps	1	2412.0	15.78	17.00	Yes	15.83	17.00	Yes
			2	2417.0	15.77			16.83		
			3	2422.0	15.95			16.85		
			4	2427.0	17.92	19.00		16.86		
			6	2437.0	18.79			16.02		
			11	2462.0	18.05			16.22		
			12	2467.0	5.17	6.00	5.17	6.00	No	
	13	2472.0	1.35	2.00	1.35		2.00			
	802.11g	6 Mbps	1	2412.0	Not Required	17.00	No	Not Required	17.00	No
			6	2437.0		18.00				
			11	2462.0		17.00				
			12	2467.0		6.00	No		6.00	No
			13	2472.0		2.00			2.00	
	802.11n	6.5 Mbps	1	2412.0	Not Required	16.00	No	Not Required	17.00	No
			6	2437.0		18.00				
			11	2462.0		17.00				
			12	2467.0		6.00	No		6.00	No
			13	2472.0		2.00			2.00	

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11n/g mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

9.5. Wi-Fi 5GHz (U-NII Bands)

WLAN output power Results

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	WLAN mode power					
						Max. Average Power			Reduced Average Power		
						Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max. Tune-up Limit (dBm)	SAR Test (Yes/No)
5GHz Ant	5.3 (UNII 2A)	802.11a	6 Mbps	52	5260	Not Required	15.00	No	Not Required	12.00	No
				56	5280						
				60	5300						
				64	5320						
		802.11n (HT20)	6.5 Mbps	52	5260	Not Required	15.00	No	Not Required	12.00	No
				56	5280						
				60	5300						
				64	5320						
		802.11n (HT40)	13.5 Mbps	54	5270	14.75	15.00	Yes	Not Required	12.00	No
				62	5310						
		802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	15.00	No	Not Required	12.00	No
				56	5280						
				60	5300						
				64	5320						
		802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	15.00	No	Not Required	12.00	No
				62	5310						
		802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	14.50	No	11.92	12.00	Yes
	5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	Not Required	15.00	No	Not Required	12.00	No
				120	5600						
				124	5620						
				140	5700						
		802.11n (HT20)	6.5 Mbps	144	5720	Not Required	14.00	No	Not Required	12.00	No
				100	5500		15.00				
				120	5600		14.50				
				124	5620		15.00				
		802.11n (HT40)	13.5 Mbps	140	5700	Not Required	14.00	No	Not Required	12.00	No
				144	5710		13.50				
				102	5510		15.00				
				118	5590		15.00				
		802.11ac (VHT20)	6.5 Mbps	126	5630	Not Required	15.00	No	Not Required	12.00	No
				142	5710						
				100	5500		14.50				
				120	5600		15.00				
		802.11ac (VHT40)	13.5 Mbps	124	5620	Not Required	15.00	No	Not Required	12.00	No
				140	5700						
				144	5720		14.00				
				102	5510		13.50				
		802.11ac (VHT80)	29.3 Mbps	118	5590	Not Required	15.00	No	Not Required	12.00	No
				126	5630						
				142	5710						
				106	5530		10.46				
	5.8 (UNII 3)	802.11a	6 Mbps	122	5610	Not Required	14.00	No	Not Required	12.00	No
				138	5690						
				149	5745						
				157	5785						
		802.11n (HT20)	6.5 Mbps	165	5825	Not Required	14.00	No	Not Required	12.00	No
				149	5745						
				157	5785						
				165	5825						
		802.11n (HT40)	13.5 Mbps	151	5755	Not Required	14.00	Yes	Not Required	12.00	No
				159	5795						
				149	5745						
				157	5785						
		802.11ac (VHT20)	6.5 Mbps	165	5825	Not Required	14.00	No	Not Required	12.00	No
				149	5745						
				157	5785						
				165	5825						
		802.11ac (VHT40)	13.5 Mbps	151	5755	Not Required	14.00	No	Not Required	12.00	No
				159	5795						
				149	5745						
				157	5785						
		802.11ac (VHT80)	29.3 Mbps	155	5775	Not Required	13.00	No	11.80	12.00	Yes

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n, ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6. Bluetooth

Bluetooth Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)	
				Meas Pwr	Tune-up Limit
2.4	GFSK	0	2402	9.44	10.50
		39	2441	9.59	
		78	2480	10.19	
	EDR 8-DPSK	0	2402	7.19	8.50
		39	2441	7.14	
		78	2480	7.82	
	LE GFSK, 1M (37 pkt)	0	2402	5.50	7.50
		19	2440	7.38	
		39	2480	6.03	
	LE GFSK, 2M (37 pkt)	0	2402	5.32	
		19	2440	7.22	
		39	2480	5.87	

Note(s):


For All exposure conditions, SAR test is evaluated at GFSK mode in Bluetooth using maximum power condition.

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.874	3.747	76.7%	1.30

Duty Cycle plots

GFSK

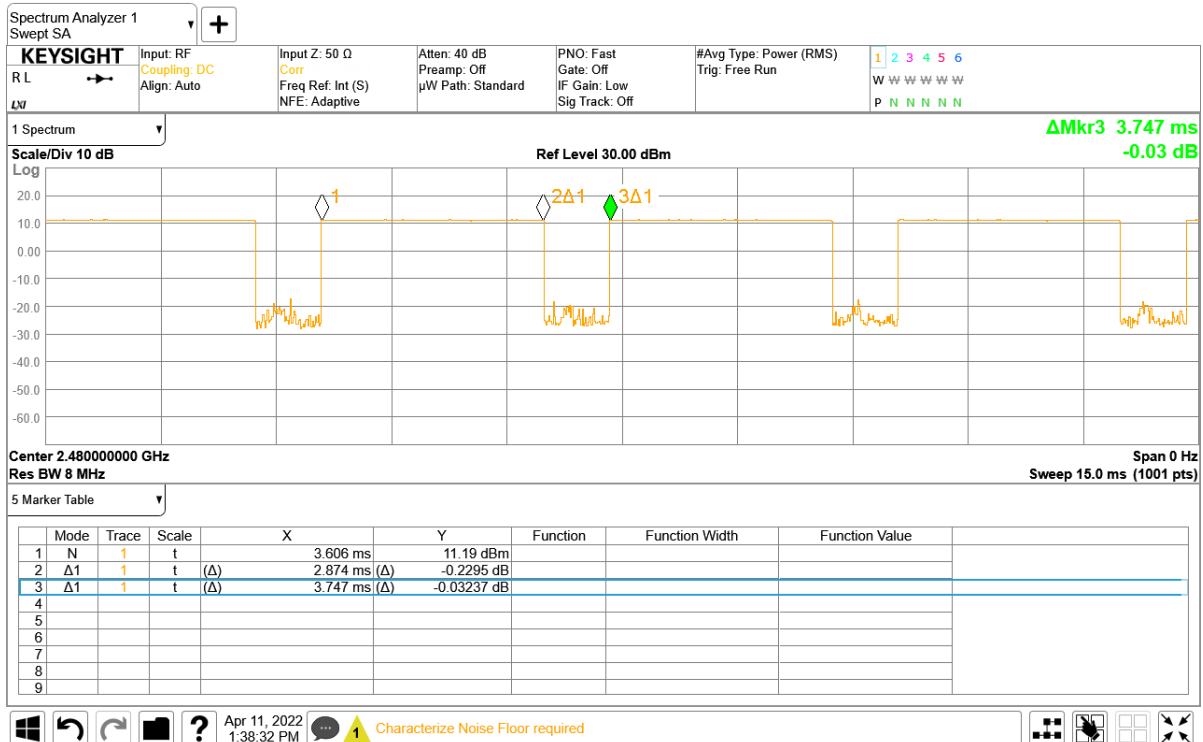

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm From that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; However, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, Including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	GPRS 4 Slots	Off	0	Left Touch	251	848.8	30.00	29.30	0.270	0.317	1
					Left Tilt	251	848.8	30.00	29.30	0.140	0.164	
					Right Touch	251	848.8	30.00	29.30	0.294	0.345	
					Right Tilt	251	848.8	30.00	29.30	0.156	0.183	
	Body-worn	GPRS 4 Slots	Off	15	Rear	251	848.8	30.00	29.30	0.453	0.532	2
					Front	251	848.8	30.00	29.30	0.325	0.382	
	Hotspot	GPRS 2 Slots	On	10	Rear	251	848.8	30.00	29.28	0.489	0.577	3
					Front	251	848.8	30.00	29.28	0.161	0.190	
					Edge 2	251	848.8	30.00	29.28	0.229	0.270	
					Edge 3	251	848.8	30.00	29.28	0.301	0.355	
					Edge 4	251	848.8	30.00	29.28	0.106	0.125	

10.2. GSM 1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	GPRS 3 Slots	Off	0	Left Touch	661	1880.0	27.50	26.93	0.143	0.163	4
					Left Tilt	661	1880.0	27.50	26.93	0.082	0.094	
					Right Touch	661	1880.0	27.50	26.93	0.107	0.122	
					Right Tilt	661	1880.0	27.50	26.93	0.087	0.100	
	Body-worn	GPRS 3 Slots	Off	15	Rear	661	1880.0	27.50	26.93	0.233	0.266	5
					Front	661	1880.0	27.50	26.93	0.153	0.175	
	Hotspot	GPRS 2 Slots	On	10	Rear	661	1880.0	25.00	24.04	0.185	0.231	6
					Front	661	1880.0	25.00	24.04	0.122	0.152	
					Edge 3	661	1880.0	25.00	24.04	0.143	0.178	
					Edge 4	661	1880.0	25.00	24.04	0.088	0.110	

10.3. WCDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	Rel 99 RMC	Off	0	Left Touch	4183	836.6	25.50	24.29	0.247	0.326	7
					Left Tilt	4183	836.6	25.50	24.29	0.137	0.181	
					Right Touch	4183	836.6	25.50	24.29	0.280	0.370	
					Right Tilt	4183	836.6	25.50	24.29	0.173	0.229	
	Body-worn	Rel 99 RMC	Off	15	Rear	4183	836.6	25.50	24.29	0.398	0.526	8
					Front	4183	836.6	25.50	24.29	0.222	0.293	
	Hotspot	Rel 99 RMC	On	10	Rear	4183	836.6	23.50	22.65	0.630	0.766	9
					Front	4183	836.6	23.50	22.65	0.202	0.246	
					Edge 2	4183	836.6	23.50	22.65	0.230	0.280	
					Edge 3	4183	836.6	23.50	22.65	0.387	0.471	
Main 1 Ant.	Product Specific 10-g	Rel 99 RMC	Off	0	Rear	4132	826.4	25.50	24.07	1.670	2.323	10
						4183	836.6	25.50	24.29	1.810	2.392	
						4233	846.6	25.50	24.13	1.460	2.002	

10.4. LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	Off	0	Left Touch	20525	836.5	1	25	24.00	22.94	0.268	0.342	
								25	12	23.00	21.94	0.202	0.258	
					Left Tilt	20525	836.5	1	25	24.00	22.94	0.141	0.180	
								25	12	23.00	21.94	0.109	0.139	
					Right Touch	20525	836.5	1	25	24.00	22.94	0.297	0.379	11
								25	12	23.00	21.94	0.228	0.291	
	Body-worn	QPSK	Off	15	Rear	20525	836.5	1	25	24.00	22.94	0.326	0.417	12
								25	12	23.00	21.94	0.275	0.351	
					Front	20525	836.5	1	25	24.00	22.94	0.216	0.276	
								25	12	23.00	21.94	0.186	0.237	
	Hotspot	QPSK	On	10	Rear	20525	836.5	1	25	22.50	21.49	0.558	0.704	
								25	12	22.50	21.44	0.564	0.720	13
					Front	20525	836.5	1	25	22.50	21.49	0.207	0.261	
								25	12	22.50	21.44	0.205	0.262	
					Edge 2	20525	836.5	1	25	22.50	21.49	0.240	0.303	
								25	12	22.50	21.44	0.241	0.308	
					Edge 3	20525	836.5	1	25	22.50	21.49	0.320	0.404	
								25	12	22.50	21.44	0.316	0.403	
					Edge 4	20525	836.5	1	25	22.50	21.49	0.113	0.143	
								25	12	22.50	21.44	0.115	0.147	

10.5. LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 2 Ant.	Head	QPSK	Off	0	Left Touch	40620	2593.0	1	49	24.50	23.41	0.386	0.497	14
								50	24	23.50	22.17	0.300	0.408	
					Left Tilt	40620	2593.0	1	49	24.50	23.41	0.141	0.181	
								50	24	23.50	22.17	0.109	0.148	
					Right Touch	40620	2593.0	1	49	24.50	23.41	0.255	0.328	
								50	24	23.50	22.17	0.196	0.266	
	Body-worn	QPSK	Off	15	Right Tilt	40620	2593.0	1	49	24.50	23.41	0.266	0.342	
								50	24	23.50	22.17	0.197	0.268	
					Rear	40620	2593.0	1	49	24.50	23.41	0.384	0.494	15
								50	24	23.50	22.17	0.294	0.399	
					Front	40620	2593.0	1	49	24.50	23.41	0.324	0.417	
								50	24	23.50	22.17	0.248	0.337	
	Hotspot	QPSK	On	10	Rear	40620	2593.0	1	49	22.50	21.92	0.313	0.358	
								50	24	22.50	21.86	0.320	0.371	16
					Front	40620	2593.0	1	49	22.50	21.92	0.237	0.271	
								50	24	22.50	21.86	0.238	0.276	
					Edge 3	40620	2593.0	1	49	22.50	21.92	0.221	0.253	
								50	24	22.50	21.86	0.177	0.205	
					Edge 4	40620	2593.0	1	49	22.50	21.92	0.186	0.213	
								50	24	22.50	21.86	0.188	0.218	

10.6. Wi-Fi (DTS Band)

WLAN SAR results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
											Tune-up limit	Meas.	Meas.	Scaled		
WLAN Ant	2.4 GHz	802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	0.173	99.5%	17.00	16.22				
						Left Tilt	11	2462.0	0.144	99.5%	17.00	16.22				
						Right Touch	11	2462.0	0.440	99.5%	17.00	16.22	0.259	0.311	1	17
						Right Tilt	11	2462.0	0.210	99.5%	17.00	16.22				
			Body-worn	Off	15	Rear	6	2437.0	0.305	99.5%	19.00	18.79	0.195	0.206	1	18
						Front	6	2437.0	0.088	99.5%	19.00	18.79				
			Hotspot	Off	10	Rear	6	2437.0	0.722	99.5%	19.00	18.79	0.454	0.479		19
						Front	6	2437.0	0.194	99.5%	19.00	18.79				
						Edge 1	6	2437.0	0.104	99.5%	19.00	18.79				
						Edge 4	6	2437.0	0.333	99.5%	19.00	18.79	0.234	0.247	2	

Note(s):

- When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively). And If the highest reported SAR is > 1.2 or 3.0 W/kg (1-g or 10-g respectively), then All required channels need to test.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
- SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.7. Wi-Fi (U-NII Bands)

U-NII 2A Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
											Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
WLAN Ant	5.3 GHz U-NII 2A	802.11ac VHT 20 29.3 Mbps	Head	On	0	Left Touch	58	5290.0	0.285	96.2%	12.00	11.92						
						Left Tilt	58	5290.0	0.400	96.2%	12.00	11.92						
						Right Touch	58	5290.0	0.358	96.2%	12.00	11.92						
						Right Tilt	58	5290.0	0.471	96.2%	12.00	11.92	0.175	0.185			1	20
		802.11n VHT 40 13.5Mbps	Body-worn	Off	15	Rear	54	5270.0	0.850	98.2%	15.00	14.75	0.456	0.492				21
						Front	54	5270.0	0.089	98.2%	15.00	14.75	0.034	0.037			2	
			Product Specific 10-g	Off	0	Rear	54	5270.0	8.120	98.2%	15.00	14.75			1.210	1.305		22
						Front	54	5270.0	0.734	98.2%	15.00	14.75						
						Edge 1	54	5270.0	3.863	98.2%	15.00	14.75			0.669	0.721	2	
						Edge 4	54	5270.0	2.352	98.2%	15.00	14.75						

U-NII 2C Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
											Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
WLAN Ant	5.5 GHz U-NII 2C	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	106	5530.0	0.582	96.2%	12.00	11.95						
						Left Tilt	106	5530.0	0.831	96.2%	12.00	11.95	0.387	0.407			2	23
						Right Touch	106	5530.0	0.600	96.2%	12.00	11.95						
						Right Tilt	106	5530.0	0.832	96.2%	12.00	11.95	0.384	0.404				
			Body-worn	Off	15	Rear	138	5690.0	1.170	96.2%	15.00	13.95	0.526	0.696				24
						Front	138	5690.0	0.212	96.2%	15.00	13.95	0.095	0.126			2	
			Product Specific 10-g	Off	0	Rear	122	5610.0	10.313	96.2%	15.00	13.91			1.900	2.539	3	25
							138	5690.0	16.682	96.2%	15.00	13.95			1.870	2.476		
						Front	138	5690.0	1.969	96.2%	15.00	13.95						
						Edge 1	138	5690.0	11.636	96.2%	15.00	13.95			1.220	1.615	2	
						Edge 4	138	5690.0	4.113	96.2%	15.00	13.95						

Note(s):

- When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively). And If the highest reported SAR is > 1.2 or 3.0 W/kg (1-g or 10-g respectively), then All required channels need to test.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

U-NII 3 Results

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
											Tune-up limit	Meas.	Meas.	Scaled		
WLAN Ant	5.8 GHz U-NII 3	802.11ac VHT 80 29.3 Mbps	Head	On	0	Left Touch	155	5775.0	0.653	96.2%	12.00	11.80	0.320	0.348	2	
						Left Tilt	155	5775.0	0.870	96.2%	12.00	11.80	0.410	0.446		26
						Right Touch	155	5775.0	0.575	96.2%	12.00	11.80				
						Right Tilt	155	5775.0	0.621	96.2%	12.00	11.80				
		802.11n VHT 40 13.5Mbps	Body-worn	Off	15	Rear	159	5795.0	0.887	98.2%	14.00	13.52	0.410	0.466		27
						Front	159	5795.0	0.181	98.2%	14.00	13.52	0.059	0.067	2	
			Hotspot	Off	10	Rear	151	5775.0	1.328	98.2%	14.00	13.54	0.656	0.742		28
						Front	151	5775.0	0.245	98.2%	14.00	13.54				
						Edge 1	151	5775.0	1.089	98.2%	14.00	13.54	0.506	0.573	2	
						Edge 4	151	5775.0	0.339	98.2%	14.00	13.54				

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively). And If the highest reported SAR is > 1.2 or 3.0 W/kg (1-g or 10-g respectively), then All required channels need to test.
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.8. Bluetooth

Antenna	Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
BT Ant	2.4 GHz	GFSK	Head	N/A	0	Left Touch	78	2480.0	76.7%	10.50	10.19	0.018	0.025	
						Left Tilt	78	2480.0	76.7%	10.50	10.19	0.013	0.018	
						Right Touch	78	2480.0	76.7%	10.50	10.19	0.051	0.071	29
						Right Tilt	78	2480.0	76.7%	10.50	10.19	0.020	0.028	
		GFSK	Body-worn	N/A	15	Rear	78	2480.0	76.7%	10.50	10.19	0.012	0.017	30
						Front	78	2480.0	76.7%	10.50	10.19	0.004	0.006	
		GFSK	Hotspot	N/A	10	Rear	78	2480.0	76.7%	10.50	10.19	0.044	0.062	31
						Front	78	2480.0	76.7%	10.50	10.19	0.007	0.010	
						Edge 1	78	2480.0	76.7%	10.50	10.19	0.006	0.008	
						Edge 4	78	2480.0	76.7%	10.50	10.19	0.013	0.018	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
835	GSM 850	Hotspot	Rear	No	0.489	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.630	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.564	N/A	N/A
1900	GSM 1900	Body-worn	Rear	No	0.233	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Hotspot	Rear	No	0.454	N/A	N/A
	Bluetooth	Head	Right Touch	No	0.051	N/A	N/A
2600	LTE Band 41	Head	Left Touch	No	0.386	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Body-worn	Rear	No	0.456	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Body-worn	Rear	No	0.526	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Hotspot	Rear	No	0.656	N/A	N/A

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
850	WCDMA Band V	Product Specific 10-g	Rear	No	1.810	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Product Specific 10-g	Rear	No	1.210	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Product Specific 10-g	Rear	No	1.900	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations						
Head & Body-worn & Hotspot & Phablet-10g	1	WWAN (2G/3G/LTE)	+	DTS			Scenarios	
	2	WWAN (2G/3G/LTE)	+	UNII				
	3	WWAN (2G/3G/LTE)	+	BT				
	4	WWAN (2G/3G/LTE)	+	UNII	+	BT		
Notes:								
1. DTS supports Wi-Fi Direct, Hotspot and VoIP.								
2. U-NII supports Wi-Fi Direct, Hotspot and VoIP.								
3. GPRS, W-CDMA, LTE supports Hotspot and VoIP								
4. U-NII Radio can transmit simultaneously with Bluetooth Radio.								
5. DTS Radio cannot transmit simultaneously with UNII Radio.								
6. DTS Radio cannot transmit simultaneously with Bluetooth Radio.								
7. BT tethering is considered about each RF exposure conditions.								

Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR₁** or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

The antennas for the unlicensed transmitters are closely situated. As a result, the associated SAR hotspots are also closely situated. Some of the sum of SAR calculations yielded results over 1.6 W/kg. The SPLSR calculations for these situations were performed by treating the unlicensed SAR values as a single transmitter. The most conservative distance between all the unlicensed hotspots to the licensed hotspot was used for the value of *d* in the SPLSR calculation.

12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.345	0.311	0.446	0.071	0.656	0.791	0.416	0.862
Body-Worn (1-g SAR)	All position	0.532	0.206	0.696	0.017	0.738	1.228	0.549	1.245
Hotspot (1-g SAR)	Rear	0.577	0.479	0.742	0.062	1.056	1.319	0.639	1.381
	Front	0.190	0.479	0.742	0.010	0.669	0.932	0.200	0.942
	Edge 1		0.479	0.573	0.008				
	Edge 2	0.270							
	Edge 3	0.355							
	Edge 4	0.125	0.247	0.742	0.018	0.372	0.867	0.143	0.885
Product Specific 10-g (10-g SAR)	All position			2.539					

12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.163	0.311	0.446	0.071	0.474	0.609	0.234	0.680
Body-Worn (1-g SAR)	All position	0.266	0.206	0.696	0.017	0.472	0.962	0.283	0.979
Hotspot (1-g SAR)	Rear	0.231	0.479	0.742	0.062	0.710	0.973	0.293	1.035
	Front	0.152	0.479	0.742	0.010	0.631	0.894	0.162	0.904
	Edge 1		0.479	0.573	0.008				
	Edge 2								
	Edge 3	0.178							
	Edge 4	0.110	0.247	0.742	0.018	0.357	0.852	0.128	0.870
Product Specific 10-g (10-g SAR)	All position			2.539					

12.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.370	0.311	0.446	0.071	0.681	0.816	0.441	0.887
Body-Worn (1-g SAR)	All position	0.526	0.206	0.696	0.017	0.732	1.222	0.543	1.239
Hotspot (1-g SAR)	Rear	0.766	0.479	0.742	0.062	1.245	1.508	0.828	1.570
	Front	0.246	0.479	0.742	0.010	0.725	0.988	0.256	0.998
	Edge 1		0.479	0.573	0.008				0.581
	Edge 2	0.280							
	Edge 3	0.471							
	Edge 4	0.154	0.247	0.742	0.018	0.401	0.896	0.172	0.914
Product Specific 10-g (10-g SAR)	All position	2.392		2.539			4.931		

SAR to Peak Location Separation Ratio (SPLSR)

SAR to Peak Location Separation Ratio (SPLSR)											
RF Exposure	Test Position	Standalone SAR (W/kg)				Σ SAR (W/kg)		Calculated distance (mm)	1-g SPLSR (= <0.04) or 10-g SPLSR (= <0.10)	Volume Scan (Yes/ No)	Figure
		WWAN	DTS	UNII	BT						
		1	2	3	4						
Product Specific 10-g (10-g SAR)	Rear	2.392		2.539		1+3	4.931	156.1	0.07	No	1

Note(s):

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

12.4. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.379	0.311	0.446	0.071	0.690	0.825	0.450	0.896
Body-Worn (1-g SAR)	All position	0.417	0.206	0.696	0.017	0.623	1.113	0.434	1.130
Hotspot (1-g SAR)	Rear	0.720	0.479	0.742	0.062	1.199	1.462	0.782	1.524
	Front	0.262	0.479	0.742	0.010	0.741	1.004	0.272	1.014
	Edge 1		0.479	0.573	0.008				
	Edge 2	0.308							
	Edge 3	0.404							
	Edge 4	0.147	0.247	0.742	0.018	0.394	0.889	0.165	0.907
Product Specific 10-g (10-g SAR)	All position			2.539					

12.5. Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Sum of SAR (W/kg)			
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT	WWAN + BT + UNII
		1	2	3	4	1 + 2	1 + 3	1 + 4	1 + 3 + 4
Head (1-g SAR)	All position	0.497	0.311	0.446	0.071	0.808	0.943	0.568	1.014
Body-Worn (1-g SAR)	All position	0.494	0.206	0.696	0.017	0.700	1.190	0.511	1.207
Hotspot (1-g SAR)	Rear	0.371	0.479	0.742	0.062	0.850	1.113	0.433	1.175
	Front	0.276	0.479	0.742	0.010	0.755	1.018	0.286	1.028
	Edge 1		0.479	0.573	0.008				
	Edge 2								
	Edge 3	0.253							
	Edge 4	0.218	0.247	0.742	0.018	0.465	0.960	0.236	0.978
Product Specific 10-g (10-g SAR)	All position			2.539					


Note(s):

- Green values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

Conclusion:

Simultaneous Transmission SAR analysis results is satisfied the FCC Limit requirement according to follow procedures with "Sum of SAR" or "SPLSR".

Figure (1)

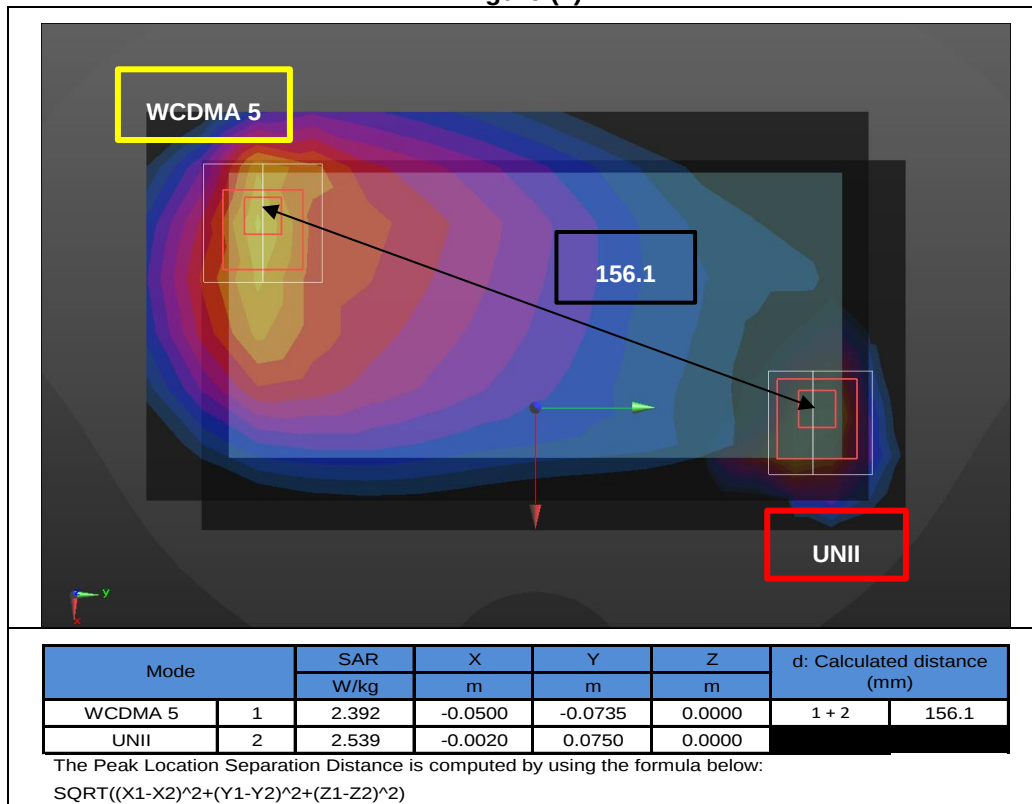

Appendixes

Refer to separated files for the following appendixes.

4790302419-S1 FCC Report SAR_App A_Photos & Ant. Locations

4790302419-S1 FCC Report SAR_App B_Highest SAR Test Plots

4790302419-S1 FCC Report SAR_App C_System Check Plots

4790302419-S1 FCC Report SAR_App D_SAR Tissue Ingredients

4790302419-S1 FCC Report SAR_App E_Probe Cal. Certificates

4790302419-S1 FCC Report SAR_App F_Dipole Cal. Certificates

4790302419-S1 FCC Report SAR_App G_Proximity Sensor feature

4790302419-S1 FCC Report SAR_App H_RCV Back-off Validation Test Data

END OF REPORT