



**FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 22 SUBPART H**

CERTIFICATION TEST REPORT

For

GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A300Y

FCC ID: A3LSMA300Y

REPORT NUMBER: 14I19693-E1 REVISION A

ISSUE DATE: Jan 26, 2015

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	12/30/14	Initial issue	P. Zhang
A	1/26/15	Updated section 5.3; 10.3; 10.4; 11	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	7
4.1.	<i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2.	<i>SAMPLE CALCULATION</i>	<i>7</i>
4.3.	<i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5.	EQUIPMENT UNDER TEST	8
5.1.	<i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2.	<i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3.	<i>MAXIMUM OUTPUT POWER (LTE).....</i>	<i>10</i>
5.4.	<i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.5.	<i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
6.	TEST AND MEASUREMENT EQUIPMENT.....	15
7.	Summary Table.....	16
8.	RF POWER OUTPUT VERIFICATION.....	17
8.1.	<i>GSM/GPRS/EDGE</i>	<i>17</i>
8.1.1.	<i>GSM OUTPUT POWER RESULT.....</i>	<i>18</i>
8.2.	<i>UMTS REL 99.....</i>	<i>19</i>
8.2.1.	<i>UMTS REL 99 OUTPUT POWER RESULT</i>	<i>19</i>
8.3.	<i>UMTS HSDPA</i>	<i>20</i>
8.3.1.	<i>UMTS HSDPA OUTPUT POWER RESULT.....</i>	<i>21</i>
8.3.2.	<i>UMTS HSUPA</i>	<i>22</i>
8.3.3.	<i>UMTS HSUPA OUTPUT POWER RESULT.....</i>	<i>23</i>
8.5.	<i>LTE OUTPUT VERIFICATION.....</i>	<i>28</i>
8.5.1.	<i>LTE OUTPUT RESULT</i>	<i>28</i>
9.	PEAK TO AVERAGE RATIO.....	30
9.1.	<i>CONDUCTED PEAK TO AVERAGE RESULT.....</i>	<i>30</i>
10.	LIMITS AND CONDUCTED RESULTS.....	33
10.1.	<i>OCCUPIED BANDWIDTH.....</i>	<i>33</i>
10.1.1.	<i>OCCUPIED BANDWIDTH RESULTS.....</i>	<i>34</i>

10.1.2.	OCCUPIED BANDWIDTH PLOTS	38
10.2.	<i>BAND EDGE EMISSIONS</i>	42
10.2.1.	BAND EDGE PLOTS	43
10.3.	<i>OUT OF BAND EMISSIONS</i>	55
10.3.1.	OUT OF BAND EMISSIONS RESULT	56
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	59
10.4.	<i>FREQUENCY STABILITY</i>	64
10.4.1.	FREQUENCY STABILITY RESULTS.....	65
11.	RADIATED TEST RESULTS	67
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	67
11.1.1.	ERP/EIRP Results.....	68
11.1.2.	ERP/EIRP DATA.....	71
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	87
11.2.1.	SPURIOUS RADIATION PLOTS.....	88
12.	SETUP PHOTOS	104

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ and NFC
MODEL: SM-A300Y
SERIAL NUMBER: 2022577
DATE TESTED: DECEMBER 23-30, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN DTS 2.4Ghz b/g/n, ANT+ and NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM850	824~849	GMSK	31.7	1479.1		
	824~849	GPRS	31.7	1479.1	28.68	737.9
	824~849	EGPRS	27.1	512.9	24.61	289.1
GSM1900	1850~1910	GMSK	28.2	660.7		
	1850~1910	GPRS	28.2	660.7	26.09	406.4
	1850~1910	EGPRS	25.8	380.2	24.03	252.9

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	24.4	275.4	20.55	113.5
	824~849	HSDPA	22.3	169.8	19.49	88.9
	824~849	HSUPA	21.5	141.2		
Band 2	1850~1910	REL99	22.5	177.8	20.01	100.2
	1850~1910	HSDPA	21.5	141.2	19.65	92.3
	1850~1910	HSUPA	21.4	138.0		

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27 (10MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	10MHz	QPSK	25.0	316.23	20.66	116.4
	824~849	10MHz	16QAM	24.0	251.1	19.81	95.7

FCC Part 27 (5MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	5MHz	QPSK	24.85	305.4	20.65	116.1
	824~849	5MHz	16QAM	23.70	234.4	19.85	96.6

FCC Part 27 (3MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	3MHz	QPSK	24.80	302.0	20.82	120.8
	824~849	3MHz	16QAM	23.90	245.4	19.86	96.8

FCC Part 27 (1.4MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	1.4MHz	QPSK	24.80	302.0	20.55	113.5
	824~849	1.4MHz	16QAM	23.70	234.4	19.59	91.0

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5, 824~849MHz	-2.2
Band 2, 1850~1910MHz	-2.8

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	ETA0U83HWE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

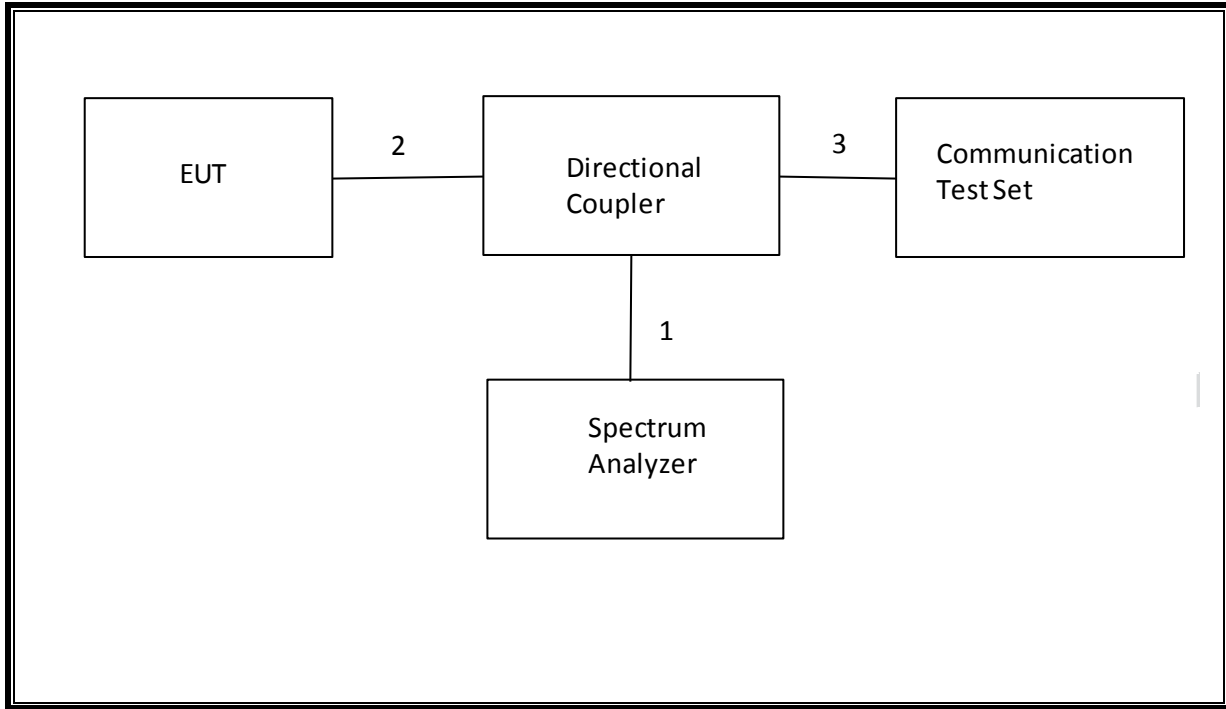

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

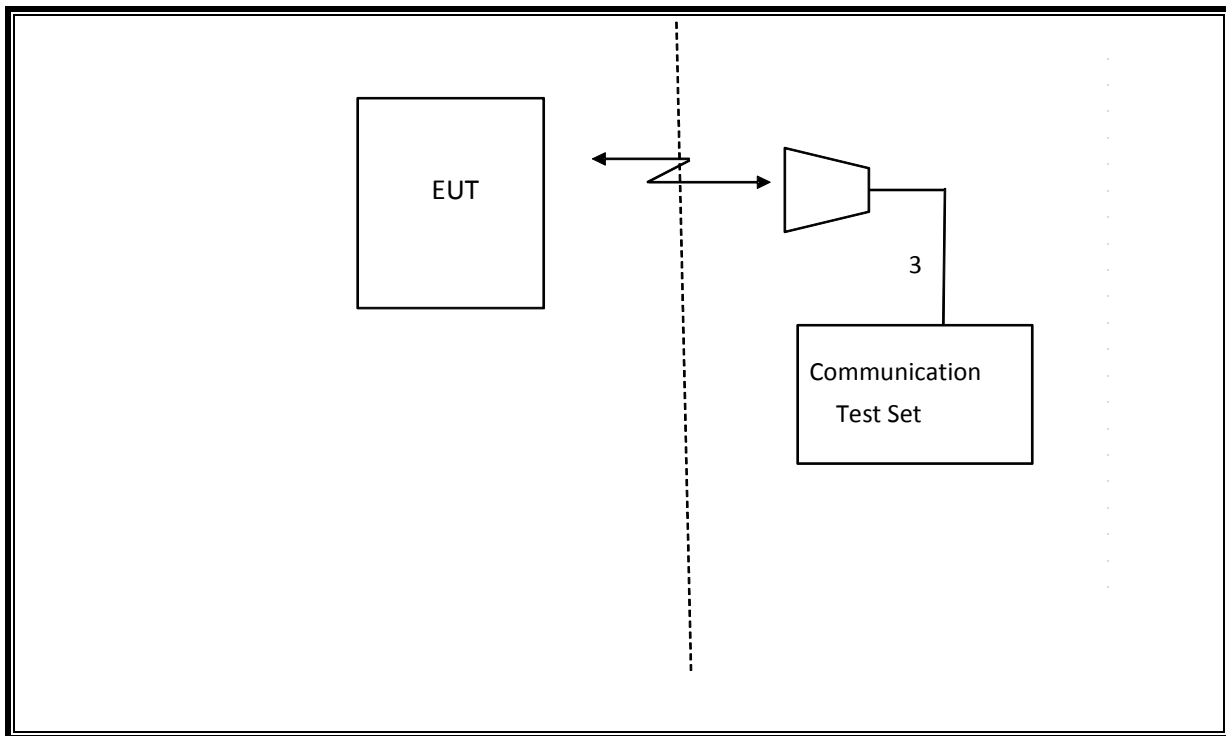

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worse Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	8.98MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-16.219dBm
2.1046	N/A	Conducted output power	N/A		Pass	31.7dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.008PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	28.68dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	26.09dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-40.7dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	31.7			
		190	836.6	31.7			
		251	848.8	31.7			
	GPRS	128	824.2	31.7	30.2	29.2	26.9
		190	836.6	31.7	30.3	29.3	26.9
		251	848.8	31.7	30.2	29.2	26.7
	EGPRS	128	824.2	26.9	27.1	27.0	27.0
		190	836.6	26.9	27.1	27.0	26.9
		251	848.8	26.8	26.9	26.9	26.8
GSM1900	GMSK	512	1850.2	28.1			
		661	1880	28.2			
		810	1909.8	28.2			
	GPRS	512	1850.2	28.1	26.5	25.3	22.5
		661	1880	28.2	26.5	25.3	22.5
		810	1909.8	28.2	26.5	25.4	22.6
	EGPRS	512	1850.2	25.7	25.6	25.0	23.1
		661	1880	25.8	25.7	25.0	23.2
		810	1909.8	25.7	25.7	25.0	23.1

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
β_{ed}	Not Applicable	

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power
				(dBm) Avg (dBm)
Band 5	REL99	4132	826.4	24.4
		4183	836.6	24.3
		4233	846.6	24.3
Band 2	REL99	9262	1852.4	22.2
		9400	1880	22.5
		9538	1907.6	22.4

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power
					(dBm) Avg (dBm)
Band 5	HSDPA	1	4132	826.4	22.3
			4183	836.6	22.3
			4233	846.6	22.3
		2	4132	826.4	22.0
			4183	836.6	22.0
			4233	846.6	22.0
		3	4132	826.4	21.0
			4183	836.6	21.0
			4233	846.6	21.0
		4	4132	826.4	21.0
			4183	836.6	21.0
			4233	846.6	21.0
Band 2	HSDPA	1	9262	1852.4	21.3
			9400	1880	21.3
			9538	1907.6	21.3
		2	9262	1852.4	21.5
			9400	1880	21.5
			9538	1907.6	21.3
		3	9262	1852.4	20.9
			9400	1880	20.9
			9538	1907.6	20.9
		4	9262	1852.4	20.8
			9400	1880	20.8
			9538	1907.6	20.9

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
β_{ed} (note1)	1309/225	94/75	47/15 47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power
					(dBm) Avg (dBm)
Band 5	HSUPA	1	4132	826.4	21.2
			4183	836.6	21.5
			4233	846.6	21.3
		2	4132	826.4	19.5
			4183	836.6	19.5
			4233	846.6	19.5
		3	4132	826.4	20.6
			4183	836.6	20.9
			4233	846.6	20.5
		4	4132	826.4	21.0
			4183	836.6	21.1
			4233	846.6	21.0
		5	4132	826.4	21.5
			4183	836.6	21.5
			4233	846.6	21.5
Band 2	HSUPA	1	9262	1852.4	21.4
			9400	1880	21.4
			9538	1907.6	21.3
		2	9262	1852.4	20.8
			9400	1880	20.9
			9538	1907.6	20.9
		3	9262	1852.4	21.2
			9400	1880	20.8
			9538	1907.6	21.4
		4	9262	1852.4	21.3
			9400	1880	21.4
			9538	1907.6	21.3
		5	9262	1852.4	21.4
			9400	1880	21.4
			9538	1907.6	21.3

DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

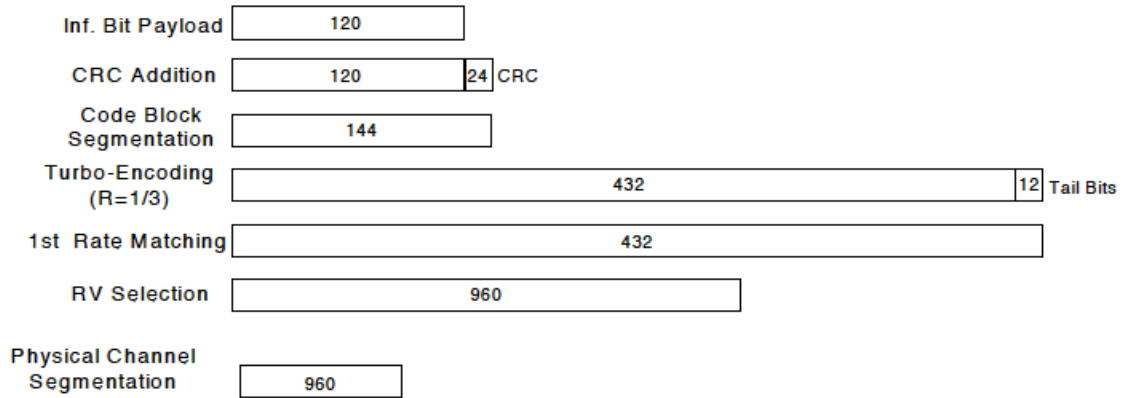


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

For the E-MPR setting, the table below was used referencing from 3GPP TS34.121-1 version 11.1.1 Release 11 specification.

Table 5.2B.5: Maximum Output Powers with HS-DPCCH and E-DCH for test

Sub-test in table C.11.1.3	Power Class 3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
1	+24	+1.7/-6.7	+21	+2.7/-5.7
2	+22	+3.7/-5.2	+19	+4.7/-4.2
3	+23	+2.7/-5.2	+20	+3.7/-4.2
4	+22	+3.7/-5.2	+19	+4.7/-4.2
5	+24	+1.7/-3.7	+21	+2.7/-2.7

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	22.3
		4183	836.6	0	22.2
		4233	846.6	0	22.2
	Subtest 2	4132	826.4	0	22.2
		4183	836.6	0	22.2
		4233	846.6	0	22.3
	Subtest 3	4132	826.4	0.5	21.6
		4183	836.6	0.5	21.6
		4233	846.6	0.5	21.7
	Subtest 4	4132	826.4	0.5	21.4
		4183	836.6	0.5	21.4
		4233	846.6	0.5	21.5

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.3
		9400	1880.0	0	21.4
		9538	1907.6	0	21.3
	Subtest 2	9262	1852.4	0	21.4
		9400	1880.0	0	21.5
		9538	1907.6	0	21.4
	Subtest 3	9262	1852.4	0.5	20.6
		9400	1880.0	0.5	21.0
		9538	1907.6	0.5	21.0
	Subtest 4	9262	1852.4	0.5	20.8
		9400	1880.0	0.5	20.9
		9538	1907.6	0.5	20.8

8.5. LTE OUTPUT VERIFICATION

8.5.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	24.90	24.90	24.80
			1	25	0	24.80	24.90	24.90
			1	49	0	25.00	24.90	24.80
			25	0	1	23.50	23.50	23.50
			25	12	1	23.30	23.50	23.30
			25	25	1	23.30	23.50	23.40
		16QAM	1	0	1	24.00	24.00	23.80
			1	25	1	23.60	24.00	23.70
			1	49	1	23.80	23.80	23.50
			25	0	2	22.00	22.00	22.00
			25	12	2	22.00	22.00	22.00
			25	25	2	22.00	22.10	22.00
			50	0	2	22.00	22.00	22.00
			50	0	2	22.00	22.00	22.00
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.85	24.70	24.70
			1	12	0	24.70	24.60	24.70
			1	24	0	24.70	24.60	24.50
			12	0	1	23.30	23.40	23.30
			12	7	1	23.30	23.40	23.20
			12	13	1	23.30	23.30	23.10
		16QAM	25	0	1	23.30	23.40	23.30
			1	0	1	23.70	23.40	23.30
			1	12	1	23.70	23.50	23.30
			1	24	1	23.70	23.70	23.20
			12	0	2	22.00	22.00	22.00
			12	7	2	22.00	22.00	22.00
			12	13	2	22.00	22.10	22.00
			25	0	2	22.00	22.00	22.00

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	24.80	24.80	24.80
			1	8	0	24.70	24.70	24.70
			1	14	0	24.70	24.60	24.70
			8	0	1	23.50	23.40	23.20
			8	4	1	23.40	23.50	23.30
			8	7	1	23.30	23.50	23.20
			15	0	1	23.40	23.40	23.20
		16QAM	1	0	1	23.90	23.60	23.80
			1	8	1	23.80	23.70	23.70
			1	14	1	23.80	23.60	23.60
			8	0	2	22.10	22.10	22.10
			8	4	2	22.00	22.00	22.00
			8	7	2	22.00	22.00	22.00
			15	0	2	22.00	22.00	22.00
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	24.80	24.80	24.60
			1	3	0	24.80	24.80	24.70
			1	5	0	24.70	24.70	24.80
			3	0	0	24.80	24.80	24.80
			3	1	0	24.80	24.80	24.80
			3	3	0	24.80	24.80	24.70
			6	0	1	23.40	23.40	23.20
		16QAM	1	0	1	23.70	23.50	23.60
			1	3	1	23.70	23.60	23.60
			1	5	1	23.60	23.60	23.60
			3	0	1	23.60	23.40	23.40
			3	1	1	23.60	23.50	23.50
			3	3	1	23.20	23.40	23.40
			6	0	2	22.00	22.00	22.00

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
GSM1900	1880	GPRS	27.65	27.12	0.53
		EGPRS	26.76	24.32	2.44

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
GSM850	836.6	GPRS	27.65	27.56	0.09
		EGPRS	23.79	20.56	3.23

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
WCDMA 5	836.6	REL99	25.45	23.22	2.66
		HSDPA	26.11	22.79	3.87

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
WCDMA 2	1880	REL99	25.69	23.34	2.35
		HSDPA	25.21	23.25	1.96

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
1.4Mhz	836.5	QPSK	28.18	22.76	5.42
		16QAM	27.76	21.89	5.87

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
3Mhz	836.5	QPSK	28.87	23.95	4.92
		16QAM	27.34	22.67	4.67

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
5Mhz	836.5	QPSK	28.87	22.87	6
		16QAM	28.28	21.89	6.39

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)		Delta
10Mhz						
	836.5	QPSK	28.54	22.84		5.7
		16QAM	28.42	21.73		6.69

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02 - 06/07/2013)

MODES TESTED

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	240.5	322.4
		190	836.6	246.2	316.2
		251	848.8	245.2	320.6
	EGPRS	128	824.2	244.7	290.4
		190	836.6	246.3	302.9
		251	848.8	238.1	310.6
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	250.4	317.6
		661	1880	243.9	318.8
		810	1909.8	243.4	313.4
	EGPRS	512	1850.2	244.3	314.7
		661	1880	244.9	306.3
		810	1909.8	249.5	321.3

WCDMA OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.15	4.65
		4183	836.6	4.17	4.64
		4233	846.6	4.17	4.66
	HSDPA	4132	826.4	4.14	4.62
		4183	836.6	4.15	4.62
		4233	846.6	4.16	4.64
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	4.17	4.66
		9400	1880	4.20	4.66
		9538	1907.6	4.19	4.67
	HSDPA	9262	1852.4	4.18	4.64
		9400	1880	4.18	4.67
		9538	1907.6	4.19	4.64
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

LTE OCCUPIED BANDWIDTH RESULTS





Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.98	9.78
			50/0	836.5	8.96	9.75
			50/0	844	8.97	9.71
		16QAM	50/0	829	8.98	9.87
			50/0	836.5	8.93	9.64
			50/0	844	8.98	9.76


Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.51	4.93
			25/0	836.5	4.51	4.95
			25/0	846.5	4.52	4.98
		16QAM	25/0	826.5	4.52	5.0
			25/0	836.5	4.50	4.96
			25/0	846.5	4.5	4.97

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	3	QPSK	15/0	825.5	2.69	2.95
			15/0	836.5	2.69	2.94
			15/0	847.5	2.69	2.98
		16QAM	15/0	825.5	2.70	2.95
			15/0	836.5	2.69	2.97
			15/0	847.5	2.68	2.97

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	1.4	QPSK	6/0	824.7	1.09	1.29
			6/0	836.5	1.09	1.29
			6/0	848.3	1.08	1.27
		16QAM	6/0	824.7	1.09	1.29
			6/0	836.5	1.08	1.28
			6/0	848.3	1.09	1.29

10.1.2. OCCUPIED BANDWIDTH PLOTS
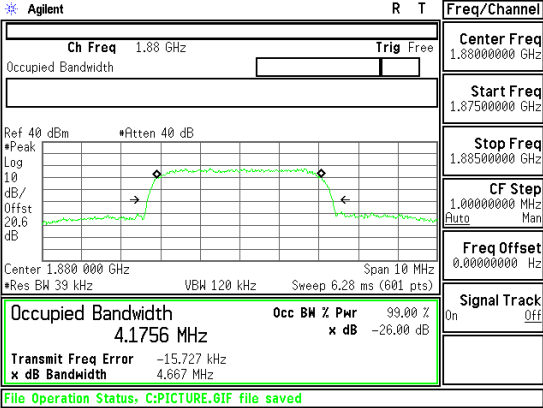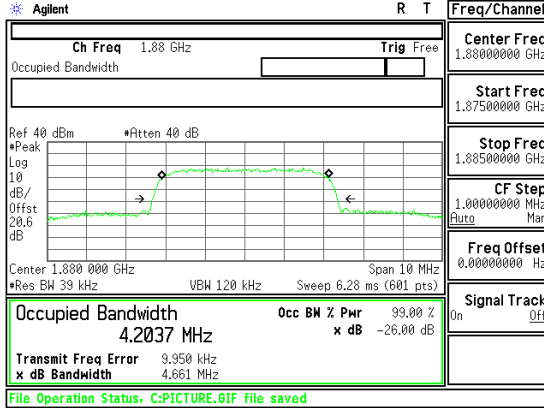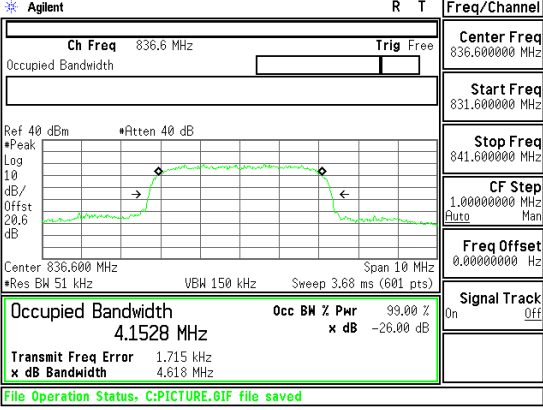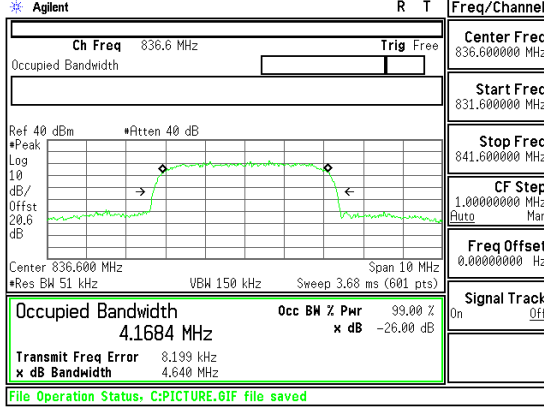
<p>Band Band 2</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1756 MHz</p> <p>Transmit Freq Error -15.727 kHz</p> <p>File Operation Status, C:PICTURE,6IF file saved</p> <p>Band WCDMA B2 HSDPA OBW</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.2037 MHz</p> <p>Transmit Freq Error 9.950 kHz</p> <p>File Operation Status, C:PICTURE,6IF file saved</p> <p>Band WCDMA B2 REL99 OBW</p>
<p>Band Band 5</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1528 MHz</p> <p>Transmit Freq Error 1.715 kHz</p> <p>File Operation Status, C:PICTURE,6IF file saved</p> <p>Band WCDMA B5 HSDPA OBW</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1684 MHz</p> <p>Transmit Freq Error 8.199 kHz</p> <p>File Operation Status, C:PICTURE,6IF file saved</p> <p>Band WCDMA B5 REL99 OBW</p>

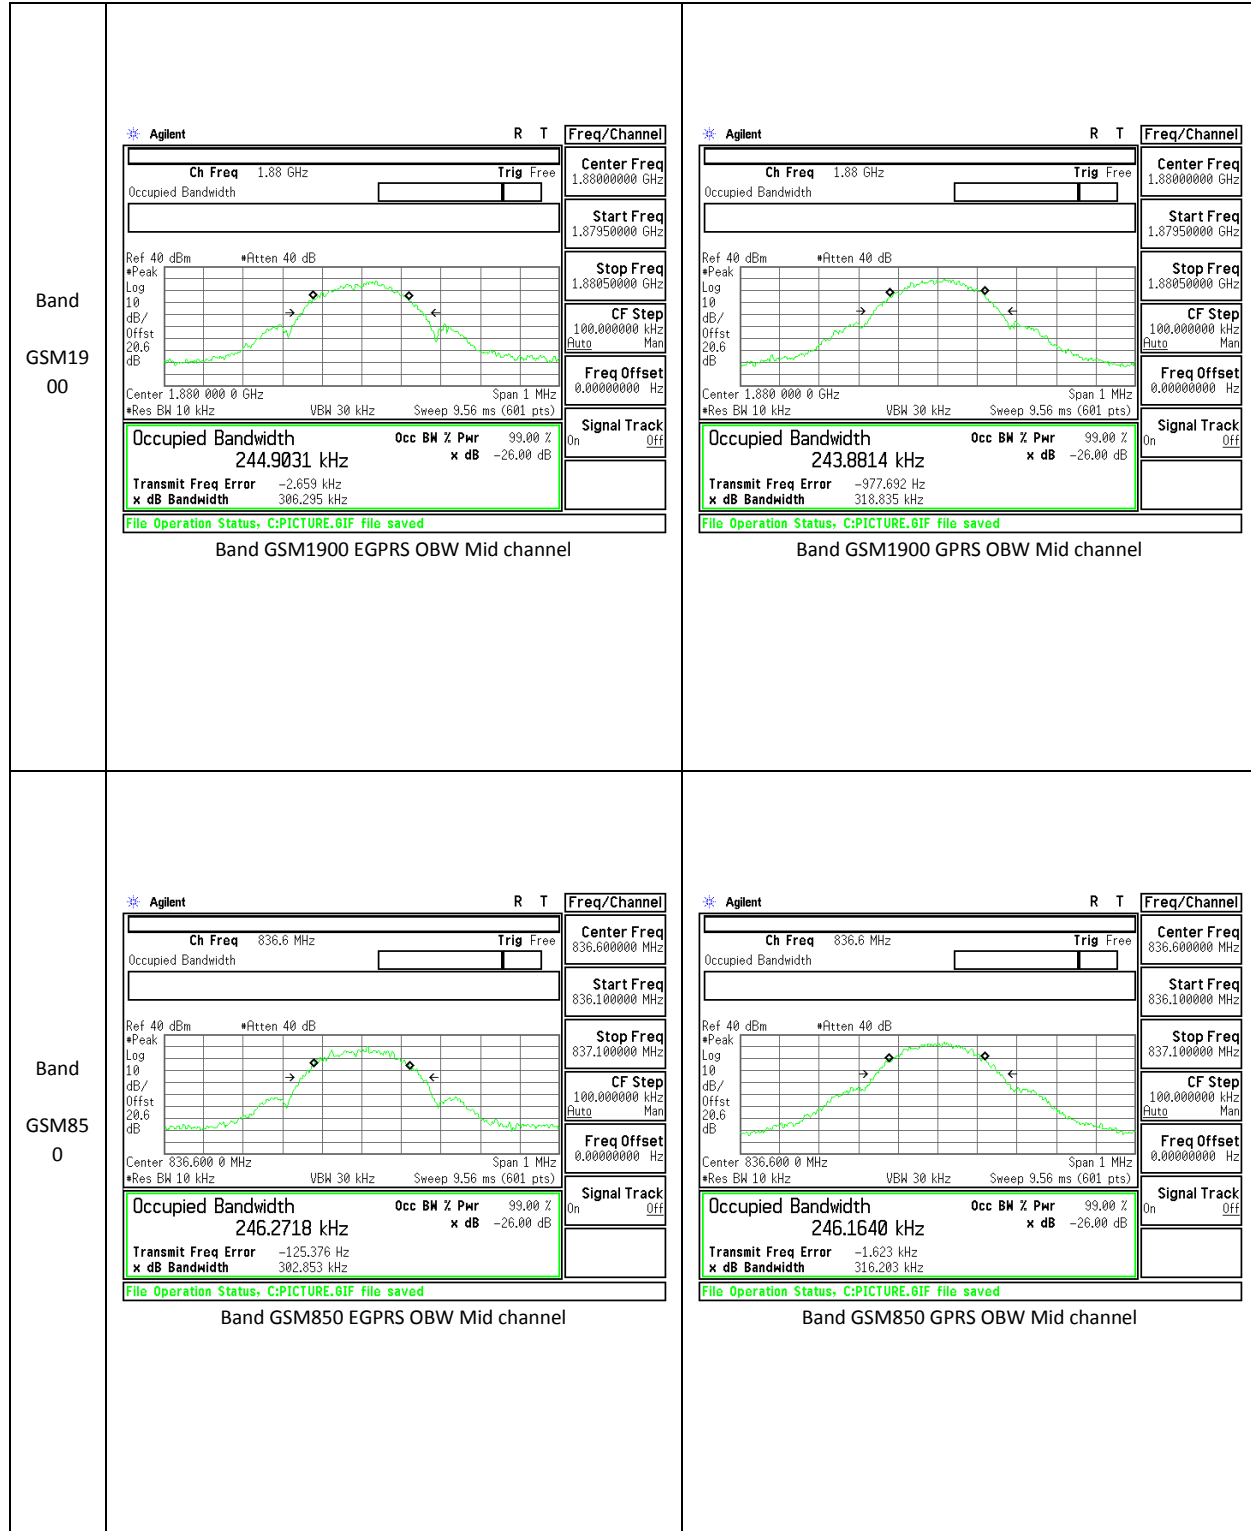

<p>Band LTE5 10MHz</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 829.000000 MHz</p> <p>Stop Freq 844.000000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9318 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 2.954 kHz x dB Bandwidth 3.642 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 829.000000 MHz</p> <p>Stop Freq 844.000000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9643 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 16.977 kHz x dB Bandwidth 3.746 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 10MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE5 5MHz</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 832.750000 MHz</p> <p>Stop Freq 840.250000 MHz</p> <p>CF Step 750.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.5035 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -8.961 kHz x dB Bandwidth 4.362 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 832.750000 MHz</p> <p>Stop Freq 840.250000 MHz</p> <p>CF Step 750.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.5070 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -79.879 Hz x dB Bandwidth 4.350 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 5MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE5 3MHz</p>	<p>Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 834.250000 MHz Stop Freq 838.750000 MHz CF Step 450.000000 kHz Freq Offset 0.00000000 Hz Res BW 43 kHz VBN 130 kHz Sweep 2.36 ms (601 pts) Span 4.5 MHz Ref 40 dBm Atten 40 dB Log 10 dB/Offst 20.6 dB Occupied Bandwidth 2.6867 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.251 kHz x dB Bandwidth 2.974 MHz File Operation Status, C:PICTURE.GIF file saved Band LTE5 3MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 834.250000 MHz Stop Freq 838.750000 MHz CF Step 450.000000 kHz Freq Offset 0.00000000 Hz Res BW 43 kHz VBN 130 kHz Sweep 2.36 ms (601 pts) Span 4.5 MHz Ref 40 dBm Atten 40 dB Log 10 dB/Offst 20.6 dB Occupied Bandwidth 2.6943 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.689 kHz x dB Bandwidth 2.939 MHz File Operation Status, C:PICTURE.GIF file saved Band LTE5 3MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE5 1.4MHz</p>	<p>Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 835.450000 MHz Stop Freq 837.550000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Res BW 20 kHz VBN 62 kHz Sweep 5.04 ms (601 pts) Span 2.1 MHz Ref 40 dBm Atten 40 dB Log 10 dB/Offst 20.6 dB Occupied Bandwidth 1.0806 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 2.177 kHz x dB Bandwidth 1.275 MHz File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 835.450000 MHz Stop Freq 837.550000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Res BW 20 kHz VBN 62 kHz Sweep 5.04 ms (601 pts) Span 2.1 MHz Ref 40 dBm Atten 40 dB Log 10 dB/Offst 20.6 dB Occupied Bandwidth 1.0873 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.831 kHz x dB Bandwidth 1.289 MHz File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz OBW QPSK Mid Channel FRB.gif</p>

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r02


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


RESULTS


10.2.1. BAND EDGE PLOTS


<p>Band Band 2 WCDMA</p>	<p>Band WCDMA B2 HSDPA CBE</p>	<p>Band WCDMA B2 HSDPA CBE</p>
<p>Band Band 2 WCDMA</p>	<p>Band WCDMA B2 REL99 CBE</p>	<p>Band WCDMA B2 REL99 CBE</p>

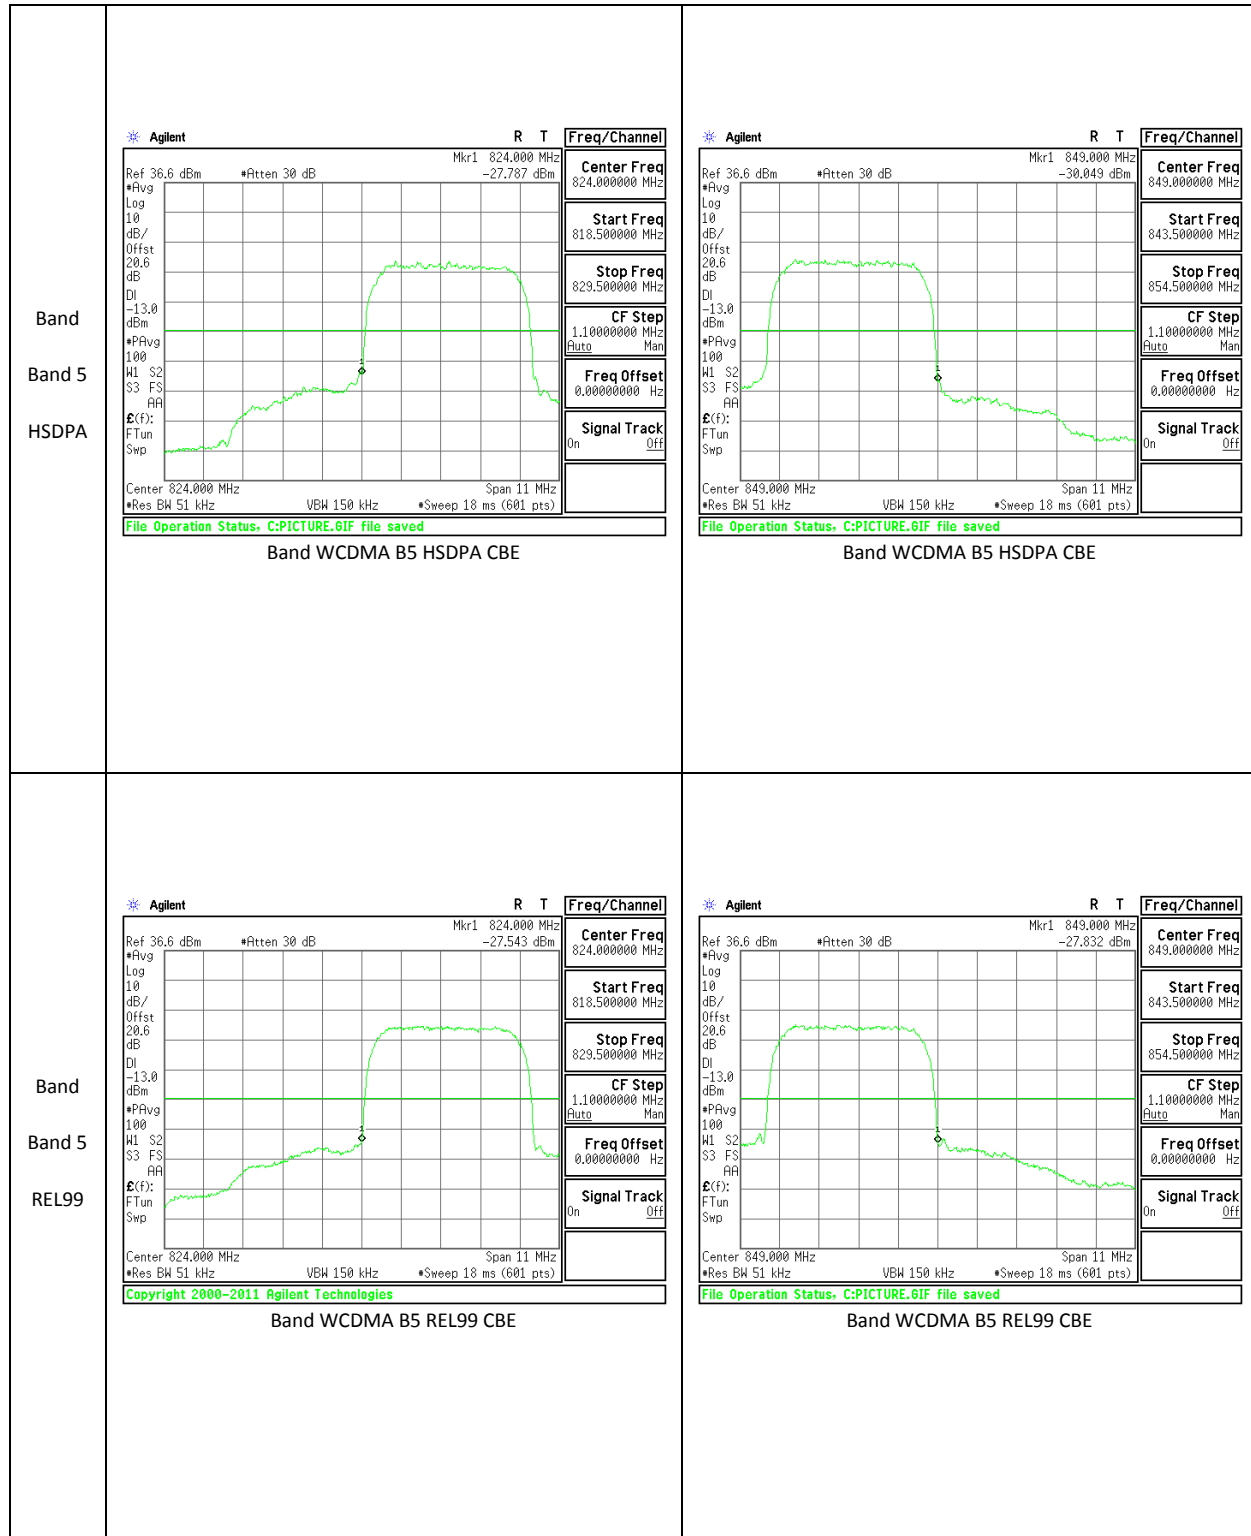


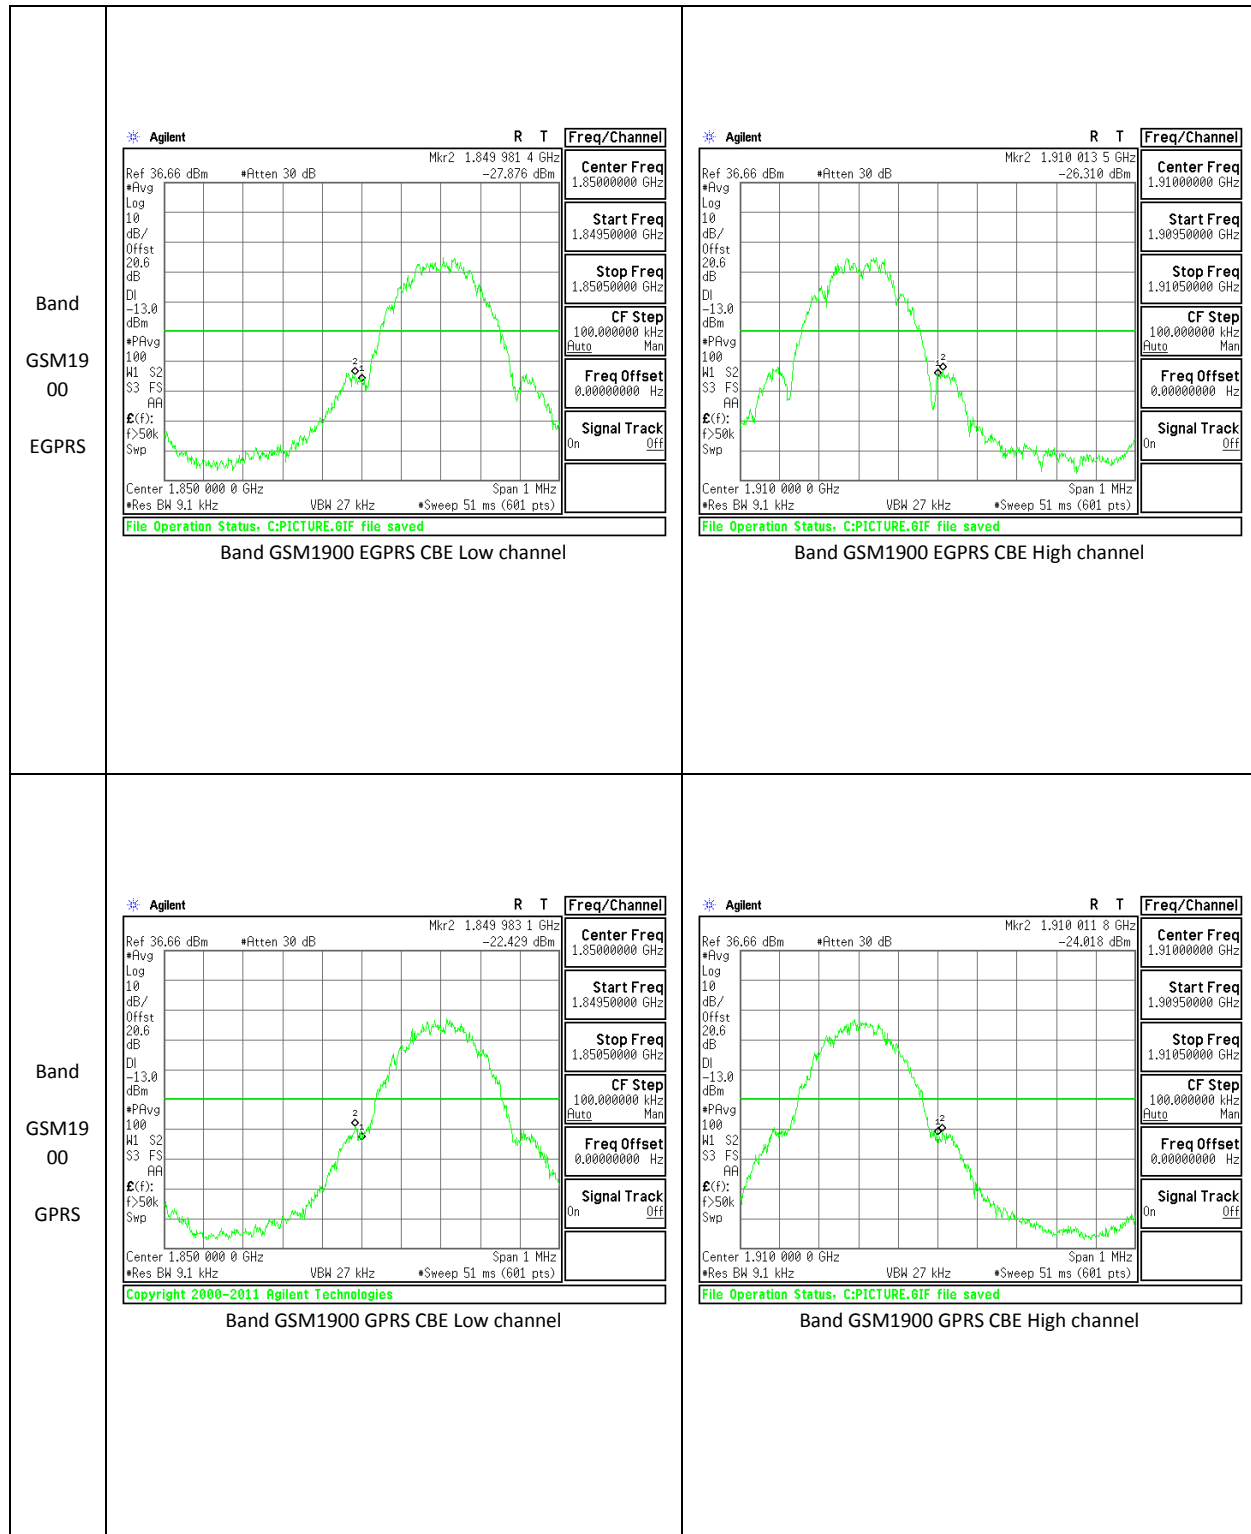


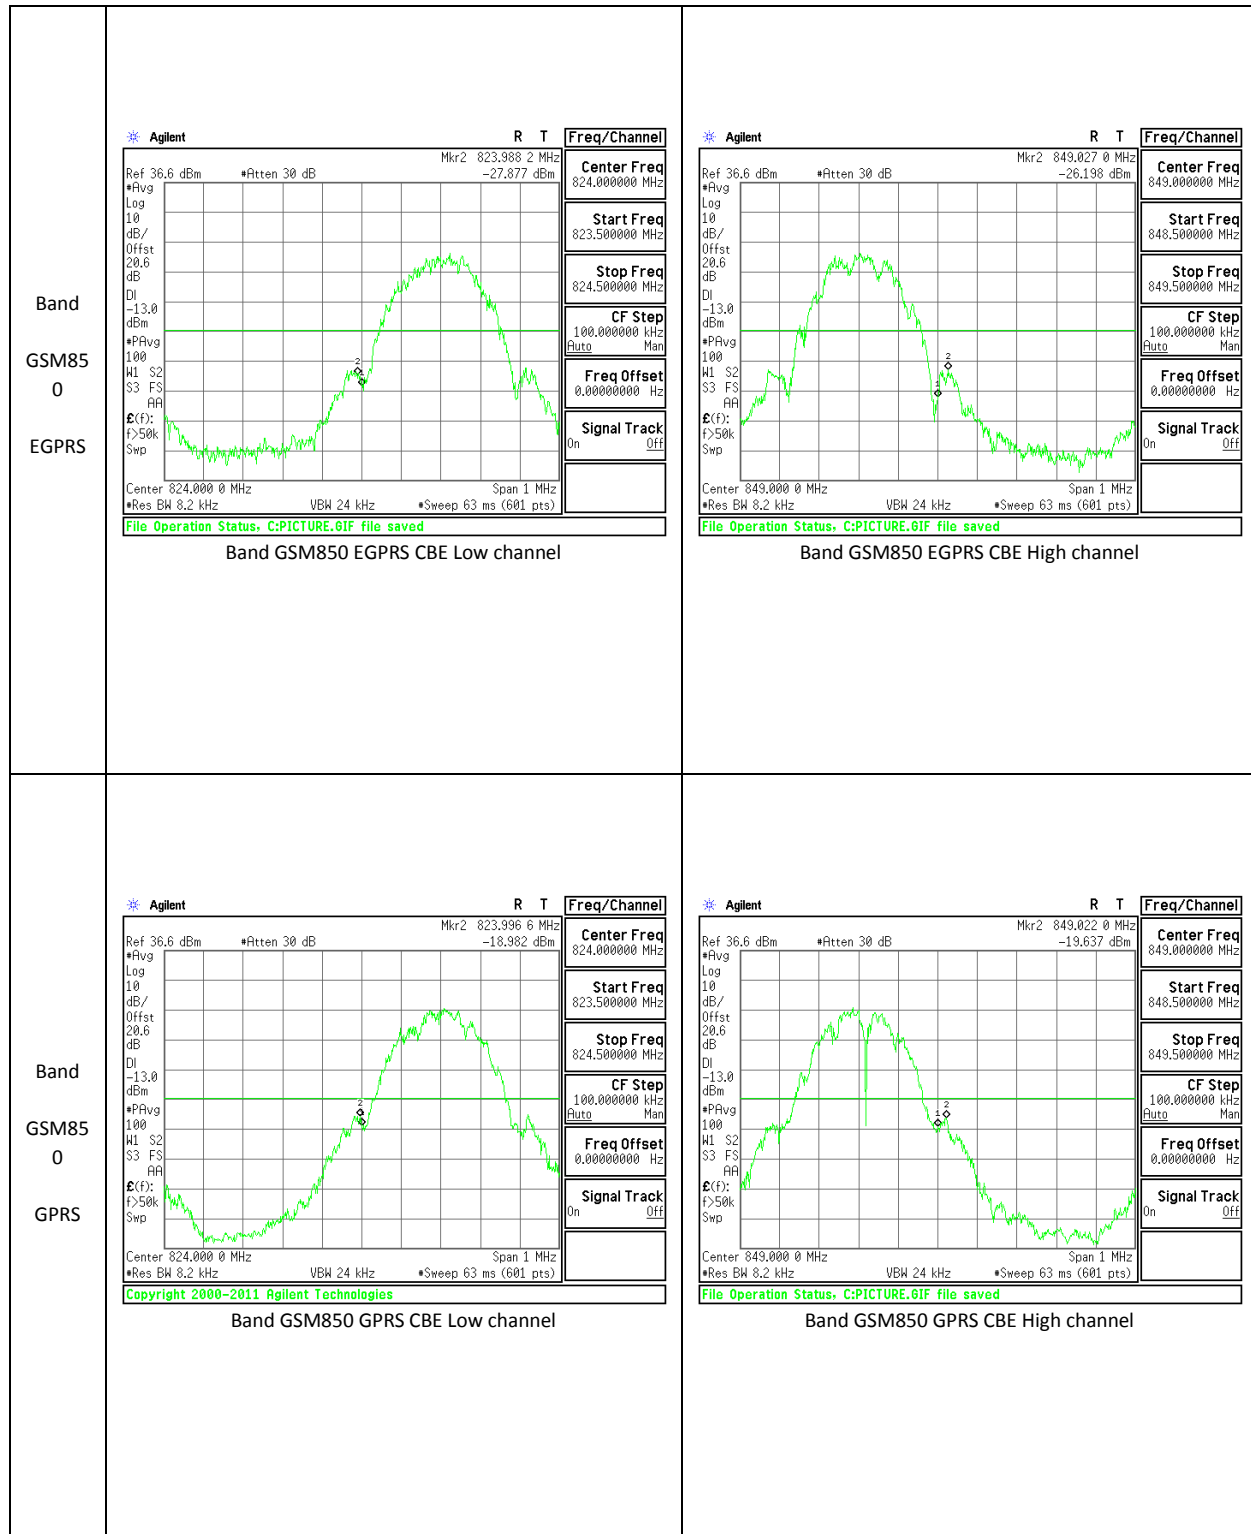


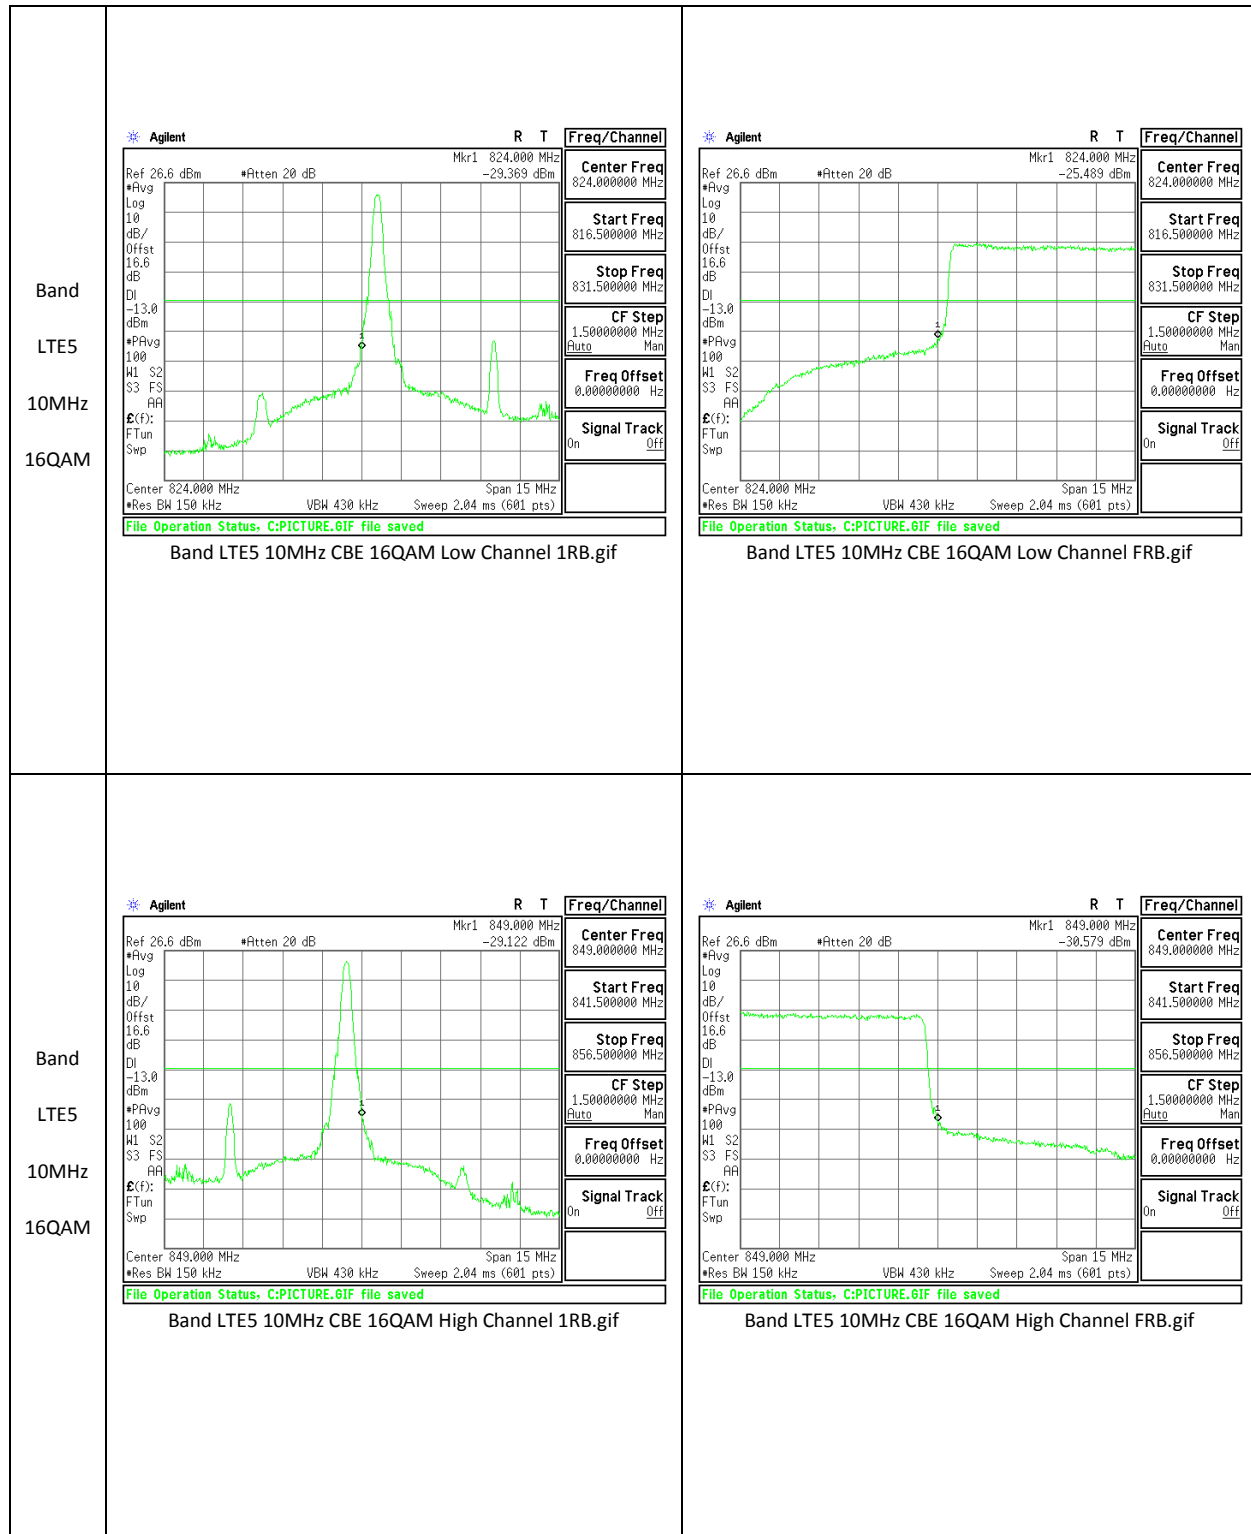


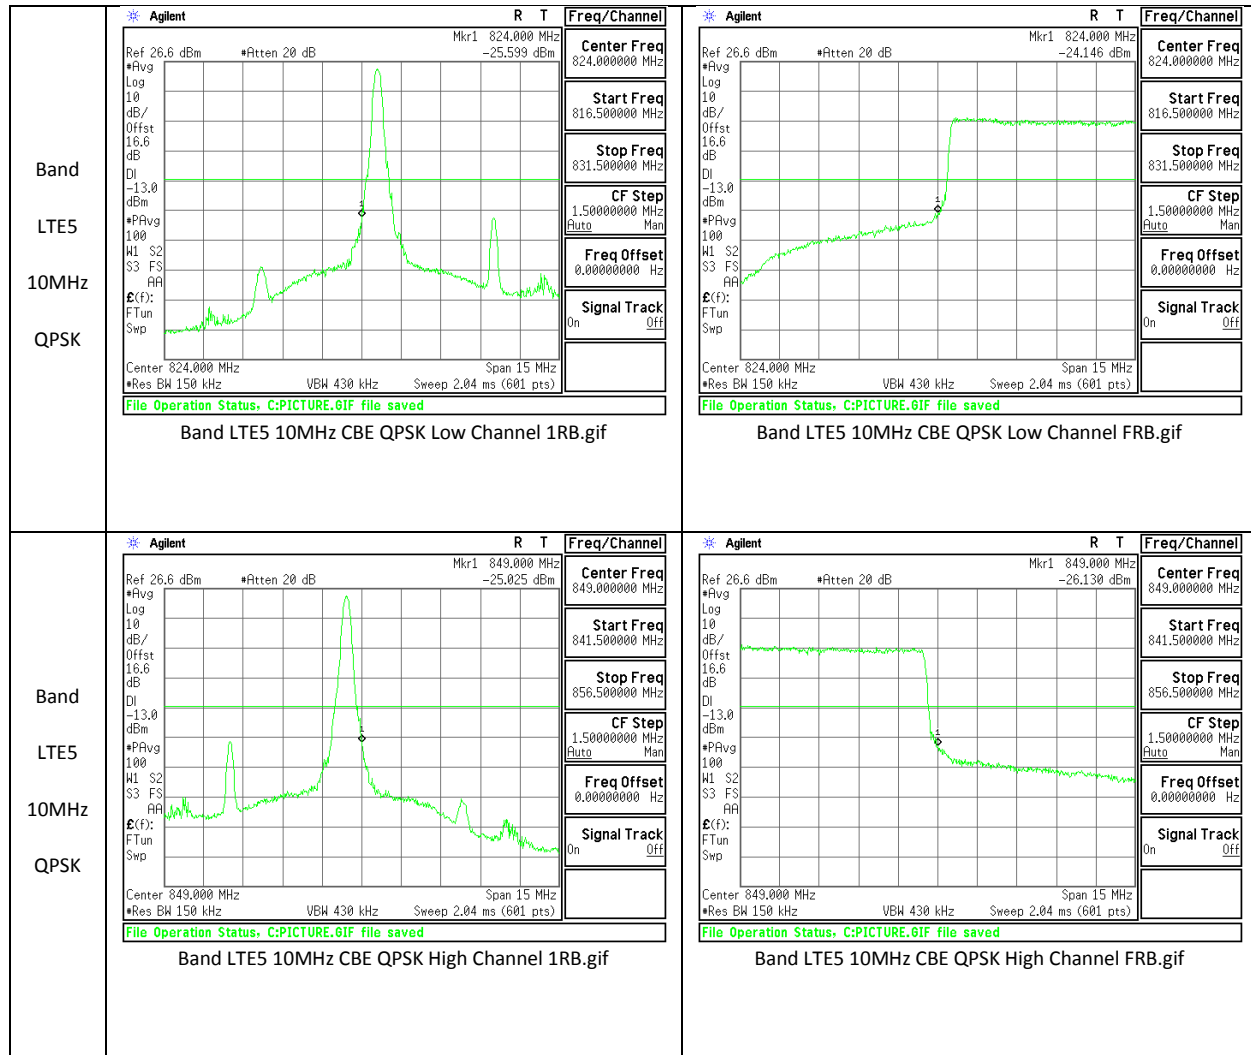





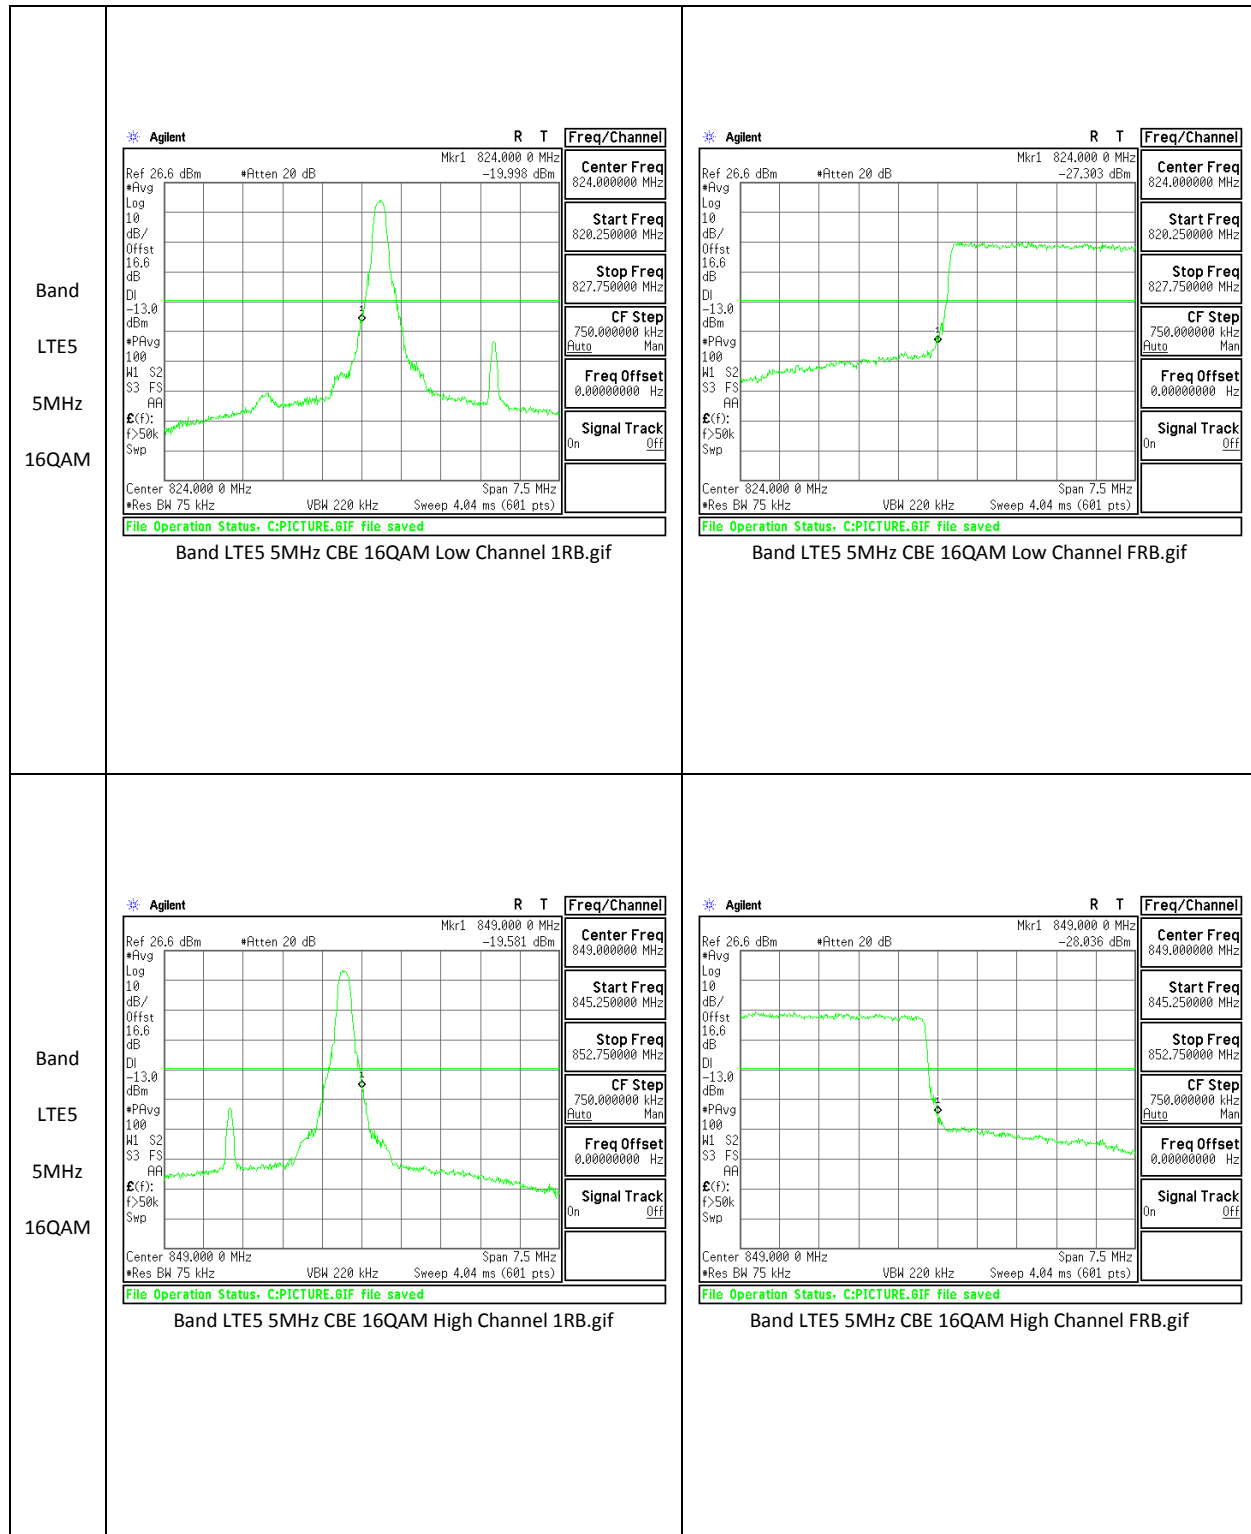


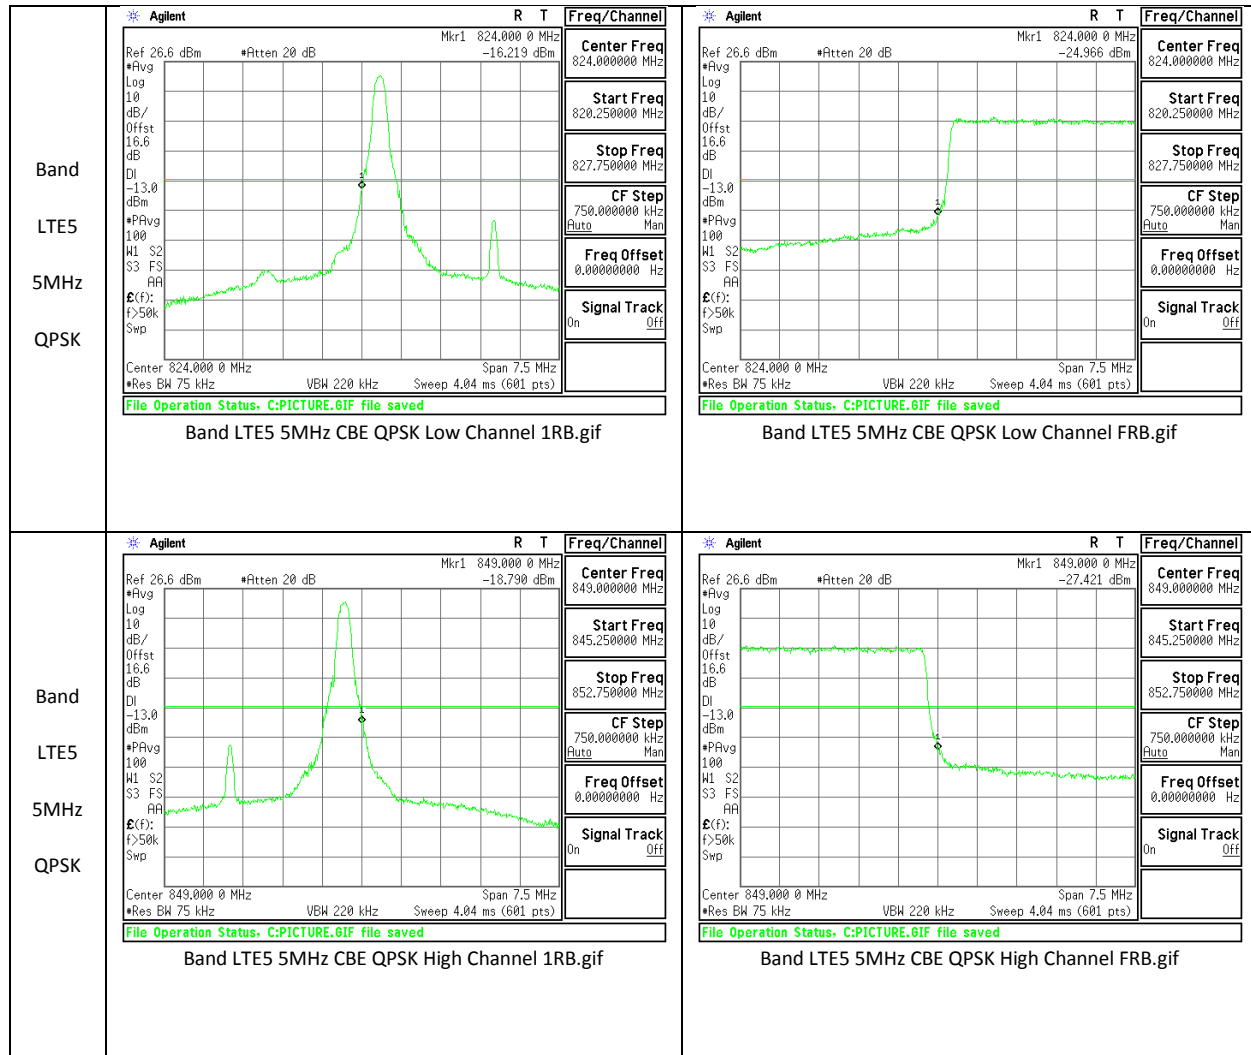

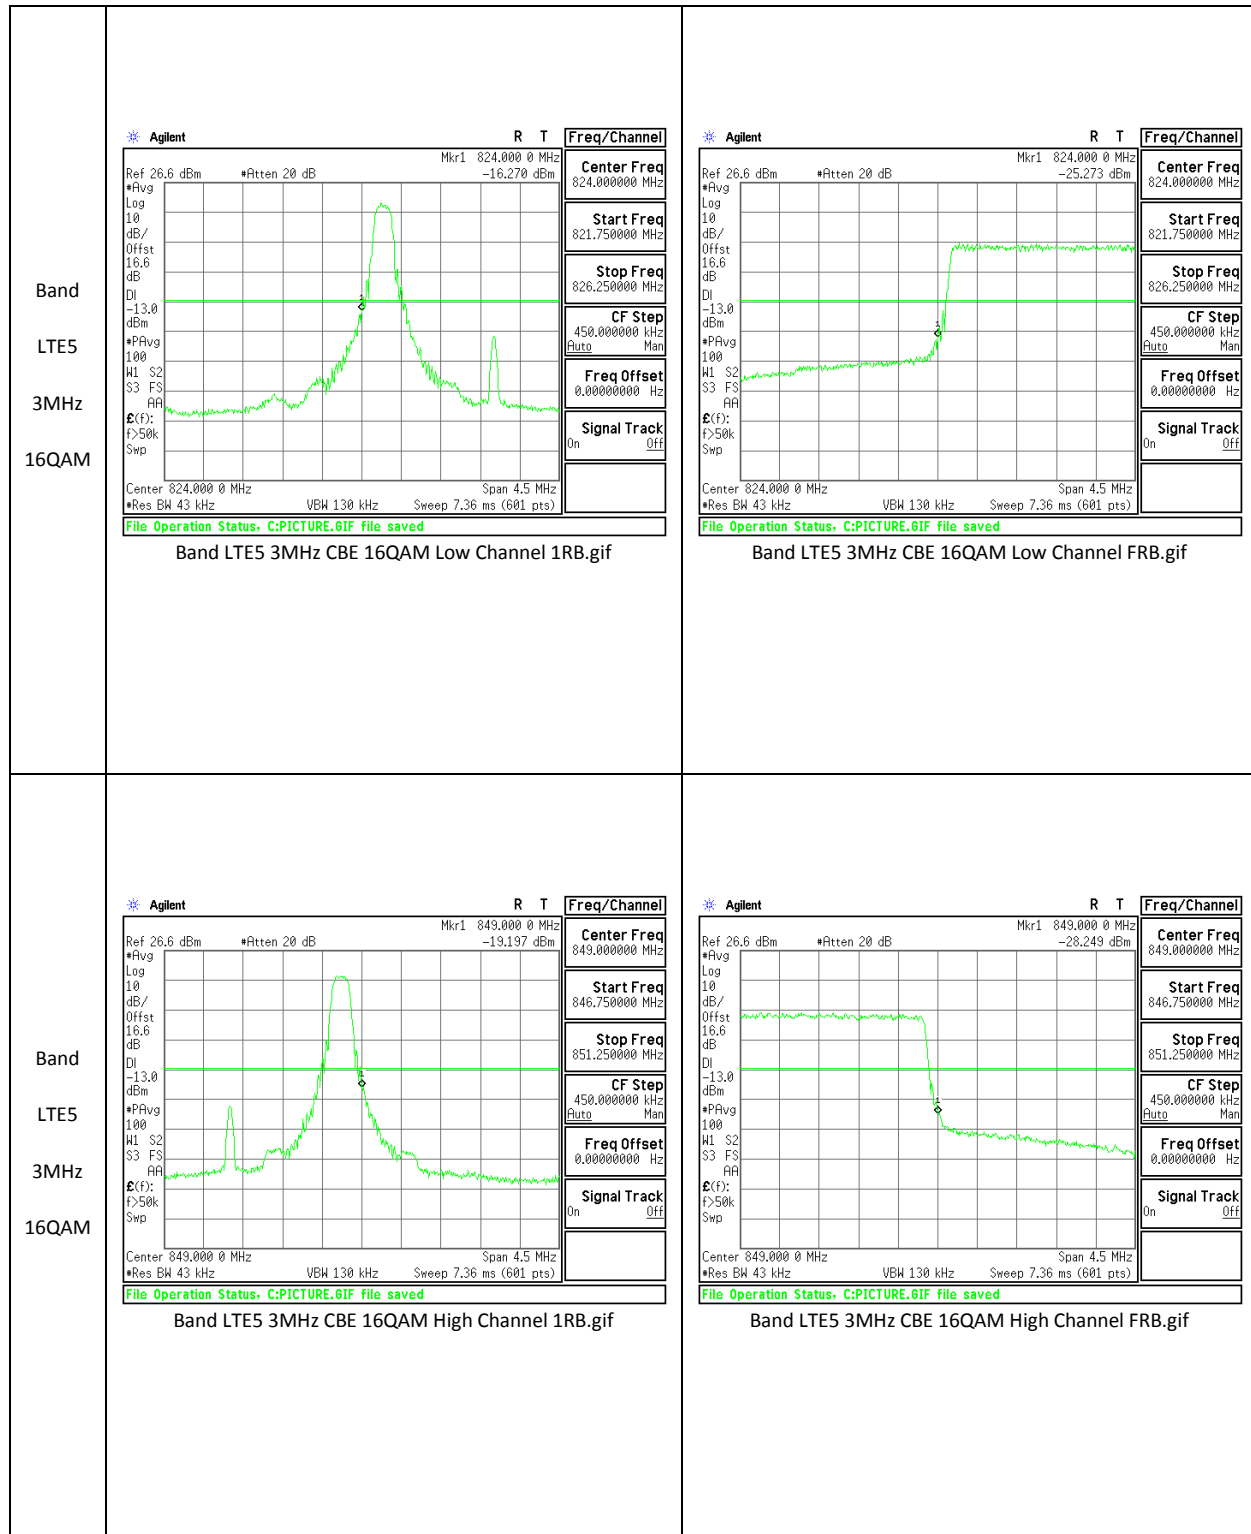

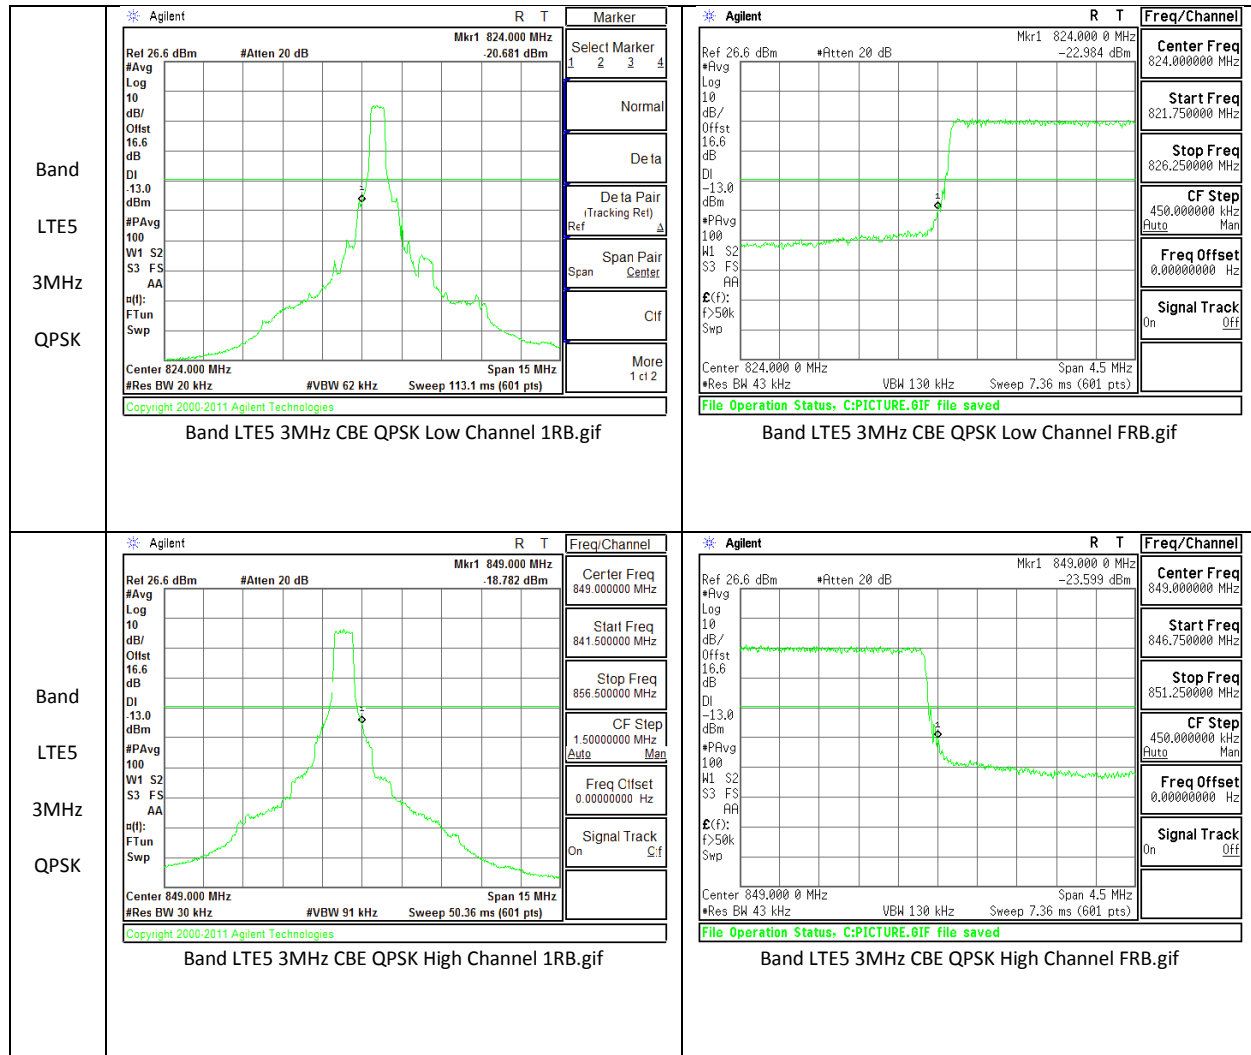

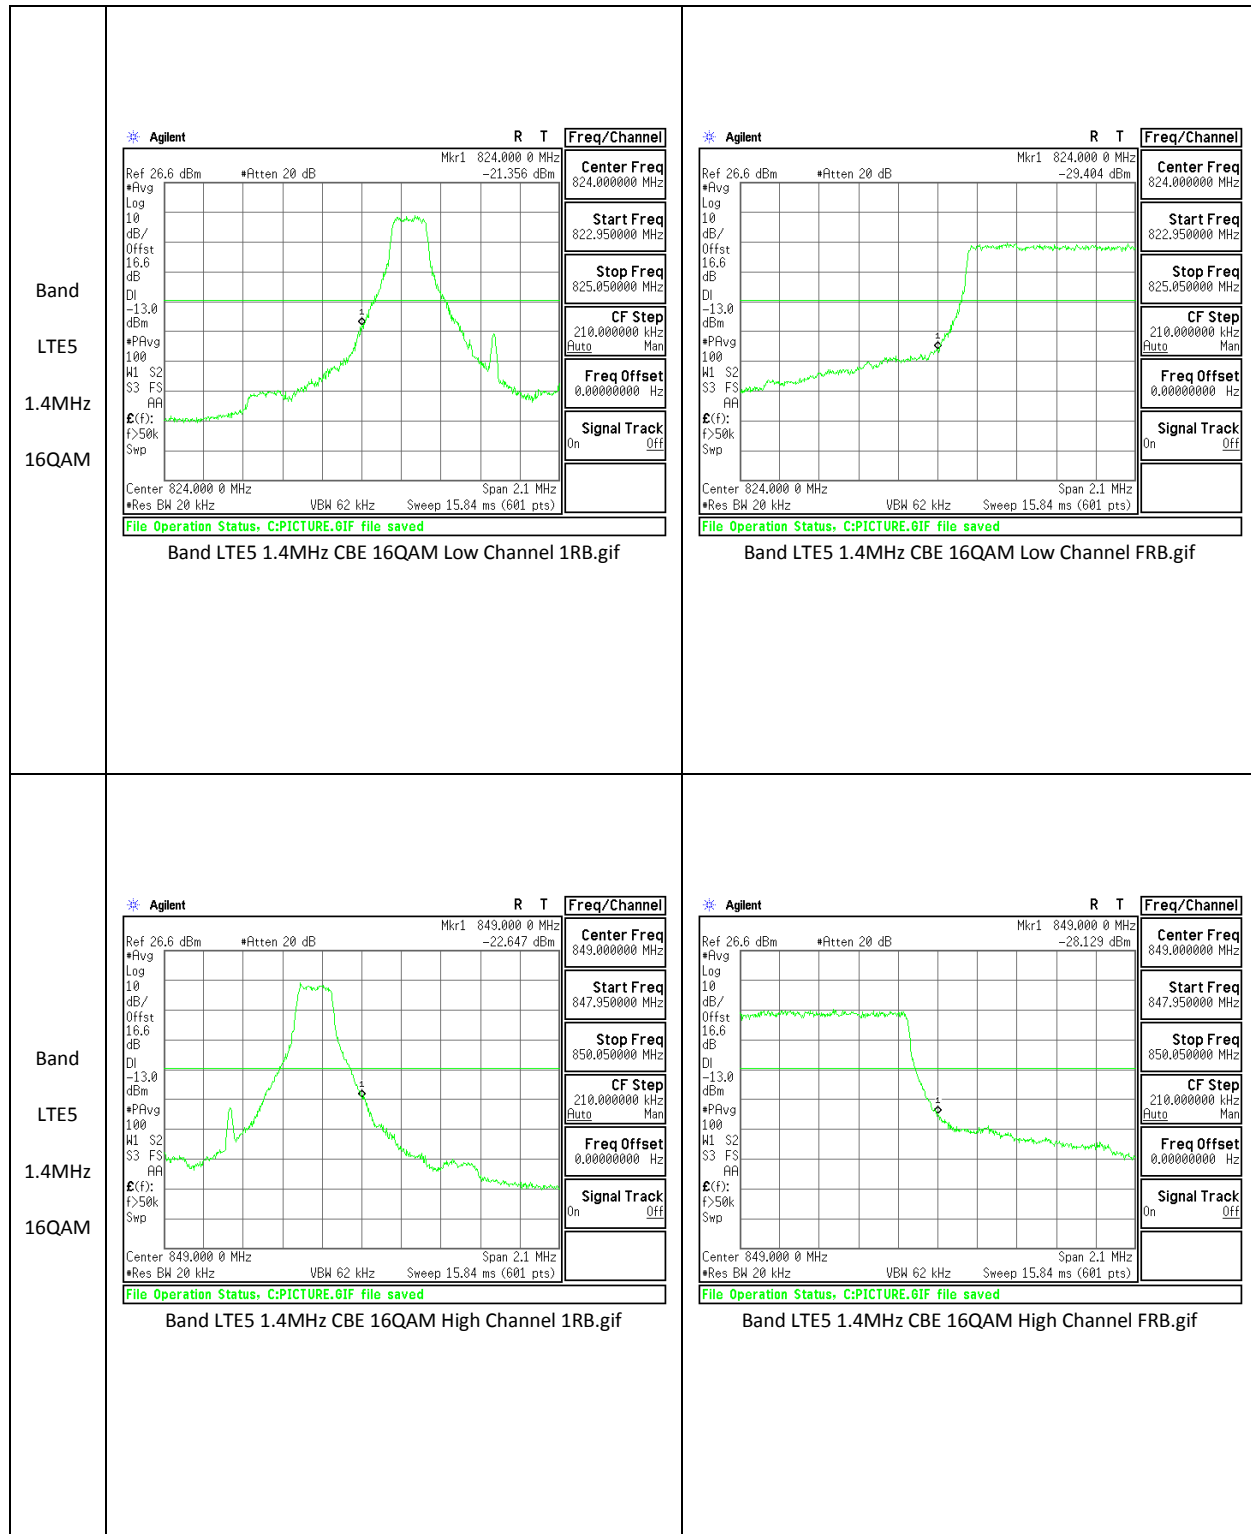
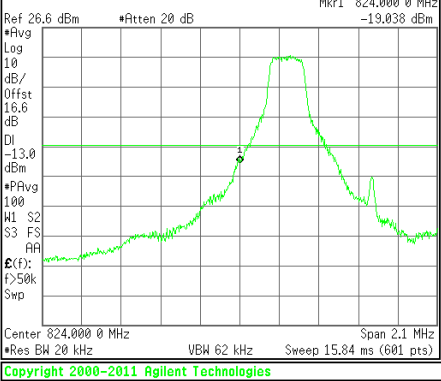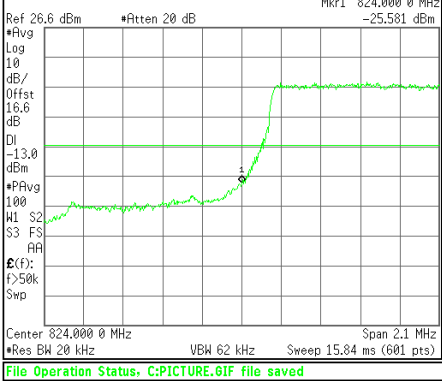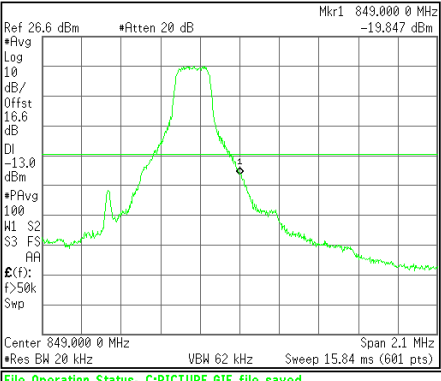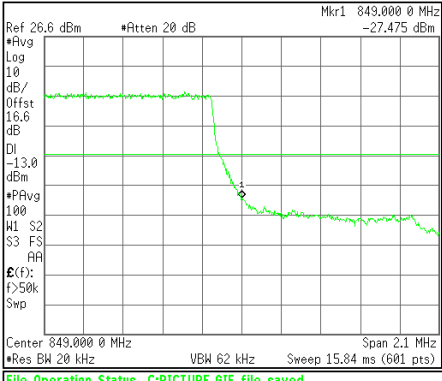
<p>Band LTE5 1.4MHz QPSK</p>	 <p>Agilent R T Freq/Channel Ref 26.6 dBm *Atten 20 dB Mkr1 824.000 0 MHz Center Freq 824.000000 MHz Start Freq 822.950000 MHz Stop Freq 825.050000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 0 MHz Span 2.1 MHz *Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (601 pts) Copyright 2000-2011 Agilent Technologies</p> <p>Band LTE5 1.4MHz CBE QPSK Low Channel 1RB.gif</p>	 <p>Agilent R T Freq/Channel Ref 26.6 dBm *Atten 20 dB Mkr1 824.000 0 MHz Center Freq 824.000000 MHz Start Freq 822.950000 MHz Stop Freq 825.050000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 0 MHz Span 2.1 MHz *Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (601 pts) File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 1.4MHz CBE QPSK Low Channel FRB.gif</p>
<p>Band LTE5 1.4MHz QPSK</p>	 <p>Agilent R T Freq/Channel Ref 26.6 dBm *Atten 20 dB Mkr1 849.000 0 MHz Center Freq 849.000000 MHz Start Freq 847.950000 MHz Stop Freq 850.050000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 0 MHz Span 2.1 MHz *Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (601 pts) File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 1.4MHz CBE QPSK High Channel 1RB.gif</p>	 <p>Agilent R T Freq/Channel Ref 26.6 dBm *Atten 20 dB Mkr1 849.000 0 MHz Center Freq 849.000000 MHz Start Freq 847.950000 MHz Stop Freq 850.050000 MHz CF Step 210.000000 kHz Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 0 MHz Span 2.1 MHz *Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (601 pts) File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE5 1.4MHz CBE QPSK High Channel FRB.gif</p>

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238,

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-23.03	-13	-10.03
		836.6	-22.48	-13	-9.48
		848.8	-22.84	-13	9.84
	EGPRS	824.2	-22.87	-13	-9.87
		836.6	-22.01	-13	-9.01
		848.8	-23.05	-13	-10.05
GSM1900	GPRS	1850.2	-23.34	-13	-10.34
		1880	-23.12	-13	-10.12
		1909.8	-23.08	-13	-10.08
	EGPRS	1850.2	-23.10	-13	-10.10
		1880	-23.04	-13	-10.04
		1909.8	-23.00	-13	-10.0

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 5	REL99	826.4	-22.98	-13	-9.98
		836.6	-22.55	-13	-9.55
		846.6	-23.45	-13	-10.45
	HSDPA	826.4	-23.02	-13	-10.02
		836.6	-23.35	-13	-10.35
		846.6	-22.98	-13	-9.98
Band 2	REL99	1852.4	-22.92	-13	-9.92
		1880	-23.20	-13	-10.20
		1907.6	-22.43	-13	-9.43
	HSDPA	1852.4	-22.96	-13	-9.96
		1880	-21.42	-13	-8.42
		1907.6	-22.94	-13	-9.94


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-23.63	-13	-10.63
			836.5	-23.71	-13	-10.71
			844	-23.31	-13	-10.31
		16QAM	829	-24.20	-13	-11.20
			836.5	-24.12	-13	-11.12
			844	-24.10	-13	-11.10



Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-23.62	-13	-10.62
			836.5	-24.10	-13	-11.10
			846.5	-24.03	-13	-11.03
		16QAM	826.5	-23.83	-13	-10.83
			836.5	-24.67	-13	-11.67
			846.5	-24.98	-13	-11.98


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	3	QPSK	825.5	-24.85	-13	-11.85
			836.5	-24.41	-13	-11.41
			847.5	-24.71	-13	-11.71
		16QAM	825.5	-24.63	-13	-11.63
			836.5	-24.60	-13	-11.60
			847.5	-24.53	-13	-11.53


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	1.4	QPSK	824.7	-24.66	-13	-11.66
			836.5	-23.78	-13	-10.78
			848.3	-24.89	-13	-11.89
		16QAM	824.7	-23.97	-13	-10.97
			836.5	-24.55	-13	-11.55
			848.3	-23.81	-13	-10.81


10.3.2. OUT OF BAND EMISSIONS PLOTS

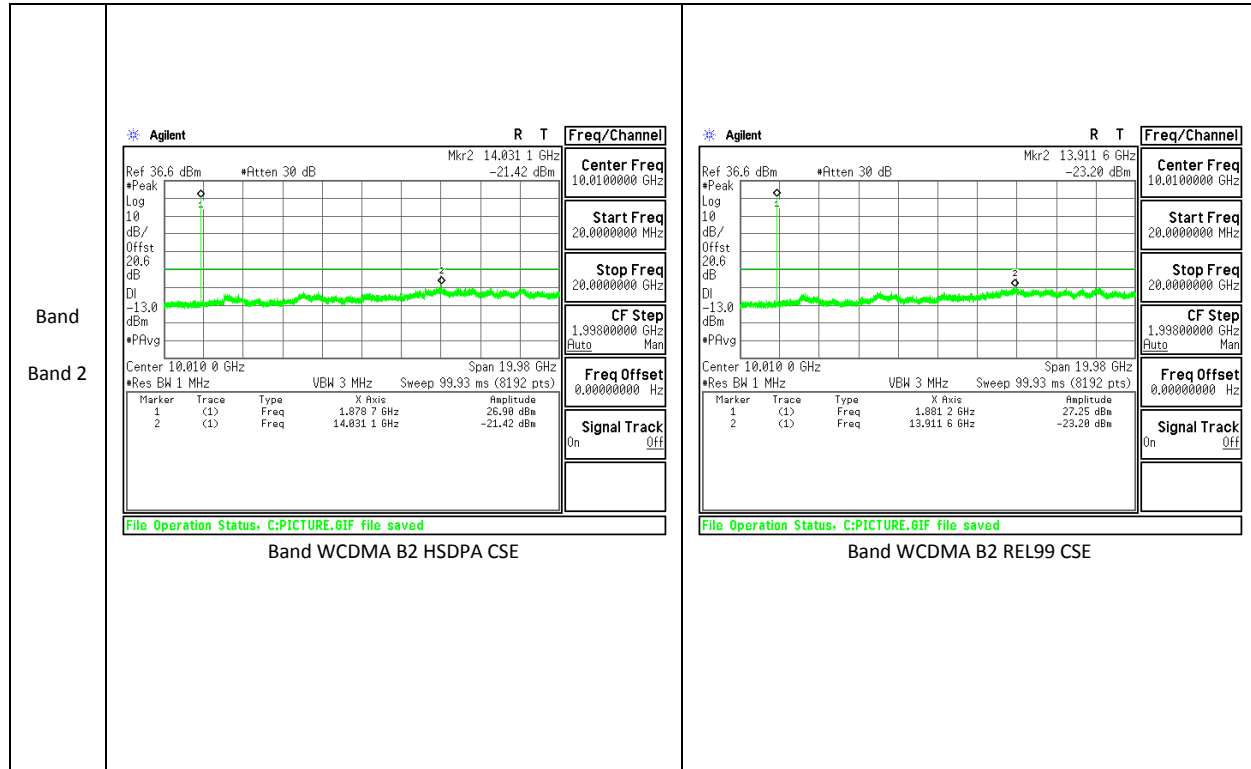

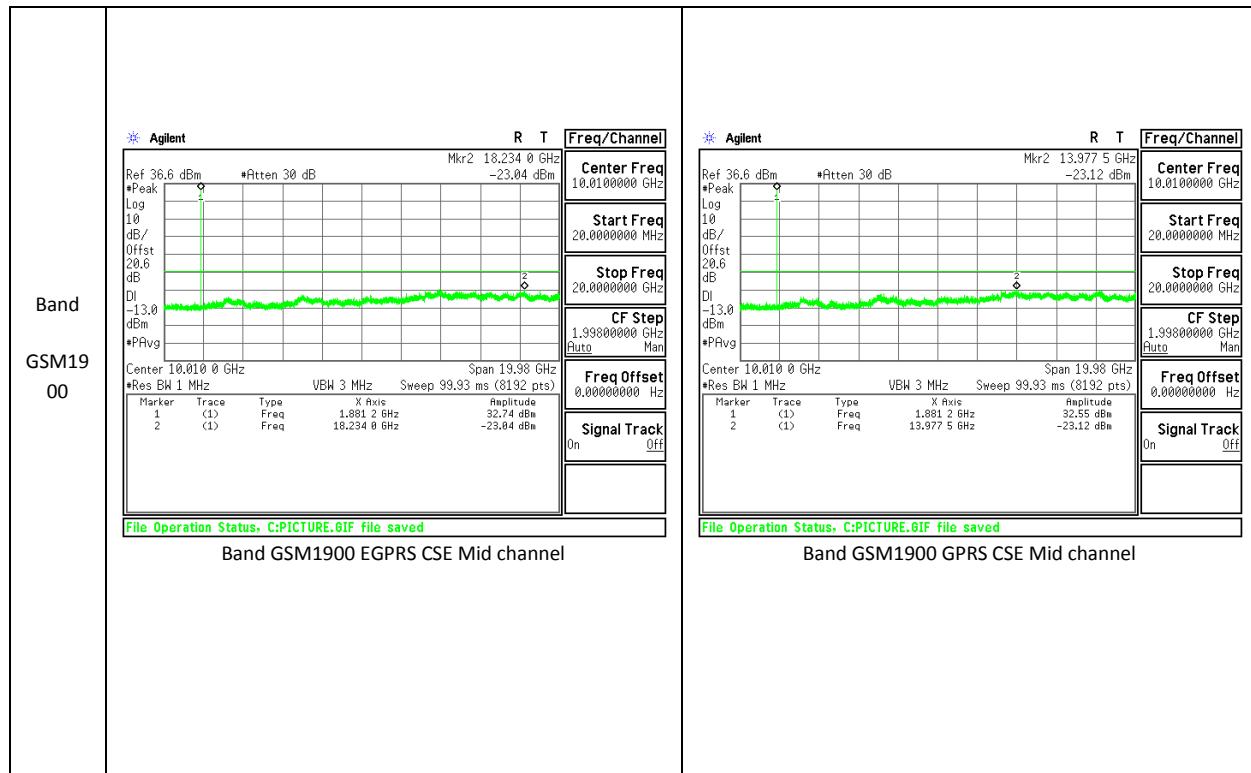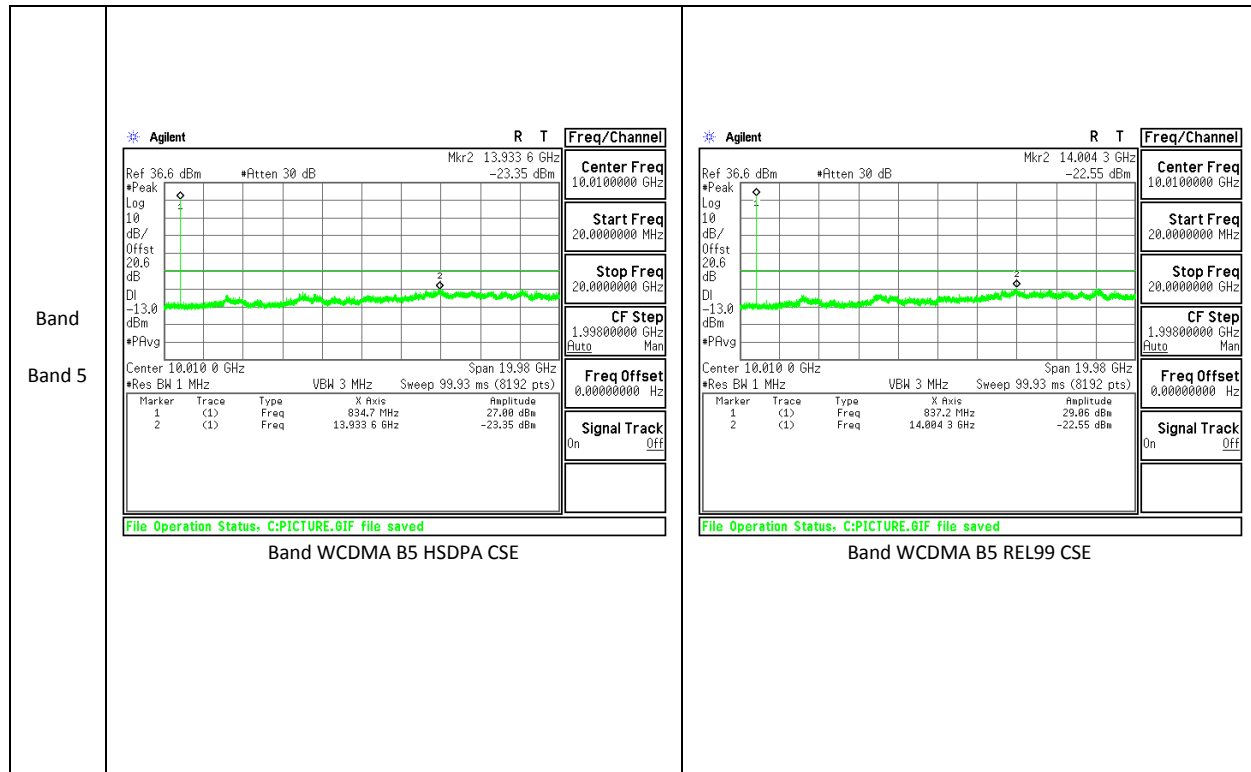

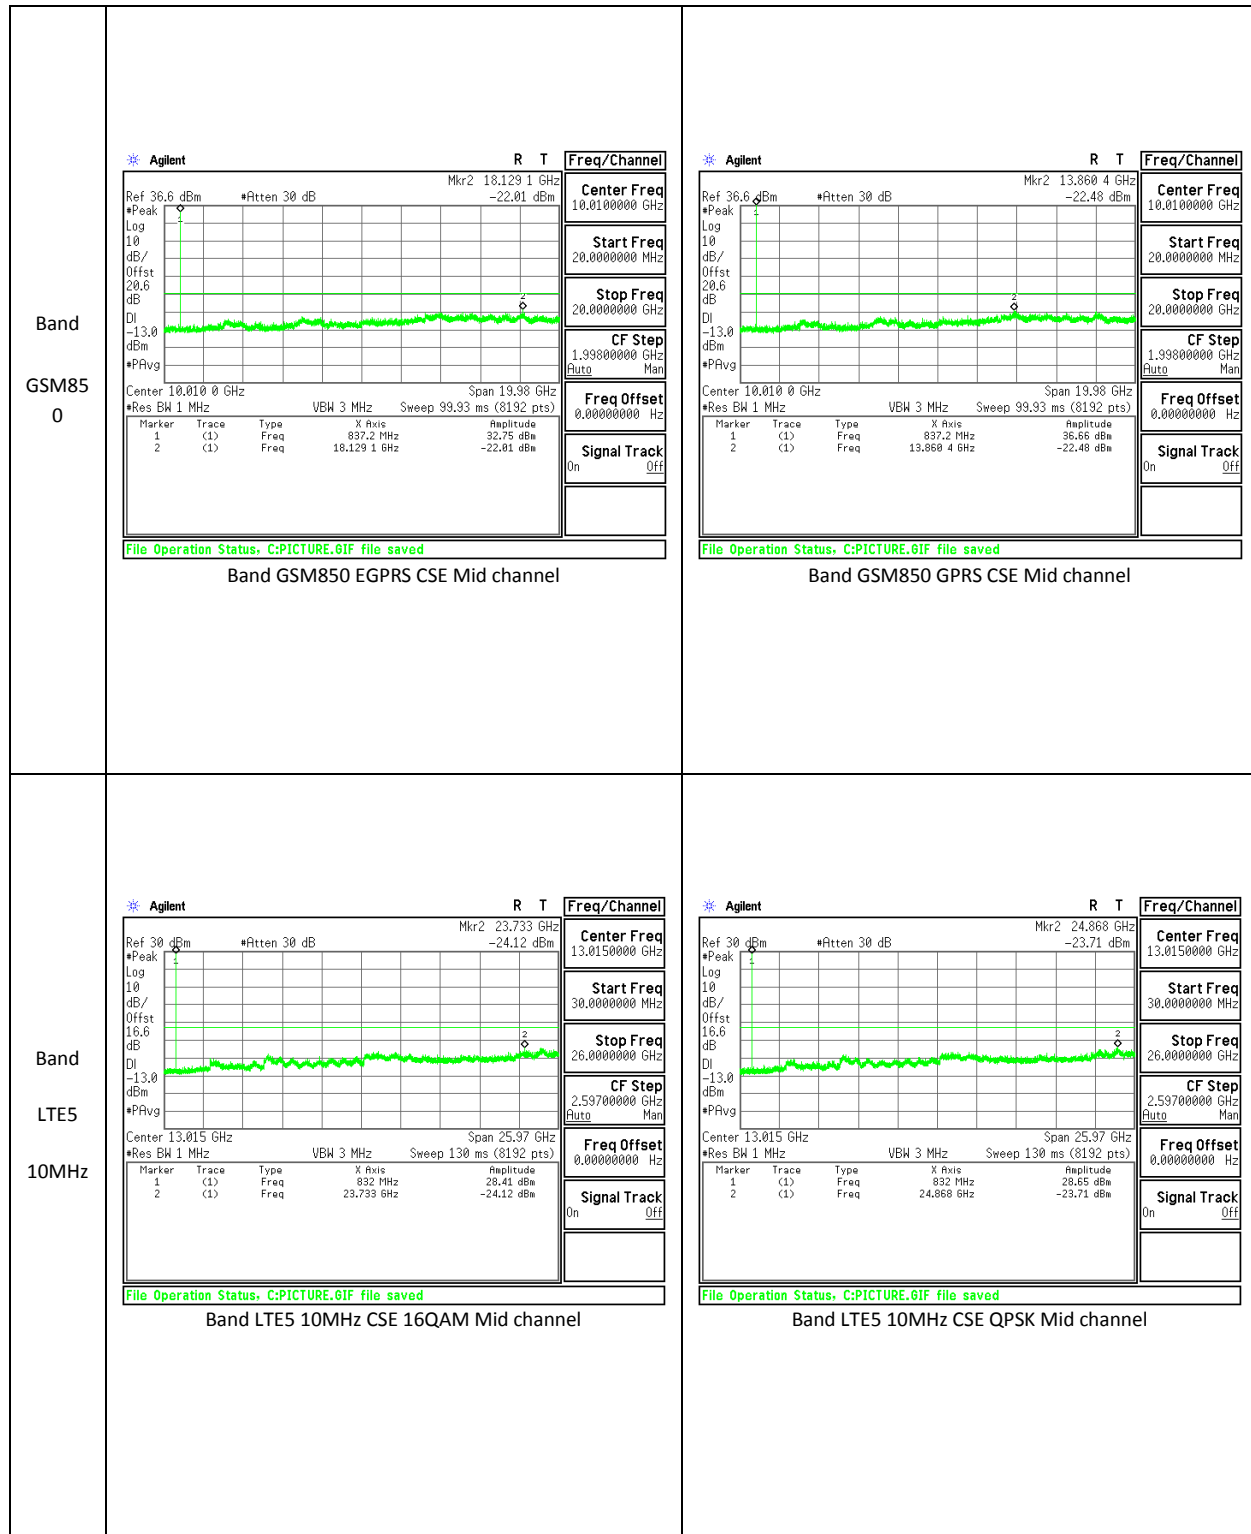

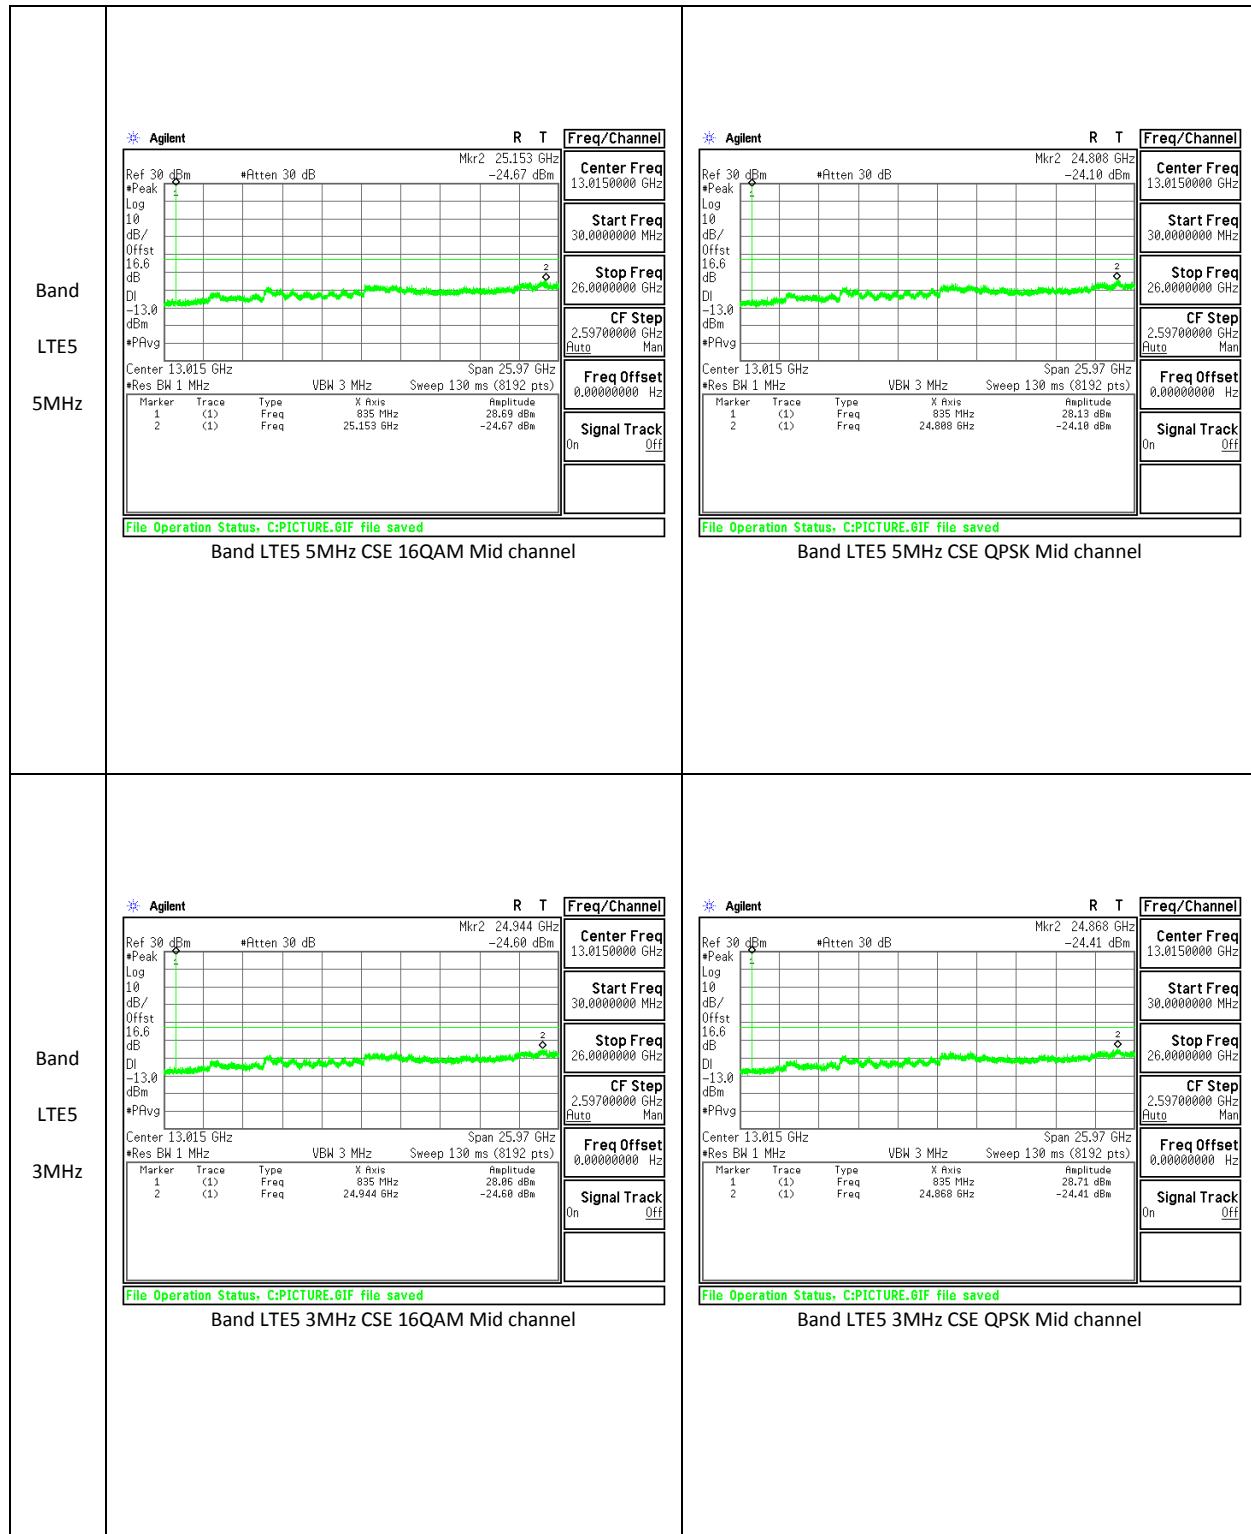

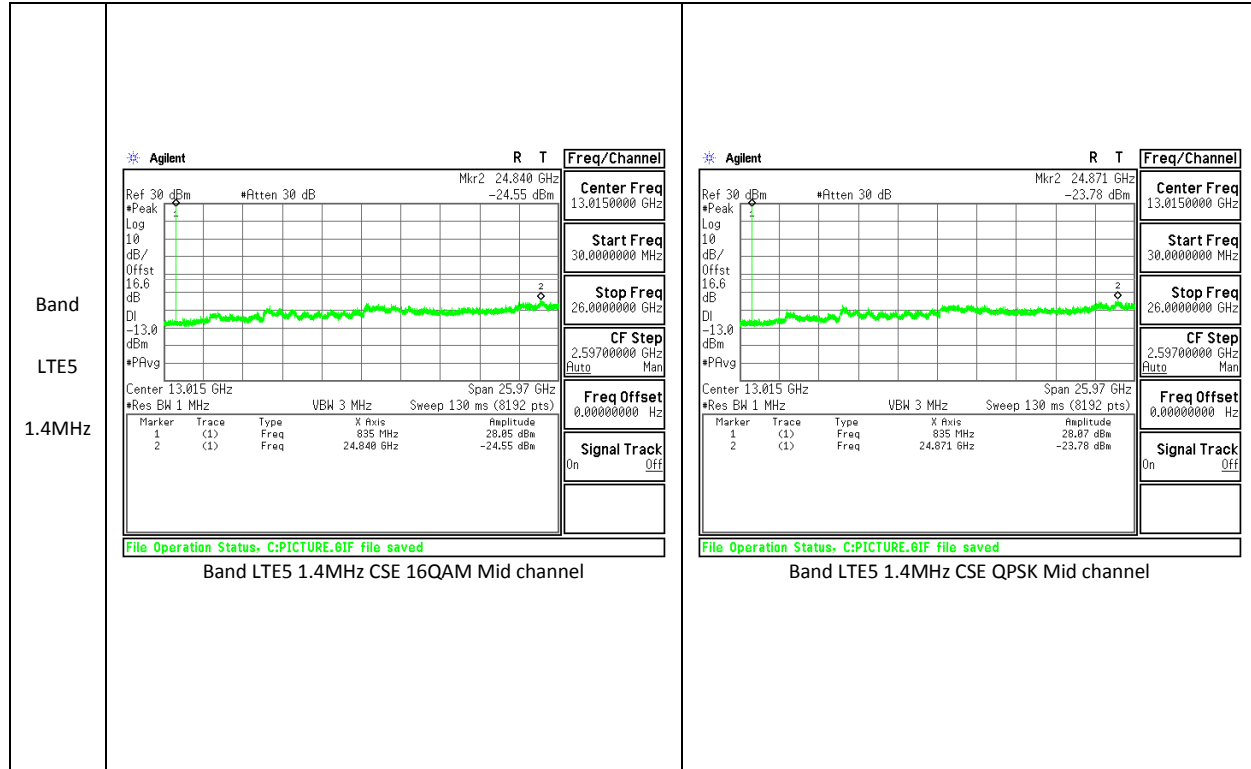

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 1900, Channel 661 - 1880MHz

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000040	-0.002	2.5
3.80	40	1880.000022	0.007	2.5
3.80	30	1880.000021	0.008	2.5
3.80	20	1880.000036	0	2.5
3.80	10	1880.000045	-0.005	2.5
3.80	0	1880.000047	-0.006	2.5
3.80	-10	1880.000042	-0.003	2.5
3.80	-20	1880.000036	0.000	2.5
3.80	-30	1880.000042	-0.003	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1880.000036	0	2.5
4.37	20	1880.000044	-0.004	2.5
3.3(End of volt)	20	1880.000042	-0.003	2.5

GPRS 850 CELL BAND, – CHANNEL 190, Frequency 836.6MHz

Reference Frequency: PCS Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.600025	-0.002	2.5
3.80	40	836.600028	-0.005	2.5
3.80	30	836.600030	-0.008	2.5
3.80	20	836.600023	0	2.5
3.80	10	836.600026	-0.004	2.5
3.80	0	836.600027	-0.004	2.5
3.80	-10	836.600026	-0.004	2.5
3.80	-20	836.600025	-0.002	2.5
3.80	-30	836.600024	0.000	2.5

Reference Frequency: PCS Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.600023	0	2.5
4.37	20	836.6000241	-0.001	2.5
3.3(End of volt)	20	836.6000212	0.003	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW \geq OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points \geq span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	19.44	87.9
		9400	1880	20.01	100.2
		9538	1907.6	19.53	89.7
	HSDPA	9262	1852.4	18.83	76.4
		9400	1880	19.65	92.3
		9538	1907.6	18.95	78.5
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	20.55	113.5
		4183	836.6	20.20	104.7
		4233	846.6	20.34	108.1
	HSDPA	4132	826.4	19.49	88.9
		4183	836.6	19.39	86.9
		4233	846.6	19.09	81.1
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	25.94	392.6
		661	1880	25.92	390.8
		810	1909.8	26.09	406.4
	EGPRS	512	1850.2	23.94	247.7
		661	1880	24.03	252.9
		810	1909.8	23.75	237.1

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	27.28	534.6
		190	836.6	27.46	557.2
		251	848.8	28.68	737.9
	EGPRS	128	824.2	24.45	278.6
		190	836.6	24.61	289.1
		251	848.8	24.36	272.9

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	20.51	112.5
			1/0	836.5	20.66	116.4
			1/0	844	19.99	99.8
		16QAM	1/0	829	19.59	91.00
			1/0	836.5	19.81	95.7
			1/0	844	19.31	85.3

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	20.19	104.5
			1/0	836.5	20.65	116.1
			1/0	846.5	19.86	96.8
		16QAM	1/0	826.5	19.28	84.7
			1/0	836.5	19.85	96.6
			1/0	846.5	18.99	79.3

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	3	QPSK	1/0	825.5	20.28	106.7
			1/0	836.5	20.82	120.8
			1/0	847.5	20.19	104.5
		16QAM	1/0	825.5	19.59	91.00
			1/0	836.5	19.86	96.8
			1/0	847.5	19.48	88.7

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	1.4	QPSK	1/0	824.7	20.55	113.5
			1/0	836.5	20.08	101.8
			1/0	848.3	19.88	97.3
		16QAM	1/0	824.7	19.26	84.3
			1/0	836.5	19.59	91.00
			1/0	848.3	18.99	79.3

11.1.2. ERP/EIRP DATA

Band LTE5 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B								
	Company:		Samsung						
	Project #:		14I19693						
	Date:		12/23/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		X-pos EUT Only						
	Mode:		LTE5 10MHz 16QAM						
	Test Equipment:								
	Receiving:		Sunol T243, and Chamber C N-type Cable						
	Substitution:		Dipole T273, 4ft SMA Cable Warehouse.						
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	8.86	V	0.9	0.0	7.96	38.5	-30.5	
	829.00	20.49	H	0.9	0.0	19.59	38.5	-18.9	
	Mid Ch								
	836.50	8.68	V	0.9	0.0	7.78	38.5	-30.7	
	836.50	20.71	H	0.9	0.0	19.81	38.5	-18.6	
	High Ch								
	844.00	7.71	V	0.9	0.0	6.81	38.5	-31.6	
	844.00	20.21	H	0.9	0.0	19.31	38.5	-19.1	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

Band LTE5 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																														
	Company:		Samsung																																																																																																												
	Project #:		14I19693																																																																																																												
	Date:		12/23/14																																																																																																												
	Test Engineer:		Charles Vergonio																																																																																																												
	Configuration:		X-pos EUT Only																																																																																																												
	Mode:		LTE5 10MHz QPSK																																																																																																												
	Test Equipment:																																																																																																														
	Receiving: Sunol T243, and Chamber C N-type Cable																																																																																																														
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																														
<table border="1"> <thead> <tr> <th>f</th> <th>SG reading</th> <th>Ant. Pol.</th> <th>Cable Loss</th> <th>Antenna Gain</th> <th>ERP</th> <th>Limit</th> <th>Margin</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>(dBm)</th> <th>(H/V)</th> <th>(dB)</th> <th>(dBd)</th> <th>(dBm)</th> <th>(dBm)</th> <th>(dB)</th> <th></th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>829.00</td> <td>9.95</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.05</td> <td>38.5</td> <td>-29.4</td> <td></td> </tr> <tr> <td>829.00</td> <td>21.41</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.51</td> <td>38.5</td> <td>-17.9</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>9.74</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.84</td> <td>38.5</td> <td>-29.6</td> <td></td> </tr> <tr> <td>836.50</td> <td>21.56</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.66</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>844.00</td> <td>8.09</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>7.19</td> <td>38.5</td> <td>-31.3</td> <td></td> </tr> <tr> <td>844.00</td> <td>20.89</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.99</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> </tbody> </table>										f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)		Low Ch										829.00	9.95	V	0.9	0.0	9.05	38.5	-29.4		829.00	21.41	H	0.9	0.0	20.51	38.5	-17.9		Mid Ch										836.50	9.74	V	0.9	0.0	8.84	38.5	-29.6		836.50	21.56	H	0.9	0.0	20.66	38.5	-17.8		High Ch										844.00	8.09	V	0.9	0.0	7.19	38.5	-31.3		844.00	20.89	H	0.9	0.0	19.99	38.5	-18.5	
f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes																																																																																																							
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)																																																																																																								
Low Ch																																																																																																															
829.00	9.95	V	0.9	0.0	9.05	38.5	-29.4																																																																																																								
829.00	21.41	H	0.9	0.0	20.51	38.5	-17.9																																																																																																								
Mid Ch																																																																																																															
836.50	9.74	V	0.9	0.0	8.84	38.5	-29.6																																																																																																								
836.50	21.56	H	0.9	0.0	20.66	38.5	-17.8																																																																																																								
High Ch																																																																																																															
844.00	8.09	V	0.9	0.0	7.19	38.5	-31.3																																																																																																								
844.00	20.89	H	0.9	0.0	19.99	38.5	-18.5																																																																																																								
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																															

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B										
Band LTE5 5MHz QPSK	Company:		Samsung							
	Project #:		14I19693							
	Date:		12/23/14							
	Test Engineer:		Charles Vergonio							
	Configuration:		X-pos EUT Only							
	Mode:		LTE5 5MHz QPSK							
	Test Equipment:									
	Receiving: Sunol T243, and Chamber C N-type Cable									
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch										
826.50	9.21	V	0.9	0.0	8.31	38.5	-30.1			
826.50	21.09	H	0.9	0.0	20.19	38.5	-18.3			
Mid Ch										
836.50	8.88	V	0.9	0.0	7.98	38.5	-30.5			
836.50	21.55	H	0.9	0.0	20.65	38.5	-17.8			
High Ch										
846.50	7.89	V	0.9	0.0	6.99	38.5	-31.5			
846.50	20.76	H	0.9	0.0	19.86	38.5	-18.6			
Rev. 3.17.11										
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

Band LTE5 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		14I19693																																																																																															
	Date:		12/23/14																																																																																															
	Test Engineer:		Charles Vergonio																																																																																															
	Configuration:		X-pos EUT Only																																																																																															
	Mode:		LTE5 3MHz 16QAM																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Sunol T243, and Chamber C N-type Cable																																																																																																	
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>825.50</td> <td>8.21</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>7.31</td> <td>38.5</td> <td>-31.1</td> <td></td> </tr> <tr> <td>825.50</td> <td>20.49</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.59</td> <td>38.5</td> <td>-18.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>8.85</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>7.95</td> <td>38.5</td> <td>-30.5</td> <td></td> </tr> <tr> <td>836.50</td> <td>20.76</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.86</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>7.66</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>6.76</td> <td>38.5</td> <td>-31.7</td> <td></td> </tr> <tr> <td>847.50</td> <td>20.38</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.48</td> <td>38.5</td> <td>-19.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									825.50	8.21	V	0.9	0.0	7.31	38.5	-31.1		825.50	20.49	H	0.9	0.0	19.59	38.5	-18.9		Mid Ch									836.50	8.85	V	0.9	0.0	7.95	38.5	-30.5		836.50	20.76	H	0.9	0.0	19.86	38.5	-18.6		High Ch									847.50	7.66	V	0.9	0.0	6.76	38.5	-31.7		847.50	20.38	H	0.9	0.0	19.48	38.5	-19.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
825.50	8.21	V	0.9	0.0	7.31	38.5	-31.1																																																																																											
825.50	20.49	H	0.9	0.0	19.59	38.5	-18.9																																																																																											
Mid Ch																																																																																																		
836.50	8.85	V	0.9	0.0	7.95	38.5	-30.5																																																																																											
836.50	20.76	H	0.9	0.0	19.86	38.5	-18.6																																																																																											
High Ch																																																																																																		
847.50	7.66	V	0.9	0.0	6.76	38.5	-31.7																																																																																											
847.50	20.38	H	0.9	0.0	19.48	38.5	-19.0																																																																																											
Rev. 3.17.11																																																																																																		
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																		

Band LTE5 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																
	Company:		Samsung																																																																																														
	Project #:		14I19693																																																																																														
	Date:		12/23/14																																																																																														
	Test Engineer:		Charles Vergonio																																																																																														
	Configuration:		X-pos EUT Only																																																																																														
	Mode:		LTE5 3MHz QPSK																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T243, and Chamber C N-type Cable																																																																																																
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>825.50</td> <td>8.98</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.08</td> <td>38.5</td> <td>-30.4</td> <td></td> </tr> <tr> <td>825.50</td> <td>21.18</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.28</td> <td>38.5</td> <td>-18.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>9.44</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.54</td> <td>38.5</td> <td>-29.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>21.72</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.82</td> <td>38.5</td> <td>-17.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>8.41</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>7.51</td> <td>38.5</td> <td>-30.9</td> <td></td> </tr> <tr> <td>847.50</td> <td>21.09</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.19</td> <td>38.5</td> <td>-18.3</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									825.50	8.98	V	0.9	0.0	8.08	38.5	-30.4		825.50	21.18	H	0.9	0.0	20.28	38.5	-18.2		Mid Ch									836.50	9.44	V	0.9	0.0	8.54	38.5	-29.9		836.50	21.72	H	0.9	0.0	20.82	38.5	-17.6		High Ch									847.50	8.41	V	0.9	0.0	7.51	38.5	-30.9		847.50	21.09	H	0.9	0.0	20.19	38.5	-18.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
825.50	8.98	V	0.9	0.0	8.08	38.5	-30.4																																																																																										
825.50	21.18	H	0.9	0.0	20.28	38.5	-18.2																																																																																										
Mid Ch																																																																																																	
836.50	9.44	V	0.9	0.0	8.54	38.5	-29.9																																																																																										
836.50	21.72	H	0.9	0.0	20.82	38.5	-17.6																																																																																										
High Ch																																																																																																	
847.50	8.41	V	0.9	0.0	7.51	38.5	-30.9																																																																																										
847.50	21.09	H	0.9	0.0	20.19	38.5	-18.3																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

Band LTE5 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		14I19693																																																																																															
	Date:		12/23/14																																																																																															
	Test Engineer:		Charles Vergonio																																																																																															
	Configuration:		X-pos EUT Only																																																																																															
	Mode:		LTE5 1.4MHz 16QAM																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Sunol T243, and Chamber C N-type Cable																																																																																																	
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>7.78</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>6.88</td> <td>38.5</td> <td>-31.6</td> <td></td> </tr> <tr> <td>824.70</td> <td>20.16</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.26</td> <td>38.5</td> <td>-19.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>7.49</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>6.59</td> <td>38.5</td> <td>-31.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>20.49</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.59</td> <td>38.5</td> <td>-18.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.30</td> <td>6.49</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>5.59</td> <td>38.5</td> <td>-32.9</td> <td></td> </tr> <tr> <td>848.30</td> <td>19.89</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>18.99</td> <td>38.5</td> <td>-19.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.70	7.78	V	0.9	0.0	6.88	38.5	-31.6		824.70	20.16	H	0.9	0.0	19.26	38.5	-19.2		Mid Ch									836.50	7.49	V	0.9	0.0	6.59	38.5	-31.9		836.50	20.49	H	0.9	0.0	19.59	38.5	-18.9		High Ch									848.30	6.49	V	0.9	0.0	5.59	38.5	-32.9		848.30	19.89	H	0.9	0.0	18.99	38.5	-19.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
824.70	7.78	V	0.9	0.0	6.88	38.5	-31.6																																																																																											
824.70	20.16	H	0.9	0.0	19.26	38.5	-19.2																																																																																											
Mid Ch																																																																																																		
836.50	7.49	V	0.9	0.0	6.59	38.5	-31.9																																																																																											
836.50	20.49	H	0.9	0.0	19.59	38.5	-18.9																																																																																											
High Ch																																																																																																		
848.30	6.49	V	0.9	0.0	5.59	38.5	-32.9																																																																																											
848.30	19.89	H	0.9	0.0	18.99	38.5	-19.5																																																																																											
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																		

Band LTE5 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																														
	Company:		Samsung																																																																																																												
	Project #:		14I19693																																																																																																												
	Date:		12/23/14																																																																																																												
	Test Engineer:		Charles Vergonio																																																																																																												
	Configuration:		X-pos EUT Only																																																																																																												
	Mode:		LTE5 1.4MHz QPSK																																																																																																												
	Test Equipment:																																																																																																														
	Receiving: Sunol T243, and Chamber C N-type Cable																																																																																																														
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																														
<table border="1"> <thead> <tr> <th>f</th> <th>SG reading</th> <th>Ant. Pol.</th> <th>Cable Loss</th> <th>Antenna Gain</th> <th>ERP</th> <th>Limit</th> <th>Margin</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>(dBm)</th> <th>(H/V)</th> <th>(dB)</th> <th>(dBd)</th> <th>(dBm)</th> <th>(dBm)</th> <th>(dB)</th> <th></th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.70</td> <td>9.19</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.29</td> <td>38.5</td> <td>-30.2</td> <td></td> </tr> <tr> <td>824.70</td> <td>21.45</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.55</td> <td>38.5</td> <td>-17.9</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.50</td> <td>9.41</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.51</td> <td>38.5</td> <td>-29.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>20.98</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.08</td> <td>38.5</td> <td>-18.4</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.30</td> <td>8.62</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>7.72</td> <td>38.5</td> <td>-30.7</td> <td></td> </tr> <tr> <td>848.30</td> <td>20.78</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.88</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> </tbody> </table>										f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)		Low Ch										824.70	9.19	V	0.9	0.0	8.29	38.5	-30.2		824.70	21.45	H	0.9	0.0	20.55	38.5	-17.9		Mid Ch										836.50	9.41	V	0.9	0.0	8.51	38.5	-29.9		836.50	20.98	H	0.9	0.0	20.08	38.5	-18.4		High Ch										848.30	8.62	V	0.9	0.0	7.72	38.5	-30.7		848.30	20.78	H	0.9	0.0	19.88	38.5	-18.6	
f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes																																																																																																							
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)																																																																																																								
Low Ch																																																																																																															
824.70	9.19	V	0.9	0.0	8.29	38.5	-30.2																																																																																																								
824.70	21.45	H	0.9	0.0	20.55	38.5	-17.9																																																																																																								
Mid Ch																																																																																																															
836.50	9.41	V	0.9	0.0	8.51	38.5	-29.9																																																																																																								
836.50	20.98	H	0.9	0.0	20.08	38.5	-18.4																																																																																																								
High Ch																																																																																																															
848.30	8.62	V	0.9	0.0	7.72	38.5	-30.7																																																																																																								
848.30	20.78	H	0.9	0.0	19.88	38.5	-18.6																																																																																																								
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																															

Band Band 2 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																
	Company:		Samsung																																																																																														
	Project #:		14I19693																																																																																														
	Date:		12/23/14																																																																																														
	Test Engineer:		Charles Vergonio																																																																																														
	Configuration:		EUT only																																																																																														
	Mode:		WCDMA_1900 MHz_HSDPA																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T345, and Chamber B SMA Cables																																																																																																
	Substitution: Horn T59, 8ft SMA Cable (SN # 245185 003) Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1852.40</td> <td>4.59</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>11.70</td> <td>33.0</td> <td>-21.3</td> <td></td> </tr> <tr> <td>1852.40</td> <td>11.72</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>18.83</td> <td>33.0</td> <td>-14.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>4.59</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>11.70</td> <td>33.0</td> <td>-21.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>12.54</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>19.65</td> <td>33.0</td> <td>-13.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.60</td> <td>5.32</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>12.43</td> <td>33.0</td> <td>-20.6</td> <td></td> </tr> <tr> <td>1907.60</td> <td>11.84</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>18.95</td> <td>33.0</td> <td>-14.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									1852.40	4.59	V	0.90	8.01	11.70	33.0	-21.3		1852.40	11.72	H	0.90	8.01	18.83	33.0	-14.2		Mid Ch									1880.00	4.59	V	0.90	8.01	11.70	33.0	-21.3		1880.00	12.54	H	0.90	8.01	19.65	33.0	-13.4		High Ch									1907.60	5.32	V	0.90	8.01	12.43	33.0	-20.6		1907.60	11.84	H	0.90	8.01	18.95	33.0	-14.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
1852.40	4.59	V	0.90	8.01	11.70	33.0	-21.3																																																																																										
1852.40	11.72	H	0.90	8.01	18.83	33.0	-14.2																																																																																										
Mid Ch																																																																																																	
1880.00	4.59	V	0.90	8.01	11.70	33.0	-21.3																																																																																										
1880.00	12.54	H	0.90	8.01	19.65	33.0	-13.4																																																																																										
High Ch																																																																																																	
1907.60	5.32	V	0.90	8.01	12.43	33.0	-20.6																																																																																										
1907.60	11.84	H	0.90	8.01	18.95	33.0	-14.1																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 4 EIRP limit is 30dBm																																																																																																	

Band Band 2 REL99	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B								
	Company:		Samsung						
	Project #:		14I19693						
	Date:		12/23/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		EUT only						
	Mode:		WCDMA_1900 MHz_Rel 99						
	Test Equipment:								
	Receiving:		Horn T345, and Chamber B SMA Cables						
	Substitution:		Horn T59, 8ft SMA Cable (SN # 245185 003) Warehouse.						
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1852.40	5.36	V	0.90	8.01	12.47	33.0	-20.5	
	1852.40	12.33	H	0.90	8.01	19.44	33.0	-13.6	
	Mid Ch								
	1880.00	5.70	V	0.90	8.01	12.81	33.0	-20.2	
	1880.00	12.90	H	0.90	8.01	20.01	33.0	-13.0	
	High Ch								
	1907.60	6.41	V	0.90	8.01	13.52	33.0	-19.5	
	1907.60	12.42	H	0.90	8.01	19.53	33.0	-13.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

		High Frequency Substitution Measurement							
		UL Verification Services, Inc. Chamber B							
Band Band 5 HSDPA	Company:		Samsung						
	Project #:		14I19693						
	Date:		12/23/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		X-pos EUT Only						
	Mode:		WCDMA_HSDPA_850						
	Test Equipment:								
			Receiving: Sunol T243, and Chamber C N-type Cable						
			Substitution: Dipole T273, 4ft SMA Cable Warehouse.						
f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes	
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)		
Low Ch									
826.40	8.36	V	0.9	0.0	7.46	38.5	-31.0		
826.40	20.39	H	0.9	0.0	19.49	38.5	-19.0		
Mid Ch									
836.60	7.55	V	0.9	0.0	6.65	38.5	-31.8		
836.60	20.29	H	0.9	0.0	19.39	38.5	-19.1		
High Ch									
846.60	7.16	V	0.9	0.0	6.26	38.5	-32.2		
846.60	19.99	H	0.9	0.0	19.09	38.5	-19.4		
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B									
Band Band 5 REL99	Company:		Samsung						
	Project #:		14I19693						
	Date:		12/23/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		X-pos EUT Only						
	Mode:		WCDMA_Rel99_850						
	Test Equipment:								
	Receiving: Sunol T243, and Chamber C N-type Cable								
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)		
Low Ch									
826.40	9.26	V	0.9	0.0	8.36	38.5	-30.1		
826.40	21.45	H	0.9	0.0	20.55	38.5	-17.9		
Mid Ch									
836.60	8.80	V	0.9	0.0	7.90	38.5	-30.5		
836.60	21.10	H	0.9	0.0	20.20	38.5	-18.2		
High Ch									
846.60	8.48	V	0.9	0.0	7.58	38.5	-30.9		
846.60	21.24	H	0.9	0.0	20.34	38.5	-18.1		
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band GSM 1900 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																
	Company:		Samsung																																																																																														
	Project #:		14I19693																																																																																														
	Date:		12/23/14																																																																																														
	Test Engineer:		Charles Vergonio																																																																																														
	Configuration:		EUT only																																																																																														
	Mode:		EGPRS 1900																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T345, and Chamber B SMA Cables																																																																																																
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low</td> </tr> <tr> <td>1850.20</td> <td>2.61</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>9.72</td> <td>33.0</td> <td>-23.3</td> <td></td> </tr> <tr> <td>1850.20</td> <td>16.83</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>23.94</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td colspan="9">Mid</td> </tr> <tr> <td>1880.00</td> <td>2.84</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>9.95</td> <td>33.0</td> <td>-23.1</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.92</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>24.03</td> <td>33.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td colspan="9">High</td> </tr> <tr> <td>1909.80</td> <td>3.19</td> <td>V</td> <td>0.90</td> <td>8.01</td> <td>10.30</td> <td>33.0</td> <td>-22.7</td> <td></td> </tr> <tr> <td>1909.80</td> <td>16.64</td> <td>H</td> <td>0.90</td> <td>8.01</td> <td>23.75</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low									1850.20	2.61	V	0.90	8.01	9.72	33.0	-23.3		1850.20	16.83	H	0.90	8.01	23.94	33.0	-9.1		Mid									1880.00	2.84	V	0.90	8.01	9.95	33.0	-23.1		1880.00	16.92	H	0.90	8.01	24.03	33.0	-9.0		High									1909.80	3.19	V	0.90	8.01	10.30	33.0	-22.7		1909.80	16.64	H	0.90	8.01	23.75	33.0	-9.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low																																																																																																	
1850.20	2.61	V	0.90	8.01	9.72	33.0	-23.3																																																																																										
1850.20	16.83	H	0.90	8.01	23.94	33.0	-9.1																																																																																										
Mid																																																																																																	
1880.00	2.84	V	0.90	8.01	9.95	33.0	-23.1																																																																																										
1880.00	16.92	H	0.90	8.01	24.03	33.0	-9.0																																																																																										
High																																																																																																	
1909.80	3.19	V	0.90	8.01	10.30	33.0	-22.7																																																																																										
1909.80	16.64	H	0.90	8.01	23.75	33.0	-9.3																																																																																										
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm																																																																																																	

Band GSM 1900 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B								
	Company:		Samsung						
	Project #:		14I19693						
	Date:		12/23/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		EUT only						
	Mode:		GPRS 1900						
	Test Equipment:								
	Receiving: Horn T345, and Chamber B SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low								
	1850.20	4.71	V	0.90	8.01	11.82	33.0	-21.2	
	1850.20	18.83	H	0.90	8.01	25.94	33.0	-7.1	
	Mid								
	1880.00	4.59	V	0.90	8.01	11.70	33.0	-21.3	
	1880.00	18.81	H	0.90	8.01	25.92	33.0	-7.1	
	High								
	1909.80	5.59	V	0.90	8.01	12.70	33.0	-20.3	
	1909.80	18.98	H	0.90	8.01	26.09	33.0	-6.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

Band GSM 850 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B																																																																																																
	Company:		Samsung																																																																																														
	Project #:		14I19693																																																																																														
	Date:		12/23/14																																																																																														
	Test Engineer:		Charles Vergonio																																																																																														
	Configuration:		X-pos EUT Only																																																																																														
	Mode:		EGPRS850																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T243, and Chamber B N-type Cable																																																																																																
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.20</td> <td>13.22</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>12.32</td> <td>38.5</td> <td>-26.1</td> <td></td> </tr> <tr> <td>824.20</td> <td>25.35</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.45</td> <td>38.5</td> <td>-14.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>12.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>12.01</td> <td>38.5</td> <td>-26.4</td> <td></td> </tr> <tr> <td>836.60</td> <td>25.51</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.61</td> <td>38.5</td> <td>-13.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.80</td> <td>12.53</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.63</td> <td>38.5</td> <td>-26.8</td> <td></td> </tr> <tr> <td>848.80</td> <td>25.26</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.36</td> <td>38.5</td> <td>-14.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.20	13.22	V	0.9	0.0	12.32	38.5	-26.1		824.20	25.35	H	0.9	0.0	24.45	38.5	-14.0		Mid Ch									836.60	12.90	V	0.9	0.0	12.01	38.5	-26.4		836.60	25.51	H	0.9	0.0	24.61	38.5	-13.8		High Ch									848.80	12.53	V	0.9	0.0	11.63	38.5	-26.8		848.80	25.26	H	0.9	0.0	24.36	38.5	-14.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
824.20	13.22	V	0.9	0.0	12.32	38.5	-26.1																																																																																										
824.20	25.35	H	0.9	0.0	24.45	38.5	-14.0																																																																																										
Mid Ch																																																																																																	
836.60	12.90	V	0.9	0.0	12.01	38.5	-26.4																																																																																										
836.60	25.51	H	0.9	0.0	24.61	38.5	-13.8																																																																																										
High Ch																																																																																																	
848.80	12.53	V	0.9	0.0	11.63	38.5	-26.8																																																																																										
848.80	25.26	H	0.9	0.0	24.36	38.5	-14.1																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B										
Band GSM 850 GPRS	Company:		Samsung							
	Project #:		14I19693							
	Date:		12/23/14							
	Test Engineer:		Charles Vergonio							
	Configuration:		X-pos EUT Only							
	Mode:		GPRS850							
	Test Equipment:									
	Receiving: Sunol T243, and Chamber B N-type Cable									
	Substitution: Dipole T273, 4ft SMA Cable Warehouse.									
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes	
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)			
Low Ch										
824.20	15.61	V	0.9	0.0	14.71	38.5	-23.7			
824.20	28.18	H	0.9	0.0	27.28	38.5	-11.2			
Mid Ch										
836.60	15.73	V	0.9	0.0	14.84	38.5	-23.6			
836.60	28.36	H	0.9	0.0	27.46	38.5	-11.0			
High Ch										
848.80	16.82	V	0.9	0.0	15.92	38.5	-22.5			
848.80	29.57	H	0.9	0.0	28.68	38.5	-9.8			
Rev. 3.17.11										
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		Band 2 HSDPA							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1852.4MHz									
3.705	-17.0	V	3.0	35.4	1.0	-51.4	-13.0	-38.4	
5.557	-15.9	V	3.0	34.7	1.0	-49.6	-13.0	-36.6	
7.410	-15.6	V	3.0	34.9	1.0	-49.5	-13.0	-36.5	
Band 2									
HSDPA									
3.705	-16.5	H	3.0	35.4	1.0	-50.9	-13.0	-37.9	
5.557	-13.7	H	3.0	34.7	1.0	-47.4	-13.0	-34.4	
7.410	-12.4	H	3.0	34.9	1.0	-46.3	-13.0	-33.3	
Mid Ch, 1880MHz									
3.760	-17.3	V	3.0	35.3	1.0	-51.7	-13.0	-38.7	
5.640	-16.0	V	3.0	34.7	1.0	-49.8	-13.0	-36.8	
7.520	-16.3	V	3.0	34.9	1.0	-50.3	-13.0	-37.3	
3.760	-15.6	H	3.0	35.3	1.0	-49.9	-13.0	-36.9	
5.640	-13.6	H	3.0	34.7	1.0	-47.3	-13.0	-34.3	
7.520	-13.0	H	3.0	34.9	1.0	-47.0	-13.0	-34.0	
High Ch, 1907.6MHz									
3.815	-14.2	V	3.0	35.3	1.0	-48.5	-13.0	-35.5	
5.723	-16.9	V	3.0	34.7	1.0	-50.7	-13.0	-37.7	
7.630	-16.4	V	3.0	34.9	1.0	-50.3	-13.0	-37.3	
3.815	-12.4	H	3.0	35.3	1.0	-46.7	-13.0	-33.7	
5.723	-14.6	H	3.0	34.7	1.0	-48.3	-13.0	-35.3	
7.630	-12.8	H	3.0	34.9	1.0	-46.7	-13.0	-33.7	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		Band 2 REL99							
Chamber		Pre-amplifier			Filter		Limit		
5m Chamber B		T34 8449B			Filter 1		Part 24		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 2									
REL99									
Low Ch, 1852.4MHz									
3.705	-16.7	V	3.0	35.4	1.0	-51.1	-13.0	-38.1	
5.557	-15.2	V	3.0	34.7	1.0	-48.9	-13.0	-35.9	
7.410	-15.3	V	3.0	34.9	1.0	-49.2	-13.0	-36.2	
3.705	-15.0	H	3.0	35.4	1.0	-49.4	-13.0	-36.4	
5.557	-14.0	H	3.0	34.7	1.0	-47.7	-13.0	-34.7	
7.410	-12.6	H	3.0	34.9	1.0	-46.5	-13.0	-33.5	
Mid Ch, 1880MHz									
3.760	-15.7	V	3.0	35.3	1.0	-50.0	-13.0	-37.0	
5.640	-14.9	V	3.0	34.7	1.0	-48.6	-13.0	-35.6	
7.520	-14.3	V	3.0	34.9	1.0	-48.2	-13.0	-35.2	
3.760	-12.8	H	3.0	35.3	1.0	-47.1	-13.0	-34.1	
5.640	-13.9	H	3.0	34.7	1.0	-47.6	-13.0	-34.6	
7.520	-12.6	H	3.0	34.9	1.0	-46.5	-13.0	-33.5	
High Ch, 1907.6MHz									
3.815	-15.0	V	3.0	35.3	1.0	-49.3	-13.0	-36.3	
5.723	-15.7	V	3.0	34.7	1.0	-49.4	-13.0	-36.4	
7.630	-13.3	V	3.0	34.9	1.0	-47.3	-13.0	-34.3	
3.815	-13.1	H	3.0	35.3	1.0	-47.3	-13.0	-34.3	
5.723	-13.6	H	3.0	34.7	1.0	-47.3	-13.0	-34.3	
7.630	-11.6	H	3.0	34.9	1.0	-45.5	-13.0	-32.5	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		Band 5 HSDPA							
Chamber		Pre-amplifier			Filter		Limit		
5m Chamber B		T34 8449B			Filter 1		Part 22		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 5 HSDPA									
Low Ch, 826.4MHz									
1.653	-22.6	V	3.0	37.4	1.0	-59.0	-13.0	-46.0	
2.479	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
3.306	-19.1	V	3.0	35.8	1.0	-53.9	-13.0	-40.9	
1.653	-22.3	H	3.0	37.4	1.0	-58.7	-13.0	-45.7	
2.479	-20.5	H	3.0	36.4	1.0	-55.9	-13.0	-42.9	
3.306	-20.8	H	3.0	35.8	1.0	-55.6	-13.0	-42.6	
Mid Ch, 836.6MHz									
1.673	-21.4	V	3.0	37.3	1.0	-57.8	-13.0	-44.8	
2.510	-22.9	V	3.0	36.4	1.0	-58.3	-13.0	-45.3	
3.346	-19.8	V	3.0	35.8	1.0	-54.5	-13.0	-41.5	
1.673	-22.3	H	3.0	37.3	1.0	-58.6	-13.0	-45.6	
2.510	-23.6	H	3.0	36.4	1.0	-58.9	-13.0	-45.9	
3.346	-20.6	H	3.0	35.8	1.0	-55.3	-13.0	-42.3	
High Ch, 846.6MHz									
1.693	-22.3	V	3.0	37.3	1.0	-58.6	-13.0	-45.6	
2.540	-21.8	V	3.0	36.3	1.0	-57.1	-13.0	-44.1	
3.386	-20.0	V	3.0	35.7	1.0	-54.7	-13.0	-41.7	
1.693	-23.5	H	3.0	37.3	1.0	-59.8	-13.0	-46.8	
2.540	-24.1	H	3.0	36.3	1.0	-59.5	-13.0	-46.5	
3.386	-20.5	H	3.0	35.7	1.0	-55.2	-13.0	-42.2	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		Band 5 REL99							
Chamber		Pre-amplifier			Filter		Limit		
5m Chamber B		T34 8449B			Filter 1		Part 22		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 5									
REL99									
Low Ch, 826.4MHz									
1.653	-24.2	V	3.0	37.4	1.0	-60.6	-13.0	-47.6	
2.479	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
3.306	-19.9	V	3.0	35.8	1.0	-54.7	-13.0	-41.7	
Mid Ch, 836.6MHz									
1.653	-23.0	H	3.0	37.4	1.0	-59.4	-13.0	-46.4	
2.479	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	
3.306	-20.1	H	3.0	35.8	1.0	-54.9	-13.0	-41.9	
High Ch, 846.6MHz									
1.673	-20.8	V	3.0	37.3	1.0	-57.1	-13.0	-44.1	
2.510	-21.7	V	3.0	36.4	1.0	-57.0	-13.0	-44.0	
3.346	-20.6	V	3.0	35.8	1.0	-55.3	-13.0	-42.3	
1.673	-20.3	H	3.0	37.3	1.0	-56.7	-13.0	-43.7	
2.510	-24.1	H	3.0	36.4	1.0	-59.5	-13.0	-46.5	
3.346	-20.7	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
1.693	-22.6	V	3.0	37.3	1.0	-58.9	-13.0	-45.9	
2.540	-22.5	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
3.386	-20.2	V	3.0	35.7	1.0	-54.9	-13.0	-41.9	
1.693	-21.7	H	3.0	37.3	1.0	-58.0	-13.0	-45.0	
2.540	-23.3	H	3.0	36.3	1.0	-58.6	-13.0	-45.6	
3.386	-19.8	H	3.0	35.7	1.0	-54.6	-13.0	-41.6	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		EGPRS1900							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
GSM1900									
EGPRS									
Low Ch, 1850.2MHz									
3.700	-13.4	V	3.0	35.4	1.0	-47.8	-13.0	-34.8	
5.551	-6.9	V	3.0	34.7	1.0	-40.7	-13.0	-27.7	
7.401	-10.2	V	3.0	34.9	1.0	-44.1	-13.0	-31.1	
3.700	-15.8	H	3.0	35.4	1.0	-50.2	-13.0	-37.2	
5.551	-10.1	H	3.0	34.7	1.0	-43.8	-13.0	-30.8	
7.401	-11.6	H	3.0	34.9	1.0	-45.5	-13.0	-32.5	
Mid Ch, 1880.0MHz									
3.760	-13.0	V	3.0	35.3	1.0	-47.3	-13.0	-34.3	
5.640	-12.6	V	3.0	34.7	1.0	-46.3	-13.0	-33.3	
7.520	-11.9	V	3.0	34.9	1.0	-45.8	-13.0	-32.8	
3.760	-15.5	H	3.0	35.3	1.0	-49.9	-13.0	-36.9	
5.640	-10.3	H	3.0	34.7	1.0	-44.0	-13.0	-31.0	
7.520	-10.4	H	3.0	34.9	1.0	-44.3	-13.0	-31.3	
High Ch, 1909.8MHz									
3.820	-12.8	V	3.0	35.3	1.0	-47.0	-13.0	-34.0	
5.729	-15.0	V	3.0	34.7	1.0	-48.7	-13.0	-35.7	
7.639	-12.6	V	3.0	35.0	1.0	-46.6	-13.0	-33.6	
3.820	-15.2	H	3.0	35.3	1.0	-49.5	-13.0	-36.5	
5.729	-12.8	H	3.0	34.7	1.0	-46.5	-13.0	-33.5	
7.639	-11.0	H	3.0	35.0	1.0	-45.0	-13.0	-32.0	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		GPRS1900								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850.2MHz									
GSM1900	3.700	-15.4	V	3.0	35.4	1.0	-49.8	-13.0	-36.8	
	5.551	-12.1	V	3.0	34.7	1.0	-45.8	-13.0	-32.8	
	7.401	-13.0	V	3.0	34.9	1.0	-46.9	-13.0	-33.9	
GPRS	3.700	-16.0	H	3.0	35.4	1.0	-50.4	-13.0	-37.4	
	5.551	-12.9	H	3.0	34.7	1.0	-46.6	-13.0	-33.6	
	7.401	-11.3	H	3.0	34.9	1.0	-45.2	-13.0	-32.2	
	Mid Ch, 1880.0MHz									
	3.760	-14.3	V	3.0	35.3	1.0	-48.6	-13.0	-35.6	
	5.640	-12.9	V	3.0	34.7	1.0	-46.6	-13.0	-33.6	
	7.520	-12.8	V	3.0	34.9	1.0	-46.7	-13.0	-33.7	
	3.760	-15.7	H	3.0	35.3	1.0	-50.1	-13.0	-37.1	
	5.640	-12.1	H	3.0	34.7	1.0	-45.8	-13.0	-32.8	
	7.520	-10.9	H	3.0	34.9	1.0	-44.8	-13.0	-31.8	
	High Ch, 1909.8MHz									
	3.820	-16.1	V	3.0	35.3	1.0	-50.4	-13.0	-37.4	
	5.729	-13.3	V	3.0	34.7	1.0	-47.1	-13.0	-34.1	
	7.639	-12.7	V	3.0	35.0	1.0	-46.6	-13.0	-33.6	
	3.820	-15.2	H	3.0	35.3	1.0	-49.4	-13.0	-36.4	
	5.729	-12.9	H	3.0	34.7	1.0	-46.7	-13.0	-33.7	
	7.639	-11.2	H	3.0	35.0	1.0	-45.2	-13.0	-32.2	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14I19693							
Date:		12/26/14							
Test Engineer:		J. Hsu							
Configuration:		EUT/ Charger/ Headset							
Mode:		EGPRS850							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
GSM850									
EGPRS									
Low Ch, 824.2MHz									
1.648	-23.2	V	3.0	37.4	1.0	-59.6	-13.0	-46.6	
2.473	-20.0	V	3.0	36.4	1.0	-55.4	-13.0	-42.4	
3.297	-19.7	V	3.0	35.8	1.0	-54.5	-13.0	-41.5	
1.648	-23.9	H	3.0	37.4	1.0	-60.3	-13.0	-47.3	
2.473	-19.4	H	3.0	36.4	1.0	-54.8	-13.0	-41.8	
3.297	-20.4	H	3.0	35.8	1.0	-55.2	-13.0	-42.2	
Mid Ch, 836.6MHz									
1.673	-23.7	V	3.0	37.3	1.0	-60.0	-13.0	-47.0	
2.510	-20.9	V	3.0	36.4	1.0	-56.2	-13.0	-43.2	
3.346	-19.2	V	3.0	35.8	1.0	-54.0	-13.0	-41.0	
1.673	-25.4	H	3.0	37.3	1.0	-61.7	-13.0	-48.7	
2.510	-23.4	H	3.0	36.4	1.0	-58.7	-13.0	-45.7	
3.346	-20.5	H	3.0	35.8	1.0	-55.2	-13.0	-42.2	
High Ch, 848.8MHz									
1.698	-22.8	V	3.0	37.3	1.0	-59.1	-13.0	-46.1	
2.546	-21.6	V	3.0	36.3	1.0	-57.0	-13.0	-44.0	
3.395	-19.8	V	3.0	35.7	1.0	-54.5	-13.0	-41.5	
1.698	-25.3	H	3.0	37.3	1.0	-61.6	-13.0	-48.6	
2.546	-22.5	H	3.0	36.3	1.0	-57.9	-13.0	-44.9	
3.395	-20.0	H	3.0	35.7	1.0	-54.7	-13.0	-41.7	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		GPRS850								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850 GPRS	Low Ch, 824.2MHz									
	1.648	-22.7	V	3.0	37.4	1.0	-59.0	-13.0	-46.0	
	2.473	-18.7	V	3.0	36.4	1.0	-54.1	-13.0	-41.1	
	3.297	-20.0	V	3.0	35.8	1.0	-54.8	-13.0	-41.8	
	1.648	-20.6	H	3.0	37.4	1.0	-57.0	-13.0	-44.0	
	2.473	-18.4	H	3.0	36.4	1.0	-53.8	-13.0	-40.8	
	3.297	-19.6	H	3.0	35.8	1.0	-54.4	-13.0	-41.4	
	Mid Ch, 836.6MHz									
	1.673	-24.3	V	3.0	37.3	1.0	-60.7	-13.0	-47.7	
2.510	-22.6	V	3.0	36.4	1.0	-57.9	-13.0	-44.9		
3.346	-20.1	V	3.0	35.8	1.0	-54.9	-13.0	-41.9		
1.673	-21.9	H	3.0	37.3	1.0	-58.2	-13.0	-45.2		
2.510	-20.7	H	3.0	36.4	1.0	-56.0	-13.0	-43.0		
3.346	-20.0	H	3.0	35.8	1.0	-54.7	-13.0	-41.7		
High Ch, 848.8MHz										
1.698	-27.1	V	3.0	37.3	1.0	-63.4	-13.0	-50.4		
2.546	-22.5	V	3.0	36.3	1.0	-57.8	-13.0	-44.8		
3.395	-20.1	V	3.0	35.7	1.0	-54.8	-13.0	-41.8		
1.698	-25.4	H	3.0	37.3	1.0	-61.7	-13.0	-48.7		
2.546	-21.7	H	3.0	36.3	1.0	-57.0	-13.0	-44.0		
3.395	-20.0	H	3.0	35.7	1.0	-54.7	-13.0	-41.7		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 16QAM 10M								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 829MHz									
	1.658	-26.9	V	3.0	37.4	1.0	-63.2	-13.0	-50.2	
	2.487	-22.3	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
10MHz	3.316	-20.7	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	1.658	-26.5	H	3.0	37.4	1.0	-62.9	-13.0	-49.9	
	2.487	-23.5	H	3.0	36.4	1.0	-58.9	-13.0	-45.9	
16QAM	3.316	-20.3	H	3.0	35.8	1.0	-55.1	-13.0	-42.1	
	Mid Ch, 836.5MHz									
	1.673	-25.2	V	3.0	37.3	1.0	-61.5	-13.0	-48.5	
	2.510	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
	3.346	-20.5	V	3.0	35.8	1.0	-55.3	-13.0	-42.3	
	1.673	-23.8	H	3.0	37.3	1.0	-60.2	-13.0	-47.2	
	2.510	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3	
	3.346	-20.5	H	3.0	35.8	1.0	-55.3	-13.0	-42.3	
	High Ch, 844MHz									
	1.688	-26.4	V	3.0	37.3	1.0	-62.7	-13.0	-49.7	
	2.532	-22.1	V	3.0	36.3	1.0	-57.4	-13.0	-44.4	
	3.376	-19.8	V	3.0	35.7	1.0	-54.6	-13.0	-41.6	
	1.688	-26.0	H	3.0	37.3	1.0	-62.3	-13.0	-49.3	
	2.532	-23.7	H	3.0	36.3	1.0	-59.1	-13.0	-46.1	
	3.376	-19.4	H	3.0	35.7	1.0	-54.1	-13.0	-41.1	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 QPSK 10M								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber B		T34 8449B		Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 829MHz									
	1.658	-27.1	V	3.0	37.4	1.0	-63.5	-13.0	-50.5	
	2.487	-22.3	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
10MHz	3.316	-20.4	V	3.0	35.8	1.0	-55.1	-13.0	-42.1	
	1.658	-26.6	H	3.0	37.4	1.0	-62.9	-13.0	-49.9	
	2.487	-24.0	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
QPSK	3.316	-20.0	H	3.0	35.8	1.0	-54.8	-13.0	-41.8	
	Mid Ch, 836.5MHz									
	1.673	-24.3	V	3.0	37.3	1.0	-60.6	-13.0	-47.6	
	2.510	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
	3.346	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	1.673	-22.9	H	3.0	37.3	1.0	-59.3	-13.0	-46.3	
	2.510	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	
	3.346	-20.7	H	3.0	35.8	1.0	-55.5	-13.0	-42.5	
	High Ch, 844MHz									
	1.688	-26.2	V	3.0	37.3	1.0	-62.5	-13.0	-49.5	
	2.532	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
	3.376	-19.7	V	3.0	35.7	1.0	-54.4	-13.0	-41.4	
	1.688	-25.7	H	3.0	37.3	1.0	-62.0	-13.0	-49.0	
	2.532	-24.2	H	3.0	36.3	1.0	-59.6	-13.0	-46.6	
	3.376	-19.6	H	3.0	35.7	1.0	-54.3	-13.0	-41.3	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 16QAM 5M								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber B		T34 8449B		Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz										
LTE5	1.653	-26.1	V	3.0	37.4	1.0	-62.5	-13.0	-49.5	
	2.480	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
5MHz	3.306	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	1.653	-25.0	H	3.0	37.4	1.0	-61.3	-13.0	-48.3	
16QAM	2.480	-24.3	H	3.0	36.4	1.0	-59.7	-13.0	-46.7	
	3.306	-20.3	H	3.0	35.8	1.0	-55.1	-13.0	-42.1	
Mid Ch, 836.5MHz										
	1.673	-22.7	V	3.0	37.3	1.0	-59.1	-13.0	-46.1	
	2.510	-21.9	V	3.0	36.4	1.0	-57.3	-13.0	-44.3	
	3.346	-20.4	V	3.0	35.8	1.0	-55.2	-13.0	-42.2	
	1.673	-22.2	H	3.0	37.3	1.0	-58.6	-13.0	-45.6	
	2.510	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3.346	-20.7	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
High Ch, 846.5MHz										
	1.693	-25.1	V	3.0	37.3	1.0	-61.4	-13.0	-48.4	
	2.540	-23.0	V	3.0	36.3	1.0	-58.3	-13.0	-45.3	
	3.386	-20.5	V	3.0	35.7	1.0	-55.2	-13.0	-42.2	
	1.693	-24.5	H	3.0	37.3	1.0	-60.8	-13.0	-47.8	
	2.540	-24.1	H	3.0	36.3	1.0	-59.4	-13.0	-46.4	
	3.386	-20.5	H	3.0	35.7	1.0	-55.2	-13.0	-42.2	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 QPSK 5M								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz										
LTE5	1.653	-26.2	V	3.0	37.4	1.0	-62.5	-13.0	-49.5	
	2.480	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
	3.306	-20.0	V	3.0	35.8	1.0	-54.8	-13.0	-41.8	
5MHz	1.653	-25.4	H	3.0	37.4	1.0	-61.8	-13.0	-48.8	
	2.480	-24.5	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
	3.306	-19.8	H	3.0	35.8	1.0	-54.6	-13.0	-41.6	
QPSK	Mid Ch, 836.5MHz									
	1.673	-22.4	V	3.0	37.3	1.0	-58.8	-13.0	-45.8	
	2.510	-22.9	V	3.0	36.4	1.0	-58.3	-13.0	-45.3	
	3.346	-20.7	V	3.0	35.8	1.0	-55.5	-13.0	-42.5	
	1.673	-22.0	H	3.0	37.3	1.0	-58.3	-13.0	-45.3	
	2.510	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0	
	3.346	-20.6	H	3.0	35.8	1.0	-55.3	-13.0	-42.3	
High Ch, 846.5MHz										
	1.693	-25.3	V	3.0	37.3	1.0	-61.6	-13.0	-48.6	
	2.540	-23.1	V	3.0	36.3	1.0	-58.4	-13.0	-45.4	
	3.386	-20.6	V	3.0	35.7	1.0	-55.3	-13.0	-42.3	
	1.693	-24.6	H	3.0	37.3	1.0	-60.9	-13.0	-47.9	
	2.540	-24.4	H	3.0	36.3	1.0	-59.8	-13.0	-46.8	
	3.386	-19.8	H	3.0	35.7	1.0	-54.5	-13.0	-41.5	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 16QAM 1.4M								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber B		T34 8449B		Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 825.5MHz										
LTE5	1.651	-23.1	V	3.0	37.4	1.0	-59.5	-13.0	-46.5	
	2.477	-23.1	V	3.0	36.4	1.0	-58.5	-13.0	-45.5	
	3.302	-20.4	V	3.0	35.8	1.0	-55.2	-13.0	-42.2	
3MHz	1.651	-22.3	H	3.0	37.4	1.0	-58.7	-13.0	-45.7	
	2.477	-24.8	H	3.0	36.4	1.0	-60.1	-13.0	-47.1	
16QAM	3.302	-20.3	H	3.0	35.8	1.0	-55.1	-13.0	-42.1	
	Mid Ch, 836.5MHz									
	1.673	-20.7	V	3.0	37.3	1.0	-57.0	-13.0	-44.0	
	2.510	-22.9	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
	3.346	-20.7	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	1.673	-19.9	H	3.0	37.3	1.0	-56.2	-13.0	-43.2	
	2.510	-24.1	H	3.0	36.4	1.0	-59.5	-13.0	-46.5	
	3.346	-20.1	H	3.0	35.8	1.0	-54.8	-13.0	-41.8	
High Ch, 847.5MHz										
	1.695	-23.4	V	3.0	37.3	1.0	-59.7	-13.0	-46.7	
	2.543	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
	3.390	-20.3	V	3.0	35.7	1.0	-55.0	-13.0	-42.0	
	1.695	-22.6	H	3.0	37.3	1.0	-58.9	-13.0	-45.9	
	2.543	-24.0	H	3.0	36.3	1.0	-59.3	-13.0	-46.3	
	3.390	-20.4	H	3.0	35.7	1.0	-55.1	-13.0	-42.1	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 QPSK 3M								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 825.5MHz										
LTE5	1.651	-23.3	V	3.0	37.4	1.0	-59.7	-13.0	-46.7	
	2.477	-22.9	V	3.0	36.4	1.0	-58.3	-13.0	-45.3	
	3.302	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
3MHz	1.651	-22.6	H	3.0	37.4	1.0	-58.9	-13.0	-45.9	
	2.477	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
	3.302	-20.4	H	3.0	35.8	1.0	-55.2	-13.0	-42.2	
QPSK	Mid Ch, 836.5MHz									
	1.673	-20.4	V	3.0	37.3	1.0	-56.7	-13.0	-43.7	
	2.510	-22.2	V	3.0	36.4	1.0	-57.5	-13.0	-44.5	
	3.346	-20.3	V	3.0	35.8	1.0	-55.1	-13.0	-42.1	
	1.673	-20.0	H	3.0	37.3	1.0	-56.3	-13.0	-43.3	
	2.510	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3	
	3.346	-20.2	H	3.0	35.8	1.0	-54.9	-13.0	-41.9	
High Ch, 847.5MHz										
	1.695	-22.2	V	3.0	37.3	1.0	-58.5	-13.0	-45.5	
	2.543	-21.6	V	3.0	36.3	1.0	-56.9	-13.0	-43.9	
	3.390	-20.6	V	3.0	35.7	1.0	-55.4	-13.0	-42.4	
	1.695	-21.7	H	3.0	37.3	1.0	-58.0	-13.0	-45.0	
	2.543	-23.3	H	3.0	36.3	1.0	-58.7	-13.0	-45.7	
	3.390	-20.5	H	3.0	35.7	1.0	-55.3	-13.0	-42.3	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement											
Company:		Samsung									
Project #:		14I19693									
Date:		12/26/14									
Test Engineer:		J. Hsu									
Configuration:		EUT/ Charger/ Headset									
Mode:		LTE B5 16QAM 1.4M									
Chamber		Pre-amplifier			Filter		Limit				
5m Chamber B		T34 8449B			Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
1.4MHz 16QAM	Low Ch, 824.7MHz										
	LTE5	1.649	-18.2	V	3.0	37.4	1.0	-54.6	-13.0	-41.6	
		2.474	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
		3.299	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
		1.649	-16.6	H	3.0	37.4	1.0	-53.0	-13.0	-40.0	
		2.474	-24.3	H	3.0	36.4	1.0	-59.7	-13.0	-46.7	
		3.299	-20.6	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	Mid Ch, 836.5MHz										
		1.673	-21.6	V	3.0	37.3	1.0	-58.0	-13.0	-45.0	
		2.510	-22.5	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
		3.346	-21.5	V	3.0	35.8	1.0	-56.2	-13.0	-43.2	
		1.673	-19.4	H	3.0	37.3	1.0	-55.7	-13.0	-42.7	
		2.510	-24.5	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
		3.346	-20.7	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	High Ch, 848.3MHz										
		1.697	97.1	V	3.0	37.3	1.0	60.8	-13.0	73.8	
		2.545	-22.2	V	3.0	36.3	1.0	-57.5	-13.0	-44.5	
		3.393	-19.8	V	3.0	35.7	1.0	-54.5	-13.0	-41.5	
	1.697	-20.4	H	3.0	37.3	1.0	-56.7	-13.0	-43.7		
	2.545	-23.8	H	3.0	36.3	1.0	-59.1	-13.0	-46.1		
	3.393	-20.5	H	3.0	35.7	1.0	-55.2	-13.0	-42.2		
Rev. 03.03.09											
Note: No other emissions were detected above the system noise floor.											

UL Verification Services, Inc. Chamber B Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19693								
Date:		12/26/14								
Test Engineer:		J. Hsu								
Configuration:		EUT/ Charger/ Headset								
Mode:		LTE B5 QPSK 1.4M								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.7MHz									
LTE5	1.649	-18.2	V	3.0	37.4	1.0	-54.6	-13.0	-41.6	
	2.474	-22.5	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
	3.299	-19.9	V	3.0	35.8	1.0	-54.7	-13.0	-41.7	
1.4MHz	1.649	-16.7	H	3.0	37.4	1.0	-53.1	-13.0	-40.1	
	2.474	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3.299	-19.3	H	3.0	35.8	1.0	-54.1	-13.0	-41.1	
QPSK	Mid Ch, 836.5MHz									
	1.673	-21.5	V	3.0	37.3	1.0	-57.8	-13.0	-44.8	
	2.510	-22.1	V	3.0	36.4	1.0	-57.4	-13.0	-44.4	
	3.346	-20.4	V	3.0	35.8	1.0	-55.2	-13.0	-42.2	
	1.673	-19.7	H	3.0	37.3	1.0	-56.0	-13.0	-43.0	
	2.510	-23.7	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
	3.346	-20.8	H	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	High Ch, 848.3MHz									
	1.697	-21.8	V	3.0	37.3	1.0	-58.1	-13.0	-45.1	
2.545	-22.5	V	3.0	36.3	1.0	-57.9	-13.0	-44.9		
3.393	-20.7	V	3.0	35.7	1.0	-55.4	-13.0	-42.4		
1.697	-19.6	H	3.0	37.3	1.0	-55.9	-13.0	-42.9		
2.545	-24.1	H	3.0	36.3	1.0	-59.4	-13.0	-46.4		
3.393	-20.3	H	3.0	35.7	1.0	-55.0	-13.0	-42.0		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										