

FCC LTE REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

January 25, 2023

Location:

HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-RF-2301-FC035-R1

FCC ID: A3LSMA546E

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A546E/DS
Additional Model(s): SM-A546E
EUT Type: Mobile phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §24, §2

Main 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.382	25.82
		1M10W7D	16QAM	0.313	24.95
		1M10W7D	64QAM	0.244	23.87
		1M10W7D	256QAM	0.125	20.98
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.383	25.83
		2M73W7D	16QAM	0.317	25.01
		2M72W7D	64QAM	0.248	23.94
		2M71W7D	256QAM	0.126	21.01
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.395	25.97
		4M55W7D	16QAM	0.328	25.16
		4M53W7D	64QAM	0.258	24.12
		4M52W7D	256QAM	0.130	21.14
LTE – Band2 (10)	1855.0 - 1905.0	9M00G7D	QPSK	0.385	25.86
		9M05W7D	16QAM	0.319	25.04
		9M00W7D	64QAM	0.251	23.99
		8M99W7D	256QAM	0.126	21.01
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.387	25.88
		13M5W7D	16QAM	0.315	24.98
		13M5W7D	64QAM	0.245	23.89
		13M5W7D	256QAM	0.127	21.03
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.406	26.09
		18M0W7D	16QAM	0.341	25.33
		17M9W7D	64QAM	0.263	24.20
		17M9W7D	256QAM	0.134	21.28

Sub 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.050	17.01
		1M10W7D	16QAM	0.050	16.95
		1M10W7D	64QAM	0.049	16.91
		1M09W7D	256QAM	0.031	14.90
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.052	17.13
		2M71W7D	16QAM	0.051	17.08
		2M71W7D	64QAM	0.051	17.11
		2M71W7D	256QAM	0.032	15.05
LTE – Band2 (5)	1852.5 - 1907.5	4M52G7D	QPSK	0.051	17.06
		4M53W7D	16QAM	0.050	17.00
		4M53W7D	64QAM	0.051	17.03
		4M52W7D	256QAM	0.032	14.99
LTE – Band2 (10)	1855.0 - 1905.0	9M03G7D	QPSK	0.050	17.02
		9M03W7D	16QAM	0.049	16.89
		9M04W7D	64QAM	0.049	16.86
		9M00W7D	256QAM	0.031	14.85
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.050	16.95
		13M5W7D	16QAM	0.048	16.81
		13M5W7D	64QAM	0.048	16.83
		13M5W7D	256QAM	0.030	14.76
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.049	16.93
		18M0W7D	16QAM	0.048	16.79
		18M0W7D	64QAM	0.048	16.80
		18M0W7D	256QAM	0.030	14.70

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2301-FC035-R1

REVIEWED BY

유진우



Report prepared by : Jin Woo Yu
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2301-FC035	January 17, 2023	- First Approval Report
HCT-RF-2301-FC035-R1	January 25, 2023	- ULCA additional test and retest

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA (Main 2 Ant).....	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	25
8.2 RADIATED SPURIOUS EMISSIONS	28
8.3 PEAK-TO-AVERAGE RATIO.....	29
8.4 OCCUPIED BANDWIDTH	30
8.5 CONDUCTED SPURIOUS EMISSIONS	31
8.6 BAND EDGE	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
9. TEST DATA (Sub 2 Ant)	51
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	51
9.2 RADIATED SPURIOUS EMISSIONS	54
9.3 PEAK-TO-AVERAGE RATIO.....	55
9.4 OCCUPIED BANDWIDTH	56
9.5 CONDUCTED SPURIOUS EMISSIONS	57
9.6 BAND EDGE	58
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	59
10. TEST DATA (Sub 2 Ant, Main 2 Ant)	77
10.1 UPLINK CARRIER AGGREGATION	77
10.1.1 RADIATED SPURIOUS EMISSIONS	77
11. TEST PLOTS (Main 2 Ant)	78
12. TEST PLOTS (Sub 2 Ant)	199
13. APPENDIX A_ TEST SETUP PHOTO	320

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA546E
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24, §2
EUT Type:	Mobile phone
Model(s):	SM-A546E/DS
Additional Model(s):	SM-A546E
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	November 28, 2022 ~ January 25, 2023
Serial number:	Radiated: R3CTA04MC7V Conducted: R3CTA0YYAEX

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80 MHz), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

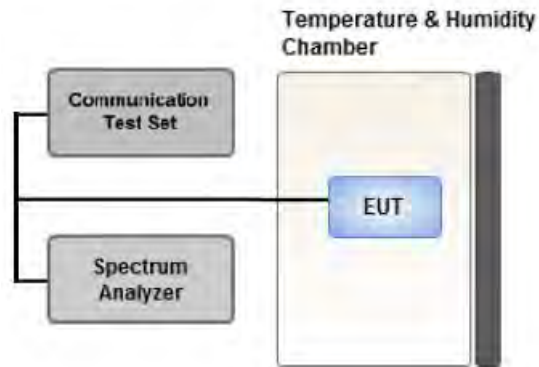

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

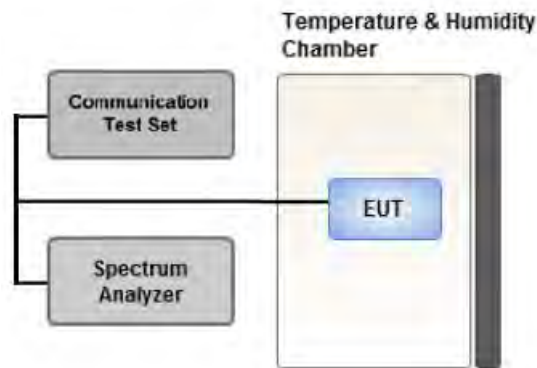

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

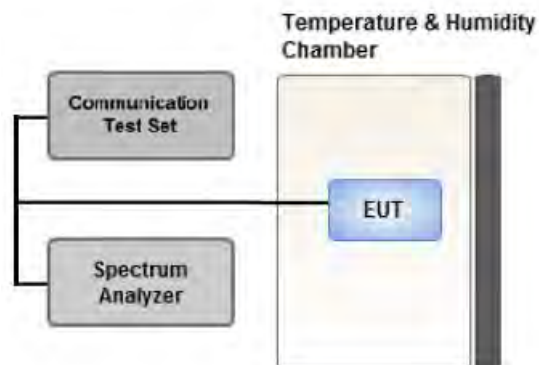

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.7 BAND EDGE

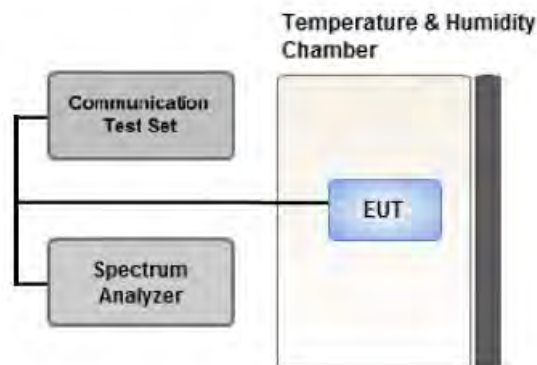

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

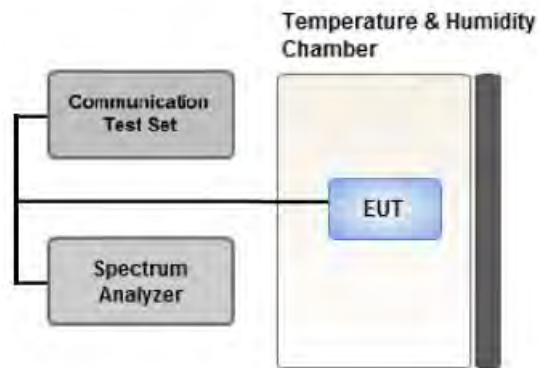

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.
(Main 2 Ant Worst case : 20 MHz)
(Sub 2 Ant Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A546E/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-A546E/DS)

[Main 2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

[Sub 2 Ant Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low	1	5	Z
			Mid, High	1	0	
		3	Low, High	1	14	
			Mid	1	0	
		5	Low, High	1	24	
			Mid	1	0	
		10	Low, High	1	49	
			Mid	1	0	
		15	Low, Mid	1	0	
			High	1	74	
		20	Low, Mid	1	0	
			High	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	3	Low, High	1	14	Z
			Mid	1	0	

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

- SM-A546E/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A546E/DS)

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/02/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/05/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	$< 13 \text{ dB}$	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	$< 2 \text{ Watts max. EIRP}$	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA (Main 2 Ant)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	LTE B2 1.4 MHz	QPSK	-16.23	17.55	10.40	2.13	H	< 2.00	0.382	25.82
		16-QAM	-17.10	16.68	10.40	2.13	H		0.313	24.95
		64-QAM	-18.18	15.60	10.40	2.13	H		0.244	23.87
		256-QAM	-21.07	12.71	10.40	2.13	H		0.125	20.98
1880.0		QPSK	-17.05	17.57	10.40	2.23	H		0.375	25.74
		16-QAM	-17.84	16.78	10.40	2.23	H		0.313	24.95
		64-QAM	-18.93	15.69	10.40	2.23	H		0.243	23.86
		256-QAM	-21.87	12.75	10.40	2.23	H		0.124	20.92
1909.3		QPSK	-17.64	16.93	10.40	2.14	H		0.330	25.19
		16-QAM	-18.52	16.05	10.40	2.14	H		0.270	24.31
		64-QAM	-19.67	14.90	10.40	2.14	H		0.207	23.16
		256-QAM	-22.54	12.03	10.40	2.14	H		0.107	20.29

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	LTE B2 3 MHz	QPSK	-16.22	17.56	10.40	2.13	H	< 2.00	0.383	25.83
		16-QAM	-17.06	16.72	10.40	2.13	H		0.316	24.99
		64-QAM	-18.23	15.55	10.40	2.13	H		0.241	23.82
		256-QAM	-21.04	12.74	10.40	2.13	H		0.126	21.01
1880.0		QPSK	-17.00	17.62	10.40	2.23	H		0.379	25.79
		16-QAM	-17.78	16.84	10.40	2.23	H		0.317	25.01
		64-QAM	-18.85	15.77	10.40	2.23	H		0.248	23.94
		256-QAM	-21.79	12.83	10.40	2.23	H		0.126	21.00
1908.5		QPSK	-17.47	17.10	10.40	2.14	H		0.344	25.36
		16-QAM	-18.45	16.12	10.40	2.14	H		0.274	24.38
		64-QAM	-19.53	15.04	10.40	2.14	H		0.214	23.30
		256-QAM	-22.38	12.19	10.40	2.14	H		0.111	20.45

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B2 5 MHz	QPSK	-16.17	17.61	10.40	2.13	H	< 2.00	0.387	25.88
		16-QAM	-17.03	16.75	10.40	2.13	H		0.318	25.02
		64-QAM	-18.10	15.68	10.40	2.13	H		0.248	23.95
		256-QAM	-21.03	12.75	10.40	2.13	H		0.126	21.02
1880.0		QPSK	-16.82	17.80	10.40	2.23	H		0.395	25.97
		16-QAM	-17.63	16.99	10.40	2.23	H		0.328	25.16
		64-QAM	-18.67	15.95	10.40	2.23	H		0.258	24.12
		256-QAM	-21.65	12.97	10.40	2.23	H		0.130	21.14
1907.5		QPSK	-17.47	17.10	10.40	2.14	H		0.344	25.36
		16-QAM	-18.38	16.19	10.40	2.14	H		0.279	24.45
		64-QAM	-19.44	15.13	10.40	2.14	H		0.218	23.39
		256-QAM	-22.32	12.25	10.40	2.14	H		0.112	20.51

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B2 10 MHz	QPSK	-16.45	17.51	10.40	2.15	H	< 2.00	0.377	25.76
		16-QAM	-17.40	16.56	10.40	2.15	H		0.303	24.81
		64-QAM	-18.46	15.50	10.40	2.15	H		0.237	23.75
		256-QAM	-21.33	12.63	10.40	2.15	H		0.122	20.88
1880.0		QPSK	-16.93	17.69	10.40	2.23	H		0.385	25.86
		16-QAM	-17.75	16.87	10.40	2.23	H		0.319	25.04
		64-QAM	-18.80	15.82	10.40	2.23	H		0.251	23.99
		256-QAM	-21.78	12.84	10.40	2.23	H		0.126	21.01
1905.0		QPSK	-17.70	16.88	10.40	2.16	H		0.325	25.12
		16-QAM	-18.52	16.06	10.40	2.16	H		0.269	24.30
		64-QAM	-19.60	14.98	10.40	2.16	H		0.210	23.22
		256-QAM	-22.54	12.04	10.40	2.16	H		0.107	20.28

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B2 15 MHz	QPSK	-16.49	17.65	10.40	2.17	H	< 2.00	0.387	25.88
		16-QAM	-17.40	16.74	10.40	2.17	H		0.314	24.97
		64-QAM	-18.48	15.66	10.40	2.17	H		0.245	23.89
		256-QAM	-21.34	12.80	10.40	2.17	H		0.127	21.03
1880.0		QPSK	-17.09	17.53	10.40	2.23	H		0.372	25.70
		16-QAM	-17.81	16.81	10.40	2.23	H		0.315	24.98
		64-QAM	-18.97	15.65	10.40	2.23	H		0.241	23.82
		256-QAM	-21.98	12.64	10.40	2.23	H		0.121	20.81
1902.5		QPSK	-17.53	17.06	10.40	2.18	H		0.337	25.28
		16-QAM	-18.30	16.29	10.40	2.18	H		0.282	24.51
		64-QAM	-19.44	15.15	10.40	2.18	H		0.217	23.37
		256-QAM	-22.42	12.17	10.40	2.18	H		0.109	20.39

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B2 20 MHz	QPSK	-16.28	17.86	10.40	2.17	H	< 2.00	0.406	26.09
		16-QAM	-17.21	16.93	10.40	2.17	H		0.328	25.16
		64-QAM	-18.30	15.84	10.40	2.17	H		0.255	24.07
		256-QAM	-21.09	13.05	10.40	2.17	H		0.134	21.28
1880.0		QPSK	-16.75	17.87	10.40	2.23	H		0.402	26.04
		16-QAM	-17.46	17.16	10.40	2.23	H		0.341	25.33
		64-QAM	-18.59	16.03	10.40	2.23	H		0.263	24.20
		256-QAM	-21.58	13.04	10.40	2.23	H		0.132	21.21
1900.0		QPSK	-17.17	17.42	10.40	2.18	H		0.366	25.64
		16-QAM	-18.01	16.58	10.40	2.18	H		0.302	24.80
		64-QAM	-19.13	15.46	10.40	2.18	H		0.233	23.68
		256-QAM	-22.02	12.57	10.40	2.18	H		0.120	20.79

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1860.0 MHz
- ▣ MEASURED OUTPUT POWER: 26.09 dBm = 0.407 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 39.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18700 (1860.0)	3 720.00	-43.42	12.30	-48.56	3.18	H	-39.44	65.53
	5 580.00	-53.38	13.60	-51.49	3.97	V	-41.86	67.96
	7 440.00	-57.76	10.80	-47.11	4.57	V	-40.88	66.97
18900 (1880.0)	3 760.00	-41.81	12.32	-46.31	3.08	H	-37.07	63.16
	5 640.00	-49.50	13.10	-47.69	3.90	V	-38.49	64.59
	7 520.00	-56.93	10.84	-46.35	4.61	H	-40.12	66.22
19100 (1900.0)	3 800.00	-42.72	12.40	-47.33	3.13	H	-38.06	64.15
	5 700.00	-50.18	13.10	-47.59	4.00	V	-38.49	64.59
	7 600.00	-57.40	11.10	-47.03	4.64	H	-40.57	66.67

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	4.78
			16-QAM	6	0	4.89
			64-QAM	6	0	5.53
			256-QAM	6	0	6.52
	3 MHz		QPSK	15	0	4.95
			16-QAM	15	0	5.22
			64-QAM	15	0	5.66
			256-QAM	15	0	6.47
	5 MHz		QPSK	25	0	4.85
			16-QAM	25	0	5.13
			64-QAM	25	0	5.63
			256-QAM	25	0	6.44
	10 MHz		QPSK	50	0	4.88
			16-QAM	50	0	5.08
			64-QAM	50	0	5.61
			256-QAM	50	0	6.45
	15 MHz		QPSK	75	0	4.83
			16-QAM	75	0	5.10
			64-QAM	75	0	5.64
			256-QAM	75	0	6.49
	20 MHz		QPSK	100	0	4.85
			16-QAM	100	0	5.15
			64-QAM	100	0	5.67
			256-QAM	100	0	6.48

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 139 ~ 162.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0978
			16-QAM	6	0	1.1006
			64-QAM	6	0	1.0970
			256-QAM	6	0	1.0991
	3 MHz		QPSK	15	0	2.7111
			16-QAM	15	0	2.7289
			64-QAM	15	0	2.7180
			256-QAM	15	0	2.7132
	5 MHz		QPSK	25	0	4.5300
			16-QAM	25	0	4.5464
			64-QAM	25	0	4.5298
			256-QAM	25	0	4.5179
	10 MHz		QPSK	50	0	8.9993
			16-QAM	50	0	9.0529
			64-QAM	50	0	9.0010
			256-QAM	50	0	8.9898
	15 MHz		QPSK	75	0	13.460
			16-QAM	75	0	13.539
			64-QAM	75	0	13.457
			256-QAM	75	0	13.447
	20 MHz		QPSK	100	0	17.928
			16-QAM	100	0	17.947
			64-QAM	100	0	17.934
			256-QAM	100	0	17.904

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 115 ~ 138.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7089	27.976	-77.225	-49.249	-13.00
		1880.0	3.7069	27.976	-77.229	-49.253	
		1909.3	3.7109	27.976	-77.110	-49.134	
	3	1851.5	3.6955	27.976	-77.546	-49.570	
		1880.0	3.7114	27.976	-77.316	-49.340	
		1908.5	3.6845	27.976	-77.046	-49.070	
	5	1852.5	3.7064	27.976	-77.261	-49.285	
		1880.0	3.6825	27.976	-77.327	-49.351	
		1907.5	3.7015	27.976	-77.323	-49.347	
	10	1855.0	3.6900	27.976	-76.927	-48.951	
		1880.0	3.6885	27.976	-77.004	-49.028	
		1905.0	3.6940	27.976	-77.320	-49.344	
	15	1857.5	3.7149	27.976	-77.545	-49.569	
		1880.0	3.7299	27.976	-77.344	-49.368	
		1902.5	3.7084	27.976	-76.794	-48.818	
	20	1860.0	3.6820	27.976	-77.307	-49.331	
		1880.0	3.7234	27.976	-77.305	-49.329	
		1900.0	3.7015	27.976	-77.218	-49.242	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 163 ~ 198.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 79 ~ 114.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1850 700 004	0.0	0.000 000	0.000
100 %		-30	1850 700 008	3.8	0.000 000	0.002
100 %		-20	1850 699 999	-5.2	0.000 000	-0.003
100 %		-10	1850 700 009	5.0	0.000 000	0.003
100 %		0	1850 700 010	5.9	0.000 000	0.003
100 %		+10	1850 700 000	-4.4	0.000 000	-0.002
100 %		+30	1850 700 008	4.1	0.000 000	0.002
100 %		+40	1850 700 000	-4.4	0.000 000	-0.002
100 %		+50	1850 700 007	3.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1850 700 010	5.3	0.000 000	0.003

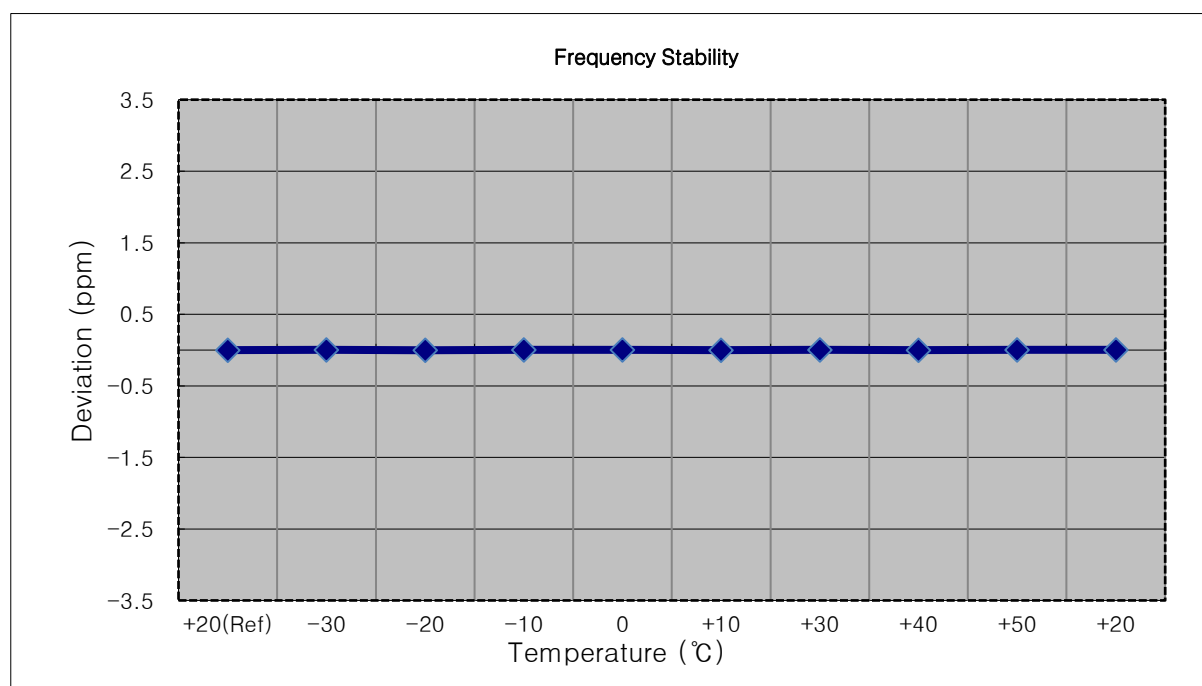


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1851 500 003	0.0	0.000 000	0.000
100 %		-30	1851 500 007	3.5	0.000 000	0.002
100 %		-20	1851 500 006	2.8	0.000 000	0.002
100 %		-10	1851 500 008	4.9	0.000 000	0.003
100 %		0	1851 500 007	3.8	0.000 000	0.002
100 %		+10	1851 500 006	3.2	0.000 000	0.002
100 %		+30	1851 500 007	3.7	0.000 000	0.002
100 %		+40	1851 500 009	5.8	0.000 000	0.003
100 %		+50	1851 500 009	5.3	0.000 000	0.003
Batt. Endpoint	3.400	+20	1851 500 008	4.7	0.000 000	0.003

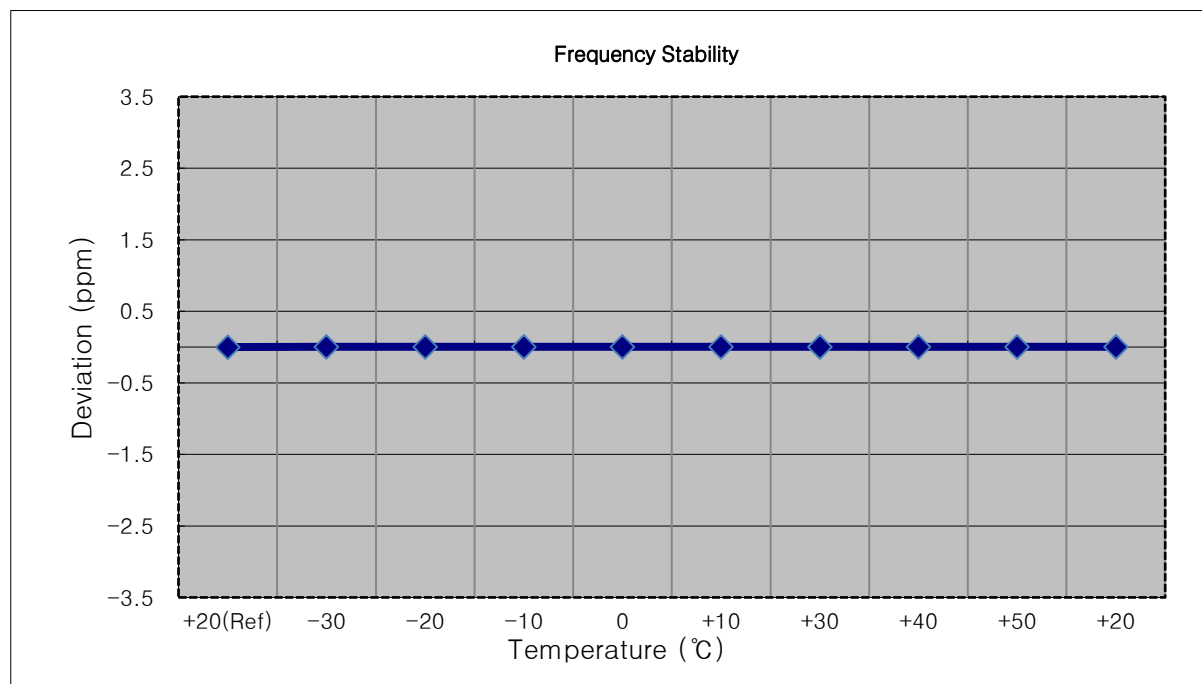


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1852 500 004	0.0	0.000 000	0.000
100 %		-30	1852 500 007	3.0	0.000 000	0.002
100 %		-20	1852 500 011	6.3	0.000 000	0.003
100 %		-10	1852 500 010	5.9	0.000 000	0.003
100 %		0	1852 500 000	-4.0	0.000 000	-0.002
100 %		+10	1852 500 010	5.6	0.000 000	0.003
100 %		+30	1852 500 009	4.5	0.000 000	0.002
100 %		+40	1852 500 007	2.4	0.000 000	0.001
100 %		+50	1852 500 010	6.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1852 500 009	5.1	0.000 000	0.003

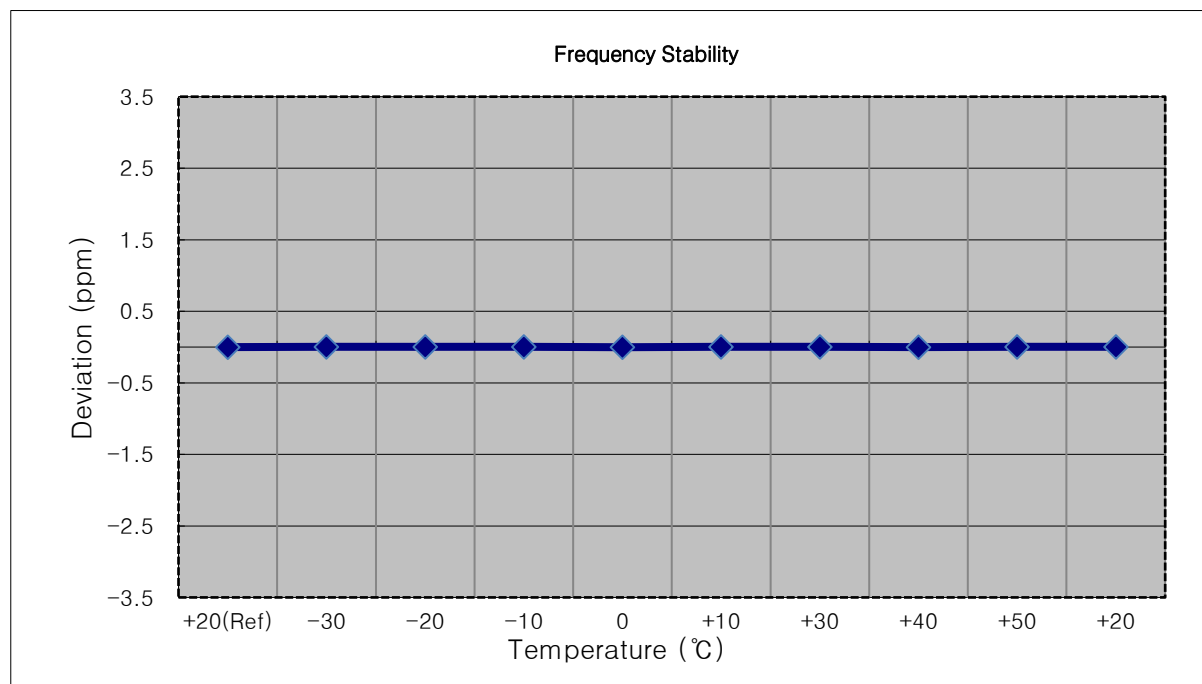


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1855 000 004	0.0	0.000 000	0.000
100 %		-30	1855 000 009	5.3	0.000 000	0.003
100 %		-20	1855 000 008	4.0	0.000 000	0.002
100 %		-10	1855 000 009	4.8	0.000 000	0.003
100 %		0	1855 000 008	4.1	0.000 000	0.002
100 %		+10	1855 000 008	4.1	0.000 000	0.002
100 %		+30	1855 000 008	4.3	0.000 000	0.002
100 %		+40	1855 000 000	-3.7	0.000 000	-0.002
100 %		+50	1854 999 999	-4.8	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1855 000 007	3.4	0.000 000	0.002

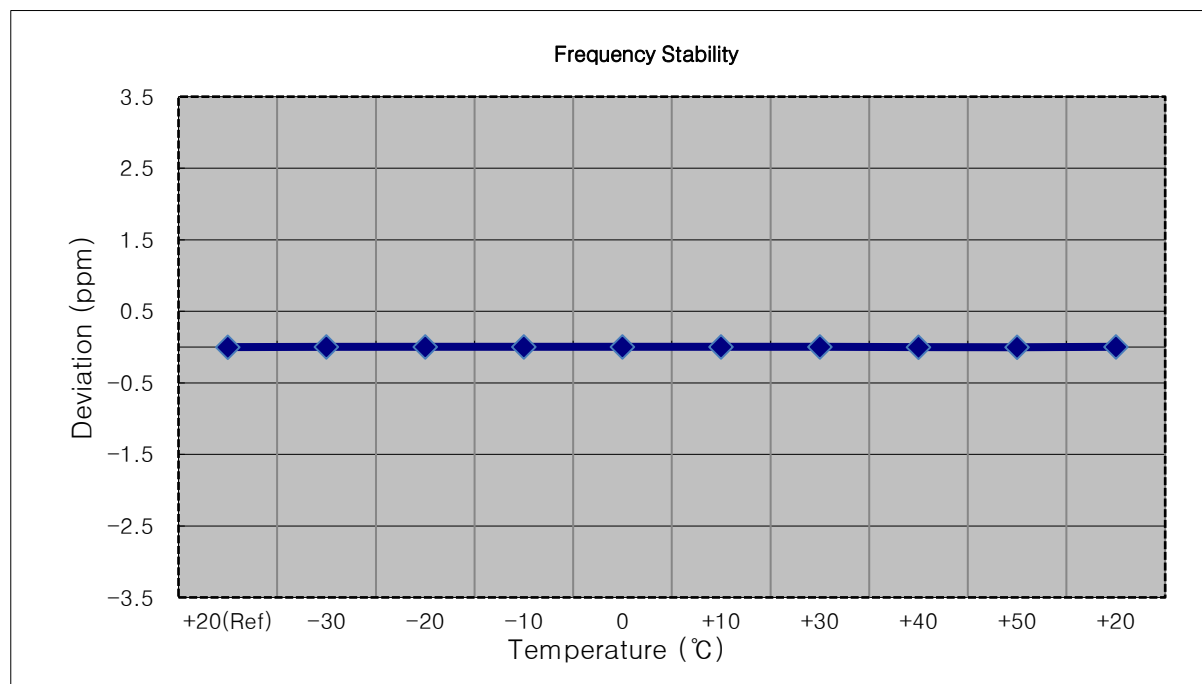


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1857 499 997	0.0	0.000 000	0.000
100 %		-30	1857 500 000	2.7	0.000 000	0.001
100 %		-20	1857 500 002	4.6	0.000 000	0.002
100 %		-10	1857 499 994	-2.7	0.000 000	-0.001
100 %		0	1857 500 001	4.1	0.000 000	0.002
100 %		+10	1857 500 002	4.7	0.000 000	0.003
100 %		+30	1857 499 993	-4.3	0.000 000	-0.002
100 %		+40	1857 500 001	4.3	0.000 000	0.002
100 %		+50	1857 500 003	6.3	0.000 000	0.003
Batt. Endpoint	3.400	+20	1857 500 001	3.6	0.000 000	0.002

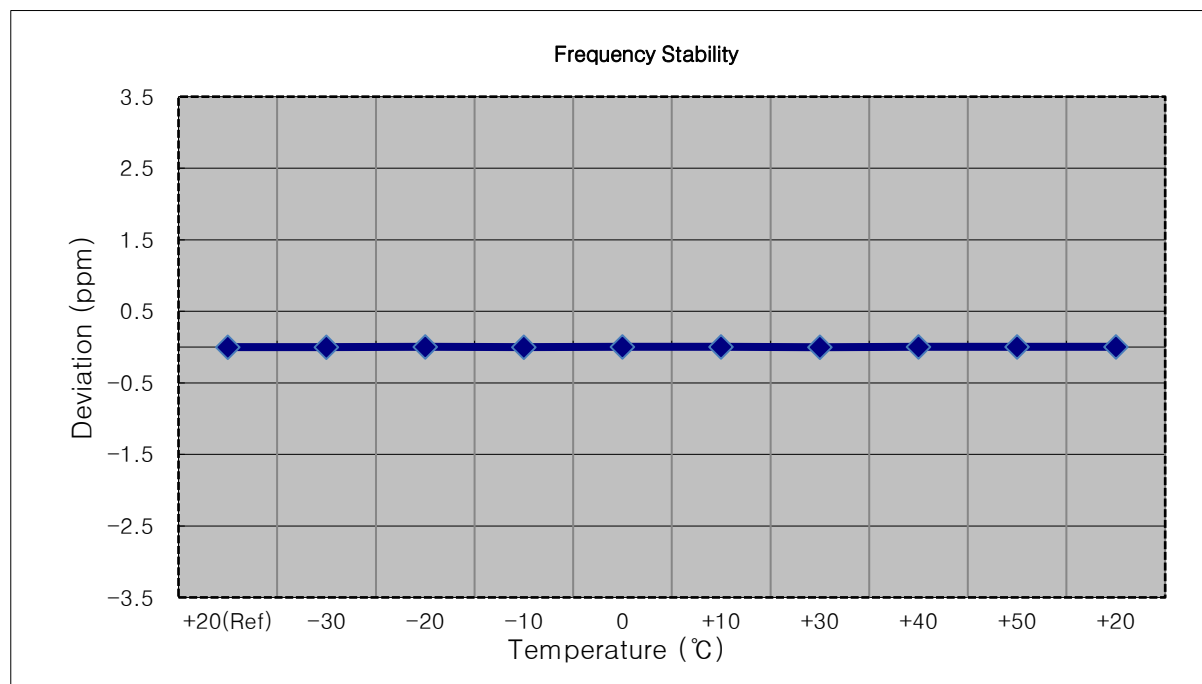


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1860 000 004	0.0	0.000 000	0.000
100 %		-30	1860 000 008	4.2	0.000 000	0.002
100 %		-20	1860 000 009	4.9	0.000 000	0.003
100 %		-10	1860 000 008	3.9	0.000 000	0.002
100 %		0	1859 999 998	-6.0	0.000 000	-0.003
100 %		+10	1860 000 007	3.5	0.000 000	0.002
100 %		+30	1860 000 007	2.8	0.000 000	0.002
100 %		+40	1860 000 002	-2.4	0.000 000	-0.001
100 %		+50	1860 000 001	-3.3	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1860 000 009	4.6	0.000 000	0.002

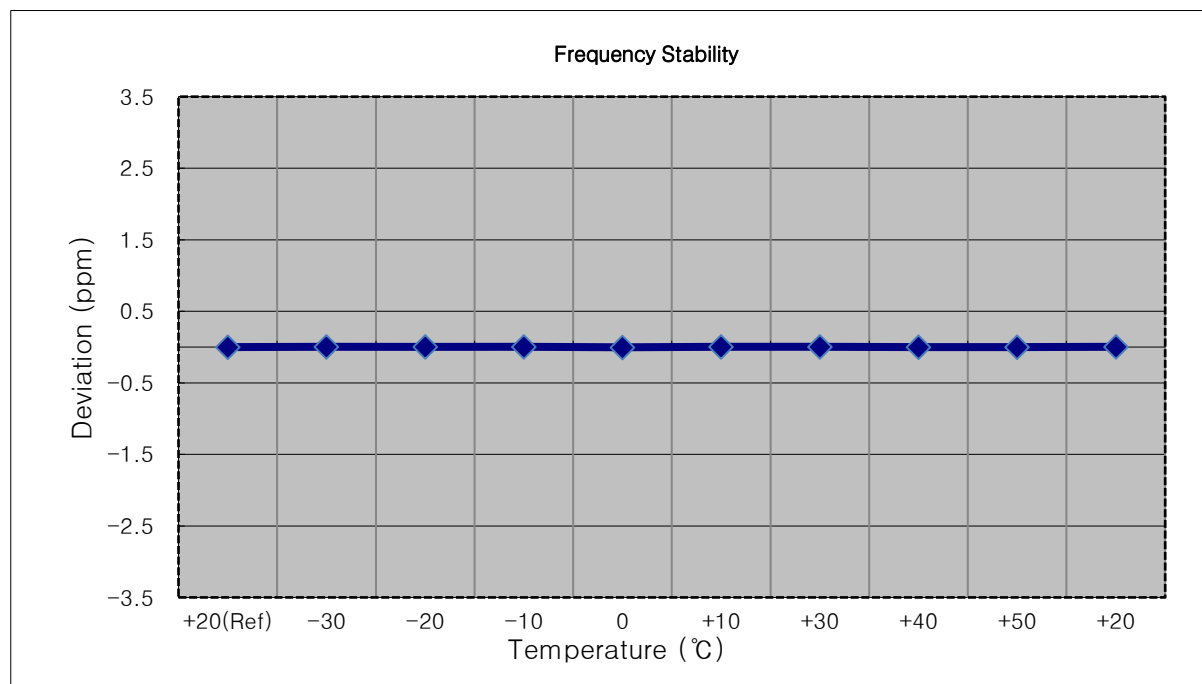


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 009	6.4	0.000 000	0.003
100 %		-20	1880 000 010	6.9	0.000 000	0.004
100 %		-10	1880 000 008	5.1	0.000 000	0.003
100 %		0	1880 000 006	2.6	0.000 000	0.001
100 %		+10	1880 000 007	4.1	0.000 000	0.002
100 %		+30	1880 000 008	4.5	0.000 000	0.002
100 %		+40	1880 000 009	5.5	0.000 000	0.003
100 %		+50	1879 999 999	-4.3	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1880 000 008	4.5	0.000 000	0.002

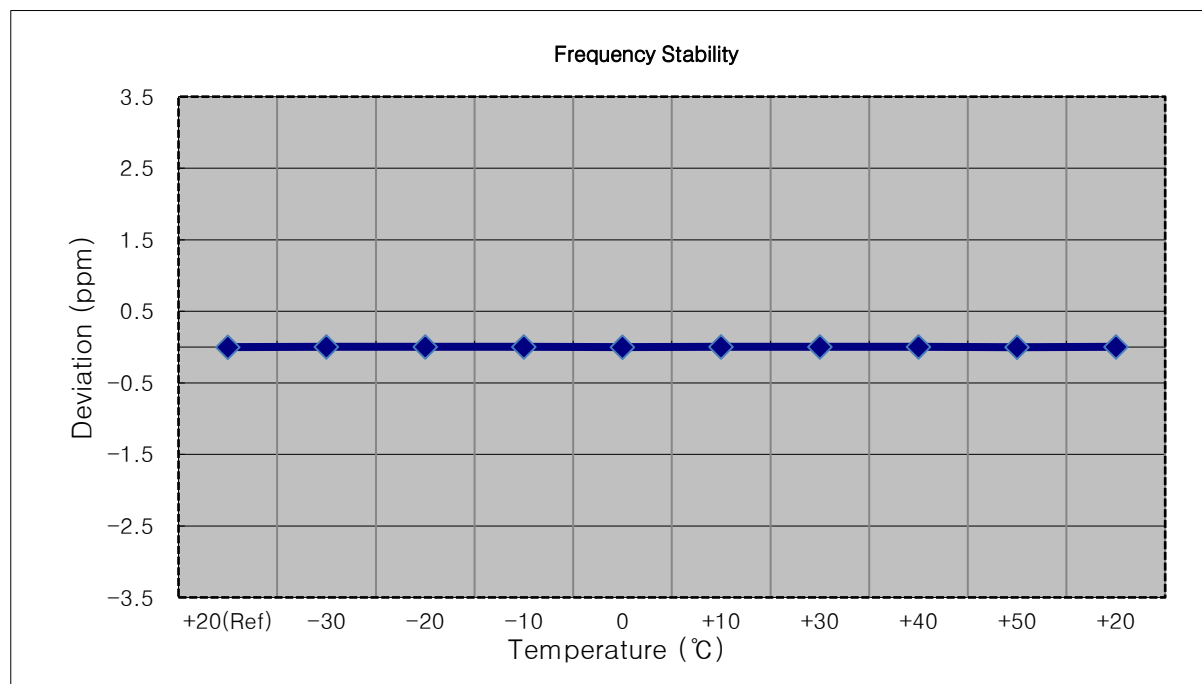


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 007	4.3	0.000 000	0.002
100 %		-20	1880 000 007	4.4	0.000 000	0.002
100 %		-10	1880 000 008	4.5	0.000 000	0.002
100 %		0	1880 000 007	4.4	0.000 000	0.002
100 %		+10	1880 000 006	2.8	0.000 000	0.001
100 %		+30	1880 000 009	6.1	0.000 000	0.003
100 %		+40	1880 000 009	5.5	0.000 000	0.003
100 %		+50	1880 000 007	3.7	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 007	4.1	0.000 000	0.002

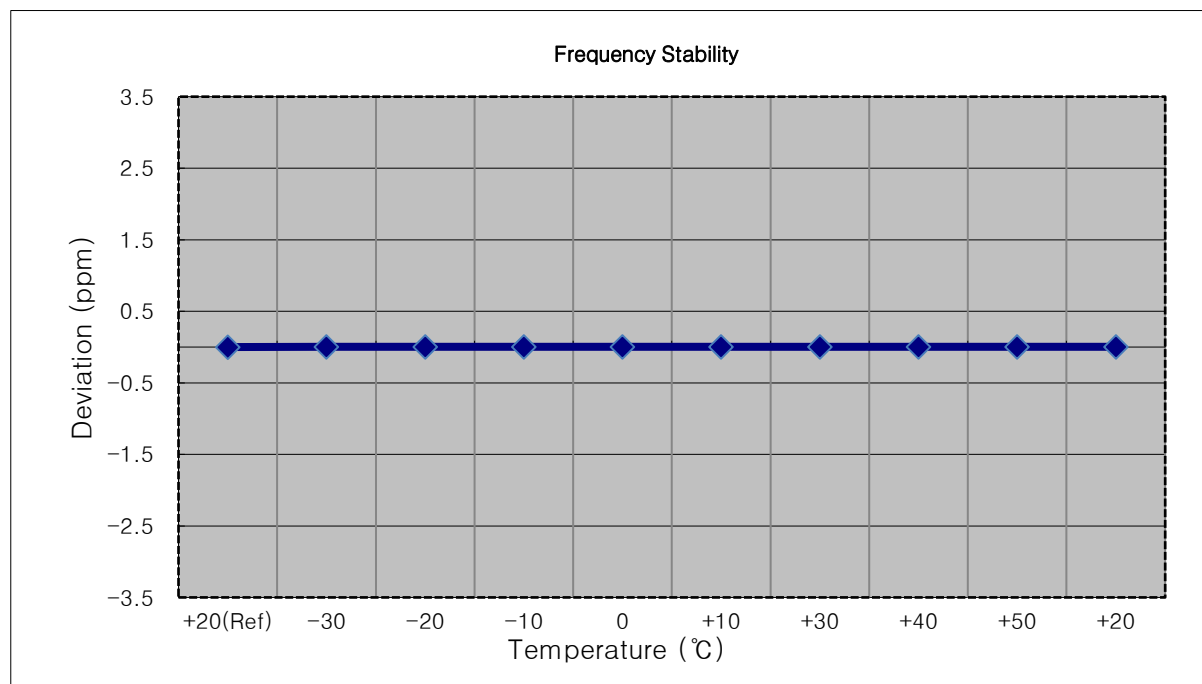


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 009	5.3	0.000 000	0.003
100 %		-20	1879 999 998	-5.6	0.000 000	-0.003
100 %		-10	1880 000 008	4.3	0.000 000	0.002
100 %		0	1880 000 009	4.9	0.000 000	0.003
100 %		+10	1880 000 008	4.6	0.000 000	0.002
100 %		+30	1880 000 009	4.9	0.000 000	0.003
100 %		+40	1880 000 008	4.0	0.000 000	0.002
100 %		+50	1880 000 008	4.4	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 009	5.8	0.000 000	0.003

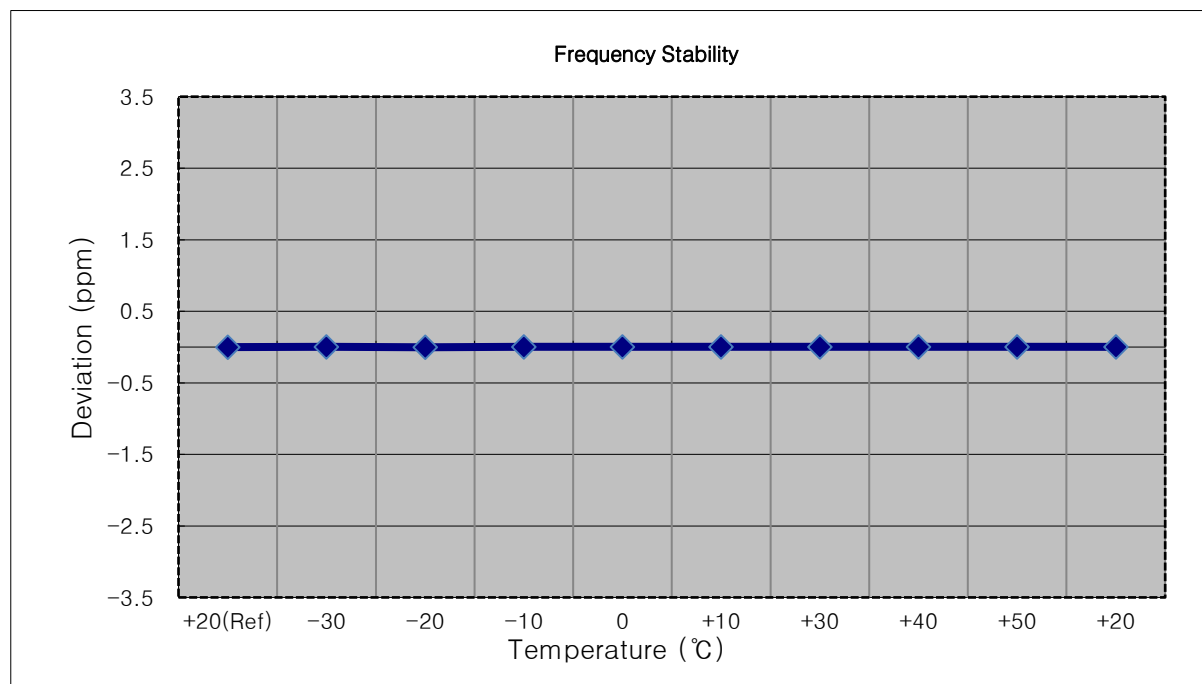


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 000	-3.8	0.000 000	-0.002
100 %		-20	1880 000 006	2.2	0.000 000	0.001
100 %		-10	1880 000 010	5.8	0.000 000	0.003
100 %		0	1880 000 008	3.4	0.000 000	0.002
100 %		+10	1880 000 007	3.1	0.000 000	0.002
100 %		+30	1880 000 007	2.7	0.000 000	0.001
100 %		+40	1880 000 009	4.5	0.000 000	0.002
100 %		+50	1880 000 007	3.0	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 007	2.8	0.000 000	0.001

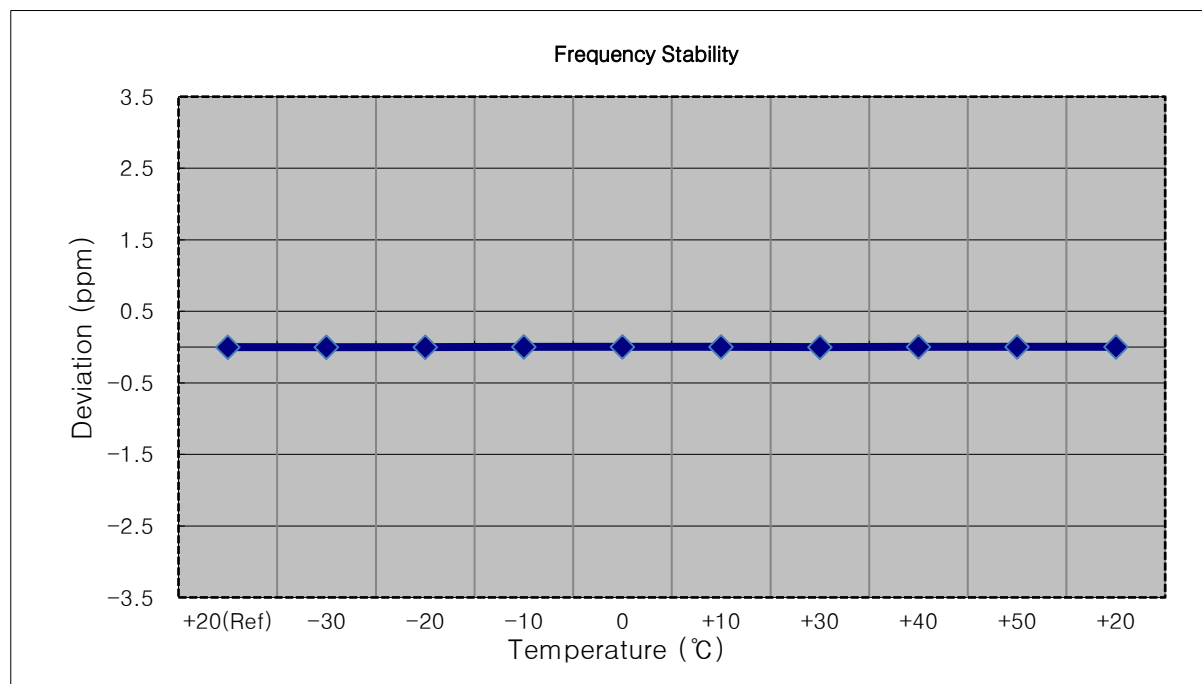


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 007	3.9	0.000 000	0.002
100 %		-20	1880 000 007	3.8	0.000 000	0.002
100 %		-10	1880 000 007	4.1	0.000 000	0.002
100 %		0	1880 000 007	3.8	0.000 000	0.002
100 %		+10	1880 000 007	3.4	0.000 000	0.002
100 %		+30	1880 000 008	5.0	0.000 000	0.003
100 %		+40	1880 000 007	4.0	0.000 000	0.002
100 %		+50	1880 000 006	3.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 008	5.1	0.000 000	0.003

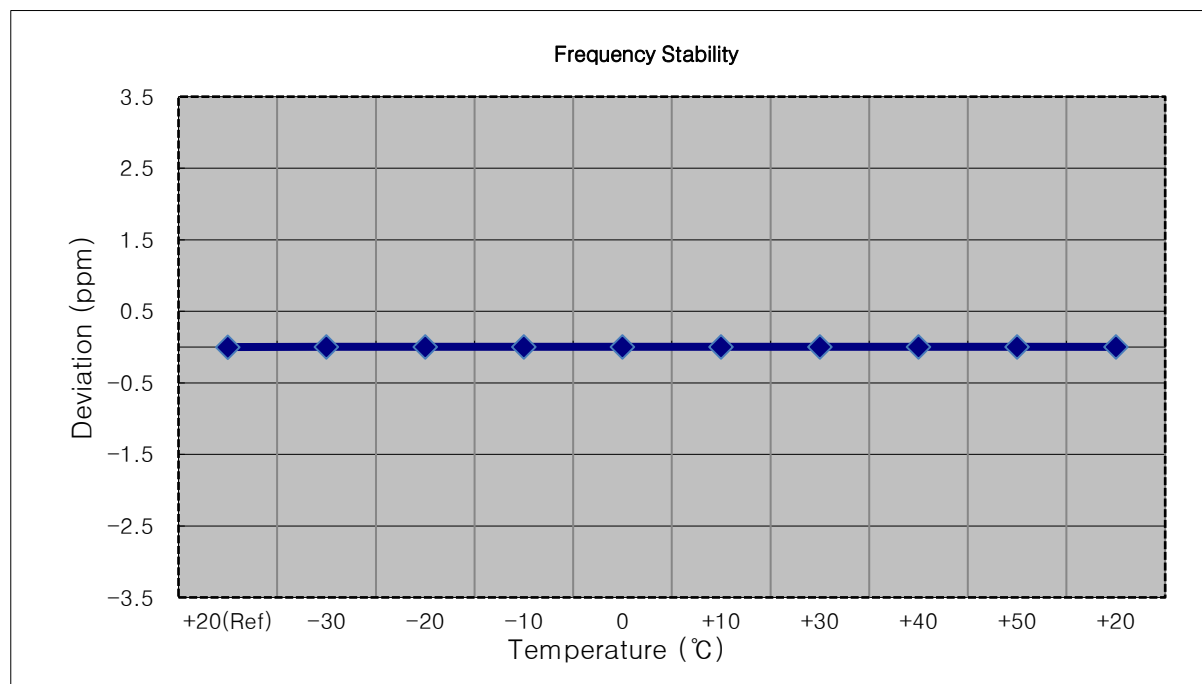


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 007	4.5	0.000 000	0.002
100 %		-20	1880 000 007	4.0	0.000 000	0.002
100 %		-10	1880 000 006	3.6	0.000 000	0.002
100 %		0	1880 000 007	4.4	0.000 000	0.002
100 %		+10	1880 000 005	2.5	0.000 000	0.001
100 %		+30	1880 000 006	3.2	0.000 000	0.002
100 %		+40	1880 000 007	4.0	0.000 000	0.002
100 %		+50	1880 000 005	2.0	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 005	2.9	0.000 000	0.002

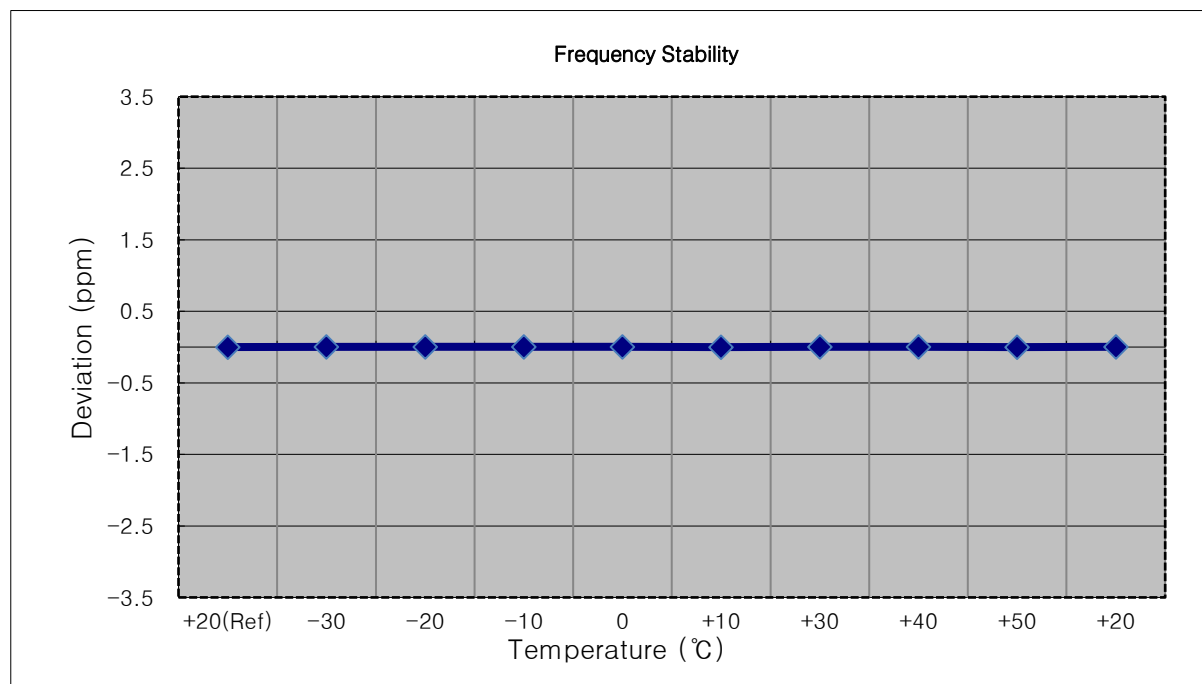


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1909 300 005	0.0	0.000 000	0.000
100 %		-30	1909 300 010	4.7	0.000 000	0.002
100 %		-20	1909 300 013	7.7	0.000 000	0.004
100 %		-10	1909 300 011	5.9	0.000 000	0.003
100 %		0	1909 300 010	5.0	0.000 000	0.003
100 %		+10	1909 300 009	4.2	0.000 000	0.002
100 %		+30	1909 300 009	4.1	0.000 000	0.002
100 %		+40	1909 300 001	-4.3	0.000 000	-0.002
100 %		+50	1909 300 011	6.3	0.000 000	0.003
Batt. Endpoint	3.400	+20	1909 300 003	-2.4	0.000 000	-0.001

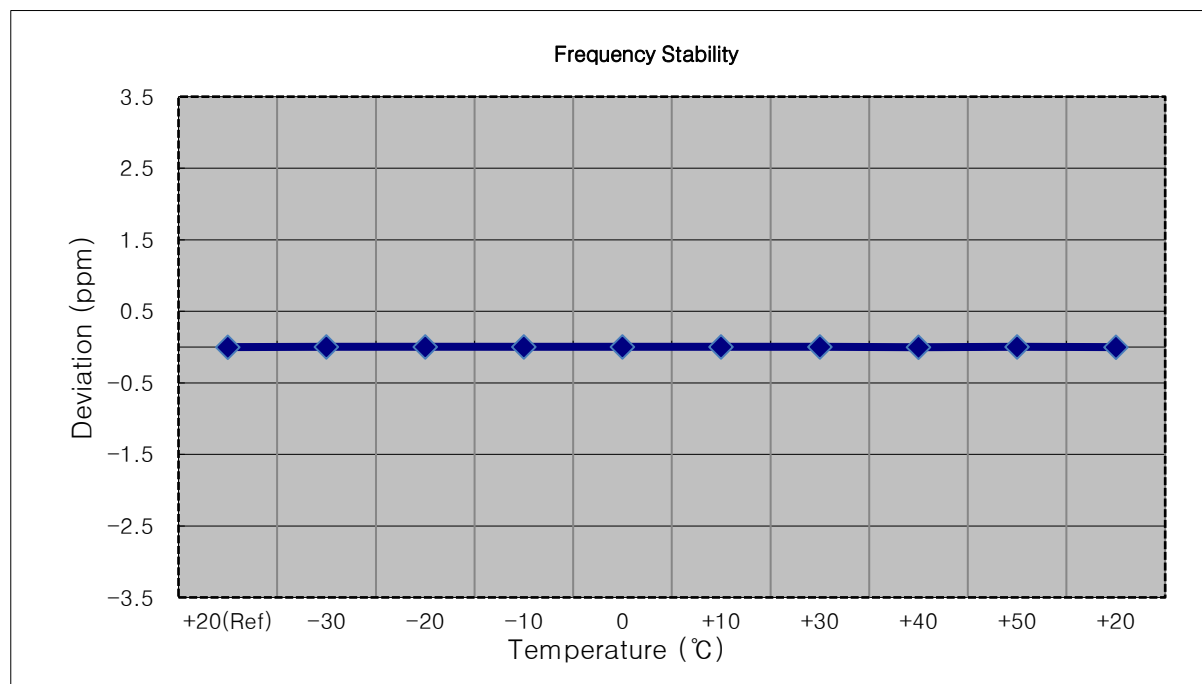


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1908 500 008	0.0	0.000 000	0.000
100 %		-30	1908 500 016	7.5	0.000 000	0.004
100 %		-20	1908 500 017	8.5	0.000 000	0.004
100 %		-10	1908 500 017	8.4	0.000 000	0.004
100 %		0	1908 500 017	8.9	0.000 000	0.005
100 %		+10	1908 500 018	10.1	0.000 001	0.005
100 %		+30	1908 500 019	10.4	0.000 001	0.005
100 %		+40	1908 500 021	13.0	0.000 001	0.007
100 %		+50	1908 500 021	12.3	0.000 001	0.006
Batt. Endpoint	3.400	+20	1908 499 999	-9.1	0.000 000	-0.005

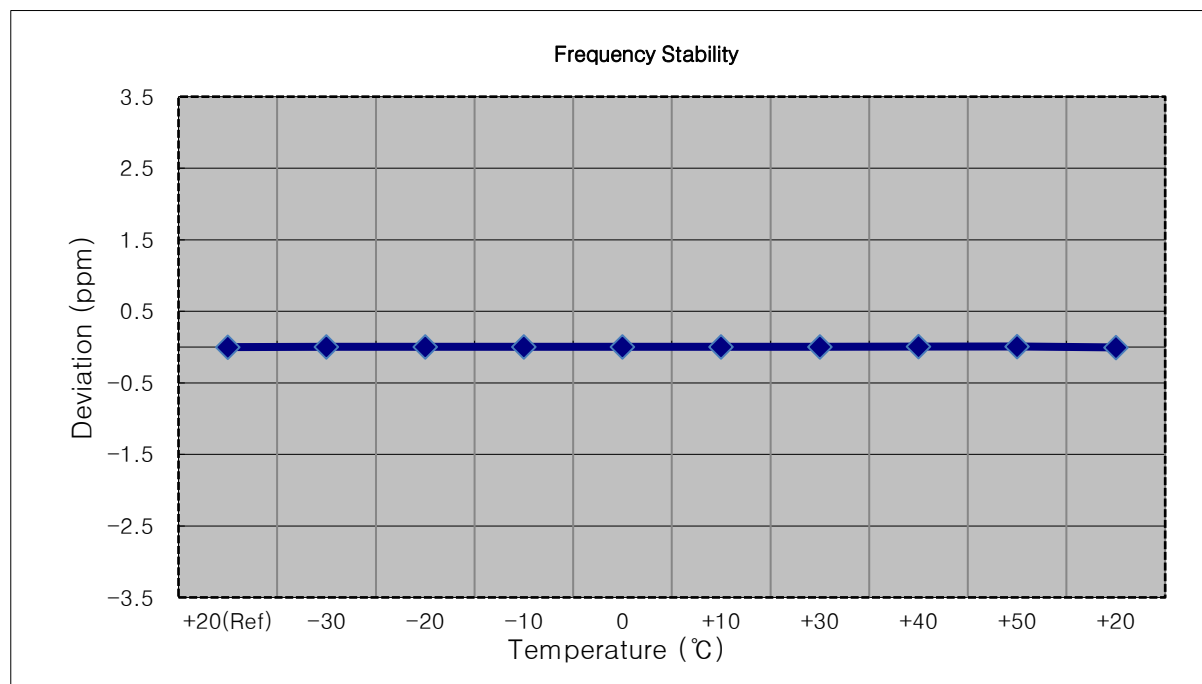


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1907 500 006	0.0	0.000 000	0.000
100 %		-30	1907 500 011	5.4	0.000 000	0.003
100 %		-20	1907 500 001	-5.0	0.000 000	-0.003
100 %		-10	1907 500 001	-4.9	0.000 000	-0.003
100 %		0	1907 500 002	-4.3	0.000 000	-0.002
100 %		+10	1907 499 999	-6.8	0.000 000	-0.004
100 %		+30	1907 500 002	-3.7	0.000 000	-0.002
100 %		+40	1907 500 001	-4.6	0.000 000	-0.002
100 %		+50	1907 500 001	-4.9	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1907 500 002	-4.1	0.000 000	-0.002

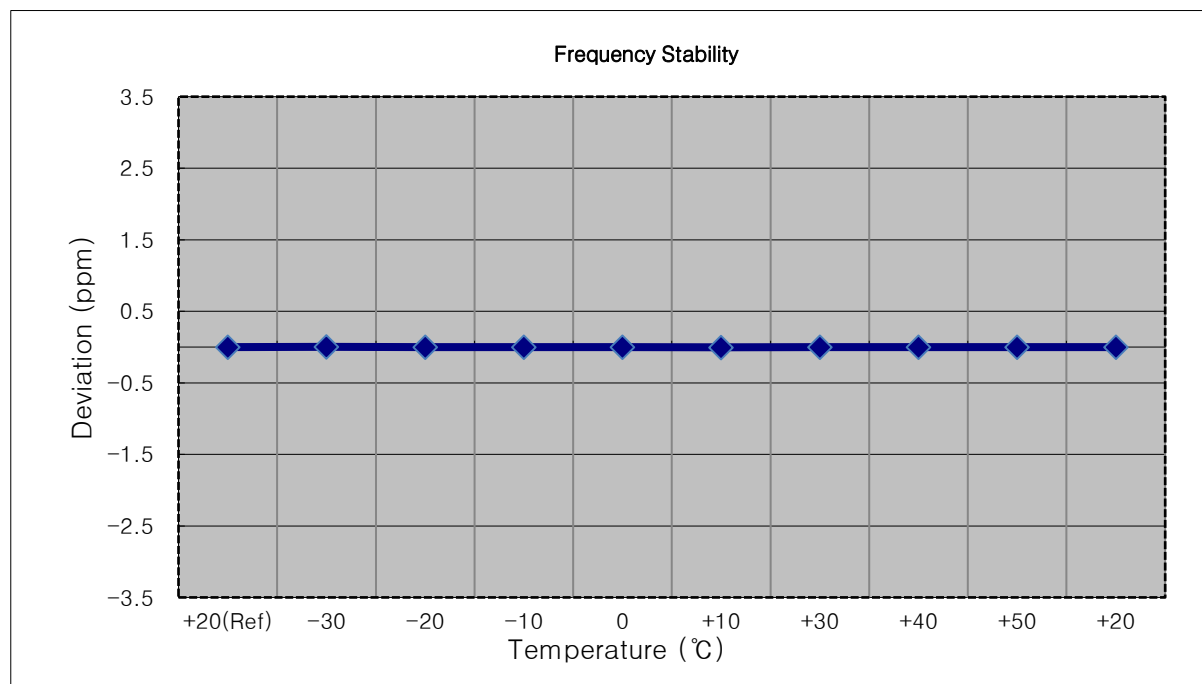


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1905 000 007	0.0	0.000 000	0.000
100 %		-30	1905 000 011	4.3	0.000 000	0.002
100 %		-20	1905 000 015	7.8	0.000 000	0.004
100 %		-10	1905 000 011	3.7	0.000 000	0.002
100 %		0	1905 000 012	5.4	0.000 000	0.003
100 %		+10	1905 000 013	5.6	0.000 000	0.003
100 %		+30	1905 000 002	-4.9	0.000 000	-0.003
100 %		+40	1905 000 012	5.2	0.000 000	0.003
100 %		+50	1905 000 011	4.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	1905 000 011	4.4	0.000 000	0.002

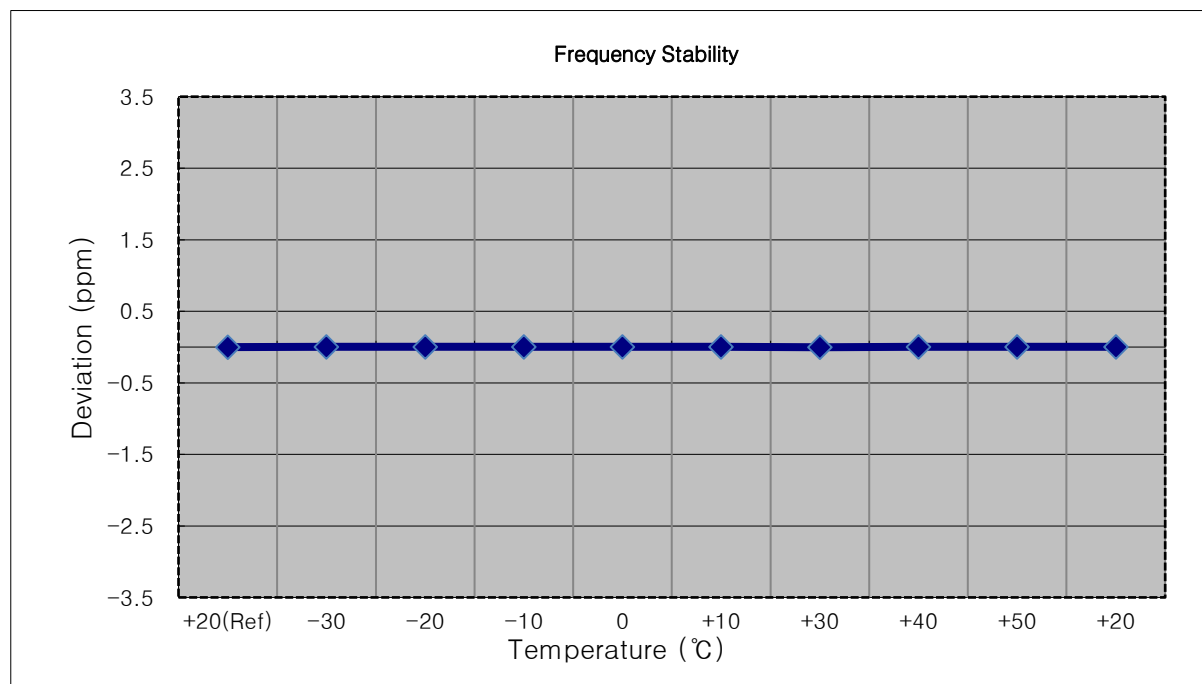


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1902 500 005	0.0	0.000 000	0.000
100 %		-30	1902 500 001	-4.1	0.000 000	-0.002
100 %		-20	1902 500 011	5.7	0.000 000	0.003
100 %		-10	1902 500 010	5.1	0.000 000	0.003
100 %		0	1902 500 009	4.5	0.000 000	0.002
100 %		+10	1902 500 010	5.6	0.000 000	0.003
100 %		+30	1902 500 007	2.3	0.000 000	0.001
100 %		+40	1902 500 012	7.3	0.000 000	0.004
100 %		+50	1902 500 009	4.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1902 500 007	2.3	0.000 000	0.001

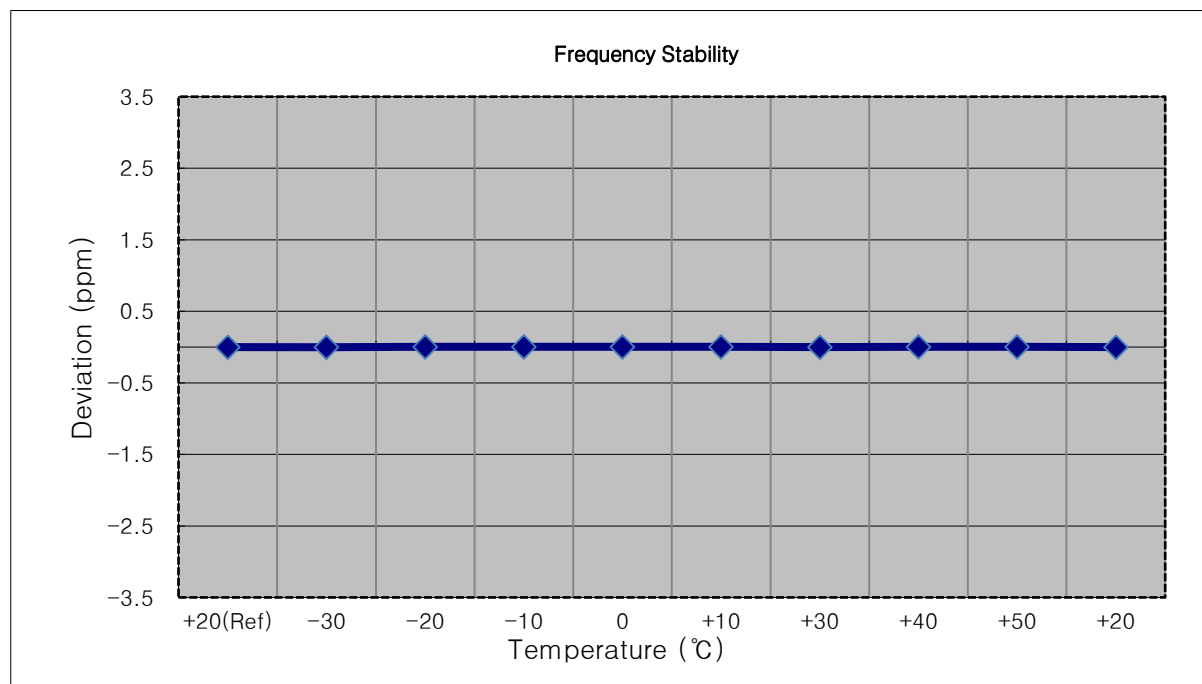

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1900 000 006	0.0	0.000 000	0.000
100 %		-30	1900 000 012	6.7	0.000 000	0.004
100 %		-20	1900 000 011	5.7	0.000 000	0.003
100 %		-10	1900 000 009	3.3	0.000 000	0.002
100 %		0	1900 000 012	6.7	0.000 000	0.004
100 %		+10	1900 000 012	6.7	0.000 000	0.004
100 %		+30	1900 000 010	4.3	0.000 000	0.002
100 %		+40	1900 000 011	5.7	0.000 000	0.003
100 %		+50	1900 000 009	2.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1900 000 012	5.8	0.000 000	0.003

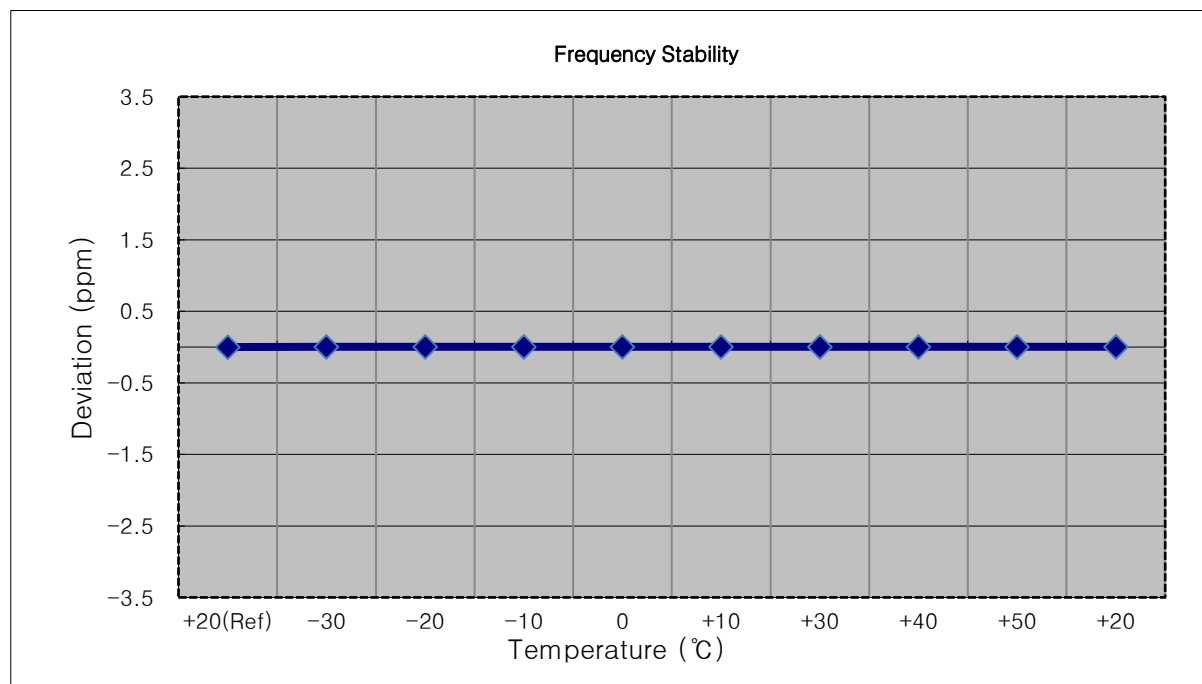

9. TEST DATA (Sub 2 Ant)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-24.74	9.08	10.00	2.12	V	< 2.00	0.050	16.96
		16-QAM	-24.75	9.07	10.00	2.12	V		0.050	16.95
		64-QAM	-24.79	9.03	10.00	2.12	V		0.049	16.91
		256-QAM	-26.80	7.02	10.00	2.12	V		0.031	14.90
1880.0		QPSK	-24.92	8.68	10.00	2.21	V		0.044	16.47
		16-QAM	-25.06	8.54	10.00	2.21	V		0.043	16.33
		64-QAM	-25.07	8.53	10.00	2.21	V		0.043	16.32
		256-QAM	-27.06	6.54	10.00	2.21	V		0.027	14.33
1909.3		QPSK	-24.91	9.11	10.01	2.11	V		0.050	17.01
		16-QAM	-25.04	8.98	10.01	2.11	V		0.049	16.88
		64-QAM	-25.05	8.97	10.01	2.11	V		0.049	16.87
		256-QAM	-27.08	6.94	10.01	2.11	V		0.030	14.84

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-24.57	9.25	10.00	2.12	V	< 2.00	0.052	17.13
		16-QAM	-24.62	9.20	10.00	2.12	V		0.051	17.08
		64-QAM	-24.59	9.23	10.00	2.12	V		0.051	17.11
		256-QAM	-26.65	7.17	10.00	2.12	V		0.032	15.05
1880.0		QPSK	-24.83	8.77	10.00	2.21	V		0.045	16.56
		16-QAM	-24.94	8.66	10.00	2.21	V		0.044	16.45
		64-QAM	-24.97	8.63	10.00	2.21	V		0.044	16.42
		256-QAM	-26.98	6.62	10.00	2.21	V		0.028	14.41
1908.5		QPSK	-24.92	9.10	10.01	2.11	V		0.050	17.00
		16-QAM	-25.02	9.00	10.01	2.11	V		0.049	16.90
		64-QAM	-25.08	8.94	10.01	2.11	V		0.048	16.84
		256-QAM	-27.15	6.87	10.01	2.11	V		0.030	14.77

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-24.64	9.18	10.00	2.12	V	< 2.00	0.051	17.06
		16-QAM	-24.70	9.12	10.00	2.12	V		0.050	17.00
		64-QAM	-24.67	9.15	10.00	2.12	V		0.050	17.03
		256-QAM	-26.71	7.11	10.00	2.12	V		0.032	14.99
1880.0		QPSK	-24.76	8.84	10.00	2.21	V		0.046	16.63
		16-QAM	-24.85	8.75	10.00	2.21	V		0.045	16.54
		64-QAM	-24.87	8.73	10.00	2.21	V		0.045	16.52
		256-QAM	-26.92	6.68	10.00	2.21	V		0.028	14.47
1907.5		QPSK	-24.95	9.07	10.01	2.11	V		0.050	16.97
		16-QAM	-25.09	8.93	10.01	2.11	V		0.048	16.83
		64-QAM	-25.08	8.94	10.01	2.11	V		0.048	16.84
		256-QAM	-27.10	6.92	10.01	2.11	V		0.030	14.82

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-24.63	8.96	10.00	2.15	V	< 2.00	0.048	16.81
		16-QAM	-24.70	8.89	10.00	2.15	V		0.047	16.74
		64-QAM	-24.65	8.94	10.00	2.15	V		0.048	16.79
		256-QAM	-26.75	6.84	10.00	2.15	V		0.029	14.69
1880.0		QPSK	-24.73	8.87	10.00	2.21	V		0.046	16.66
		16-QAM	-24.86	8.74	10.00	2.21	V		0.045	16.53
		64-QAM	-24.88	8.72	10.00	2.21	V		0.045	16.51
		256-QAM	-26.84	6.76	10.00	2.21	V		0.029	14.55
1905.0		QPSK	-24.83	9.14	10.01	2.13	V		0.050	17.02
		16-QAM	-24.96	9.01	10.01	2.13	V		0.049	16.89
		64-QAM	-24.99	8.98	10.01	2.13	V		0.049	16.86
		256-QAM	-27.00	6.97	10.01	2.13	V		0.031	14.85

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-24.52	8.82	10.00	2.17	V	< 2.00	0.046	16.65
		16-QAM	-24.55	8.79	10.00	2.17	V		0.046	16.62
		64-QAM	-24.54	8.80	10.00	2.17	V		0.046	16.63
		256-QAM	-26.63	6.71	10.00	2.17	V		0.029	14.54
1880.0		QPSK	-24.64	8.96	10.00	2.21	V		0.047	16.75
		16-QAM	-24.77	8.83	10.00	2.21	V		0.046	16.62
		64-QAM	-24.78	8.82	10.00	2.21	V		0.046	16.61
		256-QAM	-26.76	6.84	10.00	2.21	V		0.029	14.63
1902.5		QPSK	-24.82	9.09	10.01	2.15	V		0.050	16.95
		16-QAM	-24.96	8.95	10.01	2.15	V		0.048	16.81
		64-QAM	-24.94	8.97	10.01	2.15	V		0.048	16.83
		256-QAM	-27.01	6.90	10.01	2.15	V		0.030	14.76

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-24.46	8.88	10.00	2.17	V	< 2.00	0.047	16.71
		16-QAM	-24.50	8.84	10.00	2.17	V		0.046	16.67
		64-QAM	-24.48	8.86	10.00	2.17	V		0.047	16.69
		256-QAM	-26.57	6.77	10.00	2.17	V		0.029	14.60
1880.0		QPSK	-24.57	9.03	10.00	2.21	V		0.048	16.82
		16-QAM	-24.67	8.93	10.00	2.21	V		0.047	16.72
		64-QAM	-24.65	8.95	10.00	2.21	V		0.047	16.74
		256-QAM	-26.73	6.87	10.00	2.21	V		0.029	14.66
1900.0		QPSK	-24.84	9.07	10.01	2.15	V		0.049	16.93
		16-QAM	-24.98	8.93	10.01	2.15	V		0.048	16.79
		64-QAM	-24.97	8.94	10.01	2.15	V		0.048	16.80
		256-QAM	-27.07	6.84	10.01	2.15	V		0.030	14.70

9.2 RADIATED SPURIOUS EMISSIONS

- ☐ OPERATING FREQUENCY: 1851.5 MHz
☐ MEASURED OUTPUT POWER: 17.13 dBm = 0.052 W
☐ MODE: LTE B2
☐ MODULATION SIGNAL: 3 MHz QPSK
☐ DISTANCE: 3 meters
☐ LIMIT: $43 + 10 \log_{10}(W) =$ 30.13 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18616 (1851.5)	3 703.00	-59.13	11.40	-60.01	3.07	V	-51.68	68.81
	5 554.50	-60.17	11.80	-54.55	3.79	V	-46.54	63.67
	7 406.00	-63.08	10.80	-48.42	4.47	V	-42.09	59.22
	9 257.50	-61.32	10.80	-46.82	5.13	V	-41.15	58.28
	11 109.00	-62.46	11.30	-43.88	5.60	V	-38.18	55.31
18900 (1880.0)	3 760.00	-59.67	11.30	-59.80	3.07	H	-51.57	68.63
	5 640.00	-60.27	11.90	-54.67	3.89	H	-46.66	63.72
	7 520.00	-62.70	11.10	-48.47	4.51	H	-41.88	58.94
	9 400.00	-60.93	10.80	-45.65	5.07	H	-39.92	56.98
	11 280.00	-61.92	11.40	-42.62	5.62	H	-36.84	53.90
19185 (1908.5)	3 817.00	-60.82	11.10	-59.90	3.10	V	-51.90	69.03
	5 725.50	-61.29	11.70	-55.26	3.85	V	-47.41	64.54
	7 634.00	-61.44	11.20	-47.93	4.53	V	-41.26	58.39
	9 542.50	-61.05	10.90	-46.01	5.15	V	-40.26	57.40
	11 451.00	-62.22	11.40	-42.37	5.68	V	-36.65	53.78

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.42
			16-QAM	6	0	6.06
			64-QAM	6	0	6.24
			256-QAM	6	0	5.90
	3 MHz		QPSK	15	0	5.43
			16-QAM	15	0	6.11
			64-QAM	15	0	6.18
			256-QAM	15	0	6.10
	5 MHz		QPSK	25	0	5.39
			16-QAM	25	0	6.10
			64-QAM	25	0	6.20
			256-QAM	25	0	6.05
	10 MHz		QPSK	50	0	5.49
			16-QAM	50	0	6.16
			64-QAM	50	0	6.32
			256-QAM	50	0	5.98
	15 MHz		QPSK	75	0	5.24
			16-QAM	75	0	5.97
			64-QAM	75	0	6.07
			256-QAM	75	0	5.93
	20 MHz		QPSK	100	0	5.32
			16-QAM	100	0	6.01
			64-QAM	100	0	6.15
			256-QAM	100	0	5.89

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 260 ~ 283.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0929
			16-QAM	6	0	1.0948
			64-QAM	6	0	1.0963
			256-QAM	6	0	1.0908
	3 MHz		QPSK	15	0	2.7130
			16-QAM	15	0	2.7084
			64-QAM	15	0	2.7067
			256-QAM	15	0	2.7063
	5 MHz		QPSK	25	0	4.5234
			16-QAM	25	0	4.5246
			64-QAM	25	0	4.5316
			256-QAM	25	0	4.5235
	10 MHz		QPSK	50	0	9.0296
			16-QAM	50	0	9.0260
			64-QAM	50	0	9.0395
			256-QAM	50	0	8.9969
	15 MHz		QPSK	75	0	13.501
			16-QAM	75	0	13.505
			64-QAM	75	0	13.516
			256-QAM	75	0	13.503
	20 MHz		QPSK	100	0	18.022
			16-QAM	100	0	18.031
			64-QAM	100	0	18.031
			256-QAM	100	0	18.041

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 236 ~ 259.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7907	29.116	-70.770	-41.654	-13.00
		1880.0	8.5987	29.791	-70.617	-40.826	
		1909.3	9.9746	29.791	-70.218	-40.427	
	3	1851.5	4.0718	29.116	-70.657	-41.541	
		1880.0	5.2089	29.791	-70.353	-40.562	
		1908.5	9.6800	29.791	-70.091	-40.300	
	5	1852.5	4.0654	29.116	-71.170	-42.054	
		1880.0	8.5593	29.791	-70.189	-40.398	
		1907.5	3.8191	29.116	-65.831	-36.715	
	10	1855.0	4.0100	29.116	-70.296	-41.180	
		1880.0	8.8275	29.791	-69.508	-39.717	
		1905.0	9.7039	29.791	-70.984	-41.193	
	15	1857.5	3.7015	29.116	-63.146	-34.030	
		1880.0	3.8071	29.116	-69.813	-40.697	
		1902.5	8.0020	29.791	-70.166	-40.375	
	20	1860.0	8.8480	29.791	-70.752	-40.961	
		1880.0	9.7124	29.791	-70.621	-40.830	
		1900.0	9.7014	29.791	-69.961	-40.170	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 284 ~ 319.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. F Factor(dB) = Cable Loss + Attenuator + 4-way divider

Frequency Range (GHz)	Factor [dB]
0.03 – 1	26.390
1 – 5	29.116
5 – 10	29.791
10 – 15	30.426
15 – 20	30.839
Above 20(26.5)	31.551


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 201 ~ 235.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1850 699 971	0.0	0.000 000	0.000
100 %		-30	1850 699 964	-7.1	0.000 000	-0.004
100 %		-20	1850 699 978	6.5	0.000 000	0.004
100 %		-10	1850 699 963	-8.4	0.000 000	-0.005
100 %		0	1850 699 962	-8.7	0.000 000	-0.005
100 %		+10	1850 699 976	5.3	0.000 000	0.003
100 %		+30	1850 699 981	9.8	0.000 001	0.005
100 %		+40	1850 699 980	8.7	0.000 000	0.005
100 %		+50	1850 699 962	-9.3	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	1850 699 956	-15.1	-0.000 001	-0.008

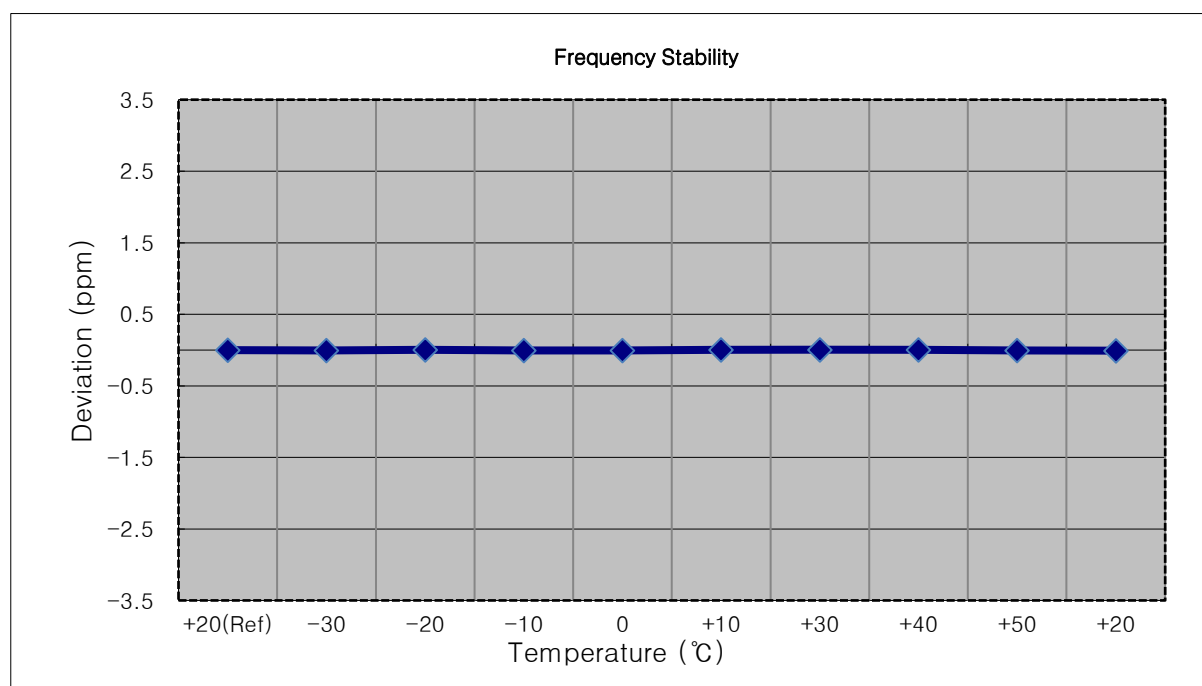


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1851 499 001	0.0	0.000 000	0.000
100 %		-30	1851 498 999	-2.1	0.000 000	-0.001
100 %		-20	1851 499 019	18.3	0.000 001	0.010
100 %		-10	1851 499 012	11.4	0.000 001	0.006
100 %		0	1851 499 011	9.8	0.000 001	0.005
100 %		+10	1851 499 008	7.1	0.000 000	0.004
100 %		+30	1851 499 022	20.7	0.000 001	0.011
100 %		+40	1851 499 020	18.7	0.000 001	0.010
100 %		+50	1851 499 016	15.4	0.000 001	0.008
Batt. Endpoint	3.400	+20	1851 499 012	11.0	0.000 001	0.006

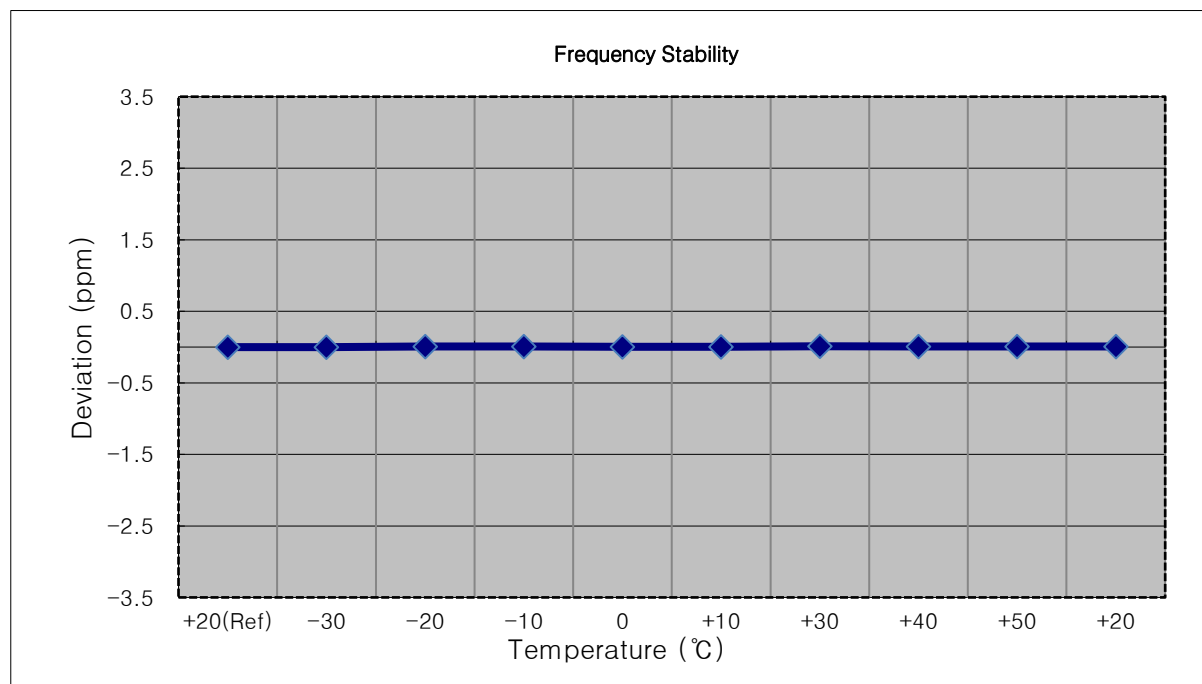


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1852 500 016	0.0	0.000 000	0.000
100 %		-30	1852 500 030	14.7	0.000 001	0.008
100 %		-20	1852 500 030	14.1	0.000 001	0.008
100 %		-10	1852 500 029	13.0	0.000 001	0.007
100 %		0	1852 500 027	11.9	0.000 001	0.006
100 %		+10	1852 500 032	16.5	0.000 001	0.009
100 %		+30	1852 500 030	14.3	0.000 001	0.008
100 %		+40	1852 500 032	16.4	0.000 001	0.009
100 %		+50	1852 500 032	16.0	0.000 001	0.009
Batt. Endpoint	3.400	+20	1852 500 031	15.4	0.000 001	0.008

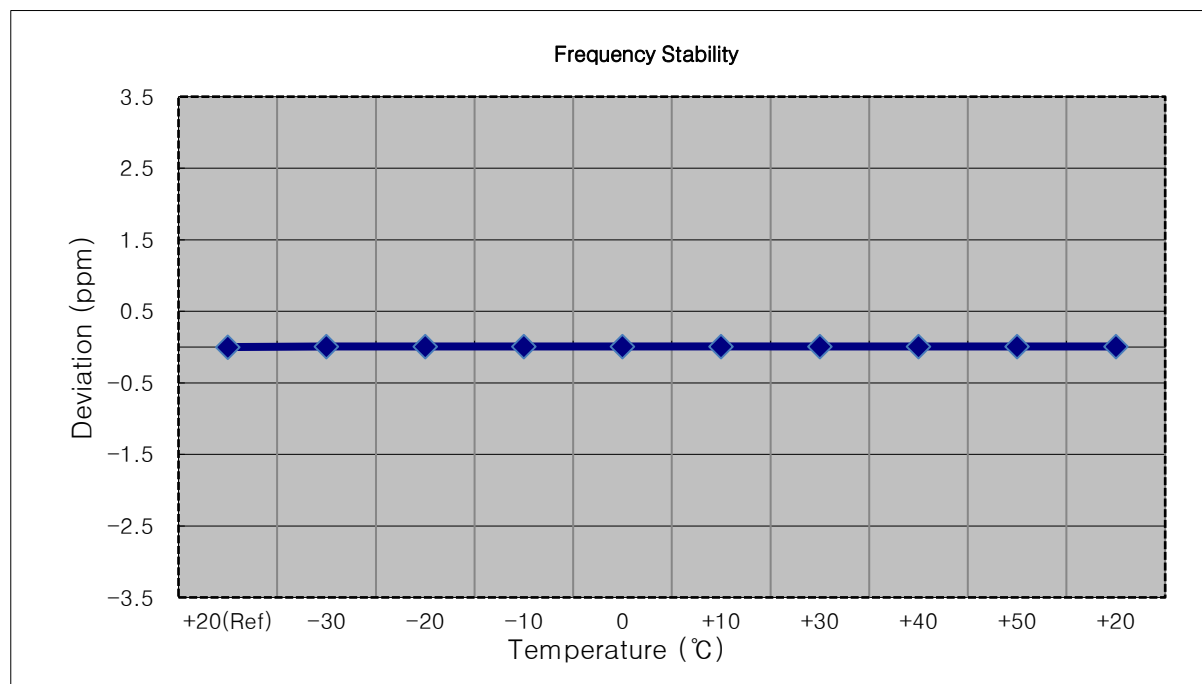


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1855 000 005	0.0	0.000 000	0.000
100 %		-30	1855 000 007	2.5	0.000 000	0.001
100 %		-20	1855 000 008	3.5	0.000 000	0.002
100 %		-10	1855 000 007	2.4	0.000 000	0.001
100 %		0	1855 000 008	3.3	0.000 000	0.002
100 %		+10	1855 000 008	3.5	0.000 000	0.002
100 %		+30	1855 000 003	-1.8	0.000 000	-0.001
100 %		+40	1855 000 008	3.3	0.000 000	0.002
100 %		+50	1855 000 009	4.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	1855 000 010	4.9	0.000 000	0.003

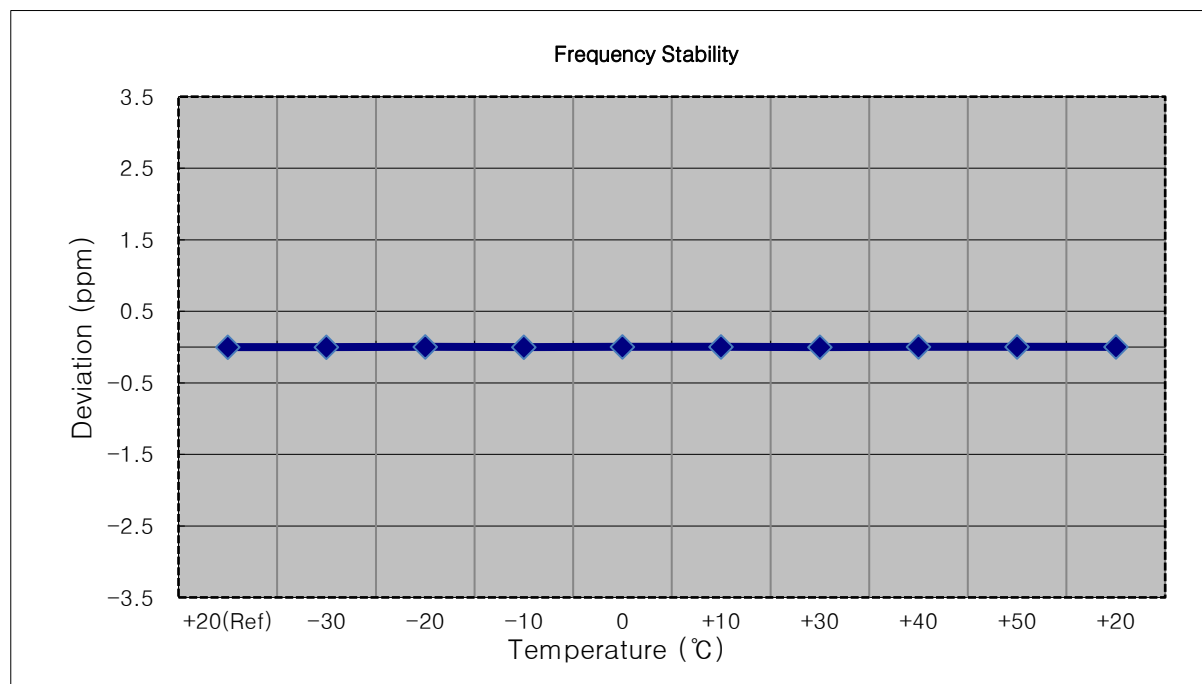


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1857 500 000	0.0	0.000 000	0.000
100 %		-30	1857 500 001	0.5	0.000 000	0.000
100 %		-20	1857 500 000	-0.3	0.000 000	0.000
100 %		-10	1857 500 005	5.0	0.000 000	0.003
100 %		0	1857 500 002	1.3	0.000 000	0.001
100 %		+10	1857 500 005	4.1	0.000 000	0.002
100 %		+30	1857 500 003	3.0	0.000 000	0.002
100 %		+40	1857 500 005	4.6	0.000 000	0.002
100 %		+50	1857 500 000	-0.1	0.000 000	0.000
Batt. Endpoint	3.400	+20	1857 500 003	2.7	0.000 000	0.001

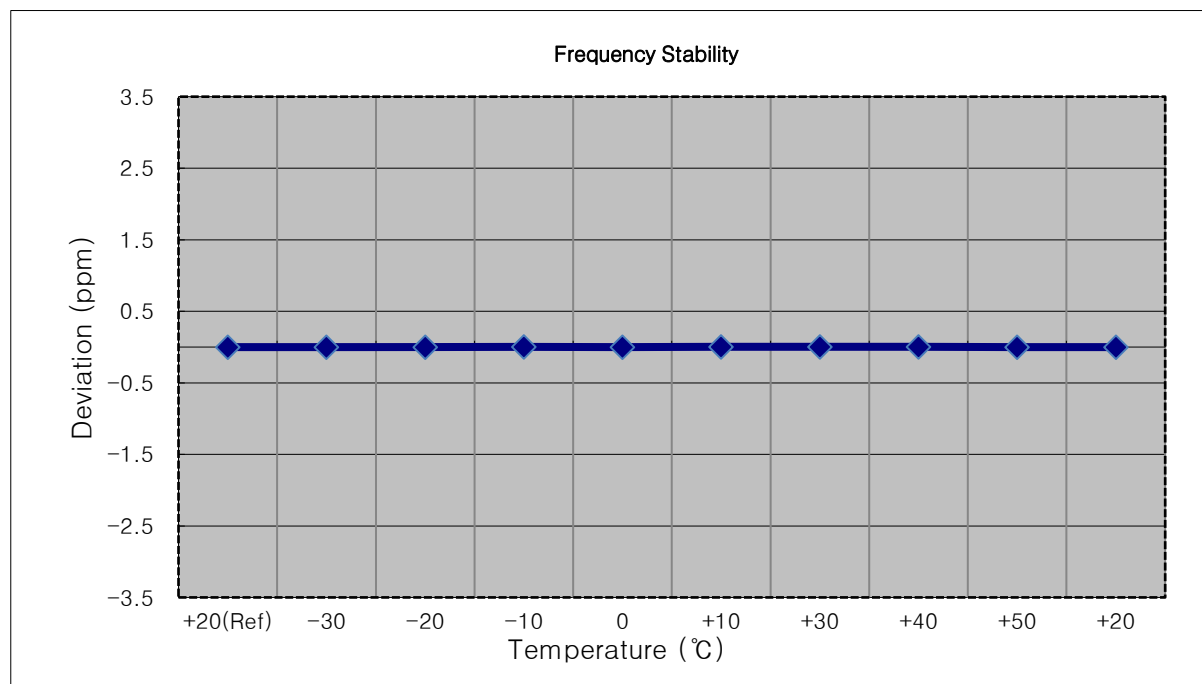


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1860 000 004	0.0	0.000 000	0.000
100 %		-30	1860 000 008	4.4	0.000 000	0.002
100 %		-20	1860 000 008	4.7	0.000 000	0.003
100 %		-10	1860 000 007	3.0	0.000 000	0.002
100 %		0	1860 000 008	3.9	0.000 000	0.002
100 %		+10	1860 000 008	4.4	0.000 000	0.002
100 %		+30	1860 000 009	4.8	0.000 000	0.003
100 %		+40	1860 000 007	3.5	0.000 000	0.002
100 %		+50	1860 000 006	2.3	0.000 000	0.001
Batt. Endpoint	3.400	+20	1860 000 007	2.9	0.000 000	0.002

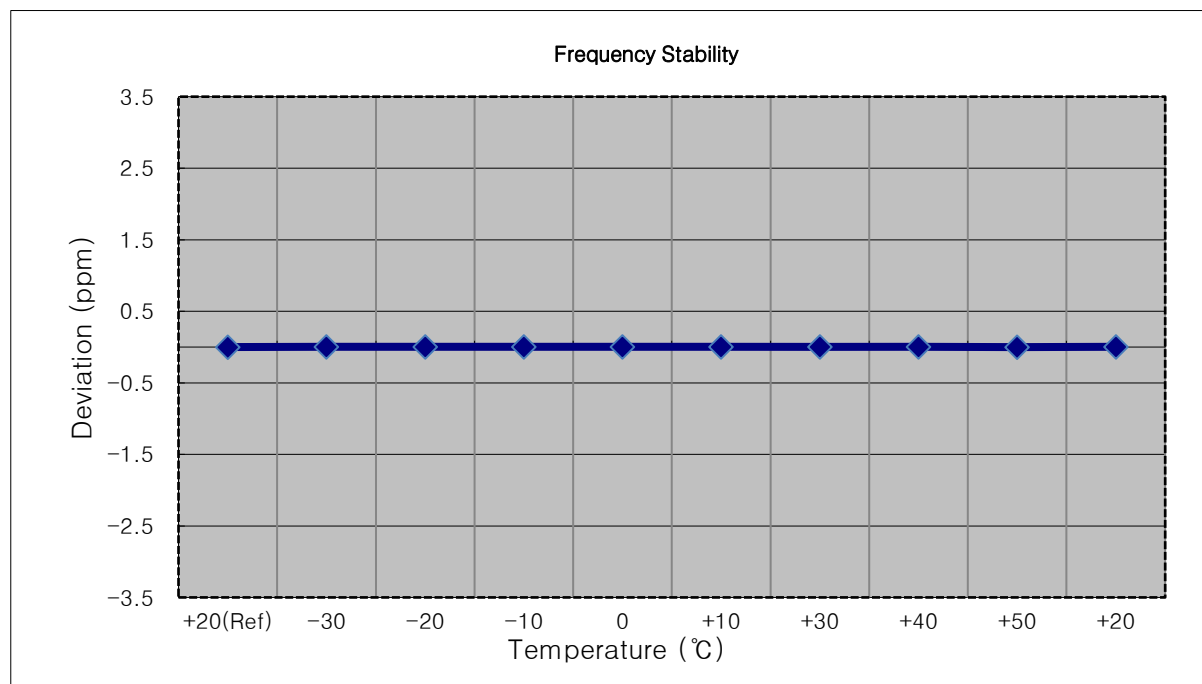


☐ MODE: LTE B2
☐ OPERATING FREQUENCY: 1880,000,000 Hz
☐ CHANNEL: 18900 (1.4 MHz)
☐ REFERENCE VOLTAGE: 3.850 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1879 999 001	0.0	0.000 000	0.000
100 %		-30	1879 998 994	-7.1	0.000 000	-0.004
100 %		-20	1879 999 008	6.5	0.000 000	0.003
100 %		-10	1879 998 993	-8.4	0.000 000	-0.004
100 %		0	1879 998 992	-8.7	0.000 000	-0.005
100 %		+10	1879 999 006	5.3	0.000 000	0.003
100 %		+30	1879 999 011	9.8	0.000 001	0.005
100 %		+40	1879 999 010	8.7	0.000 000	0.005
100 %		+50	1879 998 992	-9.3	0.000 000	-0.005
Batt. Endpoint	3.400	+20	1879 998 986	-15.1	-0.000 001	-0.008

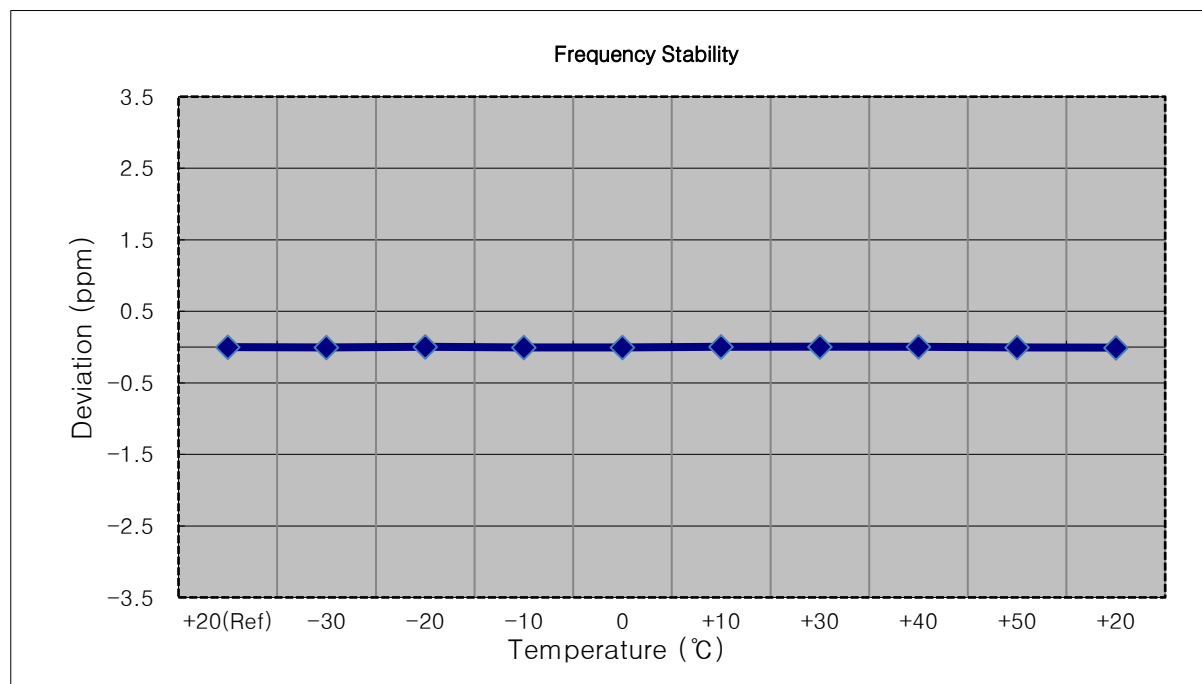


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100 %		-30	1880 000 004	2.0	0.000 000	0.001
100 %		-20	1880 000 002	-0.3	0.000 000	0.000
100 %		-10	1880 000 006	3.6	0.000 000	0.002
100 %		0	1879 999 997	-5.4	0.000 000	-0.003
100 %		+10	1879 999 997	-5.7	0.000 000	-0.003
100 %		+30	1880 000 004	2.2	0.000 000	0.001
100 %		+40	1880 000 005	2.7	0.000 000	0.001
100 %		+50	1880 000 005	3.0	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 010	7.8	0.000 000	0.004

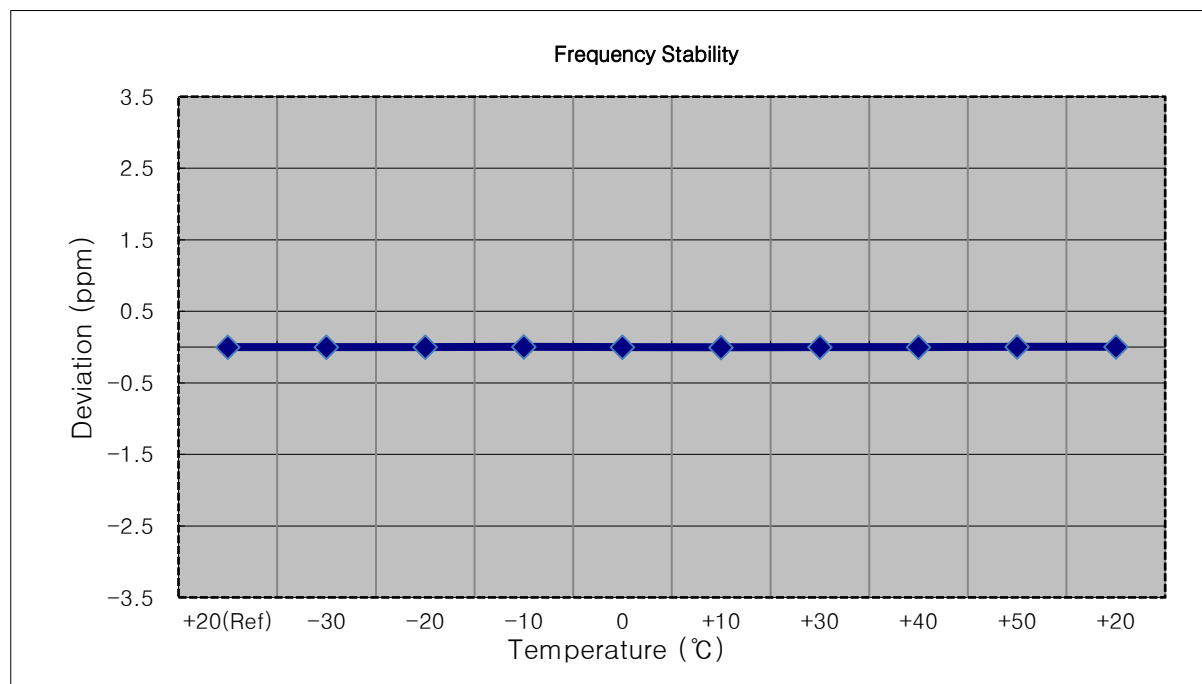


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 007	2.5	0.000 000	0.001
100 %		-20	1880 000 007	2.9	0.000 000	0.002
100 %		-10	1880 000 007	2.5	0.000 000	0.001
100 %		0	1880 000 008	4.0	0.000 000	0.002
100 %		+10	1880 000 009	4.6	0.000 000	0.002
100 %		+30	1880 000 009	5.0	0.000 000	0.003
100 %		+40	1880 000 008	3.5	0.000 000	0.002
100 %		+50	1880 000 006	1.9	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 007	2.3	0.000 000	0.001

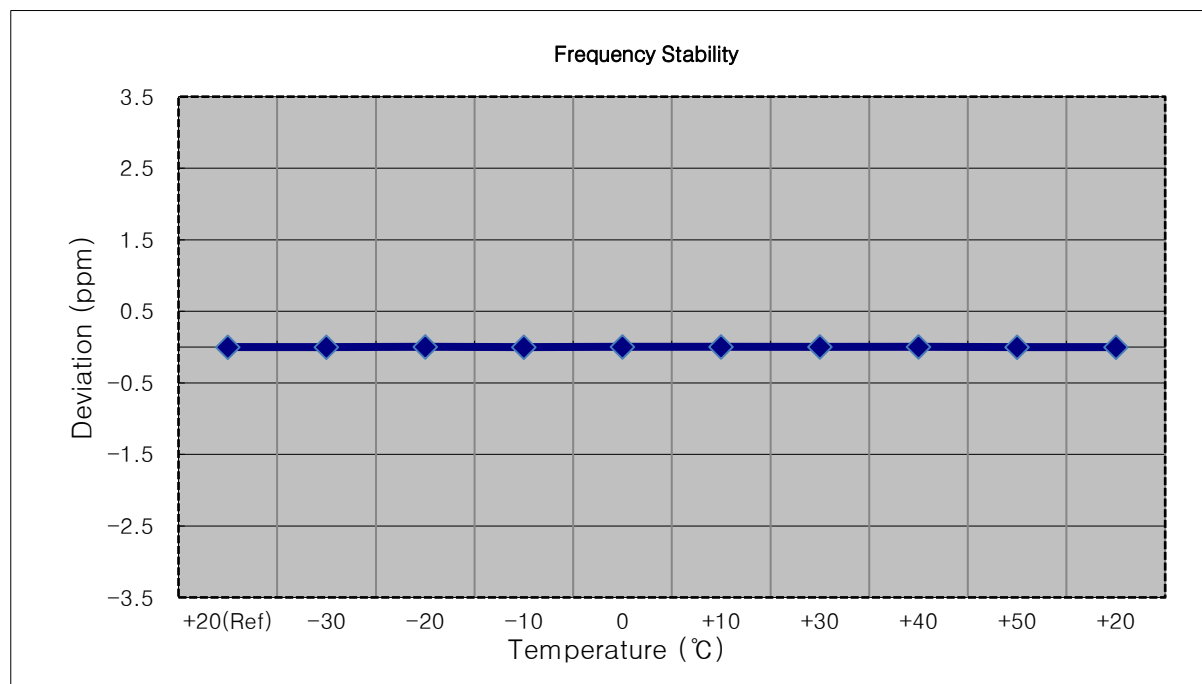


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100 %		-30	1880 000 003	0.7	0.000 000	0.000
100 %		-20	1880 000 005	2.2	0.000 000	0.001
100 %		-10	1880 000 006	4.0	0.000 000	0.002
100 %		0	1880 000 004	1.3	0.000 000	0.001
100 %		+10	1880 000 006	3.2	0.000 000	0.002
100 %		+30	1880 000 006	3.7	0.000 000	0.002
100 %		+40	1880 000 004	1.8	0.000 000	0.001
100 %		+50	1880 000 005	2.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 003	0.9	0.000 000	0.000

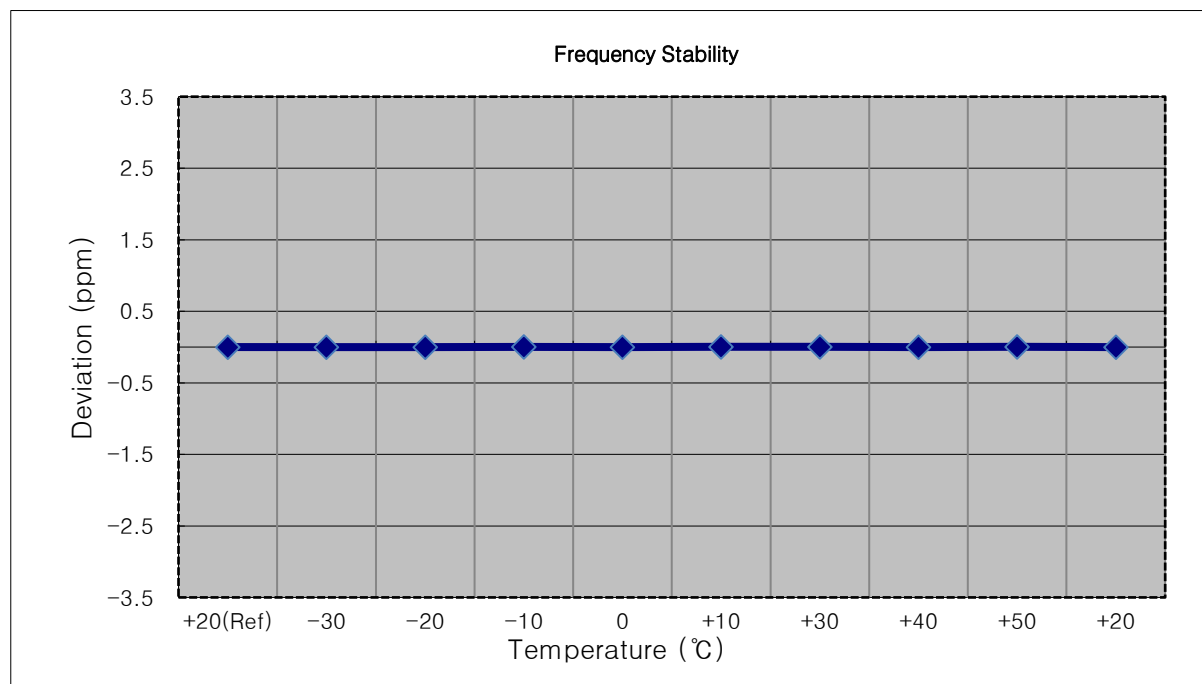


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100 %		-30	1880 000 004	2.3	0.000 000	0.001
100 %		-20	1880 000 004	1.9	0.000 000	0.001
100 %		-10	1880 000 005	2.9	0.000 000	0.002
100 %		0	1880 000 003	1.1	0.000 000	0.001
100 %		+10	1880 000 004	2.4	0.000 000	0.001
100 %		+30	1880 000 006	4.5	0.000 000	0.002
100 %		+40	1880 000 003	1.1	0.000 000	0.001
100 %		+50	1880 000 006	4.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 006	4.0	0.000 000	0.002

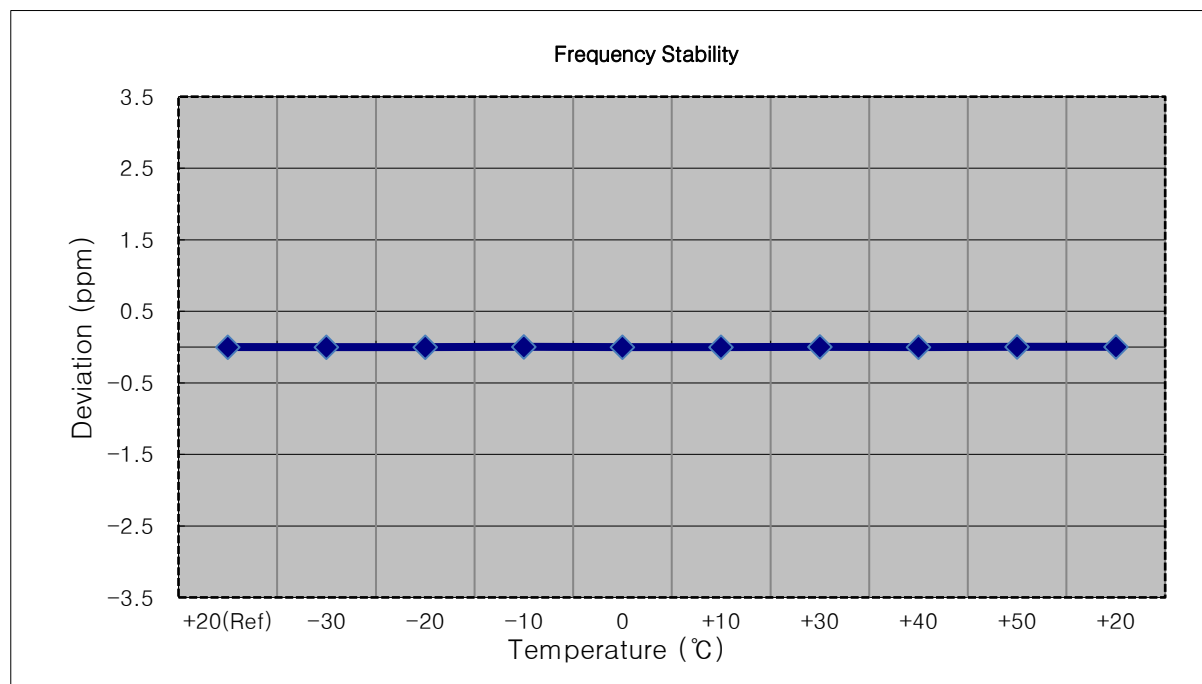


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1880 000 012	0.0	0.000 000	0.000
100 %		-30	1880 000 023	10.9	0.000 001	0.006
100 %		-20	1880 000 020	8.0	0.000 000	0.004
100 %		-10	1880 000 022	10.5	0.000 001	0.006
100 %		0	1880 000 023	11.5	0.000 001	0.006
100 %		+10	1880 000 025	13.5	0.000 001	0.007
100 %		+30	1880 000 023	11.0	0.000 001	0.006
100 %		+40	1880 000 025	12.8	0.000 001	0.007
100 %		+50	1880 000 023	11.4	0.000 001	0.006
Batt. Endpoint	3.400	+20	1880 000 024	11.6	0.000 001	0.006

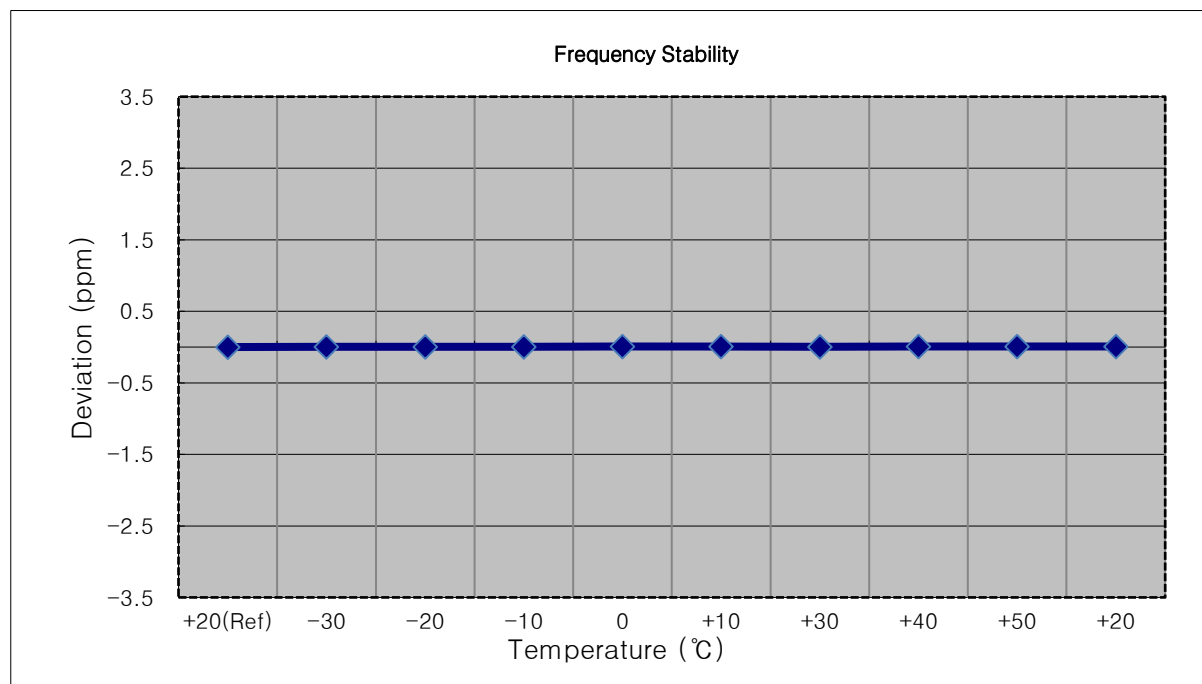


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1909 299 997	0.0	0.000 000	0.000
100 %		-30	1909 299 990	-6.4	0.000 000	-0.003
100 %		-20	1909 299 994	-2.1	0.000 000	-0.001
100 %		-10	1909 299 993	-3.6	0.000 000	-0.002
100 %		0	1909 299 993	-3.7	0.000 000	-0.002
100 %		+10	1909 299 991	-5.5	0.000 000	-0.003
100 %		+30	1909 299 992	-4.4	0.000 000	-0.002
100 %		+40	1909 299 991	-5.7	0.000 000	-0.003
100 %		+50	1909 299 994	-2.3	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1909 299 999	2.2	0.000 000	0.001

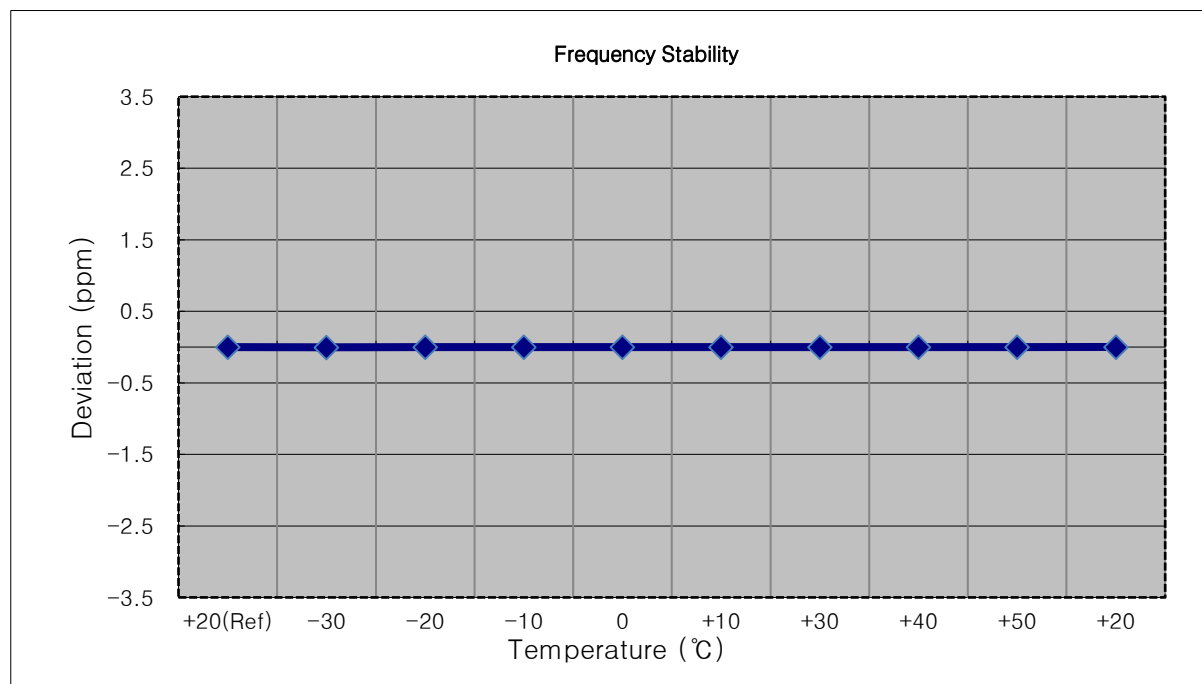


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1908 499 996	0.0	0.000 000	0.000
100 %		-30	1908 499 994	-2.8	0.000 000	-0.001
100 %		-20	1908 499 993	-3.4	0.000 000	-0.002
100 %		-10	1908 499 994	-2.0	0.000 000	-0.001
100 %		0	1908 499 996	-0.2	0.000 000	0.000
100 %		+10	1908 499 997	0.2	0.000 000	0.000
100 %		+30	1908 499 991	-5.0	0.000 000	-0.003
100 %		+40	1908 499 993	-3.1	0.000 000	-0.002
100 %		+50	1908 499 992	-4.4	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1908 499 992	-3.9	0.000 000	-0.002

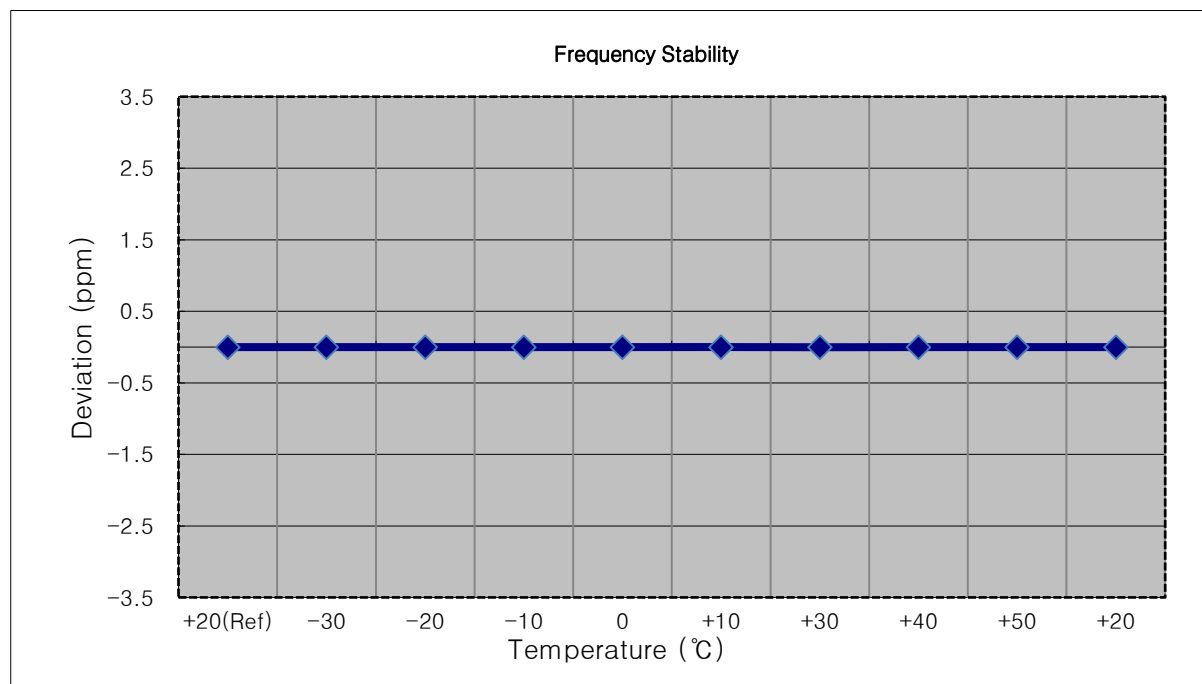


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1907 500 003	0.0	0.000 000	0.000
100 %		-30	1907 500 005	2.0	0.000 000	0.001
100 %		-20	1907 500 007	4.2	0.000 000	0.002
100 %		-10	1907 500 006	2.9	0.000 000	0.002
100 %		0	1907 500 003	0.0	0.000 000	0.000
100 %		+10	1907 500 008	4.4	0.000 000	0.002
100 %		+30	1907 500 004	1.0	0.000 000	0.001
100 %		+40	1907 500 005	2.0	0.000 000	0.001
100 %		+50	1907 500 009	5.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	1907 500 004	0.5	0.000 000	0.000

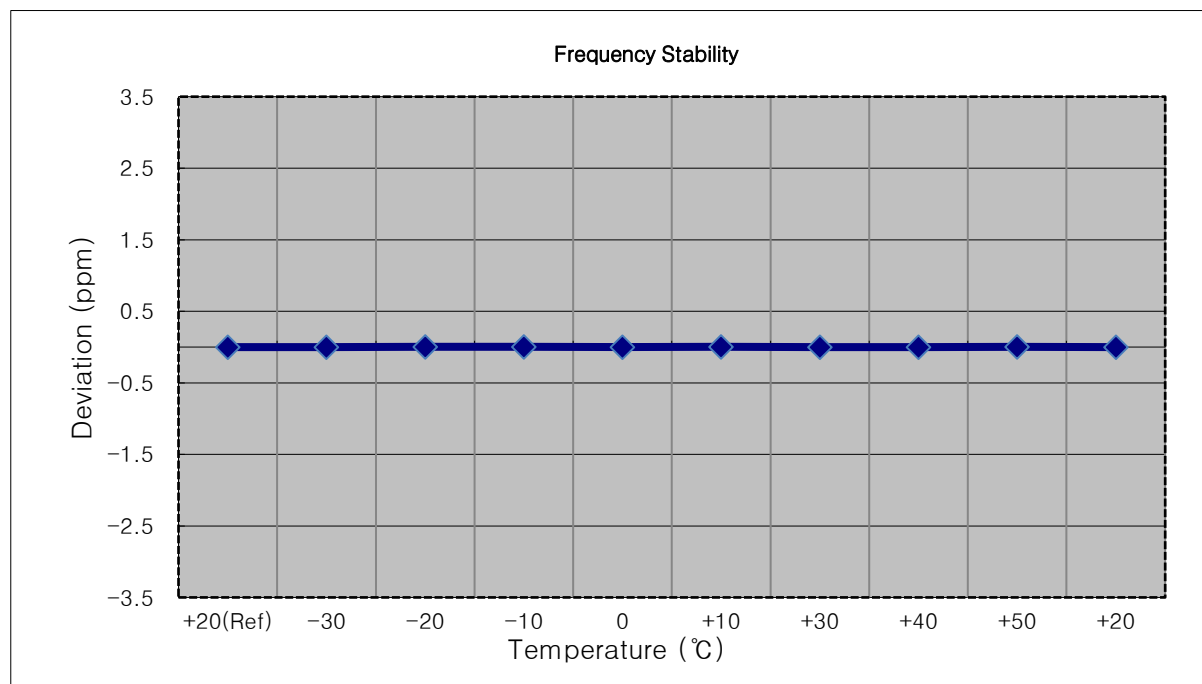


☐ MODE: LTE B2
☐ OPERATING FREQUENCY: 1905,000,000 Hz
☐ CHANNEL: 19150 (10 MHz)
☐ REFERENCE VOLTAGE: 3.850 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1905 000 008	0.0	0.000 000	0.000
100 %		-30	1905 000 016	8.0	0.000 000	0.004
100 %		-20	1905 000 015	7.1	0.000 000	0.004
100 %		-10	1905 000 016	7.4	0.000 000	0.004
100 %		0	1905 000 017	8.3	0.000 000	0.004
100 %		+10	1905 000 018	9.5	0.000 000	0.005
100 %		+30	1905 000 016	7.8	0.000 000	0.004
100 %		+40	1905 000 016	8.1	0.000 000	0.004
100 %		+50	1905 000 015	7.2	0.000 000	0.004
Batt. Endpoint	3.400	+20	1905 000 019	11.1	0.000 001	0.006

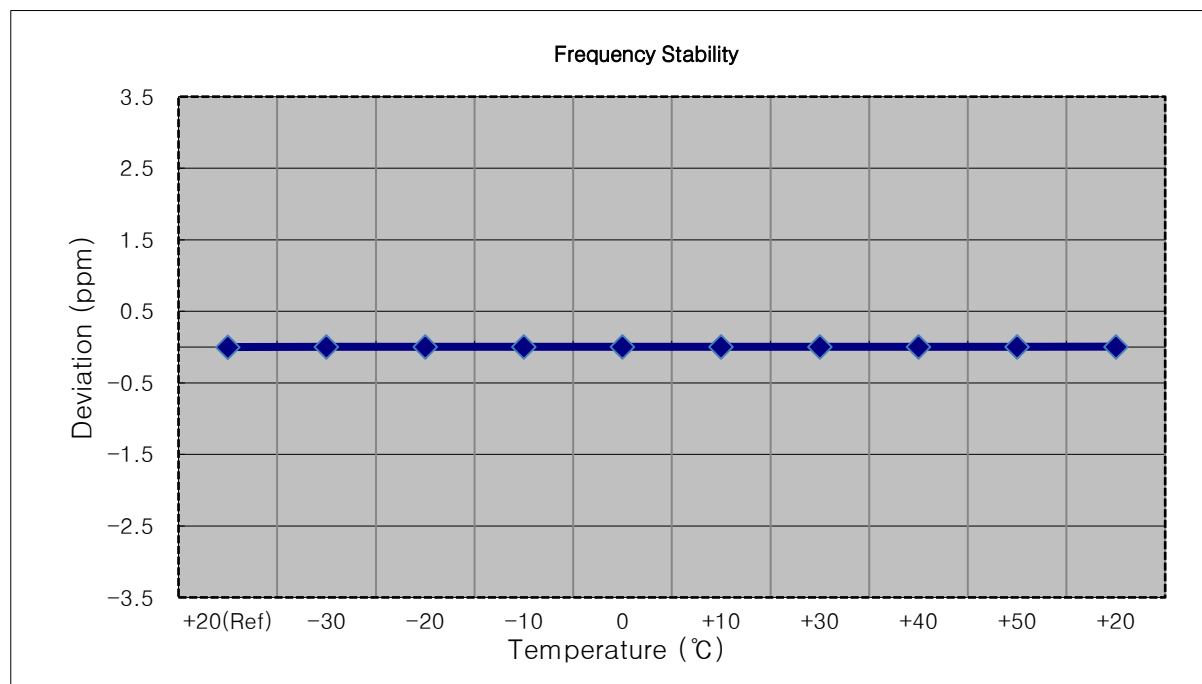


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1902 500 008	0.0	0.000 000	0.000
100 %		-30	1902 500 013	5.2	0.000 000	0.003
100 %		-20	1902 500 014	6.4	0.000 000	0.003
100 %		-10	1902 500 012	4.7	0.000 000	0.002
100 %		0	1902 500 015	7.6	0.000 000	0.004
100 %		+10	1902 500 014	6.5	0.000 000	0.003
100 %		+30	1902 500 013	5.1	0.000 000	0.003
100 %		+40	1902 500 013	5.6	0.000 000	0.003
100 %		+50	1902 500 017	9.6	0.000 001	0.005
Batt. Endpoint	3.400	+20	1902 500 014	6.8	0.000 000	0.004

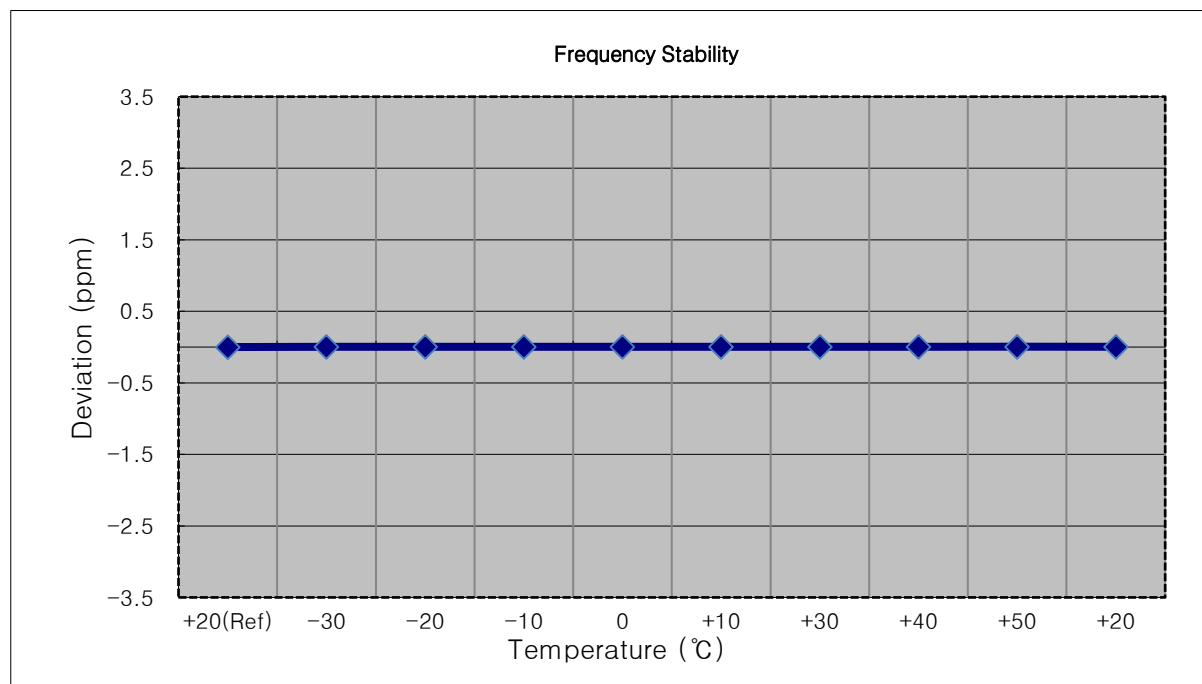

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.850	+20(Ref)	1900 000 004	0.0	0.000 000	0.000
100 %		-30	1900 000 012	7.5	0.000 000	0.004
100 %		-20	1900 000 010	6.2	0.000 000	0.003
100 %		-10	1900 000 008	4.2	0.000 000	0.002
100 %		0	1900 000 007	2.5	0.000 000	0.001
100 %		+10	1900 000 009	4.6	0.000 000	0.002
100 %		+30	1900 000 010	5.7	0.000 000	0.003
100 %		+40	1900 000 010	6.0	0.000 000	0.003
100 %		+50	1900 000 012	8.0	0.000 000	0.004
Batt. Endpoint	3.400	+20	1900 000 009	4.8	0.000 000	0.003

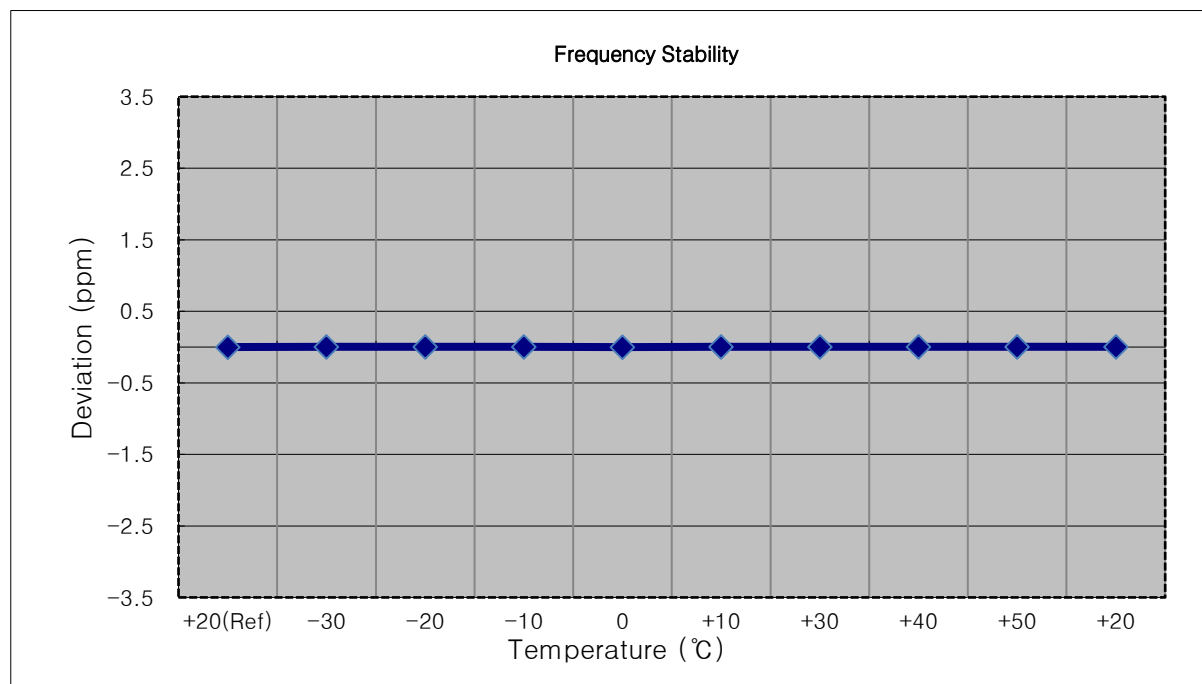

10. TEST DATA (Sub 2 Ant, Main 2 Ant)

10.1 UPLINK CARRIER AGGREGATION

Test Note

- All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
- All modes of operation were investigated and the worst case configuration results are reported in this section.
Please refer to the table below.
- The worst case is reported with the modulations, RB sizes and offsets.
 - 2A-4A (PCC - Modulation: QPSK, RB: 1, RB Offset: 0, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)
 - 4A-2A (PCC - Modulation: QPSK, RB: 1, RB Offset: 0, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
2A	4A	3	18615	10	20350
4A	2A	15	20325	20	18700

10.1.1 RADIATED SPURIOUS EMISSIONS

2A(PCC)-4A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 702.60	-60.99	11.40	-61.87	3.07	H	-53.54	-13.00
5 553.90	-62.56	11.80	-56.94	3.79	H	-48.93	-13.00
7 405.20	-64.54	10.80	-49.88	4.47	H	-43.55	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 500.00	-55.44	12.40	-61.33	2.99	H	-51.92	-13.00
5 250.00	-61.06	12.80	-60.41	3.74	V	-51.35	-13.00
7 000.00	-62.52	11.40	-54.48	4.42	V	-47.50	-13.00

4A(PCC)-2A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 495.00	-60.23	11.25	-61.87	3.00	H	-53.62	-13.00
5 242.50	-58.51	11.10	-53.59	3.68	H	-46.17	-13.00
6 990.00	-64.09	10.90	-51.37	4.30	H	-44.77	-13.00


Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 720.00	57.56	11.40	57.18	3.14	H	65.44	-13.00
5 580.00	-58.16	11.90	-52.49	3.86	H	-44.45	-13.00
7 440.00	-64.52	10.80	-49.87	4.46	H	-43.53	-13.00

11. TEST PLOTS (Main 2 Ant)

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

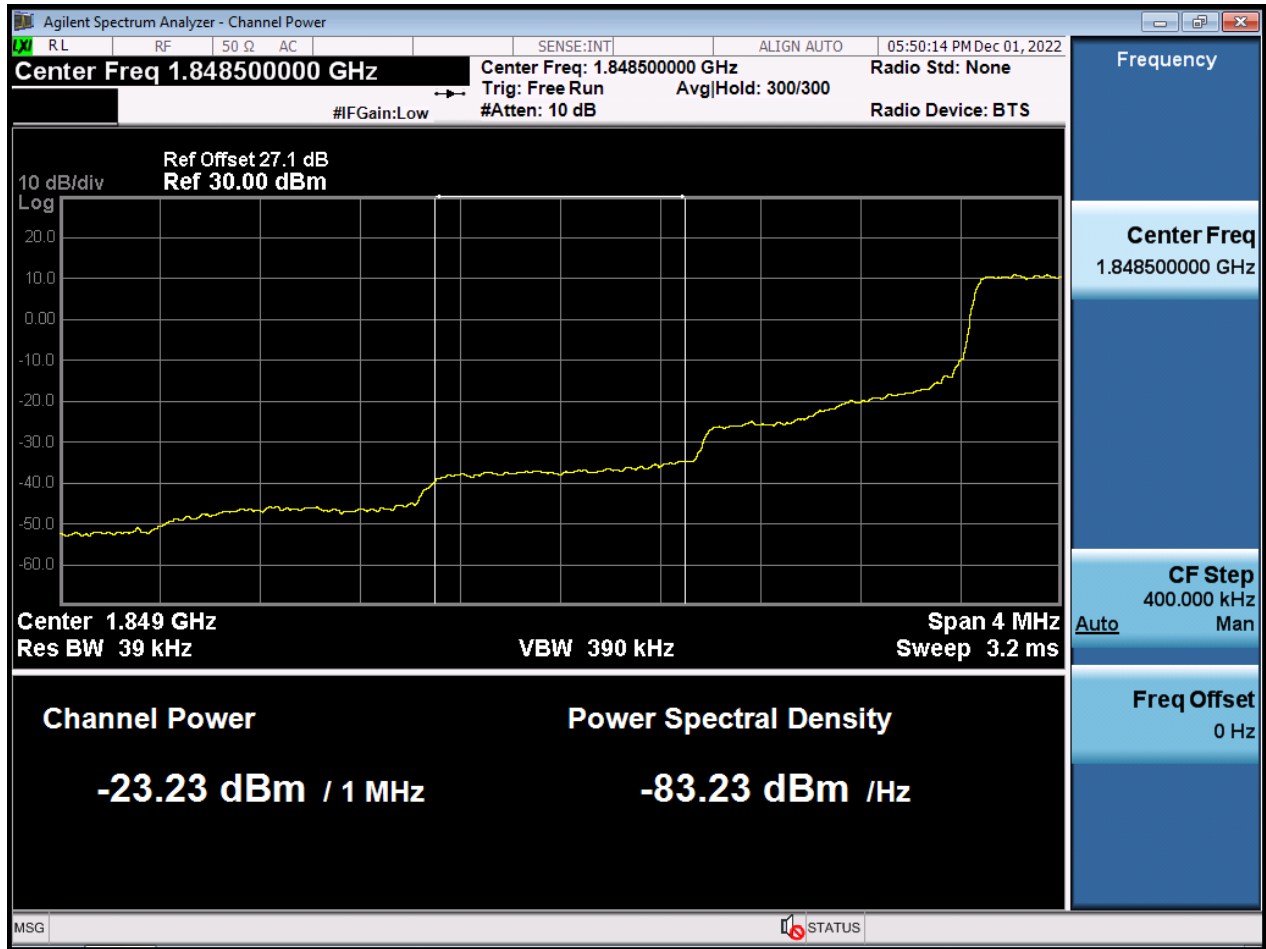


BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

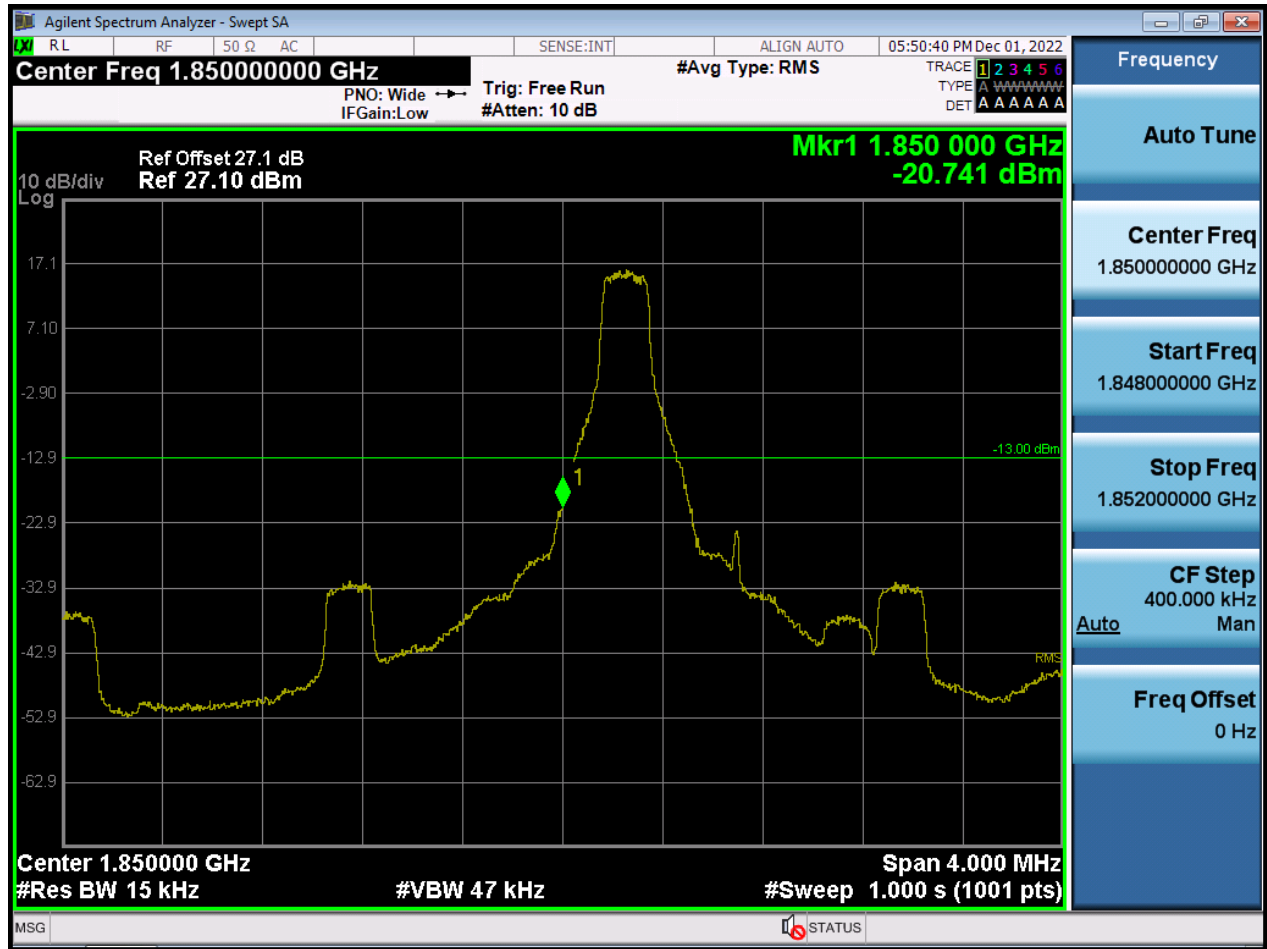


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

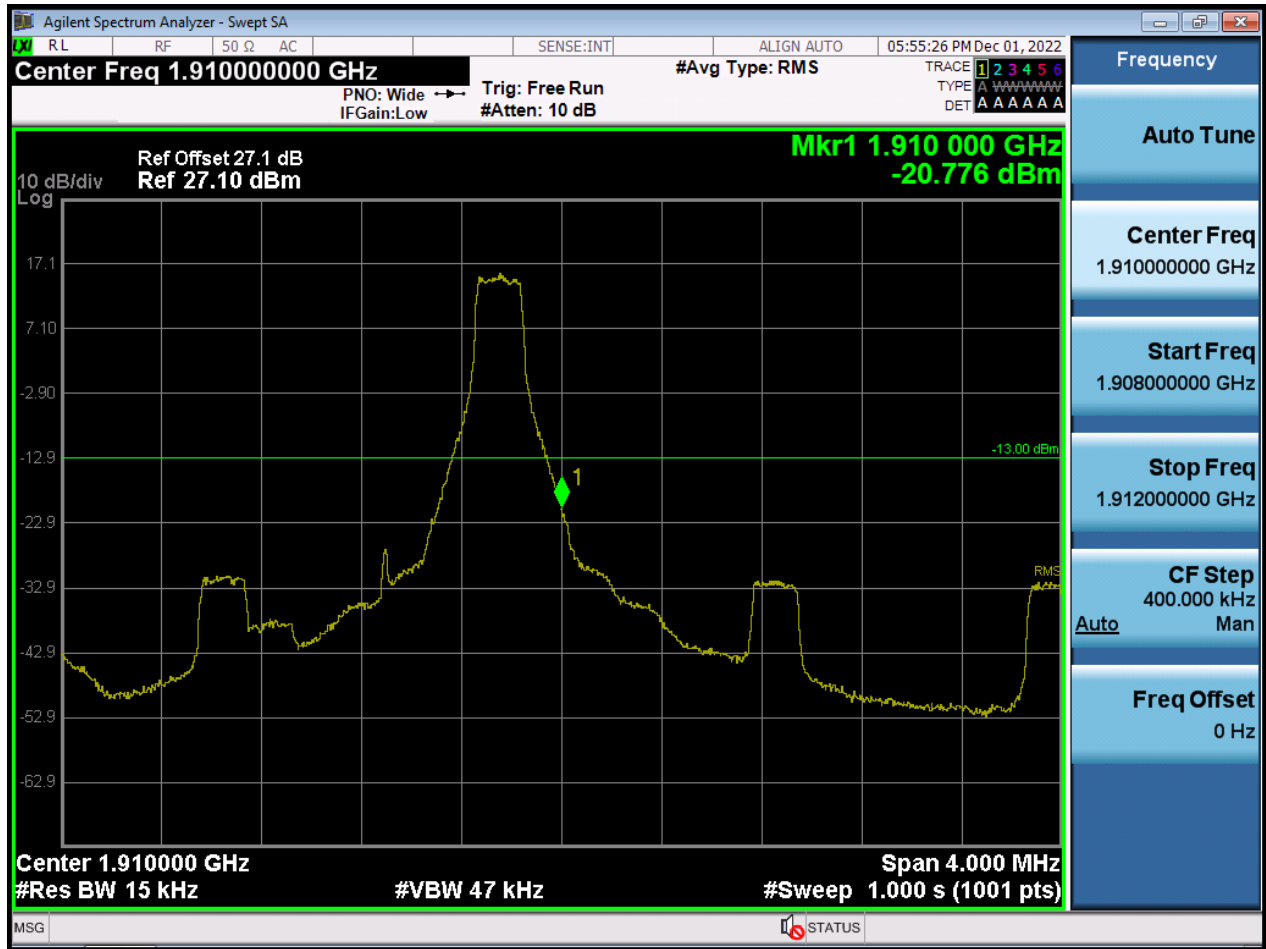

BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

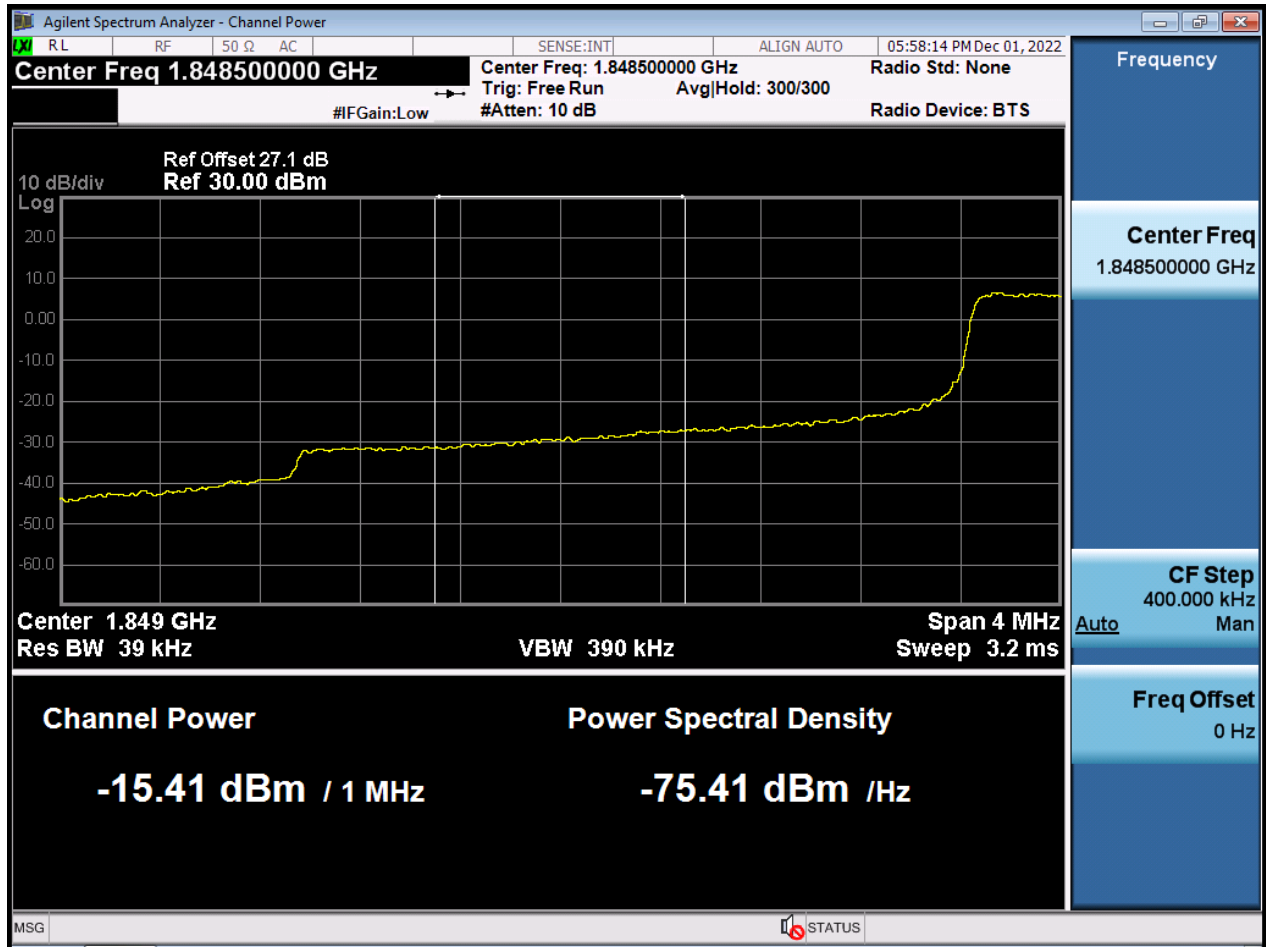


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

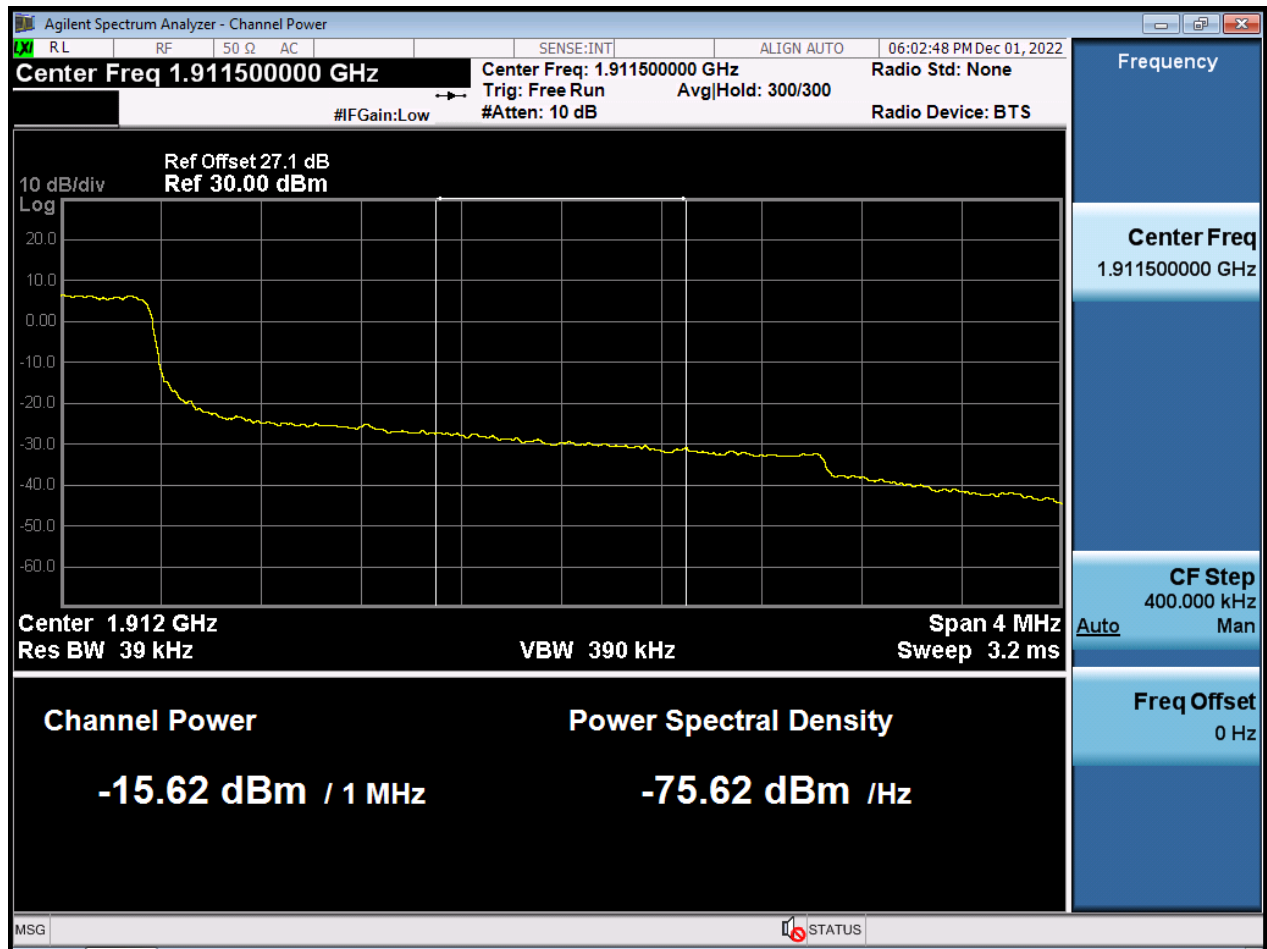


BW3 M_BandEdge_Lowest Channel_QPSK_1RB

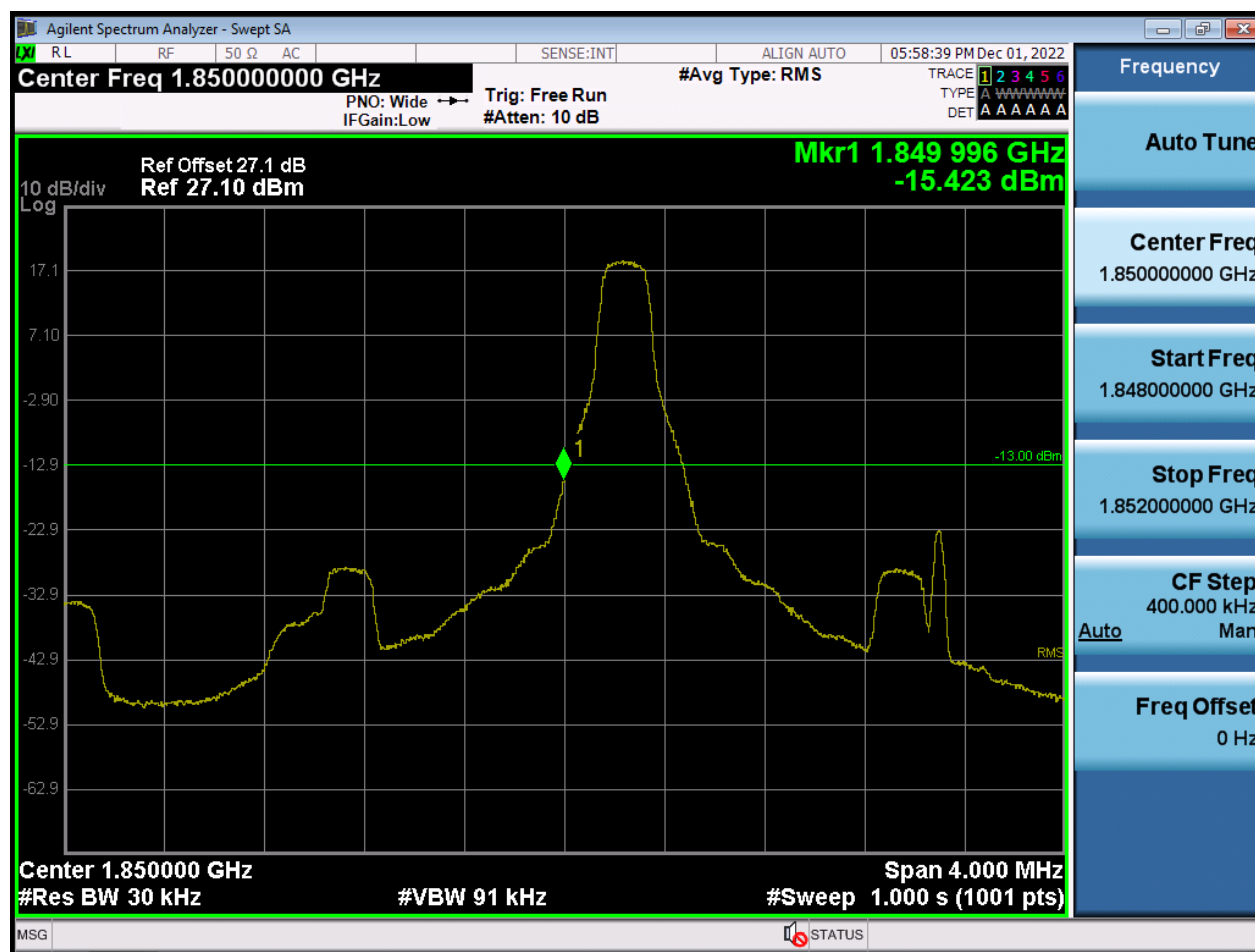


BW3 M_BandEdge_Highest Channel_QPSK_1RB

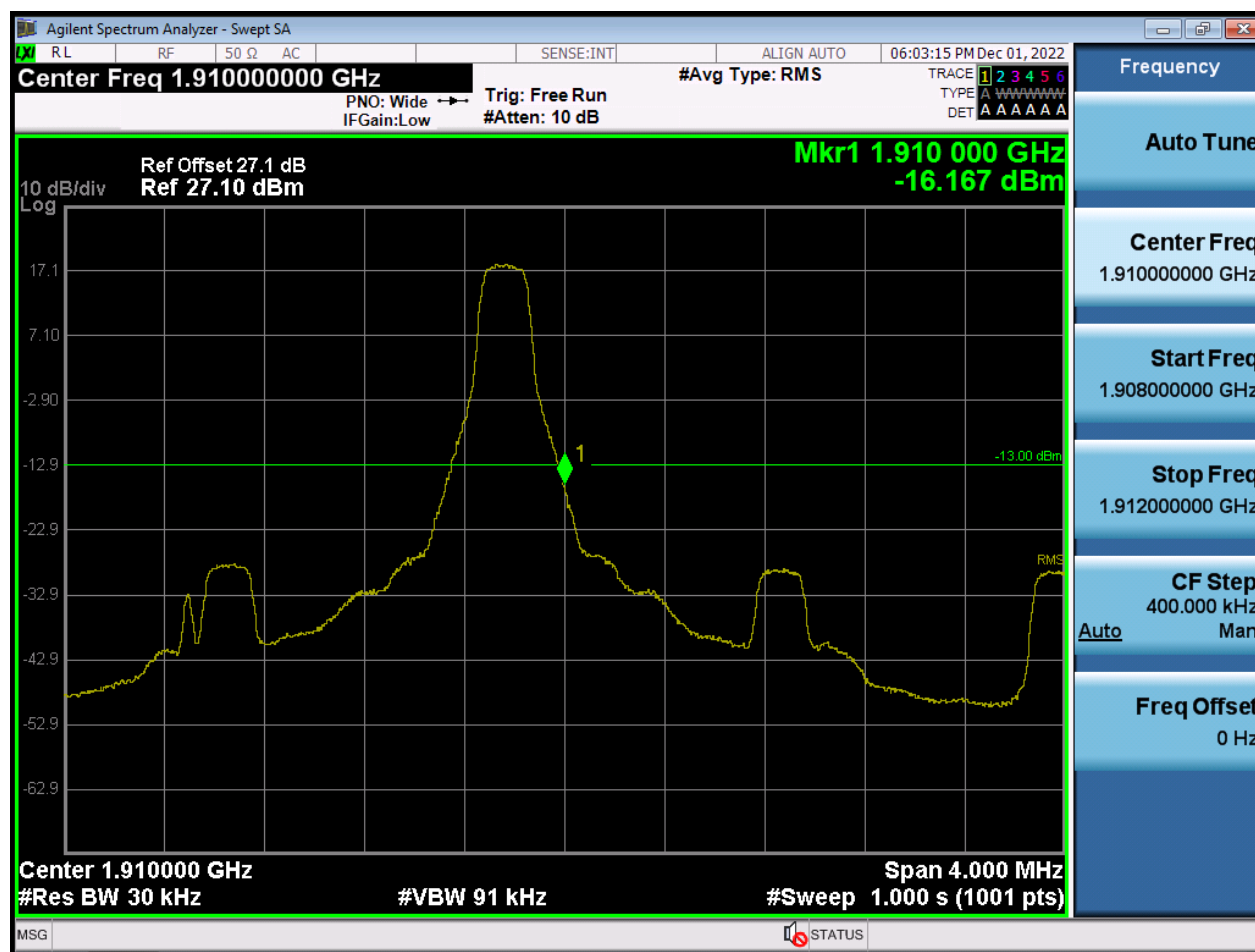

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)

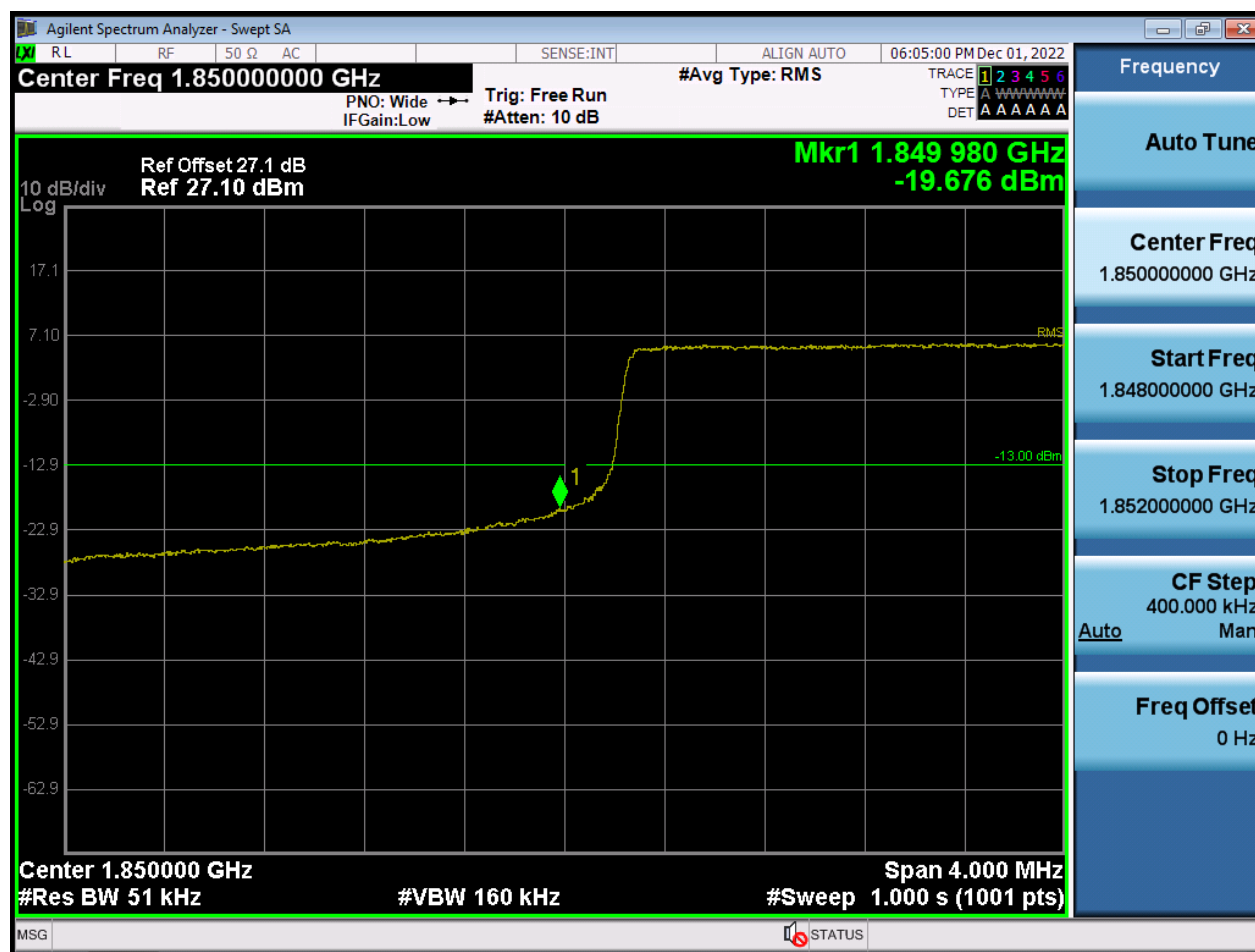


BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

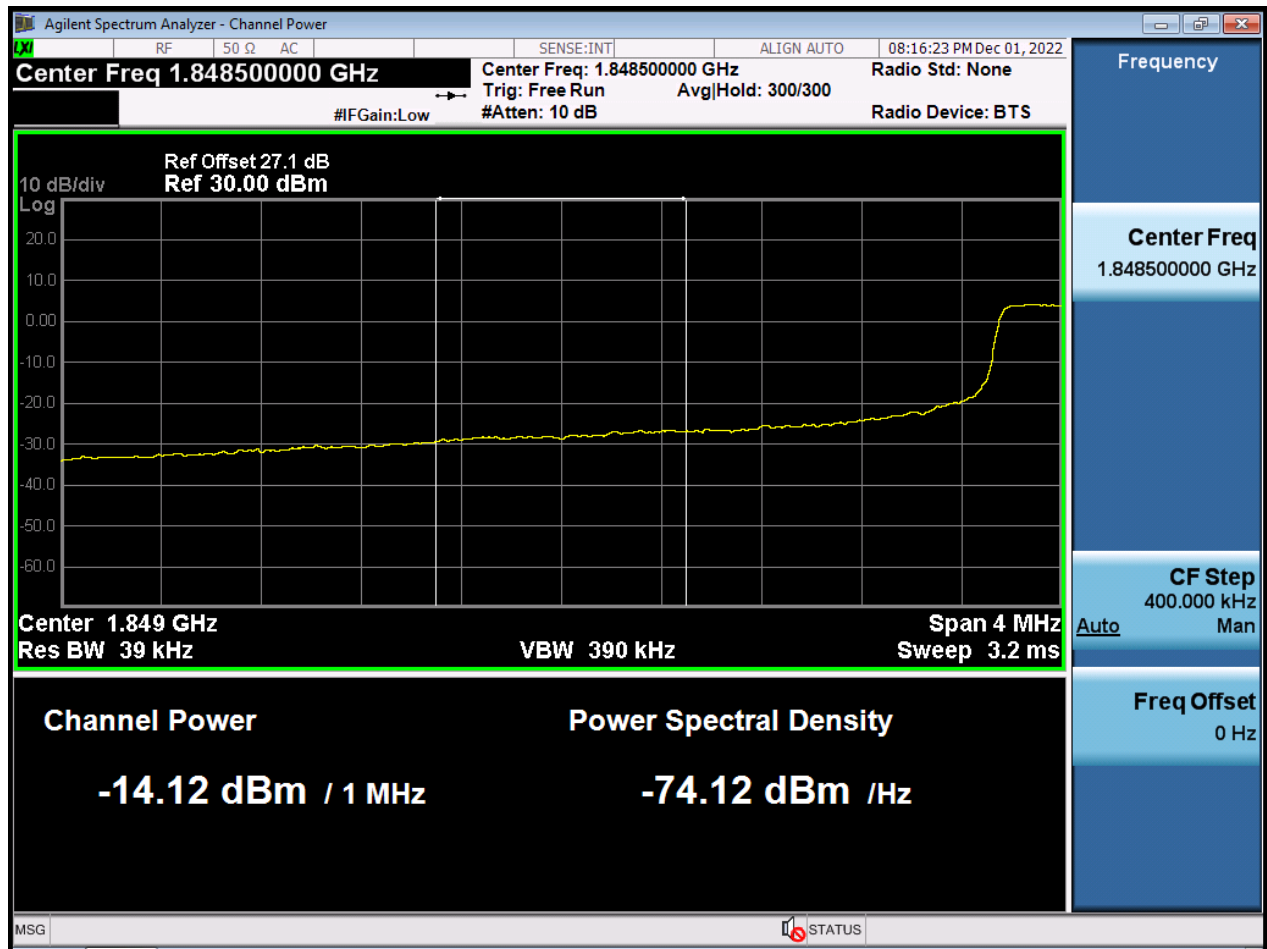


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

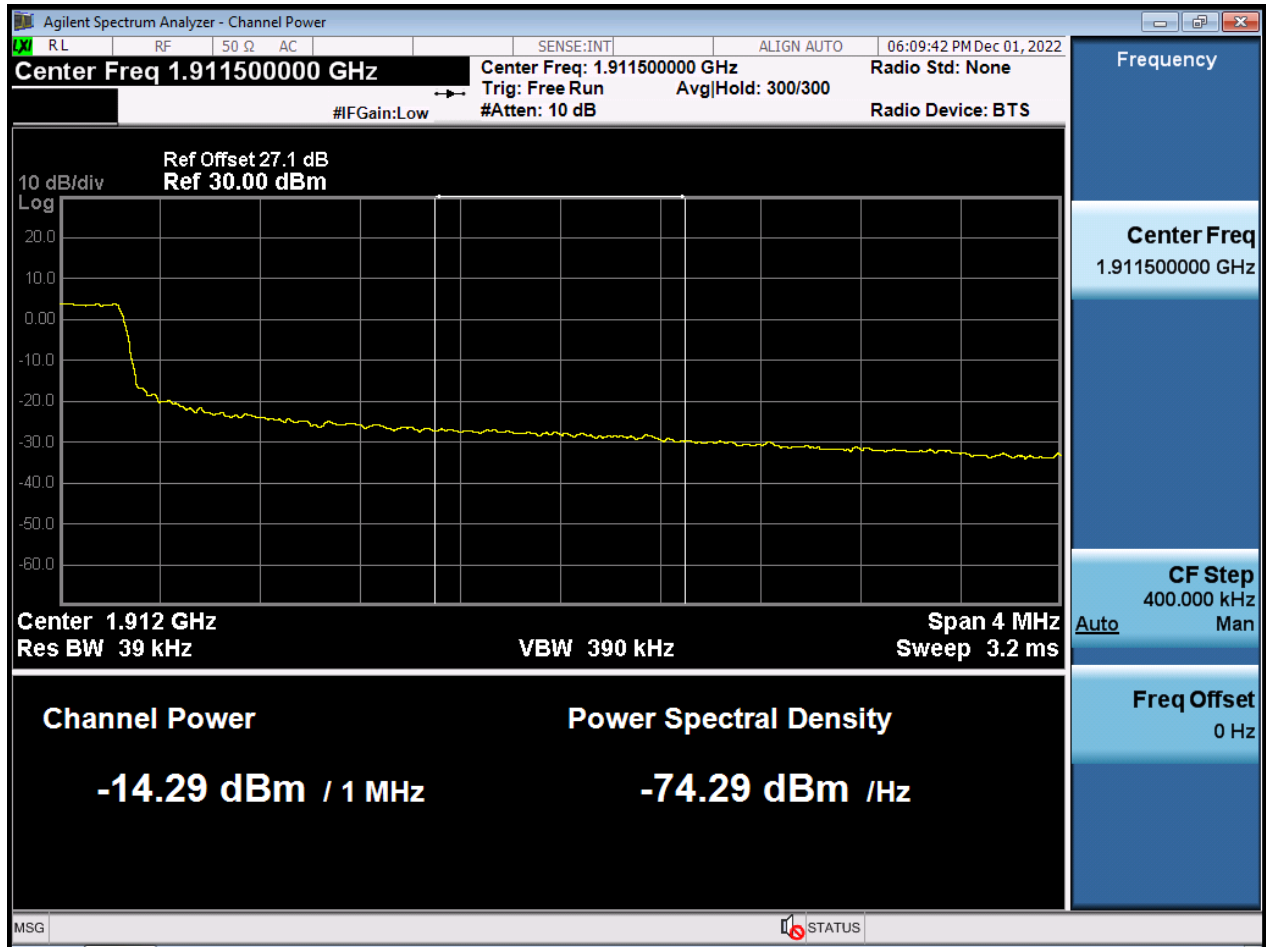


BW5 M_BandEdge_Lowest Channel_QPSK_1RB

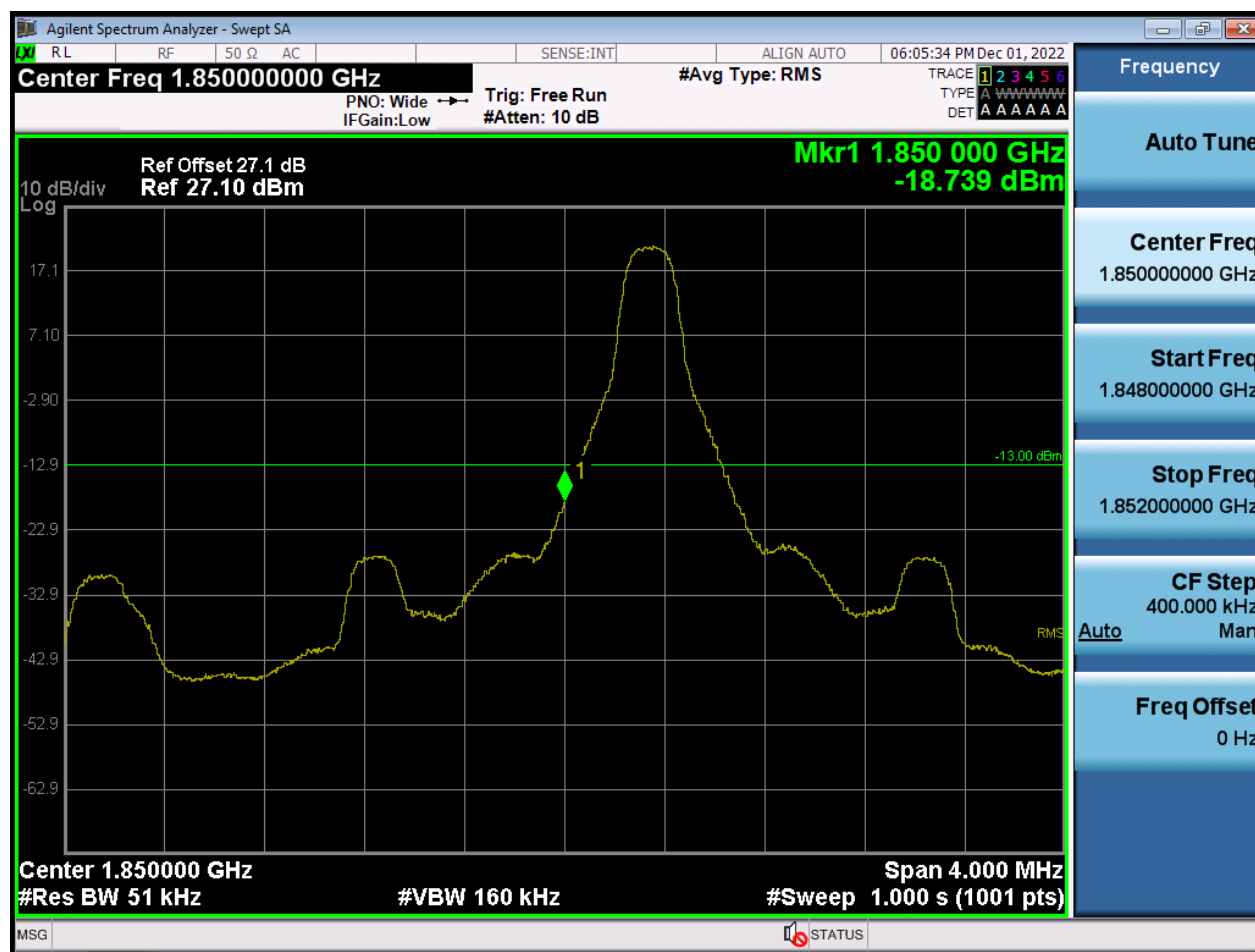


BW5 M_BandEdge_Highest Channel_QPSK_1RB

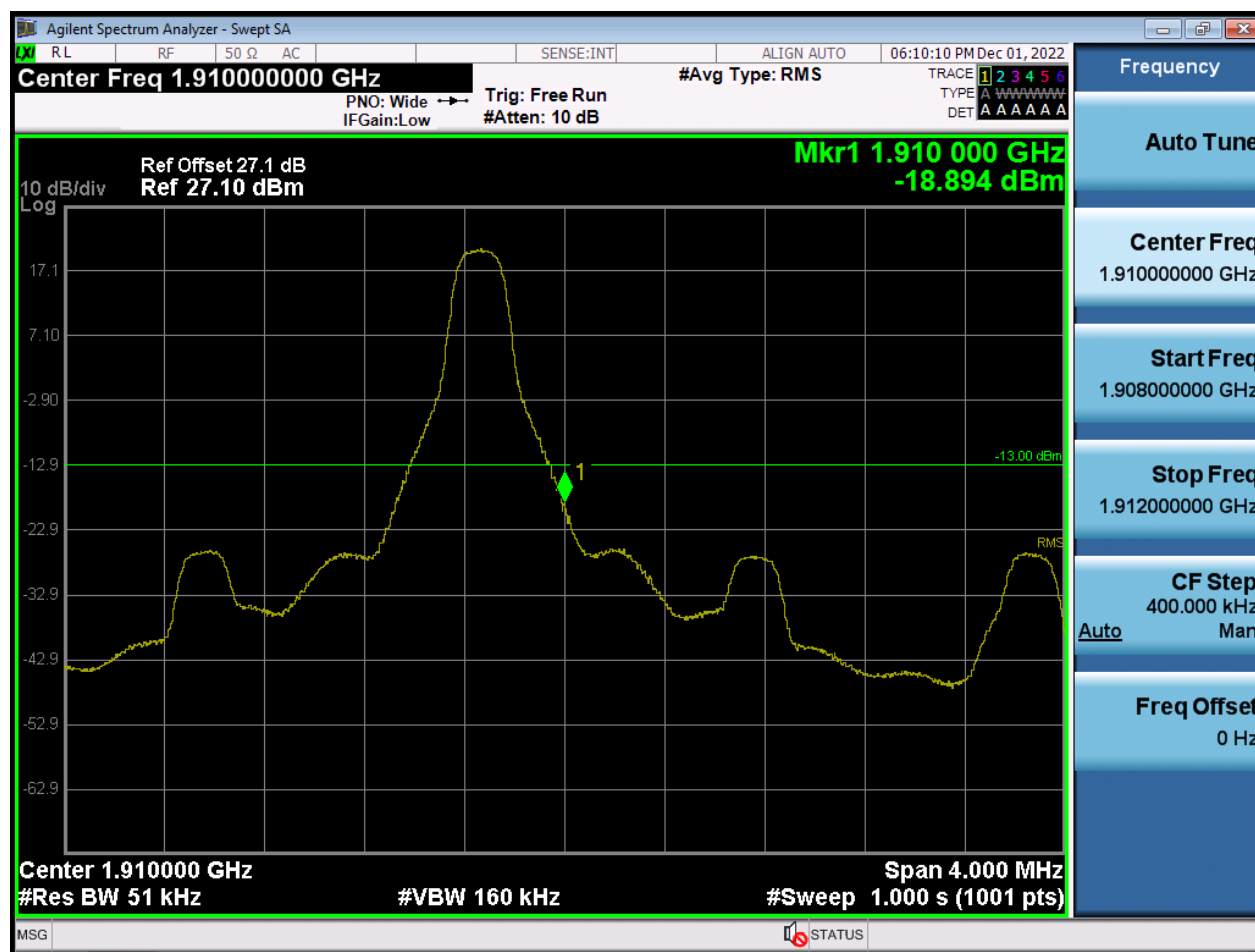

BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

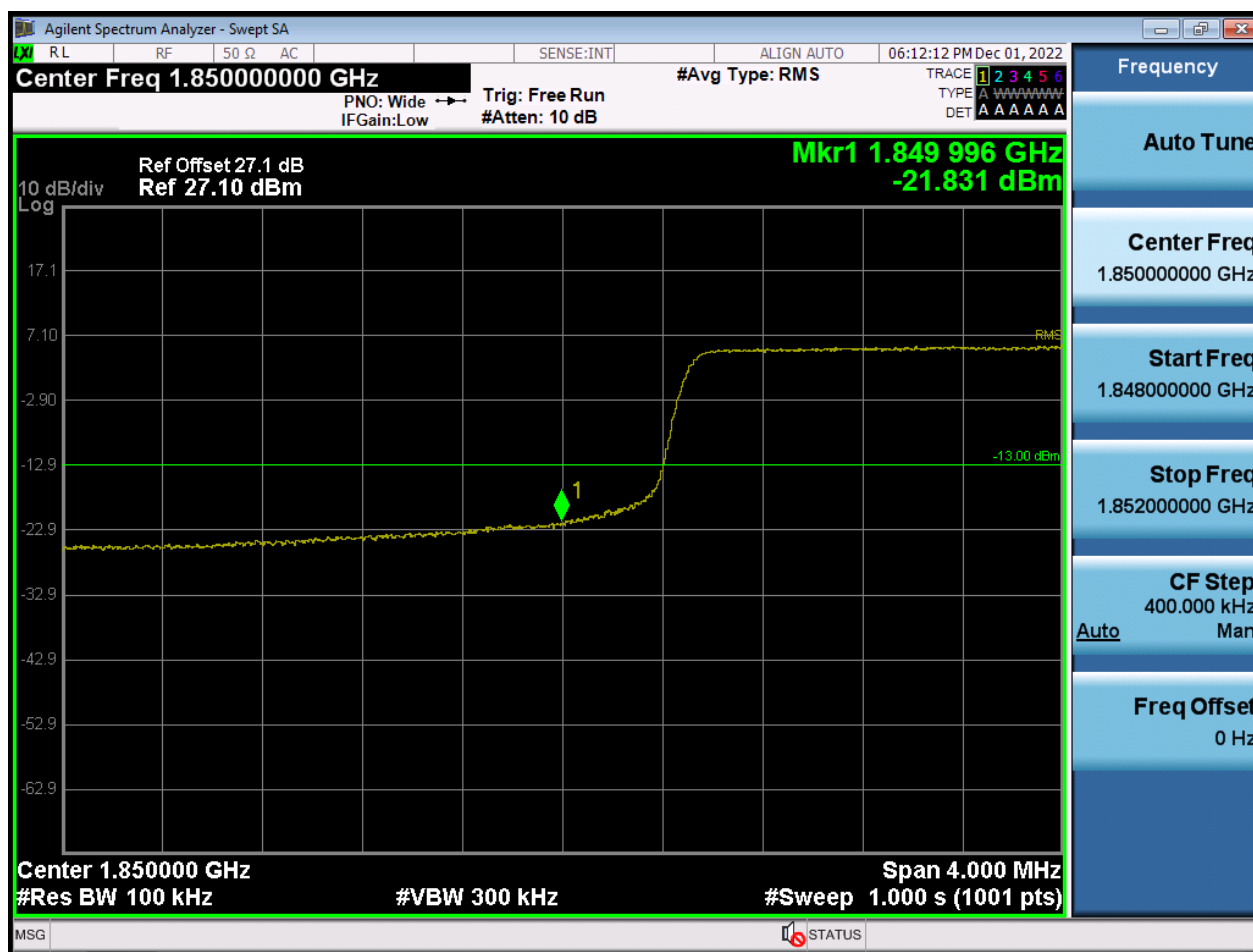


BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

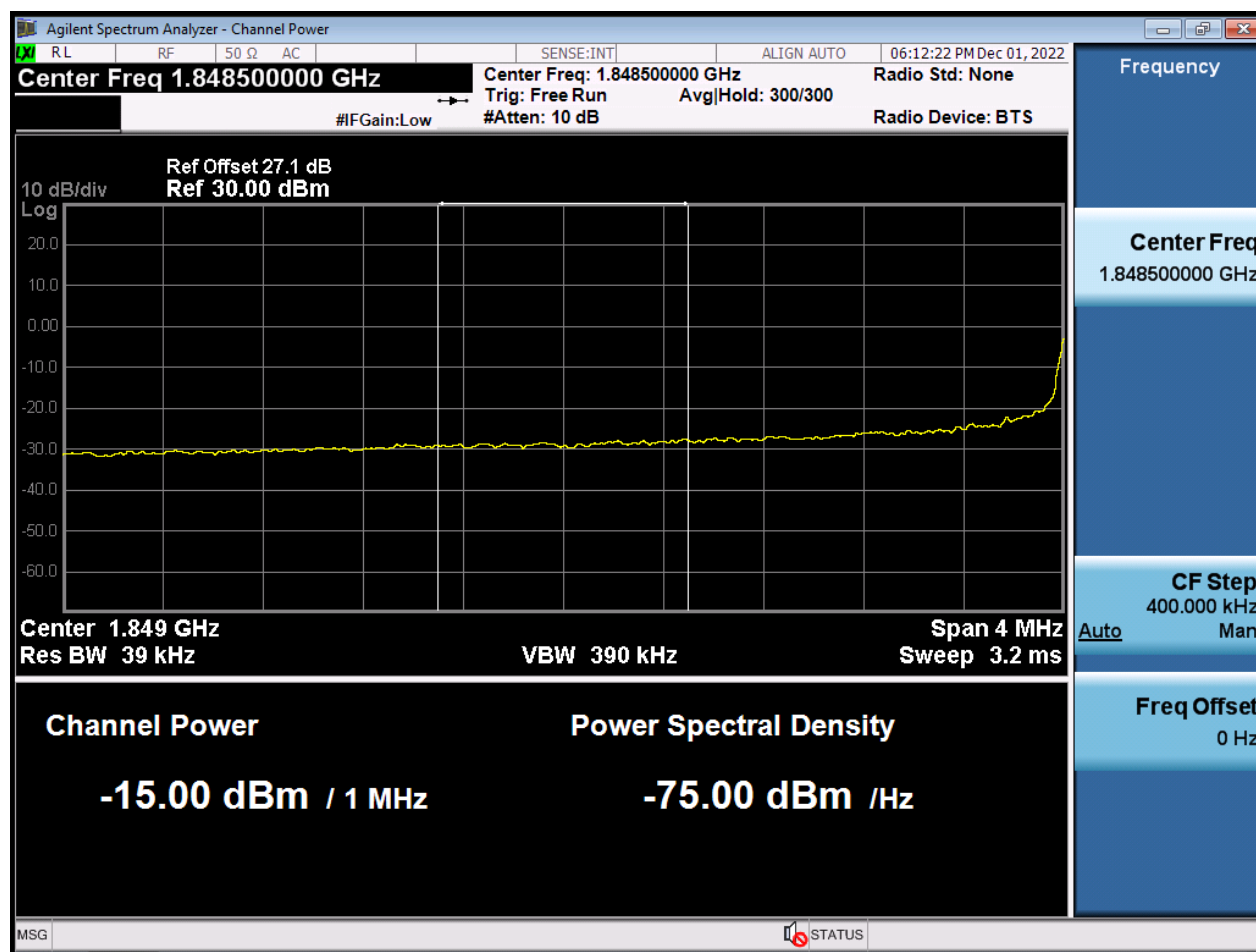


BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

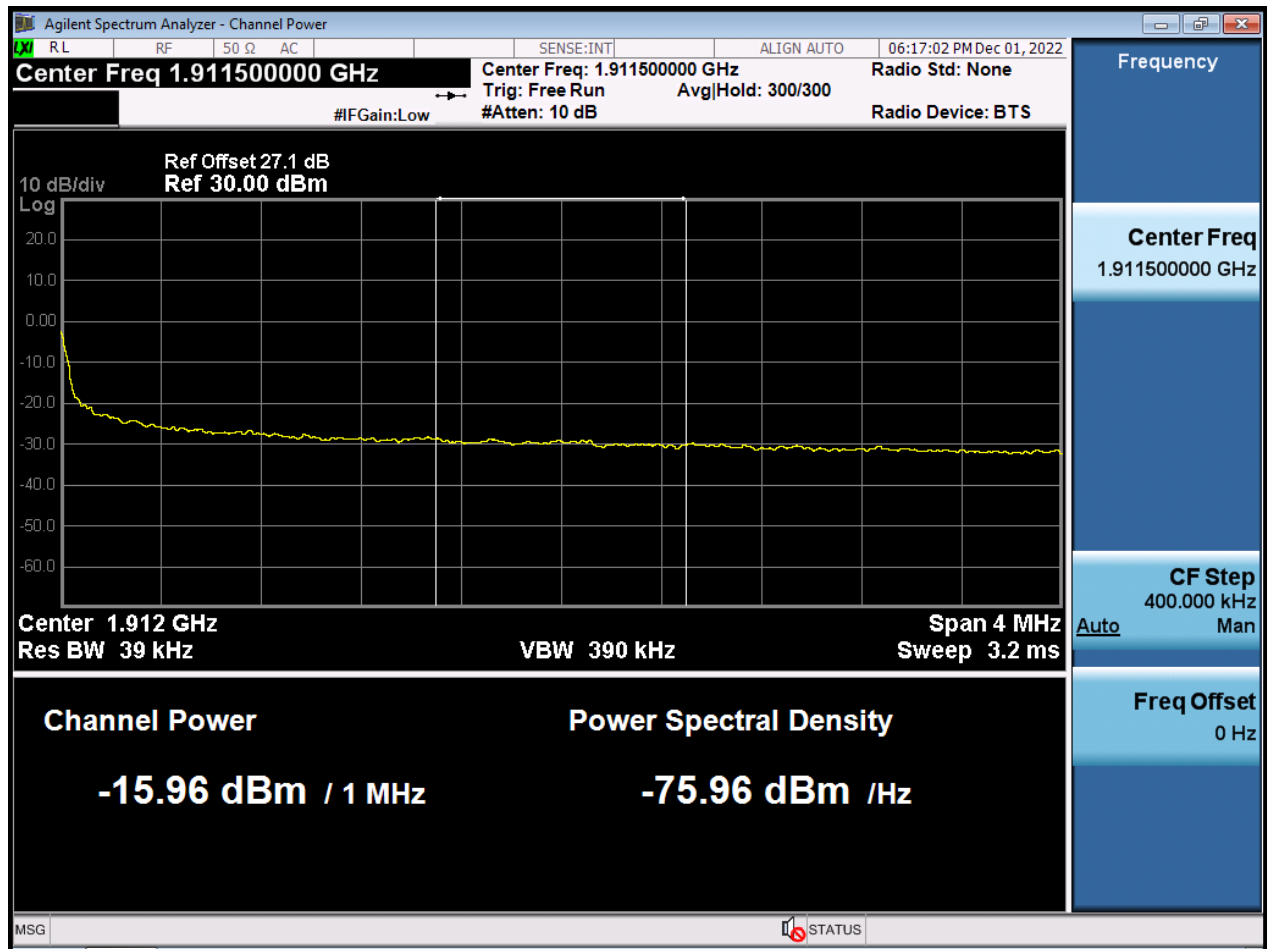


BW10 M_BandEdge_Lowest Channel_QPSK_1RB

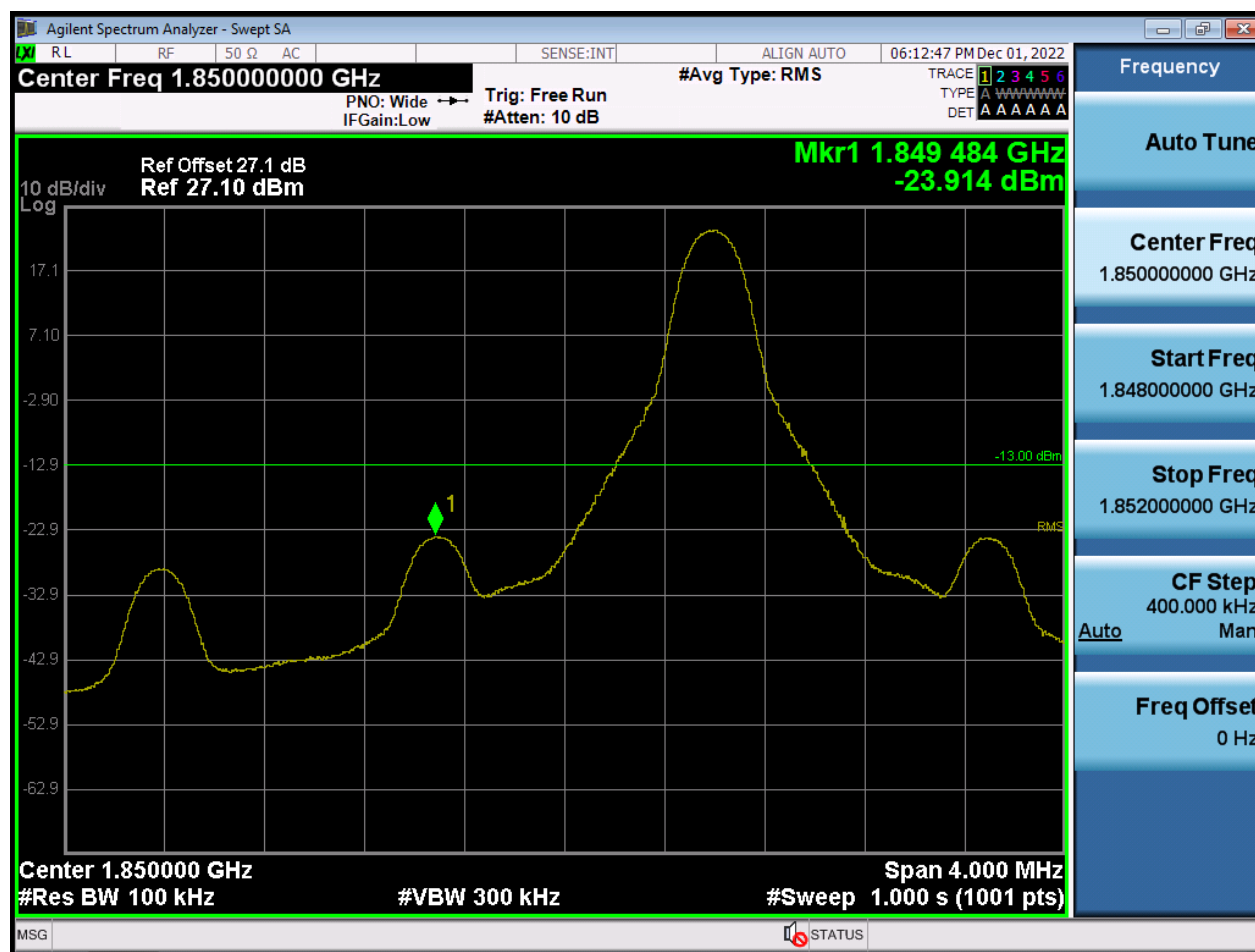


BW10 M_BandEdge_Highest Channel_QPSK_1RB

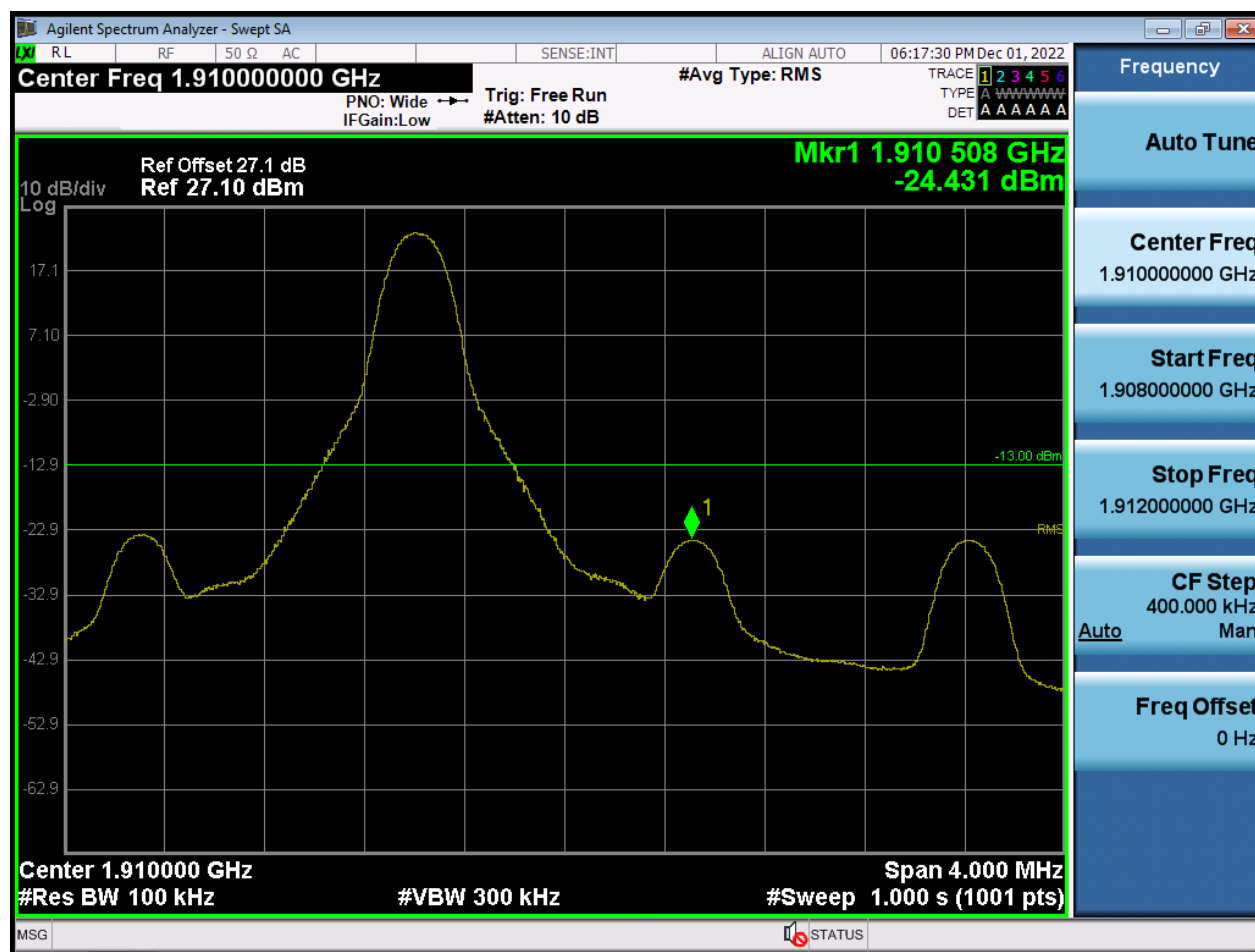


BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

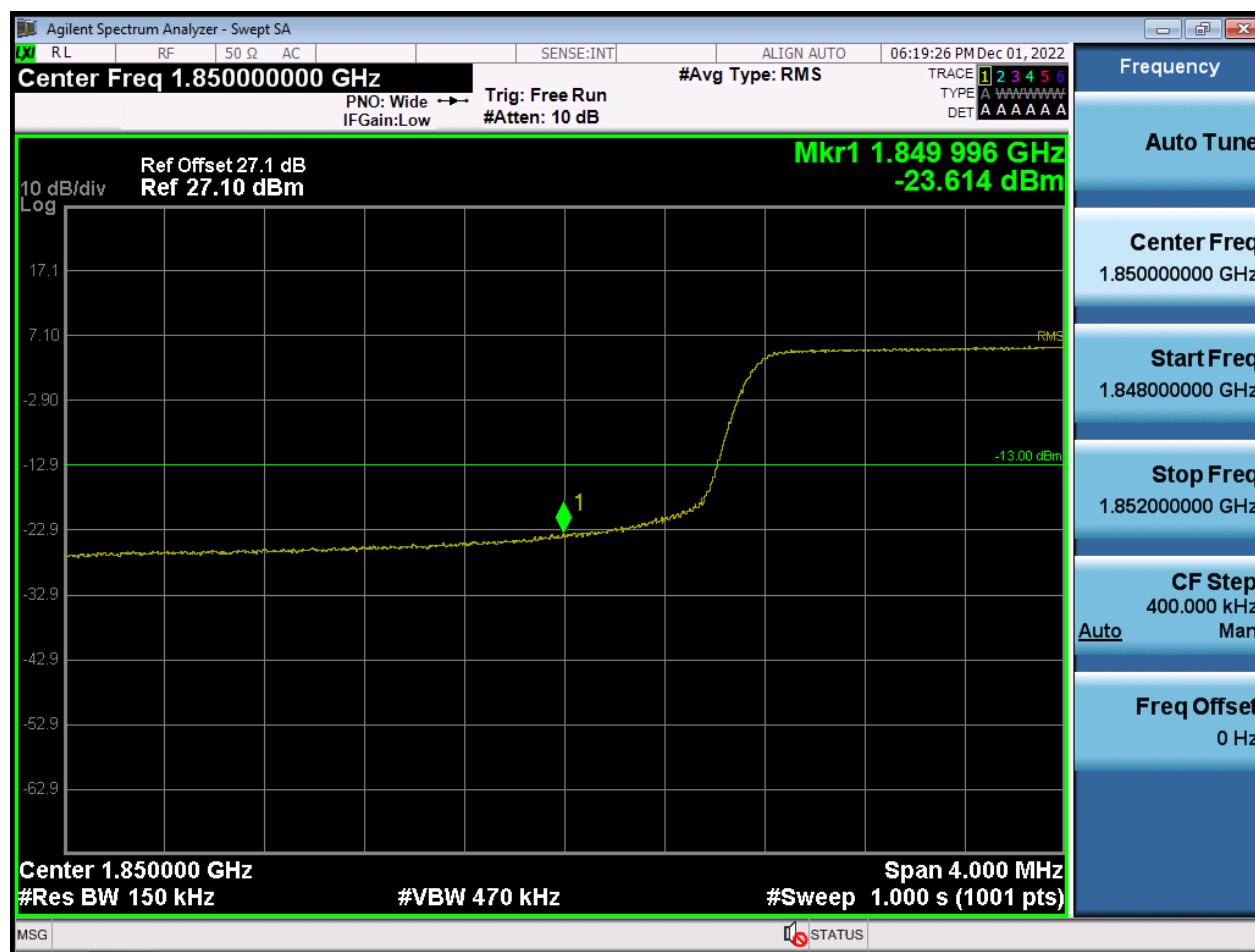


BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

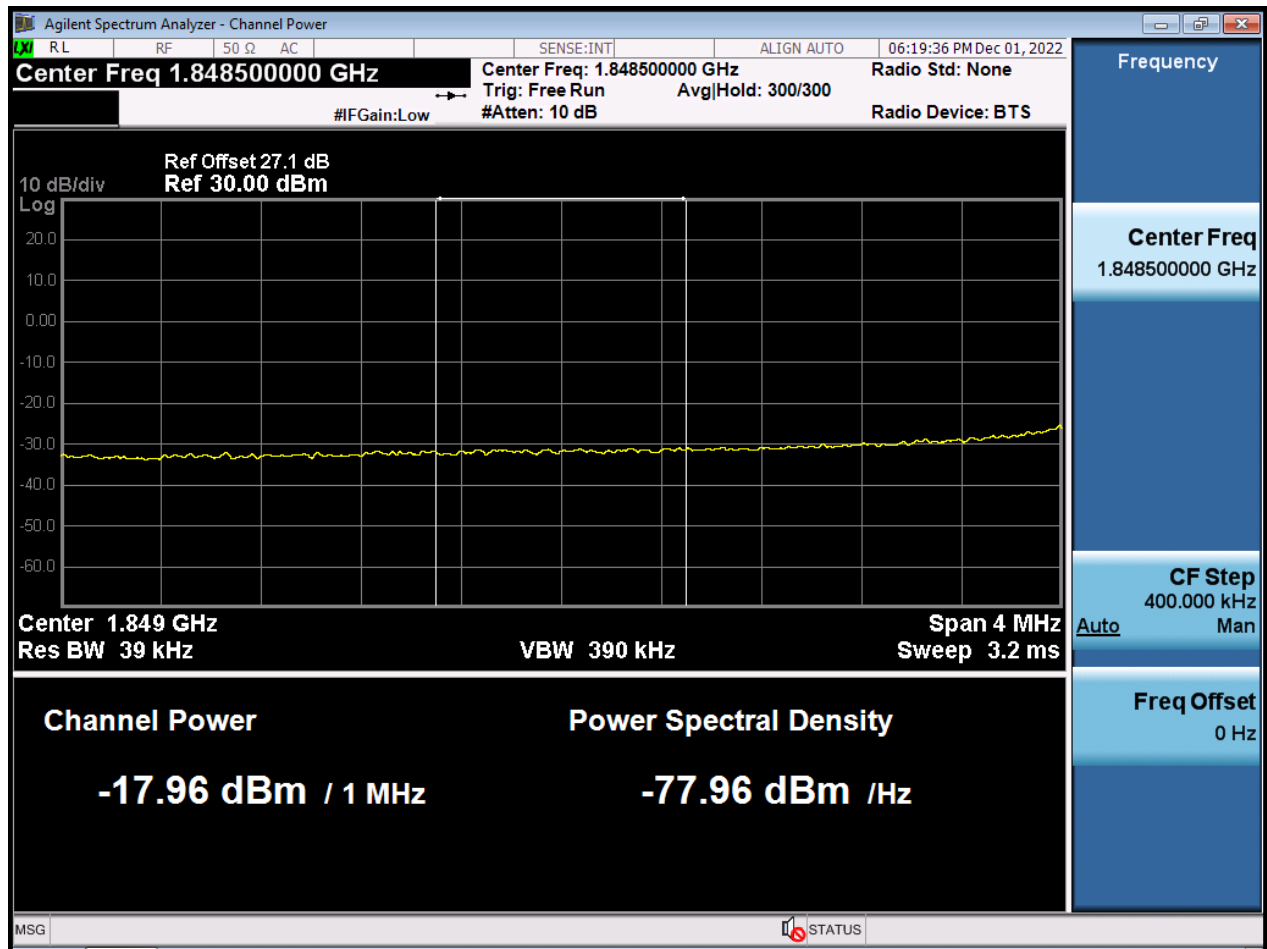


BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)

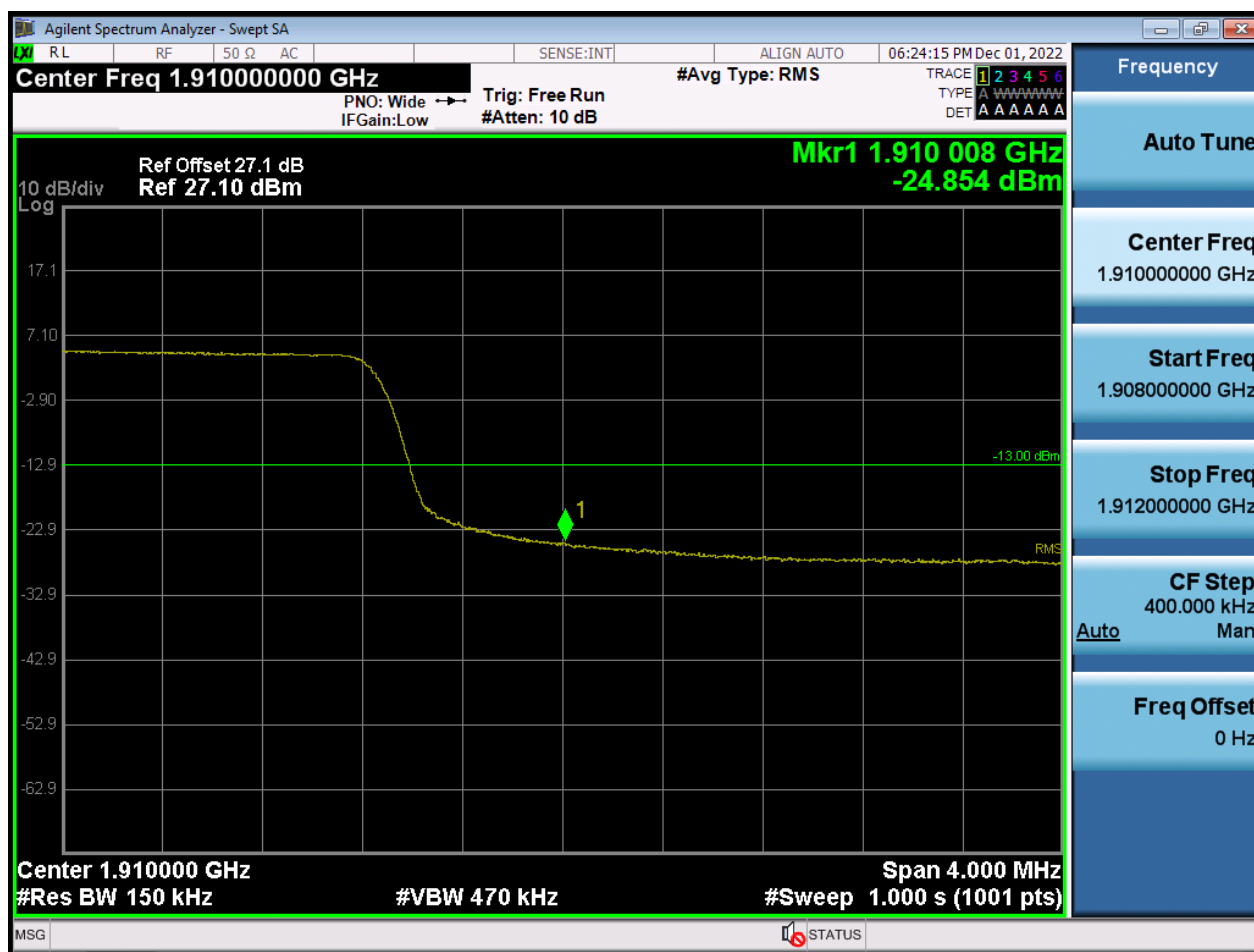

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

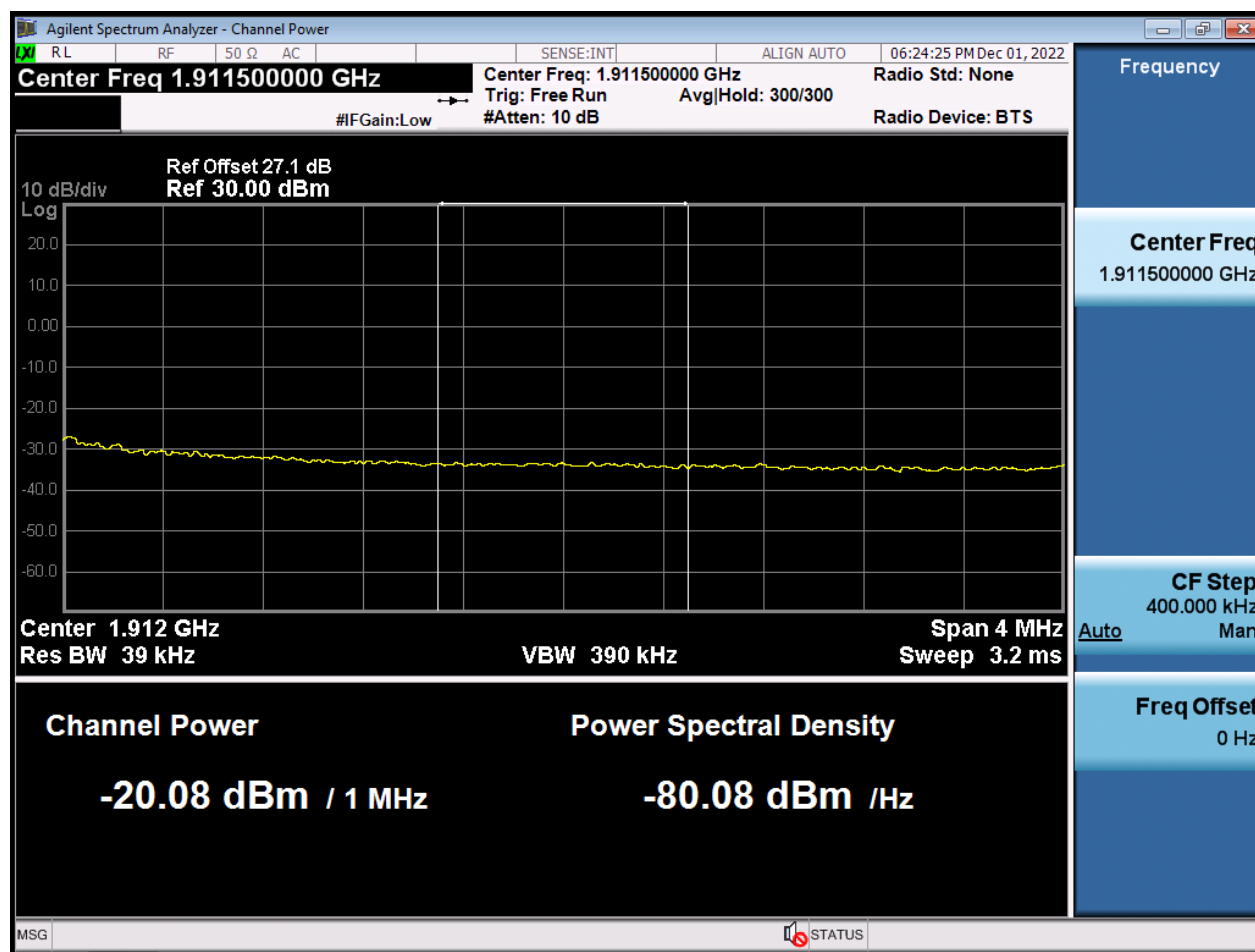

BW15 M_BandEdge_Lowest Channel_QPSK_1RB

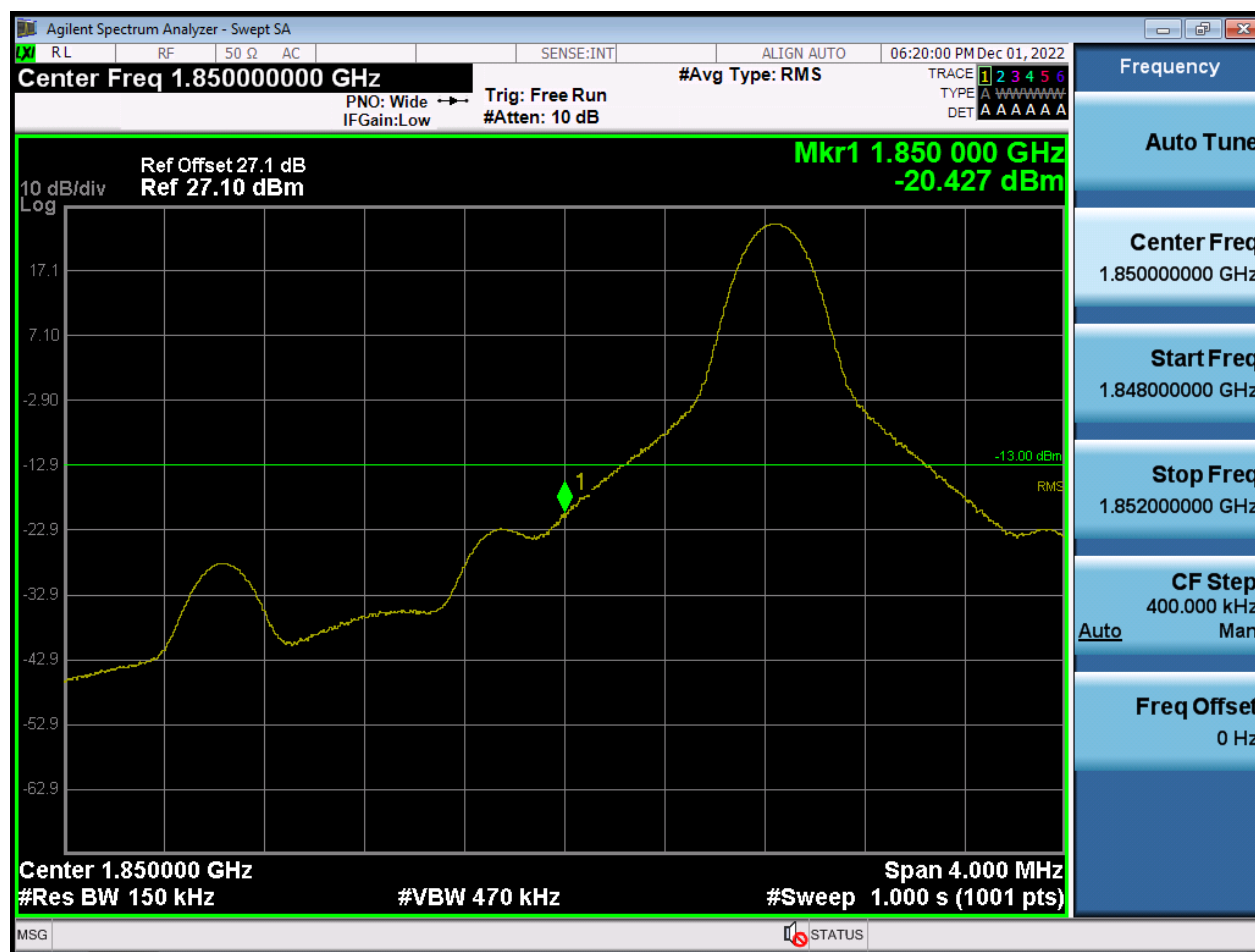


BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

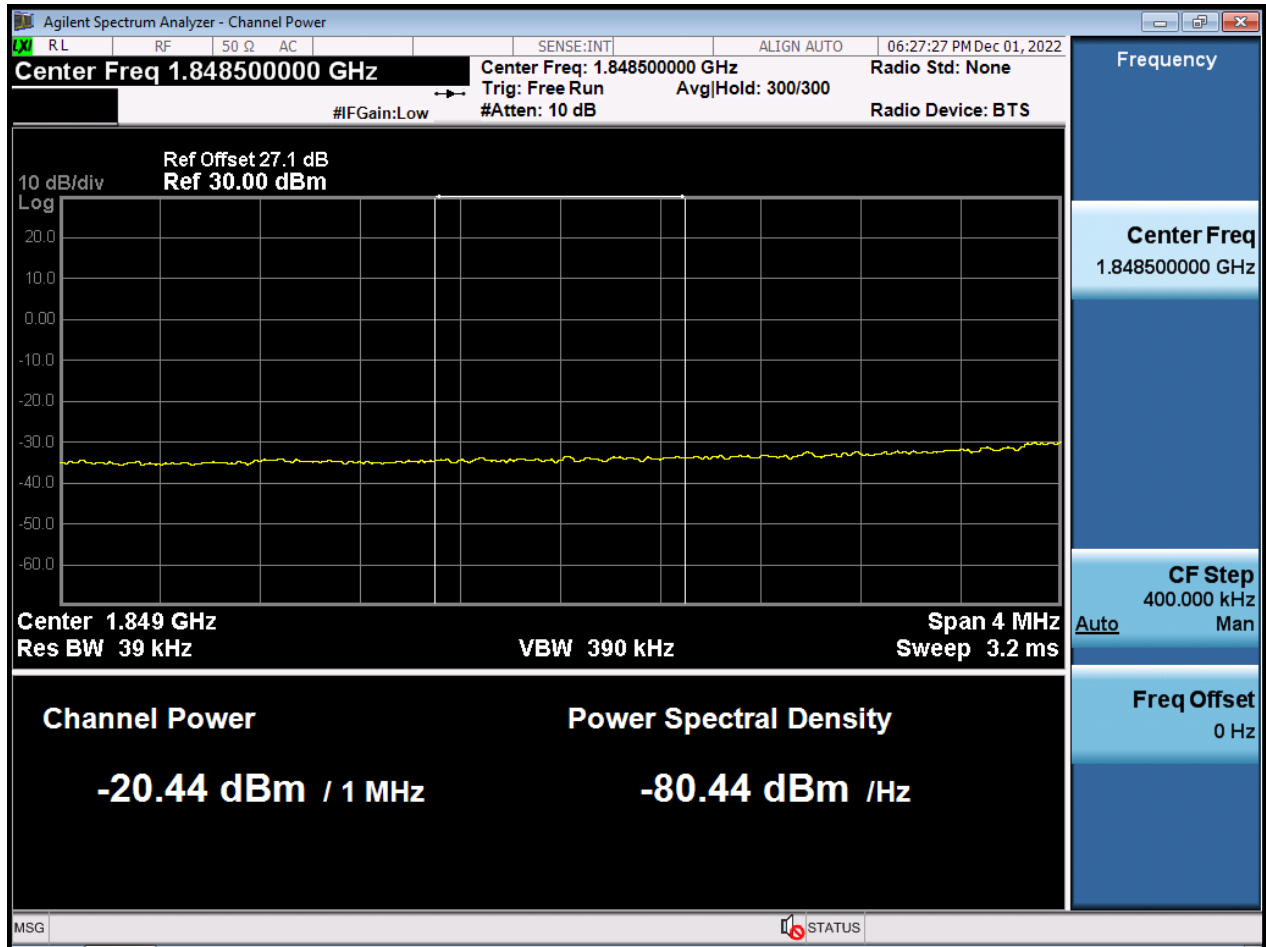


BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

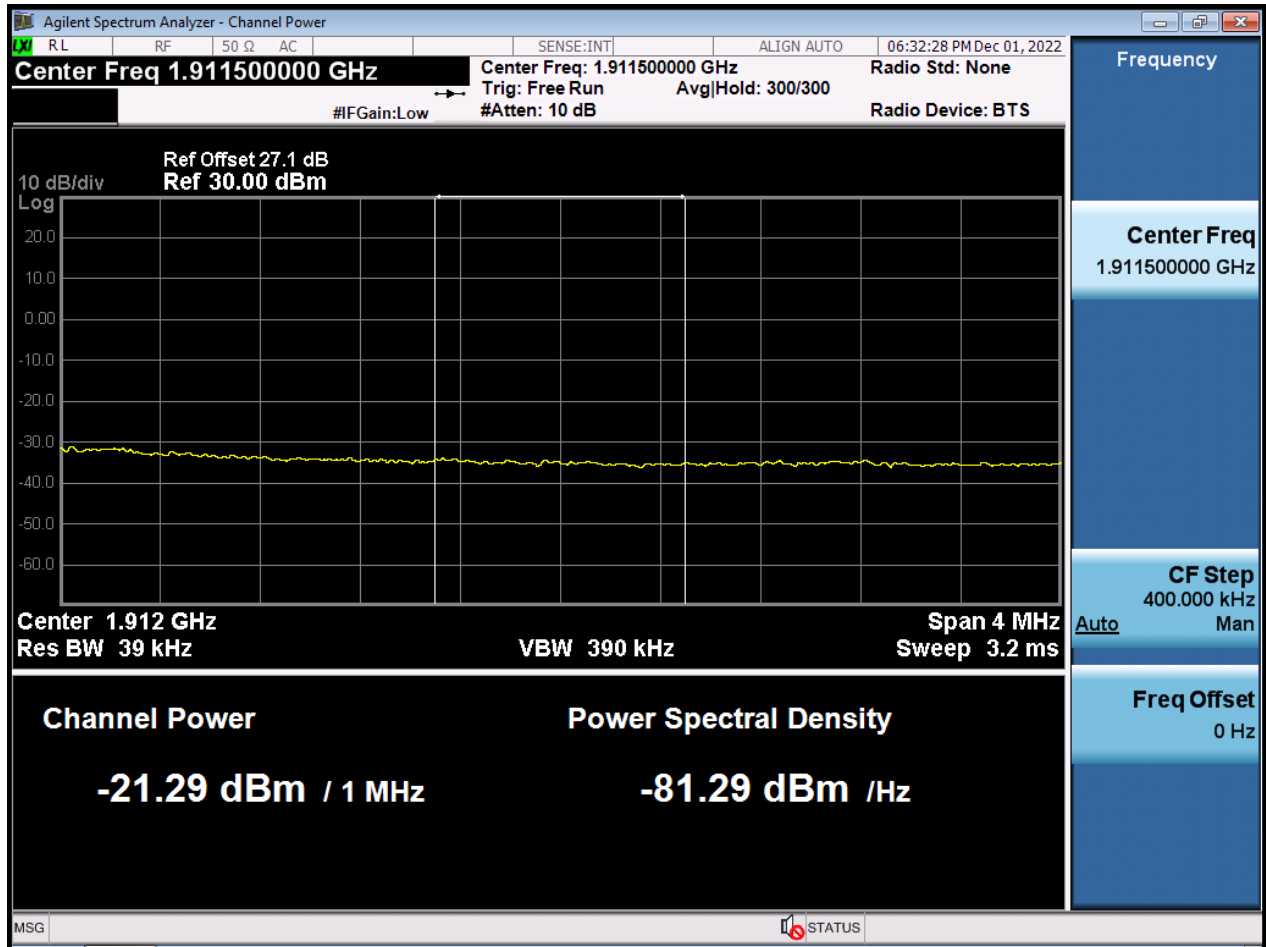


BW20 M_BandEdge_Lowest Channel_QPSK_1RB

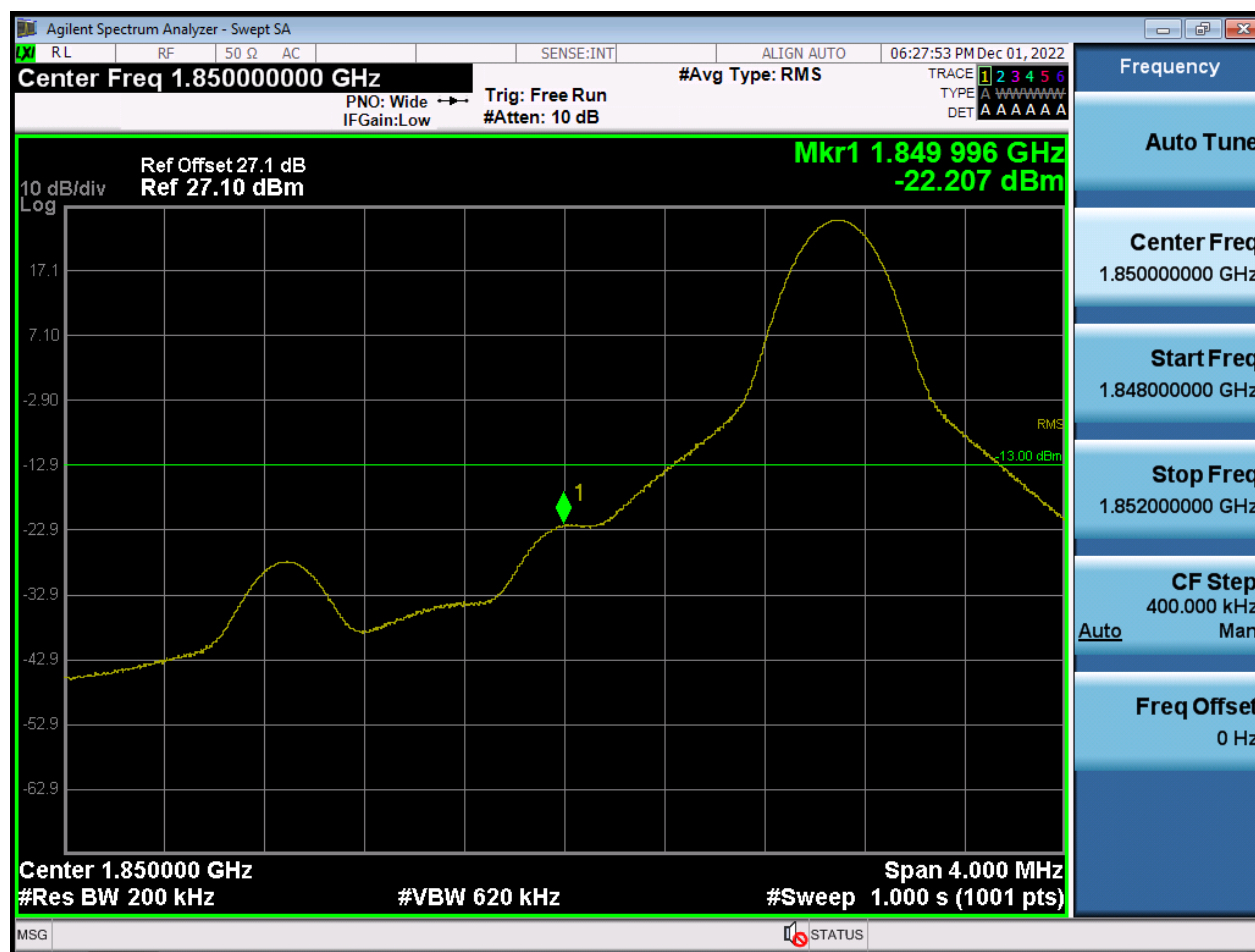


BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

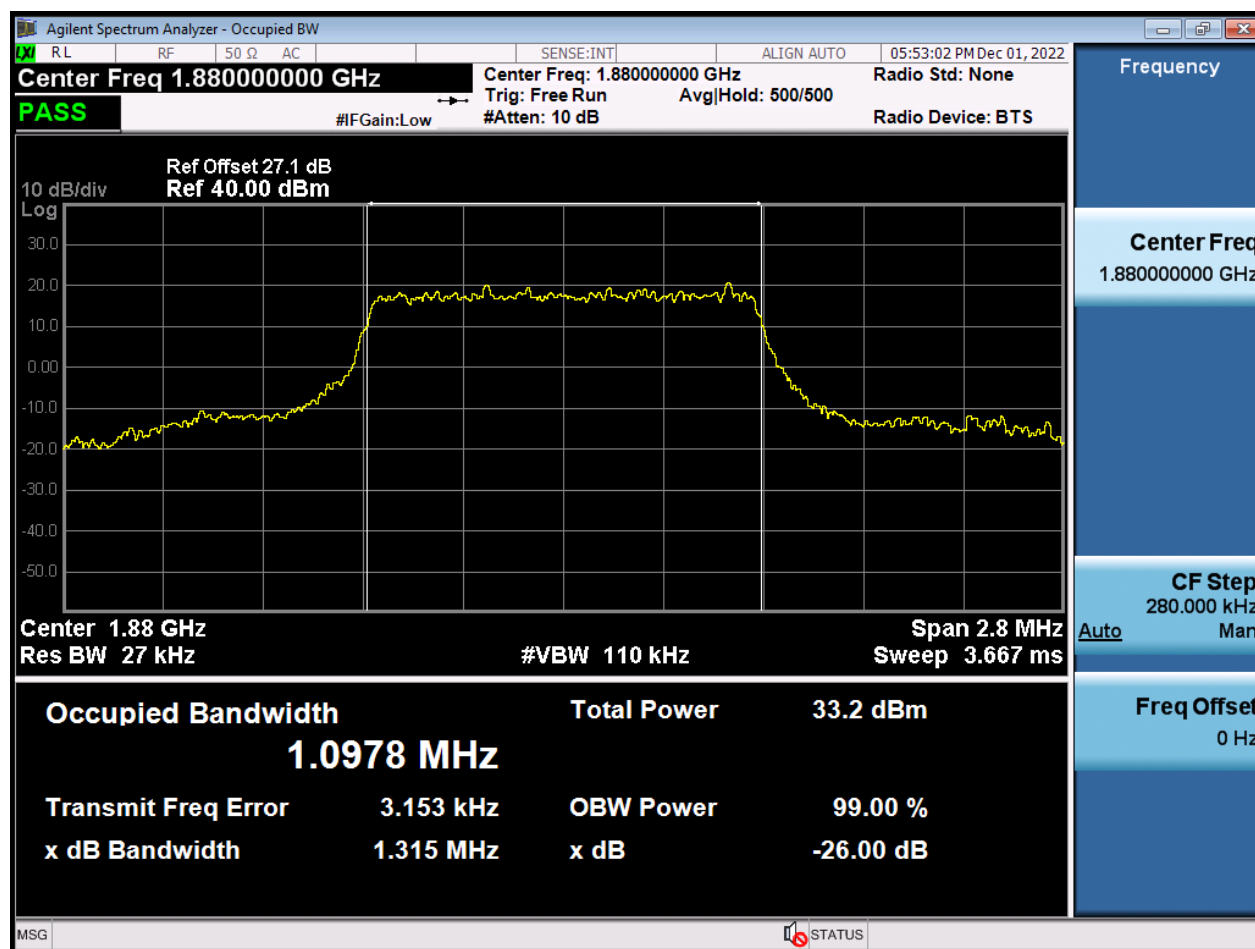


BW1.4 M_OBW_Middle Channel_16QAM_FullIRB

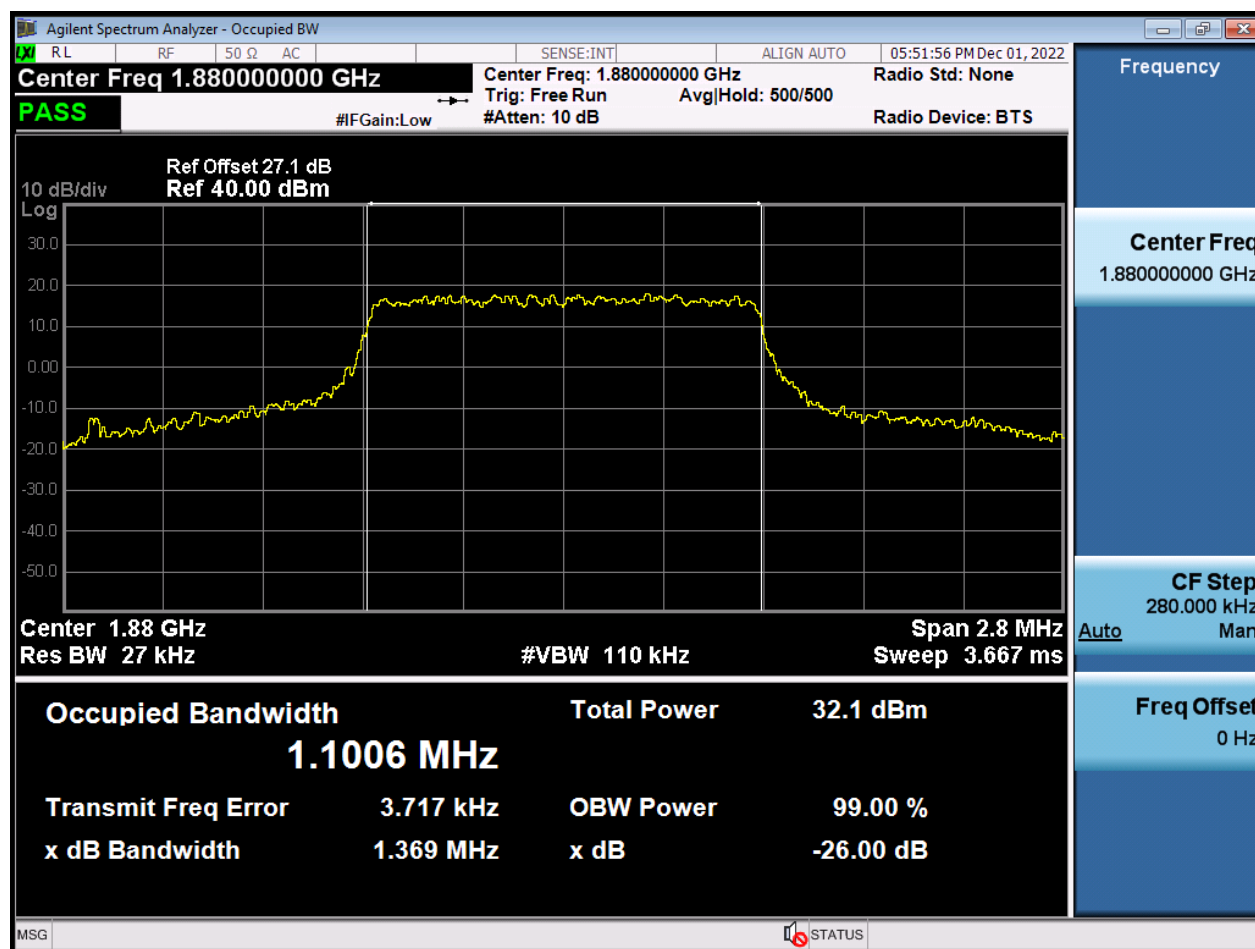


BW1.4 M_OBW_Middle Channel_64QAM_FullIRB

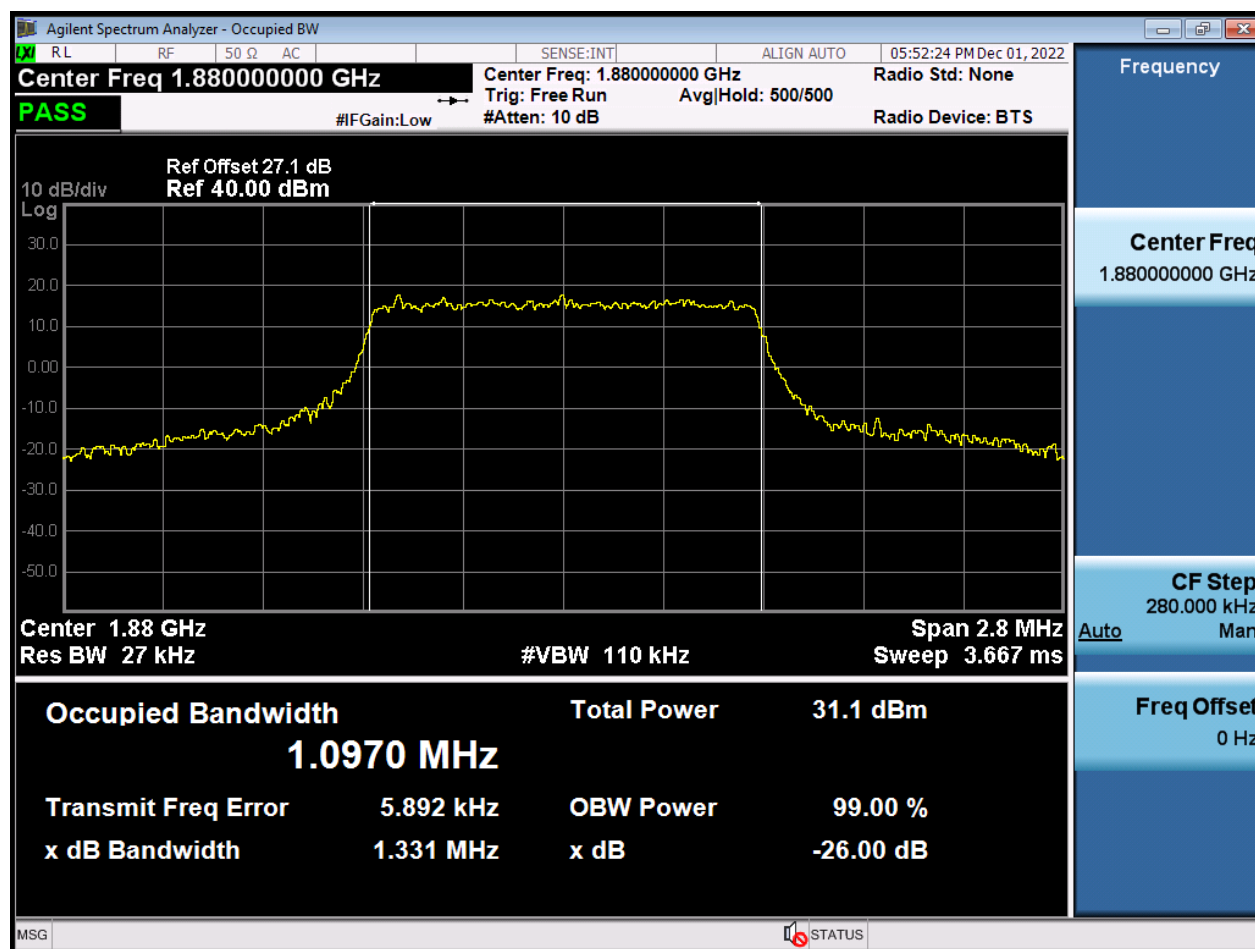


BW1.4 M_OBW_Middle Channel_256QAM_FullRB

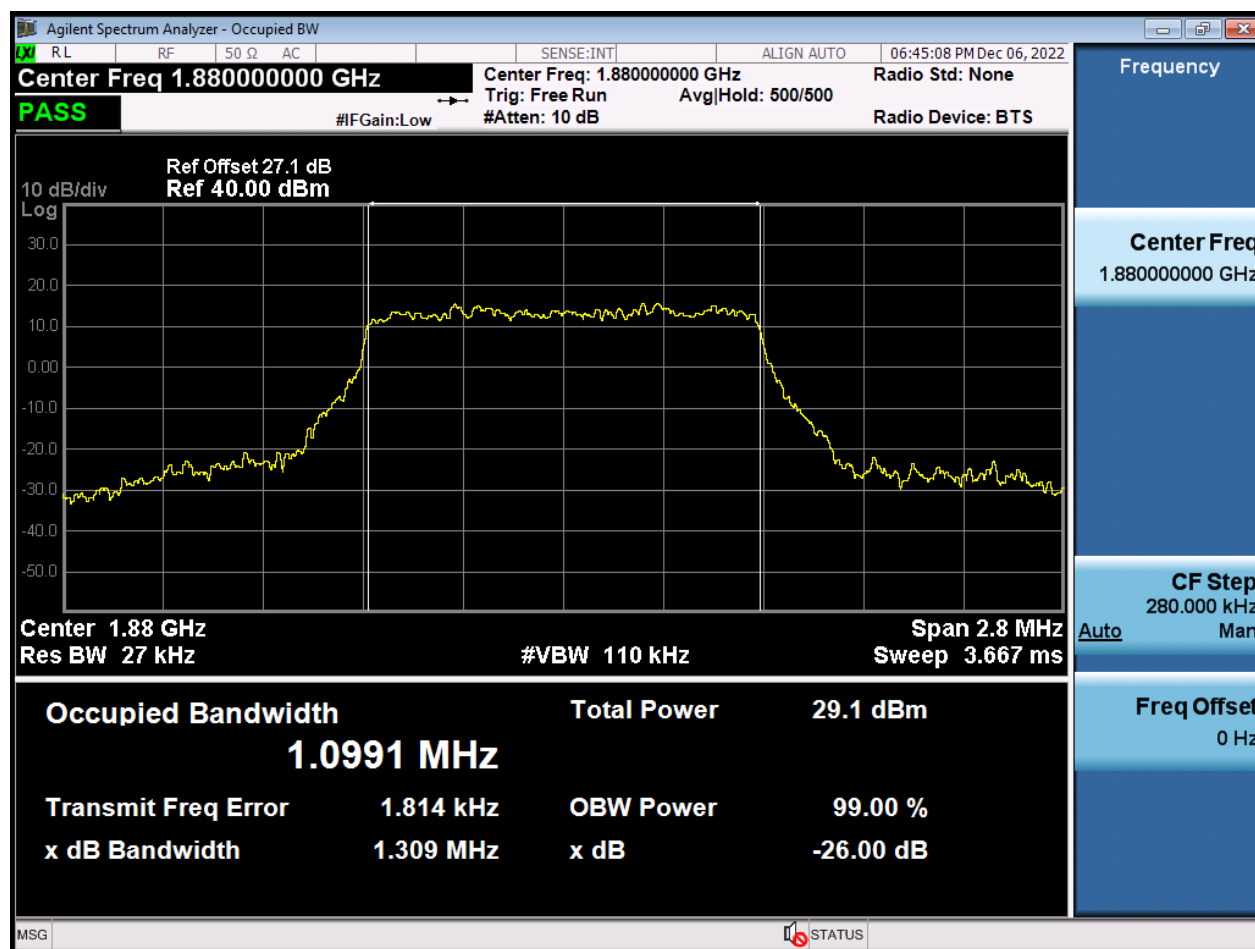


BW3 M_OBW_Middle Channel_QPSK_FullIRB

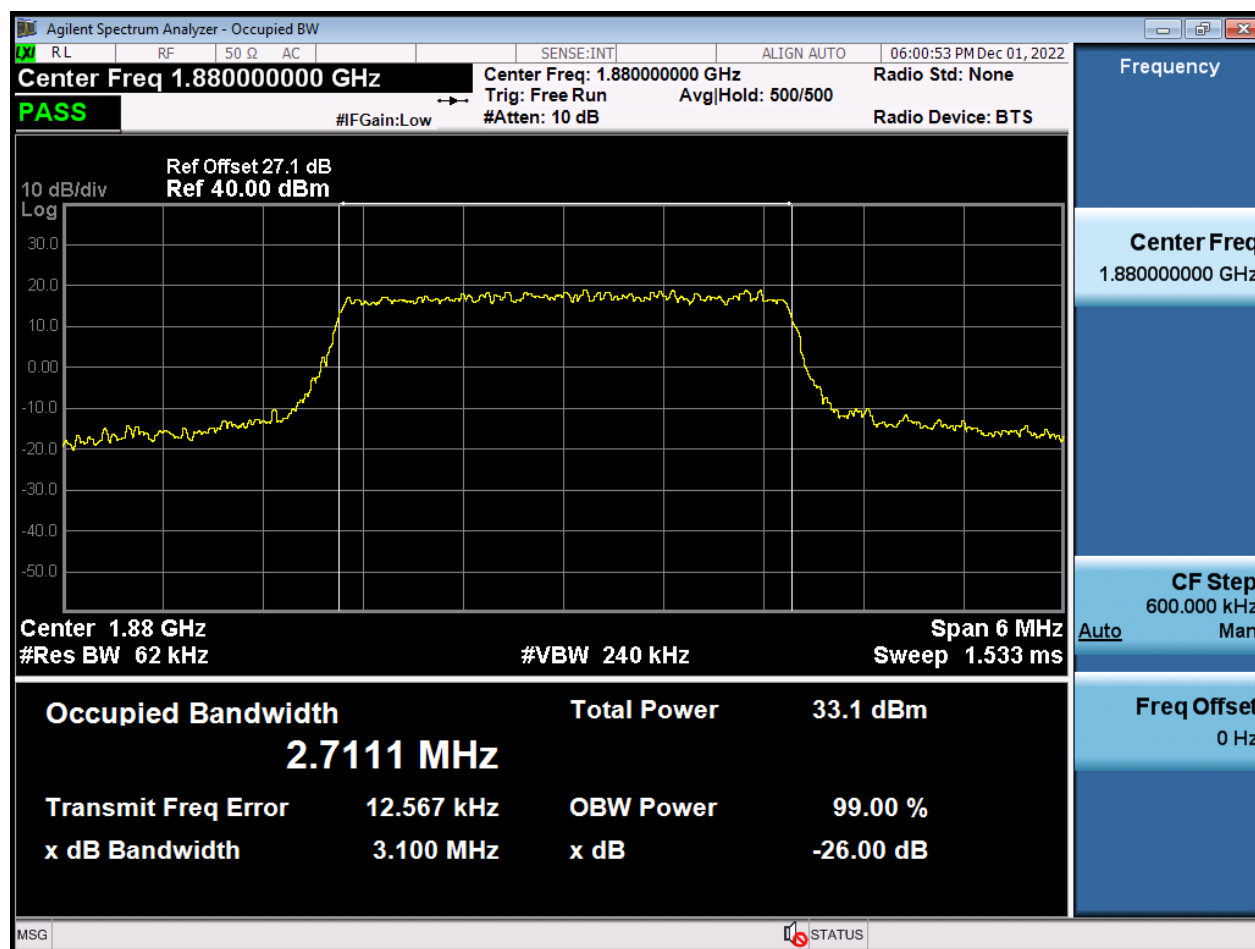


BW3 M_OBW_Middle Channel_16QAM_FullRB

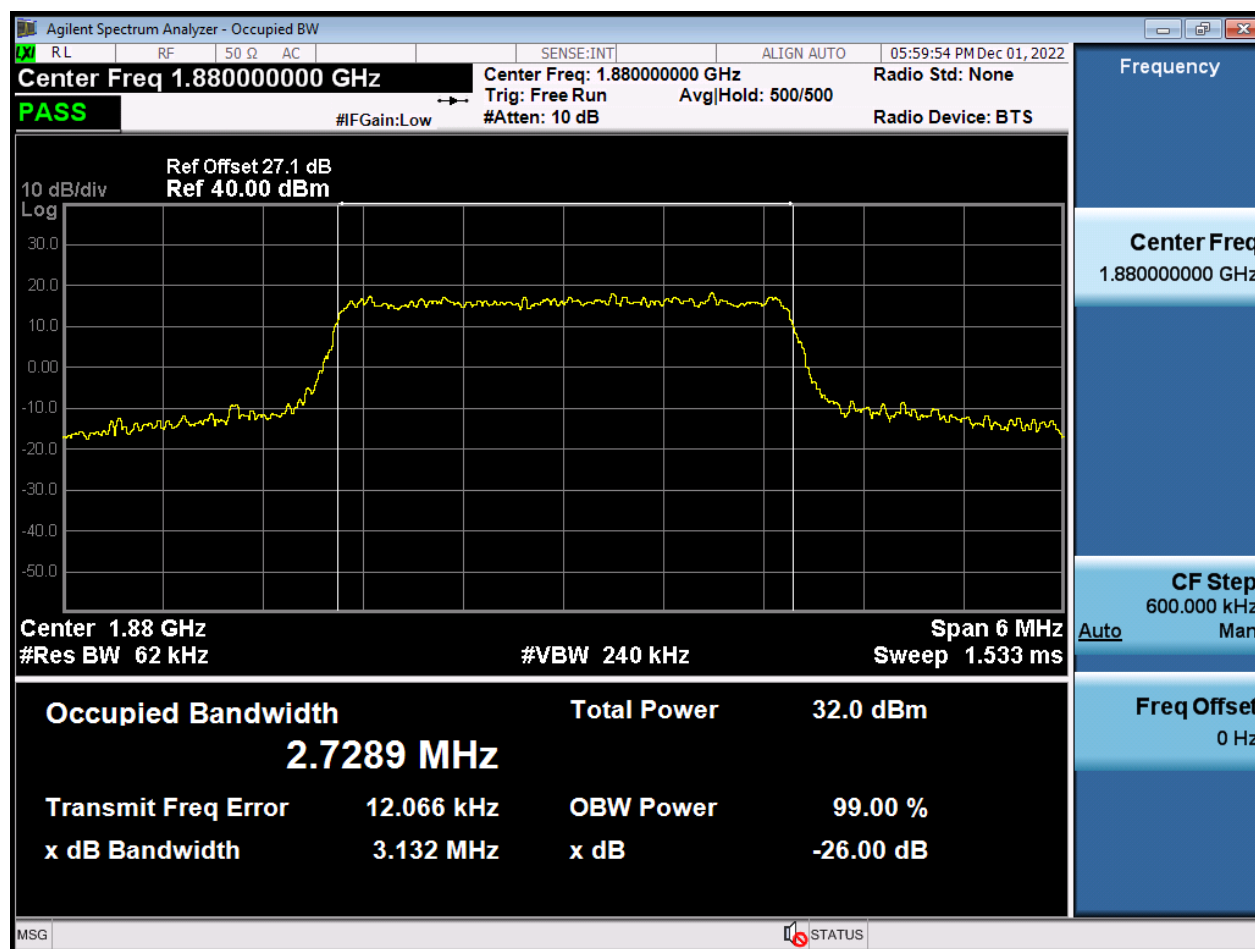


BW3 M_OBW_Middle Channel_64QAM_FullRB

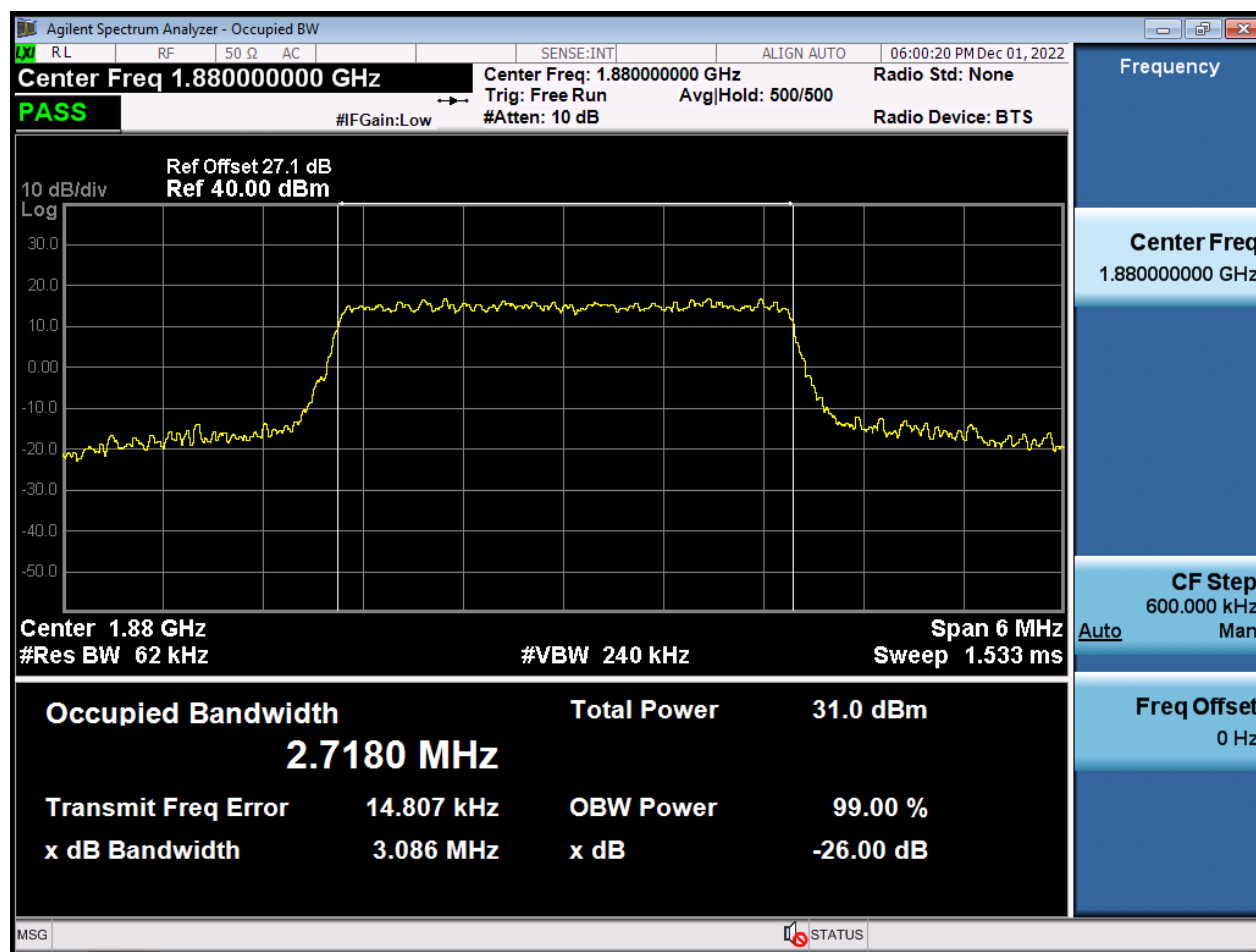


BW3 M_OBW_Middle Channel_256QAM_FullIRB

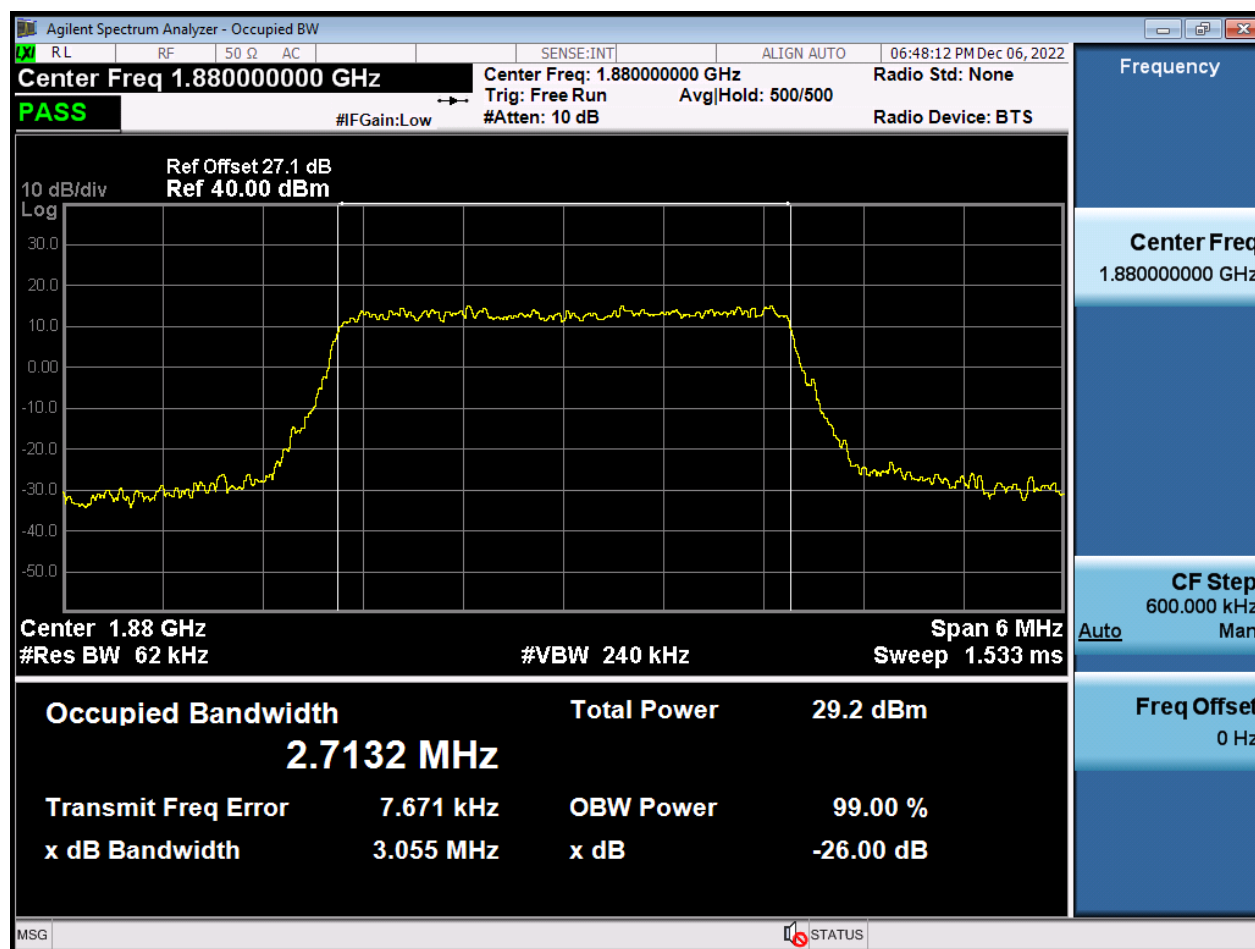


BW5 M_OBW_Middle Channel_QPSK_FullIRB

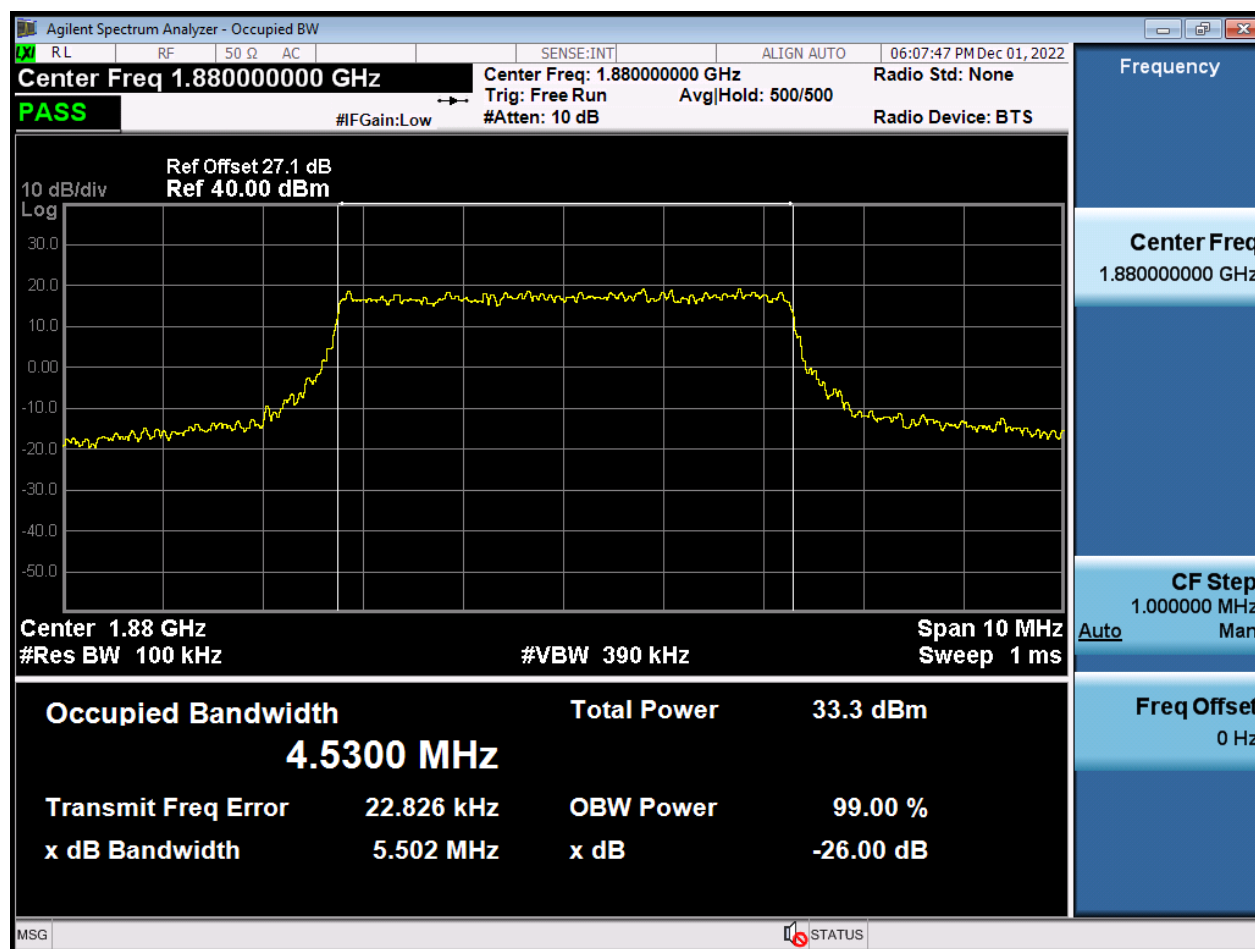


BW5 M_OBW_Middle Channel_16QAM_FullRB

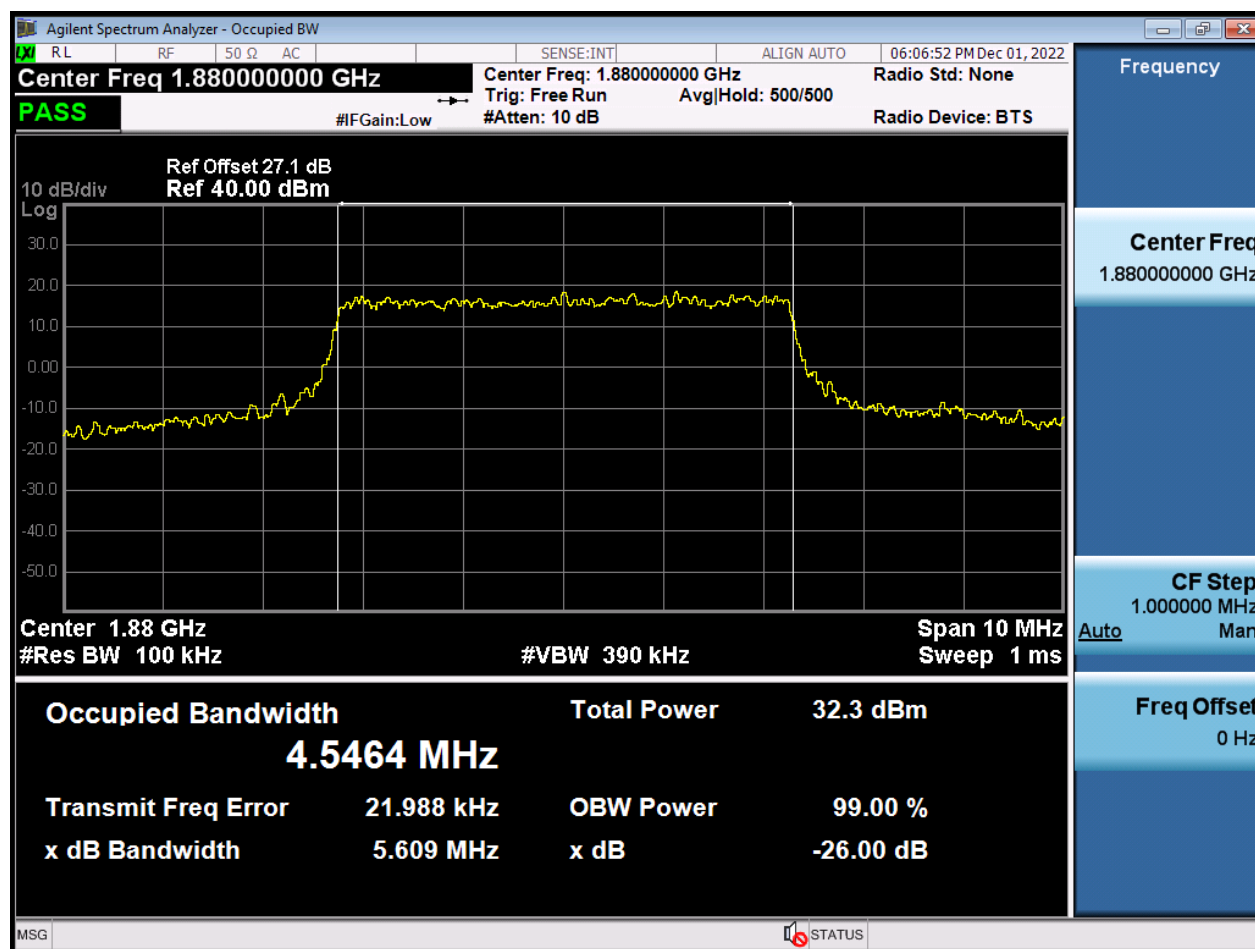


BW5 M_OBW_Middle Channel_64QAM_FullRB

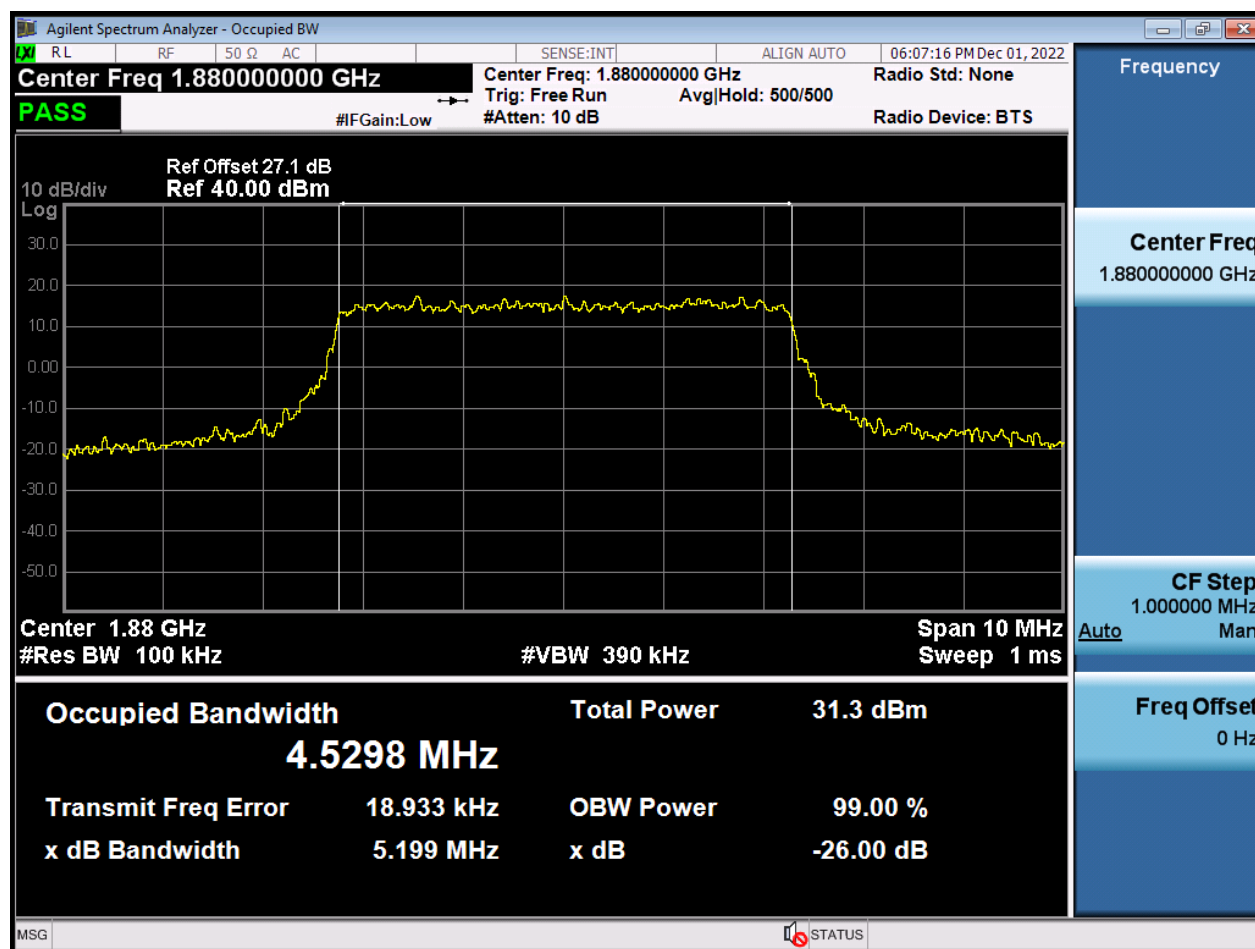


BW5 M_OBW_Middle Channel_256QAM_FullIRB

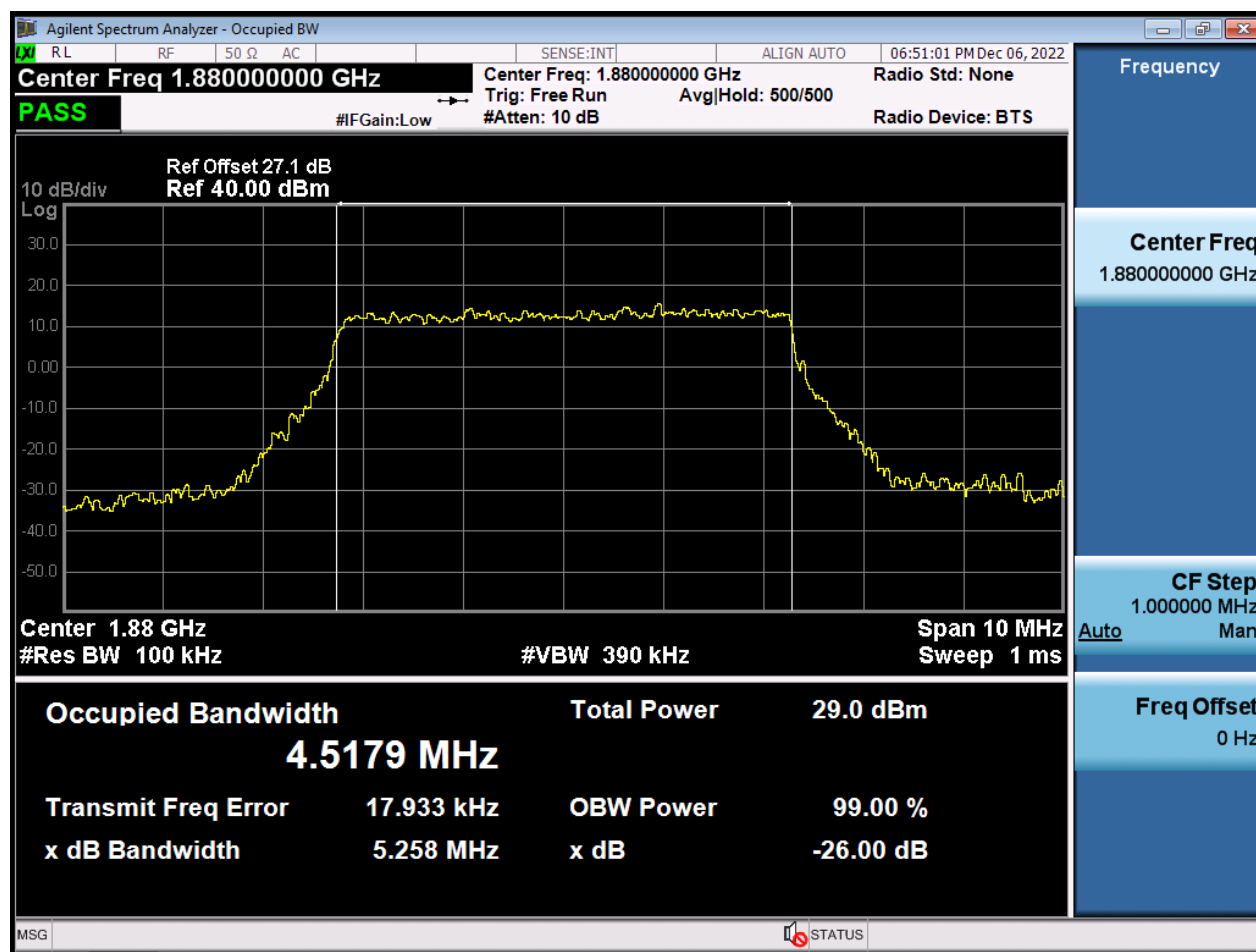


BW10 M_OBW_Middle Channel_QPSK_FullIRB

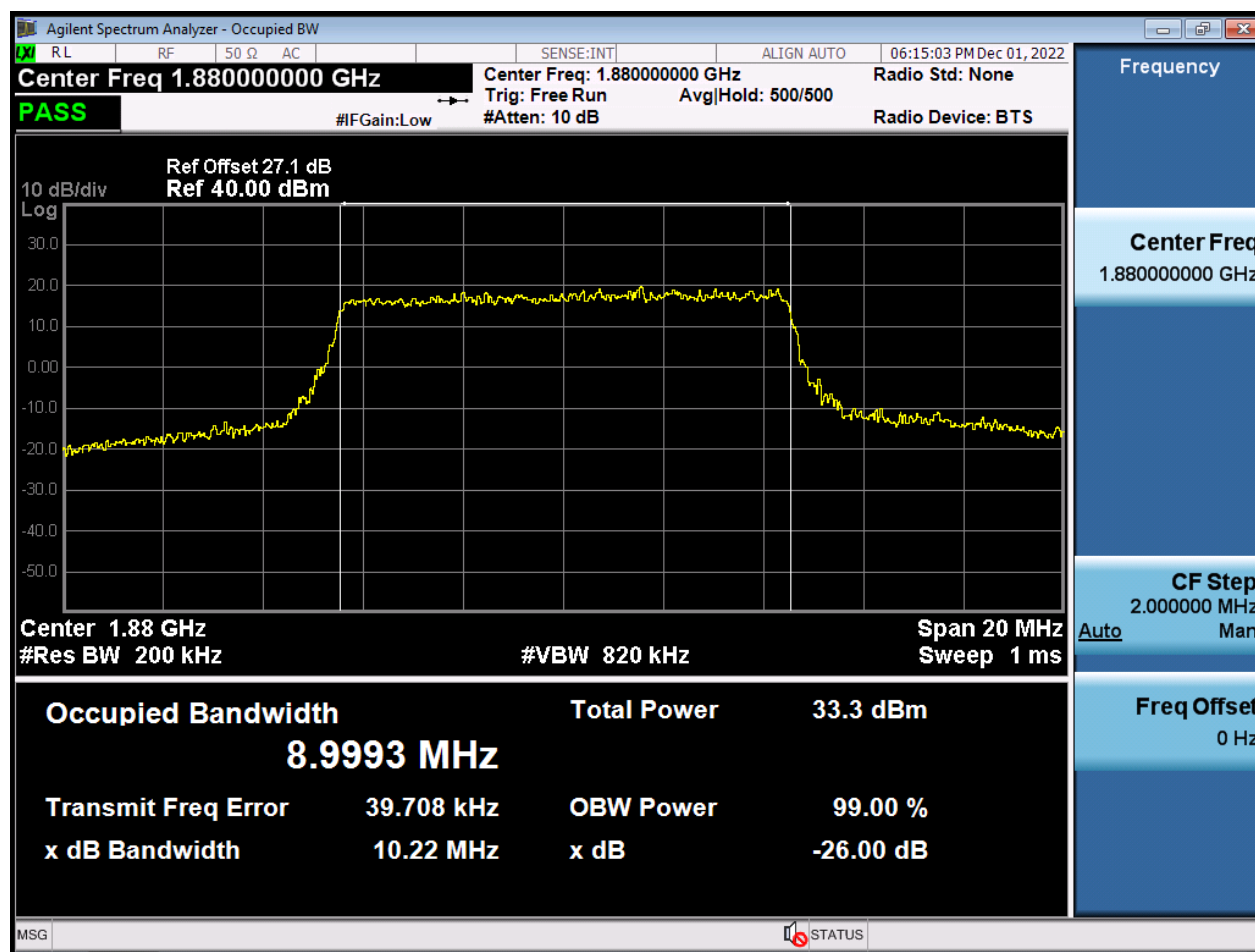


BW10 M_OBW_Middle Channel_16QAM_FullIRB

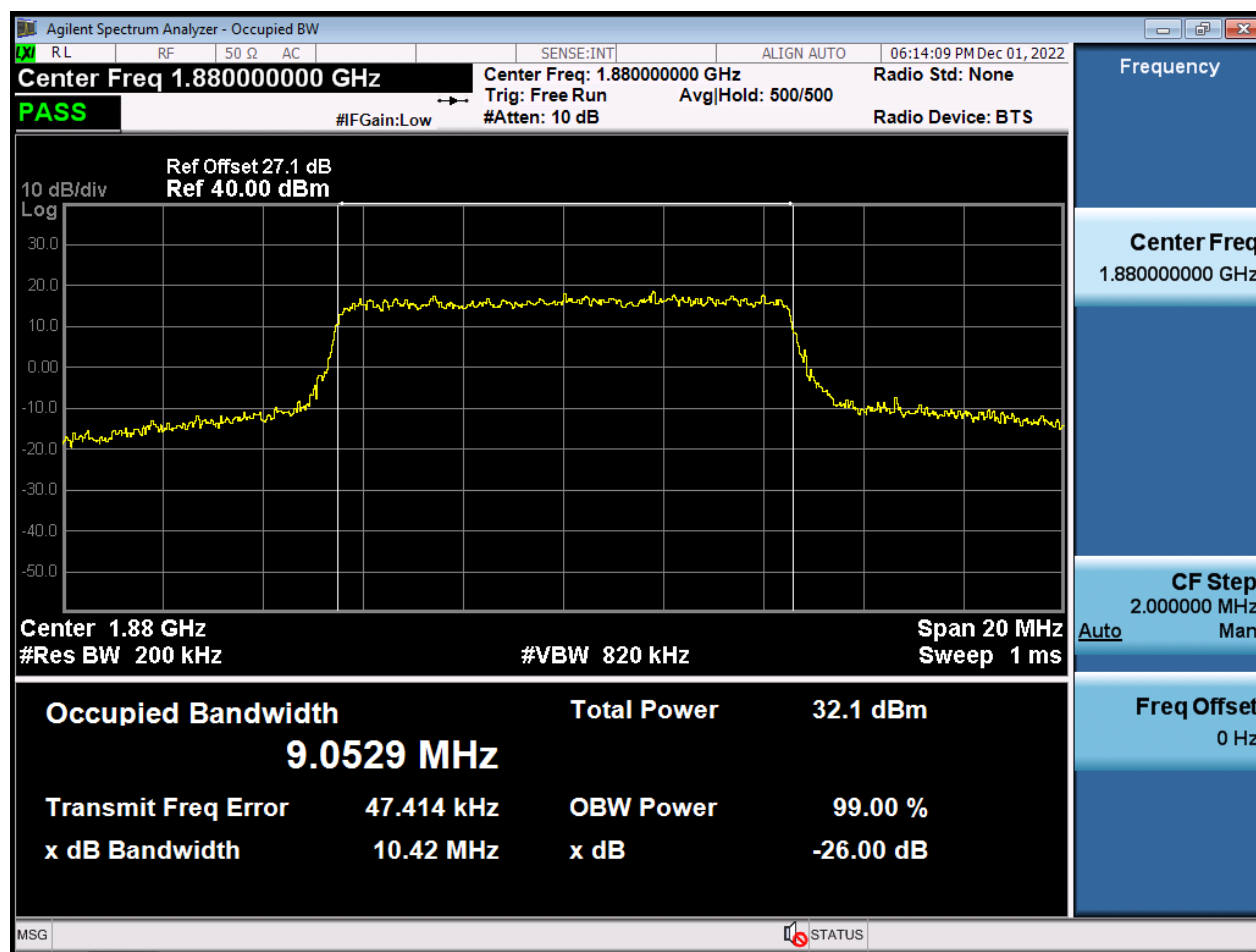


BW10 M_OBW_Middle Channel_64QAM_FullIRB

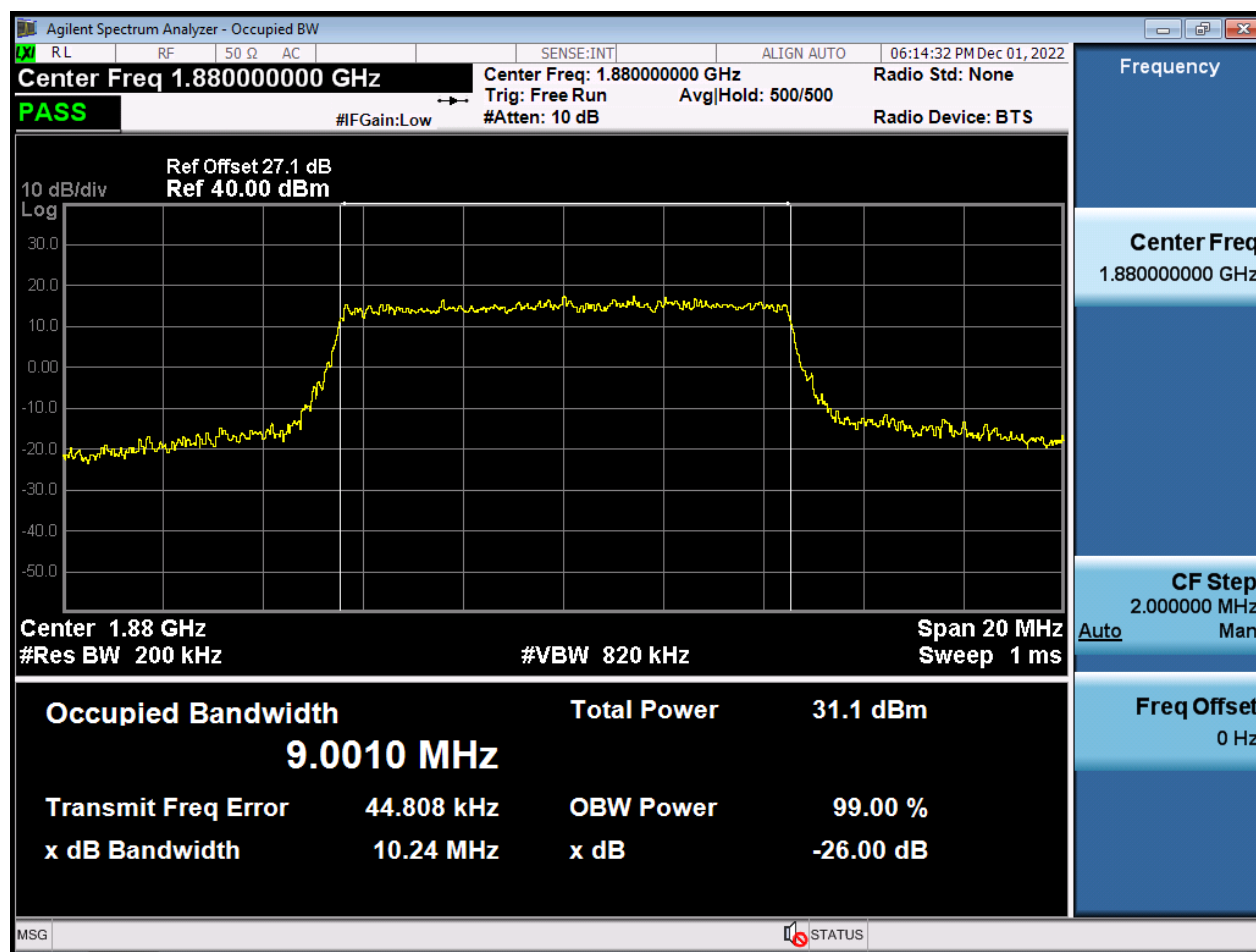


BW10 M_OBW_Middle Channel_256QAM_FullIRB

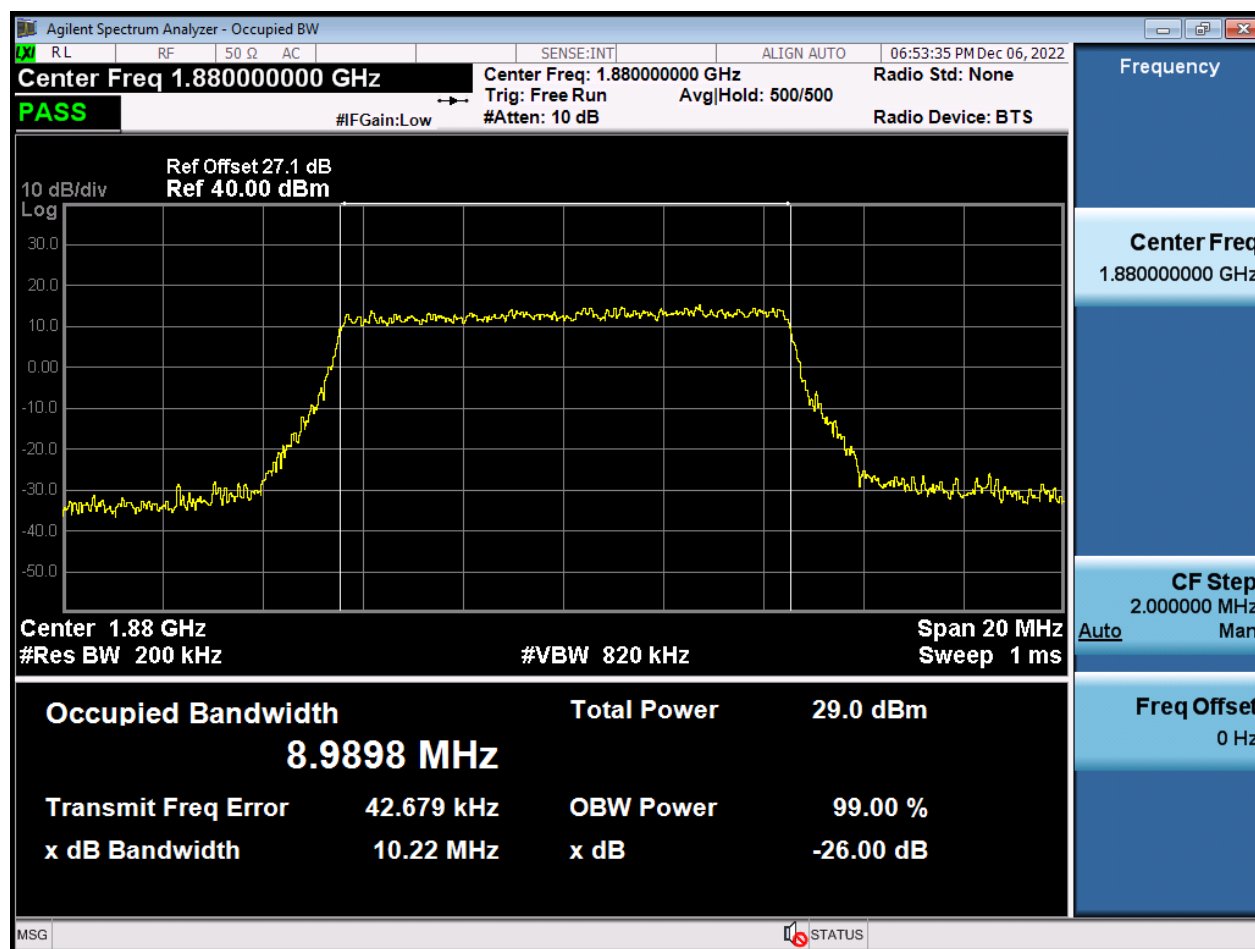


BW15 M_OBW_Middle Channel_QPSK_FullIRB

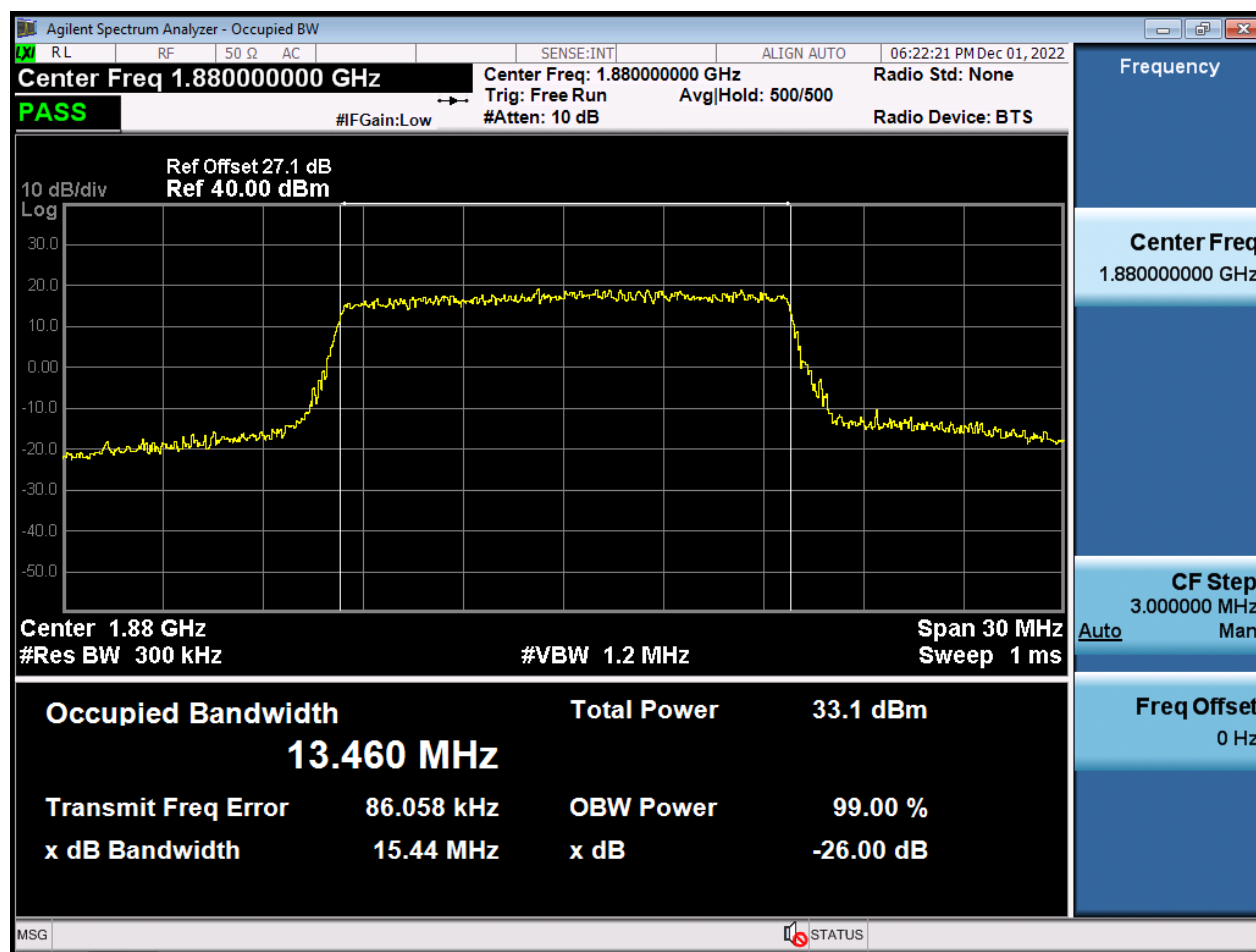


BW15 M_OBW_Middle Channel_16QAM_FullIRB

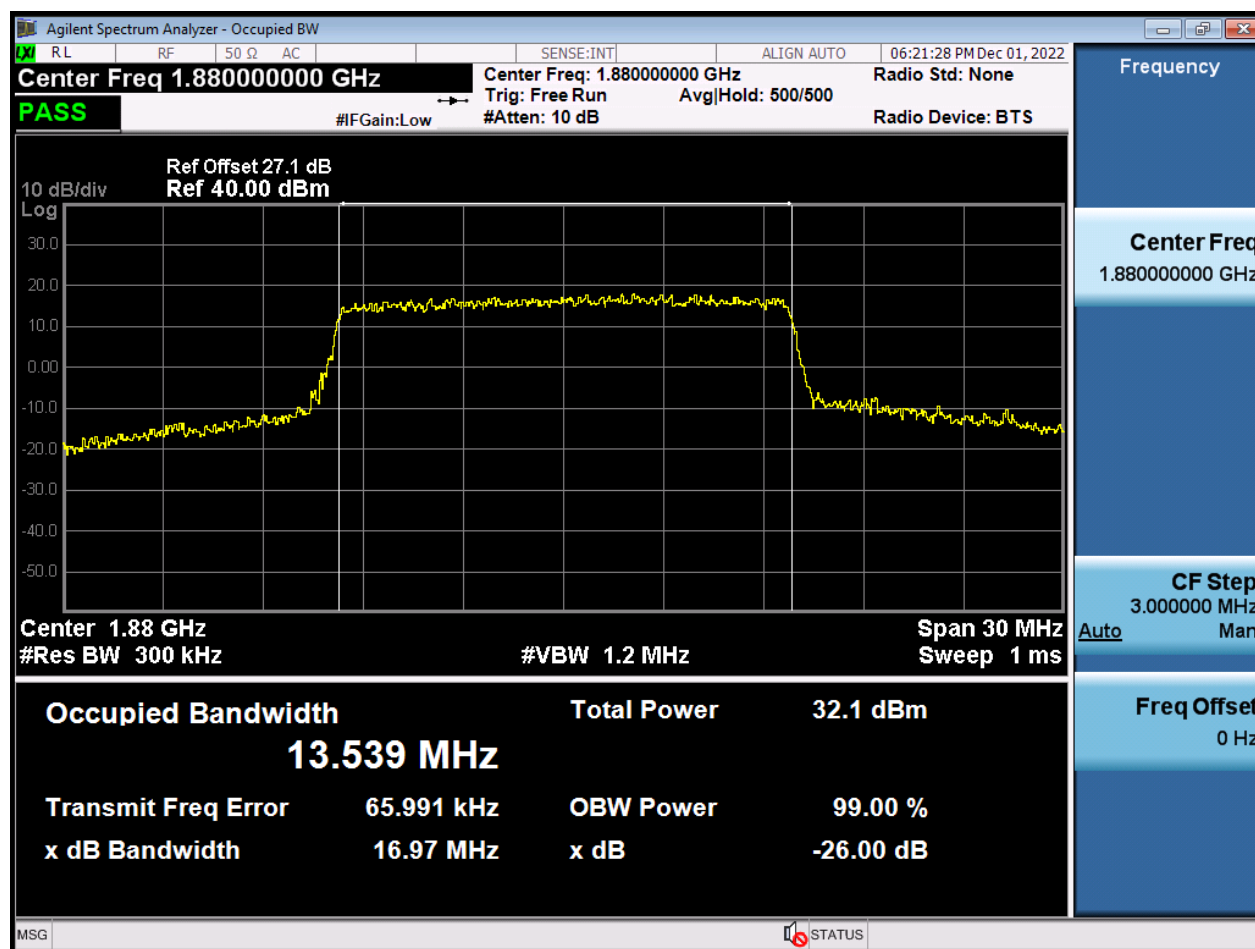


BW15 M_OBW_Middle Channel_64QAM_FullIRB

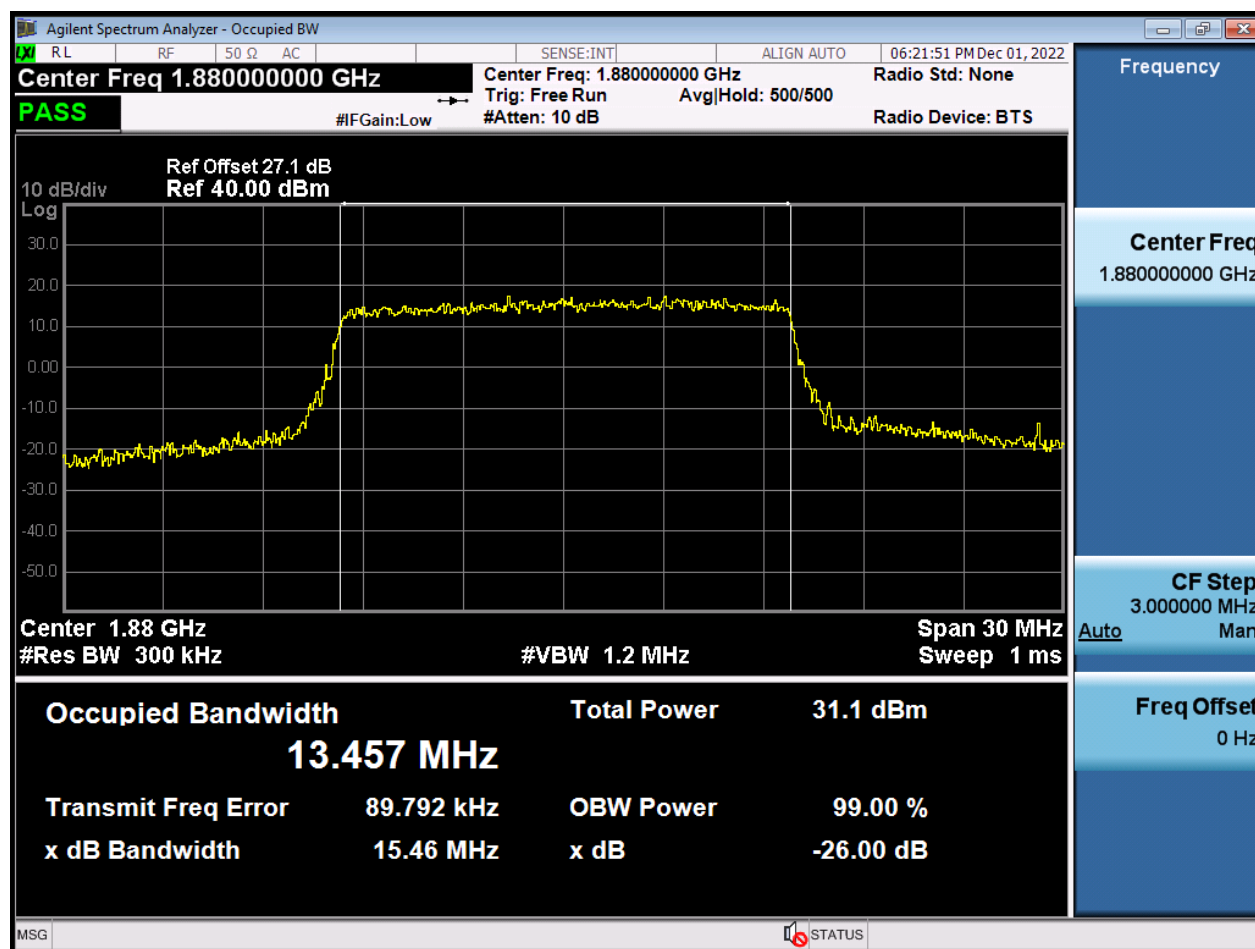


BW15 M_OBW_Middle Channel_256QAM_FullIRB

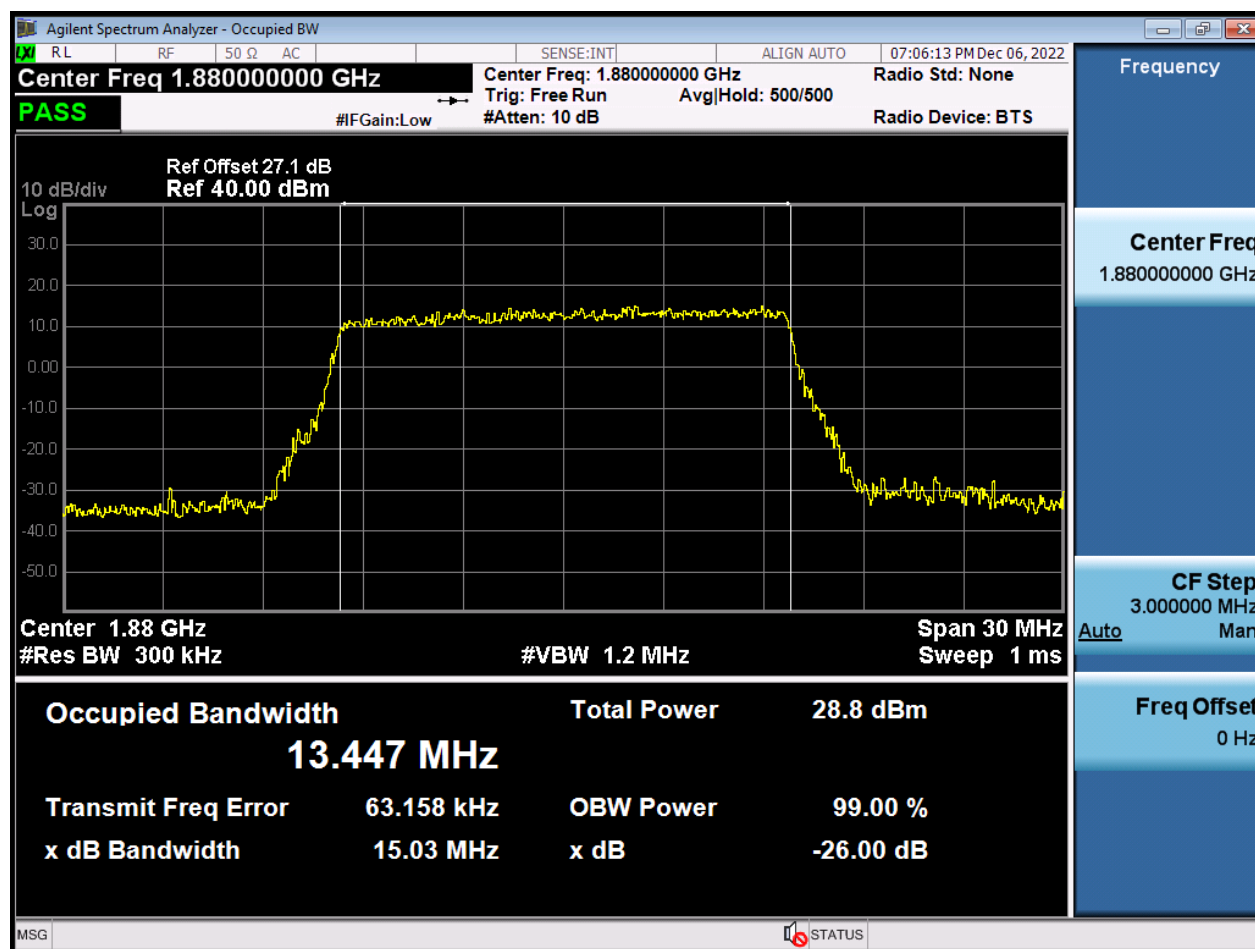


BW20 M_OBW_Middle Channel_QPSK_FullIRB

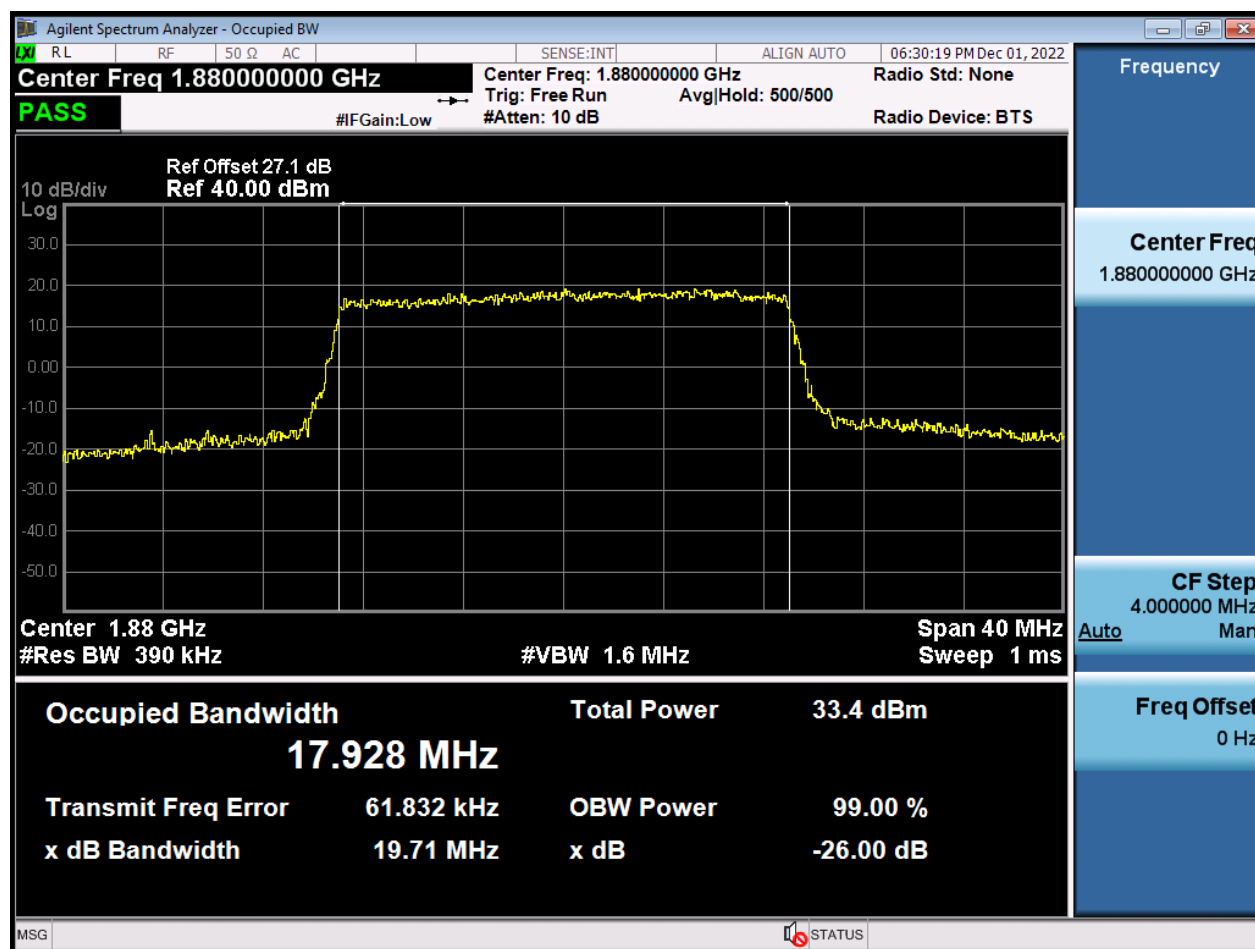


BW20 M_OBW_Middle Channel_16QAM_FullIRB

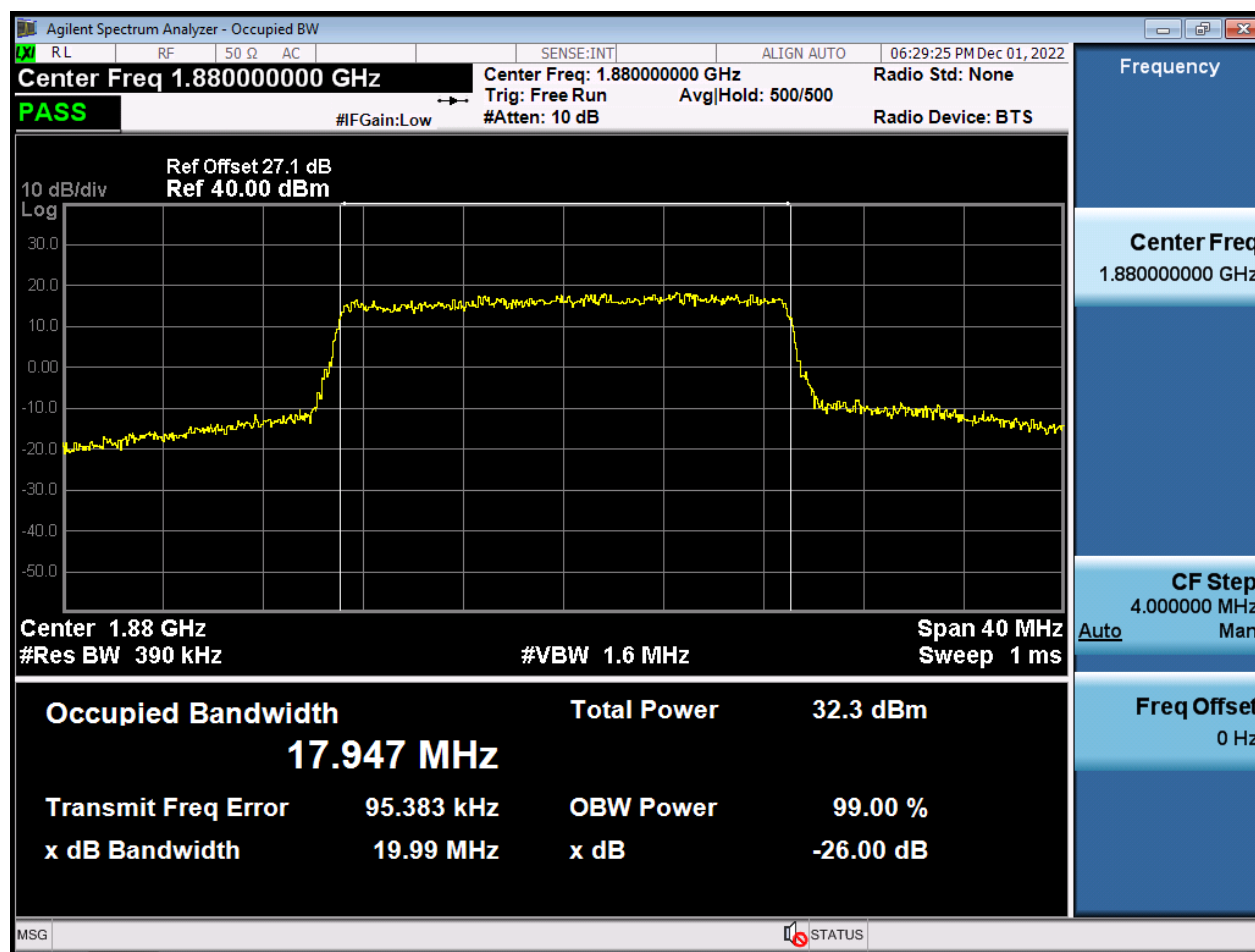


BW20 M_OBW_Middle Channel_64QAM_FullIRB

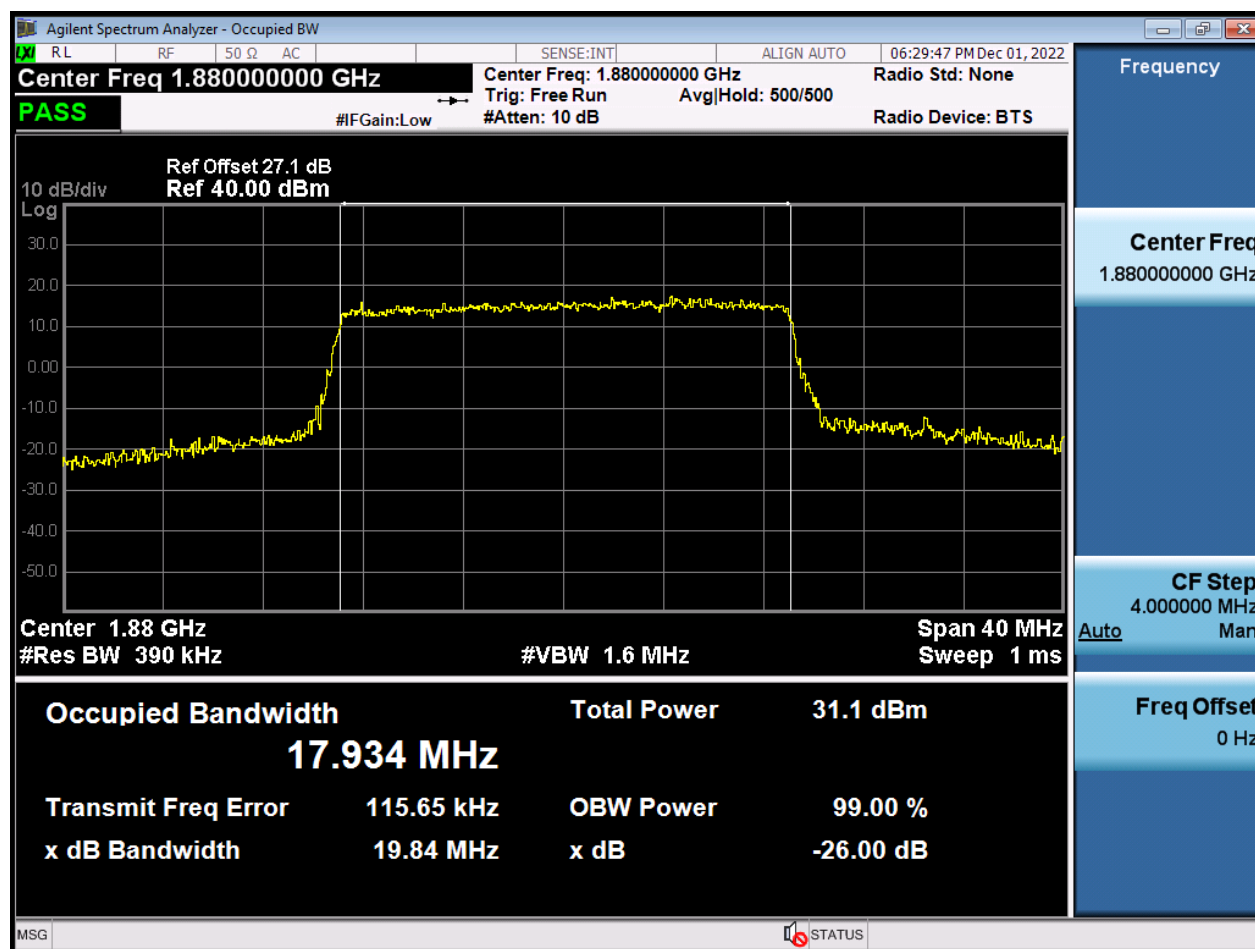


BW20 M_OBW_Middle Channel_256QAM_FullIRB

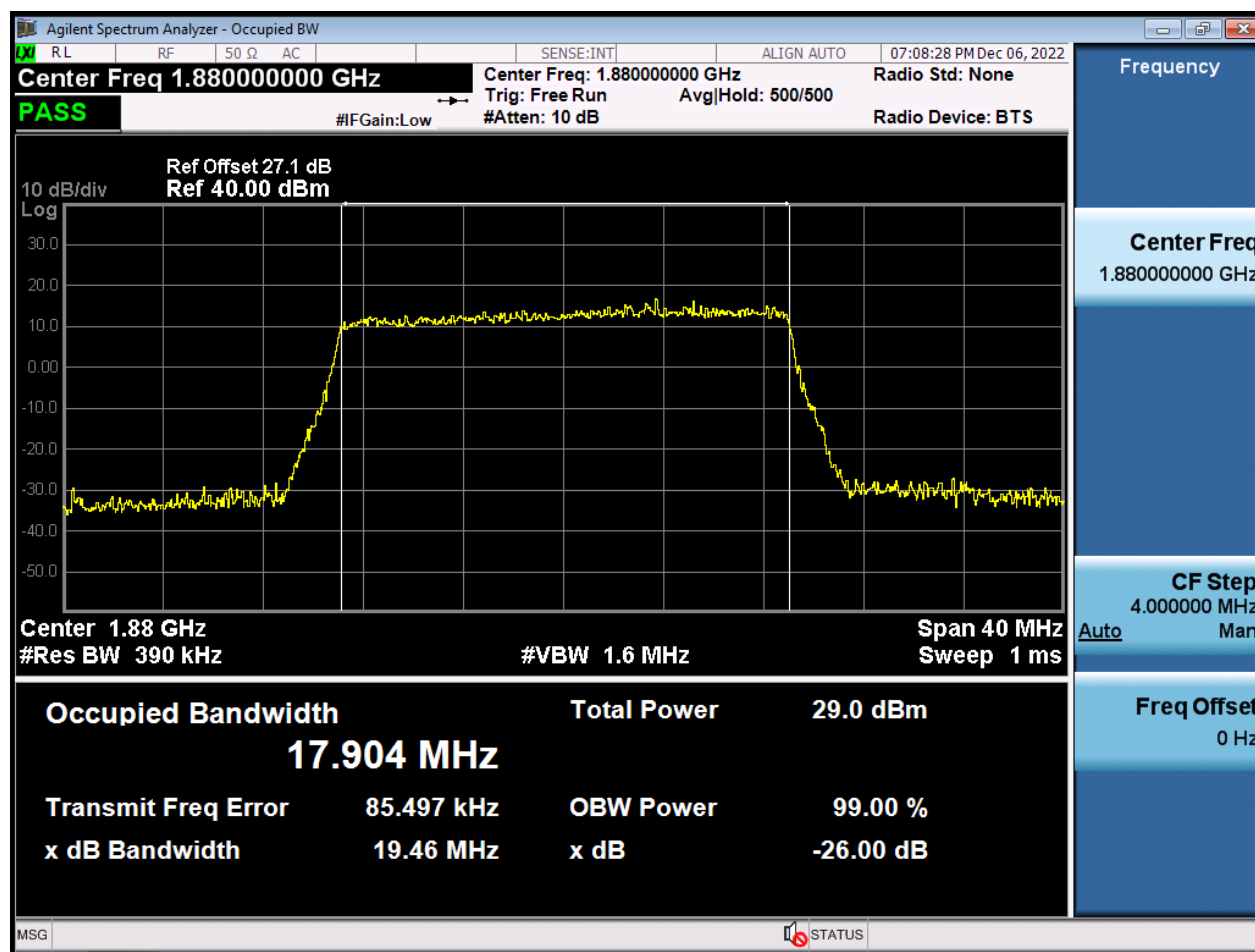


BW1.4 M_PAR_Middle Channel_QPSK_FullRB

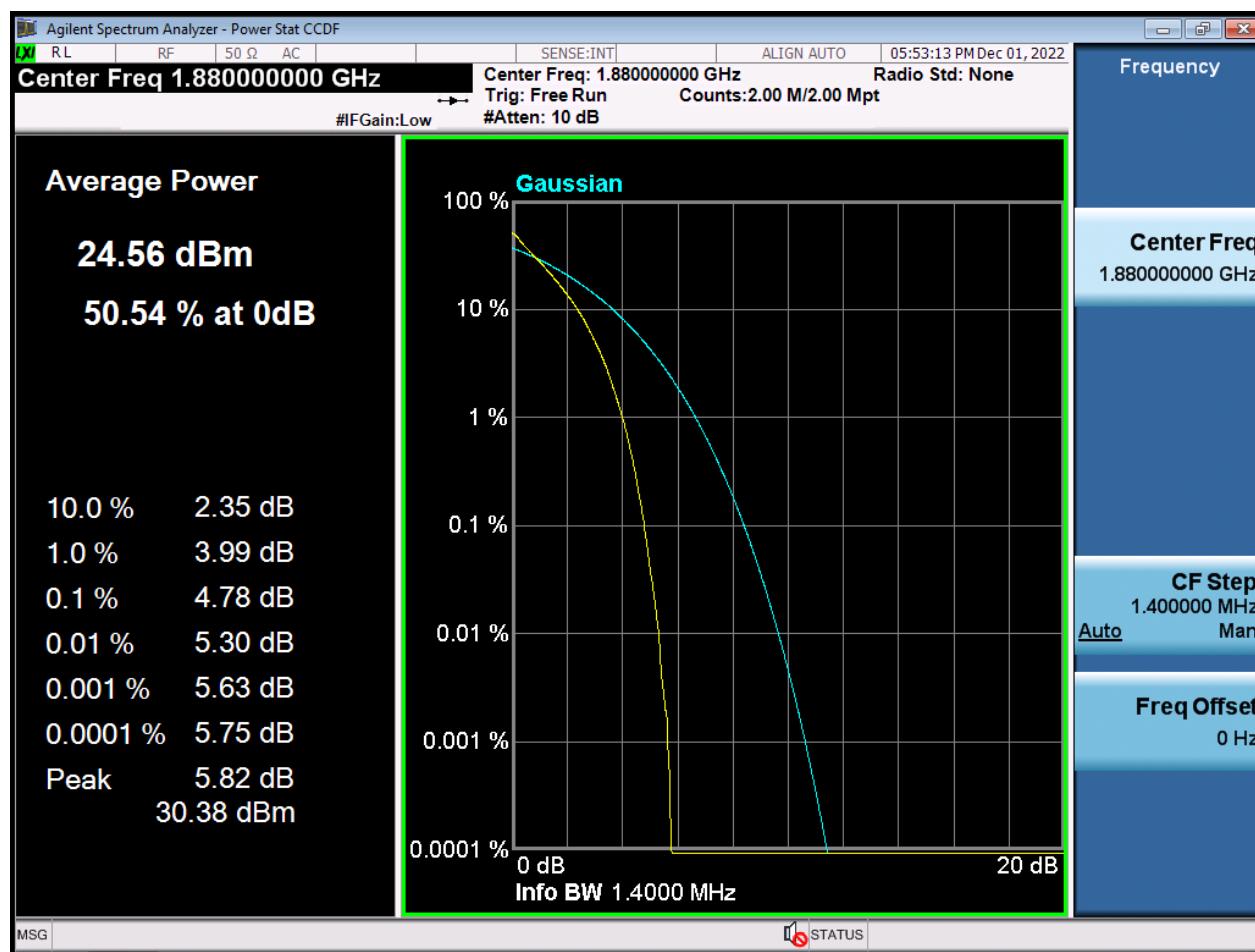


BW1.4 M_PAR_Middle Channel_16QAM_FullRB

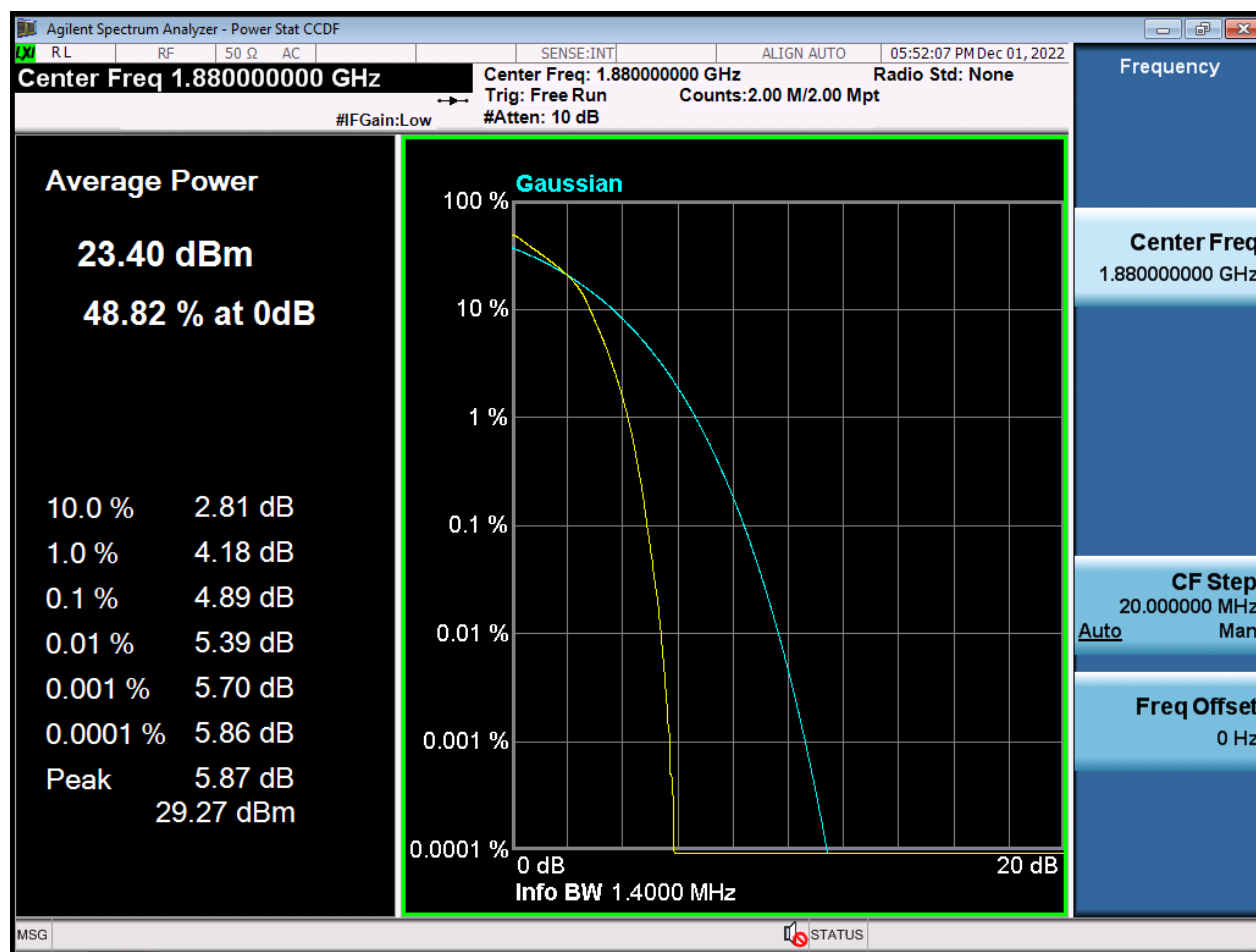


BW1.4 M_PAR_Middle Channel_64QAM_FullRB

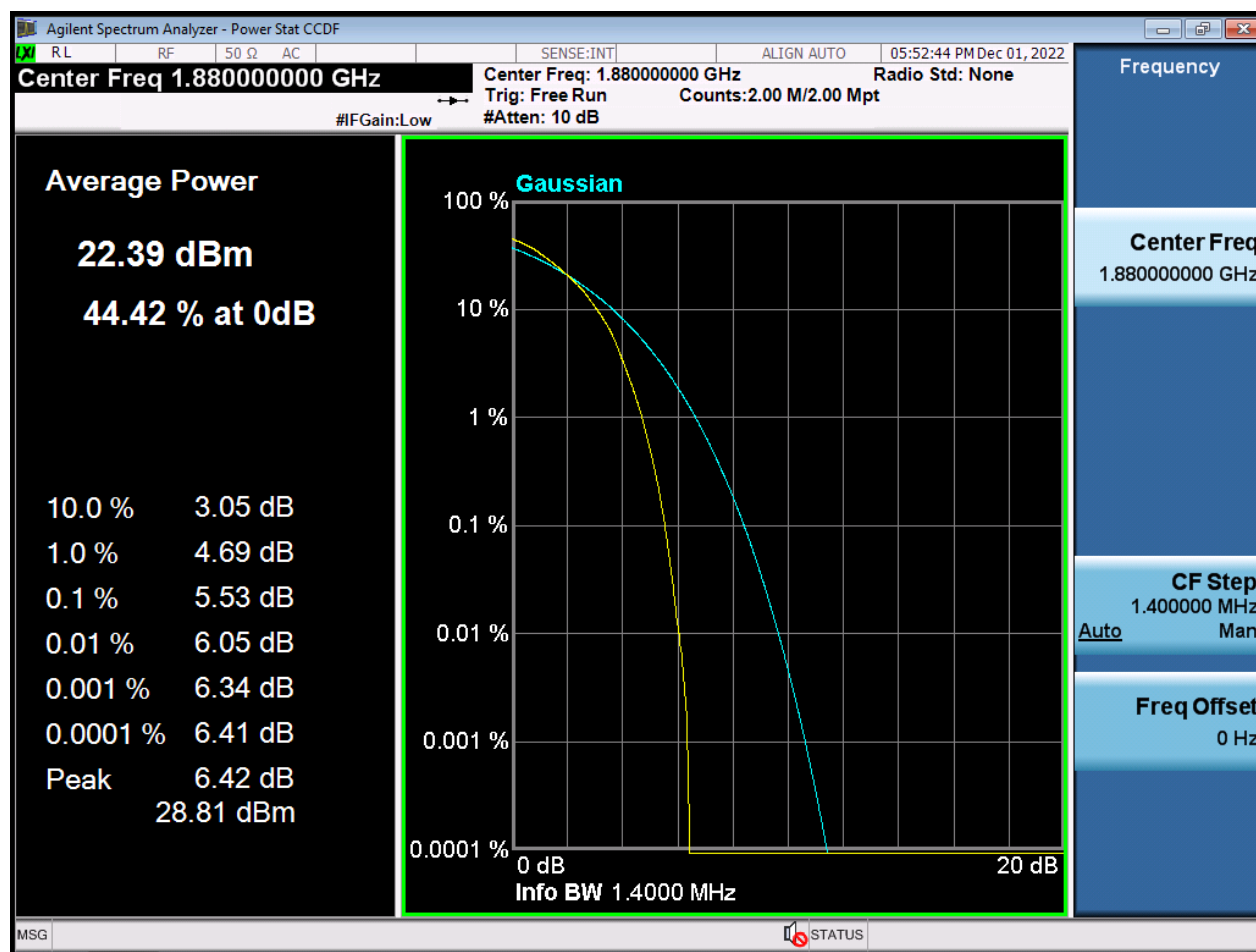


BW1.4 M_PAR_Middle Channel_256QAM_FullRB

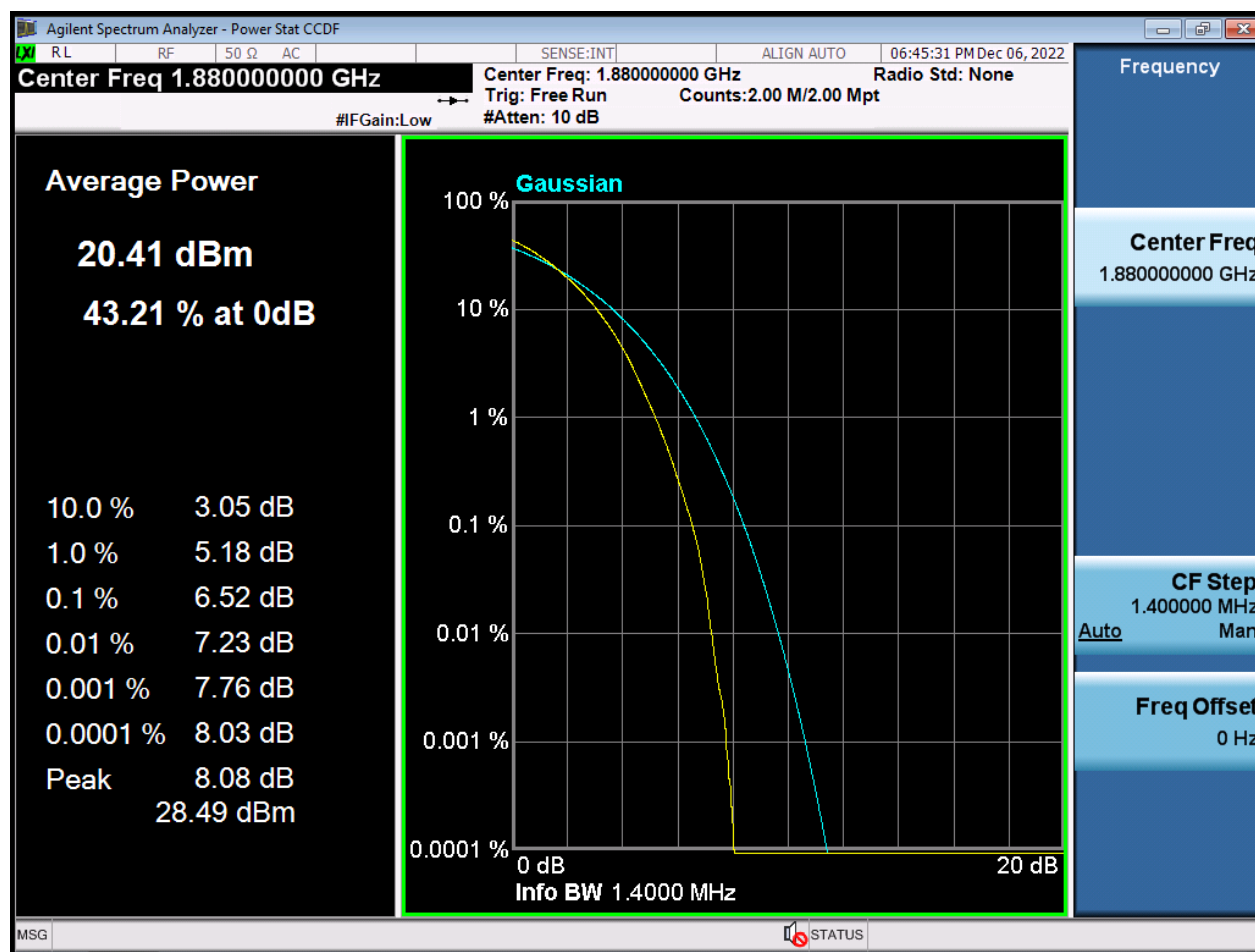


BW3 M_PAR_Middle Channel_QPSK_FullIRB

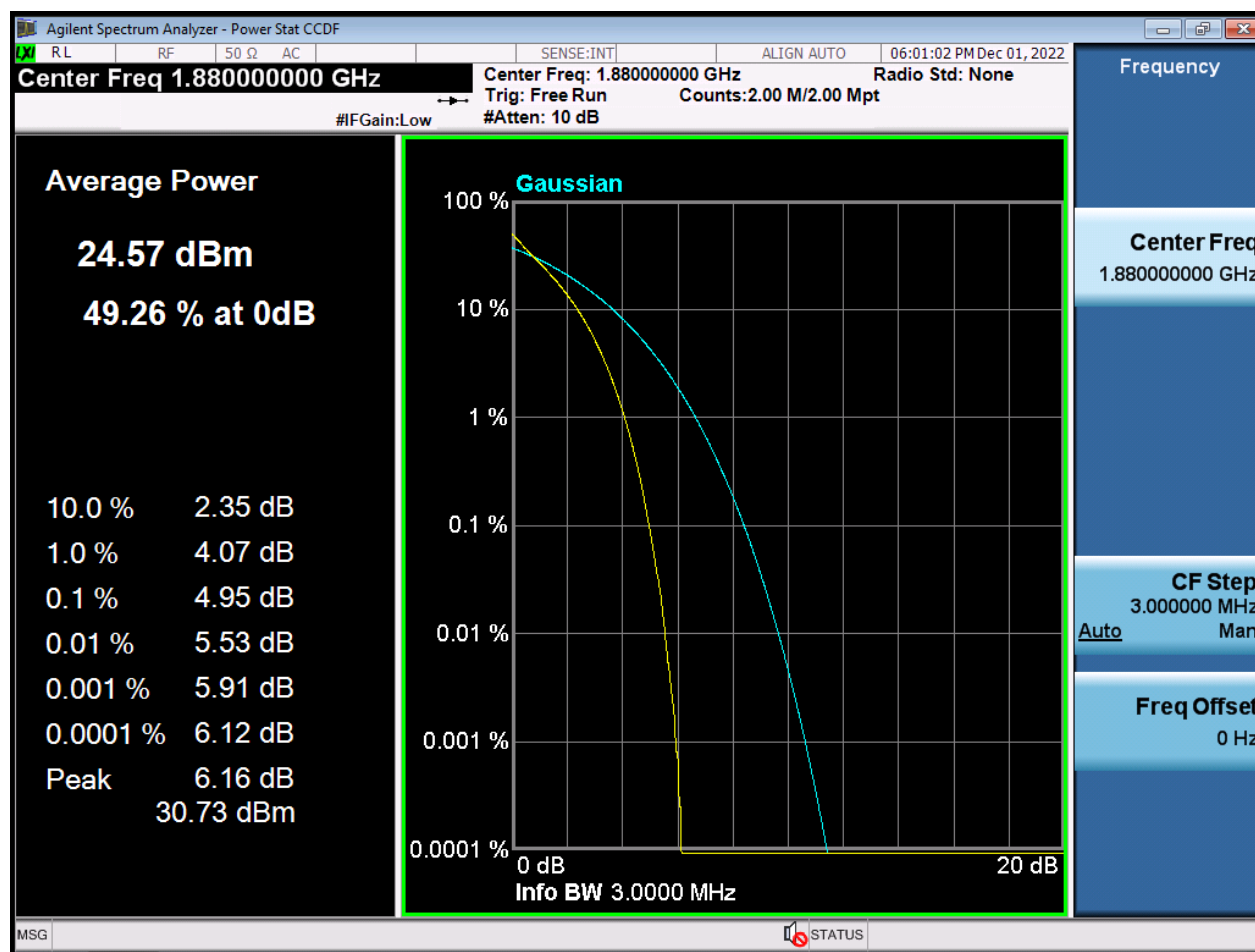


BW3 M_PAR_Middle Channel_16QAM_FullRB

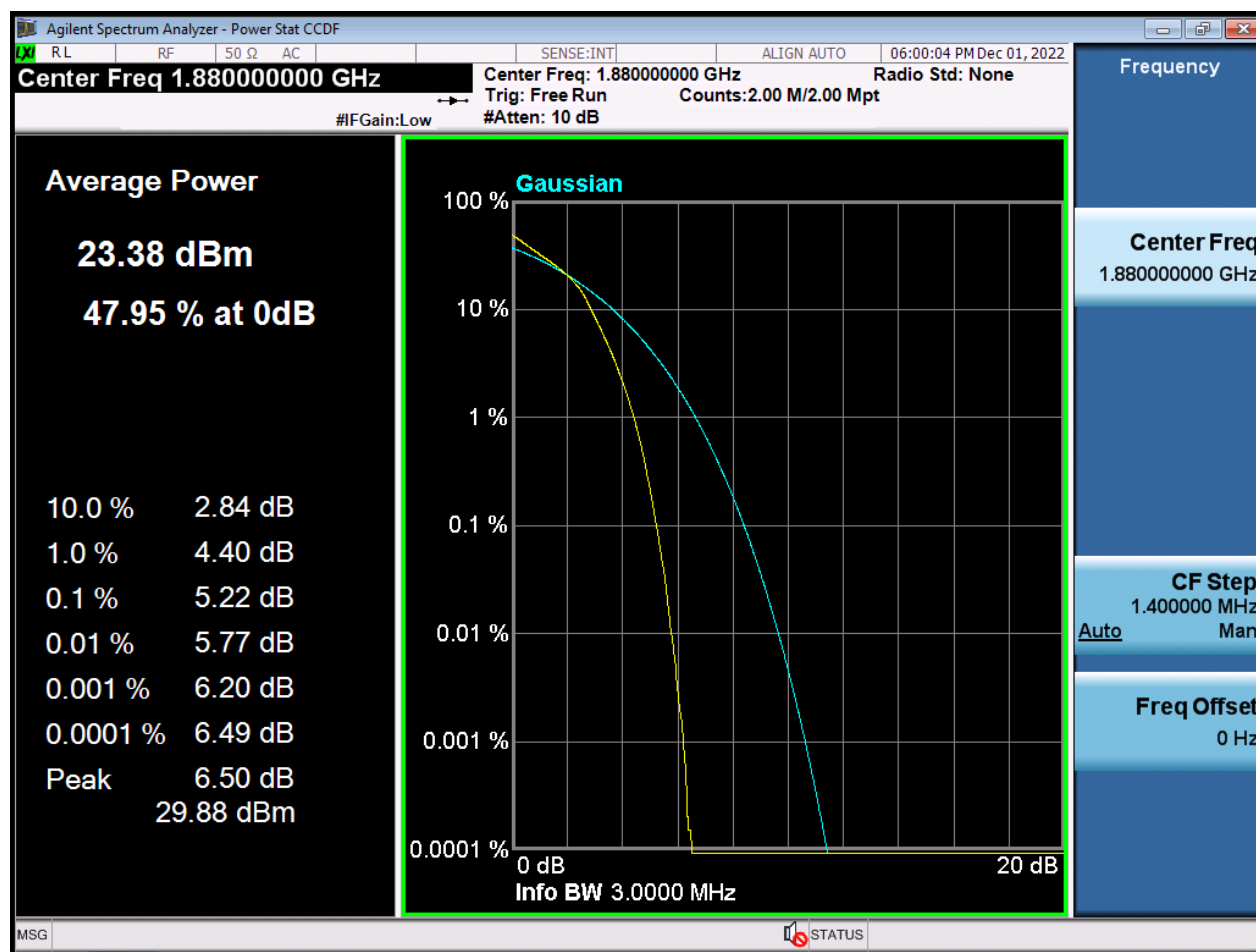


BW3 M_PAR_Middle Channel_64QAM_FullRB

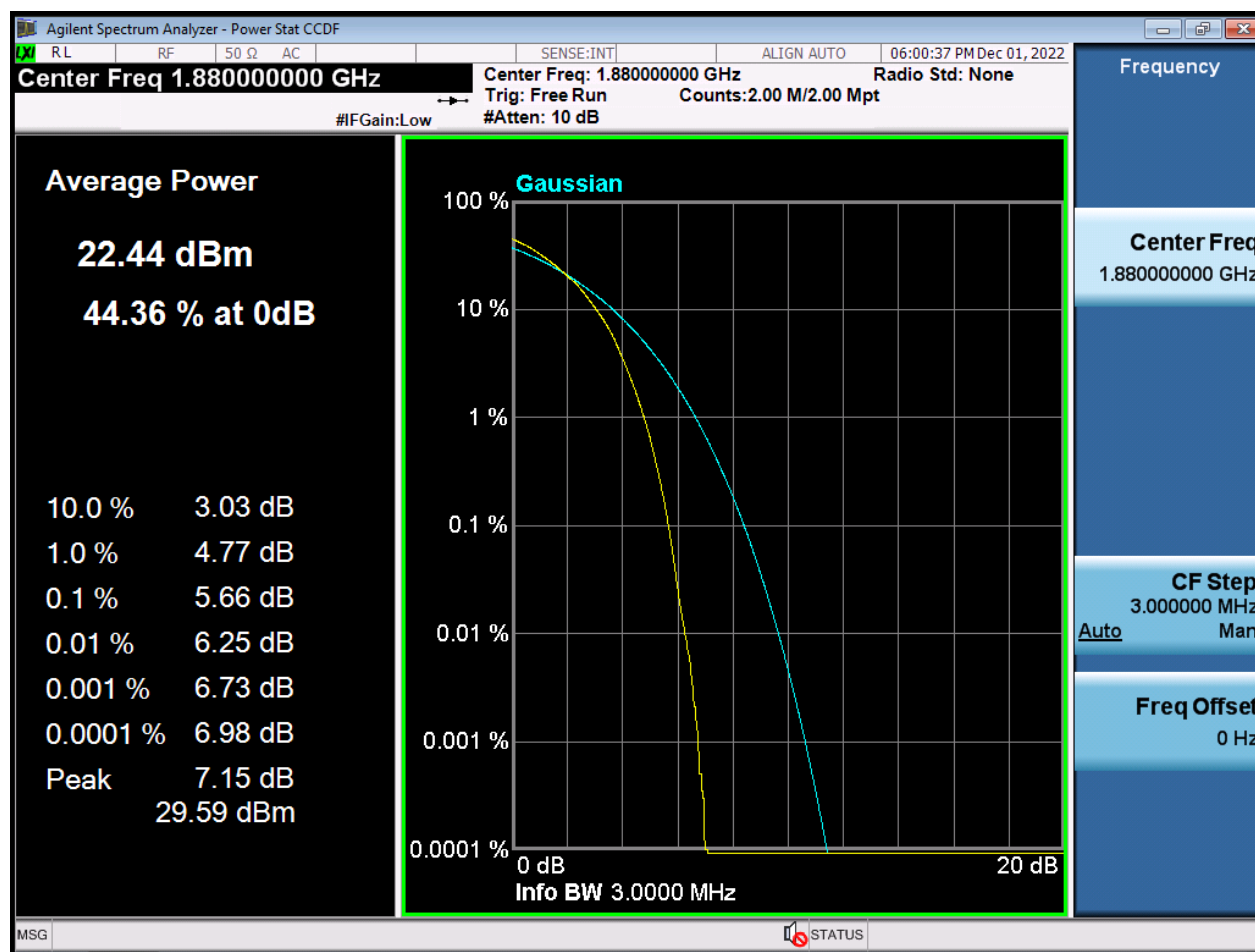


BW3 M_PAR_Middle Channel_256QAM_FullRB

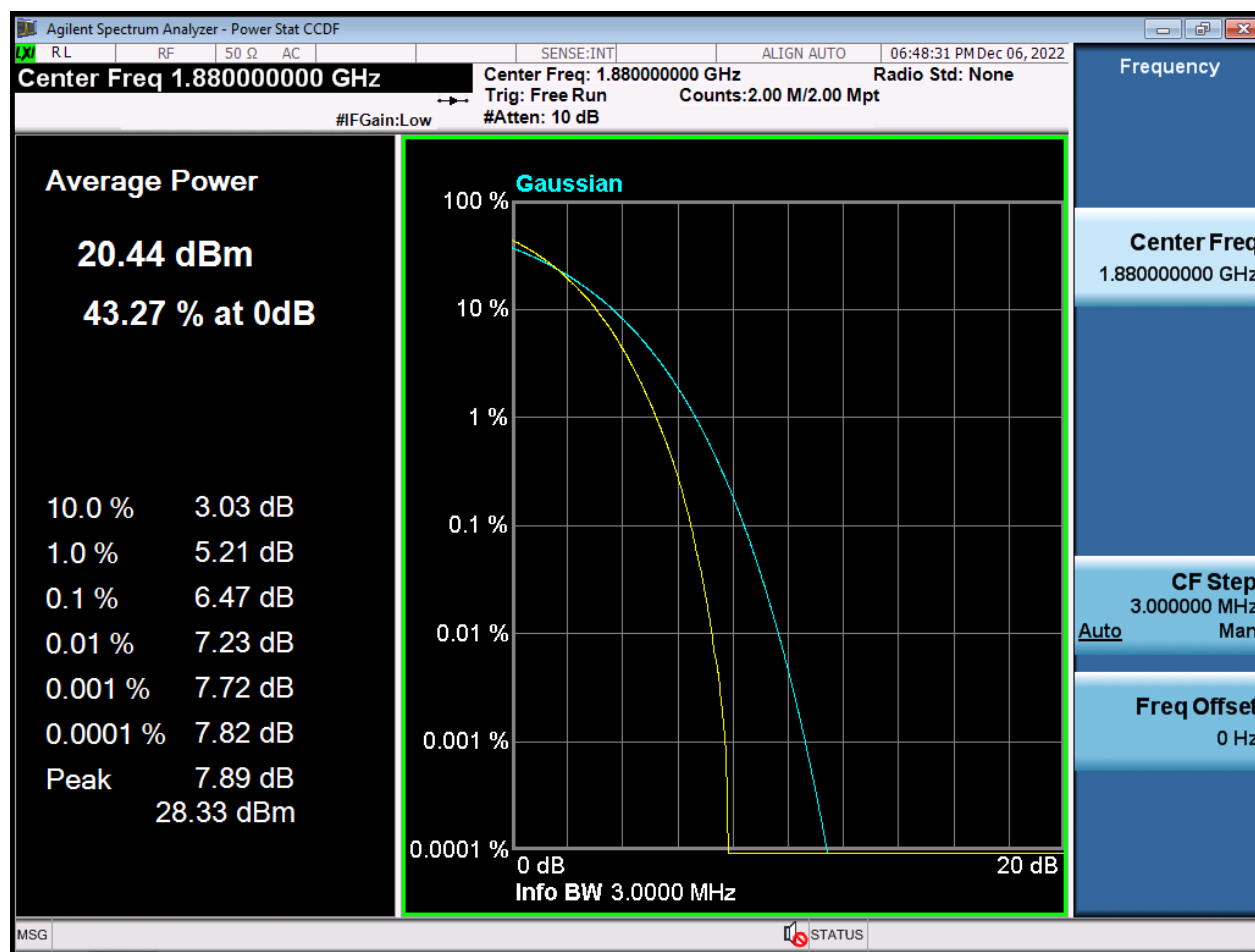


BW5 M_PAR_Middle Channel_QPSK_FullIRB

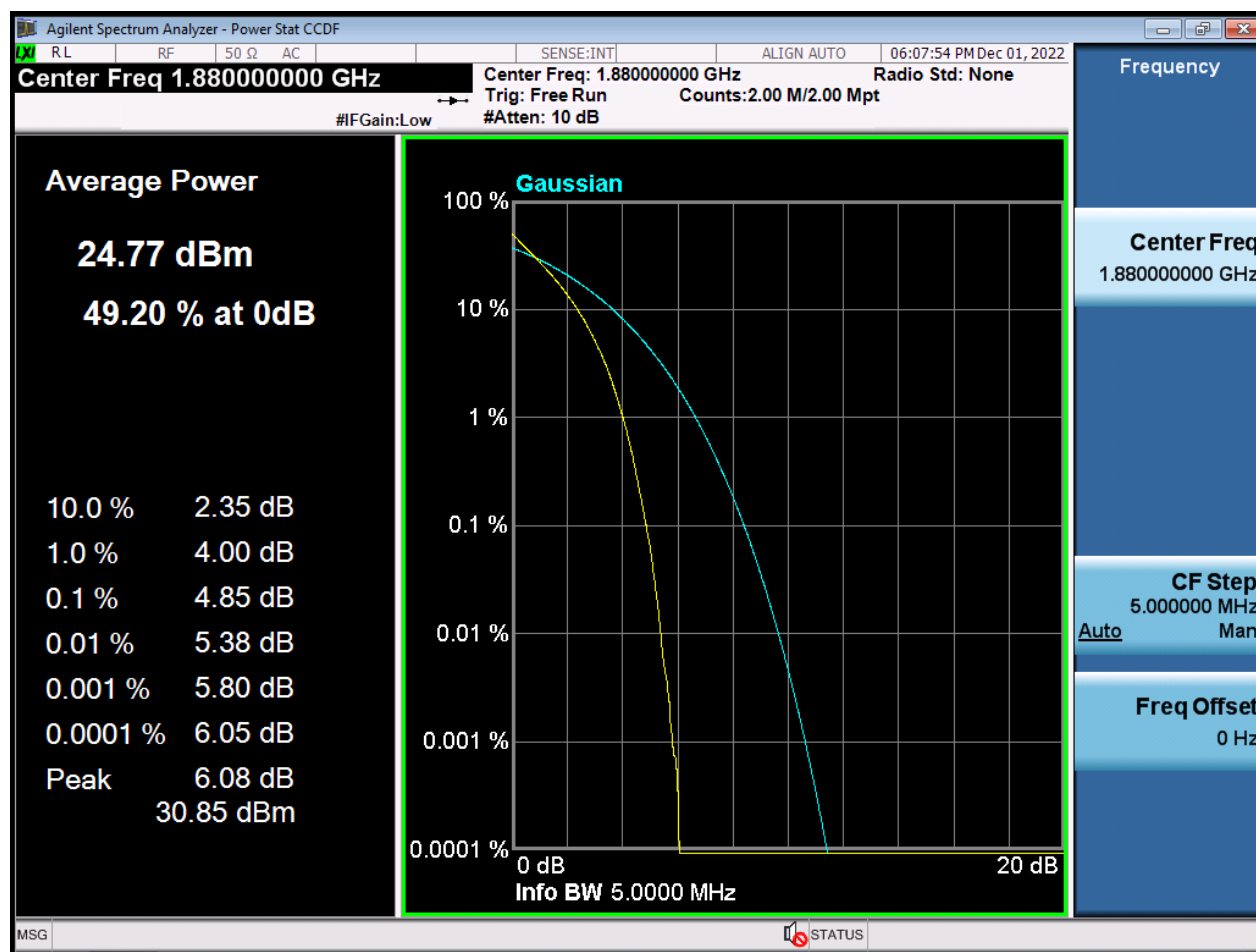


BW5 M_PAR_Middle Channel_16QAM_FullRB

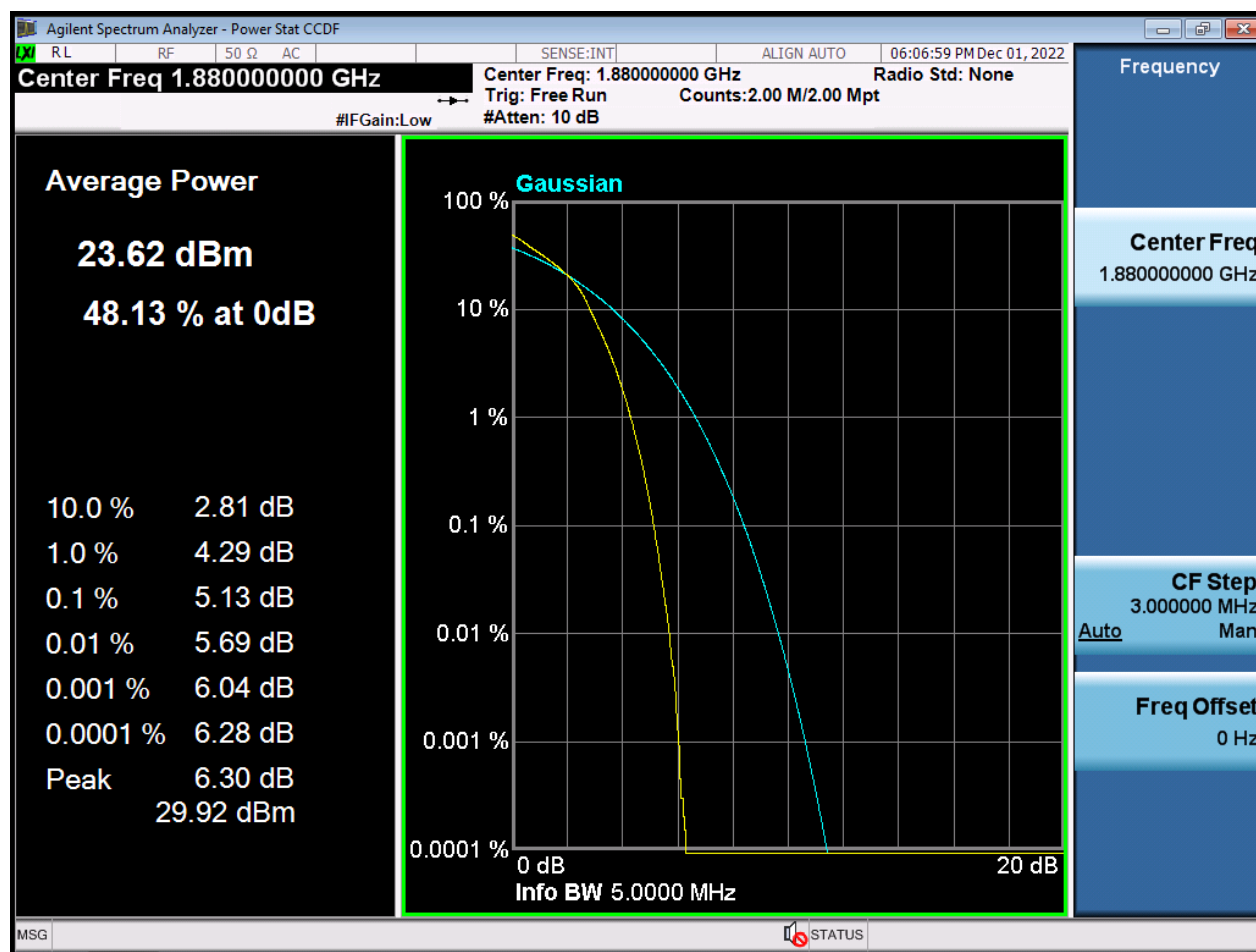


BW5 M_PAR_Middle Channel_64QAM_FullRB

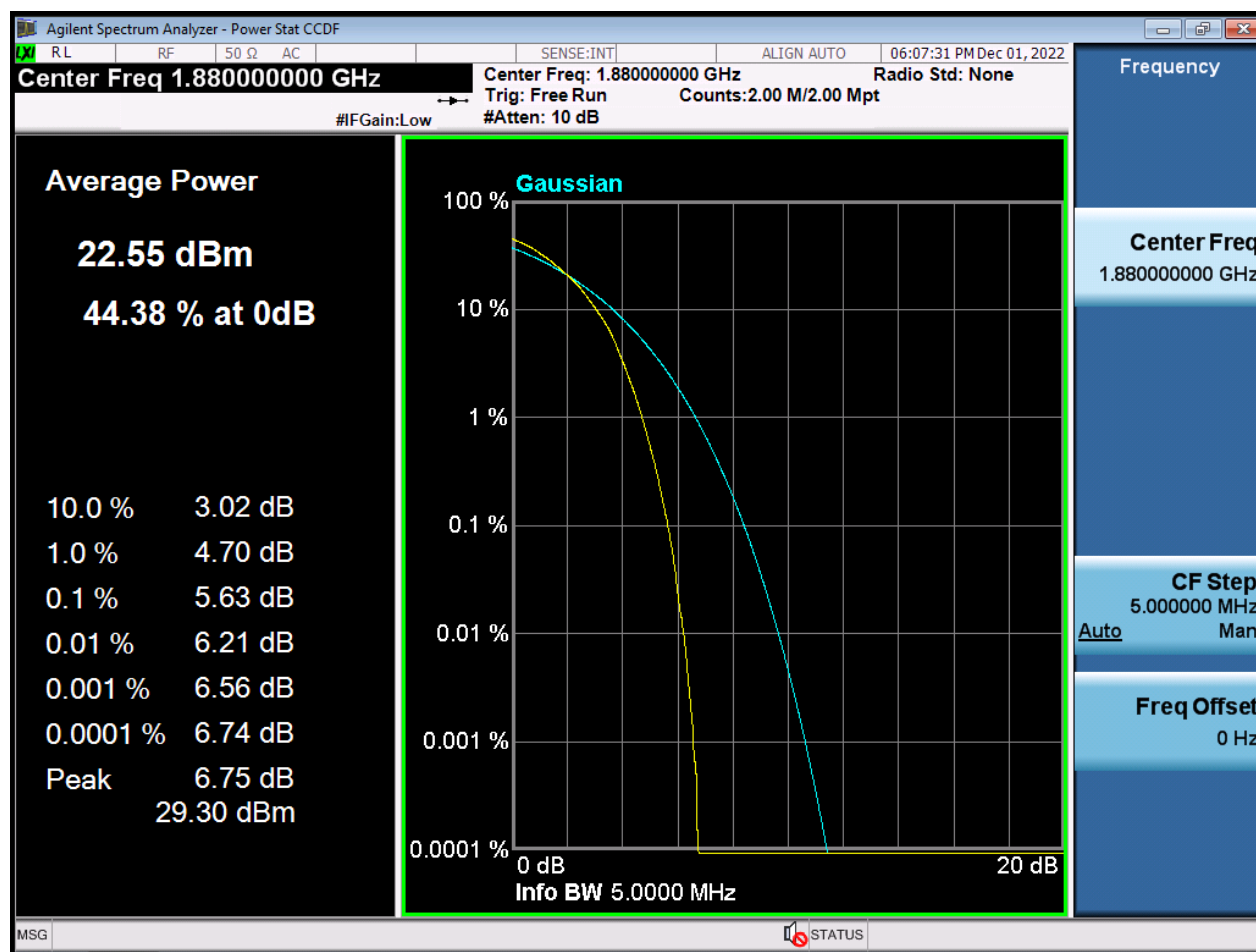


BW5 M_PAR_Middle Channel_256QAM_FullRB

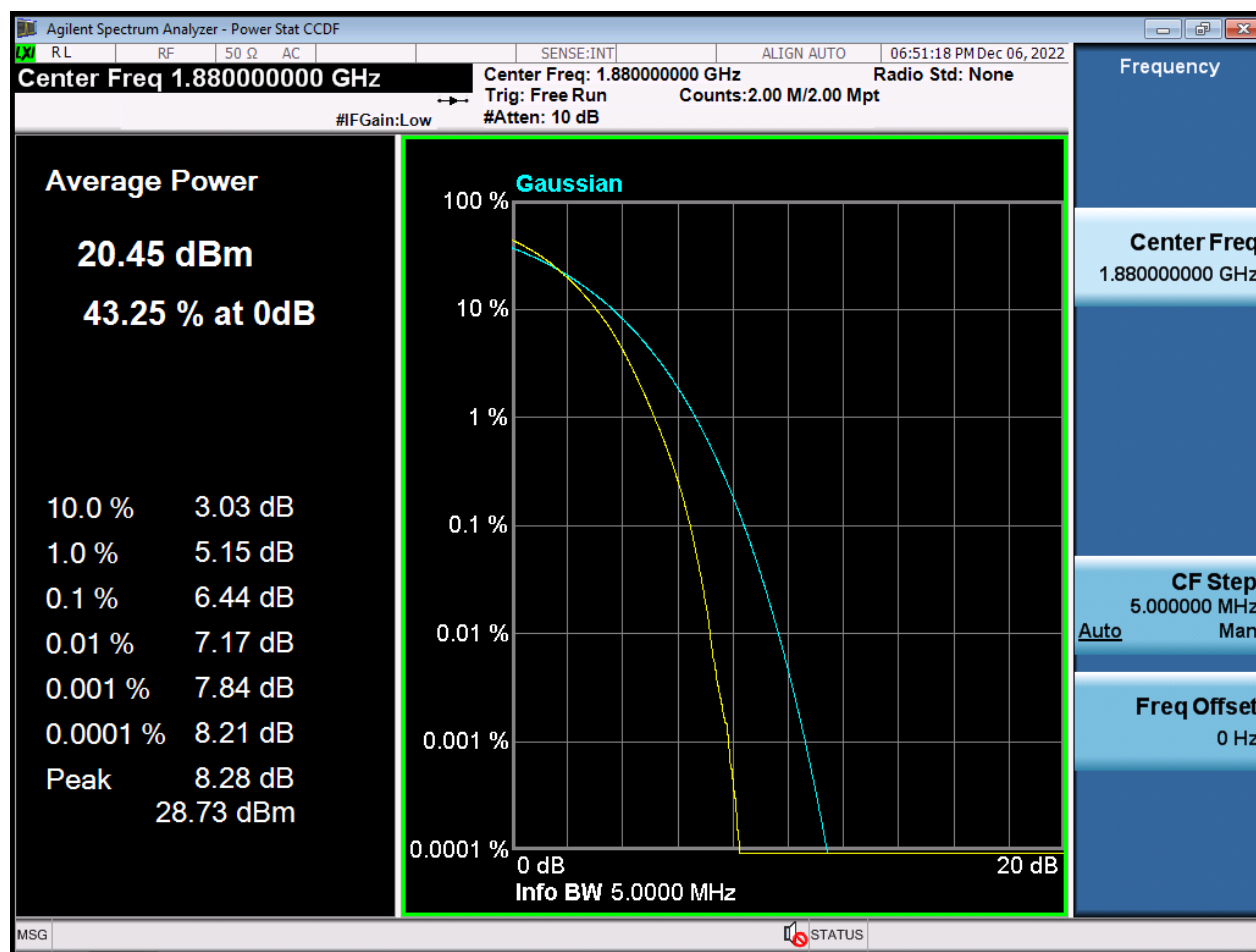


BW10 M_PAR_Middle Channelz_QPSK_FullRB

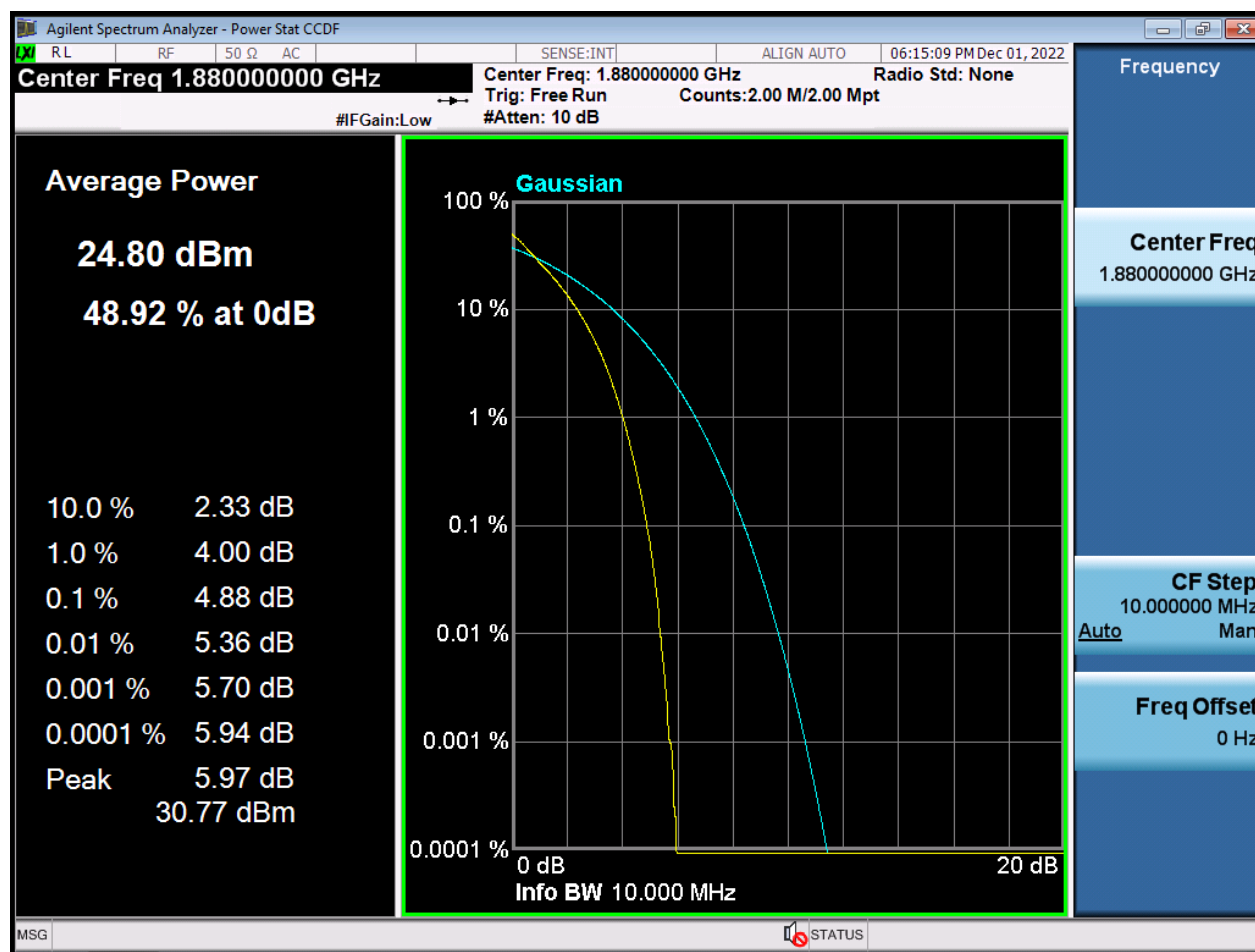


BW10 M_PAR_Middle Channel_16QAM_FullRB

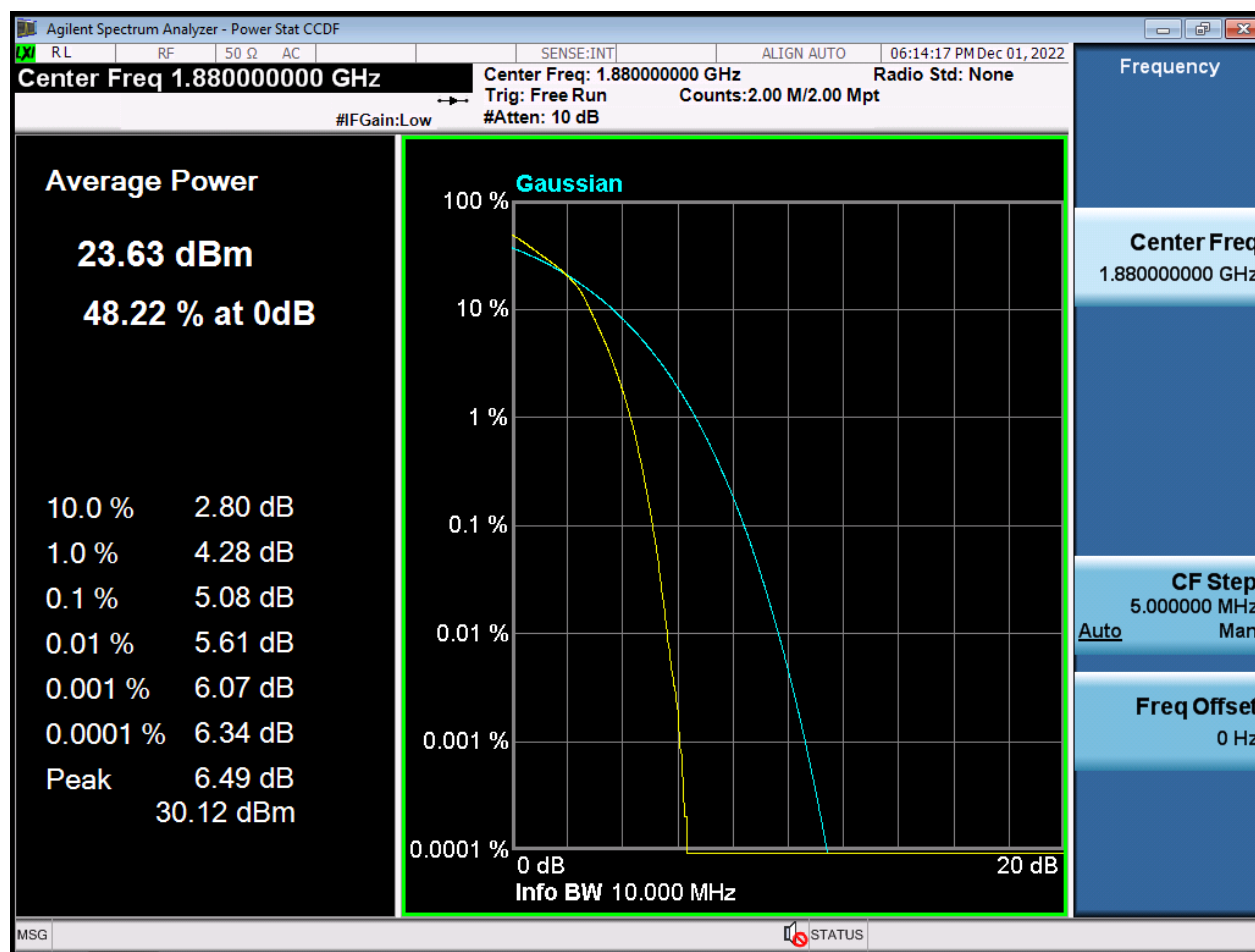


BW10 M_PAR_Middle Channel_64QAM_FullRB

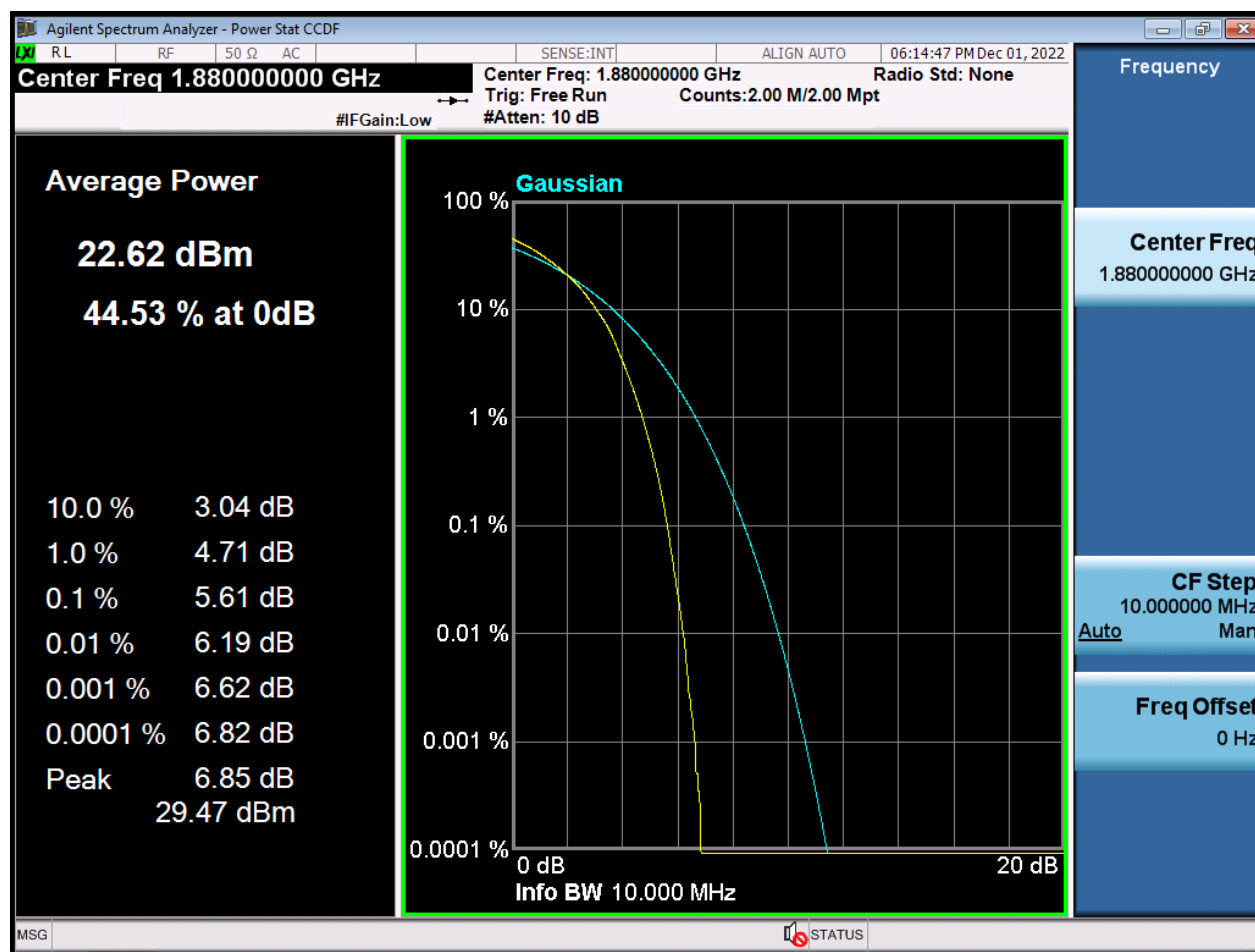


BW10 M_PAR_Middle Channel_256QAM_FullIRB

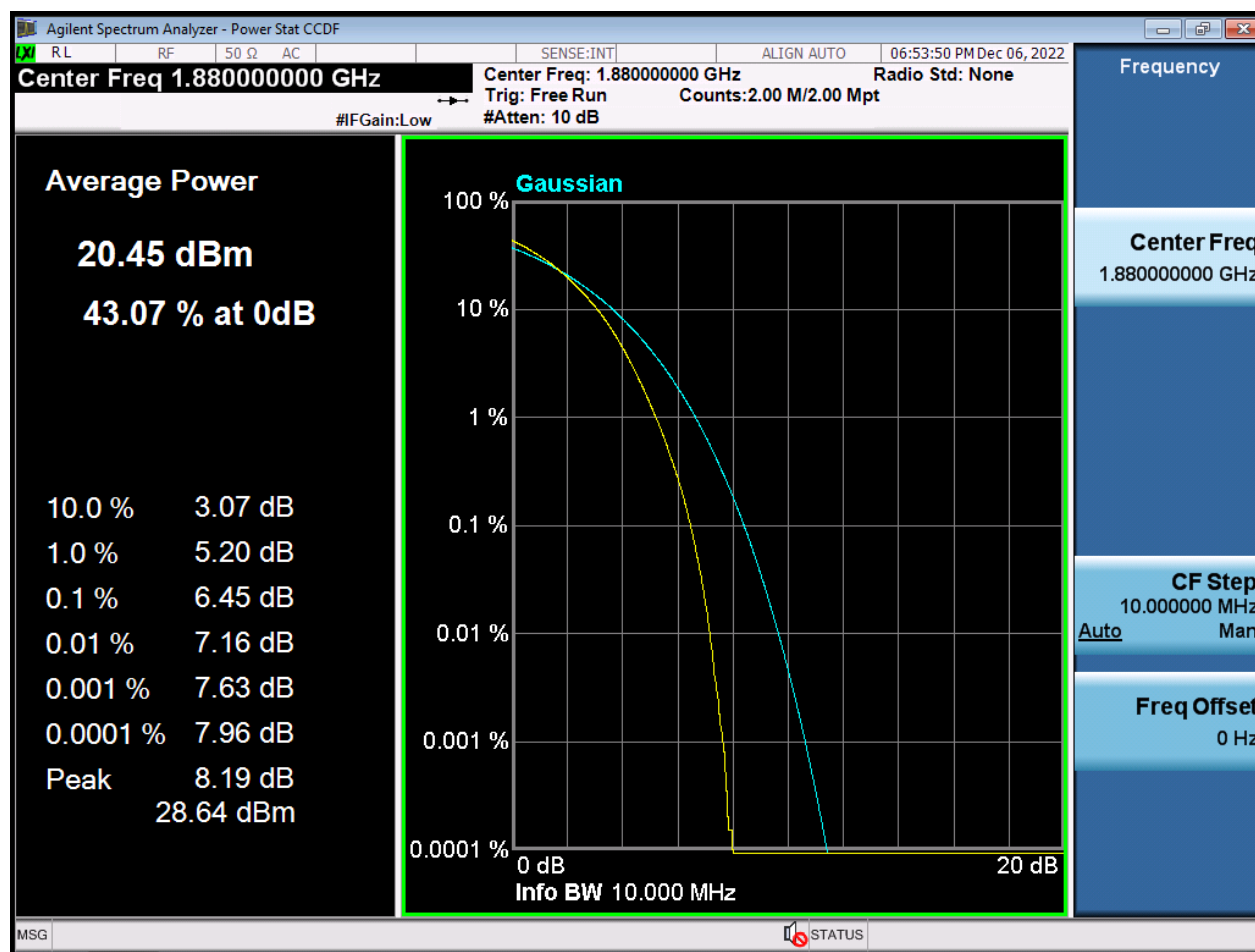


BW15 M_PAR_Middle Channel_QPSK_FullIRB

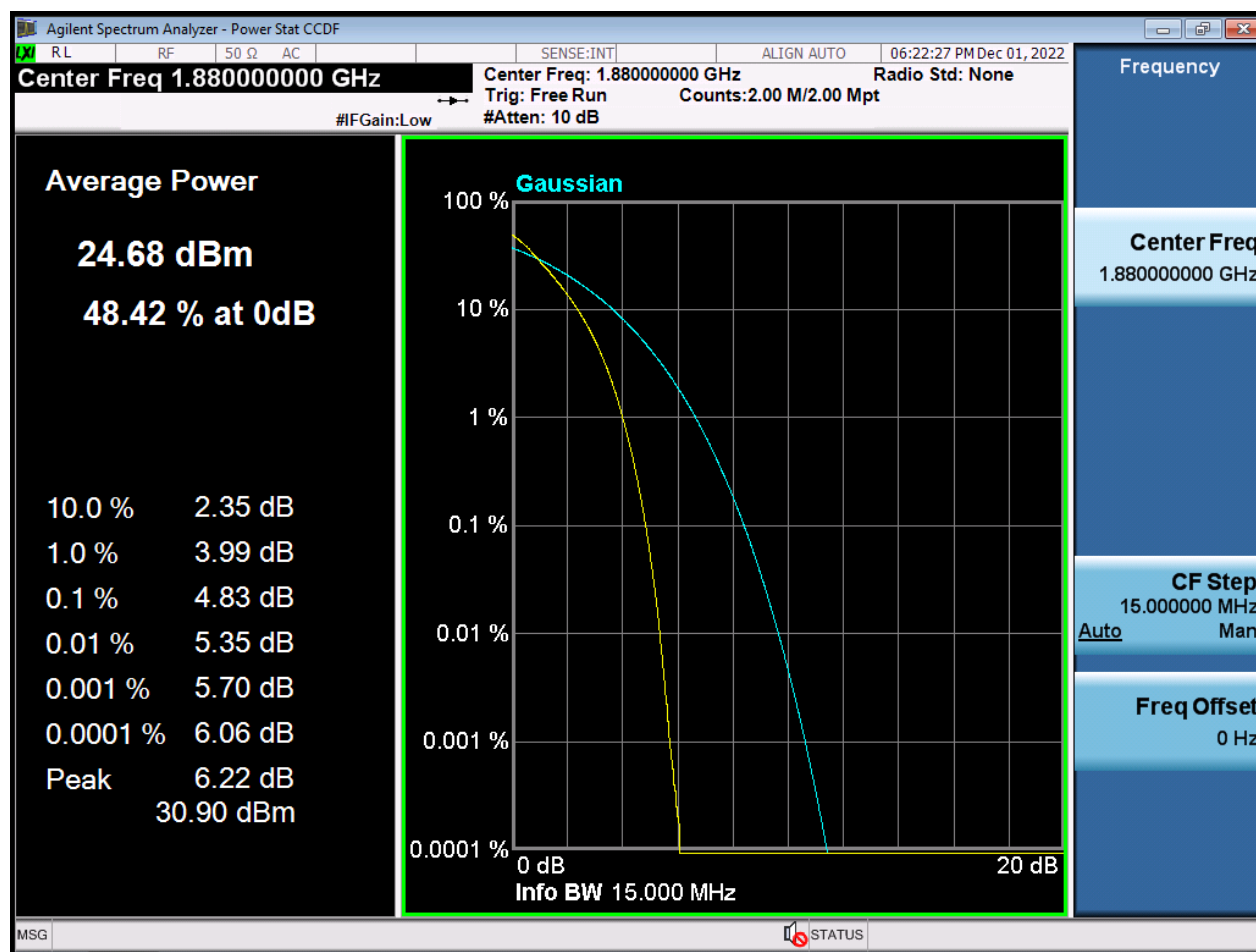


BW15 M PAR Middle Channel 16QAM FullRB

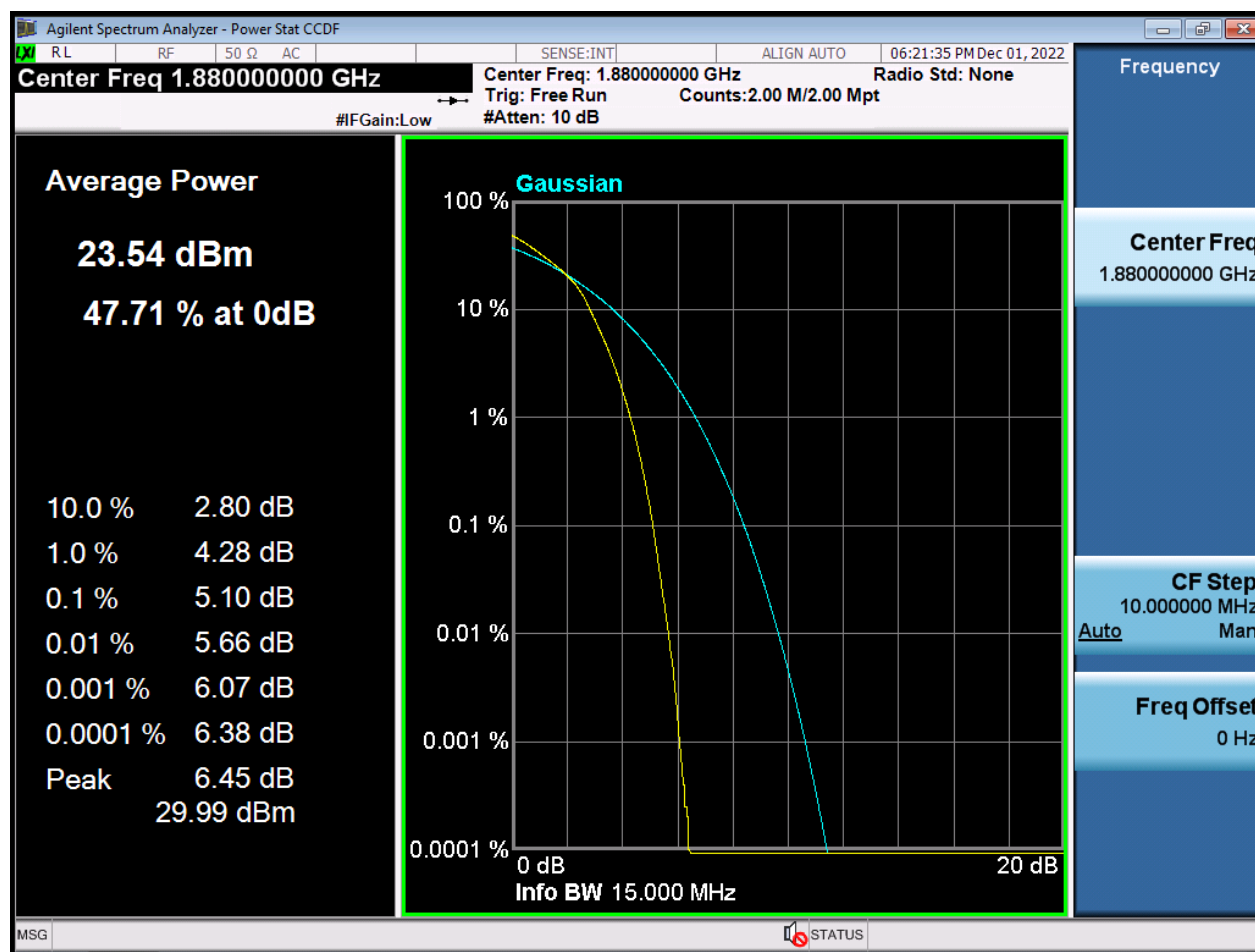


BW15 M_PAR_Middle Channel_64QAM_FullRB

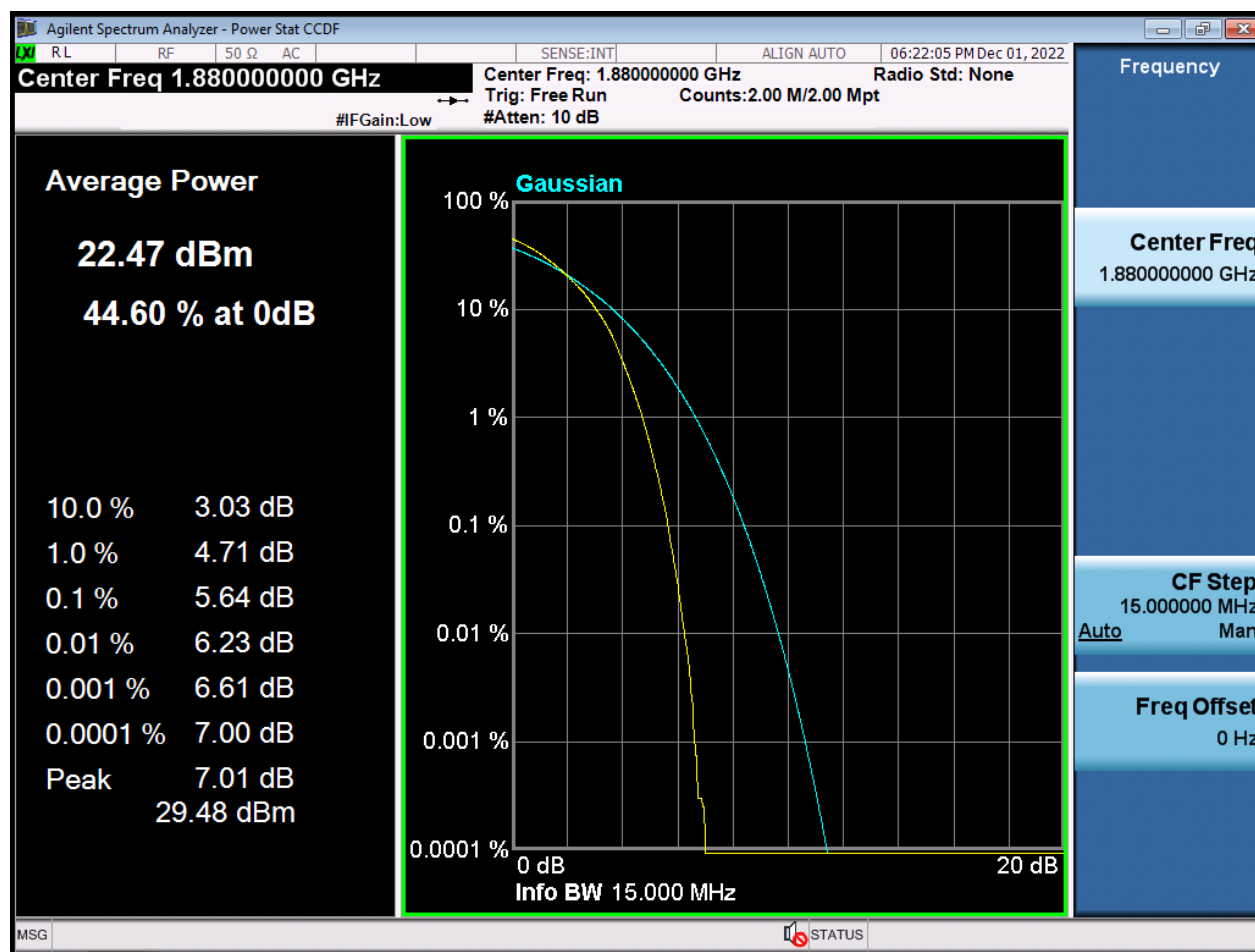


BW15 M_PAR_Middle Channel_256QAM_FullIRB

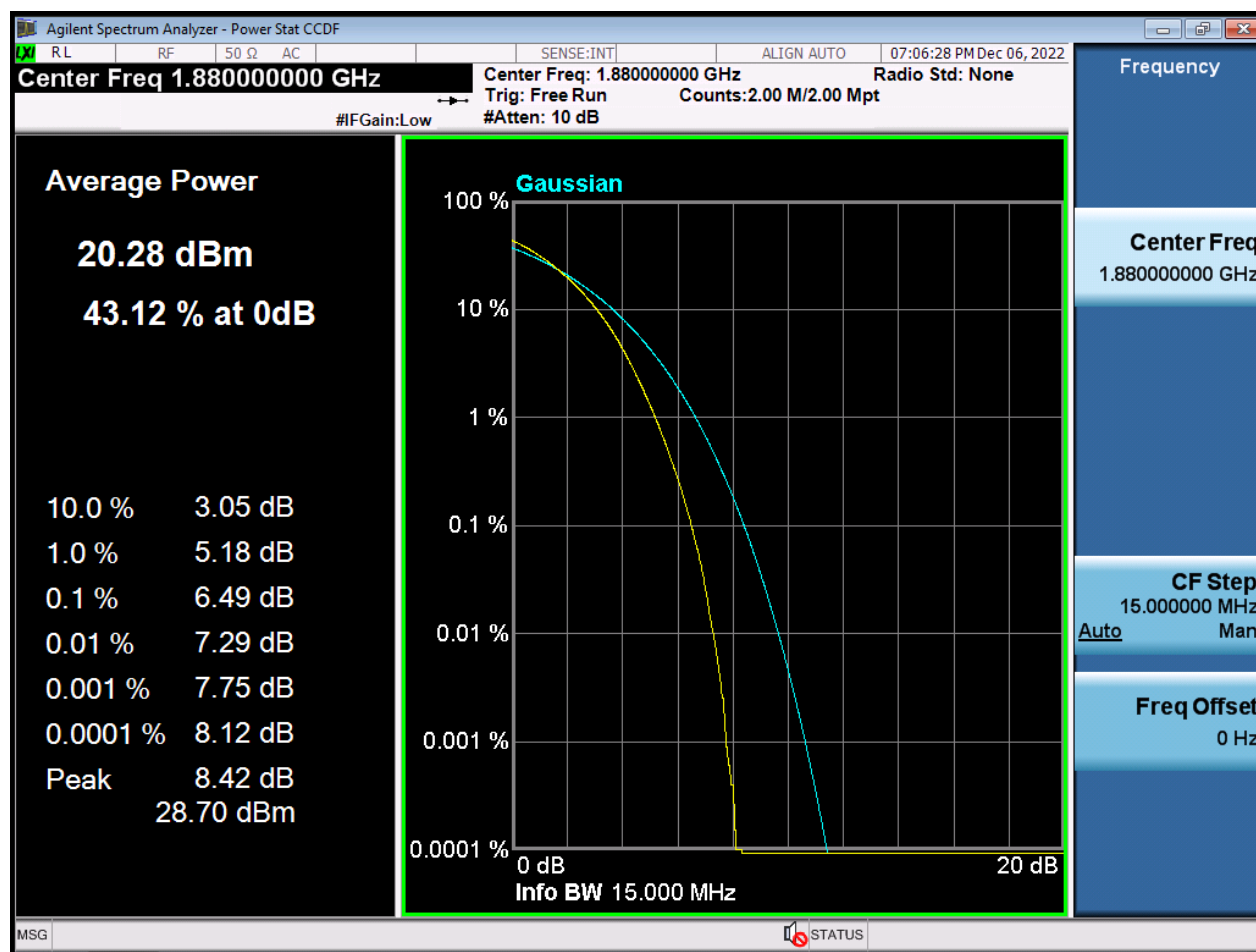


BW20 M_PAR_Middle Channel_QPSK_FullRB

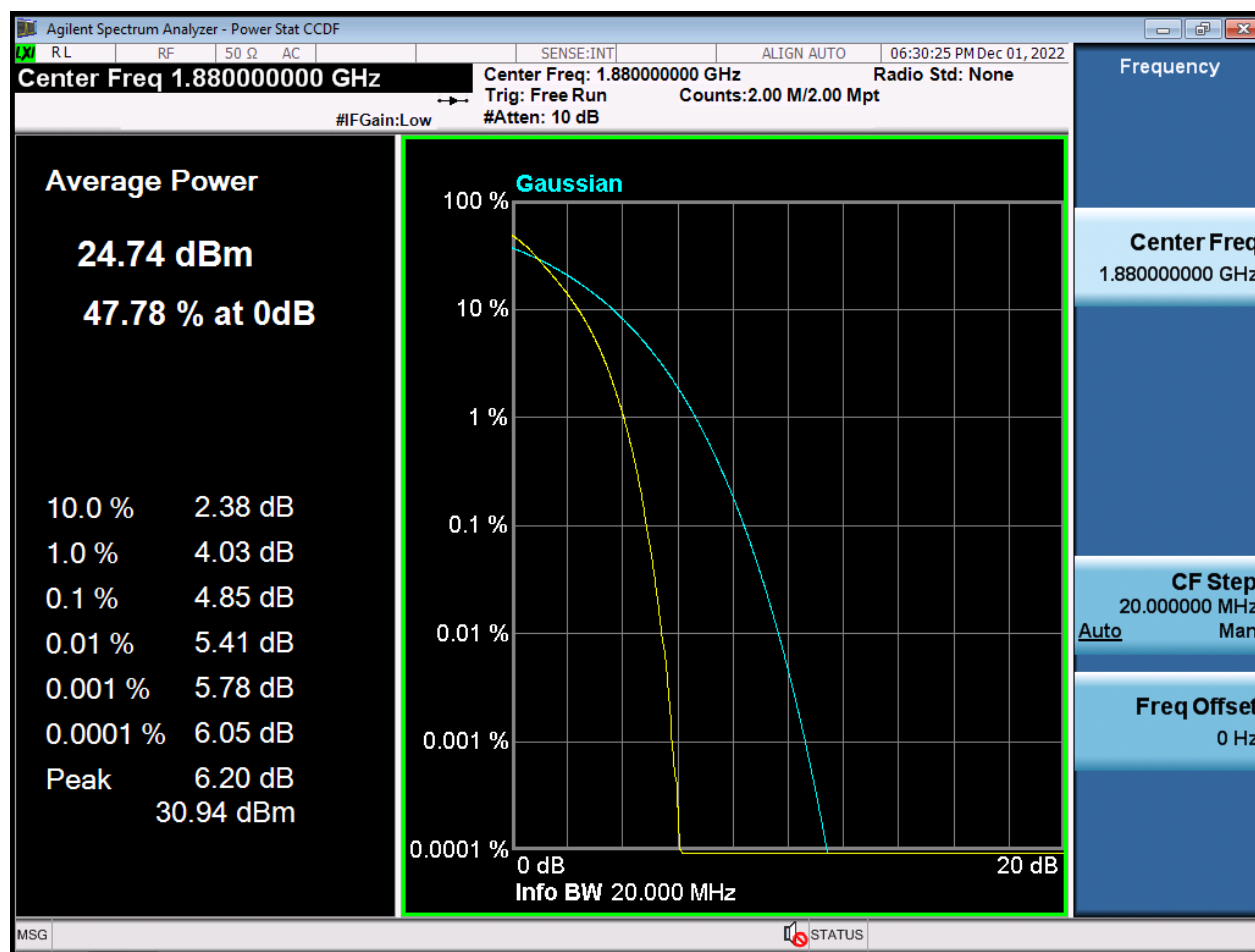


BW20 M_PAR_Middle Channel_16QAM_FullRB

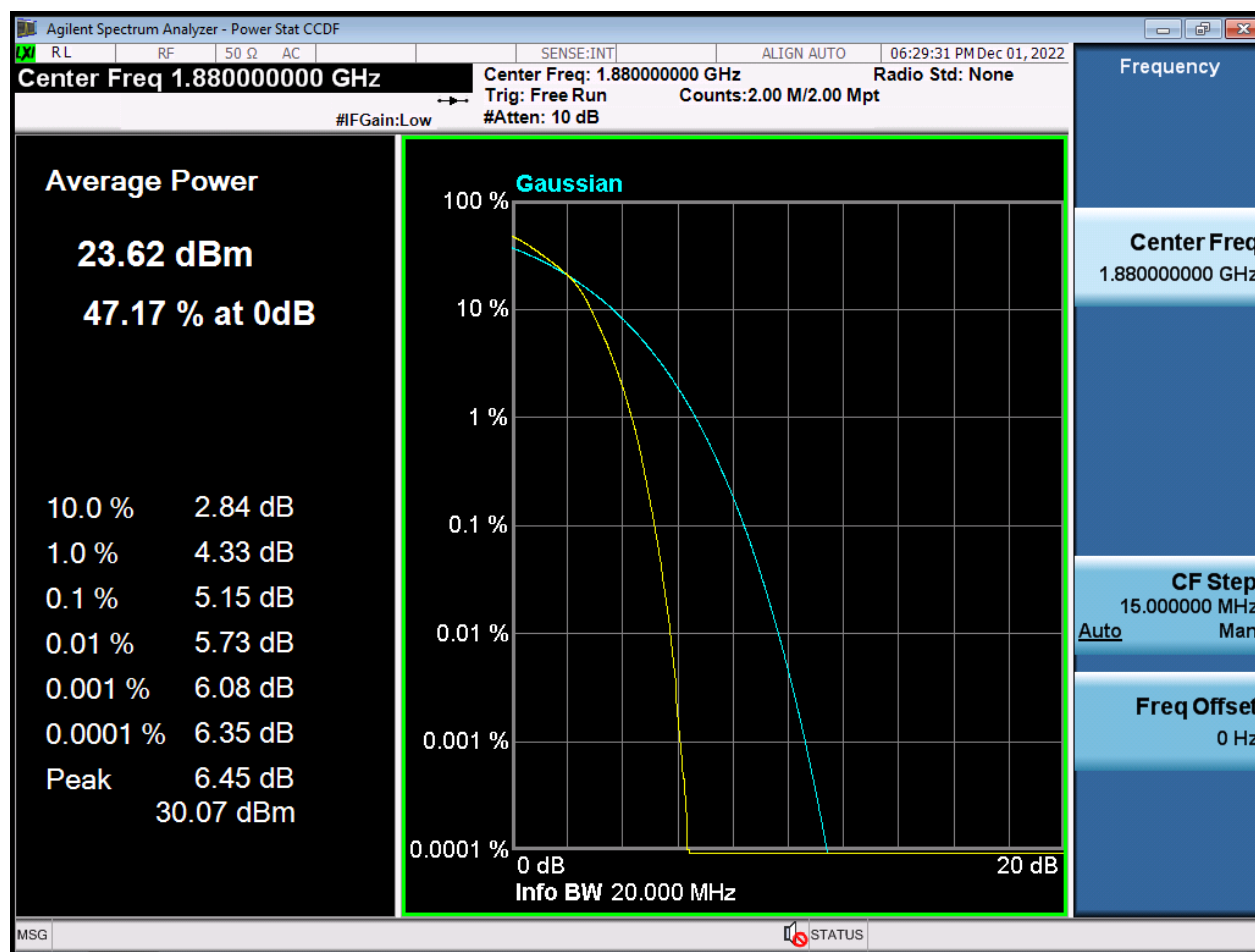


BW20 M_PAR_Middle Channel_64QAM_FullRB

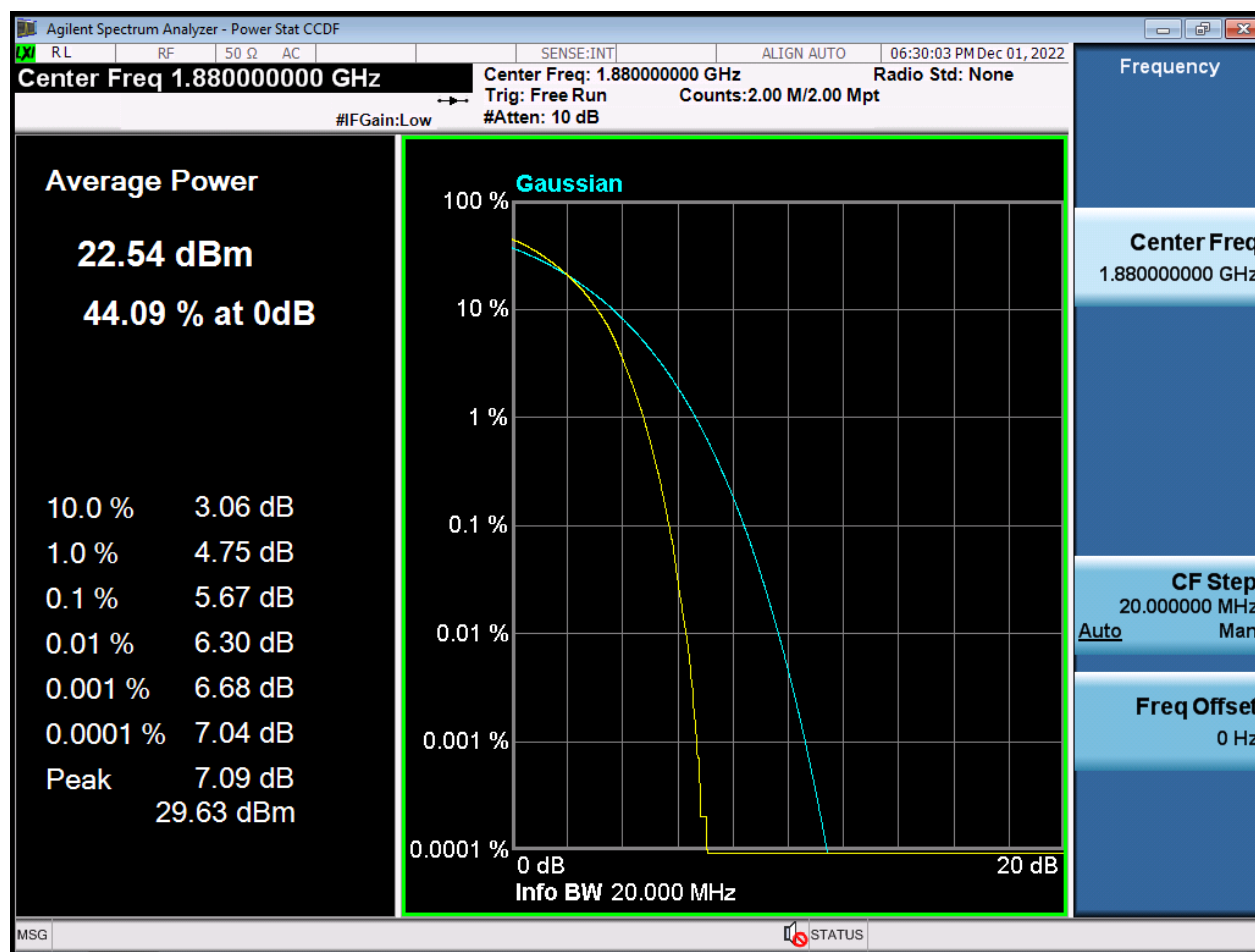


BW20 M_PAR_Middle Channel_256QAM_FullIRB

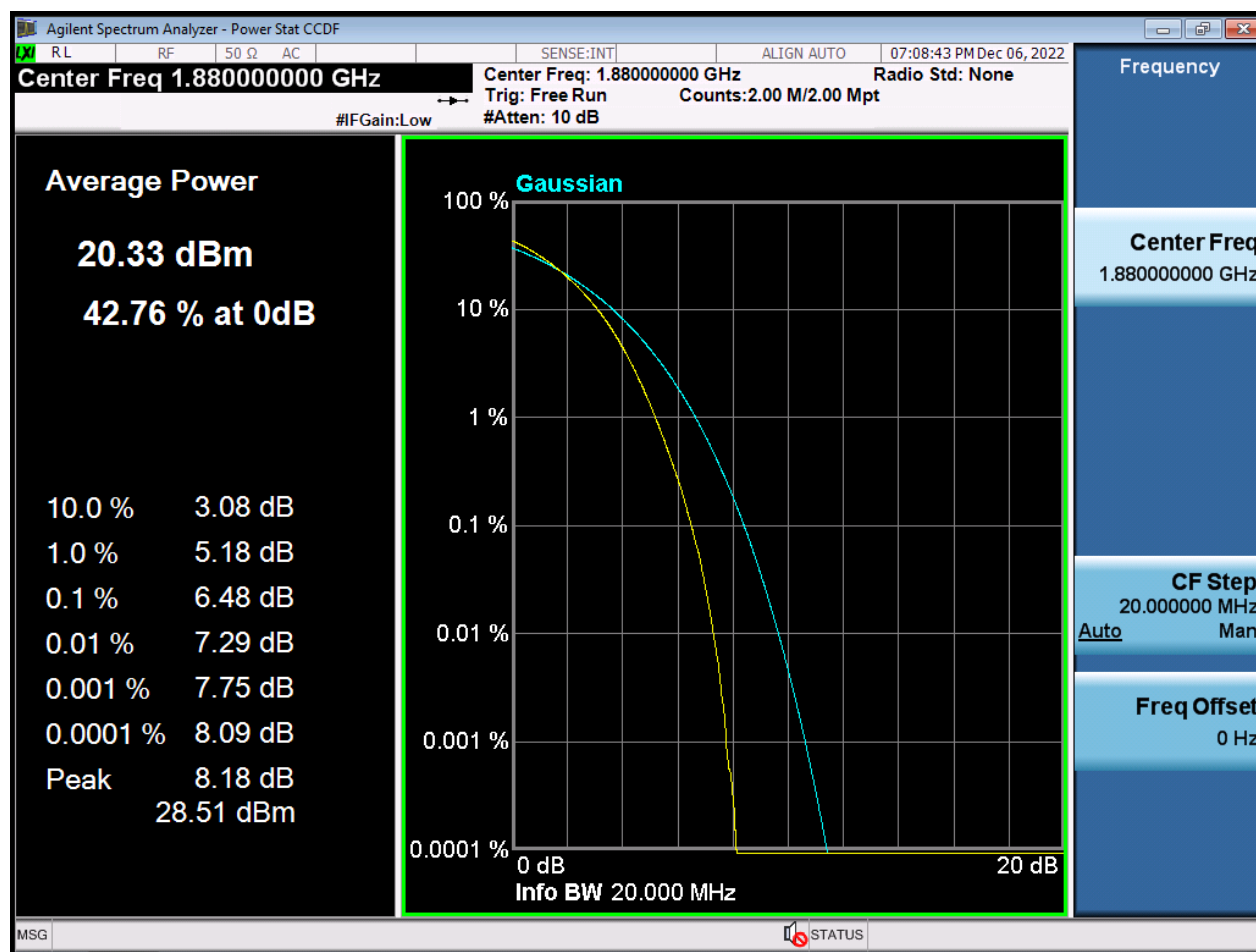


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

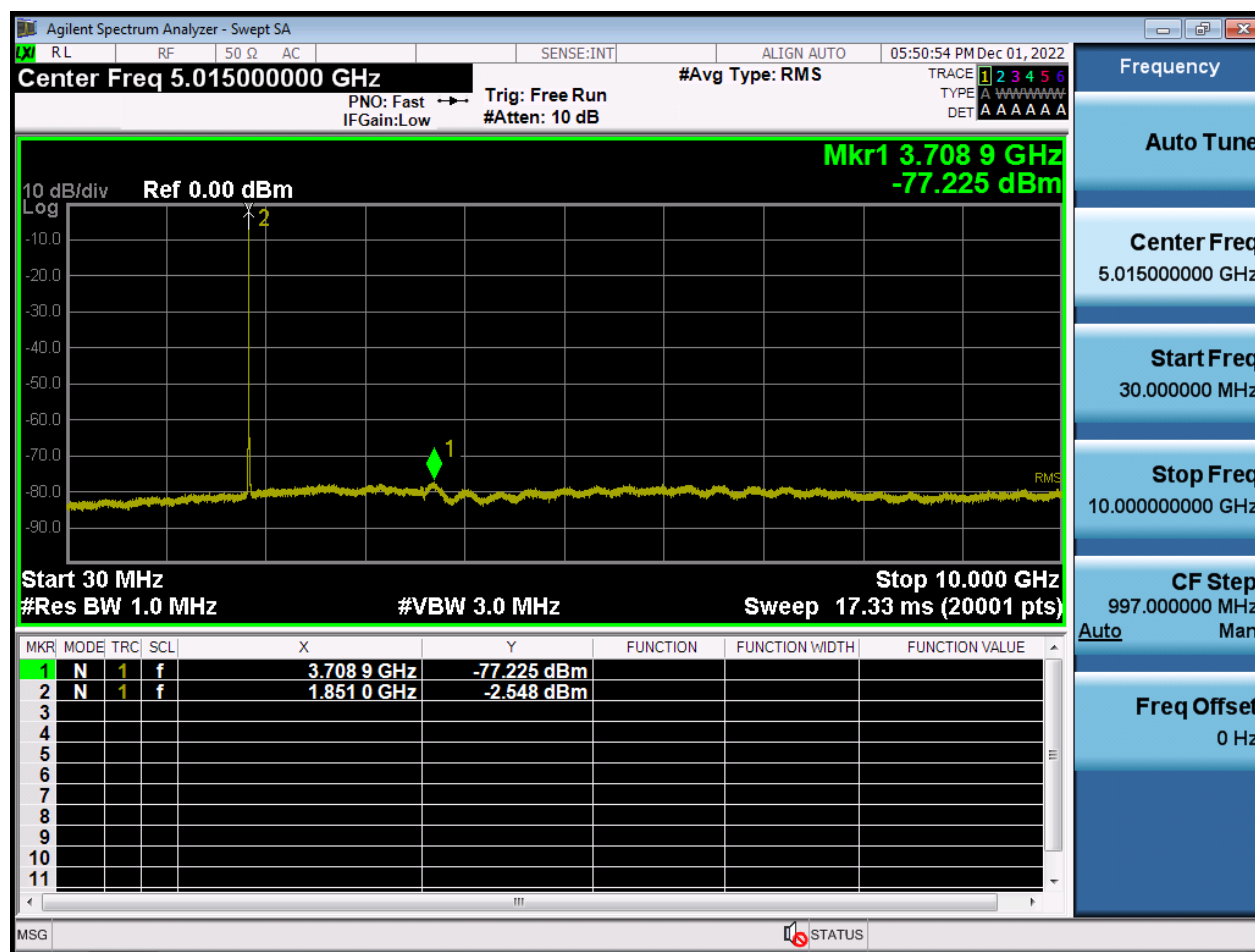


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

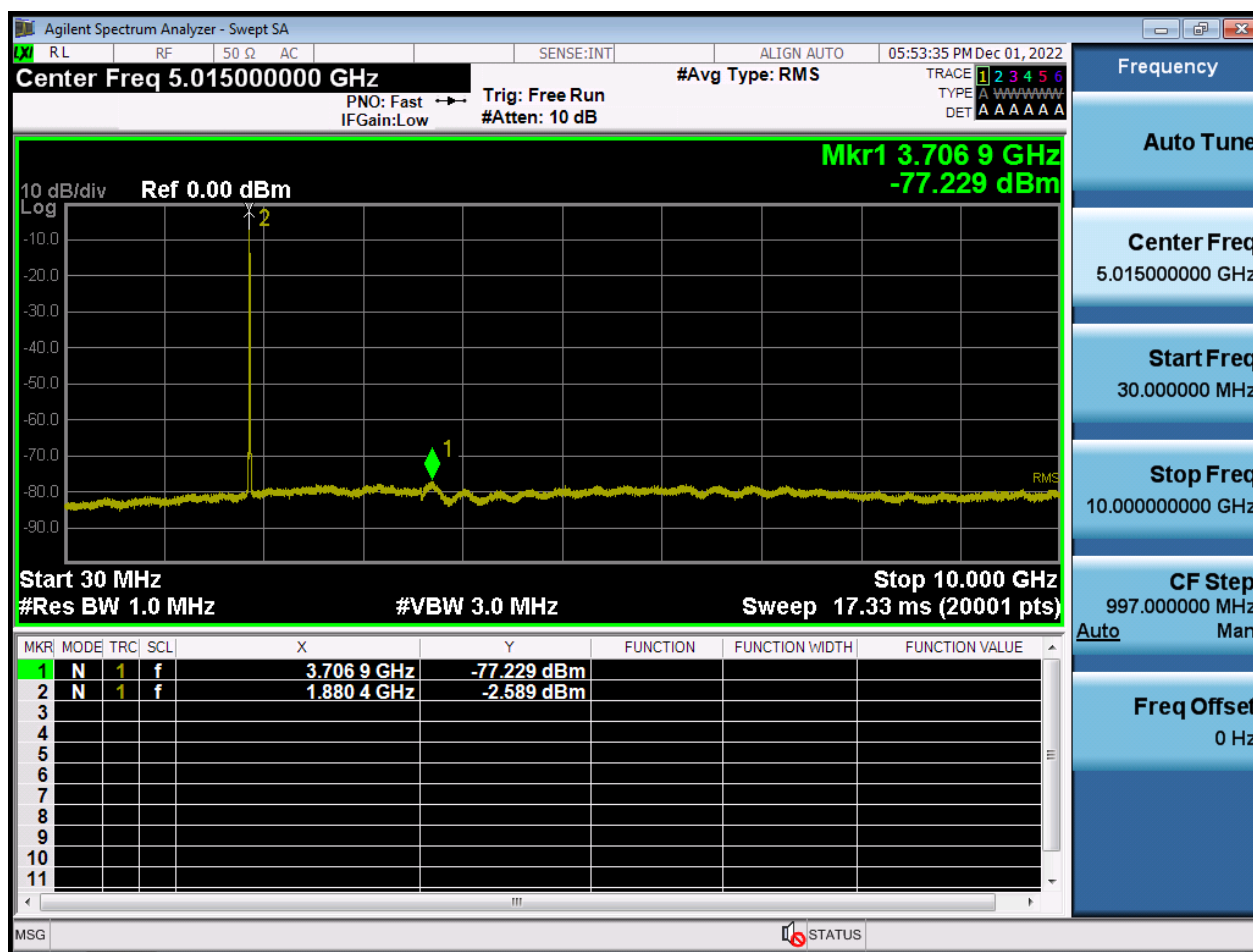


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

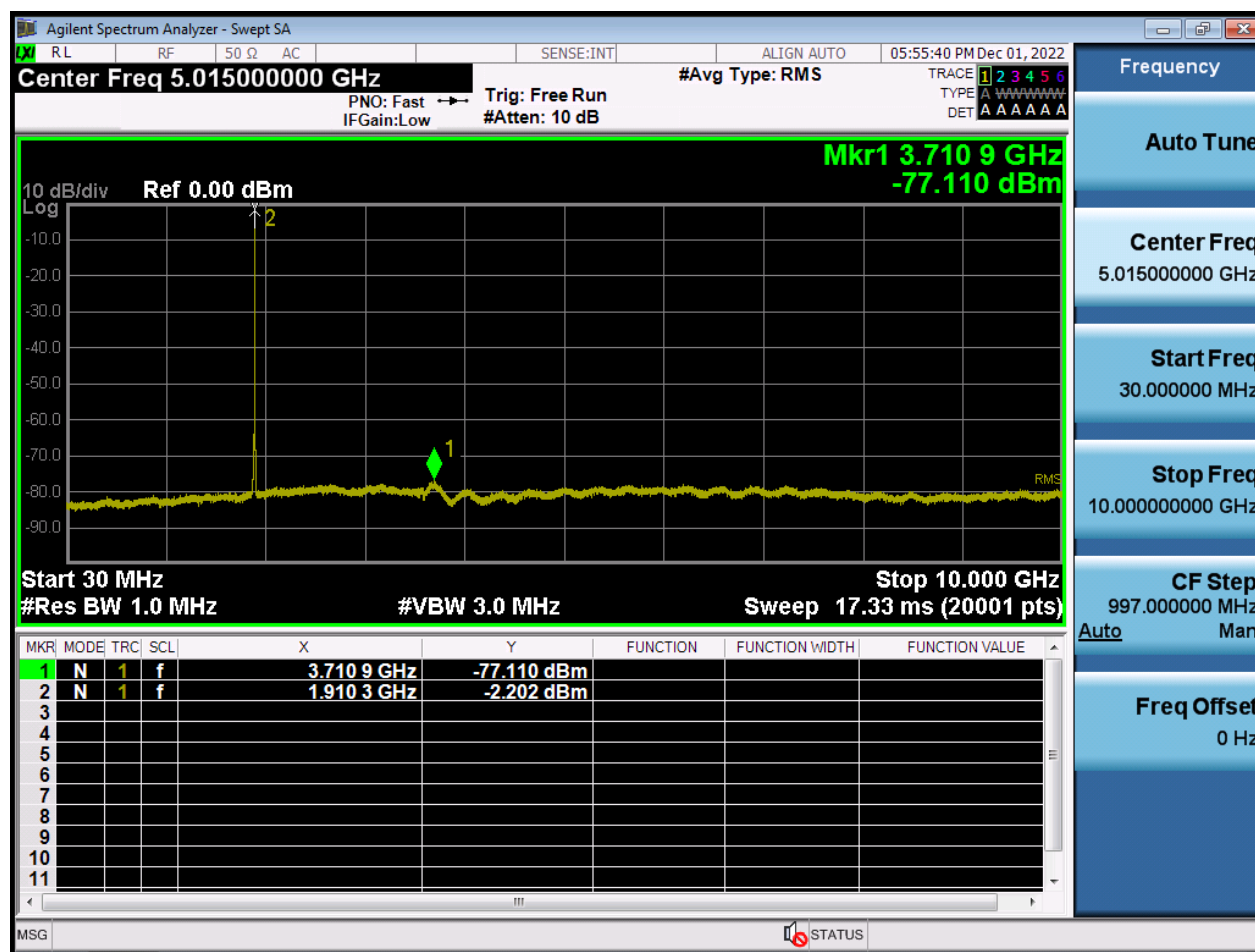

BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

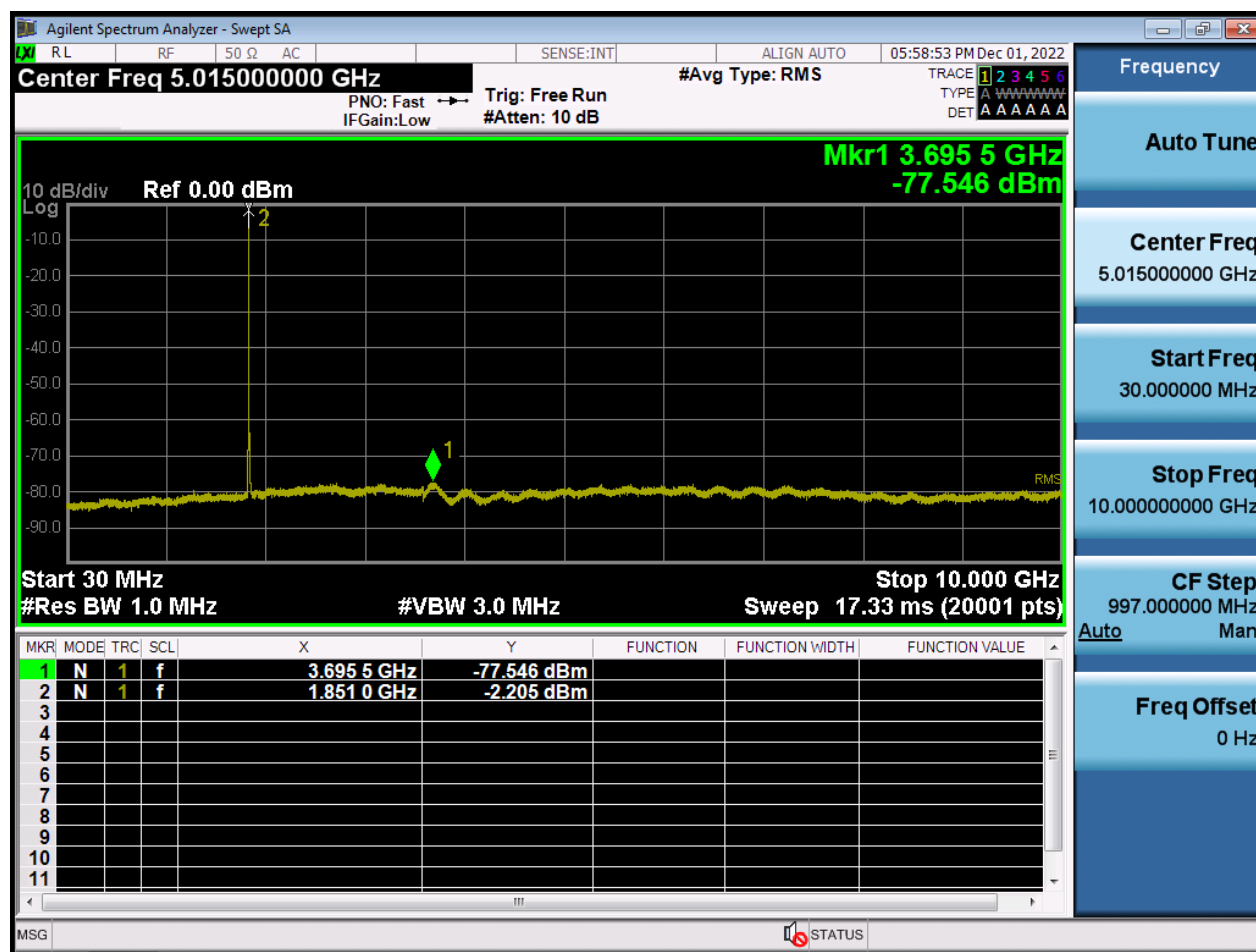

BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

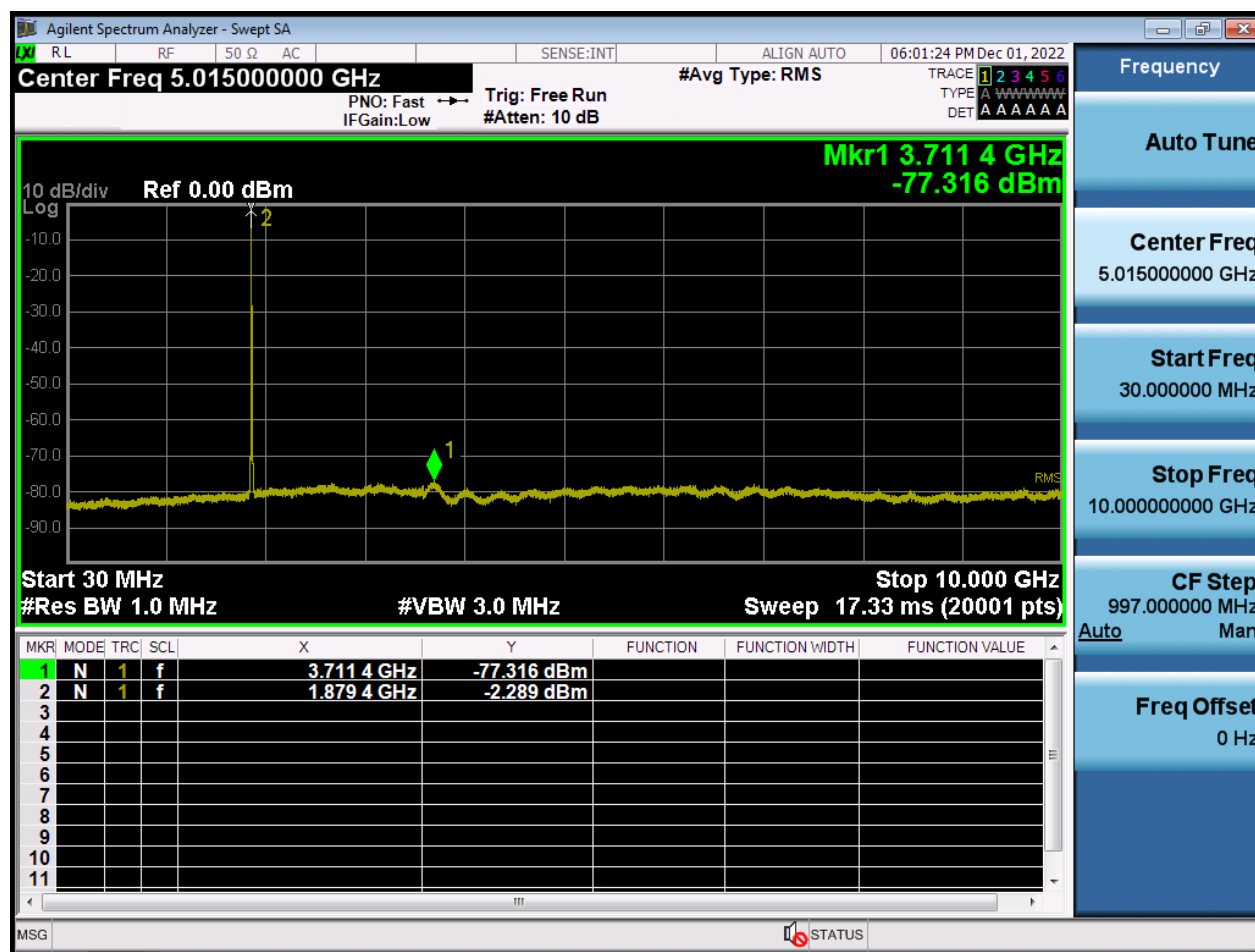

BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

