



CERTIFICATION TEST REPORT

Report Number. : 12726913-E1V3

Applicant : Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Model : SM-A705GM/DS

FCC ID : A3LSMA705GM

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+, NFC and MST

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M
FCC CFR47 PART 15 SUBPART B

Date Of Issue:
APRIL 04, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	3/29/2019	Initial Review	--
V2	4/3/2019	Updated Section 1 & 2.1	K.Kedida
V3	4/4/2019	Added MST in EUT Description	K. Kedida

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. INTRODUCTION OF TEST DATA REUSE	6
2.1. INTRODUCTION	6
2.2. DIFFERENCE	6
2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY	6
2.4. REFERENCE DETAIL	14
3. TEST METHODOLOGY	15
4. FACILITIES AND ACCREDITATION	15
5. CALIBRATION AND UNCERTAINTY	16
5.1. MEASURING INSTRUMENT CALIBRATION	16
5.2. SAMPLE CALCULATION	16
5.3. MEASUREMENT UNCERTAINTY	16
6. EQUIPMENT UNDER TEST	17
6.1. DESCRIPTION OF EUT	17
6.2. MAXIMUM OUTPUT POWER	17
6.3. SOFTWARE AND FIRMWARE	20
6.4. MAXIMUM ANTENNA GAIN	20
6.5. WORST-CASE CONFIGURATION AND MODE	20
6.6. DESCRIPTION OF TEST SETUP	21
7. TEST AND MEASUREMENT EQUIPMENT	23
8. RF OUTPUT POWER VERIFICATION	25
8.1. GSM	25
8.1.1. GSM850	26
8.1.2. GSM1900	26
8.2. WCDMA	27
8.2.1. WCDMA BAND5	31
8.2.2. WCDMA BAND2	32
8.3. LTE	33
8.3.1. LTE 5	35
8.3.2. LTE 41 (FCC)	37

9. CONDUCTED TEST RESULTS	39
9.1. OCCUPIED BANDWIDTH	39
9.1.1. GSM	42
9.1.2. WCDMA	43
9.1.3. LTE BAND 5.....	44
9.1.4. LTE BAND 41.....	46
9.2. BAND EDGE AND EMISSION MASK.....	48
9.2.1. GSM850	49
9.2.1. GSM GSM1900	50
9.2.2. WCDMA BAND5	51
9.2.3. WCDMA BAND2	52
9.2.4. LTE BAND 5 BANDEDGE.....	53
9.2.5. LTE BAND 41 ADJACENT CHANNEL POWER	61
9.3. OUT OF BAND EMISSIONS	69
9.3.1. GSM GSM850	70
9.3.2. GSM GSM1900	72
9.3.3. WCDMA BAND5	74
9.3.4. WCDMA BAND2	76
9.3.5. LTE BAND 5.....	78
9.3.6. LTE BAND 41.....	82
9.4. FREQUENCY STABILITY	86
9.4.1. GSM.....	87
9.4.2. WCDMA	89
9.4.3. LTE BAND 5.....	91
9.4.4. LTE BAND 41.....	92
9.5. PEAK TO AVERAGE RATIO	93
9.5.1. GSM.....	94
9.5.2. WCDMA	95
9.5.3. LTE BAND 5.....	96
9.5.4. LTE BAND 41.....	98
10. RADIATED TEST RESULTS.....	100
11. APPENDIX A: PRE-SCAN DATA FOR 15B RECEIVER MODE	121
12. SETUP PHOTOS (Original)	133
13. SETUP PHOTOS (Spot check).....	135

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SAMSUNG ELECTRONICS CO., LTD. 129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI, GYEONGGI-DO, 16677, KOREA
Model	SM-A705GM/DS
FCC ID	A3LSMA705GM
EUT Description	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+, NFC and MST
Serial Number	R38M106F6BR(CONDUCTED ORIGINAL) R38M10CS6GK, R38M10CS2VH(RADIATED ORIGINAL) R38M208LZJF(RADIATED SPOT CHECK)
Date Tested	FEBRUARY 18, 2019 to FEBRUARY 28, 2019 (ORIGINAL) MARCH 21, 2019 to MARCH 22, 2019 (SPOT CHECK)
Applicable Standards	FCC CFR 47 PART 22H, 24E, 27M and 15B
Test Results	Complies
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.	
Approved & Released For UL Verification Services Inc. By:	Reviewed By:
 Dan Corona Operations Leader Consumer Technology Division UL Verification Services Inc.	 Kiya Kedida Senior Project Engineer Consumer Technology Division UL Verification Services Inc.

2. INTRODUCTION OF TEST DATA REUSE

2.1. INTRODUCTION

According to the manufacturer, FCC ID: A3LSMA705FN and FCC ID: A3LSMA705GM licensed radios are electrically identical. The FCC ID: A3LSMA705FN test data shall remain representative of FCC ID: A3LSMA705GM.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID

2.2. DIFFERENCE

The FCC ID: A3LSMA705FN, shares the same enclosure and circuit board as FCC ID: A3LSMA705GM. The licensed radio antennas and surrounding circuitry and layout are identical between two models.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG705FN remains representative of FCC ID: A3LSMA705GM. The test data of FCC ID: A3LSMG705FN being submitted for this application to cover licensed radio features.

2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device A3LSMA705GM for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device in accordance to FCC public KDB 484596 D01 as shown in the summary below.

Comparison of two models, upper deviation is within 3dB range and all tests are under FCC Technical Limits.

SPOT CHECK DATA

A3LSMA705GM SPOT CHECK RESULTS										
Technology	Mode	Test Item	Channel	Measured	A3LSMA705FN		A3LSMA705GM		Delta (dB)	
				Frequency MHz	Peak (dBm)		Peak (dBm)			
GSM	GPRS 850	RSE	Low	1648	-45.48		-48.59		-3.11	
	GPRS 1900	RSE	Mid	3760	-38.69		-44.23		-5.54	
	EGPRS 850	RSE	Mid	1673	-51.63		-59.01		-7.38	
	EGPRS 1900	RSE	Mid	5640	-42.24		-51.74		-9.5	
WCDMA	REL99 B5	RSE	Low	3308	-56.51		-57.62		-1.11	
	REL99 B2	RSE	Mid	3763	-55.05		-59.74		-4.69	
	HSDPA B5	RSE	Low	2480	-55.31		-56.85		-1.54	
	HSDPA B2	RSE	High	7634	-55.91		-56.18		-0.27	
LTE 5	QPSK @ 10MHz BW	RSE	Mid	3333	-56.98		-58.63		-1.65	
	16QAM @ 10MHz BW	RSE	High	2532	-56.73		-54.98		1.75	
LTE 41	QPSK @ 20MHz BW	RSE	Mid	10336	-50.78		-50.65		0.13	
	16QAM @ 20MHz BW	RSE	Mid	10337	-51.25		-50.21		1.04	

SPOT CHECK DATA
HARMONICS AND SPURIOUS EMISSIONS

GSM

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	GPRS 850
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
824.2MHz												
1	1.648	-51.69	Pk	28.5	-35.5	10.1	-48.59	-13	-35.59	0-360	150	H
2	1.648	-56.25	Pk	28.5	-35.5	10.9	-52.35	-13	-39.35	0-360	150	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	EGPRS 850
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
836.6MHz												
1	1.673	-62.01	Pk	28.6	-35.5	9.9	-59.01	-13	-46.01	0-360	150	H
2	1.673	-65.02	Pk	28.6	-35.5	11.3	-60.62	-13	-47.62	0-360	150	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	GPRS 1900
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1880MHz												
1	3.76	-57.94	Pk	33	-30	11.8	-43.14	-13	-30.14	0-360	148	H
2	3.76	-59.03	Pk	33	-30	11.8	-44.23	-13	-31.23	0-360	148	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	EGPRS 1900
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1880MHz												
1	5.64	-72.61	Pk	35	-28.6	11.8	-54.41	-13	-41.41	0-360	148	H
2	5.64	-70.04	Pk	35	-28.6	11.9	-51.74	-13	-38.74	0-360	148	V

WCDMA

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	REL99 B5
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
826.4MHz												
1	3.306	-67.72	Pk	32.8	-33.5	10.8	-57.62	-13	-44.62	0-360	150	H
2	3.305	-68.52	Pk	32.8	-33.5	11.3	-57.92	-13	-44.92	0-360	150	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	HSDPA B5
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
826.4MHz												
1	2.478	-63.8	Pk	32.3	-35.4	10.6	-56.3	-13	-43.3	0-360	150	H
2	2.476	-64.75	Pk	32.3	-35.3	10.9	-56.85	-13	-43.85	0-360	150	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	REL99 B2
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1880MHz												
1	3.761	-71.42	Pk	33	-30	11.7	-56.72	-13	-43.72	0-360	148	H
2	3.762	-74.54	Pk	33	-30	11.8	-59.74	-13	-46.74	0-360	148	V

Company:	Samsung
Project #:	12726913
Date:	3/22/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	HSDPA B2
Chamber #:	Chamber I

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1907.6MHz												
1	7.633	-78.52	Pk	35.6	-25.8	11.9	-56.82	-13	-43.82	0-360	148	H
2	7.634	-77.98	Pk	35.6	-25.8	12	-56.18	-13	-43.18	0-360	148	V

LTE BAND 5

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 5 QPSK 10MHz
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
836.5 MHz												
1	3.33	-67.97	Pk	32.8	-33.3	11.2	-57.27	-13	-44.27	0-360	150	H
2	3.331	-69.23	Pk	32.8	-33.3	11.1	-58.63	-13	-45.63	0-360	150	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 5 16QAM 10MHz
Chamber #:	Chamber K

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
844 MHz												
1	2.531	-61.88	Pk	32.3	-35.3	9.9	-54.98	-13	-41.98	0-360	150	H
2	2.531	-63.51	Pk	32.3	-35.3	10.8	-55.71	-13	-42.71	0-360	150	V

LTE BAND 41

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 41 QPSK 20MHz
Chamber #:	Chamber I

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2593 MHz												
1	10.333	-77.43	Pk	37.2	-21.6	12	-49.83	-25	-24.83	0-360	148	H
2	10.336	-78.35	Pk	37.3	-21.5	11.9	-50.65	-25	-25.65	0-360	149	V

Company:	Samsung
Project #:	12726913
Date:	3/21/19
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 41 16QAM 20MHz
Chamber #:	Chamber I

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2593 MHz												
1	10.339	-77.72	Pk	37.3	-21.5	11.7	-50.22	-25	-25.22	0-360	148	H
2	10.338	-77.81	Pk	37.3	-21.5	11.8	-50.21	-25	-25.21	0-360	149	V

2.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/ Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title/Section
PCE	A3LSMA705FN	Grant	12726900-E1	Test	FCC Report WWAN all except Appendix A

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, ANSI C63.4:2014, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 15, and FCC KDB 971168 D01 v03r01.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☒ Chamber I (ISED:2324A-5)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☒ Chamber J (ISED:2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☒ Chamber K (ISED:2324A-1)
	☐ Chamber G (ISED:22541-4)	☐ Chamber L (ISED:2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+, NFC and MST. The model SM-A705FN/DS was used for final testing and is representative of the test results in this report.

6.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, and §27.50

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015 Sub-Clause 5.2.7/ TIA-603-E Clause 2.2.17

KDB 971168 D01Section 5.8

KDB 412172 D01

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average radiated ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz					
Frequency range (MHz)	Modulation	Radiated ERP		99% BW (kHz)	Emission Designator
		Average (dBm)	Average (W)		
824.2-848.8	GPRS	26.17	0.4140	241.05	241KGXW
	EGPRS	22.27	0.1687	229.05	229KG7W
Part 24 1900MHz					
Frequency range (MHz)	Modulation	Radiated EIRP		99% BW (kHz)	Emission Designator
		Average (dBm)	Average (W)		
1850.2-1909.8	GPRS	24.31	0.2698	245.13	245KGXW
	EGPRS	21.78	0.1507	244.77	245KG7W

WCDMA MODE

Part 22 Band 5					
Frequency range (MHz)	Modulation	Radiated ERP		99% BW (kHz)	Emission Designator
		Average (dBm)	Average (W)		
826.4-846.6	REL 99	18.33	0.0681	4120	4M12F9W
	HSDPA	17.65	0.0582	4150	4M15F9W
Part 24 Band 2					
Frequency range (MHz)	Modulation	Radiated EIRP		99% BW (kHz)	Emission Designator
		Average (dBm)	Average (W)		
1852.4-1907.6	REL 99	19.73	0.0940	4130	4M13F9W
	HSDPA	18.82	0.0762	4130	4M13F9W

LTE BAND 5

Part 22H							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Radiated ERP		99% BW (kHz)	Emission Designator
				Average (dBm)	Average (W)		
1.4	QPSK	824.7	848.3	15.96	0.0394	1100	1M10G7W
	16QAM			15.15	0.0327	1080	1M08D7W
3.0	QPSK	825.5	847.5	16.01	0.0399	2700	2M70G7W
	16QAM			15.25	0.0335	2700	2M70D7W
5.0	QPSK	826.5	846.5	16.53	0.0450	4500	4M50G7W
	16QAM			15.86	0.0385	4500	4M50D7W
10.0	QPSK	829.0	844.0	17.07	0.0509	8960	8M96G7W
	16QAM			16.35	0.0432	8960	8M96D7W

LTE BAND 41

Part 27							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Radiated EIRP		99% BW (kHz)	Emission Designator
				Average (dBm)	Average (W)		
5.0	QPSK	2498.5	2687.5	16.13	0.0410	4490	4M49G7W
	16QAM			15.49	0.0354	4490	4M49D7W
10.0	QPSK	2501.0	2685.0	16.58	0.0455	8970	8M97G7W
	16QAM			15.74	0.0375	8950	8M95D7W
15.0	QPSK	2503.5	2682.5	16.47	0.0444	13420	13M4G7W
	16QAM			15.66	0.0368	13430	13M4D7W
20.0	QPSK	2506.0	2680.0	17.06	0.0508	17900	17M9G7W
	16QAM			16.38	0.0435	17870	17M9D7W

6.3. SOFTWARE AND FIRMWARE

The test utility software used during testing was A705FN.001

6.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	-7.39
GSM1900, 1850-1910MHz	-6.07
WCDMA Band 2, 1850-1910 MHz	-6.07
WCDMA Band 5, 824-849 MHz	-7.39
LTE BAND 5, 824 - 849 MHz	-7.39
LTE BAND 41 (FCC), 2496 - 2690 MHz	-5.80

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of band 5 and band 41.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. All other testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that Y-Axis for 1900MHz, X-Axis for 850MHz, and X-Axis for 2500MHz with AC/DC Adapter and headset was worst-case orientation.

All radios that can be transmitted simultaneously have been evaluated for radiated for all possible combinations of transmission and found to be in compliance.

For check the Part15B receiver mode (Appendix A):

For LTE B5, the spurious emissions was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA50EWE	DW3J719AS/A-E	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identic	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Earphone	1	USB	Un-shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests

CONDUCTED TEST SETUP DIAGRAM

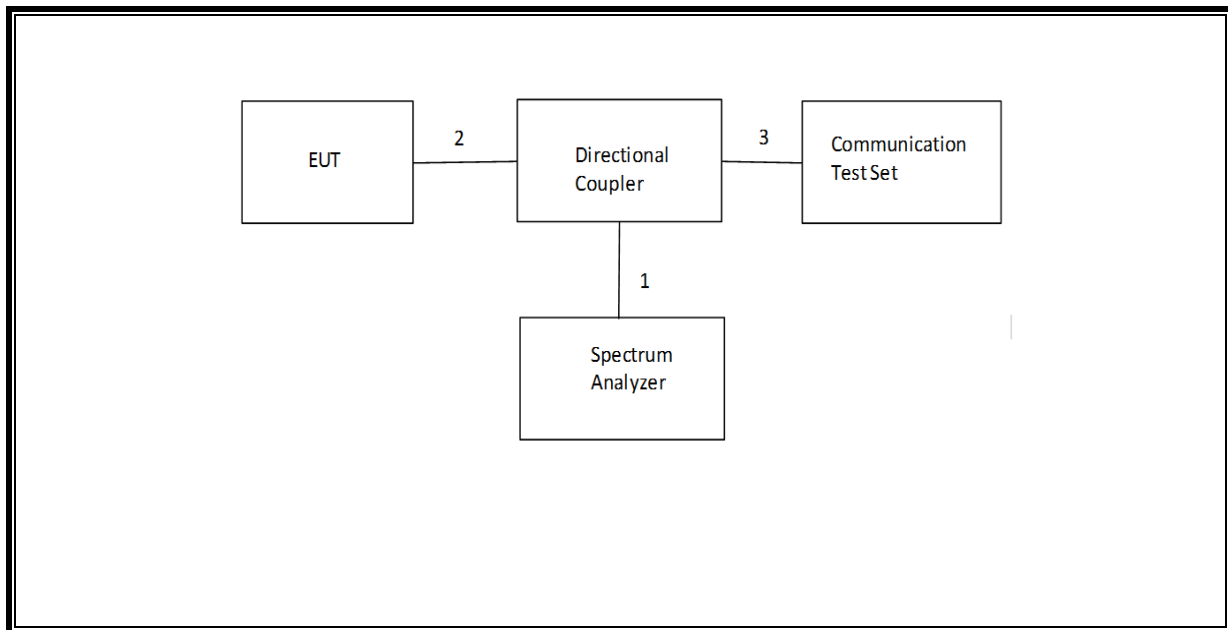

RADIATED TEST SETUP DIAGRAM

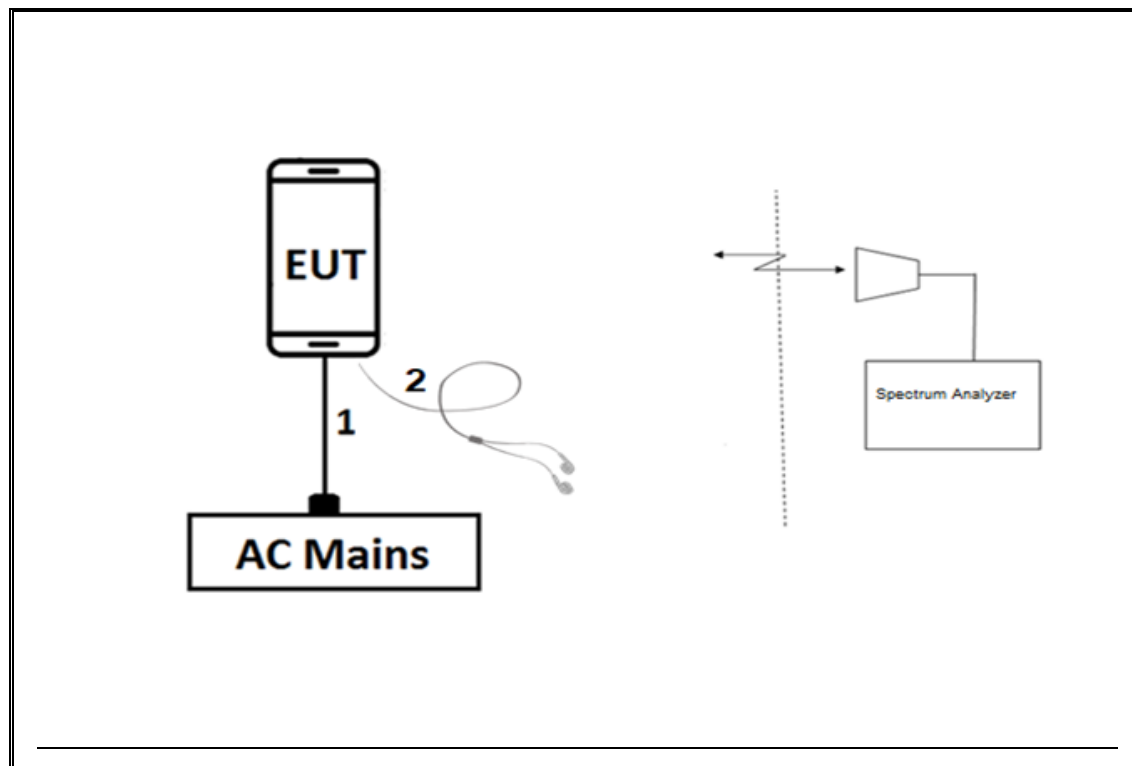

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/19	07/05/18
Highpass Filter, 1.2 GHz	Micro-Tronics	HPM50108	T1737	04/17/19	04/17/18
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM50114	T1852	07/31/19	07/31/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1240	08/31/19	08/31/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	04/30/19	04/30/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	05/24/19	05/24/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	AT0067	03/26/19	03/26/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T345	04/25/19	04/25/18
Ant., Horn 18 - 26.5 GHz	ARA	MWH-1826/B	T477	06/16/2019	06/16/2018
Hybrid Antenna	SunAR rf motion	JB3	PRE0184052	10/24/19	10/24/18
Hybrid Antenna	SunAR rf motion	JB3	PRE0184971	11/13/19	11/13/18
Hybrid Antenna	SunAR rf motion	JB3	PRE0181575	08/01/19	08/01/18
Hybrid Antenna	SunAR rf motion	JB3	PRE0181574	08/01/19	08/01/18
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	174060	08/01/19	08/01/18
RF Amplifier	AMPLICAL	AMP1G18-35	T1571	07/30/19	07/30/18
RF Amplifier	AMPLICAL	AMP1G18-35	T1569	06/03/19	06/03/18
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T1165	02/20/20	02/20/19
RF Amplifier 9KHz – 1GHz	SONOMA INSTR	310	PRE0180175	07/09/19	07/09/18
RF Amplifier 9KHz – 1GHz	SONOMA INSTR	310	PRE0180174	05/31/19	05/31/18
RF Amplifier 9KHz – 1GHz	SONOMA INSTR	310	175953	12/13/19	12/13/18
Amplifier 100kHz – 1GHz	Agilent	8447D	T15	10/20/19	10/20/18
Directional Coupler	KRYTAR	T922	PRE0078321	06/18/19	06/18/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T375	02/18/20	02/18/19
Wideband Communication Test Set, Call Box	R&S	CMW500	T1871	02/18/20	02/18/19
Wideband Communication Test Set, Call Box	R&S	CMW500	T949	02/21/20	02/21/19
Chamber, Environmental	Thermotron	SE-600-10-10	T80	05/01/19	11/01/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4440A	T200	01/28/20	01/28/19
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179375	05/08/19	05/08/18
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179372	05/04/19	05/04/18
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179367	04/25/19	04/25/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/25/20	01/25/19
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T917	01/24/20	01/24/19
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR
DC power supply 15V	Sprensen	XT15-4	T463	CNR	CNR
Power Meter	Keysight	N1911A	T1265	01/29/20	01/29/19
Power Sensor	Keysight	N1921A	T1227	02/05/20	02/05/19

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

NOTES:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.