

FCC BT LE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
May 19, 2023

Test Site/Location:
74, Seocheon-ro 578 beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2305-FC061

FCC ID: A3LSMF946B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-F946B/DS

Additional Model: SM-F946B

EUT Type: Mobile Phone

Average Output Power:
Ant.1: 17.52 dBm (56.54 mW)
Ant.2: 15.34 dBm (34.22 mW)

Frequency Range: 2 402 MHz ~ 2 480 MHz

Modulation type GFSK

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC061	May 19, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION.....	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY.....	9
7. DESCRIPTION OF TESTS.....	10
8. SUMMARY TEST OF RESULTS	27
9. TEST RESULT	28
9.1 DUTY CYCLE.....	28
9.2 6 dB BANDWIDTH	33
9.3 OUTPUT POWER	51
9.4 POWER SPECTRAL DENSITY	55
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	61
9.6 RADIATED SPURIOUS EMISSIONS	67
9.7 RADIATED RESTRICTED BAND EDGES	84
9.8 POWERLINE CONDUCTED EMISSIONS	94
10. LIST OF TEST EQUIPMENT	96
11. ANNEX A_ TEST SETUP PHOTO	99

1. EUT DESCRIPTION

Model	SM-F946B/DS			
Additional Model	SM-F946B			
EUT Type	Mobile Phone			
Power Supply	DC 3.88 V			
Frequency Range	2 402 MHz ~ 2 480 MHz			
Max. RF Output Power (Normal)	Ant.1	Peak (For information only)	1 M Bit/s:	17.902 dBm (61.69 mW)
			2 M Bit/s:	17.886 dBm (61.46 mW)
			125 k Bit/s :	8.549 dBm (7.16 mW)
			500 k Bit/s :	8.574 dBm (7.20 mW)
	Ant.2	Average	1 M Bit/s:	17.52 dBm (56.54 mW)
			2 M Bit/s:	17.38 dBm (54.72 mW)
			125 k Bit/s :	8.31 dBm (6.77 mW)
			500 k Bit/s :	8.41 dBm (6.94 mW)
Modulation Type	GFSK			
Bluetooth Version	5.3			
Number of Channels	40 Channels			
Date(s) of Tests	March 24 2023 ~ May 19, 2023			
Serial number	Radiated: 723cc3597a4d7ece Conducted: 723cbc64c674d7ece			

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		Dual BT
	Ant1(core-0)	Ant2(Core-1)	Ant1 & Ant2
Bluetooth	O	O	X

Note:

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output
- 3) Dual BT = Single Output 1& 2

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi	2.4 GHz WiFi	5 GHz WiFi	5 GHz WiFi	6 GHz WiFi	6 GHz WiFi	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
	Ant.1	Ant.2	Ant.1	Ant.2	Ant.1	Ant.2			
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS**FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

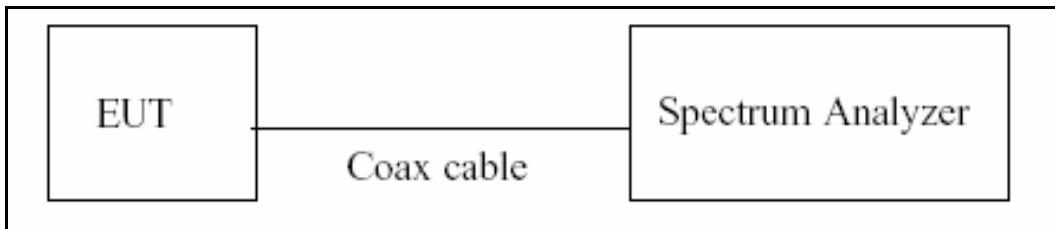

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 8 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

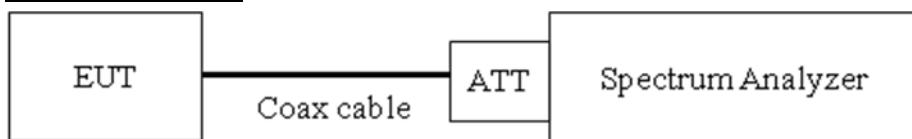

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

(Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

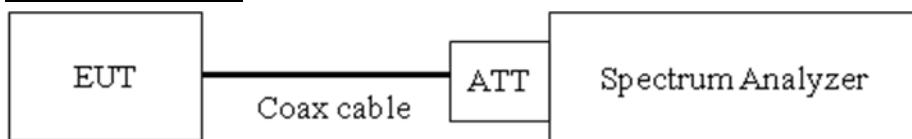

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.


The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) RBW = 3 kHz \leq RBW \leq 100 kHz.
- 4) VBW \geq 3 x RBW.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep \geq [2 xspan / RBW].
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions**Limit**

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration**Test Procedure**

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.30
100	10.05
200	10.06
300	10.08
400	10.11
500	10.13
600	10.14
700	10.15
800	10.18
900	10.21
1000	10.31
2000	10.42
2400	10.57
2412	10.60
2437	10.60
2462	10.60
2500	10.76
3000	10.89
4000	11.24
5000	11.42
5700	11.87
5800	11.87
6000	11.98
7000	12.07
8000	12.19
9000	12.24
10000	12.38
11000	12.43
12000	12.49
13000	12.66
14000	12.96
15000	13.12
16000	13.15
17000	13.05
18000	13.08
19000	12.97
20000	13.23
21000	13.67
22000	13.49
23000	13.62
24000	13.60
25000	13.92

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

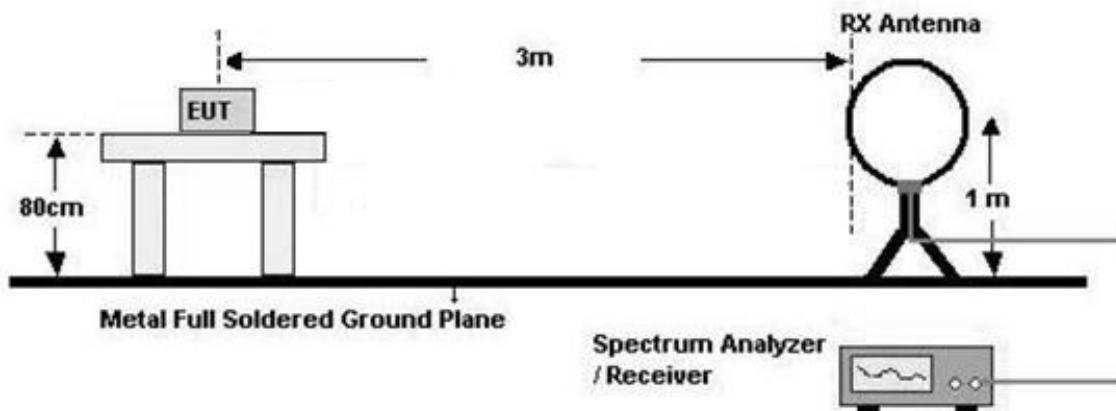

30 MHz - 1 GHz

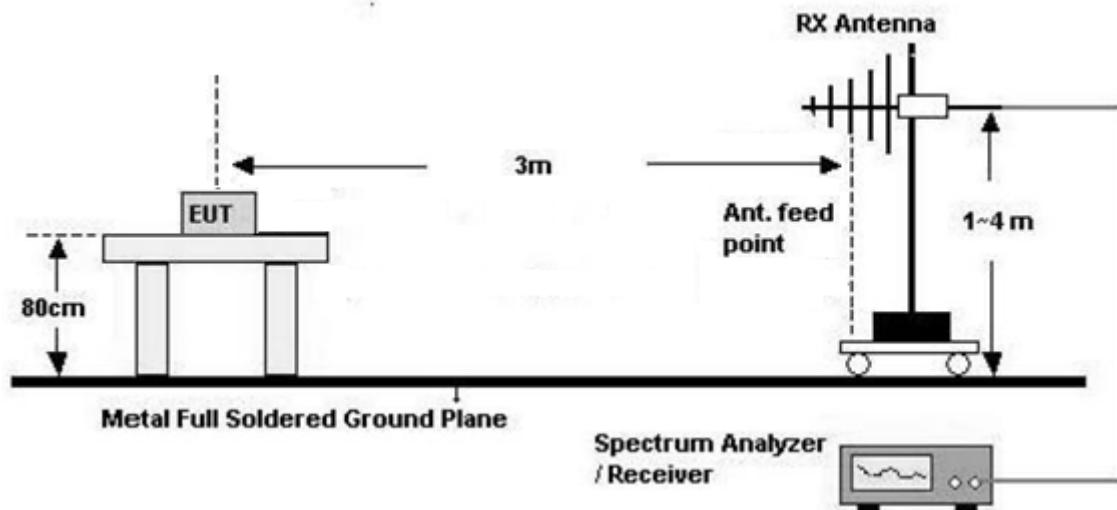

Above 1 GHz

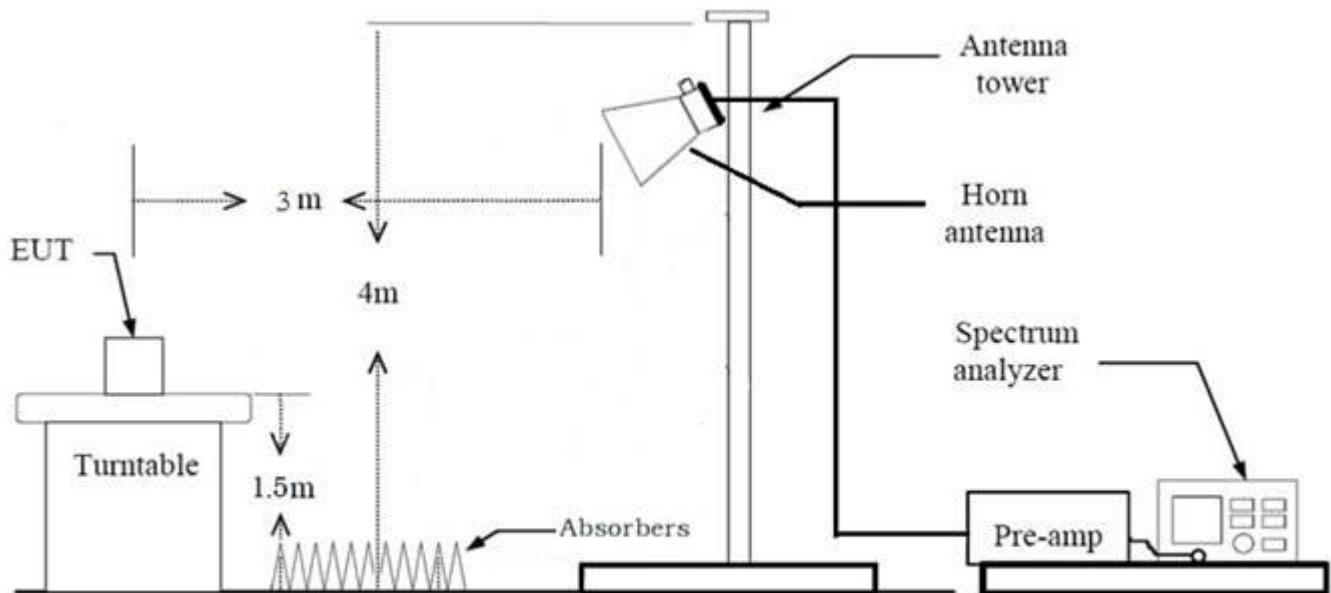

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.

5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Distance Correction Factor($0.009\text{ MHz} - 0.490\text{ MHz}$) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor($0.490\text{ MHz} - 30\text{ MHz}$) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times \text{RBW}$

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98 %, duty cycle variations are less than ± 2 %
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
- 9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
- 11. Total (Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)
 - + Distance Factor(D.F)

Total (Measurement Type : Average)

$$\begin{aligned} &= \text{Average Measured Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} \\ &\quad + \text{Distance Factor(D.F)} + \text{Duty Cycle Factor} \end{aligned}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (*ie:* margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
 - Worstcase : Stand alone
2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 - (1) Ant 1
 - Radiated Spurious Emissions : Worst Case Half-open
 - Radiated Restricted Band Edge : Worst Case Open
 - (2) Ant 2
 - Radiated Spurious Emissions : Worst Case Half-open
 - Radiated Restricted Band Edge : Worst Case Open
3. EUT Axis:
 - (1) Ant 1
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Z
 - (2) Ant 2
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case : 1M Bit/s 37 Byte, 2M Bit/s 37 Byte)
(125k, 500k, 1M Bit/s all have the same 1MHz Band width and only Worst result is attached.)
5. All datarate of operation were investigated and the worst case configuration results are reported.
 - Worst case : 1 M, 2 M
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
7. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.
(Worst case : SM-F946B/DS)

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : Z

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

- Worst case : Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on		
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on				
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on	
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on	

4. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

(Test Result : Please refer to the SM-F946B/DS [BT] Test Report.)

RSDB Scenario	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	Ant All
	Channel	0	6	120
	Data Rate	1 Mbps	6 Mbps	MCS 0
	Mode	$\pi/4$ DQPSK	802.11b	802.11a

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone etc) + Travel Adapter,
Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

Conducted test

1. The EUT was configured with packet length of highest power.

- ALL supported mode tested.
- Worst Results refer to Notes for each test item

2. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.389	0.755	0.515	2.883
	255	2.130	2.500	0.852	0.696
2M	37	0.205	0.536	0.383	4.172
	255	1.075	1.408	0.764	1.170
125k	37	3.100	4.110	0.754	1.225
	255	17.067	18.067	0.945	0.247
500k	37	1.067	1.813	0.588	2.304
	255	4.560	5.310	0.859	0.661

■ 1 M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

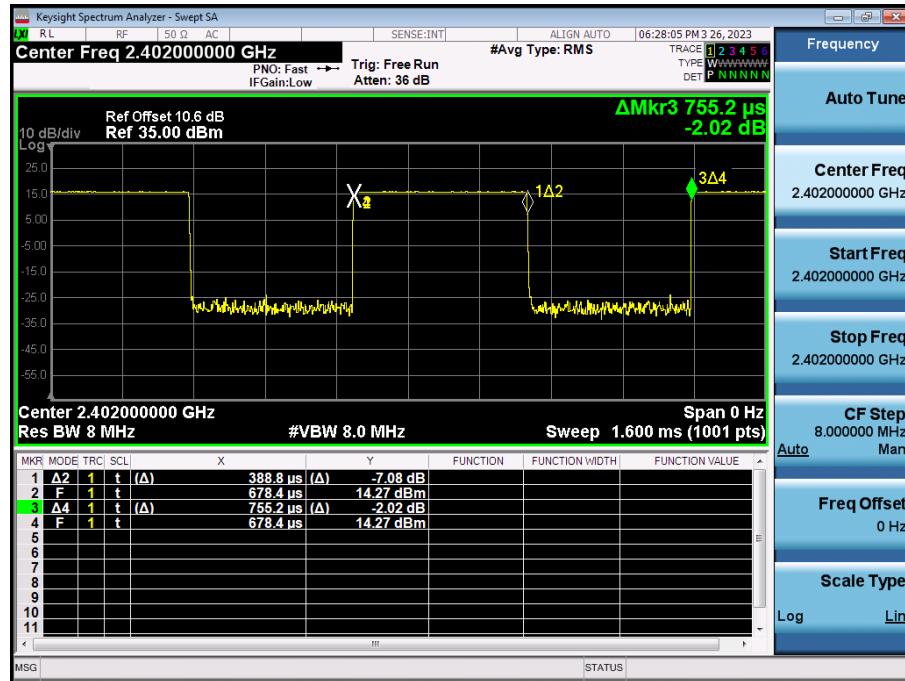

■ 1 M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

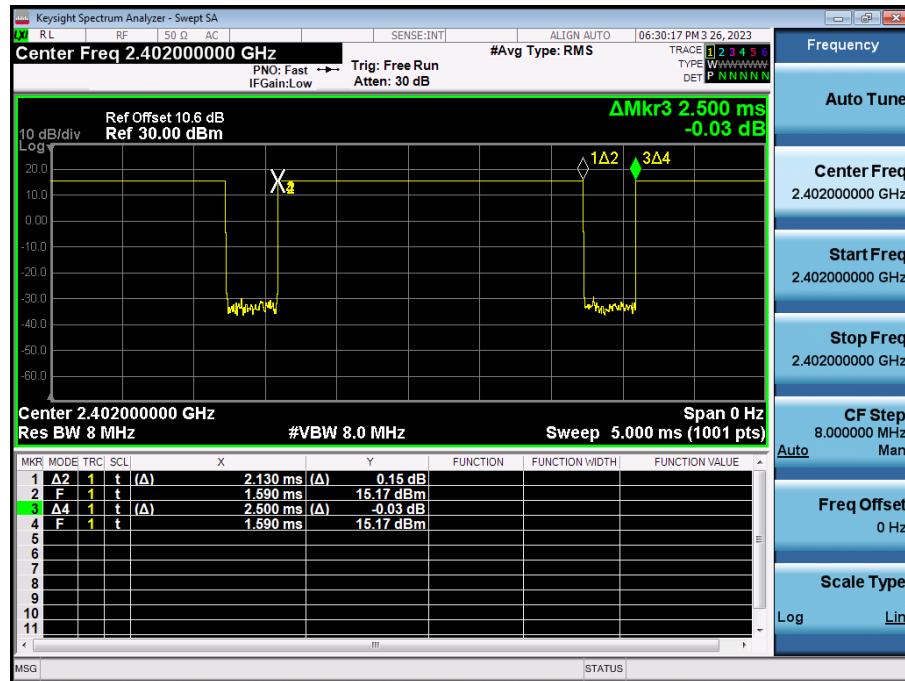


■ 2 M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

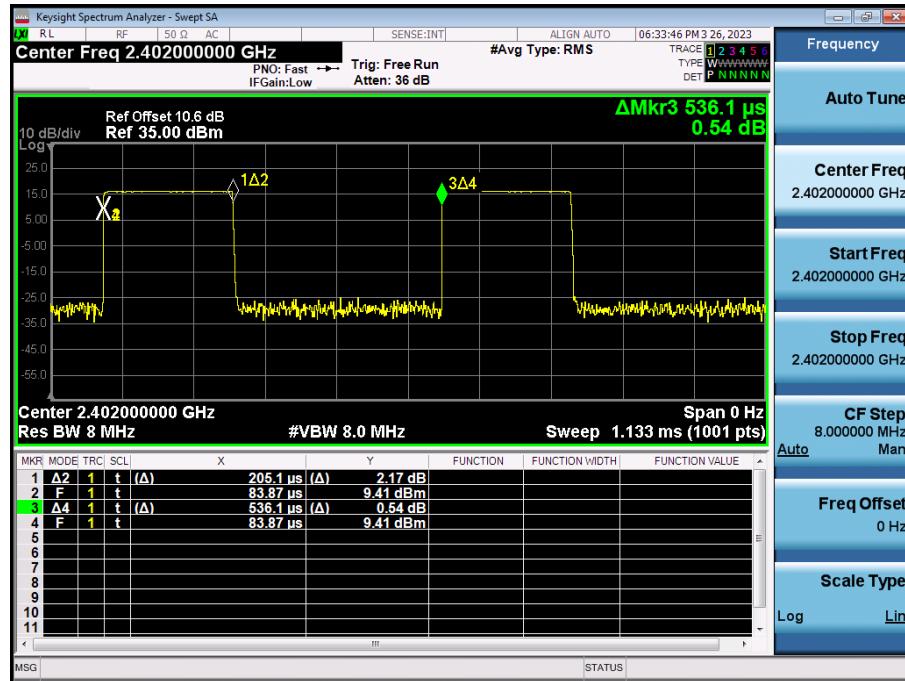

■ 2 M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

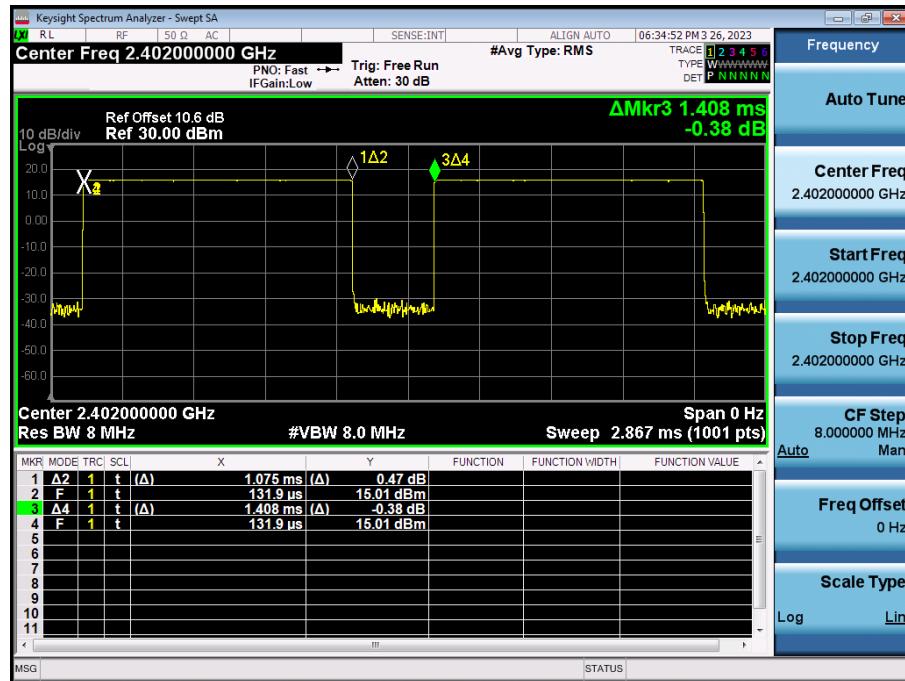


■ 125 k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

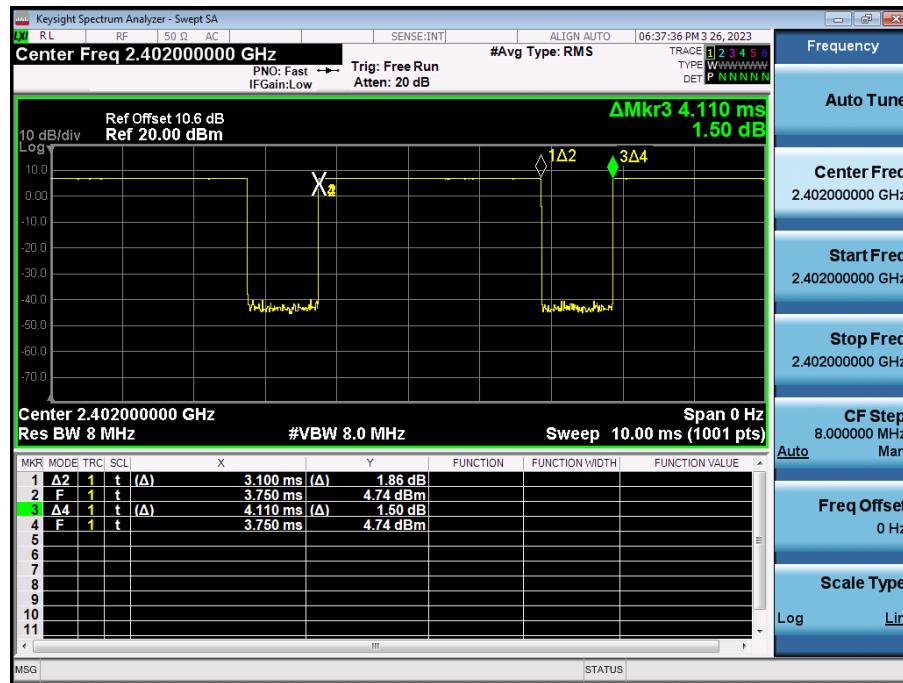


■ 125 k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

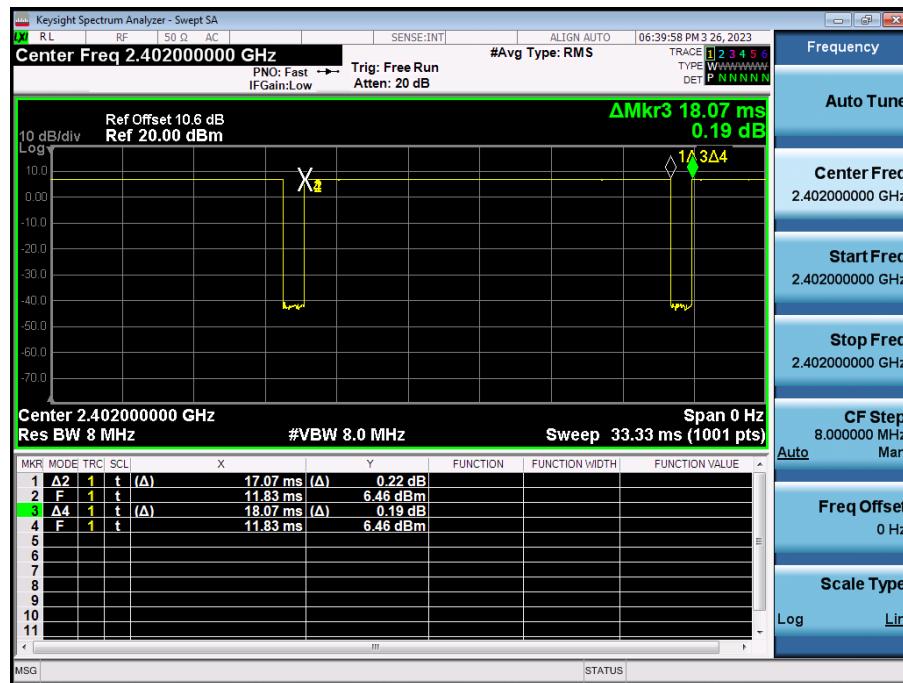


500 k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

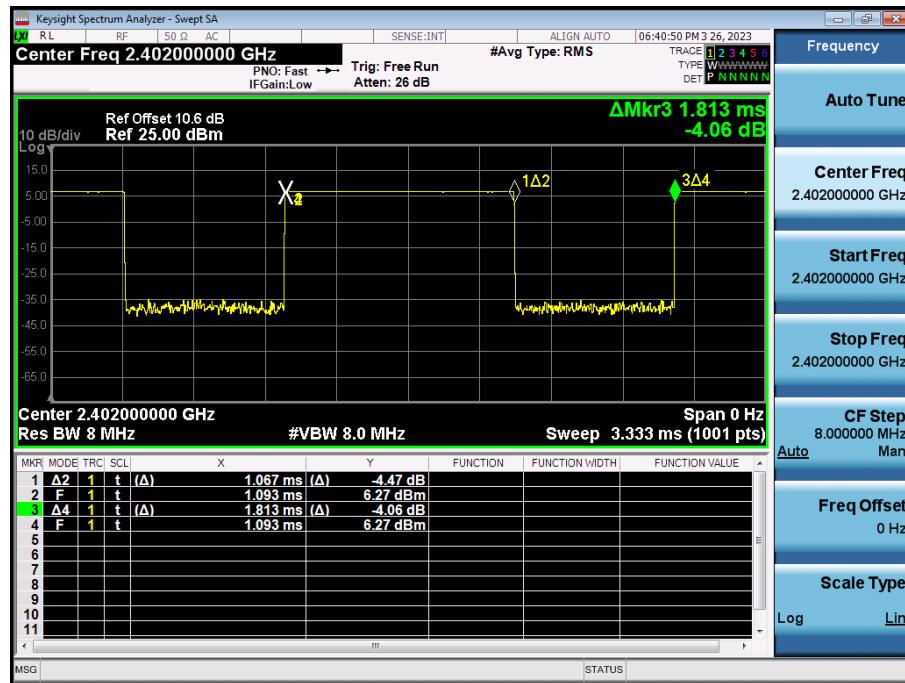

500 k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

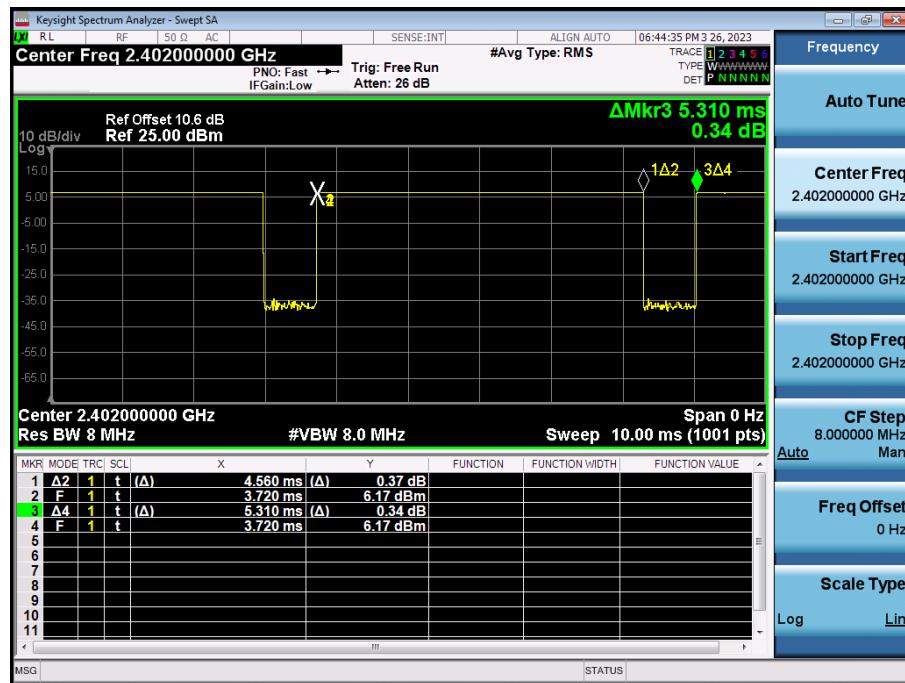

9.2 6 dB BANDWIDTH

[Ant.1]

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M(37)	0	676.2	> 500
	19	674.1	
	39	673.5	
1M(255)	0	665.6	> 500
	19	665.6	
	39	669.7	
2M(37)	0	1146	> 500
	19	1145	
	39	1150	
2M(255)	0	1155	> 500
	19	1159	
	39	1163	
125k(37)	0	629.1	> 500
	19	628.5	
	39	628.3	
125k(255)	0	629.5	> 500
	19	646.9	
	39	628.4	
500k(37)	0	666.6	> 500
	19	666.8	
	39	663.9	
500k(255)	0	670.2	> 500
	19	665.6	
	39	662.9	

Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW Channel.

1M Bit/s: 255 Byte

2M Bit/s: 37 Byte

125k Bit/s: 37 Byte

500k Bit/s: 255 Byte

[Ant.2]

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M(37)	0	675.0	> 500
	19	674.8	
	39	674.2	
1M(255)	0	665.8	> 500
	19	669.0	
	39	666.5	
2M(37)	0	1146	> 500
	19	1148	
	39	1149	
2M(255)	0	1153	> 500
	19	1159	
	39	1156	
125k(37)	0	627.9	> 500
	19	626.1	
	39	627.0	
125k(255)	0	628.2	> 500
	19	673.4	
	39	649.9	
500k(37)	0	664.8	> 500
	19	664.6	
	39	664.2	
500k(255)	0	665.0	> 500
	19	665.6	
	39	666.7	

Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW Channel

1M Bit/s: 255 Byte

2M Bit/s: 37 Byte


125k Bit/s: 37 Byte

500k Bit/s: 37 Byte

[Ant.1]

■ 1 MBit/s (255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

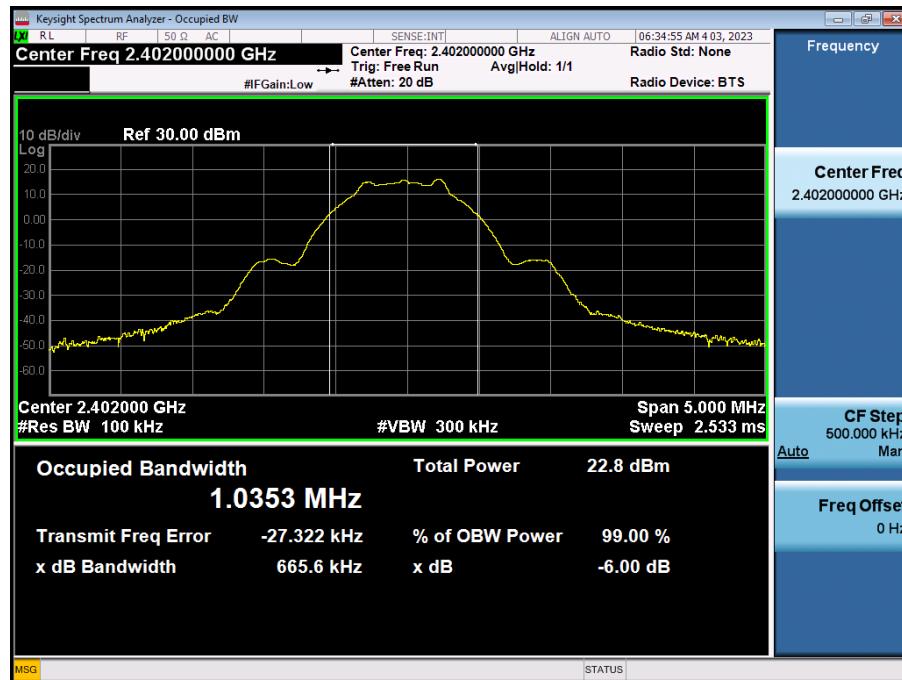

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)

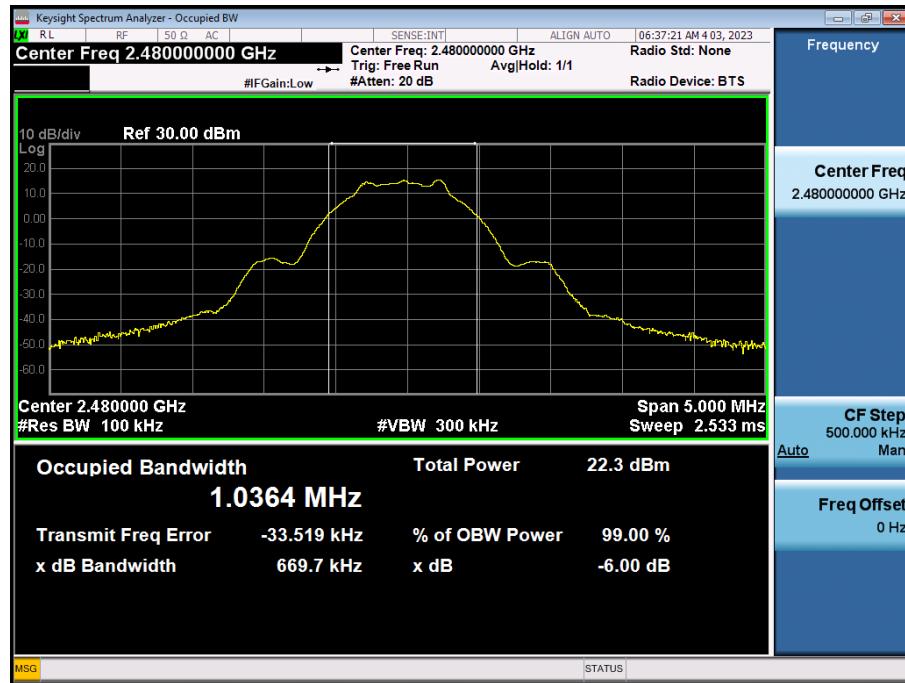


■ 2 MBit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)

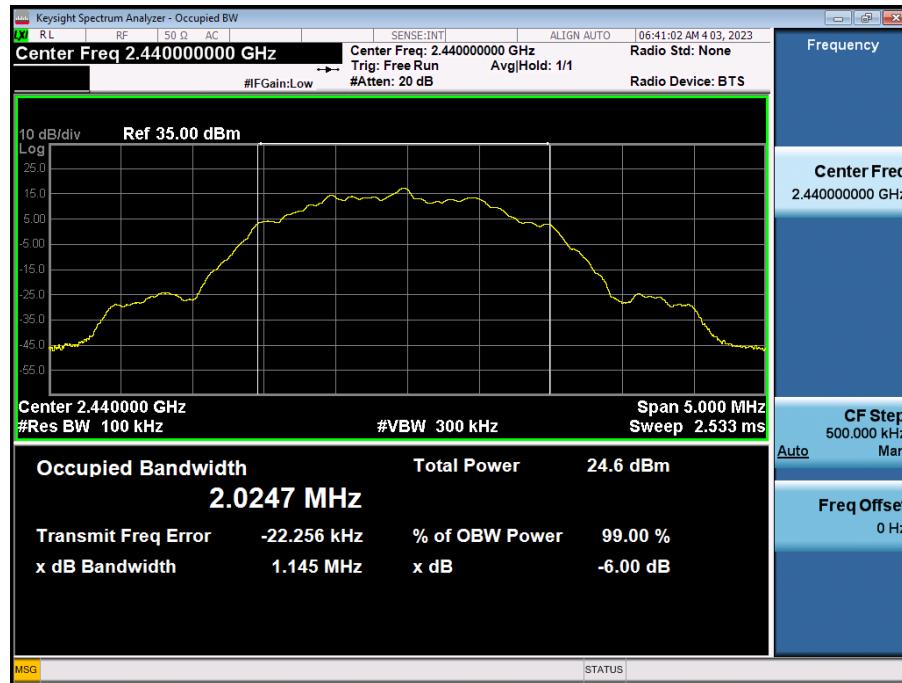


6 dB Bandwidth plot (High-CH 39)




125k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

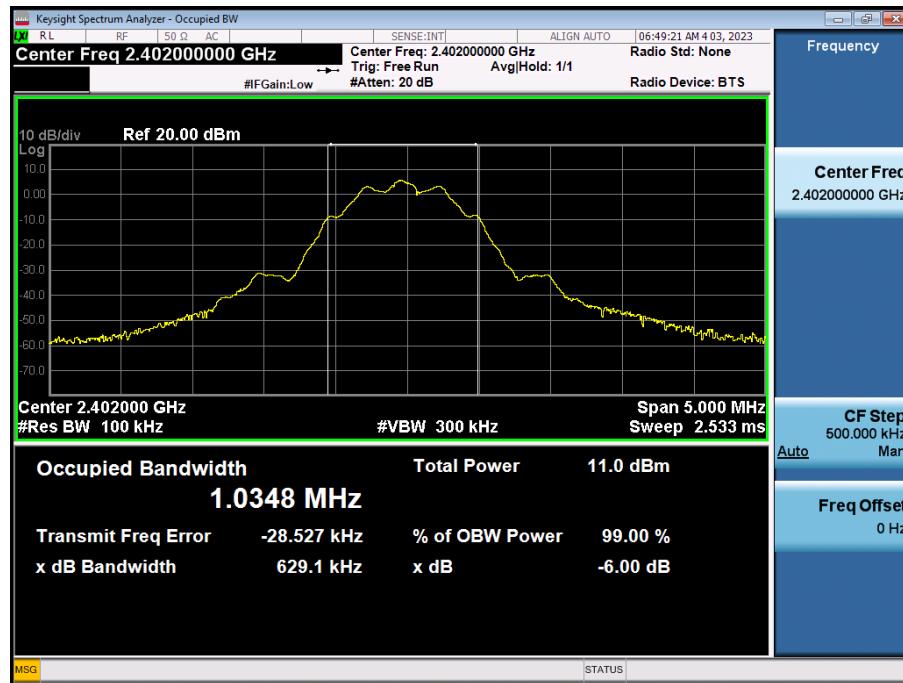

6 dB Bandwidth plot (Mid-CH 19)

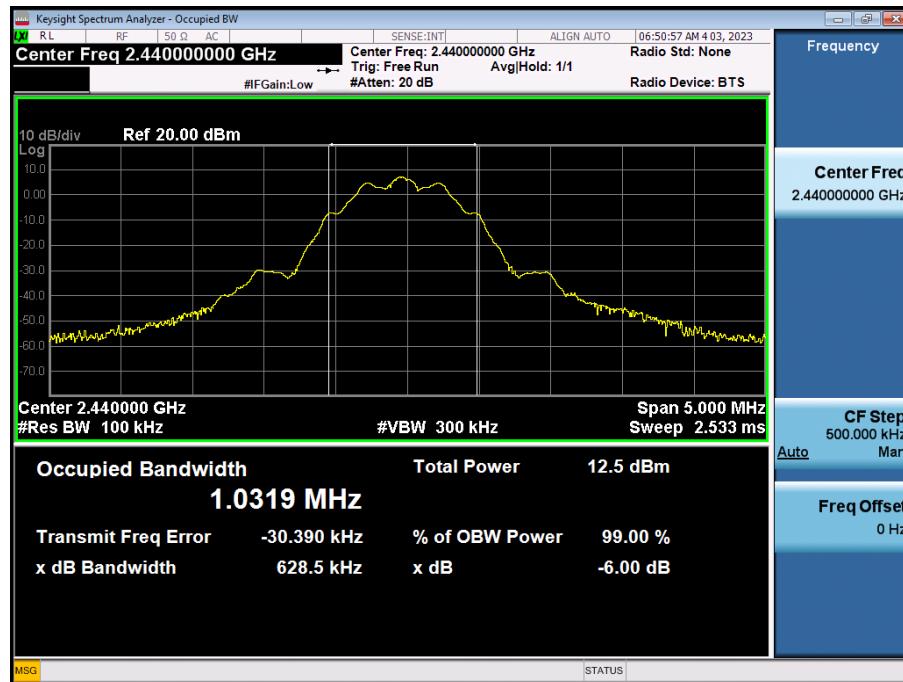

6 dB Bandwidth plot (High-CH 39)

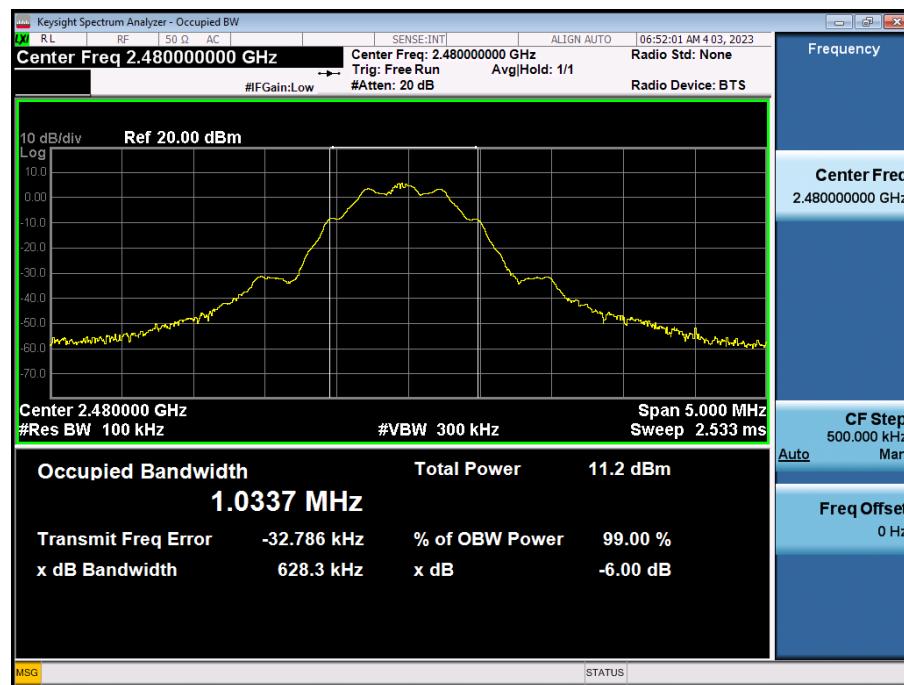

500k Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)



[Ant.2]

■ 1 MBit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

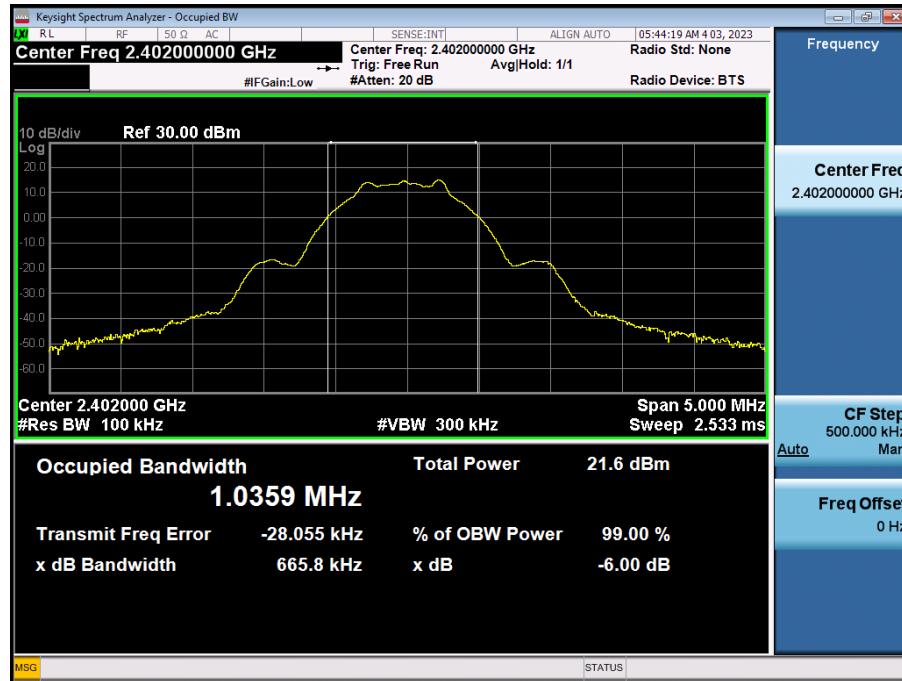

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



■ 2 MBit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)




□ 125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

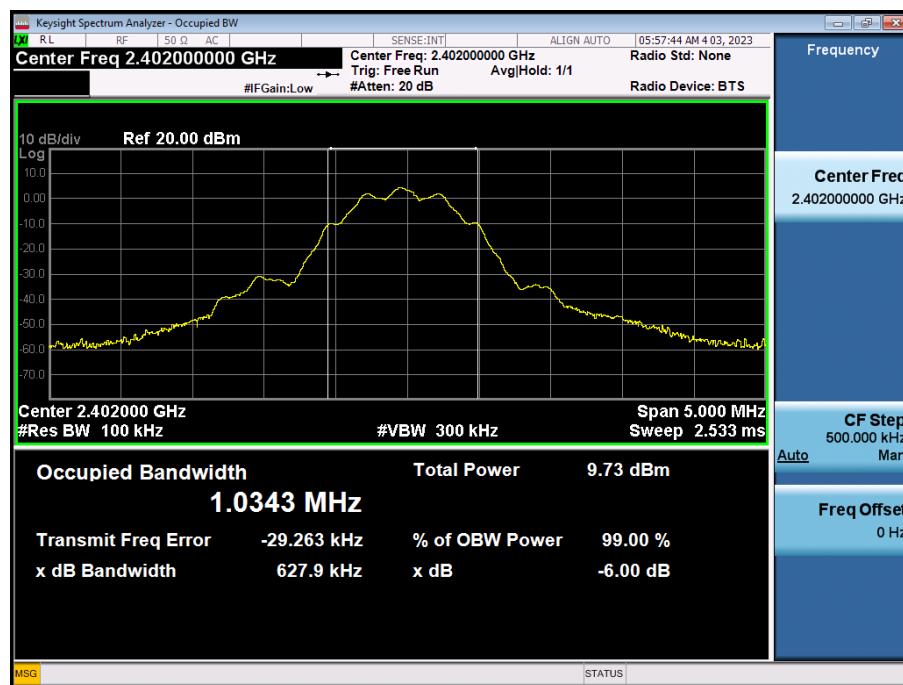

6 dB Bandwidth plot (Mid-CH 19)

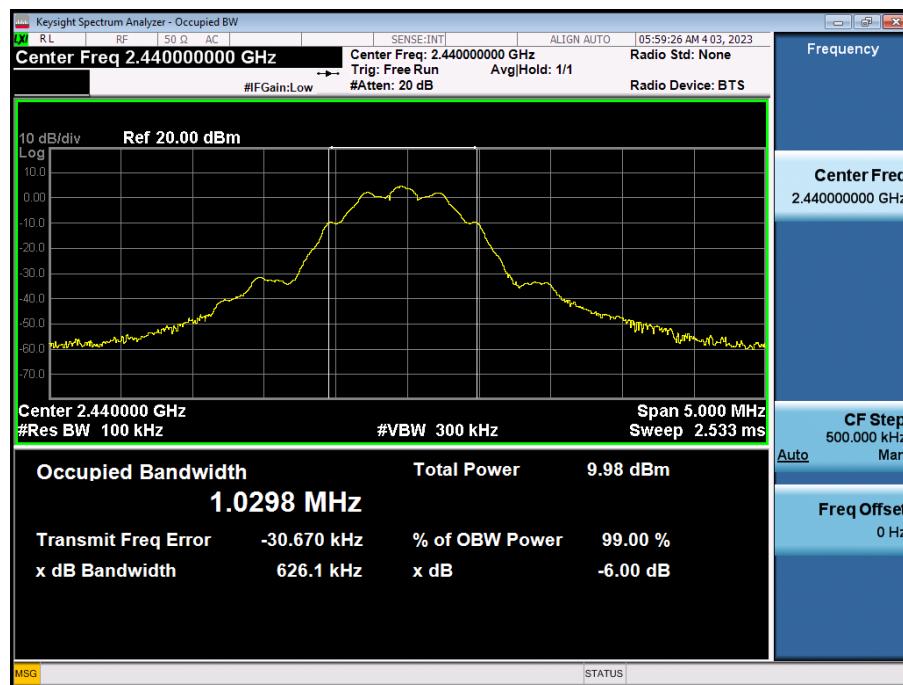


6 dB Bandwidth plot (High-CH 39)




500k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

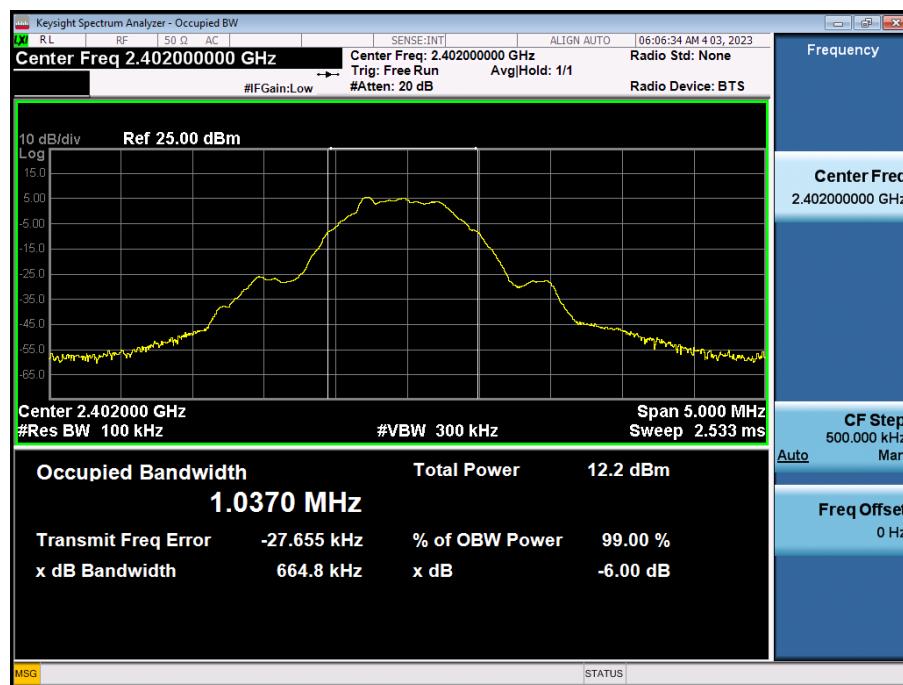

6 dB Bandwidth plot (Mid-CH 19)

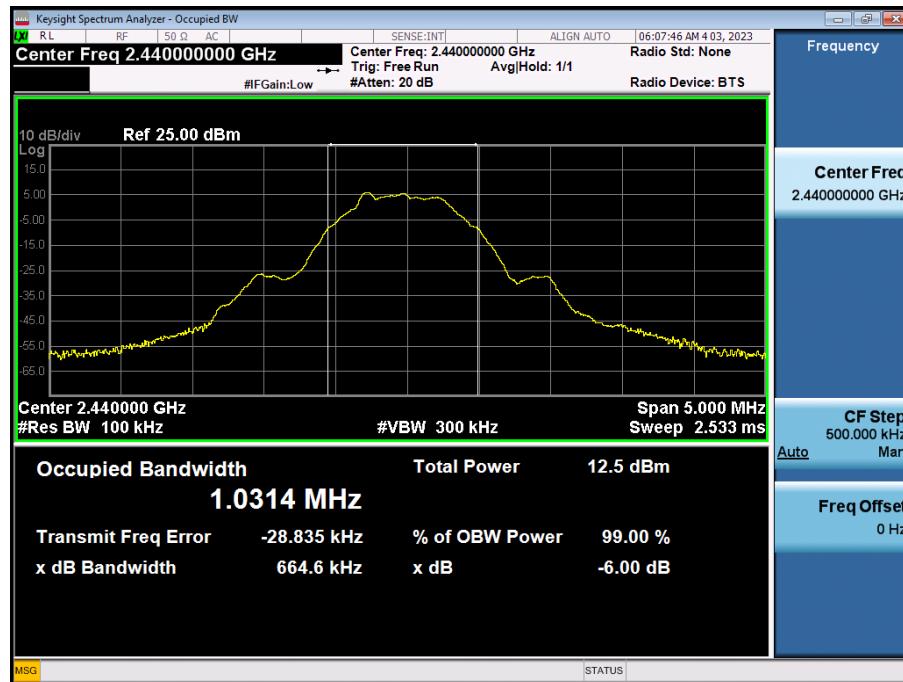

6 dB Bandwidth plot (High-CH 39)

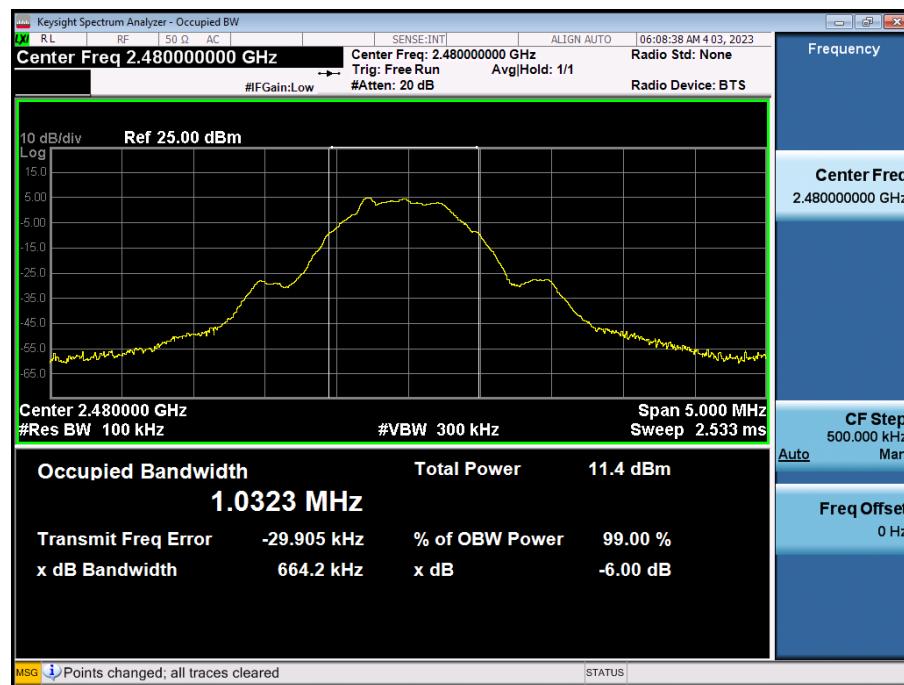

9.3 OUTPUT POWER

[Ant.1]

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	16.689	30
		2440	19	17.902	
		2480	39	16.297	
	255	2402	0	16.323	
		2440	19	17.391	
		2480	39	15.632	
2M	37	2402	0	16.791	30
		2440	19	17.886	
		2480	39	16.532	
	255	2402	0	16.422	
		2440	19	17.530	
		2480	39	15.864	
125k	37	2402	0	7.132	30
		2440	19	8.549	
		2480	39	7.381	
	255	2402	0	7.094	
		2440	19	8.534	
		2480	39	7.350	
500k	37	2402	0	7.203	30
		2440	19	8.574	
		2480	39	7.485	
	255	2402	0	7.160	
		2440	19	8.535	
		2480	39	7.434	

[Ant.2]

Peak Power

Data rate	Packet length	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	15.388	30
		2440	19	15.654	
		2480	39	14.708	
	255	2402	0	15.052	
		2440	19	15.265	
		2480	39	14.301	
2M	37	2402	0	15.514	30
		2440	19	15.816	
		2480	39	14.905	
	255	2402	0	15.226	
		2440	19	15.442	
		2480	39	14.424	
125k	37	2402	0	5.713	30
		2440	19	6.012	
		2480	39	4.962	
	255	2402	0	5.729	
		2440	19	6.001	
		2480	39	4.956	
500k	37	2402	0	5.828	30
		2440	19	6.081	
		2480	39	5.068	
	255	2402	0	5.764	
		2440	19	6.044	
		2480	39	4.996	

[Ant.1]

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	13.43	2.88	16.31	30
		2440	19	14.64	2.88	17.52	
		2480	39	12.81	2.88	15.69	
	255	2402	0	15.31	0.70	16.01	
		2440	19	16.42	0.70	17.12	
		2480	39	14.57	0.70	15.27	
2M	37	2402	0	11.97	4.17	16.14	30
		2440	19	13.21	4.17	17.38	
		2480	39	11.69	4.17	15.86	
	255	2402	0	14.68	1.17	15.85	
		2440	19	15.87	1.17	17.04	
		2480	39	14.15	1.17	15.32	
125k	37	2402	0	5.65	1.22	6.87	30
		2440	19	7.08	1.22	8.30	
		2480	39	5.89	1.22	7.11	
	255	2402	0	6.60	0.25	6.85	
		2440	19	8.06	0.25	8.31	
		2480	39	6.81	0.25	7.06	
500k	37	2402	0	4.60	2.30	6.90	30
		2440	19	6.11	2.30	8.41	
		2480	39	5.06	2.30	7.36	
	255	2402	0	6.12	0.66	6.78	
		2440	19	7.67	0.66	8.33	
		2480	39	6.56	0.66	7.22	

[Ant.2]

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	12.16	2.88	15.04	30
		2440	19	12.46	2.88	15.34	
		2480	39	11.42	2.88	14.30	
	255	2402	0	14.11	0.70	14.81	
		2440	19	14.24	0.70	14.94	
		2480	39	13.24	0.70	13.94	
2M	37	2402	0	10.95	4.17	15.12	30
		2440	19	11.13	4.17	15.30	
		2480	39	10.21	4.17	14.38	
	255	2402	0	13.66	1.17	14.83	
		2440	19	13.82	1.17	14.99	
		2480	39	12.84	1.17	14.01	
125k	37	2402	0	4.39	1.22	5.61	30
		2440	19	4.41	1.22	5.63	
		2480	39	3.50	1.22	4.72	
	255	2402	0	5.29	0.25	5.54	
		2440	19	5.34	0.25	5.59	
		2480	39	4.46	0.25	4.71	
500k	37	2402	0	3.23	2.30	5.53	30
		2440	19	3.40	2.30	5.70	
		2480	39	2.36	2.30	4.66	
	255	2402	0	4.93	0.66	5.59	
		2440	19	4.97	0.66	5.63	
		2480	39	4.16	0.66	4.82	

9.4 POWER SPECTRAL DENSITY

[Ant.1]

Frequency (MHz)	Channel No.	Mode	Test Result			
			Measured PSD (dBm/3 kHz)	Duty Cycle Factor(dB)	Total PSD (dBm/ 3kHz)	Limit
2402	0	1 MBit/s 37 Byte	-2.797	2.88	0.086	8 dBm / 3 kHz
2440	19		-1.985	2.88	0.898	
2480	39		-3.166	2.88	-0.283	
2402	0	1 MBit/s 255 Byte	-5.944	0.70	-5.248	
2440	19		-4.450	0.70	-3.754	
2480	39		-6.567	0.70	-5.871	
2402	0	2 MBit/s 37 Byte	-5.992	4.17	-1.820	
2440	19		-4.572	4.17	-0.400	
2480	39		-5.559	4.17	-1.387	
2402	0	2 MBit/s 255 Byte	-8.324	1.17	-7.154	
2440	19		-6.720	1.17	-5.550	
2480	39		-9.144	1.17	-7.974	
2402	0	125k 37 Byte	-1.229	1.22	-0.004	
2440	19		0.376	1.22	1.601	
2480	39		-0.131	1.22	1.094	
2402	0	125k 255 Byte	0.161	0.25	0.408	
2440	19		1.374	0.25	1.621	
2480	39		0.185	0.25	0.432	
2402	0	500k 37 Byte	-7.627	2.30	-5.323	
2440	19		-7.480	2.30	-5.176	
2480	39		-7.550	0.66	-6.889	
2402	0	500k 255 Byte	-11.983	0.66	-11.322	
2440	19		-9.905	0.66	-9.244	
2480	39		-10.484	0.66	-9.823	

Note :

1. Total PSD = Measured PSD + Duty Cycle Factor
2. In order to simplify the report, The plots were attached with the highest PSD Mode.
Worst case : 125k Bit/s (255 Byte)

[Ant.2]

Frequency (MHz)	Channel No.	Mode	Test Result			
			Measured PSD (dBm/3 kHz)	Duty Cycle Factor(dB)	Total PSD (dBm/ 3kHz)	Limit (dBm)
2402	0	1 MBit/s 37 Byte	-4.460	2.88	-1.577	8 dBm / 3 kHz
2440	19		-3.913	2.88	-1.030	
2480	39		-5.048	2.88	-2.165	
2402	0		-6.615	0.70	-5.919	
2440	19		-7.154	0.70	-6.458	
2480	39		-7.950	0.70	-7.254	
2402	0	1 MBit/s 255 Byte	-6.707	4.17	-2.535	8 dBm / 3 kHz
2440	19		-7.168	4.17	-2.996	
2480	39		-7.405	4.17	-3.233	
2402	0		-9.555	1.17	-8.385	
2440	19		-9.389	1.17	-8.219	
2480	39		-10.424	1.17	-9.254	
2402	0	2 MBit/s 255 Byte	-2.521	1.22	-1.296	8 dBm / 3 kHz
2440	19		-2.428	1.22	-1.203	
2480	39		-3.045	1.22	-1.820	
2402	0		-1.961	0.25	-1.714	
2440	19		-1.200	0.25	-0.953	
2480	39		-2.232	0.25	-1.985	
2402	0	500k 37 Byte	-8.396	2.30	-6.092	8 dBm / 3 kHz
2440	19		-8.080	2.30	-5.776	
2480	39		-10.773	0.66	-10.112	
2402	0		-11.781	0.66	-11.120	
2440	19		-14.093	0.66	-13.432	
2480	39		-12.565	0.66	-11.904	

Note :

1. Total PSD = Measured PSD + Duty Cycle Factor

2. In order to simplify the report, The plots were attached with the highest PSD Mode.

Worst case : 125k Bit/s (255 Byte)

[Ant.1]

■ 125k Bit/s (255 Byte) Test Plots


Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)

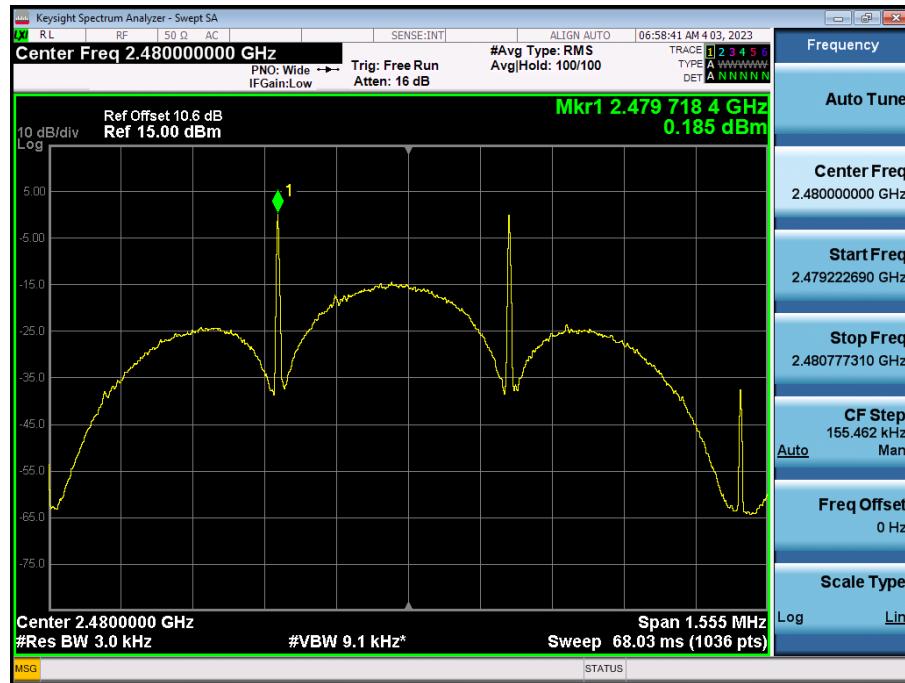


[Ant.2]

□ 125k Bit/s (255 Byte) Test Plots


Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)

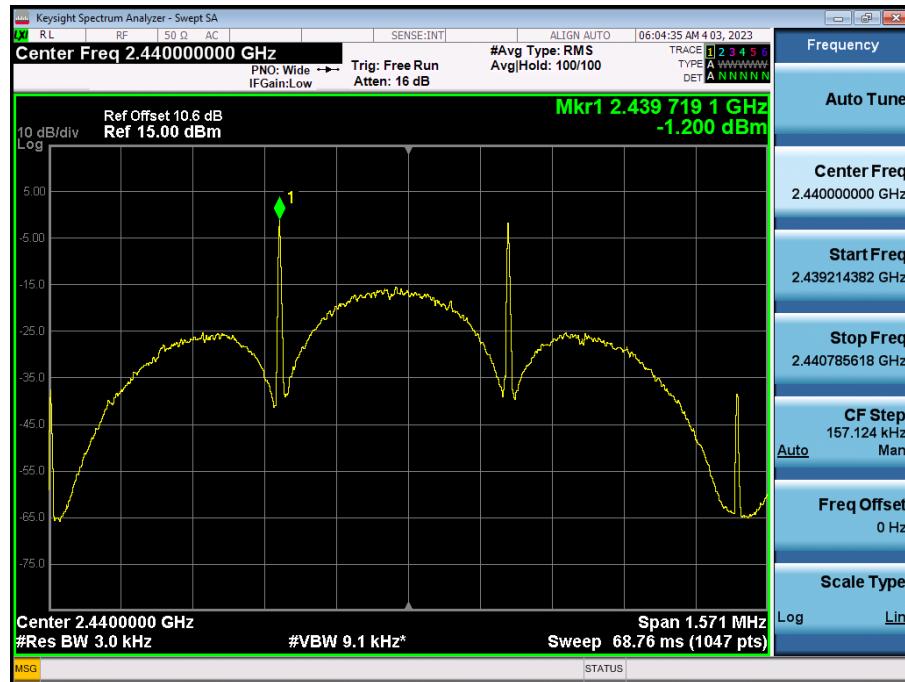

Power Spectral Density (High-CH 39)

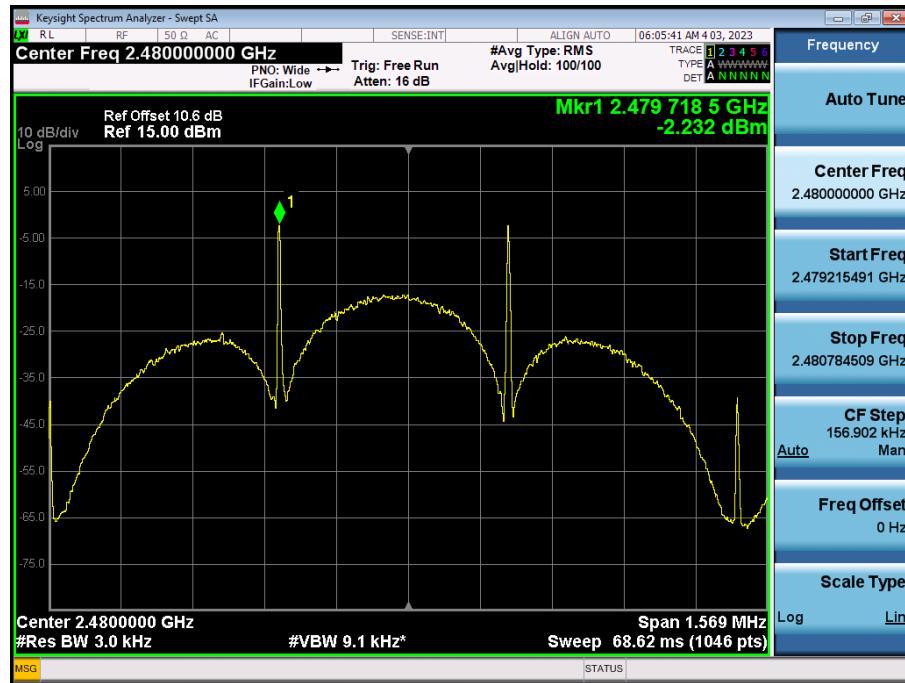

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

[Ant.1]

[BAND EDGE]

Frequency (MHz)	Mode	Channel No.	Position	Test Result	
				Measured Level (dB)	Limit (dBc)
2402	1M Bit/s 37 Byte	0	Lower	57.740	30
2480		39	Upper	58.667	30
2402	1M Bit/s 255 Byte	0	Lower	60.133	30
2480		39	Upper	62.736	30
2402	2M Bit/s 37 Byte	0	Lower	45.627	30
2480		39	Upper	57.955	30
2402	2M Bit/s 255 Byte	0	Lower	46.287	30
2480		39	Upper	63.678	30
2402	125k Bit/s 37 Byte	0	Lower	60.419	30
2480		39	Upper	63.352	30
2402	125k Bit/s 255 Byte	0	Lower	60.408	30
2480		39	Upper	62.533	30
2402	500k Bit/s 37 Byte	0	Lower	58.268	30
2480		39	Upper	59.580	30
2402	500k Bit/s 255 Byte	0	Lower	58.356	30
2480		39	Upper	59.690	30

Note :

1. In order to simplify the report, attached plots were only the worst case channel and data rate.
 - (1) Lower Band Edge 2M Bit/s (37 Byte)
 - (2) Upper Band Edge 2M Bit/s (37 Byte)

[CONDUCTED SPURIOUS EMISSIONS]

Note :

1. In order to simplify the report, attached plots were only the worst case channel and data rate.
Worst case 1M Bit/s (37 Byte)

[Ant.2]**[BAND EDGE]**

Frequency (MHz)	Mode	Channel No.	Position	Test Result	
				Measured Level (dB)	Limit (dBc)
2402	1M Bit/s 37 Byte	0	Lower	59.655	30
2480		39	Upper	62.506	30
2402	1M Bit/s 255 Byte	0	Lower	59.755	30
2480		39	Upper	62.498	30
2402	2M Bit/s 37 Byte	0	Lower	45.843	30
2480		39	Upper	61.311	30
2402	2M Bit/s 255 Byte	0	Lower	46.063	30
2480		39	Upper	61.281	30
2402	125k Bit/s 37 Byte	0	Lower	59.752	30
2480		39	Upper	61.685	30
2402	125k Bit/s 255 Byte	0	Lower	60.641	30
2480		39	Upper	60.625	30
2402	500k Bit/s 37 Byte	0	Lower	57.484	30
2480		39	Upper	57.974	30
2402	500k Bit/s 255 Byte	0	Lower	60.424	30
2480		39	Upper	61.717	30

Note :

1. In order to simplify the report, attached plots were only the worst case channel and data rate.
 - (1) Lower 2M Bit/s (37 Byte)
 - (2) Upper 500k Bit/s (37 Byte)

[CONDUCTED SPURIOUS EMISSIONS]**Note :**

1. In order to simplify the report, attached plots were only the worst case channel and data rate.

Worst case 1M Bit/s (37 Byte)

[Ant.1]

■ Test Plots(Band Edge_Lower)

2M Bit/s (37 Byte) Low Channel(Ch. 0)




■ Test Plots(Band Edge_Upper)

2M Bit/s (37 Byte) High Channel(Ch. 39)



**□ 1M Bit/s (37 Byte) Test Plots
[CONDUCTED SPURIOUS EMISSIONS]**

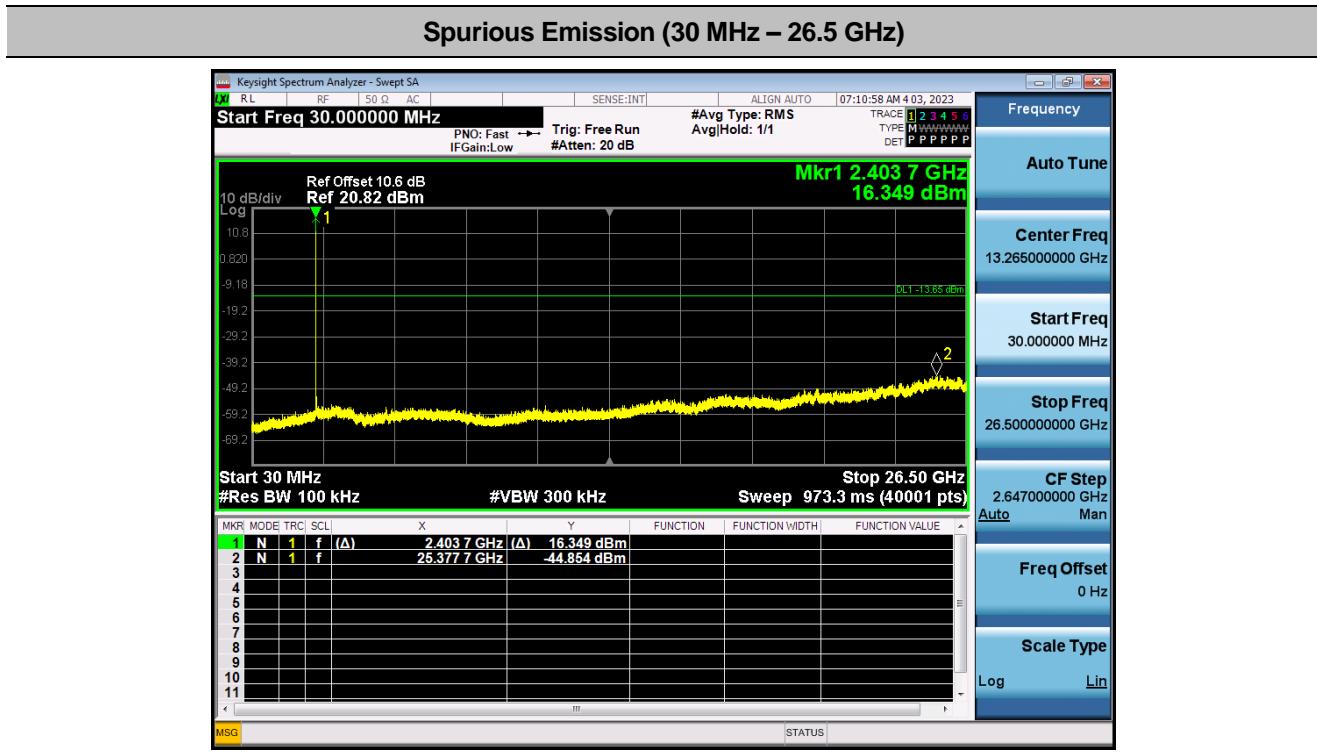

Limit (dBm): -13.65

[Ant.2]


□ Test Plots(Band Edge_Lower)

2M Bit/s (37 Byte) Low Channel(Ch. 0)



□ Test Plots(Band Edge_Upper)


500k Bit/s (37 Byte) High Channel(Ch. 39)

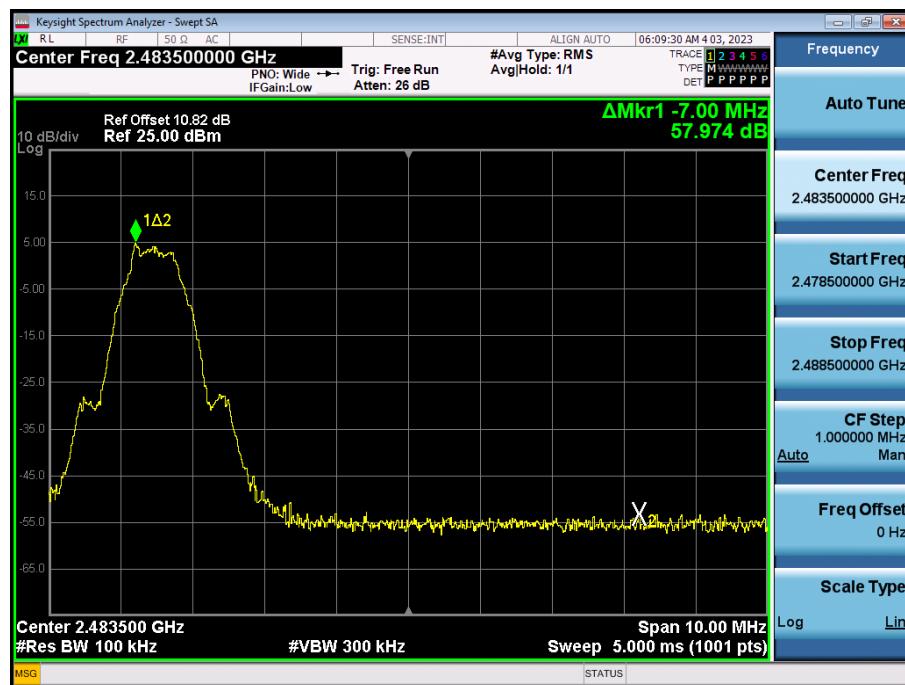

□ 1M Bit/s (37 Byte) Test Plots

[CONDUCTED SPURIOUS EMISSIONS]

Spurious Emission (30 MHz – 26.5 GHz)

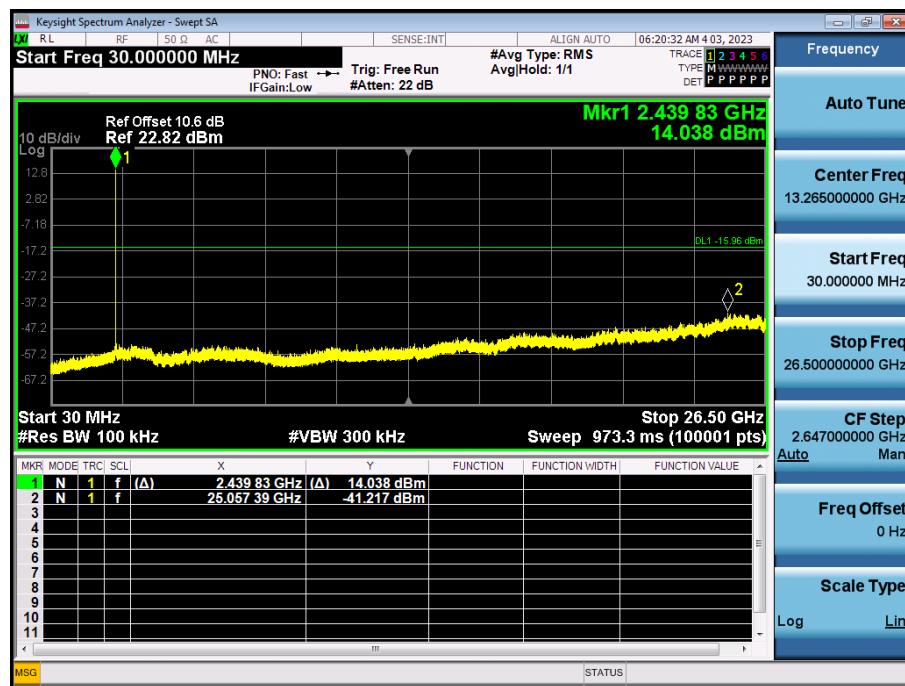

Limit (dBm): -15.96

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz**[Ant.1]****Closed Mode****Mode : 2M Bit/s (37 Bytes)**

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	43.15	0.00	2.92	V	46.07	73.98	27.91	PK
4880	31.18	4.17	2.92	V	38.27	53.98	15.71	AV
7320	41.34	0.00	9.42	V	50.76	73.98	23.22	PK
7320	29.28	4.17	10.20	V	43.65	53.98	10.33	AV
4880	43.20	0.00	2.92	H	46.12	73.98	27.86	PK
4880	31.21	4.17	2.92	H	38.30	53.98	15.68	AV
7320	41.48	0.00	9.42	H	50.90	73.98	23.08	PK
7320	29.40	4.17	10.20	H	43.77	53.98	10.21	AV

Open Mode**Mode : 2M Bit/s (37 Bytes)**

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	43.39	0.00	2.92	V	46.31	73.98	27.67	PK
4880	31.17	4.17	2.92	V	38.26	53.98	15.72	AV
7320	41.79	0.00	9.42	V	51.21	73.98	22.77	PK
7320	29.35	4.17	10.20	V	43.72	53.98	10.26	AV
4880	43.27	0.00	2.92	H	46.19	73.98	27.79	PK
4880	31.09	4.17	2.92	H	38.18	53.98	15.80	AV
7320	41.70	0.00	9.42	H	51.12	73.98	22.86	PK
7320	29.28	4.17	10.20	H	43.65	53.98	10.33	AV

Half Open mode**Mode : 1M Bit/s (37 Bytes)**

Operating Frequency : 2 402 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	45.21	0.00	2.51	V	47.72	73.98	26.26	PK
4804	32.55	2.88	2.51	V	37.95	53.98	16.03	AV
7206	41.64	0.00	9.10	V	50.74	73.98	23.24	PK
7206	29.07	2.88	9.10	V	41.05	53.98	12.93	AV
4804	45.34	0.00	2.51	H	47.85	73.98	26.13	PK
4804	32.86	2.88	2.51	H	38.26	53.98	15.72	AV
7206	41.73	0.00	9.10	H	50.83	73.98	23.15	PK
7206	29.16	2.88	9.10	H	41.14	53.98	12.84	AV

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	42.96	0.00	2.92	V	45.88	73.98	28.10	PK
4880	31.28	2.88	2.92	V	37.08	53.98	16.90	AV
7320	41.14	0.00	9.42	V	50.56	73.98	23.42	PK
7320	29.33	2.88	10.20	V	42.41	53.98	11.57	AV
4880	43.11	0.00	2.92	H	46.03	73.98	27.95	PK
4880	31.34	2.88	2.92	H	37.14	53.98	16.84	AV
7320	41.48	0.00	9.42	H	50.90	73.98	23.08	PK
7320	29.48	2.88	10.20	H	42.56	53.98	11.42	AV

Operating Frequency : 2 480 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol.	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.26	0.00	2.00	V	45.26	73.98	28.72	PK
4960	31.22	2.88	2.00	V	36.10	53.98	17.88	AV
7440	40.76	0.00	9.99	V	50.75	73.98	23.23	PK
7440	28.88	2.88	9.99	V	41.76	53.98	12.22	AV
4960	43.18	0.00	2.00	H	45.18	73.98	28.80	PK
4960	31.20	2.88	2.00	H	36.08	53.98	17.90	AV
7440	40.59	0.00	9.99	H	50.58	73.98	23.40	PK
7440	28.49	2.88	9.99	H	41.37	53.98	12.61	AV

Mode : 2M Bit/s (37 Bytes)

Operating Frequency : 2 402 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	44.93	0.00	2.51	V	47.44	73.98	26.54	PK
4804	32.54	4.17	2.51	V	39.23	53.98	14.75	AV
7206	41.31	0.00	9.10	V	50.41	73.98	23.57	PK
7206	29.08	4.17	9.10	V	42.35	53.98	11.63	AV
4804	45.02	0.00	2.51	H	47.53	73.98	26.45	PK
4804	32.81	4.17	2.51	H	39.50	53.98	14.48	AV
7206	41.42	0.00	9.10	H	50.52	73.98	23.46	PK
7206	29.19	4.17	9.10	H	42.46	53.98	11.52	AV

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4880	43.28	0.00	2.92	V	46.20	73.98	27.78	PK
4880	30.97	4.17	2.92	V	38.06	53.98	15.92	AV
7320	41.89	0.00	9.42	V	51.31	73.98	22.67	PK
7320	29.42	4.17	10.20	V	43.79	53.98	10.19	AV
4880	43.70	0.00	2.92	H	46.62	73.98	27.36	PK
4880	31.11	4.17	2.92	H	38.20	53.98	15.78	AV
7320	42.18	0.00	9.42	H	51.60	73.98	22.38	PK
7320	29.48	4.17	10.20	H	43.85	53.98	10.13	AV

Operating Frequency : 2 480 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol.	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.28	0.00	2.00	V	45.28	73.98	28.70	PK
4960	31.40	4.17	2.00	V	37.57	53.98	16.41	AV
7440	40.76	0.00	9.99	V	50.75	73.98	23.23	PK
7440	28.92	4.17	9.99	V	43.08	53.98	10.90	AV
4960	42.96	0.00	2.00	H	44.96	73.98	29.02	PK
4960	31.28	4.17	2.00	H	37.45	53.98	16.53	AV
7440	40.62	0.00	9.99	H	50.61	73.98	23.37	PK
7440	28.67	4.17	9.99	H	42.83	53.98	11.15	AV

[Ant.2]**Closed Mode****Mode : 2M Bit/s (37 Bytes)**

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	42.37	0.00	2.92	V	45.29	73.98	28.69	PK
4880	30.84	4.17	2.92	V	37.93	53.98	16.05	AV
7320	41.31	0.00	9.42	V	50.73	73.98	23.25	PK
7320	29.11	4.17	10.20	V	43.48	53.98	10.50	AV
4880	42.45	0.00	2.92	H	45.37	73.98	28.61	PK
4880	30.92	4.17	2.92	H	38.01	53.98	15.97	AV
7320	41.39	0.00	9.42	H	50.81	73.98	23.17	PK
7320	29.13	4.17	10.20	H	43.50	53.98	10.48	AV

Open Mode**Mode : 2M Bit/s (37 Bytes)**

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	42.81	0.00	2.92	V	45.73	73.98	28.25	PK
4880	30.76	4.17	2.92	V	37.85	53.98	16.13	AV
7320	41.02	0.00	9.42	V	50.44	73.98	23.54	PK
7320	29.09	4.17	10.20	V	43.46	53.98	10.52	AV
4880	42.97	0.00	2.92	H	45.89	73.98	28.09	PK
4880	30.89	4.17	2.92	H	37.98	53.98	16.00	AV
7320	41.26	0.00	9.42	H	50.68	73.98	23.30	PK
7320	29.14	4.17	10.20	H	43.51	53.98	10.47	AV

Half Open Mode**Mode : 1M Bit/s (37 Bytes)**

Operating Frequency : 2 402 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	44.02	0.00	2.51	V	46.53	73.98	27.45	PK
4804	32.19	2.88	2.51	V	37.59	53.98	16.39	AV
7206	41.08	0.00	9.10	V	50.18	73.98	23.80	PK
7206	28.64	2.88	9.10	V	40.62	53.98	13.36	AV
4804	44.13	0.00	2.51	H	46.64	73.98	27.34	PK
4804	32.28	2.88	2.51	H	37.68	53.98	16.30	AV
7206	41.30	0.00	9.10	H	50.40	73.98	23.58	PK
7206	28.87	2.88	9.10	H	40.85	53.98	13.13	AV

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	43.07	0.00	2.92	V	45.99	73.98	27.99	PK
4880	30.68	2.88	2.92	V	36.48	53.98	17.50	AV
7320	40.68	0.00	9.42	V	50.10	73.98	23.88	PK
7320	29.11	2.88	10.20	V	42.19	53.98	11.79	AV
4880	43.23	0.00	2.92	H	46.15	73.98	27.83	PK
4880	30.82	2.88	2.92	H	36.62	53.98	17.36	AV
7320	40.97	0.00	9.42	H	50.39	73.98	23.59	PK
7320	29.19	2.88	10.20	H	42.27	53.98	11.71	AV

Operating Frequency : 2 480 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol.	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	42.88	0.00	2.00	V	44.88	73.98	29.10	PK
4960	30.85	2.88	2.00	V	35.73	53.98	18.25	AV
7440	40.58	0.00	9.99	V	50.57	73.98	23.41	PK
7440	28.56	2.88	9.99	V	41.44	53.98	12.54	AV
4960	42.39	0.00	2.00	H	44.39	73.98	29.59	PK
4960	30.49	2.88	2.00	H	35.37	53.98	18.61	AV
7440	40.49	0.00	9.99	H	50.48	73.98	23.50	PK
7440	28.50	2.88	9.99	H	41.38	53.98	12.60	AV

Mode : 2M Bit/s (37 Bytes)

Operating Frequency : 2 402 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	43.92	0.00	2.51	V	46.43	73.98	27.55	PK
4804	32.11	4.17	2.51	V	38.80	53.98	15.18	AV
7206	40.82	0.00	9.10	V	49.92	73.98	24.06	PK
7206	28.67	4.17	9.10	V	41.94	53.98	12.04	AV
4804	44.46	0.00	2.51	H	46.97	73.98	27.01	PK
4804	32.34	4.17	2.51	H	39.03	53.98	14.95	AV
7206	40.91	0.00	9.10	H	50.01	73.98	23.97	PK
7206	28.91	4.17	9.10	H	42.18	53.98	11.80	AV

Operating Frequency : 2 440 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4880	42.81	0.00	2.92	V	45.73	73.98	28.25	PK
4880	30.75	4.17	2.92	V	37.84	53.98	16.14	AV
7320	41.34	0.00	9.42	V	50.76	73.98	23.22	PK
7320	29.15	4.17	10.20	V	43.52	53.98	10.46	AV
4880	42.99	0.00	2.92	H	45.91	73.98	28.07	PK
4880	30.83	4.17	2.92	H	37.92	53.98	16.06	AV
7320	41.67	0.00	9.42	H	51.09	73.98	22.89	PK
7320	29.18	4.17	10.20	H	43.55	53.98	10.43	AV

Operating Frequency : 2 480 MHz


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF-AG [dB/m]	Pol.	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.35	0.00	2.00	V	45.35	73.98	28.63	PK
4960	30.81	4.17	2.00	V	36.98	53.98	17.00	AV
7440	41.26	0.00	9.99	V	51.25	73.98	22.73	PK
7440	28.59	4.17	9.99	V	42.75	53.98	11.23	AV
4960	43.08	0.00	2.00	H	45.08	73.98	28.90	PK
4960	30.61	4.17	2.00	H	36.78	53.98	17.20	AV
7440	41.19	0.00	9.99	H	51.18	73.98	22.80	PK
7440	28.54	4.17	9.99	H	42.70	53.98	11.28	AV

[Ant.1]

Mode : 2M Bit/s (37 Bytes) Test Plots


Closed

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, Z-H)

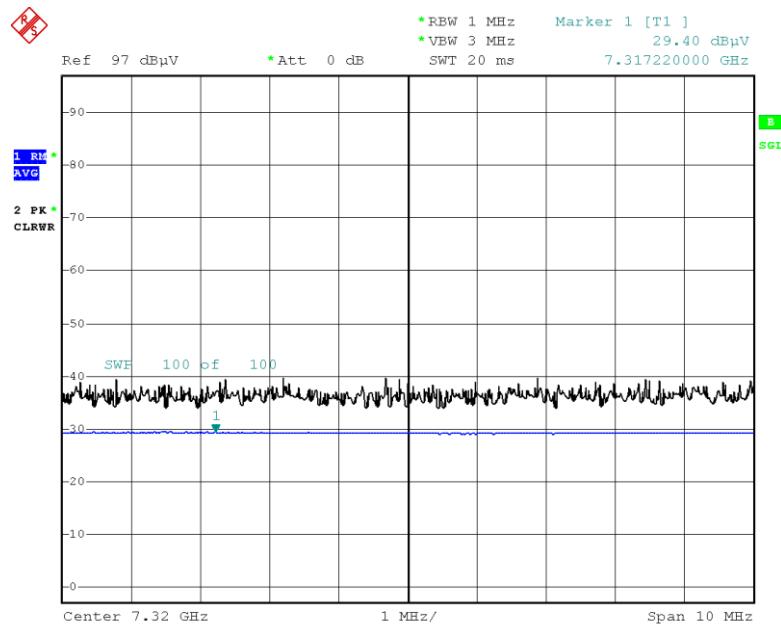

Date: 7.APR.2023 19:27:14

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, Z-H)

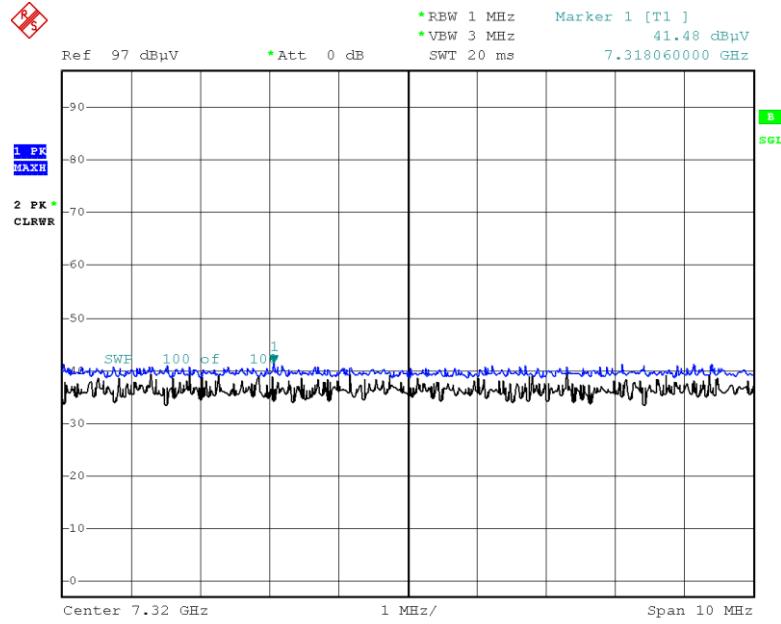


Date: 7.APR.2023 19:27:24

Mode : 2M Bit/s (37 Bytes) Test Plots


Open Mode

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, X-V)

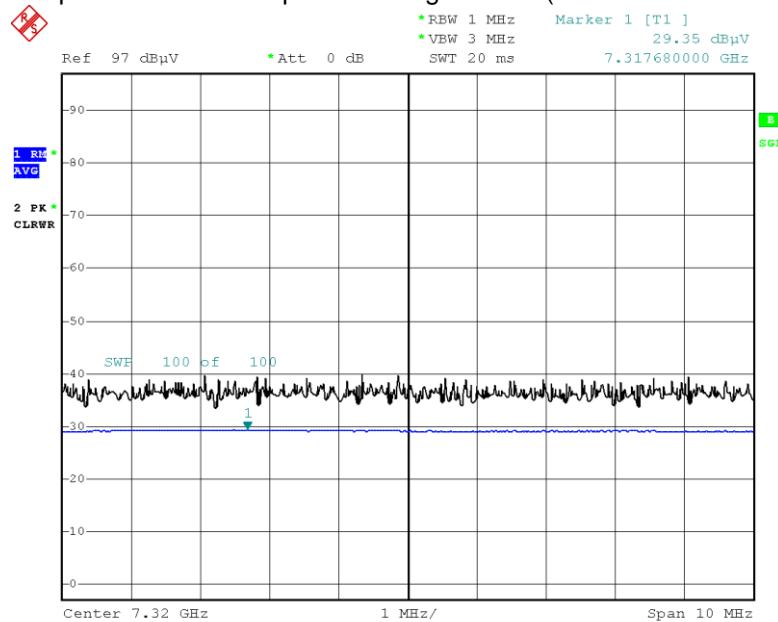

Date: 7.APR.2023 18:05:10

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, X-V)

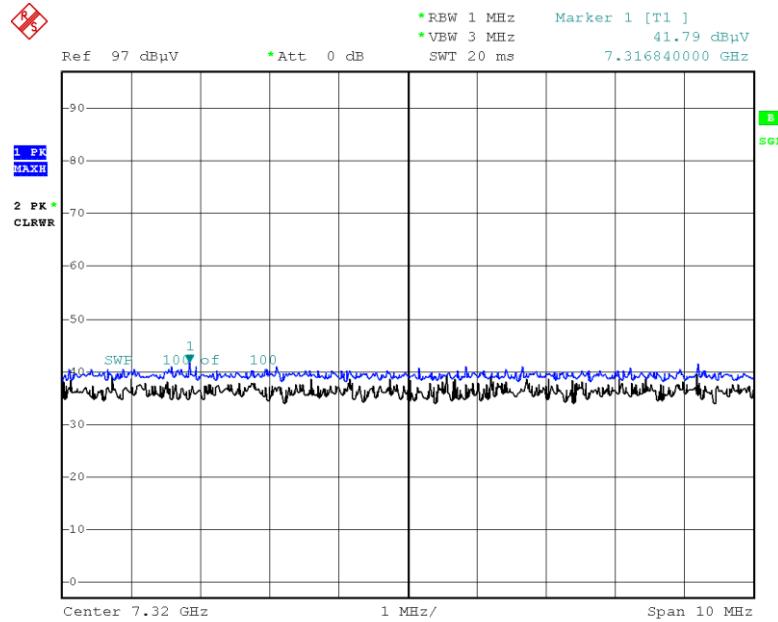


Date: 7.APR.2023 18:05:17

Mode : 2M Bit/s (37 Bytes) Test Plots


Half Open mode

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, Y-H)

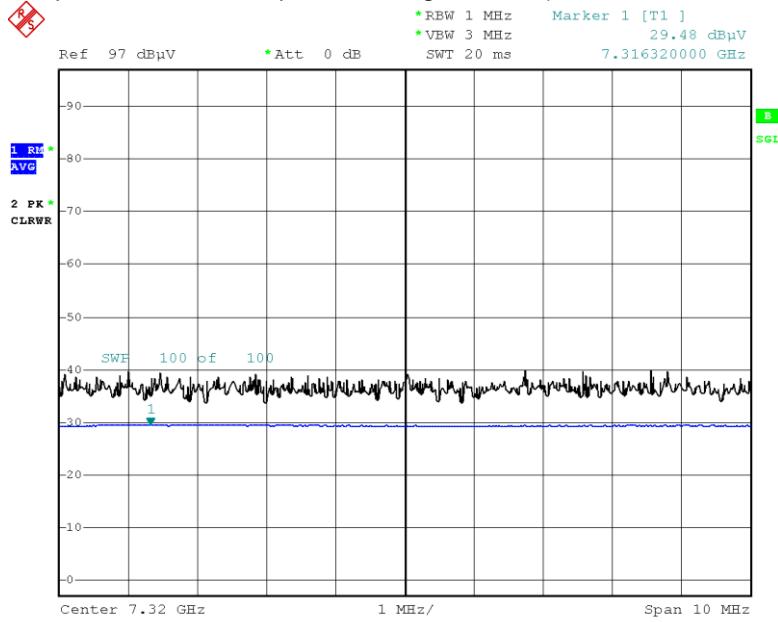

Date: 7.APR.2023 16:16:46

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, Y-H)

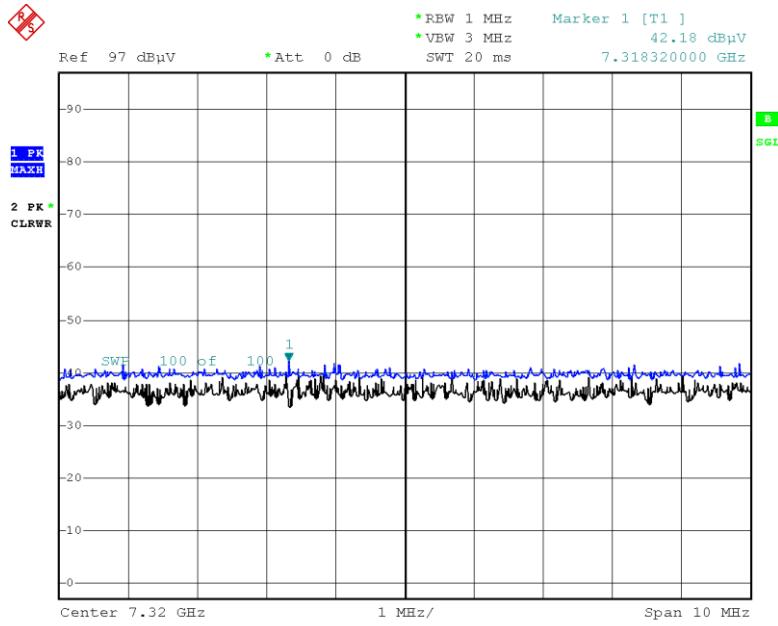


Date: 7.APR.2023 16:16:54

[Ant.2]

Mode : 2M Bit/s (37 Bytes) Test Plots


Closed Mode

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, Y-H)

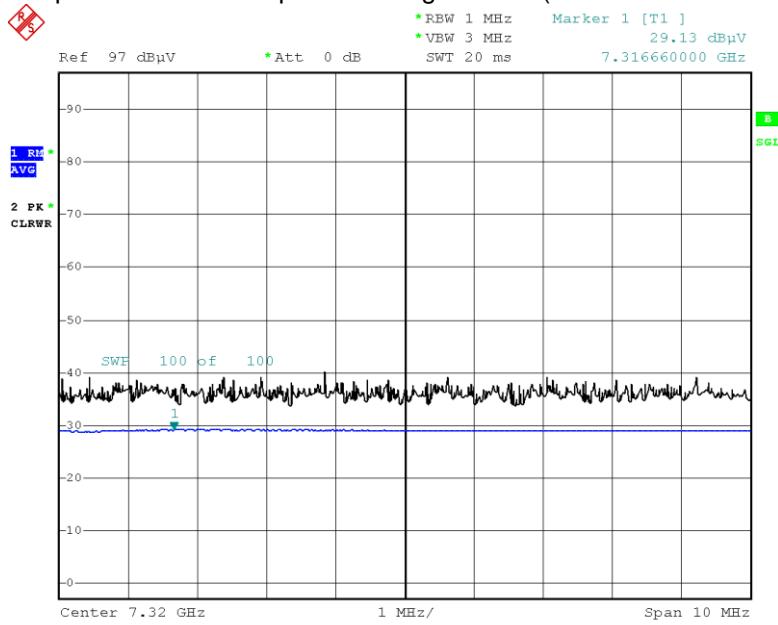

Date: 9.APR.2023 13:03:37

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, Y-H)

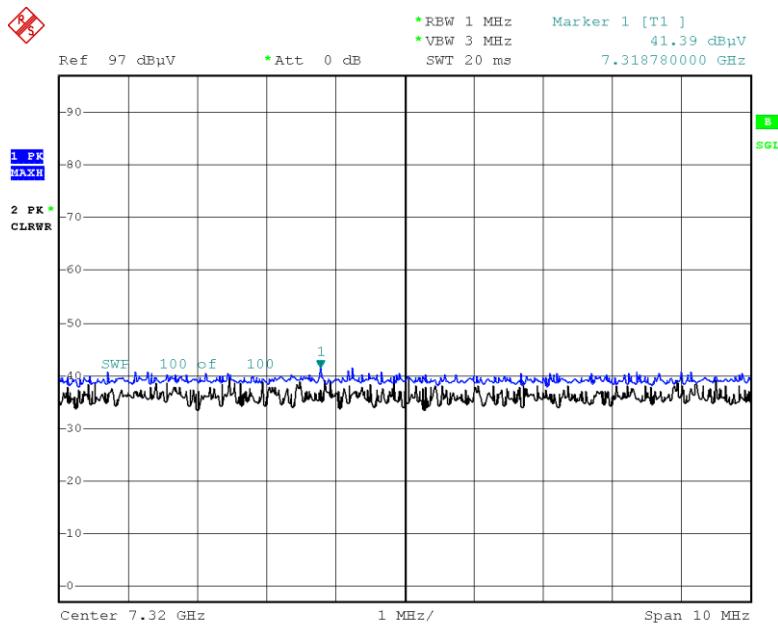


Date: 9.APR.2023 13:03:44

Mode : 2M Bit/s (37 Bytes) Test Plots


Open Mode

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, X-H)

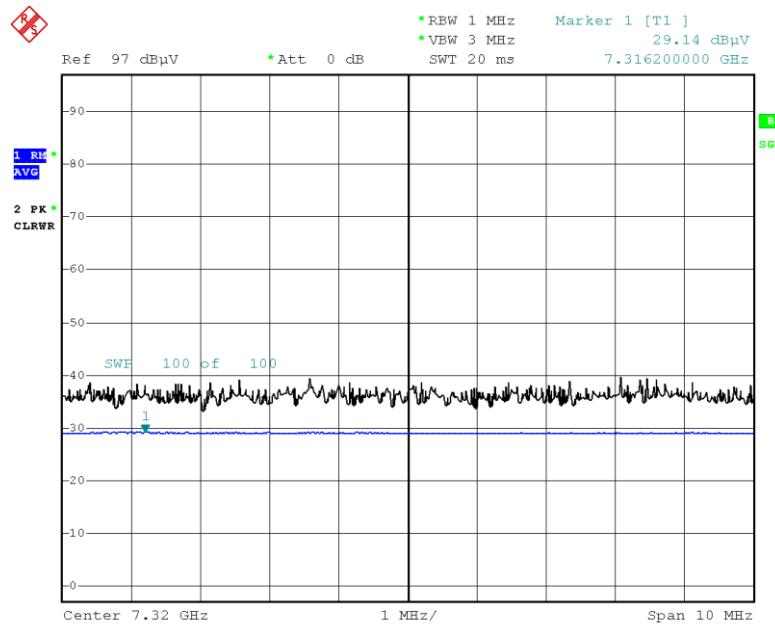

Date: 9.APR.2023 11:33:15

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, X-H)

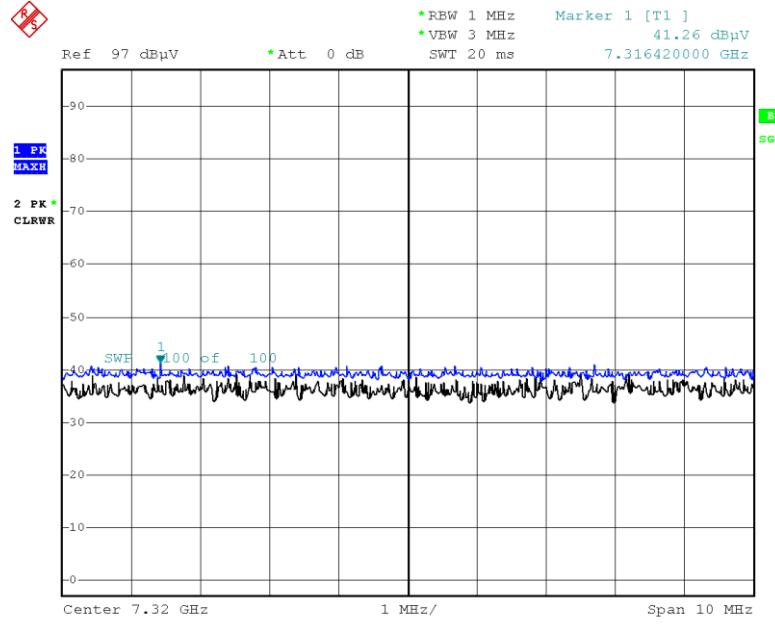


Date: 9.APR.2023 11:33:22

Mode : 2M Bit/s (37 Bytes) Test Plots


Half Open Mode

Radiated Spurious Emissions plot – Average Result (Ch. 19 3rd Harmonic, X-H)

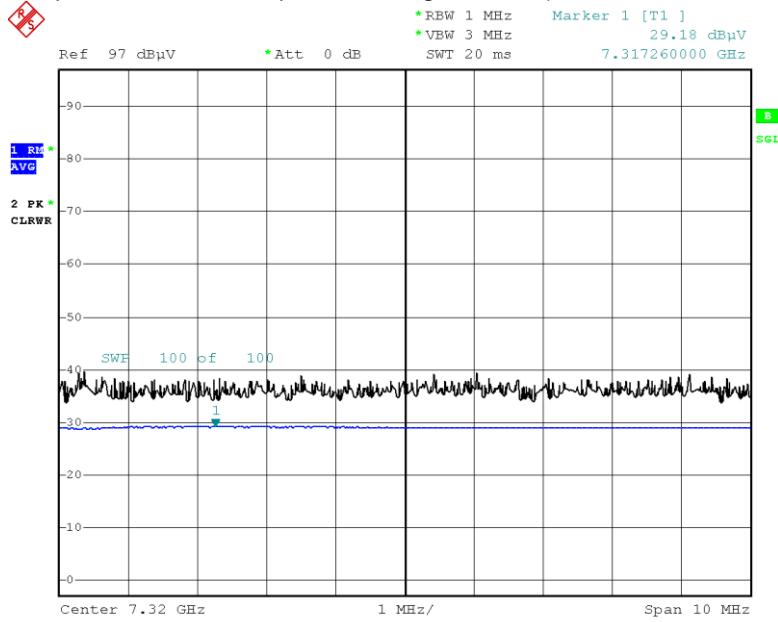

Date: 9.APR.2023 11:57:48

Radiated Spurious Emissions plot – Peak Result (Ch. 19 3rd Harmonic, X-H)

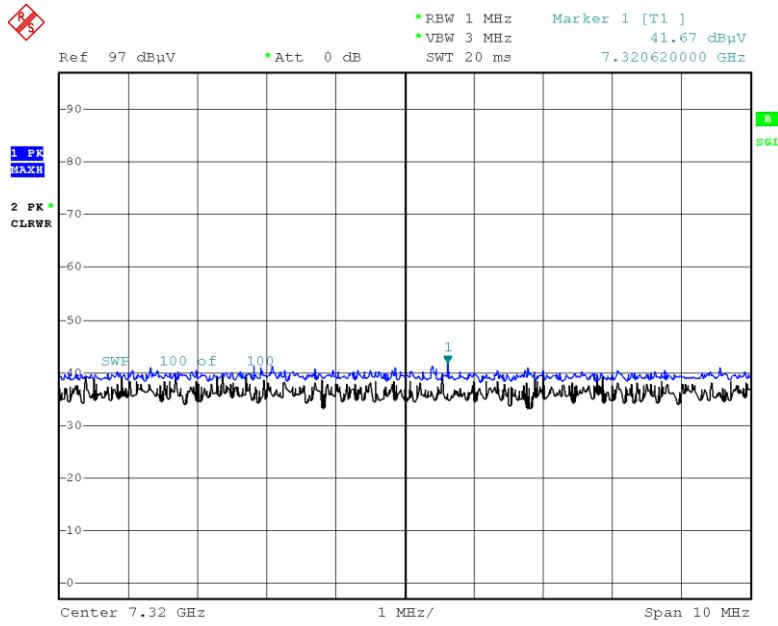

Date: 9.APR.2023 11:57:56

Note:

In order to simplify the report, Plots of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

[Ant.1]

Closed Mode

Mode : 2M Bit/s (37 Bytes)

Operating Frequency		2480 MHz						
Channel No.		39 CH						
Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.83	0.00	35.10	H	55.93	73.98	18.05	PK
2483.5	6.98	4.17	35.10	H	46.25	53.98	7.73	AV
2483.5	20.56	0.00	35.10	V	55.66	73.98	18.32	PK
2483.5	6.89	4.17	35.10	V	46.16	53.98	7.82	AV

Open Mode

Mode : 1M Bit/s (37 Bytes)

Operating Frequency		2402 MHz, 2480 MHz						
Channel No.		0 CH, 39 CH						
Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.63	0.00	34.90	H	53.53	73.98	20.45	PK
2390.0	6.12	2.88	34.90	H	43.90	53.98	10.08	AV
2390.0	18.62	0.00	34.90	V	53.52	73.98	20.46	PK
2390.0	6.10	2.88	34.90	V	43.88	53.98	10.10	AV
2483.5	20.29	0.00	35.10	H	55.39	73.98	18.59	PK
2483.5	6.96	2.88	35.10	H	44.94	53.98	9.04	AV
2483.5	20.11	0.00	35.10	V	55.21	73.98	18.77	PK
2483.5	6.87	2.88	35.10	V	44.85	53.98	9.13	AV

Mode : 2 M Bit/s (37 Bytes)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	18.43	0.00	34.90	H	53.33	73.98	20.65	PK
2390.0	6.13	4.17	34.90	H	45.20	53.98	8.78	AV
2390.0	18.40	0.00	34.90	V	53.30	73.98	20.68	PK
2390.0	6.11	4.17	34.90	V	45.18	53.98	8.80	AV
2483.5	22.01	0.00	35.10	H	57.11	73.98	16.87	PK
2483.5	7.04	4.17	35.10	H	46.31	53.98	7.67	AV
2483.5	21.64	0.00	35.10	V	56.74	73.98	17.24	PK
2483.5	6.93	4.17	35.10	V	46.20	53.98	7.78	AV

Half Open**Mode : 2M Bit/s (37 Bytes)**

Operating Frequency 2480 MHz

Channel No. 39 CH

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	21.59	0.00	35.10	H	56.69	73.98	17.29	PK
2483.5	6.90	4.17	35.10	H	46.17	53.98	7.81	AV
2483.5	21.19	0.00	35.10	V	56.29	73.98	17.69	PK
2483.5	6.84	4.17	35.10	V	46.11	53.98	7.87	AV

[Ant.2]**Closed****Mode : 2M Bit/s (37 Bytes)**

Operating Frequency 2480 MHz

Channel No. 39 CH

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	20.96	0.00	35.10	H	56.06	73.98	17.92	PK
2483.5	6.93	4.17	35.10	H	46.20	53.98	7.78	AV
2483.5	20.68	0.00	35.10	V	55.78	73.98	18.20	PK
2483.5	6.86	4.17	35.10	V	46.13	53.98	7.85	AV

Open Mode**Mode : 1M Bit/s (37 Bytes)**

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	19.07	0.00	34.90	H	53.97	73.98	20.01	PK
2390.0	6.38	2.88	34.90	H	44.16	53.98	9.82	AV
2390.0	18.99	0.00	34.90	V	53.89	73.98	20.09	PK
2390.0	6.31	2.88	34.90	V	44.09	53.98	9.89	AV
2483.5	20.81	0.00	35.10	H	55.91	73.98	18.07	PK
2483.5	6.91	2.88	35.10	H	44.89	53.98	9.09	AV
2483.5	20.58	0.00	35.10	V	55.68	73.98	18.30	PK
2483.5	6.76	2.88	35.10	V	44.74	53.98	9.24	AV

Mode : 2 M Bit/s (37 Bytes)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.43	0.00	34.90	H	53.33	73.98	20.65	PK
2390.0	6.29	4.17	34.90	H	45.36	53.98	8.62	AV
2390.0	18.31	0.00	34.90	V	53.21	73.98	20.77	PK
2390.0	6.18	4.17	34.90	V	45.25	53.98	8.73	AV
2483.5	21.36	0.00	35.10	H	56.46	73.98	17.52	PK
2483.5	7.08	4.17	35.10	H	46.35	53.98	7.63	AV
2483.5	21.28	0.00	35.10	V	56.38	73.98	17.60	PK
2483.5	6.94	4.17	35.10	V	46.21	53.98	7.77	AV

Half Open**Mode : 2M Bit/s (37 Bytes)**

Operating Frequency 2480 MHz

Channel No. 39 CH


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	AF+CL+DF [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	19.74	0.00	35.10	H	54.84	73.98	19.14	PK
2483.5	6.95	4.17	35.10	H	46.22	53.98	7.76	AV
2483.5	19.71	0.00	35.10	V	54.81	73.98	19.17	PK
2483.5	6.89	4.17	35.10	V	46.16	53.98	7.82	AV

[Ant.1]


Closed

□ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, Z-H)

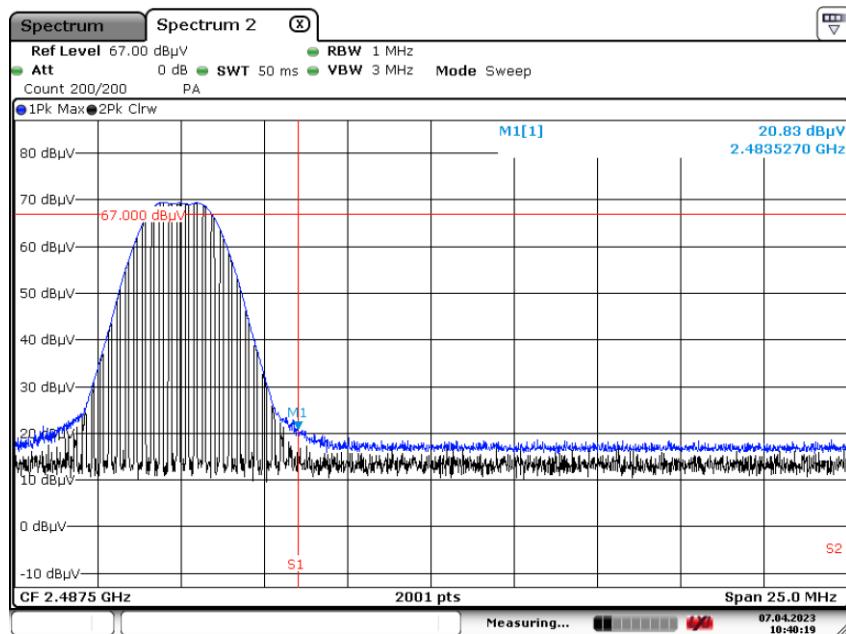


Radiated Restricted Band Edges plot – Average Result (Ch.39, Z-H)

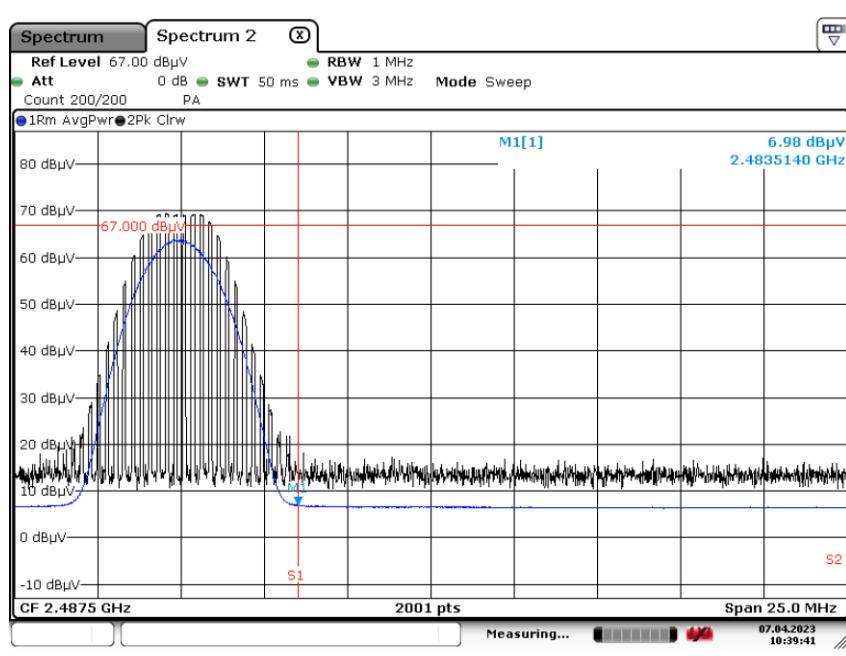

Open Mode


■ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, Z-V)

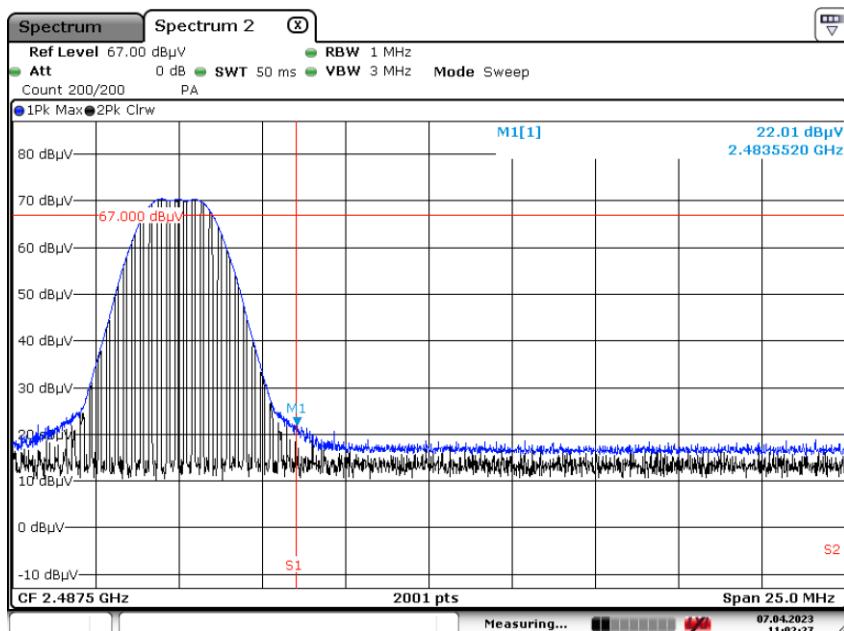

Date: 7.APR.2023 11:02:28

Radiated Restricted Band Edges plot – Average Result (Ch.39, Z-V)

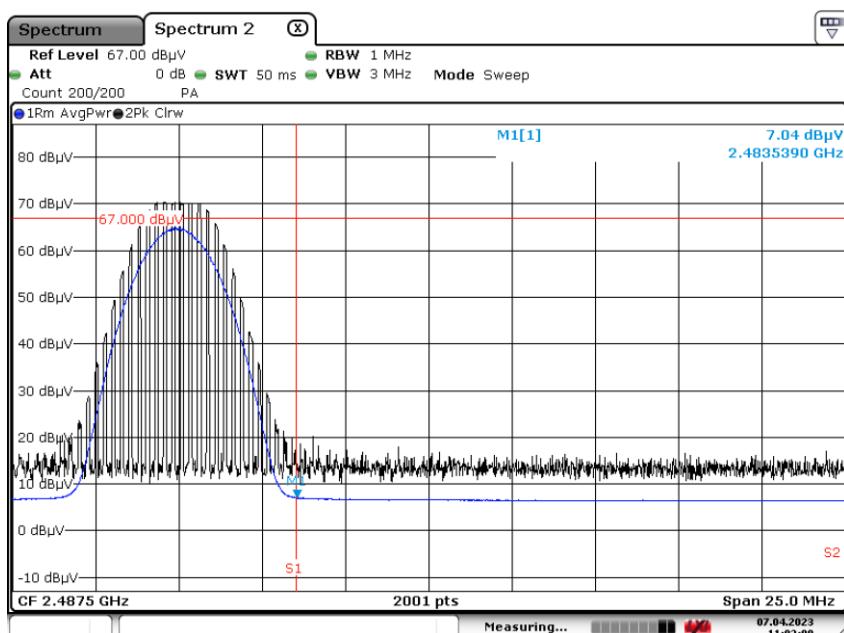


Date: 7.APR.2023 11:02:09

Half Open


■ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, Z-V)

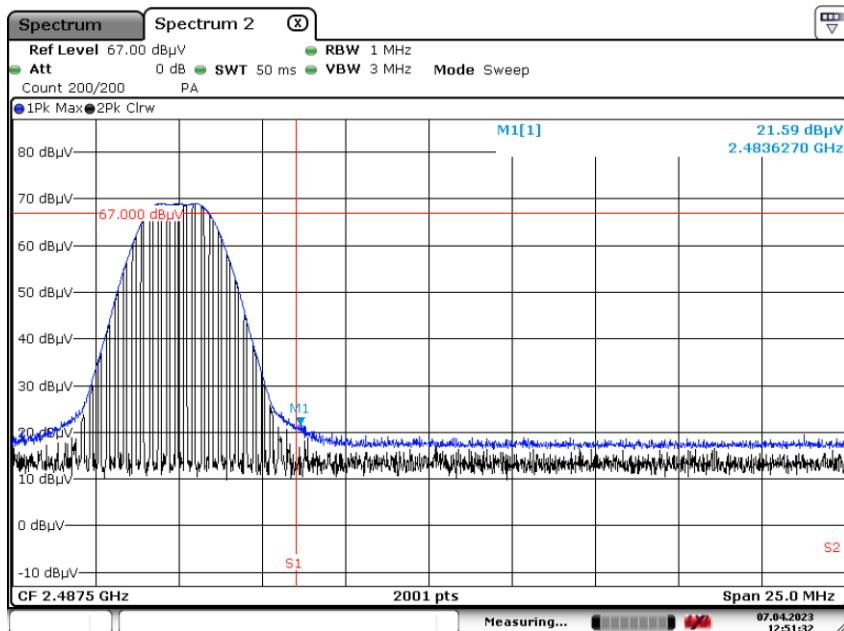

Date: 7.APR.2023 12:51:32

Radiated Restricted Band Edges plot – Average Result (Ch.39, Z-V)

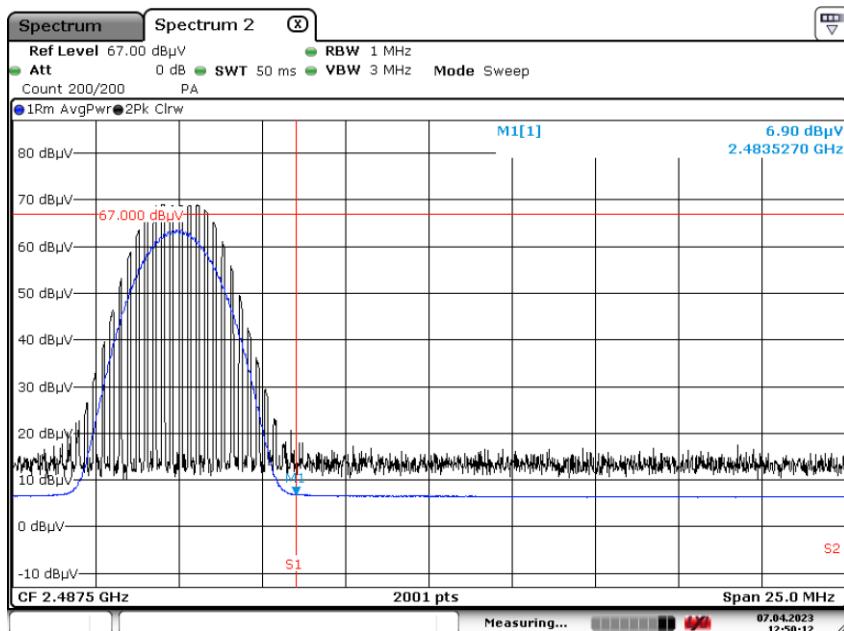


Date: 7.APR.2023 12:50:13

[Ant.2]


Closed Mode

□ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

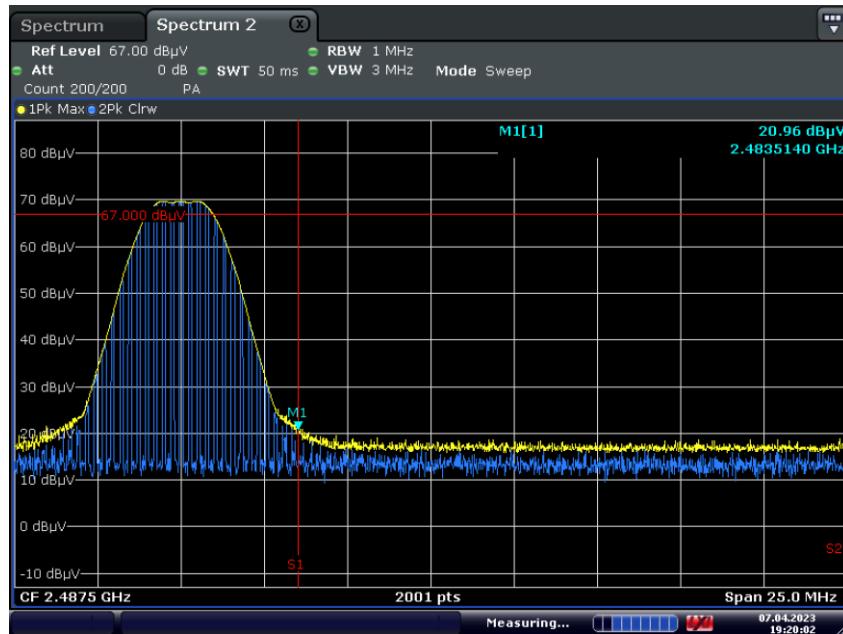


Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

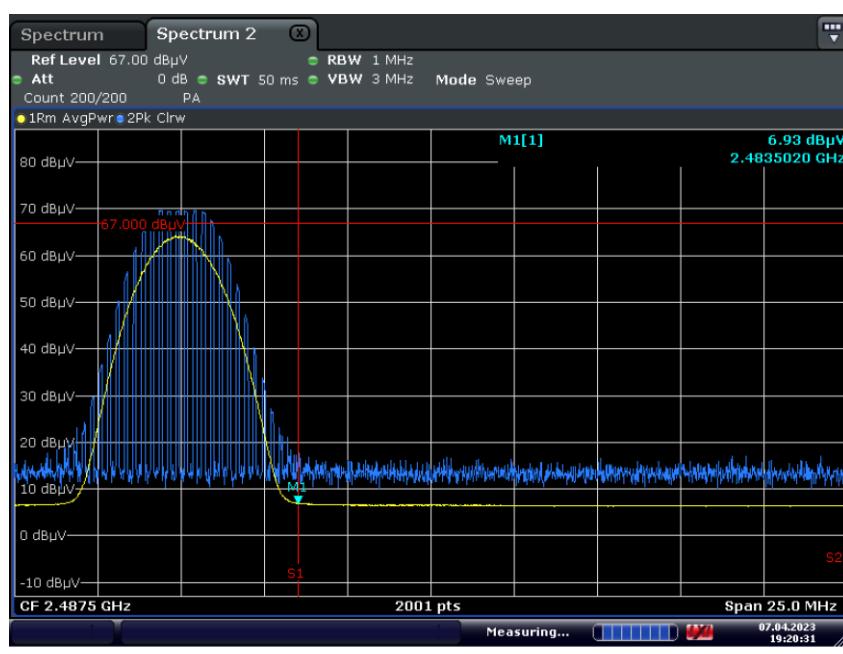

Open Mode


■ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

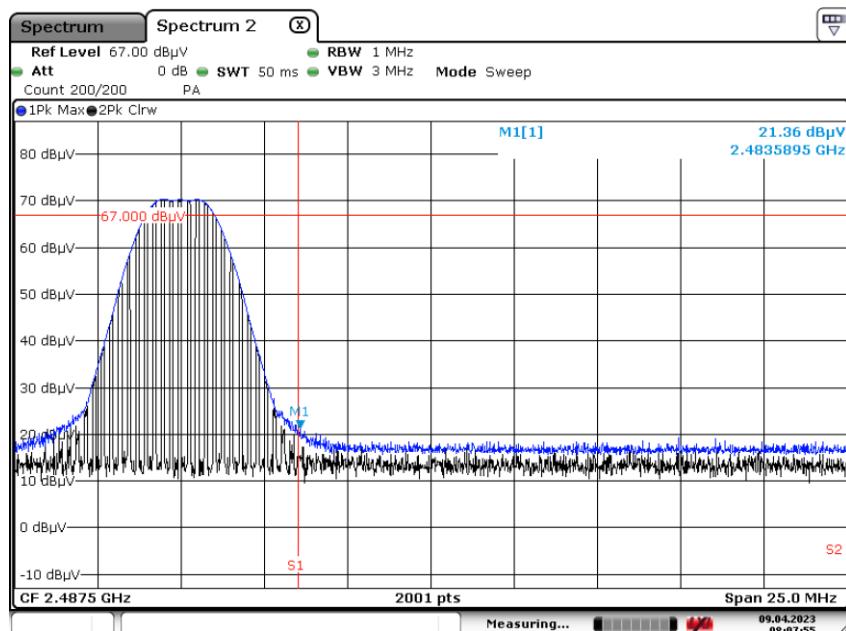

Date: 9 APR 2023 08:07:56

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

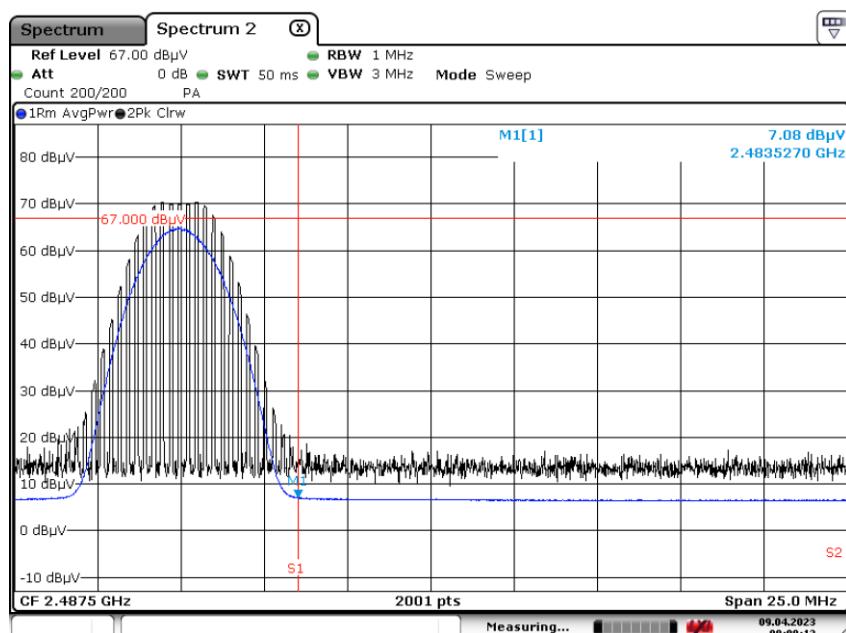


Date: 9 APR 2023 08:08:13


Half Open

■ Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

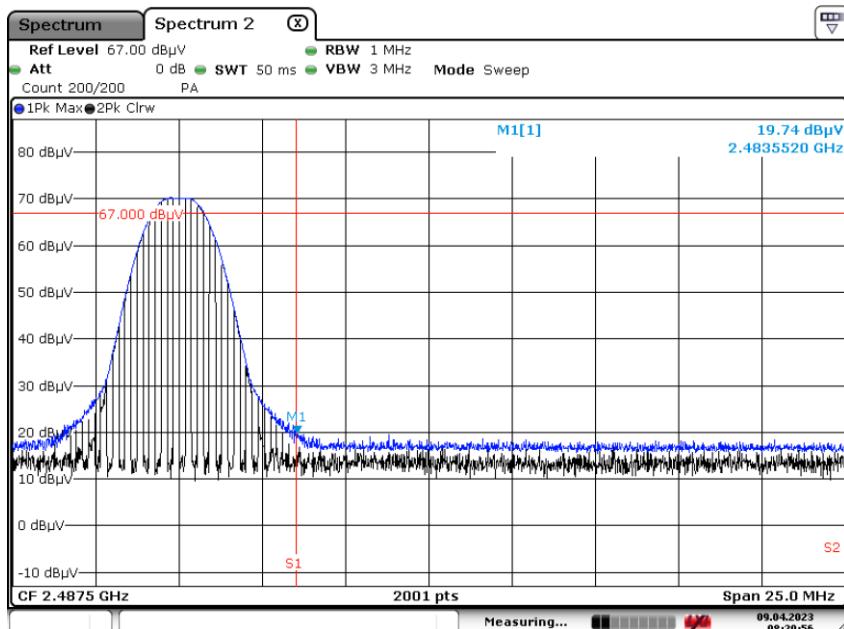

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

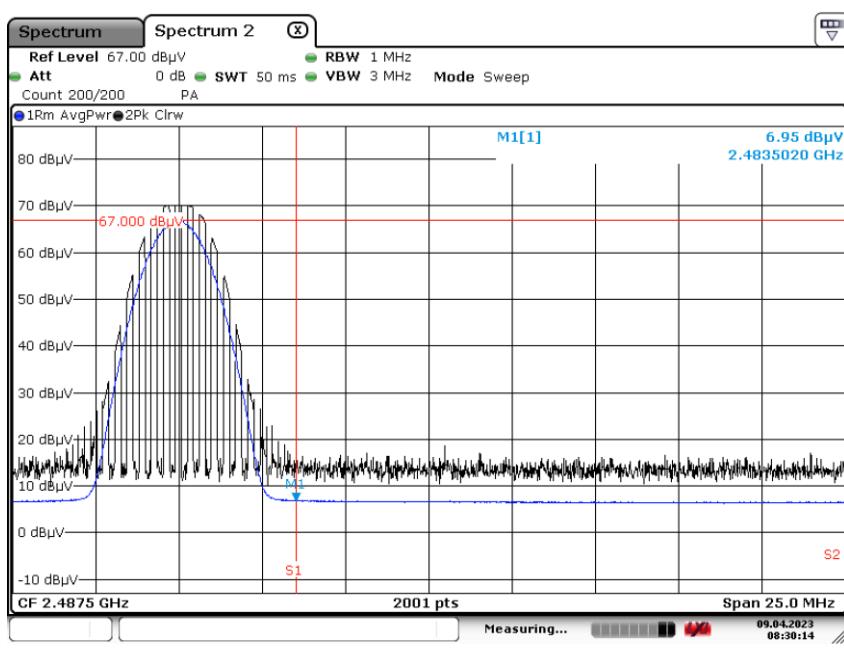

Note:

In order to simplify the report, Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-F946B/DS
Operating Conditions : BTLE Mode
Comment :

Full Spectrum

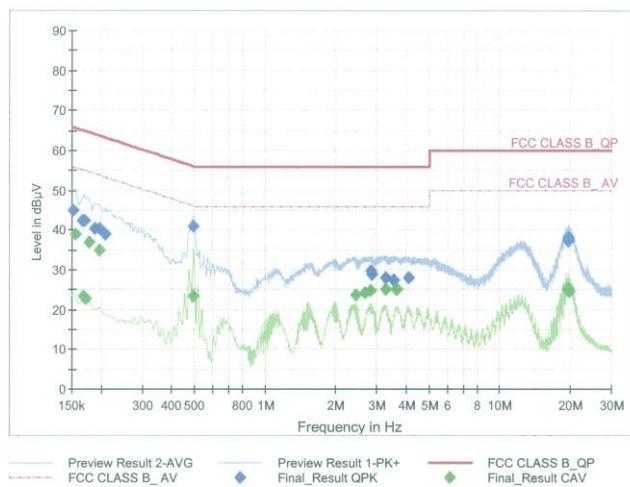

Final Result QPK

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	45.02	65.88	20.86	1000.0	9.000	N	OFF	9.6
0.1658	42.28	65.17	22.89	1000.0	9.000	N	OFF	9.6
0.1703	42.50	64.95	22.44	1000.0	9.000	N	OFF	9.6
0.1883	40.30	64.11	23.81	1000.0	9.000	N	OFF	9.6
0.1973	40.36	63.73	23.37	1000.0	9.000	N	OFF	9.6
0.2085	39.02	63.27	24.24	1000.0	9.000	N	OFF	9.6
0.4943	41.00	56.10	15.09	1000.0	9.000	L1	OFF	9.7
2.8333	29.60	56.00	26.40	1000.0	9.000	L1	OFF	9.8
2.8490	28.78	56.00	27.22	1000.0	9.000	L1	OFF	9.8
3.2765	28.07	56.00	27.93	1000.0	9.000	L1	OFF	9.8
3.5488	27.47	56.00	28.53	1000.0	9.000	L1	OFF	9.8
4.0910	28.07	56.00	27.93	1000.0	9.000	L1	OFF	9.8
19.5283	37.56	60.00	22.44	1000.0	9.000	L1	OFF	10.3
19.5328	37.47	60.00	22.53	1000.0	9.000	L1	OFF	10.3
19.5508	37.99	60.00	22.01	1000.0	9.000	L1	OFF	10.3
19.5553	37.26	60.00	22.74	1000.0	9.000	L1	OFF	10.3
19.5733	37.76	60.00	22.24	1000.0	9.000	L1	OFF	10.3
19.5958	37.72	60.00	22.28	1000.0	9.000	L1	OFF	10.3

2023-04-17

오후 8:20:37

Test

2 / 2

Final_Result_CAV

Frequency (MHz)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	38.80	55.75	16.95	1000.0	9.000	N	OFF	9.6
0.1680	23.34	55.06	31.72	1000.0	9.000	L1	OFF	9.7
0.1725	22.76	54.84	32.07	1000.0	9.000	L1	OFF	9.7
0.1770	37.06	54.63	17.56	1000.0	9.000	L1	OFF	9.7
0.1973	34.93	53.73	18.80	1000.0	9.000	L1	OFF	9.7
0.4965	23.27	46.06	22.79	1000.0	9.000	L1	OFF	9.7
2.4440	23.58	46.00	22.42	1000.0	9.000	L1	OFF	9.7
2.6735	24.34	46.00	21.66	1000.0	9.000	L1	OFF	9.8
2.8333	24.87	46.00	21.13	1000.0	9.000	L1	OFF	9.8
3.2585	25.13	46.00	20.87	1000.0	9.000	L1	OFF	9.8
3.6275	25.08	46.00	20.92	1000.0	9.000	L1	OFF	9.8
3.6770	25.10	46.00	20.90	1000.0	9.000	L1	OFF	9.8
19.5328	25.51	50.00	24.49	1000.0	9.000	L1	OFF	10.3
19.5530	24.79	50.00	25.21	1000.0	9.000	L1	OFF	10.3
19.5733	25.19	50.00	24.81	1000.0	9.000	L1	OFF	10.3
19.5935	25.32	50.00	24.68	1000.0	9.000	L1	OFF	10.3
19.6565	25.12	50.00	24.88	1000.0	9.000	L1	OFF	10.3
19.6993	24.43	50.00	25.57	1000.0	9.000	L1	OFF	10.3

2023-04-17

오후 8:20:37

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/09/2024	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/05/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSVA40(10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual
Signal Analyzer	N9030A	Keysight	MY52350879	01/02/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC061-P