

FCC DTS REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 28, 2023

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:
74, Seoicheon-ro 578 beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2305-FC060-R1

FCC ID: A3LSMF946B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-F946B/DS
Additional Model: SM-F946B
EUT Type: Mobile Phone
Average Output Power: SISO(Ant. 2) : 16.95 dBm
MIMO : 20.22 dBm
Frequency Range: 2 412 MHz ~ 2 472 MHz
Modulation type: OFDM, OFDMA
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2305-FC060-R1

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC060	May 19, 2023	- First Approval Report
HCT-RF-2305-FC060-R1	May 28, 2023	- Added the note #4 – #6 on page 26. - Revised the data of channel 12 on page 38 – 40. - Revised the worst case axis of radiated spurious emissions on page 26. (X → Y)

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION.....	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS	11
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	29
9.1 DUTY CYCLE.....	29
9.2 6 dB BANDWIDTH	31
9.3 OUTPUT POWER	35
9.4 POWER SPECTRAL DENSITY	41
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	47
9.6 RADIATED SPURIOUS EMISSIONS	53
9.7 RADIATED RESTRICTED BAND EDGES	68
10. LIST OF TEST EQUIPMENT	87
11. ANNEX A_ TEST SETUP PHOTO	90

1. EUT DESCRIPTION

Model	SM-F946B/DS		
Additional Model	SM-F946B		
EUT Type	Mobile Phone		
Power Supply	DC 3.88 V		
Frequency Range	2 412 MHz ~ 2 472 MHz		
Max. RF Output Power	<u>Peak Power</u>	SISO(Ant. 2)	24.38 dBm
		MIMO	27.68 dBm
	<u>Average Power</u>	SISO(Ant. 2)	16.95 dBm
		MIMO	20.22 dBm
Modulation Type	OFDM, OFDMA		
Number of Channels	13 Channels		
Date(s) of Tests	March 24 2023 ~ May 19, 2023		
Serial number	Radiated: 723cc3597a4d7ece Conducted :723cbc64c674d7ece		

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	SISO ANT.1	SISO ANT.2	CDD	SDM
802.11ax	X	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario 1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario 2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario 3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{\text{ANT}}/ N_{\text{SS}}),$$

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{\text{SS}}} \left(\sum_{k=1}^{N_{\text{ANT}}} g_{j,k} \right)^2}{N_{\text{ANT}}} \right]$$

Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
			SDM	CDD
ANT1	-3.20	2 / 2	-1.53	0.69
ANT2	-1.53			

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G_N is the gain of the nth antenna and N_{ANT} is the total number of antennas used.

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{\text{ANT}}/ N_{\text{SS}}),$$

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left(\frac{(10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)})^2}{2} \right) \text{ dBi}$$

Sample MIMO Calculation:

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Republic of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

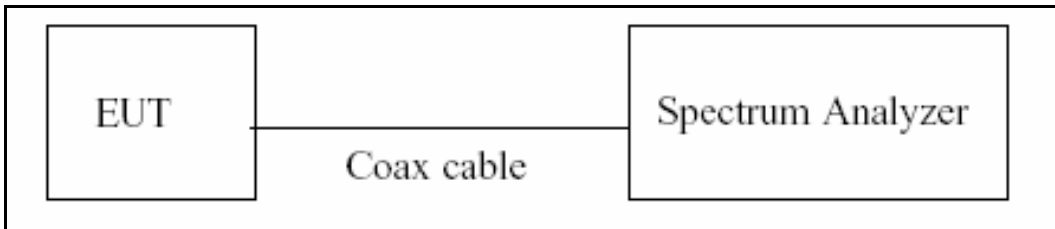

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

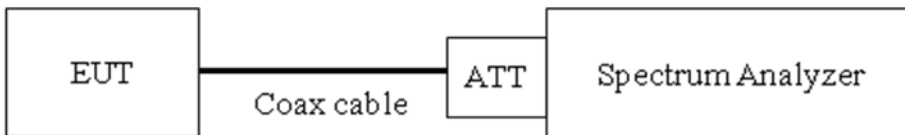

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

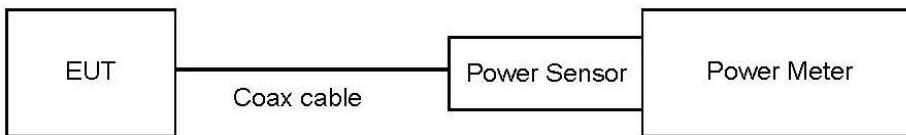

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge (Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.30
100	10.05
200	10.06
300	10.08
400	10.11
500	10.13
600	10.14
700	10.15
800	10.18
900	10.21
1000	10.31
2000	10.42
2400	10.57
2412	10.60
2437	10.60
2462	10.60
2500	10.76
3000	10.89
4000	11.24
5000	11.42
5700	11.87
5800	11.87
6000	11.98
7000	12.07
8000	12.19
9000	12.24
10000	12.38
11000	12.43
12000	12.49
13000	12.66
14000	12.96
15000	13.12
16000	13.15
17000	13.05
18000	13.08
19000	12.97
20000	13.23
21000	13.67
22000	13.49
23000	13.62
24000	13.60
25000	13.92

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

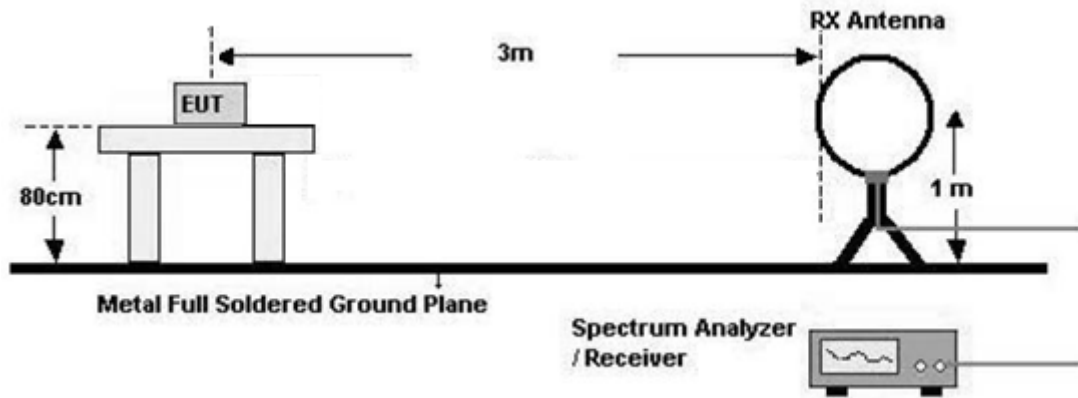

30 MHz - 1 GHz

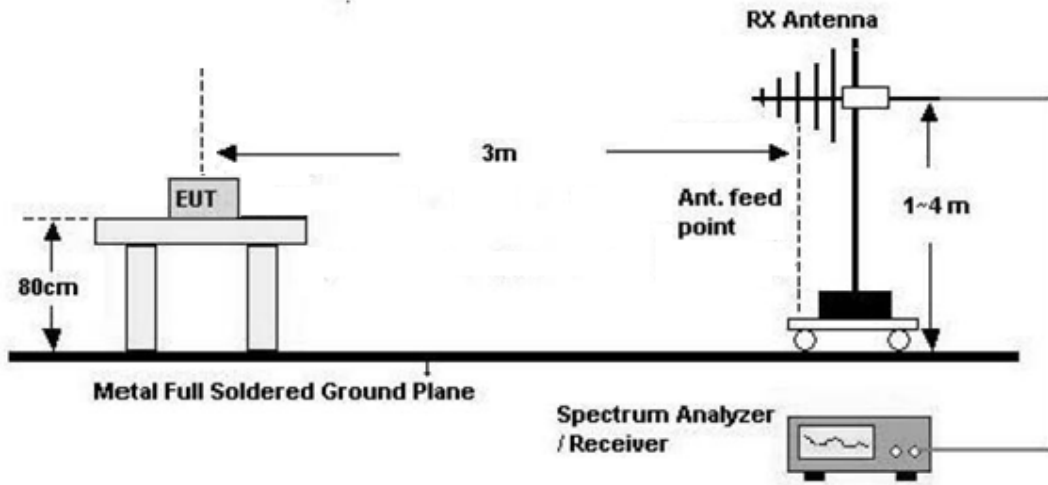

Above 1 GHz

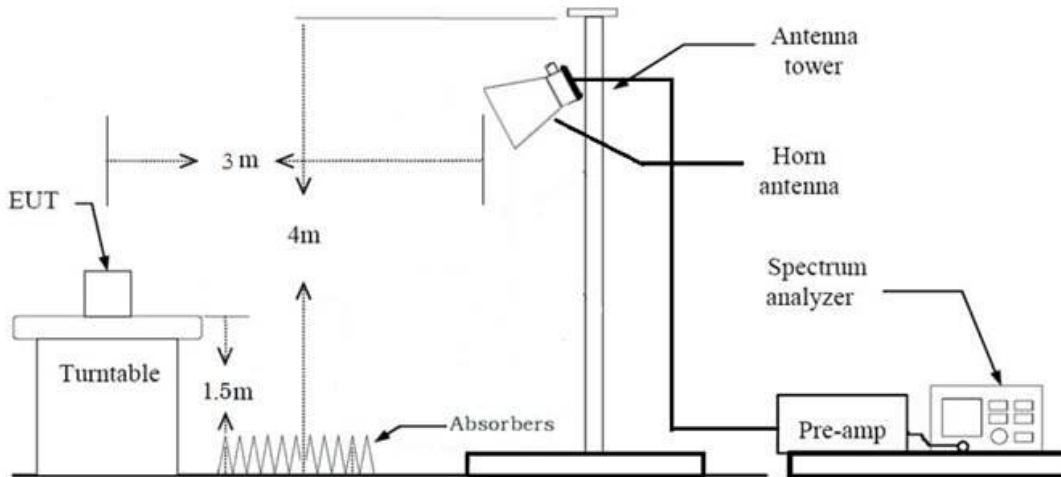

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)} + \text{Duty Cycle Factor}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98 %,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle \geq 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak (Final Result) = Measured Value + Correction Factor

7.8. Test RU offset for Tones

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-

7.9. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS0)

2. Bandedge (Conducted)

: All Mode (Channel, Tones, RU Offset) of operation were investigated and the worst case configuration results are reported.

Tones	Channel	RU Index
26	1, 11, 12, 13	0, 8
52	1, 11, 12, 13	37, 40
106	1, 11, 12, 13	53, 54
242	1, 11, 12, 13	61
SU	1, 11, 12, 13	-

3. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

4. The conducted tests were investigated in SISO(Ant1) and SISO(Ant2).

5. This device is not supported SISO(Ant1) configuration.

Therefore reported SISO(Ant1) results are used for information purposes only. (ex. MIMO calculation)

6. The results of MIMO were summed by SISO(Ant1) + SISO(Ant2).

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories (Earphone, etc)

- Worst case : Stand alone

2. All Antenna of operation were investigated and the worst case results are reported

- Mode : SISO(Ant. 2), MIMO(SDM), MIMO(CDD)

- Worst case : MIMO(CDD)

3. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.

- Radiated Spurious Emissions : Worst Case Closed mode

- Radiated Restricted Band Edge : Worst Case Open mode

4. EUT Axis

- Radiated Spurious Emissions : Y

- Radiated Restricted Band Edge : X

5. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS 0)

6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

TEST	tone	RU OFFSET
RSE	WORST CASE : 26T	26T : 4
	ADDITIONAL TONE : SU	SU: -
Band-Edge	WORST CASE : 242T	61
	ADDITIONAL TONE : 26T, 52T, 106T, SU	Low Edge : 0, 37, 53 High Edge : 8, 40, 54

7. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

Radiated test(RSDB)

1. Please refer to the [DTS], [UNII 6e], [BT], [UNII] Test Report.

2. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

AC Power line Conducted Emissions

1. Please refer to the SM-F946B/DS [DTS] Test Report.

2. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS (Note1)
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note1:

1. Please refer to the SM-F946B/DS [DTS] Test Report.

9. TEST RESULT

9.1 DUTY CYCLE


Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	26	MCS0	5.088	5.109	0.996	0.018
	52	MCS0	5.077	5.100	0.996	0.019
	106	MCS0	4.769	4.792	0.995	0.021
	242	MCS0	4.666	4.689	0.995	0.021
802.11ax (SU)	BW 20	MCS0	5.445	5.461	0.997	0.012

Note:


1. 802.11ax All mode transmits continuously(Duty cycle \geq 98%)
2. In order to simplify the report, Test results were written only in the worst case datarate.
(Worst case datarate : MCS0)

Test Plots


26 Tones MCS0

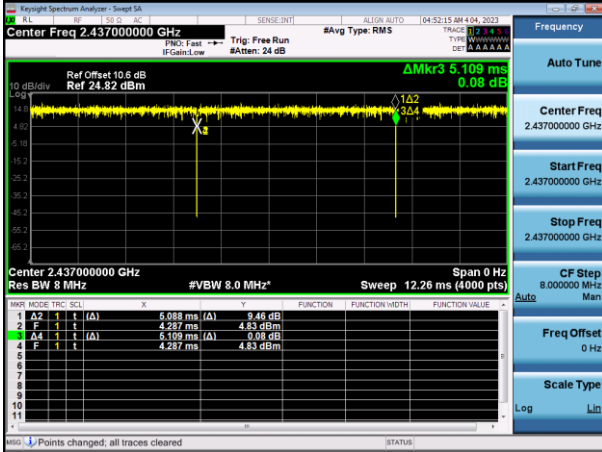


52 Tones MCS0

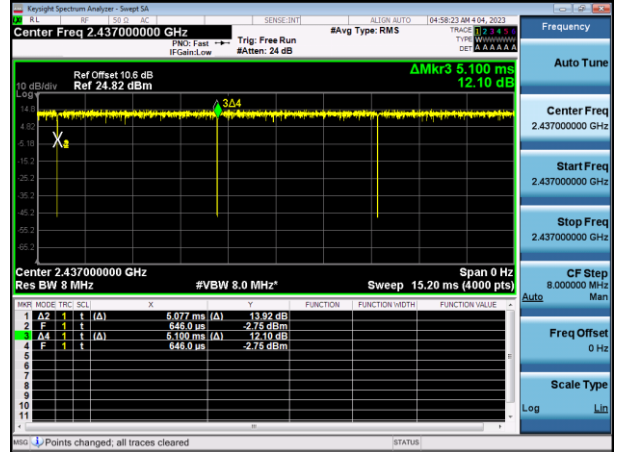


106 Tones MCS0

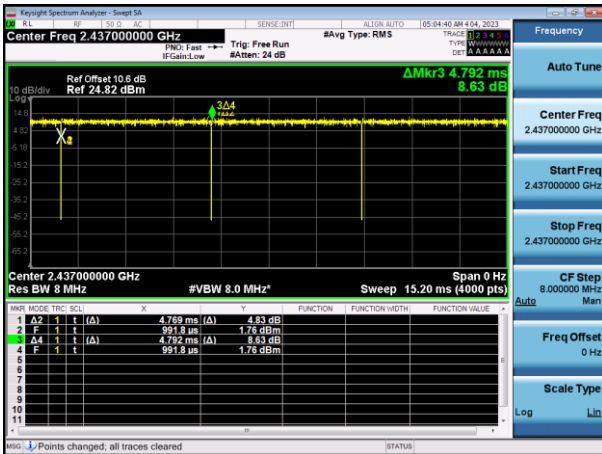

242 Tones MCS0

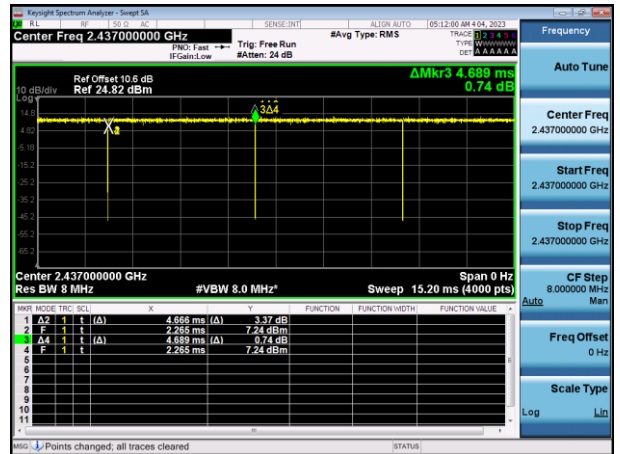

SU MCS0

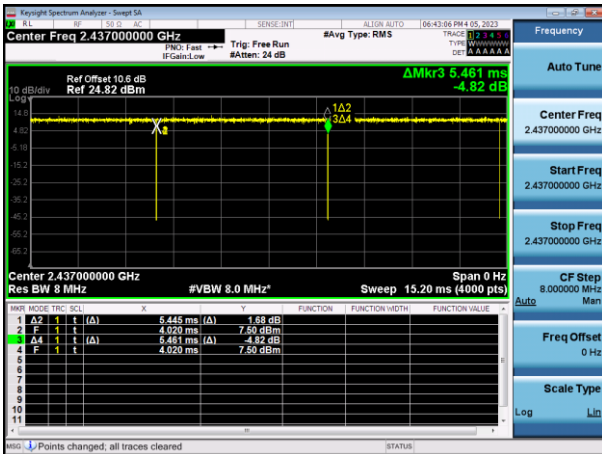

9.2 6 dB BANDWIDTH

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	6 dB BandWidth (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	2.134	17.119	18.123	-	-
			Mid	2.709	15.097	-	19.091	18.975
			High	2.117	17.059	17.165	-	-
	2437	6	Low	2.133	17.100	18.118	-	-
			Mid	2.706	15.102	-	19.096	19.012
			High	2.156	17.024	17.178	-	-
	2462	11	Low	2.154	17.091	18.145	-	-
			Mid	2.706	15.098	-	19.096	19.034
			High	2.126	17.100	17.143	-	-
	2467	12	Low	2.134	17.070	18.099	-	-
			Mid	2.710	15.105	-	19.090	18.988
			High	2.177	17.084	17.167	-	-
	2472	13	Low	2.121	17.091	17.154	-	-
			Mid	2.707	15.116	-	19.072	19.012
			High	2.160	17.063	17.152	-	-

Limit : > 500 kHz


[ANT.2]


BW	Frequency [MHz]	Channel No.	RU Index	6 dB BandWidth (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	2.133	17.124	18.141	-	-
			Mid	2.690	15.121	-	19.103	18.962
			High	2.148	17.050	17.161	-	-
	2437	6	Low	2.094	17.103	18.132	-	-
			Mid	2.718	15.117	-	19.100	19.014
			High	2.125	17.088	17.137	-	-
	2462	11	Low	2.109	17.094	17.174	-	-
			Mid	2.704	15.122	-	19.098	19.006
			High	2.126	17.060	17.185	-	-
	2467	12	Low	2.134	15.862	17.172	-	-
			Mid	2.707	15.079	-	19.101	18.921
			High	2.138	17.077	17.177	-	-
	2472	13	Low	2.129	17.068	17.158	-	-
			Mid	2.689	15.122	-	19.086	18.996
			High	2.147	17.080	18.362	-	-

Limit : > 500 kHz

Test Plots

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

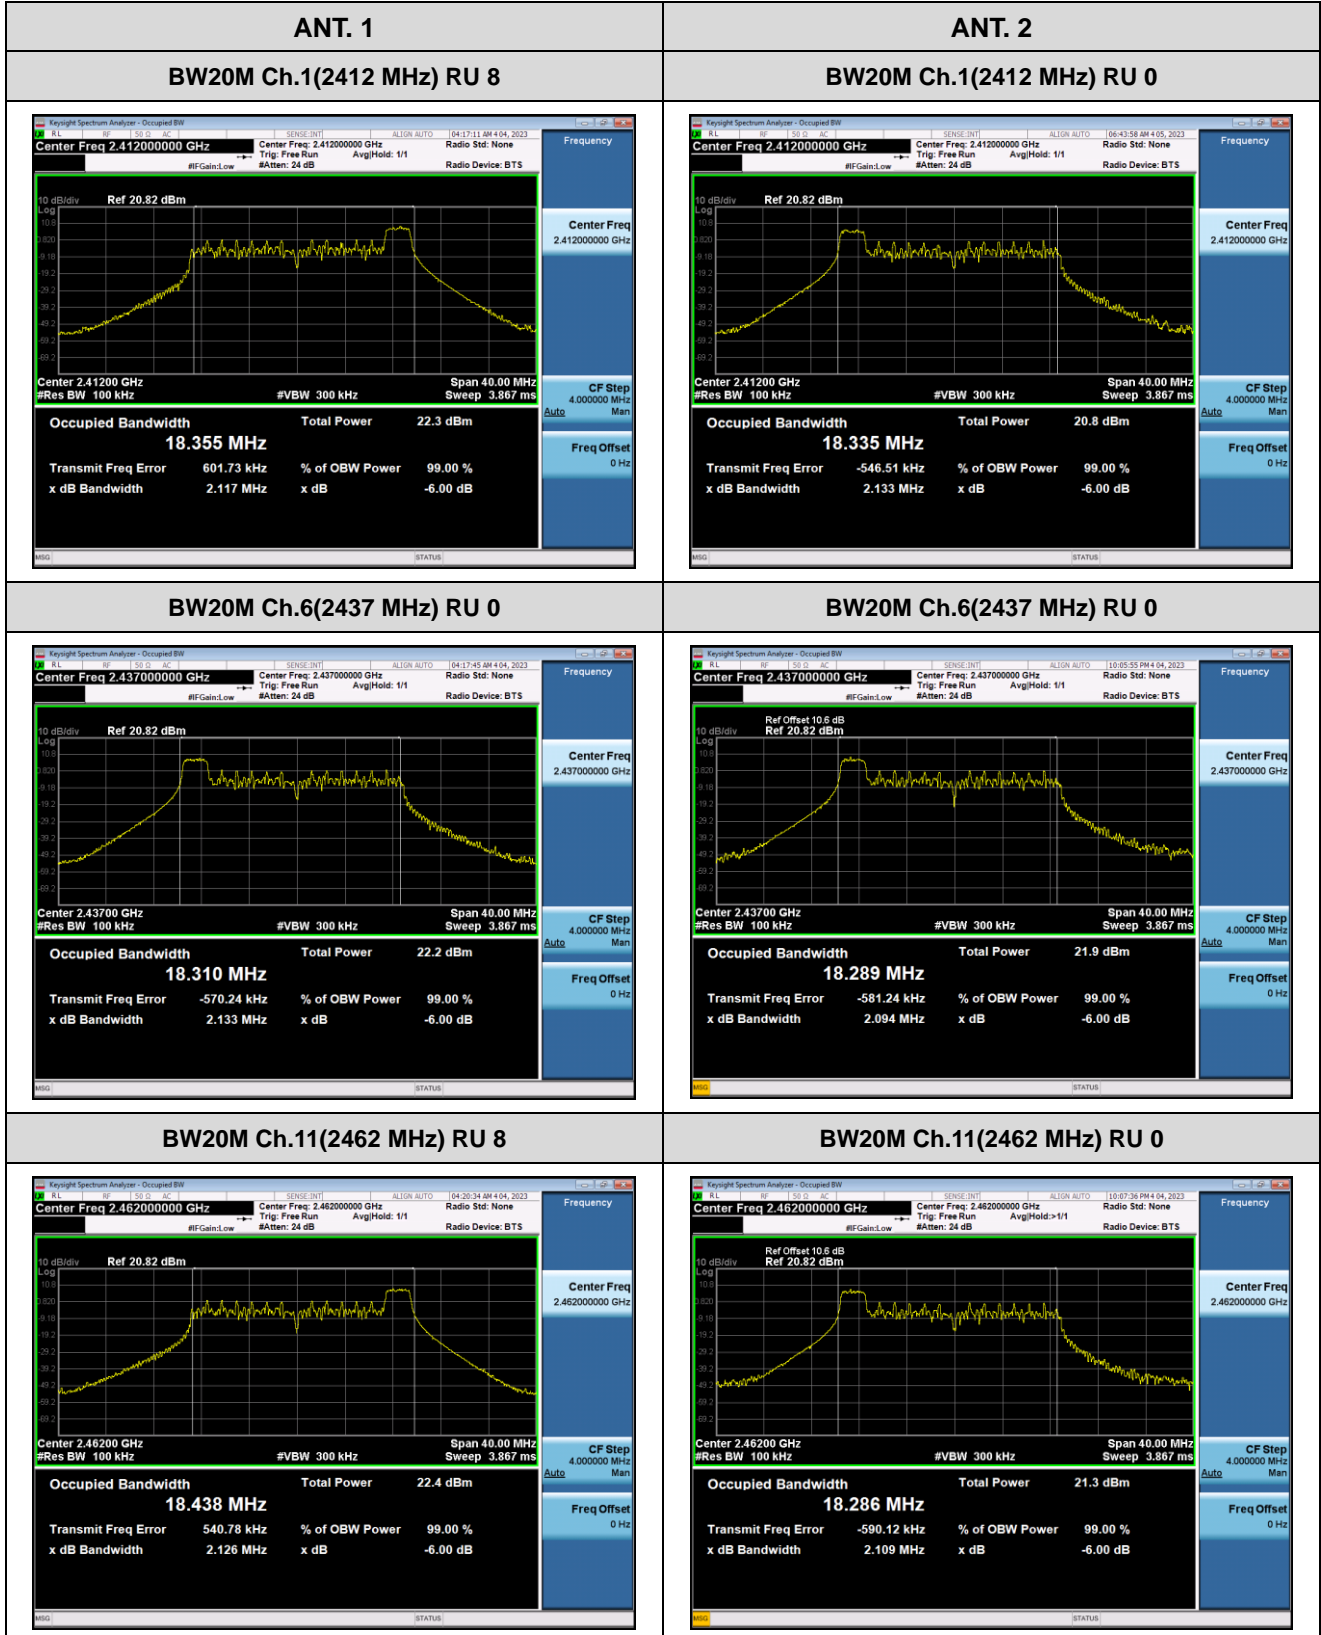

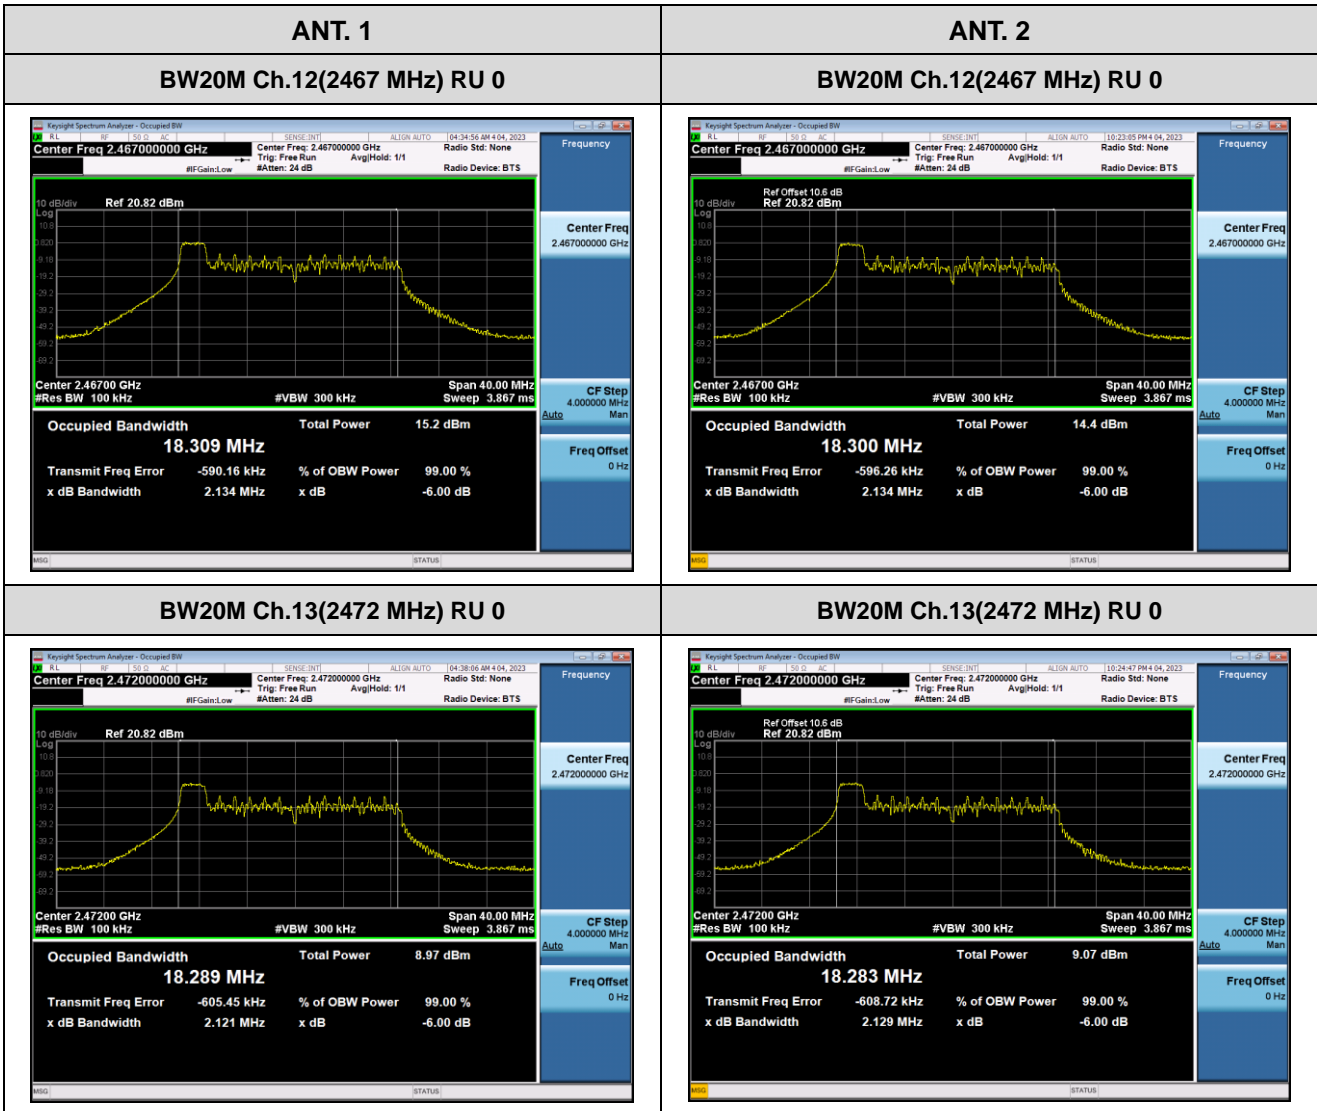

9.3 OUTPUT POWER

Peak Power

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	21.76	22.72	24.67	-	-
			Mid	21.76	22.77	-	23.84	23.91
			High	22.49	23.13	24.72	-	-
	2437	6	Low	22.39	23.28	24.94	-	-
			Mid	21.97	23.10	-	24.04	25.02
			High	22.42	23.28	24.85	-	-
	2462	11	Low	22.59	23.52	25.12	-	-
			Mid	22.10	23.26	-	24.18	24.14
			High	22.51	23.34	24.93	-	-
	2467	12	Low	15.44	15.36	14.98	-	-
			Mid	15.10	15.14	-	13.95	13.96
			High	15.22	15.13	14.69	-	-
	2472	13	Low	9.06	8.98	8.58	-	-
			Mid	8.76	8.68	-	7.60	7.57
			High	9.00	8.69	8.43	-	-

Limit : 30 dBm

[ANT. 2]

BW	Frequency [MHz]	Channel No.	RU Index	Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	20.76	21.86	23.67	-	-
			Mid	20.89	21.83	-	22.84	22.88
			High	21.65	22.30	23.91	-	-
	2437	6	Low	21.82	22.51	24.38	-	-
			Mid	21.62	22.33	-	23.28	24.29
			High	22.01	22.38	24.14	-	-
	2462	11	Low	21.31	22.44	24.14	-	-
			Mid	20.96	22.23	-	22.89	22.94
			High	21.15	22.33	23.63	-	-
	2467	12	Low	14.62	14.29	13.94	-	-
			Mid	14.04	13.84	-	12.79	12.79
			High	14.56	13.89	13.50	-	-
	2472	13	Low	9.25	9.01	8.57	-	-
			Mid	8.34	8.41	-	7.27	7.30
			High	8.67	8.18	7.96	-	-

Limit : 30 dBm

[MIMO]

Note:

1. MIMO Peak Power = $10 \cdot \log((10^{\text{ANT. 1 Peak power / 10}}) + (10^{\text{ANT. 2 Peak power / 10}}))$

BW	Frequency [MHz]	Channel No.	RU Index	Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	24.30	25.32	27.21	-	-
			Mid	24.35	25.34	-	26.38	26.44
			High	25.10	25.75	27.34	-	-
	2437	6	Low	25.13	25.93	27.68	-	-
			Mid	24.81	25.74	-	26.69	27.68
			High	25.23	25.86	27.52	-	-
	2462	11	Low	25.00	26.02	27.67	-	-
			Mid	24.58	25.78	-	26.59	26.59
			High	24.89	25.88	27.34	-	-
	2467	12	Low	18.06	17.87	17.50	-	-
			Mid	17.61	17.55	-	16.42	16.43
			High	17.91	17.56	17.15	-	-
	2472	13	Low	12.17	12.01	11.59	-	-
			Mid	11.56	11.56	-	10.45	10.45
			High	11.85	11.45	11.21	-	-

Limit : 30 dBm

Average Power

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	12.06	13.10	15.39	-	-
			Mid	12.41	13.30	-	15.68	15.44
			High	12.86	13.77	15.86	-	-
	2437	6	Low	12.53	13.51	15.73	-	-
			Mid	12.43	13.50	-	16.52	17.45
			High	12.76	13.77	15.80	-	-
	2462	11	Low	12.92	13.91	15.90	-	-
			Mid	12.70	13.69	-	15.86	15.73
			High	12.84	13.77	15.89	-	-
	2467	12	Low	5.81	5.77	5.75	-	-
			Mid	5.64	5.63	-	5.80	5.58
			High	5.63	5.66	5.71	-	-
	2472	13	Low	-0.55	-0.61	-0.63	-	-
			Mid	-0.84	-0.84	-	-0.65	-0.66
			High	-1.21	-1.06	-0.76	-	-

Limit : 30 dBm

[ANT. 2]

BW	Frequency [MHz]	Channel No.	RU Index	Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	11.21	12.31	14.43	-	-
			Mid	11.28	12.43	-	14.73	14.50
			High	11.84	12.94	14.64	-	-
	2437	6	Low	12.21	13.02	15.06	-	-
			Mid	11.87	12.99	-	15.97	16.95
			High	11.98	12.92	14.94	-	-
	2462	11	Low	11.82	12.92	14.85	-	-
			Mid	11.39	12.86	-	14.78	14.52
			High	11.43	12.79	14.66	-	-
	2467	12	Low	4.89	4.80	4.75	-	-
			Mid	4.40	4.57	-	4.56	4.39
			High	4.34	4.26	4.42	-	-
	2472	13	Low	-0.68	-0.75	-0.66	-	-
			Mid	-1.50	-1.08	-	-0.96	-1.03
			High	-1.50	-1.51	-1.31	-	-

Limit : 30 dBm

[MIMO]

Note:

1. MIMO Average Power = $10 \cdot \log(((10^{\wedge}(\text{ANT. 1 Average power} / 10)) + (10^{\wedge}(\text{ANT. 2 Average power} / 10))))$

BW	Frequency [MHz]	Channel No.	RU Index	Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	14.67	15.73	17.95	-	-
			Mid	14.89	15.90	-	18.24	18.01
			High	15.39	16.39	18.30	-	-
	2437	6	Low	15.38	16.28	18.42	-	-
			Mid	15.17	16.26	-	19.26	20.22
			High	15.40	16.38	18.40	-	-
	2462	11	Low	15.42	16.45	18.42	-	-
			Mid	15.10	16.31	-	18.36	18.18
			High	15.20	16.32	18.33	-	-
	2467	12	Low	8.38	8.32	8.29	-	-
			Mid	8.07	8.14	-	8.23	8.04
			High	8.04	8.03	8.12	-	-
	2472	13	Low	2.40	2.33	2.37	-	-
			Mid	1.85	2.05	-	2.21	2.17
			High	1.66	1.73	1.98	-	-

Limit : 30 dBm

9.4 POWER SPECTRAL DENSITY

Note :

1. MIMO PSD = $10 \cdot \log(((10^{(ANT. 1 \text{ PSD} / 10)})) + (10^{(ANT. 2 \text{ PSD} / 10)}))$

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	Max. Power Spectral Density (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-4.724	-6.254	-7.294	-	-
			Mid	-4.440	-6.562	-	-10.274	-10.963
			High	-4.053	-6.052	-6.977	-	-
	2437	6	Low	-4.155	-5.851	-6.901	-	-
			Mid	-4.454	-6.356	-	-9.552	-9.100
			High	-3.971	-5.964	-6.935	-	-
	2462	11	Low	-3.874	-5.620	-6.670	-	-
			Mid	-4.150	-6.080	-	-10.088	-10.935
			High	-3.996	-6.038	-6.938	-	-
	2467	12	Low	-10.911	-13.689	-17.064	-	-
			Mid	-11.284	-14.083	-	-20.198	-21.036
			High	-11.208	-14.105	-17.194	-	-
	2472	13	Low	-17.253	-20.202	-23.325	-	-
			Mid	-17.833	-20.718	-	-26.629	-27.140
			High	-18.027	-20.589	-23.579	-	-

[ANT. 2]

BW	Frequency [MHz]	Channel No.	RU Index	Max. Power Spectral Density (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-5.694	-7.203	-8.197	-	-
			Mid	-5.689	-7.351	-	-11.238	-11.832
			High	-5.093	-6.964	-7.883	-	-
	2437	6	Low	-4.363	-6.497	-7.556	-	-
			Mid	-4.775	-6.767	-	-10.118	-9.063
			High	-4.671	-6.825	-70.472	-	-
	2462	11	Low	-4.855	-6.161	-7.793	-	-
			Mid	-5.516	-6.702	-	-11.311	-11.924
			High	-5.408	-6.971	-8.213	-	-
	2467	12	Low	-11.694	-14.498	-17.712	-	-
			Mid	-12.429	-15.310	-	-21.329	-22.034
			High	-12.460	-15.352	-18.423	-	-
	2472	13	Low	-17.217	-19.947	-22.822	-	-
			Mid	-18.191	-20.561	-	-26.398	-26.996
			High	-18.167	-20.883	-24.014	-	-

[MIMO]


BW	Frequency [MHz]	Channel No.	RU Index	Max. Power Spectral Density (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-2.172	-3.692	-4.712	-	-
			Mid	-2.009	-3.928	-	-7.719	-8.366
			High	-1.532	-3.474	-4.396	-	-
	2437	6	Low	-1.247	-3.152	-4.206	-	-
			Mid	-1.601	-3.546	-	-6.815	-6.071
			High	-1.297	-3.363	-6.935	-	-
	2462	11	Low	-1.327	-2.872	-4.185	-	-
			Mid	-1.769	-3.370	-	-7.646	-8.391
			High	-1.635	-3.469	-4.519	-	-
	2467	12	Low	-8.275	-11.064	-14.366	-	-
			Mid	-8.809	-11.643	-	-17.716	-18.496
			High	-8.779	-11.674	-14.755	-	-
	2472	13	Low	-14.225	-17.062	-20.056	-	-
			Mid	-14.998	-17.628	-	-23.502	-24.057
			High	-15.086	-17.723	-20.781	-	-

Test Plots

Note:

1. In order to simplify the report, attached plots were only the worst case PSD channel.
2. MIMO Total PSD = MIMO Measured PSD + Duty Cycle Factor


[MIMO]

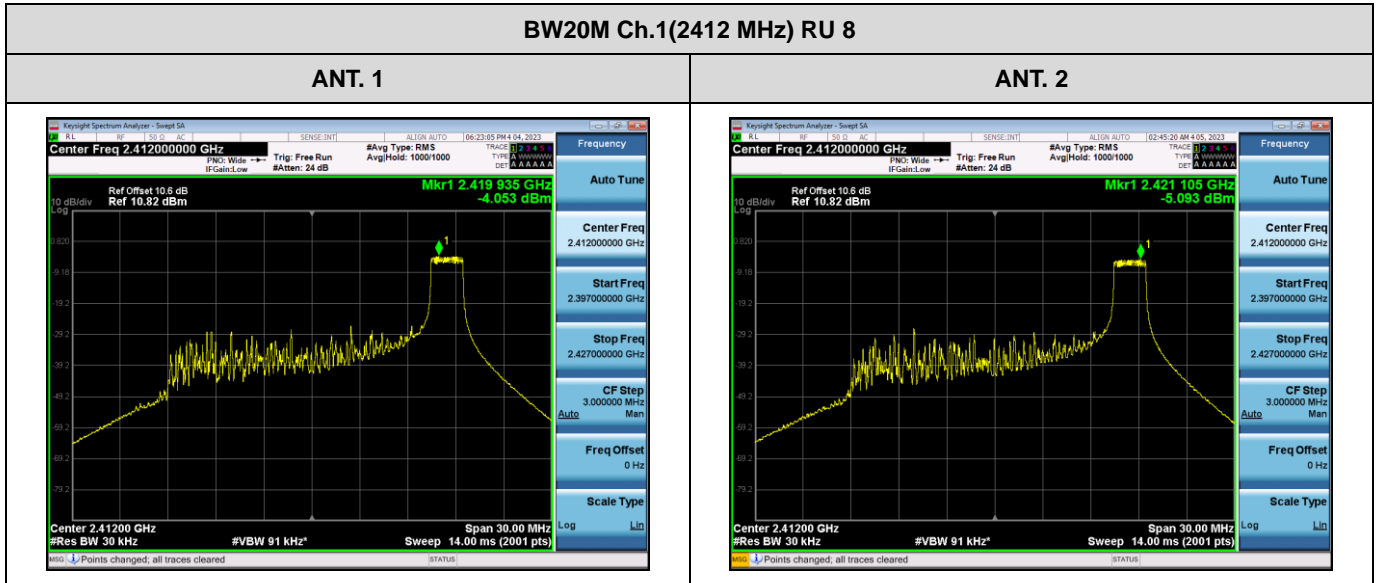


MIMO Measured PSD (dBm)	Duty Cycle Factor (dB)	MIMO Total PSD (dBm)
-1.532	0.000	-1.532

BW20M Ch.6(2437 MHz) RU 0

ANT. 1

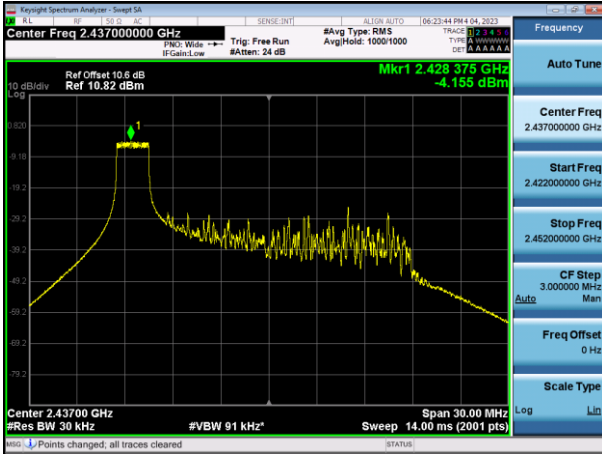


ANT. 2

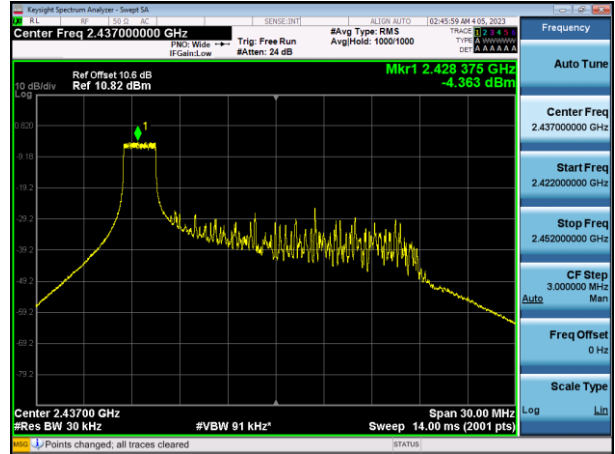


MIMO Measured PSD (dBm)	Duty Cycle Factor (dB)	MIMO Total PSD (dBm)
-1.247	0.000	-1.247

BW20M Ch.11(2462 MHz) RU 0


ANT. 1

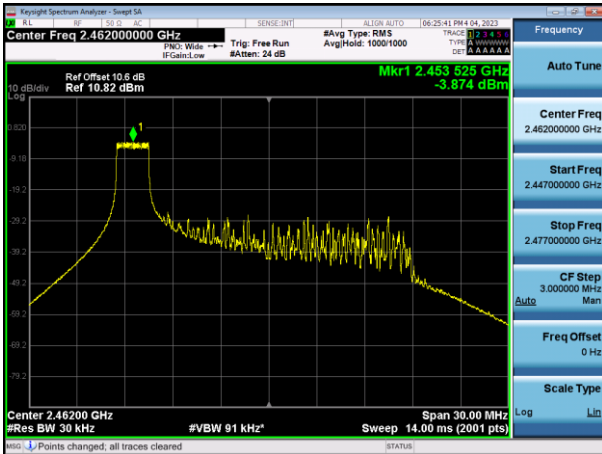


ANT. 2

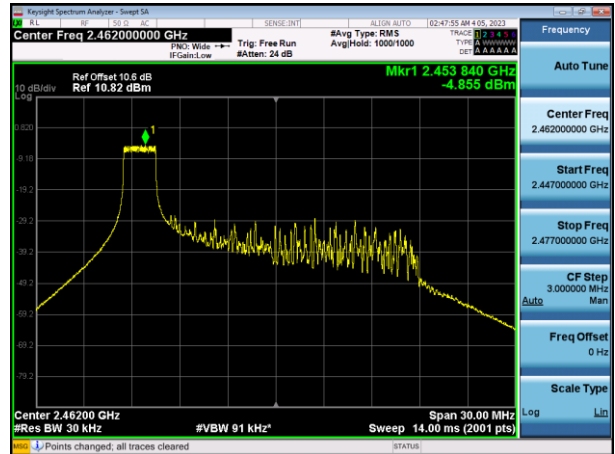

MIMO Measured PSD (dBm)	Duty Cycle Factor (dB)	MIMO Total PSD (dBm)
-1.327	0.000	-1.327

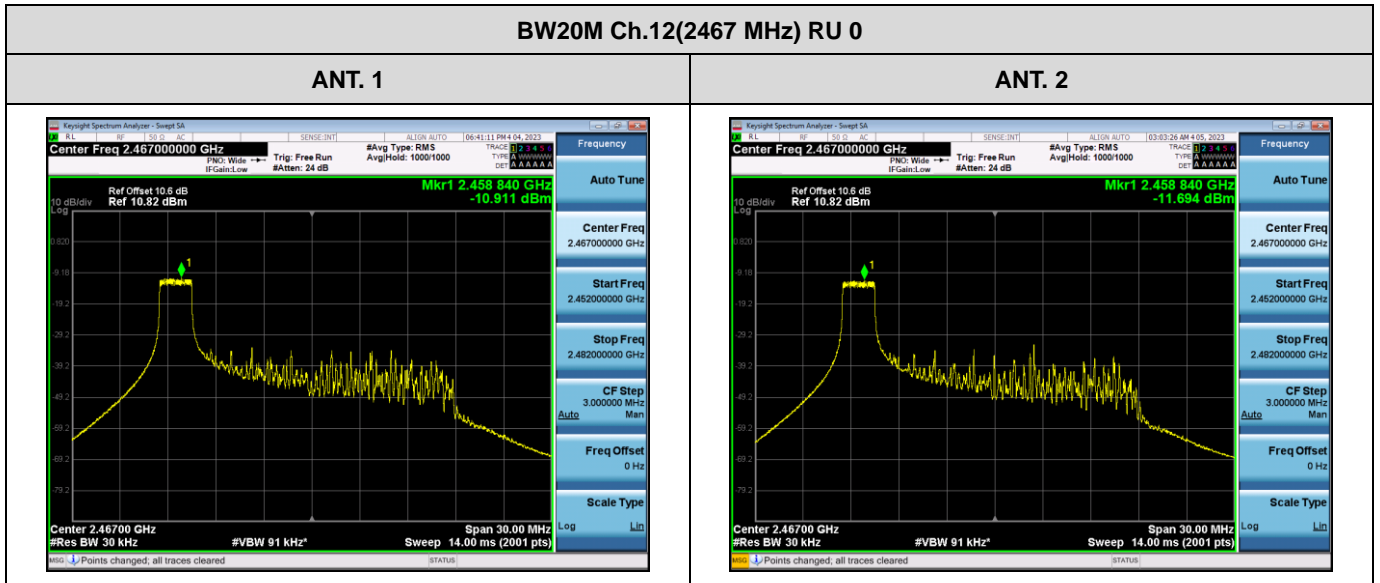

MIMO Measured PSD (dBm)	Duty Cycle Factor (dB)	MIMO Total PSD (dBm)
-8.275	0.000	-8.275

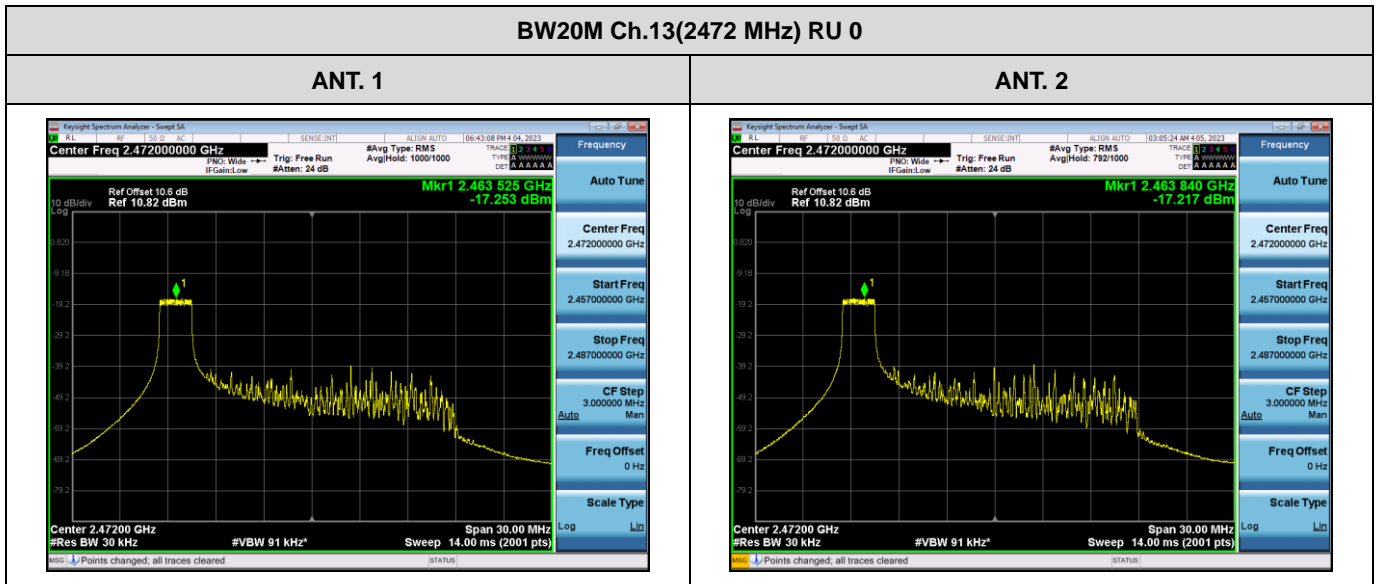

MIMO Measured PSD (dBm)	Duty Cycle Factor (dB)	MIMO Total PSD (dBm)
-14.225	0.000	-14.225

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Band Edge

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	33.825	32.769	33.462
	2462	11	High	Highest Bandedge	57.441	58.873	56.655
	2467	12	High	Highest Bandedge	51.968	49.744	48.607
	2472	13	High	Highest Bandedge	31.563	32.170	31.362

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	33.963	34.409
	2462	11		Highest Bandedge	48.495	47.002
	2467	12		Highest Bandedge	46.563	47.126
	2472	13		Highest Bandedge	31.141	38.821

Limit : 30 dBc

[ANT. 2]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	32.730	31.814	31.768
	2462	11	High	Highest Bandedge	59.422	56.726	54.906
	2467	12	High	Highest Bandedge	51.654	49.880	47.729
	2472	13	High	Highest Bandedge	31.579	31.520	31.438


BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	32.874	32.627
	2462	11		Highest Bandedge	48.782	43.888
	2467	12		Highest Bandedge	46.872	46.308
	2472	13		Highest Bandedge	32.495	32.121


Limit : 30 dBc

☐ Test Plots

Note: In order to simplify the report, attached plots were only the worst case.

[ANT. 1]

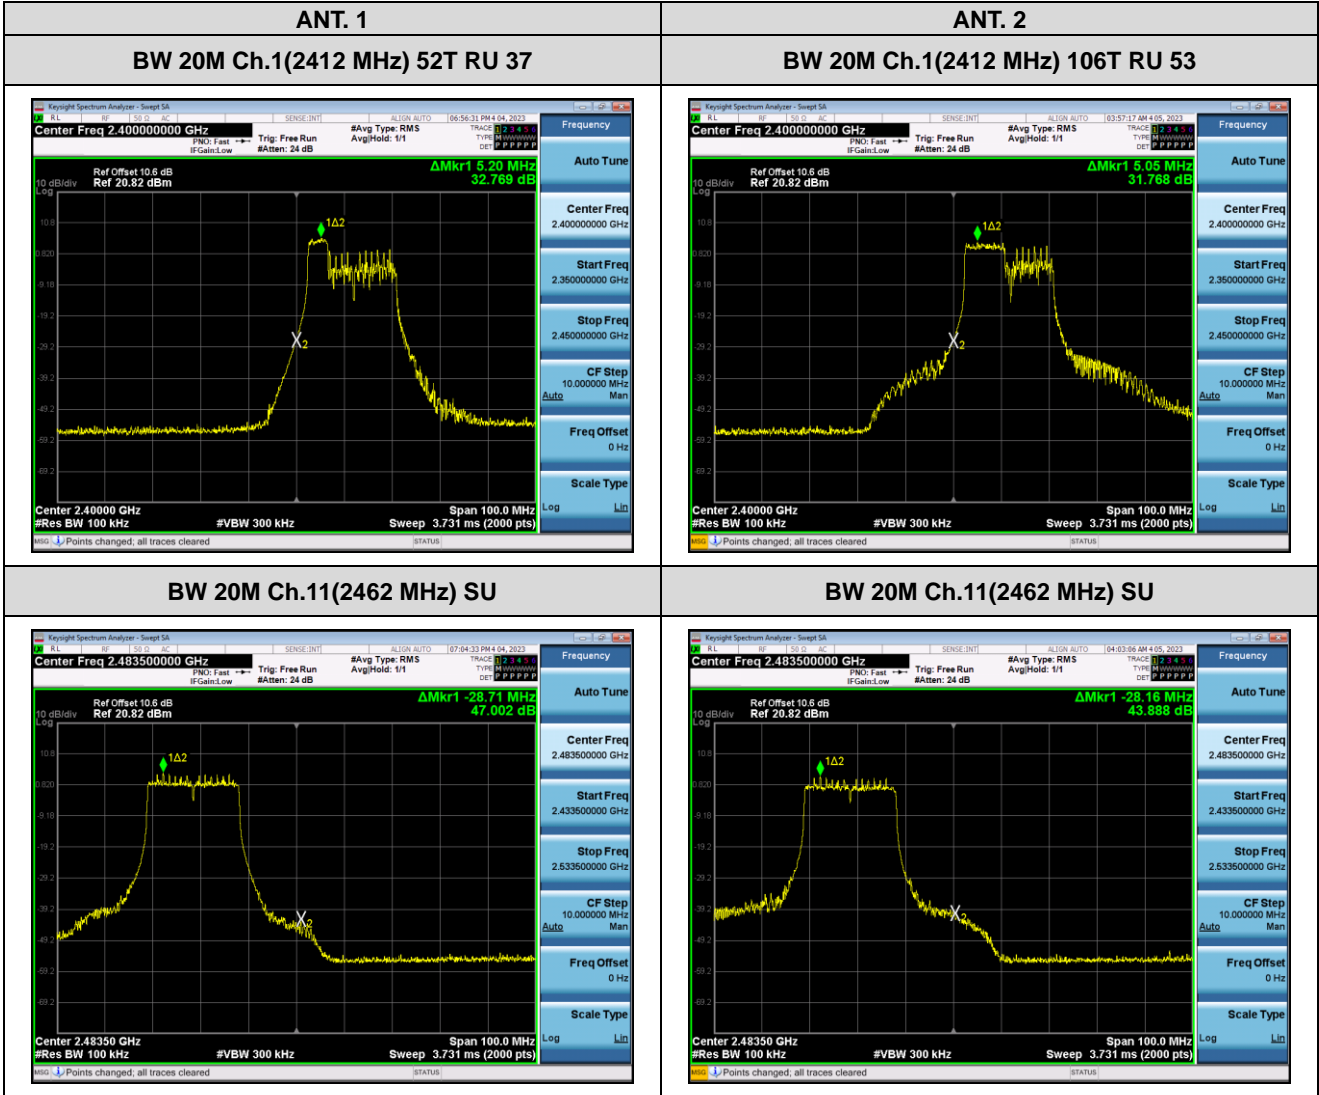

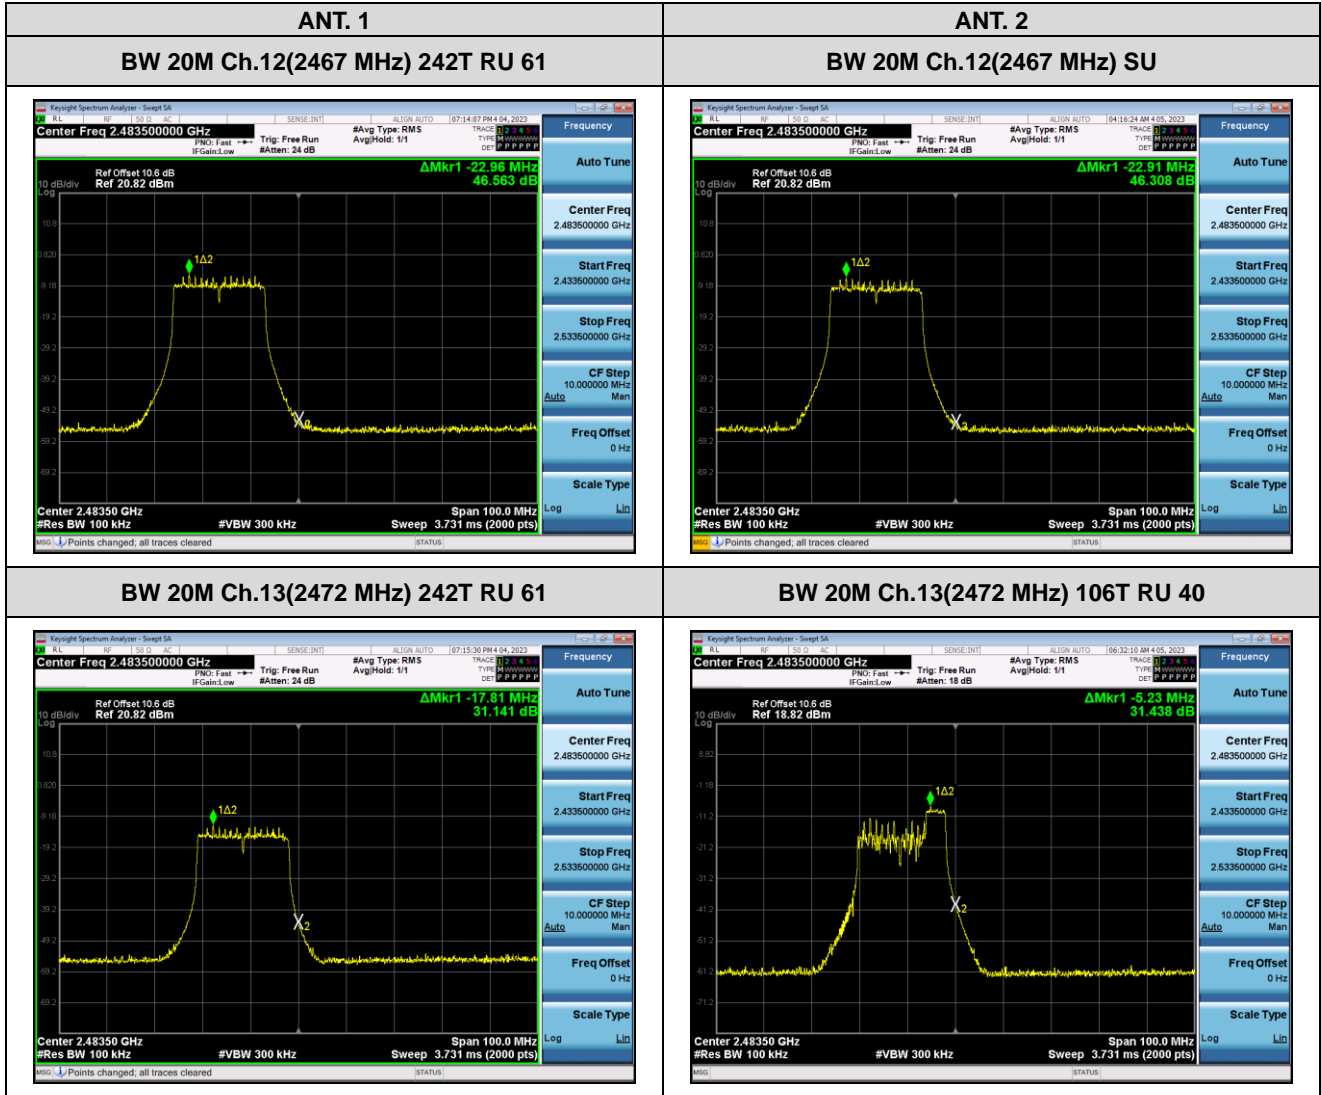

Conducted Spurious Emissions

Note: Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

[ANT. 1]

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	45.828	44.521	44.181	-	-
			Mid	45.300	43.915	-	41.438	43.464
			High	47.664	45.360	44.047	-	-
	2437	6	Low	45.262	44.759	46.346	-	-
			Mid	45.695	45.300	-	44.676	43.135
			High	45.486	44.494	45.525	-	-
	2462	11	Low	46.439	43.545	45.208	-	-
			Mid	47.071	44.794	-	41.060	41.621
			High	46.340	45.303	44.784	-	-

[ANT. 2]

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	44.515	43.970	41.866	-	-
			Mid	44.536	42.381	-	40.366	40.420
			High	44.821	42.819	42.939	-	-
	2437	6	Low	46.700	44.211	43.573	-	-
			Mid	45.318	43.248	-	42.556	41.596
			High	46.041	44.226	42.758	-	-
	2462	11	Low	45.774	43.670	42.557	-	-
			Mid	46.189	43.987	-	40.502	40.123
			High	44.170	43.213	43.349	-	-


Limit : 30 dBc

▣ Test Plots


Note:

In order to simplify the report, attached plots were only the worst case.

[ANT. 1] BW20M Ch.11(2 462MHz) 242T RU 61

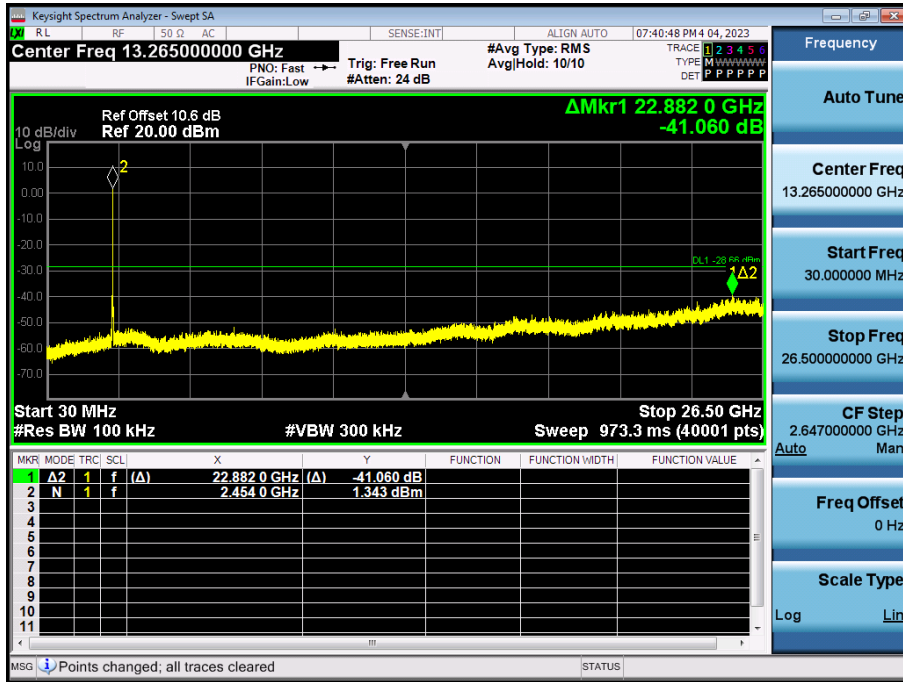

[ANT. 2] BW20M Ch.11(2 462MHz) SU

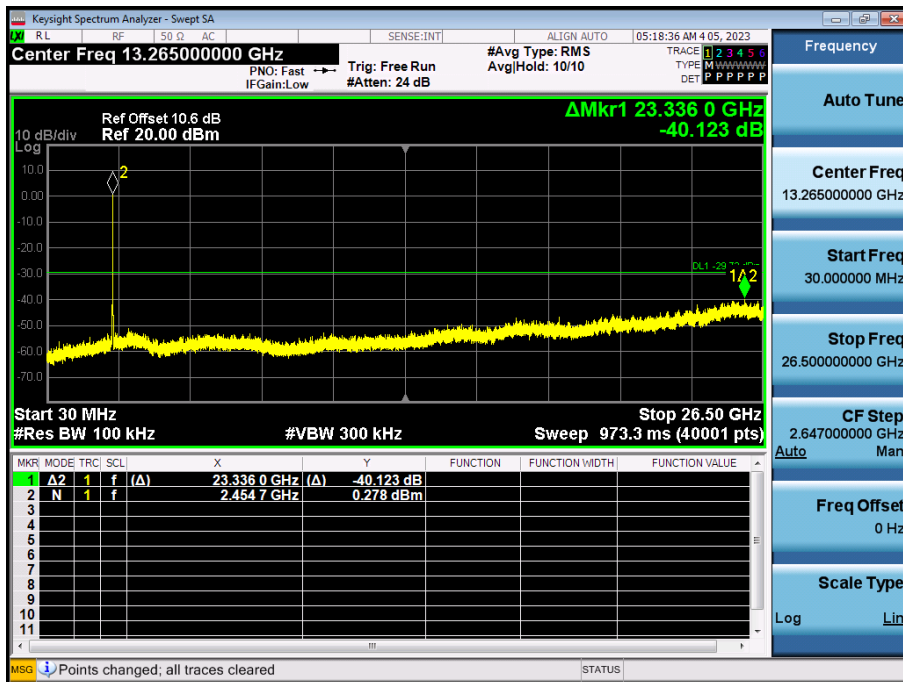

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBµV/m]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBµV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBµV/m]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

[MIMO]

Open Mode

1. 26 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch
RU offset	4

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.21	0.00	2.47	V	45.68	73.98	28.30	PK
4924	30.96	0.00	2.47	V	33.43	53.98	20.55	AV
7386	41.69	0.00	10.24	V	51.93	73.98	22.05	PK
7386	28.91	0.00	10.24	V	39.15	53.98	14.83	AV
4924	45.39	0.00	2.47	H	47.86	73.98	26.12	PK
4924	31.79	0.00	2.47	H	34.26	53.98	19.72	AV
7386	40.96	0.00	10.24	H	51.20	73.98	22.78	PK
7386	28.12	0.00	10.24	H	38.36	53.98	15.62	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.

2. SU

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.90	0.00	2.47	V	45.37	73.98	28.61	PK
4924	30.94	0.00	2.47	V	33.41	53.98	20.57	AV
7386	40.98	0.00	10.24	V	51.22	73.98	22.76	PK
7386	29.05	0.00	10.24	V	39.29	53.98	14.69	AV
4924	43.82	0.00	2.47	H	46.29	73.98	27.69	PK
4924	31.53	0.00	2.47	H	34.00	53.98	19.98	AV
7386	40.21	0.00	10.24	H	50.45	73.98	23.53	PK
7386	27.96	0.00	10.24	H	38.20	53.98	15.78	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.

Closed Mode

1. 26 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz
Channel No.	1 Ch
RU offset	4

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.96	0.00	3.42	V	47.38	73.98	26.60	PK
4824	32.41	0.00	3.42	V	35.83	53.98	18.15	AV
7236	41.52	0.00	8.48	V	50.00	73.98	23.98	PK
7236	29.49	0.00	8.48	V	37.97	53.98	16.01	AV
4824	44.50	0.00	3.42	H	47.92	73.98	26.06	PK
4824	32.53	0.00	3.42	H	35.95	53.98	18.03	AV
7236	41.28	0.00	8.48	H	49.76	73.98	24.22	PK
7236	29.28	0.00	8.48	H	37.76	53.98	16.22	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437 MHz
Channel No.	6 Ch
RU offset	4

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.91	0.00	2.97	V	46.88	73.98	27.10	PK
4874	31.38	0.00	2.97	V	34.35	53.98	19.63	AV
7311	43.68	0.00	9.43	V	53.11	73.98	20.87	PK
7311	30.56	0.00	9.43	V	39.99	53.98	13.99	AV
4874	43.40	0.00	2.97	H	46.37	73.98	27.61	PK
4874	31.36	0.00	2.97	H	34.33	53.98	19.65	AV
7311	43.64	0.00	9.43	H	53.07	73.98	20.91	PK
7311	30.14	0.00	9.43	H	39.57	53.98	14.41	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch
RU offset	4

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.58	0.00	2.47	V	45.05	73.98	28.93	PK
4924	30.96	0.00	2.47	V	33.43	53.98	20.55	AV
7386	43.79	0.00	10.24	V	54.03	73.98	19.95	PK
7386	31.23	0.00	10.24	V	41.47	53.98	12.51	AV
4924	42.95	0.00	2.47	H	45.42	73.98	28.56	PK
4924	31.25	0.00	2.47	H	33.72	53.98	20.26	AV
7386	45.63	0.00	10.24	H	55.87	73.98	18.11	PK
7386	32.99	0.00	10.24	H	43.23	53.98	10.75	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.

2. SU

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.59	0.00	3.42	V	47.01	73.98	26.97	PK
4824	32.29	0.00	3.42	V	35.71	53.98	18.27	AV
7236	41.69	0.00	8.48	V	50.17	73.98	23.81	PK
7236	29.51	0.00	8.48	V	37.99	53.98	15.99	AV
4824	43.93	0.00	3.42	H	47.35	73.98	26.63	PK
4824	32.46	0.00	3.42	H	35.88	53.98	18.10	AV
7236	41.28	0.00	8.48	H	49.76	73.98	24.22	PK
7236	29.44	0.00	8.48	H	37.92	53.98	16.06	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2437 MHz
 Channel No.: 06 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.75	0.00	2.97	V	46.72	73.98	27.26	PK
4874	31.40	0.00	2.97	V	34.37	53.98	19.61	AV
7311	41.42	0.00	9.43	V	50.85	73.98	23.13	PK
7311	29.66	0.00	9.43	V	39.09	53.98	14.89	AV
4874	43.57	0.00	2.97	H	46.54	73.98	27.44	PK
4874	31.40	0.00	2.97	H	34.37	53.98	19.61	AV
7311	40.24	0.00	9.43	H	49.67	73.98	24.31	PK
7311	29.41	0.00	9.43	H	38.84	53.98	15.14	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.95	0.00	2.47	V	46.42	73.98	27.56	PK
4924	30.25	0.00	2.47	V	32.72	53.98	21.26	AV
7386	41.62	0.00	10.24	V	51.86	73.98	22.12	PK
7386	29.14	0.00	10.24	V	39.38	53.98	14.60	AV
4924	44.76	0.00	2.47	H	47.23	73.98	26.75	PK
4924	31.35	0.00	2.47	H	33.82	53.98	20.16	AV
7386	40.99	0.00	10.24	H	51.23	73.98	22.75	PK
7386	28.69	0.00	10.24	H	38.93	53.98	15.05	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.

Half Open Mode

1. 26 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch
RU offset	4

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.76	0.00	2.47	V	45.23	73.98	28.75	PK
4924	31.35	0.00	2.47	V	33.82	53.98	20.16	AV
7386	40.16	0.00	10.24	V	50.40	73.98	23.58	PK
7386	28.71	0.00	10.24	V	38.95	53.98	15.03	AV
4924	42.99	0.00	2.47	H	45.46	73.98	28.52	PK
4924	31.46	0.00	2.47	H	33.93	53.98	20.05	AV
7386	40.22	0.00	10.24	H	50.46	73.98	23.52	PK
7386	28.75	0.00	10.24	H	38.99	53.98	14.99	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.

2. SU

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	44.00	0.00	2.47	V	46.47	73.98	27.51	PK
4924	31.06	0.00	2.47	V	33.53	53.98	20.45	AV
7386	40.24	0.00	10.24	V	50.48	73.98	23.50	PK
7386	28.53	0.00	10.24	V	38.77	53.98	15.21	AV
4924	44.04	0.00	2.47	H	46.51	73.98	27.47	PK
4924	31.11	0.00	2.47	H	33.58	53.98	20.40	AV
7386	41.14	0.00	10.24	H	51.38	73.98	22.60	PK
7386	29.18	0.00	10.24	H	39.42	53.98	14.56	AV

Note:

Channel 12 and 13 are less powerful than channel 11. So, The test for high channel was performed at channel 11.


▣ Test Plots

Note:

In order to simplify, Plots of worst case are only reported.


Open Mode

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, V)

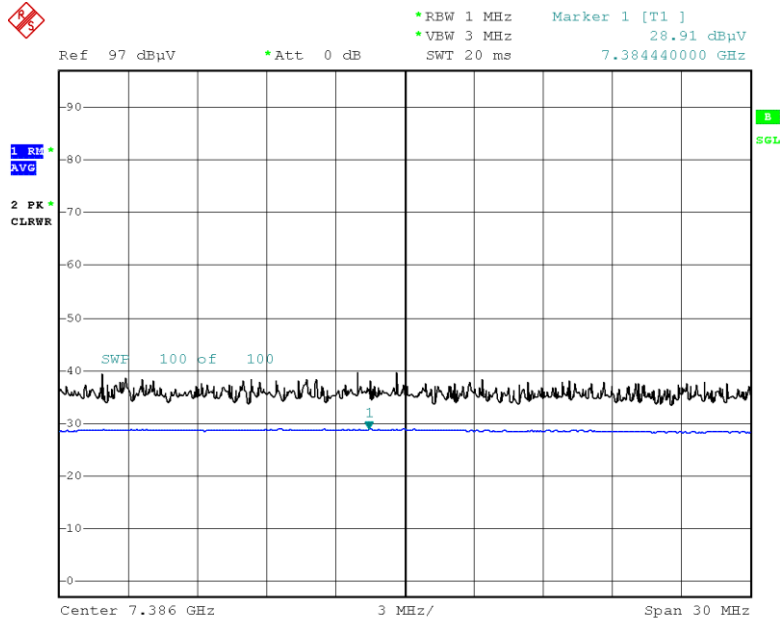


Date: 11.APR.2023 03:02:35

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, V)

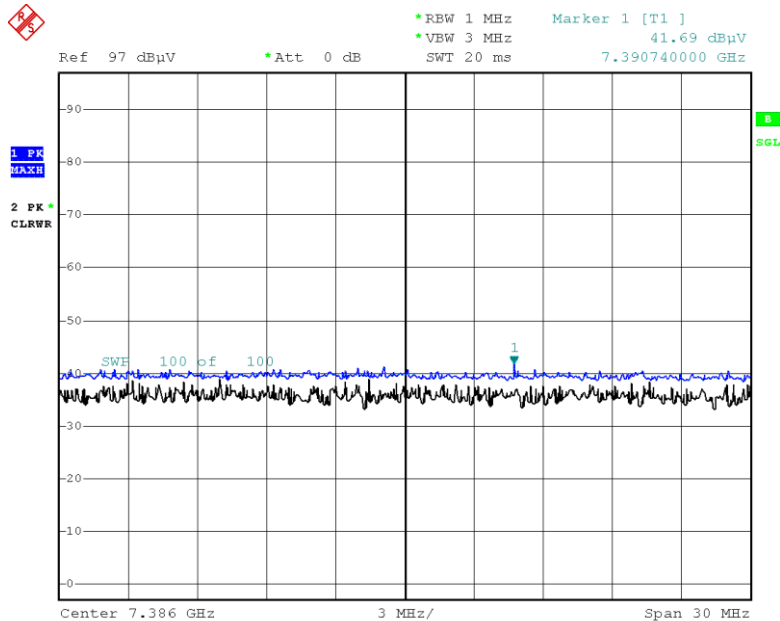


Date: 11.APR.2023 03:03:01

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, V)

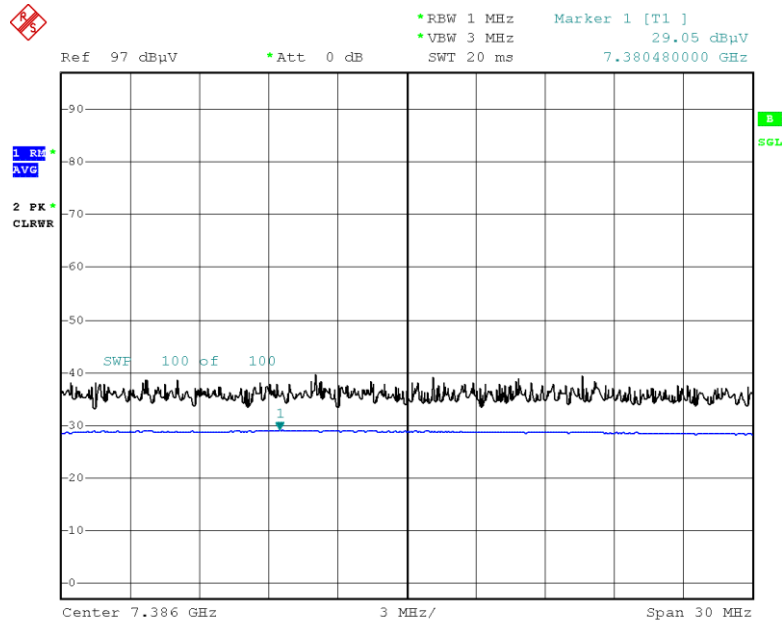

Date: 11.APR.2023 05:07:20


Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, V)

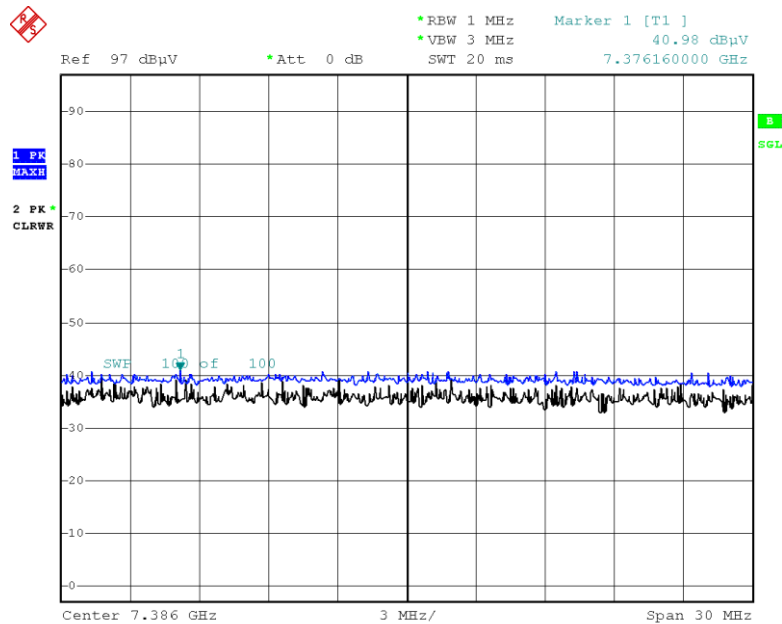

Date: 11.APR.2023 05:07:29


Closed

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, H)

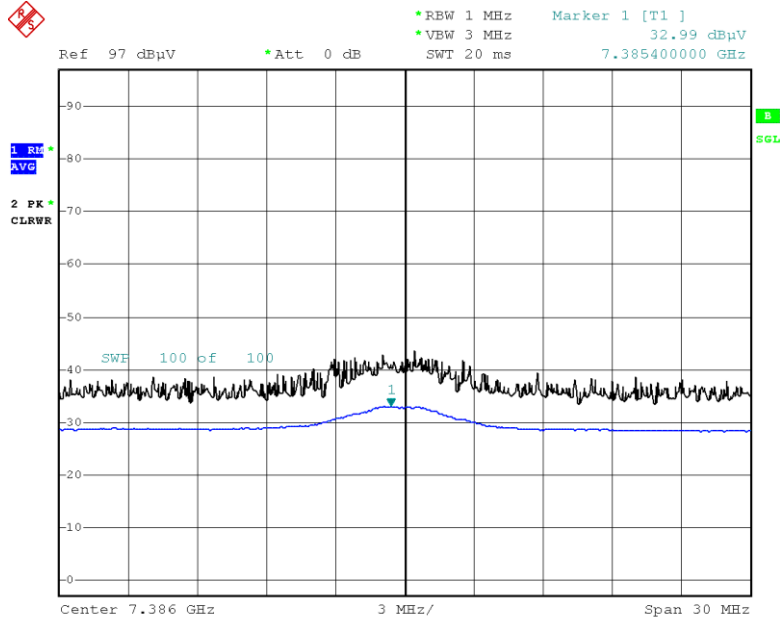


Date: 12.APR.2023 03:06:00

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, H)

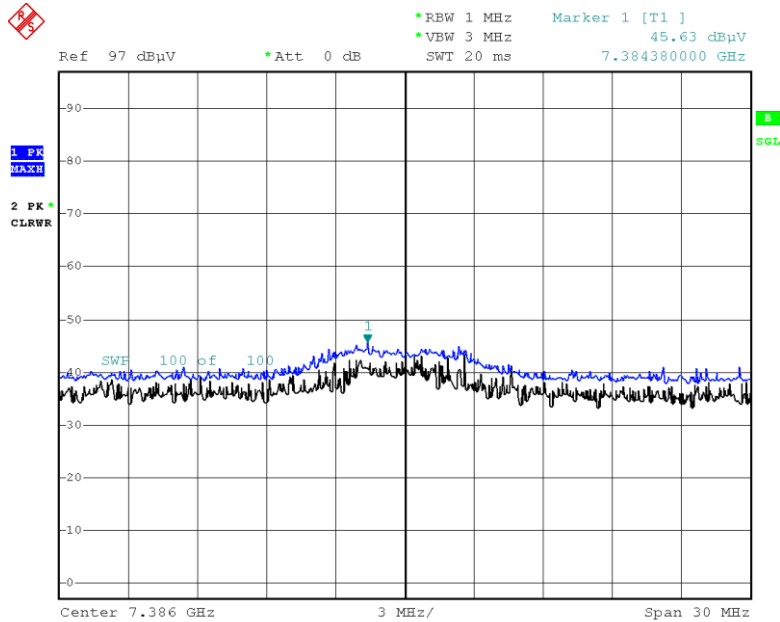


Date: 12.APR.2023 03:06:10

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, V)

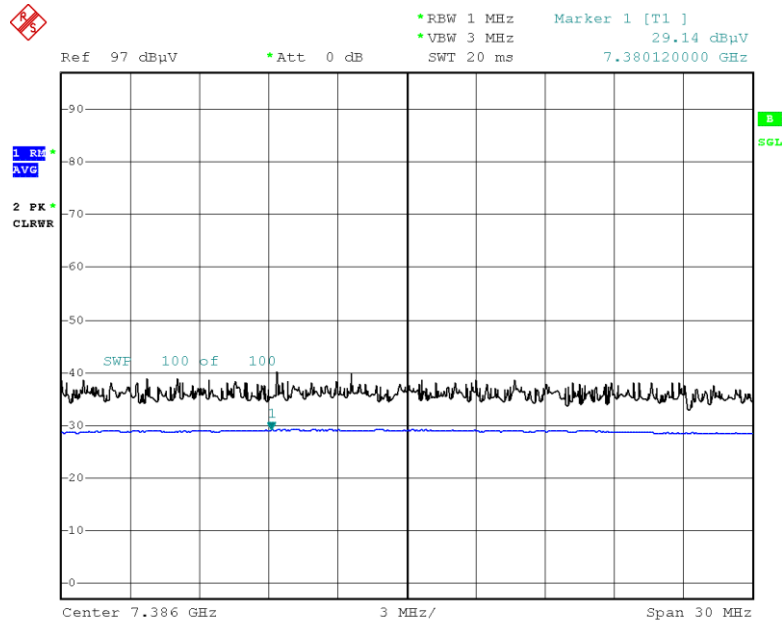

Date: 11.APR.2023 23:27:13


Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, V)

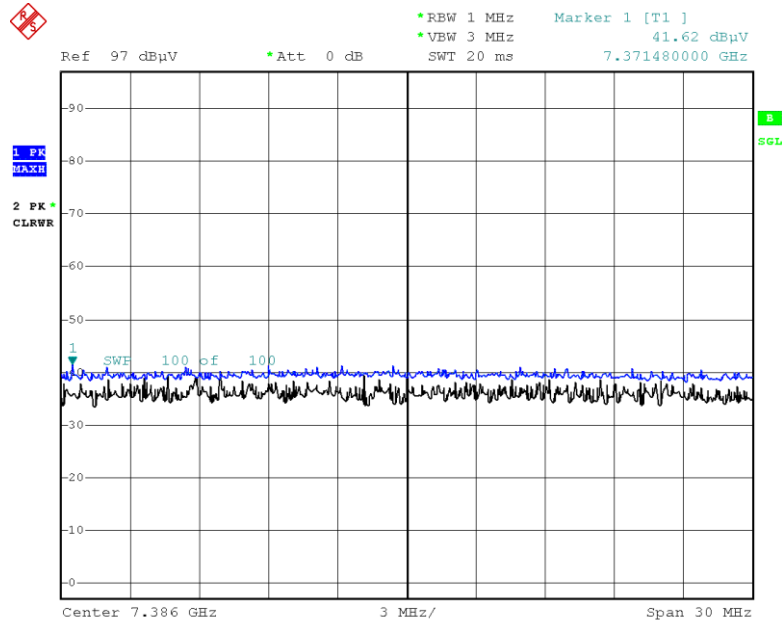

Date: 11.APR.2023 23:27:24


Half Open

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, H)

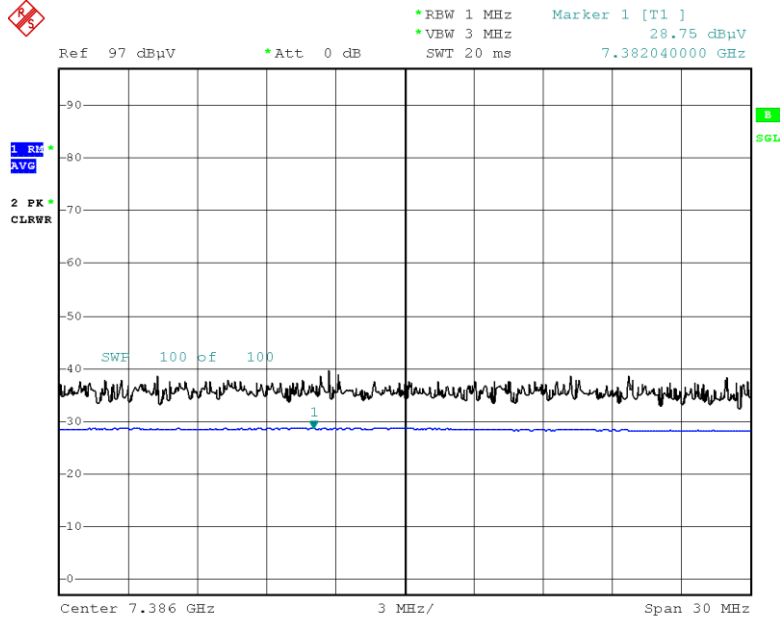


Date: 12.APR.2023 21:58:51

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_ 26Tone, RU 4, Ch.11 3rd Harmonic, H)

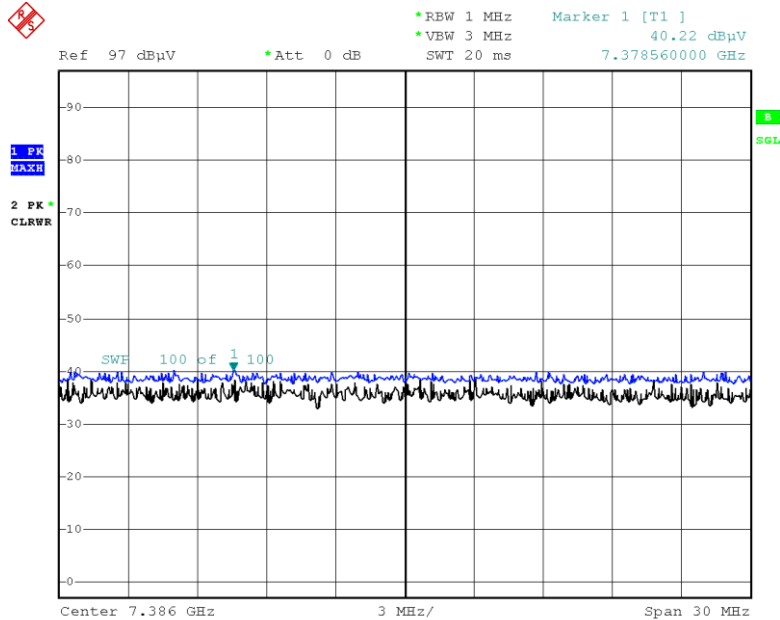


Date: 12.APR.2023 21:58:58

Radiated Spurious Emissions plot – Average result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, Y-H)

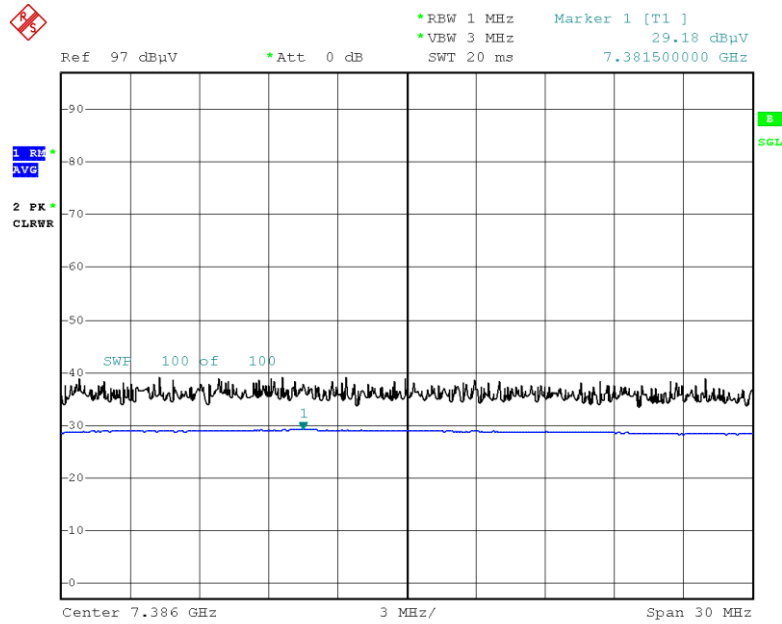

Date: 13.APR.2023 01:11:45

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20)_SU, Ch.11 3rd Harmonic, Y-H)

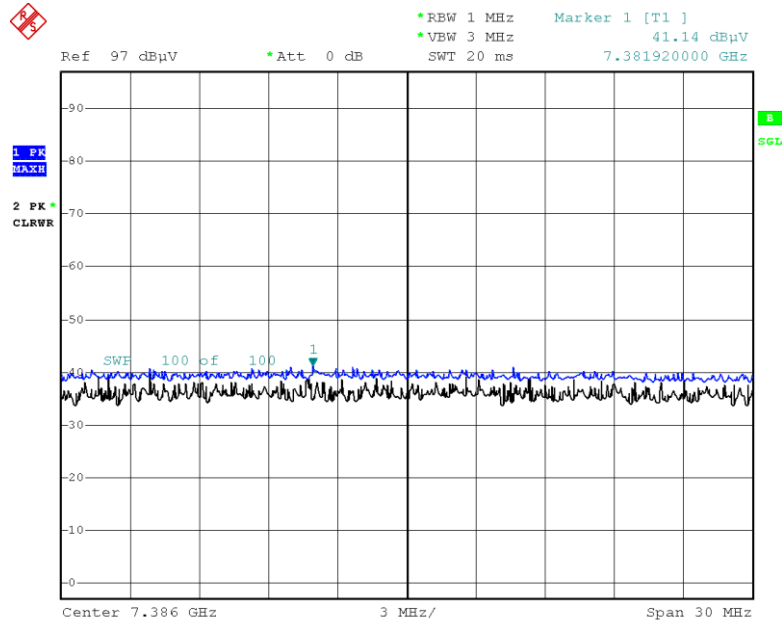

Date: 13.APR.2023 01:11:55

9.7 RADIATED RESTRICTED BAND EDGES

[MIMO]

Closed Mode

1. 242 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2457 MHz
Channel No.	10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	35.930	0.00	35.10	H	71.03	73.98	2.95	PK
2483.5	13.250	0.00	35.10	H	48.35	53.98	5.63	AV
2483.5	35.420	0.00	35.10	V	70.52	73.98	3.46	PK
2483.5	13.170	0.00	35.10	V	48.27	53.98	5.71	AV

Open Mode

1. 26 Tones

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 0
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.540	0.00	34.90	H	53.44	73.98	20.54	PK
2390.0	6.230	0.00	34.90	H	41.13	53.98	12.85	AV
2390.0	18.500	0.00	34.90	V	53.40	73.98	20.58	PK
2390.0	6.180	0.00	34.90	V	41.08	53.98	12.90	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 8
 Operating Frequency: 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.040	0.00	35.10	H	55.14	73.98	18.84	PK
2483.5	6.710	0.00	35.10	H	41.81	53.98	12.17	AV
2483.5	19.640	0.00	35.10	V	54.74	73.98	19.24	PK
2483.5	6.450	0.00	35.10	V	41.55	53.98	12.43	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 8
 Channel No. 12 Ch
 Operating Frequency 2467 MHz

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	25.430	0.00	35.10	H	60.53	73.98	13.45	PK
2483.5	7.300	0.00	35.10	H	42.40	53.98	11.58	AV
2483.5	25.420	0.00	35.10	V	60.52	73.98	13.46	PK
2483.5	6.870	0.00	35.10	V	41.97	53.98	12.01	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 8
 Operating Frequency 2472 MHz
 Channel No. 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5	28.520	0.00	35.10	H	63.62	73.98	10.36	PK
#2483.5	15.370	0.00	35.10	H	50.47	53.98	3.51	AV
#2483.5	27.930	0.00	35.10	V	63.03	73.98	10.95	PK
#2483.5	15.210	0.00	35.10	V	50.31	53.98	3.67	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

2. 52 Tones

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 37
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	19.990	0.00	34.90	H	54.89	73.98	19.09	PK
2390.0	6.380	0.00	34.90	H	41.28	53.98	12.70	AV
2390.0	19.870	0.00	34.90	V	54.77	73.98	19.21	PK
2390.0	6.320	0.00	34.90	V	41.22	53.98	12.76	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 40
 Operating Frequency: 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.760	0.00	35.10	H	56.86	73.98	17.12	PK
2483.5	6.910	0.00	35.10	H	42.01	53.98	11.97	AV
2483.5	21.530	0.00	35.10	V	56.63	73.98	17.35	PK
2483.5	6.390	0.00	35.10	V	41.49	53.98	12.49	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 40
 Operating Frequency: 2467 MHz
 Channel No. 12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	22.640	0.00	35.10	H	57.74	73.98	16.24	PK
2483.5	7.040	0.00	35.10	H	42.14	53.98	11.84	AV
2483.5	21.990	0.00	35.10	V	57.09	73.98	16.89	PK
2483.5	6.860	0.00	35.10	V	41.96	53.98	12.02	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 40
 Operating Frequency: 2472 MHz
 Channel No. 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5	25.840	0.00	35.10	H	60.94	73.98	13.04	PK
#2483.5	13.800	0.00	35.10	H	48.90	53.98	5.08	AV
#2483.5	25.400	0.00	35.10	V	60.50	73.98	13.48	PK
#2483.5	13.580	0.00	35.10	V	48.68	53.98	5.30	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

3. 106 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	53
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	33.320	0.00	34.90	H	68.22	73.98	5.76	PK
2390.0	7.690	0.00	34.90	H	42.59	53.98	11.39	AV
2390.0	32.610	0.00	34.90	V	67.51	73.98	6.47	PK
2390.0	7.590	0.00	34.90	V	42.49	53.98	11.49	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	54
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	27.440	0.00	35.10	H	62.54	73.98	11.44	PK
2483.5	7.650	0.00	35.10	H	42.75	53.98	11.23	AV
2483.5	27.310	0.00	35.10	V	62.41	73.98	11.57	PK
2483.5	7.520	0.00	35.10	V	42.62	53.98	11.36	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2467 MHz
 RU Index: 54
 Channel No. 12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.560	0.00	35.10	H	56.66	73.98	17.32	PK
2483.5	6.810	0.00	35.10	H	41.91	53.98	12.07	AV
2483.5	21.490	0.00	35.10	V	56.59	73.98	17.39	PK
2483.5	6.630	0.00	35.10	V	41.73	53.98	12.25	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 54
 Operating Frequency: 2472 MHz
 Channel No. 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	35.850	0.00	35.10	H	70.95	73.98	3.03	PK
2483.5	14.690	0.00	35.10	H	49.79	53.98	4.19	AV
2483.5	35.410	0.00	35.10	V	70.51	73.98	3.47	PK
2483.5	14.370	0.00	35.10	V	49.47	53.98	4.51	AV

4. 242 Tones

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 61
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	33.670	0.00	34.90	H	68.57	73.98	5.41	PK
2390.0	11.560	0.00	34.90	H	46.46	53.98	7.52	AV
2390.0	32.850	0.00	34.90	V	67.75	73.98	6.23	PK
2390.0	11.280	0.00	34.90	V	46.18	53.98	7.80	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 61
 Operating Frequency: 2417 MHz
 Channel No. 02 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2390.0	29.110	0.00	34.90	H	64.01	73.98	9.97	PK
2390.0	15.980	0.00	34.90	H	50.88	53.98	3.10	AV
#2390.0	28.670	0.00	34.90	V	63.57	73.98	10.41	PK
2390.0	15.630	0.00	34.90	V	50.53	53.98	3.45	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 61
 Operating Frequency: 2422 MHz
 Channel No. 03 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	34.310	0.00	34.90	H	69.21	73.98	4.77	PK
2390.0	12.410	0.00	34.90	H	47.31	53.98	6.67	AV
2390.0	34.080	0.00	34.90	V	68.98	73.98	5.00	PK
2390.0	12.080	0.00	34.90	V	46.98	53.98	7.00	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 RU Index: 61
 Operating Frequency: 2427 MHz
 Channel No. 04 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	36.000	0.00	35.10	H	71.10	73.98	2.88	PK
2390.0	16.860	0.00	35.10	H	51.96	53.98	2.02	AV
2390.0	34.820	0.00	35.10	V	69.92	73.98	4.06	PK
2390.0	15.930	0.00	35.10	V	51.03	53.98	2.95	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2452 MHz
Channel No.	09 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5	30.810	0.00	35.10	H	65.91	73.98	8.07	PK
2483.5	15.630	0.00	35.10	H	50.73	53.98	3.25	AV
#2483.5	29.790	0.00	35.10	V	64.89	73.98	9.09	PK
2483.5	15.220	0.00	35.10	V	50.32	53.98	3.66	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2457 MHz
Channel No.	10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5	29.700	0.00	35.10	H	64.80	73.98	9.18	PK
2483.5	15.980	0.00	35.10	H	51.08	53.98	2.90	AV
#2483.5	29.180	0.00	35.10	V	64.28	73.98	9.70	PK
2483.5	15.670	0.00	35.10	V	50.77	53.98	3.21	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	27.210	0.00	35.10	H	62.31	73.98	11.67	PK
2483.5	12.130	0.00	35.10	H	47.23	53.98	6.75	AV
2483.5	26.840	0.00	35.10	V	61.94	73.98	12.04	PK
2483.5	11.860	0.00	35.10	V	46.96	53.98	7.02	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
RU Index:	61
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.190	0.00	35.10	H	56.29	73.98	17.69	PK
2483.5	7.110	0.00	35.10	H	42.21	53.98	11.77	AV
2483.5	21.090	0.00	35.10	V	56.19	73.98	17.79	PK
2483.5	6.970	0.00	35.10	V	42.07	53.98	11.91	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	34.330	0.00	35.10	H	69.43	73.98	4.55	PK
2483.5	12.040	0.00	35.10	H	47.14	53.98	6.84	AV
2483.5	33.820	0.00	35.10	V	68.92	73.98	5.06	PK
2483.5	11.890	0.00	35.10	V	46.99	53.98	6.99	AV

5. SU

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	25.730	0.00	34.90	H	60.63	73.98	13.35	PK
2390.0	10.010	0.00	34.90	H	44.91	53.98	9.07	AV
2390.0	25.440	0.00	34.90	V	60.34	73.98	13.64	PK
2390.0	9.860	0.00	34.90	V	44.76	53.98	9.22	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2390.0	29.010	0.00	34.90	H	63.91	73.98	10.07	PK
2390.0	15.230	0.00	34.90	H	50.13	53.98	3.85	AV
#2390.0	28.920	0.00	34.90	V	63.82	73.98	10.16	PK
2390.0	14.930	0.00	34.90	V	49.83	53.98	4.15	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	33.810	0.00	35.10	H	68.91	73.98	5.07	PK
2483.5	14.500	0.00	35.10	H	49.60	53.98	4.38	AV
2483.5	32.480	0.00	35.10	V	67.58	73.98	6.40	PK
2483.5	14.370	0.00	35.10	V	49.47	53.98	4.51	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	24.970	0.00	35.10	H	60.07	73.98	13.91	PK
2483.5	10.660	0.00	35.10	H	45.76	53.98	8.22	AV
2483.5	24.660	0.00	35.10	V	59.76	73.98	14.22	PK
2483.5	10.570	0.00	35.10	V	45.67	53.98	8.31	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2467 MHz
 Channel No.: 12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	18.340	0.00	35.10	H	53.44	73.98	20.54	PK
2483.5	6.650	0.00	35.10	H	41.75	53.98	12.23	AV
2483.5	18.210	0.00	35.10	V	53.31	73.98	20.67	PK
2483.5	6.490	0.00	35.10	V	41.59	53.98	12.39	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2472 MHz
 Channel No.: 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	28.770	0.00	35.10	H	63.87	73.98	10.11	PK
2483.5	9.150	0.00	35.10	H	44.25	53.98	9.73	AV
2483.5	28.490	0.00	35.10	V	63.59	73.98	10.39	PK
2483.5	8.910	0.00	35.10	V	44.01	53.98	9.97	AV

Half Open

1. 242 Tones

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
RU Index:	61
Operating Frequency	2457 MHz
Channel No.	10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5	30.540	0.00	35.10	H	65.64	73.98	8.34	PK
#2483.5	16.440	0.00	35.10	H	51.54	53.98	2.44	AV
2483.5	30.490	0.00	35.10	V	65.59	73.98	8.39	PK
2483.5	16.420	0.00	35.10	V	51.52	53.98	2.46	AV


■ Test Plots [MIMO]

Note:

In order to simplify the report, Plots of worst case are only reported.


Closed

Average result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.10, X-H)

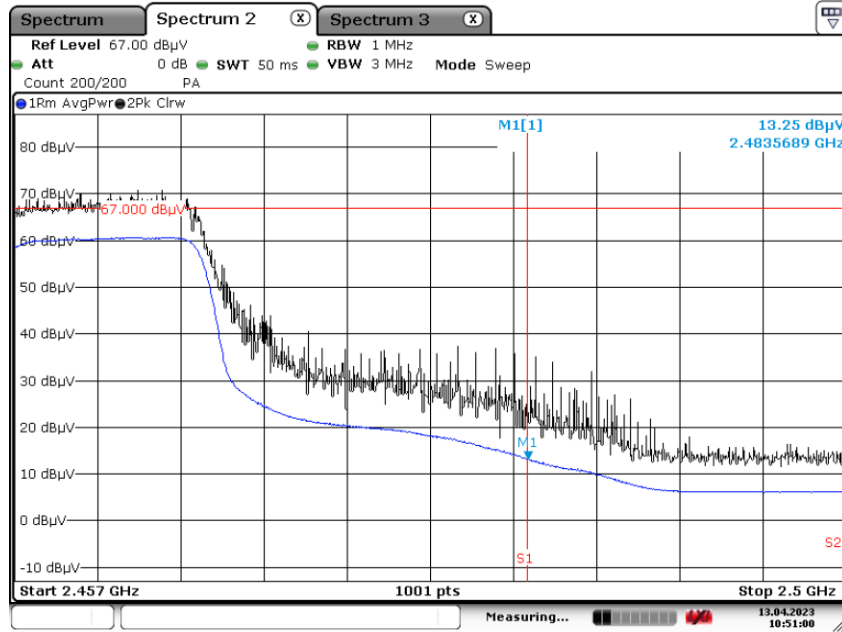

Date: 13.APR.2023 10:51:00


Peak result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.10, X-H)

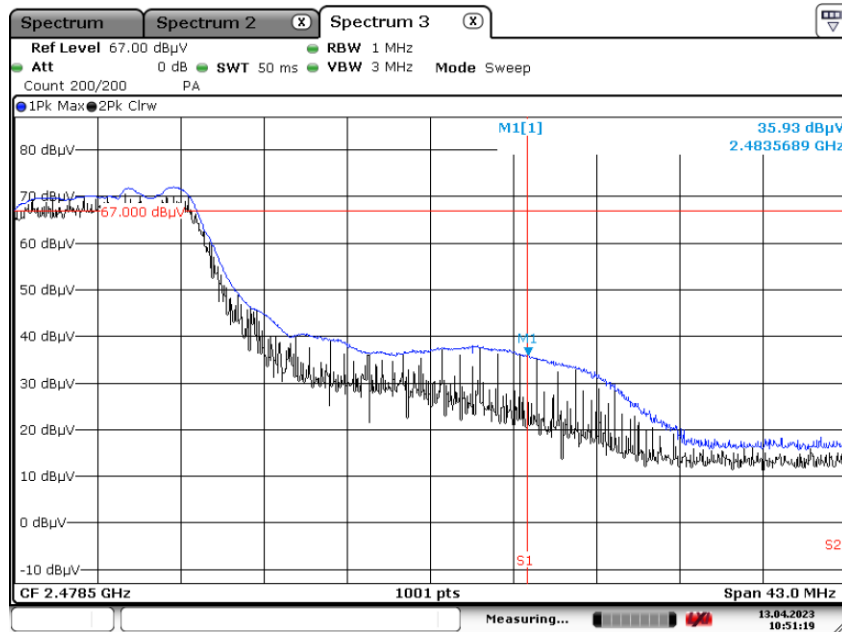

Date: 13.APR.2023 10:51:19


Open Mode

Average result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.4, X-H)

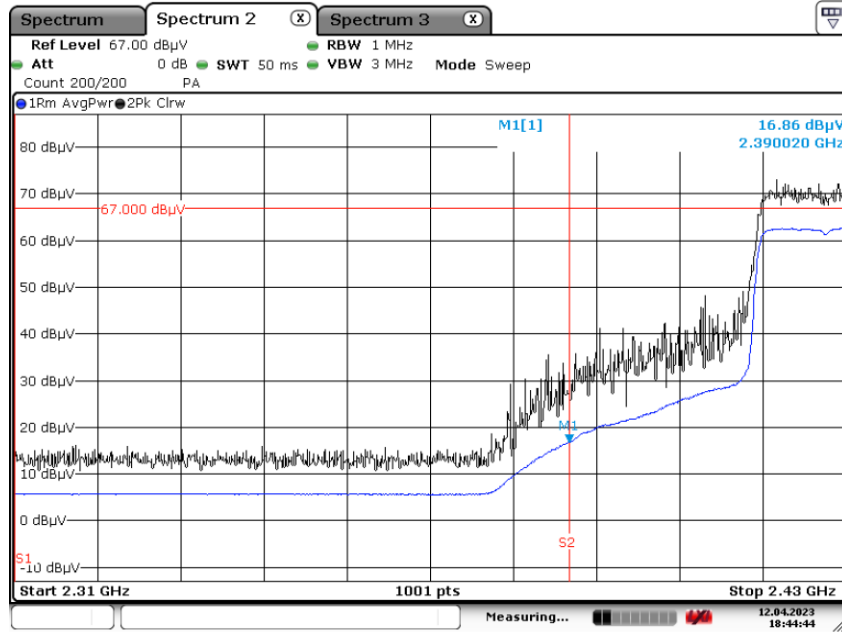

Date: 12.APR.2023 18:44:45


Peak result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.4, X-H)

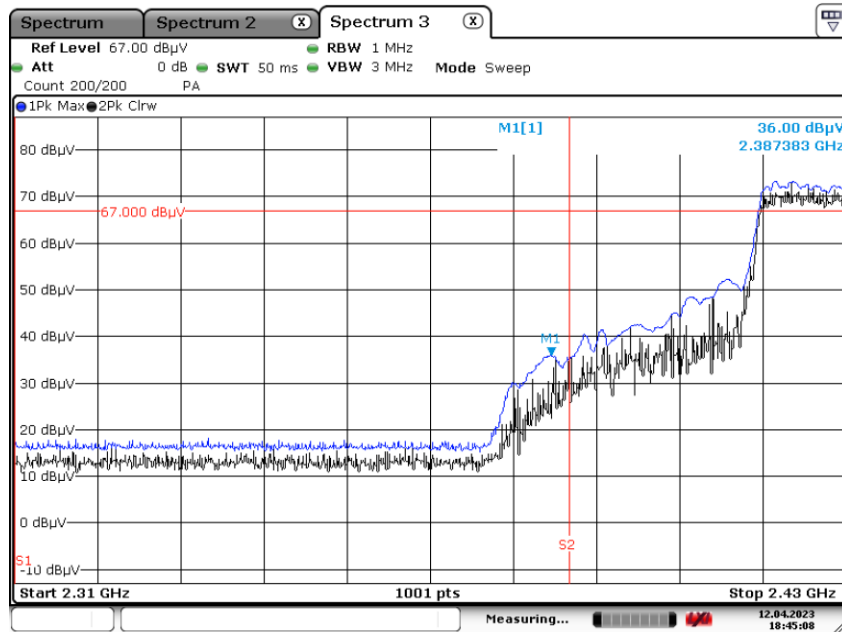

Date: 12.APR.2023 18:45:08


Half Open Mode

Average result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.10, X-H)
[integration method Used]

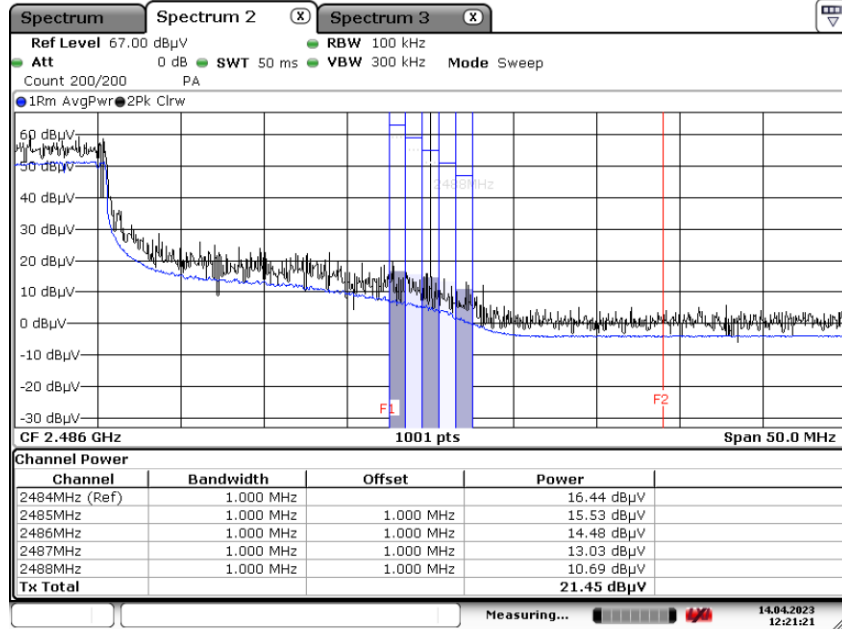

Date: 14.APR.2023 12:21:22

Peak result(802.11ax(HE20), MCS0, 242 Tone, RU 61 ch.10, X-H)
[integration method Used]

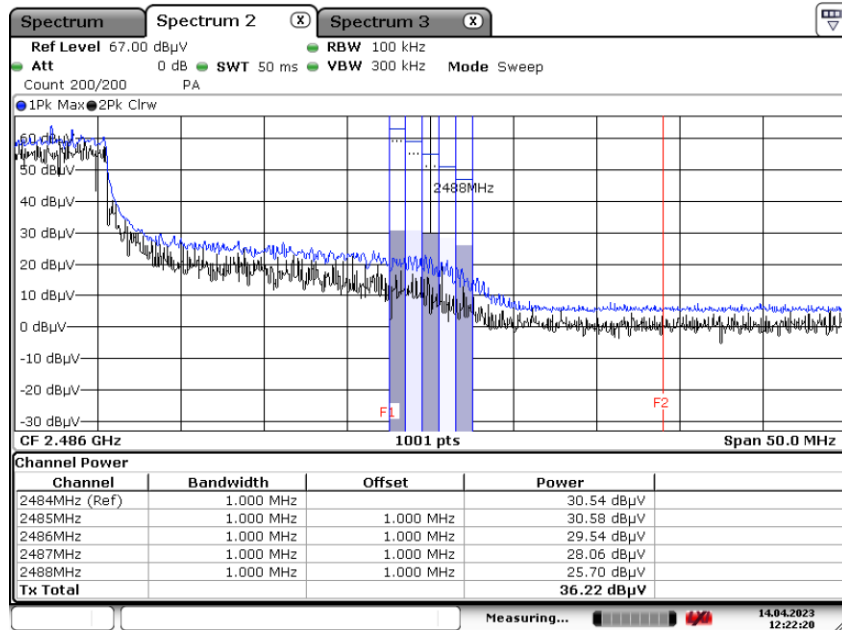

Date: 14.APR.2023 12:22:20

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/09/2024	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEK	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEK	N/A	12/05/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEK	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEK	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSVA40(10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual
Signal Analyzer	N9030A	Keysight	MY52350879	01/02/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC060-P