

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 25, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2305-FC074-R2

FCC ID: A3LSMF946B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-F946B/DS
 Additional Model(s): SM-F946B
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.288	24.59
		1M10W7D	16QAM	0.245	23.89
		1M10W7D	64QAM	0.191	22.81
		1M10W7D	256QAM	0.092	19.63
LTE – Band26 (3)	815.5 – 824.0	2M71G7D	QPSK	0.292	24.65
		2M72W7D	16QAM	0.251	24.00
		2M72W7D	64QAM	0.189	22.77
		2M72W7D	256QAM	0.094	19.72
LTE – Band26 (5)	816.5 – 824.0	4M52G7D	QPSK	0.299	24.75
		4M51W7D	16QAM	0.241	23.82
		4M51W7D	64QAM	0.193	22.85
		4M54W7D	256QAM	0.094	19.72
LTE – Band26 (10)	819.0 – 824.0	8M98G7D	QPSK	0.288	24.59
		9M01W7D	16QAM	0.239	23.78
		9M00W7D	64QAM	0.190	22.79
		8M98W7D	256QAM	0.091	19.58
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.301	24.79
		13M5W7D	16QAM	0.246	23.91
		13M5W7D	64QAM	0.193	22.86
		13M5W7D	256QAM	0.091	19.60

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2305-FC074-R2

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC074	May 19, 2023	- First Approval Report
HCT-RF-2305-FC074-R1	May 23, 2023	- Added the Straddle Channel Data.
HCT-RF-2305-FC074-R2	May 25, 2023	- Added a description of conducted test.(Page 17)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS	10
3.5 OCCUPIED BANDWIDTH.	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.9 WORST CASE(RADIATED TEST)	15
3.10 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 CONDUCTED OUTPUT POWER.....	23
8.2 EFFECTIVE RADIATED POWER.....	28
8.3 RADIATED SPURIOUS EMISSIONS	30
8.4 OCCUPIED BANDWIDTH	31
8.5 CONDUCTED SPURIOUS EMISSIONS	32
8.6 CHANNEL EDGE.....	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
8.8 STRADDLE CHANNEL	38
8.8.1 CONDUCTED OUTPUT POWER.....	38
8.8.2 EFFECTIVE RADIATED POWER	42
8.8.3 RADIATED SPURIOUS EMISSIONS	43
8.8.4 CONDUCTED SPURIOUS EMISSIONS	44
8.8.5 CHANNEL EDGE(Part90)	44
8.8.6 BAND EDGE(Part22)	44
9. TEST PLOTS.....	45
10. TEST PLOTS (STRADDLE CHANNEL).....	94
11. ANNEX A_ TEST SETUP PHOTO	119

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMF946B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§90, §22, §2
EUT Type:	Mobile phone
Model(s):	SM-F946B/DS
Additional Model(s):	SM-F946B
Tx Frequency:	814.7 MHz – 824.0 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 824.0 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 824.0 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz – 824.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	March 27, 2023 ~ May 10, 2023
Serial number:	Radiated: R3CW30A3AVJ Conducted: R3CW30A3CMX

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, WPT, AIT, Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

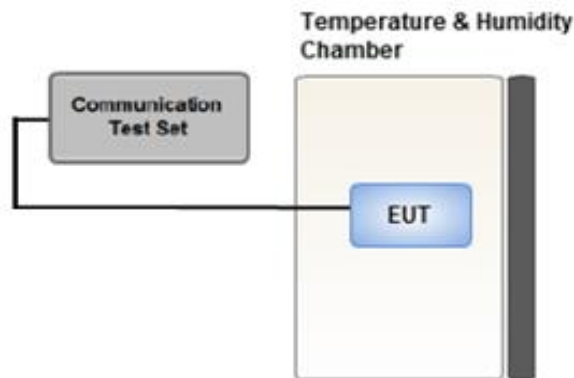

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

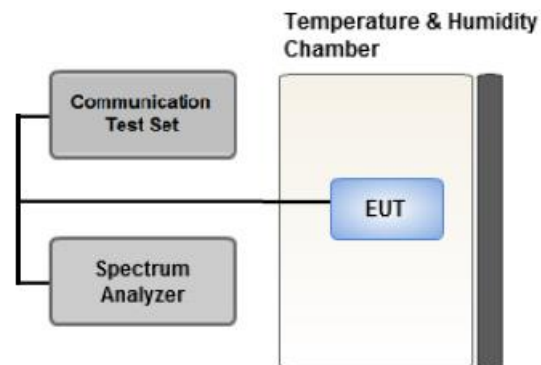

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE



Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/ \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

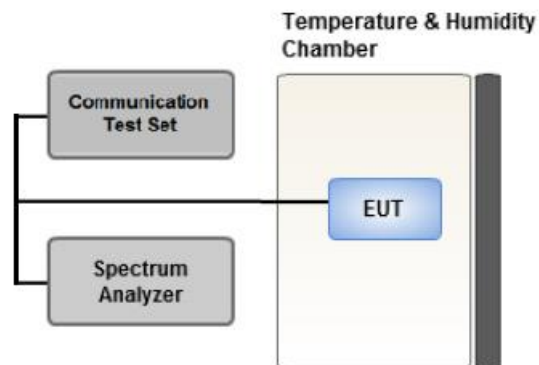

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
Worst case: Open mode.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- This device supports two additional antenna configurations for Low bands
All antenna configurations were investigated and the worst case configuration results are reported.
Antenna configurations: Only Main1, AFS(Main1+Main2)
Worst case: AFS(Main1+Main2)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.
- SM-F946B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-F946B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low	1	5	X
			High	1	0	
		3	Low	1	14	
			High	1	0	
		5	Low	1	24	
			High	1	0	
		10	Mid	1	49	
15	Mid	1	74			
Effective Radiated Power (Straddle Channel)	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	5	Low	1	24	X
			High	1	0	
Radiated Spurious and Harmonic Emissions (Straddle Channel)	QPSK	5	Mid	1	0	X

3.10 WORST CASE(CONDUCTED TEST)

-Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

- SM-F946B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

- Both Main1 Ant & AFS(Main1 Ant+Main2 Ant) has same antenna port.

So conducted tests were performed Main1 Ant port.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Straddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5, 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.53	0.284	24.57	0.286	100
		1	3	24.46	0.279	24.59	0.288	100
		1	5	24.43	0.277	24.52	0.283	100
		3	0	24.48	0.281	24.55	0.285	100
		3	1	24.46	0.279	24.55	0.285	100
		3	3	24.42	0.277	24.54	0.285	100
		6	0	23.02	0.200	23.07	0.203	100
	16QAM	1	0	23.67	0.233	23.74	0.236	100
		1	3	23.84	0.242	23.89	0.245	100
		1	5	23.64	0.231	23.82	0.241	100
		3	0	23.55	0.226	23.64	0.231	100
		3	1	23.59	0.229	23.68	0.233	100
		3	3	23.61	0.230	23.71	0.235	100
		6	0	22.58	0.181	22.62	0.183	100
	64QAM	1	0	22.65	0.184	22.68	0.185	100
		1	3	22.70	0.186	22.81	0.191	100
		1	5	22.50	0.178	22.70	0.186	100
		3	0	22.66	0.185	22.64	0.184	100
		3	1	22.54	0.179	22.68	0.185	100
		3	3	22.64	0.184	22.67	0.185	100
		6	0	21.54	0.143	21.58	0.144	100
	256QAM	1	0	19.47	0.089	19.56	0.090	100
		1	3	19.54	0.090	19.63	0.092	100
		1	5	19.48	0.089	19.55	0.090	100
		3	0	19.53	0.090	19.61	0.091	100
		3	1	19.48	0.089	19.56	0.090	100
		3	3	19.56	0.090	19.55	0.090	100
		6	0	19.49	0.089	19.56	0.090	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	24.42	0.277	24.49	0.281	100
		1	7	24.61	0.289	24.65	0.292	100
		1	14	24.45	0.279	24.57	0.286	100
		8	0	23.56	0.227	23.57	0.228	100
		8	3	23.56	0.227	23.56	0.227	100
		8	7	23.52	0.225	23.58	0.228	100
		15	0	23.52	0.225	23.55	0.226	100
	16QAM	1	0	23.66	0.232	23.74	0.237	100
		1	7	24.00	0.251	23.95	0.248	100
		1	14	23.77	0.238	23.79	0.239	100
		8	0	22.55	0.180	22.56	0.180	100
		8	3	22.54	0.179	22.57	0.181	100
		8	7	22.54	0.179	22.65	0.184	100
		15	0	22.54	0.179	22.59	0.181	100
	64QAM	1	0	22.69	0.186	22.77	0.189	100
		1	7	22.70	0.186	22.72	0.187	100
		1	14	22.67	0.185	22.70	0.186	100
		8	0	21.55	0.143	21.55	0.143	100
		8	3	21.59	0.144	21.59	0.144	100
		8	7	21.60	0.145	21.61	0.145	100
		15	0	21.54	0.143	21.60	0.145	100
	256QAM	1	0	19.36	0.086	19.43	0.088	100
		1	7	19.58	0.091	19.72	0.094	100
		1	14	19.65	0.092	19.54	0.090	100
		8	0	19.56	0.090	19.53	0.090	100
		8	3	19.58	0.091	19.56	0.090	100
		8	7	19.52	0.090	19.60	0.091	100
		15	0	19.58	0.091	19.57	0.091	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.60	0.288	24.71	0.296	100
		1	12	24.61	0.289	24.75	0.299	100
		1	24	24.55	0.285	24.62	0.290	100
		12	0	23.42	0.220	23.53	0.225	100
		12	6	23.55	0.226	23.60	0.229	100
		12	11	23.50	0.224	23.58	0.228	100
		25	0	23.59	0.229	23.60	0.229	100
	16QAM	1	0	23.73	0.236	23.81	0.240	100
		1	12	23.67	0.233	23.78	0.239	100
		1	24	23.82	0.241	23.79	0.239	100
		12	0	22.49	0.177	22.54	0.179	100
		12	6	22.55	0.180	22.59	0.182	100
		12	11	22.51	0.178	22.60	0.182	100
		25	0	22.47	0.177	22.57	0.181	100
	64QAM	1	0	22.84	0.192	22.77	0.189	100
		1	12	22.76	0.189	22.85	0.193	100
		1	24	22.49	0.177	22.68	0.185	100
		12	0	21.45	0.140	21.52	0.142	100
		12	6	21.51	0.142	21.61	0.145	100
		12	11	21.53	0.142	21.58	0.144	100
		25	0	21.49	0.141	21.56	0.143	100
	256QAM	1	0	19.38	0.087	19.54	0.090	100
		1	12	19.68	0.093	19.72	0.094	100
		1	24	19.40	0.087	19.54	0.090	100
		12	0	19.38	0.087	19.45	0.088	100
		12	6	19.53	0.090	19.60	0.091	100
		12	11	19.47	0.089	19.56	0.090	100
		25	0	19.49	0.089	19.56	0.090	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	24.59	0.288	100
		1	24	24.52	0.283	100
		1	49	24.50	0.282	100
		25	0	23.46	0.222	100
		25	12	23.58	0.228	100
		25	24	23.46	0.222	100
		50	0	23.53	0.225	100
	16QAM	1	0	23.72	0.236	100
		1	24	23.70	0.234	100
		1	49	23.78	0.239	100
		25	0	22.44	0.175	100
		25	12	22.55	0.180	100
		25	24	22.54	0.179	100
		50	0	22.60	0.182	100
	64QAM	1	0	22.72	0.187	100
		1	24	22.79	0.190	100
		1	49	22.59	0.182	100
		25	0	21.47	0.140	100
		25	12	21.59	0.144	100
		25	24	21.51	0.142	100
		50	0	21.47	0.140	100
	256QAM	1	0	19.58	0.091	100
		1	24	19.41	0.087	100
		1	49	19.52	0.090	100
		25	0	19.42	0.087	100
		25	12	19.55	0.090	100
		25	24	19.43	0.088	100
		50	0	19.51	0.089	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	24.65	0.292	100
		1	36	24.79	0.301	100
		1	74	24.63	0.290	100
		36	0	23.49	0.223	100
		36	18	23.62	0.230	100
		36	39	23.61	0.229	100
		75	0	23.62	0.230	100
	16QAM	1	0	23.79	0.240	100
		1	36	23.79	0.239	100
		1	74	23.91	0.246	100
		36	0	22.53	0.179	100
		36	18	22.61	0.182	100
		36	39	22.63	0.183	100
		75	0	22.63	0.183	100
	64QAM	1	0	22.86	0.193	100
		1	36	22.82	0.191	100
		1	74	22.73	0.188	100
		36	0	21.54	0.142	100
		36	18	21.63	0.145	100
		36	39	21.61	0.145	100
		75	0	21.60	0.145	100
	256QAM	1	0	19.57	0.091	100
		1	36	19.60	0.091	100
		1	74	19.54	0.090	100
		36	0	19.51	0.089	100
		36	18	19.57	0.091	100
		36	39	19.52	0.090	100
		75	0	19.58	0.091	100

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-32.37	28.47	-9.95	1.40	H	< 100	0.052	17.12
		16QAM	-33.16	27.68	-9.95	1.40	H		0.043	16.33
		64QAM	-34.24	26.60	-9.95	1.40	H		0.034	15.25
		256QAM	-37.37	23.47	-9.95	1.40	H		0.016	12.12
823.3		QPSK	-32.29	28.76	-9.94	1.41	H		0.055	17.41
		16QAM	-33.07	27.98	-9.94	1.41	H		0.046	16.63
		64QAM	-34.12	26.93	-9.94	1.41	H		0.036	15.58
		256QAM	-37.23	23.82	-9.94	1.41	H		0.018	12.47

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-32.31	28.53	-9.95	1.41	H	< 100	0.052	17.17
		16QAM	-33.06	27.78	-9.95	1.41	H		0.044	16.42
		64QAM	-34.10	26.74	-9.95	1.41	H		0.035	15.38
		256QAM	-37.23	23.61	-9.95	1.41	H		0.017	12.25
822.5		QPSK	-32.28	28.73	-9.94	1.41	H		0.055	17.38
		16QAM	-32.98	28.03	-9.94	1.41	H		0.047	16.68
		64QAM	-34.05	26.96	-9.94	1.41	H		0.036	15.61
		256QAM	-37.21	23.80	-9.94	1.41	H		0.018	12.45

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
816.5	LTE B26/ 5 MHz	QPSK	-32.13	28.66	-9.95	1.41	H	< 100	0.054	17.30
		16QAM	-32.91	27.88	-9.95	1.41	H		0.045	16.52
		64QAM	-33.97	26.82	-9.95	1.41	H		0.035	15.46
		256QAM	-37.10	23.69	-9.95	1.41	H		0.017	12.33
821.5		QPSK	-32.10	28.85	-9.94	1.41	H		0.056	17.50
		16QAM	-32.82	28.13	-9.94	1.41	H		0.048	16.78
		64QAM	-33.89	27.06	-9.94	1.41	H		0.037	15.71
		256QAM	-37.13	23.82	-9.94	1.41	H		0.018	12.47

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
819.0	LTE B26/ 10 MHz	QPSK	-32.16	28.65	-9.95	1.41	H	< 100	0.054	17.29
		16QAM	-32.89	27.92	-9.95	1.41	H		0.045	16.56
		64QAM	-33.93	26.88	-9.95	1.41	H		0.036	15.52
		256QAM	-37.02	23.79	-9.95	1.41	H		0.018	12.43

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
821.5	LTE B26/ 15 MHz	QPSK	-32.30	28.65	-9.94	1.41	H	< 7.00	0.054	17.30
		16QAM	-33.13	27.82	-9.94	1.41	H		0.044	16.47
		64QAM	-34.19	26.76	-9.94	1.41	H		0.035	15.41
		256QAM	-37.08	23.87	-9.94	1.41	H		0.018	12.52

Note

1. Limit: None (for reporting purposes only)

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26715 (816.5)	1 633.00	-52.98	9.50	-63.33	1.96	V	-55.79	-13.00
	2 449.50	-51.72	10.30	-56.05	2.56	H	-48.31	-13.00
	3 266.00	-55.98	10.89	-55.93	2.92	H	-47.96	-13.00
26765 (821.5)	1 643.00	-53.19	9.60	-63.83	1.99	H	-56.22	-13.00
	2 464.50	-53.01	10.42	-57.97	2.55	H	-50.10	-13.00
	3 286.00	-57.60	12.01	-58.90	2.92	V	-49.82	-13.00

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0996
			16QAM			1.0974
			64QAM			1.0977
			256QAM			1.1015
	3 MHz	822.5	QPSK	15		2.7104
			16QAM			2.7175
			64QAM			2.7159
			256QAM			2.7208
	5 MHz	821.5	QPSK	25		4.5178
			16QAM			4.5132
			64QAM			4.5108
			256QAM			4.5408
	10 MHz	819.0	QPSK	50		8.9840
			16QAM			9.0120
			64QAM			9.0023
			256QAM			8.9824
	15 MHz	821.5	QPSK	75		13.461
			16QAM			13.450
			64QAM			13.450
			256QAM			13.445

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 46 ~ 65.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.6686	27.976	-67.271	-39.295	-13.00
		823.3	3.6800	27.976	-67.195	-39.219	
	3	815.5	3.6775	27.976	-67.221	-39.245	
		822.5	3.7194	27.976	-67.252	-39.276	
	5	816.5	3.6930	27.976	-67.007	-39.031	
		821.5	3.6860	27.976	-67.095	-39.119	
	10	819.0	3.7184	27.976	-67.216	-39.240	
	15	821.5	3.7029	27.976	-66.861	-38.885	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 86 ~ 93.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 66 ~ 85.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	814 700 004	0.0	0.000 000	0.000
100 %		-30	814 700 009	5.0	0.000 001	0.006
100 %		-20	814 699 999	-4.7	-0.000 001	-0.006
100 %		-10	814 699 998	-6.0	-0.000 001	-0.007
100 %		0	814 700 007	2.9	0.000 000	0.004
100 %		+10	814 699 998	-6.4	-0.000 001	-0.008
100 %		+30	814 700 000	-4.3	-0.000 001	-0.005
100 %		+40	814 700 001	-3.1	0.000 000	-0.004
100 %		+50	814 700 011	7.4	0.000 001	0.009
Batt. Endpoint		3.350	+20	814 700 001	-3.0	0.000 000

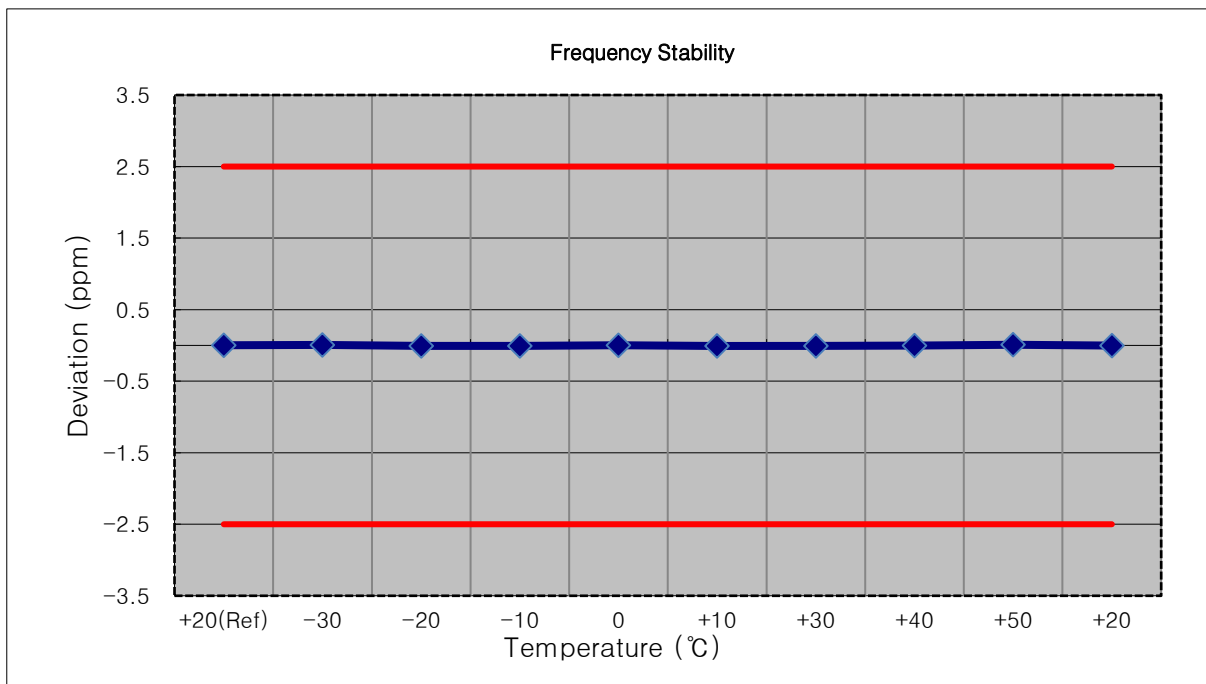


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	815 499 991	0.0	0.000 000	0.000
100 %		-30	815 500 001	10.1	0.000 001	0.012
100 %		-20	815 499 984	-7.1	-0.000 001	-0.009
100 %		-10	815 500 001	10.3	0.000 001	0.013
100 %		0	815 499 979	-12.5	-0.000 002	-0.015
100 %		+10	815 499 985	-6.5	-0.000 001	-0.008
100 %		+30	815 499 983	-7.9	-0.000 001	-0.010
100 %		+40	815 499 981	-10.1	-0.000 001	-0.012
100 %		+50	815 499 984	-7.2	-0.000 001	-0.009
Batt. Endpoint		3.350	+20	815 499 983	-8.2	-0.000 001

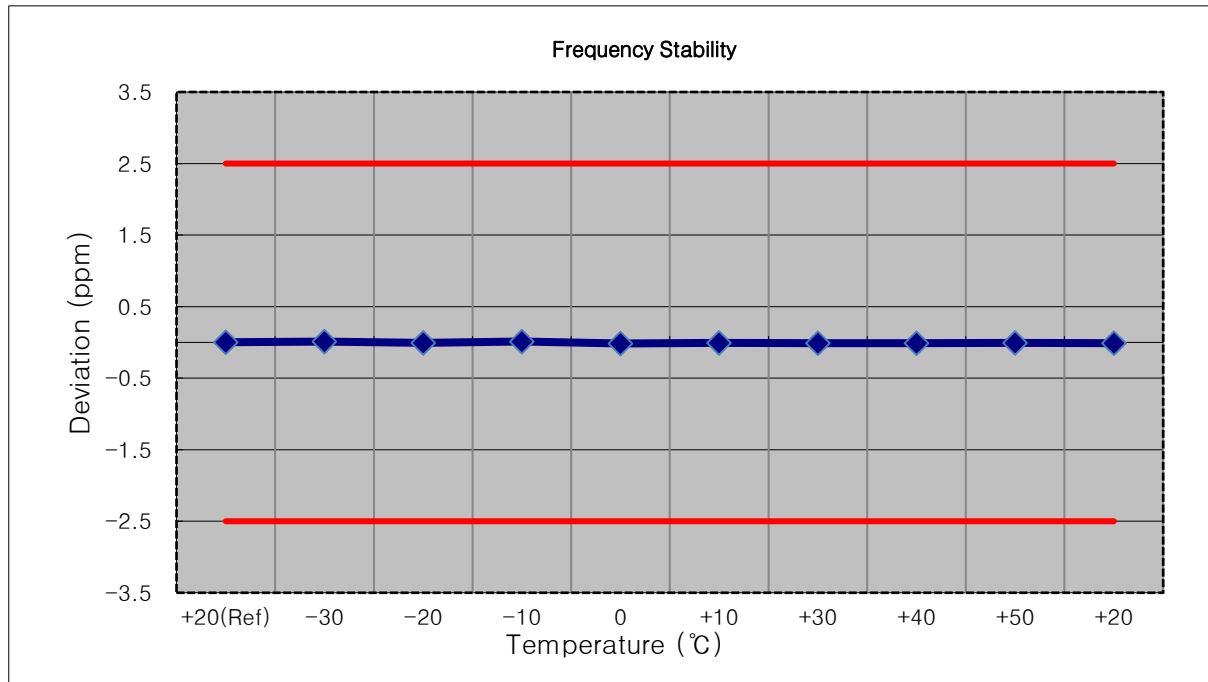


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	816 499 992	0.0	0.000 000	0.000
100 %		-30	816 499 985	-6.7	-0.000 001	-0.008
100 %		-20	816 499 987	-4.9	-0.000 001	-0.006
100 %		-10	816 499 988	-4.1	-0.000 001	-0.005
100 %		0	816 499 987	-5.5	-0.000 001	-0.007
100 %		+10	816 499 987	-5.2	-0.000 001	-0.006
100 %		+30	816 499 986	-5.7	-0.000 001	-0.007
100 %		+40	816 499 985	-7.0	-0.000 001	-0.009
100 %		+50	816 499 985	-7.2	-0.000 001	-0.009
Batt. Endpoint		3.350	+20	816 499 987	-5.0	-0.000 001

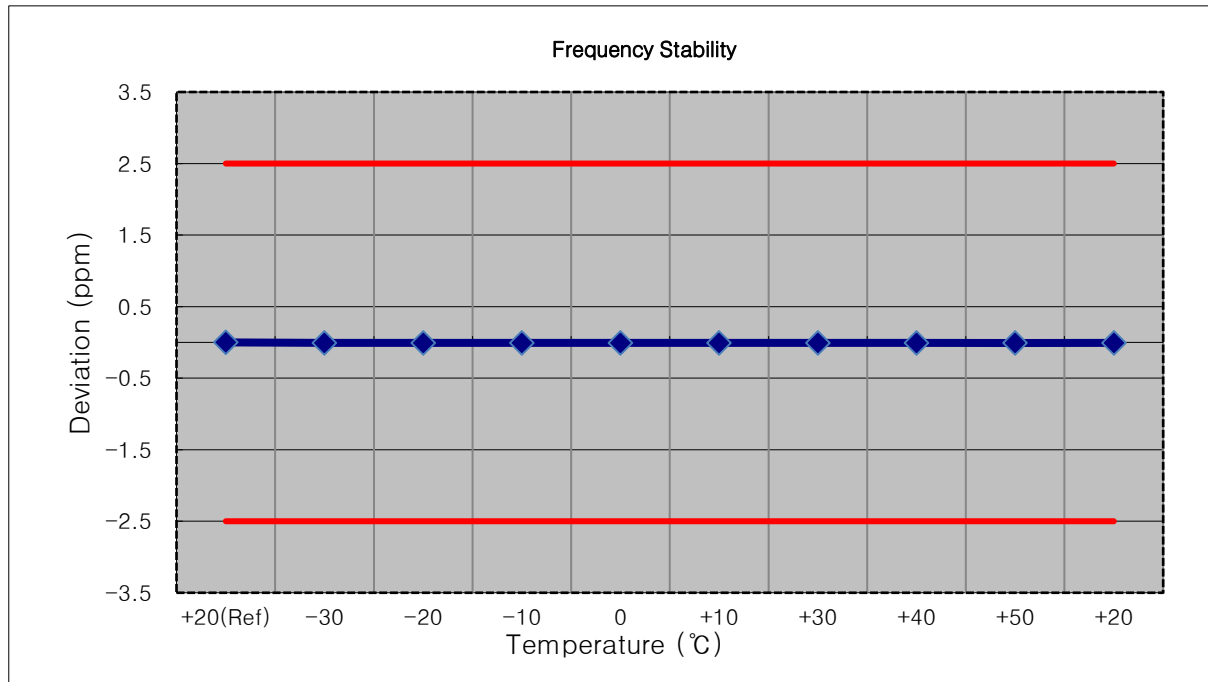


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	818 999 995	0.0	0.000 000	0.000
100 %		-30	818 999 990	-4.6	-0.000 001	-0.006
100 %		-20	818 999 990	-4.8	-0.000 001	-0.006
100 %		-10	818 999 990	-4.7	-0.000 001	-0.006
100 %		0	818 999 990	-5.0	-0.000 001	-0.006
100 %		+10	818 999 989	-5.5	-0.000 001	-0.007
100 %		+30	818 999 989	-6.0	-0.000 001	-0.007
100 %		+40	818 999 989	-6.0	-0.000 001	-0.007
100 %		+50	818 999 989	-5.8	-0.000 001	-0.007
Batt. Endpoint		3.350	+20	818 999 988	-7.2	-0.000 001

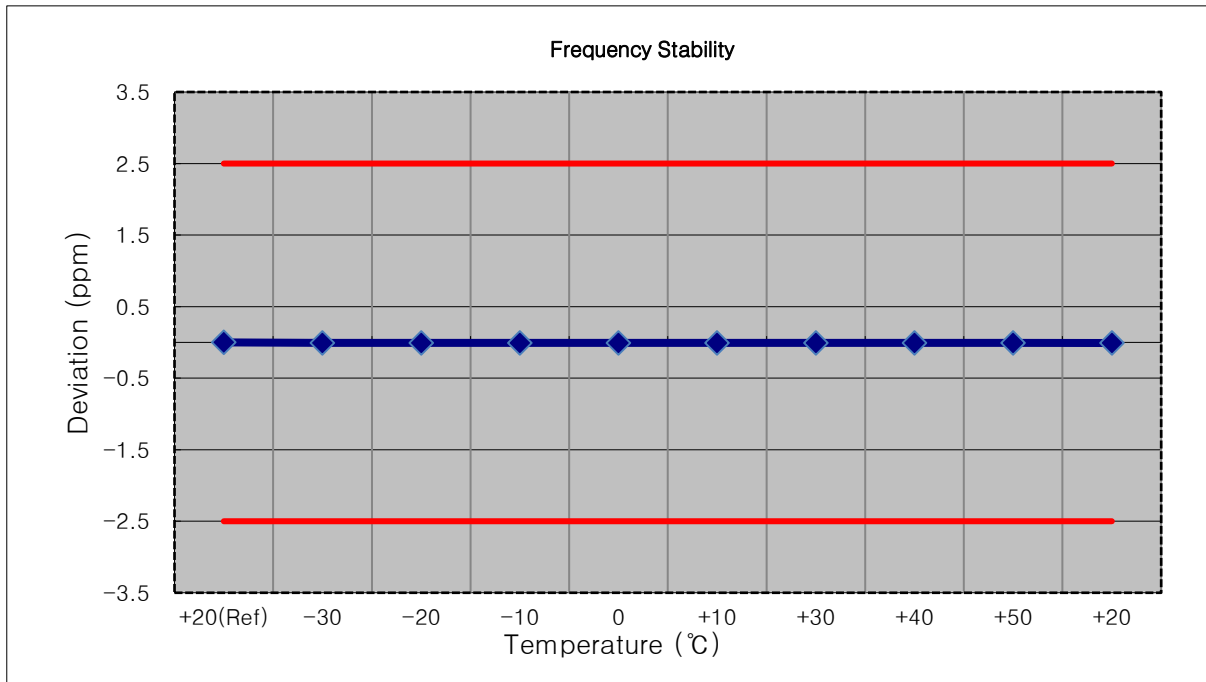

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	821 499 992	0.0	0.000 000	0.000
100 %		-30	821 499 985	-7.3	-0.000 001	-0.009
100 %		-20	821 499 985	-7.0	-0.000 001	-0.009
100 %		-10	821 499 985	-6.8	-0.000 001	-0.008
100 %		0	821 499 987	-5.0	-0.000 001	-0.006
100 %		+10	821 499 985	-6.6	-0.000 001	-0.008
100 %		+30	821 499 988	-3.7	0.000 000	-0.005
100 %		+40	821 499 987	-5.4	-0.000 001	-0.007
100 %		+50	821 499 986	-5.9	-0.000 001	-0.007
Batt. Endpoint		3.350	+20	821 499 986	-5.9	-0.000 001

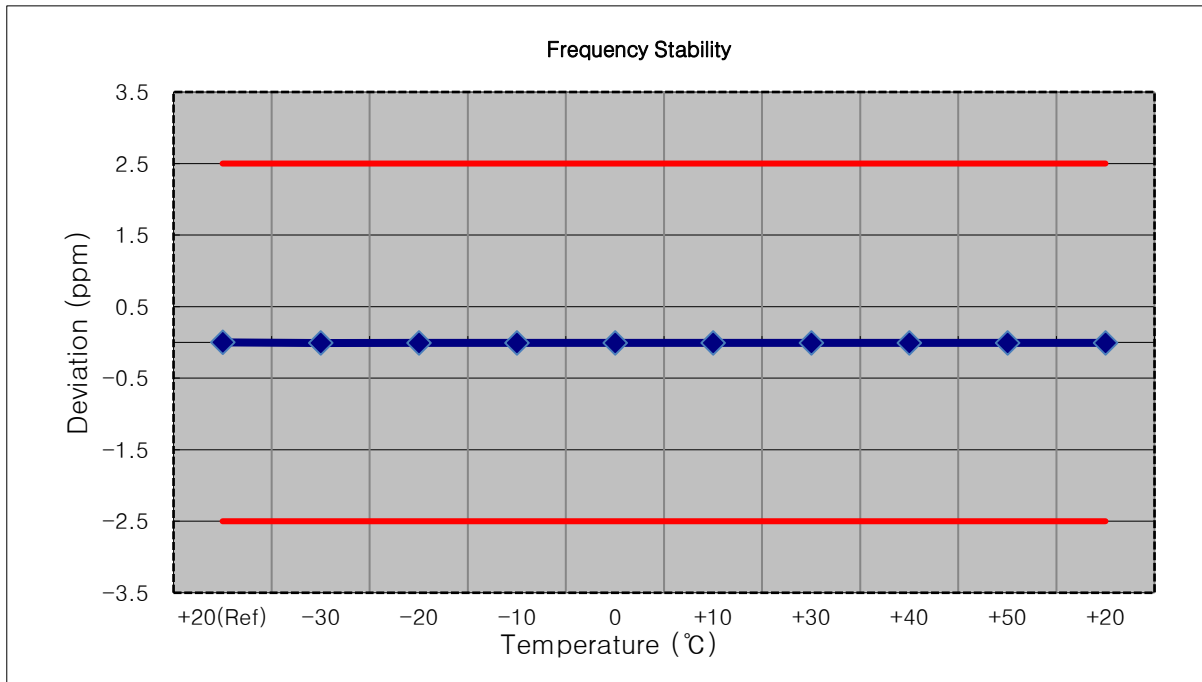

8.8 STRADDLE CHANNEL

8.8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	24.55	0.285	100
		1	3	24.53	0.284	100
		1	5	24.48	0.280	100
		3	0	24.51	0.283	100
		3	1	24.50	0.282	100
		3	3	24.48	0.281	100
		6	0	23.04	0.202	100
	16QAM	1	0	23.70	0.235	100
		1	3	23.87	0.244	100
		1	5	23.73	0.236	100
		3	0	23.59	0.229	100
		3	1	23.64	0.231	100
		3	3	23.66	0.232	100
		6	0	22.60	0.182	100
	64QAM	1	0	22.67	0.185	100
		1	3	22.76	0.189	100
		1	5	22.60	0.182	100
		3	0	22.65	0.184	100
		3	1	22.61	0.182	100
		3	3	22.66	0.184	100
		6	0	21.56	0.143	100
	256QAM	1	0	19.52	0.089	100
		1	3	19.59	0.091	100
		1	5	19.51	0.089	100
		3	0	19.57	0.091	100
		3	1	19.52	0.090	100
		3	3	19.55	0.090	100
		6	0	19.52	0.090	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	24.45	0.279	100
		1	7	24.63	0.291	100
		1	14	24.51	0.282	100
		8	0	23.56	0.227	100
		8	3	23.56	0.227	100
		8	7	23.55	0.227	100
		15	0	23.54	0.226	100
	16QAM	1	0	23.70	0.234	100
		1	7	23.98	0.250	100
		1	14	23.78	0.239	100
		8	0	22.55	0.180	100
		8	3	22.56	0.180	100
		8	7	22.60	0.182	100
		15	0	22.56	0.180	100
	64QAM	1	0	22.73	0.187	100
		1	7	22.71	0.187	100
		1	14	22.68	0.185	100
		8	0	21.55	0.143	100
		8	3	21.59	0.144	100
		8	7	21.60	0.145	100
		15	0	21.57	0.144	100
	256QAM	1	0	19.40	0.087	100
		1	7	19.65	0.092	100
		1	14	19.59	0.091	100
		8	0	19.55	0.090	100
		8	3	19.57	0.091	100
		8	7	19.56	0.090	100
		15	0	19.58	0.091	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	24.66	0.292	100
		1	12	24.68	0.294	100
		1	24	24.58	0.287	100
		12	0	23.47	0.223	100
		12	6	23.57	0.228	100
		12	11	23.54	0.226	100
		25	0	23.60	0.229	100
	16QAM	1	0	23.77	0.238	100
		1	12	23.73	0.236	100
		1	24	23.80	0.240	100
		12	0	22.52	0.178	100
		12	6	22.57	0.181	100
		12	11	22.56	0.180	100
		25	0	22.52	0.179	100
	64QAM	1	0	22.81	0.191	100
		1	12	22.81	0.191	100
		1	24	22.59	0.181	100
		12	0	21.49	0.141	100
		12	6	21.56	0.143	100
		12	11	21.56	0.143	100
		25	0	21.52	0.142	100
	256QAM	1	0	19.46	0.088	100
		1	12	19.70	0.093	100
		1	24	19.47	0.089	100
		12	0	19.41	0.087	100
		12	6	19.57	0.090	100
		12	11	19.51	0.089	100
		25	0	19.52	0.090	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	24.57	0.286	100
		1	24	24.50	0.282	100
		1	49	24.48	0.281	100
		25	0	23.44	0.221	100
		25	12	23.56	0.227	100
		25	24	23.44	0.221	100
		50	0	23.50	0.224	100
	16QAM	1	0	23.70	0.234	100
		1	24	23.68	0.233	100
		1	49	23.77	0.238	100
		25	0	22.42	0.175	100
		25	12	22.53	0.179	100
		25	24	22.53	0.179	100
		50	0	22.58	0.181	100
	64QAM	1	0	22.71	0.187	100
		1	24	22.77	0.189	100
		1	49	22.57	0.181	100
		25	0	21.45	0.140	100
		25	12	21.57	0.144	100
		25	24	21.50	0.141	100
		50	0	21.45	0.140	100
	256QAM	1	0	19.56	0.090	100
		1	24	19.38	0.087	100
		1	49	19.50	0.089	100
		25	0	19.40	0.087	100
		25	12	19.53	0.090	100
		25	24	19.41	0.087	100
		50	0	19.49	0.089	100

8.8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-32.03	29.10	-9.94	1.41	H	< 7.00	0.060	17.75
		16QAM	-32.78	28.35	-9.94	1.41	H		0.050	17.00
		64QAM	-33.87	27.26	-9.94	1.41	H		0.039	15.91
		256QAM	-37.01	24.12	-9.94	1.41	H		0.019	12.77

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-32.07	29.06	-9.94	1.41	H	< 7.00	0.059	17.71
		16QAM	-32.80	28.33	-9.94	1.41	H		0.050	16.98
		64QAM	-33.86	27.27	-9.94	1.41	H		0.039	15.92
		256QAM	-37.02	24.11	-9.94	1.41	H		0.019	12.76

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-32.01	29.12	-9.94	1.41	H	< 7.00	0.060	17.77
		16QAM	-32.74	28.39	-9.94	1.41	H		0.051	17.04
		64QAM	-33.85	27.28	-9.94	1.41	H		0.039	15.93
		256QAM	-37.04	24.09	-9.94	1.41	H		0.019	12.74

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-32.03	29.10	-9.94	1.41	H	< 7.00	0.060	17.75
		16QAM	-32.79	28.34	-9.94	1.41	H		0.050	16.99
		64QAM	-33.85	27.28	-9.94	1.41	H		0.039	15.93
		256QAM	-36.98	24.15	-9.94	1.41	H		0.019	12.80

8.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-52.56	9.70	-63.15	2.04	V	-55.49	-13.00
	2 472.00	-55.43	10.46	-60.45	2.54	H	-52.53	-13.00
	3 296.00	-55.99	12.07	-57.04	2.95	V	-47.92	-13.00

8.8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7124	27.976	-66.891	-38.915	-13.00
	3		3.6880	27.976	-67.273	-39.297	
	5		3.6810	27.976	-66.882	-38.906	
	10		3.7005	27.976	-66.884	-38.908	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 95 ~ 98.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.8.5 CHANNEL EDGE(Part90)


- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 99 ~ 110.

8.8.6 BAND EDGE(Part22)


- Test Channel : 26790(824.0 MHz)
- Plots of the EUT's Band Edge are shown Page 111 ~ 118.

9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6_0)

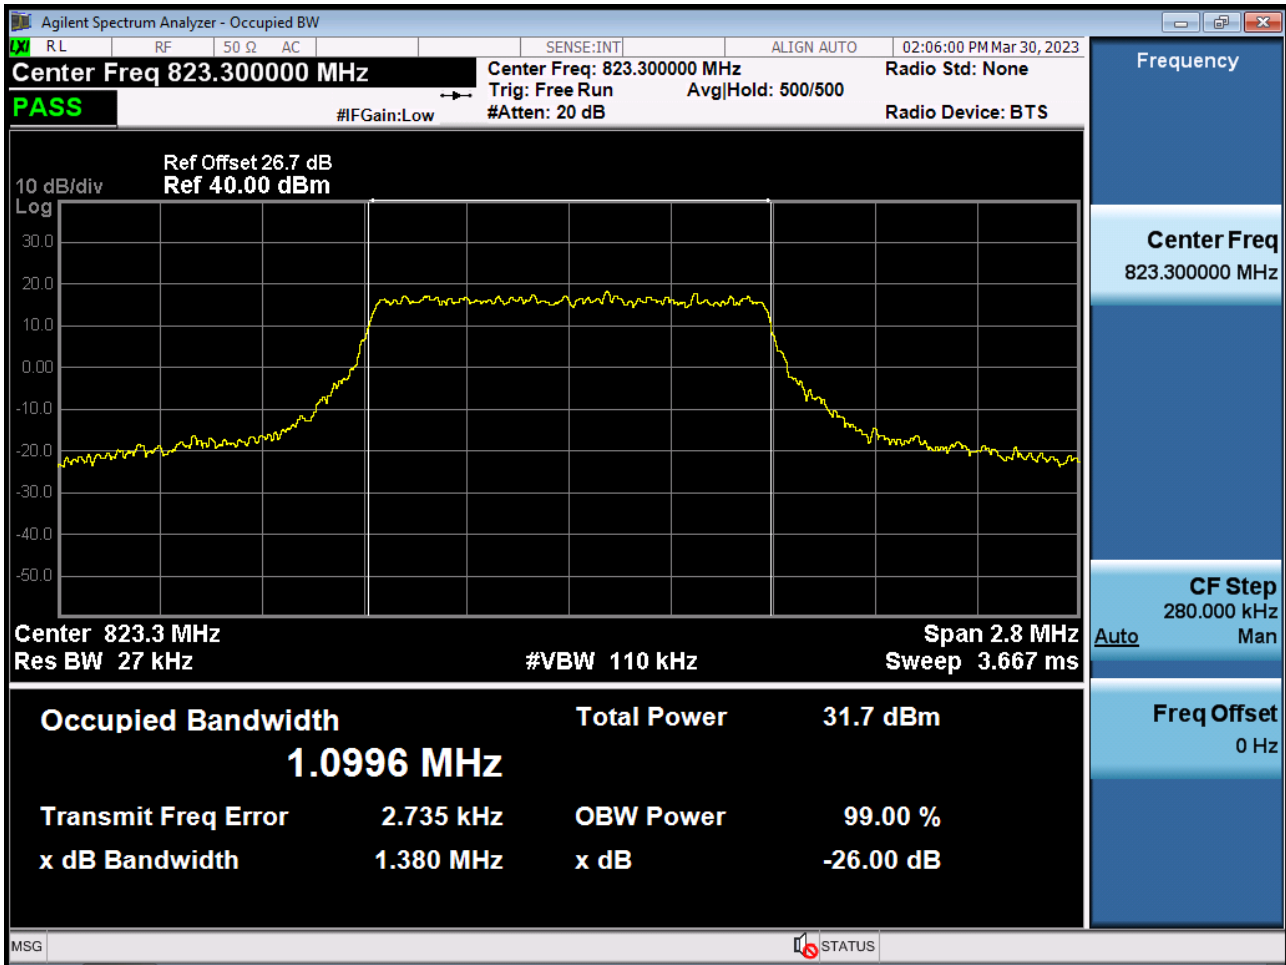


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6_0)

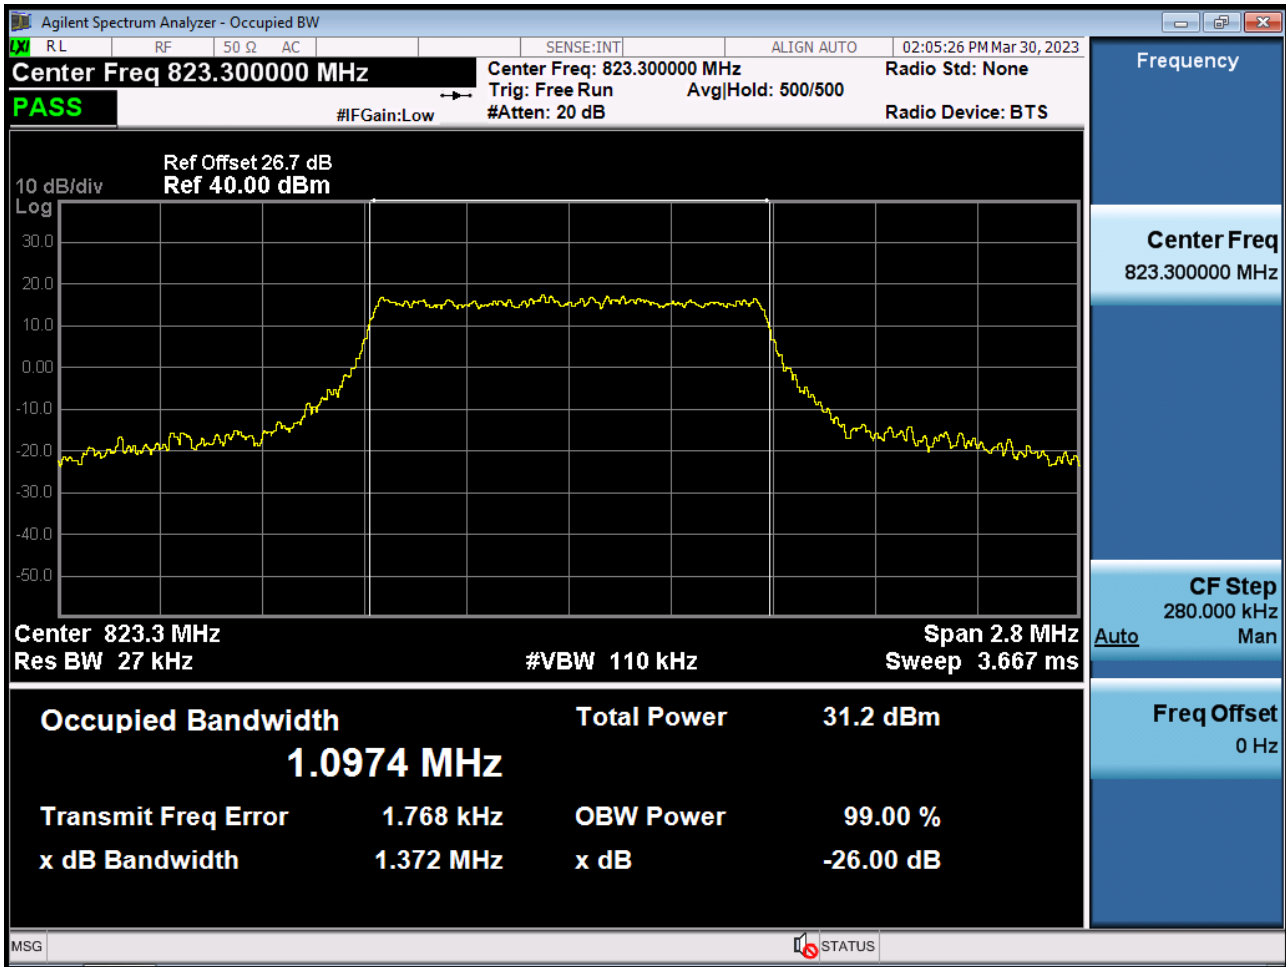


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6_0)

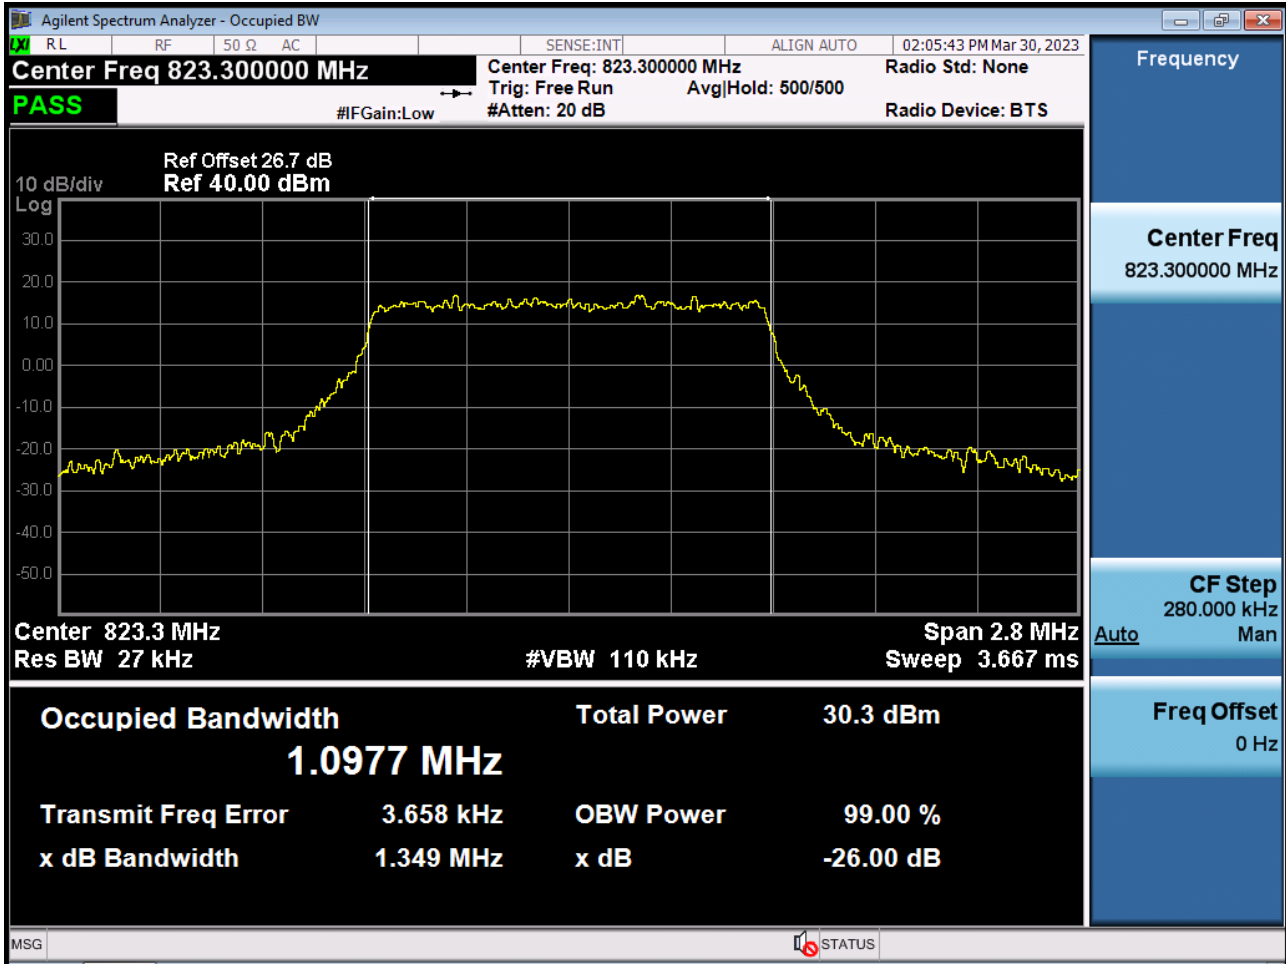


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 256QAM RB 6_0)

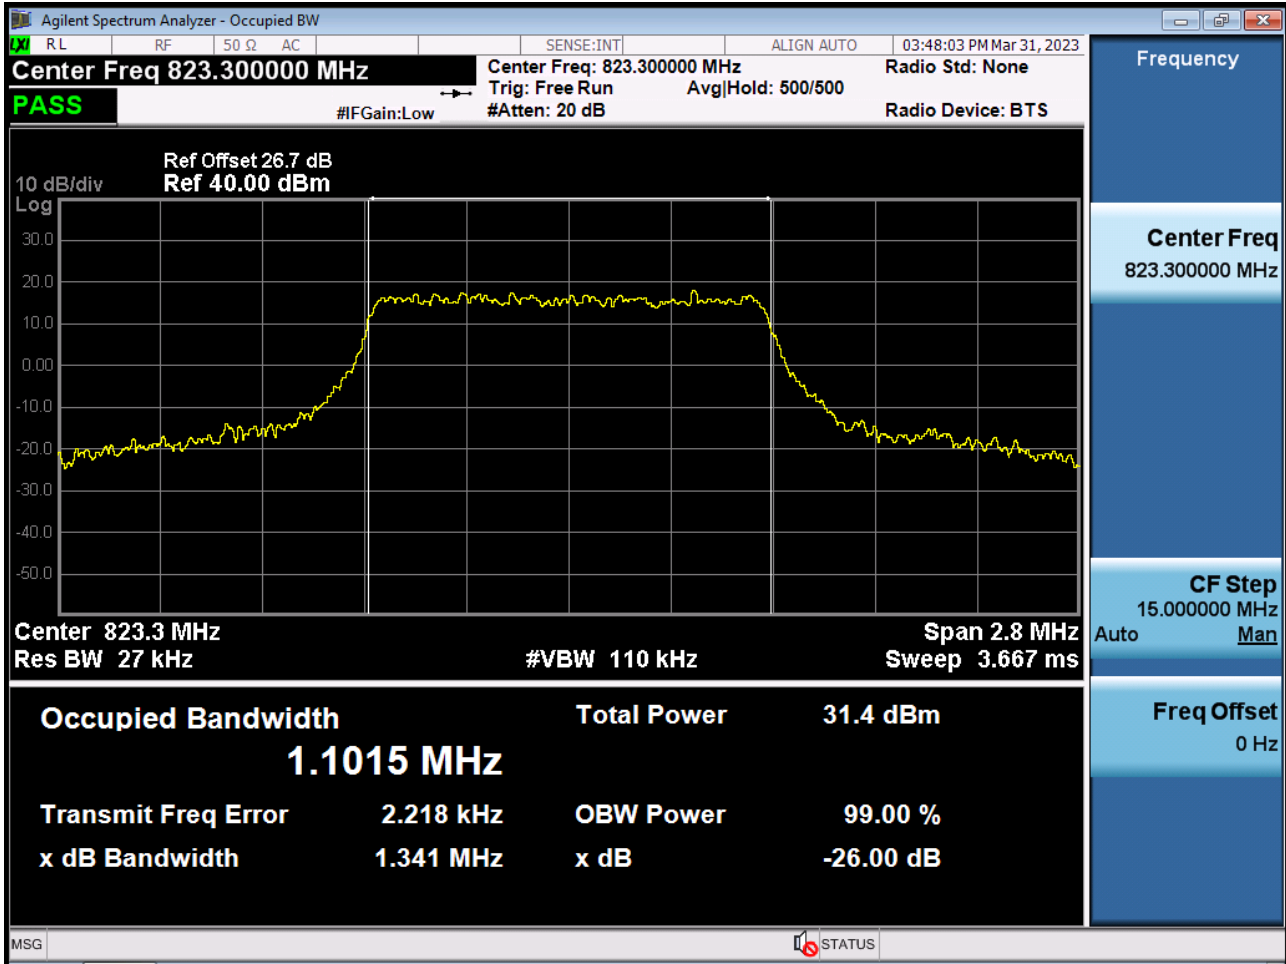


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15_0)

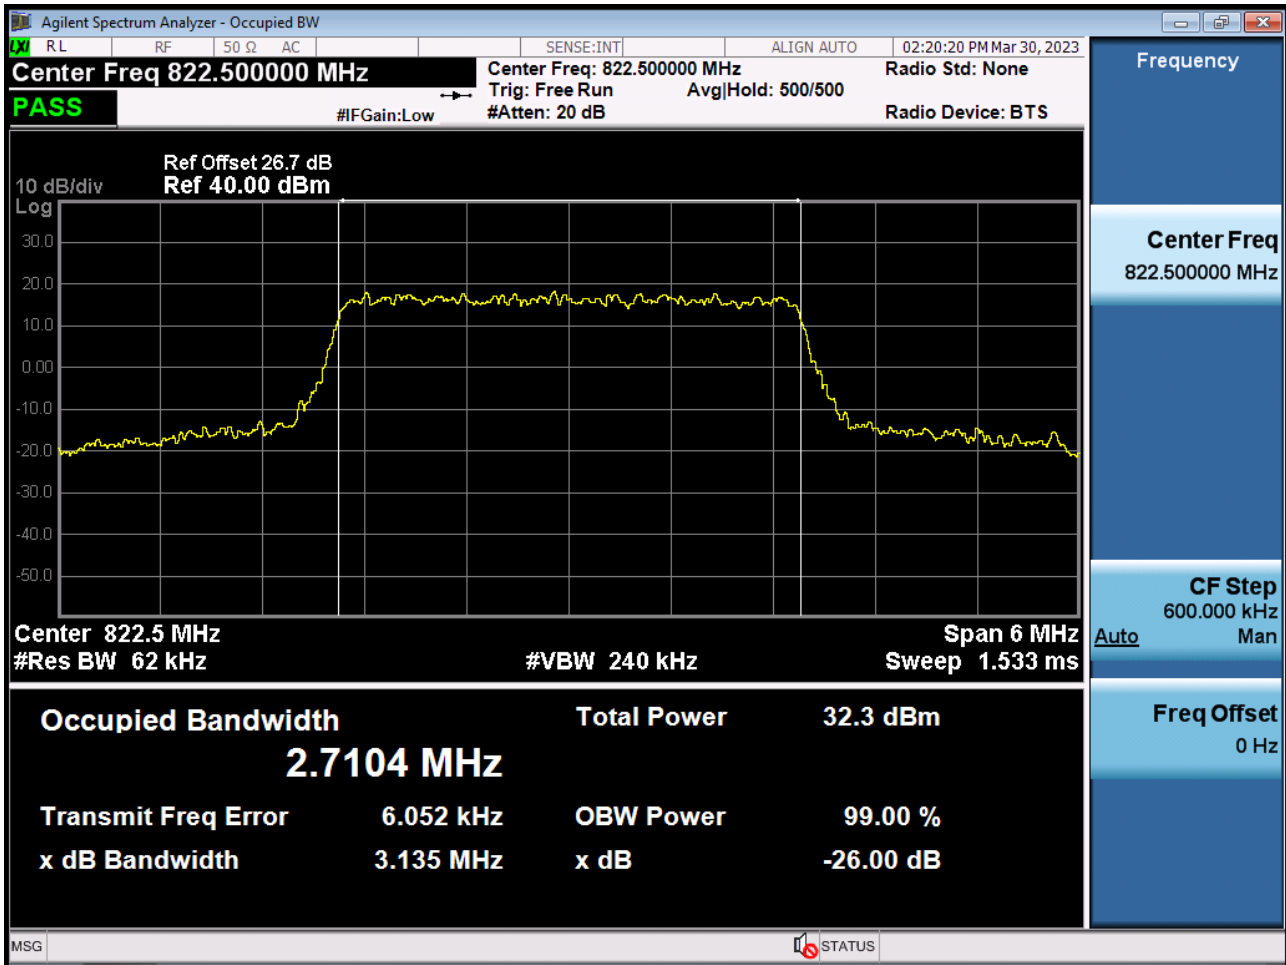


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15_0)

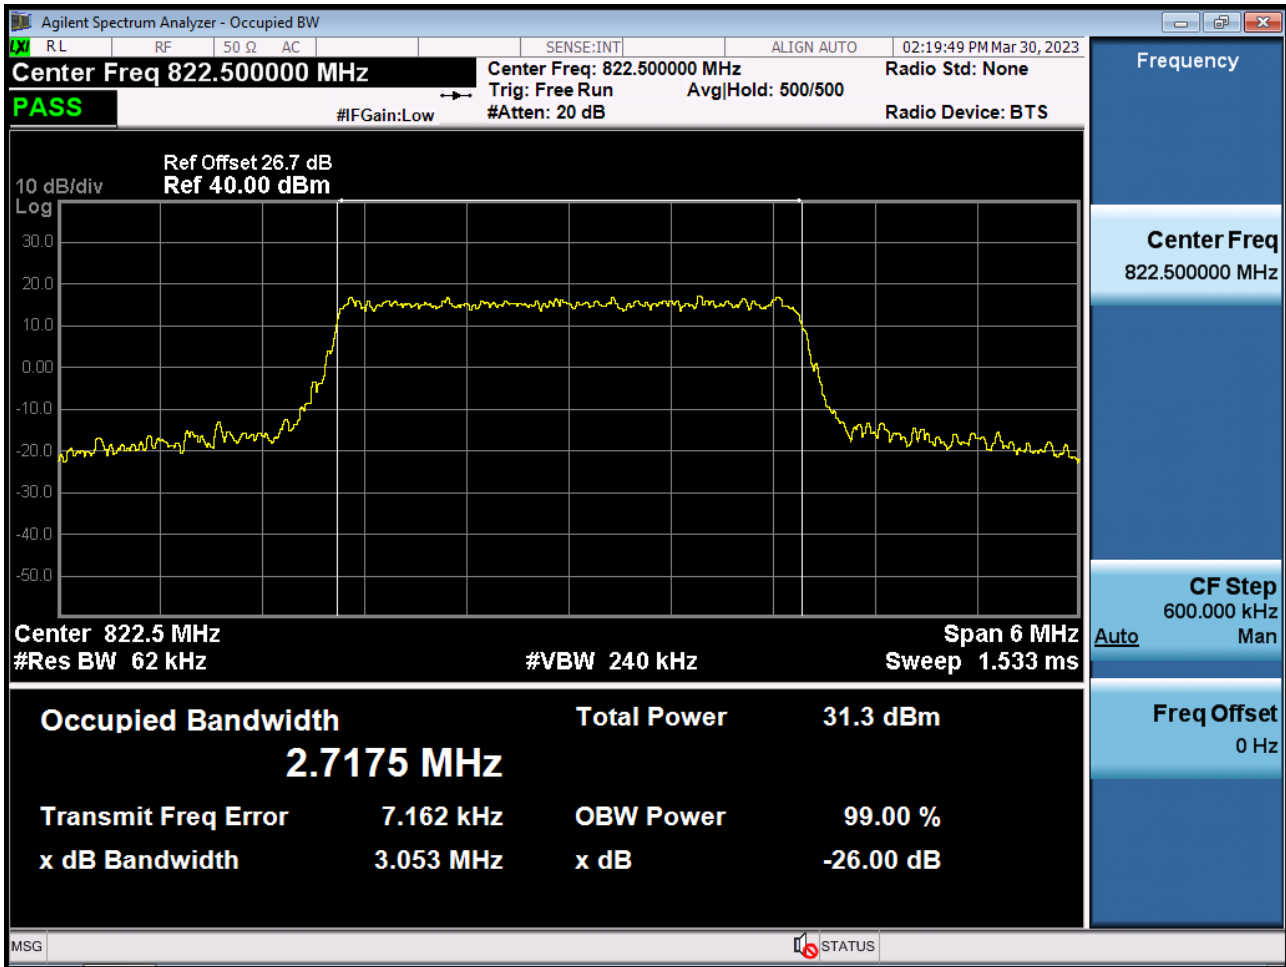


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15_0)

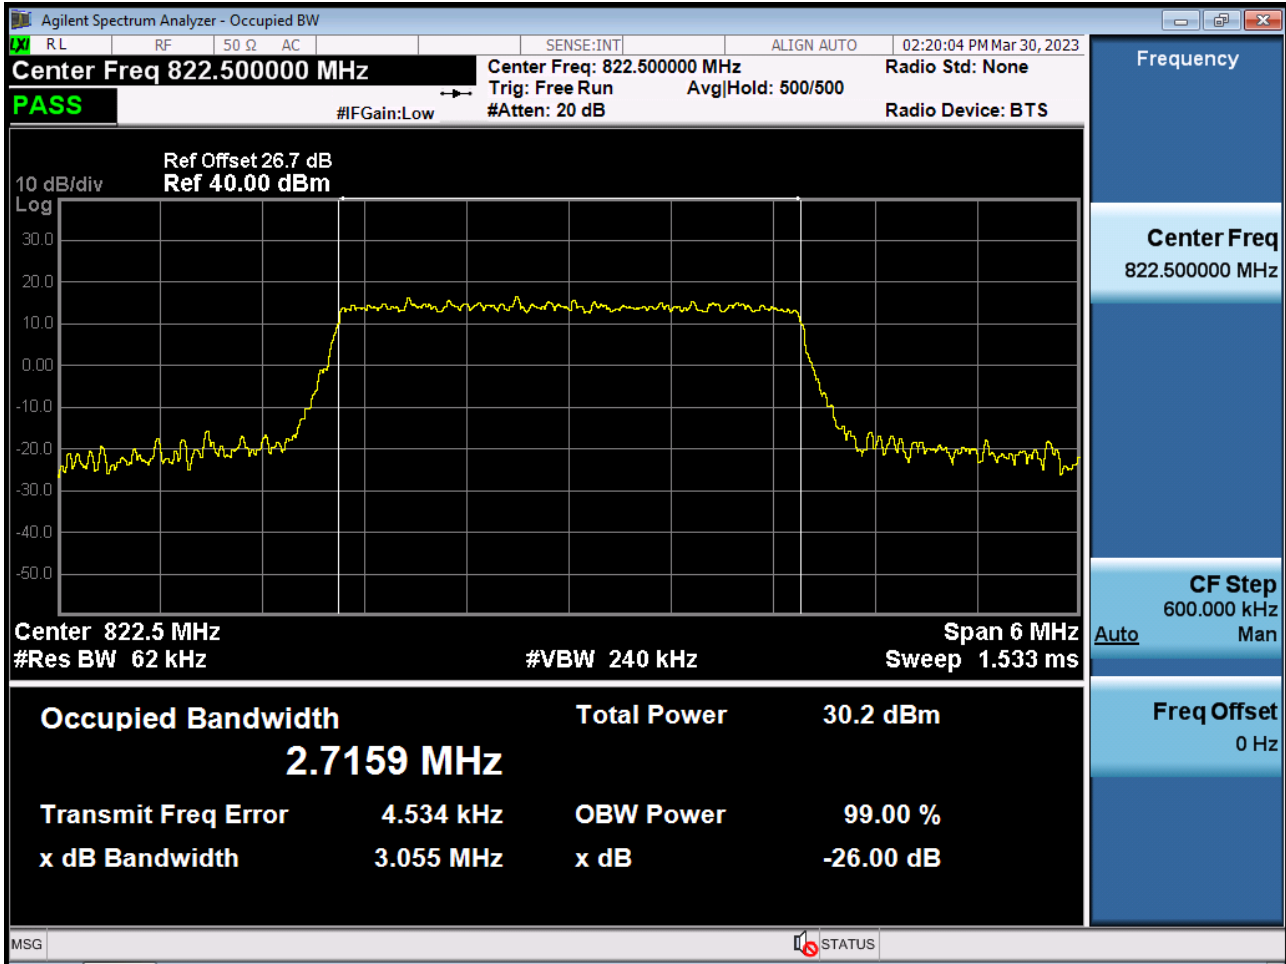


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 256QAM RB 15_0)

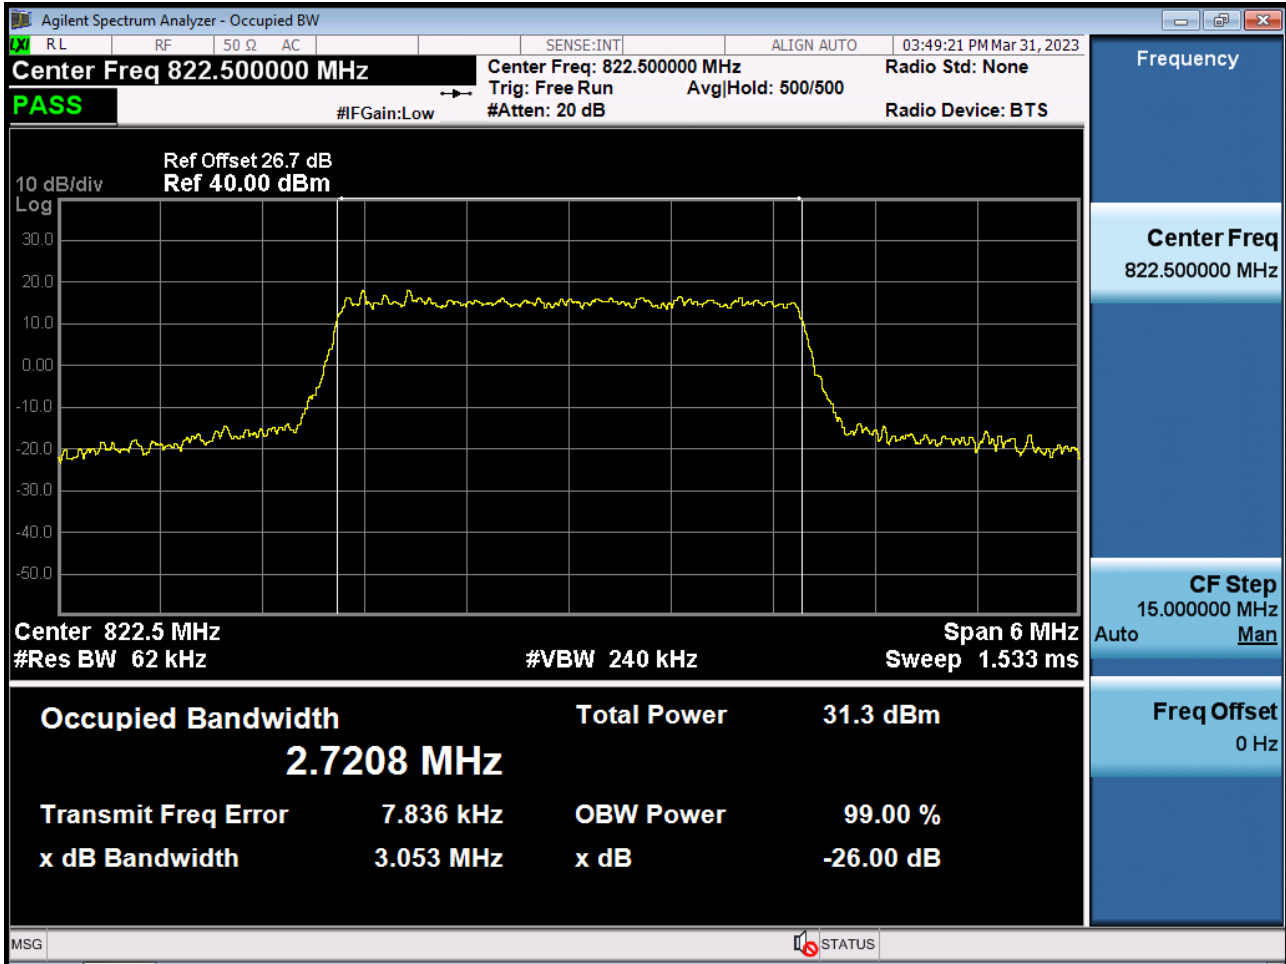


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25_0)

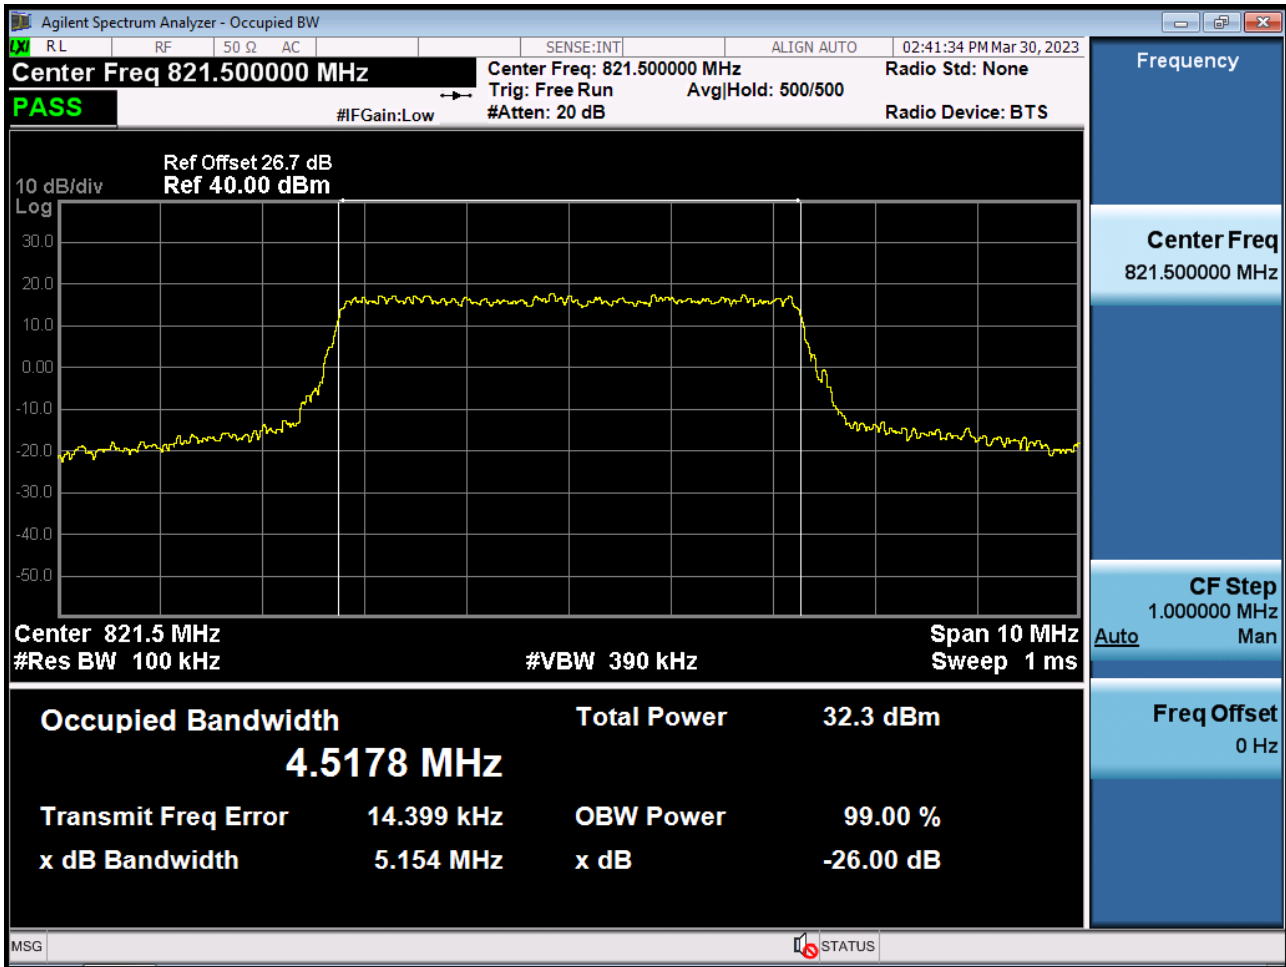


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25_0)

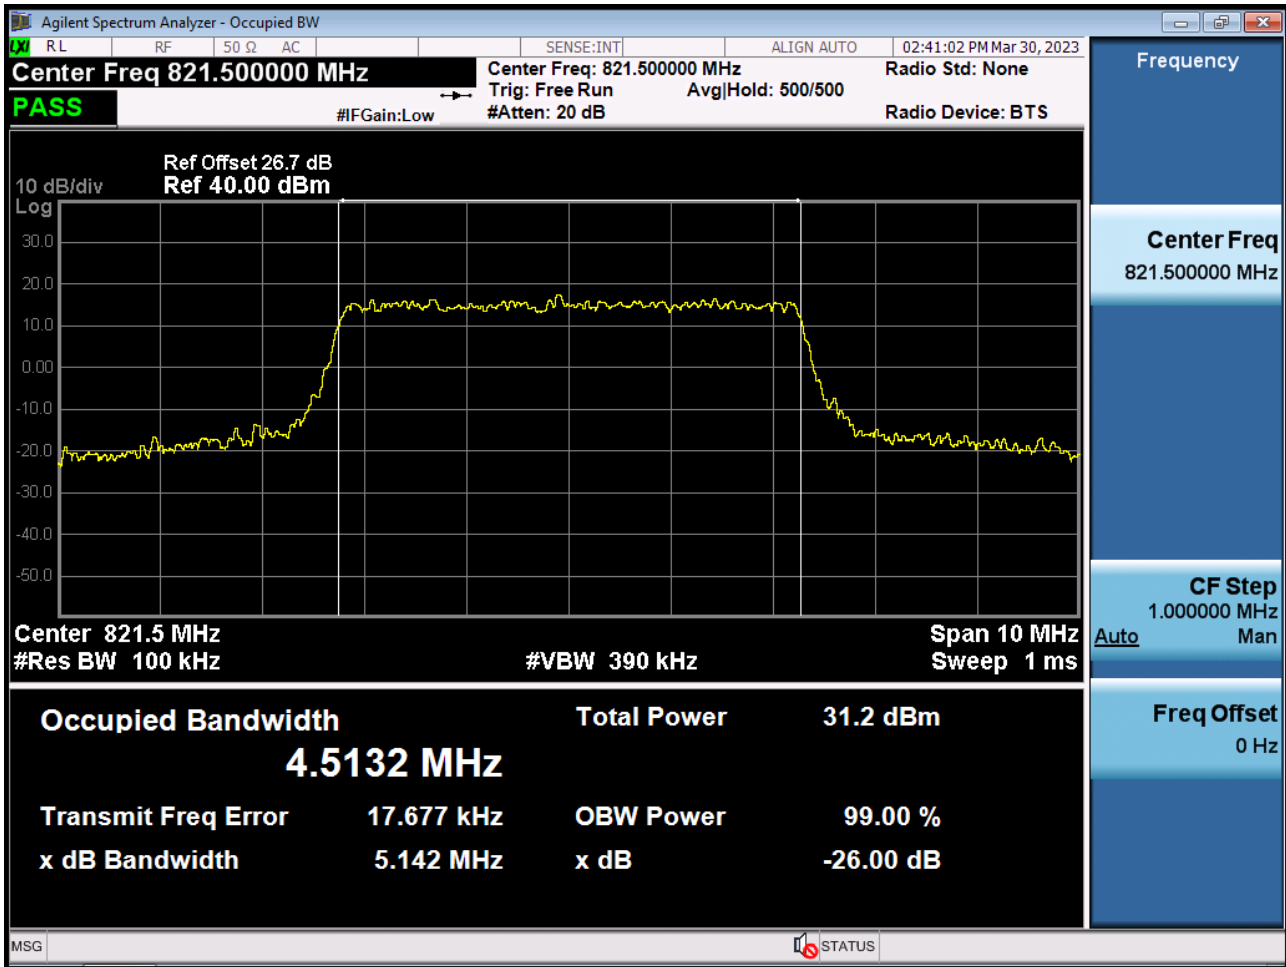


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25_0)

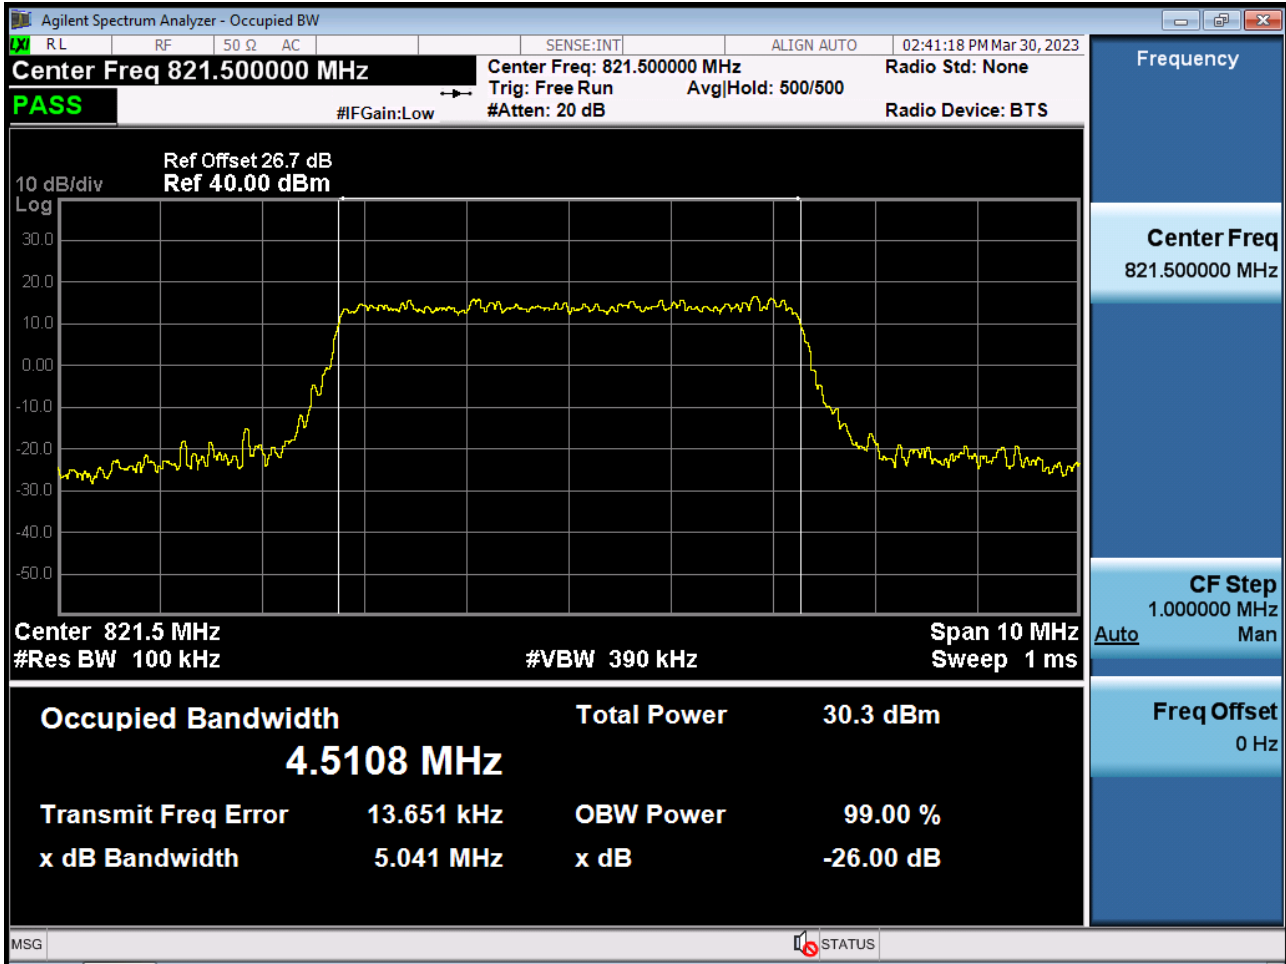


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 256QAM RB 25_0)

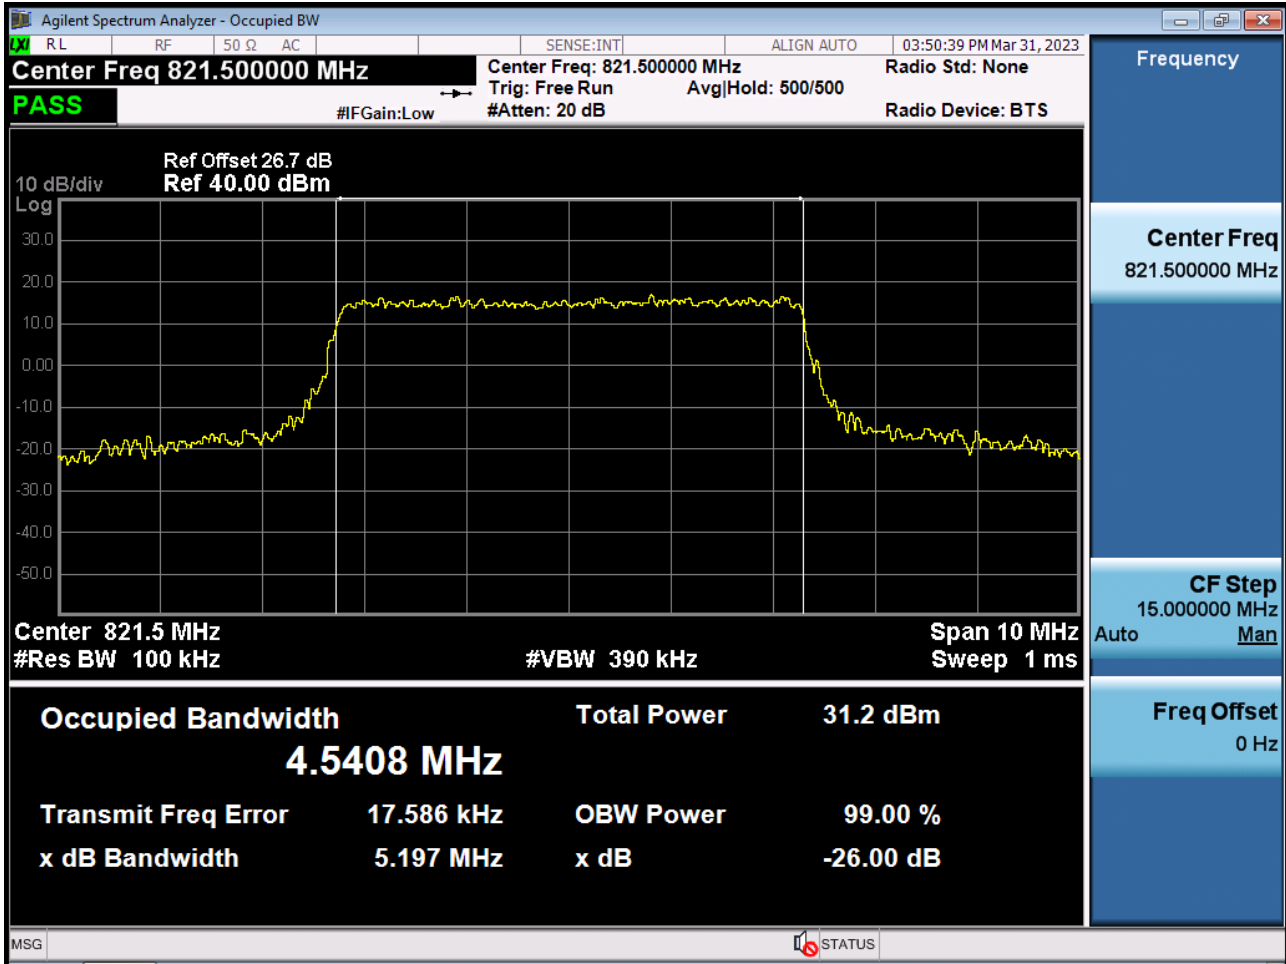


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50_0)

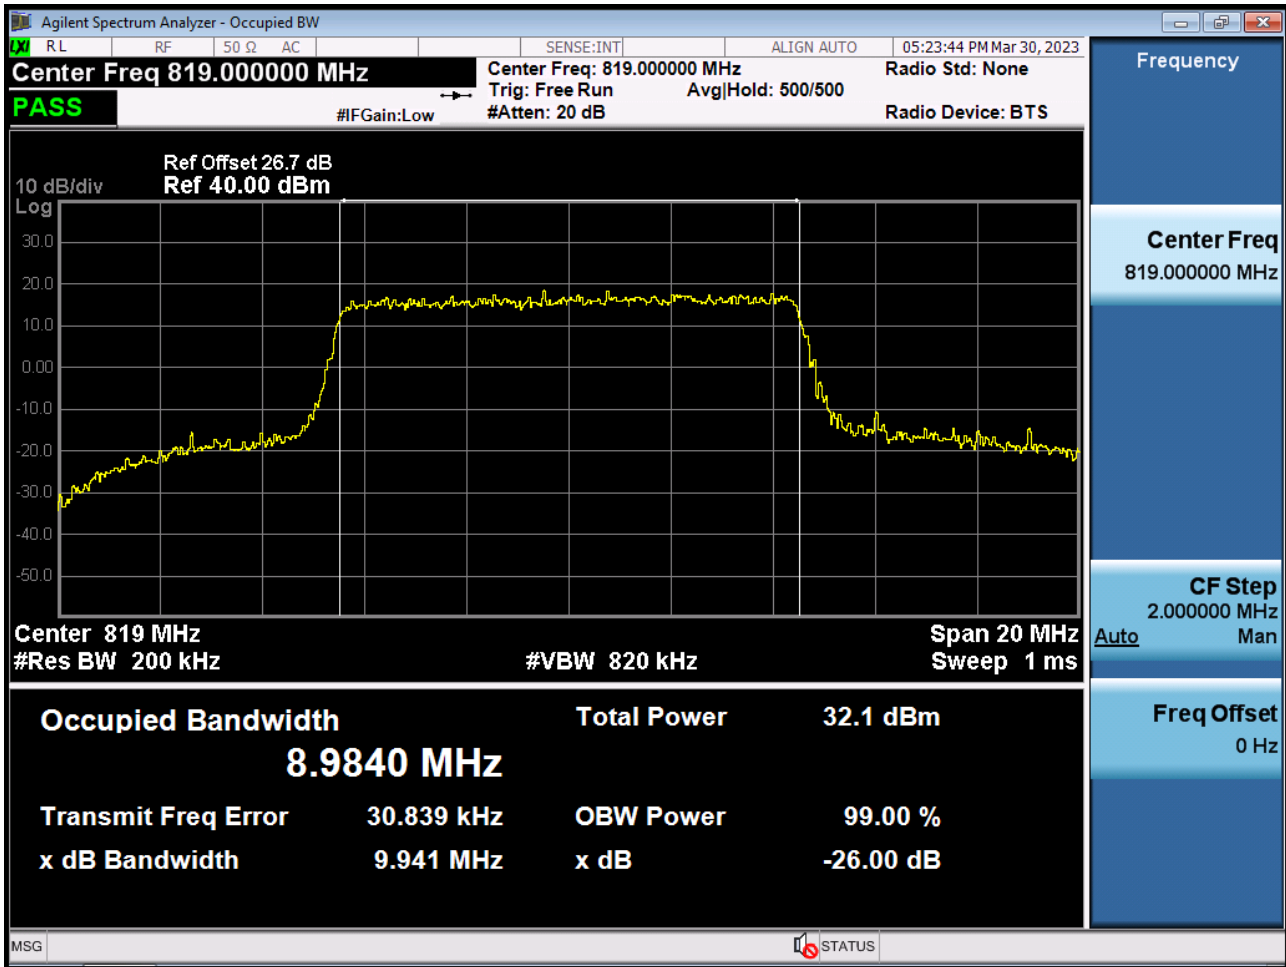


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50_0)

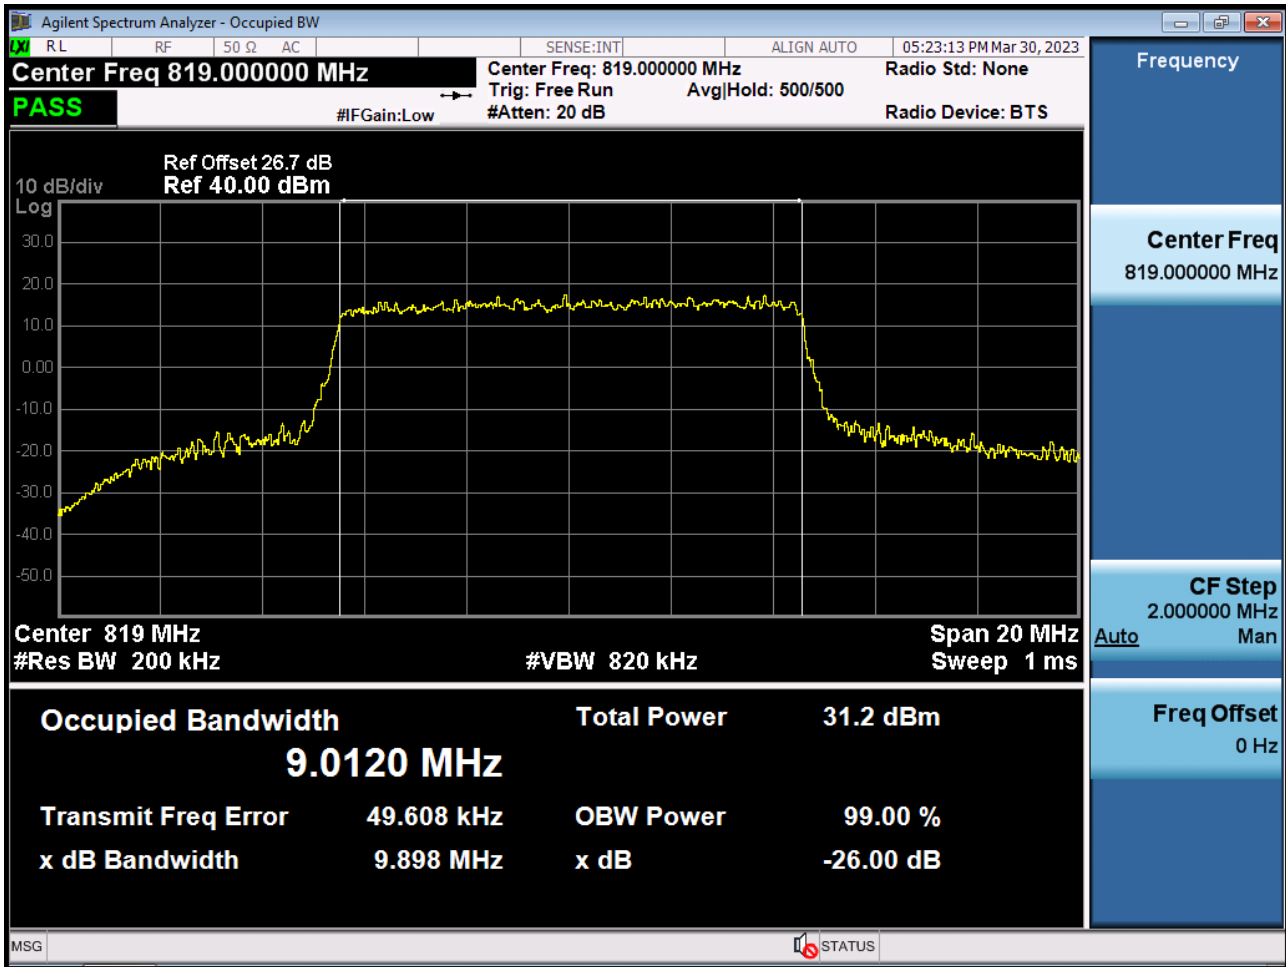


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50_0)

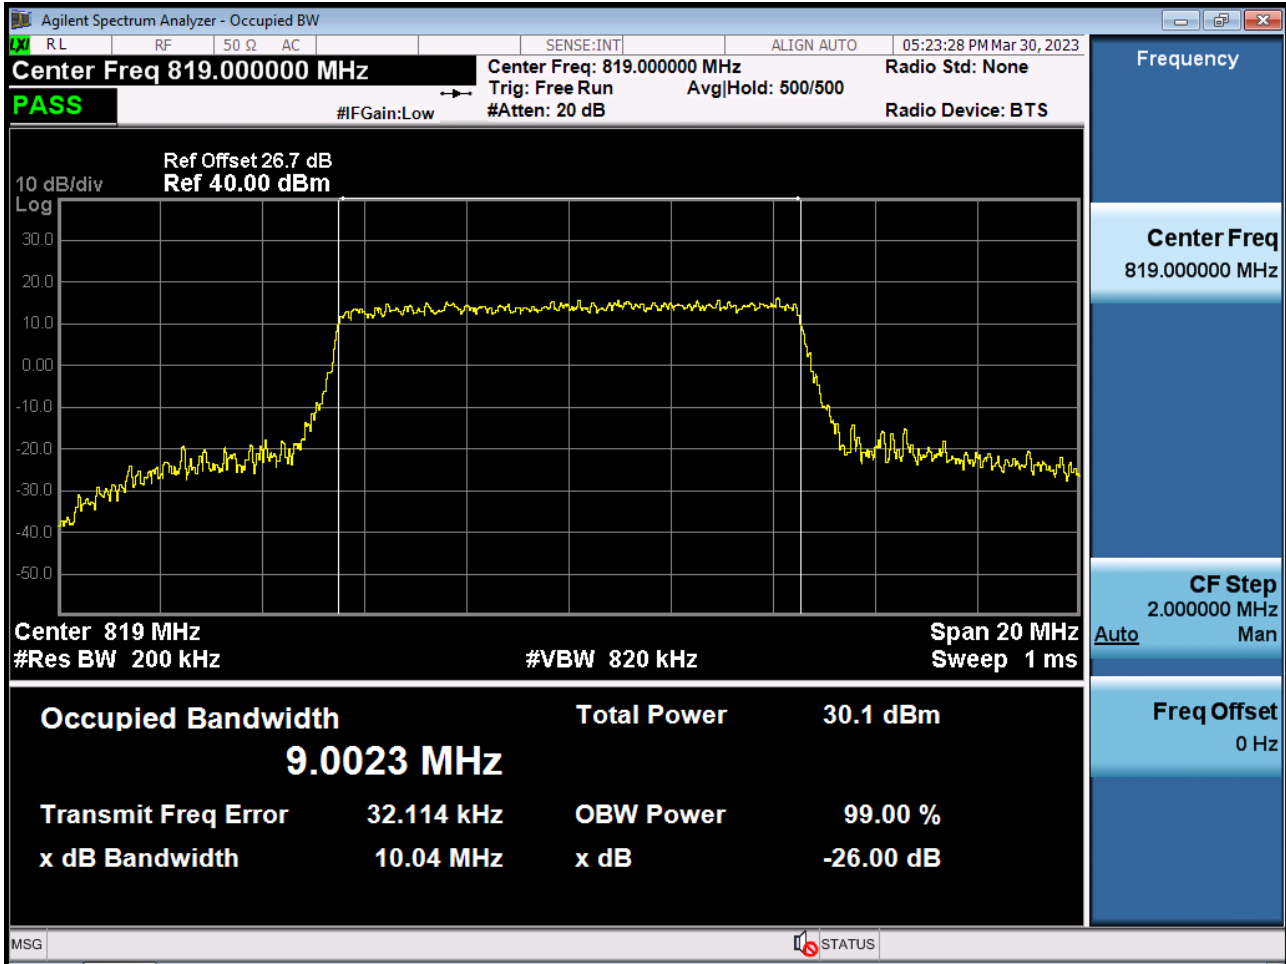


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 256QAM RB 50_0)

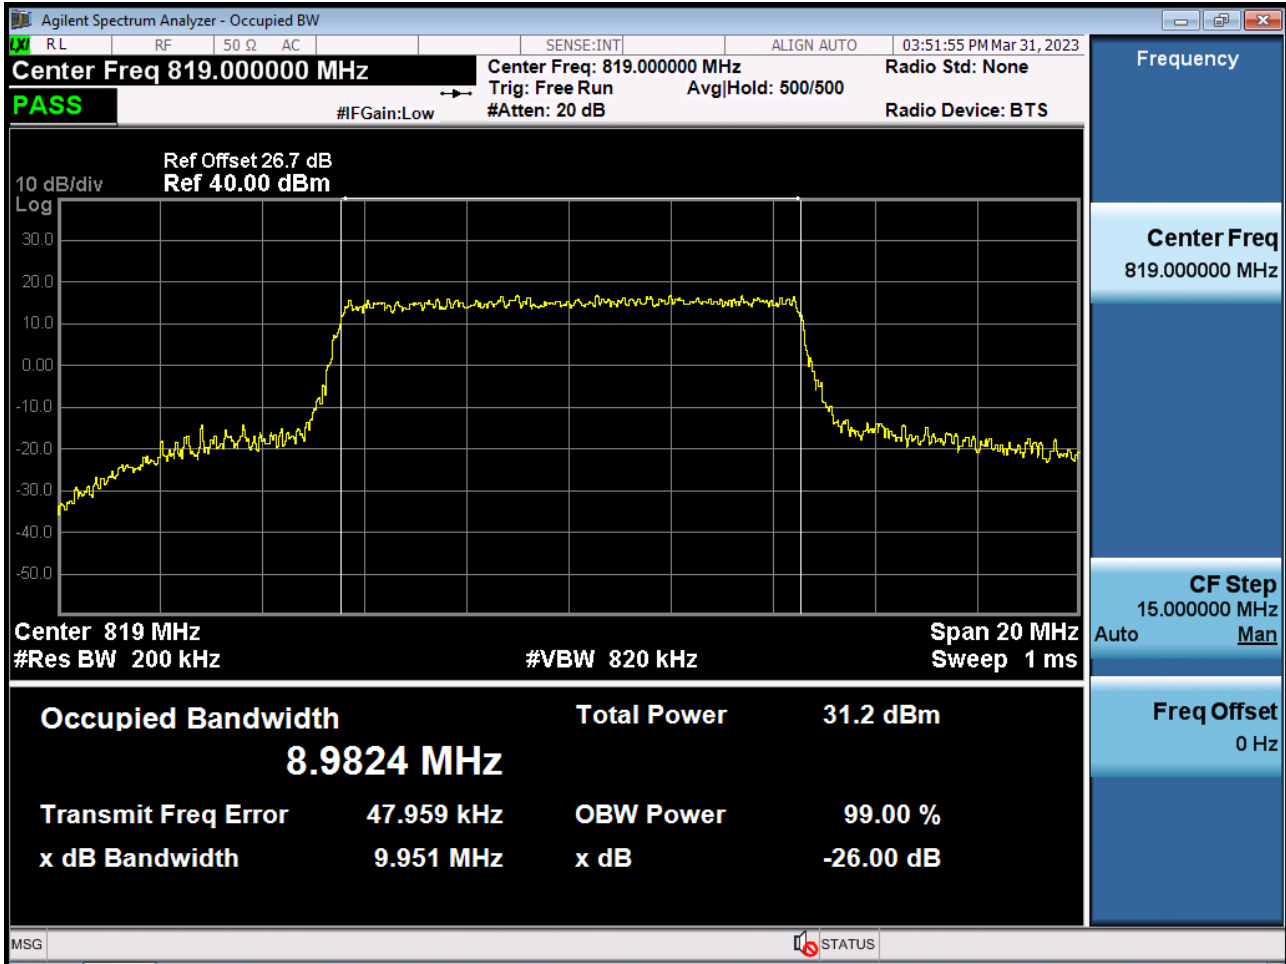


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75_0)

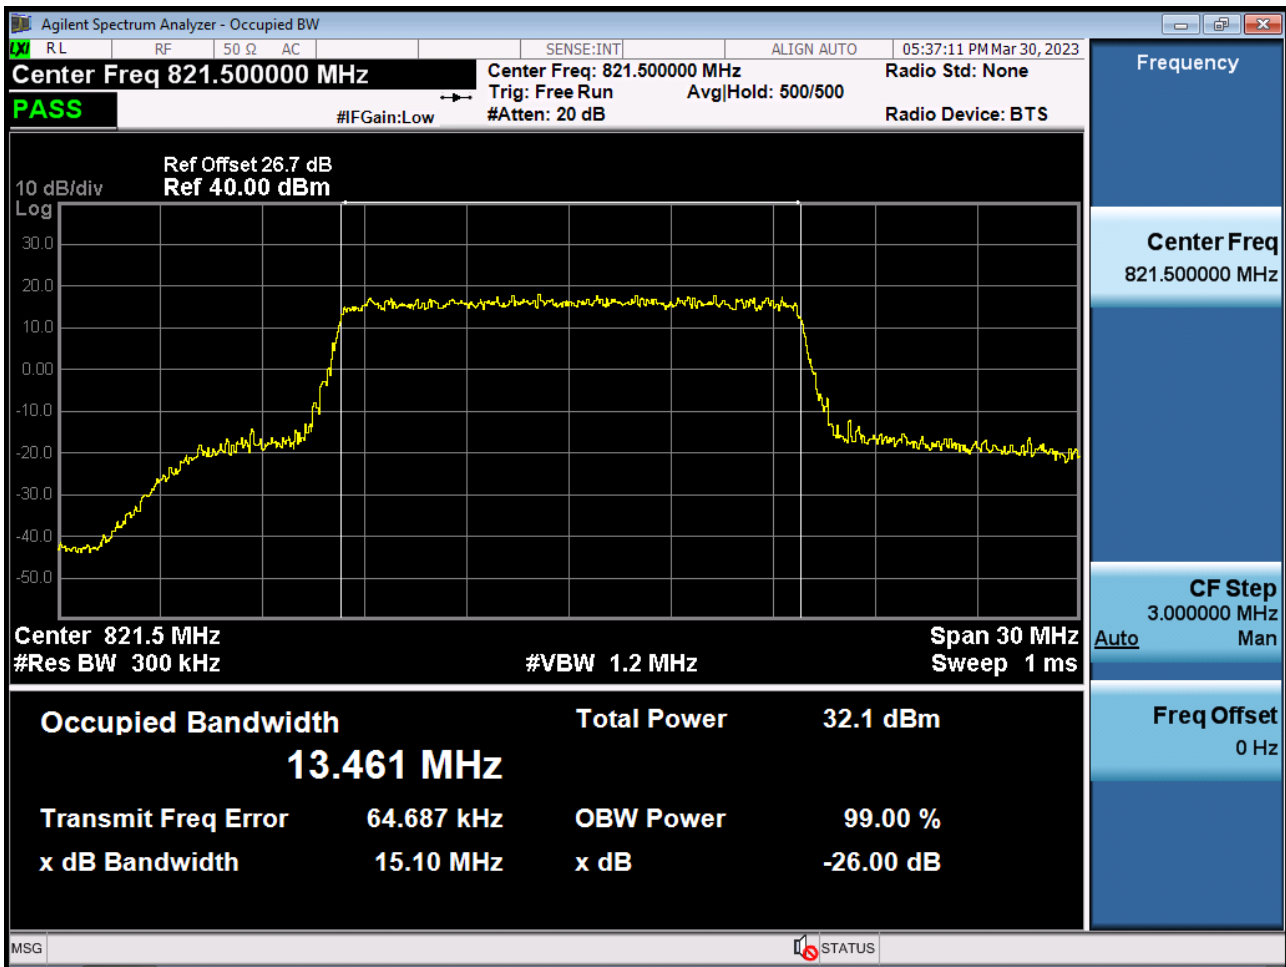


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75_0)

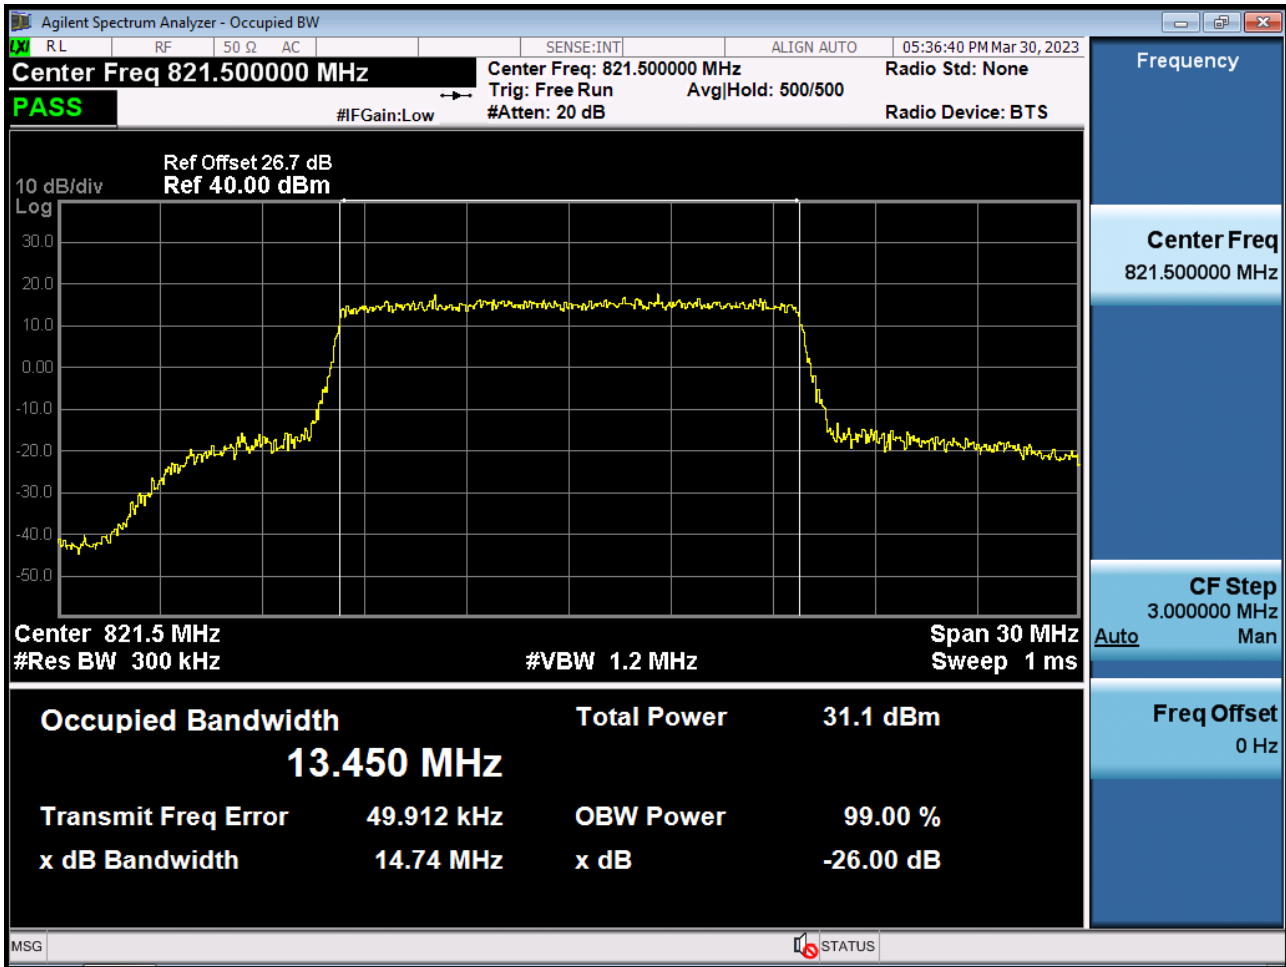


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75_0)

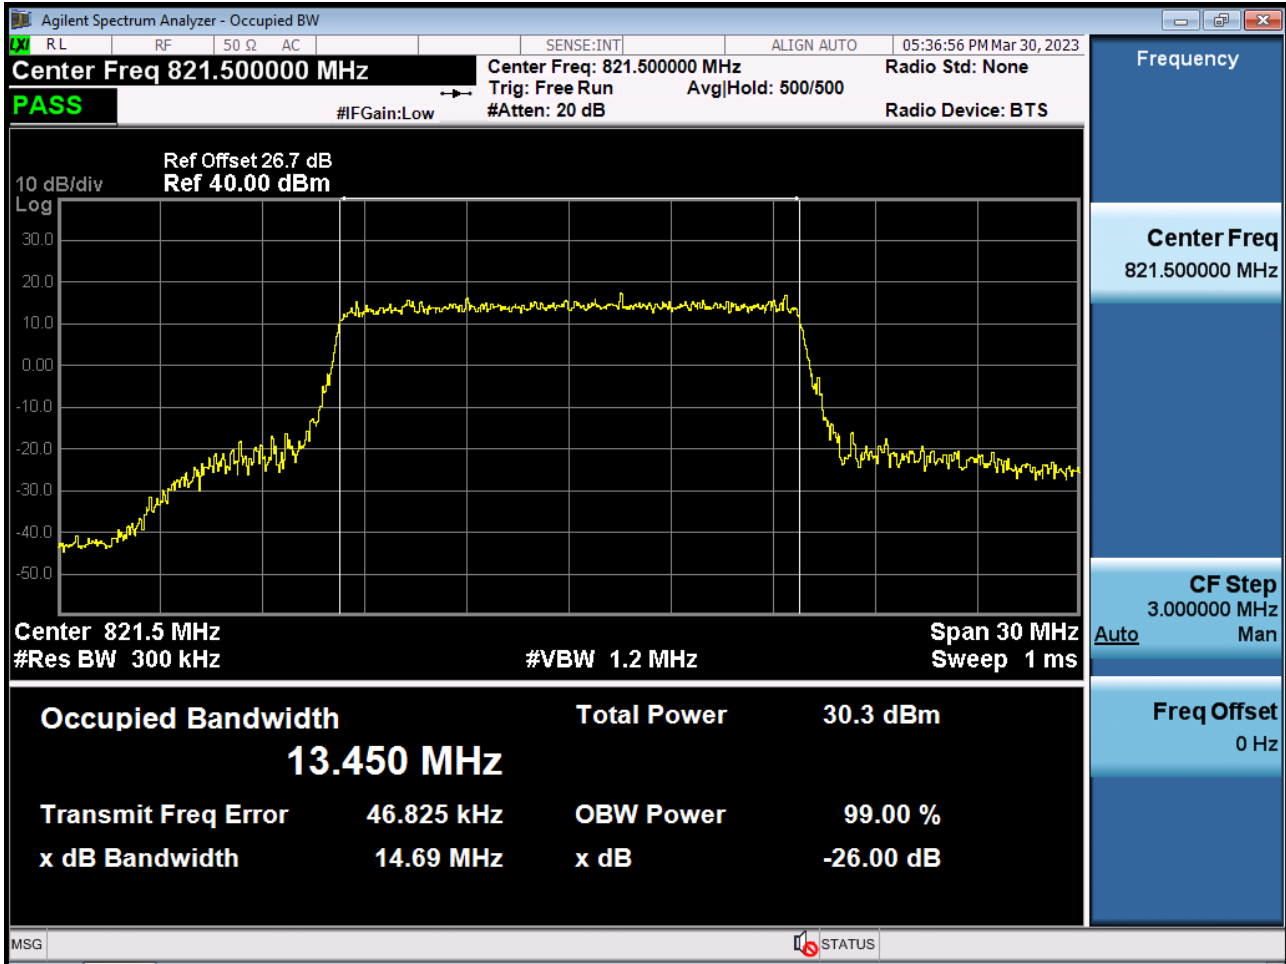


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 256QAM RB 75_0)

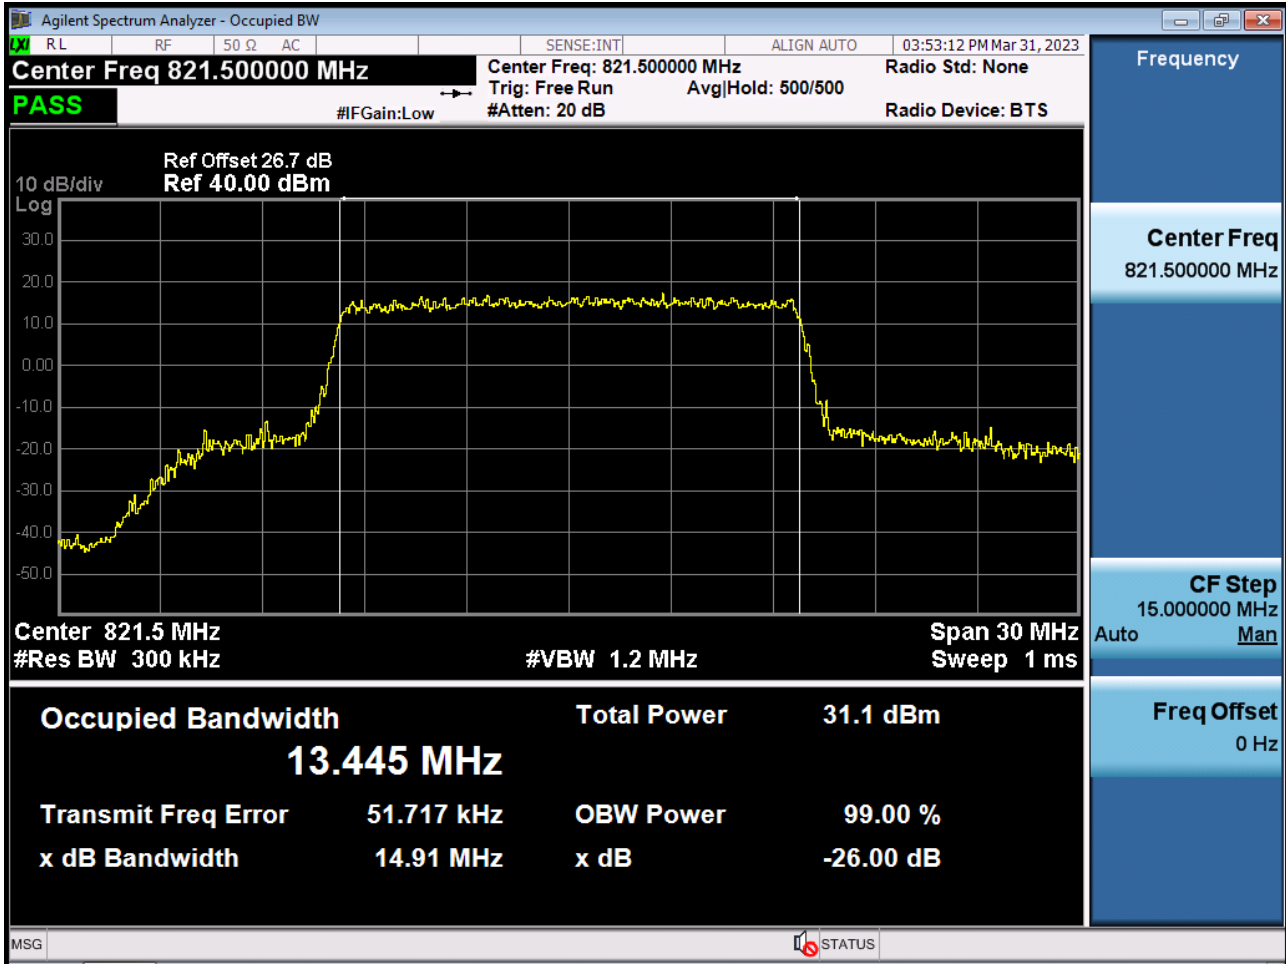


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

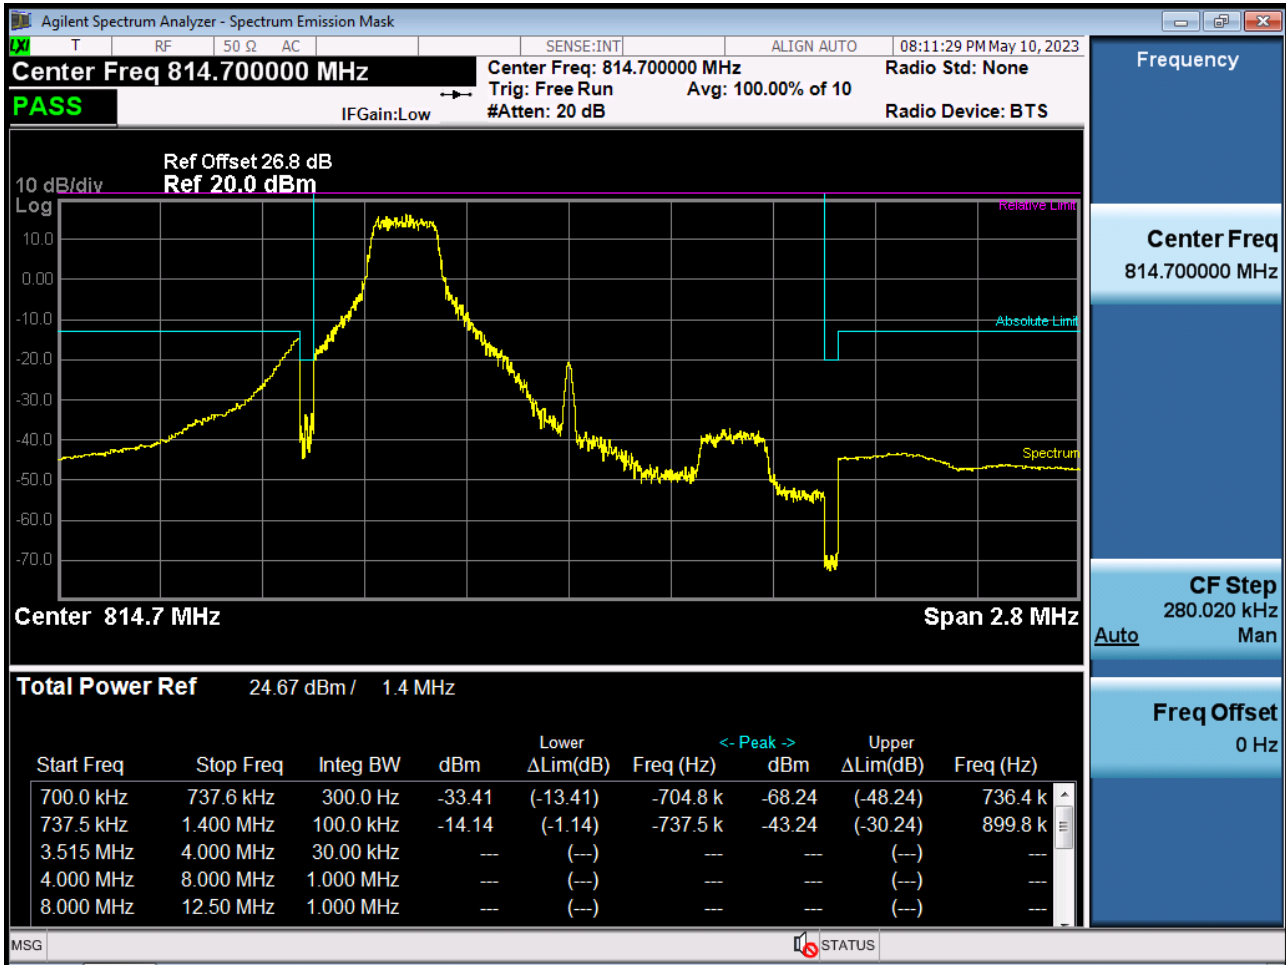


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK_RB6_Offset 0)

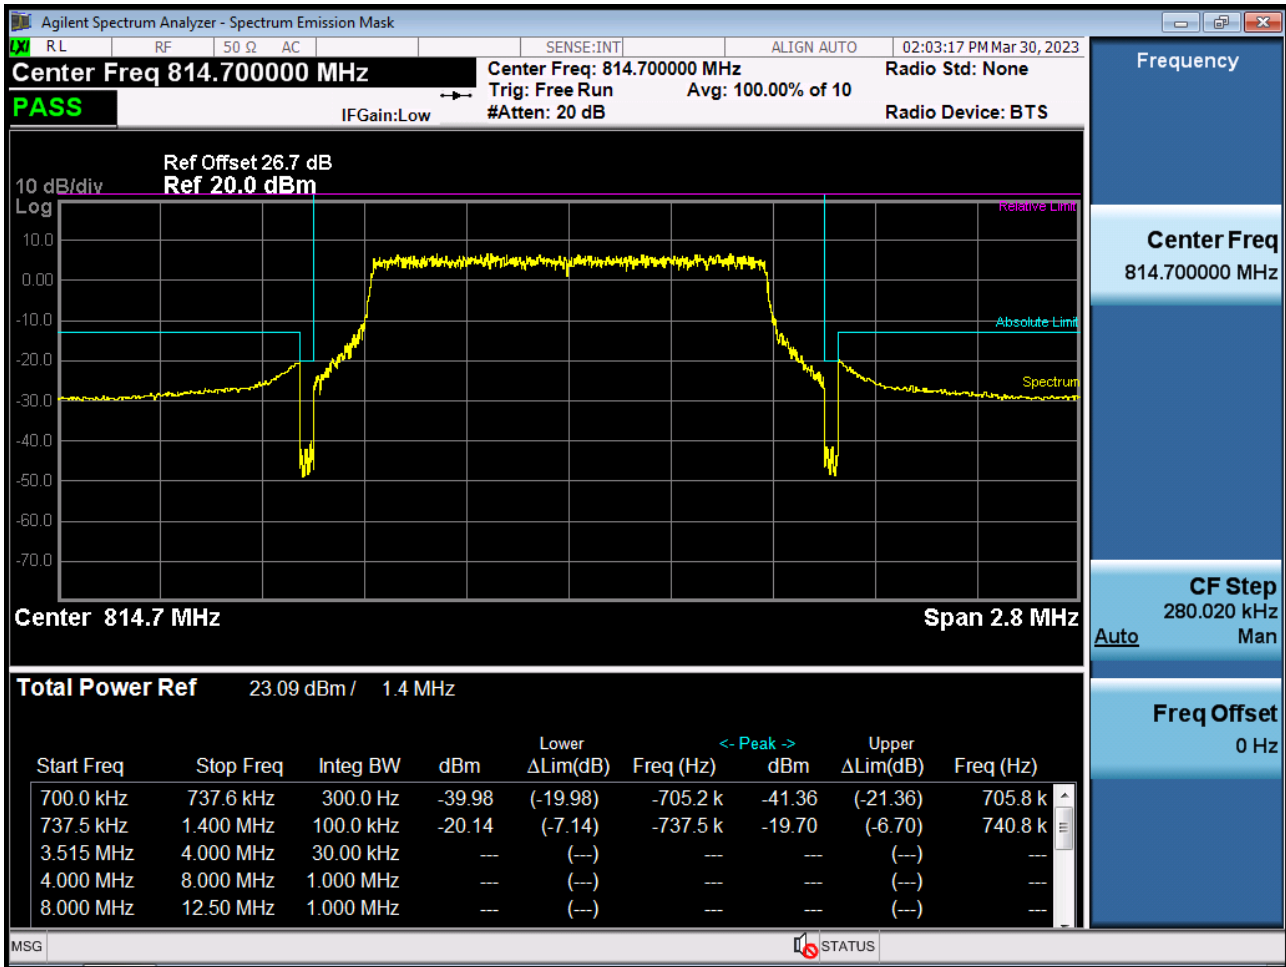


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

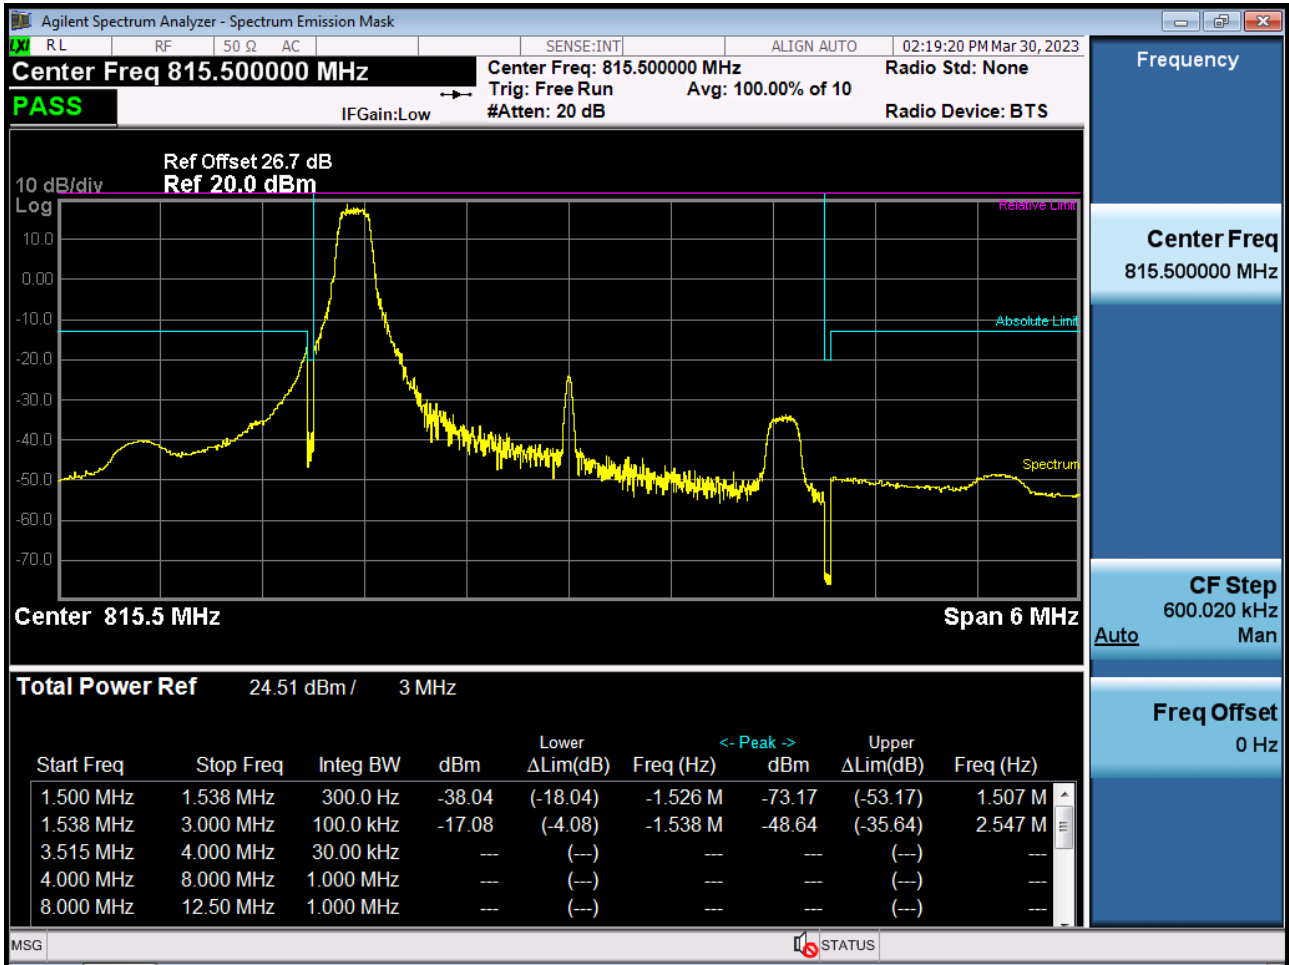


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK_RB15_Offset 0)

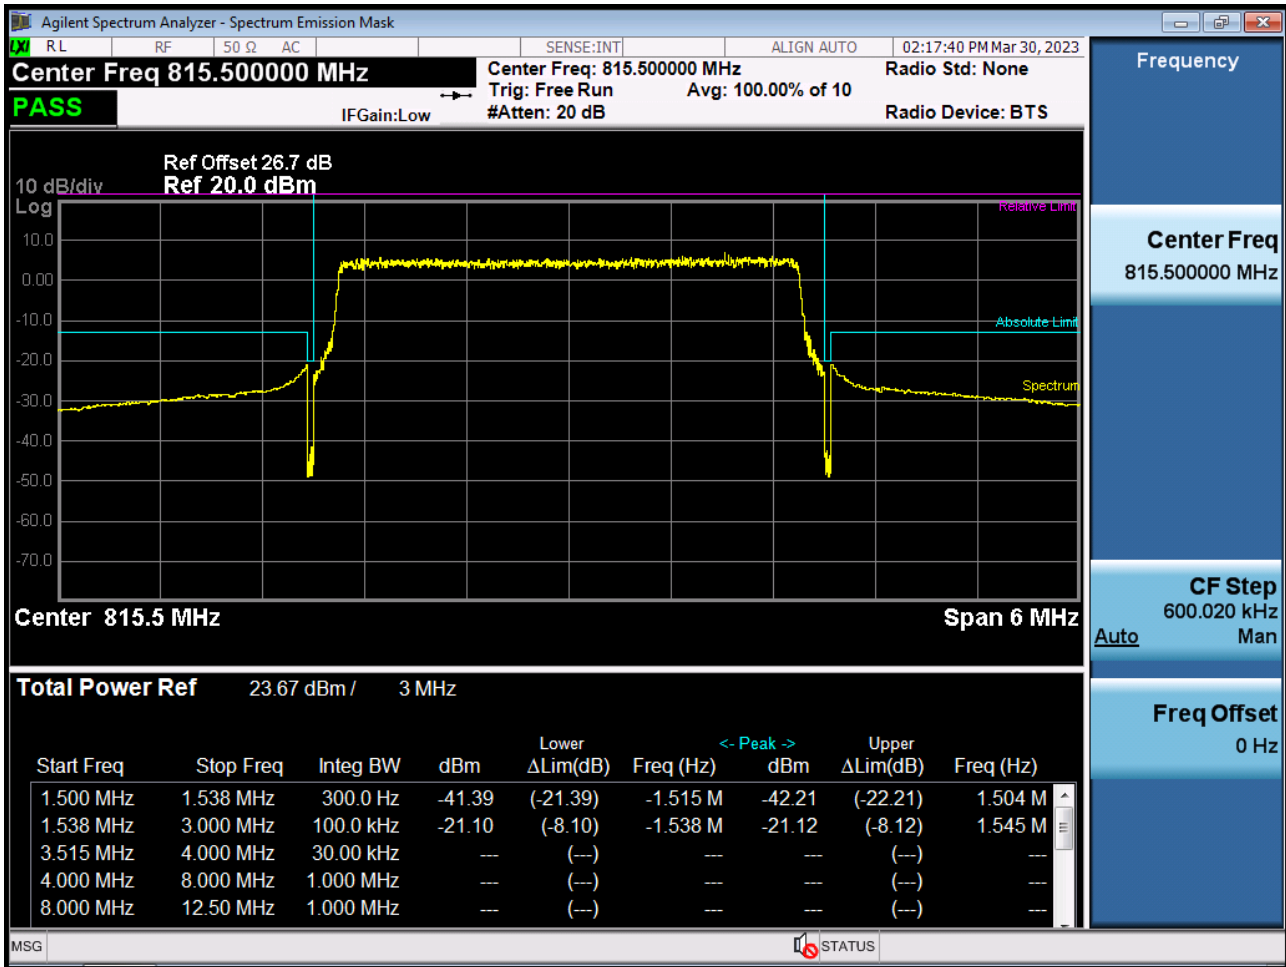


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

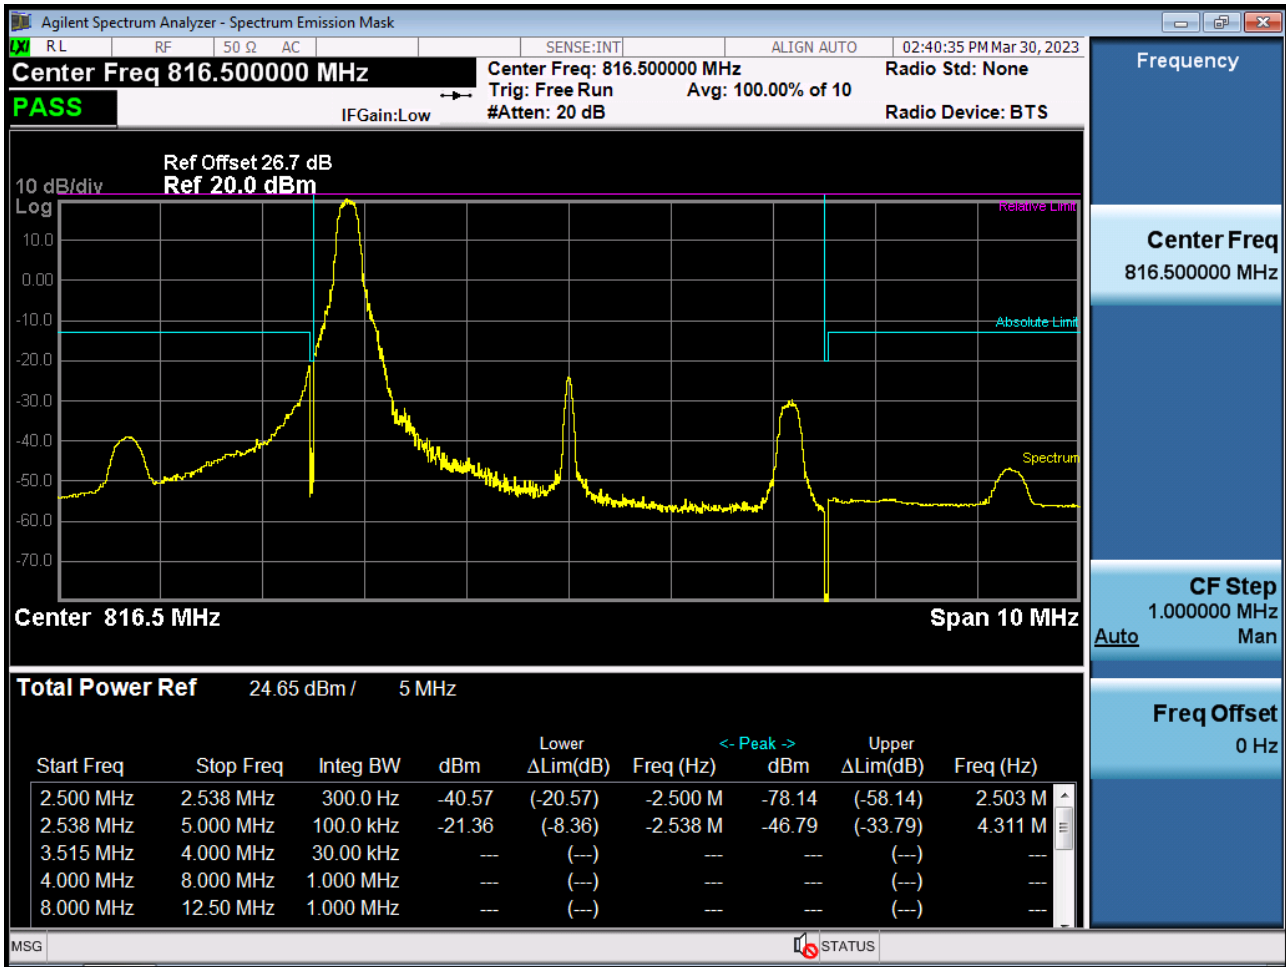


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK_RB25_Offset 0)

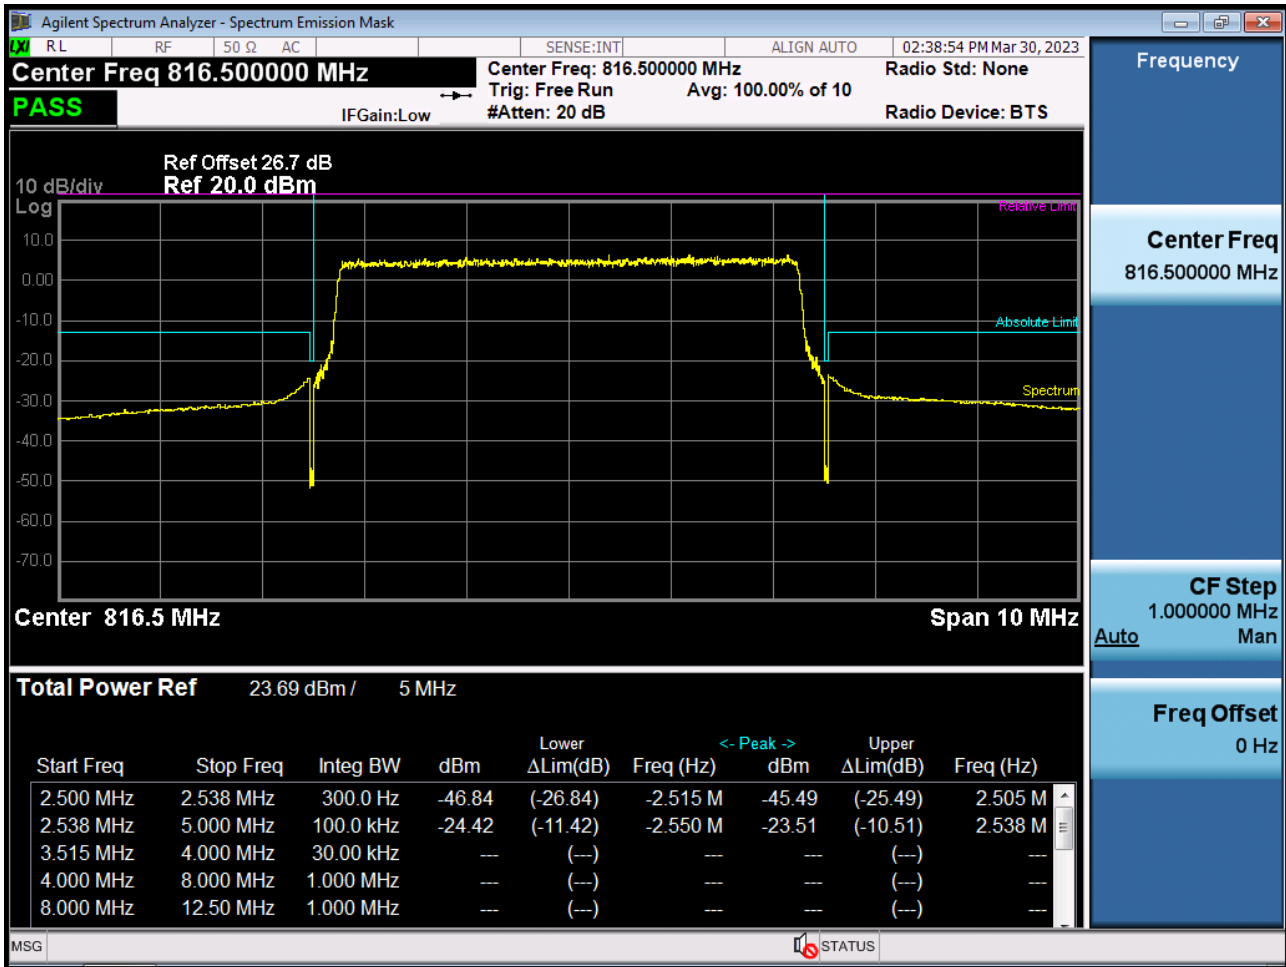


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

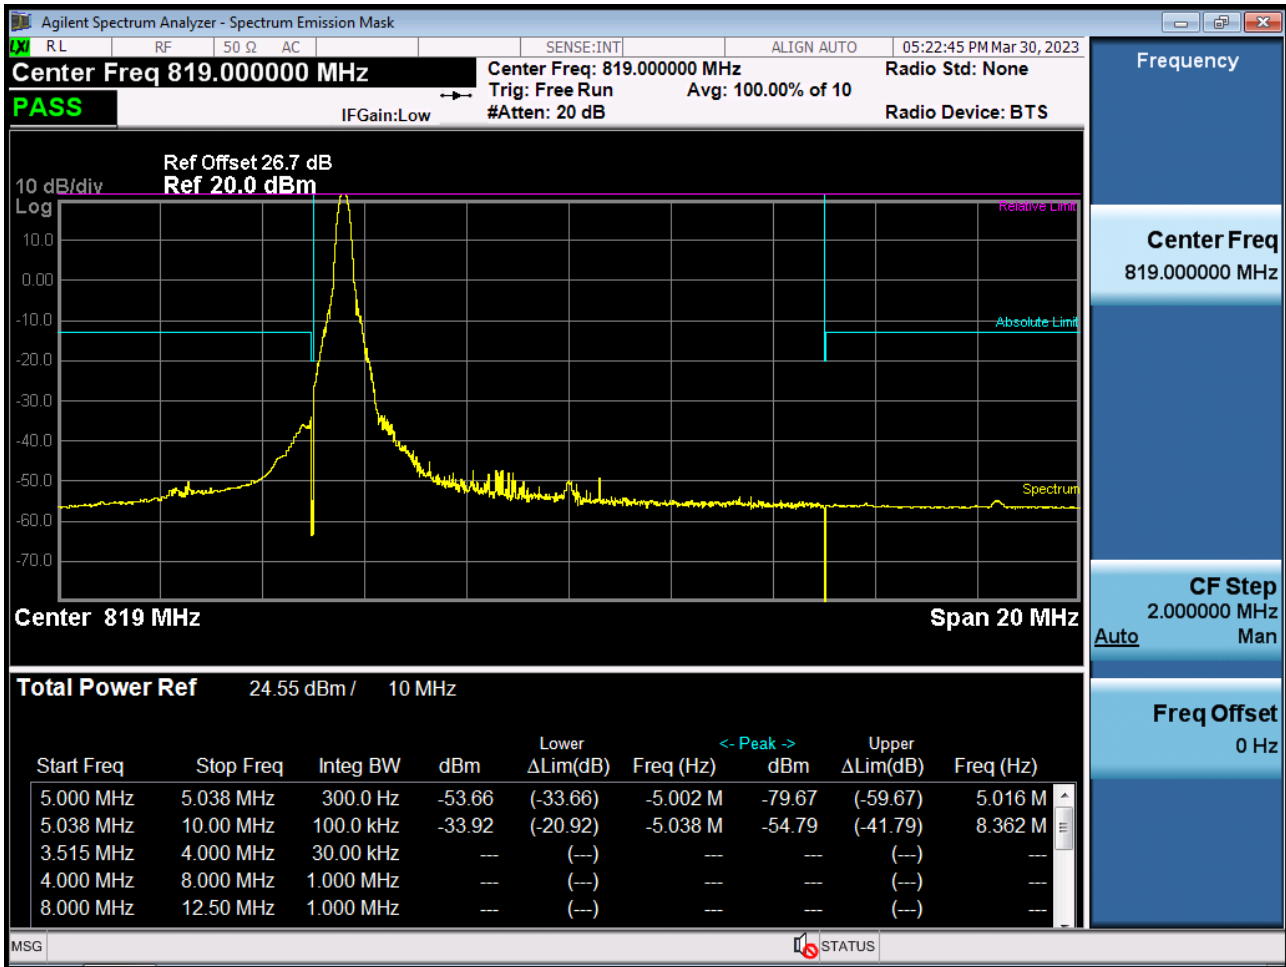


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK_RB50_Offset 0)

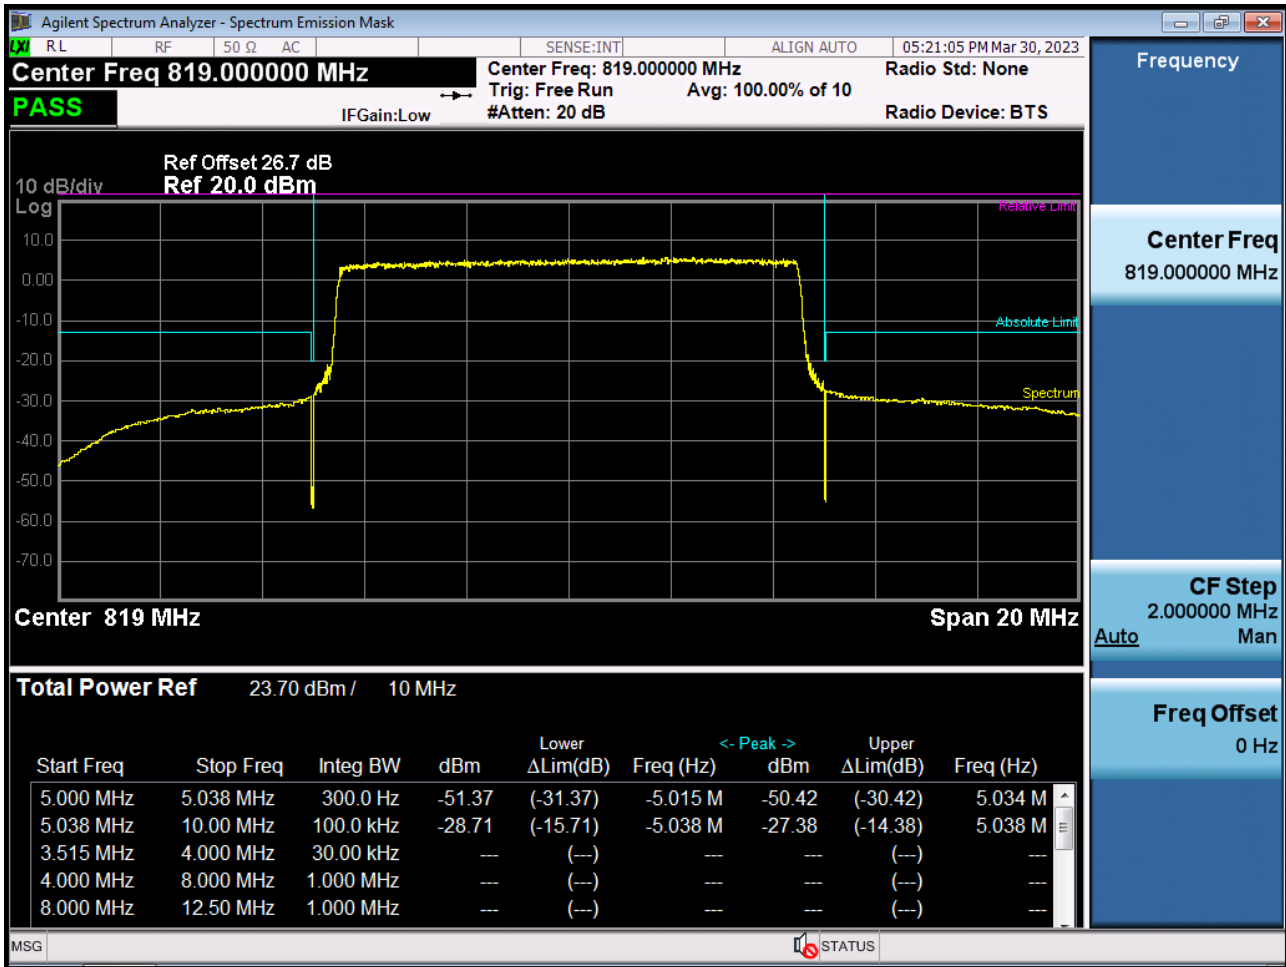


BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK_RB1_Offset 49)

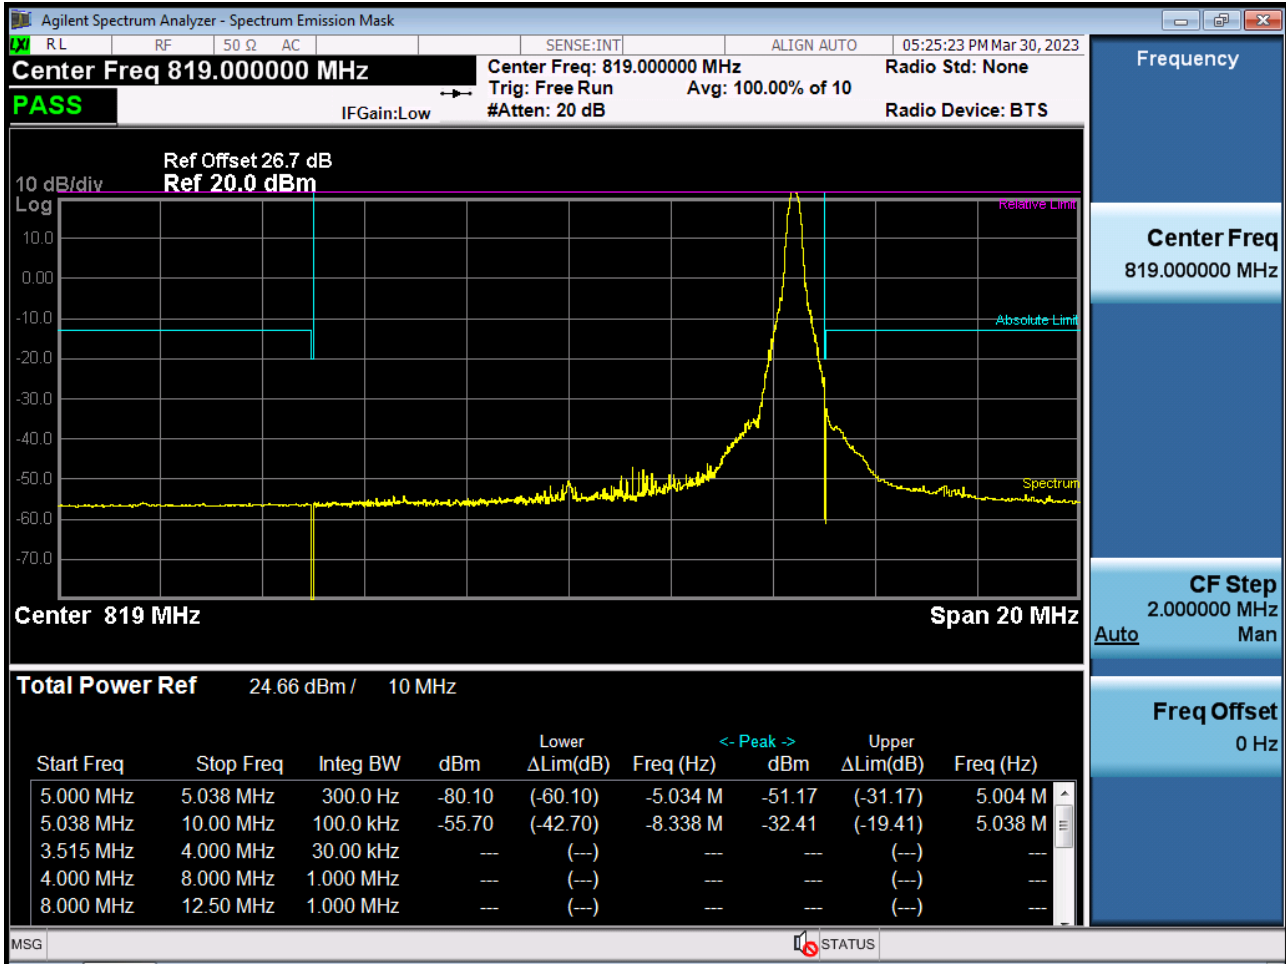


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

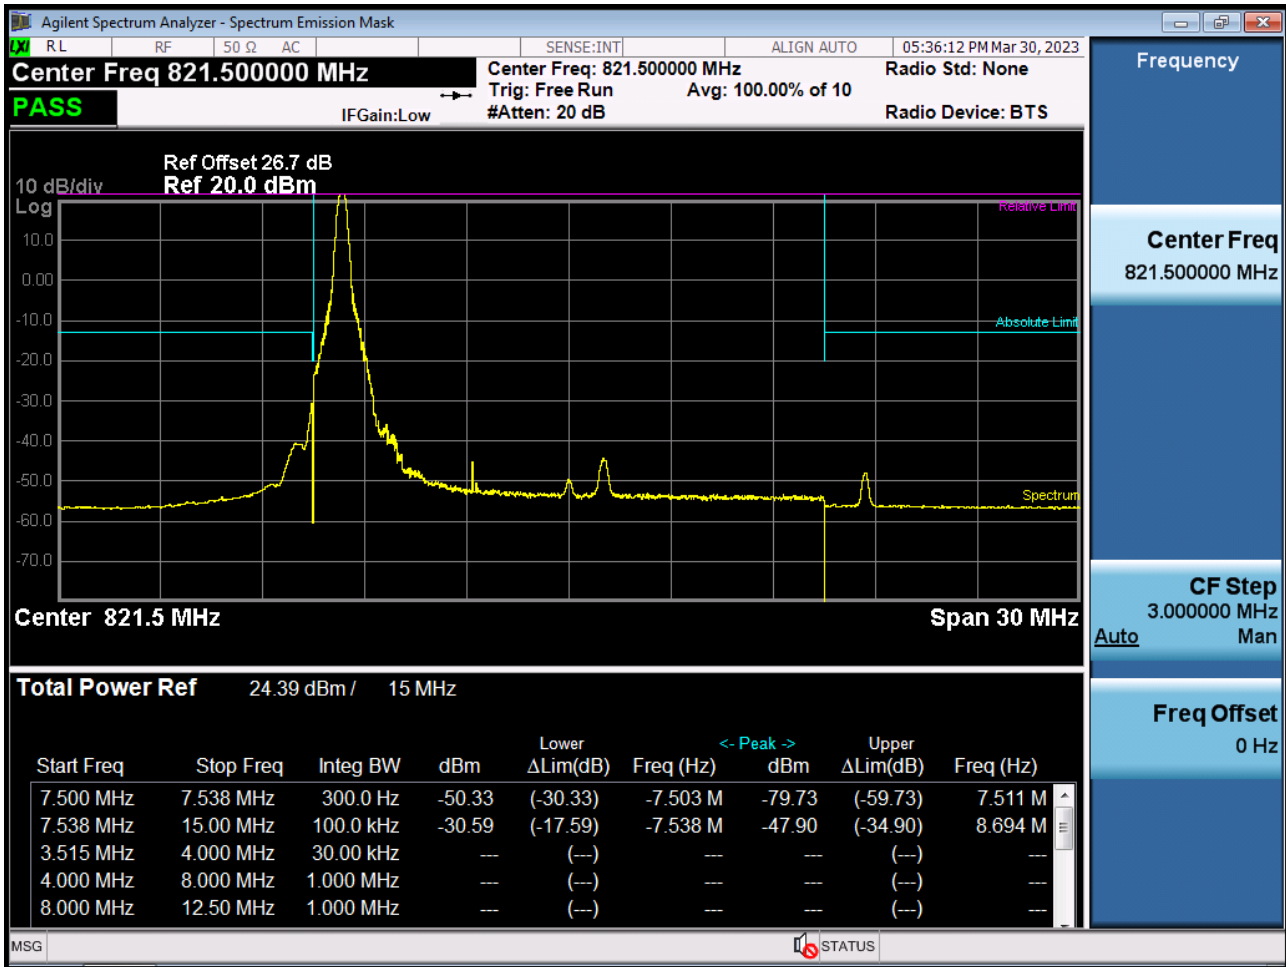


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)

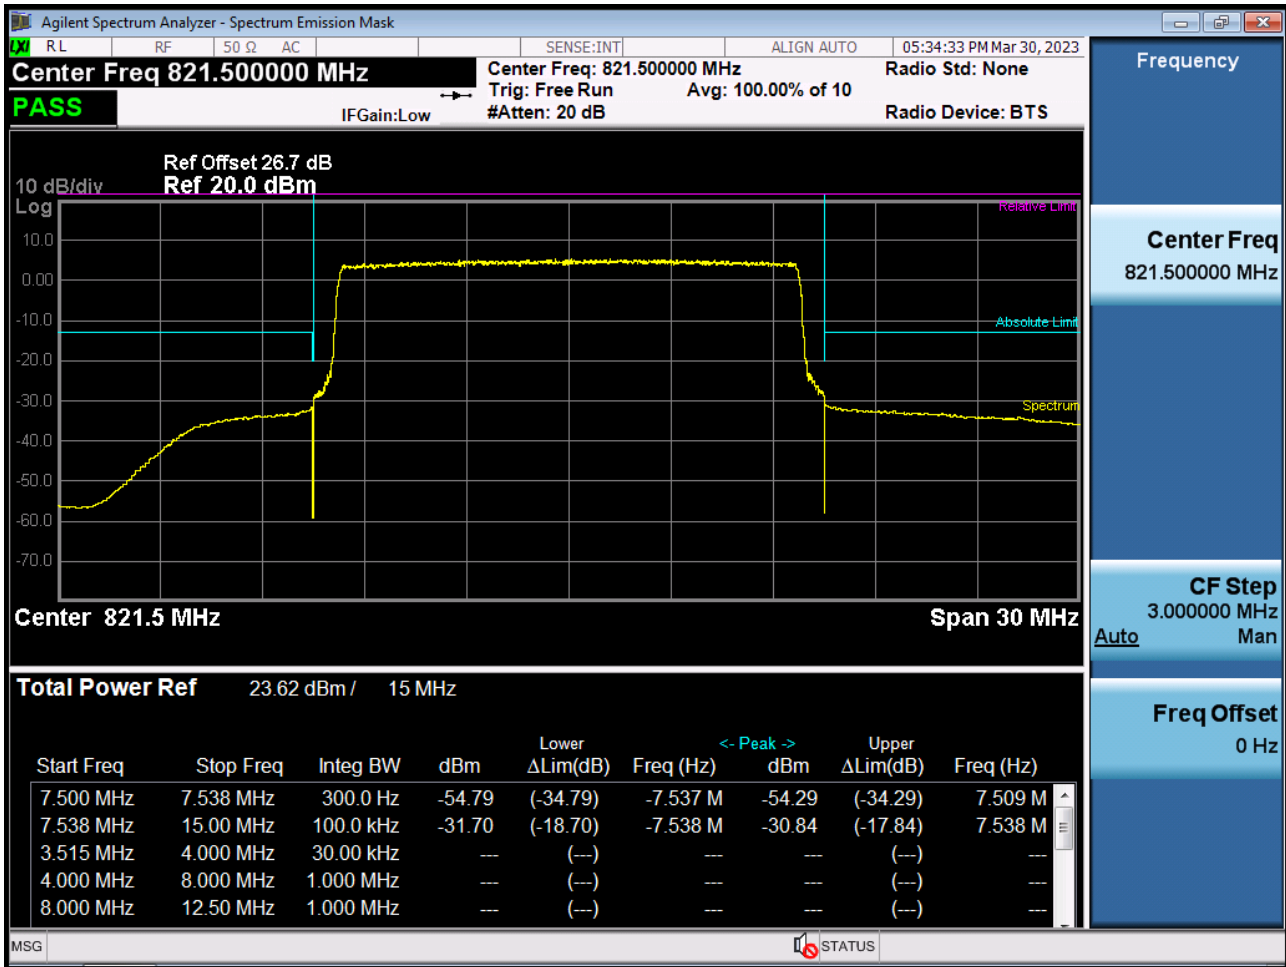

BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK_RB1_Offset 74)

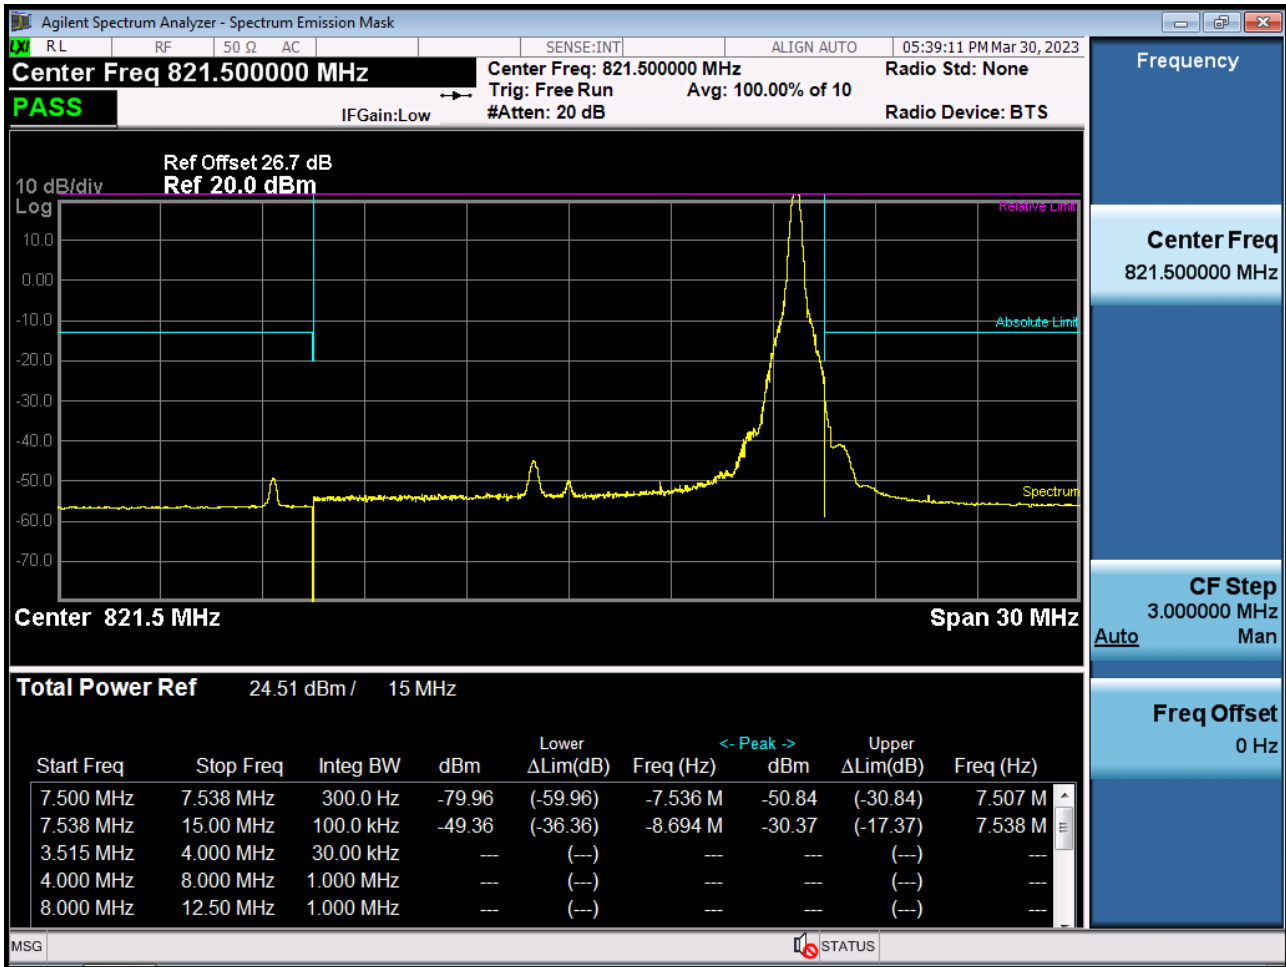


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)

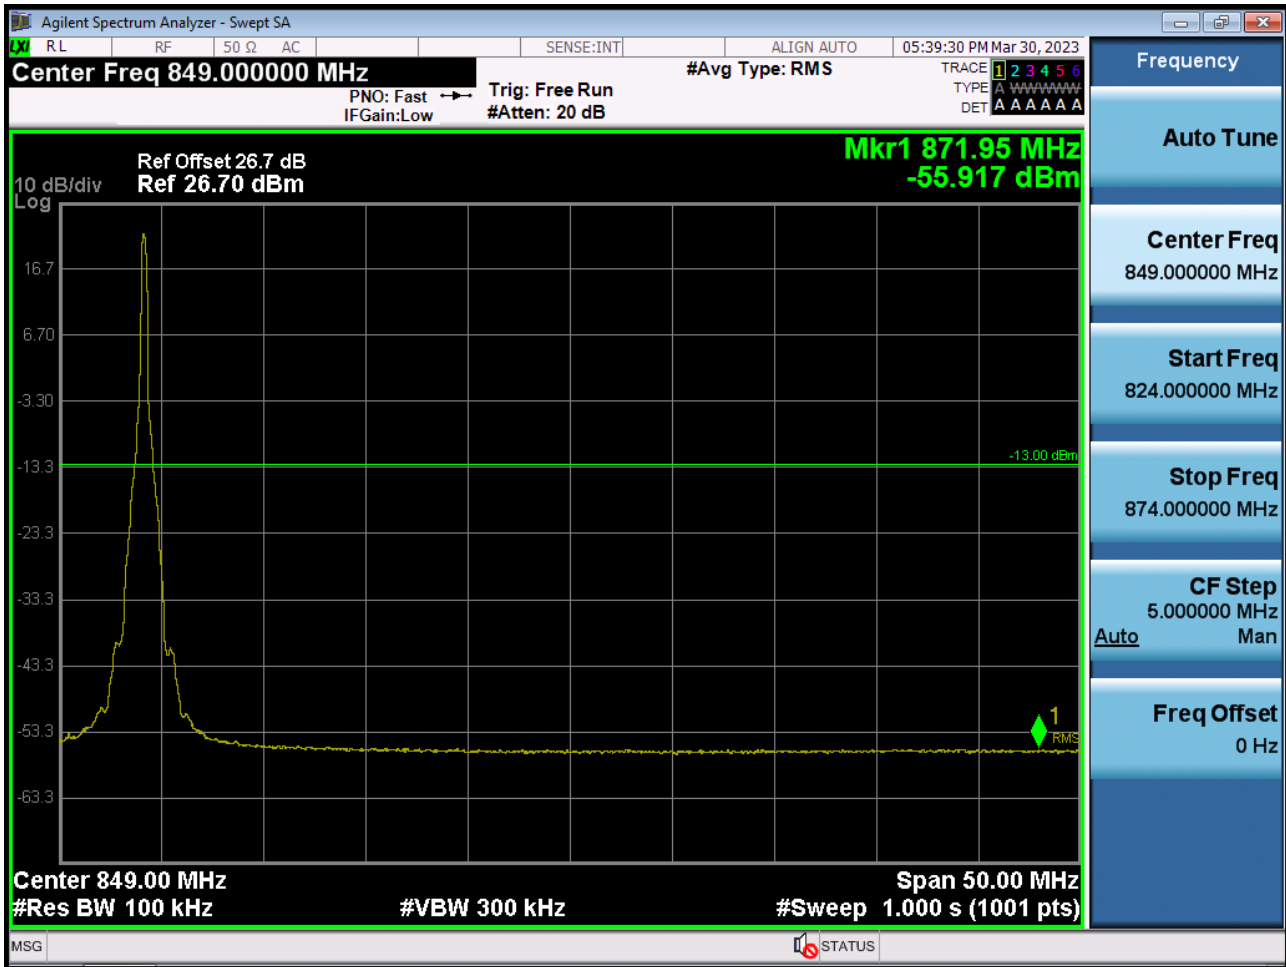


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK_RB75_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB1_Offset 5)

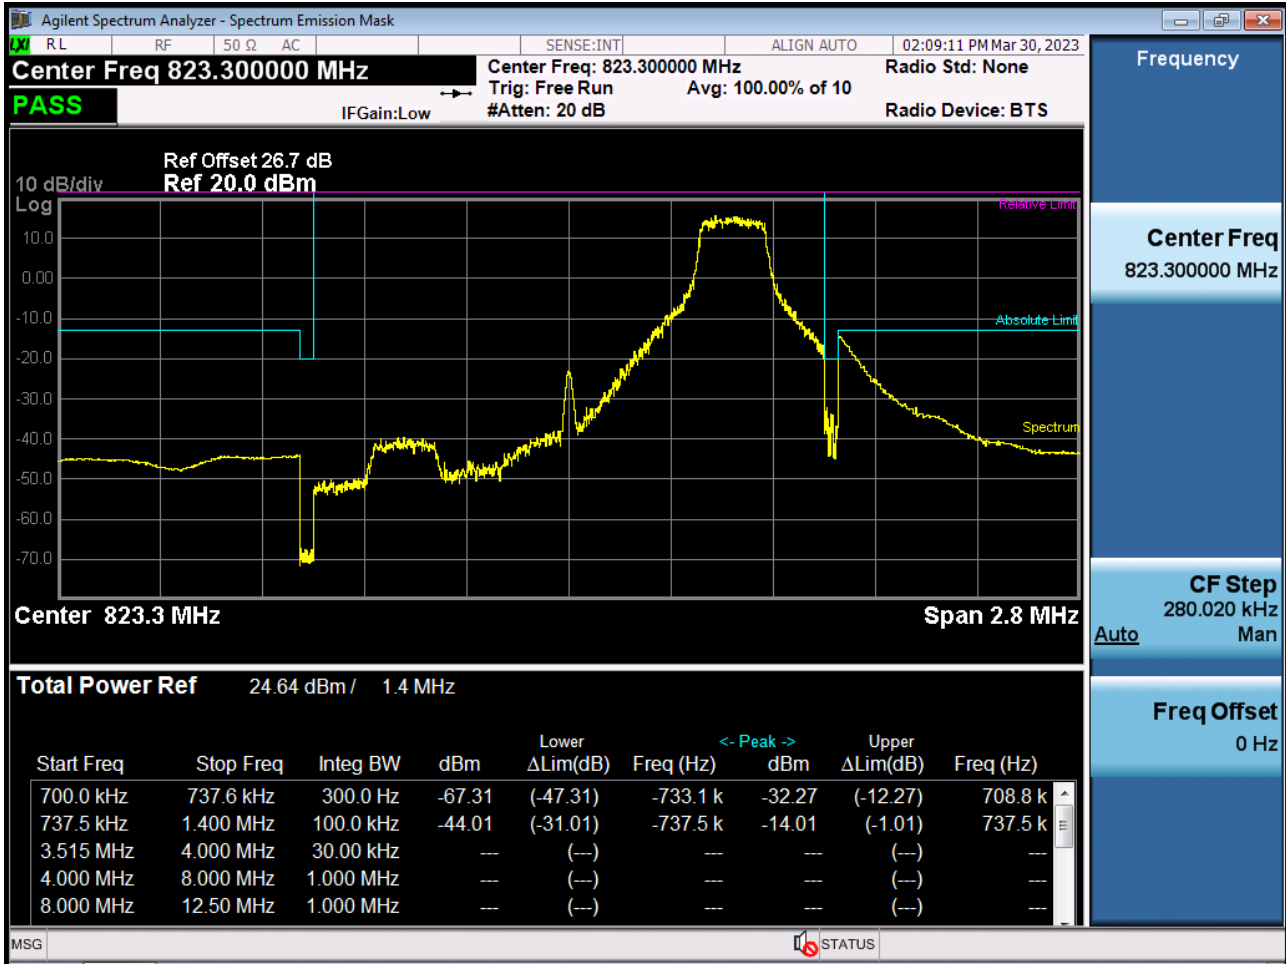


BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB6_Offset 0)

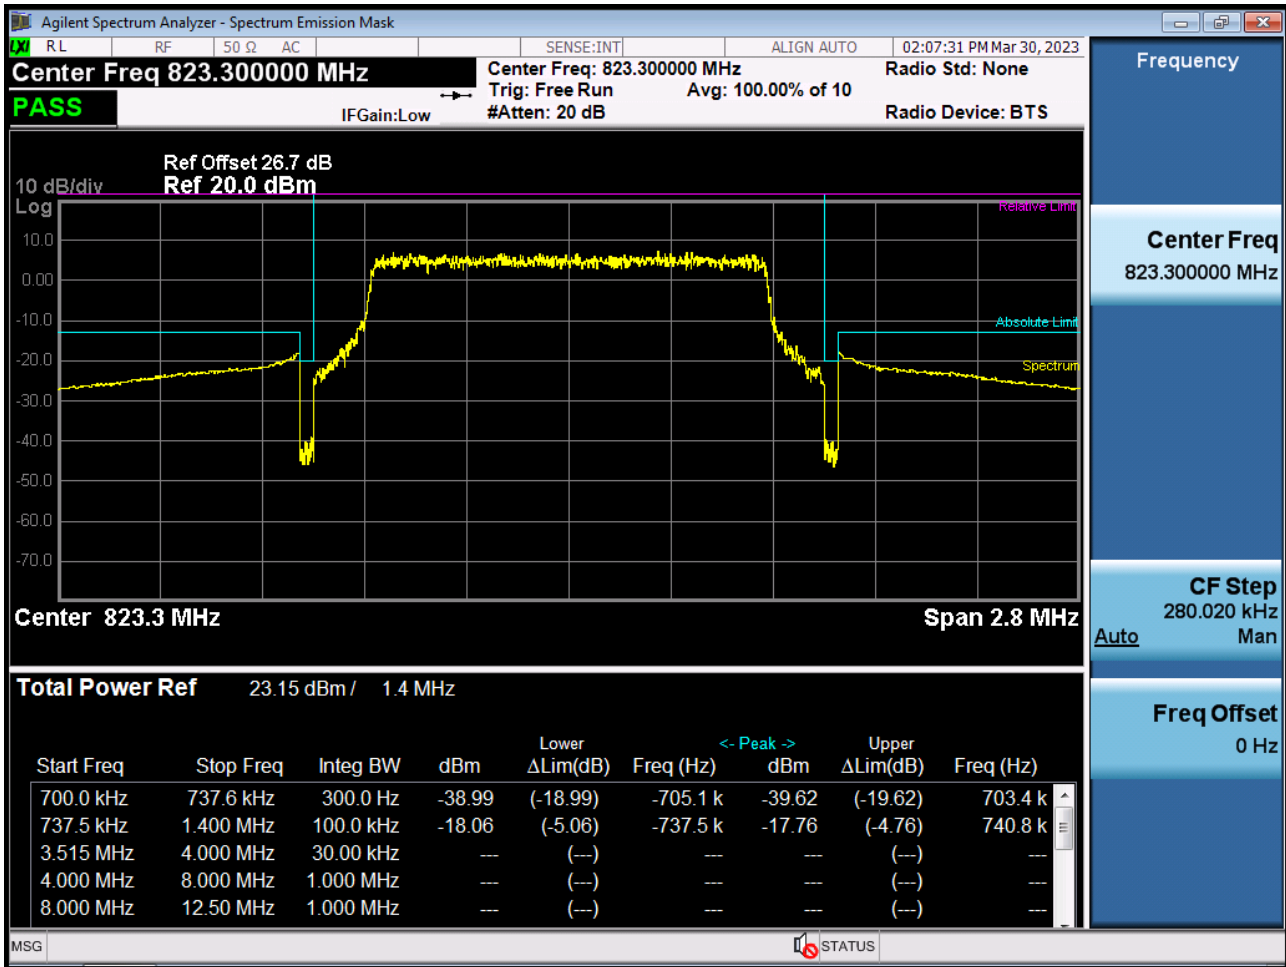


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB1_Offset 14)

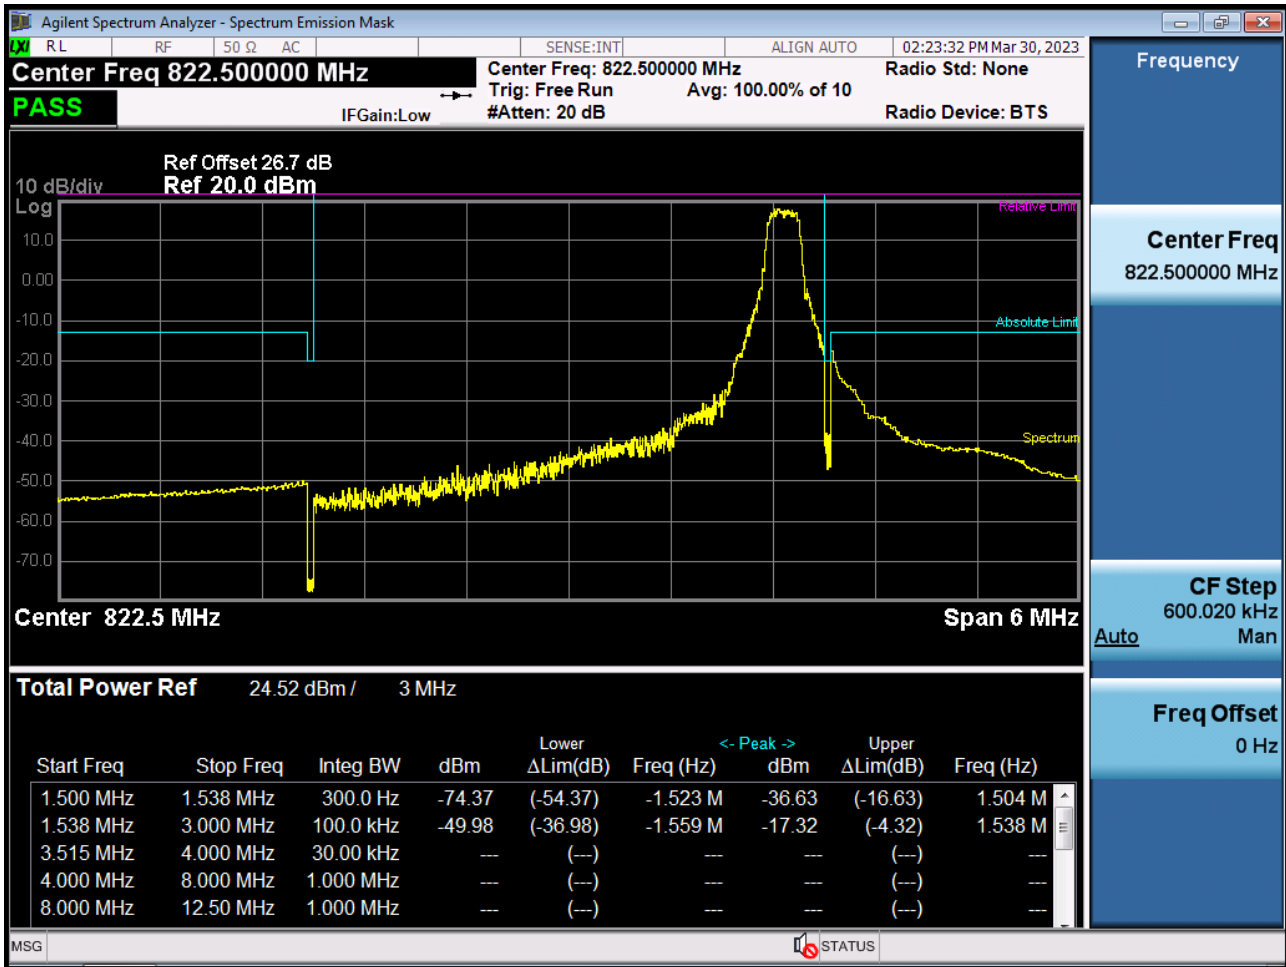


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB15_Offset 0)

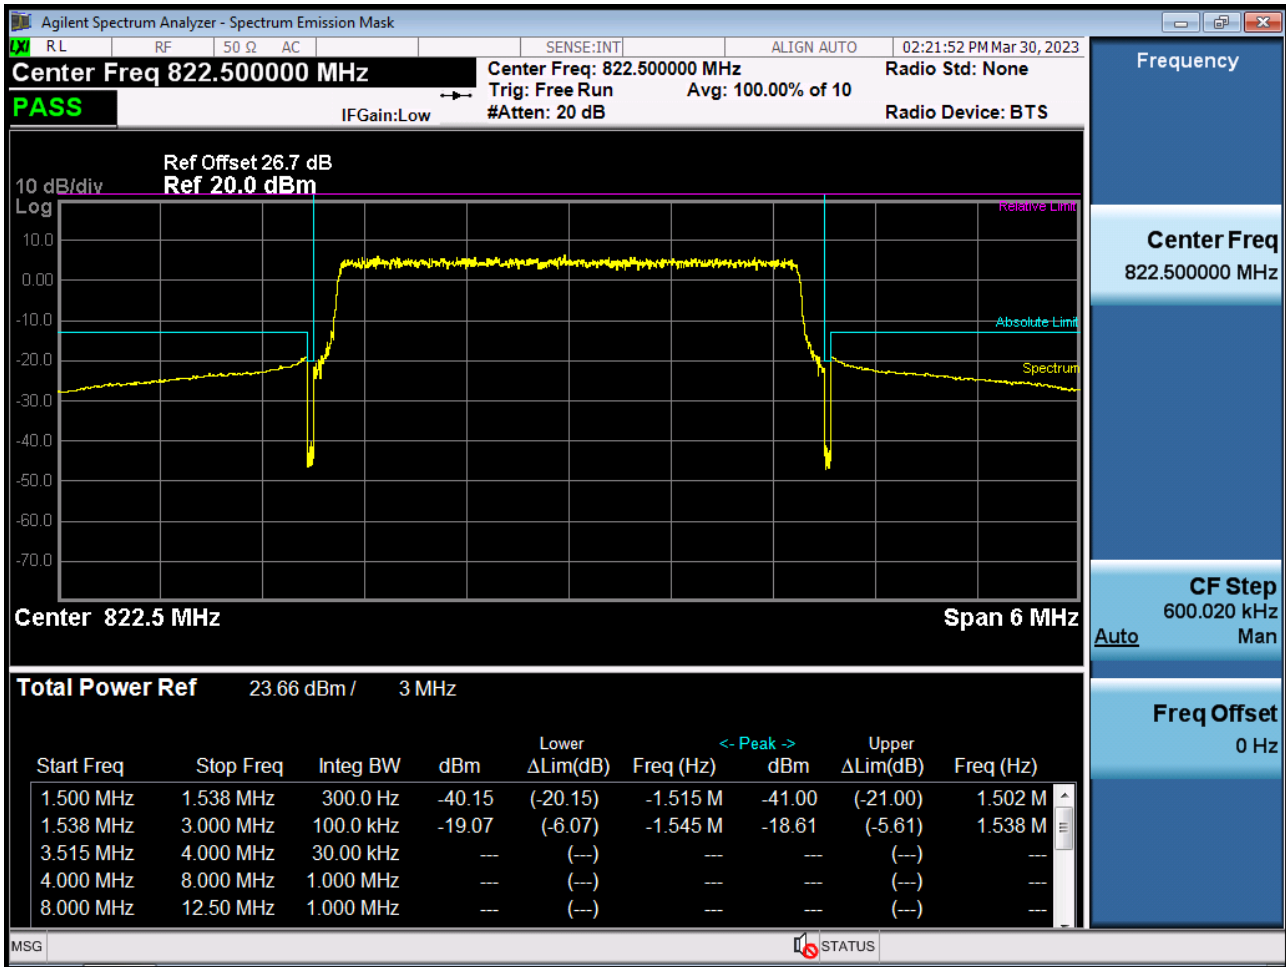


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB1_Offset 24)

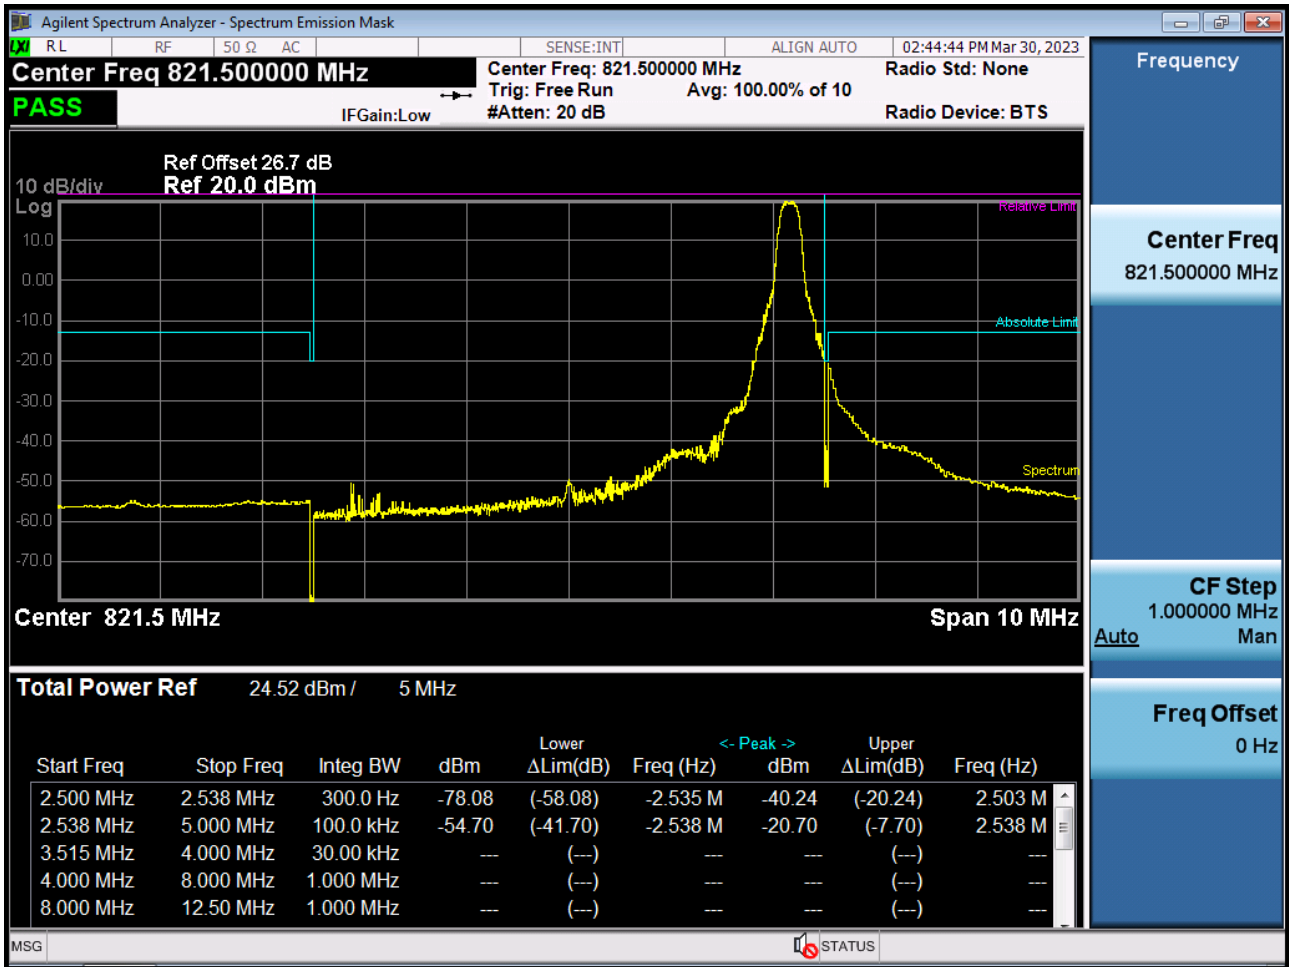


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB25_Offset 0)

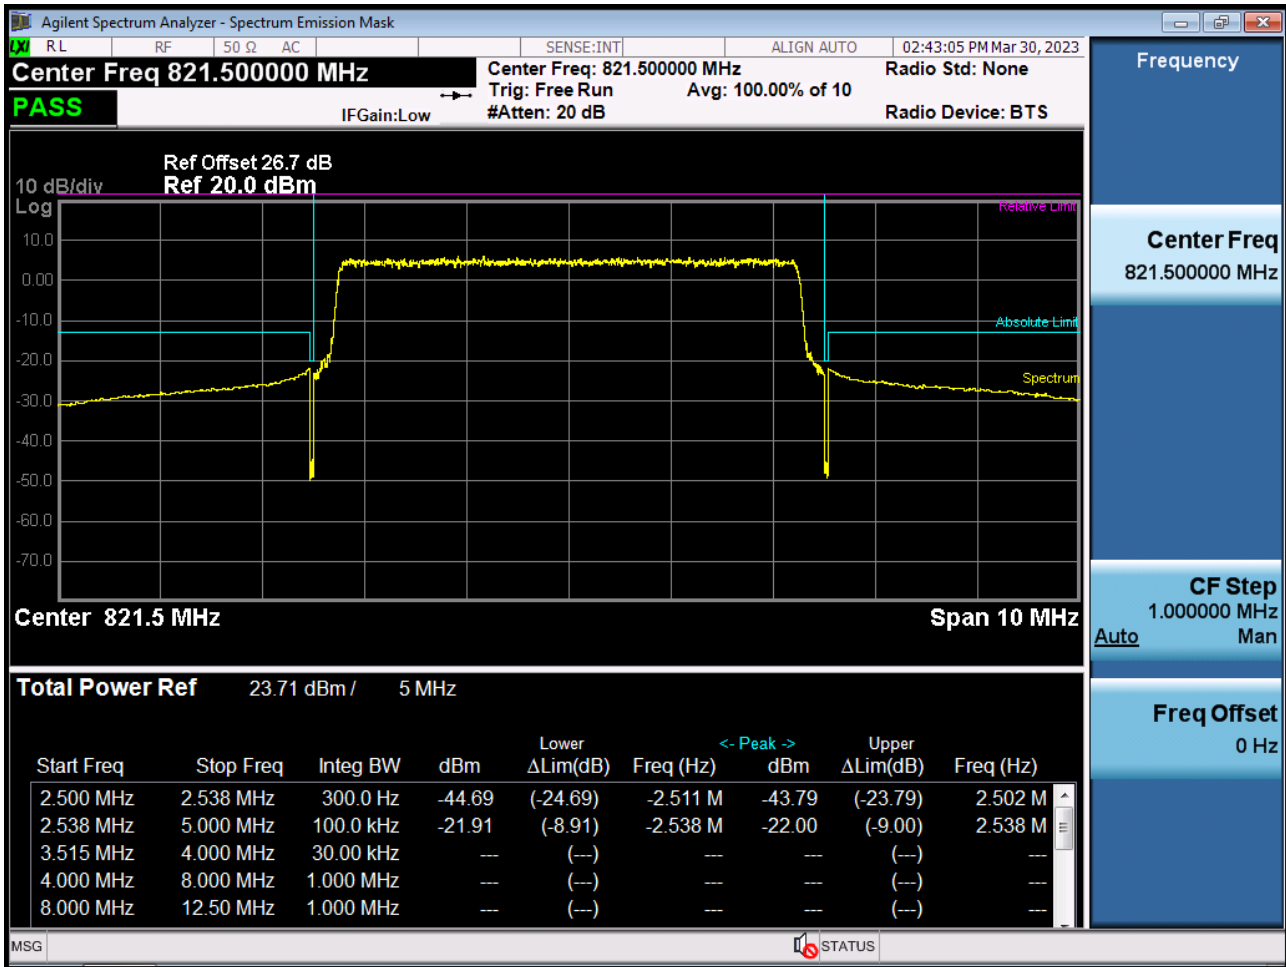


BAND 26. Conducted Spurious (26697 ch_1.4 MHz_QPSK_RB 1_0)

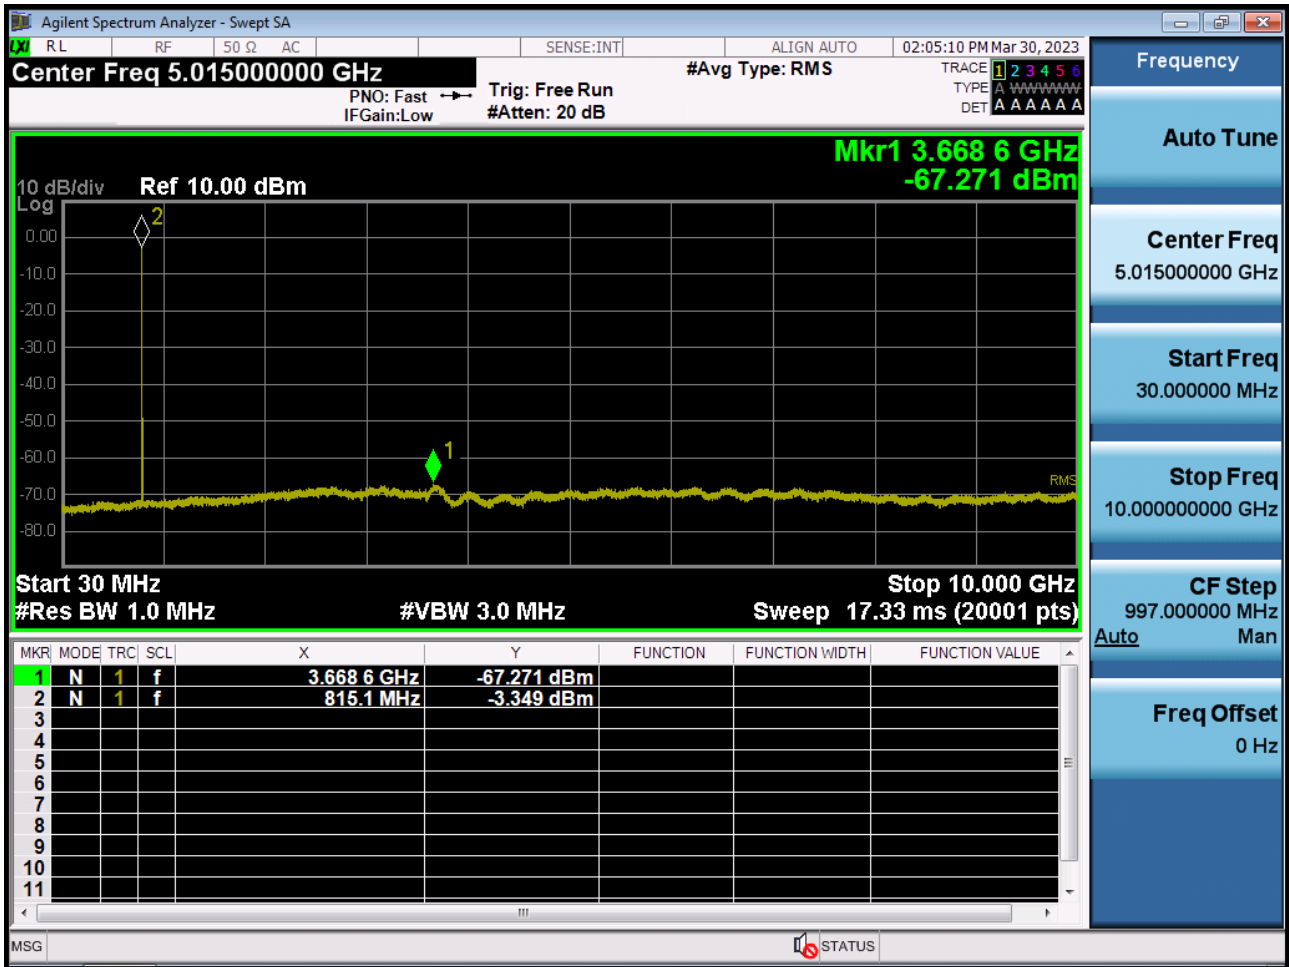


BAND 26. Conducted Spurious (26783 ch_1.4 MHz_QPSK_RB 1_0)

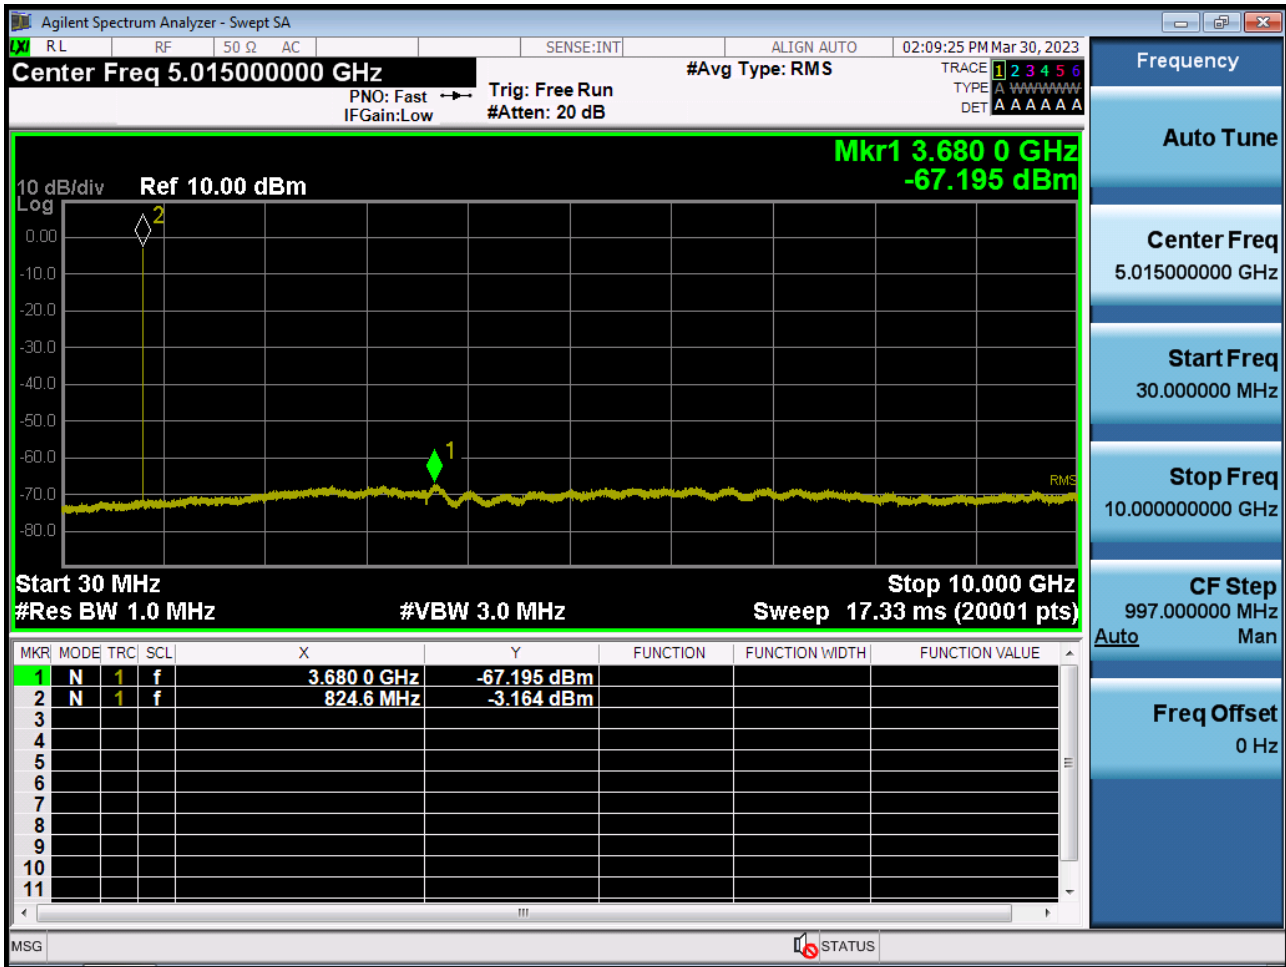


BAND 26. Conducted Spurious (26705 ch_3 MHz_QPSK_RB 1_0)

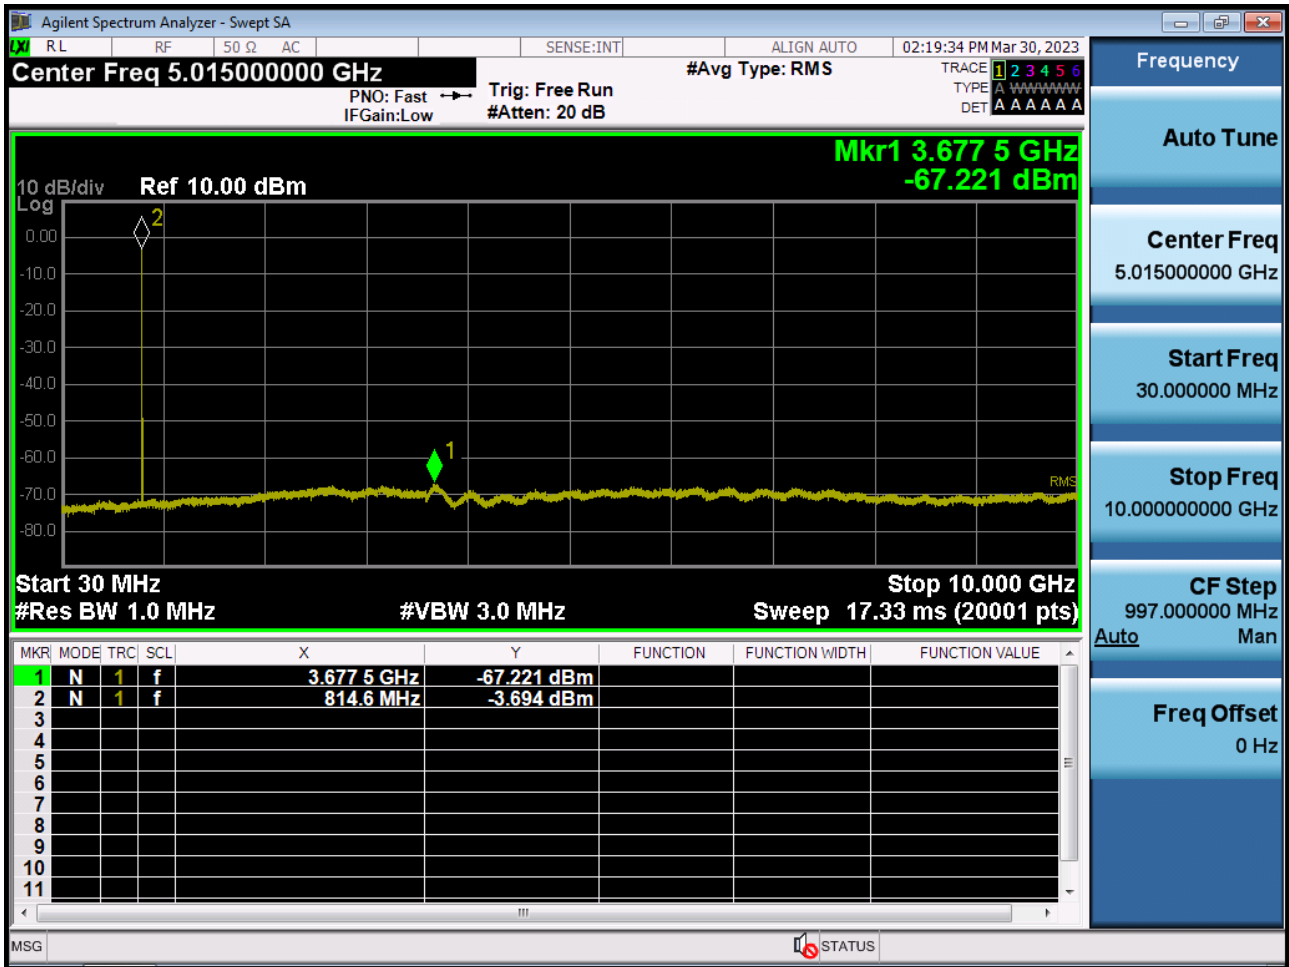


BAND 26. Conducted Spurious (26775 ch_3 MHz_QPSK_RB 1_0)

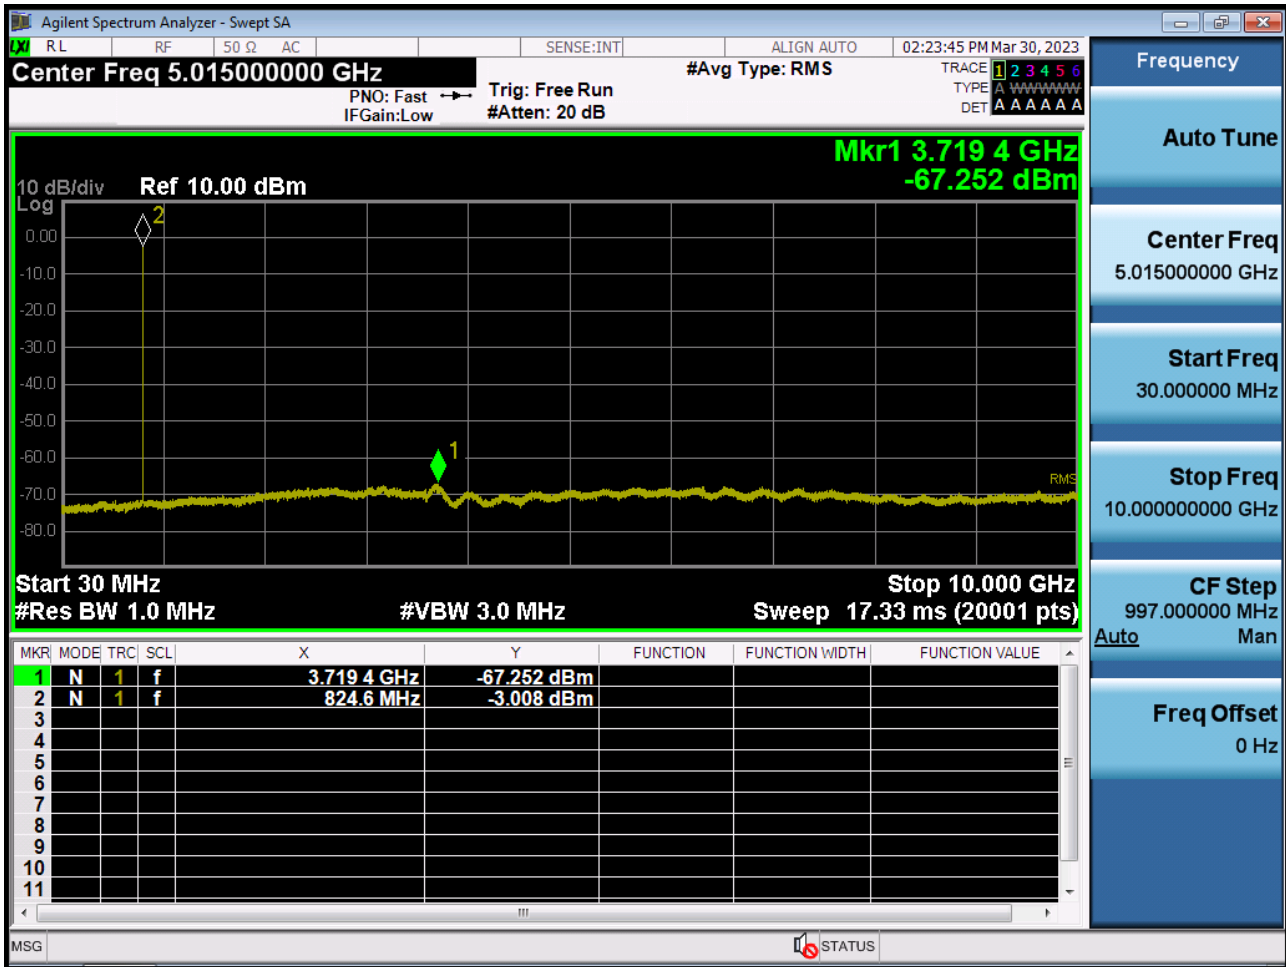


BAND 26. Conducted Spurious (26715 ch_5 MHz_QPSK_RB 1_0)

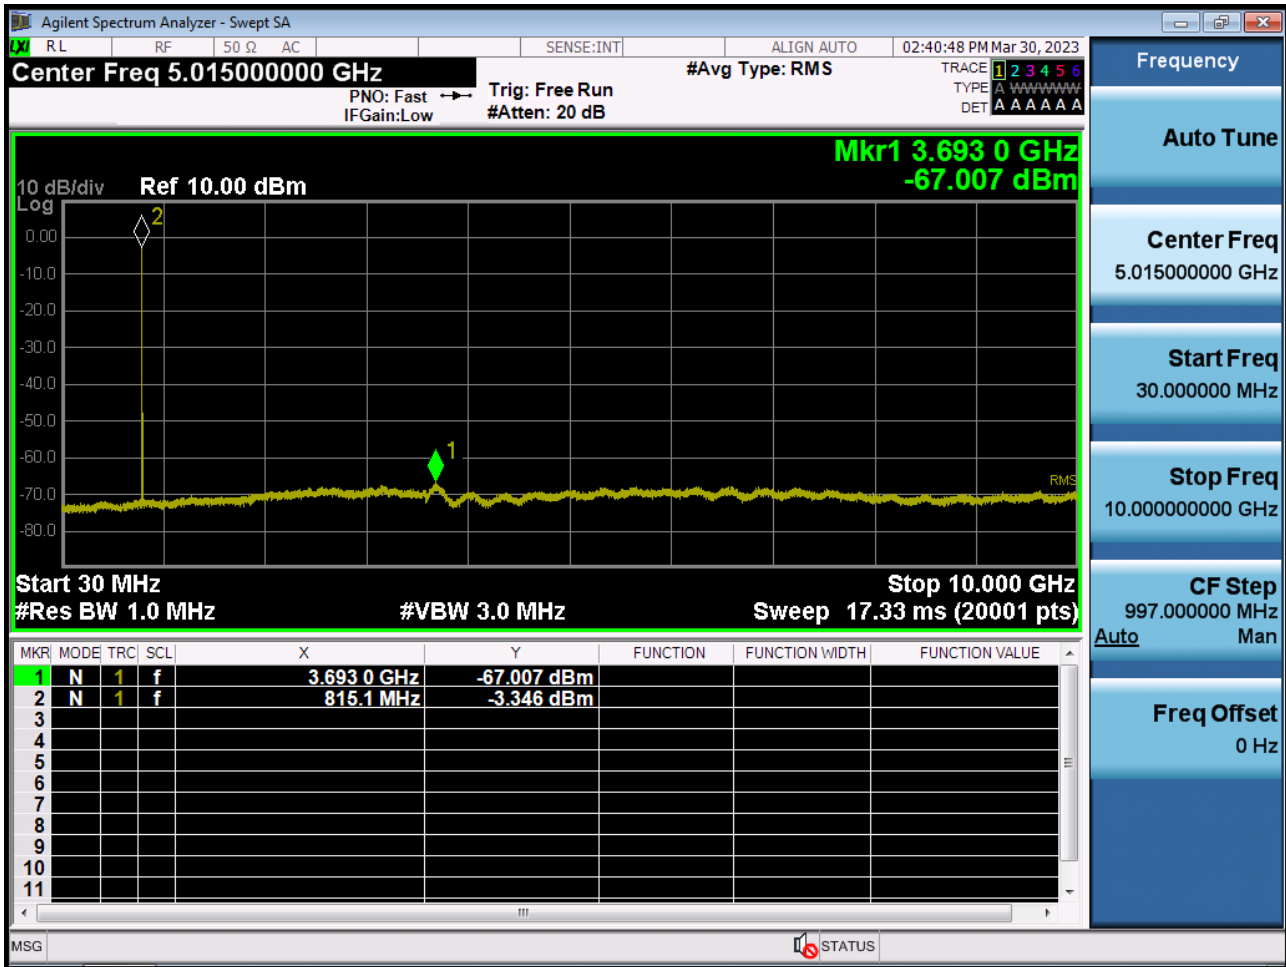


BAND 26. Conducted Spurious (26765 ch_5 MHz_QPSK_RB 1_0)

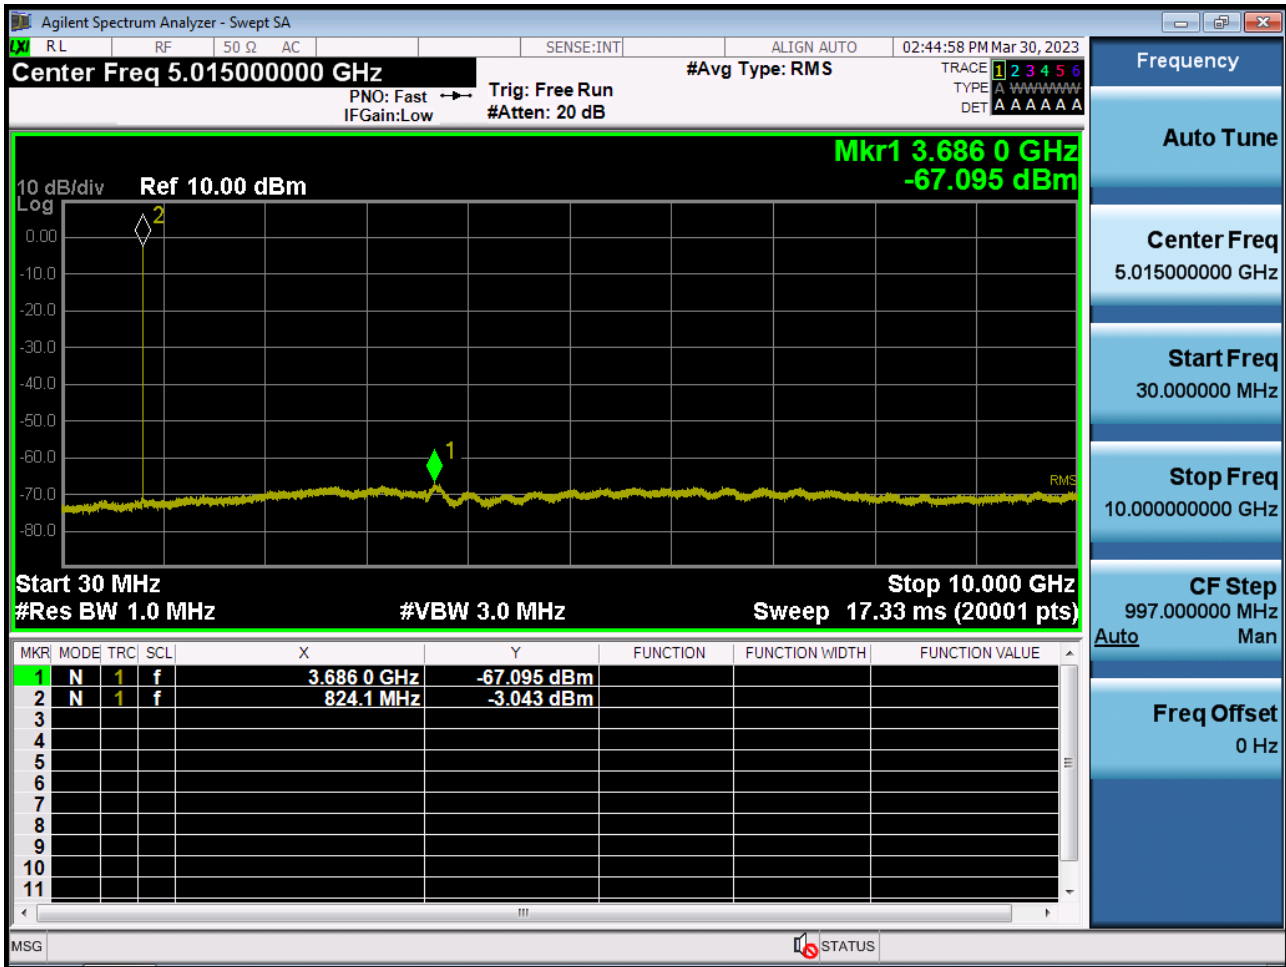

BAND 26. Conducted Spurious (26740 ch_10 MHz_QPSK_RB 1_0)

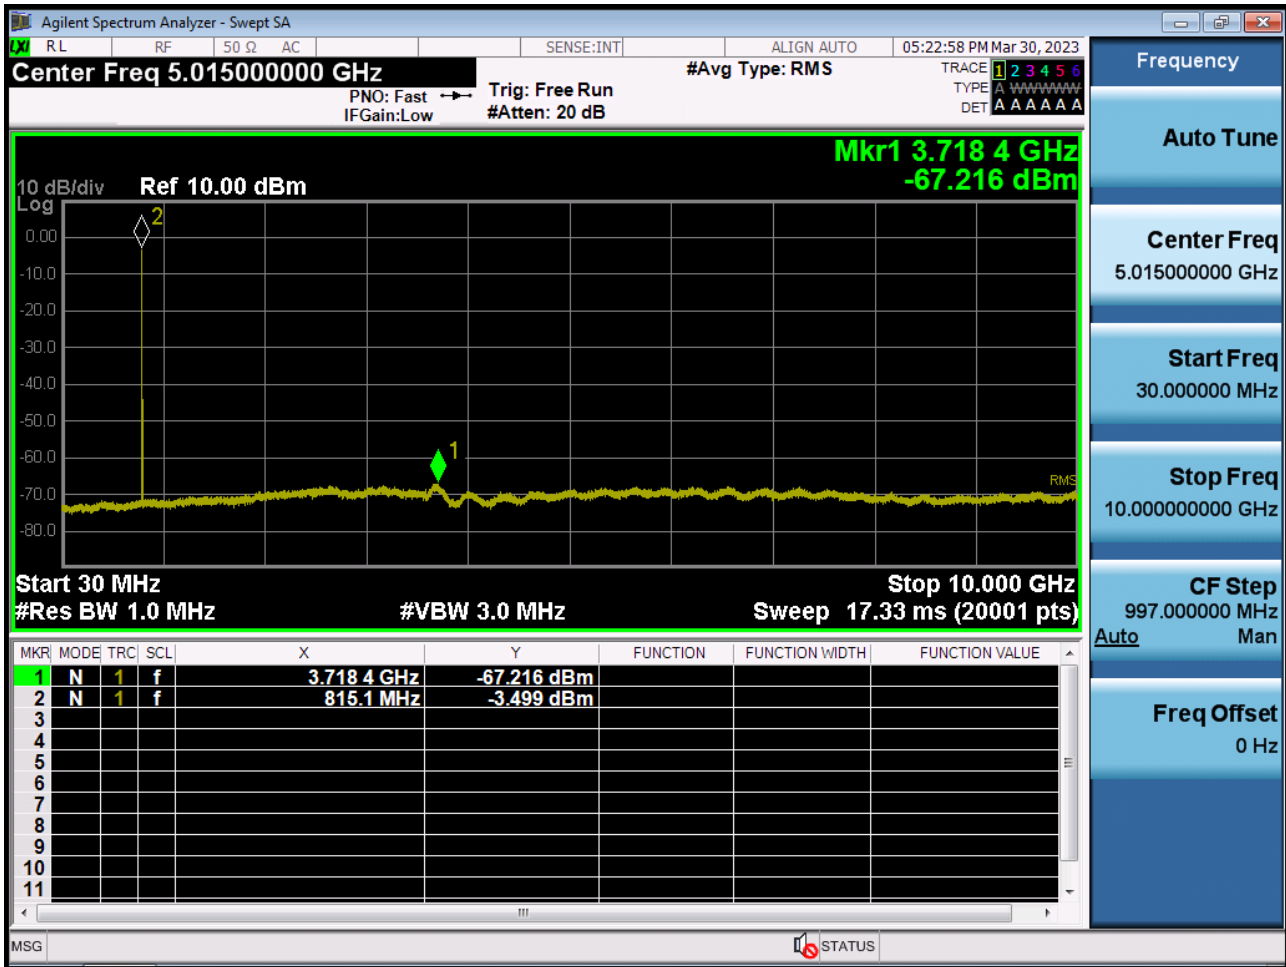


BAND 26. Conducted Spurious (26765 ch_15 MHz_QPSK_RB 1_0)

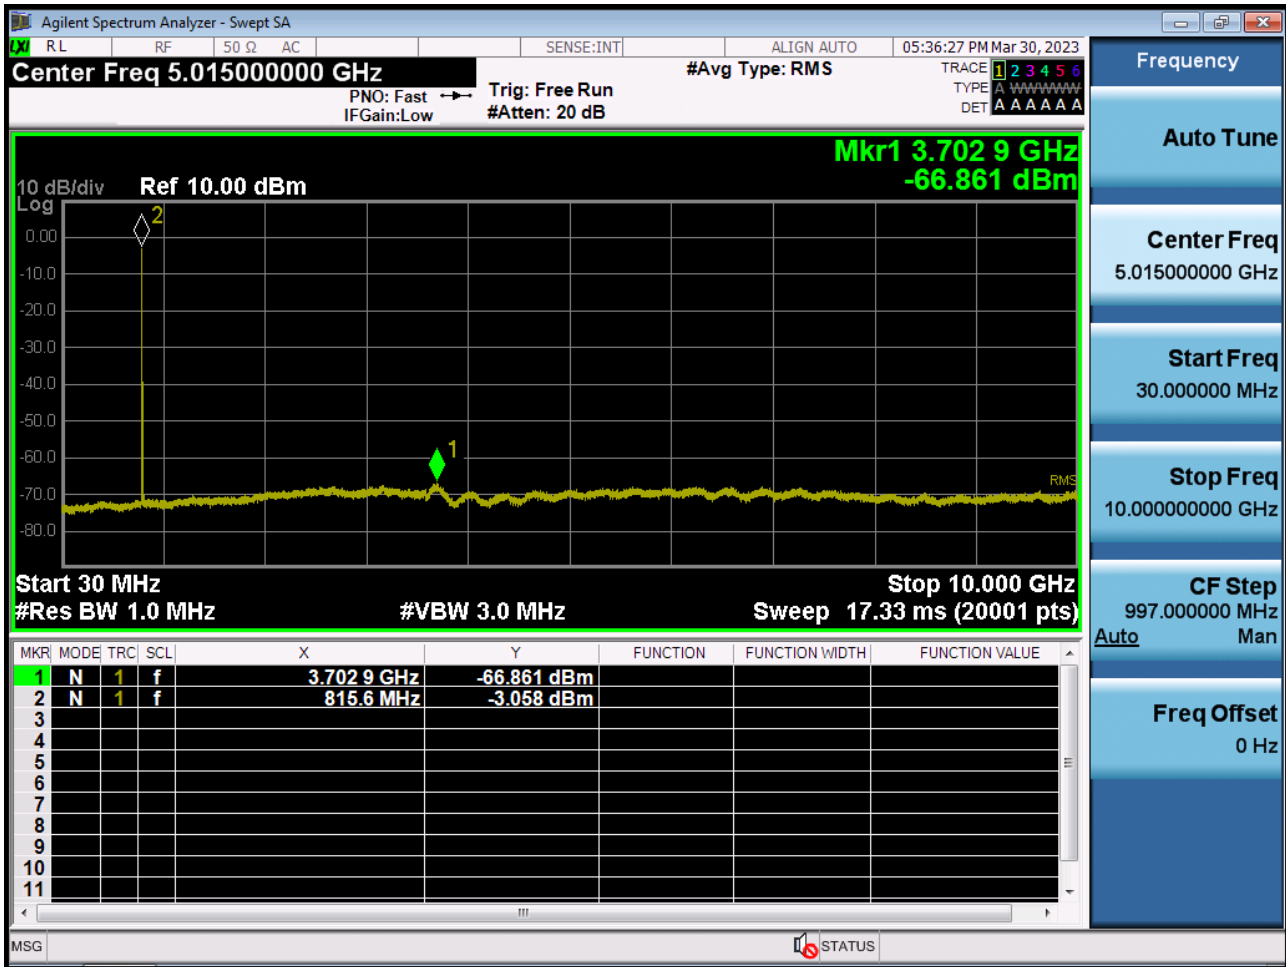


10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4 MHz_QPSK_RB 1_0)

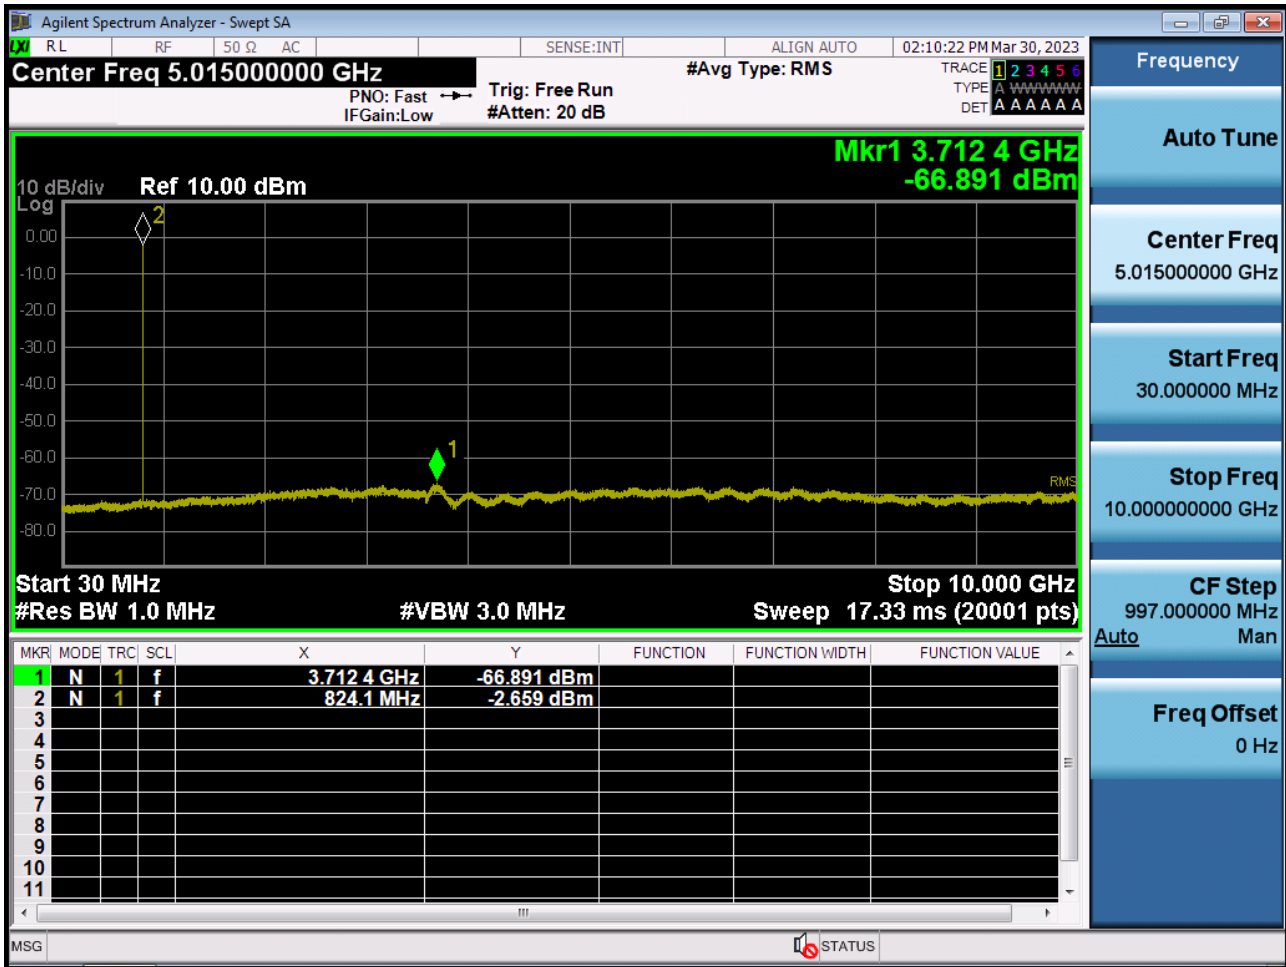


BAND 26. Conducted Spurious (3 MHz_QPSK_RB 1_0)

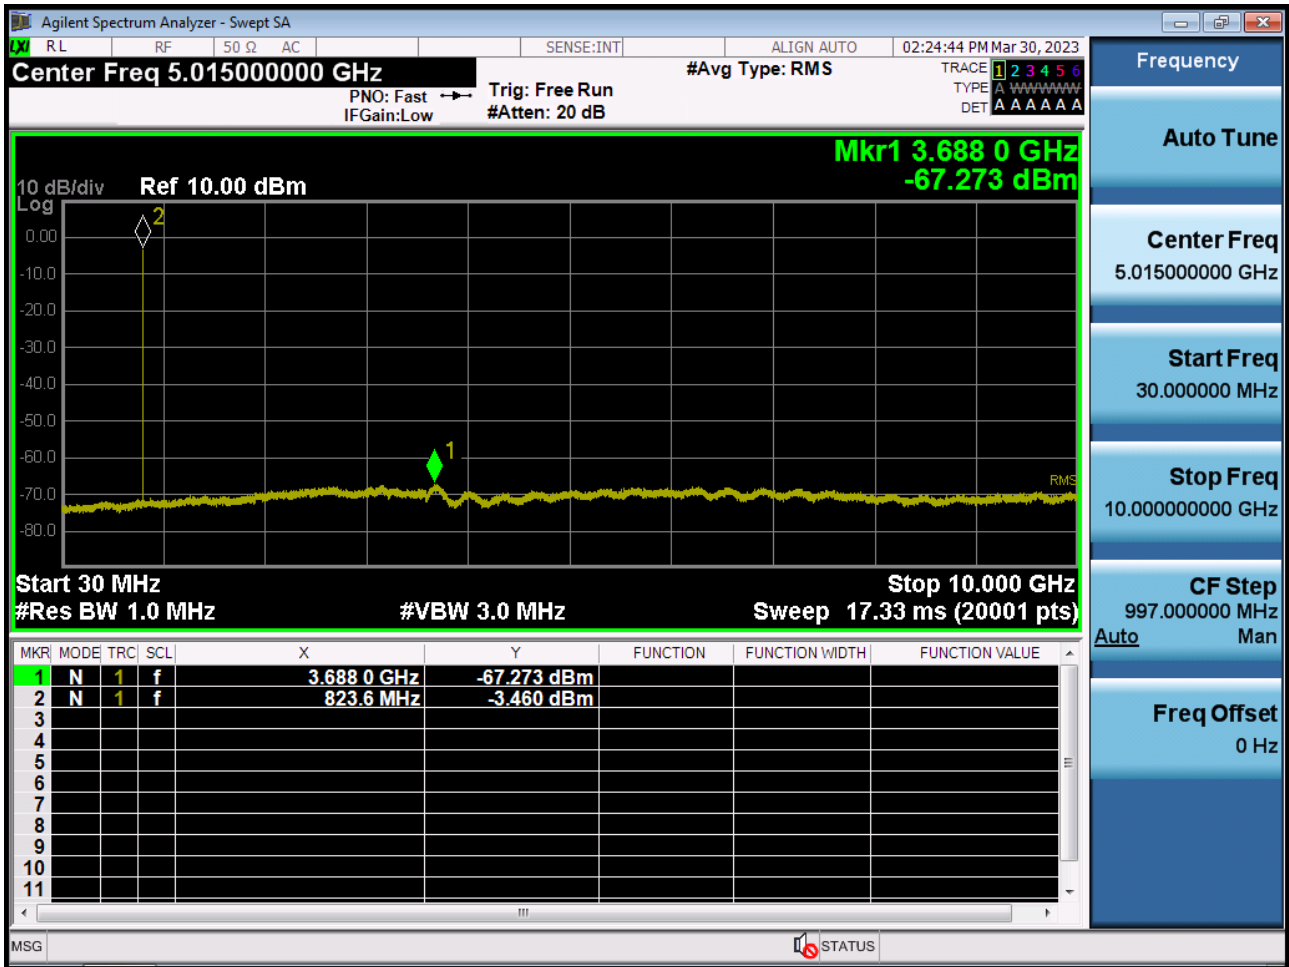


BAND 26. Conducted Spurious (5 MHz_QPSK_RB 1_0)

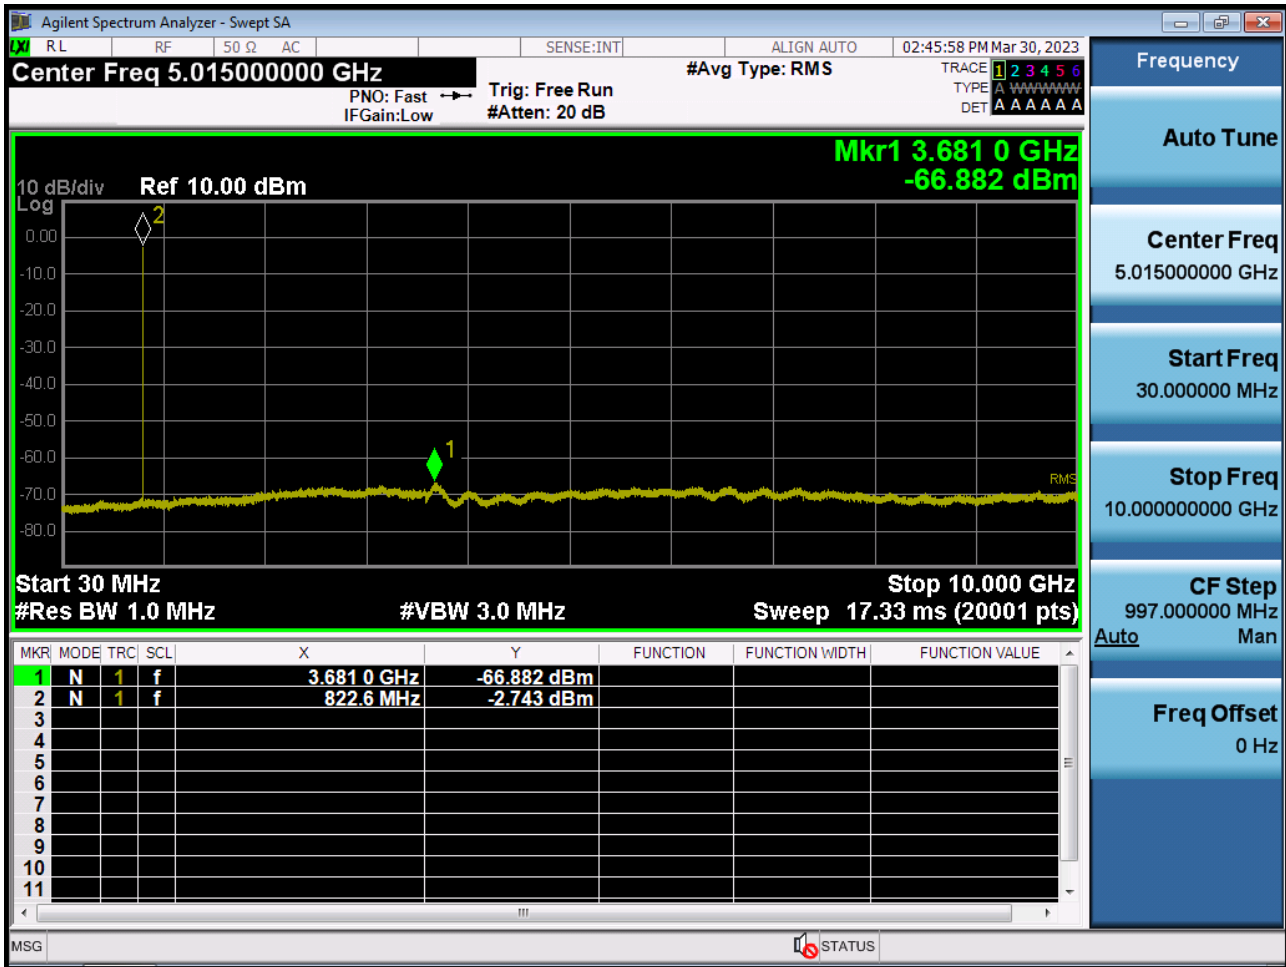


BAND 26. Conducted Spurious (10 MHz_QPSK_RB 1_0)

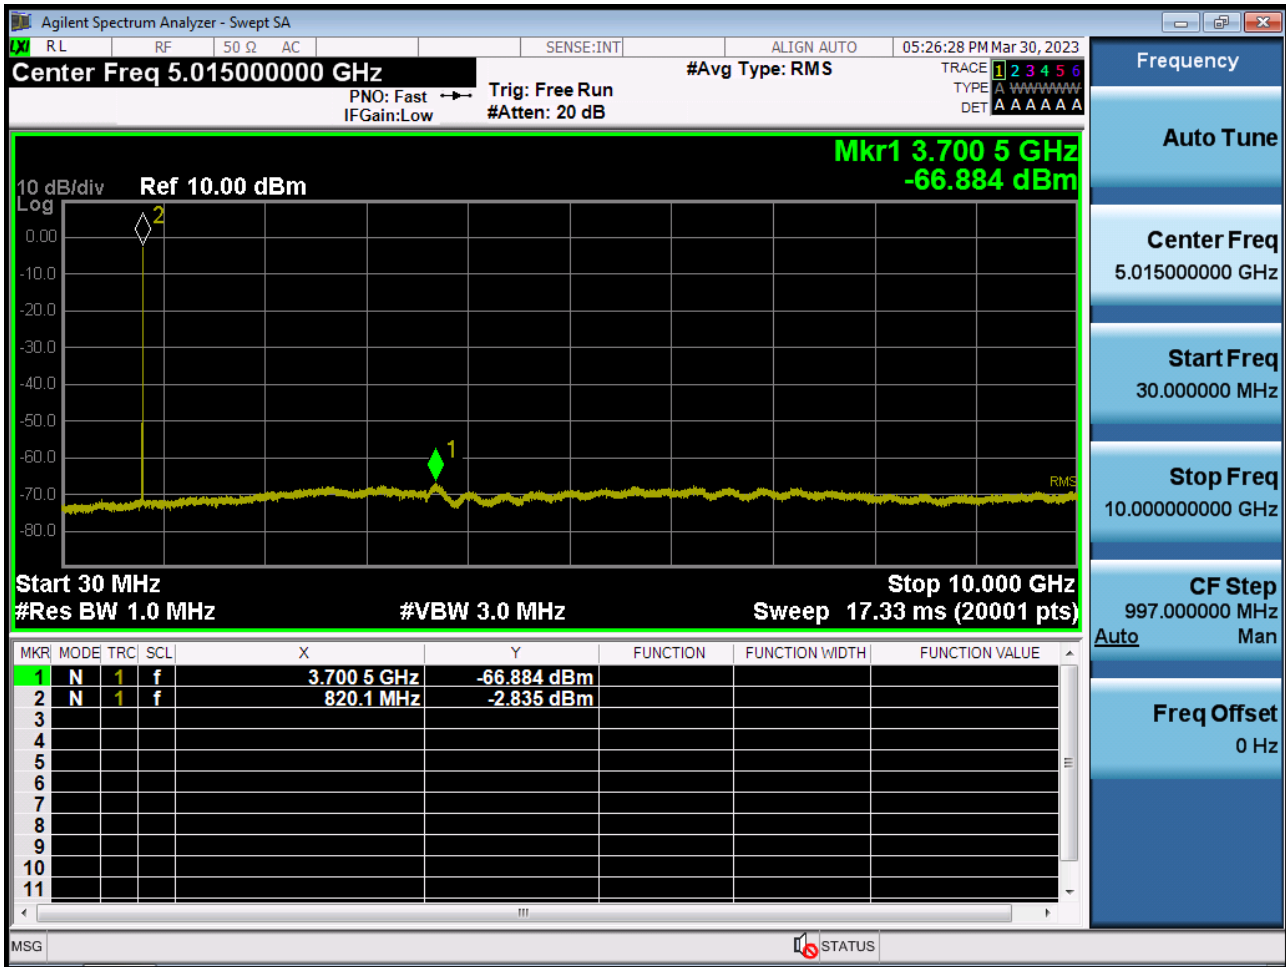


BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_0)

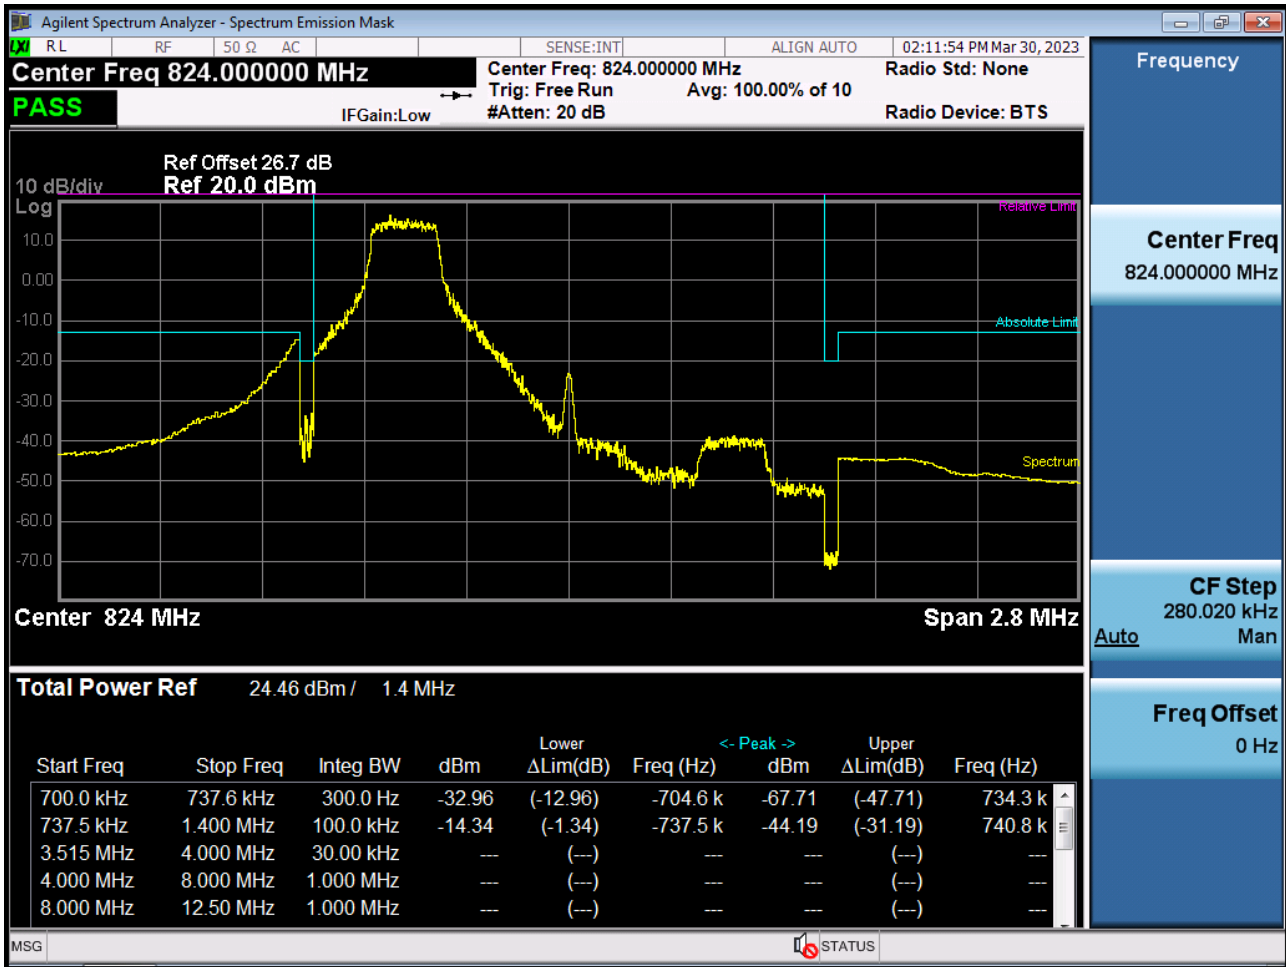


BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_5)

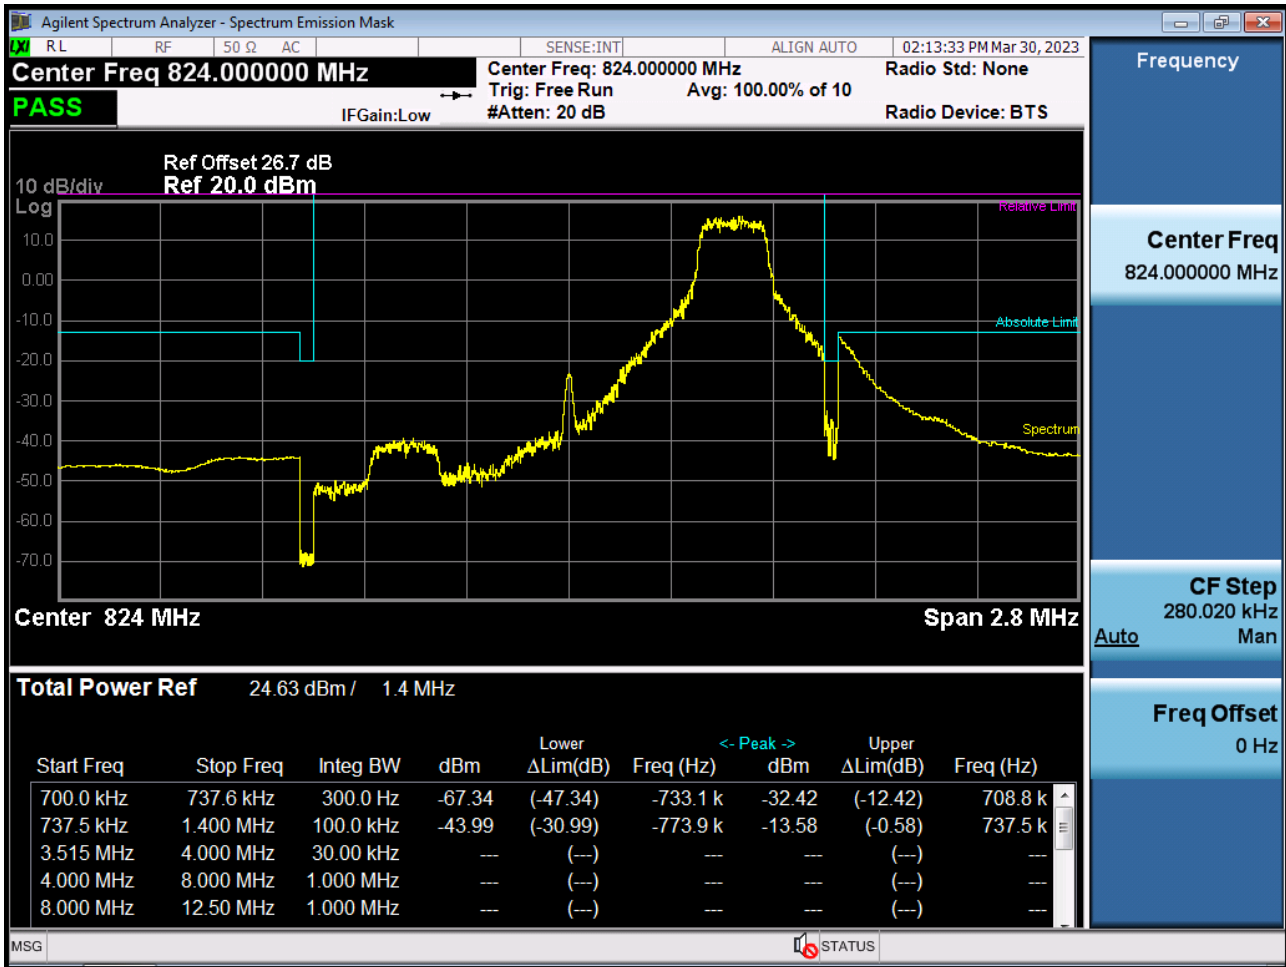


BAND 26. Channel Edge (1.4 MHz_QPSK_Full RB)

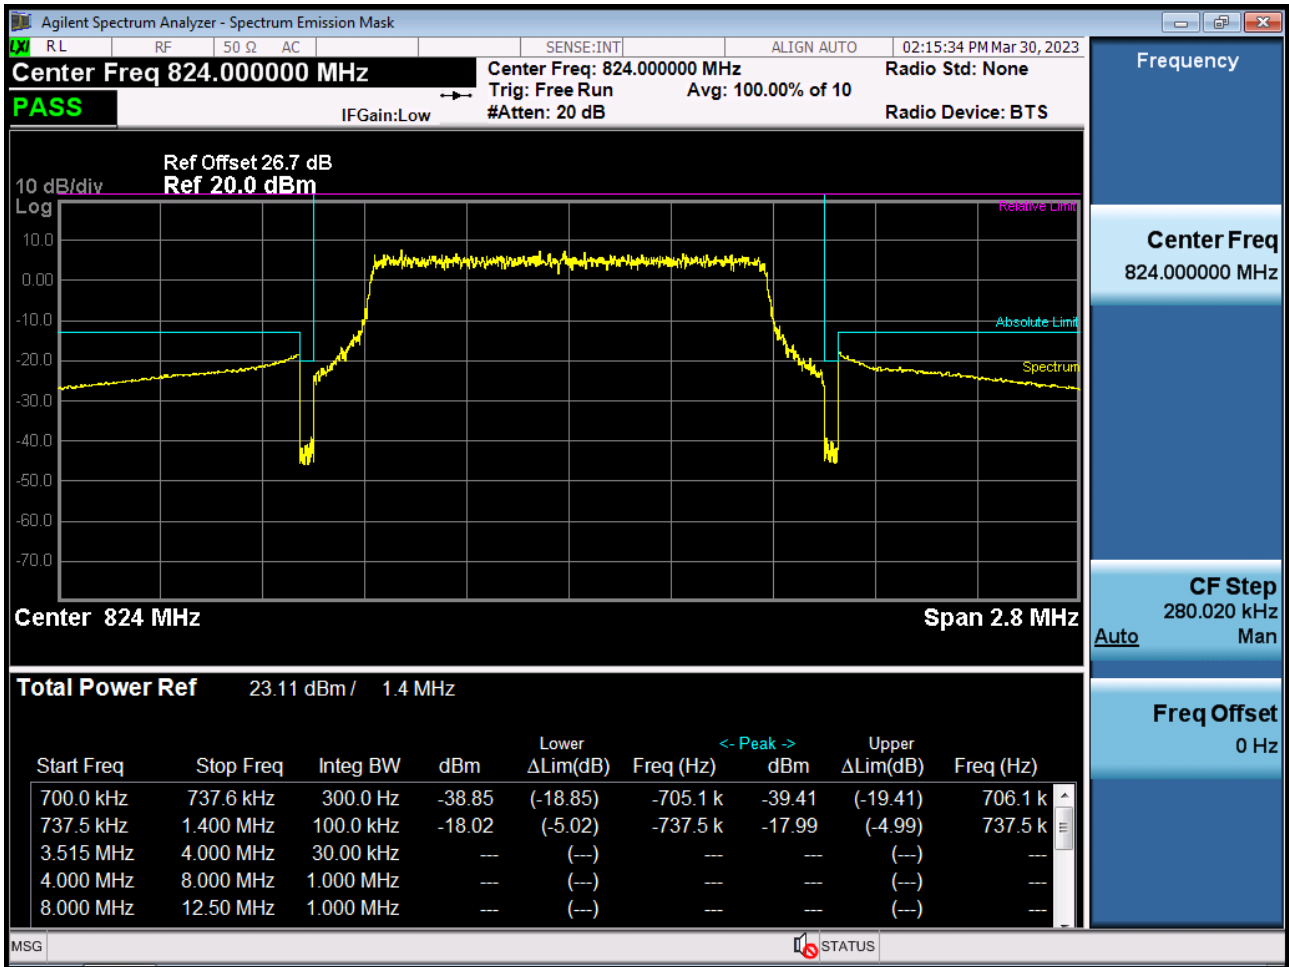


BAND 26. Channel Edge (3 MHz_QPSK_RB 1_0)

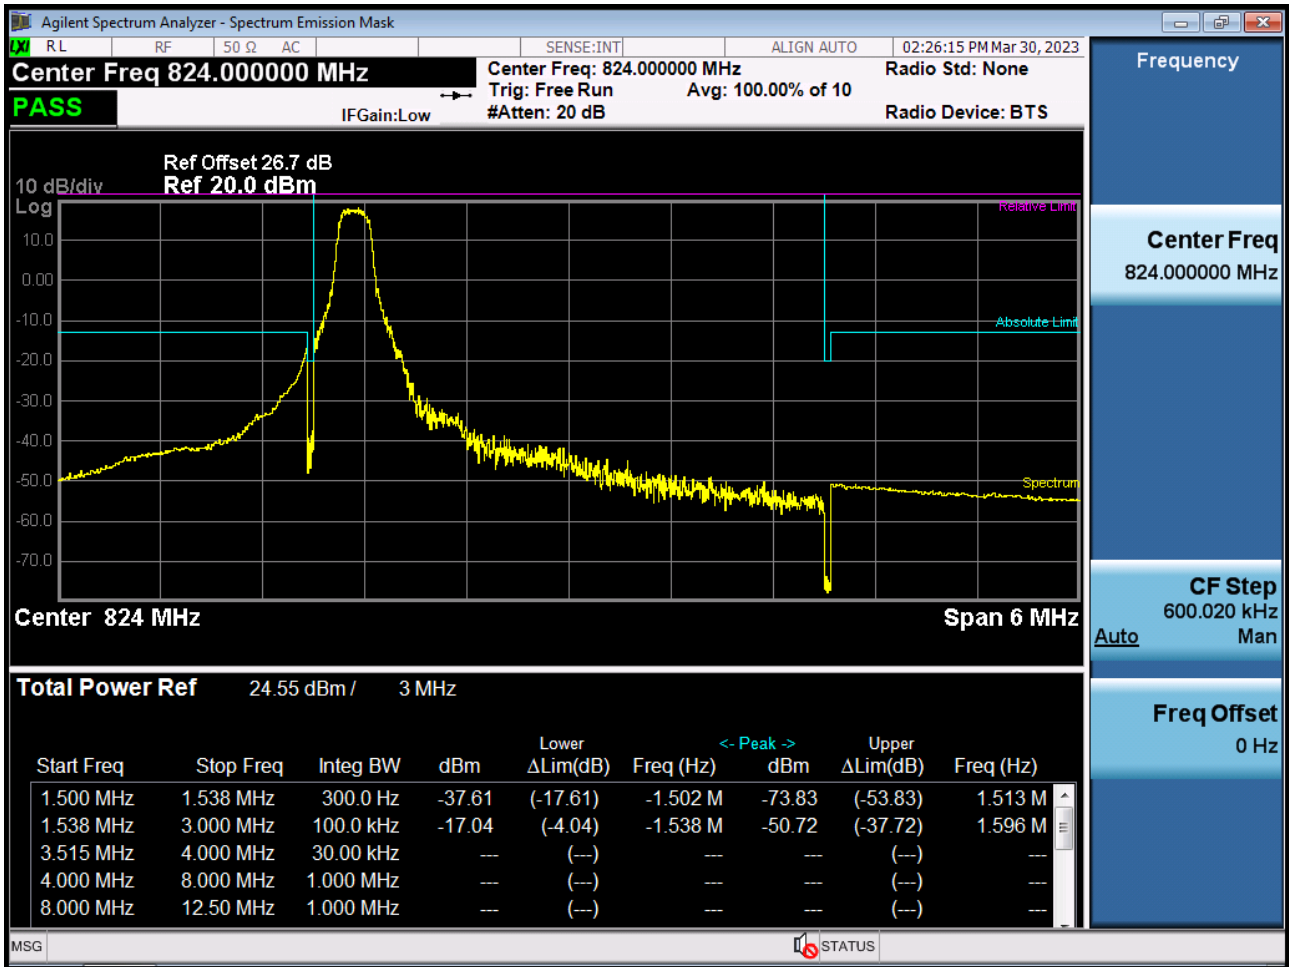


BAND 26. Channel Edge (3 MHz_QPSK_RB 1_14)

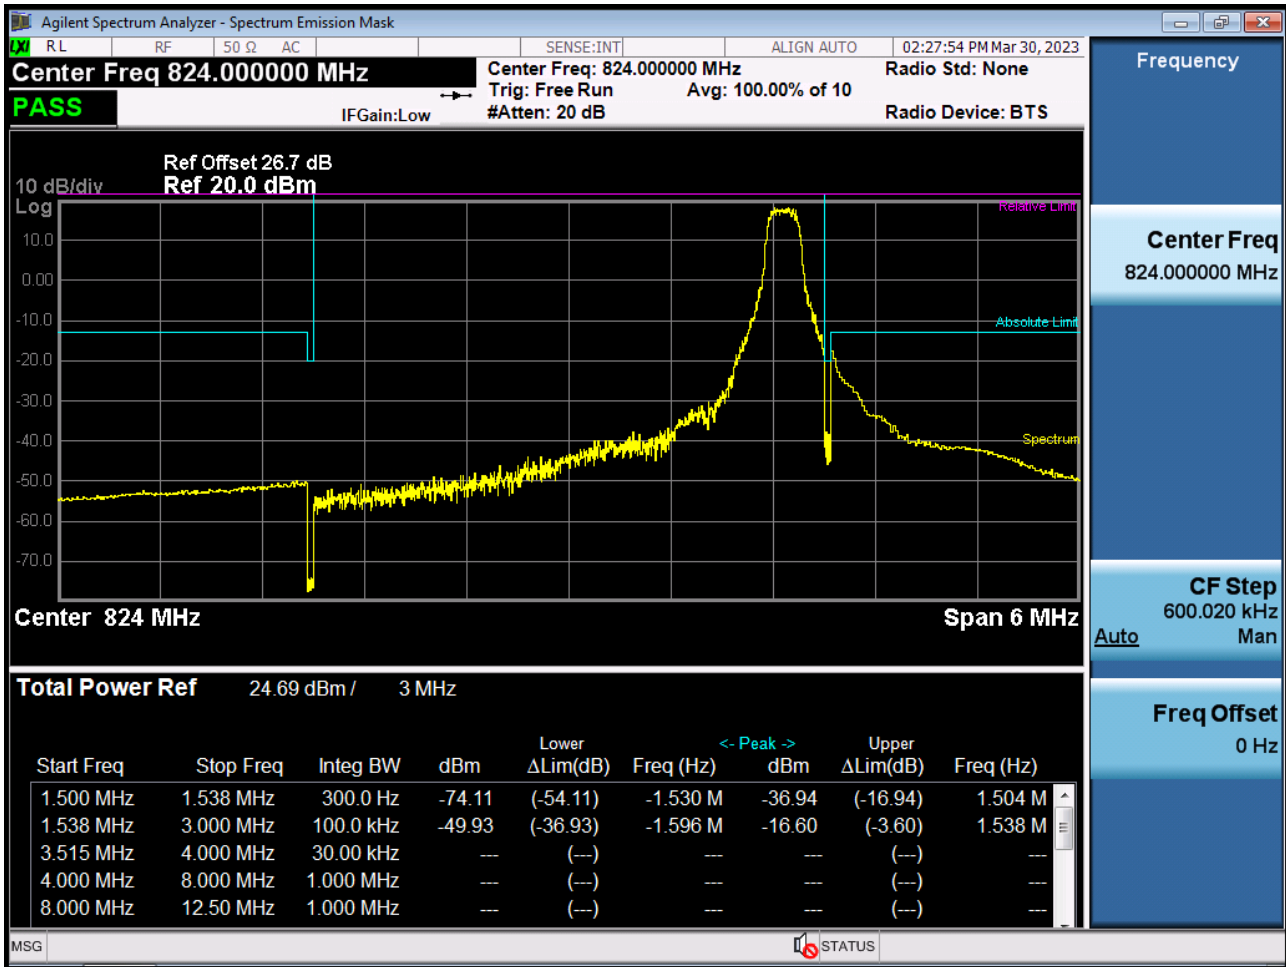


BAND 26. Channel Edge (3 MHz_QPSK_Full RB)

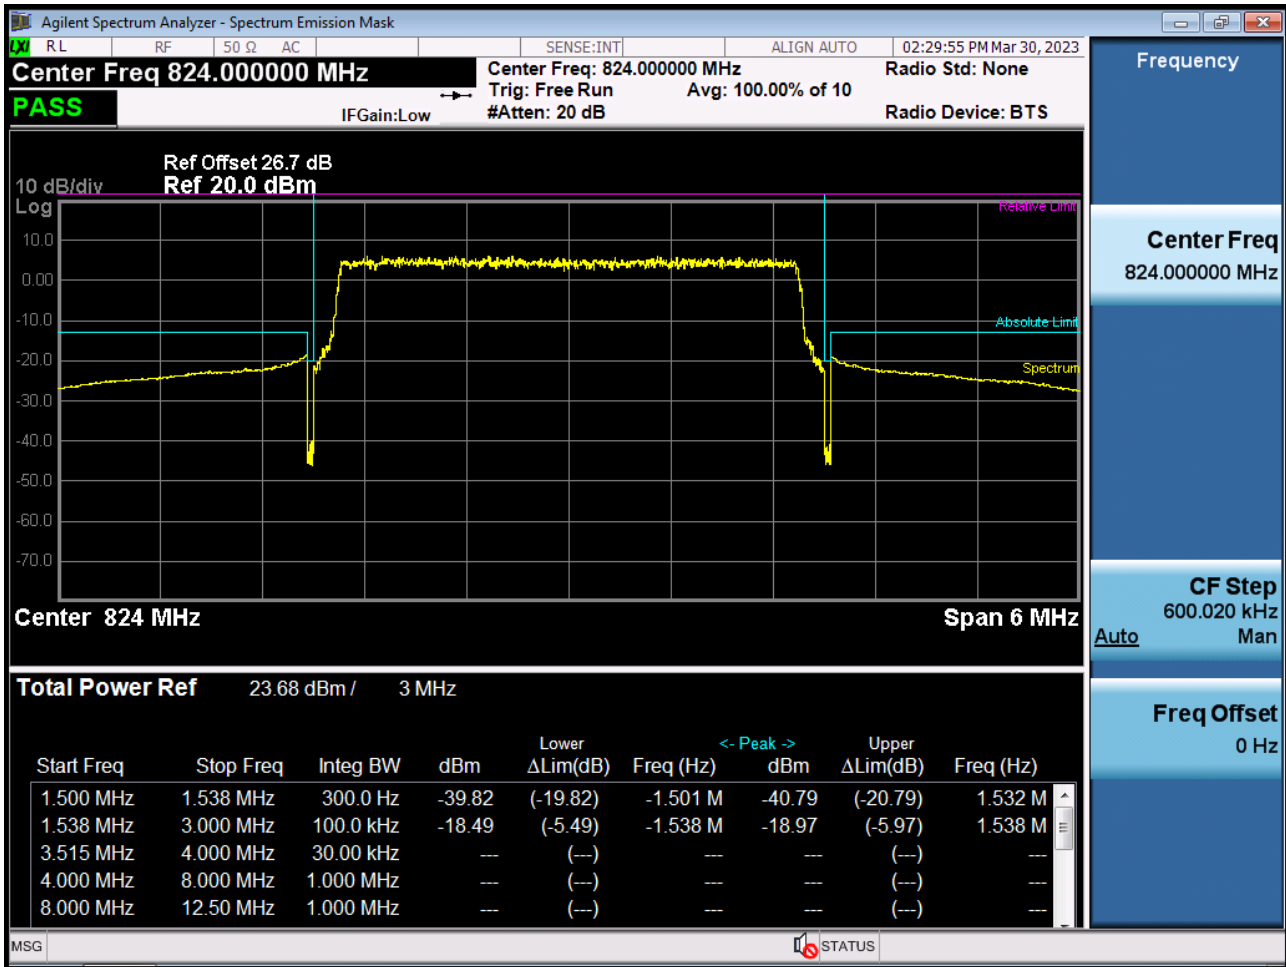


BAND 26. Channel Edge (5 MHz_QPSK_RB 1_0)

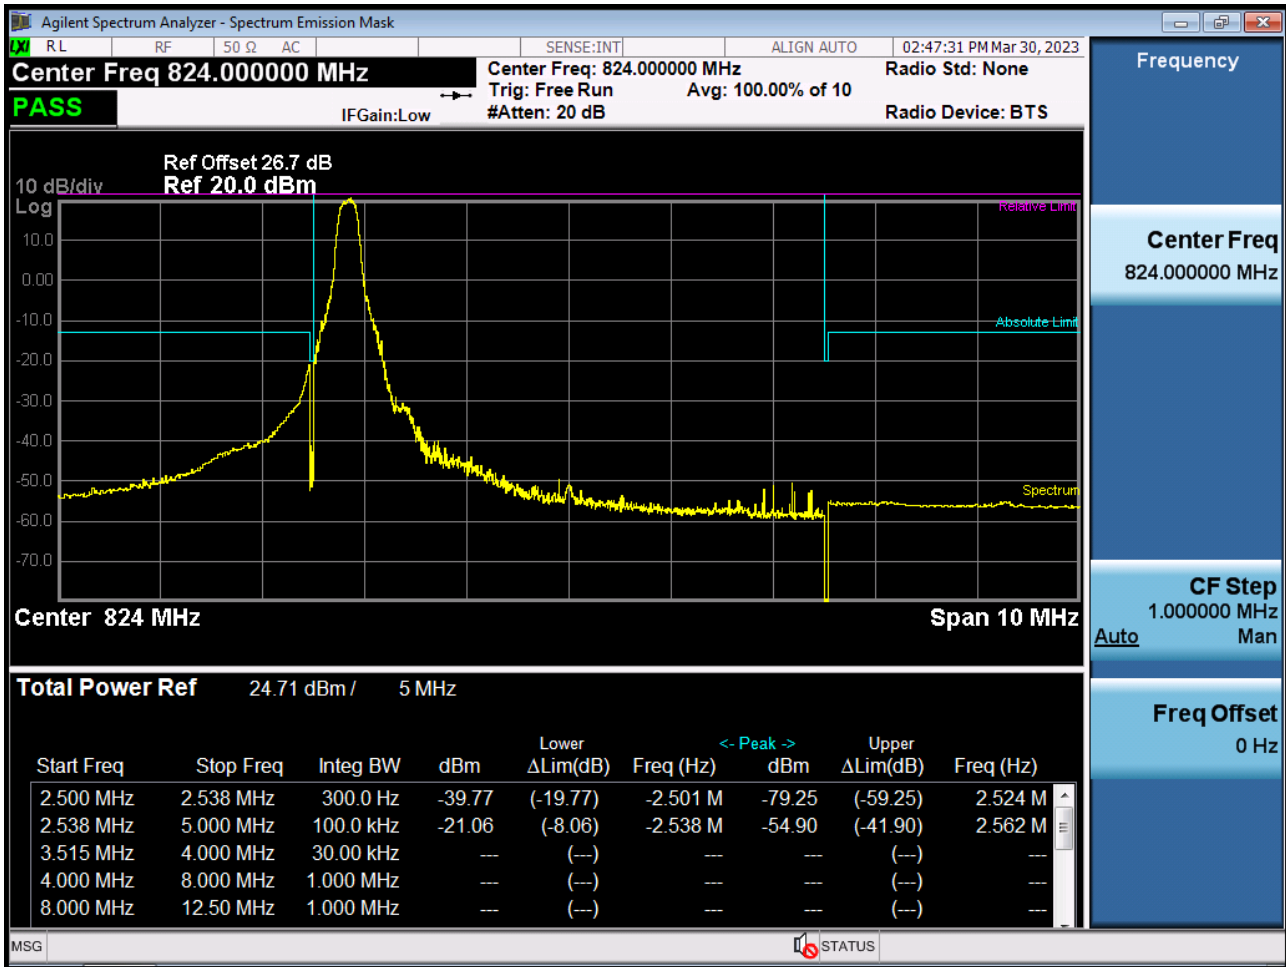


BAND 26. Channel Edge (5 MHz_QPSK_RB 1_24)

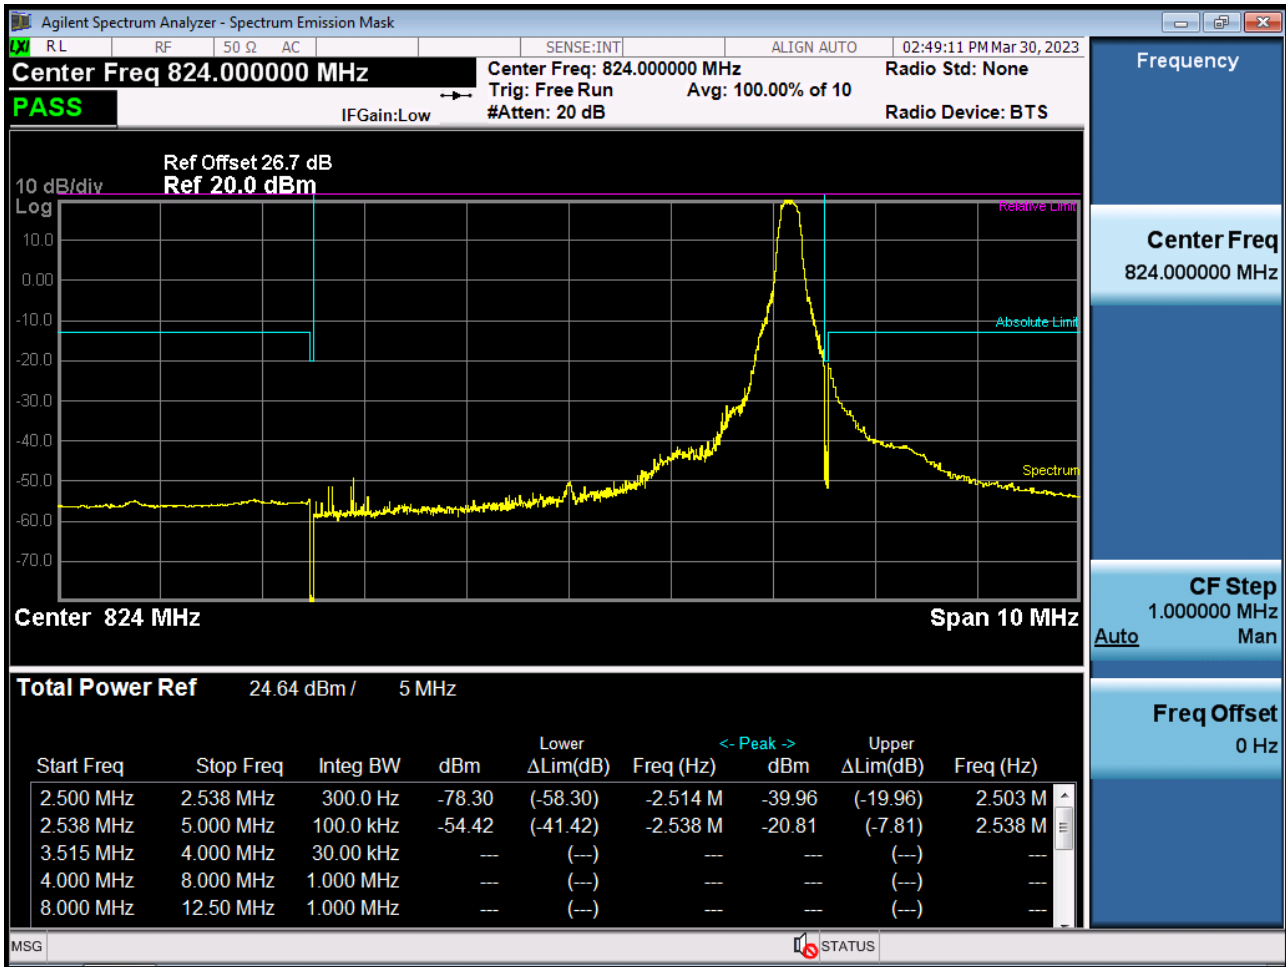


BAND 26. Channel Edge (5 MHz_QPSK_Full RB)

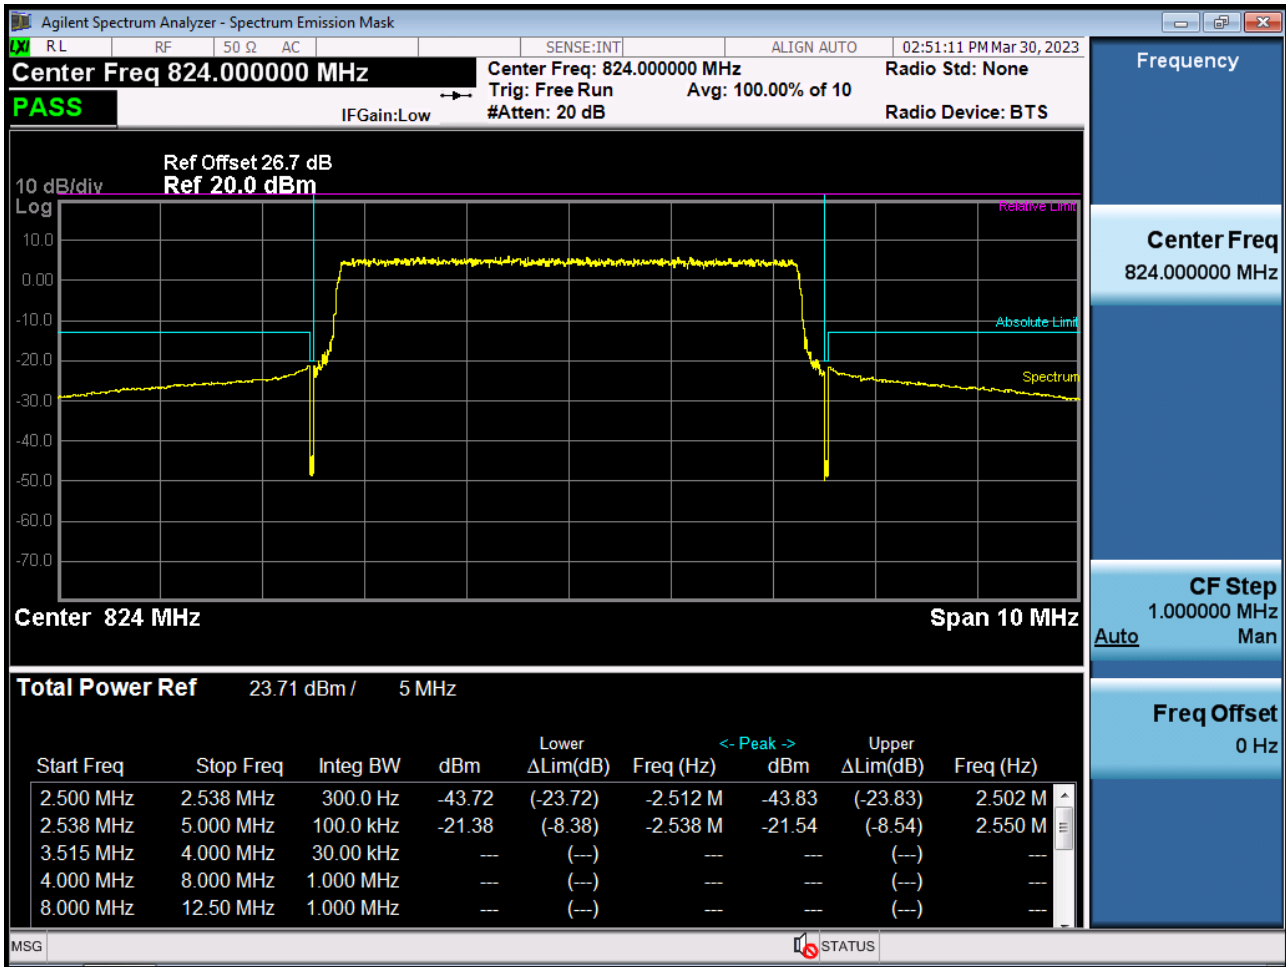


BAND 26. Channel Edge (10 MHz_QPSK_RB 1_0)

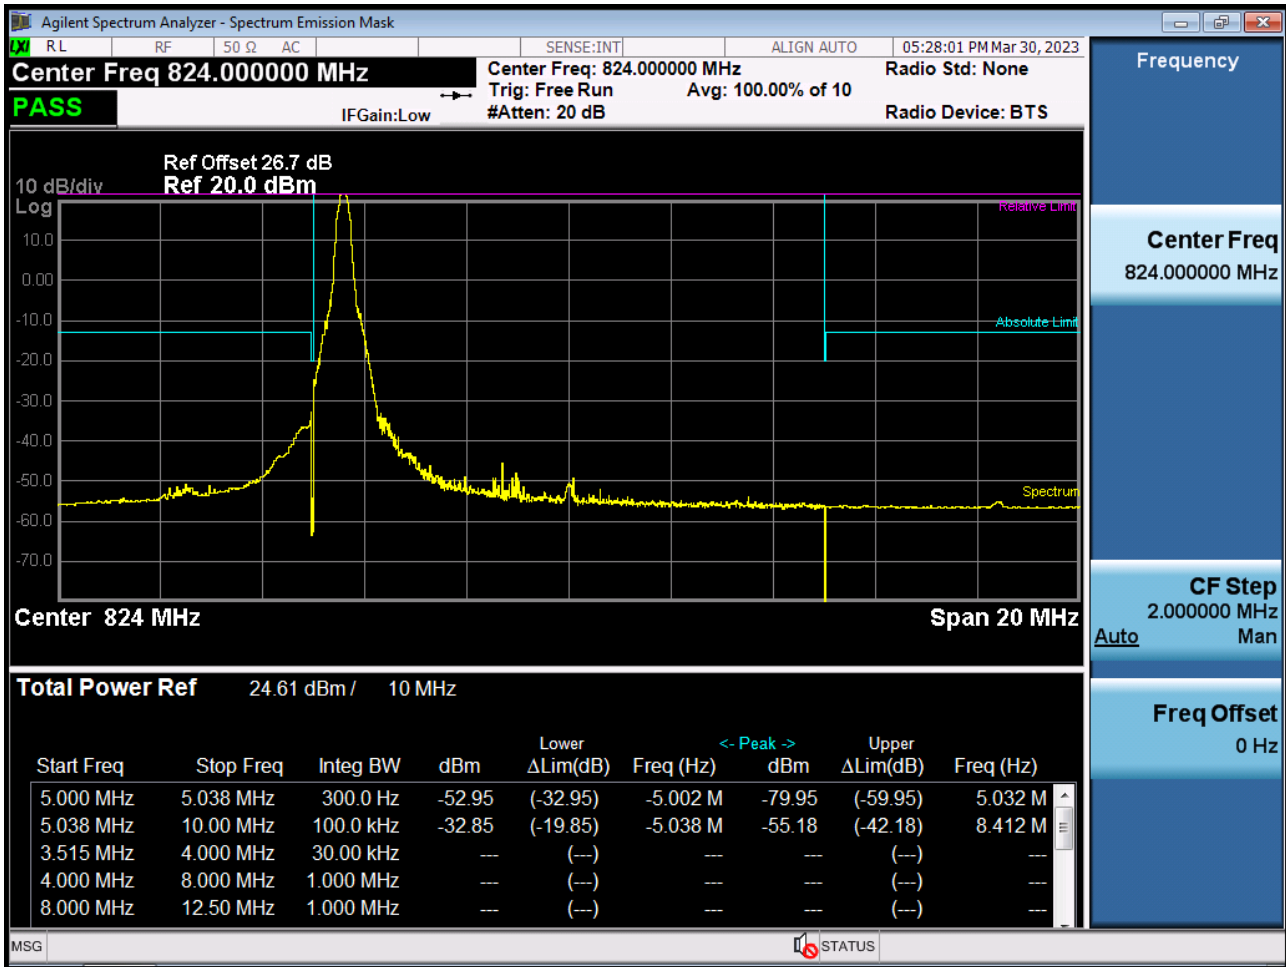


BAND 26. Channel Edge (10 MHz_QPSK_RB 1_49)

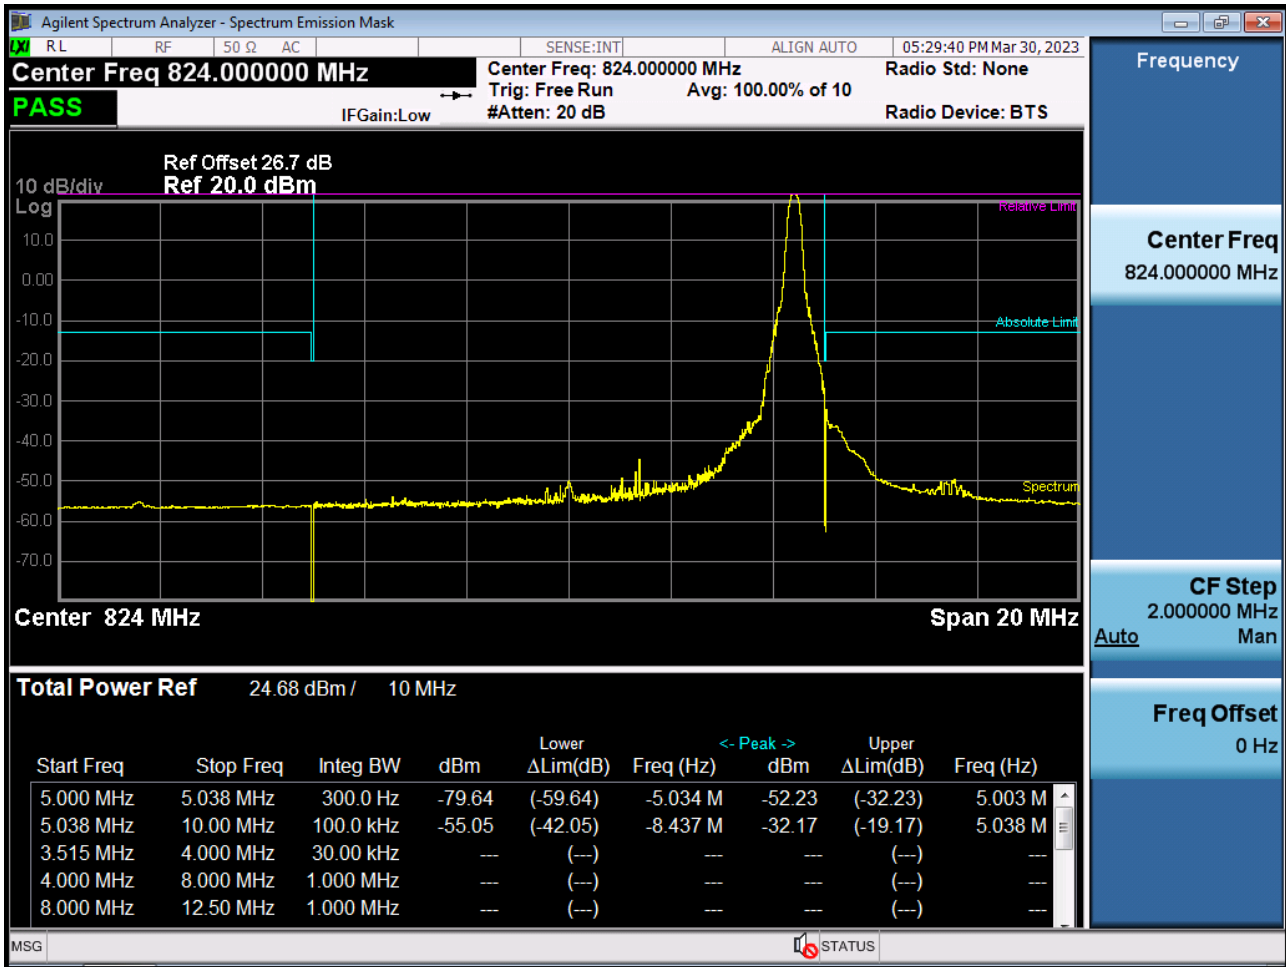


BAND 26. Channel Edge (10 MHz_QPSK_Full RB)

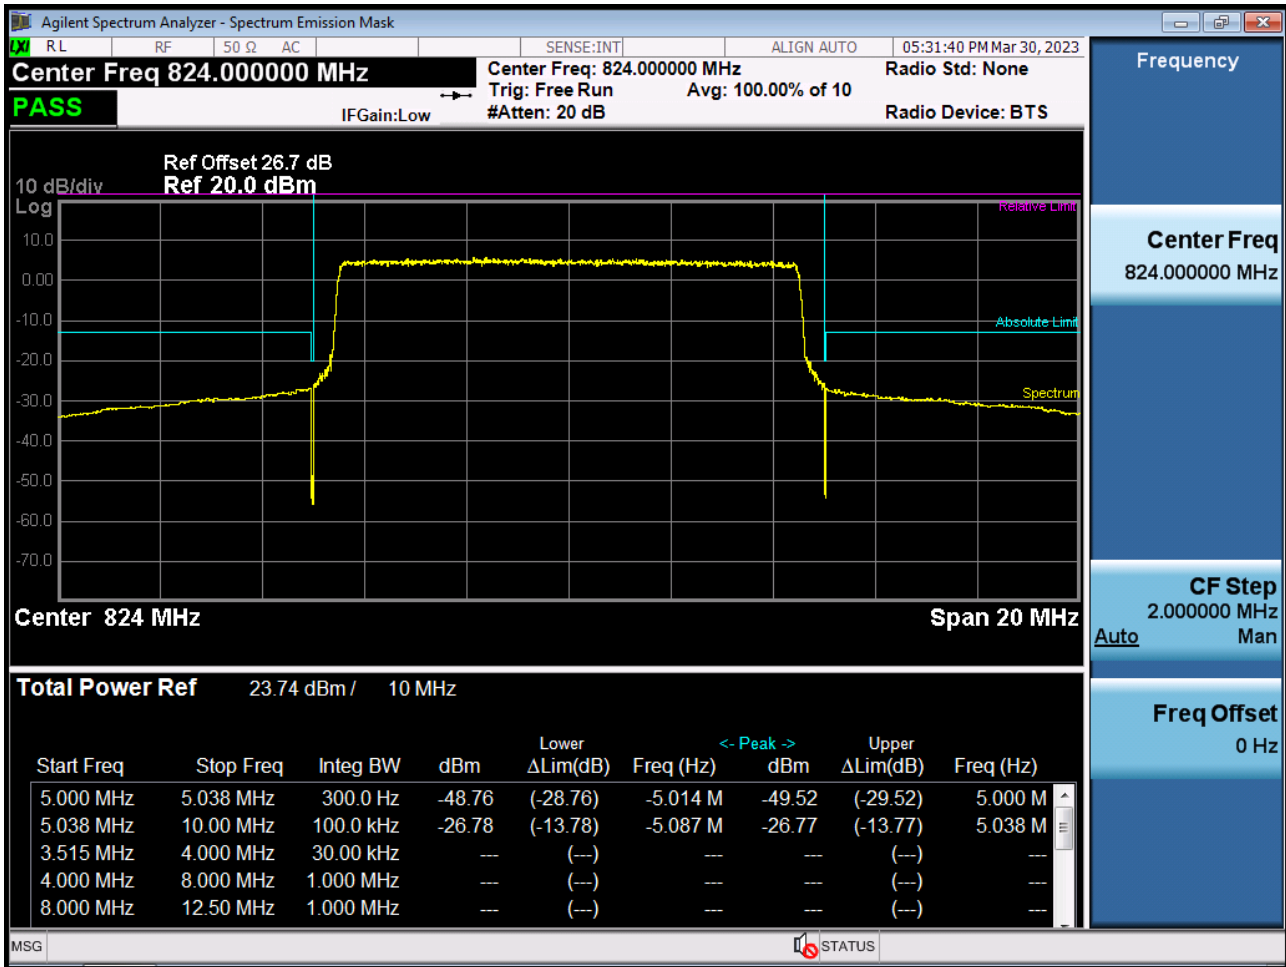

BAND 26. Band Edge (1.4 MHz_QPSK_RB 1_5)

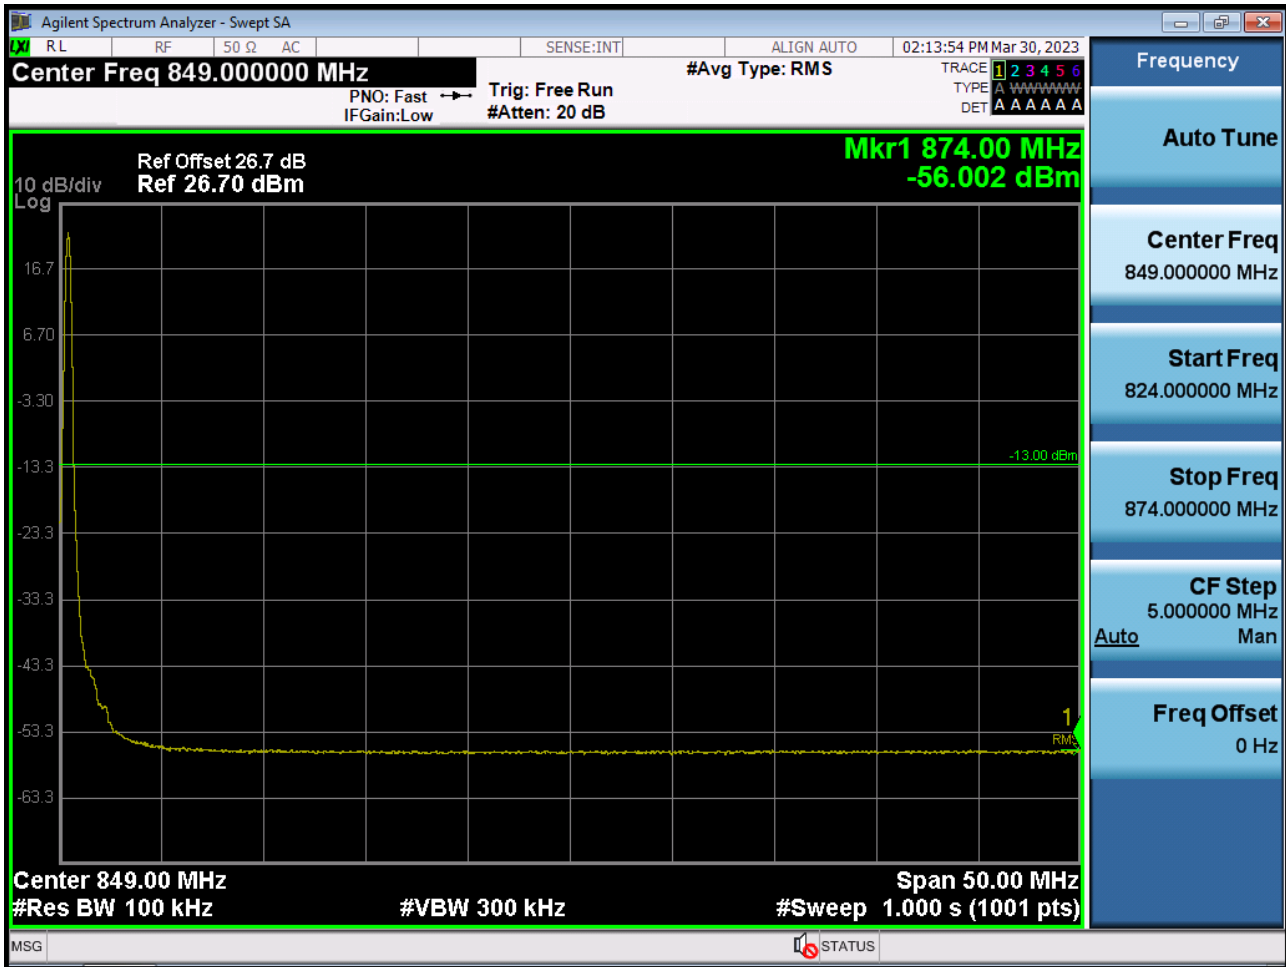

BAND 26. Band Edge (1.4 MHz_QPSK_FullIRB)

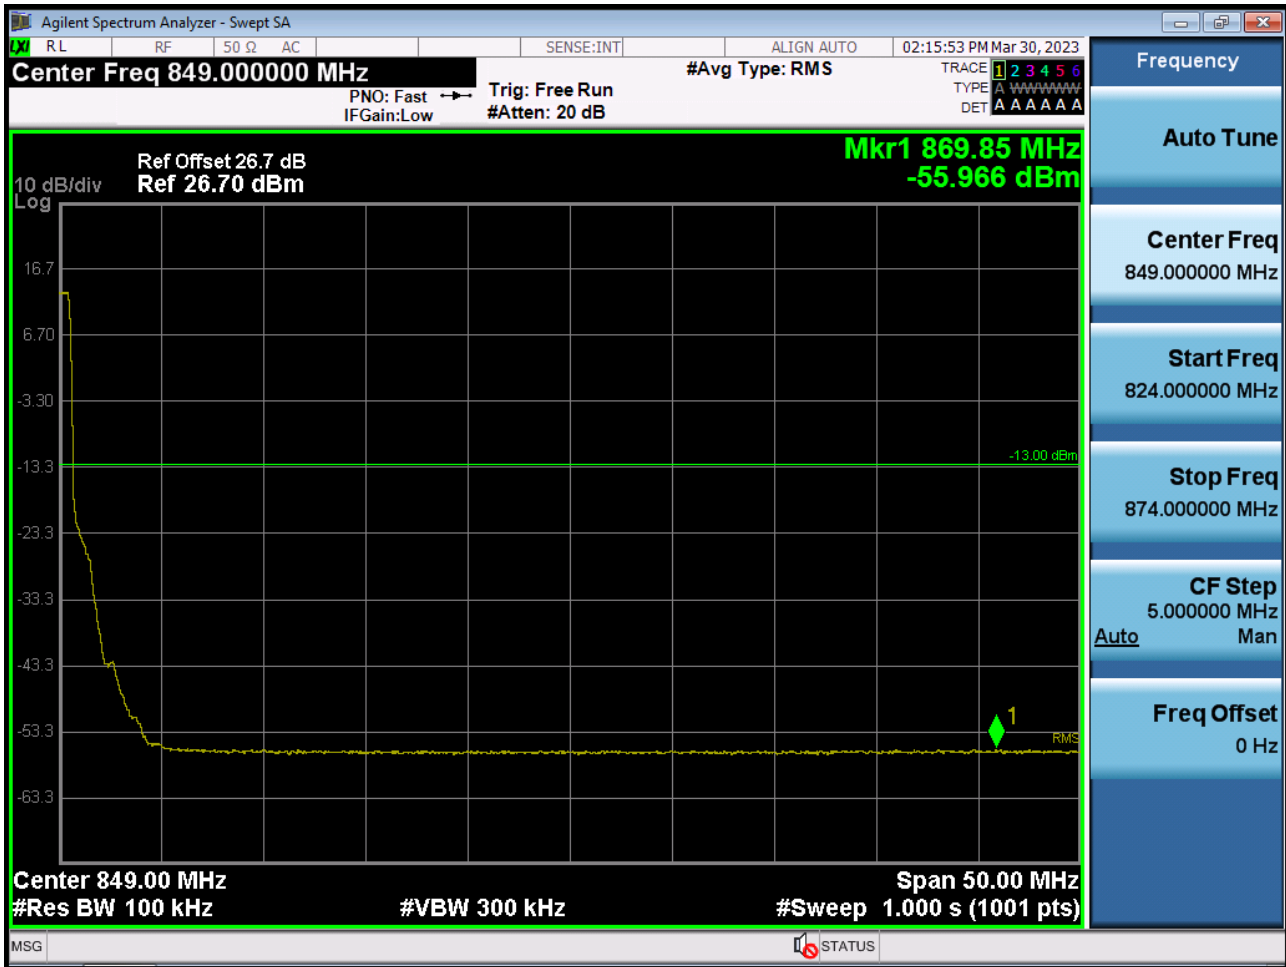

BAND 26. Band Edge (3 MHz_QPSK_RB 1_14)



BAND 26. Band Edge (3 MHz_QPSK_ Full RB)



BAND 26. Band Edge (5 MHz_QPSK_RB 1_24)



BAND 26. Band Edge (5 MHz_QPSK_ Full RB)



BAND 26. Band Edge (10 MHz_QPSK_RB 1_49)



BAND 26. Band Edge (10 MHz_QPSK_ Full RB)



11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC074-P