

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
May 24, 2023

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2305-FC068-R2

**FCC ID:** A3LSMF946B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-F946B/DS  
 Additional Model(s): SM-F946B  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §24, §2

### Main 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.218	23.39
		1M10W7D	16QAM	0.186	22.69
		1M10W7D	64QAM	0.146	21.64
		1M10W7D	256QAM	0.071	18.53
LTE – Band2 (3)	1851.5 - 1908.5	2M72G7D	QPSK	0.223	23.48
		2M72W7D	16QAM	0.190	22.78
		2M71W7D	64QAM	0.148	21.71
		2M71W7D	256QAM	0.072	18.57
LTE – Band2 (5)	1852.5 - 1907.5	4M52G7D	QPSK	0.219	23.40
		4M52W7D	16QAM	0.187	22.72
		4M53W7D	64QAM	0.147	21.66
		4M51W7D	256QAM	0.071	18.50
LTE – Band2 (10)	1855.0 - 1905.0	9M03G7D	QPSK	0.224	23.51
		9M02W7D	16QAM	0.188	22.74
		9M01W7D	64QAM	0.148	21.70
		9M00W7D	256QAM	0.072	18.57
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.217	23.37
		13M5W7D	16QAM	0.181	22.57
		13M5W7D	64QAM	0.141	21.49
		13M5W7D	256QAM	0.070	18.44
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.216	23.35
		18M0W7D	16QAM	0.176	22.46
		17M9W7D	64QAM	0.138	21.40
		17M9W7D	256QAM	0.070	18.46

**Sub 2 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.248	23.95
		1M10W7D	16QAM	0.211	23.24
		1M10W7D	64QAM	0.163	22.11
		1M10W7D	256QAM	0.078	18.94
LTE – Band2 (3)	1851.5 - 1908.5	2M70G7D	QPSK	0.249	23.97
		2M72W7D	16QAM	0.209	23.20
		2M71W7D	64QAM	0.163	22.11
		2M71W7D	256QAM	0.079	18.96
LTE – Band2 (5)	1852.5 - 1907.5	4M50G7D	QPSK	0.257	24.10
		4M50W7D	16QAM	0.219	23.41
		4M52W7D	64QAM	0.169	22.29
		4M50W7D	256QAM	0.082	19.14
LTE – Band2 (10)	1855.0 - 1905.0	9M01G7D	QPSK	0.275	24.40
		9M02W7D	16QAM	0.233	23.67
		8M99W7D	64QAM	0.181	22.58
		8M98W7D	256QAM	0.088	19.43
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.252	24.02
		13M5W7D	16QAM	0.215	23.33
		13M5W7D	64QAM	0.165	22.18
		13M4W7D	256QAM	0.081	19.07
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.265	24.24
		17M9W7D	16QAM	0.214	23.31
		17M9W7D	64QAM	0.169	22.28
		17M9W7D	256QAM	0.084	19.25

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2305-FC068-R2

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Kwon Jeong  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC068	May 19, 2023	- First Approval Report
HCT-RF-2305-FC068-R1	May 23, 2023	- Revised the 2 page (Sub2 Ant E.I.R.P)
HCT-RF-2305-FC068-R2	May 24, 2023	- Revised the 2 page (Sub2 Ant E.I.R.P)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	3
1. GENERAL INFORMATION .....	7
2. INTRODUCTION .....	8
2.1. DESCRIPTION OF EUT .....	8
2.2. MEASURING INSTRUMENT CALIBRATION .....	8
2.3. TEST FACILITY .....	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE .....	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS .....	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH. ....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	15
3.7 BAND EDGE .....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.9 WORST CASE(RADIATED TEST) .....	18
3.10 WORST CASE(CONDUCTED TEST) .....	20
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS .....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA (Main 2 Ant).....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS .....	29
8.3 PEAK-TO-AVERAGE RATIO.....	30
8.4 OCCUPIED BANDWIDTH .....	31
8.5 CONDUCTED SPURIOUS EMISSIONS .....	32
8.6 BAND EDGE .....	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	34
9. TEST DATA (Sub 2 Ant) .....	52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	52
9.2 RADIATED SPURIOUS EMISSIONS .....	55
9.3 PEAK-TO-AVERAGE RATIO.....	56
9.4 OCCUPIED BANDWIDTH .....	57
9.5 CONDUCTED SPURIOUS EMISSIONS .....	58
9.6 BAND EDGE .....	59
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	60

**10. TEST DATA (Main 2 Ant, Sub 2 Ant) ..... 78**  
    **10.1 UPLINK CARRIER AGGREGATION ..... 78**  
        **10.1.1 RADIATED SPURIOUS EMISSIONS ..... 79**

**11. TEST PLOTS (Main 2 Ant) ..... 80**

**12. TEST PLOTS (Sub 2 Ant) ..... 201**

**13. APPENDIX A\_ TEST SETUP PHOTO ..... 322**

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF946B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§24, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F946B/DS
<b>Additional Model(s):</b>	SM-F946B
<b>Tx Frequency:</b>	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
<b>Date(s) of Tests:</b>	March 27, 2023 ~ April 27, 2023
<b>Serial number:</b>	Radiated: R3CW30A3AVJ Conducted: R3CW30A3CMX

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, WPT, AIT, Bluetooth, BT LE, NFC.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**



### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

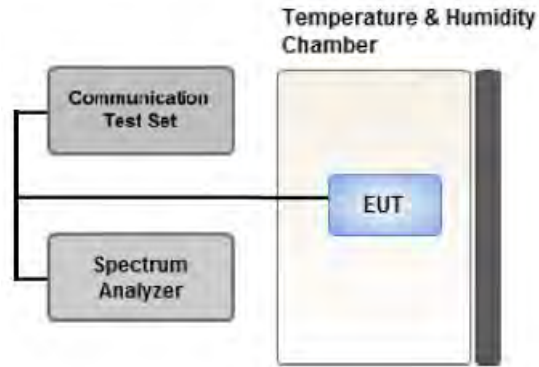

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

**② Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .  
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

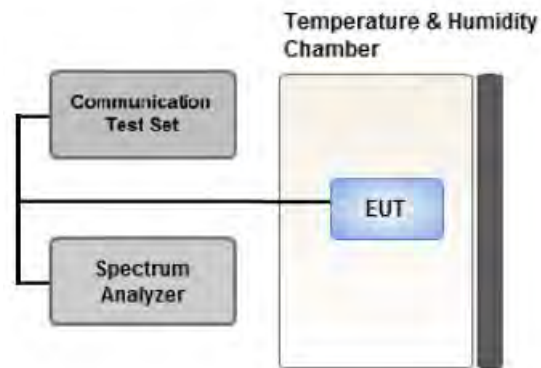

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

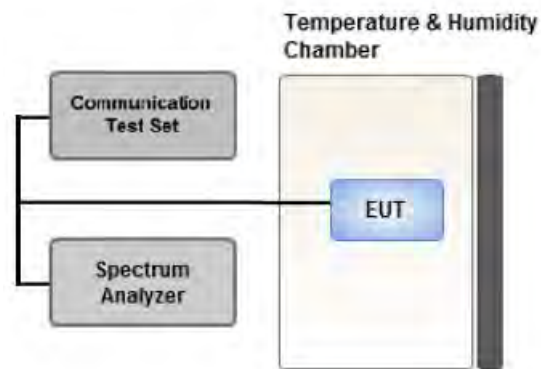

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

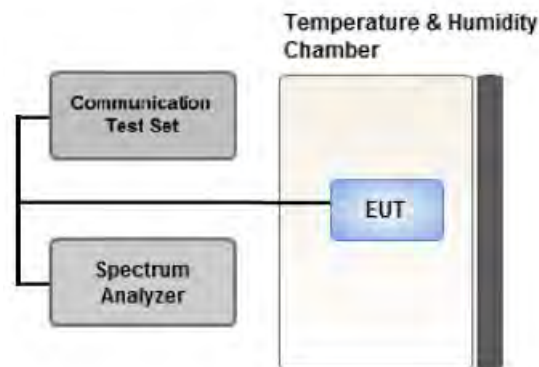

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz}/ \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

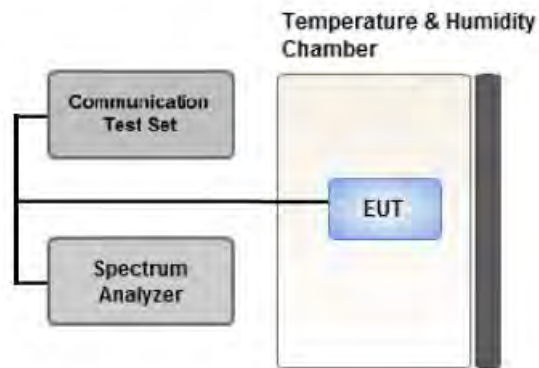

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
Worst case: Open mode.
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.  
(Main 2 Ant Worst case : 10 MHz)  
(Sub 2 Ant Worst case : 10 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-F946B/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-F946B/DS)

[ Main 2 Ant Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis			
<b>Effective Isotropic Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1.4	Mid	1	5	X			
			Low, High	1	0				
		3	Mid	1	14				
			Low, High	1	0				
		5	Mid	1	24				
			Low, High	1	0				
		10	Mid	1	49				
			Low, High	1	0				
		15	Mid	1	74				
			Low, High	1	0				
		20	Mid	1	99				
			Low, High	1	0				
		<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	10	Mid		1	49	Z
					Low, High		1	0	

[ Sub 2 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

**3.10 WORST CASE(CONDUCTED TEST)**

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

- SM-F946B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 8. TEST DATA (Main 2 Ant)

#### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1850.7	LTE B2/ 1.4 MHz	QPSK	-19.45	14.33	10.40	2.13	H	< 2.00	0.182	22.60
		16-QAM	-20.13	13.65	10.40	2.13	H		0.156	21.92
		64-QAM	-21.23	12.55	10.40	2.13	H		0.121	20.82
		256-QAM	-24.33	9.45	10.40	2.13	H		0.059	17.72
1880.0		QPSK	-19.72	14.90	10.40	2.23	H		0.203	23.07
		16-QAM	-20.45	14.17	10.40	2.23	H		0.171	22.34
		64-QAM	-21.54	13.08	10.40	2.23	H		0.133	21.25
		256-QAM	-24.64	9.98	10.40	2.23	H		0.065	18.15
1909.3		QPSK	-19.44	15.13	10.40	2.14	H		0.218	23.39
		16-QAM	-20.14	14.43	10.40	2.14	H		0.186	22.69
		64-QAM	-21.19	13.38	10.40	2.14	H		0.146	21.64
		256-QAM	-24.30	10.27	10.40	2.14	H		0.071	18.53

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1851.5	LTE B2/ 3 MHz	QPSK	-19.46	14.32	10.40	2.13	H	< 2.00	0.182	22.59
		16-QAM	-20.16	13.62	10.40	2.13	H		0.155	21.89
		64-QAM	-21.21	12.57	10.40	2.13	H		0.121	20.84
		256-QAM	-24.38	9.40	10.40	2.13	H		0.059	17.67
1880.0		QPSK	-19.61	15.01	10.40	2.23	H		0.208	23.18
		16-QAM	-20.32	14.30	10.40	2.23	H		0.177	22.47
		64-QAM	-21.42	13.20	10.40	2.23	H		0.137	21.37
		256-QAM	-24.48	10.14	10.40	2.23	H		0.068	18.31
1908.5		QPSK	-19.35	15.22	10.40	2.14	H		0.223	23.48
		16-QAM	-20.05	14.52	10.40	2.14	H		0.190	22.78
		64-QAM	-21.12	13.45	10.40	2.14	H		0.148	21.71
		256-QAM	-24.26	10.31	10.40	2.14	H		0.072	18.57

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-19.42	14.36	10.40	2.13	H	< 2.00		0.183	22.63
		16-QAM	-20.08	13.70	10.40	2.13	H			0.158	21.97
		64-QAM	-21.18	12.60	10.40	2.13	H			0.122	20.87
		256-QAM	-24.31	9.47	10.40	2.13	H			0.060	17.74
1880.0		QPSK	-19.45	15.17	10.40	2.23	H			0.216	23.34
		16-QAM	-20.16	14.46	10.40	2.23	H			0.183	22.63
		64-QAM	-21.23	13.39	10.40	2.23	H			0.143	21.56
		256-QAM	-24.30	10.32	10.40	2.23	H			0.071	18.49
1907.5		QPSK	-19.43	15.14	10.40	2.14	H			0.219	23.40
		16-QAM	-20.11	14.46	10.40	2.14	H			0.187	22.72
		64-QAM	-21.17	13.40	10.40	2.14	H			0.147	21.66
		256-QAM	-24.33	10.24	10.40	2.14	H			0.071	18.50

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-19.40	14.56	10.40	2.15	H	< 2.00		0.191	22.81
		16-QAM	-20.12	13.84	10.40	2.15	H			0.162	22.09
		64-QAM	-21.19	12.77	10.40	2.15	H			0.127	21.02
		256-QAM	-24.32	9.64	10.40	2.15	H			0.062	17.89
1880.0		QPSK	-19.44	15.18	10.40	2.23	H			0.216	23.35
		16-QAM	-20.17	14.45	10.40	2.23	H			0.183	22.62
		64-QAM	-21.25	13.37	10.40	2.23	H			0.143	21.54
		256-QAM	-24.33	10.29	10.40	2.23	H			0.070	18.46
1905.0		QPSK	-19.31	15.27	10.40	2.16	H			0.224	23.51
		16-QAM	-20.08	14.50	10.40	2.16	H			0.188	22.74
		64-QAM	-21.12	13.46	10.40	2.16	H			0.148	21.70
		256-QAM	-24.25	10.33	10.40	2.16	H			0.072	18.57

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	
1857.5	LTE B2/ 15 MHz	QPSK	-19.47	14.67	10.40	2.17	H	< 2.00	0.195	22.90	
		16-QAM	-20.30	13.84	10.40	2.17	H		0.161	22.07	
		64-QAM	-21.34	12.80	10.40	2.17	H		0.127	21.03	
		256-QAM	-24.45	9.69	10.40	2.17	H		0.062	17.92	
1880.0		QPSK	-19.66	14.96	10.40	2.23	H		0.206	23.13	
		16-QAM	-20.50	14.12	10.40	2.23	H		0.169	22.29	
		64-QAM	-21.55	13.07	10.40	2.23	H		0.133	21.24	
		256-QAM	-24.51	10.11	10.40	2.23	H		0.067	18.28	
1902.5		QPSK	-19.44	15.15	10.40	2.18	H		0.217	23.37	
		16-QAM	-20.24	14.35	10.40	2.18	H		0.181	22.57	
		64-QAM	-21.32	13.27	10.40	2.18	H		0.141	21.49	
		256-QAM	-24.37	10.22	10.40	2.18	H		0.070	18.44	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	
1860.0	LTE B2/ 20 MHz	QPSK	-19.49	14.65	10.40	2.17	H	< 2.00	0.194	22.88	
		16-QAM	-20.41	13.73	10.40	2.17	H		0.157	21.96	
		64-QAM	-21.43	12.71	10.40	2.17	H		0.124	20.94	
		256-QAM	-24.45	9.69	10.40	2.17	H		0.062	17.92	
1880.0		QPSK	-19.44	15.18	10.40	2.23	H		0.216	23.35	
		16-QAM	-20.33	14.29	10.40	2.23	H		0.176	22.46	
		64-QAM	-21.39	13.23	10.40	2.23	H		0.138	21.40	
		256-QAM	-24.33	10.29	10.40	2.23	H		0.070	18.46	
1900.0		QPSK	-19.60	14.99	10.40	2.18	H		0.209	23.21	
		16-QAM	-20.43	14.16	10.40	2.18	H		0.173	22.38	
		64-QAM	-21.48	13.11	10.40	2.18	H		0.136	21.33	
		256-QAM	-24.55	10.04	10.40	2.18	H		0.067	18.26	

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY: 1905.0 MHz
- ▣ MEASURED OUTPUT POWER: 23.51 dBm = 0.224 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  36.51 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18650 (1855.0)	3 710.00	-55.46	12.30	-60.57	3.14	H	-51.41	74.91
	5 565.00	-55.67	13.30	-53.58	3.90	V	-44.18	67.69
	7 420.00	-56.92	10.80	-46.76	4.57	V	-40.53	64.04
18900 (1880.0)	3 760.00	-55.44	12.32	-59.94	3.08	V	-50.70	74.21
	5 640.00	-55.73	13.10	-53.92	3.90	H	-44.72	68.23
	7 520.00	-57.01	10.84	-46.43	4.61	V	-40.20	63.71
19150 (1905.0)	3 810.00	-54.07	12.40	-58.49	3.12	V	-49.21	72.72
	5 715.00	-56.78	13.07	-54.41	3.96	H	-45.29	68.80
	7 620.00	-57.21	11.18	-46.72	4.65	V	-40.19	63.70

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	4.79
			16-QAM	6	0	5.55
			64-QAM	6	0	6.05
			256-QAM	6	0	6.67
	3 MHz		QPSK	15	0	4.80
			16-QAM	15	0	5.64
			64-QAM	15	0	6.13
			256-QAM	15	0	6.67
	5 MHz		QPSK	25	0	4.82
			16-QAM	25	0	5.61
			64-QAM	25	0	6.09
			256-QAM	25	0	6.64
	10 MHz		QPSK	50	0	4.89
			16-QAM	50	0	5.64
			64-QAM	50	0	6.12
			256-QAM	50	0	6.63
	15 MHz		QPSK	75	0	4.87
			16-QAM	75	0	5.63
			64-QAM	75	0	6.13
			256-QAM	75	0	6.62
20 MHz	QPSK	100	0	4.82		
	16-QAM	100	0	5.61		
	64-QAM	100	0	6.08		
	256-QAM	100	0	6.62		

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 141 ~ 164.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.1017
			16-QAM	6	0	1.0991
			64-QAM	6	0	1.1013
			256-QAM	6	0	1.1007
	3 MHz		QPSK	15	0	2.7193
			16-QAM	15	0	2.7213
			64-QAM	15	0	2.7125
			256-QAM	15	0	2.7109
	5 MHz		QPSK	25	0	4.5164
			16-QAM	25	0	4.5182
			64-QAM	25	0	4.5286
			256-QAM	25	0	4.5137
	10 MHz		QPSK	50	0	9.0296
			16-QAM	50	0	9.0242
			64-QAM	50	0	9.0057
			256-QAM	50	0	9.0043
	15 MHz		QPSK	75	0	13.478
			16-QAM	75	0	13.473
			64-QAM	75	0	13.475
			256-QAM	75	0	13.470
20 MHz	QPSK	100	0	17.930		
	16-QAM	100	0	17.947		
	64-QAM	100	0	17.933		
	256-QAM	100	0	17.937		

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 117 ~ 140.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7015	27.976	-77.262	-49.286	-13.00
		1880.0	3.6960	27.976	-77.080	-49.104	
		1909.3	3.6830	27.976	-77.368	-49.392	
	3	1851.5	3.7089	27.976	-77.092	-49.116	
		1880.0	1.9607	27.976	-76.325	-48.349	
		1908.5	3.6940	27.976	-76.937	-48.961	
	5	1852.5	3.7124	27.976	-77.343	-49.367	
		1880.0	1.9607	27.976	-77.027	-49.051	
		1907.5	1.9881	27.976	-76.896	-48.920	
	10	1855.0	3.7034	27.976	-77.071	-49.095	
		1880.0	1.9572	27.976	-76.148	-48.172	
		1905.0	1.9836	27.976	-76.763	-48.787	
	15	1857.5	3.7059	27.976	-77.506	-49.530	
		1880.0	1.9652	27.976	-75.685	-47.709	
		1902.5	1.9796	27.976	-76.854	-48.878	
	20	1860.0	3.6905	27.976	-77.254	-49.278	
		1880.0	1.9652	27.976	-76.410	-48.434	
		1900.0	1.9766	27.976	-76.793	-48.817	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 165 ~ 200.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131




## 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 81 ~ 116.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 700 006	0.0	0.000 000	0.000
100 %		-30	1850 700 011	5.0	0.000 000	0.003
100 %		-20	1850 700 009	2.5	0.000 000	0.001
100 %		-10	1850 700 012	5.5	0.000 000	0.003
100 %		0	1850 700 009	2.6	0.000 000	0.001
100 %		+10	1850 700 002	-4.1	0.000 000	-0.002
100 %		+30	1850 700 009	2.2	0.000 000	0.001
100 %		+40	1850 700 003	-3.2	0.000 000	-0.002
100 %		+50	1850 700 001	-5.3	0.000 000	-0.003
Batt. Endpoint		3.350	+20	1850 700 009	2.4	0.000 000

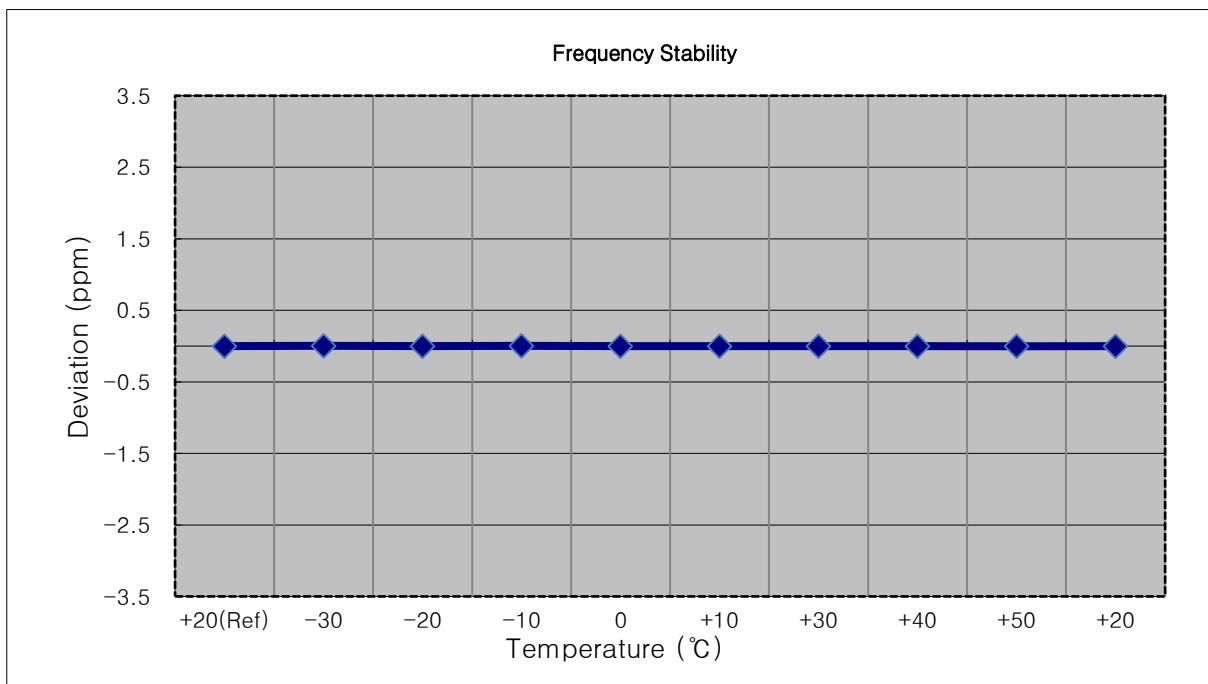


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 499 997	0.0	0.000 000	0.000
100 %		-30	1851 499 992	-4.7	0.000 000	-0.003
100 %		-20	1851 499 988	-8.4	0.000 000	-0.005
100 %		-10	1851 499 994	-2.7	0.000 000	-0.001
100 %		0	1851 499 994	-3.0	0.000 000	-0.002
100 %		+10	1851 499 991	-6.3	0.000 000	-0.003
100 %		+30	1851 499 994	-3.3	0.000 000	-0.002
100 %		+40	1851 499 993	-3.9	0.000 000	-0.002
100 %		+50	1851 499 993	-3.8	0.000 000	-0.002
Batt. Endpoint	3.350	+20	1851 499 993	-3.8	0.000 000	-0.002

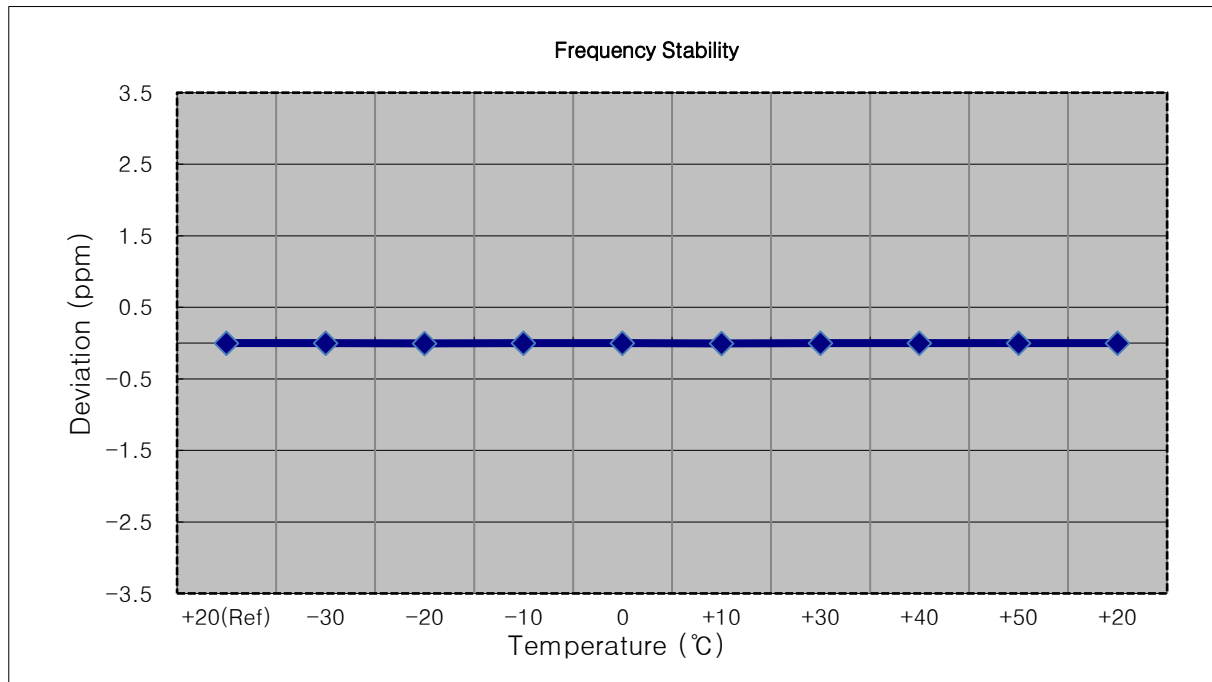


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 499 995	0.0	0.000 000	0.000
100 %		-30	1852 499 991	-3.4	0.000 000	-0.002
100 %		-20	1852 499 991	-3.5	0.000 000	-0.002
100 %		-10	1852 499 988	-6.6	0.000 000	-0.004
100 %		0	1852 499 991	-3.8	0.000 000	-0.002
100 %		+10	1852 499 991	-3.3	0.000 000	-0.002
100 %		+30	1852 499 991	-4.0	0.000 000	-0.002
100 %		+40	1852 499 991	-3.4	0.000 000	-0.002
100 %		+50	1852 499 990	-4.9	0.000 000	-0.003
Batt. Endpoint	3.350	+20	1852 499 989	-5.7	0.000 000	-0.003

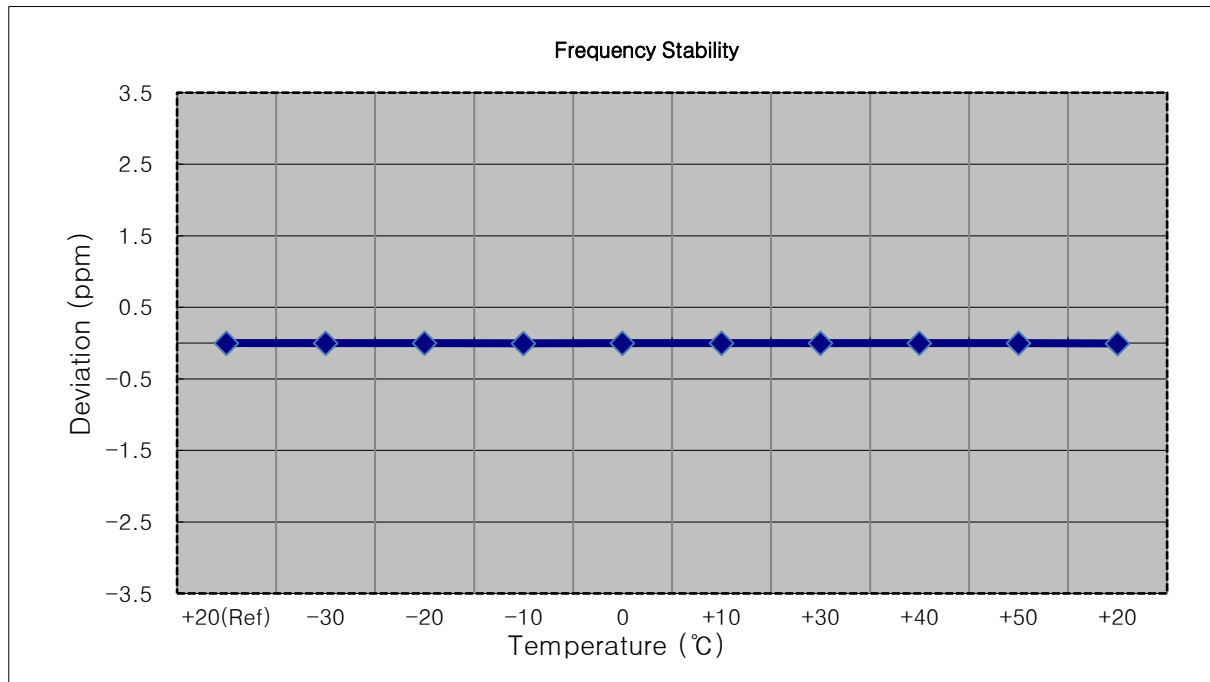


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1854 999 996	0.0	0.000 000	0.000
100 %		-30	1854 999 992	-3.3	0.000 000	-0.002
100 %		-20	1854 999 999	3.4	0.000 000	0.002
100 %		-10	1854 999 992	-3.1	0.000 000	-0.002
100 %		0	1854 999 992	-3.2	0.000 000	-0.002
100 %		+10	1854 999 992	-3.4	0.000 000	-0.002
100 %		+30	1854 999 993	-2.9	0.000 000	-0.002
100 %		+40	1854 999 993	-2.9	0.000 000	-0.002
100 %		+50	1854 999 998	2.8	0.000 000	0.002
Batt. Endpoint	3.350	+20	1854 999 998	2.9	0.000 000	0.002

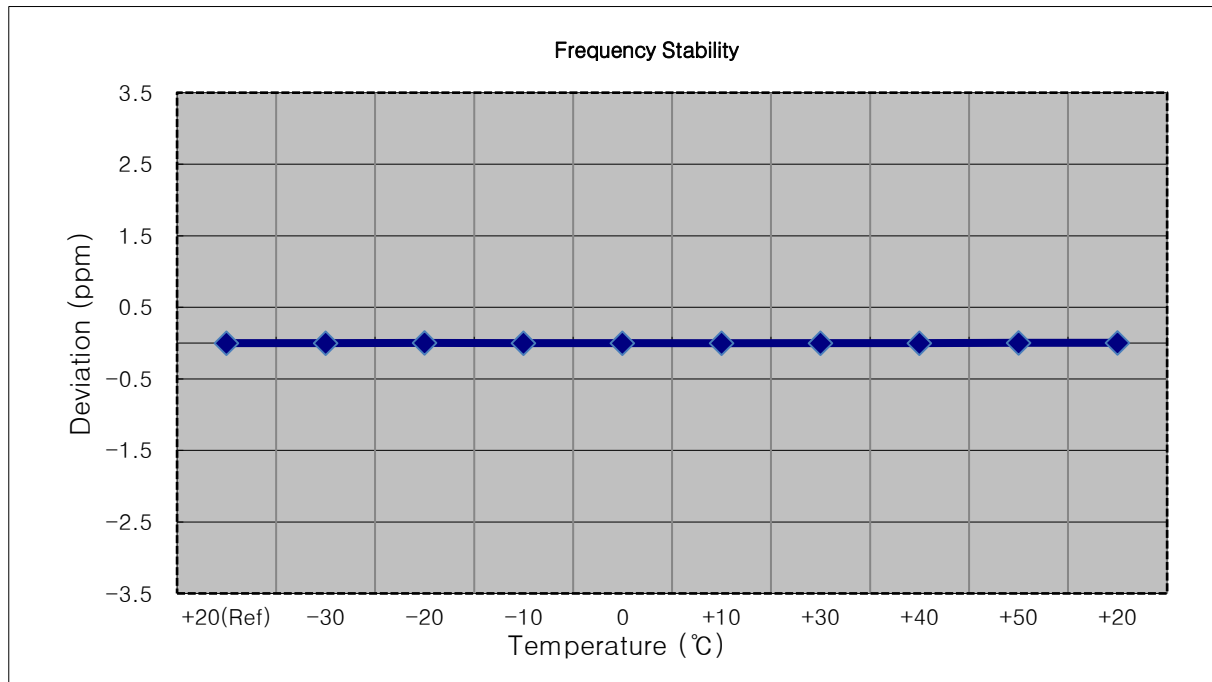


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1857 500 002	0.0	0.000 000	0.000
100 %		-30	1857 499 999	-3.0	0.000 000	-0.002
100 %		-20	1857 499 998	-4.5	0.000 000	-0.002
100 %		-10	1857 499 997	-5.9	0.000 000	-0.003
100 %		0	1857 499 997	-5.5	0.000 000	-0.003
100 %		+10	1857 499 999	-3.3	0.000 000	-0.002
100 %		+30	1857 500 006	3.5	0.000 000	0.002
100 %		+40	1857 500 000	-2.3	0.000 000	-0.001
100 %		+50	1857 499 998	-4.6	0.000 000	-0.002
Batt. Endpoint	3.350	+20	1857 499 997	-5.4	0.000 000	-0.003

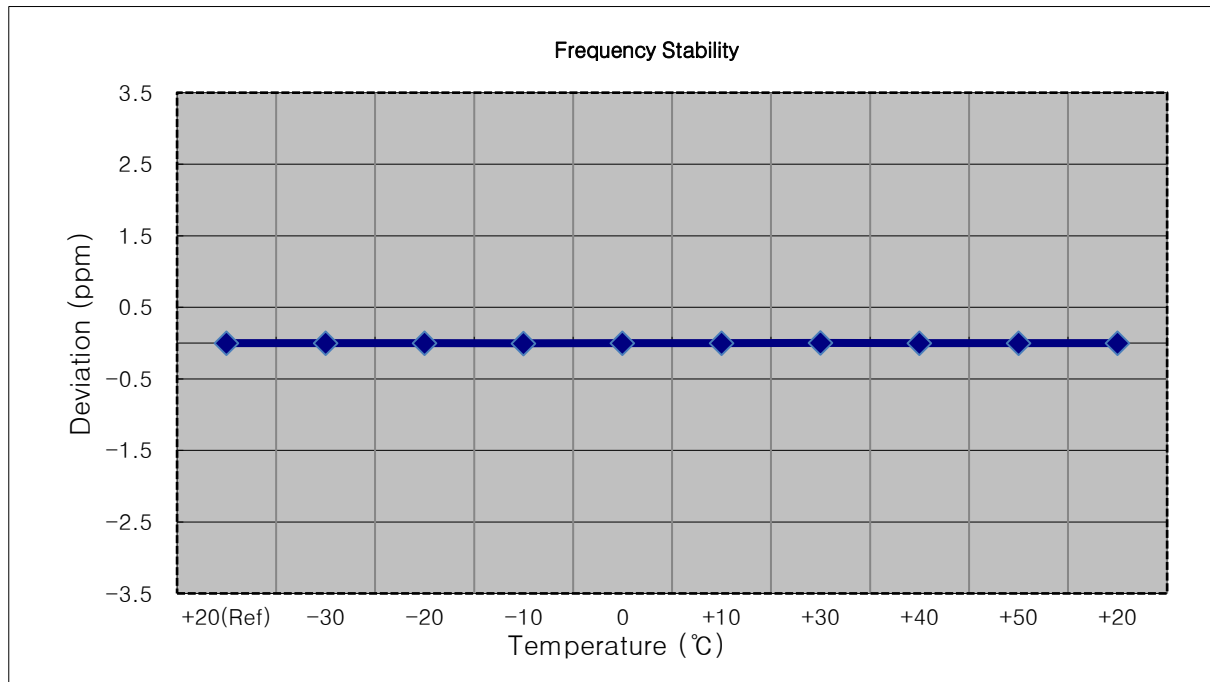


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1860 000 006	0.0	0.000 000	0.000
100 %		-30	1860 000 011	5.1	0.000 000	0.003
100 %		-20	1860 000 009	3.2	0.000 000	0.002
100 %		-10	1860 000 008	2.6	0.000 000	0.001
100 %		0	1860 000 010	4.6	0.000 000	0.002
100 %		+10	1860 000 013	7.6	0.000 000	0.004
100 %		+30	1860 000 011	5.6	0.000 000	0.003
100 %		+40	1860 000 011	4.7	0.000 000	0.003
100 %		+50	1860 000 013	6.8	0.000 000	0.004
Batt. Endpoint	3.350	+20	1860 000 011	5.5	0.000 000	0.003

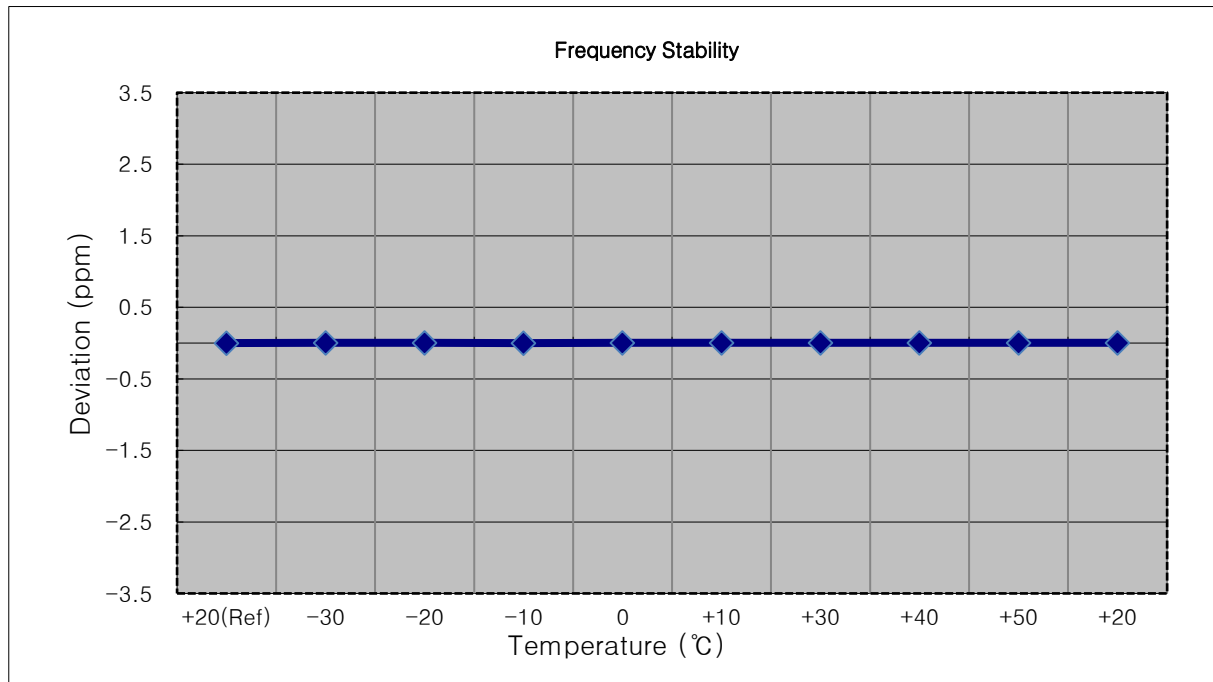

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 005	0.0	0.000 000	0.000
100 %		-30	1880 000 002	-3.0	0.000 000	-0.002
100 %		-20	1880 000 009	3.9	0.000 000	0.002
100 %		-10	1880 000 009	4.8	0.000 000	0.003
100 %		0	1880 000 001	-3.5	0.000 000	-0.002
100 %		+10	1880 000 008	3.6	0.000 000	0.002
100 %		+30	1880 000 007	2.3	0.000 000	0.001
100 %		+40	1880 000 002	-2.2	0.000 000	-0.001
100 %		+50	1880 000 010	4.9	0.000 000	0.003
Batt. Endpoint		3.350	+20	1880 000 009	4.6	0.000 000

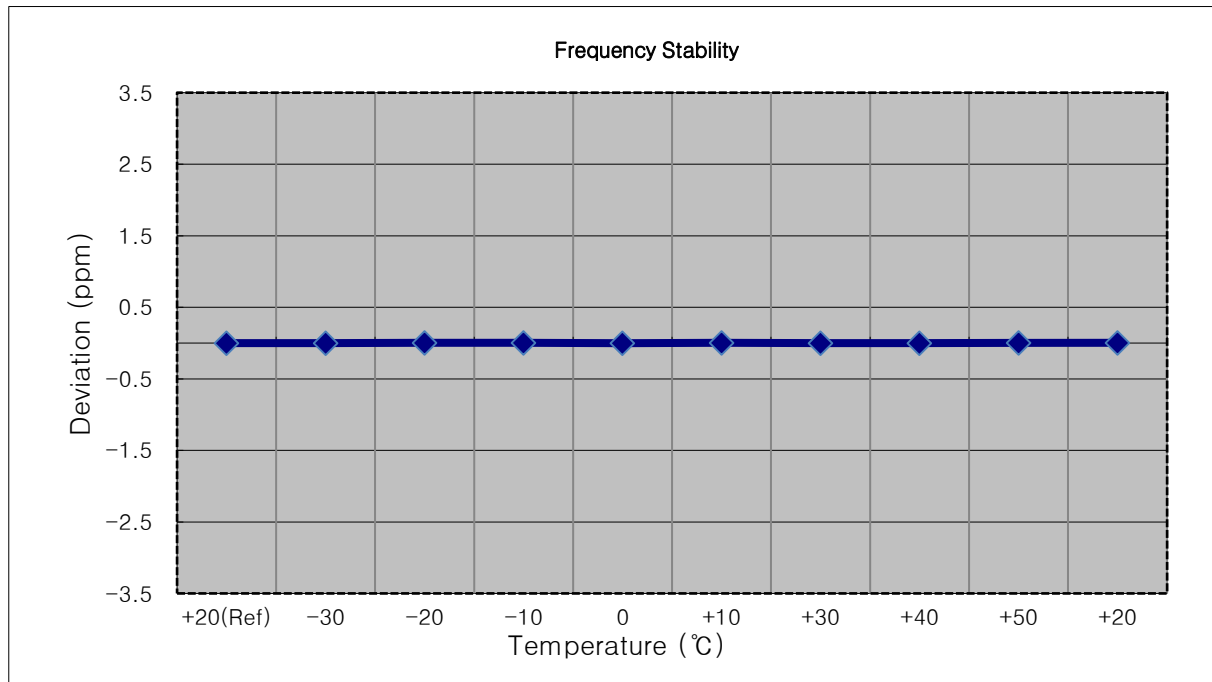




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 997	0.0	0.000 000	0.000
100 %		-30	1879 999 992	-4.9	0.000 000	-0.003
100 %		-20	1879 999 995	-1.7	0.000 000	-0.001
100 %		-10	1879 999 994	-3.0	0.000 000	-0.002
100 %		0	1879 999 992	-5.1	0.000 000	-0.003
100 %		+10	1879 999 994	-3.4	0.000 000	-0.002
100 %		+30	1879 999 991	-6.2	0.000 000	-0.003
100 %		+40	1879 999 992	-5.0	0.000 000	-0.003
100 %		+50	1879 999 994	-3.5	0.000 000	-0.002
Batt. Endpoint	3.350	+20	1880 000 000	3.2	0.000 000	0.002

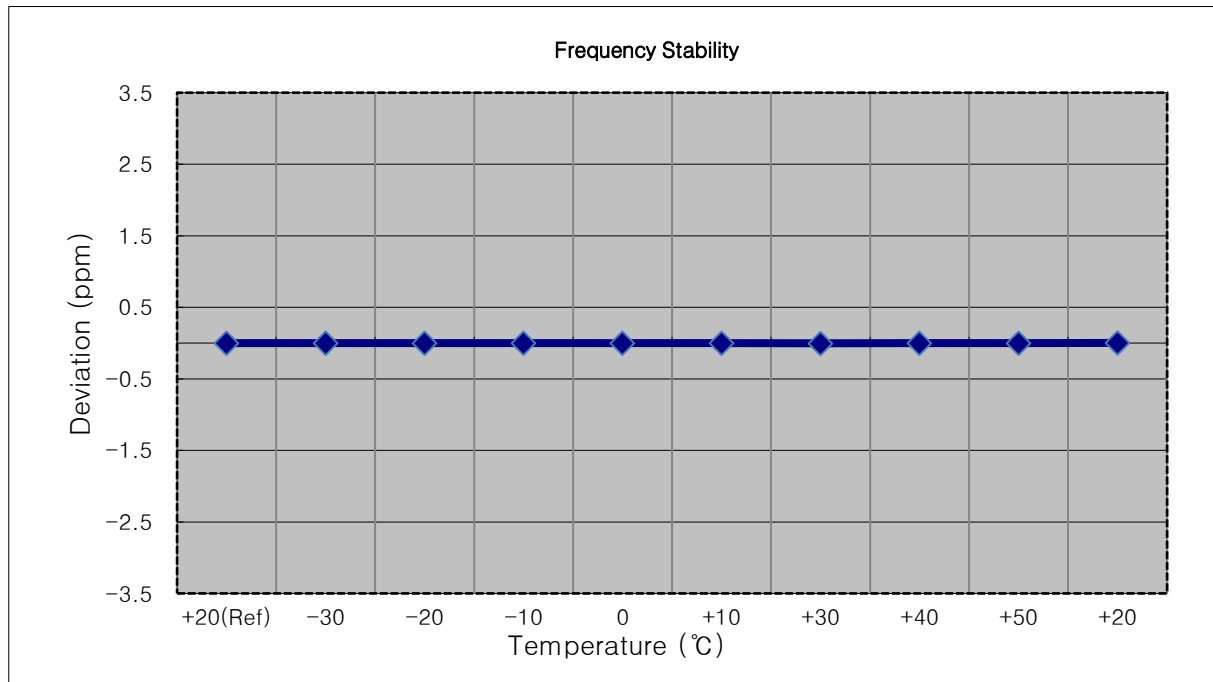


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 994	0.0	0.000 000	0.000
100 %		-30	1879 999 988	-6.2	0.000 000	-0.003
100 %		-20	1879 999 989	-5.3	0.000 000	-0.003
100 %		-10	1879 999 992	-2.7	0.000 000	-0.001
100 %		0	1879 999 990	-3.9	0.000 000	-0.002
100 %		+10	1879 999 990	-3.9	0.000 000	-0.002
100 %		+30	1879 999 988	-5.8	0.000 000	-0.003
100 %		+40	1879 999 991	-3.2	0.000 000	-0.002
100 %		+50	1879 999 992	-2.2	0.000 000	-0.001
Batt. Endpoint	3.350	+20	1879 999 993	-1.6	0.000 000	-0.001

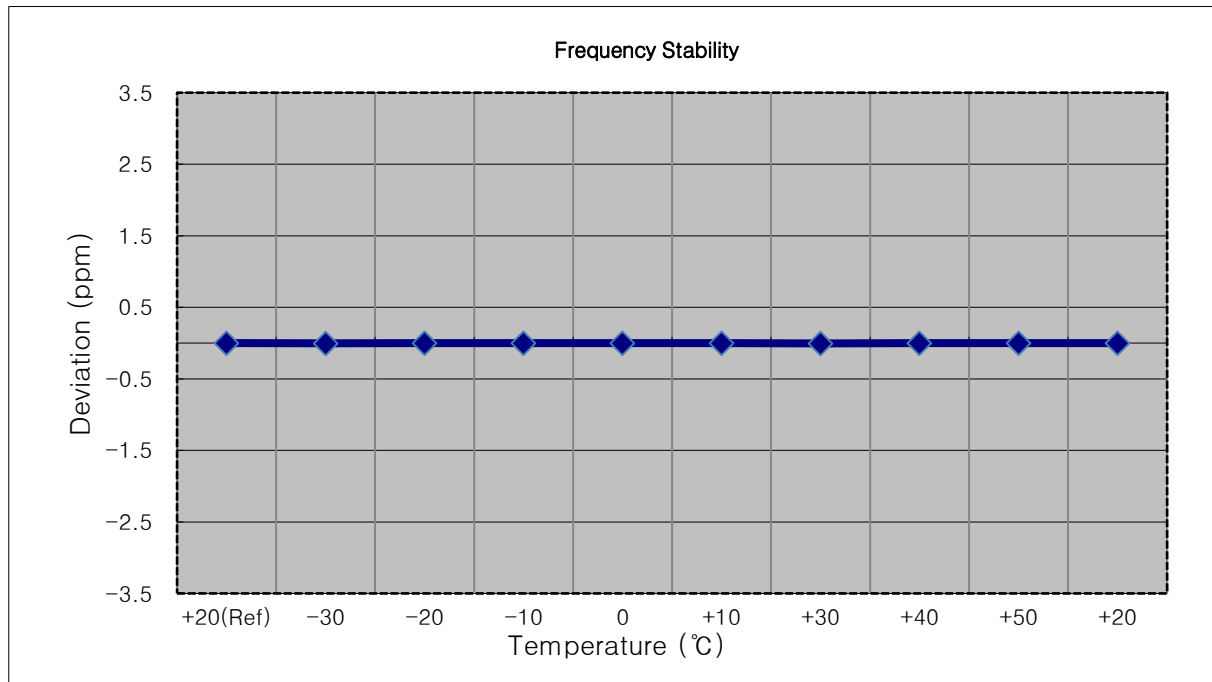


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 996	0.0	0.000 000	0.000
100 %		-30	1879 999 992	-4.2	0.000 000	-0.002
100 %		-20	1879 999 991	-5.4	0.000 000	-0.003
100 %		-10	1879 999 991	-4.5	0.000 000	-0.002
100 %		0	1879 999 989	-6.6	0.000 000	-0.004
100 %		+10	1879 999 992	-3.6	0.000 000	-0.002
100 %		+30	1879 999 989	-6.6	0.000 000	-0.004
100 %		+40	1879 999 991	-4.8	0.000 000	-0.003
100 %		+50	1879 999 992	-3.8	0.000 000	-0.002
Batt. Endpoint	3.350	+20	1879 999 991	-4.6	0.000 000	-0.002

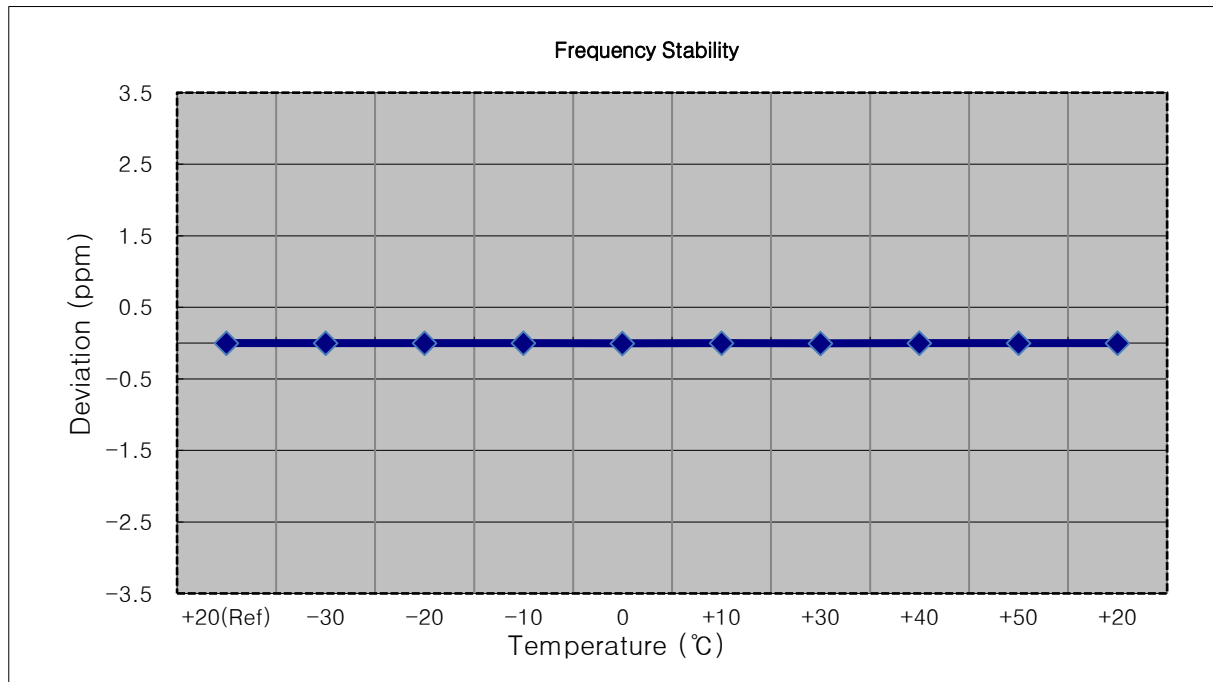


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 005	2.1	0.000 000	0.001
100 %		-20	1880 000 006	3.2	0.000 000	0.002
100 %		-10	1880 000 009	5.9	0.000 000	0.003
100 %		0	1880 000 007	3.5	0.000 000	0.002
100 %		+10	1880 000 008	4.8	0.000 000	0.003
100 %		+30	1880 000 007	4.2	0.000 000	0.002
100 %		+40	1880 000 007	3.8	0.000 000	0.002
100 %		+50	1880 000 007	3.6	0.000 000	0.002
Batt. Endpoint	3.350	+20	1880 000 009	6.0	0.000 000	0.003

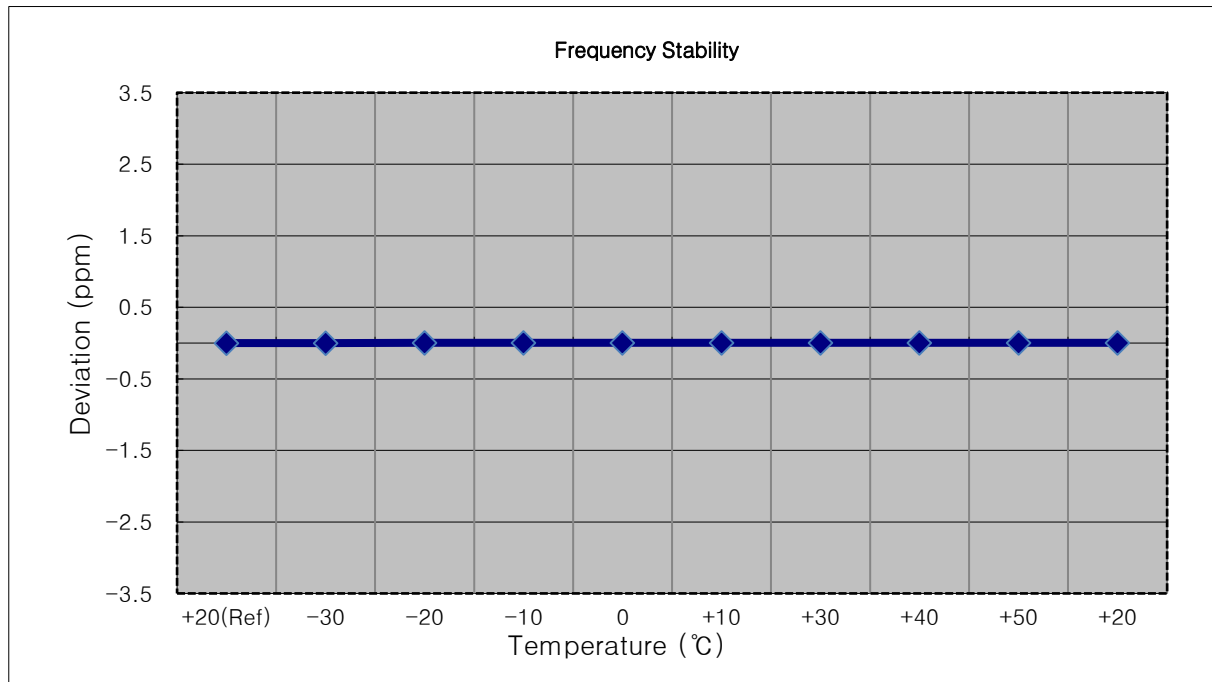


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 005	0.0	0.000 000	0.000
100 %		-30	1880 000 010	4.8	0.000 000	0.003
100 %		-20	1880 000 010	5.4	0.000 000	0.003
100 %		-10	1880 000 010	5.0	0.000 000	0.003
100 %		0	1880 000 013	7.8	0.000 000	0.004
100 %		+10	1880 000 010	4.9	0.000 000	0.003
100 %		+30	1880 000 012	7.4	0.000 000	0.004
100 %		+40	1880 000 012	7.1	0.000 000	0.004
100 %		+50	1880 000 010	4.6	0.000 000	0.002
Batt. Endpoint	3.350	+20	1880 000 011	6.3	0.000 000	0.003

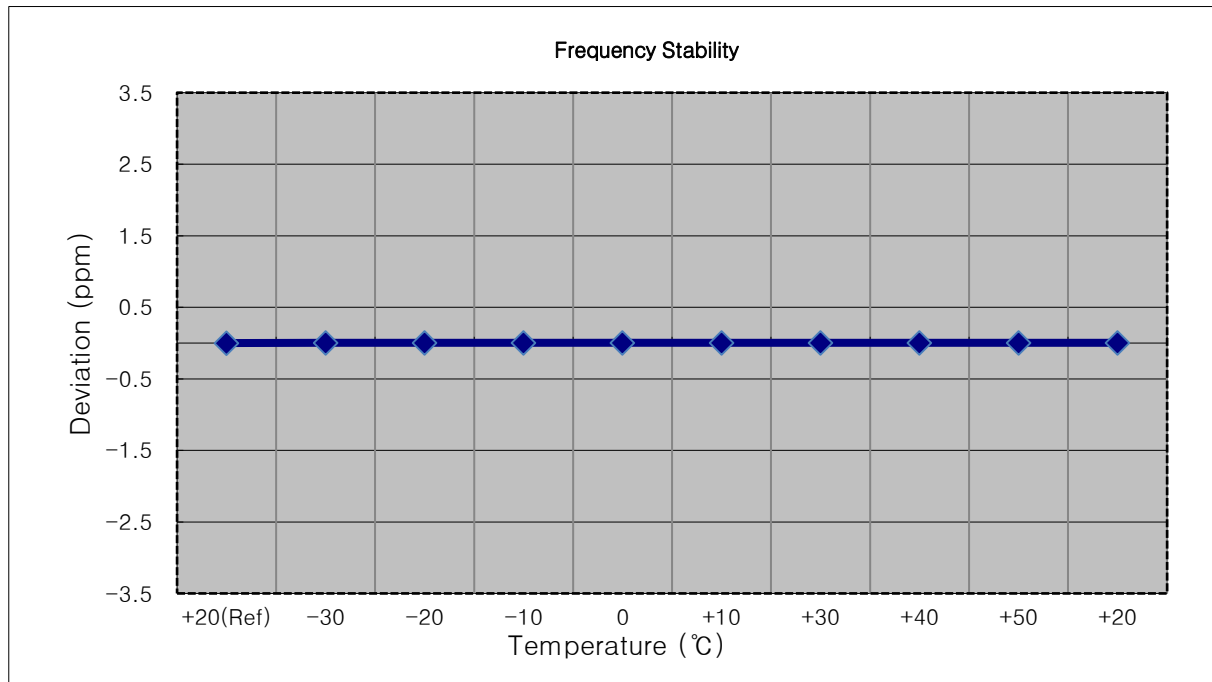


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 300 005	0.0	0.000 000	0.000
100 %		-30	1909 300 009	3.5	0.000 000	0.002
100 %		-20	1909 300 010	5.0	0.000 000	0.003
100 %		-10	1909 300 010	4.8	0.000 000	0.003
100 %		0	1909 300 012	6.9	0.000 000	0.004
100 %		+10	1909 300 000	-5.6	0.000 000	-0.003
100 %		+30	1909 300 013	8.0	0.000 000	0.004
100 %		+40	1909 300 013	8.0	0.000 000	0.004
100 %		+50	1909 300 000	-5.2	0.000 000	-0.003
Batt. Endpoint		3.350	+20	1909 300 011	5.5	0.000 000

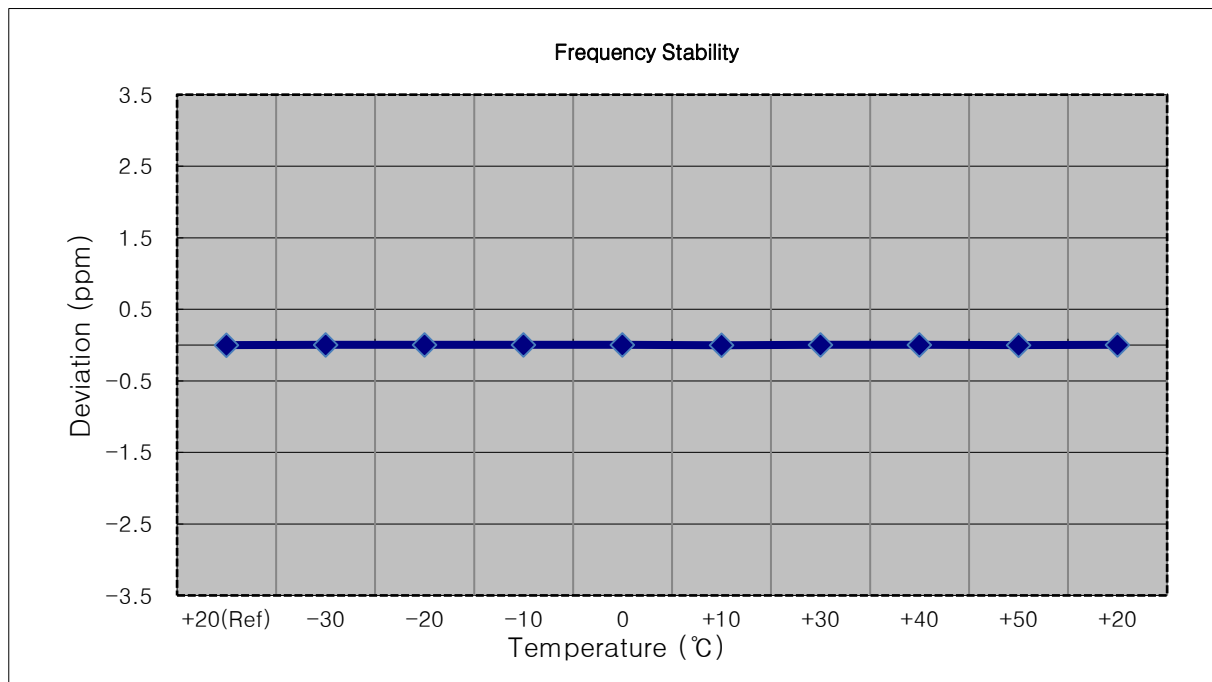


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1908 499 993	0.0	0.000 000	0.000
100 %		-30	1908 499 984	-8.8	0.000 000	-0.005
100 %		-20	1908 500 000	6.4	0.000 000	0.003
100 %		-10	1908 499 982	-11.1	-0.000 001	-0.006
100 %		0	1908 499 983	-10.3	-0.000 001	-0.005
100 %		+10	1908 499 983	-9.8	-0.000 001	-0.005
100 %		+30	1908 499 987	-6.3	0.000 000	-0.003
100 %		+40	1908 500 002	9.2	0.000 000	0.005
100 %		+50	1908 499 982	-11.2	-0.000 001	-0.006
Batt. Endpoint	3.350	+20	1908 499 984	-9.7	-0.000 001	-0.005

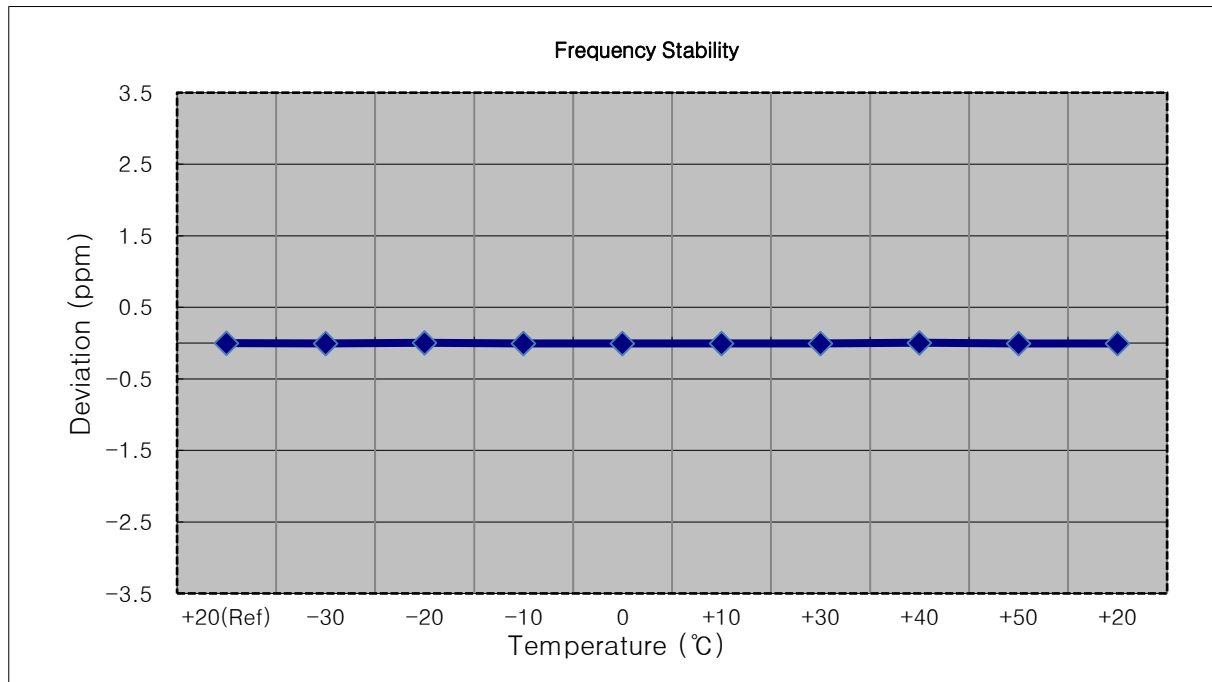

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 500 004	0.0	0.000 000	0.000
100 %		-30	1907 500 008	3.3	0.000 000	0.002
100 %		-20	1907 500 007	3.0	0.000 000	0.002
100 %		-10	1907 500 011	6.5	0.000 000	0.003
100 %		0	1907 500 001	-3.2	0.000 000	-0.002
100 %		+10	1907 500 008	3.9	0.000 000	0.002
100 %		+30	1907 500 008	3.5	0.000 000	0.002
100 %		+40	1907 500 008	3.8	0.000 000	0.002
100 %		+50	1907 499 999	-5.1	0.000 000	-0.003
Batt. Endpoint	3.350	+20	1907 499 999	-5.8	0.000 000	-0.003

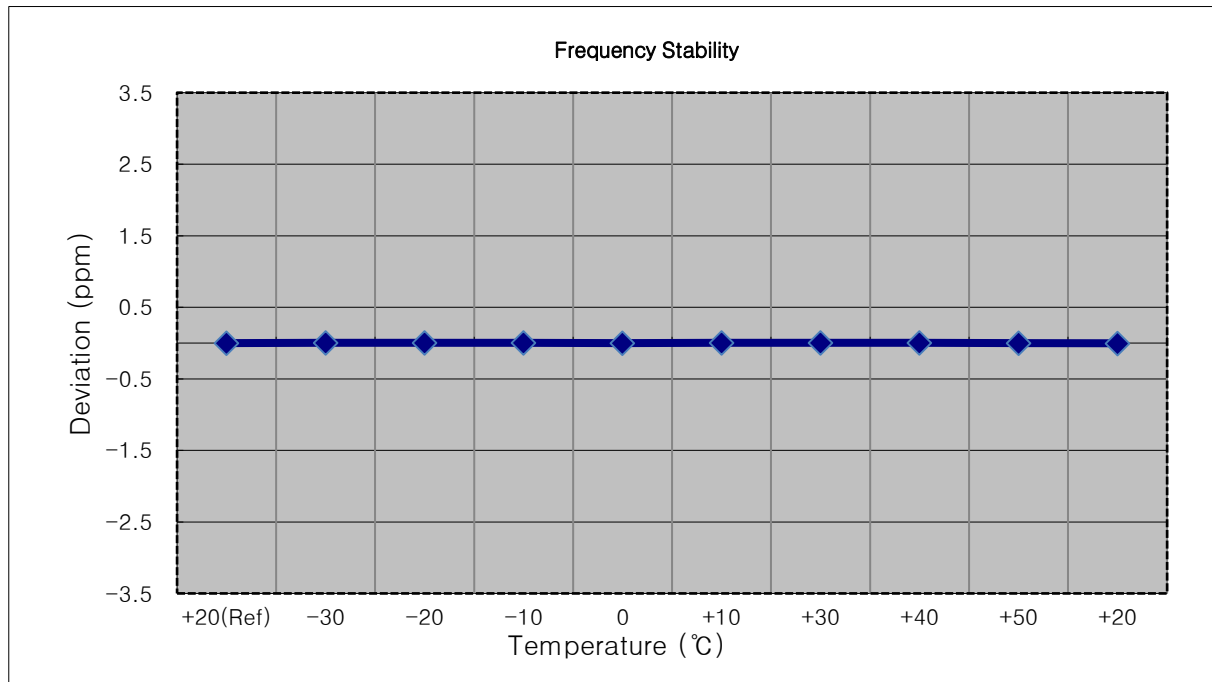




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1904 999 995	0.0	0.000 000	0.000
100 %		-30	1904 999 987	-8.2	0.000 000	-0.004
100 %		-20	1904 999 988	-7.2	0.000 000	-0.004
100 %		-10	1904 999 987	-7.7	0.000 000	-0.004
100 %		0	1904 999 990	-5.2	0.000 000	-0.003
100 %		+10	1904 999 987	-8.1	0.000 000	-0.004
100 %		+30	1904 999 988	-6.8	0.000 000	-0.004
100 %		+40	1904 999 986	-9.1	0.000 000	-0.005
100 %		+50	1904 999 987	-8.5	0.000 000	-0.004
Batt. Endpoint	3.350	+20	1904 999 986	-8.9	0.000 000	-0.005

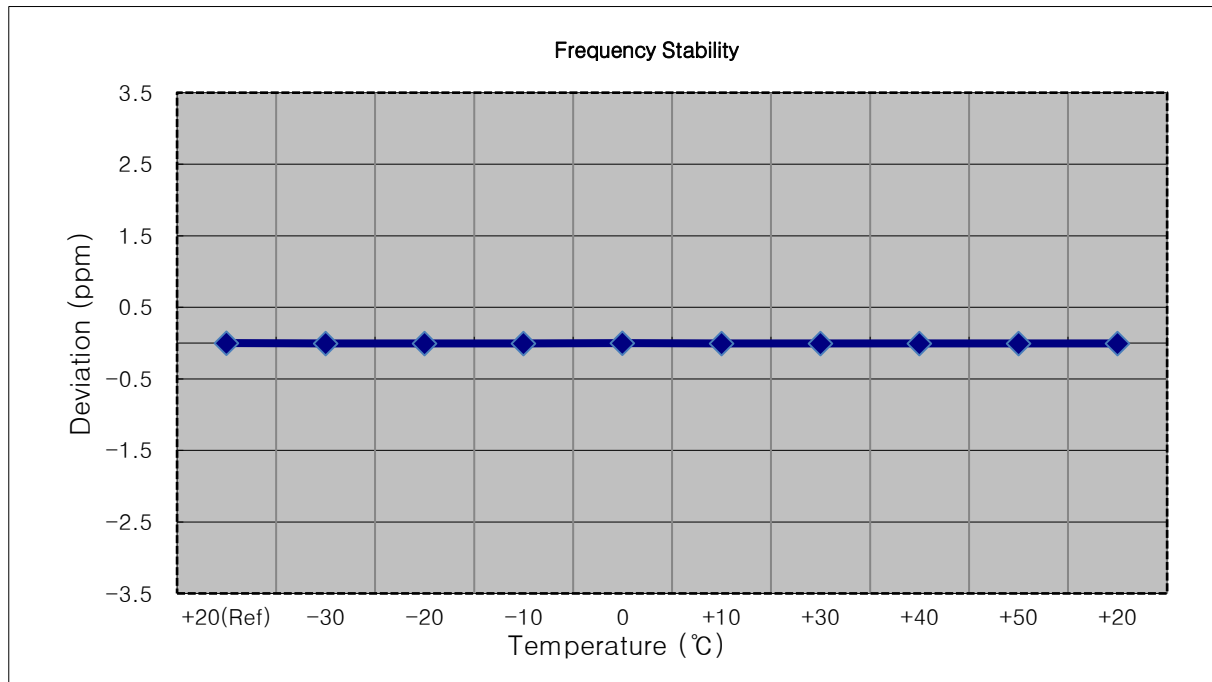


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1902 499 993	0.0	0.000 000	0.000
100 %		-30	1902 499 987	-6.2	0.000 000	-0.003
100 %		-20	1902 499 985	-8.1	0.000 000	-0.004
100 %		-10	1902 499 985	-8.4	0.000 000	-0.004
100 %		0	1902 499 983	-9.9	-0.000 001	-0.005
100 %		+10	1902 499 985	-8.7	0.000 000	-0.005
100 %		+30	1902 499 987	-6.3	0.000 000	-0.003
100 %		+40	1902 499 985	-8.5	0.000 000	-0.004
100 %		+50	1902 499 987	-6.8	0.000 000	-0.004
Batt. Endpoint	3.350	+20	1902 499 984	-8.9	0.000 000	-0.005

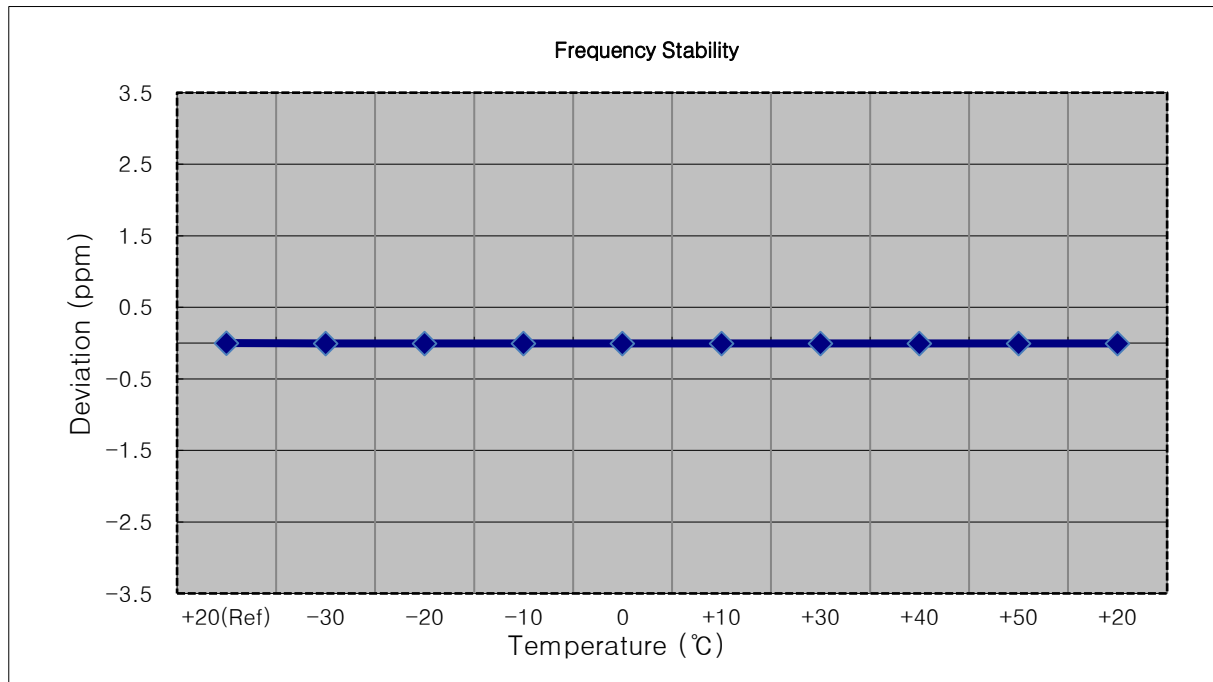

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1899 999 992	0.0	0.000 000	0.000
100 %		-30	1899 999 984	-7.8	0.000 000	-0.004
100 %		-20	1899 999 983	-9.0	0.000 000	-0.005
100 %		-10	1899 999 984	-8.0	0.000 000	-0.004
100 %		0	1899 999 986	-5.9	0.000 000	-0.003
100 %		+10	1899 999 985	-7.6	0.000 000	-0.004
100 %		+30	1899 999 986	-6.6	0.000 000	-0.003
100 %		+40	1899 999 986	-6.7	0.000 000	-0.004
100 %		+50	1899 999 986	-6.7	0.000 000	-0.004
Batt. Endpoint	3.350	+20	1899 999 985	-7.2	0.000 000	-0.004

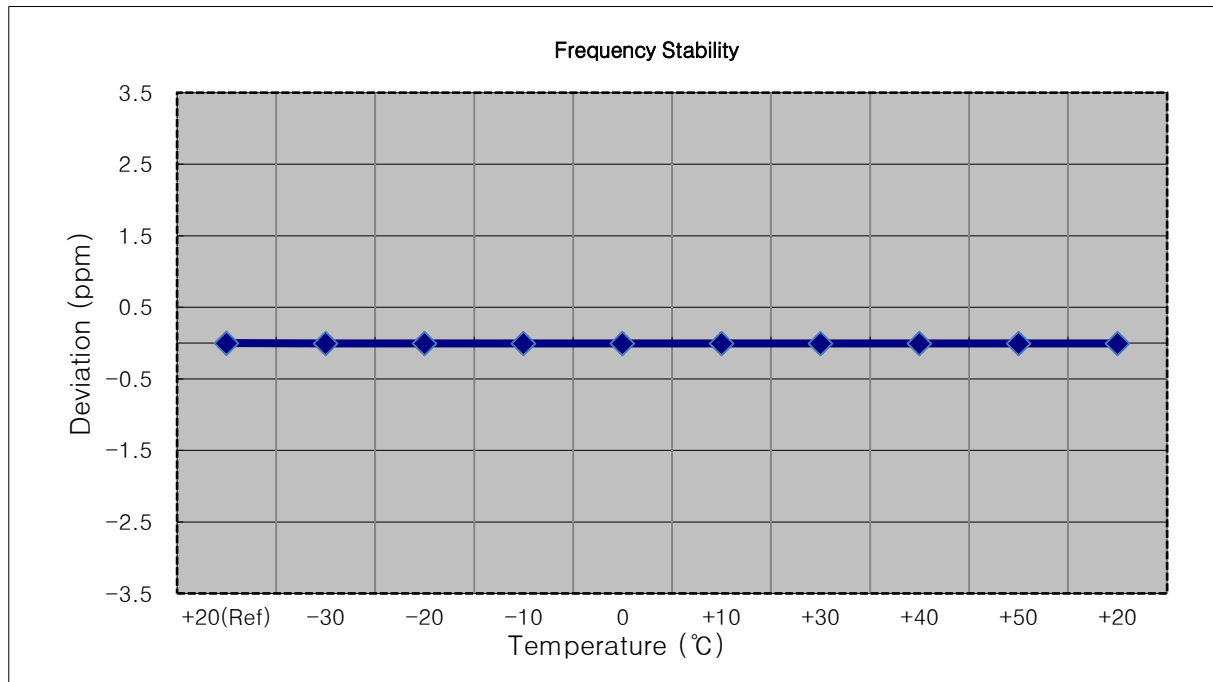

## 9. TEST DATA (Sub 2 Ant)

### 9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W		W	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-18.52	15.26	10.40	2.13	H	< 2.00	0.226	23.53	
		16-QAM	-19.18	14.60	10.40	2.13	H		0.194	22.87	
		64-QAM	-20.30	13.48	10.40	2.13	H		0.150	21.75	
		256-QAM	-23.48	10.30	10.40	2.13	H		0.072	18.57	
1880.0		QPSK	-18.84	15.78	10.40	2.23	H		0.248	23.95	
		16-QAM	-19.55	15.07	10.40	2.23	H		0.211	23.24	
		64-QAM	-20.68	13.94	10.40	2.23	H		0.163	22.11	
		256-QAM	-23.85	10.77	10.40	2.23	H		0.078	18.94	
1909.3		QPSK	-19.46	15.11	10.40	2.14	H		0.217	23.37	
		16-QAM	-20.24	14.33	10.40	2.14	H		0.182	22.59	
		64-QAM	-21.32	13.25	10.40	2.14	H		0.142	21.51	
		256-QAM	-24.42	10.15	10.40	2.14	H		0.069	18.41	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W		W	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-18.59	15.19	10.40	2.13	H	< 2.00	0.222	23.46	
		16-QAM	-19.38	14.40	10.40	2.13	H		0.185	22.67	
		64-QAM	-20.40	13.38	10.40	2.13	H		0.146	21.65	
		256-QAM	-23.61	10.17	10.40	2.13	H		0.070	18.44	
1880.0		QPSK	-18.82	15.80	10.40	2.23	H		0.249	23.97	
		16-QAM	-19.59	15.03	10.40	2.23	H		0.209	23.20	
		64-QAM	-20.68	13.94	10.40	2.23	H		0.163	22.11	
		256-QAM	-23.83	10.79	10.40	2.23	H		0.079	18.96	
1908.5		QPSK	-19.32	15.25	10.40	2.14	H		0.224	23.51	
		16-QAM	-20.10	14.47	10.40	2.14	H		0.188	22.73	
		64-QAM	-21.17	13.40	10.40	2.14	H		0.147	21.66	
		256-QAM	-24.30	10.27	10.40	2.14	H		0.071	18.53	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-18.46	15.32	10.40	2.13	H	< 2.00	0.229	23.59	
		16-QAM	-19.17	14.61	10.40	2.13	H		0.194	22.88	
		64-QAM	-20.19	13.59	10.40	2.13	H		0.154	21.86	
		256-QAM	-23.39	10.39	10.40	2.13	H		0.074	18.66	
1880.0		QPSK	-18.69	15.93	10.40	2.23	H		0.257	24.10	
		16-QAM	-19.38	15.24	10.40	2.23	H		0.219	23.41	
		64-QAM	-20.50	14.12	10.40	2.23	H		0.169	22.29	
		256-QAM	-23.65	10.97	10.40	2.23	H		0.082	19.14	
1907.5		QPSK	-19.10	15.47	10.40	2.14	H		0.236	23.73	
		16-QAM	-19.77	14.80	10.40	2.14	H		0.202	23.06	
		64-QAM	-20.85	13.72	10.40	2.14	H		0.158	21.98	
		256-QAM	-23.99	10.58	10.40	2.14	H		0.077	18.84	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-18.55	15.41	10.40	2.15	H	< 2.00	0.232	23.66	
		16-QAM	-19.15	14.81	10.40	2.15	H		0.202	23.06	
		64-QAM	-20.25	13.71	10.40	2.15	H		0.157	21.96	
		256-QAM	-23.40	10.56	10.40	2.15	H		0.076	18.81	
1880.0		QPSK	-18.39	16.23	10.40	2.23	H		0.275	24.40	
		16-QAM	-19.12	15.50	10.40	2.23	H		0.233	23.67	
		64-QAM	-20.21	14.41	10.40	2.23	H		0.181	22.58	
		256-QAM	-23.36	11.26	10.40	2.23	H		0.088	19.43	
1905.0		QPSK	-18.87	15.71	10.40	2.16	H		0.248	23.95	
		16-QAM	-19.56	15.02	10.40	2.16	H		0.212	23.26	
		64-QAM	-20.65	13.93	10.40	2.16	H		0.165	22.17	
		256-QAM	-23.80	10.78	10.40	2.16	H		0.080	19.02	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-18.63	15.51	10.40	2.17	H	< 2.00	0.237	23.74	
		16-QAM	-19.38	14.76	10.40	2.17	H		0.199	22.99	
		64-QAM	-20.51	13.63	10.40	2.17	H		0.154	21.86	
		256-QAM	-23.57	10.57	10.40	2.17	H		0.076	18.80	
1880.0		QPSK	-18.77	15.85	10.40	2.23	H		0.252	24.02	
		16-QAM	-19.46	15.16	10.40	2.23	H		0.215	23.33	
		64-QAM	-20.61	14.01	10.40	2.23	H		0.165	22.18	
		256-QAM	-23.72	10.90	10.40	2.23	H		0.081	19.07	
1902.5		QPSK	-18.82	15.77	10.40	2.18	H		0.250	23.99	
		16-QAM	-19.66	14.93	10.40	2.18	H		0.206	23.15	
		64-QAM	-20.72	13.87	10.40	2.18	H		0.162	22.09	
		256-QAM	-23.77	10.82	10.40	2.18	H		0.080	19.04	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-18.60	15.54	10.40	2.17	H	< 2.00	0.238	23.77	
		16-QAM	-19.42	14.72	10.40	2.17	H		0.197	22.95	
		64-QAM	-20.49	13.65	10.40	2.17	H		0.154	21.88	
		256-QAM	-23.55	10.59	10.40	2.17	H		0.076	18.82	
1880.0		QPSK	-18.55	16.07	10.40	2.23	H		0.265	24.24	
		16-QAM	-19.48	15.14	10.40	2.23	H		0.214	23.31	
		64-QAM	-20.51	14.11	10.40	2.23	H		0.169	22.28	
		256-QAM	-23.54	11.08	10.40	2.23	H		0.084	19.25	
1900.0		QPSK	-18.72	15.87	10.40	2.18	H		0.256	24.09	
		16-QAM	-19.66	14.93	10.40	2.18	H		0.206	23.15	
		64-QAM	-20.68	13.91	10.40	2.18	H		0.163	22.13	
		256-QAM	-23.66	10.93	10.40	2.18	H		0.082	19.15	

**9.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY: 1880.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.40 dBm = 0.275 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.40 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18650 (1855.0)	3 710.00	-54.87	12.30	-59.98	3.14	H	-50.82	75.22
	5 565.00	-55.49	13.30	-53.40	3.90	H	-44.00	68.40
	7 420.00	-57.12	10.80	-46.96	4.57	V	-40.73	65.13
18900 (1880.0)	3 760.00	-54.52	12.32	-59.02	3.08	H	-49.78	74.18
	5 640.00	-55.03	13.10	-53.22	3.90	V	-44.02	68.42
	7 520.00	-56.67	10.84	-46.09	4.61	V	-39.86	64.26
19150 (1905.0)	3 810.00	-55.78	12.40	-60.20	3.12	H	-50.92	75.32
	5 715.00	-56.19	13.07	-53.82	3.96	V	-44.70	69.10
	7 620.00	-58.79	11.18	-48.30	4.65	V	-41.77	66.17

**9.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.37
			16-QAM	6	0	6.12
			64-QAM	6	0	6.61
			256-QAM	6	0	6.75
	3 MHz		QPSK	15	0	5.26
			16-QAM	15	0	6.14
			64-QAM	15	0	6.59
			256-QAM	15	0	6.75
	5 MHz		QPSK	25	0	5.31
			16-QAM	25	0	6.12
			64-QAM	25	0	6.57
			256-QAM	25	0	6.74
	10 MHz		QPSK	50	0	5.37
			16-QAM	50	0	6.13
			64-QAM	50	0	6.54
			256-QAM	50	0	6.70
	15 MHz		QPSK	75	0	5.32
			16-QAM	75	0	6.12
			64-QAM	75	0	6.52
			256-QAM	75	0	6.67
20 MHz	QPSK	100	0	5.24		
	16-QAM	100	0	6.08		
	64-QAM	100	0	6.50		
	256-QAM	100	0	6.65		

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 262 ~ 285.



**9.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0995
			16-QAM	6	0	1.0998
			64-QAM	6	0	1.0981
			256-QAM	6	0	1.1019
	3 MHz		QPSK	15	0	2.7032
			16-QAM	15	0	2.7145
			64-QAM	15	0	2.7089
			256-QAM	15	0	2.7115
	5 MHz		QPSK	25	0	4.4991
			16-QAM	25	0	4.5016
			64-QAM	25	0	4.5150
			256-QAM	25	0	4.5044
	10 MHz		QPSK	50	0	9.0120
			16-QAM	50	0	9.0198
			64-QAM	50	0	8.9922
			256-QAM	50	0	8.9822
	15 MHz		QPSK	75	0	13.490
			16-QAM	75	0	13.492
			64-QAM	75	0	13.464
			256-QAM	75	0	13.422
20 MHz	QPSK	100	0	17.944		
	16-QAM	100	0	17.915		
	64-QAM	100	0	17.910		
	256-QAM	100	0	17.919		

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 238 ~ 261.

**9.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7084	27.976	-77.415	-49.439	-13.00
		1880.0	3.7049	27.976	-77.185	-49.209	
		1909.3	3.6651	27.976	-77.224	-49.248	
	3	1851.5	3.7094	27.976	-77.303	-49.327	
		1880.0	3.6735	27.976	-77.418	-49.442	
		1908.5	3.6840	27.976	-77.274	-49.298	
	5	1852.5	3.7015	27.976	-77.366	-49.390	
		1880.0	3.6905	27.976	-77.276	-49.300	
		1907.5	3.7069	27.976	-76.858	-48.882	
	10	1855.0	3.7064	27.976	-77.302	-49.326	
		1880.0	3.6955	27.976	-77.236	-49.260	
		1905.0	3.6800	27.976	-77.511	-49.535	
	15	1857.5	3.6835	27.976	-77.201	-49.225	
		1880.0	3.6980	27.976	-77.303	-49.327	
		1902.5	3.7259	27.976	-77.151	-49.175	
	20	1860.0	3.6735	27.976	-77.064	-49.088	
		1880.0	3.6860	27.976	-77.203	-49.227	
		1900.0	3.6980	27.976	-77.153	-49.177	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 286 ~ 321.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## 9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 202 ~ 237.

**9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 700 003	0.0	0.000 000	0.000
100 %		-30	1850 699 999	-3.5	0.000 000	-0.002
100 %		-20	1850 700 006	3.2	0.000 000	0.002
100 %		-10	1850 700 005	2.5	0.000 000	0.001
100 %		0	1850 700 006	3.3	0.000 000	0.002
100 %		+10	1850 700 006	3.5	0.000 000	0.002
100 %		+30	1850 700 001	-1.9	0.000 000	-0.001
100 %		+40	1850 700 006	3.2	0.000 000	0.002
100 %		+50	1850 700 005	2.7	0.000 000	0.001
Batt. Endpoint		3.350	+20	1850 700 001	-2.0	0.000 000

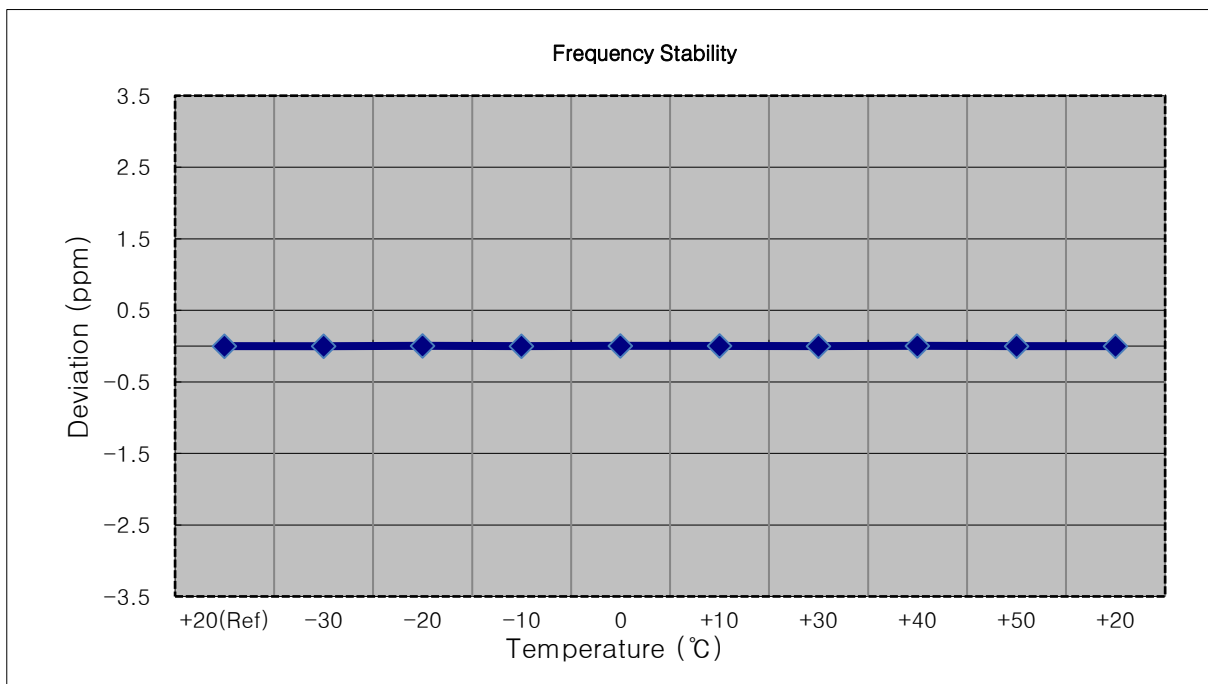


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 500 005	0.0	0.000 000	0.000
100 %		-30	1851 500 000	-5.0	0.000 000	-0.003
100 %		-20	1851 500 003	-2.1	0.000 000	-0.001
100 %		-10	1851 500 001	-3.5	0.000 000	-0.002
100 %		0	1851 500 002	-2.5	0.000 000	-0.001
100 %		+10	1851 500 003	-2.2	0.000 000	-0.001
100 %		+30	1851 500 000	-5.0	0.000 000	-0.003
100 %		+40	1851 500 000	-5.1	0.000 000	-0.003
100 %		+50	1851 500 001	-3.9	0.000 000	-0.002
Batt. Endpoint	3.350	+20	1851 500 008	2.8	0.000 000	0.002

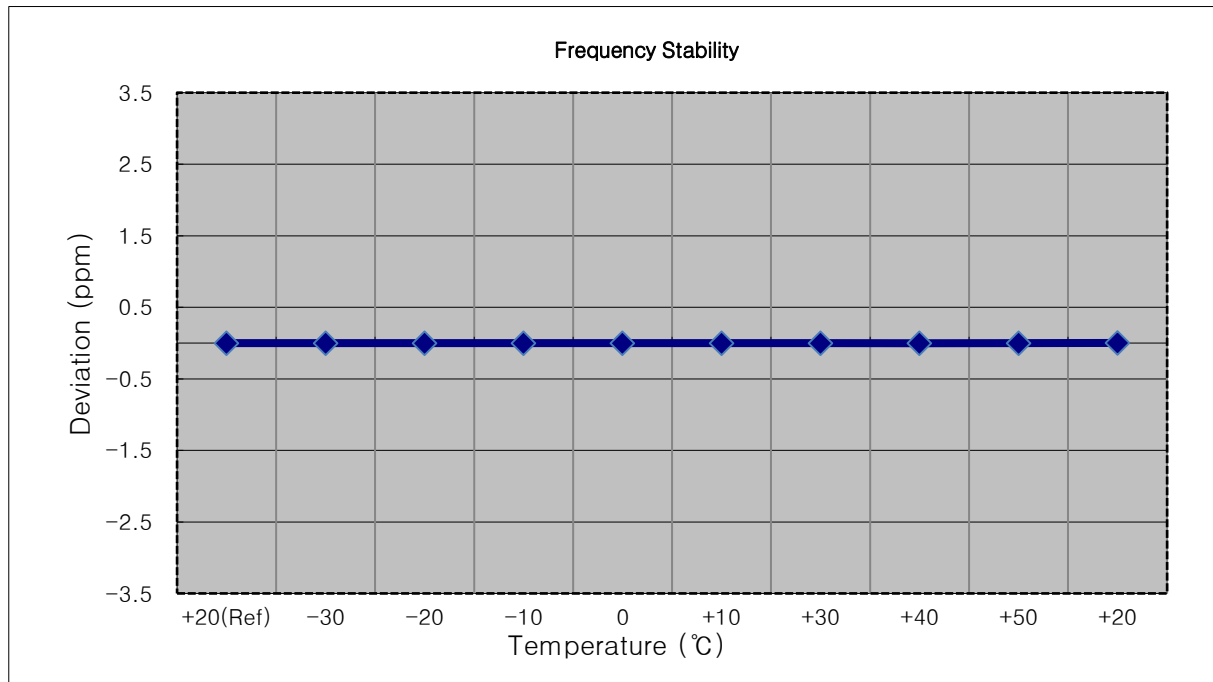


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 500 005	0.0	0.000 000	0.000
100 %		-30	1852 500 001	-4.0	0.000 000	-0.002
100 %		-20	1852 500 000	-4.5	0.000 000	-0.002
100 %		-10	1852 500 000	-4.4	0.000 000	-0.002
100 %		0	1852 500 000	-4.9	0.000 000	-0.003
100 %		+10	1852 500 000	-4.3	0.000 000	-0.002
100 %		+30	1852 500 009	4.0	0.000 000	0.002
100 %		+40	1852 500 008	3.6	0.000 000	0.002
100 %		+50	1852 500 010	5.4	0.000 000	0.003
Batt. Endpoint	3.350	+20	1852 500 008	3.2	0.000 000	0.002

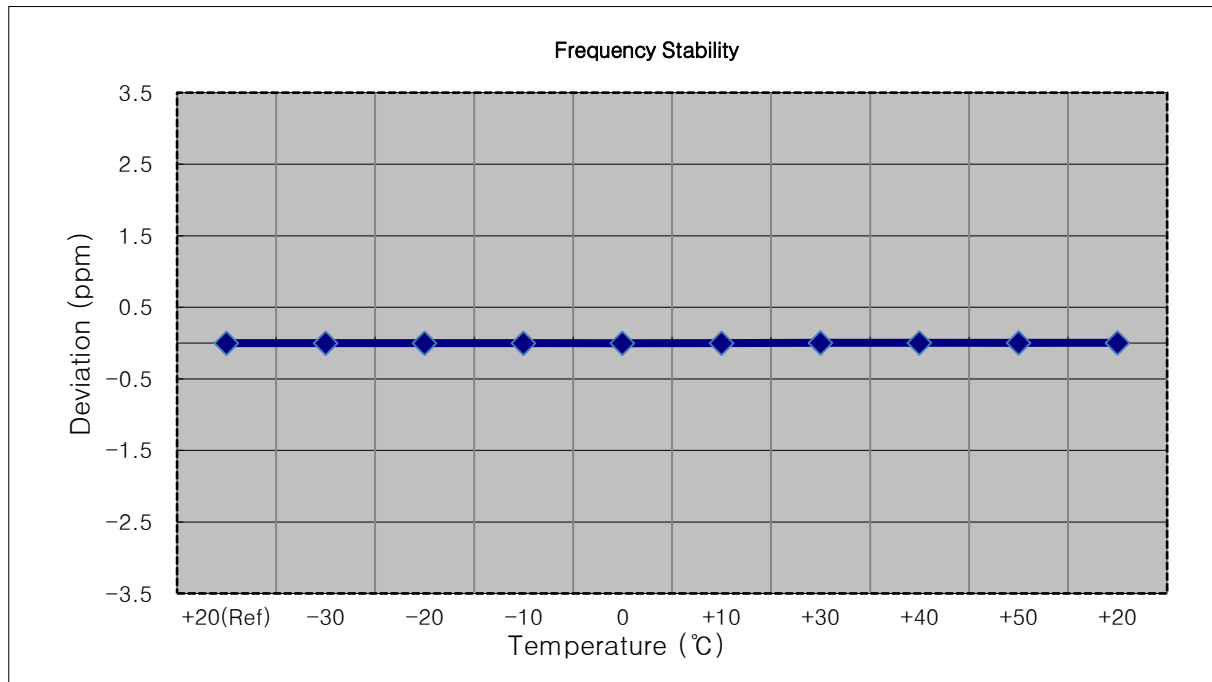


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1855 000 004	0.0	0.000 000	0.000
100 %		-30	1855 000 002	-2.1	0.000 000	-0.001
100 %		-20	1855 000 008	4.0	0.000 000	0.002
100 %		-10	1854 999 997	-6.6	0.000 000	-0.004
100 %		0	1855 000 006	2.3	0.000 000	0.001
100 %		+10	1855 000 006	1.8	0.000 000	0.001
100 %		+30	1855 000 006	1.8	0.000 000	0.001
100 %		+40	1855 000 009	4.8	0.000 000	0.003
100 %		+50	1855 000 001	-2.7	0.000 000	-0.001
Batt. Endpoint	3.350	+20	1855 000 006	2.6	0.000 000	0.001

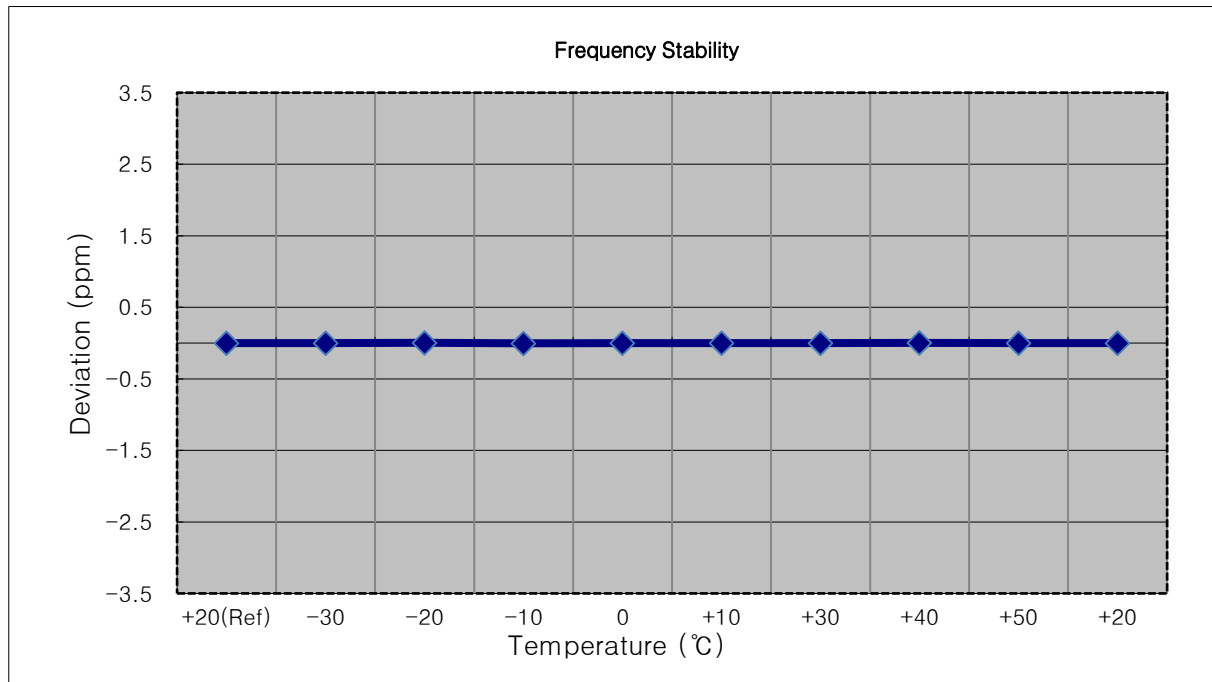

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1857 500 002	0.0	0.000 000	0.000
100 %		-30	1857 499 999	-3.6	0.000 000	-0.002
100 %		-20	1857 500 005	3.2	0.000 000	0.002
100 %		-10	1857 499 999	-3.5	0.000 000	-0.002
100 %		0	1857 499 998	-4.5	0.000 000	-0.002
100 %		+10	1857 500 000	-2.6	0.000 000	-0.001
100 %		+30	1857 499 998	-4.0	0.000 000	-0.002
100 %		+40	1857 500 000	-2.6	0.000 000	-0.001
100 %		+50	1857 500 006	3.8	0.000 000	0.002
Batt. Endpoint		3.350	+20	1857 499 996	-6.5	0.000 000

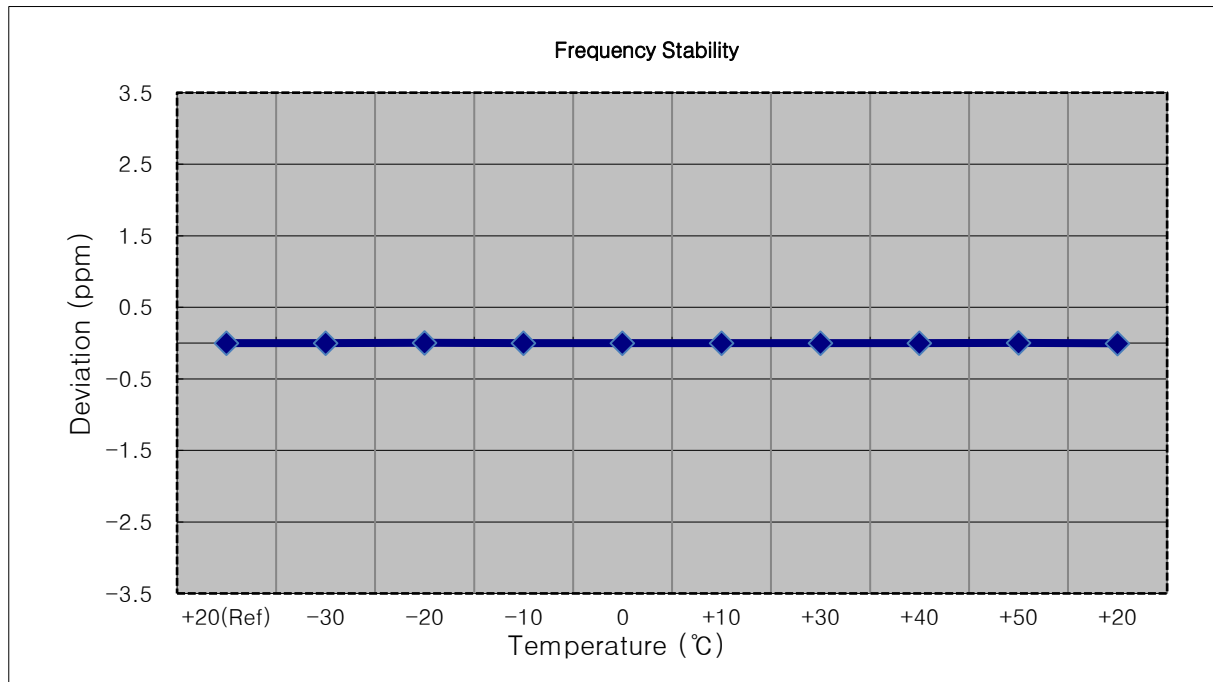




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1860 000 006	0.0	0.000 000	0.000
100 %		-30	1860 000 014	7.9	0.000 000	0.004
100 %		-20	1860 000 011	4.1	0.000 000	0.002
100 %		-10	1860 000 012	5.8	0.000 000	0.003
100 %		0	1860 000 011	4.2	0.000 000	0.002
100 %		+10	1860 000 012	5.7	0.000 000	0.003
100 %		+30	1860 000 011	4.6	0.000 000	0.002
100 %		+40	1860 000 013	6.8	0.000 000	0.004
100 %		+50	1860 000 011	4.5	0.000 000	0.002
Batt. Endpoint	3.350	+20	1860 000 013	6.3	0.000 000	0.003

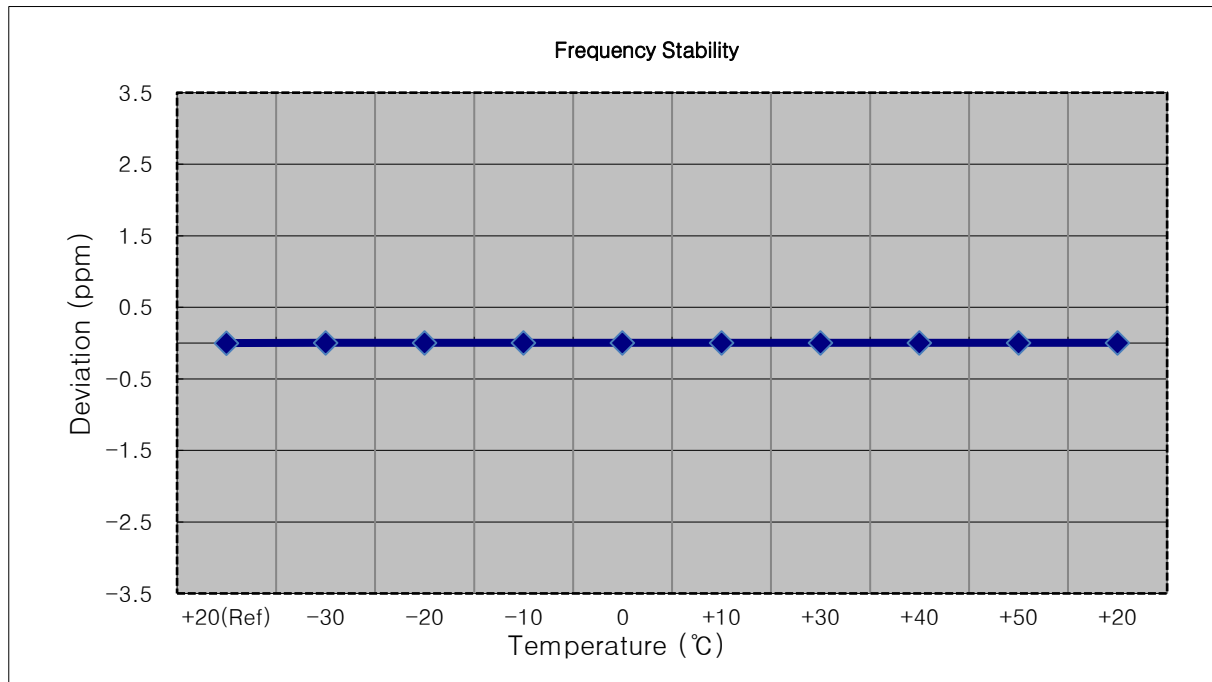


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 997	0.0	0.000 000	0.000
100 %		-30	1880 000 001	3.3	0.000 000	0.002
100 %		-20	1880 000 001	4.0	0.000 000	0.002
100 %		-10	1880 000 000	2.7	0.000 000	0.001
100 %		0	1879 999 994	-3.2	0.000 000	-0.002
100 %		+10	1880 000 001	4.1	0.000 000	0.002
100 %		+30	1880 000 001	3.8	0.000 000	0.002
100 %		+40	1880 000 000	3.2	0.000 000	0.002
100 %		+50	1880 000 001	3.7	0.000 000	0.002
Batt. Endpoint	3.350	+20	1880 000 001	3.7	0.000 000	0.002

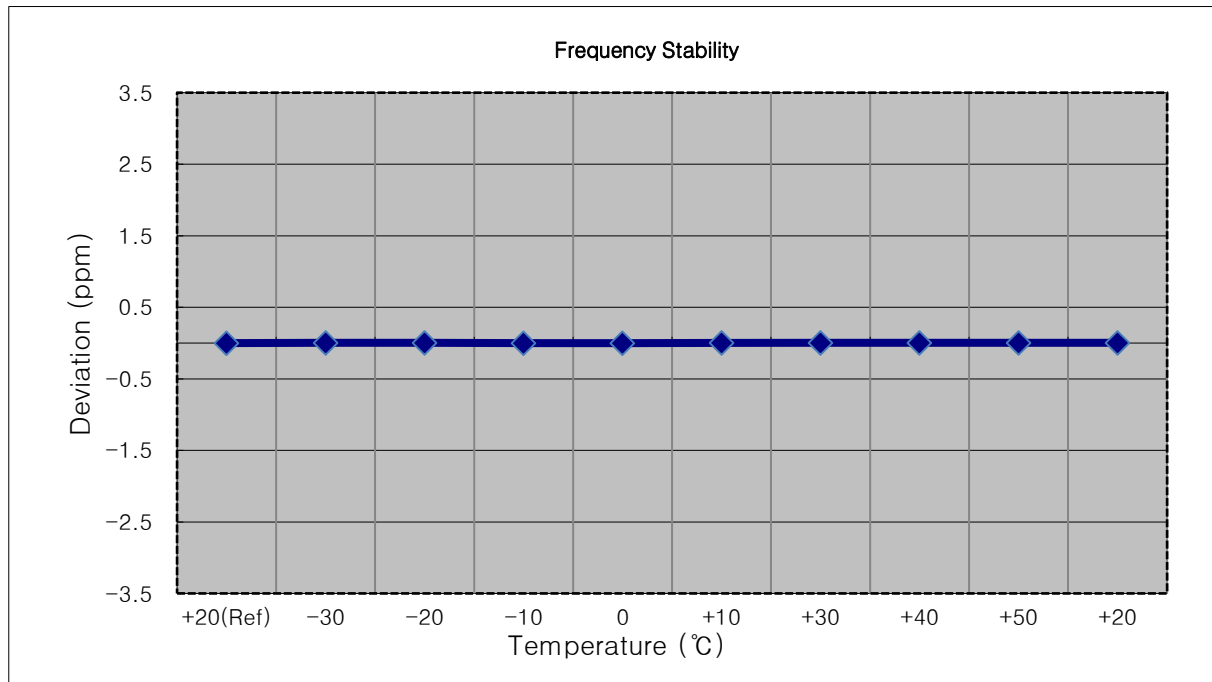


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 997	0.0	0.000 000	0.000
100 %		-30	1880 000 001	4.6	0.000 000	0.002
100 %		-20	1879 999 993	-4.3	0.000 000	-0.002
100 %		-10	1879 999 992	-4.6	0.000 000	-0.002
100 %		0	1880 000 001	3.8	0.000 000	0.002
100 %		+10	1879 999 992	-4.5	0.000 000	-0.002
100 %		+30	1880 000 001	4.2	0.000 000	0.002
100 %		+40	1879 999 994	-3.3	0.000 000	-0.002
100 %		+50	1879 999 999	2.6	0.000 000	0.001
Batt. Endpoint		3.350	+20	1879 999 992	-4.4	0.000 000

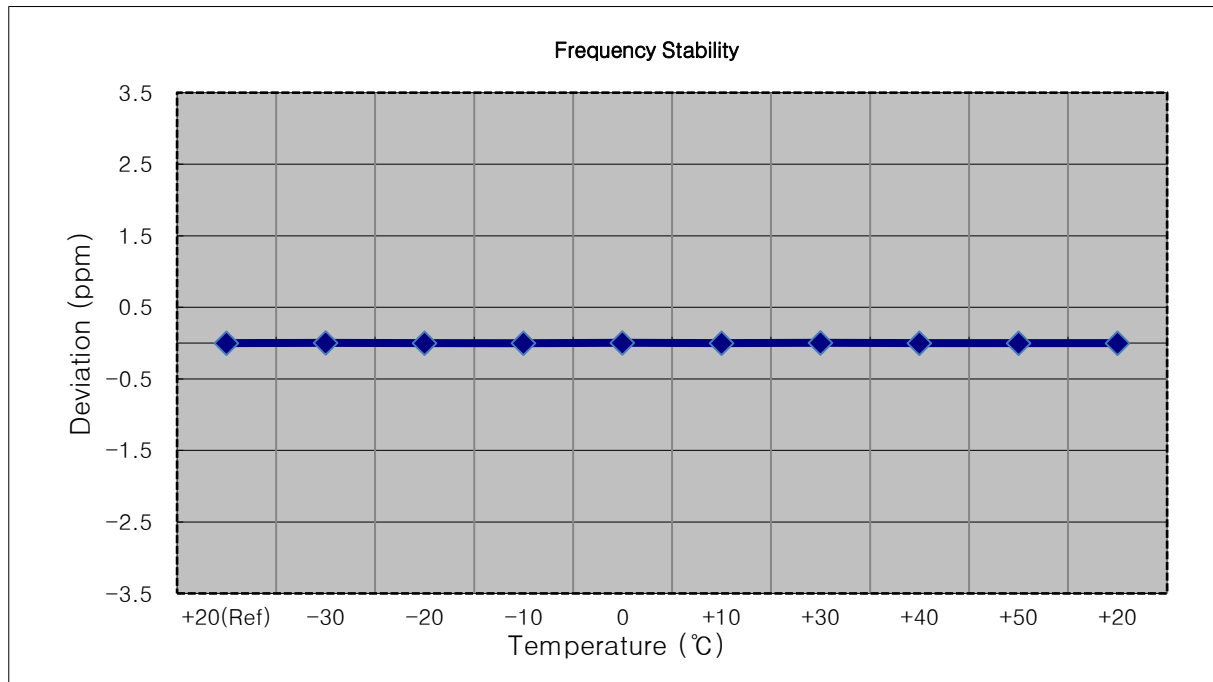


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 996	0.0	0.000 000	0.000
100 %		-30	1879 999 998	2.0	0.000 000	0.001
100 %		-20	1880 000 001	4.5	0.000 000	0.002
100 %		-10	1880 000 001	4.9	0.000 000	0.003
100 %		0	1879 999 993	-3.3	0.000 000	-0.002
100 %		+10	1879 999 994	-2.8	0.000 000	-0.001
100 %		+30	1880 000 000	3.8	0.000 000	0.002
100 %		+40	1880 000 000	3.8	0.000 000	0.002
100 %		+50	1880 000 002	5.2	0.000 000	0.003
Batt. Endpoint	3.350	+20	1880 000 000	3.6	0.000 000	0.002

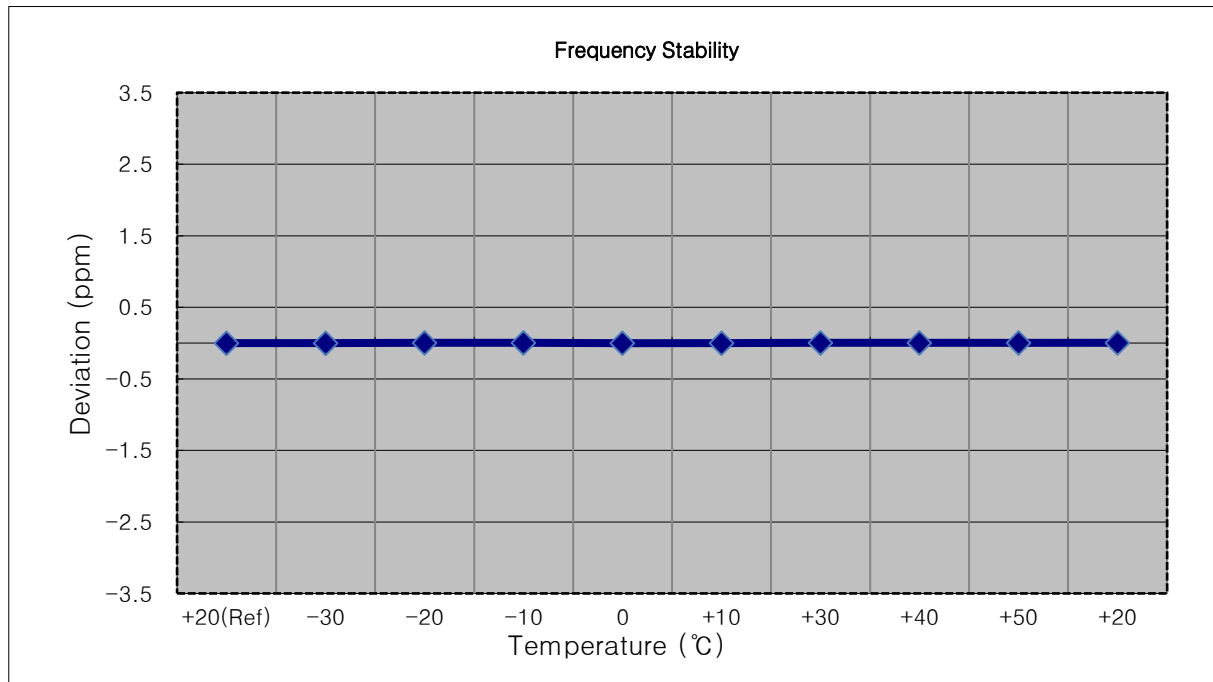


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 996	0.0	0.000 000	0.000
100 %		-30	1879 999 998	2.3	0.000 000	0.001
100 %		-20	1879 999 991	-5.1	0.000 000	-0.003
100 %		-10	1880 000 000	3.5	0.000 000	0.002
100 %		0	1879 999 999	2.8	0.000 000	0.001
100 %		+10	1880 000 000	4.4	0.000 000	0.002
100 %		+30	1879 999 998	2.3	0.000 000	0.001
100 %		+40	1879 999 991	-4.7	0.000 000	-0.003
100 %		+50	1879 999 993	-2.8	0.000 000	-0.001
Batt. Endpoint	3.350	+20	1879 999 993	-2.7	0.000 000	-0.001

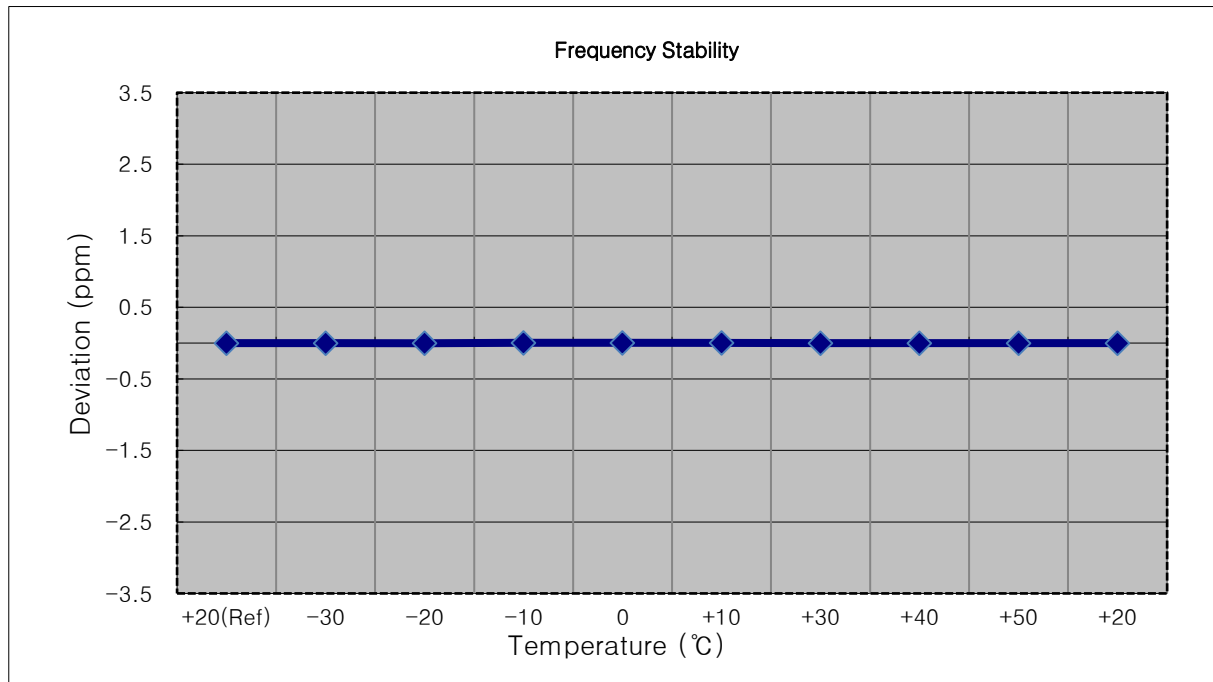


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 006	2.2	0.000 000	0.001
100 %		-20	1880 000 011	7.4	0.000 000	0.004
100 %		-10	1880 000 006	3.1	0.000 000	0.002
100 %		0	1880 000 008	4.4	0.000 000	0.002
100 %		+10	1880 000 010	6.6	0.000 000	0.004
100 %		+30	1880 000 009	5.7	0.000 000	0.003
100 %		+40	1880 000 007	3.9	0.000 000	0.002
100 %		+50	1880 000 008	4.2	0.000 000	0.002
Batt. Endpoint	3.350	+20	1880 000 008	4.2	0.000 000	0.002

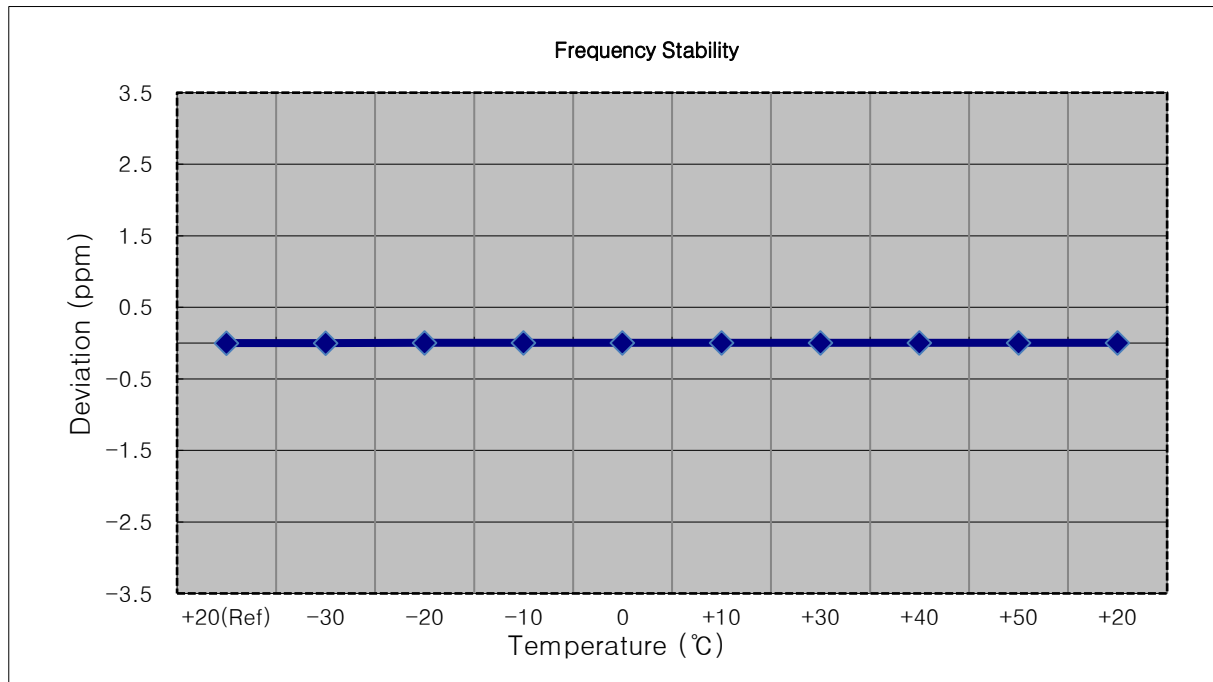


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 007	0.0	0.000 000	0.000
100 %		-30	1880 000 014	6.8	0.000 000	0.004
100 %		-20	1880 000 012	4.8	0.000 000	0.003
100 %		-10	1880 000 014	7.1	0.000 000	0.004
100 %		0	1880 000 013	6.1	0.000 000	0.003
100 %		+10	1880 000 013	6.2	0.000 000	0.003
100 %		+30	1880 000 010	3.5	0.000 000	0.002
100 %		+40	1880 000 012	5.4	0.000 000	0.003
100 %		+50	1880 000 012	5.5	0.000 000	0.003
Batt. Endpoint	3.350	+20	1880 000 013	5.7	0.000 000	0.003

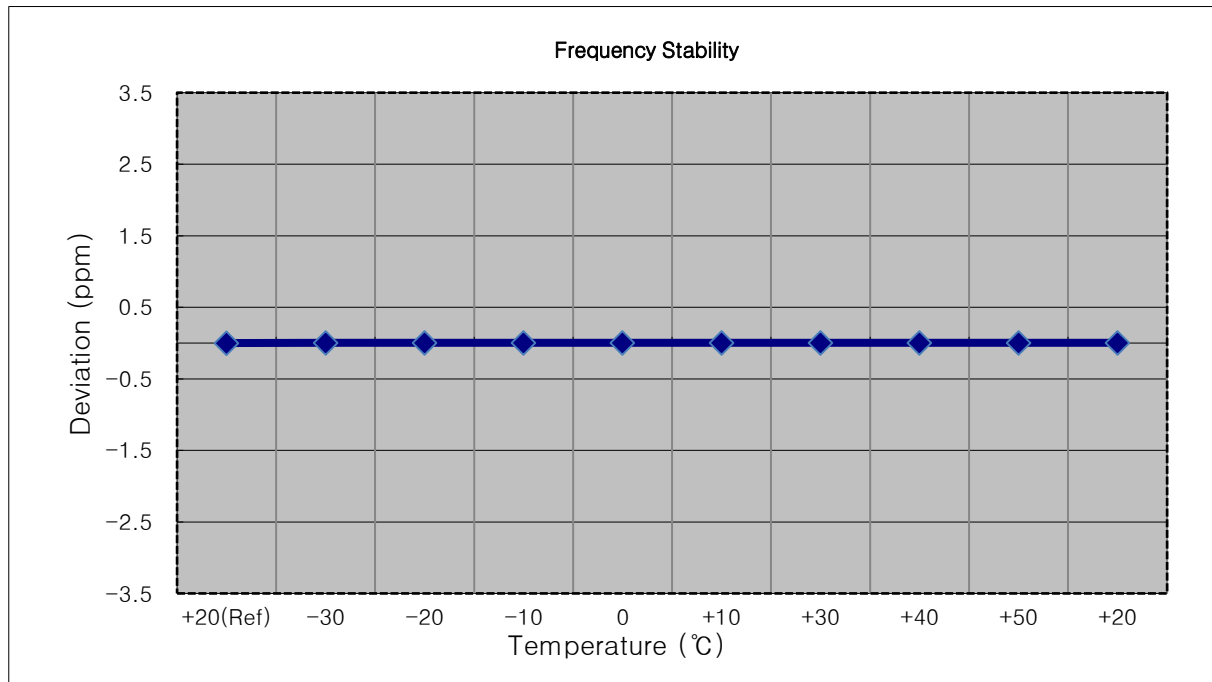

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm	
100 %	3.880	+20(Ref)	1909 300 007	0.0	0.000 000	0.000	
100 %		-30	1909 300 010	3.0	0.000 000	0.002	
100 %		-20	1909 300 010	3.3	0.000 000	0.002	
100 %		-10	1909 300 011	4.6	0.000 000	0.002	
100 %		0	1909 300 012	5.3	0.000 000	0.003	
100 %		+10	1909 300 010	3.5	0.000 000	0.002	
100 %		+30	1909 300 012	5.7	0.000 000	0.003	
100 %		+40	1909 300 011	4.5	0.000 000	0.002	
100 %		+50	1909 300 004	1909 300 004	-2.7	0.000 000	-0.001
Batt. Endpoint		3.350	+20	1909 300 010	3.8	0.000 000	0.002

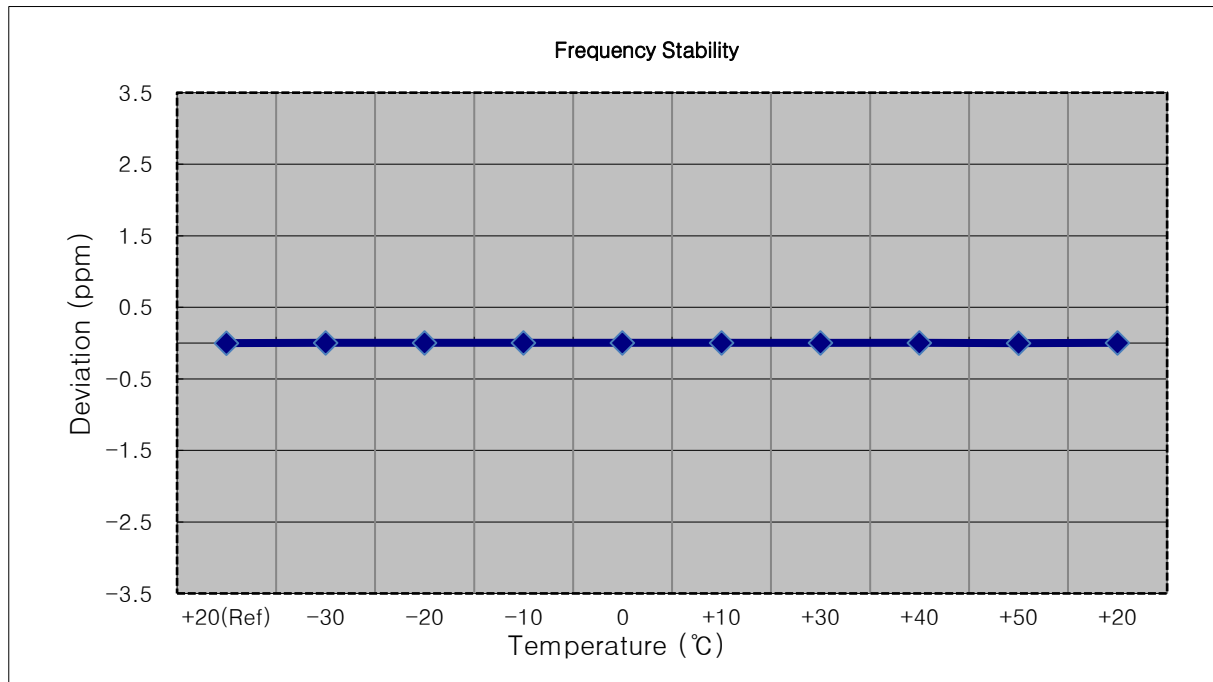




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1908 500 010	0.0	0.000 000	0.000
100 %		-30	1908 500 002	-7.6	0.000 000	-0.004
100 %		-20	1908 500 019	9.3	0.000 000	0.005
100 %		-10	1908 500 003	-6.2	0.000 000	-0.003
100 %		0	1908 500 018	8.2	0.000 000	0.004
100 %		+10	1908 500 003	-6.9	0.000 000	-0.004
100 %		+30	1908 500 002	-8.0	0.000 000	-0.004
100 %		+40	1908 499 999	-10.3	-0.000 001	-0.005
100 %		+50	1908 500 016	6.0	0.000 000	0.003
Batt. Endpoint	3.350	+20	1908 500 016	6.7	0.000 000	0.004

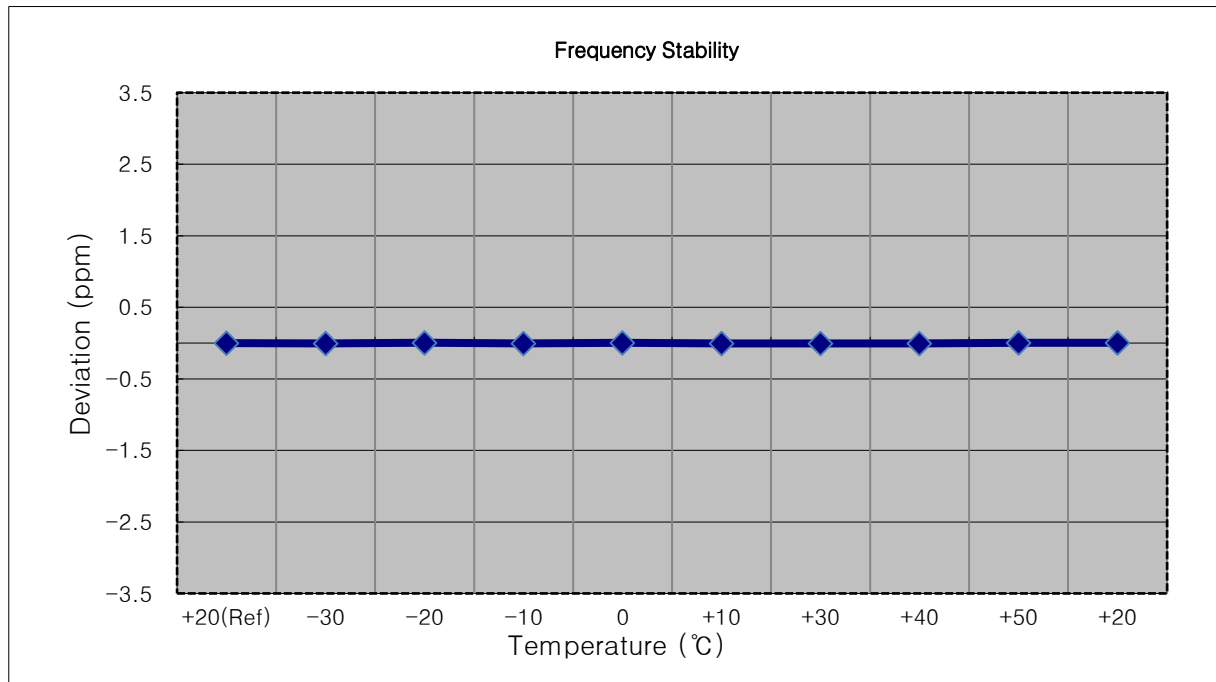


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 500 005	0.0	0.000 000	0.000
100 %		-30	1907 500 009	4.0	0.000 000	0.002
100 %		-20	1907 500 011	5.8	0.000 000	0.003
100 %		-10	1907 500 008	3.0	0.000 000	0.002
100 %		0	1907 500 009	4.0	0.000 000	0.002
100 %		+10	1907 500 003	-2.9	0.000 000	-0.002
100 %		+30	1907 500 001	-4.9	0.000 000	-0.003
100 %		+40	1907 500 008	3.0	0.000 000	0.002
100 %		+50	1907 500 010	4.9	0.000 000	0.003
Batt. Endpoint	3.350	+20	1907 500 001	-4.0	0.000 000	-0.002

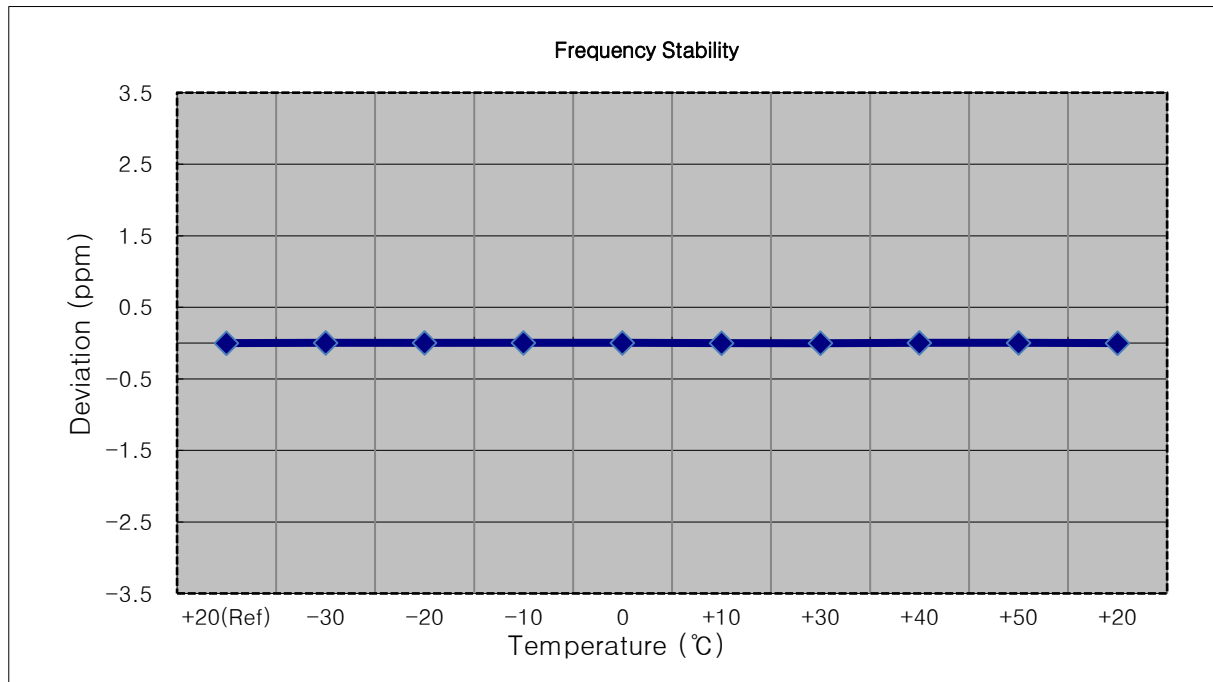


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1904 999 996	0.0	0.000 000	0.000
100 %		-30	1904 999 991	-5.1	0.000 000	-0.003
100 %		-20	1904 999 990	-5.9	0.000 000	-0.003
100 %		-10	1904 999 988	-8.3	0.000 000	-0.004
100 %		0	1904 999 988	-8.0	0.000 000	-0.004
100 %		+10	1904 999 991	-5.0	0.000 000	-0.003
100 %		+30	1904 999 990	-5.7	0.000 000	-0.003
100 %		+40	1904 999 989	-6.9	0.000 000	-0.004
100 %		+50	1904 999 990	-5.7	0.000 000	-0.003
Batt. Endpoint	3.350	+20	1904 999 992	-3.7	0.000 000	-0.002

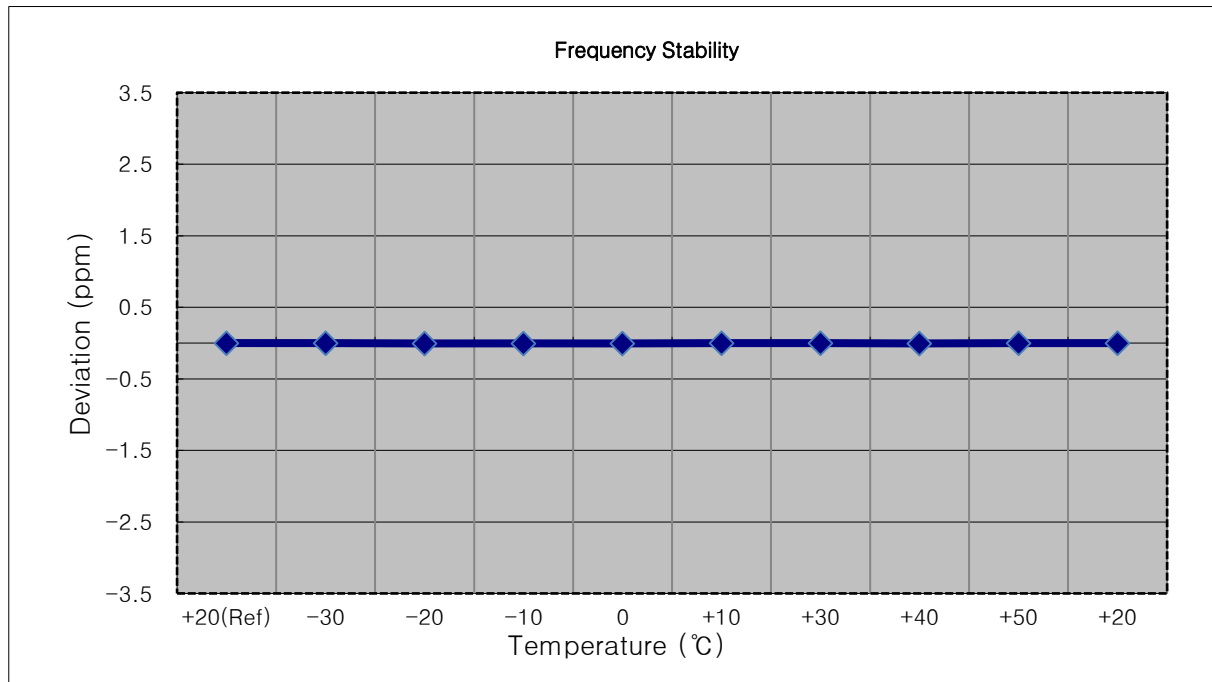


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1902 499 991	0.0	0.000 000	0.000
100 %		-30	1902 499 983	-7.4	0.000 000	-0.004
100 %		-20	1902 499 981	-9.9	-0.000 001	-0.005
100 %		-10	1902 499 984	-6.8	0.000 000	-0.004
100 %		0	1902 499 985	-5.9	0.000 000	-0.003
100 %		+10	1902 499 985	-5.3	0.000 000	-0.003
100 %		+30	1902 499 981	-10.0	-0.000 001	-0.005
100 %		+40	1902 499 983	-7.1	0.000 000	-0.004
100 %		+50	1902 499 984	-6.7	0.000 000	-0.004
Batt. Endpoint	3.350	+20	1902 499 986	-4.8	0.000 000	-0.003

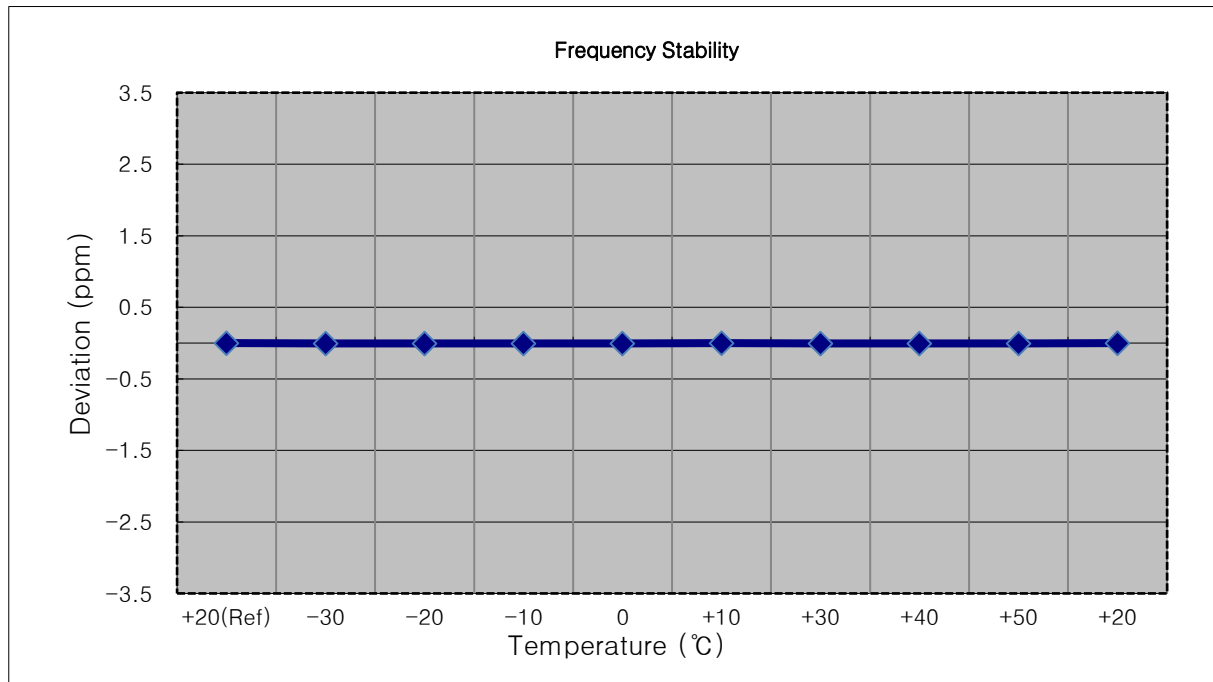

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1899 999 994	0.0	0.000 000	0.000
100 %		-30	1899 999 984	-10.5	-0.000 001	-0.006
100 %		-20	1899 999 986	-8.0	0.000 000	-0.004
100 %		-10	1899 999 985	-9.5	-0.000 001	-0.005
100 %		0	1899 999 982	-12.1	-0.000 001	-0.006
100 %		+10	1899 999 988	-6.5	0.000 000	-0.003
100 %		+30	1899 999 987	-6.8	0.000 000	-0.004
100 %		+40	1899 999 987	-6.8	0.000 000	-0.004
100 %		+50	1899 999 985	-9.6	-0.000 001	-0.005
Batt. Endpoint	3.350	+20	1899 999 985	-9.3	0.000 000	-0.005

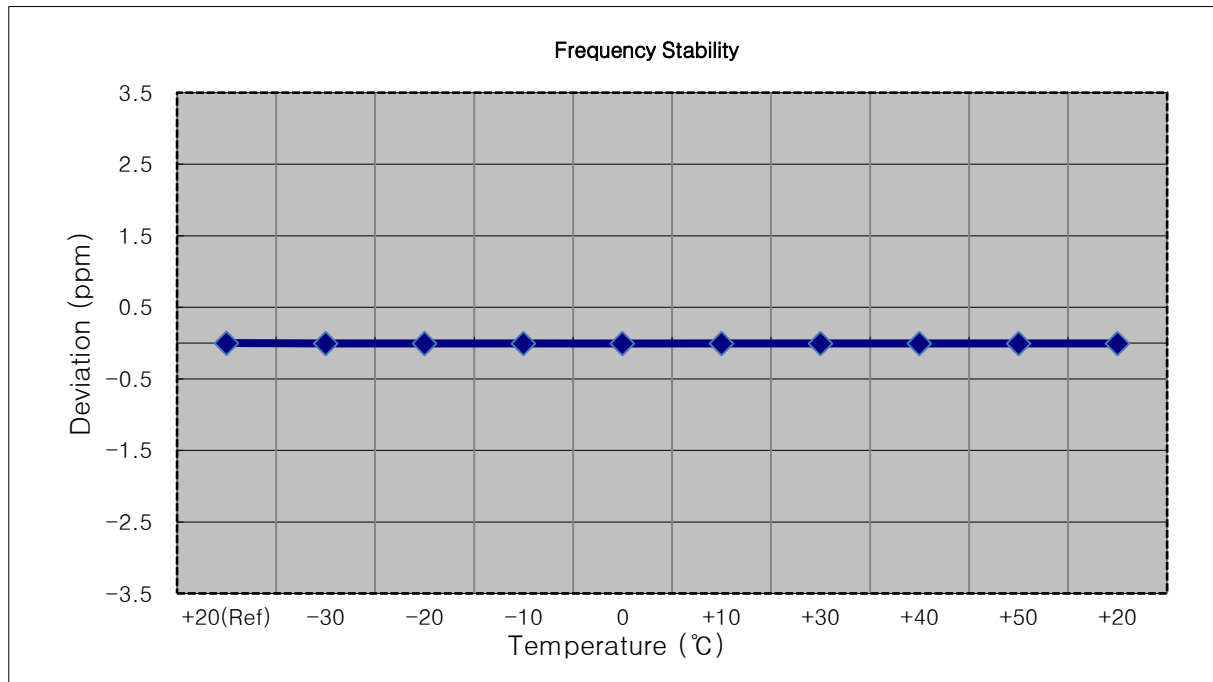

## 10. TEST DATA (Main 2 Ant, Sub 2 Ant)

### 10.1 UPLINK CARRIER AGGREGATION

Test Note

1. All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. All modes of operation were investigated and the worst case configuration results are reported in this section.  
Please refer to the table below.
3. The worst case is reported with the modulations, RB sizes and offsets.
  - 2A(Main 2 Ant)-4A(Sub 2 Ant) (PCC - Modulation: QPSK, RB: 1, RB Offset: 0, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)
  - 4A(Sub 2 Ant)-2A(Main 2 Ant) (PCC - Modulation: QPSK, RB: 1, RB Offset: 0, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

**Radiated Spurious Emissions**

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
2A(Main 2 Ant)	4A(Sub 2 Ant)	10	19150	5	20175
4A(Sub 2 Ant)	2A(Main 2 Ant)	5	20175	10	19150

**10.1.1 RADIATED SPURIOUS EMISSIONS**

2A(PCC)-4A(Sub 2 Ant)(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 810.00	-54.07	12.40	-58.49	3.12	V	-49.21	-13.00
5 715.00	-55.07	13.07	-52.70	3.96	V	-43.58	-13.00
7 620.00	-57.40	11.18	-46.91	4.65	H	-40.38	-13.00
9 525.00	-58.04	10.90	-42.06	5.25	V	-36.41	-13.00
11 430.00	-58.39	10.98	-37.89	5.88	V	-32.79	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 465.00	-54.97	12.47	-61.49	2.96	H	-51.98	-13.00
5 197.50	-57.25	12.50	-56.30	3.78	H	-47.58	-13.00
6 930.00	-56.56	11.78	-48.92	4.38	H	-41.52	-13.00
8 662.50	-57.57	11.16	-44.31	5.00	H	-38.15	-13.00
10 395.00	-59.40	11.40	-42.16	5.79	V	-36.55	-13.00

4A(Sub 2 Ant)(PCC)-2A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 465.00	-54.91	12.47	-61.43	2.96	H	-51.92	-13.00
5 197.50	-56.87	12.50	-55.92	3.78	V	-47.20	-13.00
6 930.00	-55.49	11.78	-47.85	4.38	H	-40.45	-13.00
8 662.50	-57.55	11.16	-44.29	5.00	H	-38.13	-13.00
10 395.00	-58.89	11.40	-41.65	5.79	H	-36.04	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 810.00	-54.65	12.40	-59.07	3.12	H	-49.79	-13.00
5 715.00	-56.83	13.07	-54.46	3.96	H	-45.34	-13.00
7 620.00	-57.10	11.18	-46.61	4.65	H	-40.08	-13.00
9 525.00	-58.72	10.90	-42.74	5.25	V	-37.09	-13.00
11 430.00	-60.23	10.98	-39.73	5.88	V	-34.63	-13.00


## 11. TEST PLOTS (Main 2 Ant)



BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(1)




BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

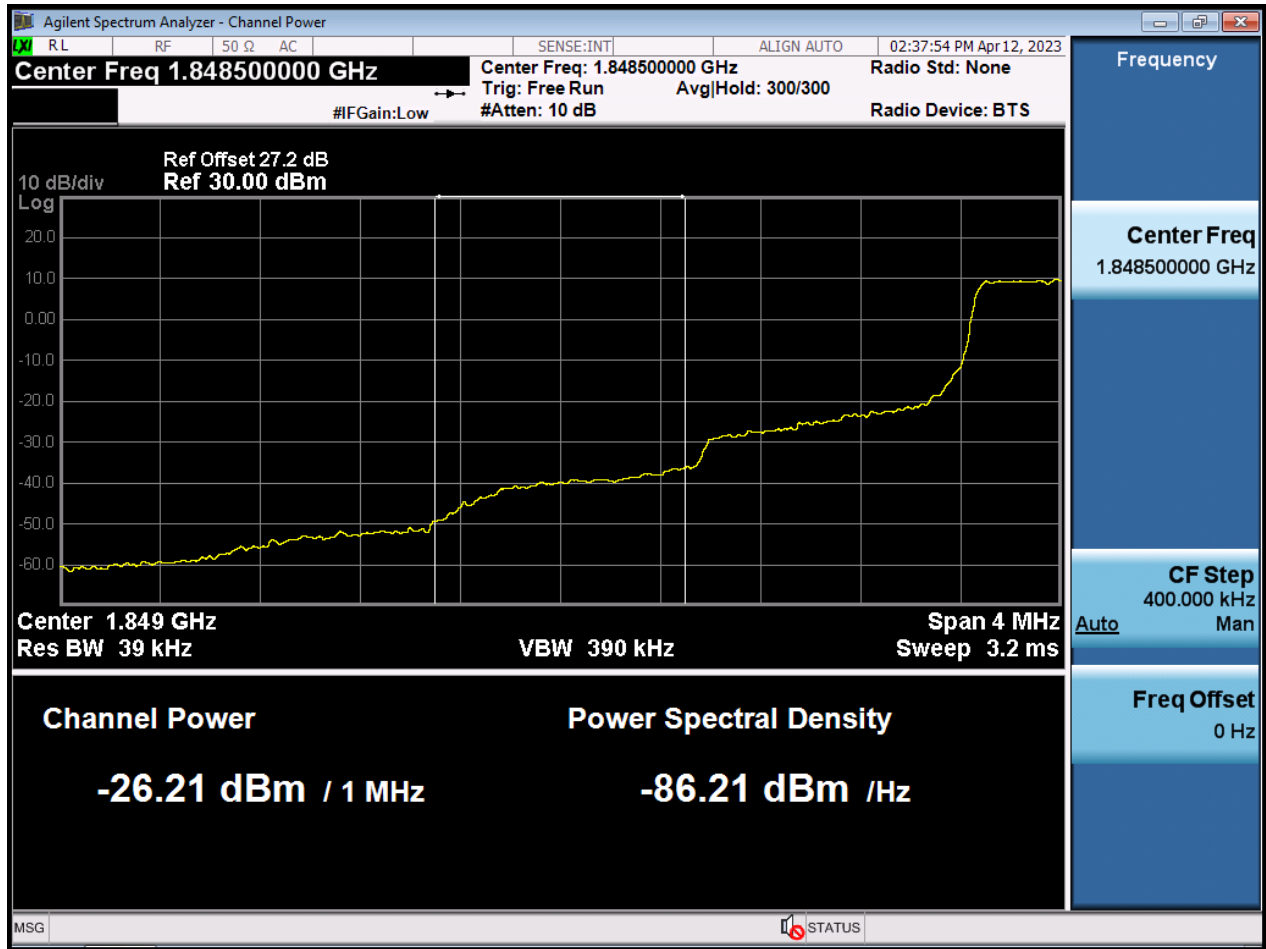


BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(1)




BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(2)

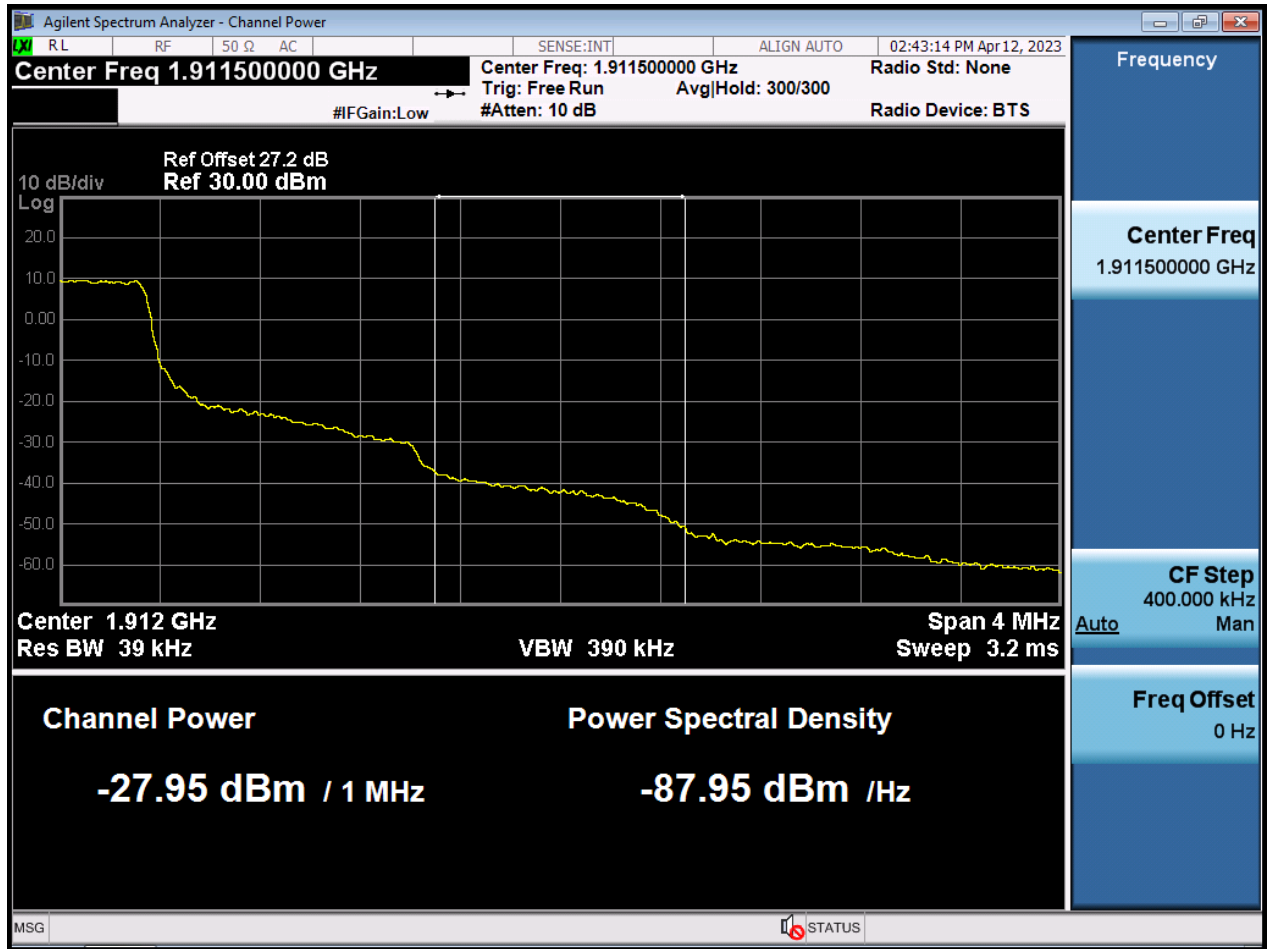

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

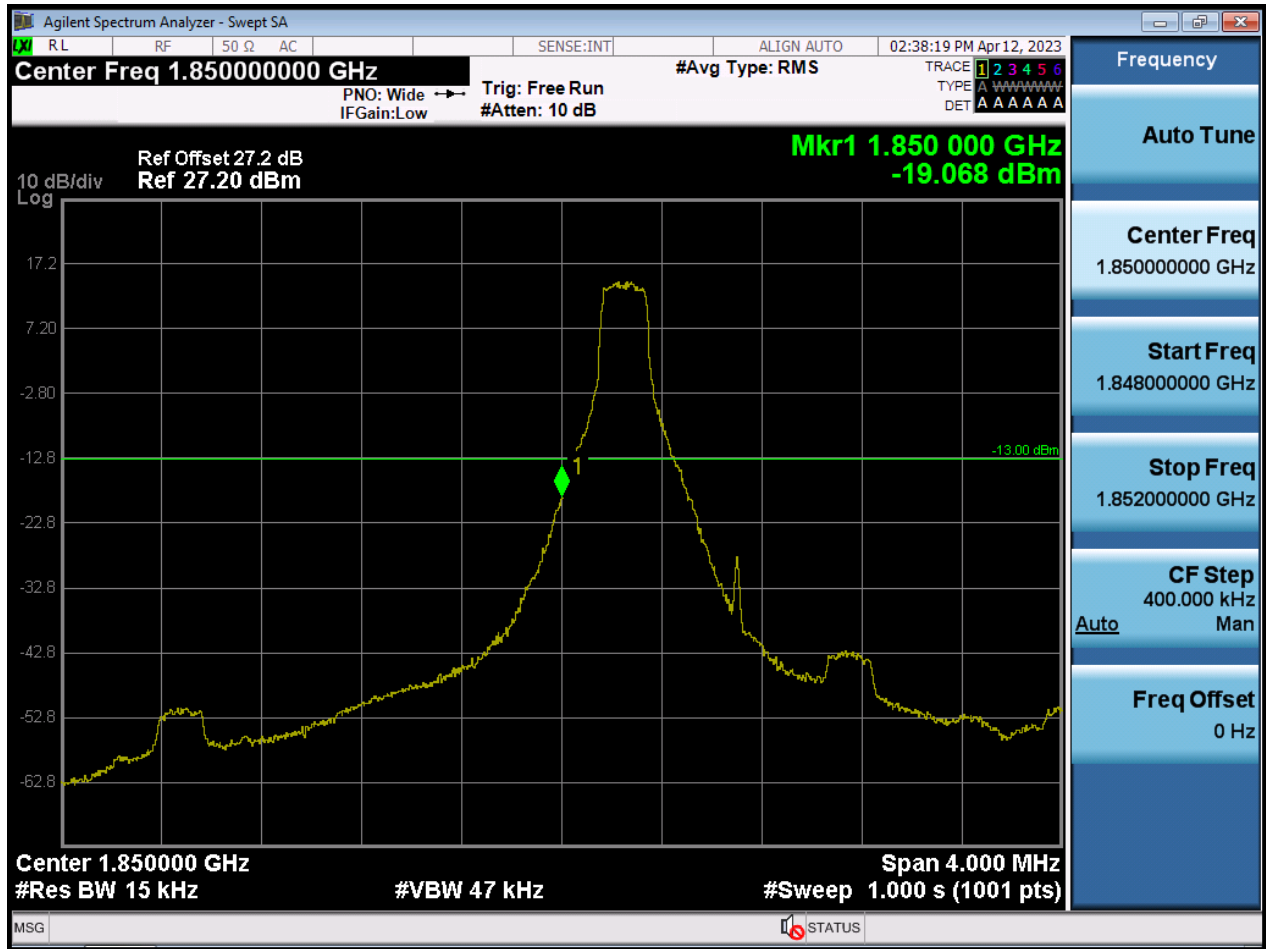


BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_1RB

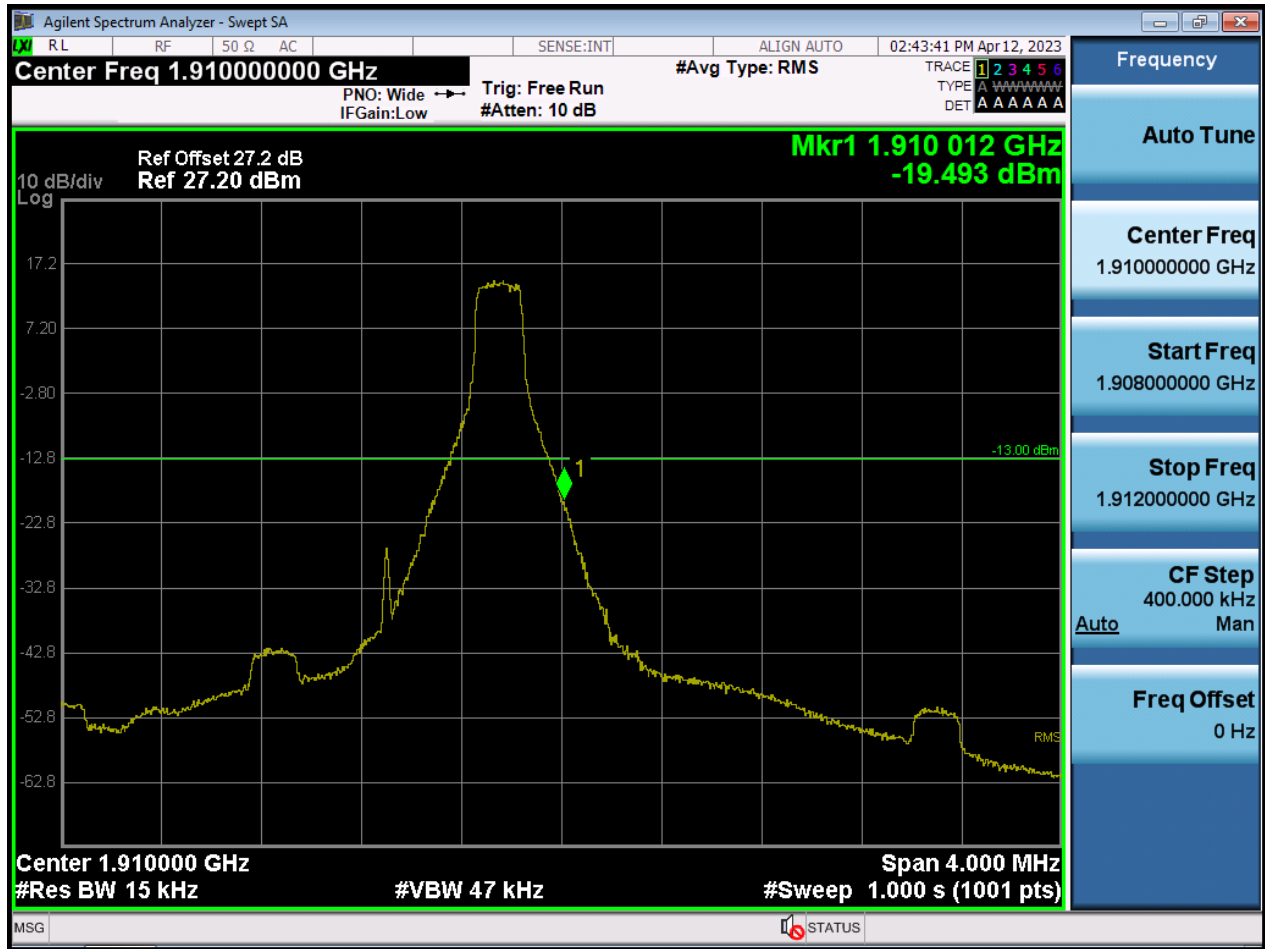

BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)



BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

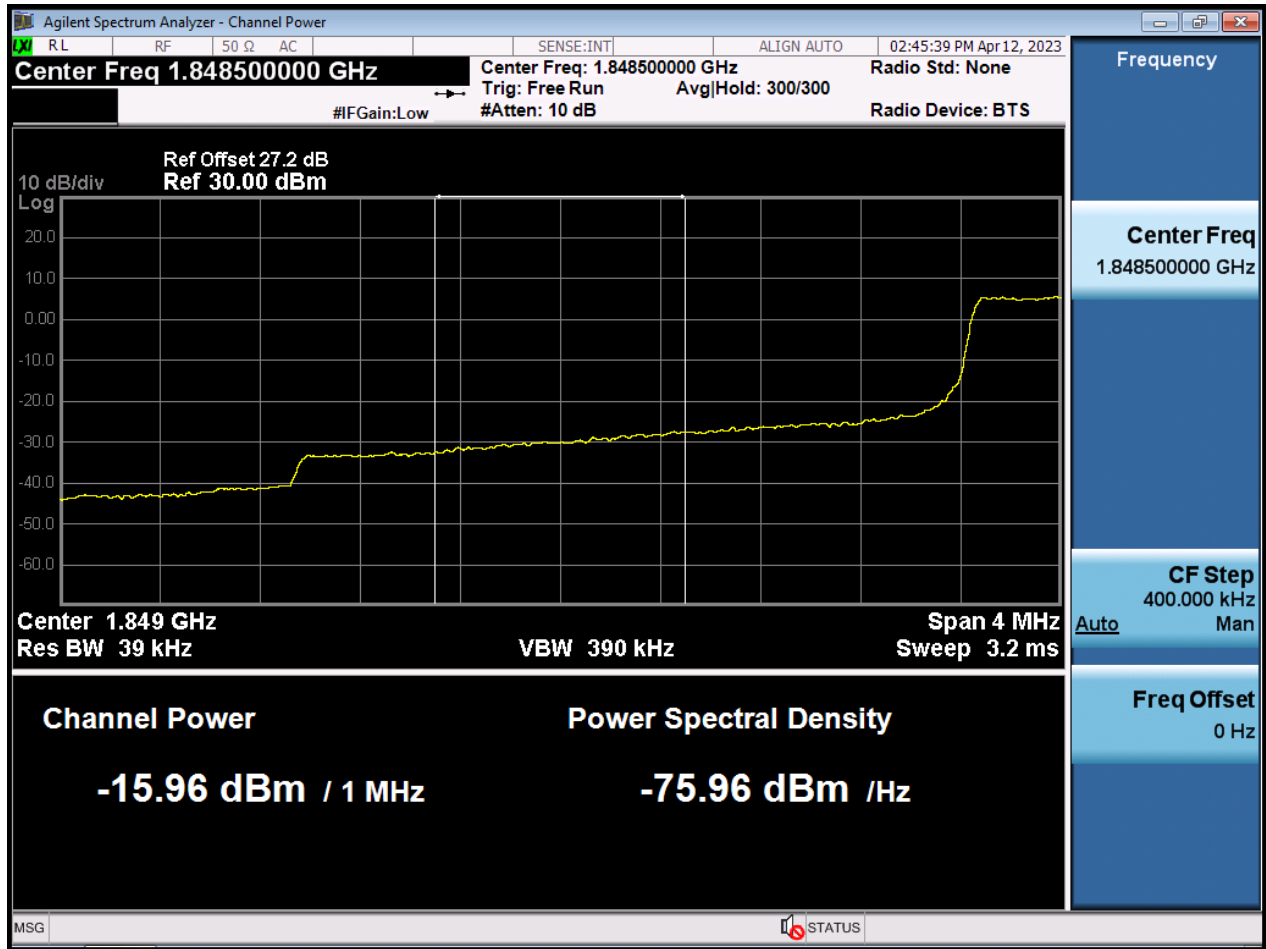





BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

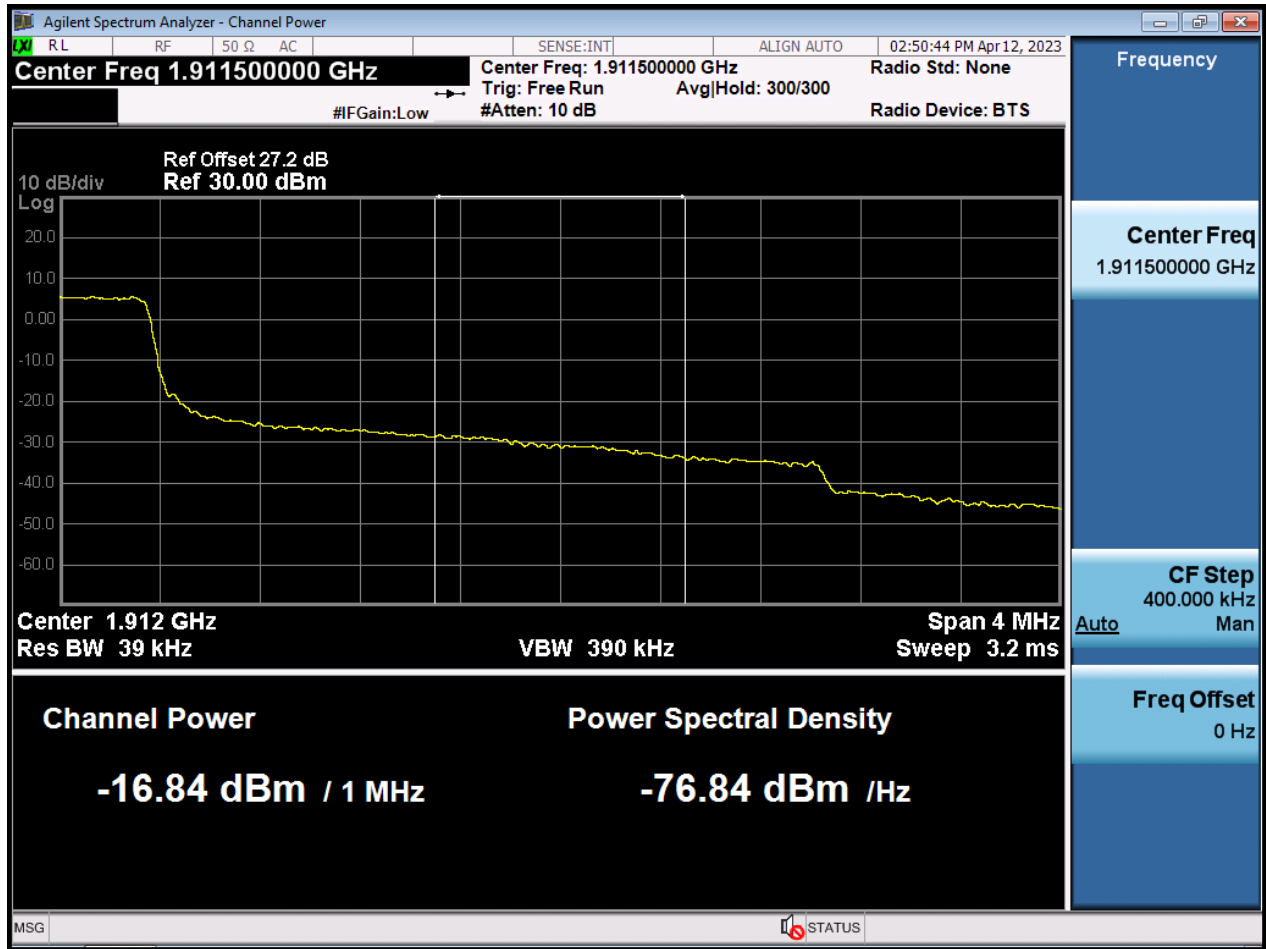

BW3 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

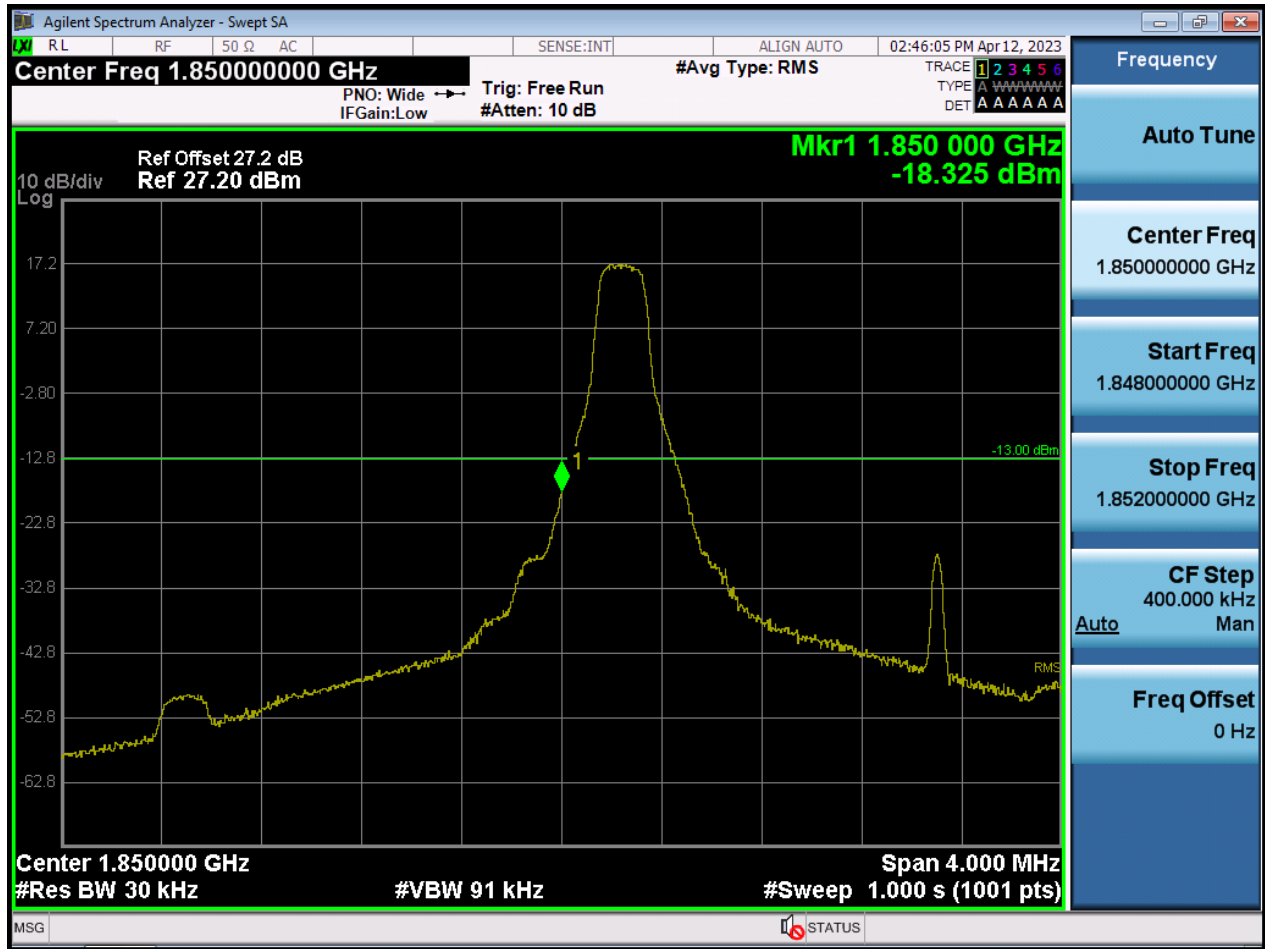


BW3 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

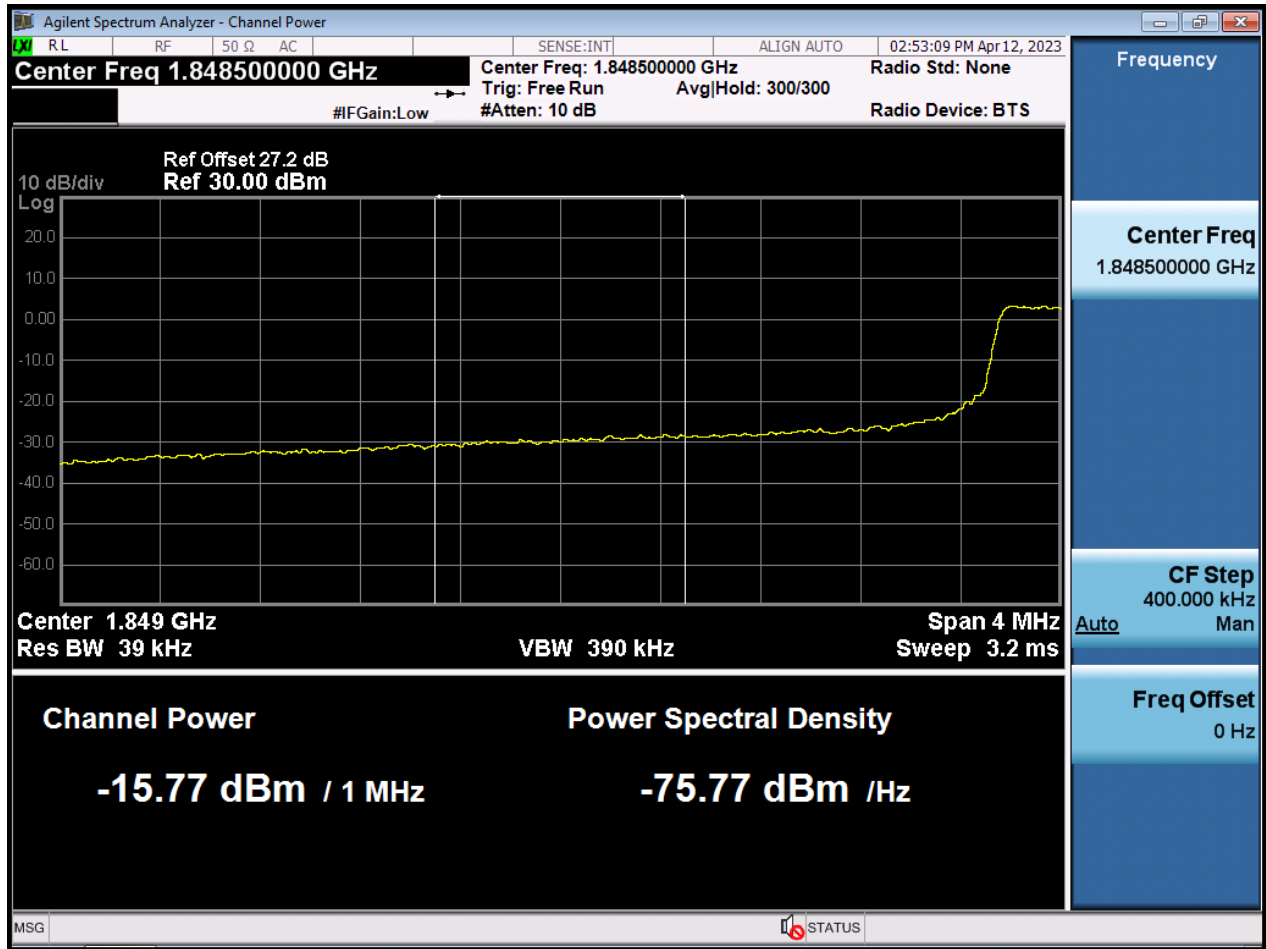

BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)




BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

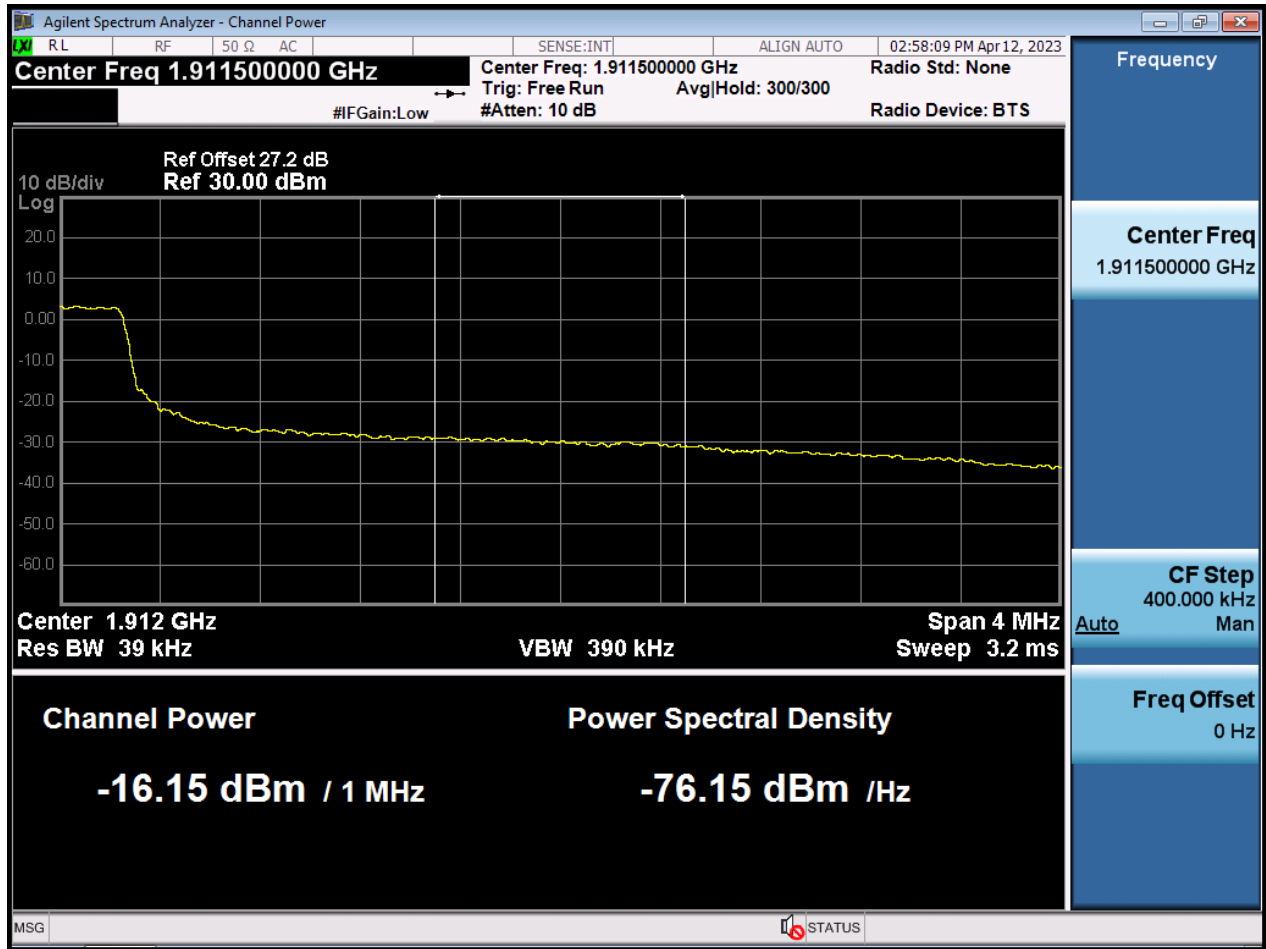



BW5 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

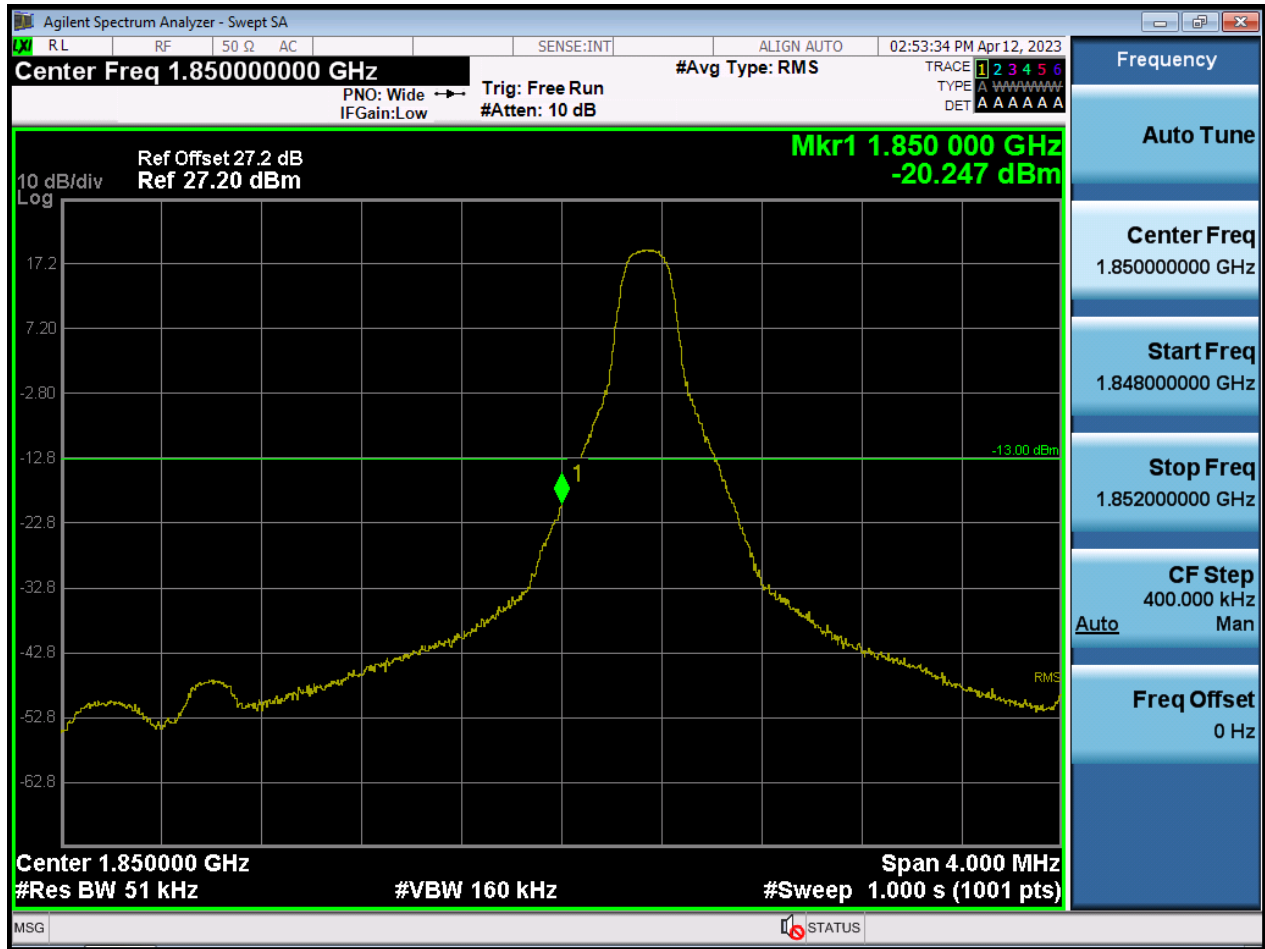


BW5 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

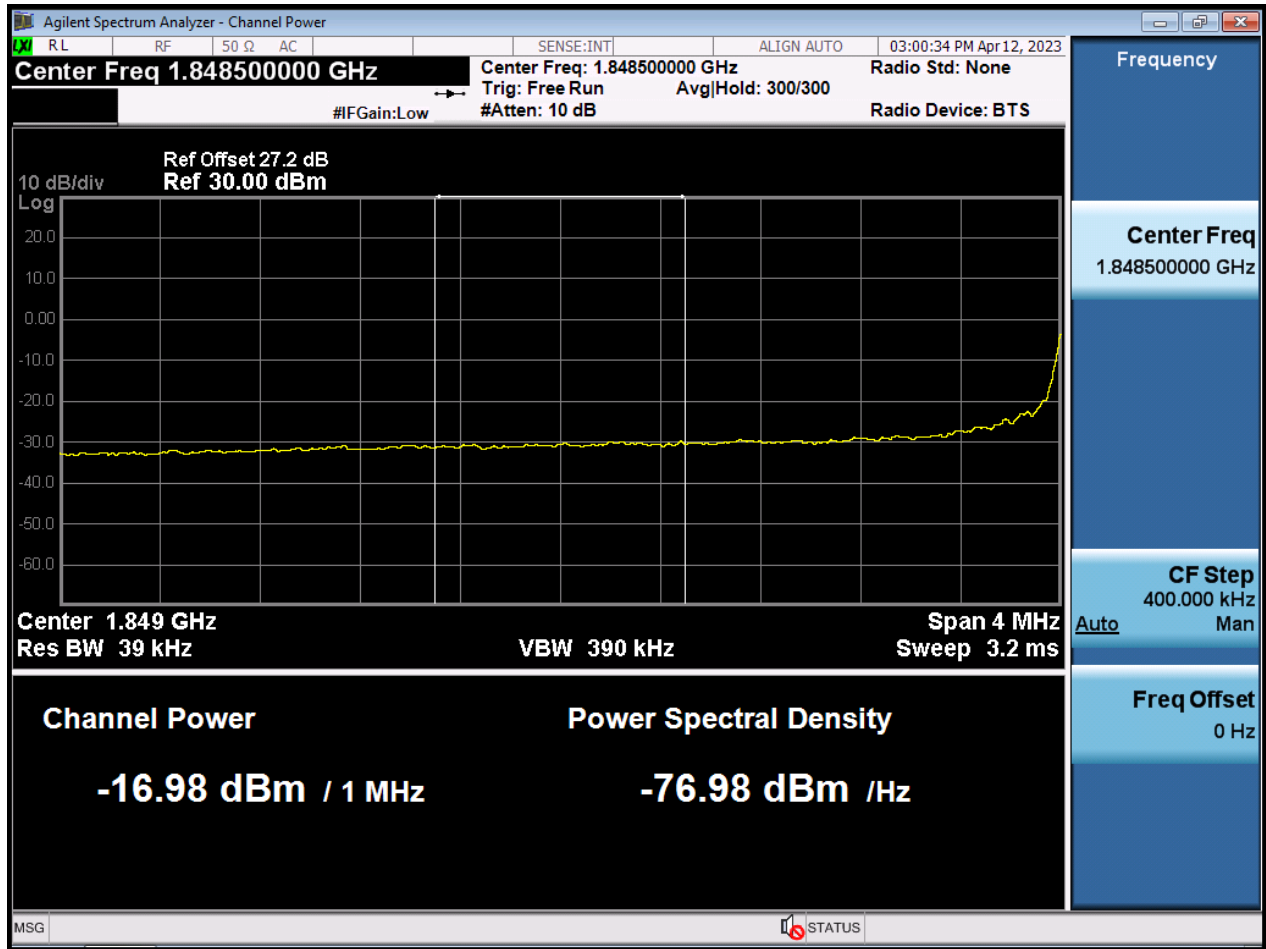

BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

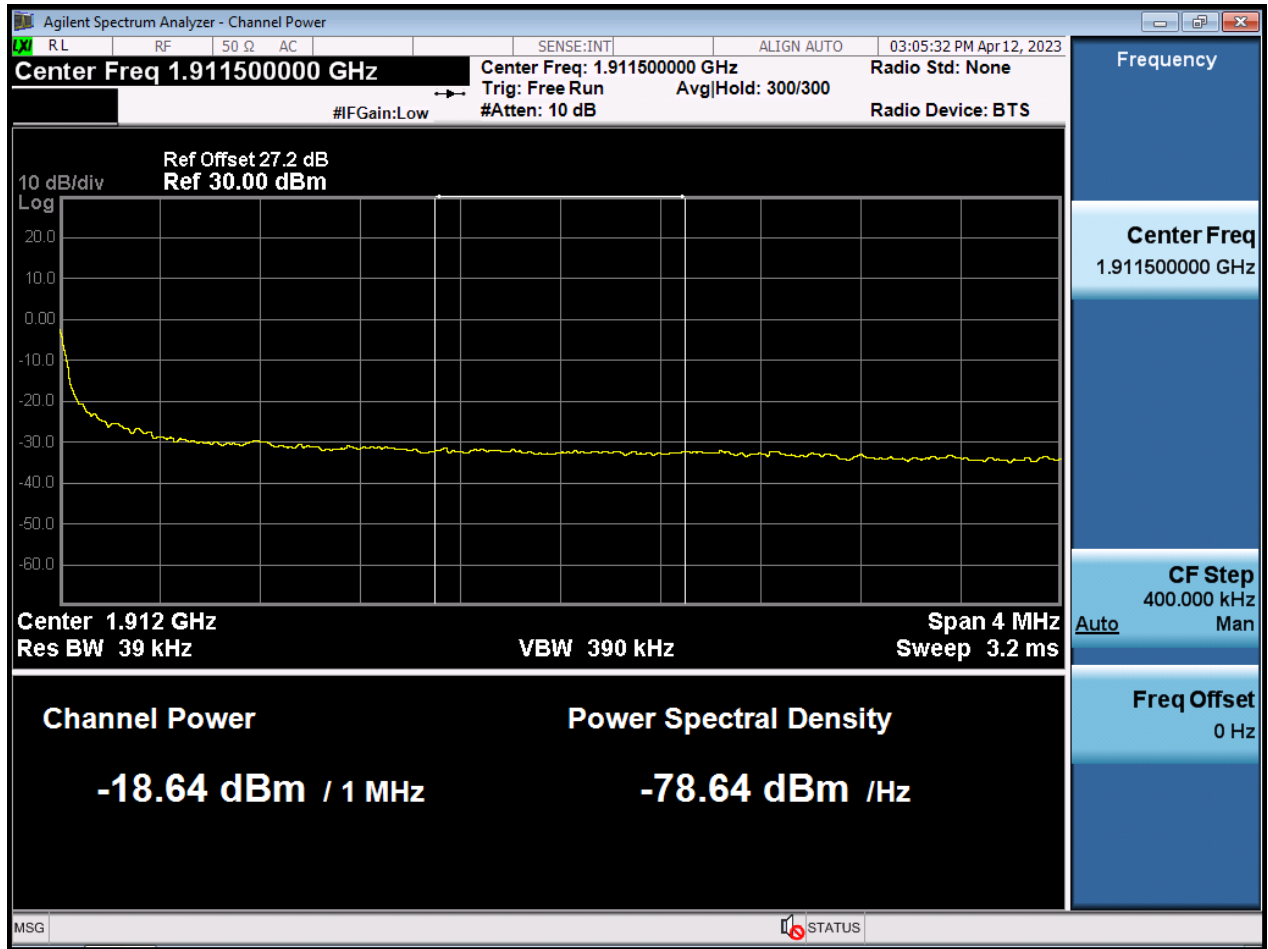

BW10 M\_BandEdge\_Lowest Channel\_QPSK\_1RB



BW10 M\_BandEdge\_Highest Channel\_QPSK\_1RB






BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(1)




BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

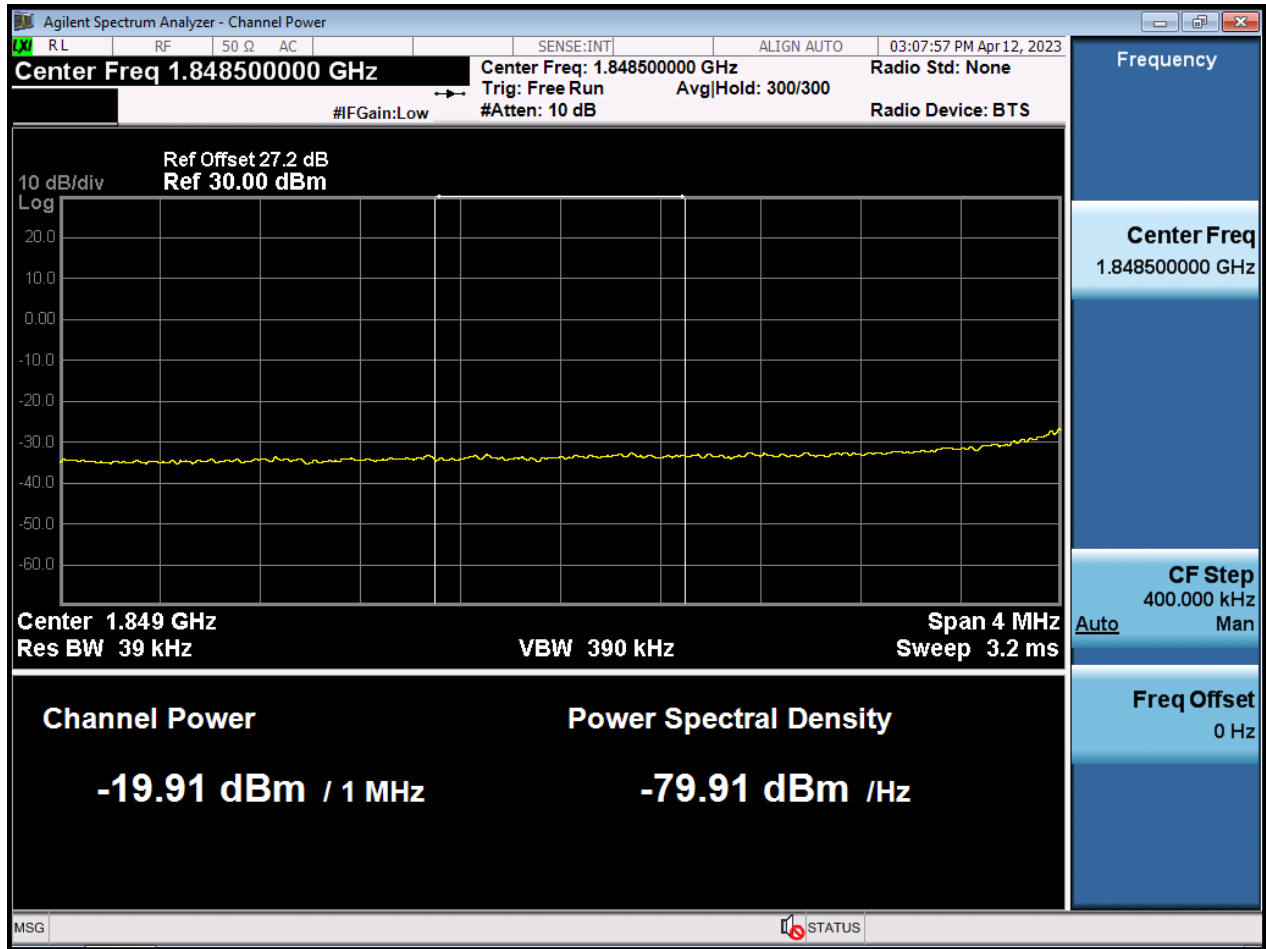


BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

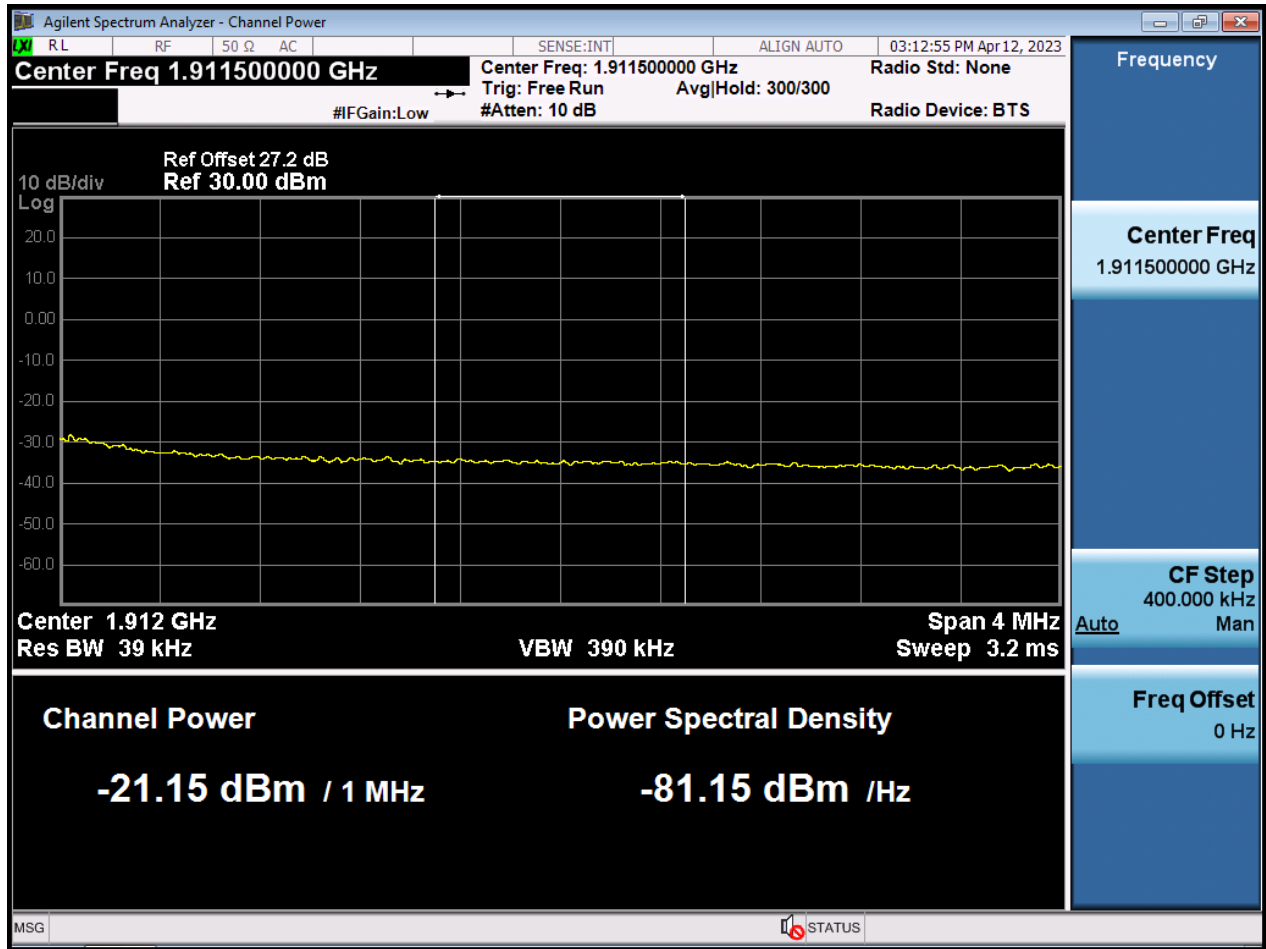

BW15 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

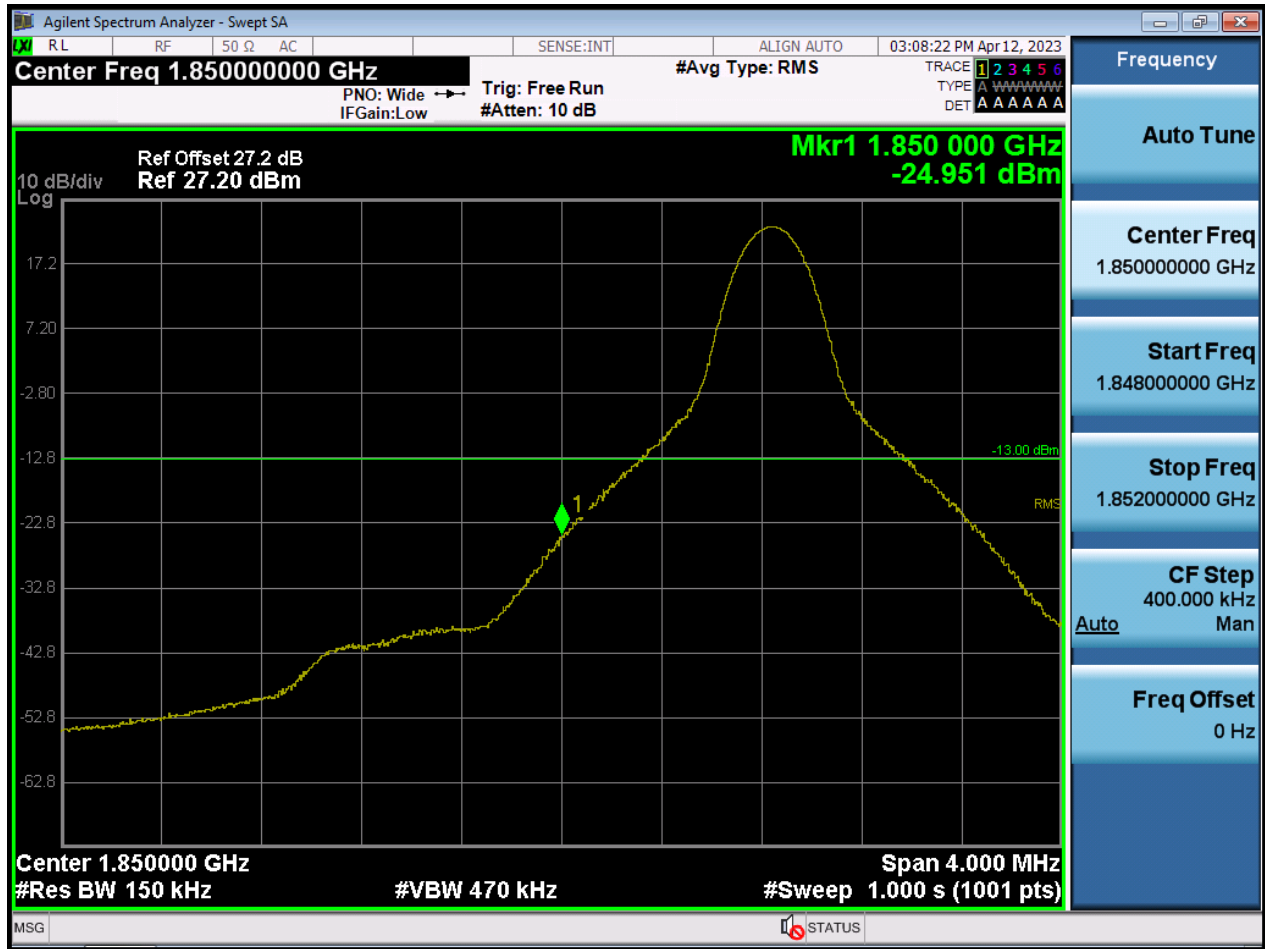




BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(1)



BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

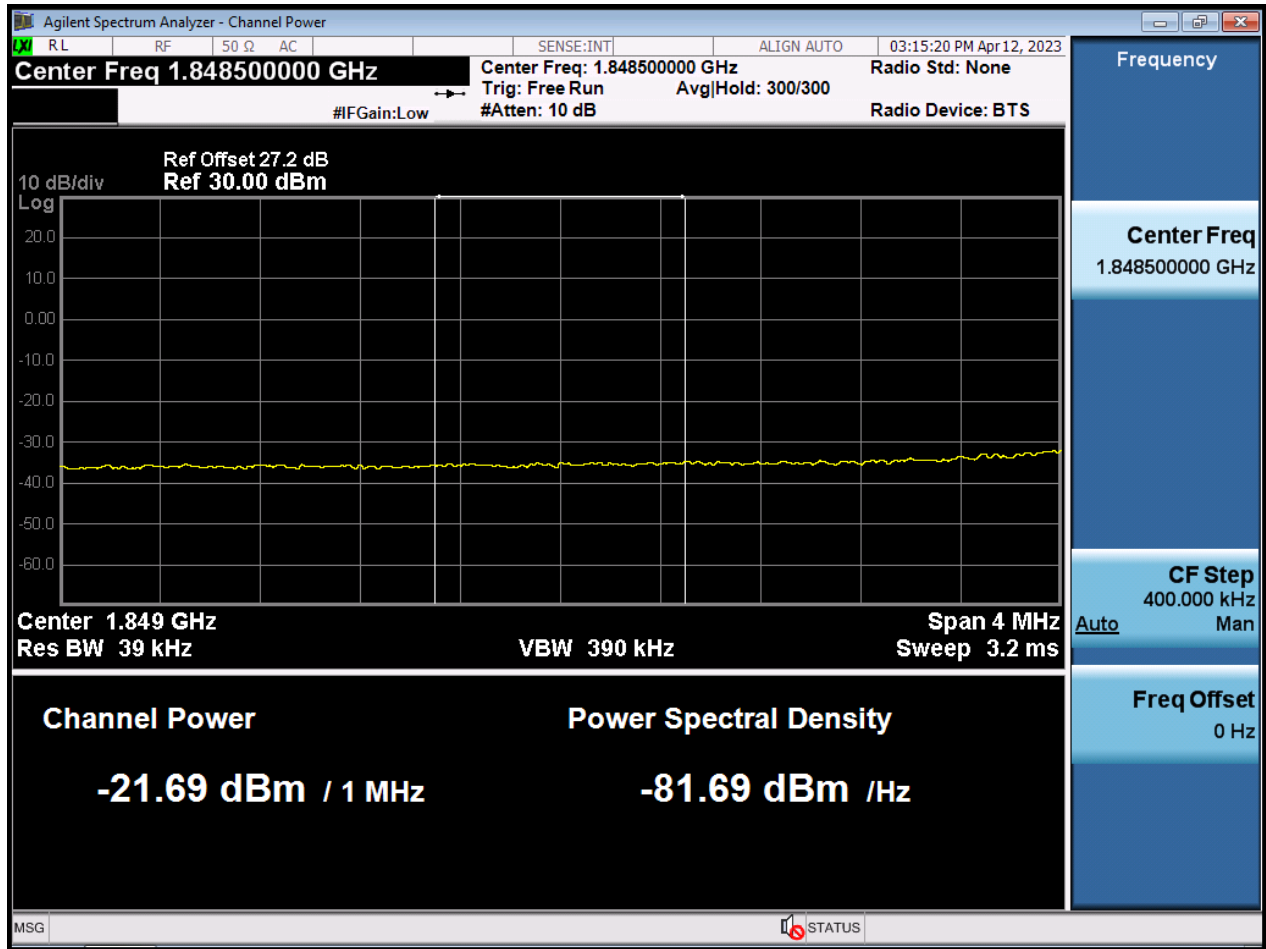




BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

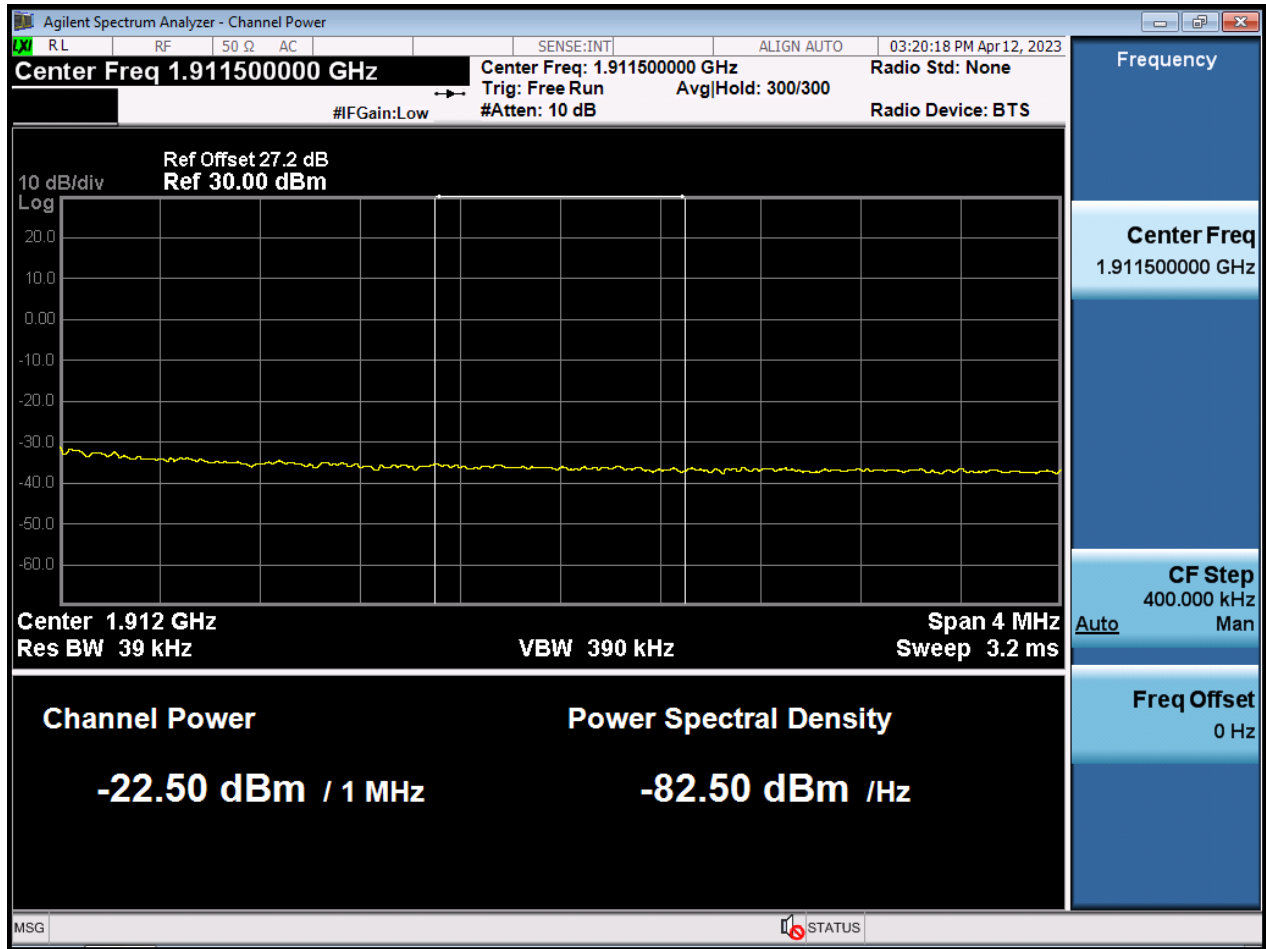


BW20 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW20 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW1.4 M\_OBW\_Middle Channel\_QPSK\_FullRB

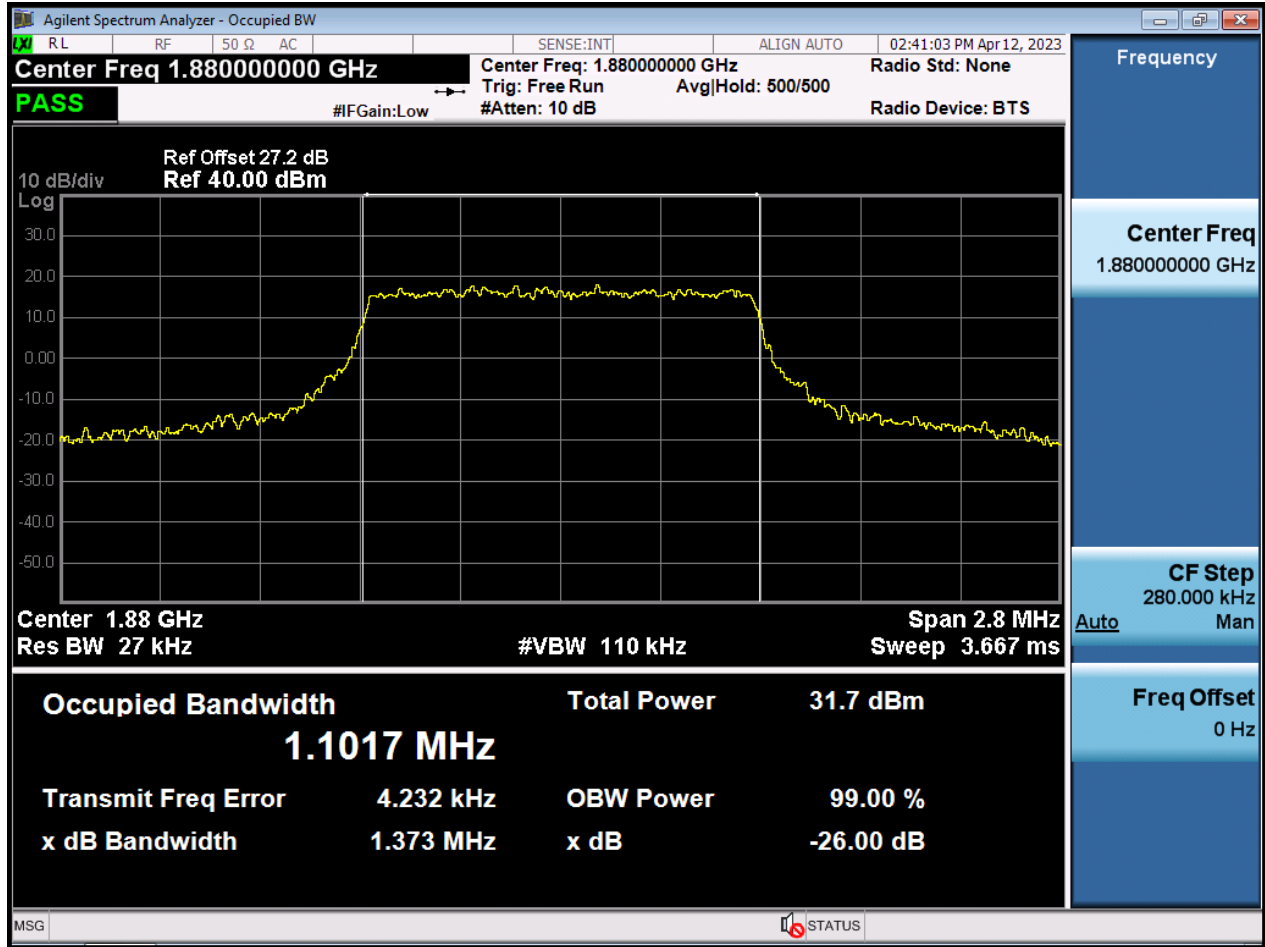


BW1.4 M\_OBW\_Middle Channel\_16QAM\_FullRB

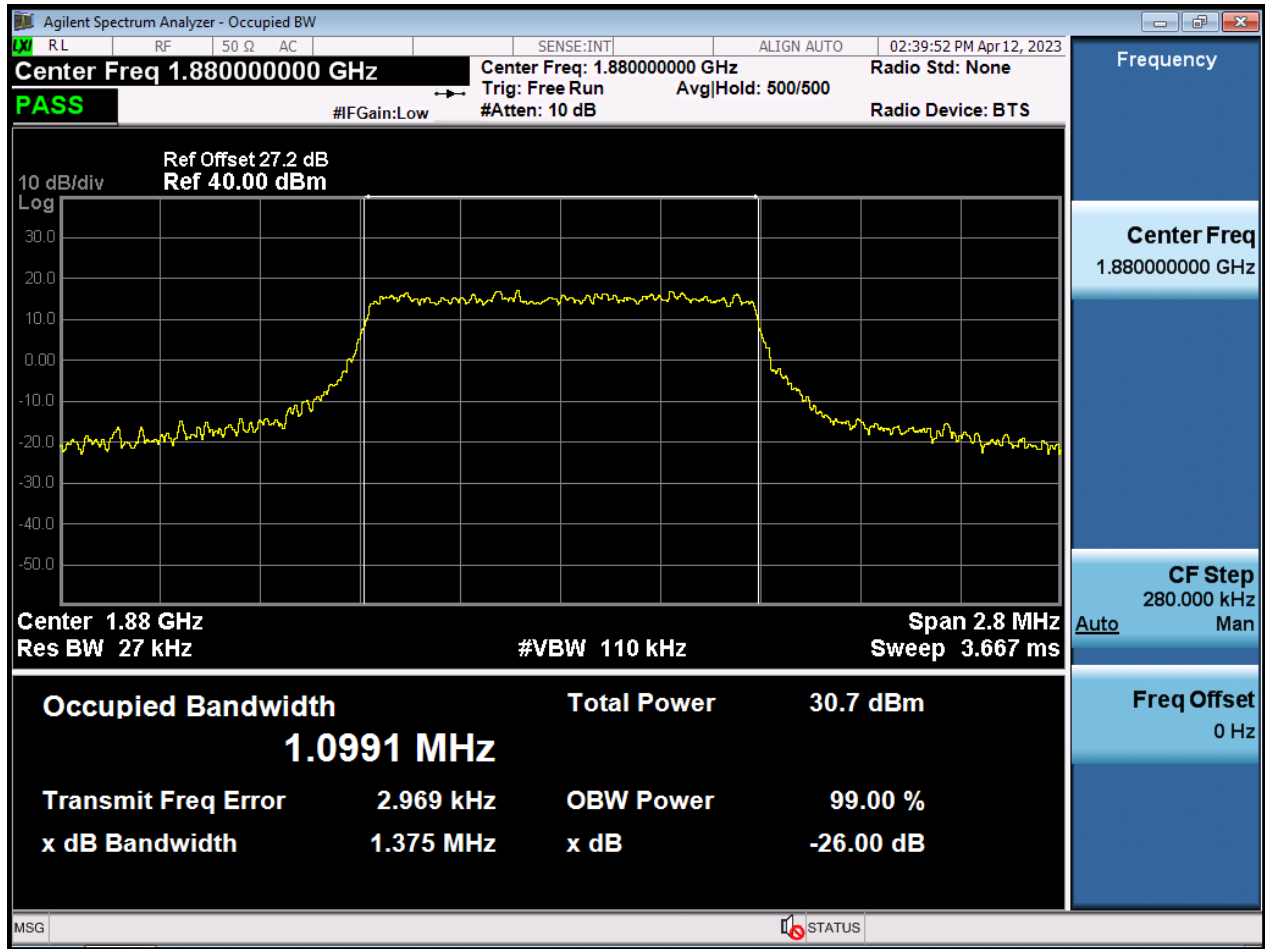

BW1.4 M\_OBW\_Middle Channel\_64QAM\_FullRB

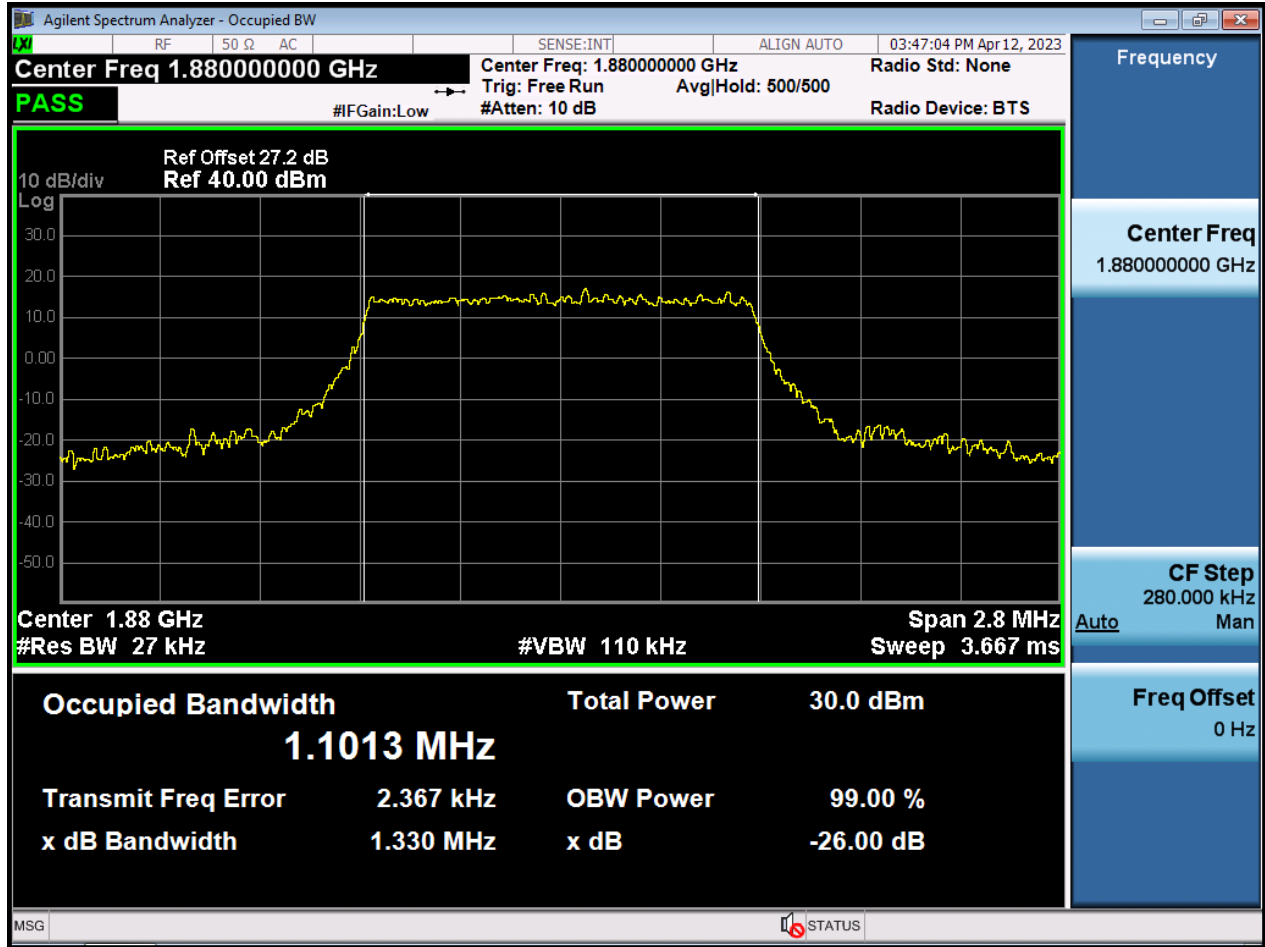


BW1.4 M\_OBW\_Middle Channel\_256QAM\_FullRB

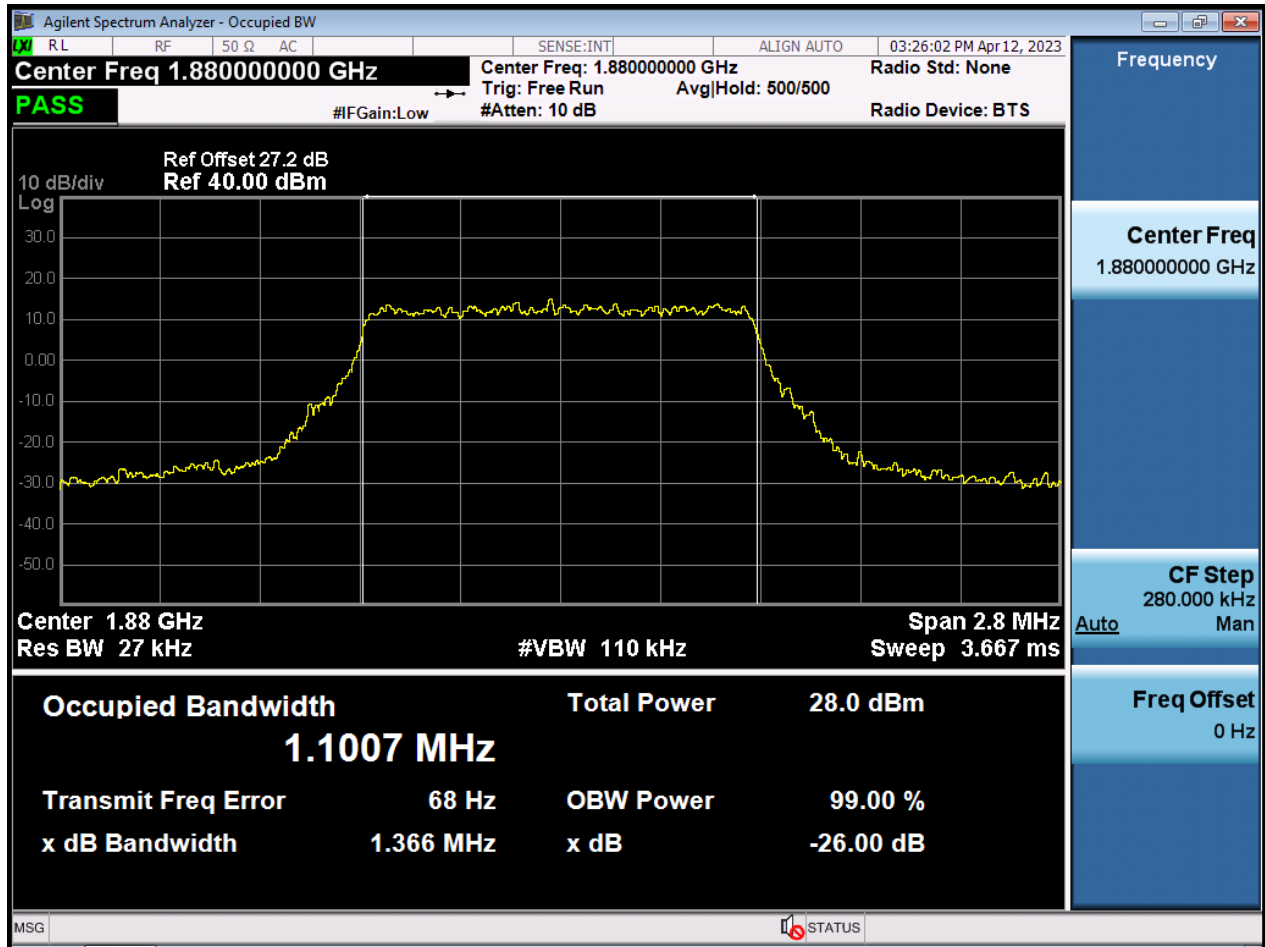





BW3 M\_OBW\_Middle Channel\_QPSK\_FullIRB

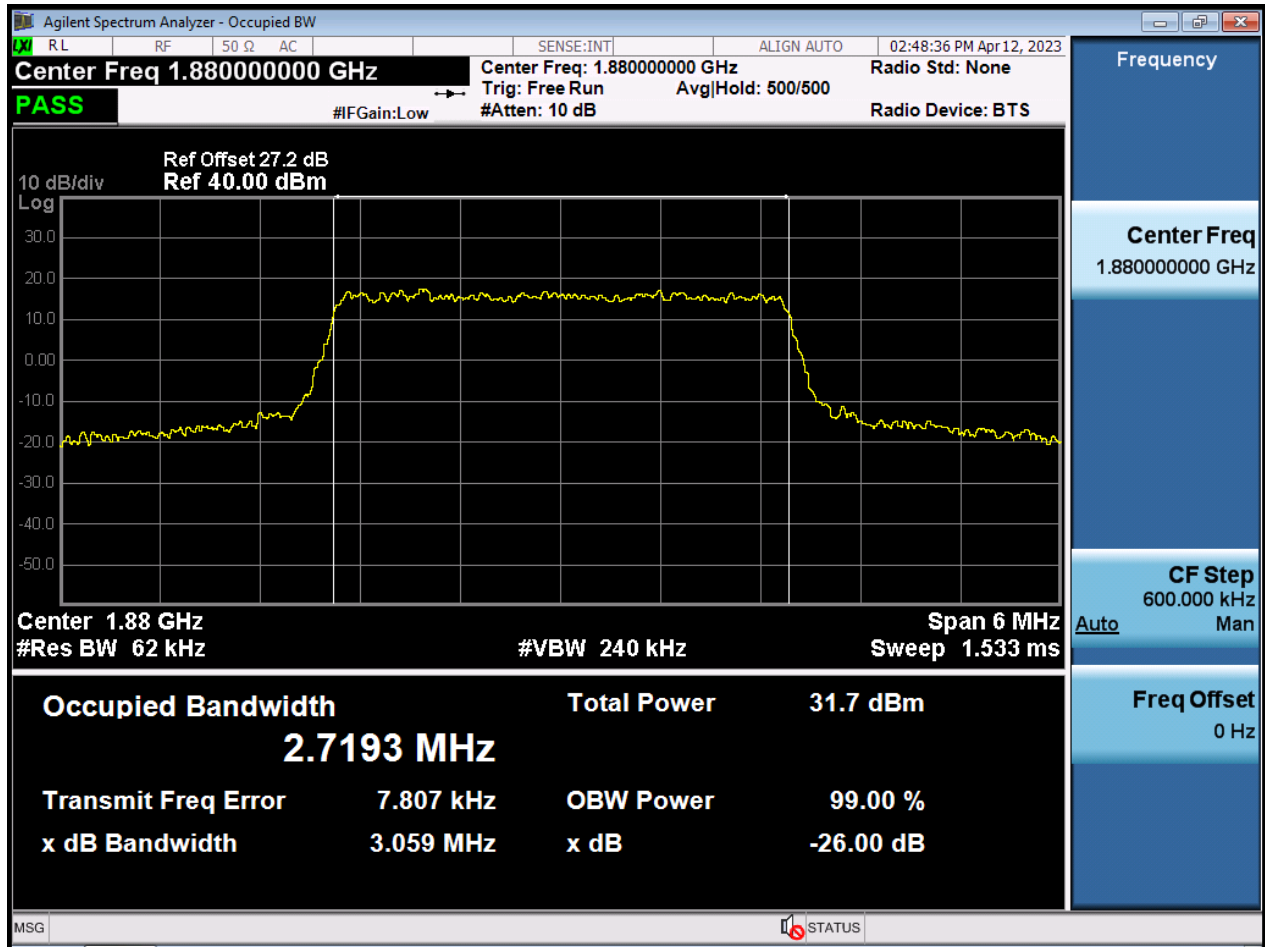


BW3 M\_OBW\_Middle Channel\_16QAM\_FullRB

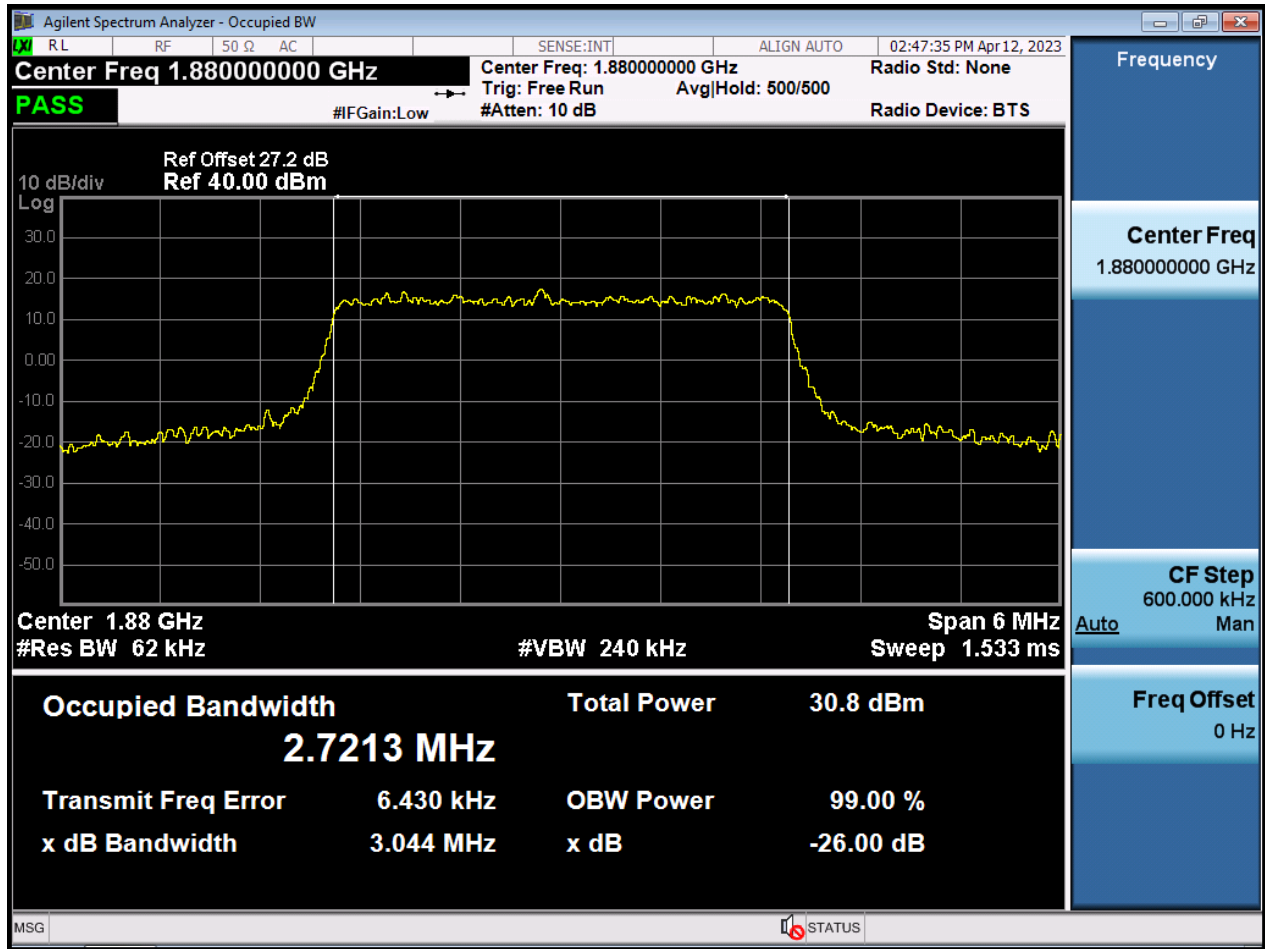


BW3 M\_OBW\_Middle Channel\_64QAM\_FullRB

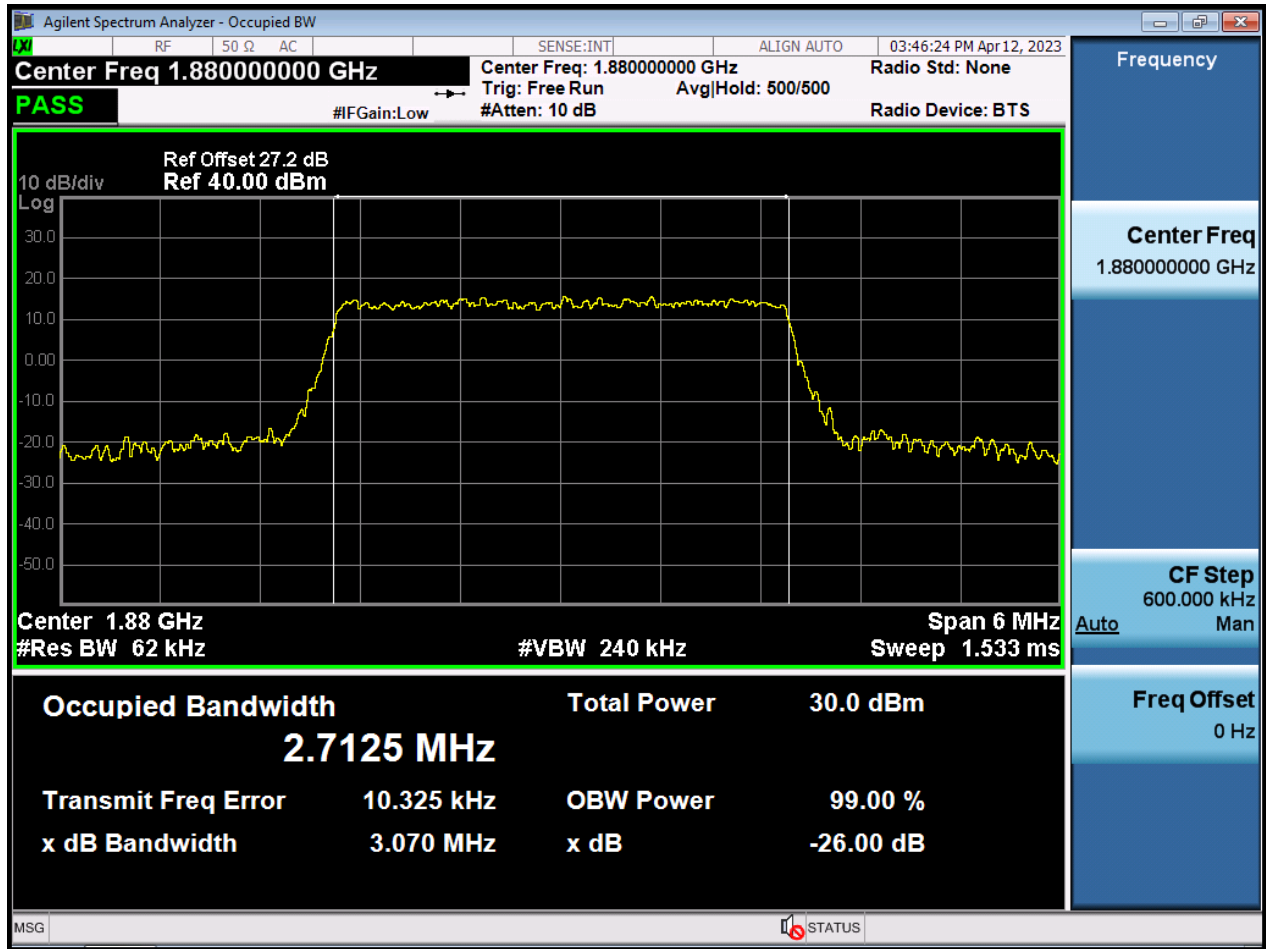


BW3 M\_OBW\_Middle Channel\_256QAM\_FullIRB

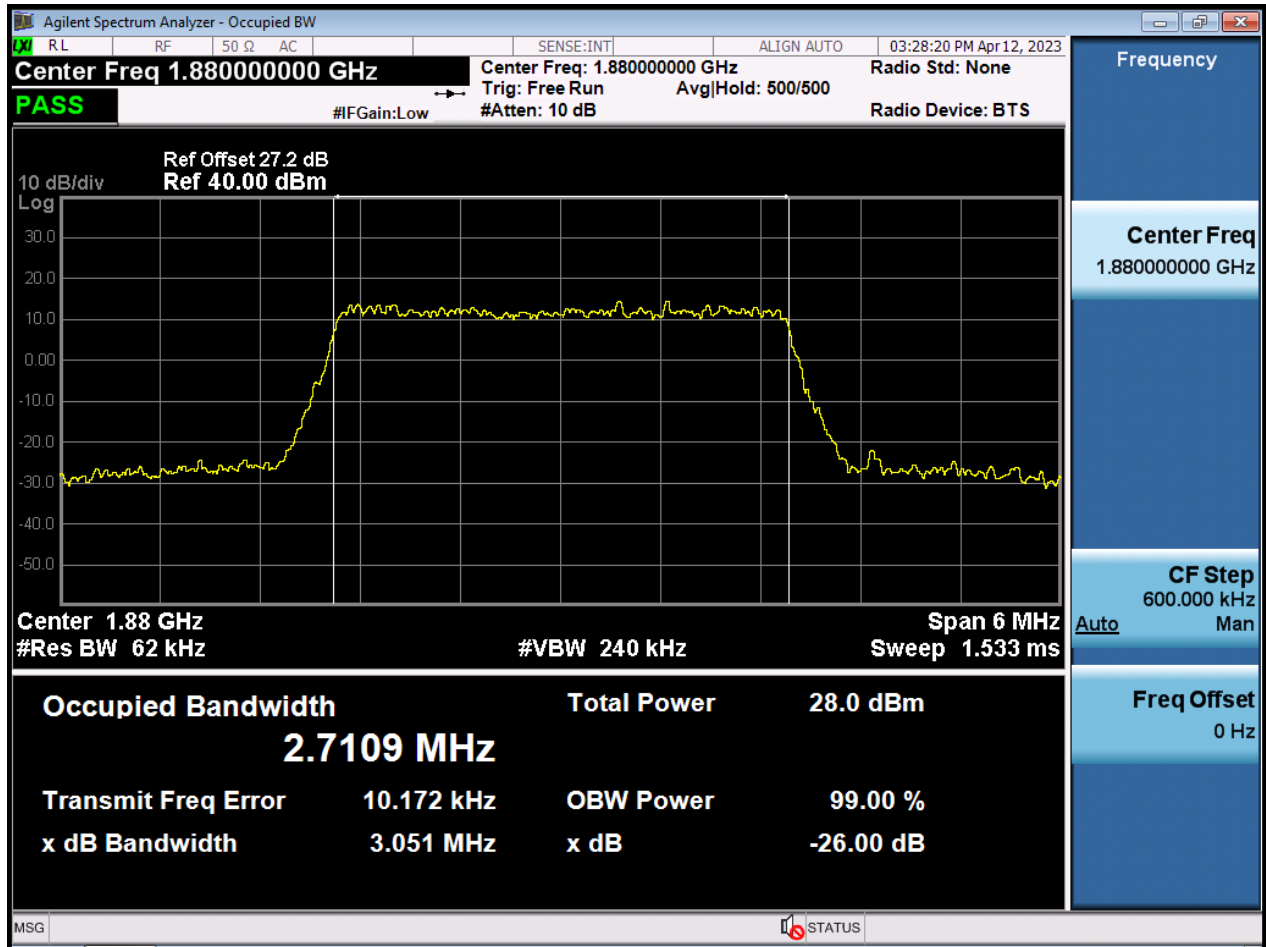


BW5 M\_OBW\_Middle Channel\_QPSK\_FullIRB

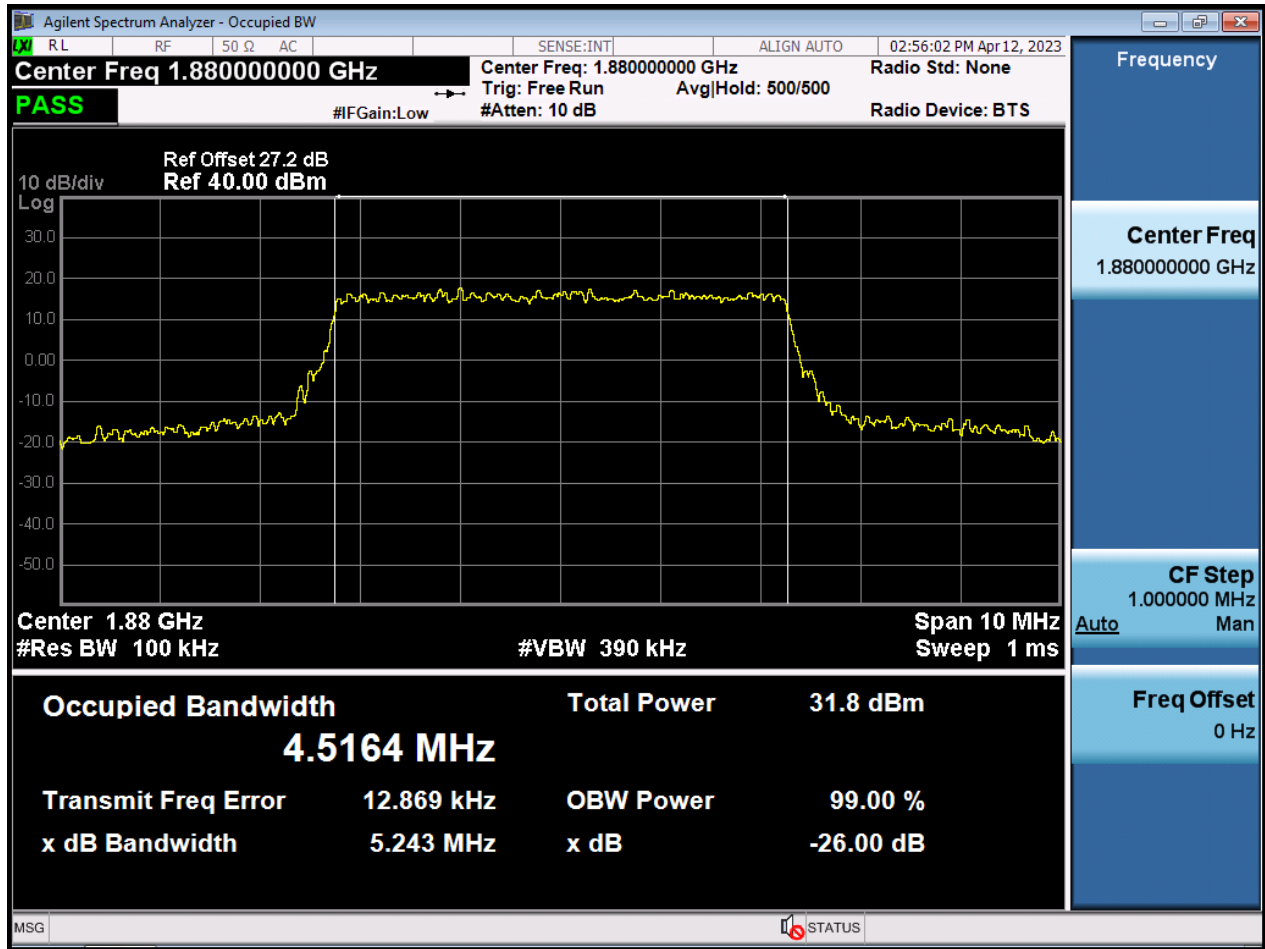


BW5 M\_OBW\_Middle Channel\_16QAM\_FullRB

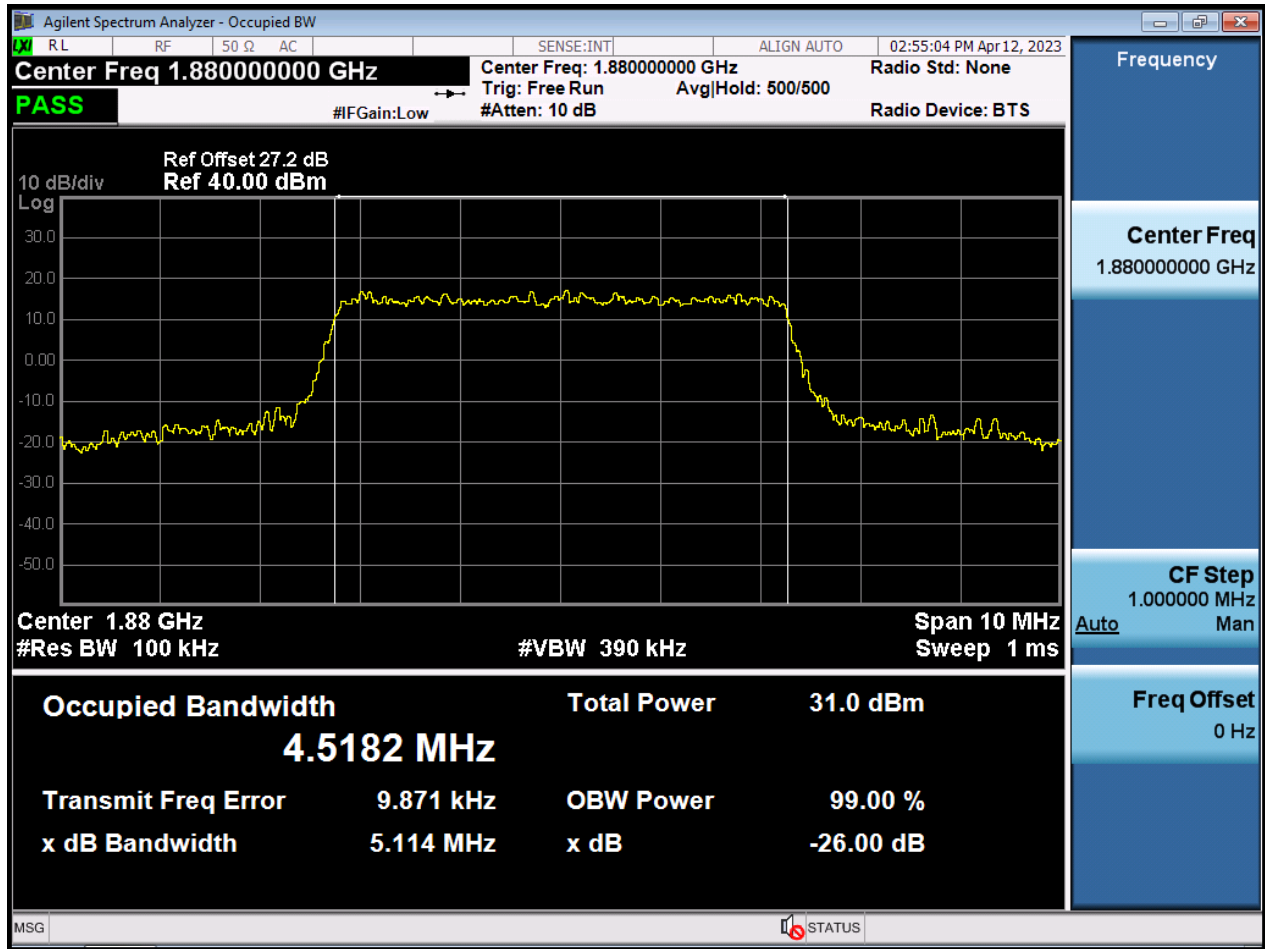

BW5 M\_OBW\_Middle Channel\_64QAM\_FullRB

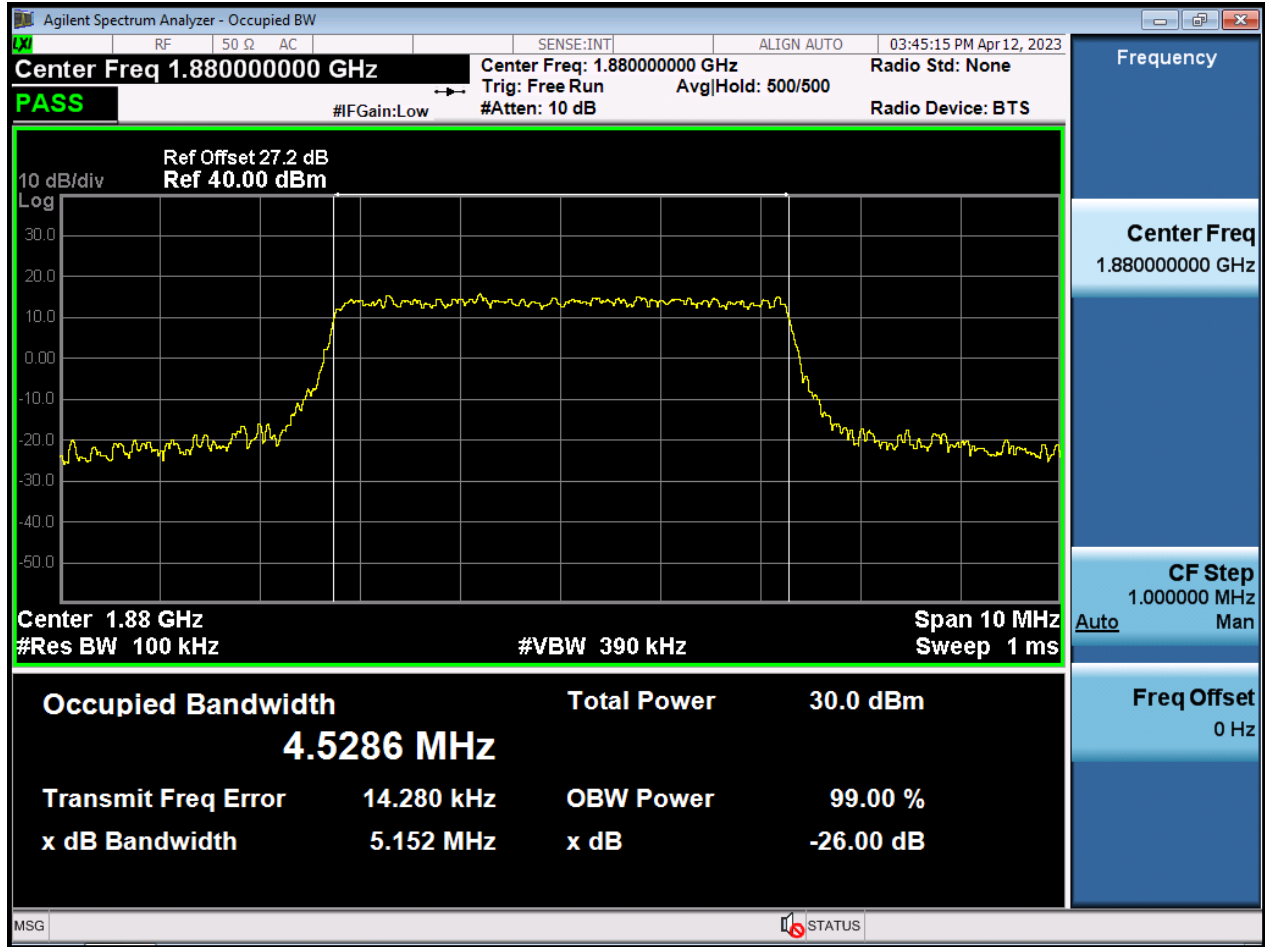


BW5 M\_OBW\_Middle Channel\_256QAM\_FullIRB

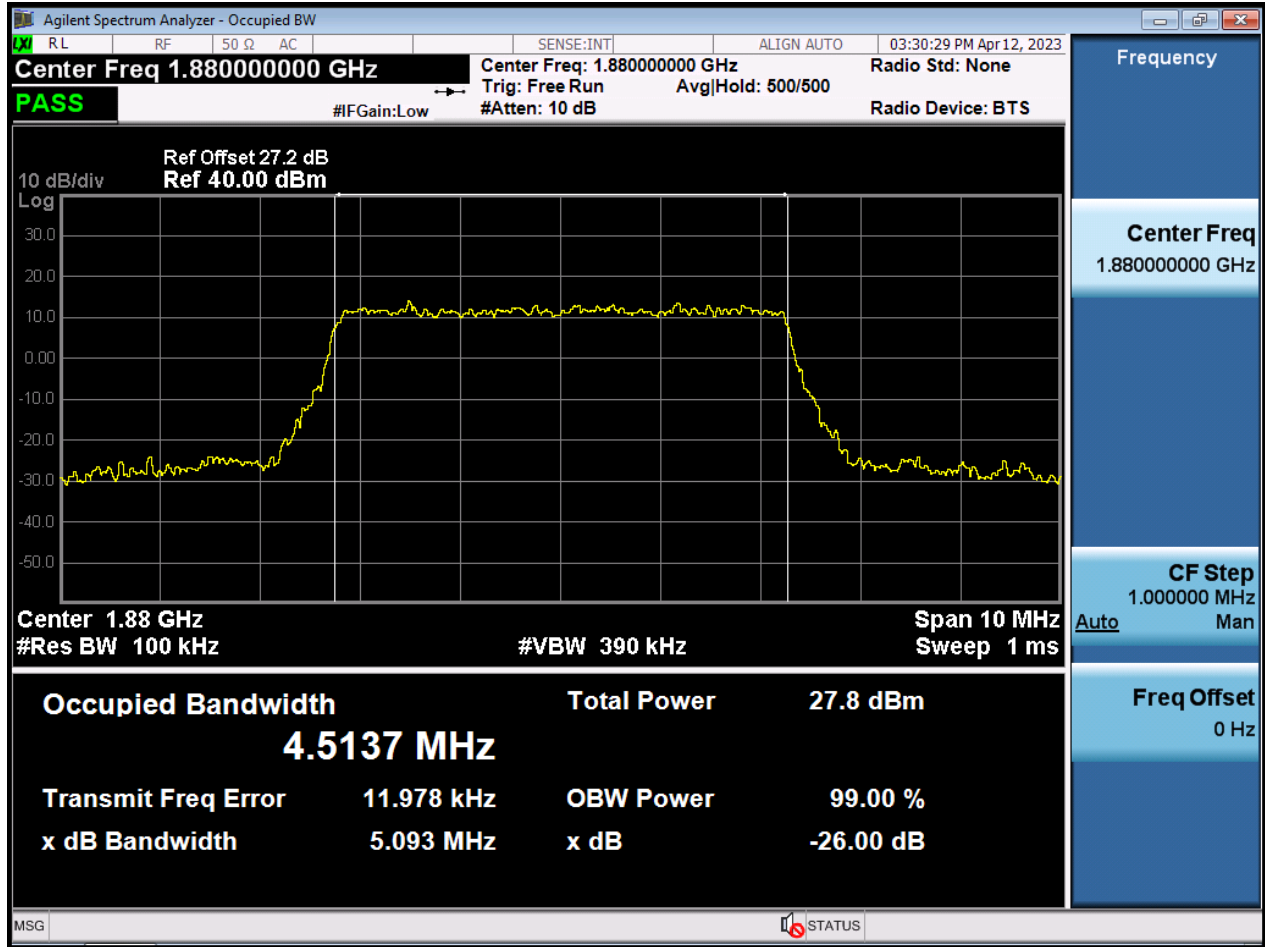





BW10 M\_OBW\_Middle Channel\_QPSK\_FullRB

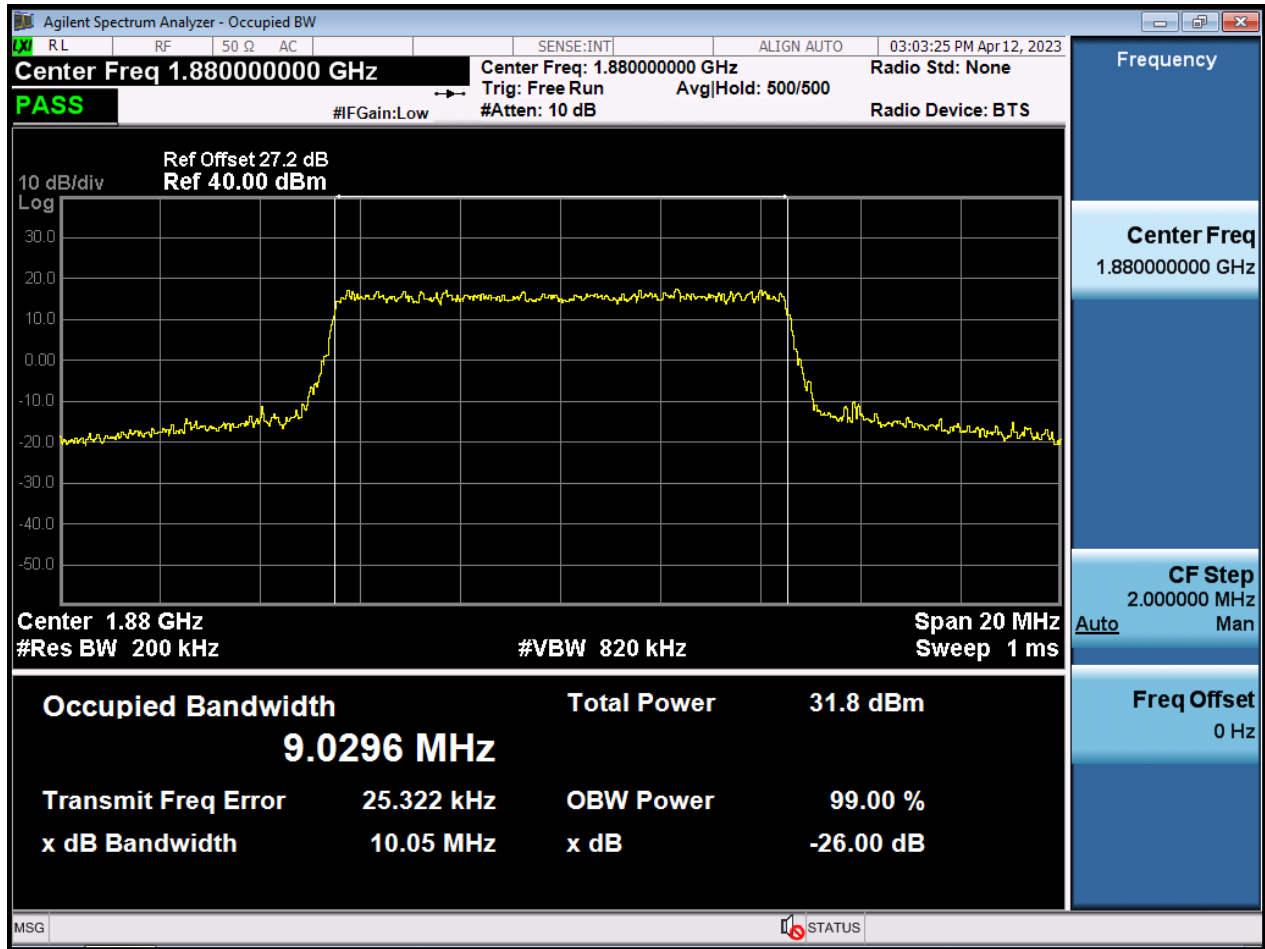


BW10 M\_OBW\_Middle Channel\_16QAM\_FullIRB

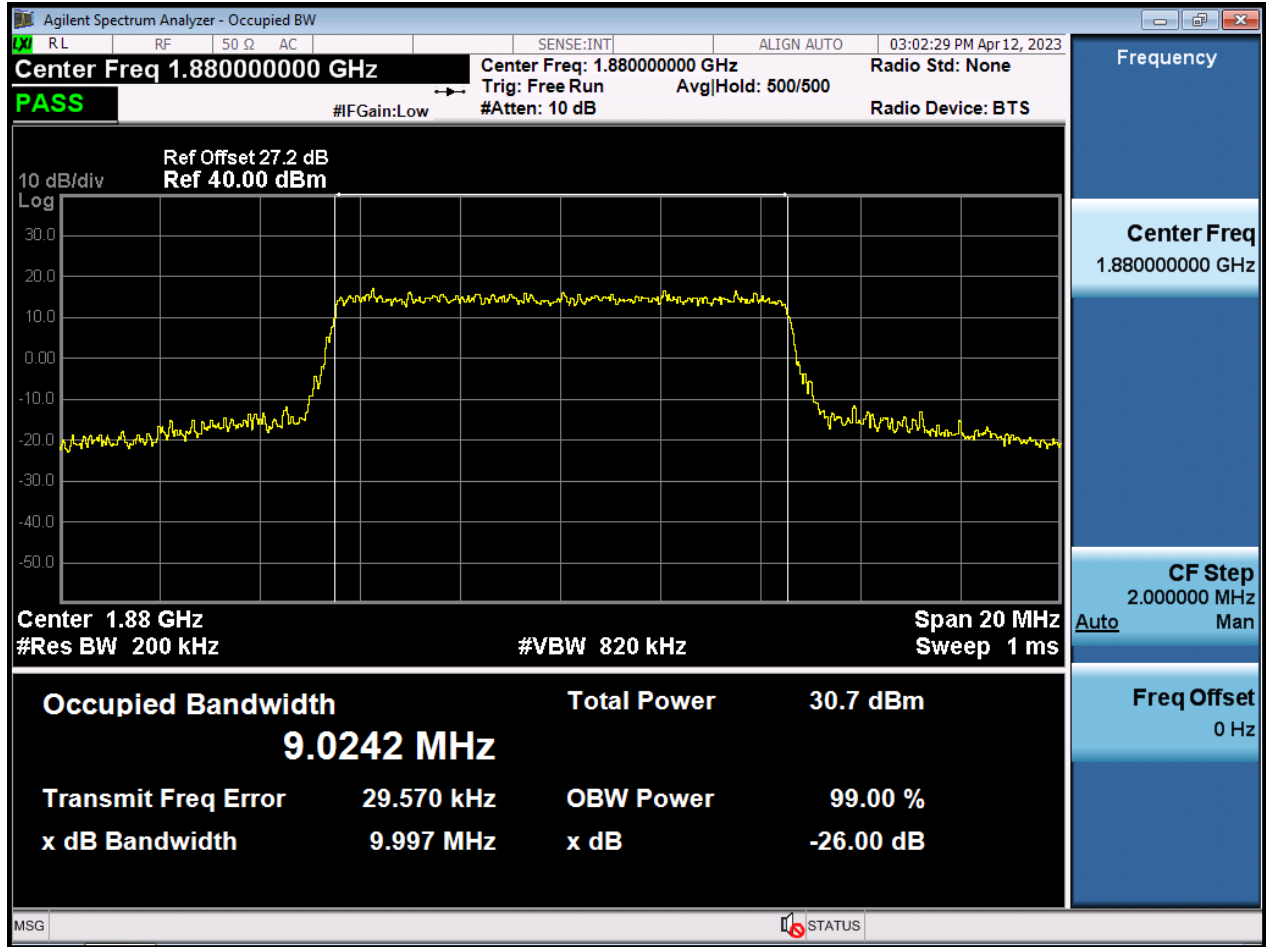


BW10 M\_OBW\_Middle Channel\_64QAM\_FullIRB

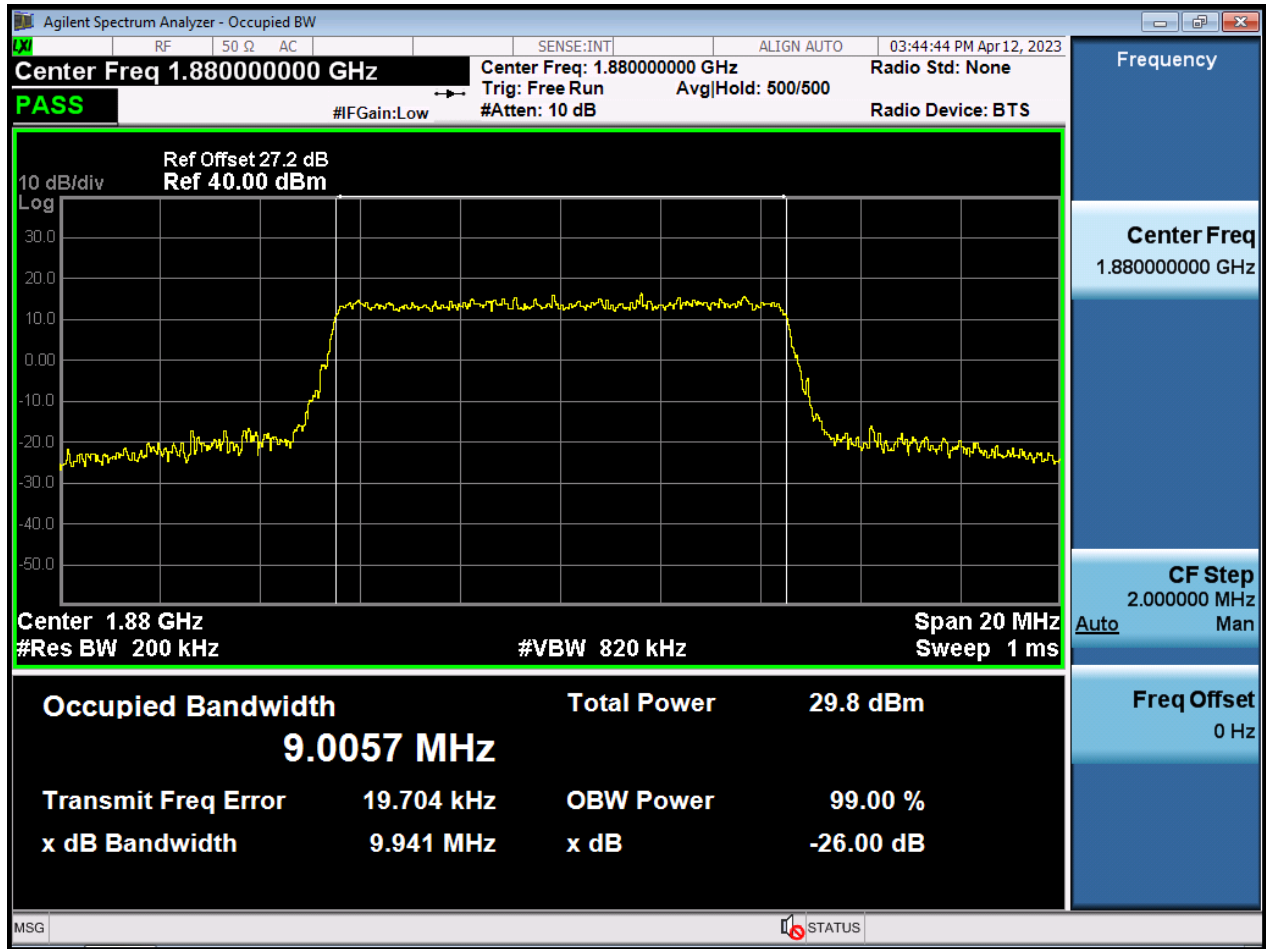


BW10 M\_OBW\_Middle Channel\_256QAM\_FullIRB

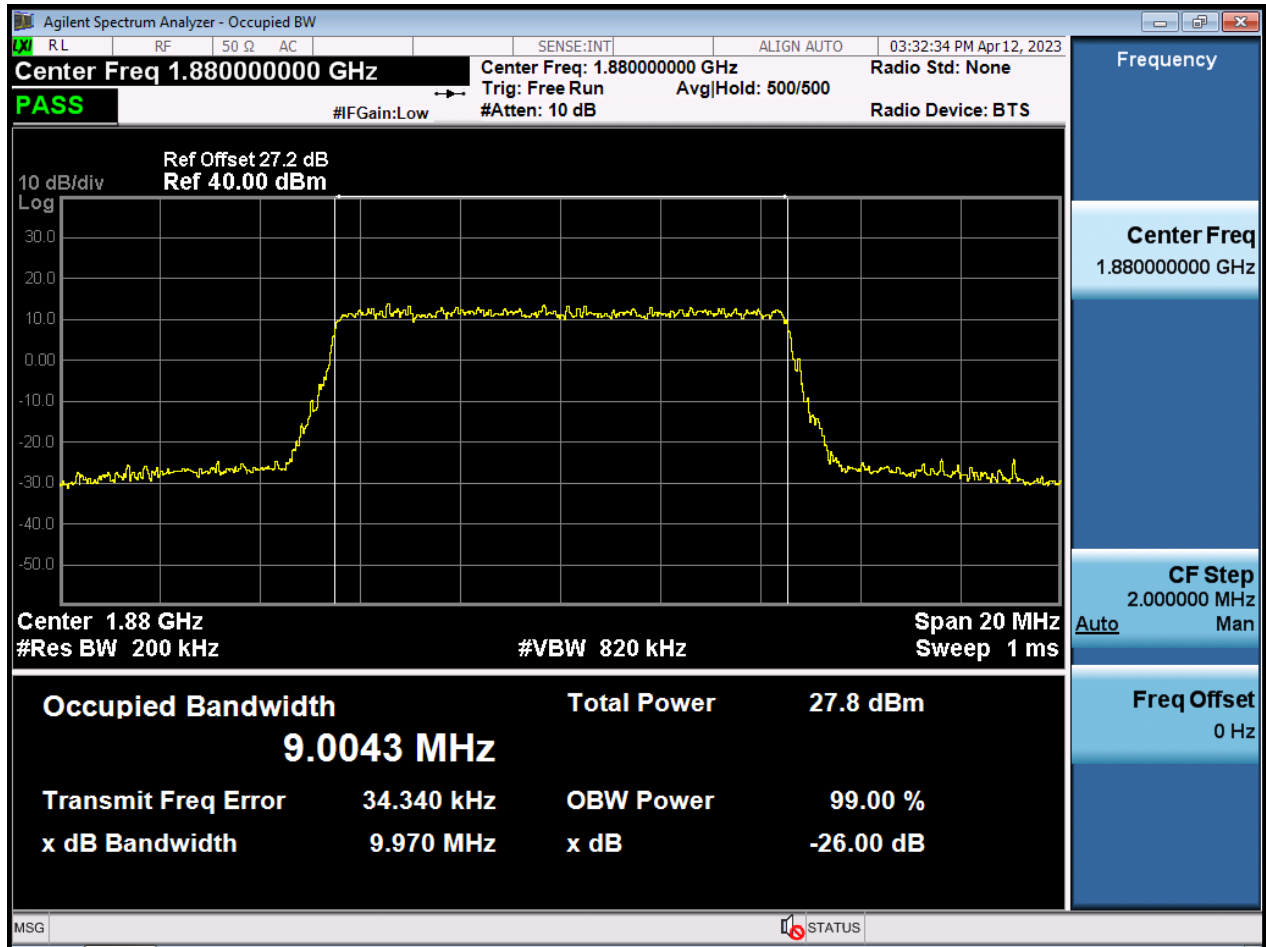


BW15 M\_OBW\_Middle Channel\_QPSK\_FullRB

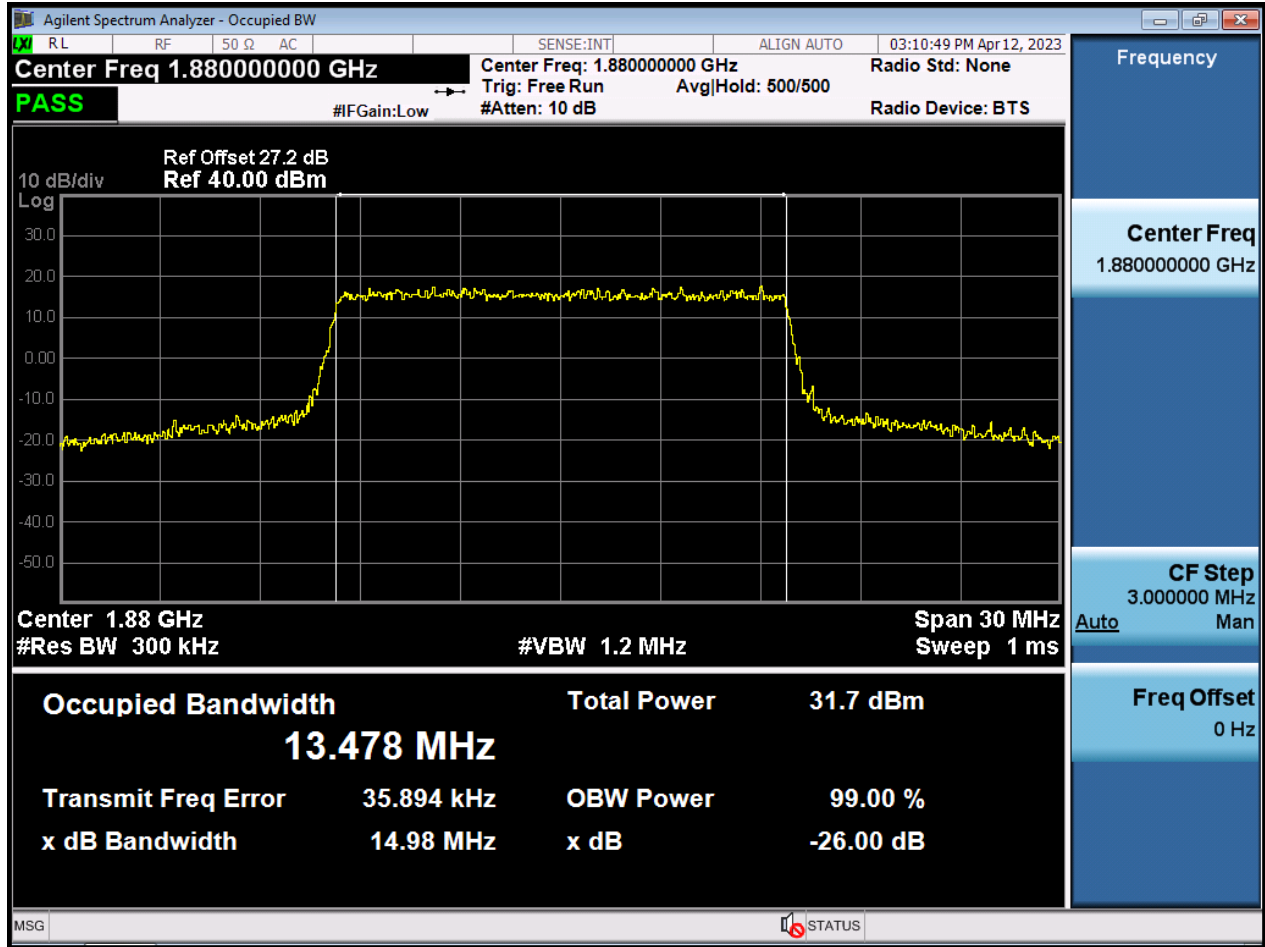


BW15 M\_OBW\_Middle Channel\_16QAM\_FullIRB

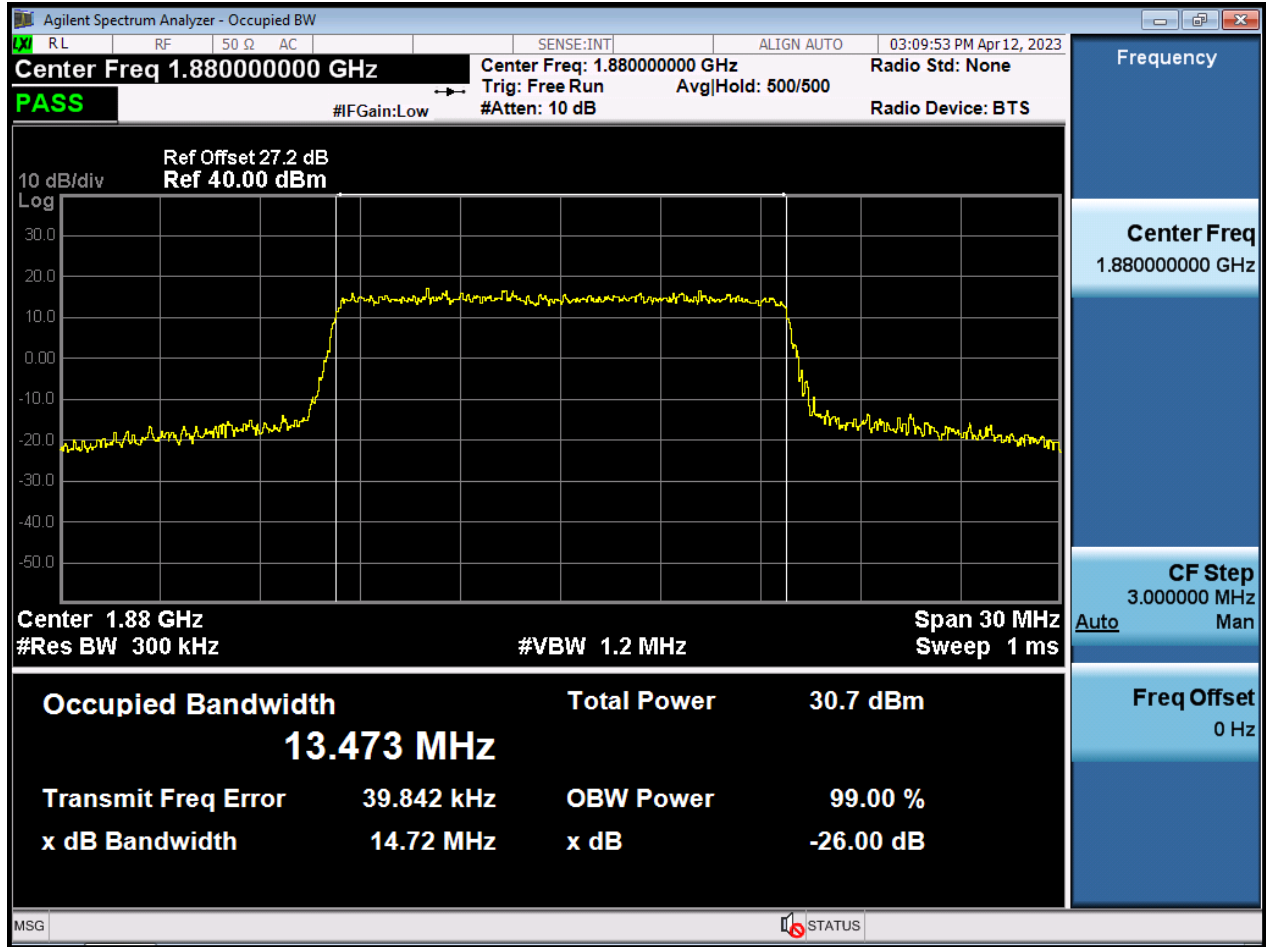

BW15 M\_OBW\_Middle Channel\_64QAM\_FullIRB

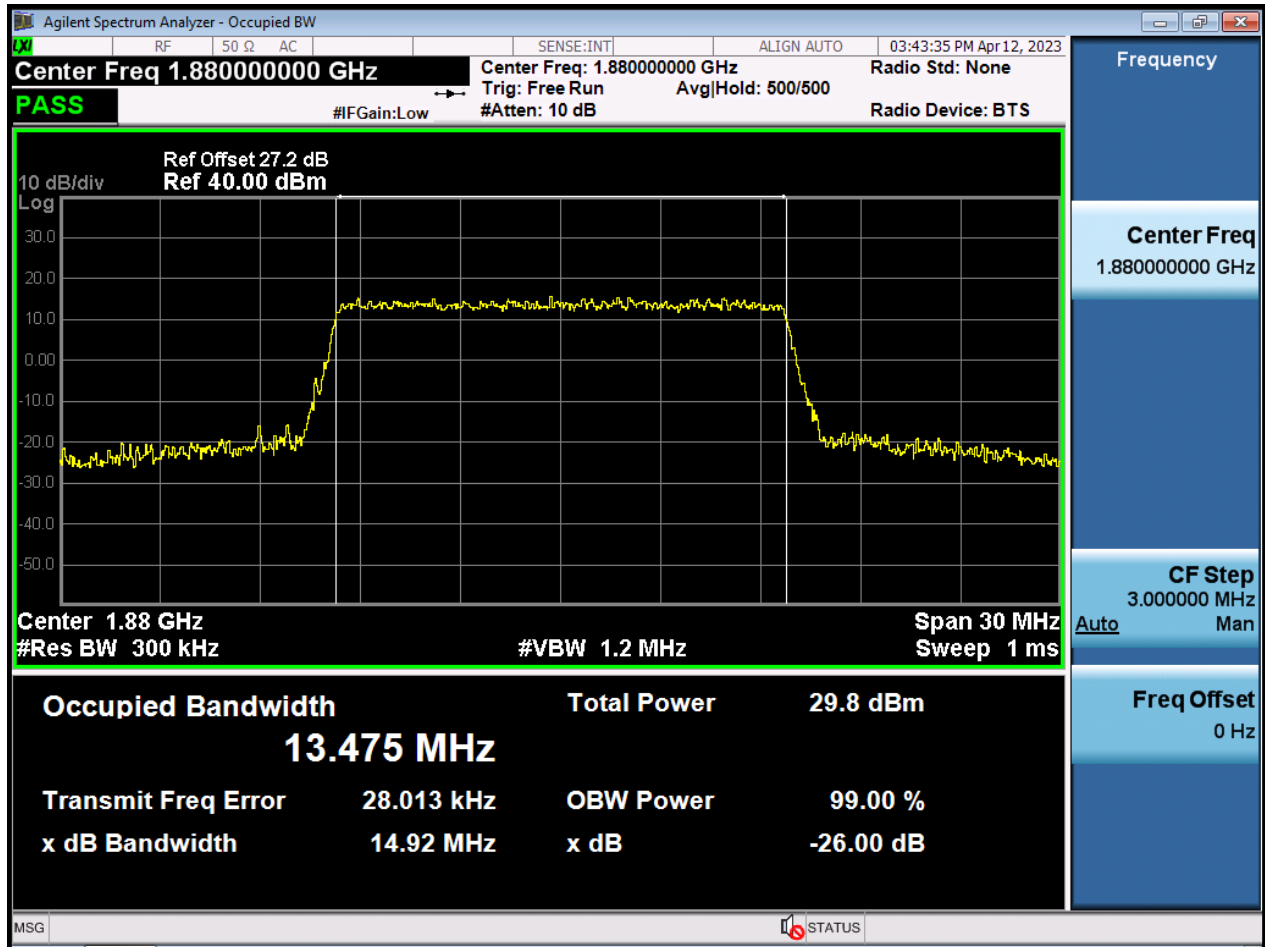


BW15 M\_OBW\_Middle Channel\_256QAM\_FullIRB

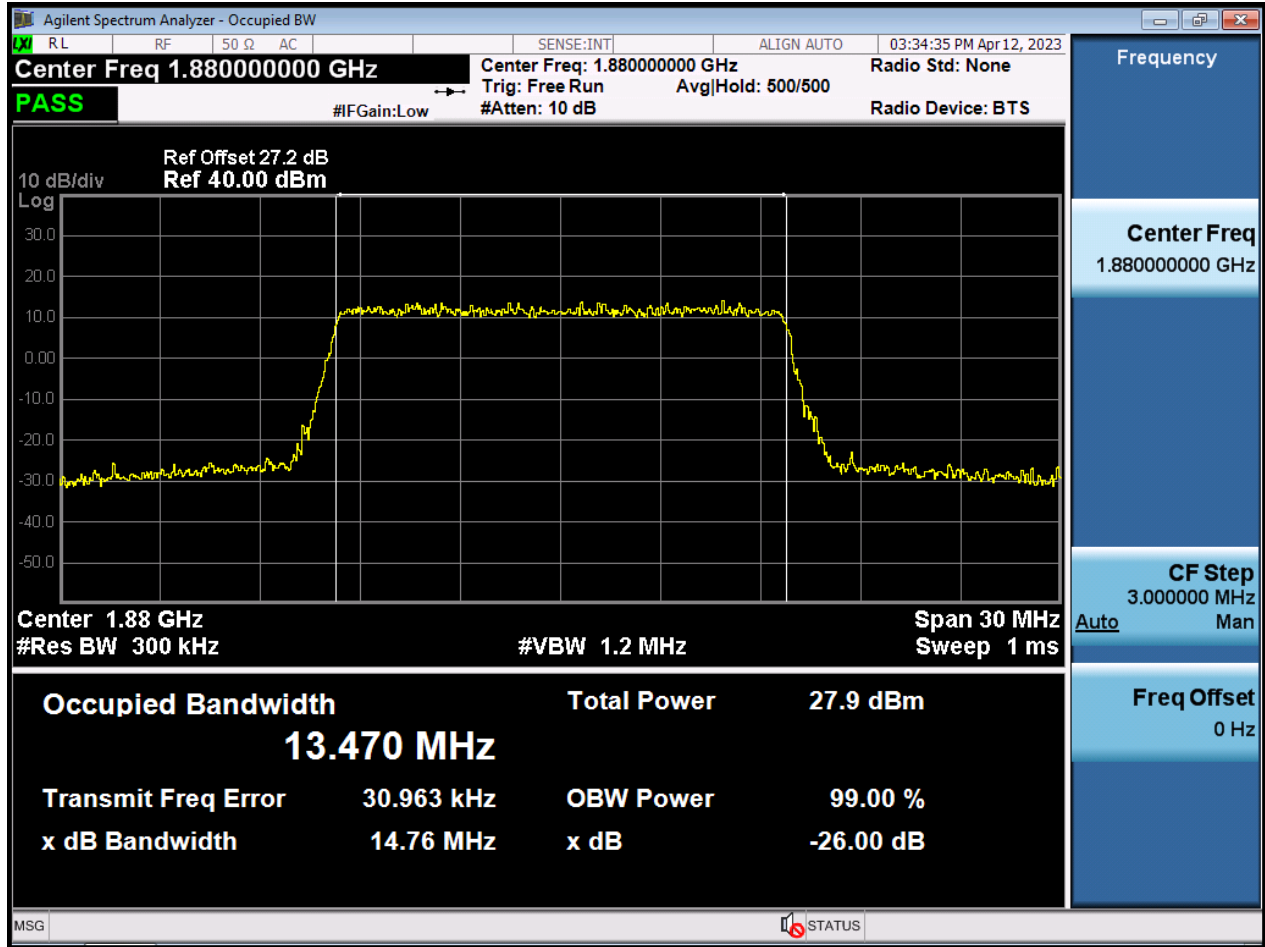





BW20 M\_OBW\_Middle Channel\_QPSK\_FullRB

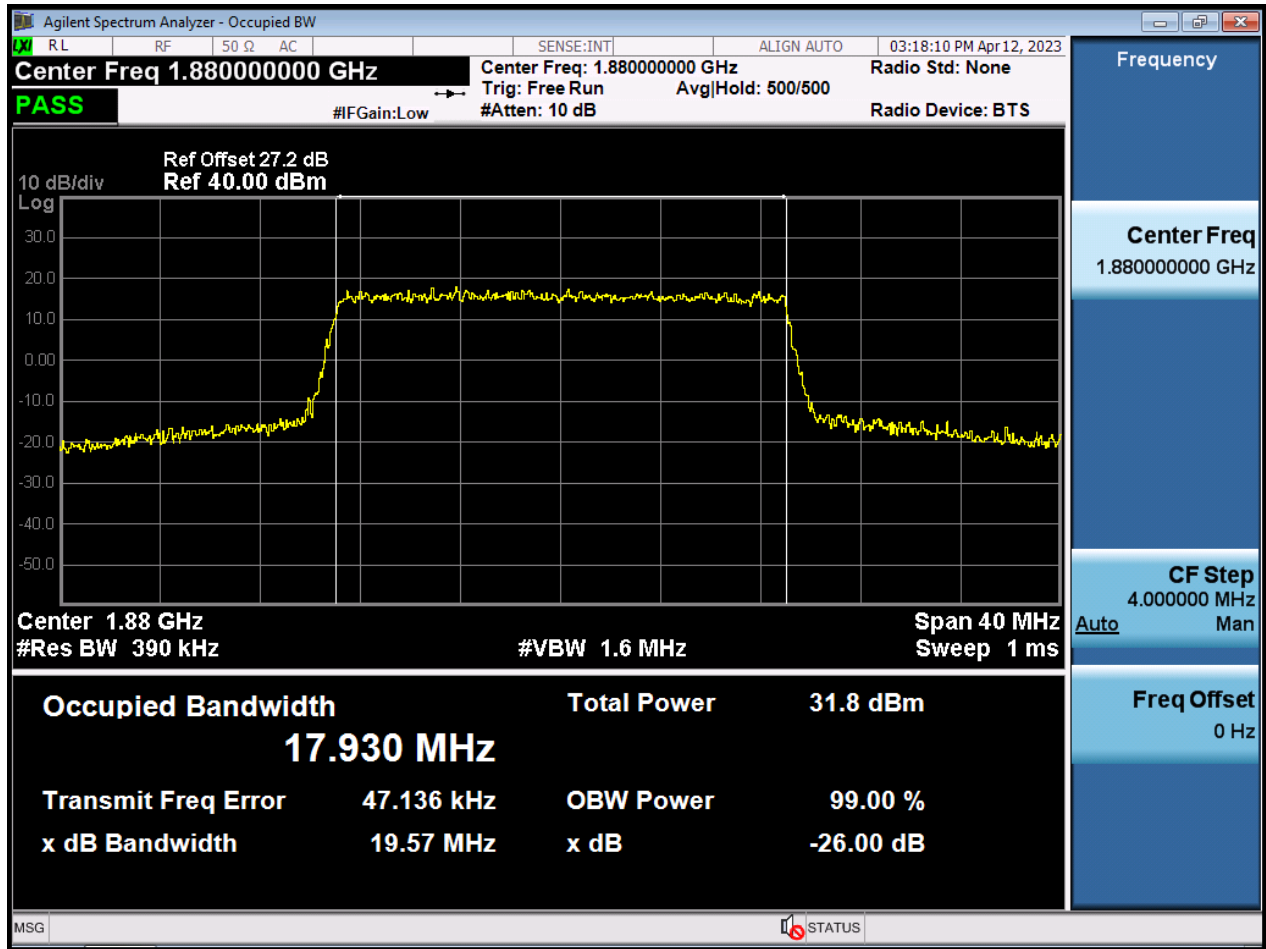


BW20 M\_OBW\_Middle Channel\_16QAM\_FullRB

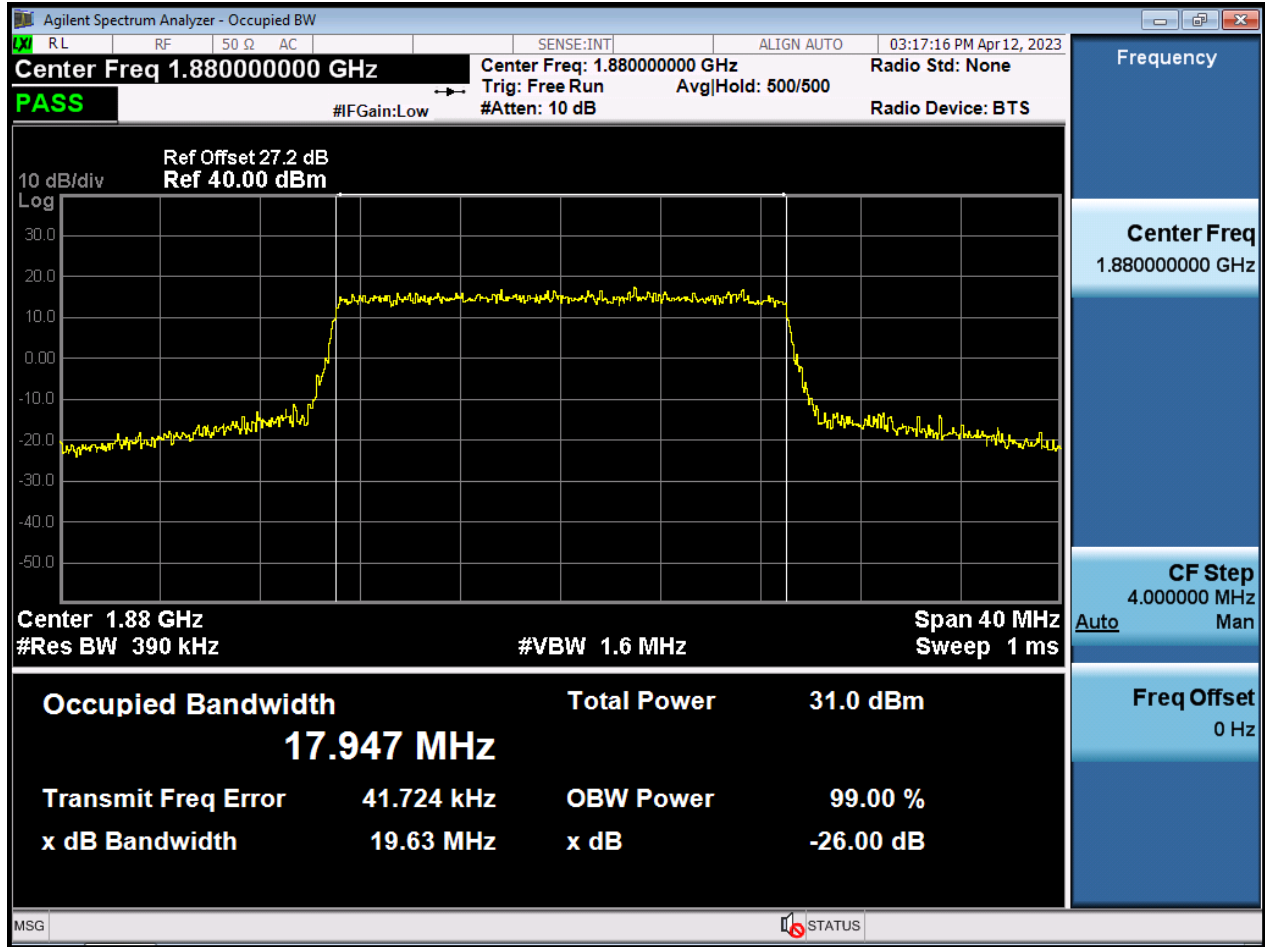


BW20 M\_OBW\_Middle Channel\_64QAM\_FullIRB

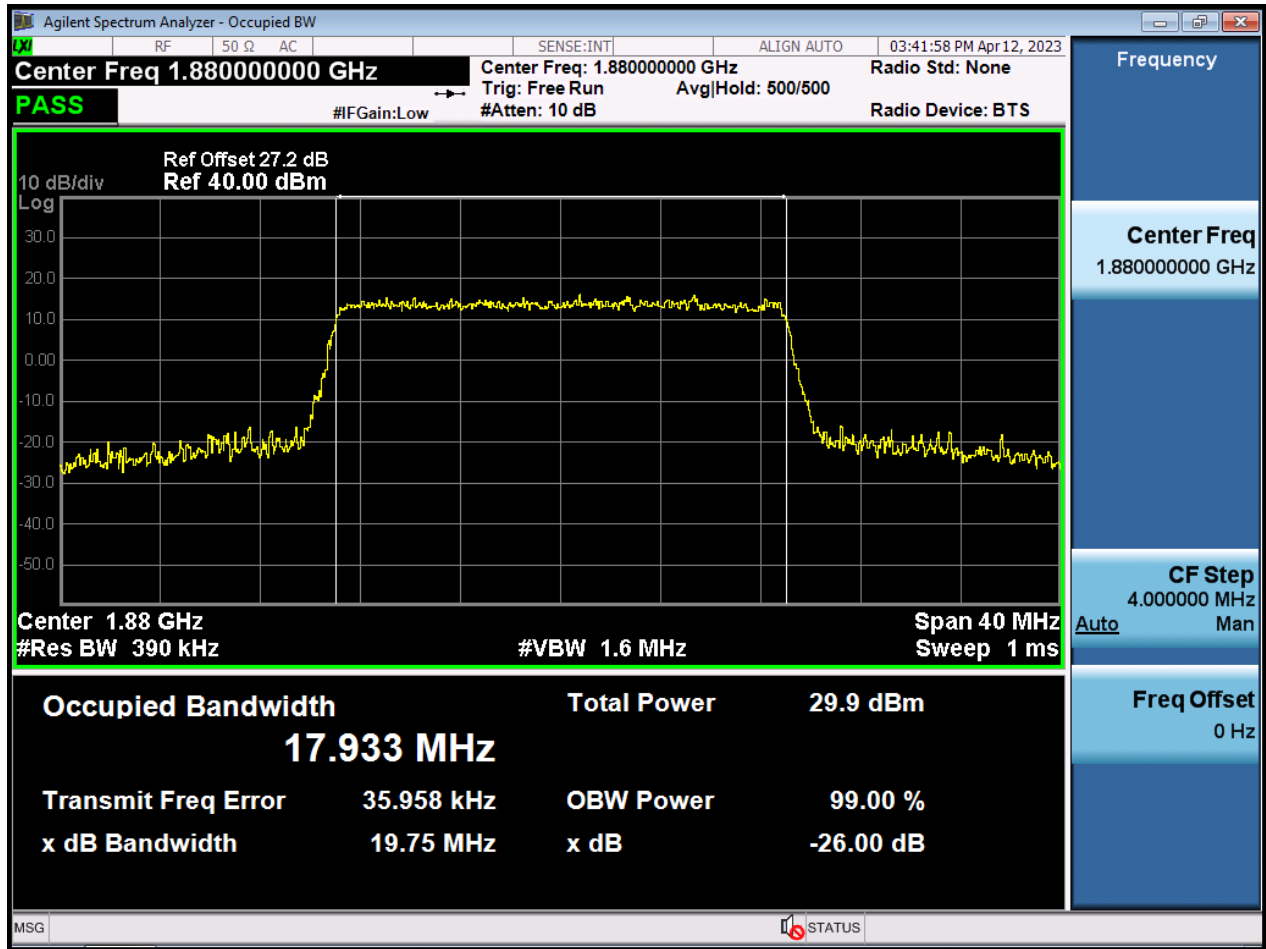


BW20 M\_OBW\_Middle Channel\_256QAM\_FullRB

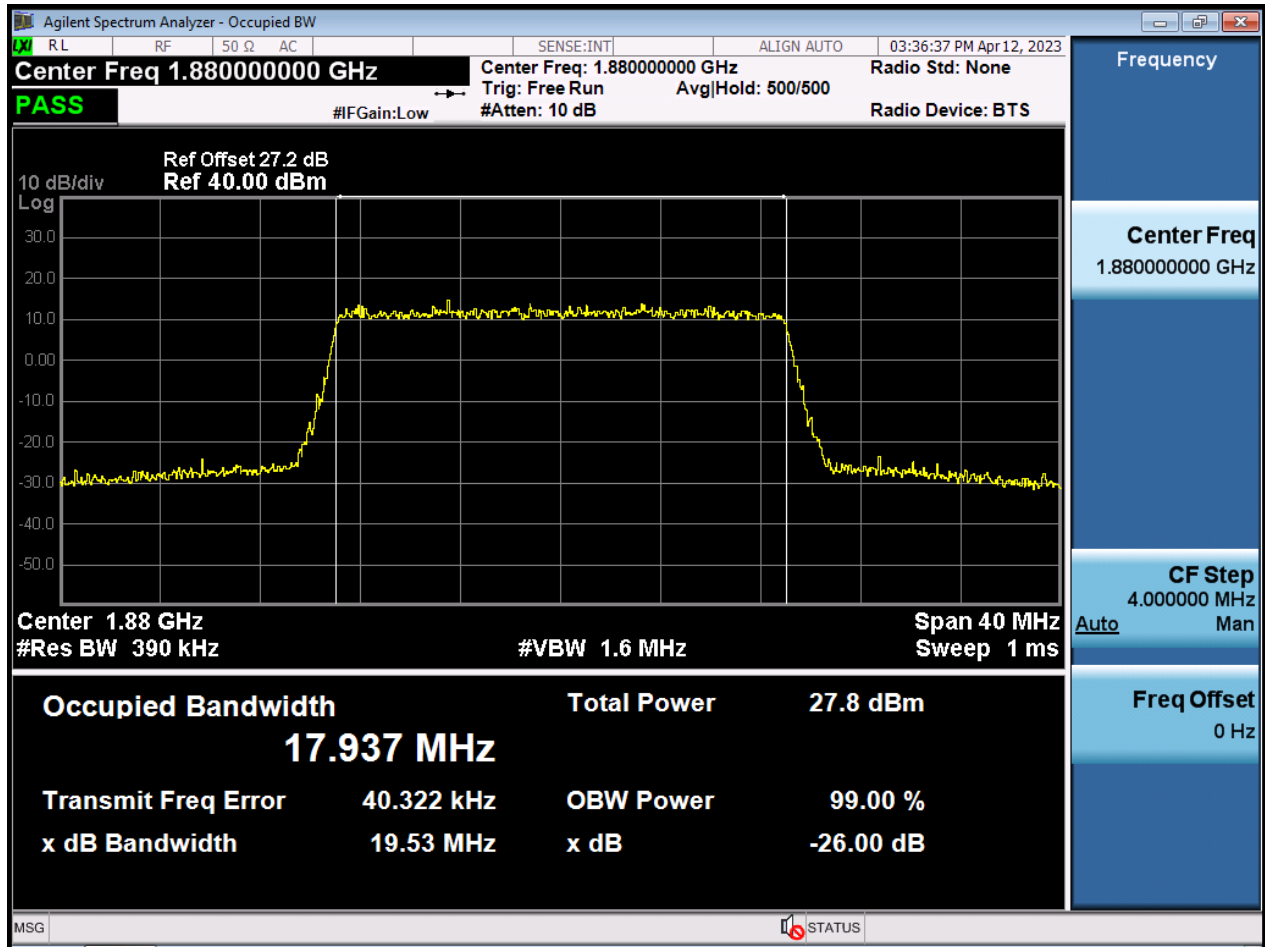


BW1.4 M\_PAR\_Middle Channel\_QPSK\_FullRB

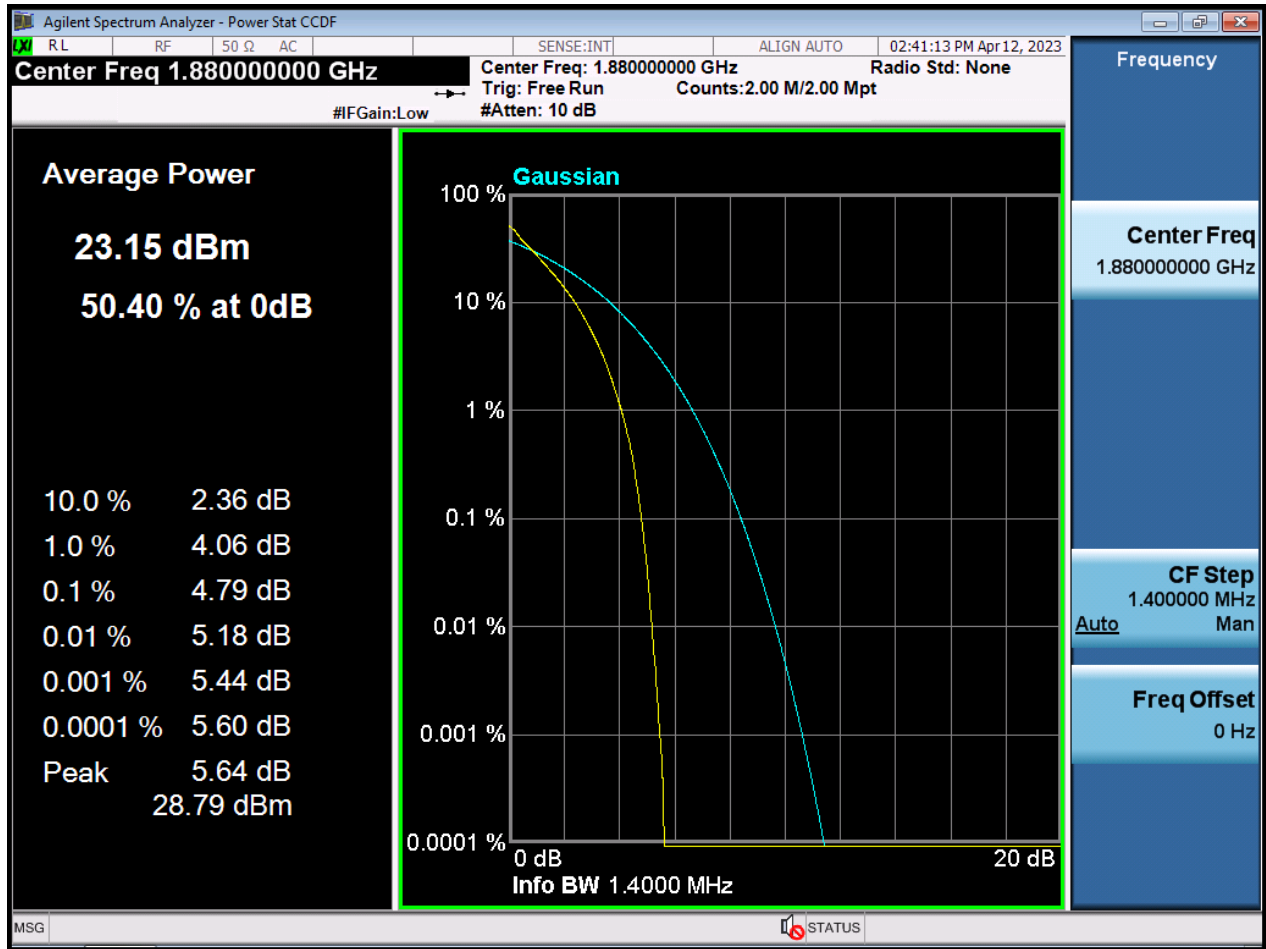


BW1.4 M\_PAR\_Middle Channel\_16QAM\_FullIRB

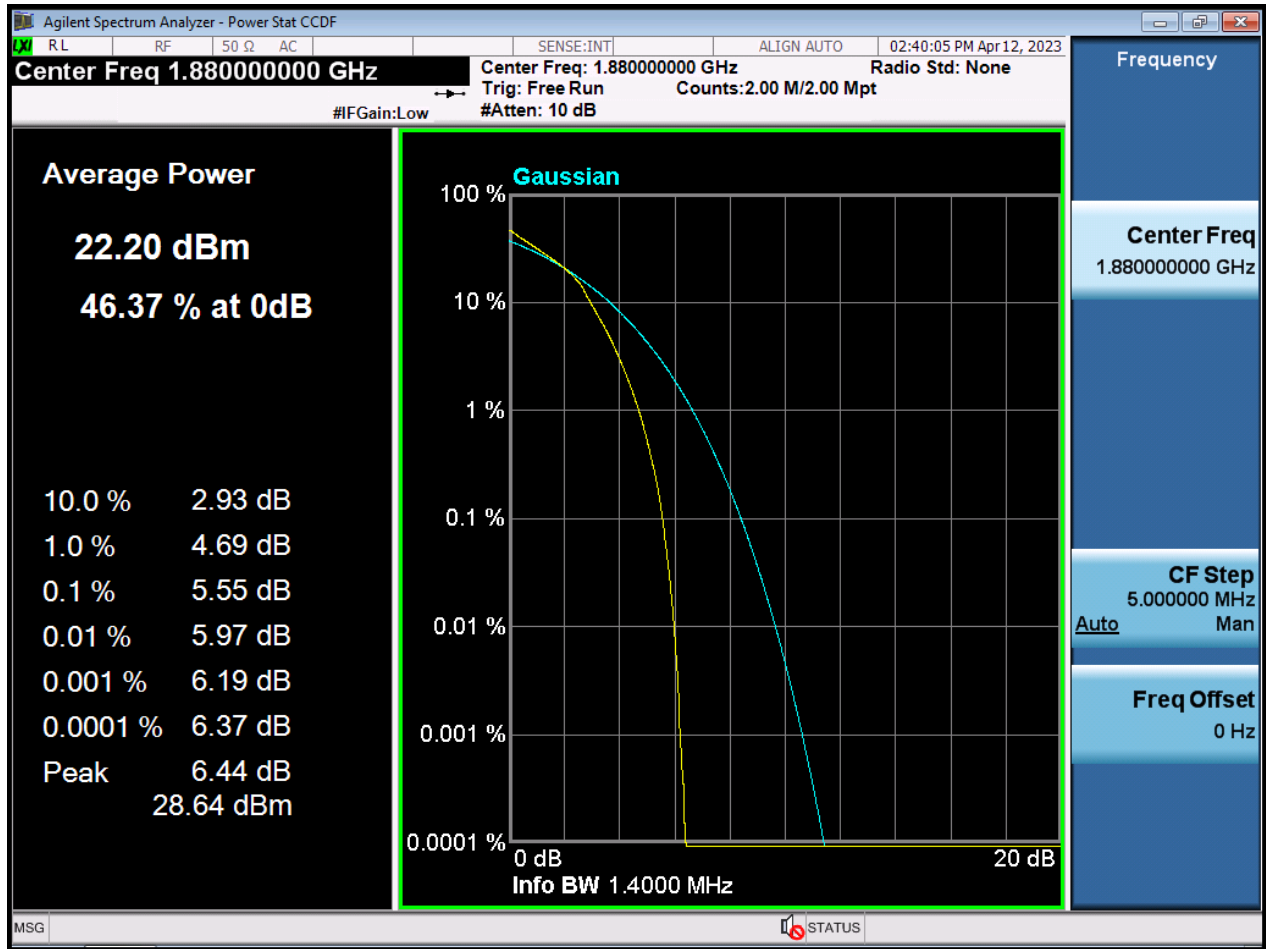

BW1.4 M\_PAR\_Middle Channel\_64QAM\_FullIRB

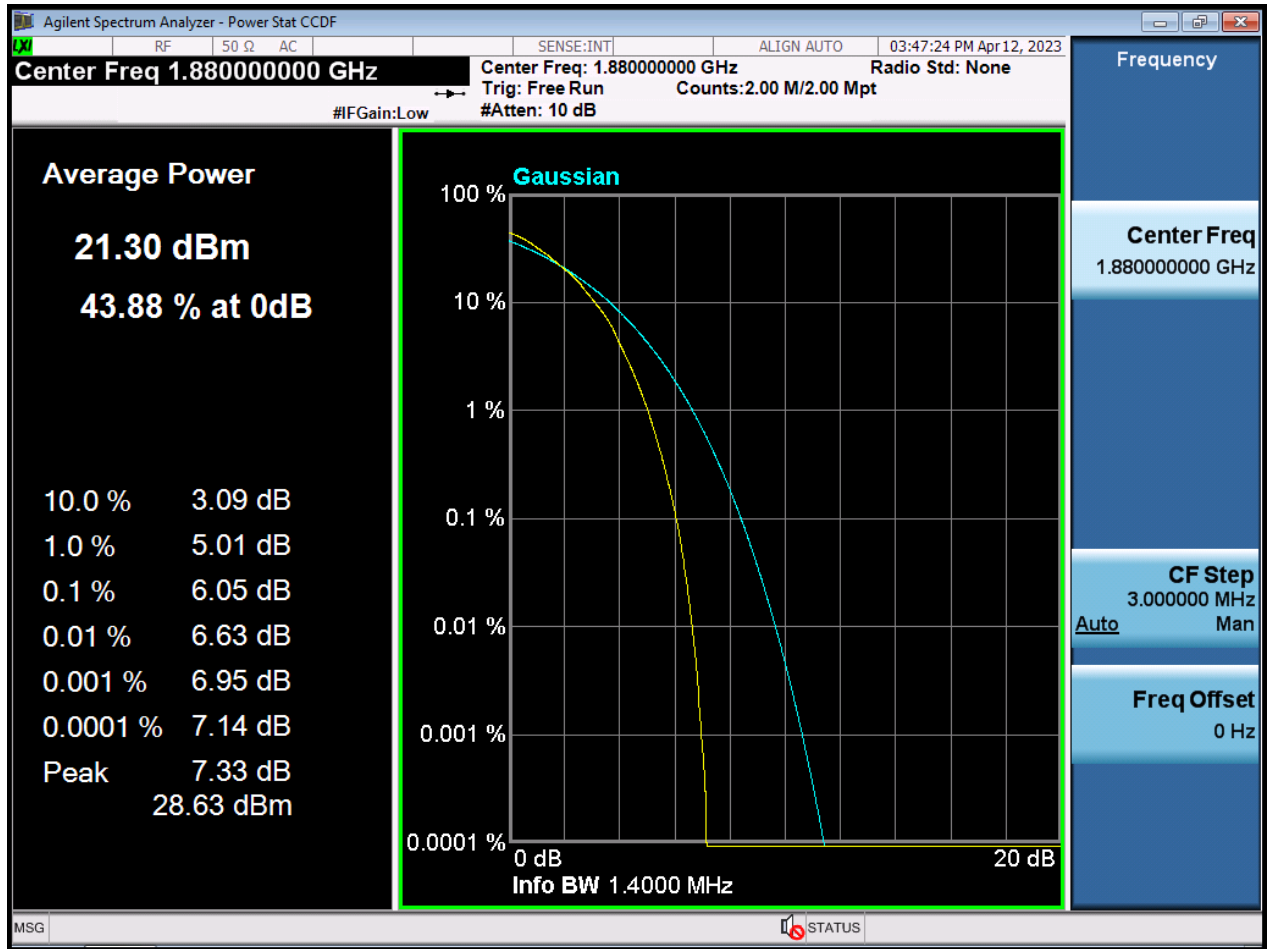


BW1.4 M\_PAR\_Middle Channel\_256QAM\_FullRB

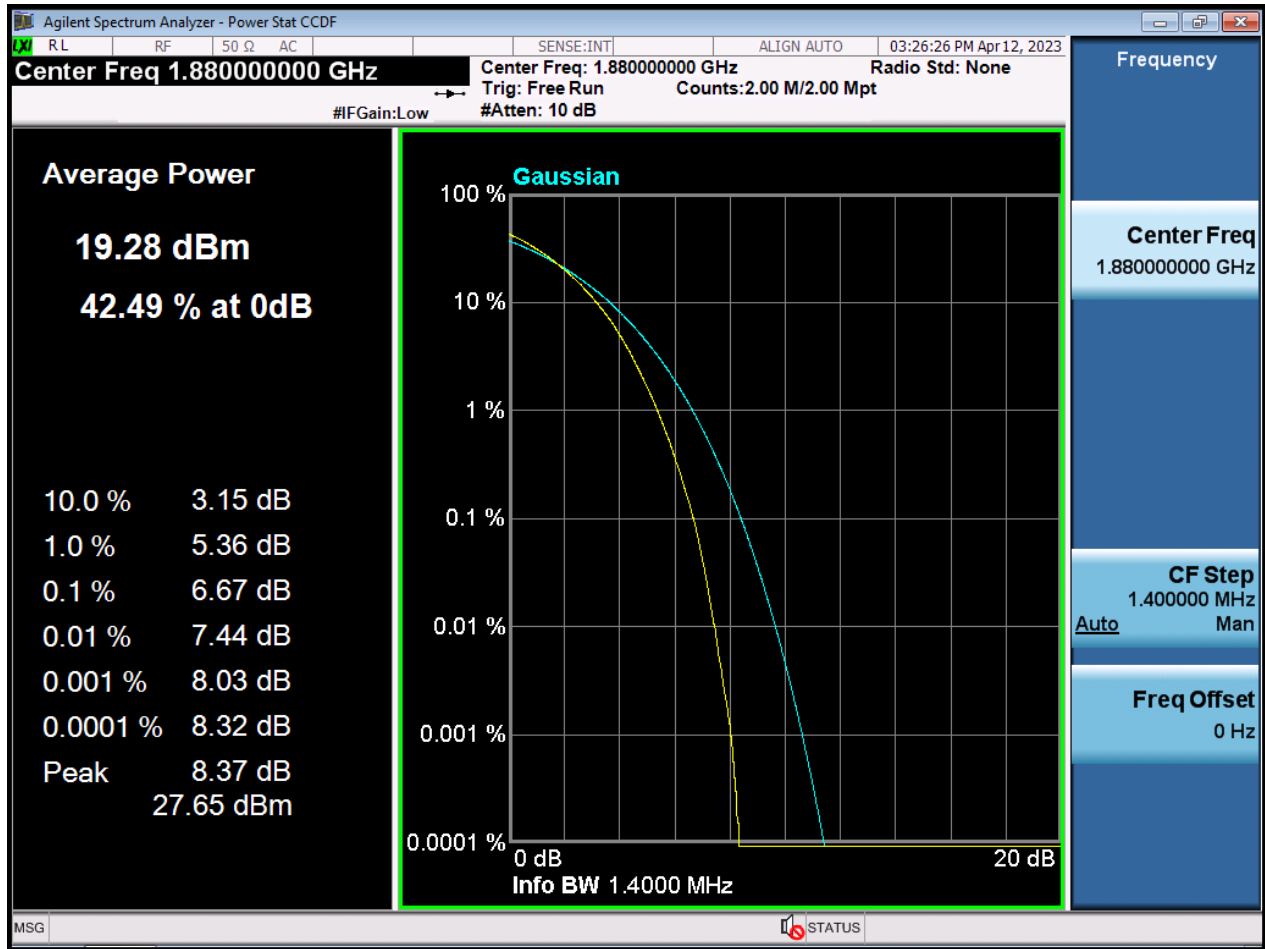





BW3 M\_PAR\_Middle Channel\_QPSK\_FullIRB

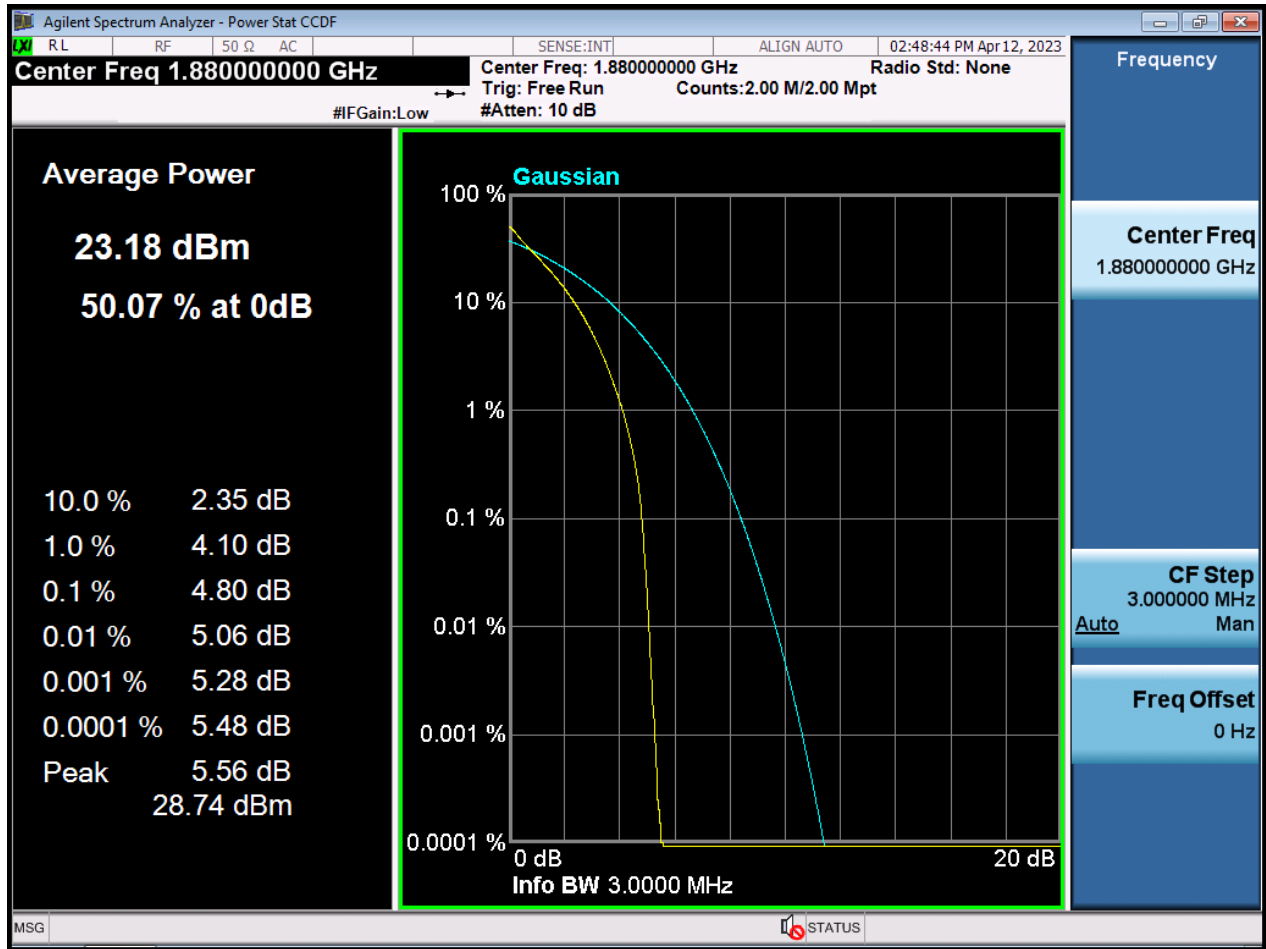


BW3 M\_PAR\_Middle Channel\_16QAM\_FullRB

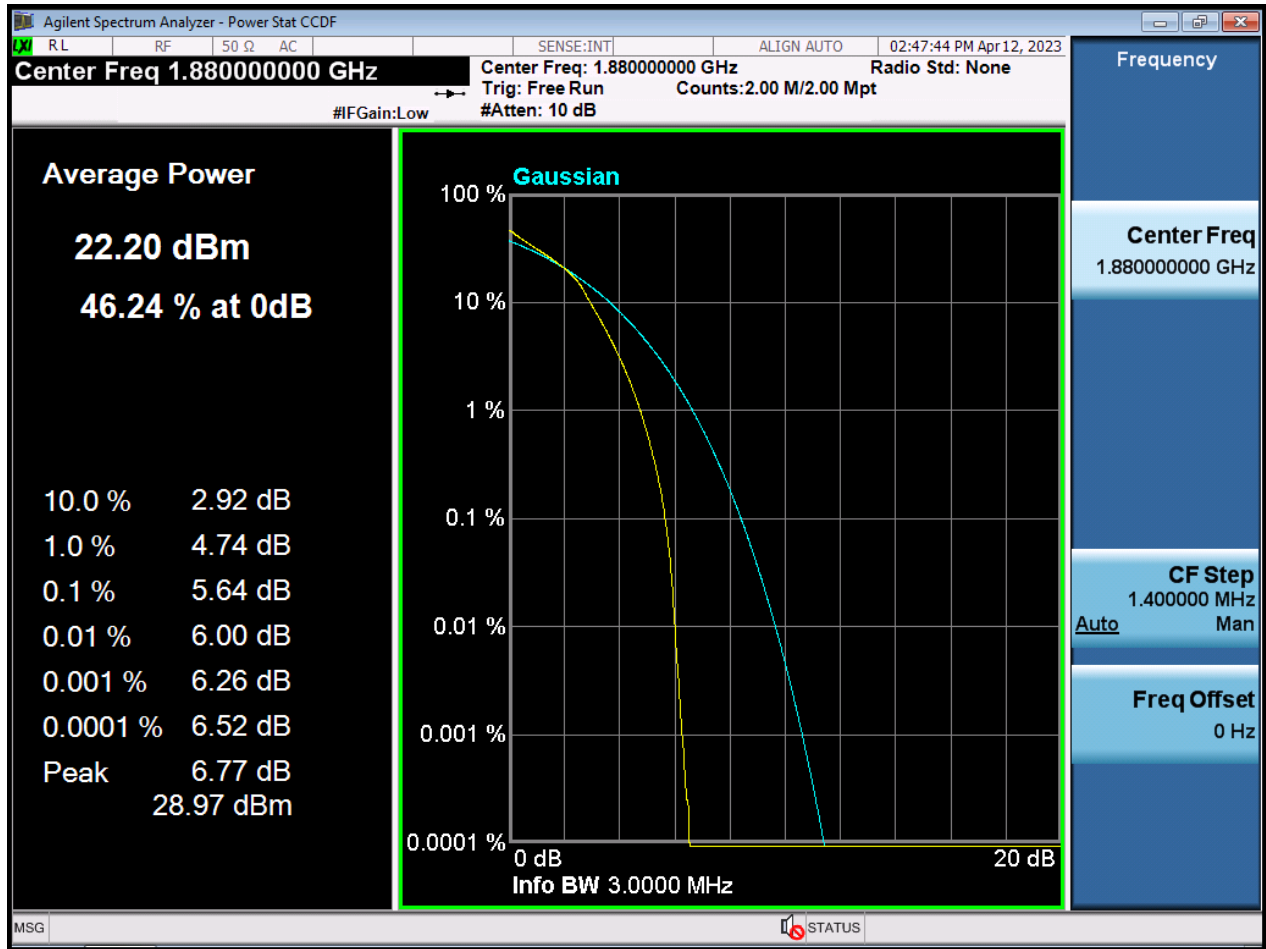


BW3 M\_PAR\_Middle Channel\_64QAM\_FullRB

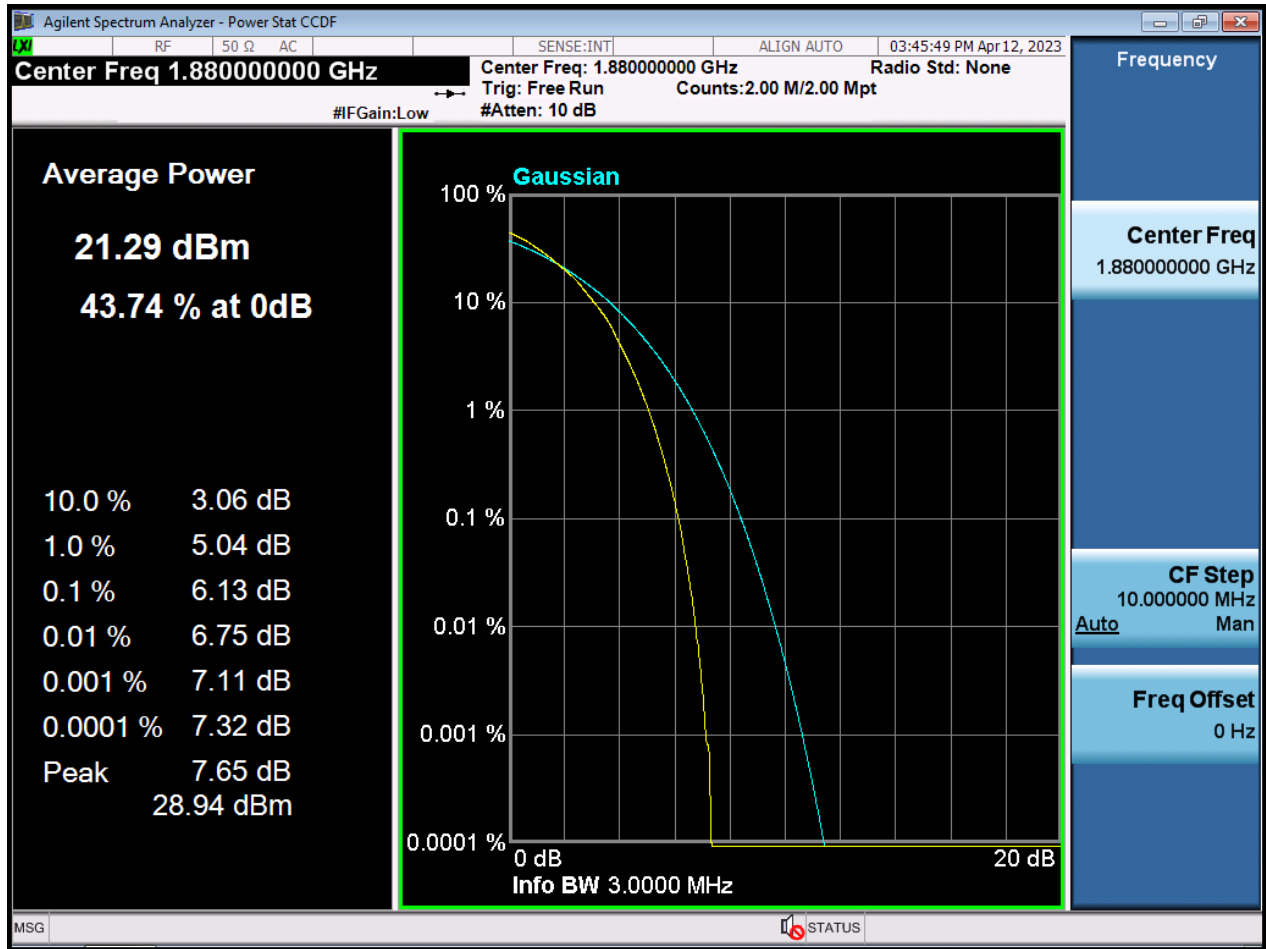


BW3 M\_PAR\_Middle Channel\_256QAM\_FullRB

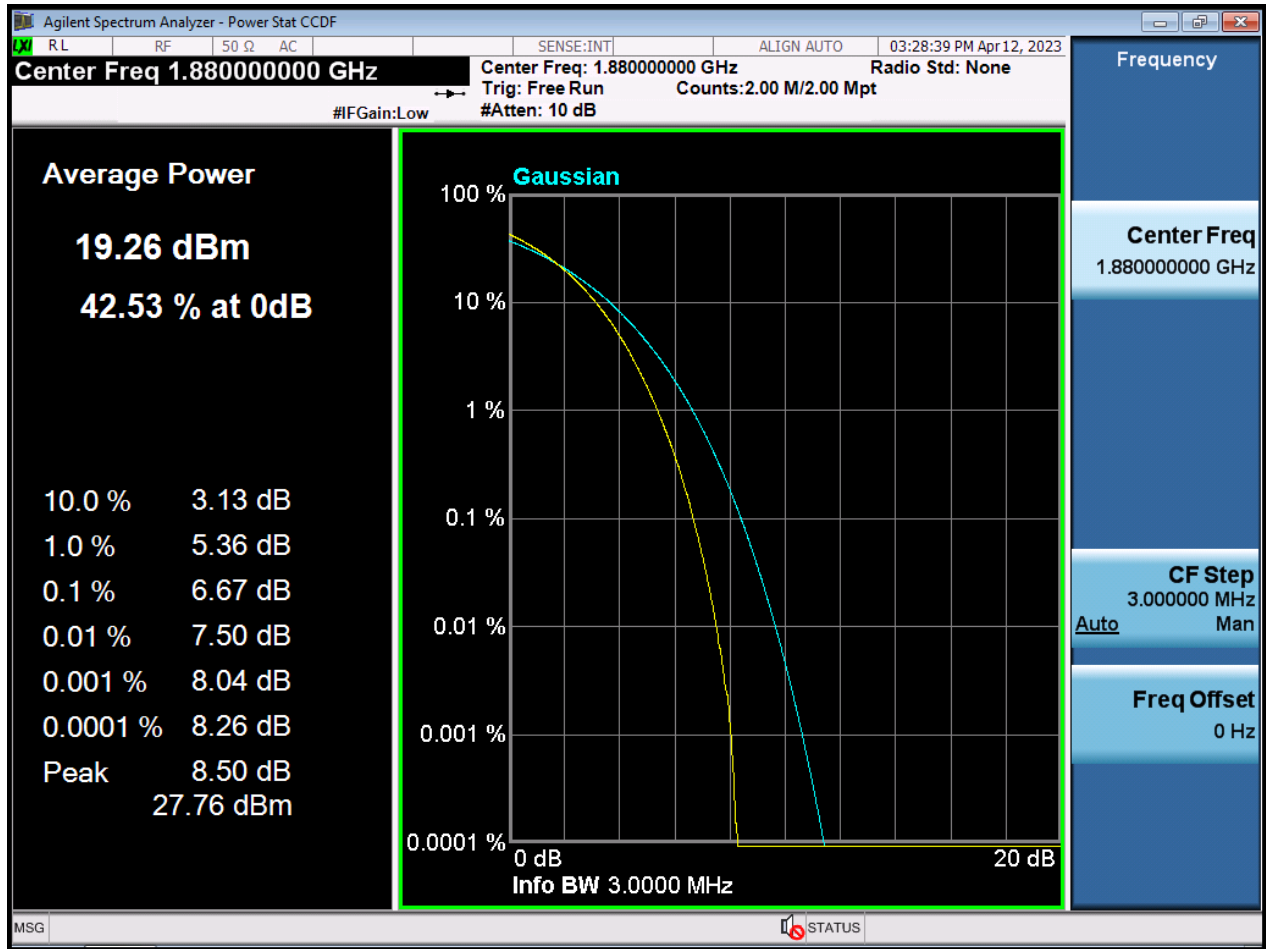


BW5 M\_PAR\_Middle Channel\_QPSK\_FullIRB

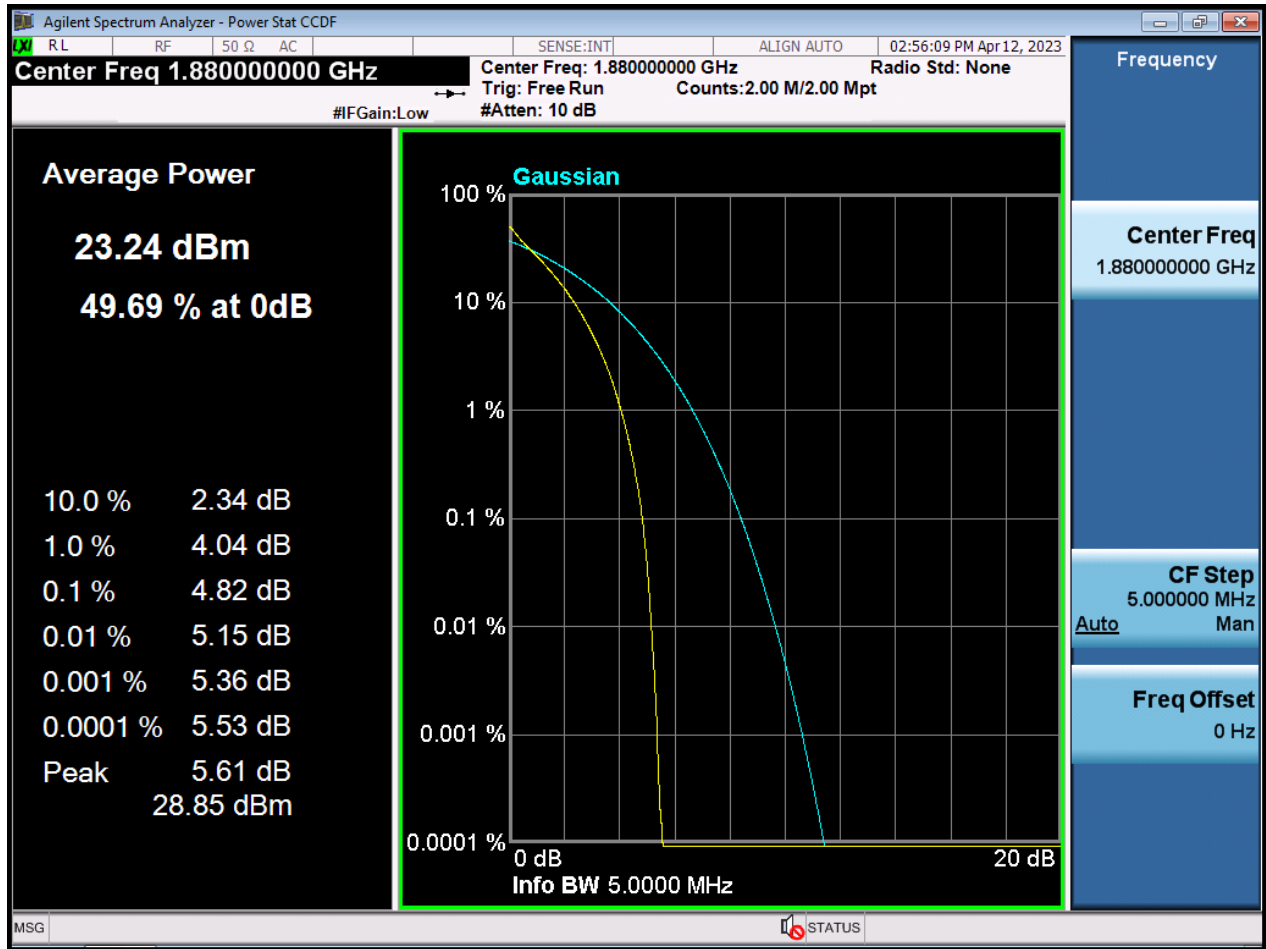


BW5 M\_PAR\_Middle Channel\_16QAM\_FullRB

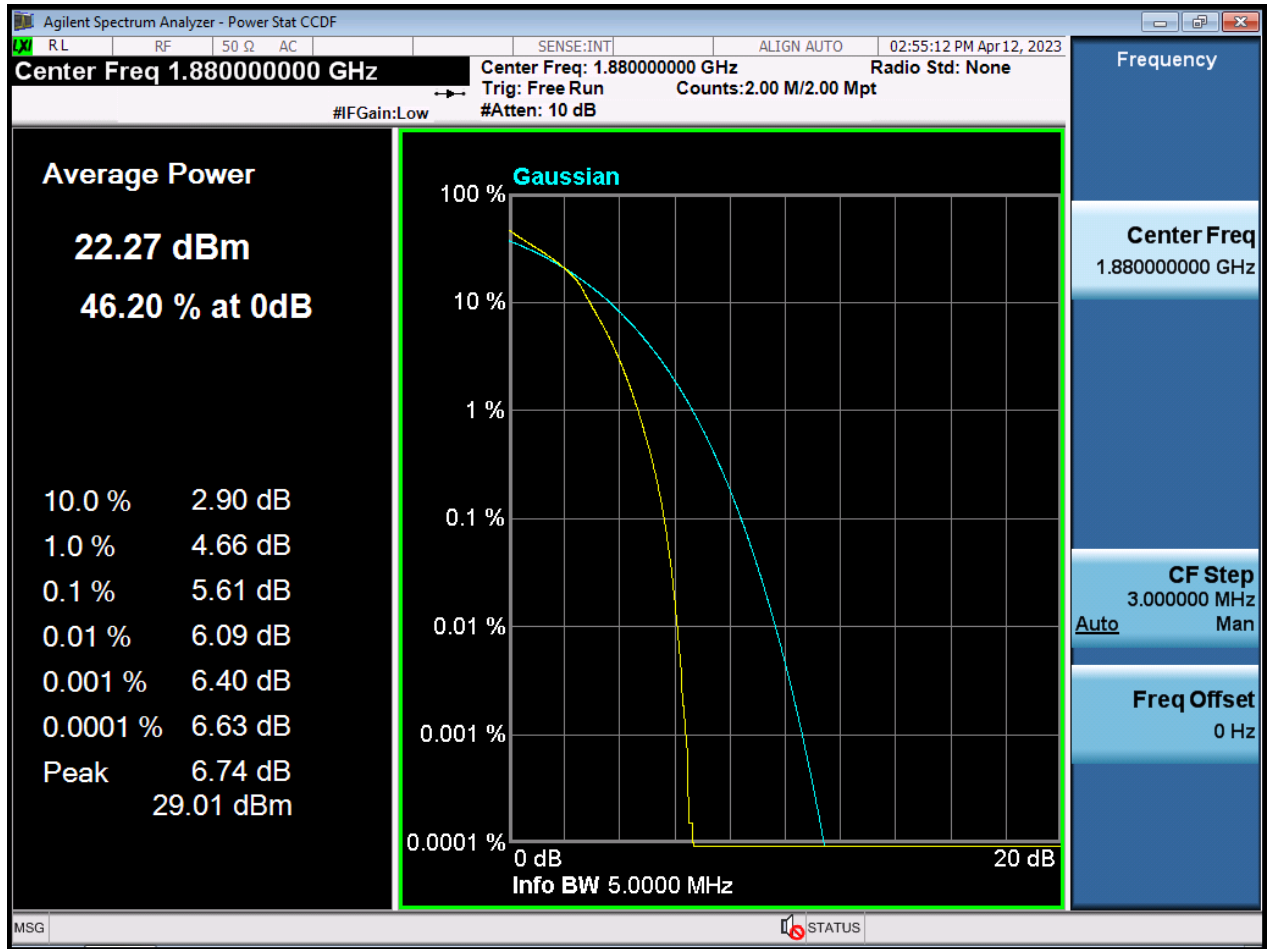

BW5 M\_PAR\_Middle Channel\_64QAM\_FullRB

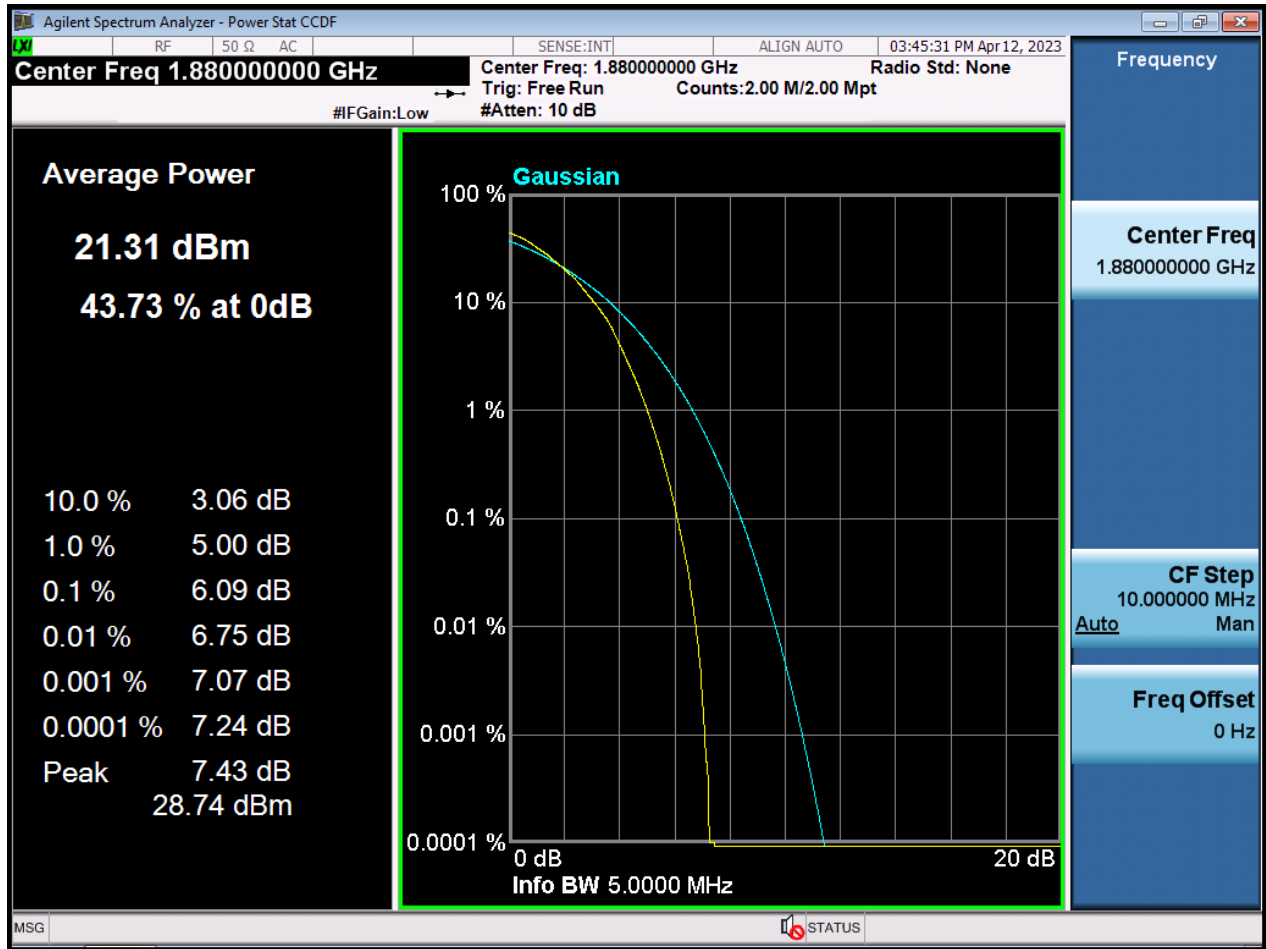


BW5 M\_PAR\_Middle Channel\_256QAM\_FullRB

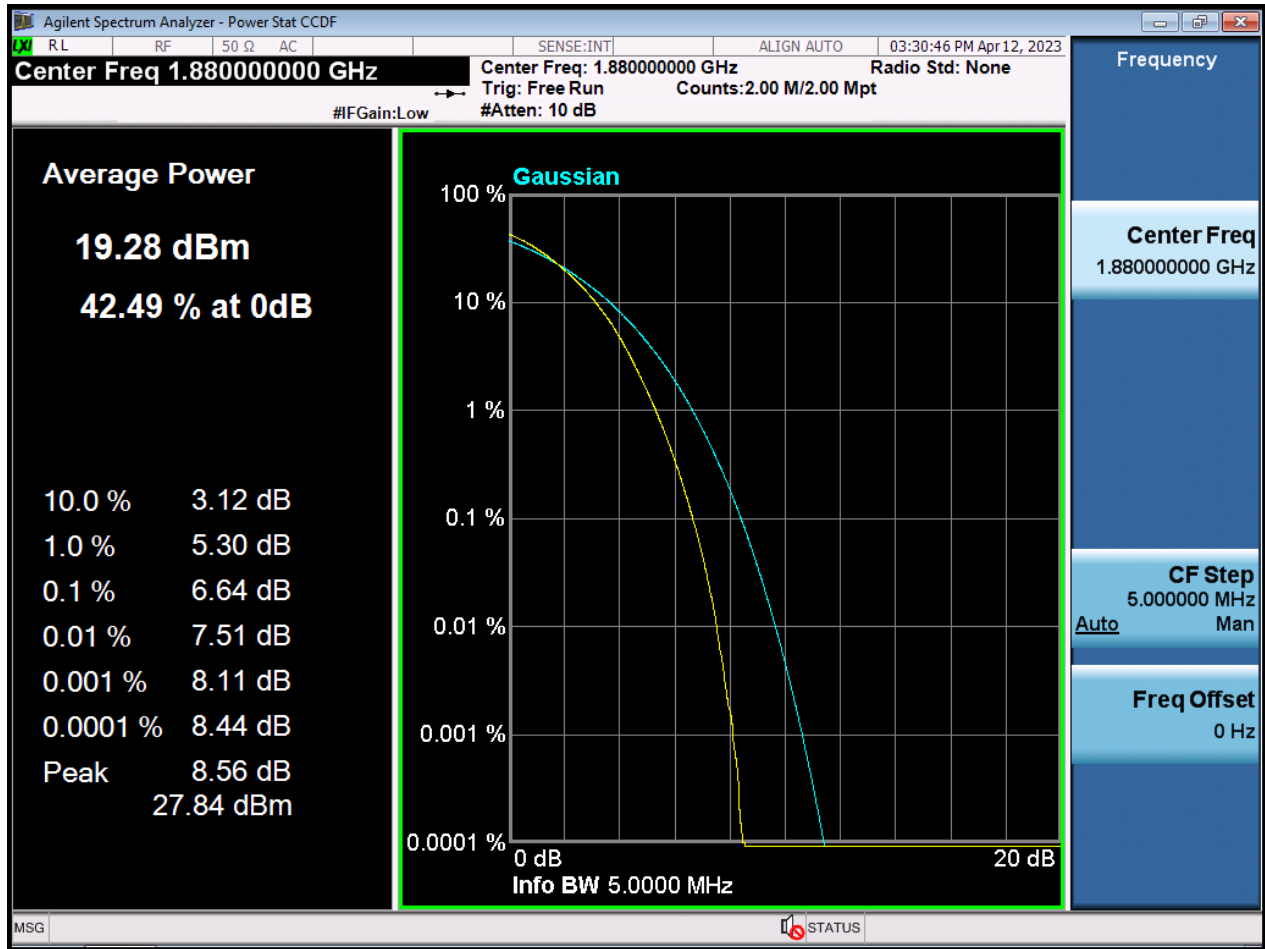





BW10 M\_PAR\_Middle Channelz\_QPSK\_FullRB

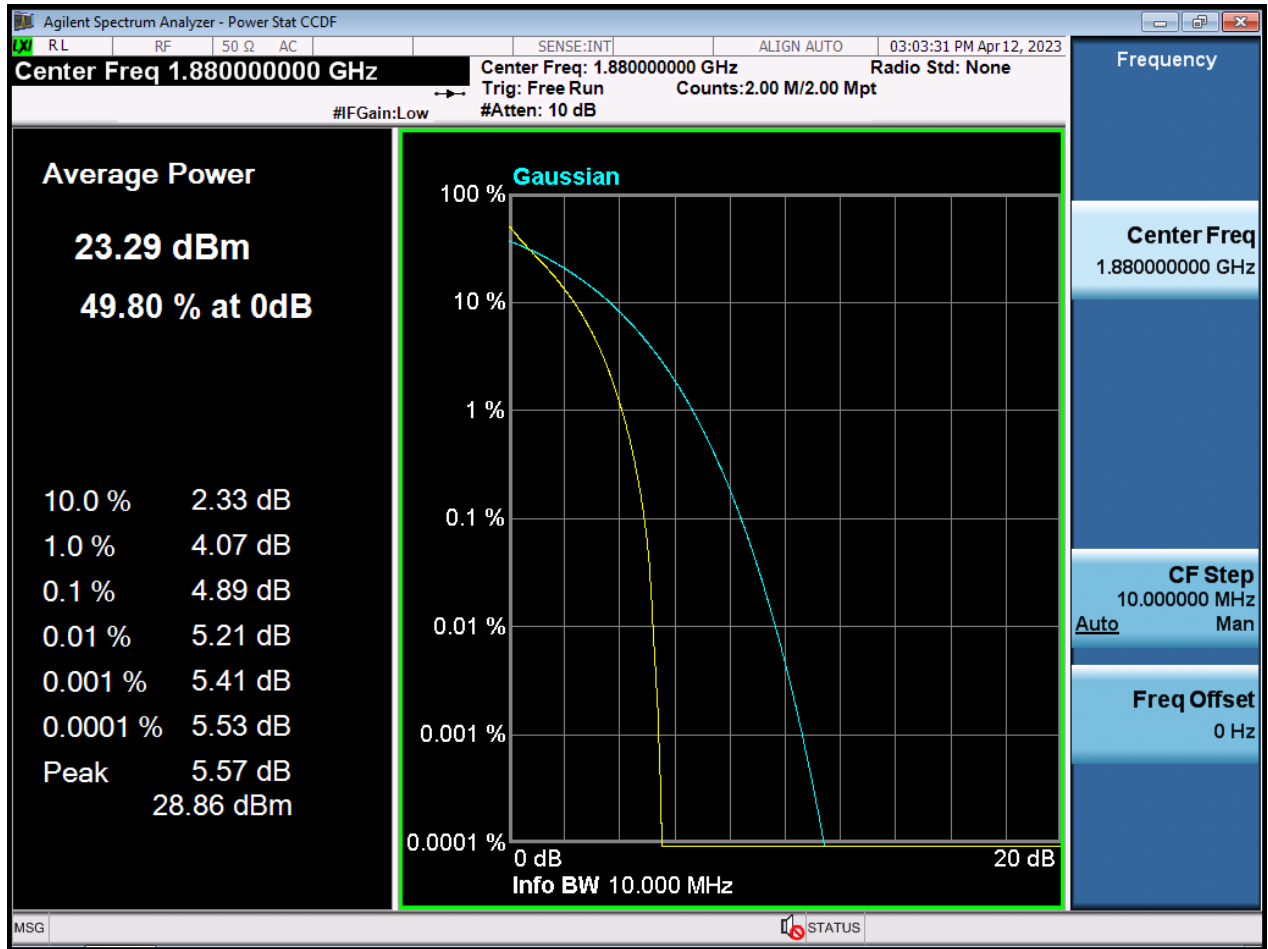


BW10 M\_PAR\_Middle Channel\_16QAM\_FullRB

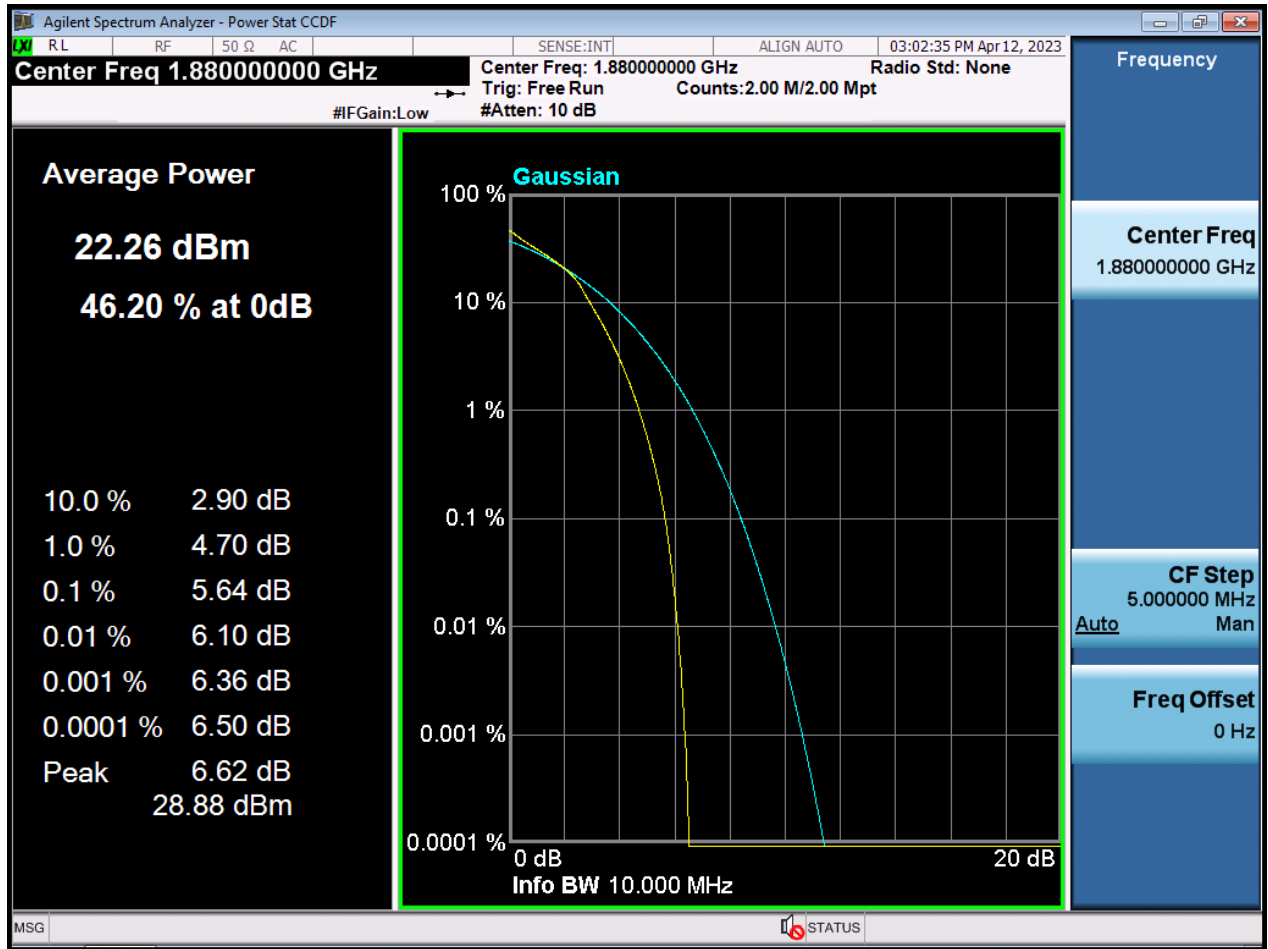


BW10 M\_PAR\_Middle Channel\_64QAM\_FullRB

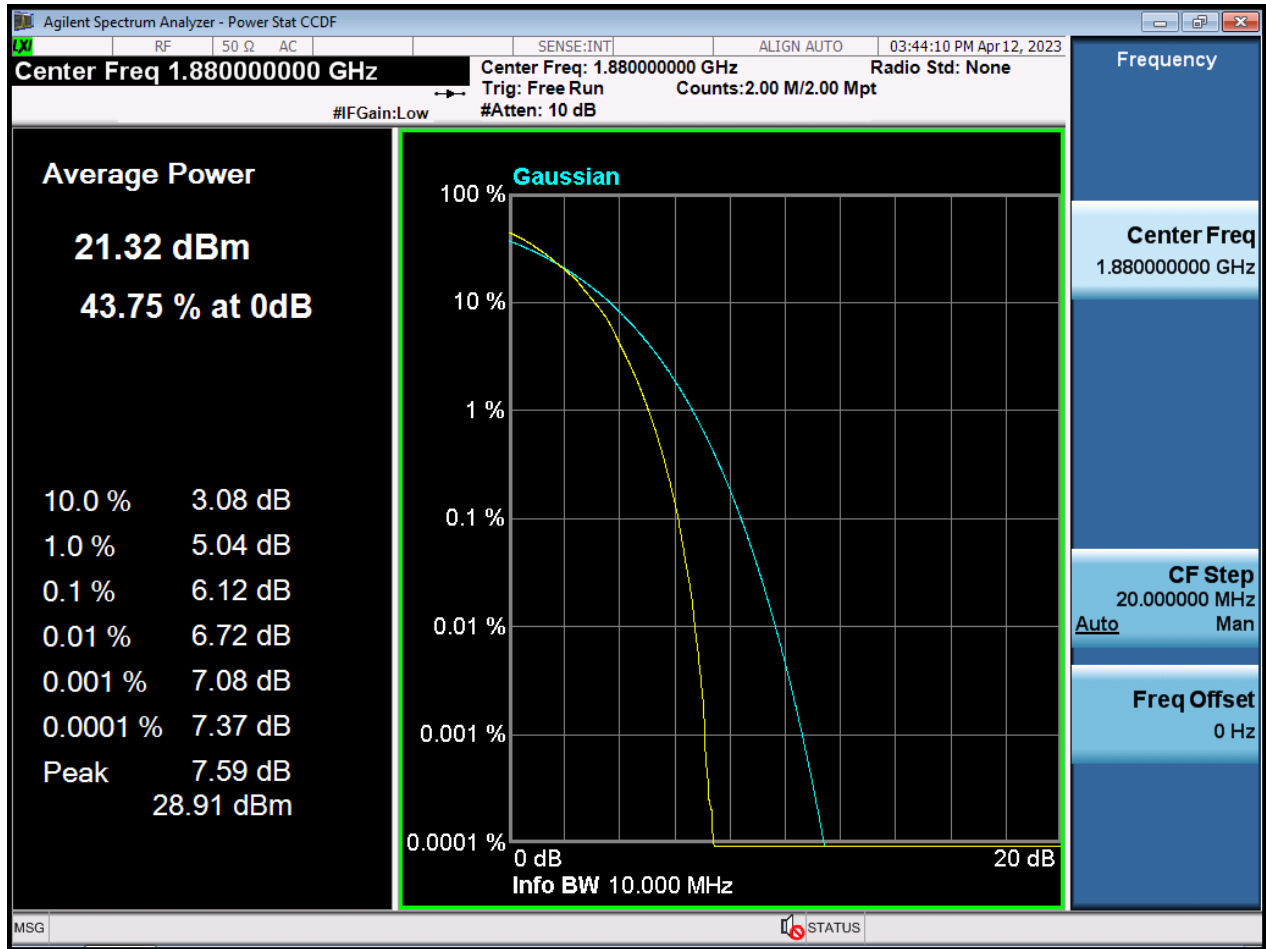


BW10 M\_PAR\_Middle Channel\_256QAM\_FullIRB

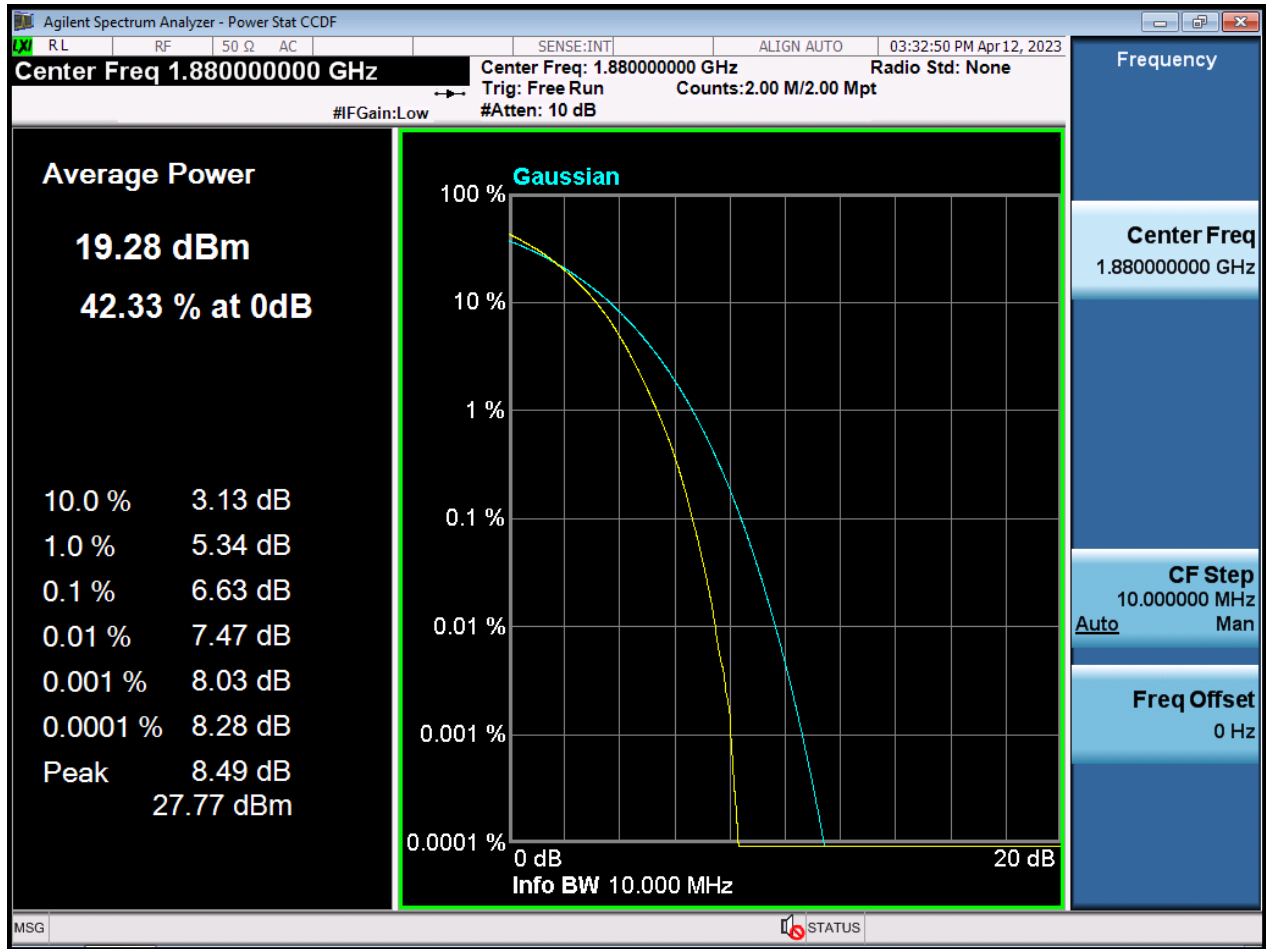


BW15 M\_PAR\_Middle Channel\_QPSK\_FullRB

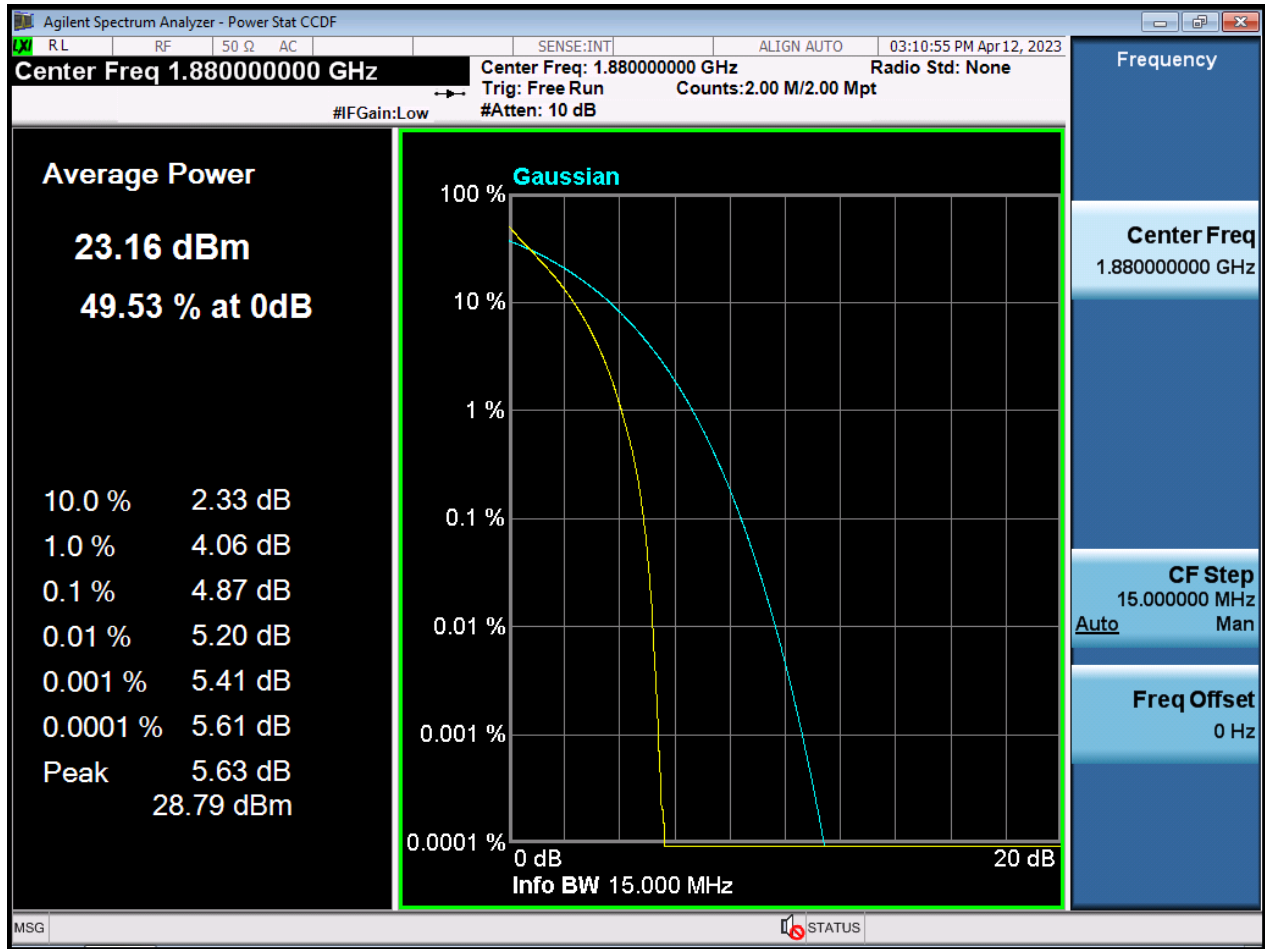


BW15 M\_PAR\_Middle Channel\_16QAM\_FullRB

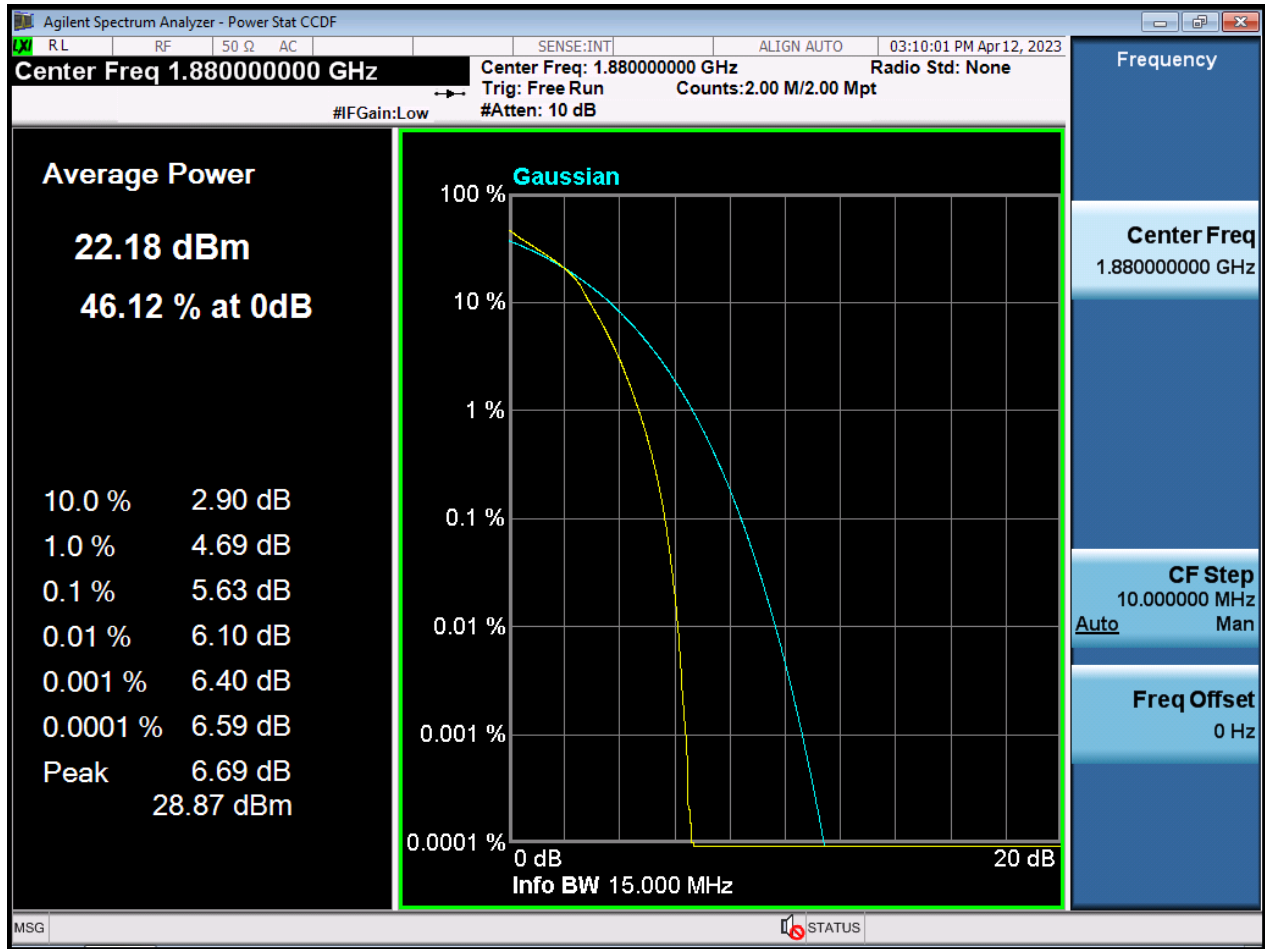

BW15 M\_PAR\_Middle Channel\_64QAM\_FullRB

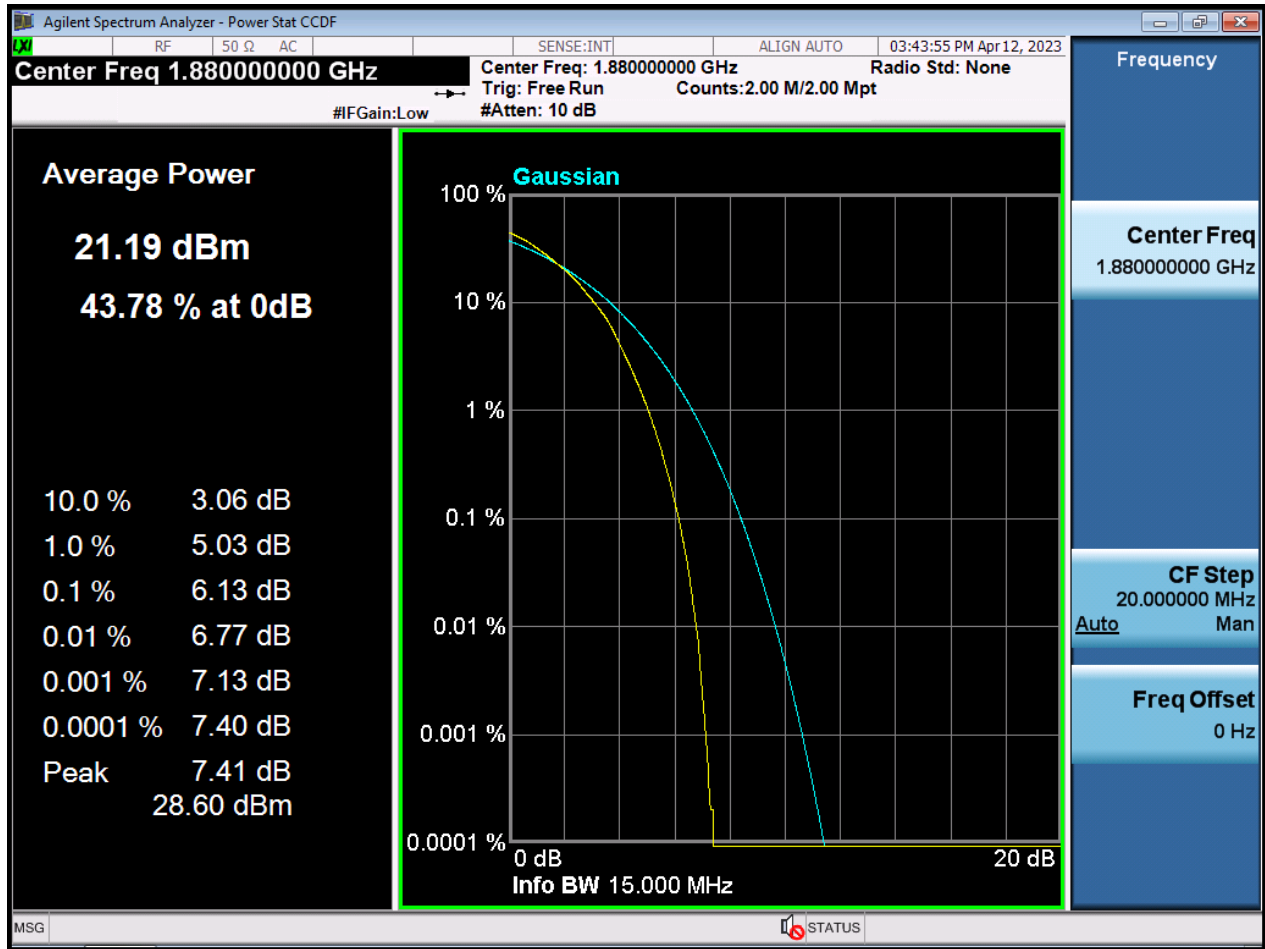


BW15 M\_PAR\_Middle Channel\_256QAM\_FullRB

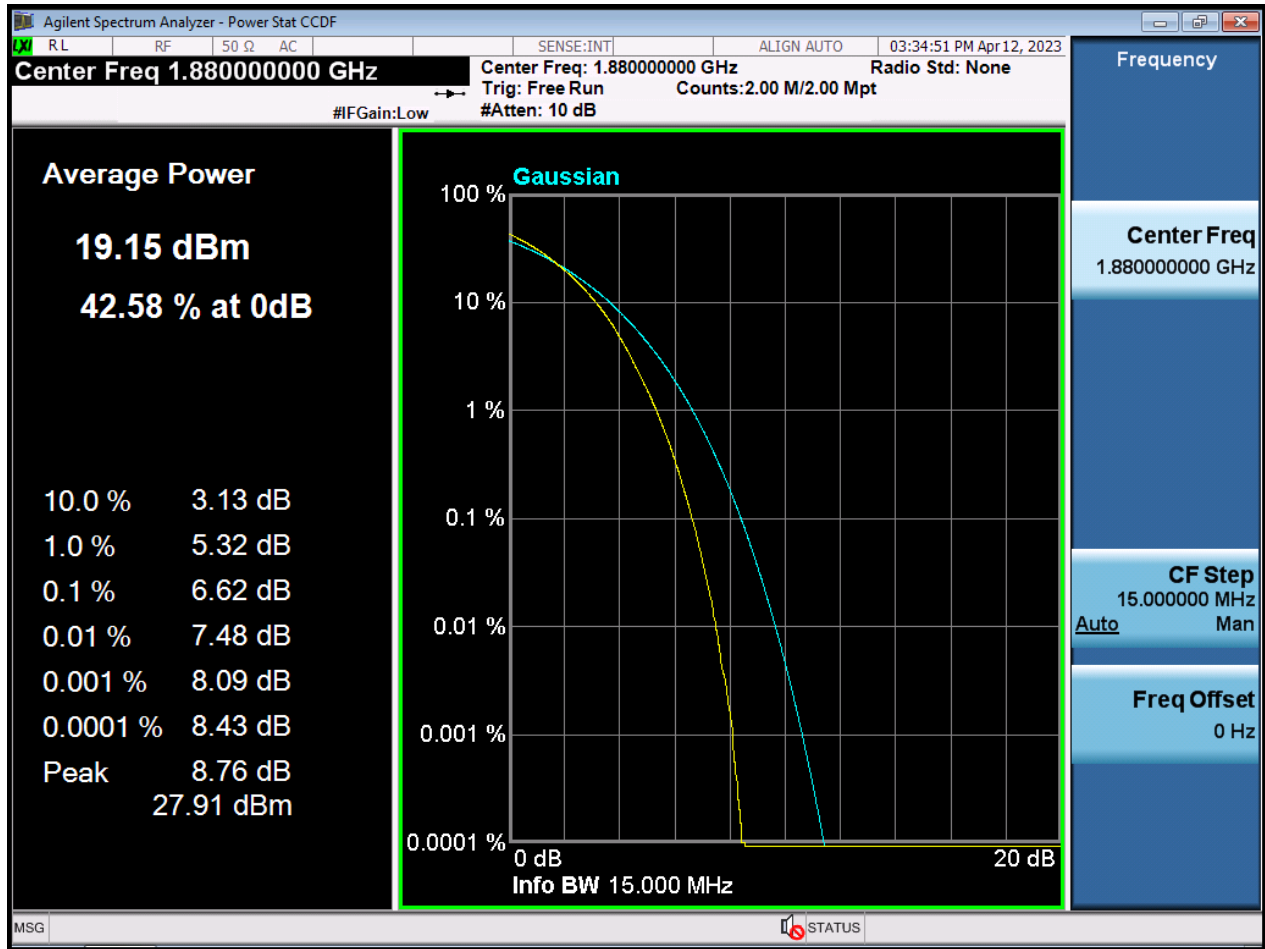





BW20 M\_PAR\_Middle Channel\_QPSK\_FullRB

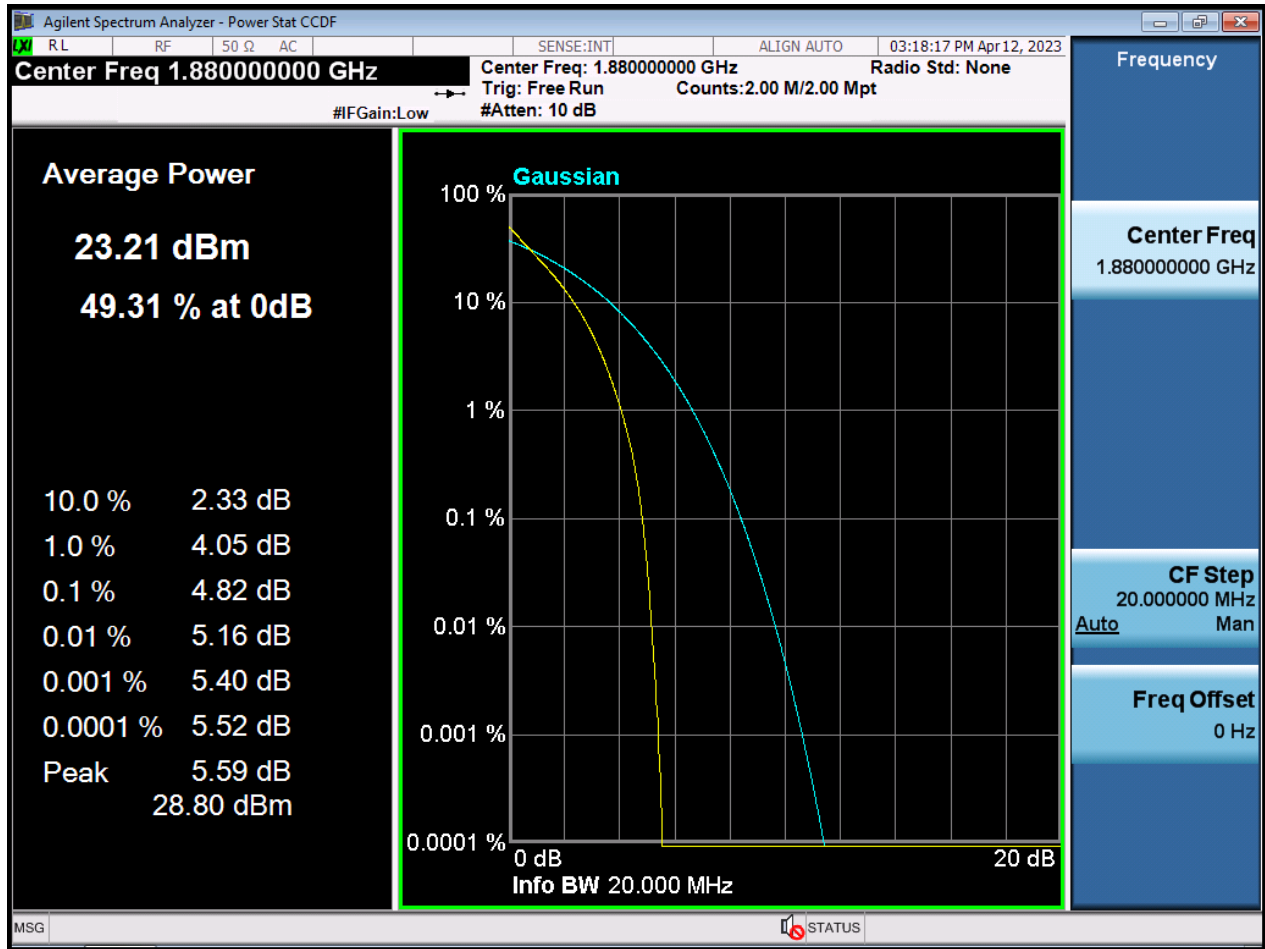


BW20 M\_PAR\_Middle Channel\_16QAM\_FullRB

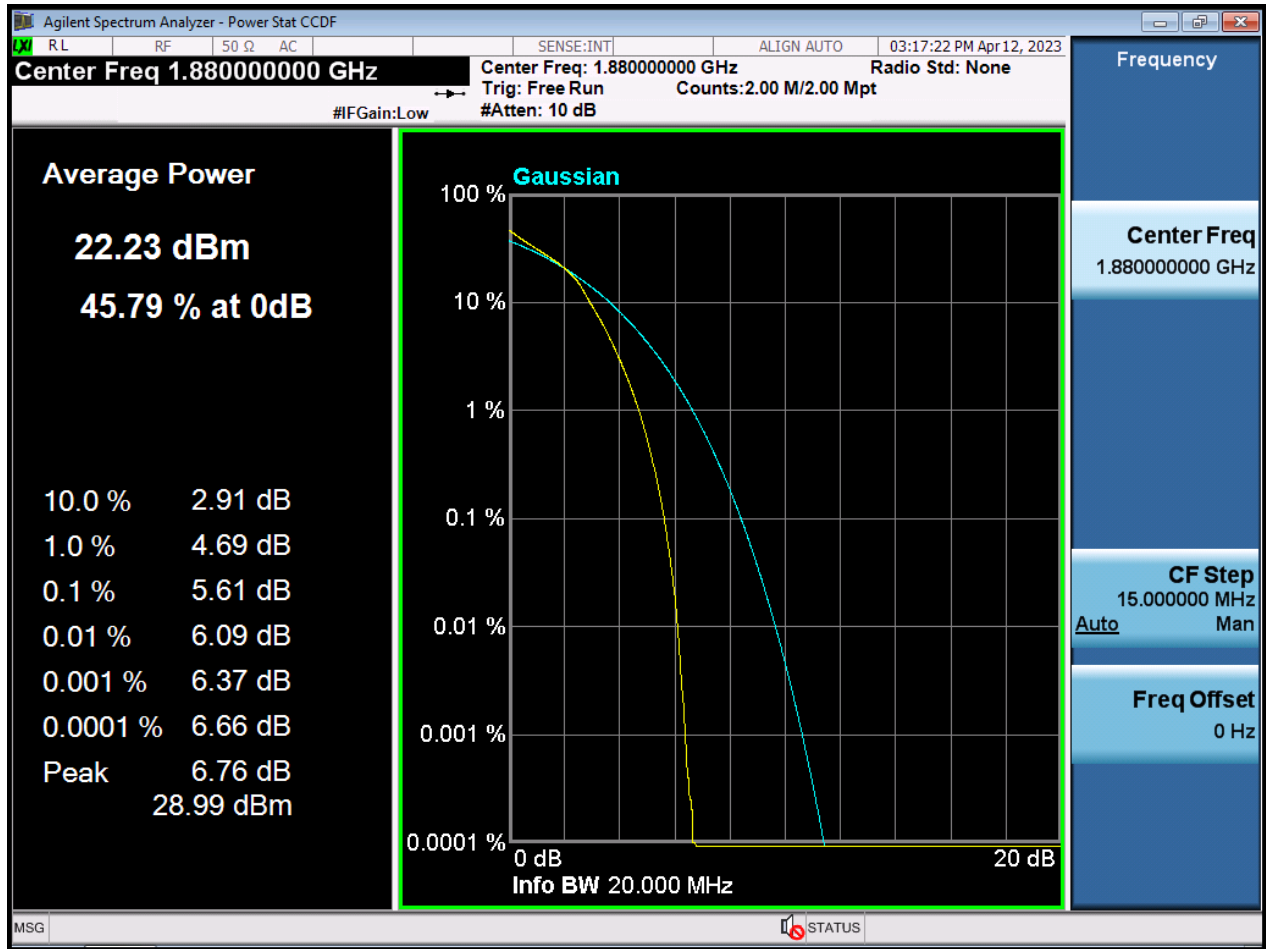


BW20 M\_PAR\_Middle Channel\_64QAM\_FullRB

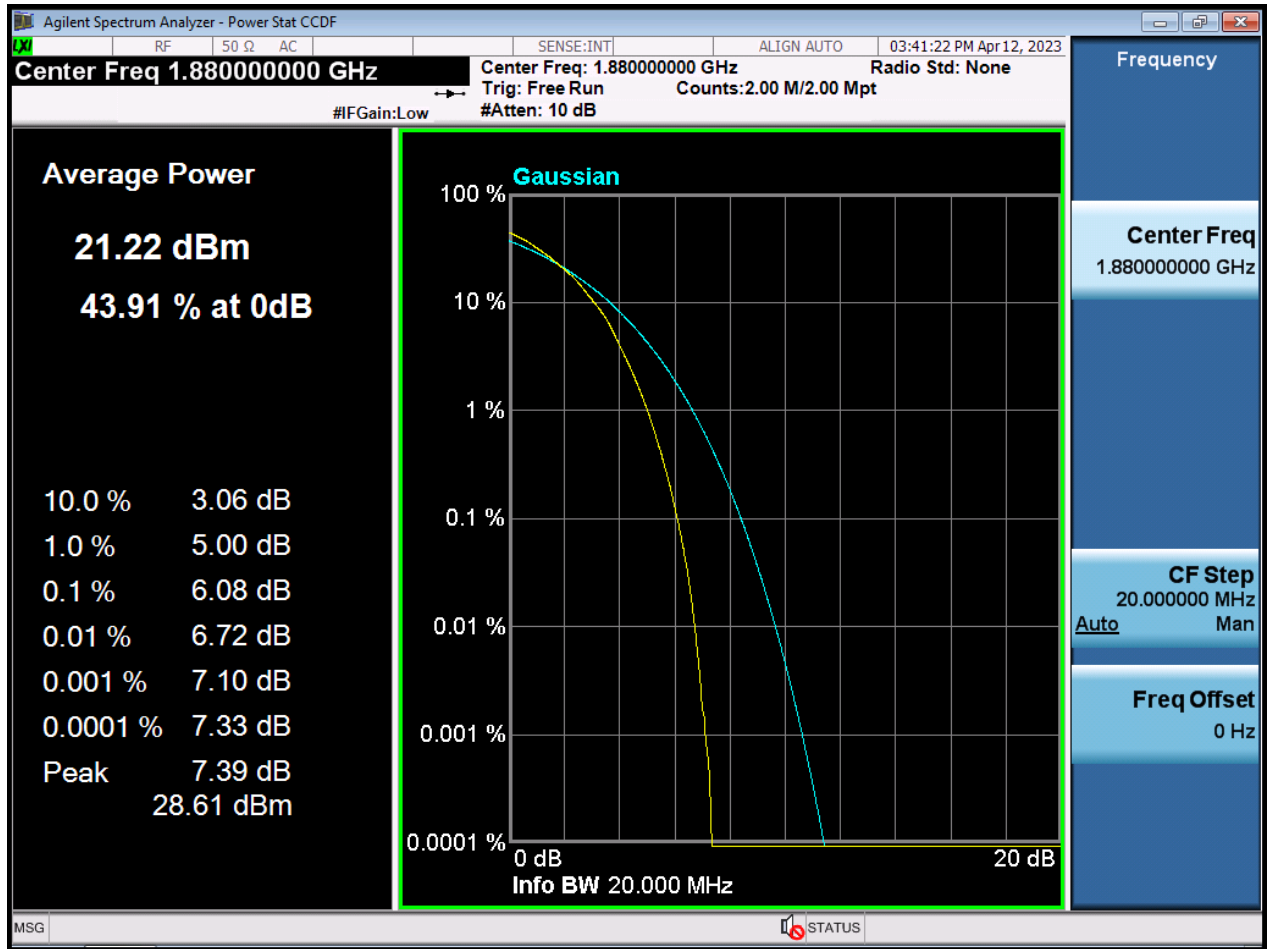


BW20 M\_PAR\_Middle Channel\_256QAM\_FullIRB

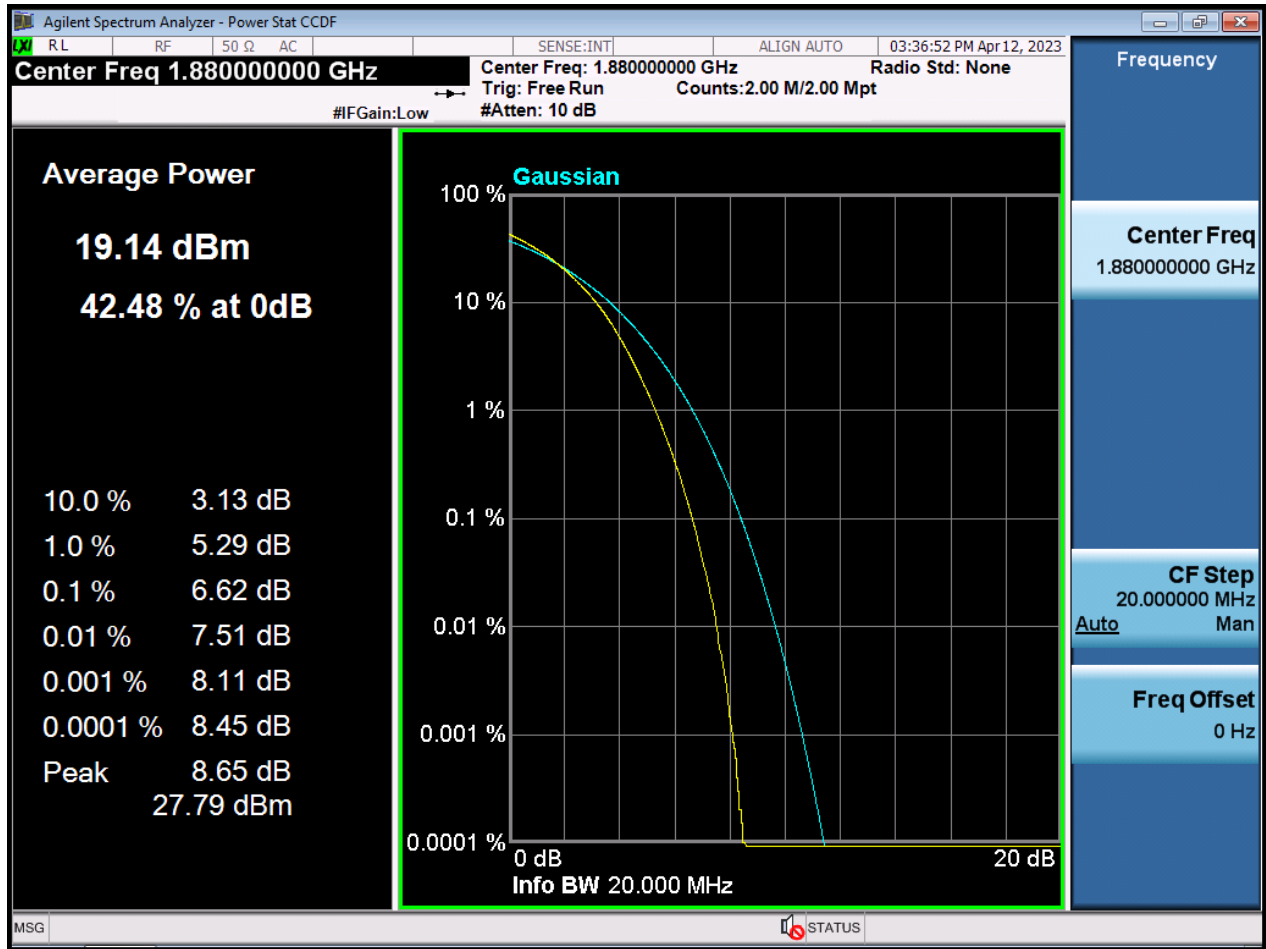


BW1.4 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

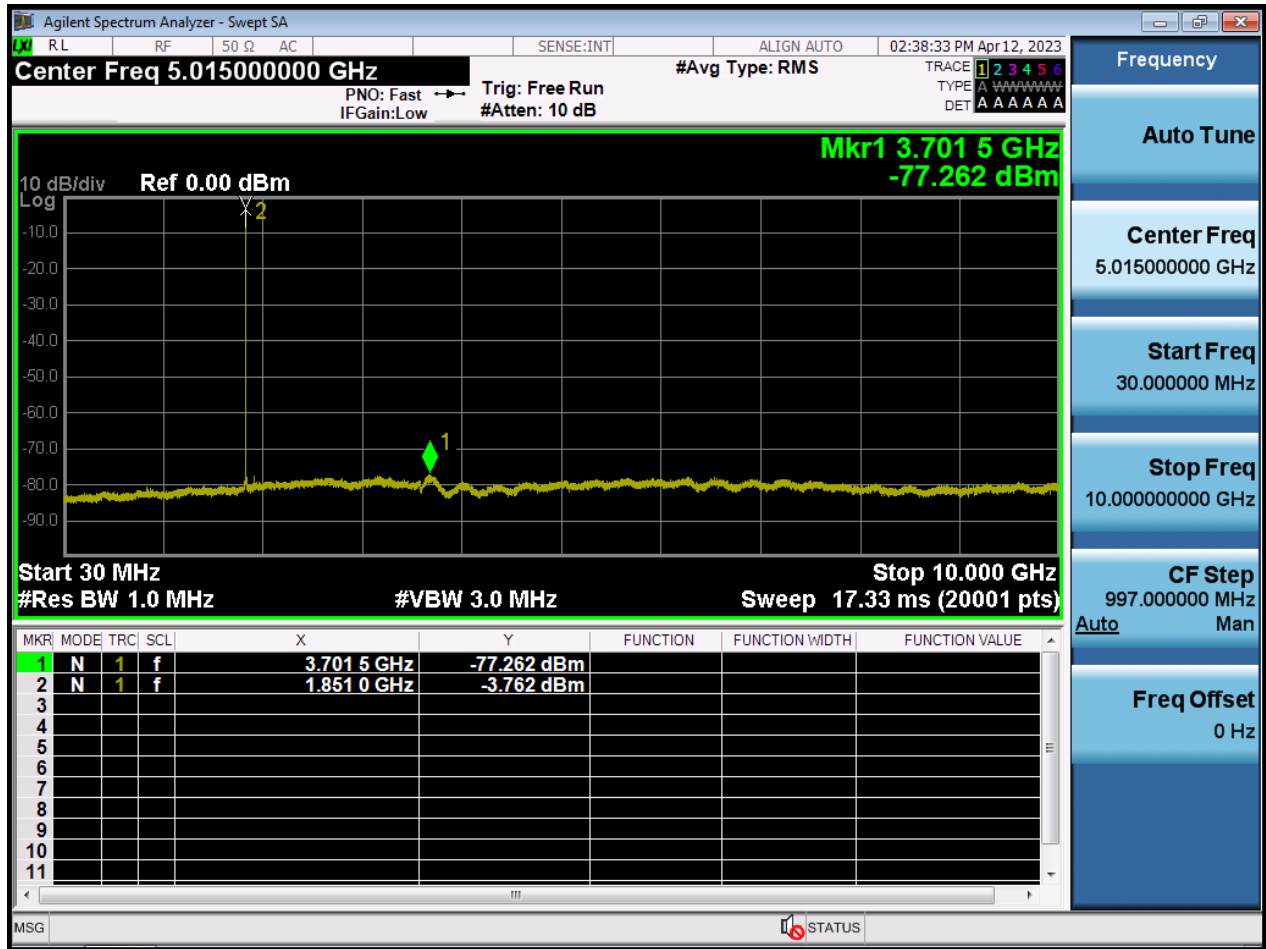


BW1.4 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

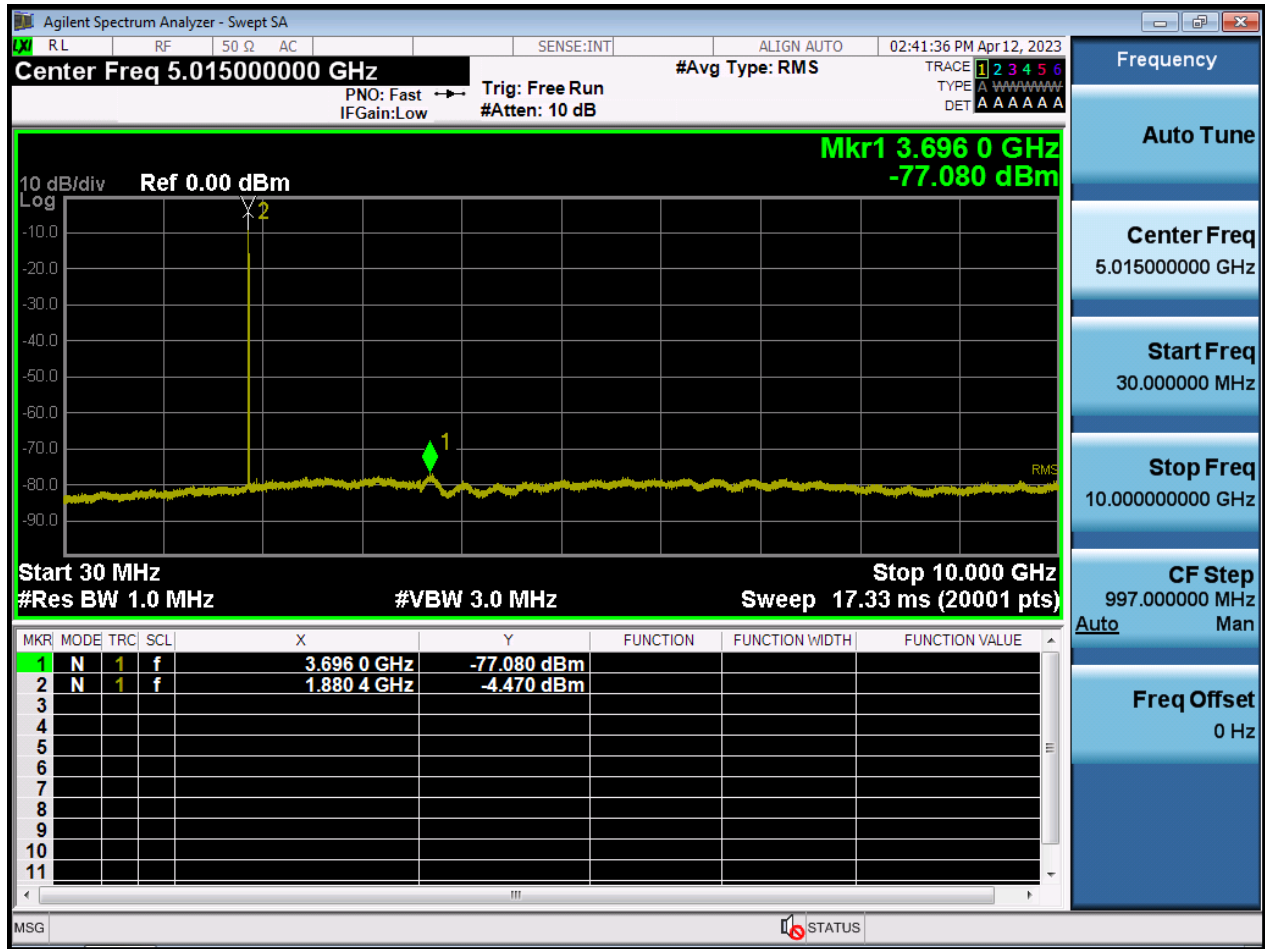

BW1.4 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

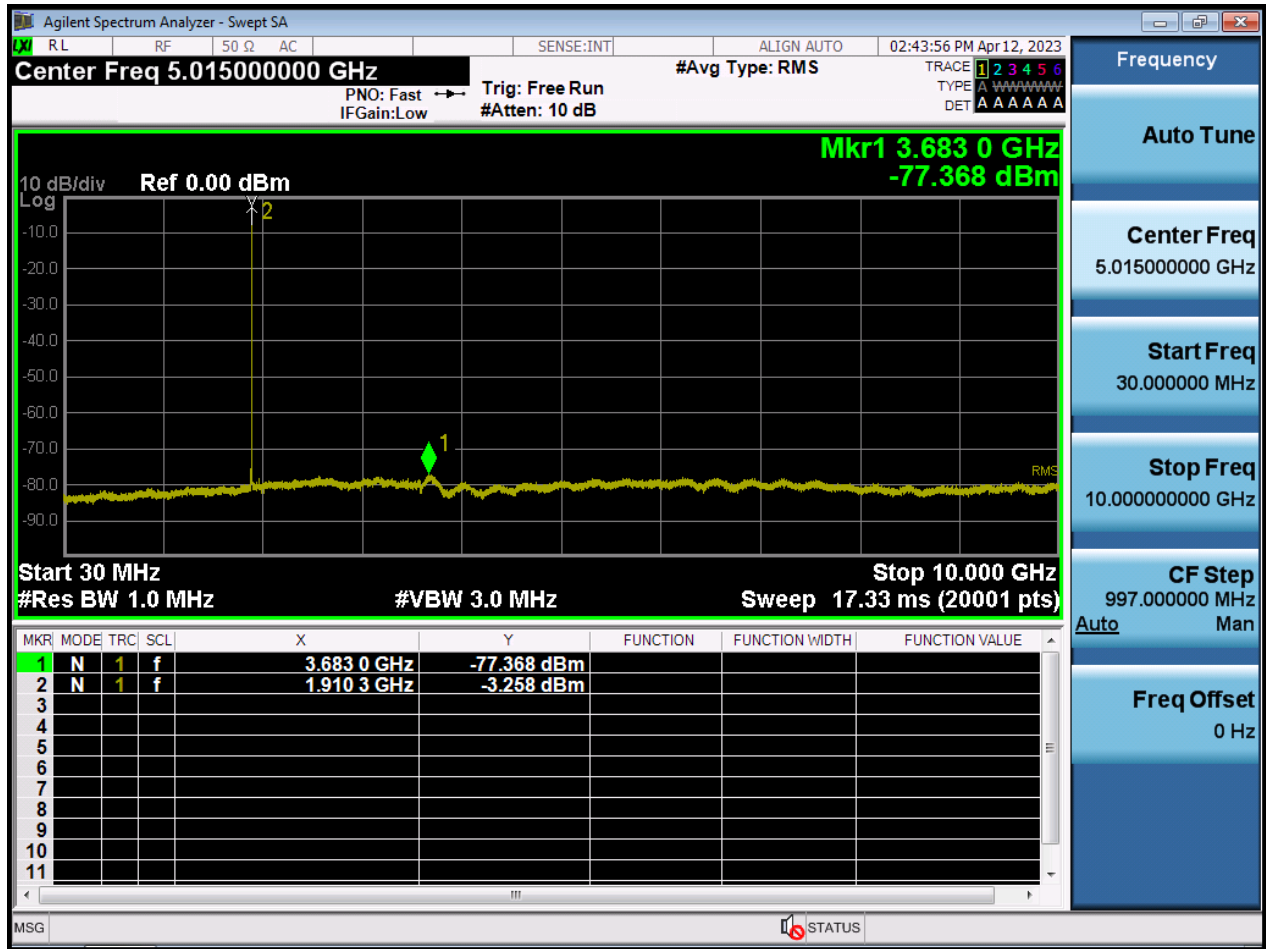

BW3 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

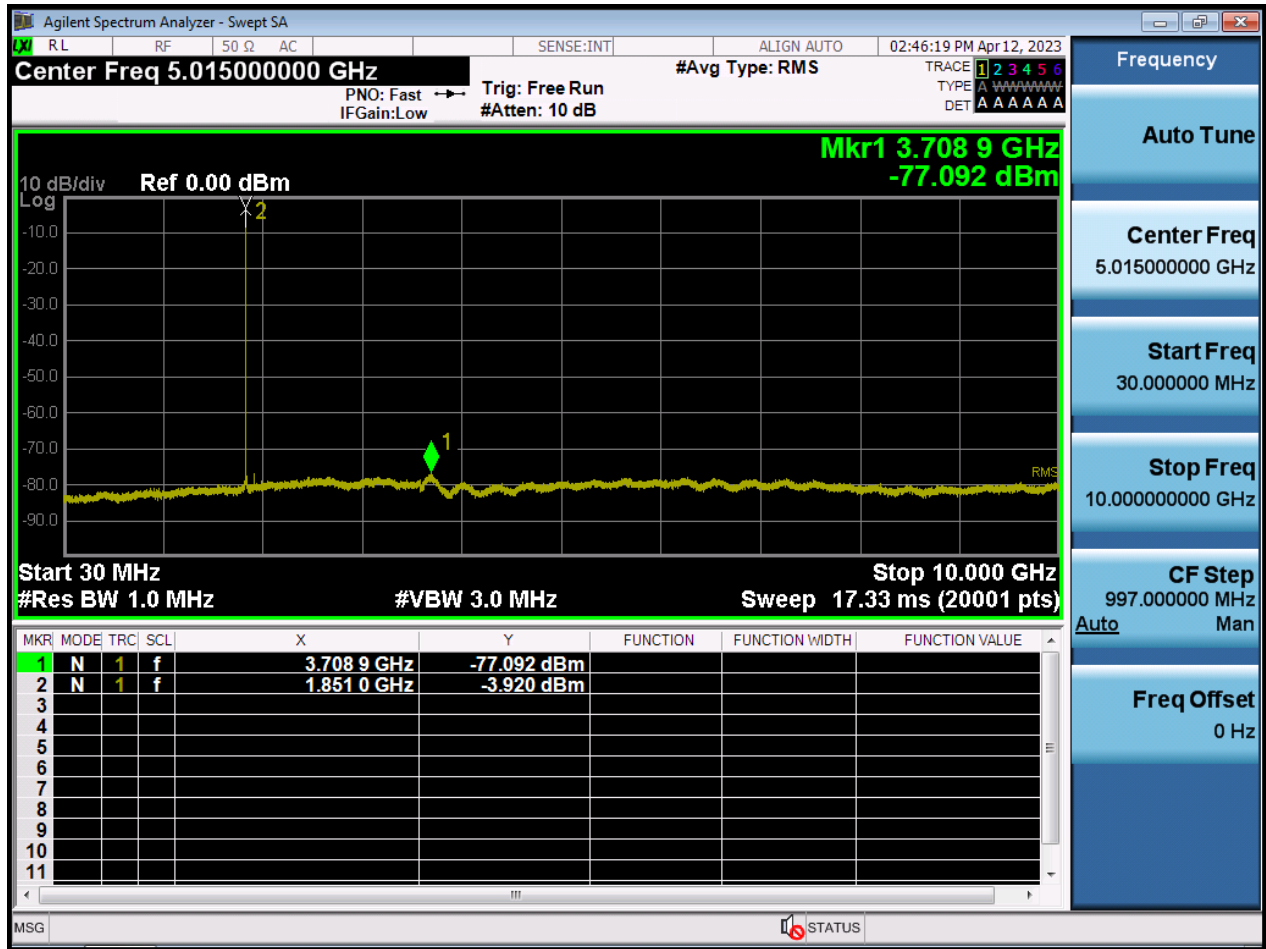





BW3 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

