



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR  
GSM/WCDMA Phone + Bluetooth and WLAN 2.4GHz b/g/n**

**MODEL NUMBER: SM-G360HU/DS  
FCC ID: A3LSMG360HU**

**REPORT NUMBER: 14I19507-E4**

**ISSUE DATE: December 4, 2014**

**Prepared for  
SAMSUNG ELECTRONICS CO., LTD.  
129 Samsung-ro, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

**Prepared by  
UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

Rev.	Date	Revisions	Revised By
--	12/4/14	Initial issue	P. Zhang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	6
4.2. SAMPLE CALCULATION .....	7
4.3. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>13</b>
<b>8. SUMMARY TABLE .....</b>	<b>14</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
9.1. 6 dB BANDWIDTH.....	15
9.1.1. 802.11b MODE IN THE 2.4 GHz BAND.....	15
9.1.2. 802.11g MODE IN THE 2.4 GHz BAND.....	15
9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	16
9.1.4. 6 dB BANDWIDTH MID CH PLOTS.....	17
9.2. 99% BANDWIDTH.....	18
9.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	18
9.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	18
9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	18
9.2.4. 99% BANDWIDTH MID CH PLOTS.....	19
9.3. OUTPUT POWER.....	20
9.3.1. 802.11b MODE IN THE 2.4 GHz BAND.....	21
9.3.2. 802.11g MODE IN THE 2.4 GHz BAND.....	22
9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	23

9.4. PSD.....24  
9.4.1. 802.11b MODE IN THE 2.4 GHz BAND.....24  
9.4.2. 802.11g MODE IN THE 2.4 GHz BAND.....25  
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....25  
9.4.4. PSD Chain 0 MID CH PLOTS.....26  
9.5. OUT-OF-BAND EMISSIONS.....27  
9.5.1. 802.11b MODE IN THE 2.4 GHz BAND.....28  
9.5.2. 802.11g MODE IN THE 2.4 GHz BAND.....34  
9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....40  
10. RADIATED TEST RESULTS .....46  
10.1. LIMITS AND PROCEDURE.....46  
10.2. TRANSMITTER ABOVE 1 GHz.....48  
10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND.....48  
10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND.....61  
10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....74  
10.3. WORST-CASE BELOW 1 GHz.....87  
11. AC POWER LINE CONDUCTED EMISSIONS .....90  
12. SETUP PHOTOS .....95

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD  
**EUT DESCRIPTION:** GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n  
**MODEL:** SM-G360HU/DS  
**SERIAL NUMBER:** R31F801R93W (conducted), R31F808G6SJ (radiated)  
**DATE TESTED:** September 8 - 12, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released

For UL Verification Services Inc. By:

Tested By:



PENG ZHANG  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.

DANIEL SOPER  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input checked="" type="checkbox"/> Chamber G(IC: 2324B-7)
	<input checked="" type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

## 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

## 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth and WLAN 2.4GHz b/g/n

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	16.4	43.65
2412 - 2462	802.11g	14.5	28.18
2412 - 2462	802.11n HT20	12.2	16.60

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 2.034dBi.

## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA0U10IBE	N/A	N/A
Headset	Samsung	N/A	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

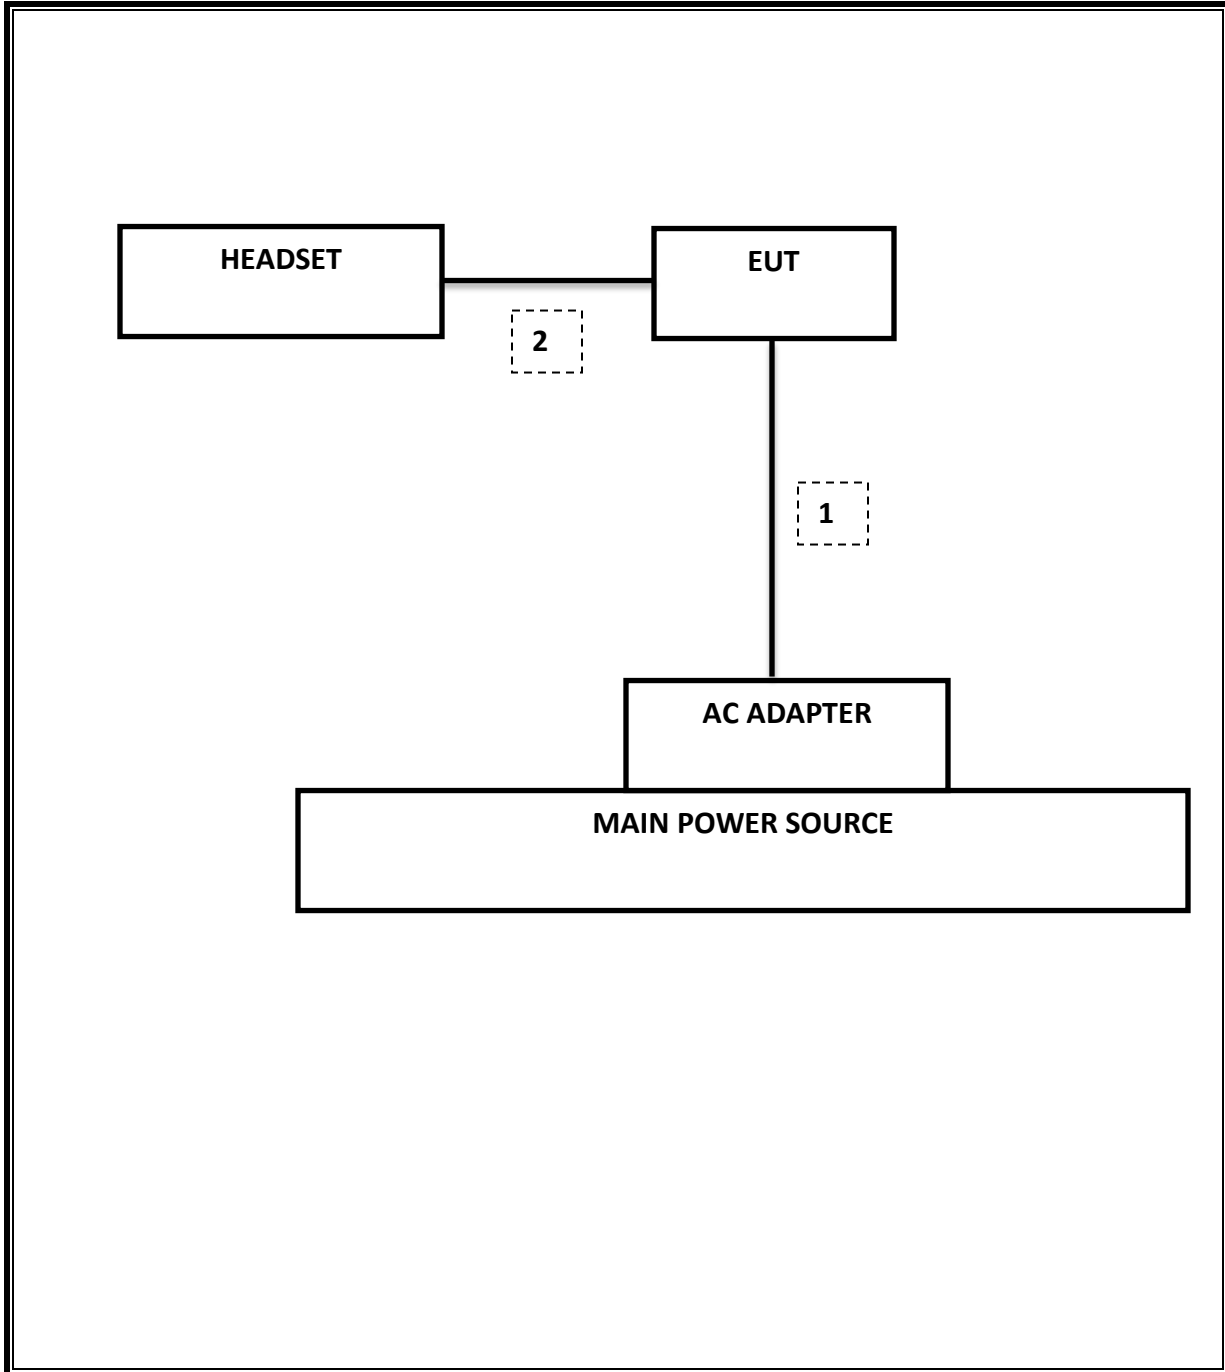

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
Spectrum Analyzer,9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/15
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn,18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and AVGPSD-3 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

## 8. SUMMARY TABLE

The model FCC ID: A3LSMG360HU shares the same enclosure and circuit board as mode FCC ID: A3LSMG360H. The WLAN/Bluetooth circuitry and layout, including antenna, are almost identical between the two units. The WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMG360H WLAN remains representative of this model (FCC ID: A3LSMG360HU) test data for FCC ID: A3LSMG360H is being submitted for this application.

Radiated emissions were fully re-evaluated against FCC Part 15B requirements for digital devices and results indicated no significant differences between the two versions.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.6 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-30.18dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	16.4 dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-14.22 dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	42.87 dBmV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	50.9dBuV/m

## 9. ANTENNA PORT TEST RESULTS

### 9.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS

##### 9.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.57	0.5
Mid	2437	8.60	0.5
High	2462	9.06	0.5
Worst		8.60	


##### 9.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.15	0.5
Mid	2437	15.15	0.5
High	2462	15.10	0.5
Worst		15.10	

### 9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.18	0.5
Mid	2437	15.18	0.5
High	2462	15.15	0.5
Worst		15.15	

### 9.1.4. 6 dB BANDWIDTH MID CH PLOTS

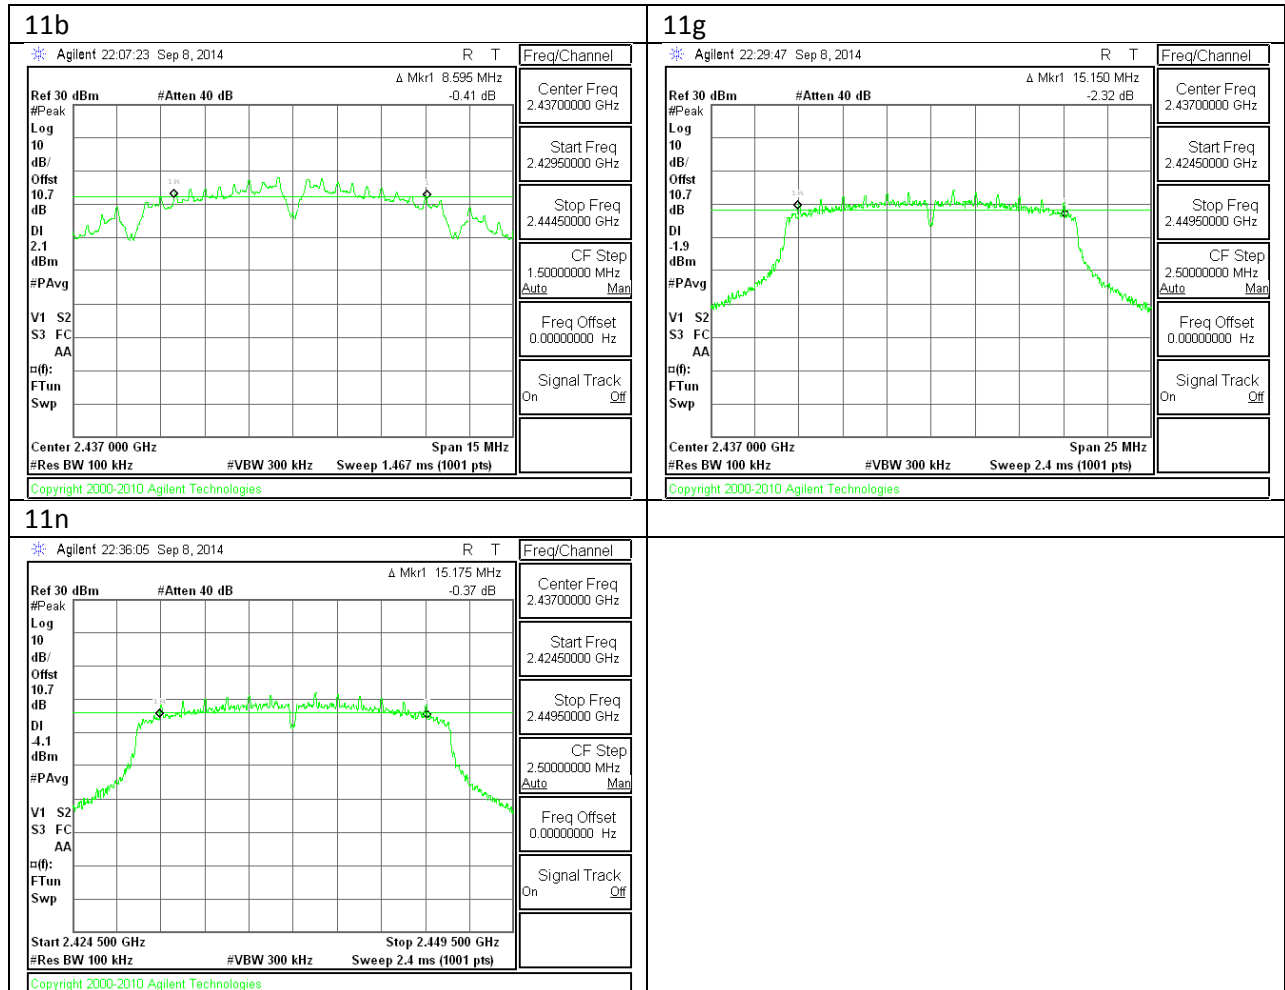

## 9.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.90
Mid	2437	13.89
High	2462	13.90
Worst		13.90


#### 9.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.19
Mid	2437	16.13
High	2462	16.21
Worst		16.21

#### 9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.26
Mid	2437	17.26
High	2462	17.26
Worst		17.26

### 9.2.4. 99% BANDWIDTH MID CH PLOTS

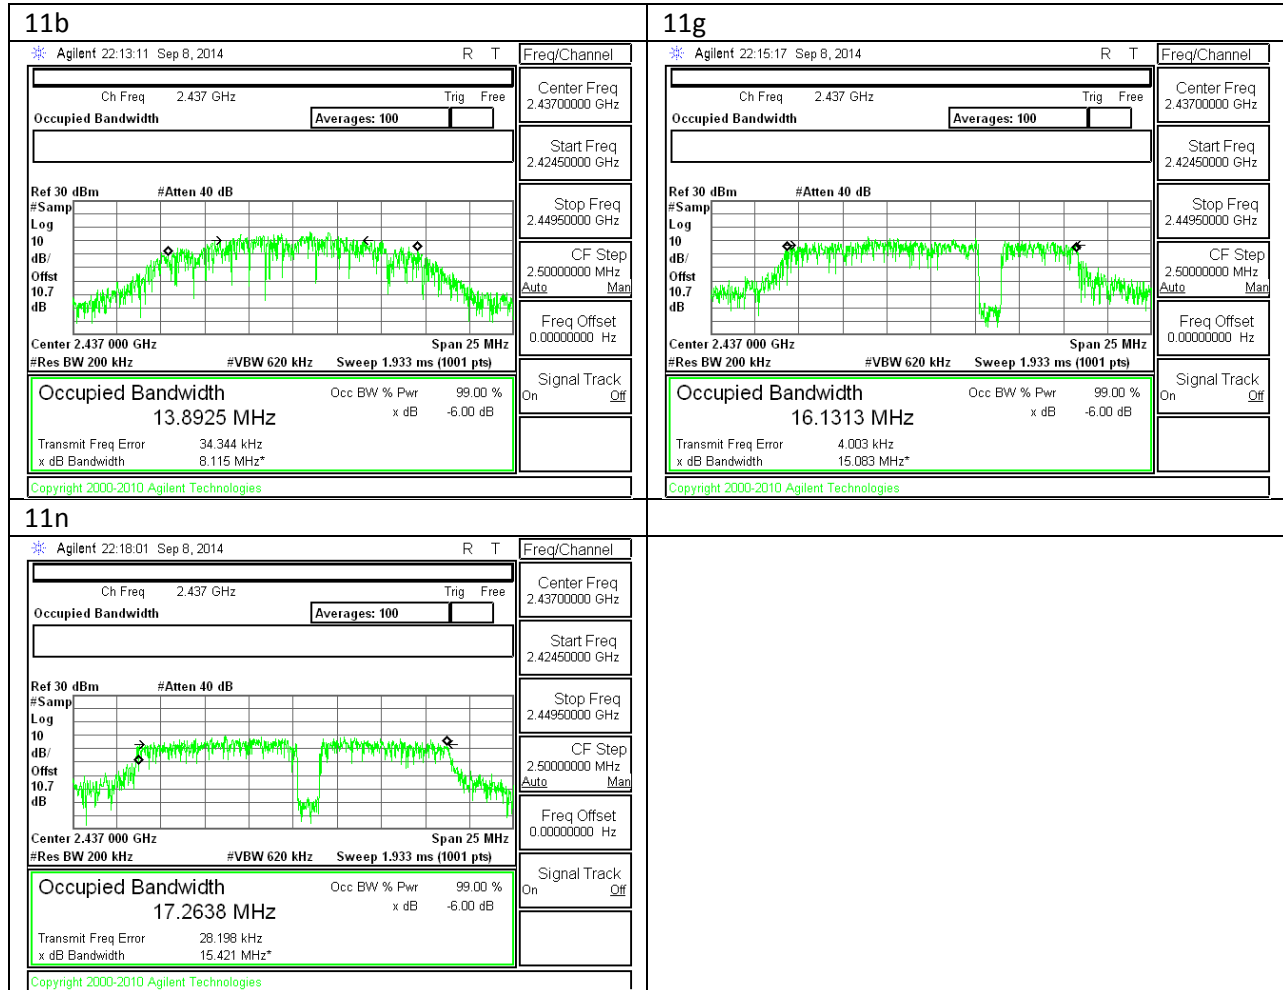

### **9.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power.

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 0.2 dB (including 10 dB pad and 0.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### **RESULTS**

**9.3.1. 802.11b MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.03	30.00	30	36	30.00
Mid	2437	2.03	30.00	30	36	30.00
High	2462	2.03	30.00	30	36	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	16.30	16.30	30.00	-13.70
Mid	2437	16.40	16.40	30.00	-13.60
High	2462	16.30	16.30	30.00	-13.70
Worst			16.40		

### 9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.03	30.00	30	36	30.00
Mid	2437	2.03	30.00	30	36	30.00
High	2462	2.03	30.00	30	36	30.00

#### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.50	14.50	30.00	-15.50
Mid	2437	14.30	14.30	30.00	-15.70
High	2462	14.50	14.50	30.00	-15.50
Worst			14.50		

**9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.03	30.00	30	36	30.00
Mid	2437	2.03	30.00	30	36	30.00
High	2462	2.03	30.00	30	36	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	11.90	11.90	30.00	-18.10
Mid	2437	12.20	12.20	30.00	-17.80
High	2462	12.10	12.10	30.00	-17.90
Worst			12.20		

## 9.4. PSD

### LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

#### 9.4.1. 802.11b MODE IN THE 2.4 GHz BAND

##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-14.36	8.0	-22.4
Mid	2437	-14.56	8.0	-22.6
High	2462	-14.22	8.0	-22.2

### 9.4.2. 802.11g MODE IN THE 2.4 GHz BAND

#### PSD Results


Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-18.97	8.0	-27.0
Mid	2437	-19.85	8.0	-27.9
High	2462	-20.09	8.0	-28.1

### 9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-21.20	8.0	-29.2
Mid	2437	-20.33	8.0	-28.3
High	2462	-20.87	8.0	-28.9

### 9.4.4. PSD Chain 0 MID CH PLOTS

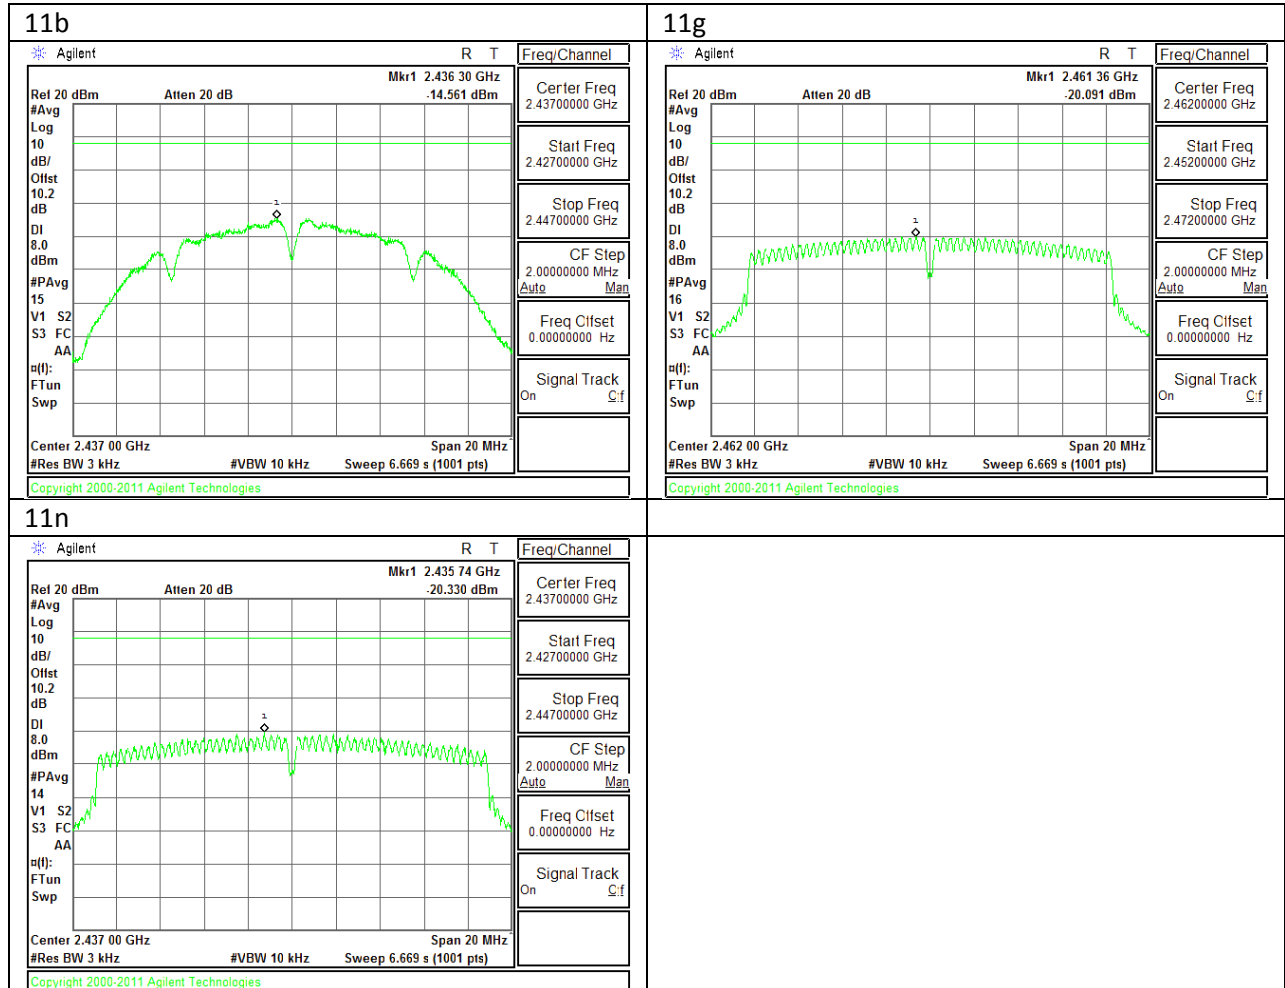

## **9.5. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

### **RESULTS**


### 9.5.1. 802.11b MODE IN THE 2.4 GHz BAND

#### IN-BAND REFERENCE LEVEL

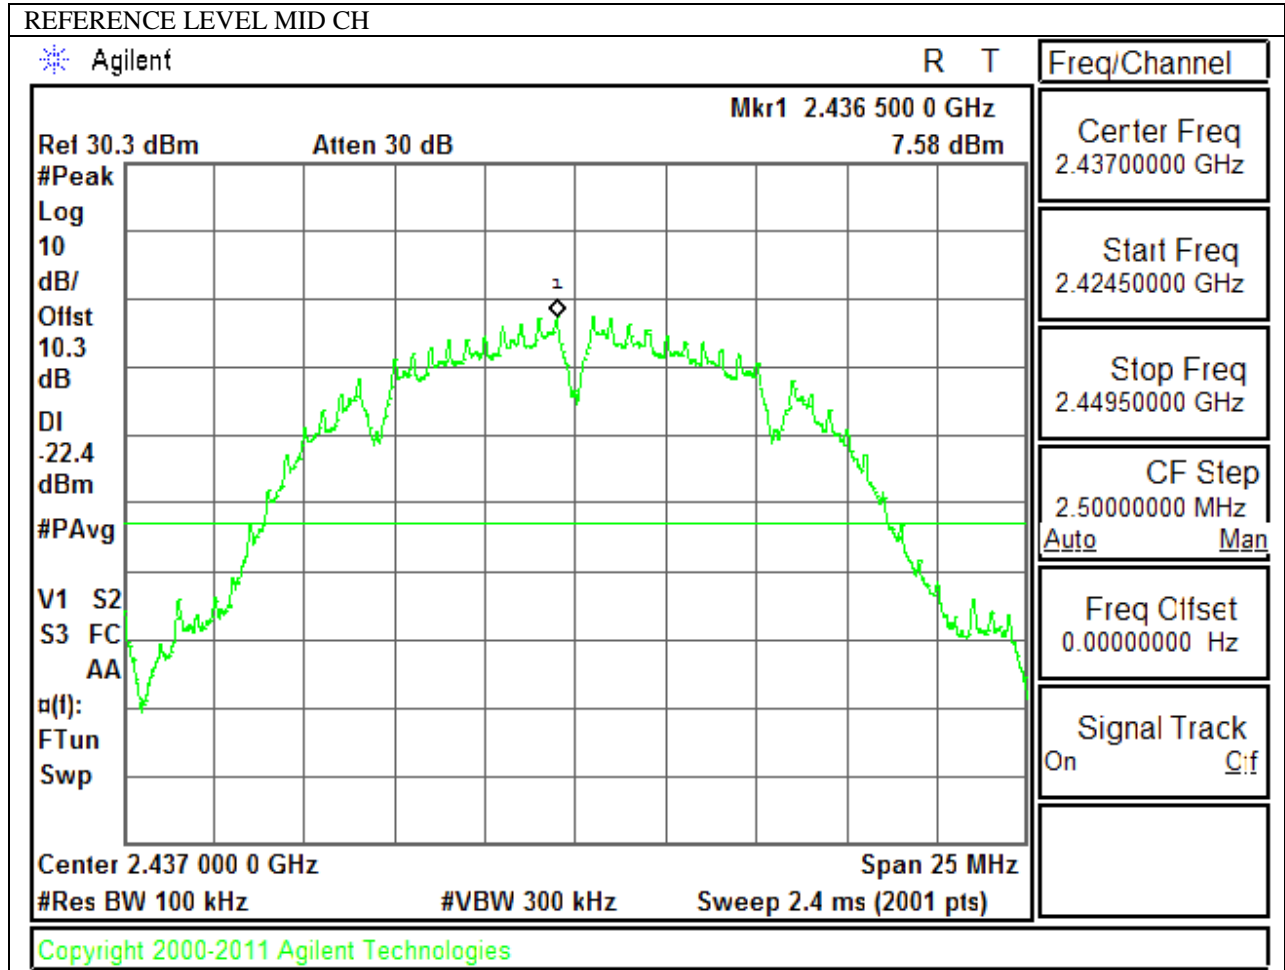






**HIGH CHANNEL BANDEDGE**

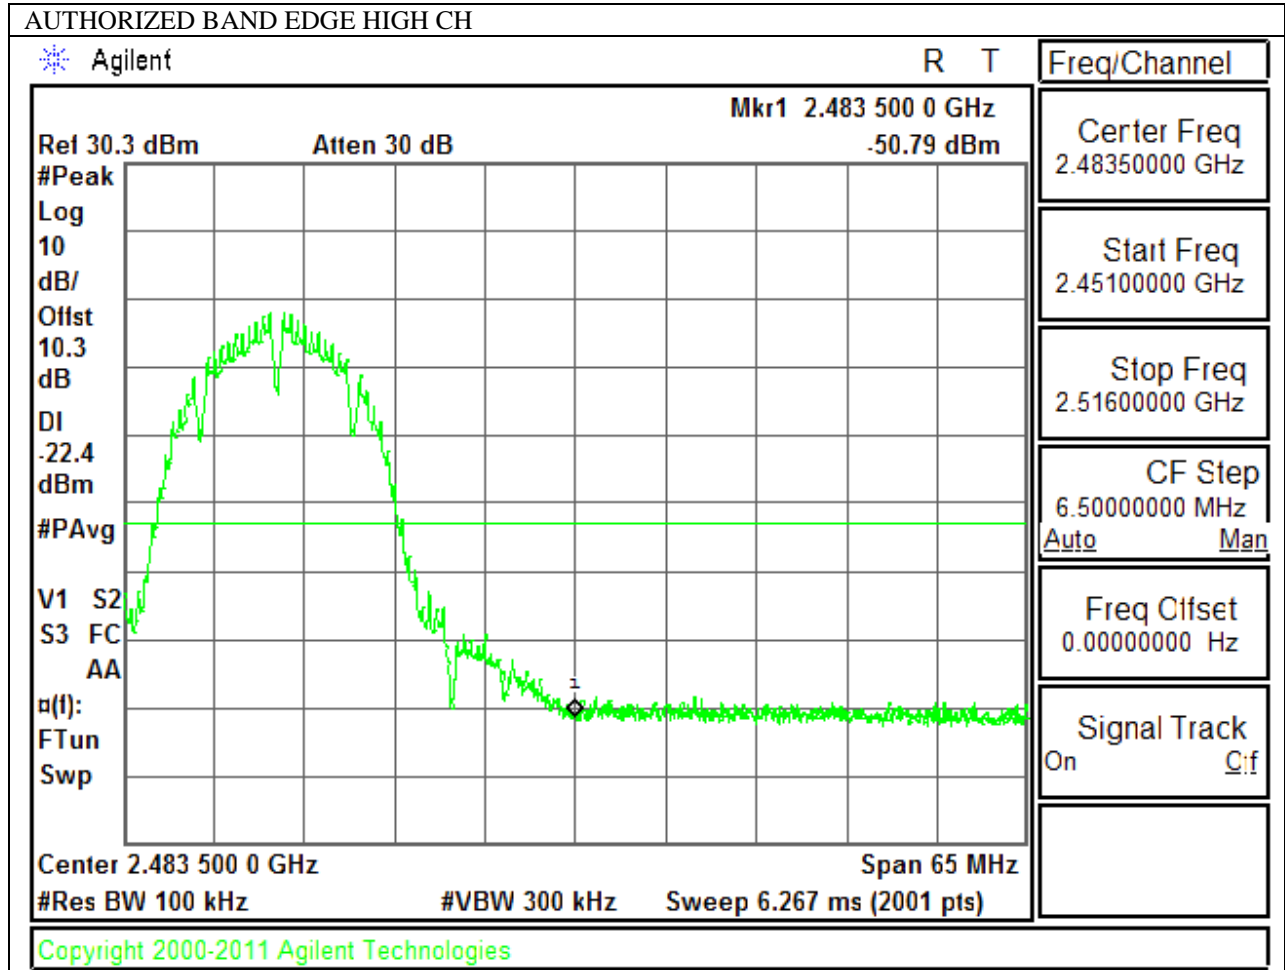

**OUT-OF-BAND EMISSIONS**

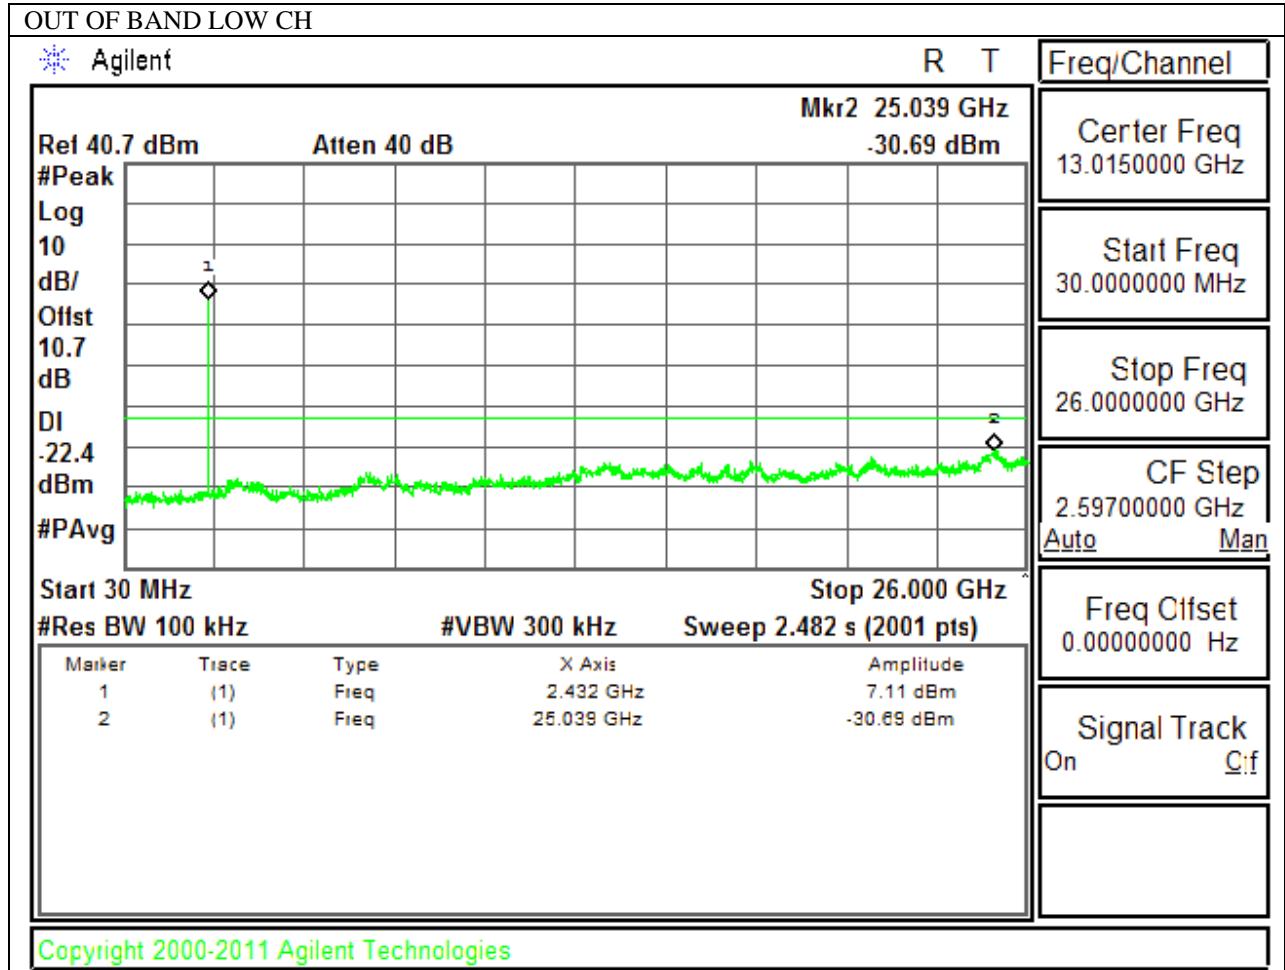


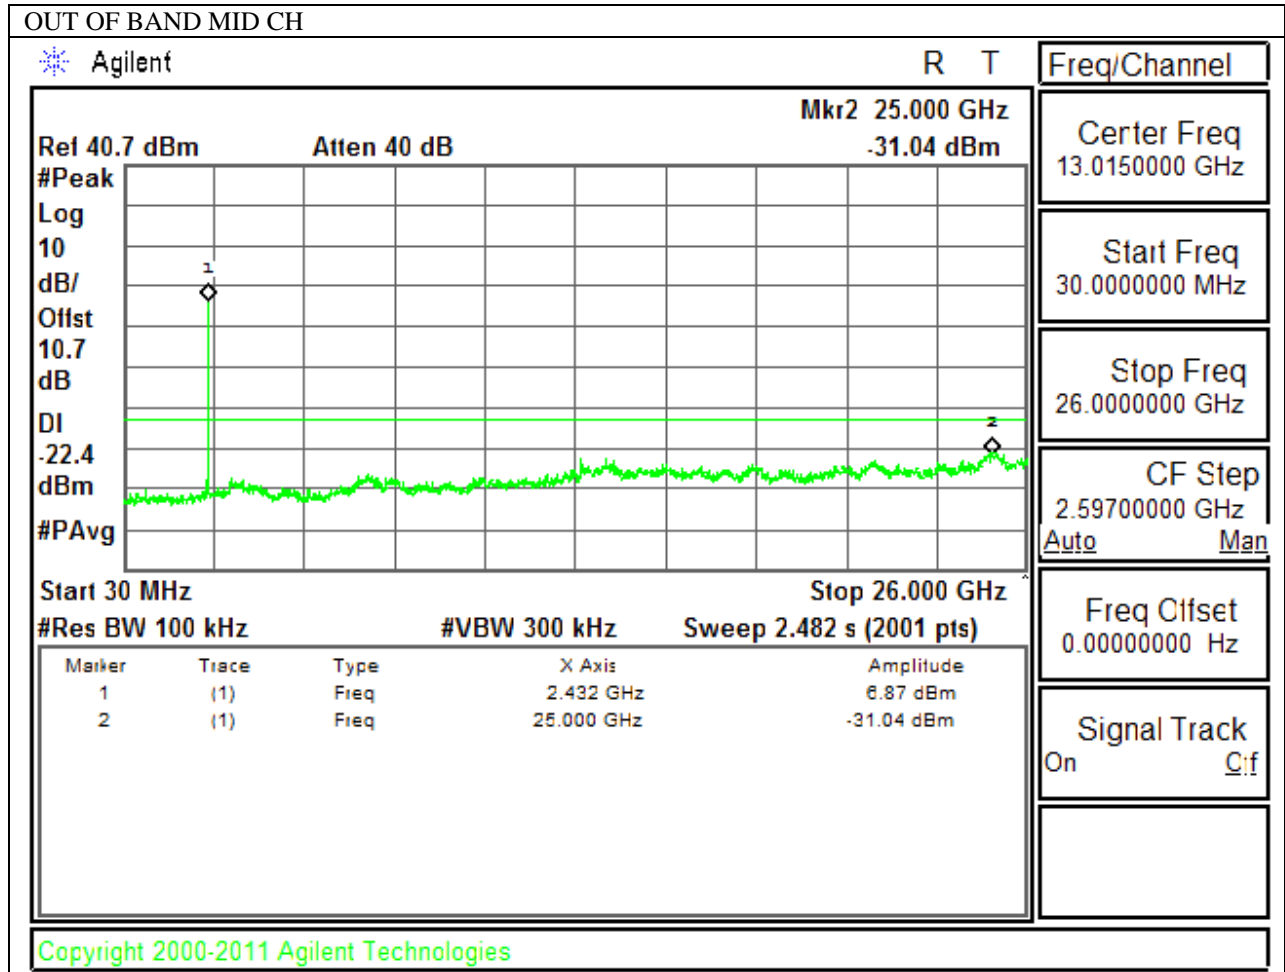

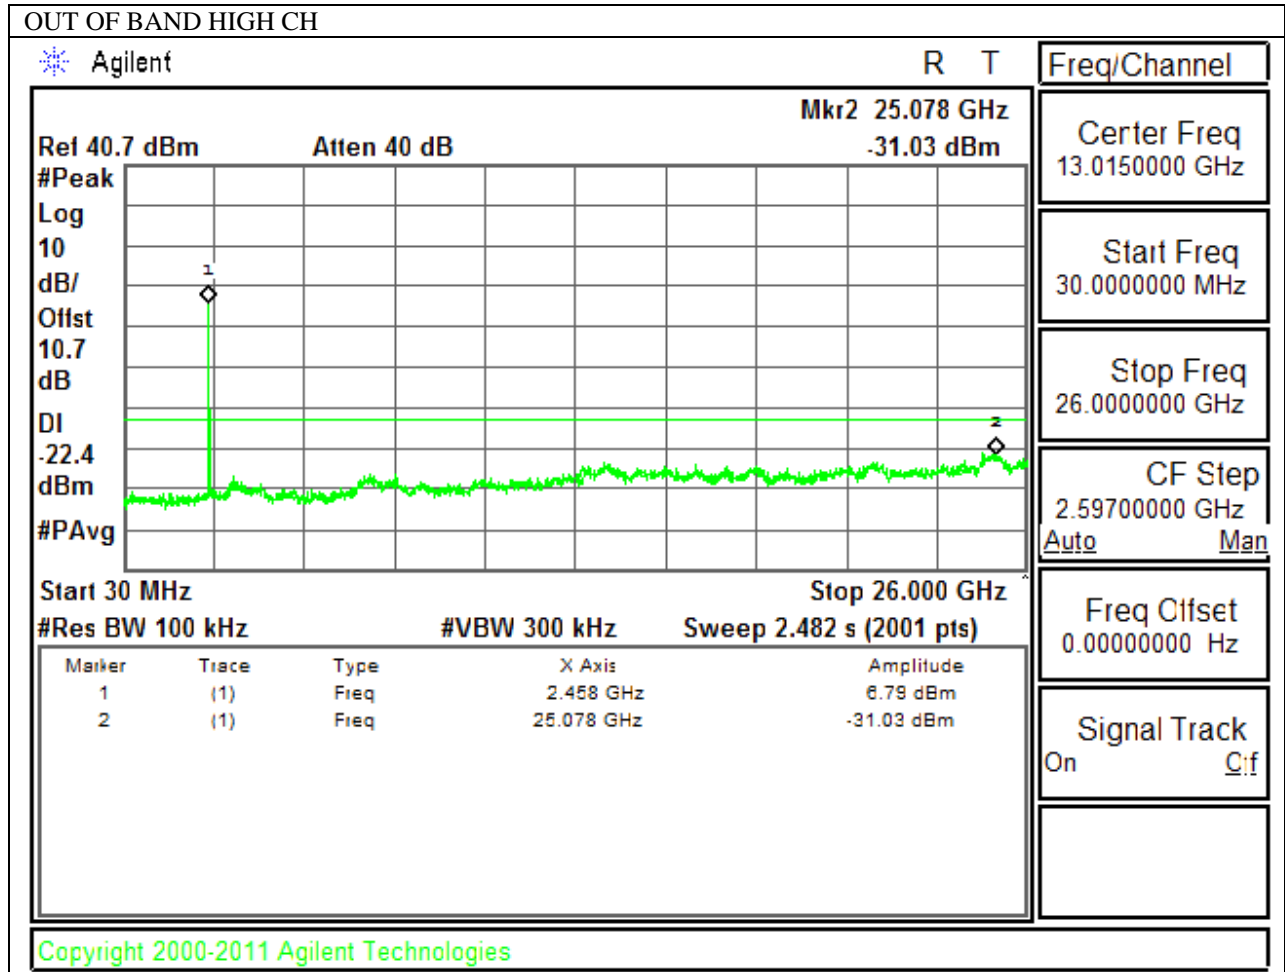


### 9.5.2. 802.11g MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

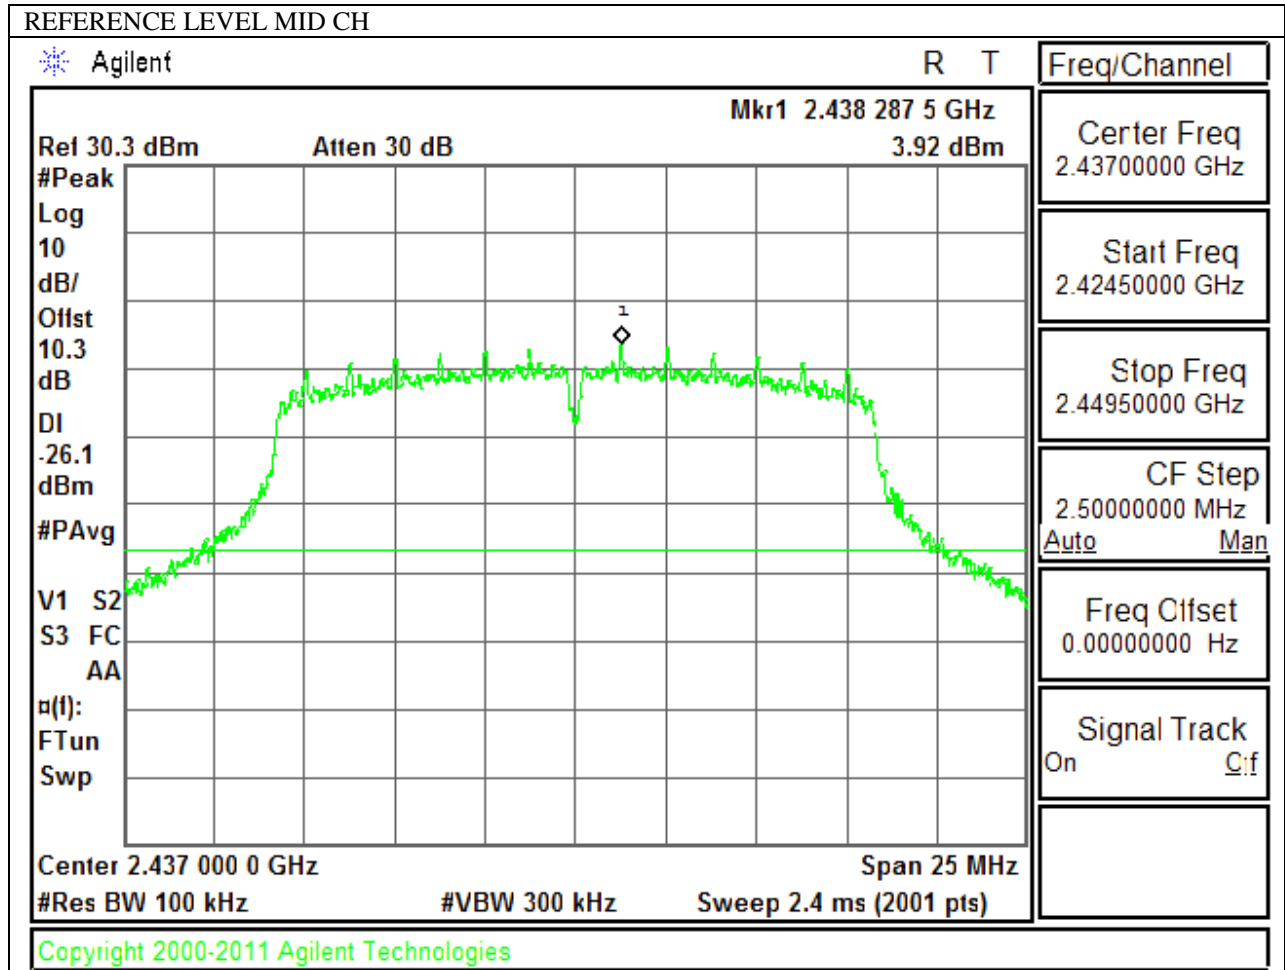


**LOW CHANNEL BANDEDGE**

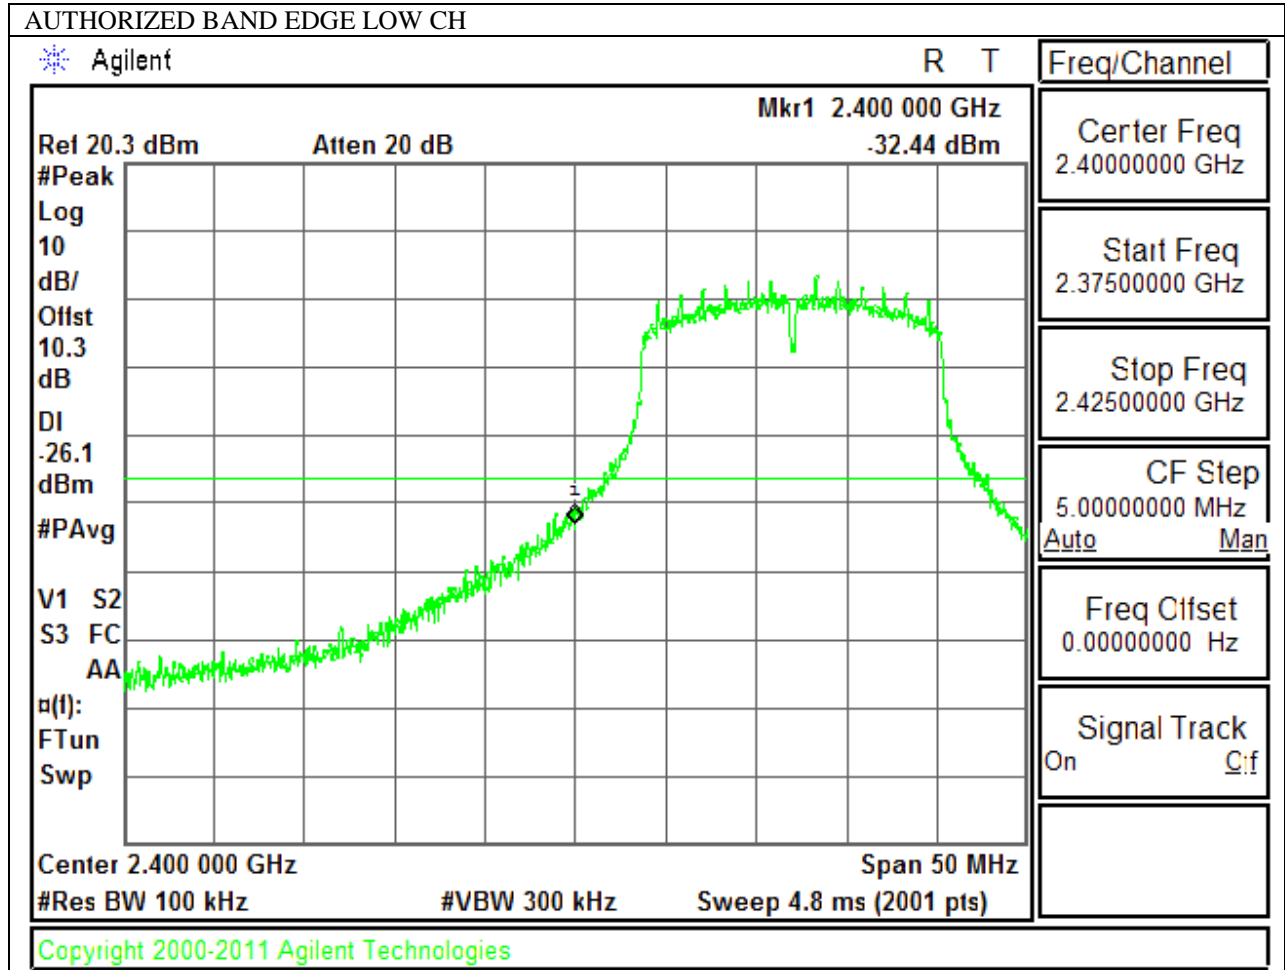



**HIGH CHANNEL BANDEDGE**

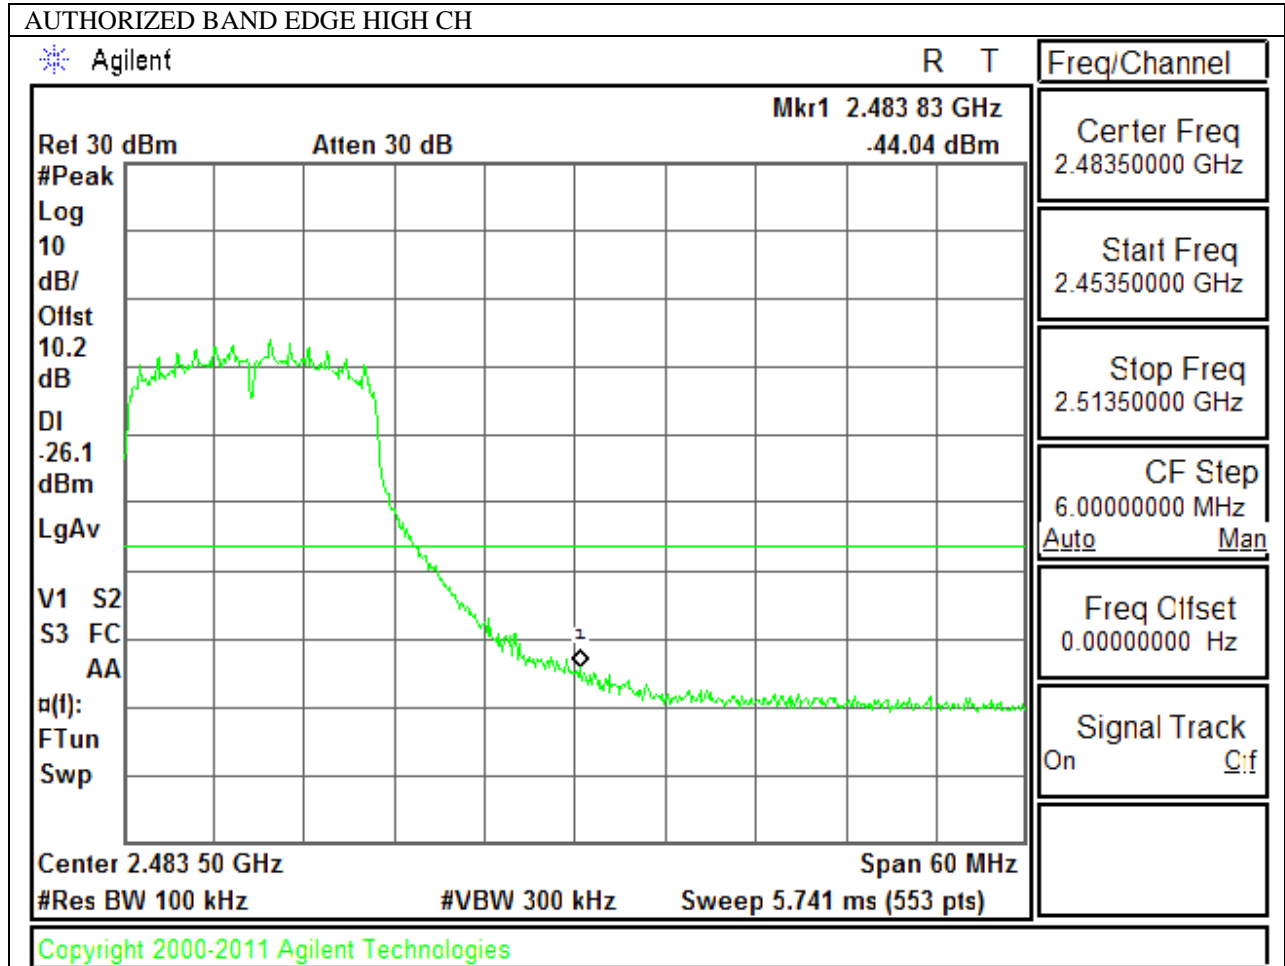

**OUT-OF-BAND EMISSIONS**

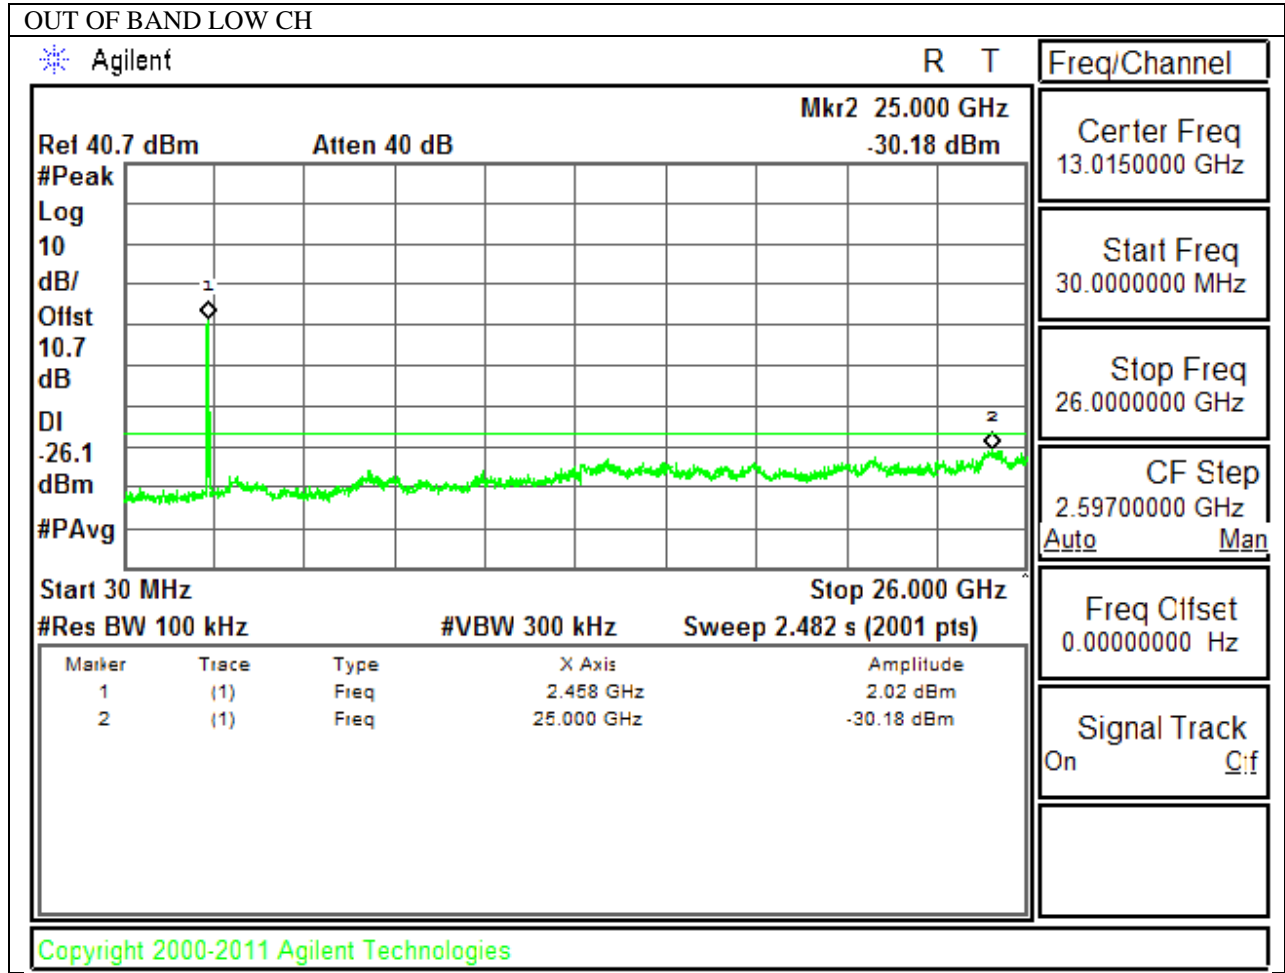


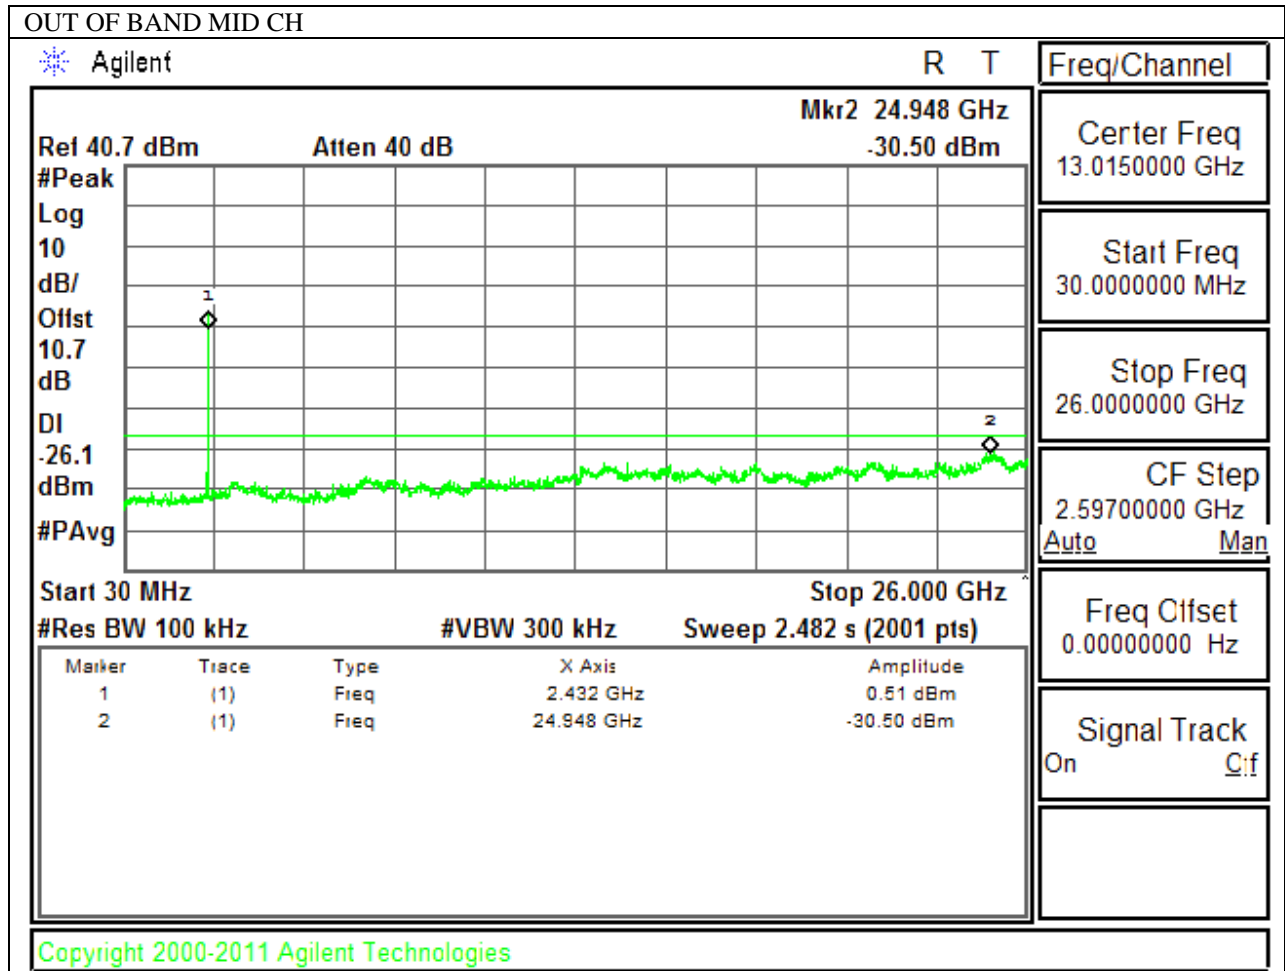

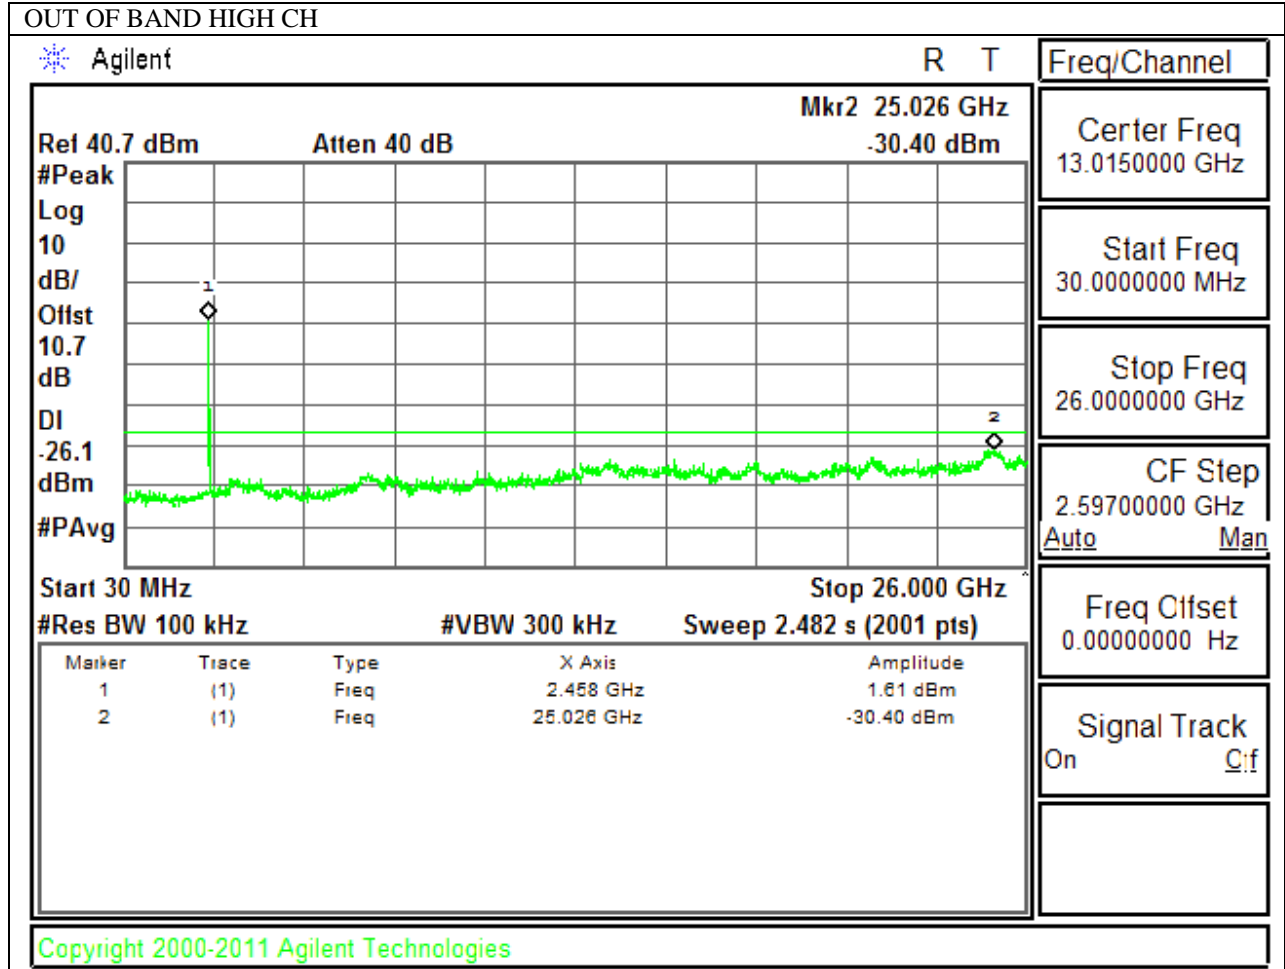


### 9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

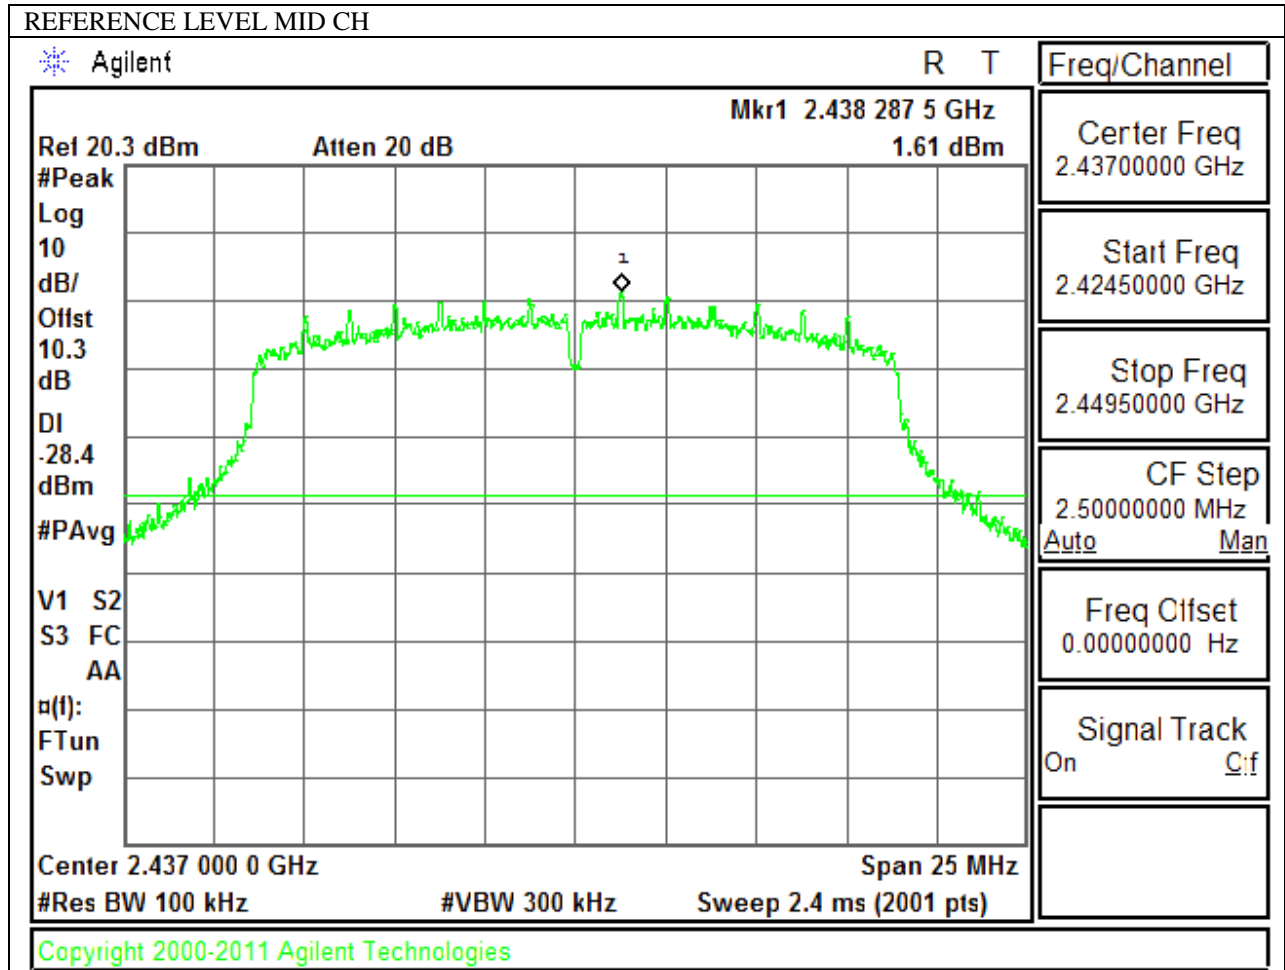


**LOW CHANNEL BANDEDGE**

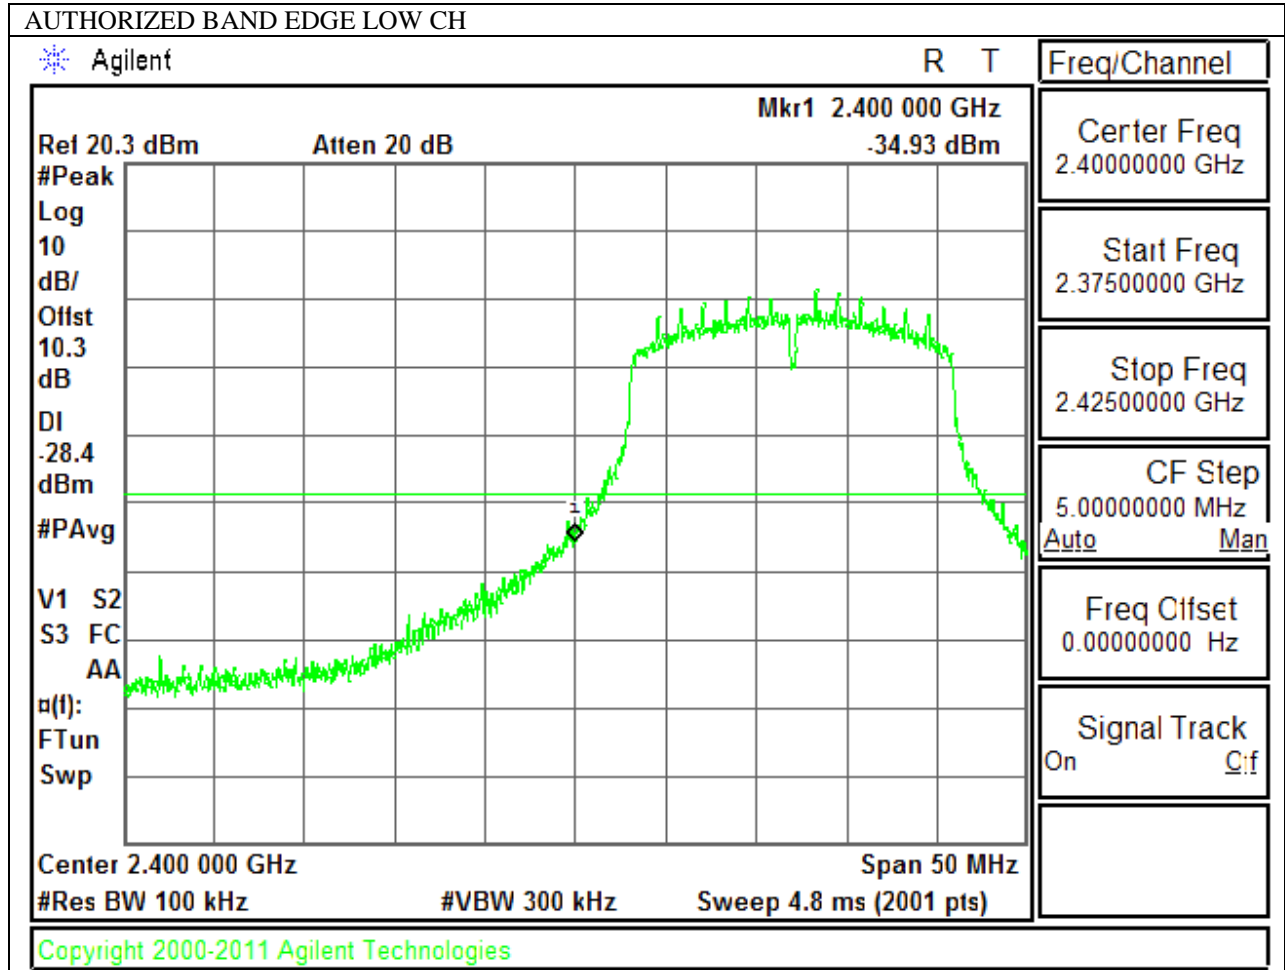



**HIGH CHANNEL BANDEDGE**

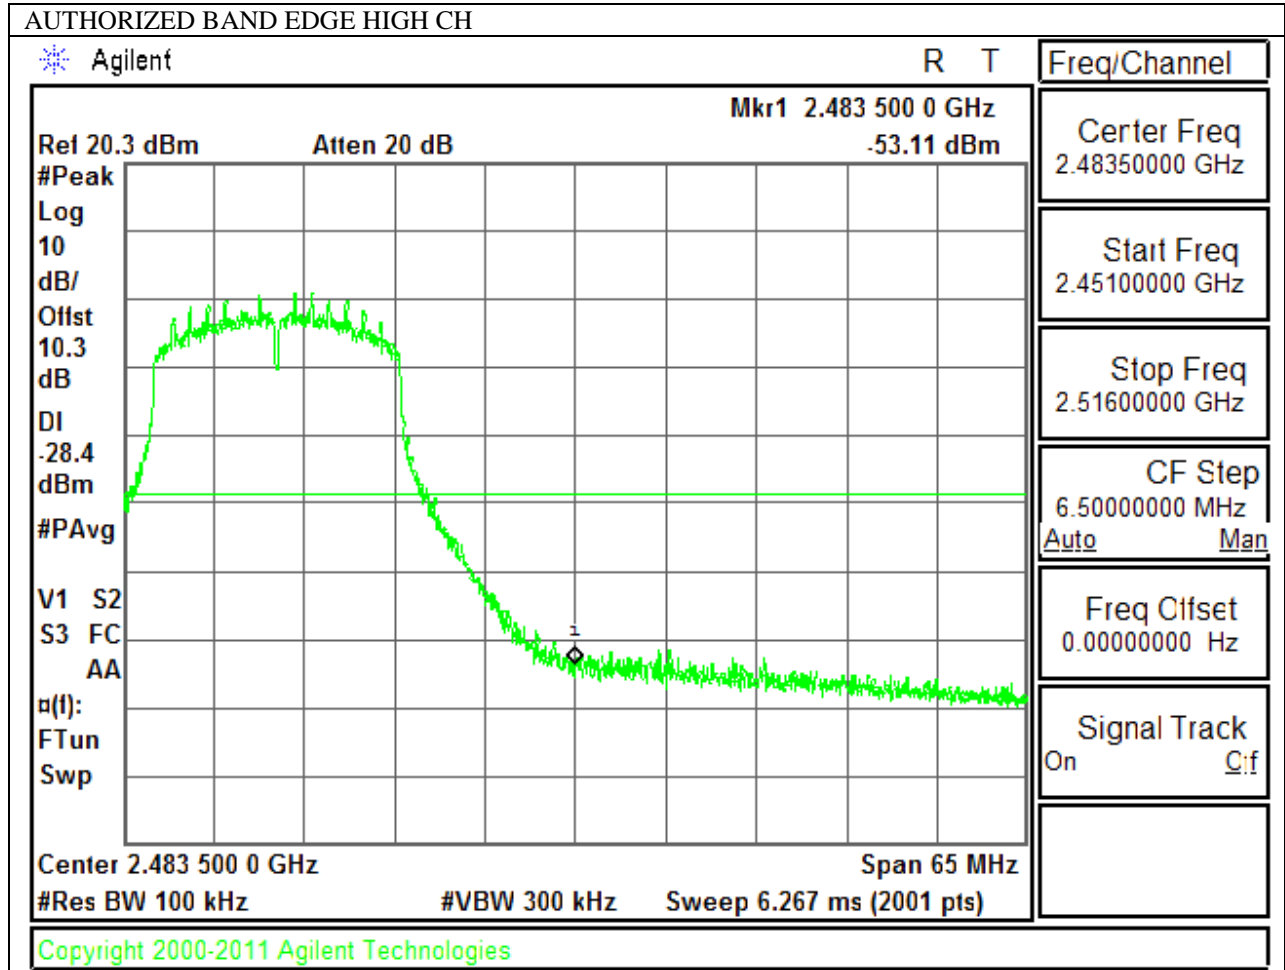

**OUT-OF-BAND EMISSIONS**

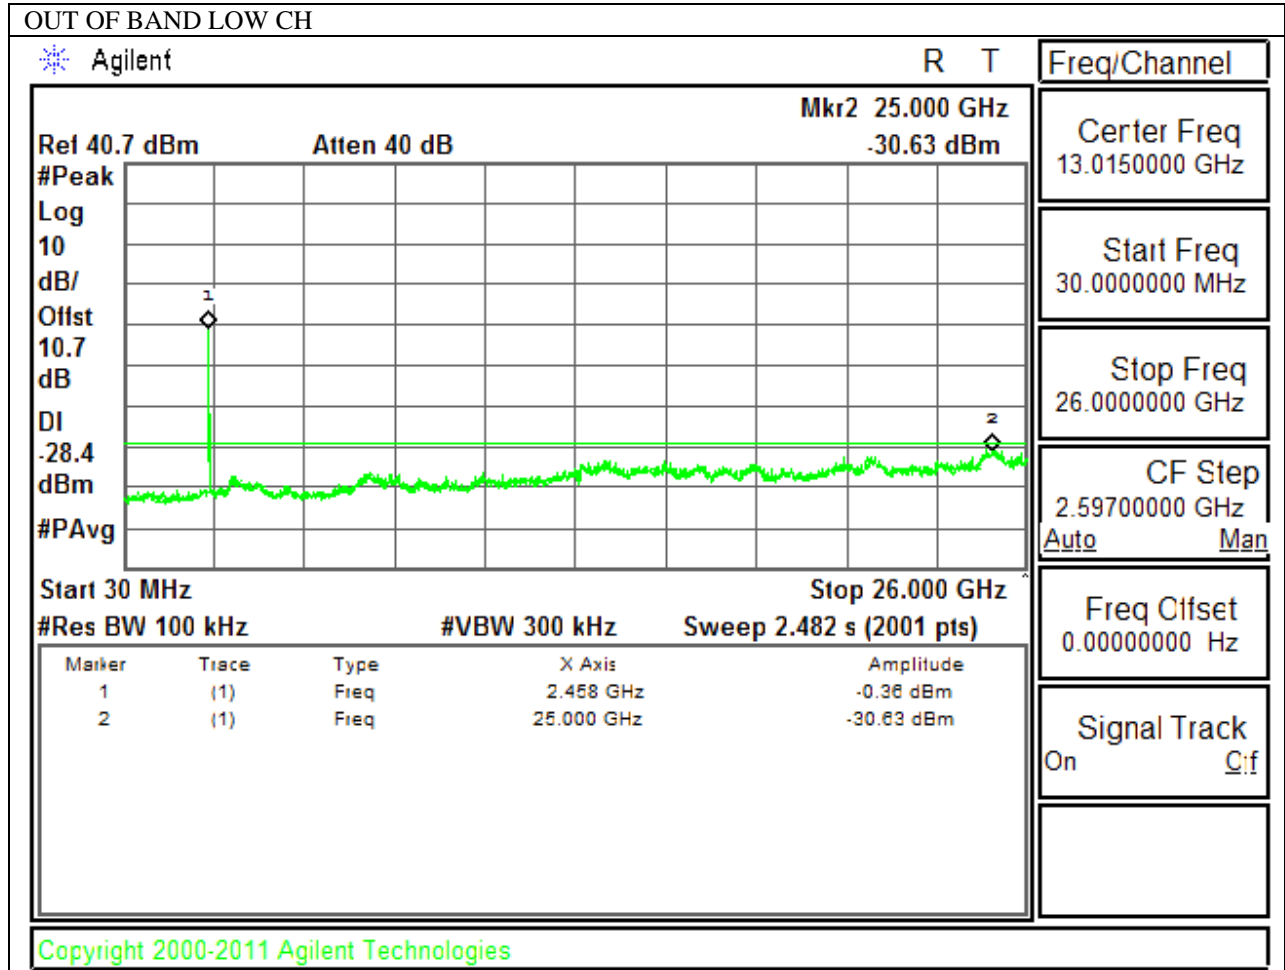

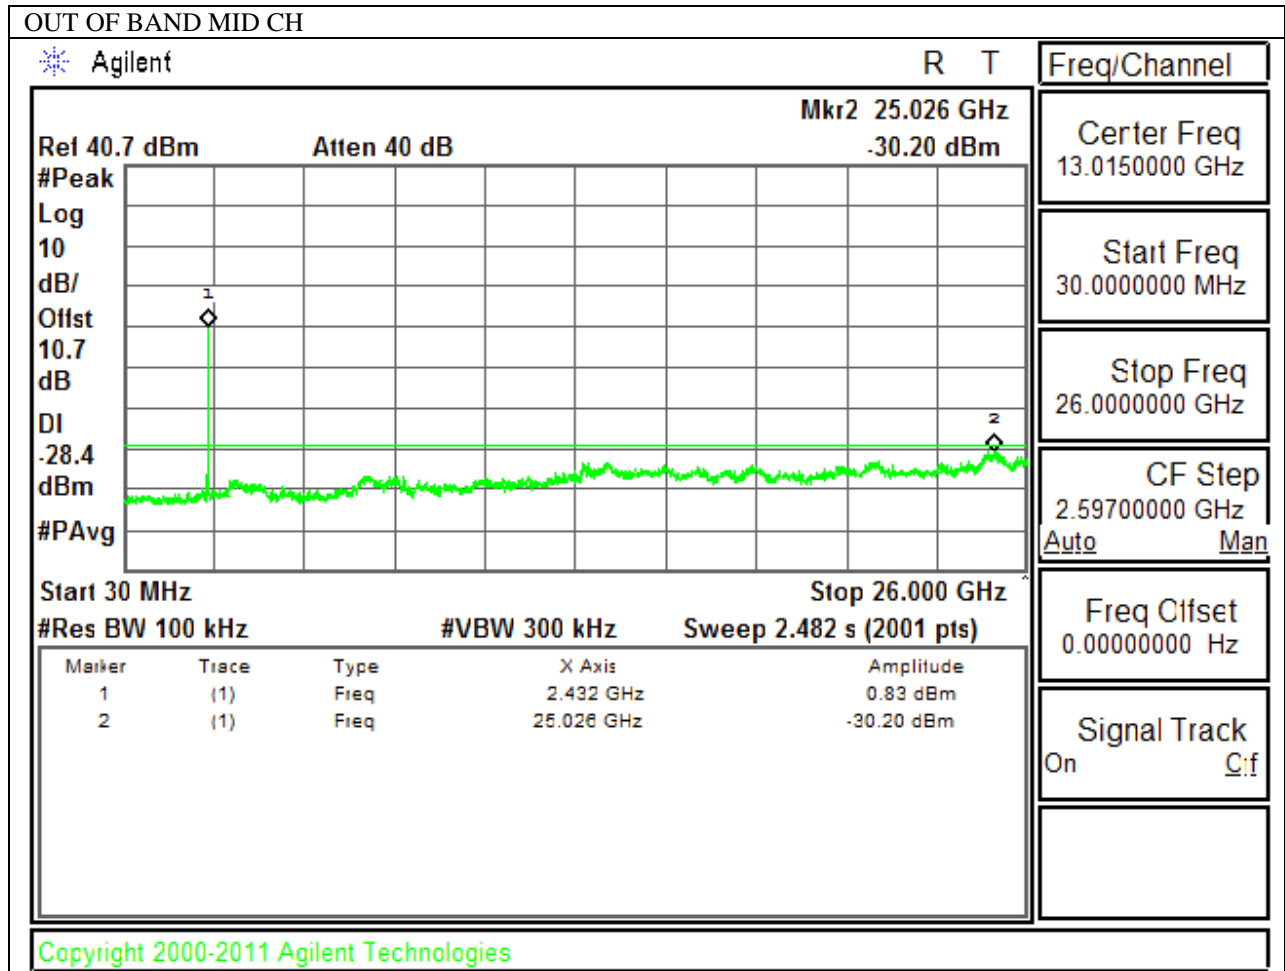

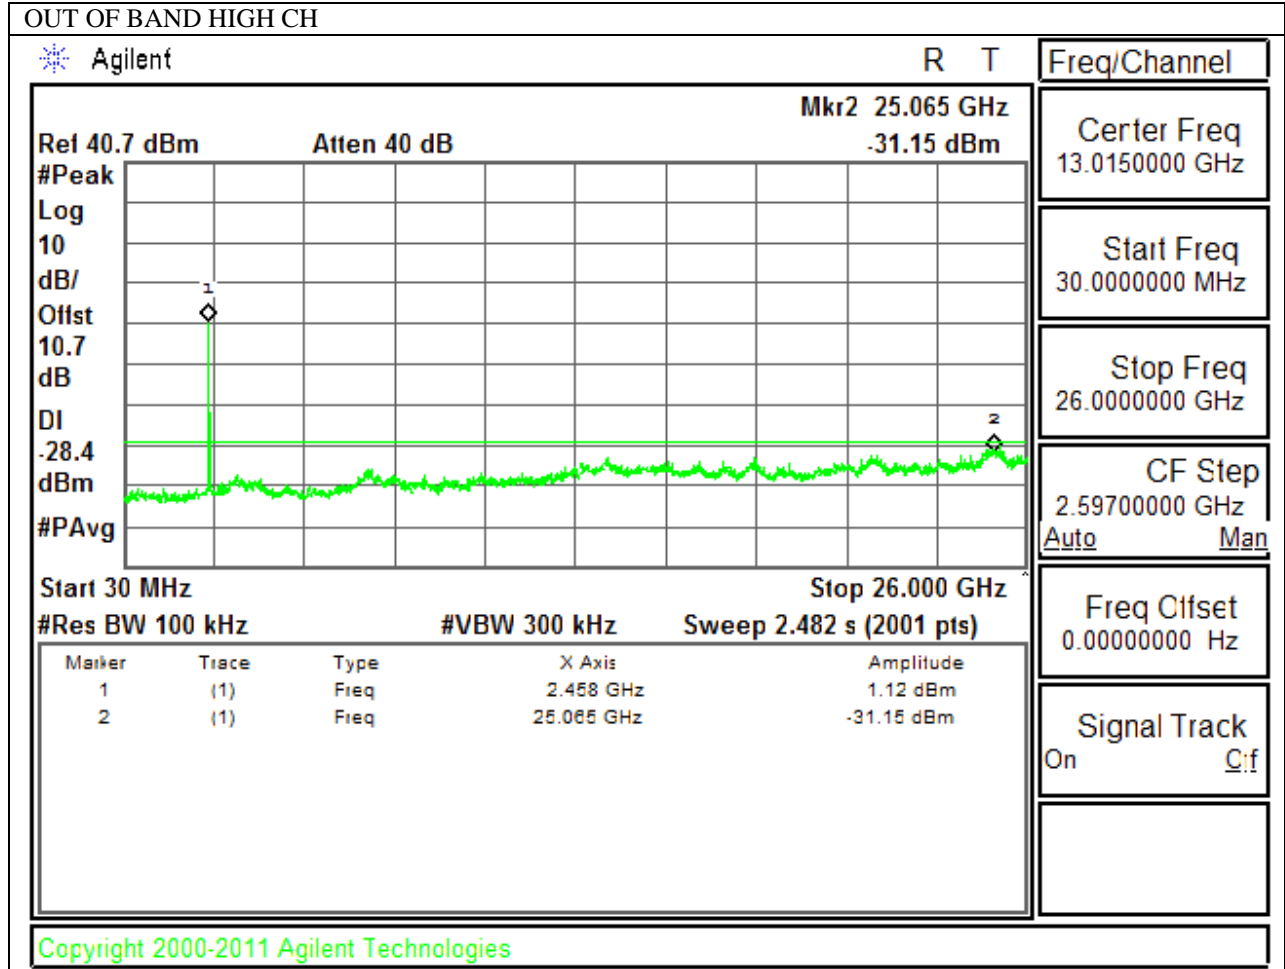

## 10. RADIATED TEST RESULTS

### 10.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit ( $\mu\text{V}/\text{m}$ ) at 3 m	Field Strength Limit (dB $\mu\text{V}/\text{m}$ ) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor =  $10\log(1/x)$  for this sample B mode = 0dB (duty cycle >98.9%); G mode = 0.21dB; N mode = 0.22dB.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 10.2. TRANSMITTER ABOVE 1 GHz

### 10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)


#### HORIZONTAL PEAK AND AVERAGE PLOT

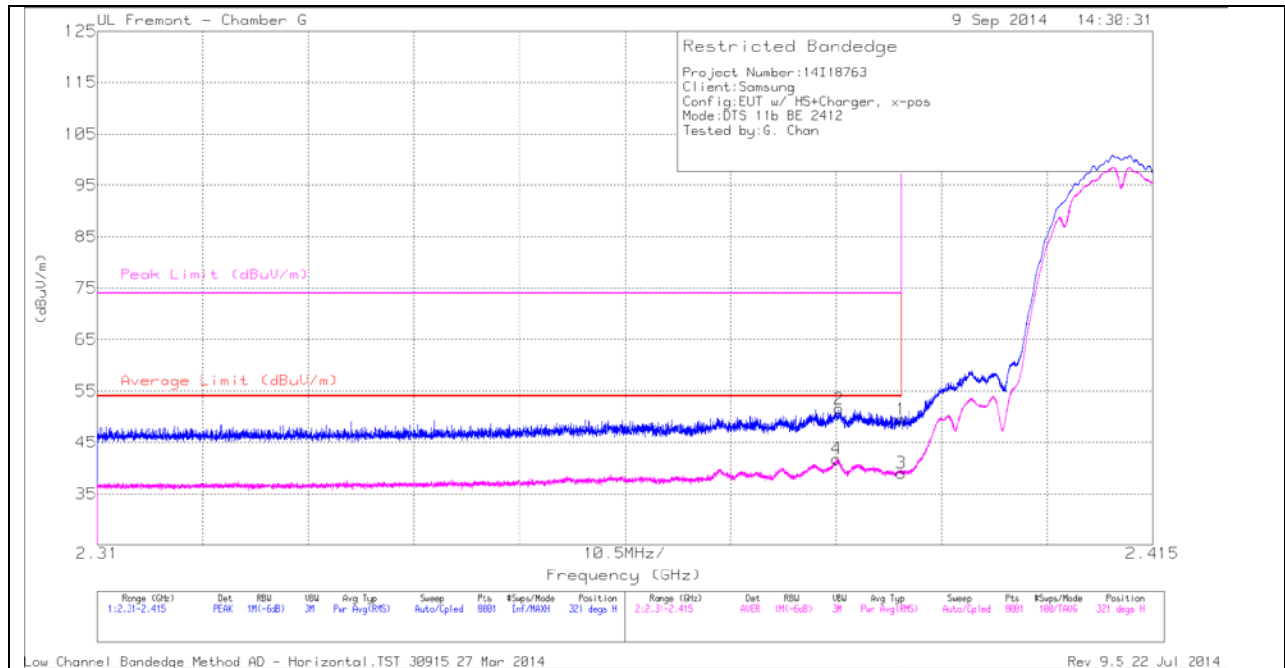

#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.384	44.62	PK	31.8	-24.9	0	51.52	-	-	74	-22.48	321	353	H
4	* 2.384	34.84	RMS	31.8	-24.9	0	41.79	54	-12.21	-	-	321	353	H
1	* 2.39	42.59	PK	31.8	-24.9	0	49.49	-	-	74	-24.51	321	353	H
3	* 2.39	32.08	RMS	31.8	-24.9	0	39.03	54	-14.97	-	-	321	353	H

**VERTICAL PEAK AND AVERAGE PLOT**

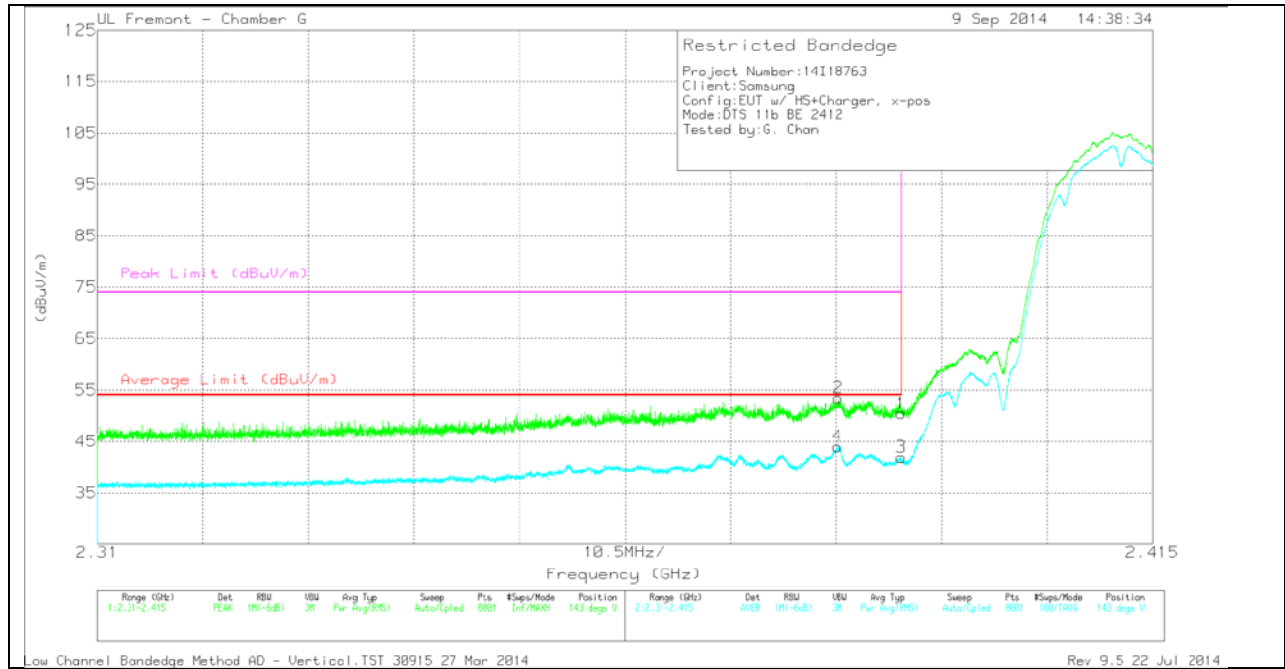


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.384	46.59	PK	31.8	-24.9	0	53.49	-	-	74	-20.51	143	364	V
4	* 2.384	37.08	RMS	31.8	-24.9	0	44.03	54	-9.97	-	-	143	364	V
1	* 2.39	43.53	PK	31.8	-24.9	0	50.43	-	-	74	-23.57	143	364	V
3	* 2.39	34.98	RMS	31.8	-24.9	0	41.93	54	-12.07	-	-	143	364	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

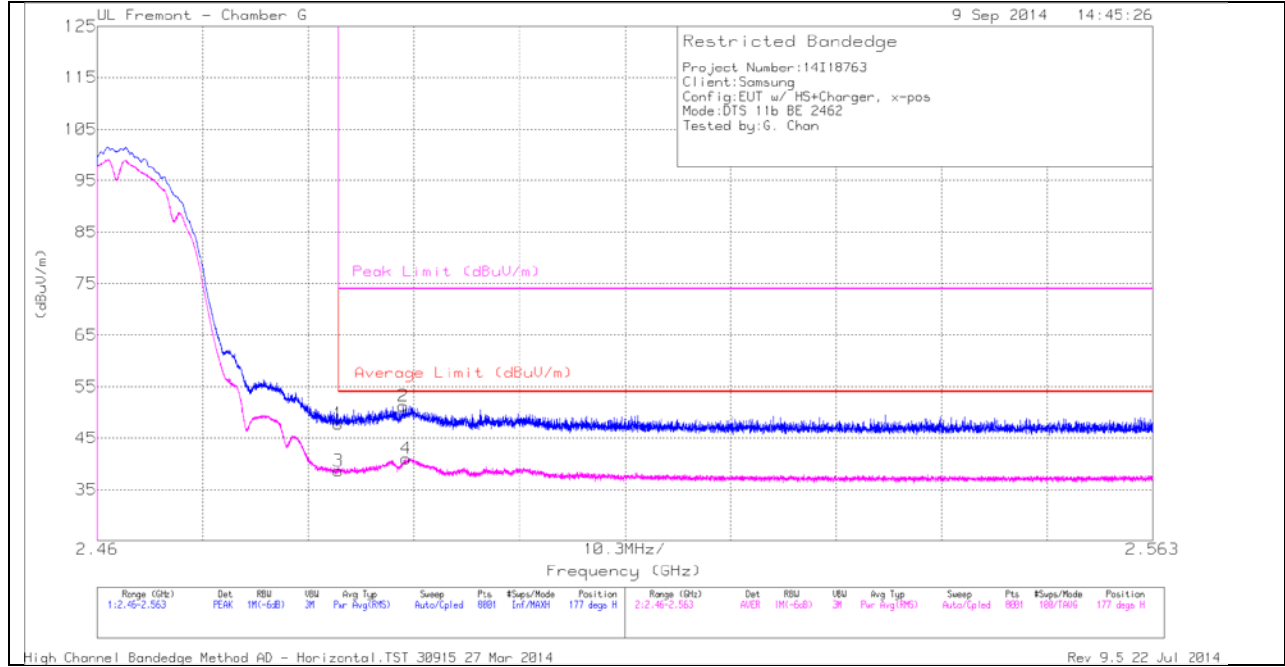

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.68	PK	32	-24.9	0	47.78	-	-	74	-26.22	177	354	H
3	* 2.484	31.49	RMS	32	-24.9	0	38.64	54	-15.36	-	-	177	354	H
2	* 2.49	44.11	PK	32	-24.9	0	51.21	-	-	74	-22.79	177	354	H
4	* 2.49	33.87	RMS	32	-24.9	0	41.02	54	-12.98	-	-	177	354	H

**VERTICAL PEAK AND AVERAGE PLOT**

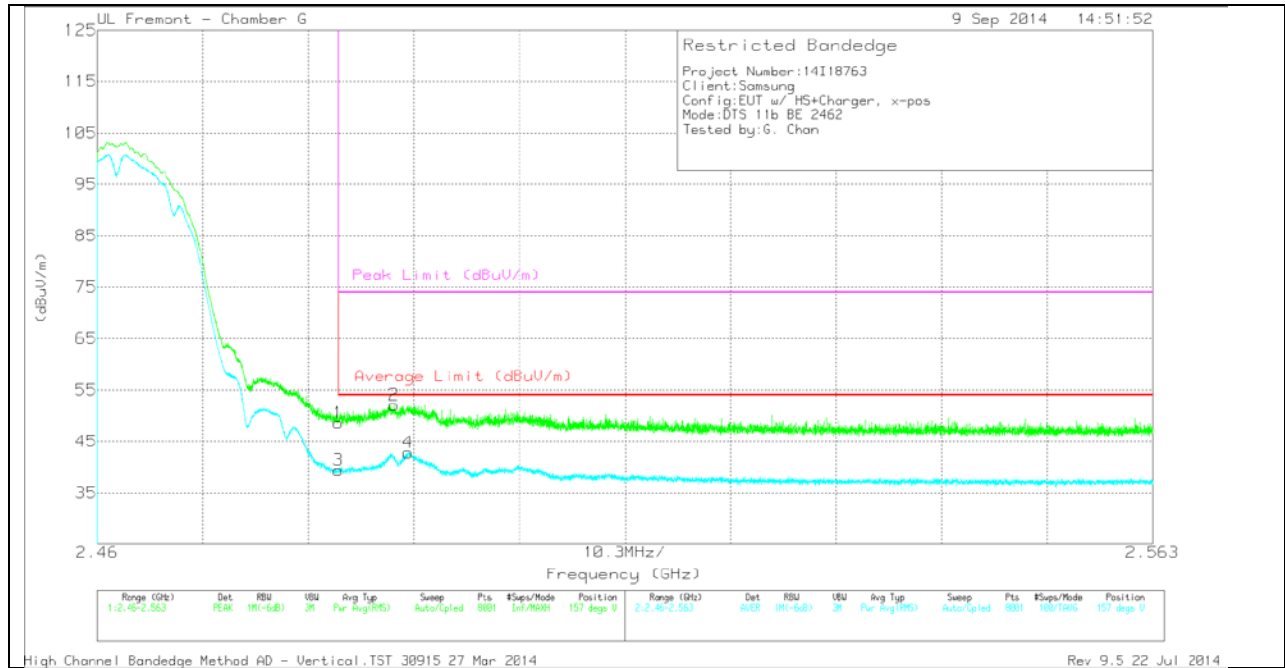


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.5	PK	32	-24.9	0	48.6	-	-	74	-25.4	157	352	V
3	* 2.484	32.25	RMS	32	-24.9	0	39.4	54	-14.6	-	-	157	352	V
2	* 2.489	44.98	PK	32	-24.9	0	52.08	-	-	74	-21.92	157	352	V
4	* 2.49	35.68	RMS	32	-24.9	0	42.83	54	-11.17	-	-	157	352	V


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

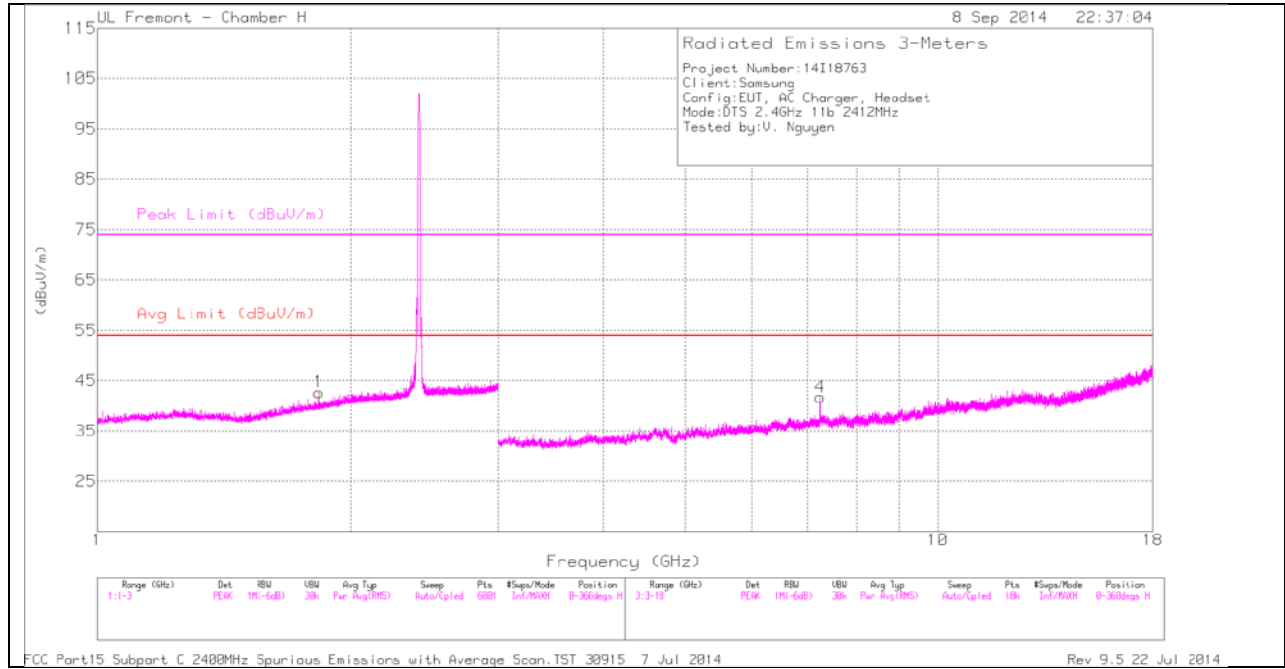

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

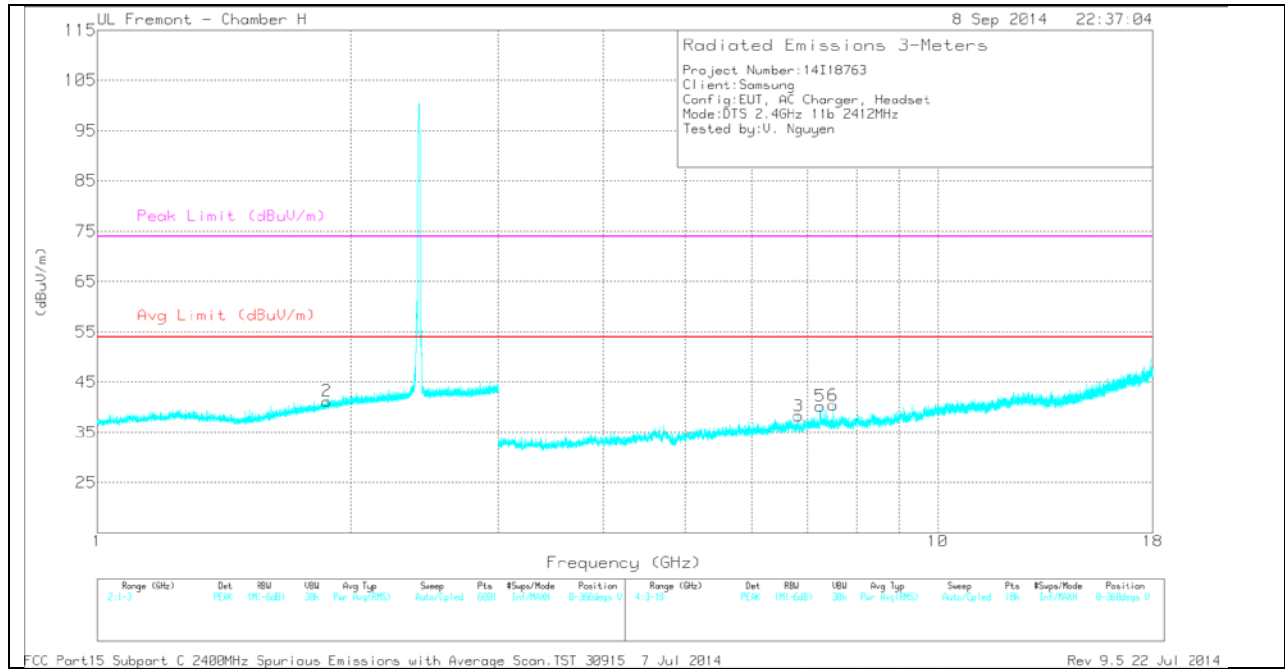

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 7.509	34.48	PK	36.1	-30.2	0	40.38	-	-	74	-33.62	0-360	201	V
1	1.834	37.71	PK	30.2	-25.2	0	42.71	-	-	-	-	0-360	201	H
2	1.874	35.92	PK	30.5	-25.2	0	41.22	-	-	-	-	0-360	100	V
3	6.829	33.27	PK	35.8	-30.8	0	38.27	-	-	-	-	0-360	100	V
4	7.236	35.84	PK	36.2	-30.3	0	41.74	-	-	-	-	0-360	100	H
5	7.237	34.32	PK	36.2	-30.3	0	40.22	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.509	39.93	PK2	36.1	-30.2	0	45.83	-	-	74	-28.17	186	320	V
* 7.508	28	MAv1	36.1	-30.2	0	33.9	54	-20.1	-	-	186	320	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

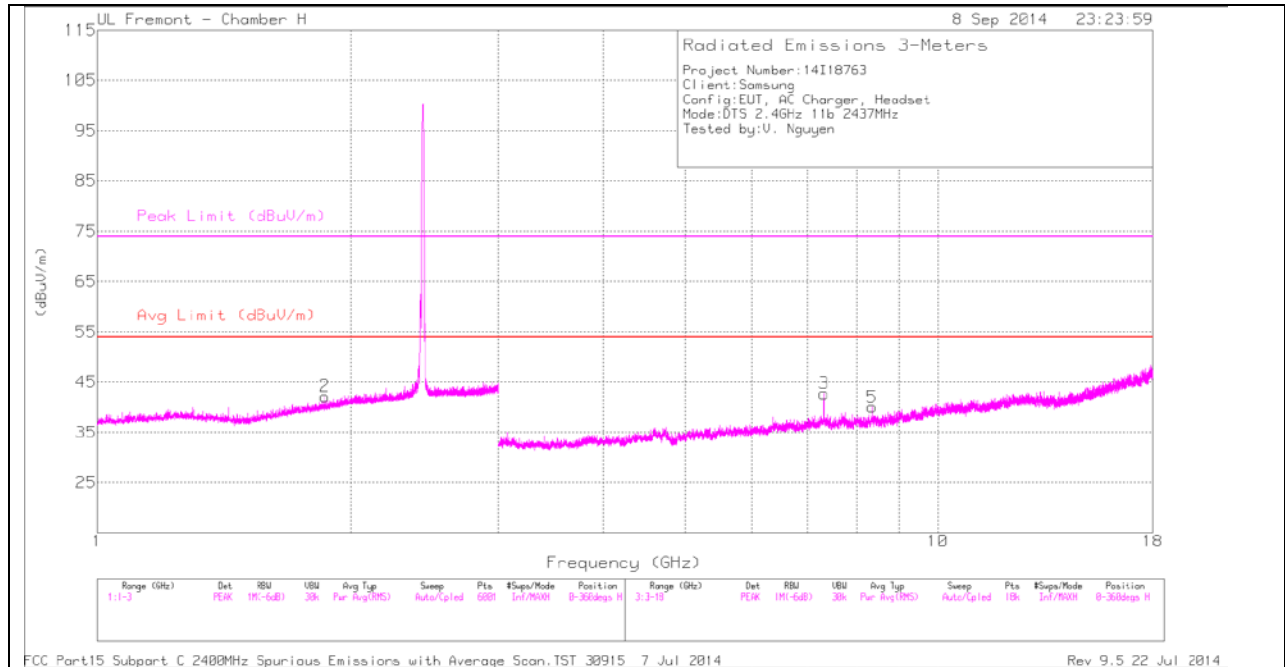

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

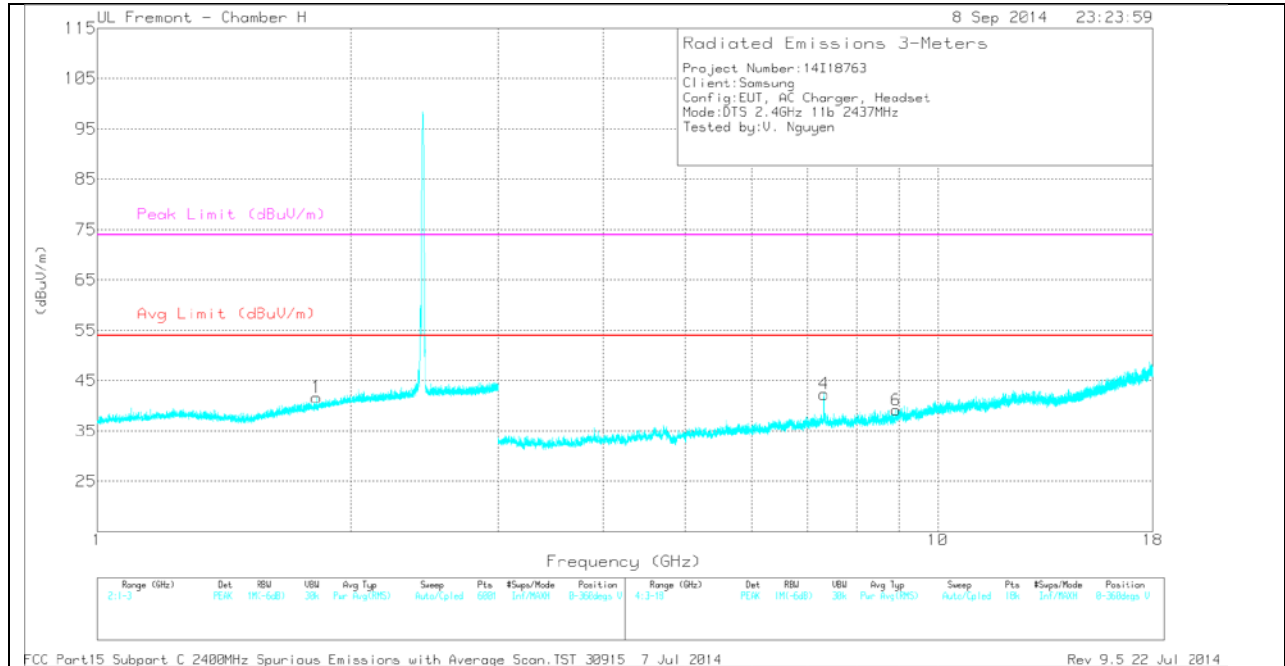

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 7.311	35.63	PK	36.2	-29.1	0	42.73	-	-	74	-31.27	0-360	100	H
5	* 8.35	31.34	PK	36.1	-27.4	0	40.04	-	-	74	-33.96	0-360	201	H
4	* 7.312	35.25	PK	36.2	-29.1	0	42.35	-	-	74	-31.65	0-360	201	V
1	1.822	36.69	PK	30.2	-25.2	0	41.69	-	-	-	-	0-360	201	V
2	1.865	36.99	PK	30.4	-25.2	0	42.19	-	-	-	-	0-360	201	H
6	8.921	30.55	PK	36.3	-27.7	0	39.15	-	-	-	-	0-360	100	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.31	43.52	PK2	36.2	-29.1	0	50.62	-	-	74	-23.38	26	101	H
* 7.312	35.03	MAV1	36.2	-29.1	0	42.13	54	-11.87	-	-	26	101	H
* 8.348	37.57	PK2	36.1	-27.4	0	46.27	-	-	74	-27.73	258	332	H
* 8.351	26.31	MAV1	36.1	-27.5	0	34.91	54	-19.09	-	-	258	332	H
* 7.312	43.41	PK2	36.2	-29.1	0	50.51	-	-	74	-23.49	8	233	V
* 7.312	35.02	MAV1	36.2	-29.1	0	42.12	54	-11.88	-	-	8	233	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

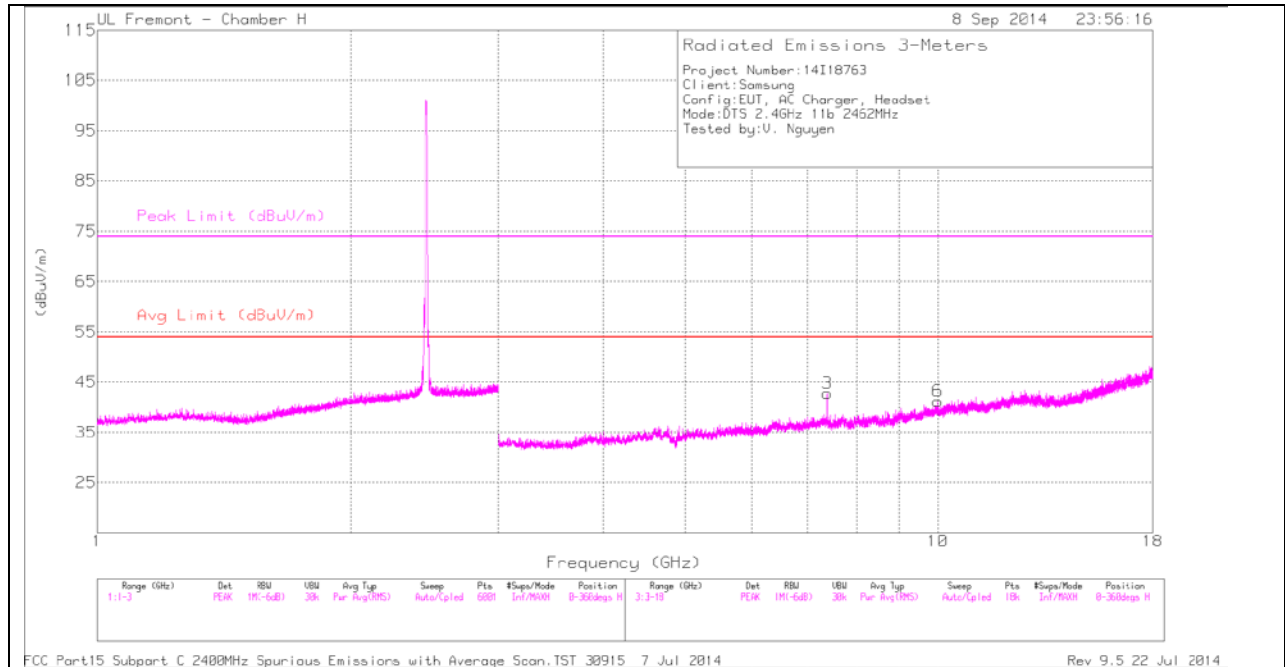

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

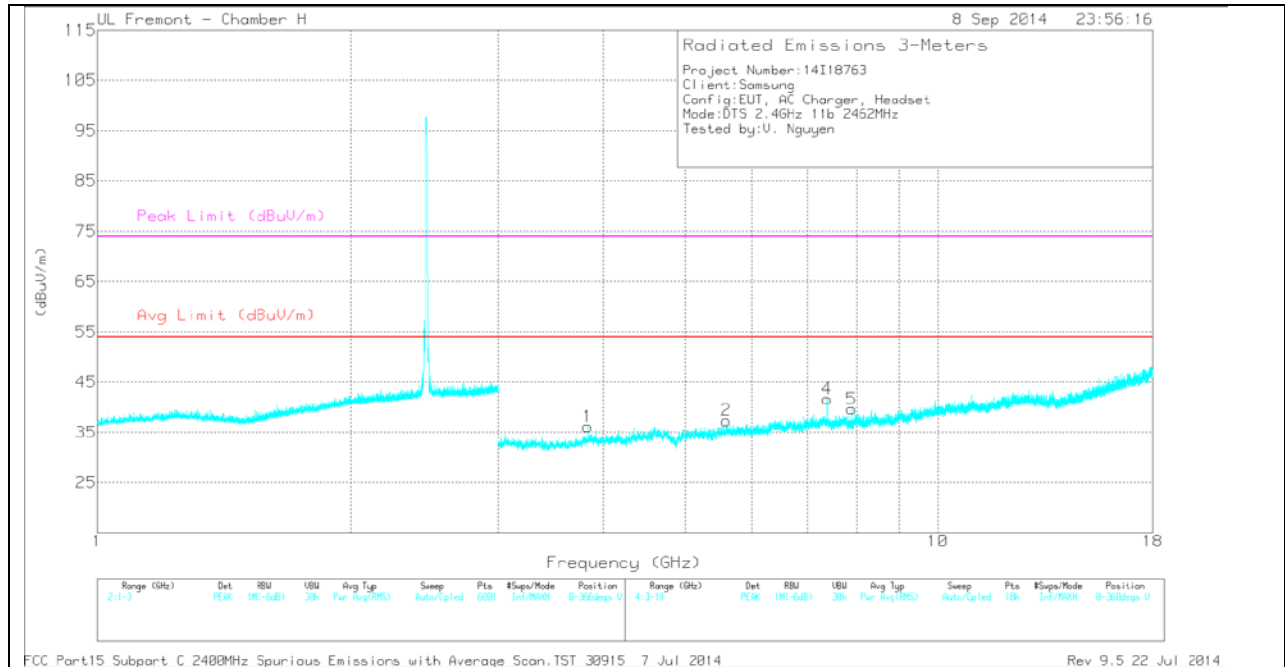

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 7.385	35.69	PK	36.1	-29	0	42.79	-	-	74	-31.21	0-360	201	H
1	* 3.83	34.95	PK	33.3	-32.1	0	36.15	-	-	74	-37.85	0-360	201	V
4	* 7.384	34.57	PK	36.1	-29	0	41.67	-	-	74	-32.33	0-360	201	V
2	5.599	34.35	PK	35.1	-32.1	0	37.35	-	-	-	-	0-360	201	V
5	7.888	33.35	PK	36	-29.7	0	39.65	-	-	-	-	0-360	201	V
6	9.997	29.41	PK	37.3	-25.5	0	41.21	-	-	-	-	0-360	201	H

PK - Peak detector

*RADIATED EMISSIONS*


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.385	44.47	PK2	36.1	-29	0	51.57	-	-	74	-22.43	132	307	H
* 7.385	37.01	MAV1	36.1	-29	0	44.11	54	-9.89	-	-	132	307	H
* 3.832	41.62	PK2	33.3	-32.1	0	42.82	-	-	74	-31.18	16	109	V
* 3.829	29.97	MAV1	33.3	-32.1	0	31.17	54	-22.83	-	-	16	109	V
* 7.385	43.13	PK2	36.1	-29	0	50.23	-	-	74	-23.77	11	265	V
* 7.385	34.3	MAV1	36.1	-29	0	41.4	54	-12.6	-	-	11	265	V

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

## 10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

### RESTRICTED BANDEDGE (LOW CHANNEL)


#### HORIZONTAL PEAK AND AVERAGE PLOT

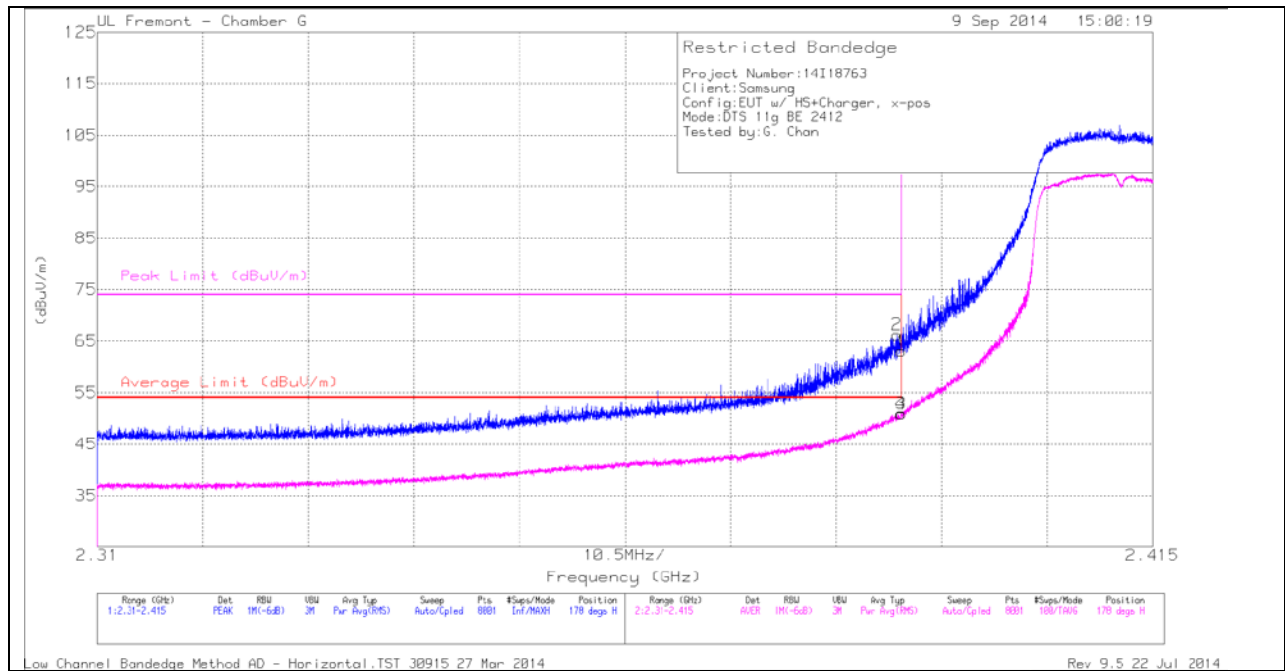

#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	56.19	PK	31.8	-24.9	0	63.09	-	-	74	-10.91	178	301	H
2	* 2.39	59.35	PK	31.8	-24.9	0	66.25	-	-	74	-7.75	178	301	H
3	* 2.39	43.79	RMS	31.8	-24.9	.21	50.9	54	-3.1	-	-	178	301	H
4	* 2.39	43.75	RMS	31.8	-24.9	.21	50.86	54	-3.14	-	-	178	301	H

**VERTICAL PEAK AND AVERAGE PLOT**

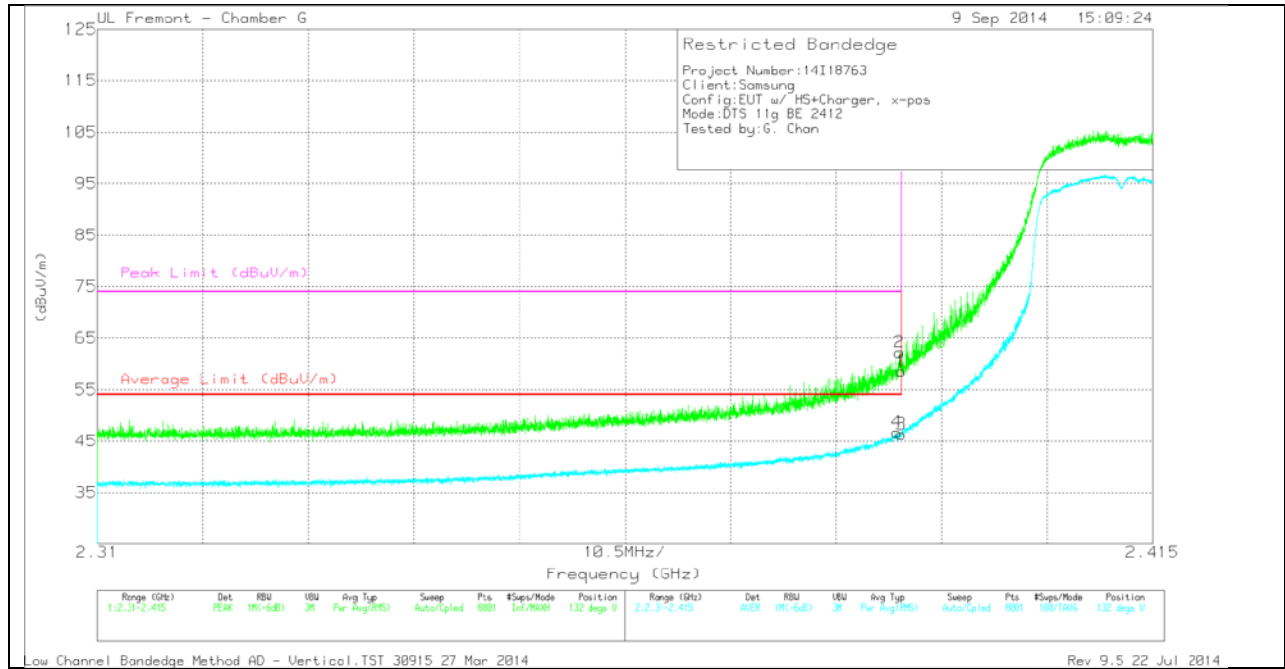


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.66	PK	31.8	-24.9	0	58.56	-	-	74	-15.44	132	365	V
2	* 2.39	55.34	PK	31.8	-24.9	0	62.24	-	-	74	-11.76	132	365	V
3	* 2.39	39.23	RMS	31.8	-24.9	.21	46.34	54	-7.66	-	-	132	365	V
4	* 2.39	39.6	RMS	31.8	-24.9	.21	46.71	54	-7.29	-	-	132	365	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

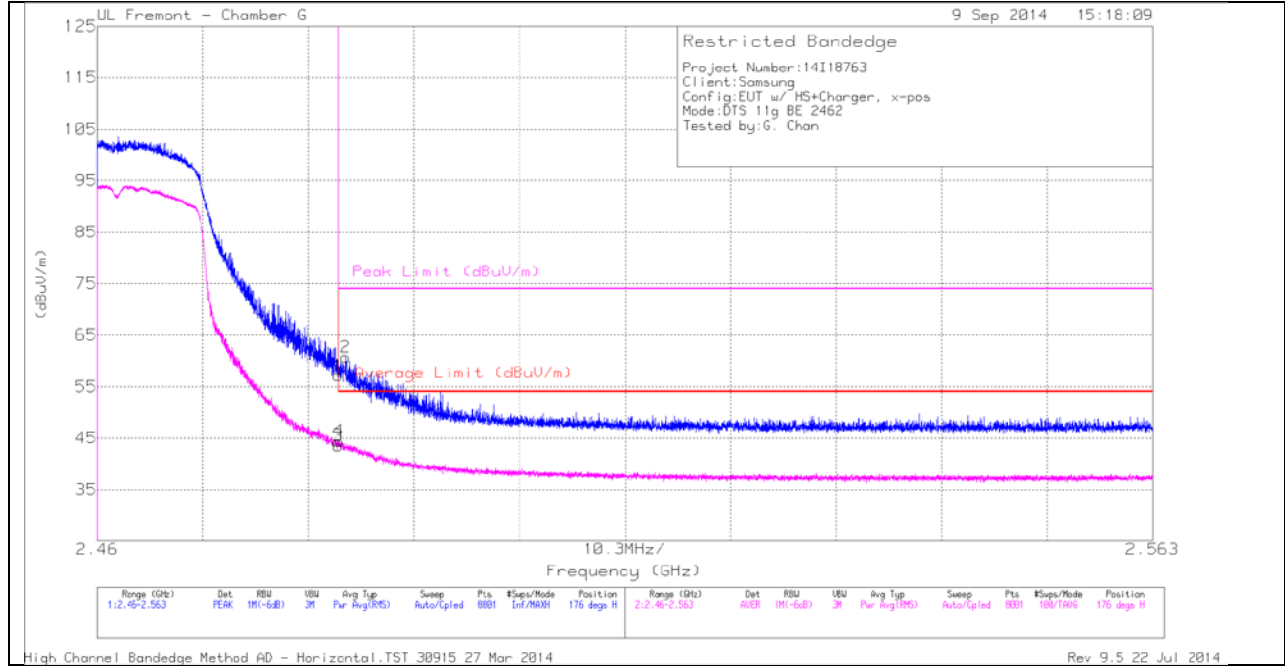

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.08	PK	32	-24.9	0	57.18	-	-	74	-16.82	176	353	H
2	* 2.484	53.58	PK	32	-24.9	0	60.68	-	-	74	-13.32	176	353	H
3	* 2.484	36.19	RMS	32	-24.9	.21	43.5	54	-10.5	-	-	176	353	H
4	* 2.484	37.07	RMS	32	-24.9	.21	44.38	54	-9.62	-	-	176	353	H

**VERTICAL PEAK AND AVERAGE PLOT**

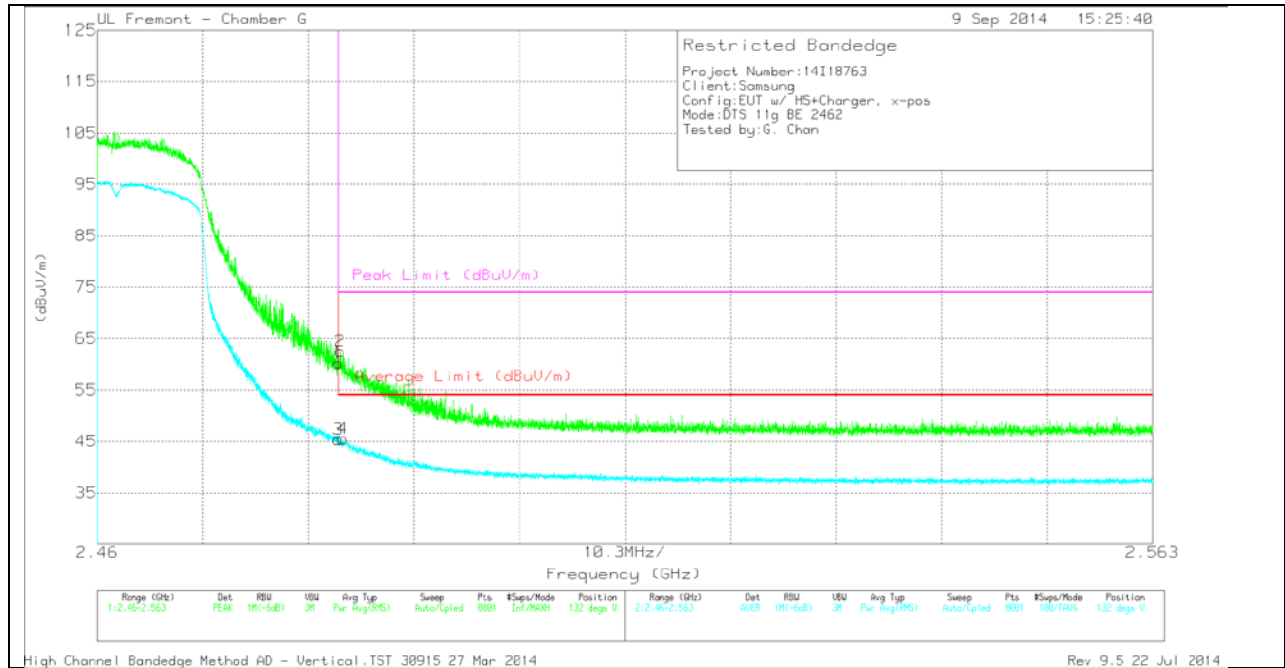


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.15	PK	32	-24.9	0	60.25	-	-	74	-13.75	132	352	V
2	* 2.484	55.42	PK	32	-24.9	0	62.52	-	-	74	-11.48	132	352	V
3	* 2.484	38.08	RMS	32	-24.9	.21	45.39	54	-8.61	-	-	132	352	V
4	* 2.484	38.2	RMS	32	-24.9	.21	45.51	54	-8.49	-	-	132	352	V


### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

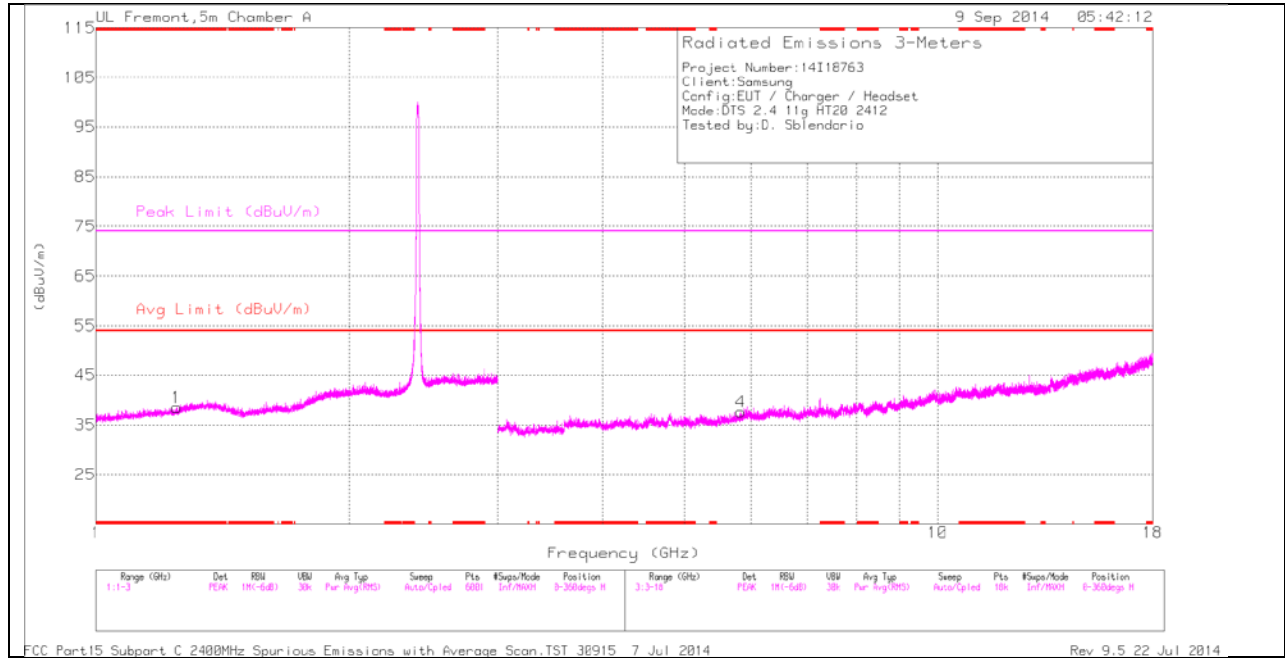

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

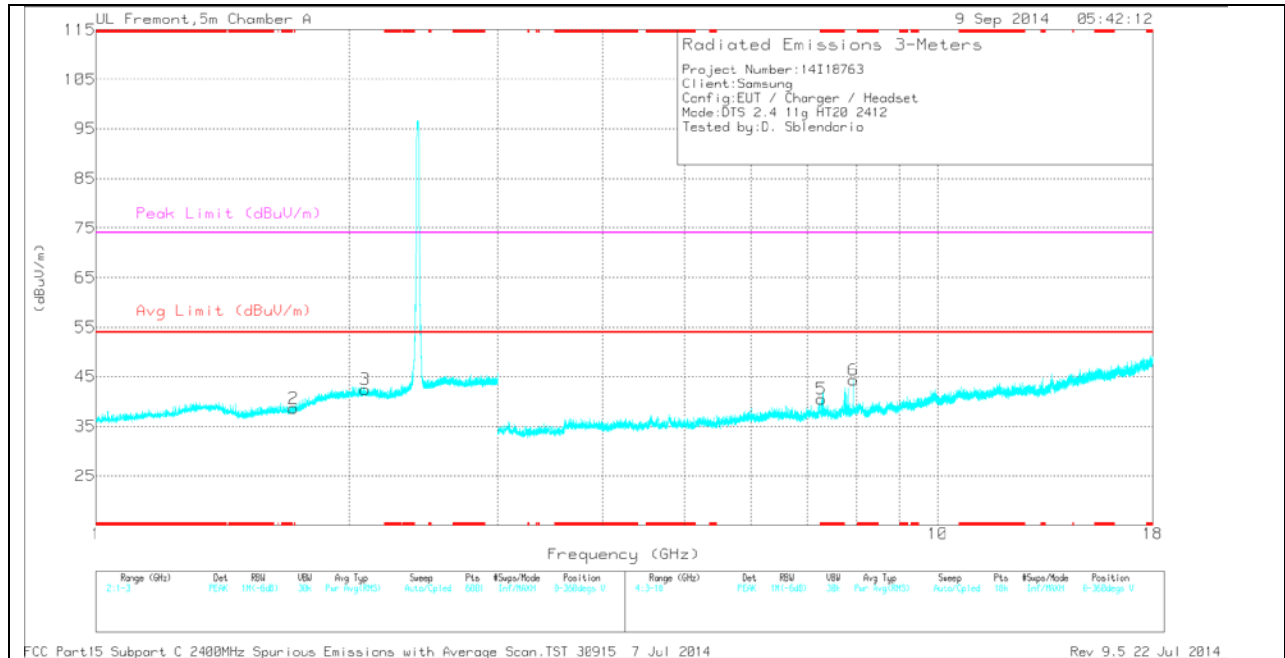

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.247	36.15	PK	29.7	-27.4	0	38.45	-	-	74	-35.55	0-360	201	H
5	* 7.269	31.91	PK	35.2	-26.6	0	40.51	-	-	74	-33.49	0-360	100	V
2	1.715	35.35	PK	29.3	-26	0	38.65	-	-	-	-	0-360	201	V
3	2.088	35.29	PK	31.8	-24.7	0	42.39	-	-	-	-	0-360	100	V
4	5.837	31.35	PK	34.9	-28.6	0	37.65	-	-	-	-	0-360	201	H
6	7.939	35	PK	35.5	-26.2	0	44.3	-	-	-	-	0-360	100	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.938	37.69	PK2	35.5	-26.2	0	46.99	-	-	-	-	1	100	V
7.938	26.56	MAv1	35.5	-26.2	0.21	35.86	-	-	-	-	1	100	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

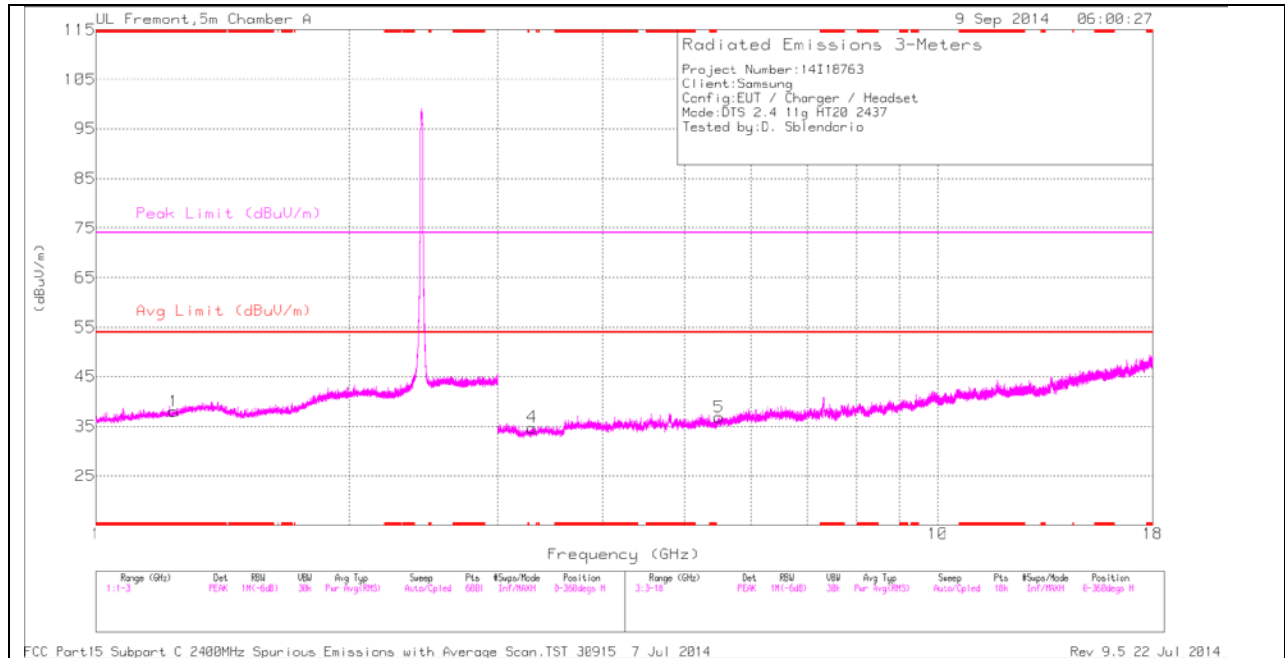

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

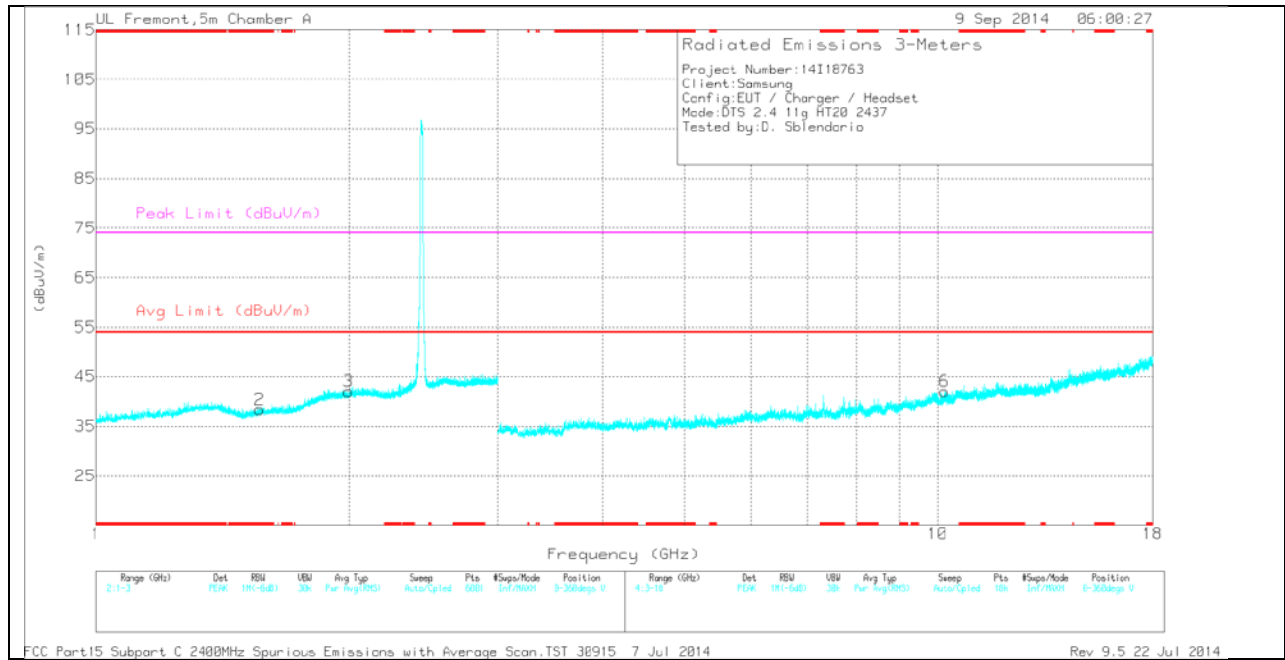

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.238	35.81	PK	29.7	-27.5	0	38.01	-	-	74	-35.99	0-360	100	H
2	* 1.563	35.81	PK	28.8	-26.2	0	38.41	-	-	74	-35.59	0-360	201	V
3	1.996	35.25	PK	32.1	-25.3	0	42.05	-	-	-	-	0-360	201	V
4	3.295	33.05	PK	32.9	-31.2	0	34.75	-	-	-	-	0-360	100	H
5	5.492	31.1	PK	34.4	-28.7	0	36.8	-	-	-	-	0-360	201	H
6	10.18	27.58	PK	37.2	-22.7	0	42.08	-	-	-	-	0-360	201	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.24	44.51	PK2	29.7	-27.5	0	46.71	-	-	74	-27.29	1	100	H
* 1.237	32.55	MAv1	29.6	-27.5	0.21	34.65	54	-19.35	-	-	1	100	H


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

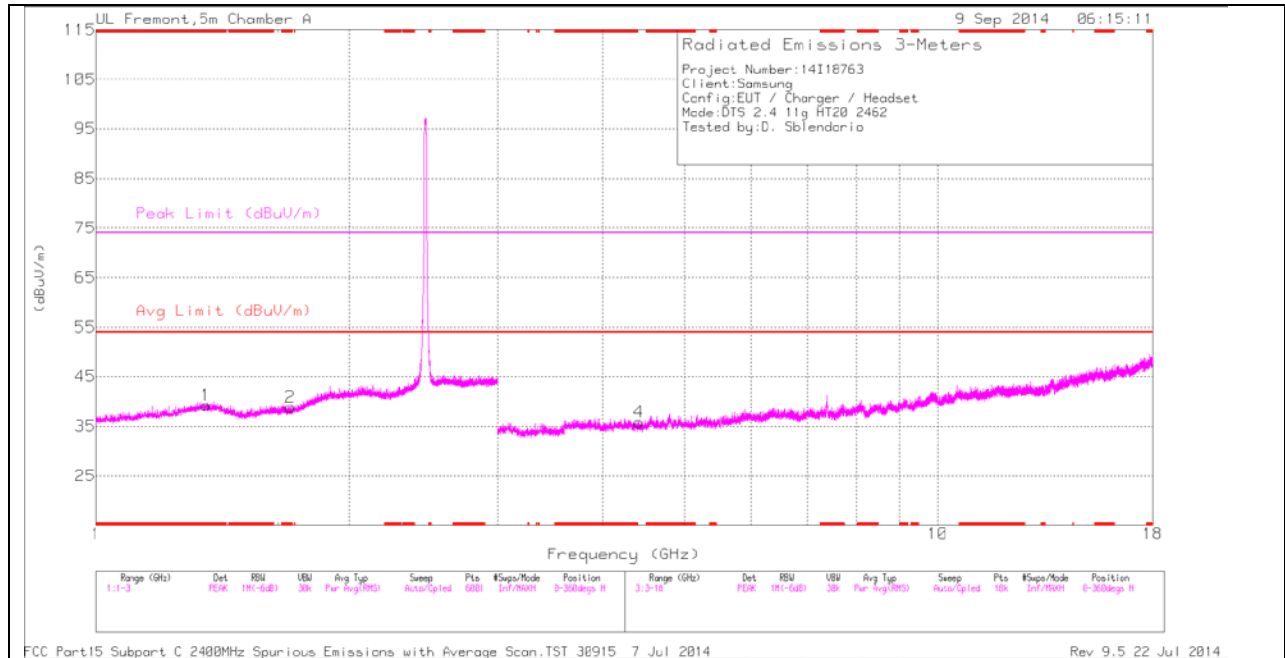

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

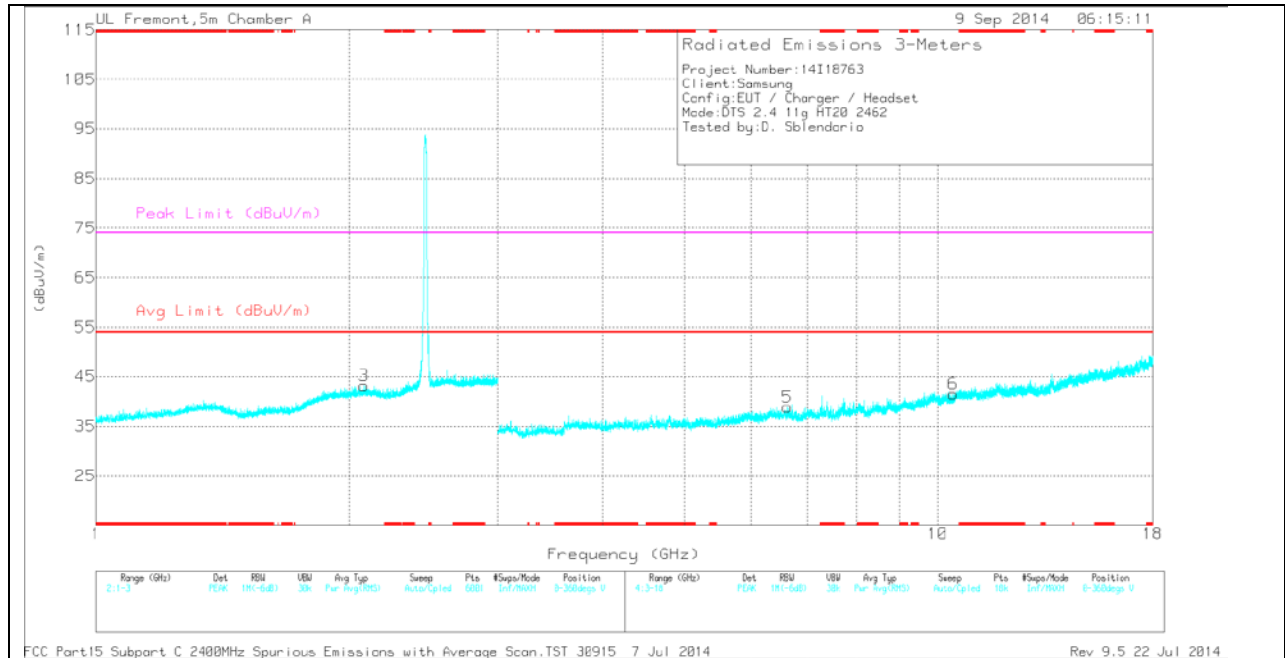

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.35	35.89	PK	30	-26.6	0	39.29	-	-	74	-34.71	0-360	100	H
2	* 1.701	35.67	PK	29.1	-25.9	0	38.87	-	-	74	-35.13	0-360	100	H
3	2.081	36.12	PK	31.8	-24.7	0	43.22	-	-	-	-	0-360	201	V
4	4.417	32.53	PK	33.9	-30.6	0	35.83	-	-	-	-	0-360	201	H
5	6.623	30.27	PK	35.5	-26.9	0	38.87	-	-	-	-	0-360	100	V
6	10.44	27	PK	37.4	-22.9	0	41.5	-	-	-	-	0-360	201	V

PK - Peak detector

*RADIATED EMISSIONS*


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.349	43.54	PK2	30	-26.6	0	46.94	-	-	74	-27.06	1	100	H
* 1.352	32.59	MAV1	30	-26.6	0.21	35.99	54	-18.01	-	-	1	100	H

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND**

**RESTRICTED BANDEDGE (LOW CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

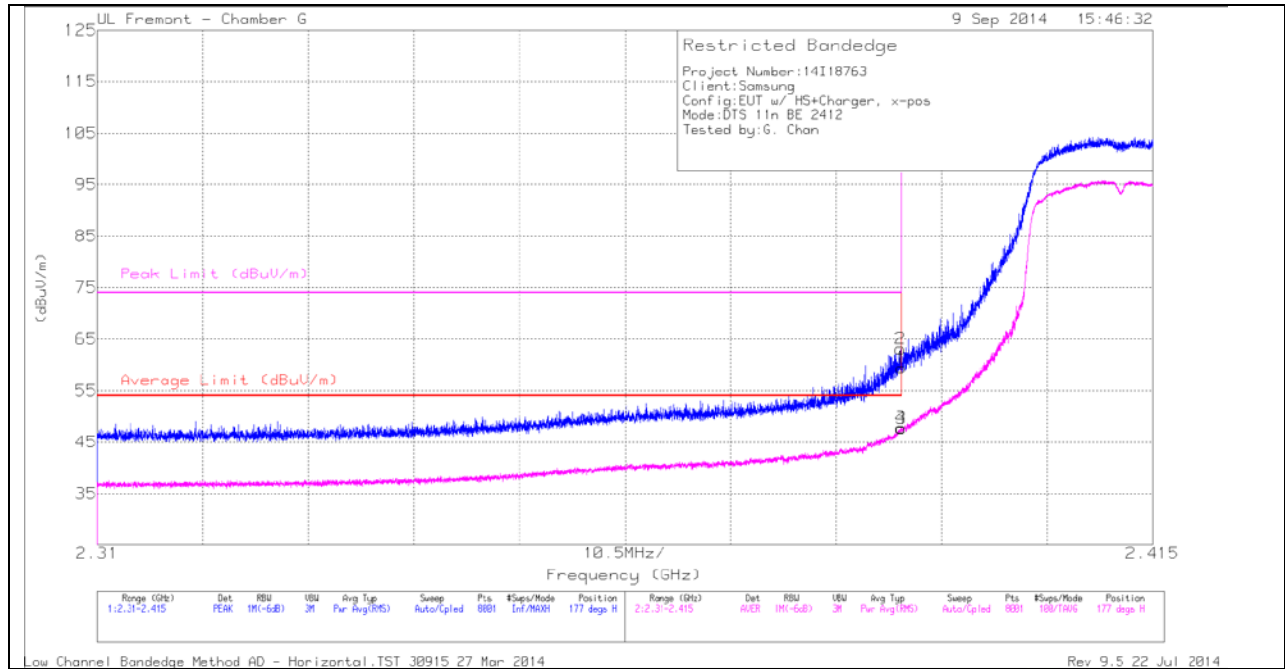

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.53	PK	31.8	-24.9	0	59.43	-	-	74	-14.57	177	293	H
2	* 2.39	56.2	PK	31.8	-24.9	0	63.1	-	-	74	-10.9	177	293	H
3	* 2.39	40.56	RMS	31.8	-24.9	.22	47.68	54	-6.32	-	-	177	293	H
4	* 2.39	40.63	RMS	31.8	-24.9	.22	47.75	54	-6.25	-	-	177	293	H

**VERTICAL PEAK AND AVERAGE PLOT**

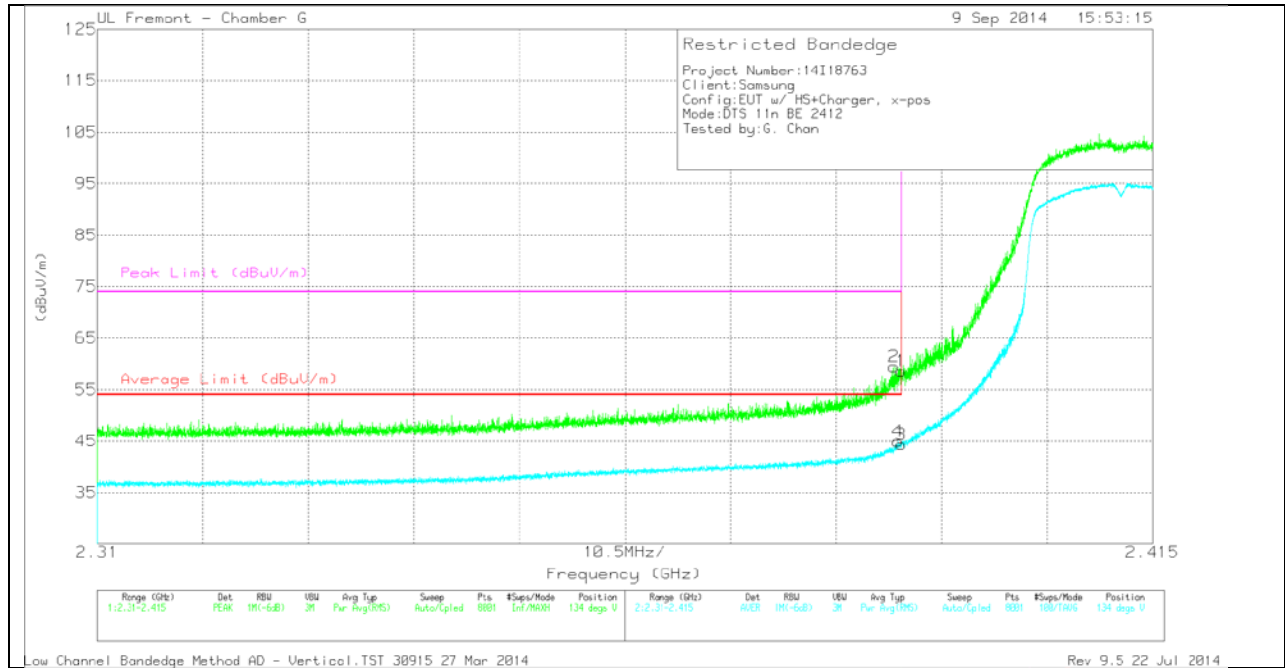


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	52.55	PK	31.8	-24.9	0	59.45	-	-	74	-14.55	134	364	V
1	* 2.39	51.67	PK	31.8	-24.9	0	58.57	-	-	74	-15.43	134	364	V
3	* 2.39	37.2	RMS	31.8	-24.9	.22	44.32	54	-9.68	-	-	134	364	V
4	* 2.39	37.82	RMS	31.8	-24.9	.22	44.94	54	-9.06	-	-	134	364	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

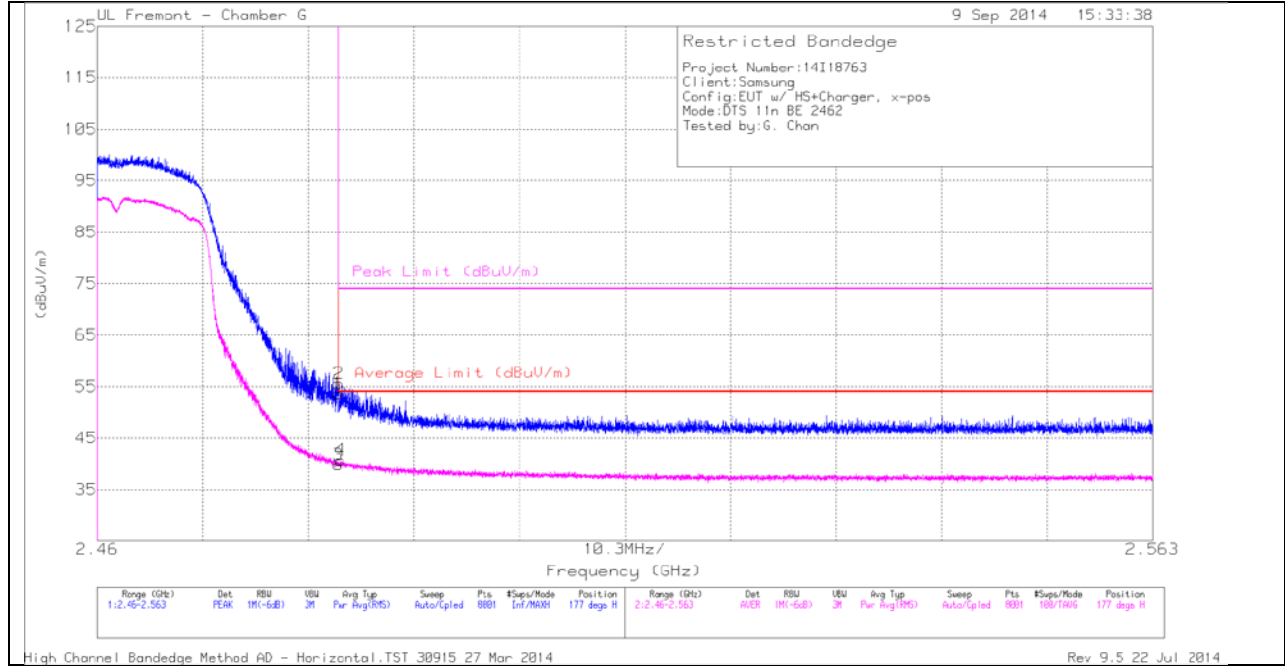

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.52	PK	32	-24.9	0	53.62	-	-	74	-20.38	177	355	H
2	* 2.484	48.47	PK	32	-24.9	0	55.57	-	-	74	-18.43	177	355	H
3	* 2.484	32.49	RMS	32	-24.9	.22	39.81	54	-14.19	-	-	177	355	H
4	* 2.484	33.39	RMS	32	-24.9	.22	40.71	54	-13.29	-	-	177	355	H

**VERTICAL PEAK AND AVERAGE PLOT**

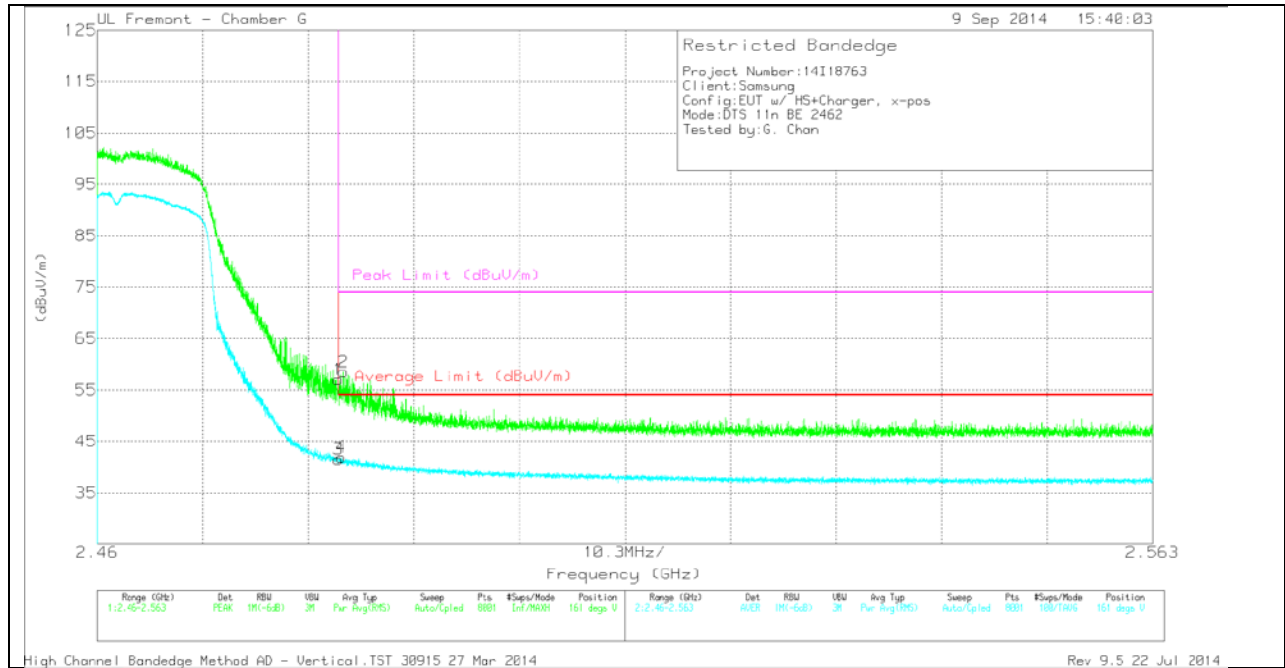


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.94	PK	32	-24.9	0	57.04	-	-	74	-16.96	161	352	V
2	* 2.484	51.42	PK	32	-24.9	0	58.52	-	-	74	-15.48	161	352	V
3	* 2.484	34.22	RMS	32	-24.9	.22	41.54	54	-12.46	-	-	161	352	V
4	* 2.484	34.61	RMS	32	-24.9	.22	41.93	54	-12.07	-	-	161	352	V


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

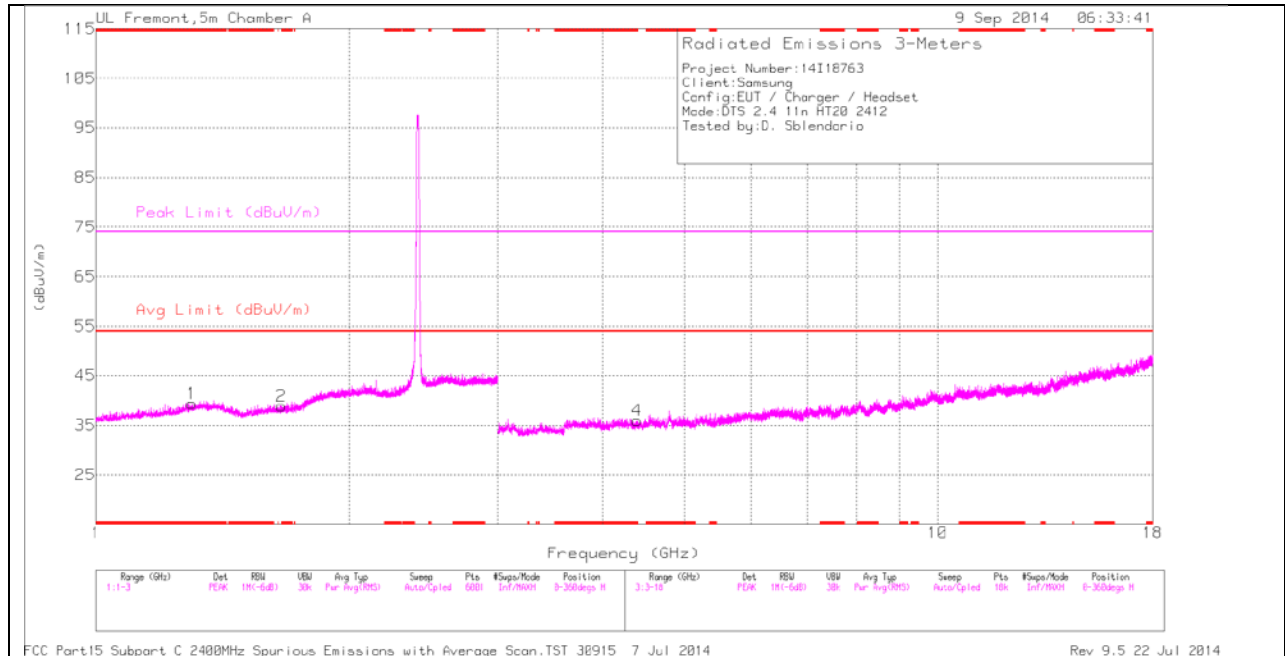

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

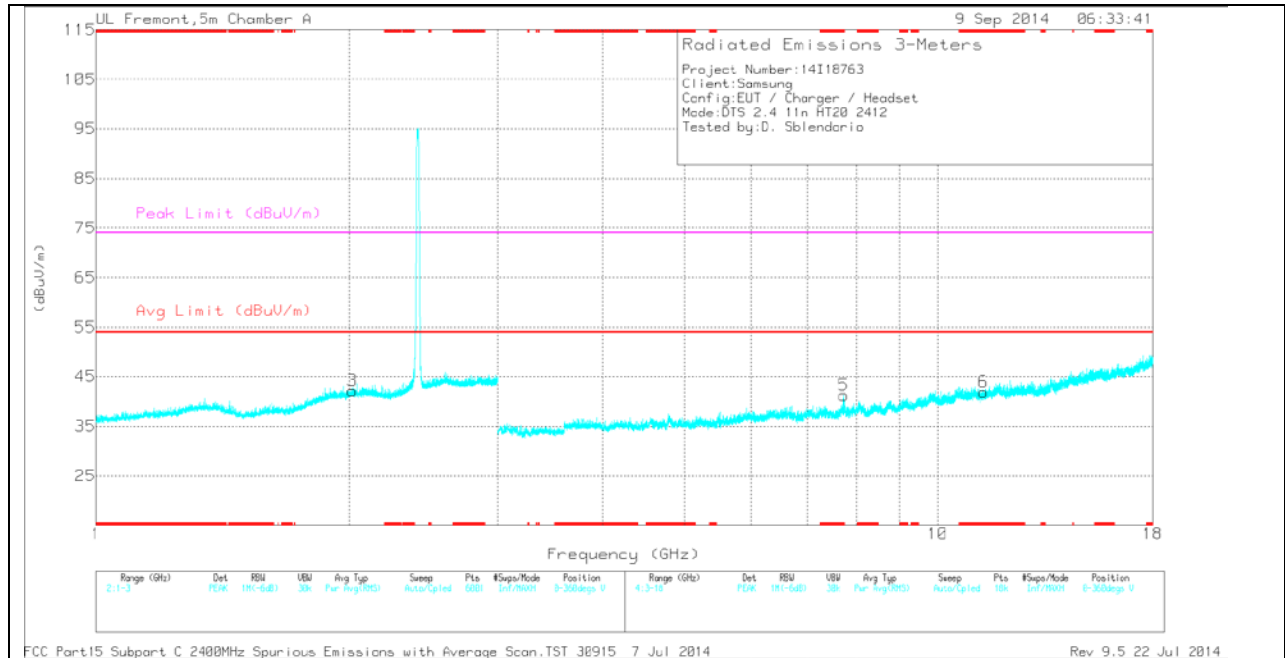

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.298	36.15	PK	30.2	-27	0	39.35	-	-	74	-34.65	0-360	100	H
2	* 1.661	35.66	PK	29	-25.8	0	38.86	-	-	74	-35.14	0-360	100	H
4	* 4.391	32.61	PK	33.9	-30.6	0	35.91	-	-	74	-38.09	0-360	100	H
5	* 7.73	31.26	PK	35.4	-25.4	0	41.26	-	-	74	-32.74	0-360	100	V
6	* 11.337	25.86	PK	38	-21.9	0	41.96	-	-	74	-32.04	0-360	100	V
3	2.018	35.32	PK	32	-25.2	0	42.12	-	-	-	-	0-360	100	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.297	43.94	PK2	30.2	-27	0	47.14	-	-	74	-26.86	1	100	H
* 1.297	32.56	MAv1	30.2	-27	0.22	35.76	54	-18.24	-	-	1	100	H


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

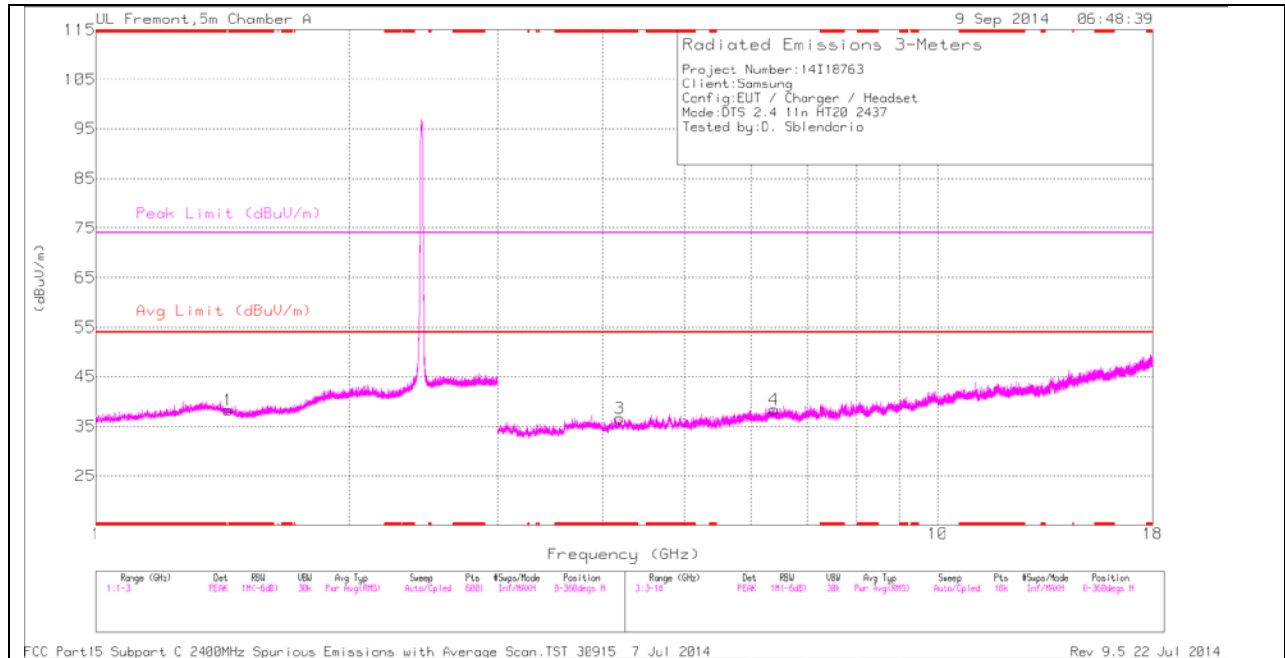

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

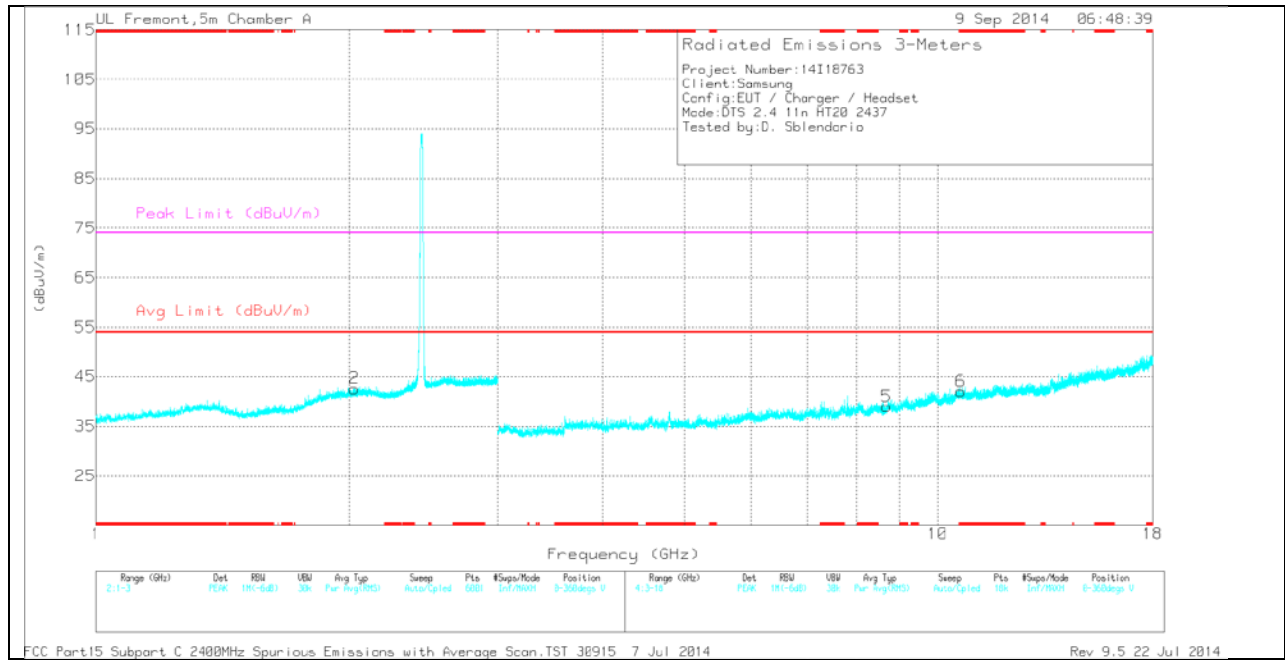

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.435	35.53	PK	29.4	-26.7	0	38.23	-	-	74	-35.77	0-360	100	H
3	* 4.187	32.43	PK	33.9	-29.7	0	36.63	-	-	74	-37.37	0-360	201	H
6	* 10.657	26.16	PK	37.8	-21.9	0	42.06	-	-	74	-31.94	0-360	100	V
2	2.027	35.72	PK	32	-25.1	0	42.62	-	-	-	-	0-360	201	V
4	6.394	30.96	PK	35.5	-28.1	0	38.36	-	-	-	-	0-360	100	H
5	8.692	28.28	PK	35.8	-25.1	0	38.98	-	-	-	-	0-360	100	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.188	39.51	PK2	33.9	-29.7	0	43.71	-	-	74	-30.29	1	202	H
* 4.188	28.82	MAv1	33.9	-29.7	0.22	33.02	54	-20.98	-	-	1	202	H


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

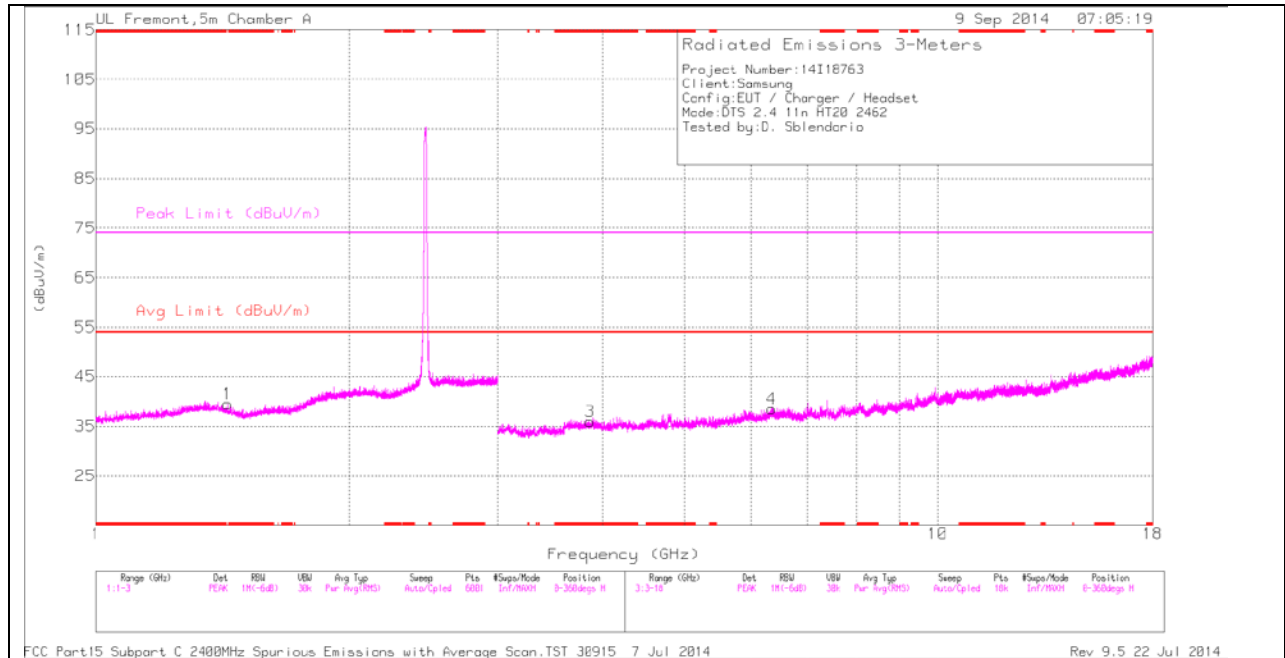

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

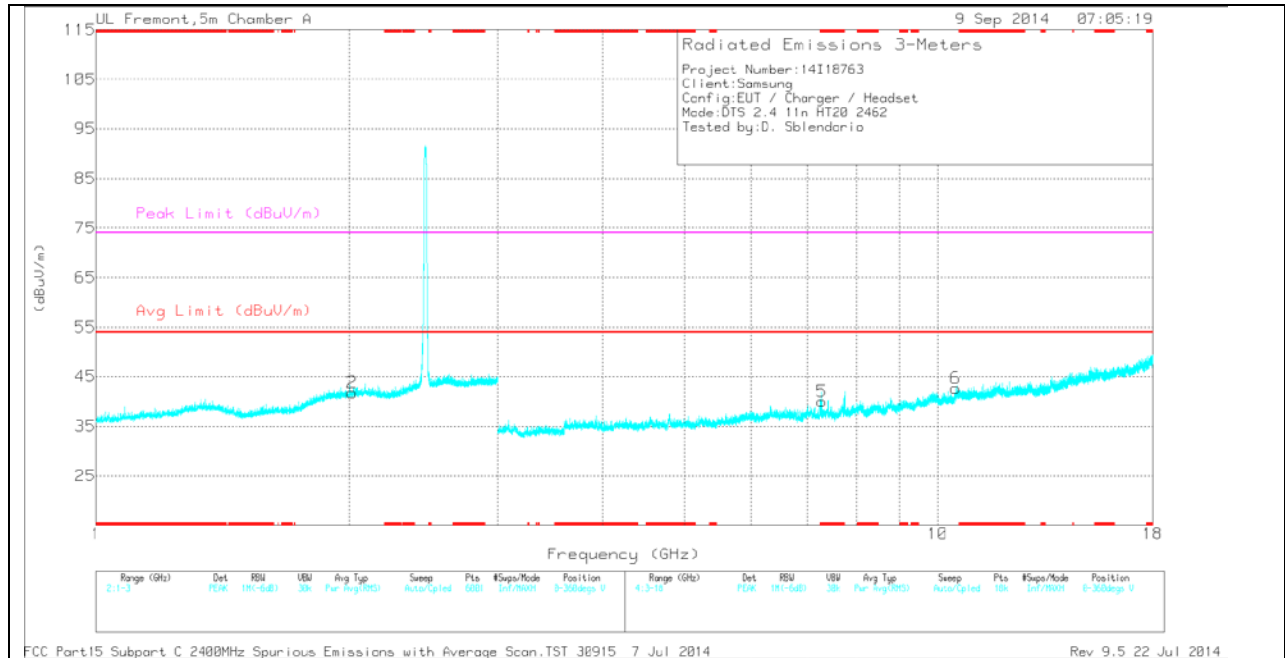

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 3.862	32.83	PK	33.7	-30.6	0	35.93	-	-	74	-38.07	0-360	100	H
5	* 7.283	31.36	PK	35.2	-26.5	0	40.06	-	-	74	-33.94	0-360	100	V
1	1.431	36.75	PK	29.5	-26.7	0	39.55	-	-	-	-	0-360	100	H
2	2.015	35.07	PK	32	-25.3	0	41.77	-	-	-	-	0-360	100	V
4	6.351	30.41	PK	35.5	-27.4	0	38.51	-	-	-	-	0-360	201	H
6	10.5	27.53	PK	37.5	-22.3	0	42.73	-	-	-	-	0-360	100	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.86	41.05	PK2	33.7	-30.6	0	44.15	-	-	74	-29.85	1	100	H
* 3.863	29.92	MAv1	33.7	-30.6	0.22	33.02	54	-20.98	-	-	1	100	H


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

### 10.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

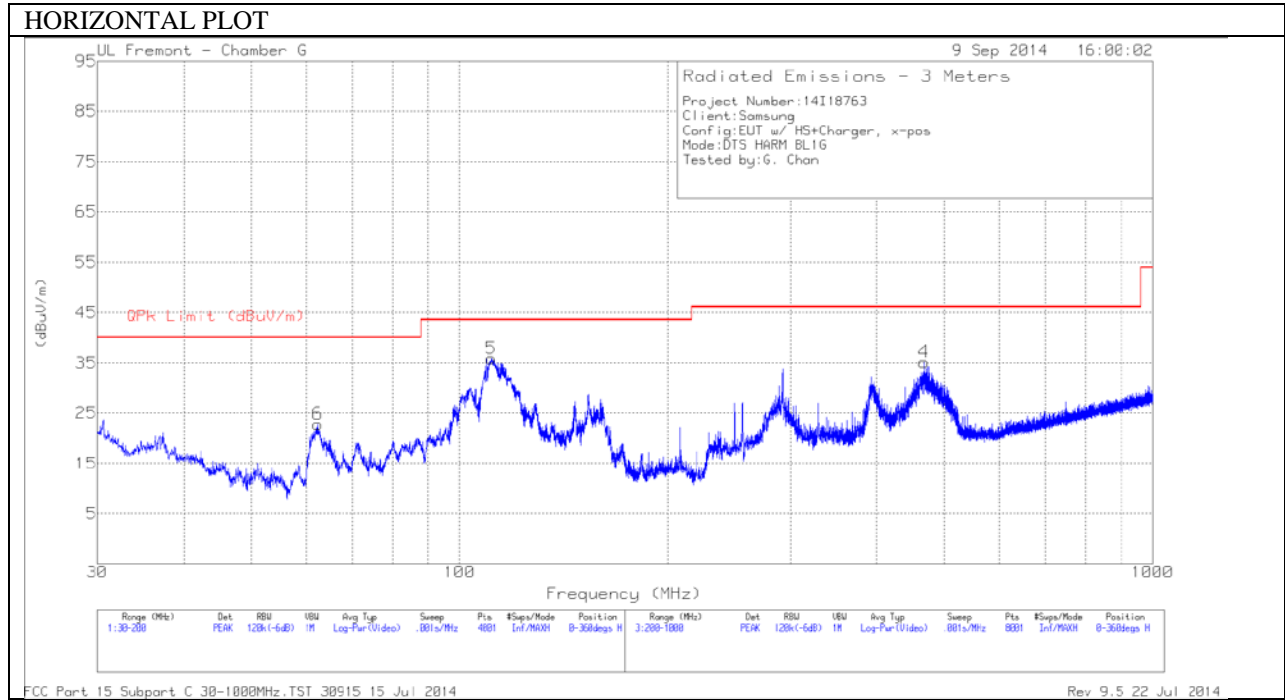

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

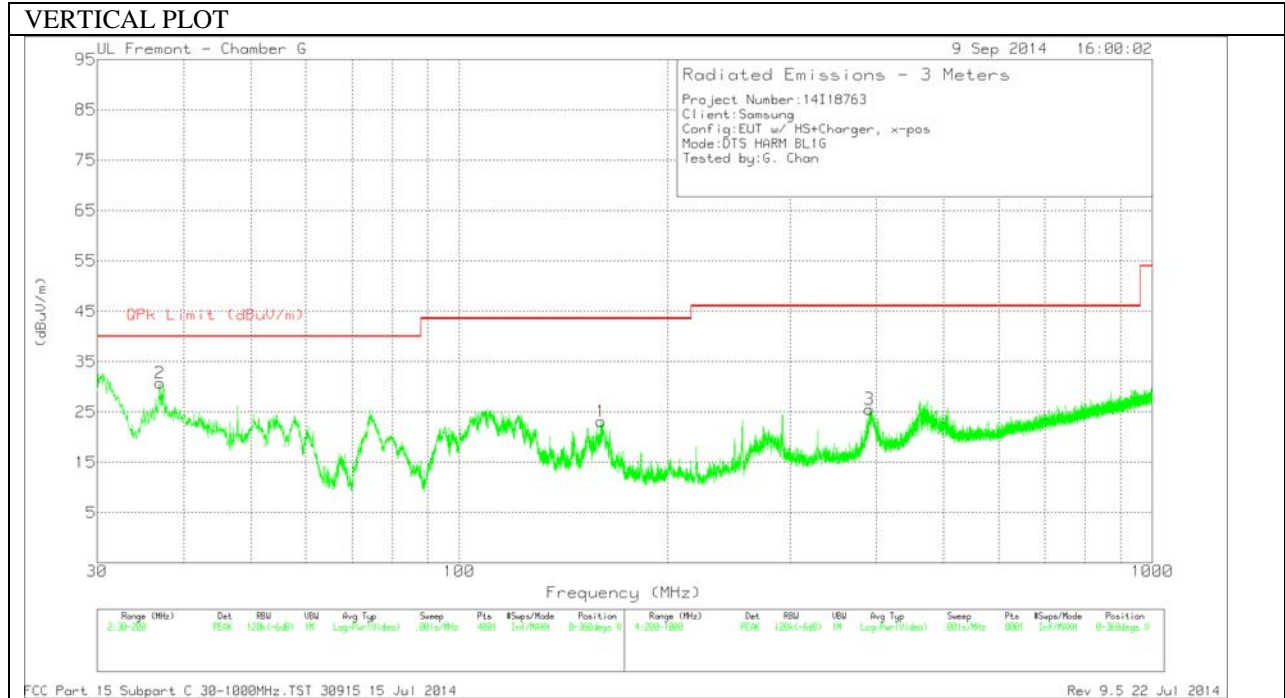

**Below 1G Data**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Hybrid	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 111.2175	50.28	PK	15.6	-30	35.88	43.52	-7.64	0-360	301	H
1	160.0925	37.42	PK	15.2	-29.5	23.12	43.52	-20.4	0-360	100	V
2	36.97	42.25	PK	19.3	-30.8	30.75	40	-9.25	0-360	100	V
3	390.4	35.24	PK	18.3	-28	25.54	46.02	-20.48	0-360	100	V
4	468	42.68	PK	20.2	-27.7	35.18	46.02	-10.84	0-360	201	H
6	62.4275	42.42	PK	10.9	-30.5	22.82	40	-17.18	0-360	301	H

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

**LINE 1 PLOT**

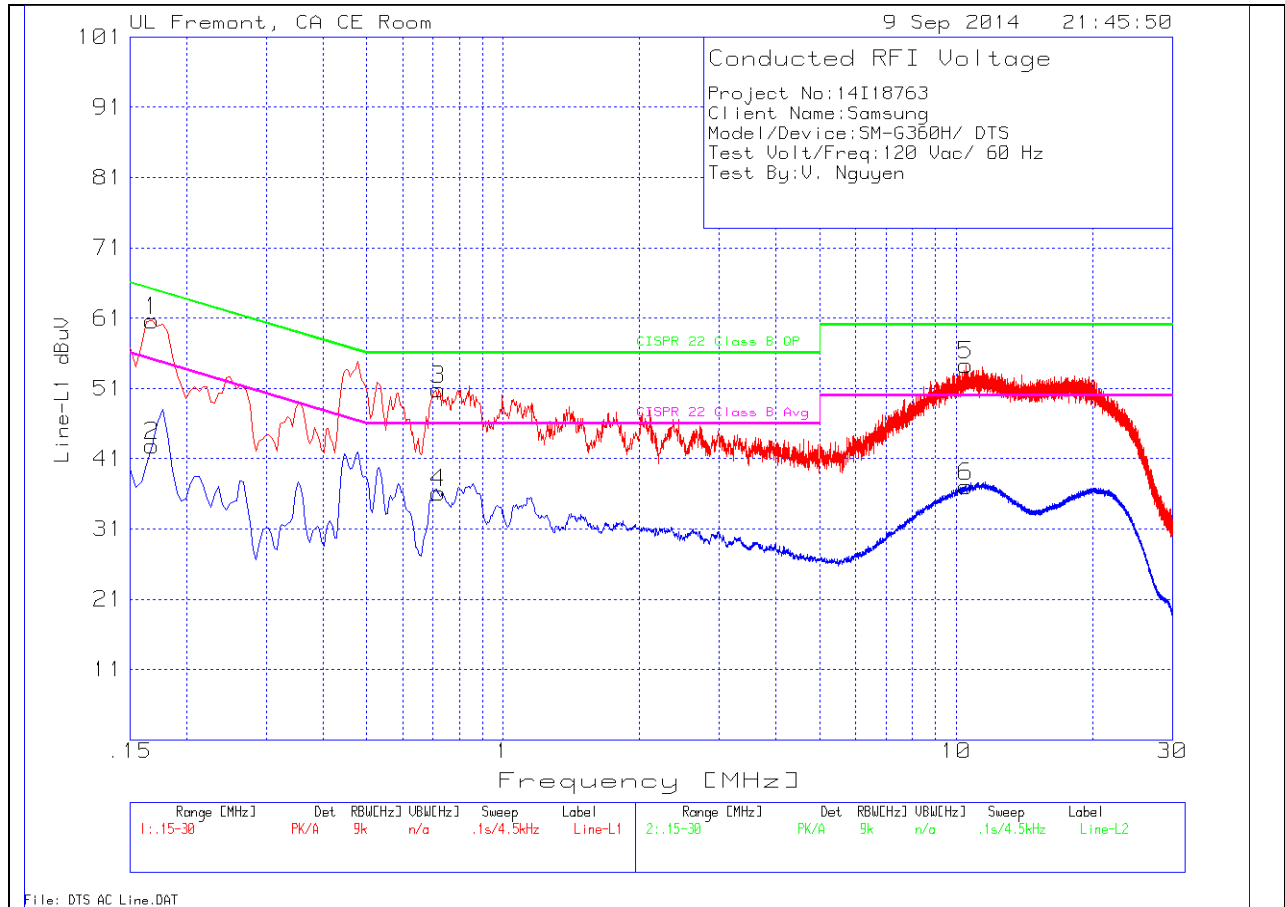


### LINE 1 RESULTS

#### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.168	59.41	PK	1.2	0	60.61	65.1	-4.49	-	-
2	.168	41.67	Av	1.2	0	42.87	-	-	55.1	-12.23
3	.7215	50.59	PK	.3	0	50.89	56	-5.11	-	-
4	.7215	35.81	Av	.3	0	36.11	-	-	46	-9.89
5	10.5045	53.93	PK	.2	.2	54.33	60	-5.67	-	-
6	10.5045	36.63	Av	.2	.2	37.03	-	-	50	-12.97

LINE 2 PLOT

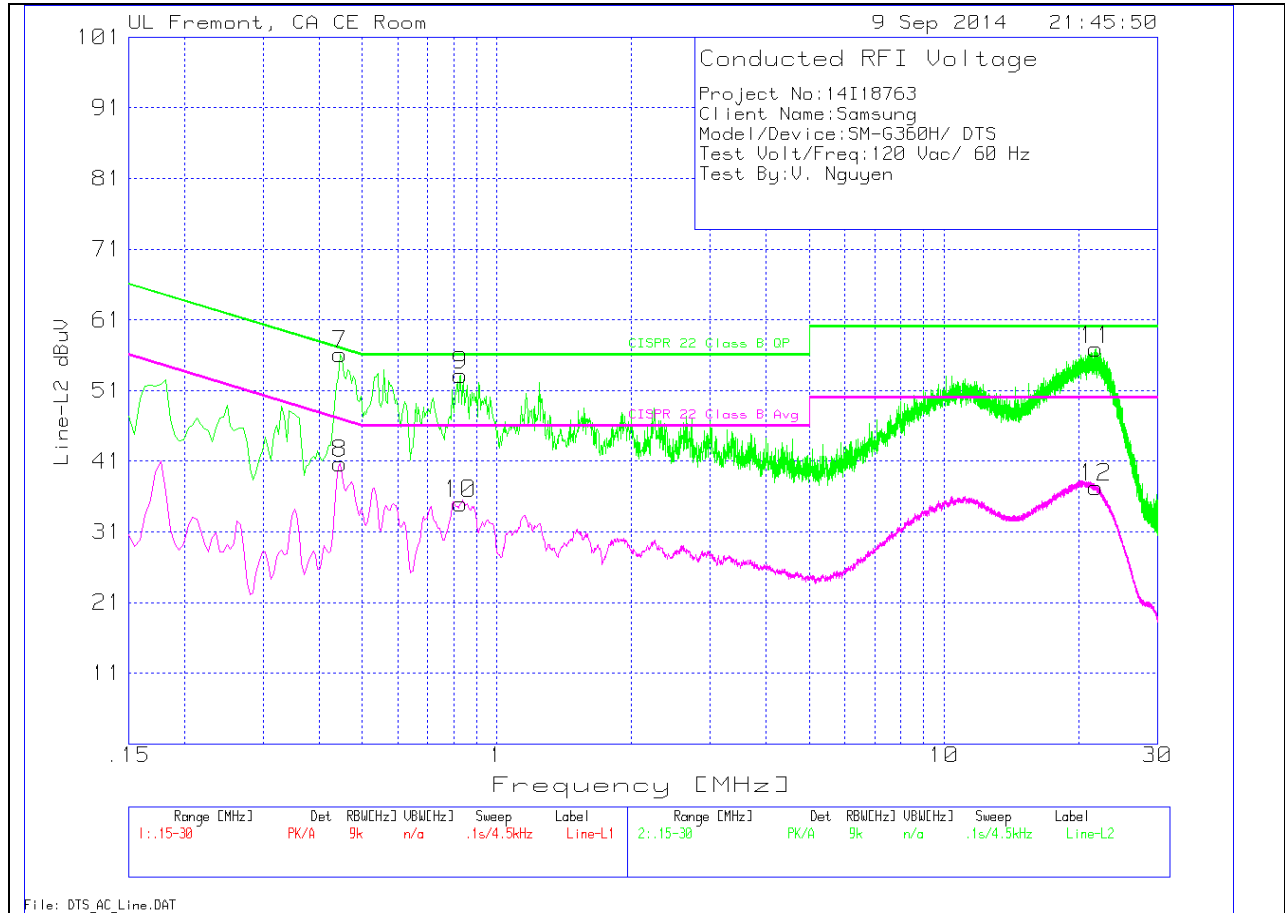

## LINE 2 RESULTS

### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.447	55.74	PK	.4	0	56.14	56.9	-.76	-	-
8	.447	40.29	Av	.4	0	40.69	-	-	46.9	-6.21
9	.8295	52.88	PK	.3	0	53.18	56	-2.82	-	-
10	.8295	34.7	Av	.3	0	35	-	-	46	-11
11	21.84	56.34	PK	.3	.2	56.84	60	-3.16	-	-
12	21.84	36.84	Av	.3	.2	37.34	-	-	50	-12.66