

# REPORT

## FCC Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do,  
443-742 Rep. of Korea

**Date of Issue:**  
November 28, 2014

**Test Site/Location:**  
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-  
myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1411-F034

**HCT FRN:** 0005866421

**FCC ID : A3LSMG720N0**

**APPLICANT : SAMSUNG Electronics Co., Ltd.**

**FCC Model(s):** SM-G720N0  
**EUT Type:** Mobile Phone  
**Max. RF Output Power:** 93.74 dB $\mu$ V/m  
**Frequency Range:** 2402 MHz -2480 MHz  
**Modulation type** GFSK  
**FCC Classification:** Low Power communication Device Transmitter(DXX)  
**FCC Rule Part(s):** Part 15.249

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by  
: Jong Seok Lee  
Test Engineer of RF Team



Approved by  
: Chang Seok Choi  
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1411-F034	November 28, 2014	- First Approval Report

# Table of Contents

- 1. GENERAL INFORMATION ..... 4
- 2. EUT DESCRIPTION ..... 4
- 3. TEST METHODOLOGY ..... 5
  - 3.1 EUT CONFIGURATION ..... 5
  - 3.2 EUT EXERCISE ..... 5
  - 3.3 GENERAL TEST PROCEDURES ..... 5
  - 3.4 DESCRIPTION OF TEST MODES ..... 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS ..... 6
  - 5.1 FACILITIES ..... 6
  - 5.2 EQUIPMENT ..... 6
- 6. ANTENNA REQUIREMENTS ..... 6
- 7. SUMMARY TEST OF RESULTS ..... 7
- 8. TEST RESULT ..... 8
  - 8.1 DUTY CYCLE..... 8
  - 8.2 OCCUPIED BANDWIDTH MEASUREMENT ..... 10
  - 8.3 RADIATED MEASUREMENT..... 13
    - 8.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT ..... 13
    - 8.3.2 RADIATED SPURIOUS EMISSIONS..... 15
    - 8.3.3 RADIATED BAND EDGES MEASUREMENTS..... 23
  - 8.4 POWERLINE CONDUCTED EMISSIONS ..... 25
- 9.LIST OF TEST EQUIPMENT ..... 30
  - 9.1 LIST OF TEST EQUIPMENT (Conducted Test) ..... 30
  - 9.2 LIST OF TEST EQUIPMENT (Radiated Test)..... 31

## 1. GENERAL INFORMATION

**Applicant:** SAMSUNG Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea  
**FCC ID:** A3LSMG720N0  
**EUT Type:** Mobile Phone  
**Model name(s):** SM-G720N0  
**Date(s) of Tests:** November 19, 2014 ~ November 24, 2014  
**Place of Tests:** HCT Co., Ltd.  
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea  
 (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>FCC Model Name</b>	SM-G720N0	
<b>EUT Type</b>	Mobile Phone	
<b>Power Supply</b>	DC 3.85 V	
<b>Battery type</b>	Li-ion Battery(Standard)	
<b>Frequency Range</b>	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
<b>Fundamental Field Strength Level</b>	Peak	93.74 dB $\mu$ V/m
	Average	41.74 dB $\mu$ V/m
<b>Operating Mode</b>	ANT+	
<b>Modulation Type</b>	GFSK	
<b>Number of Channels</b>	79 Channels	
<b>Antenna Specification</b>	Manufacturer: ethertronics Antenna type: Internal Antenna Peak Gain : 0.2 dBi	

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.249” were used in the measurement.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.249 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

## 7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Occupied Bandwidth	§2.1049	N/A	CONDUCTED	PASS
Duty Cycle	§15.35(c)	N/A		N/A
Fundamental Field Strength Level	§15.249(a)(e)	< 50 mV/m	RADIATED	PASS
Harmonic Field Strength Level	§15.249(a)(e)	< 500 mV/m		PASS
General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	§15.205, 15.209, 15.249(d)(e)	< 15.209 limits or 50dB below the level of the fundamental		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.4		PASS


## 8. TEST RESULT

### 8.1 DUTY CYCLE

#### Test Requirements §15.35(c)

(c) Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification

#### ■ TEST CONFIGURATION

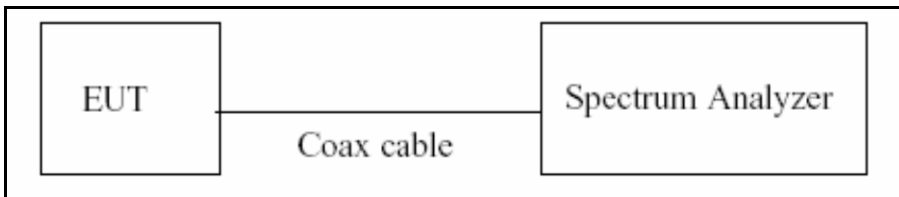


#### ■ TEST RESULTS

$$\begin{aligned} \text{DCCF} &= 20 \cdot \log_{10}(\text{Pulse width} / \text{Period of the pulse train}) \\ &= 20 \cdot \log_{10}(0.157 \text{ ms} / 62.5 \text{ ms}) = -52.00 \text{ dB} \end{aligned}$$


<b>DCCF</b>
<b>-52.00 dB</b>

▣ TEST RESULTS PLOTS

Pulse Width plot

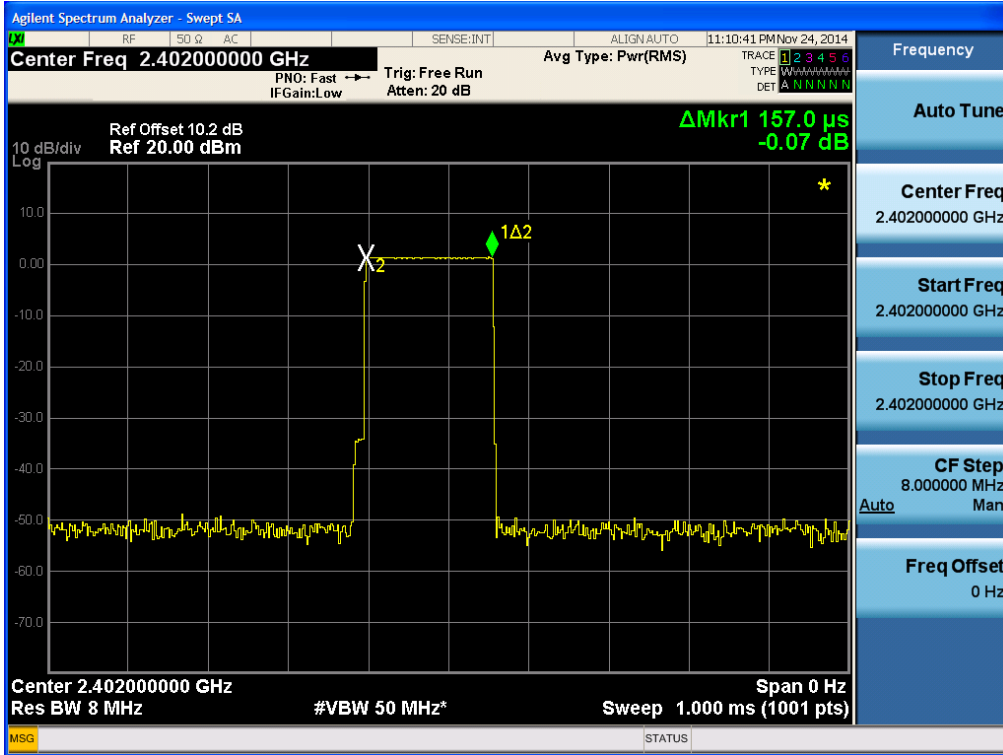

Period of the Pulse Train

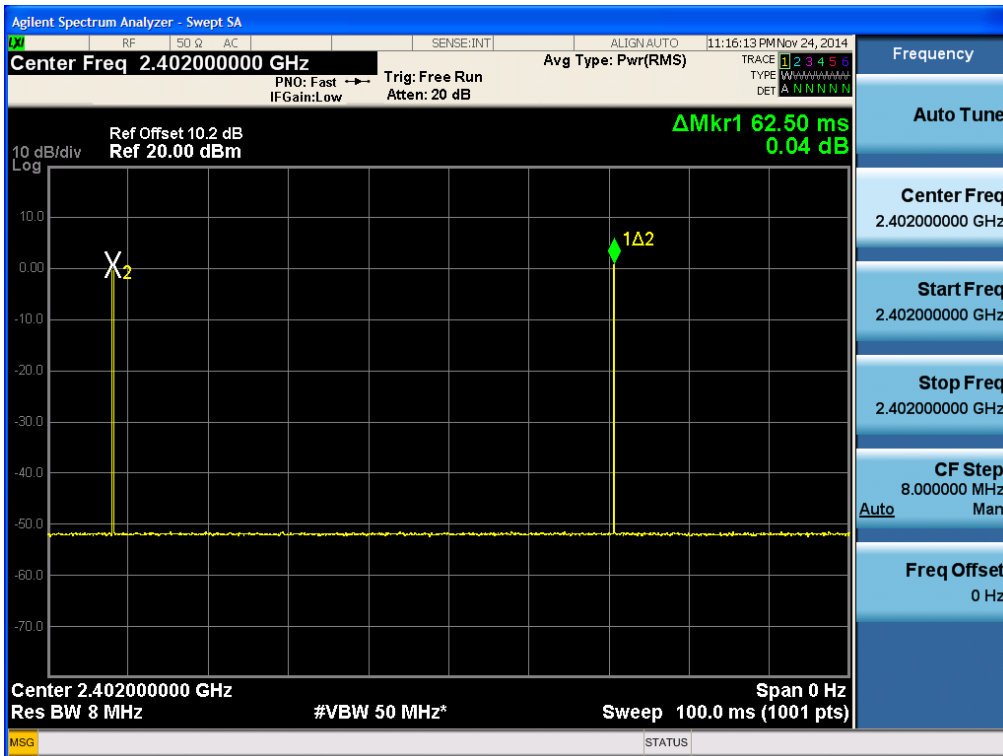


## 8.2 OCCUPIED BANDWIDTH MEASUREMENT

### Test Requirements and limit, §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

RBW = 1% to 3% of the 99% bandwidth.

VBW  $\geq$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

#### ■ TEST RESULTS


ANT+ Mode		99% Bandwidth (kHz)
Frequency[MHz]	Channel No.	
2402	0	809.28
2440	39	795.39
2480	78	820.72

▣ RESULT PLOTS


Occupied Bandwidth plot (Low-CH 0)



Occupied Bandwidth plot (Mid-CH 39)

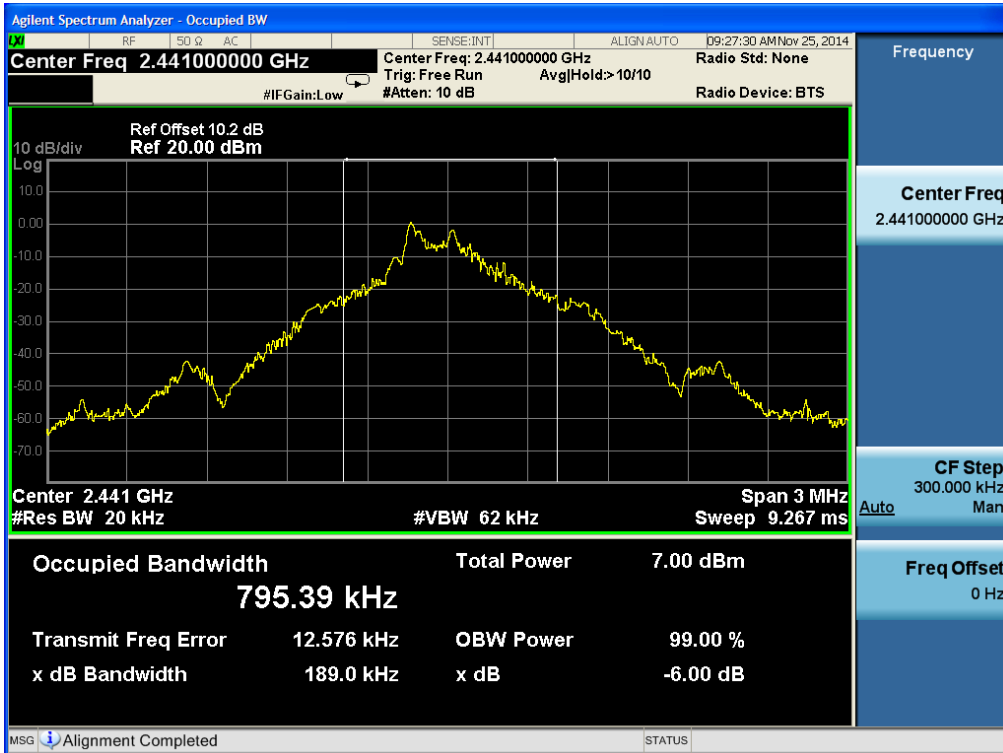

**Occupied Bandwidth plot (High-CH 78)**

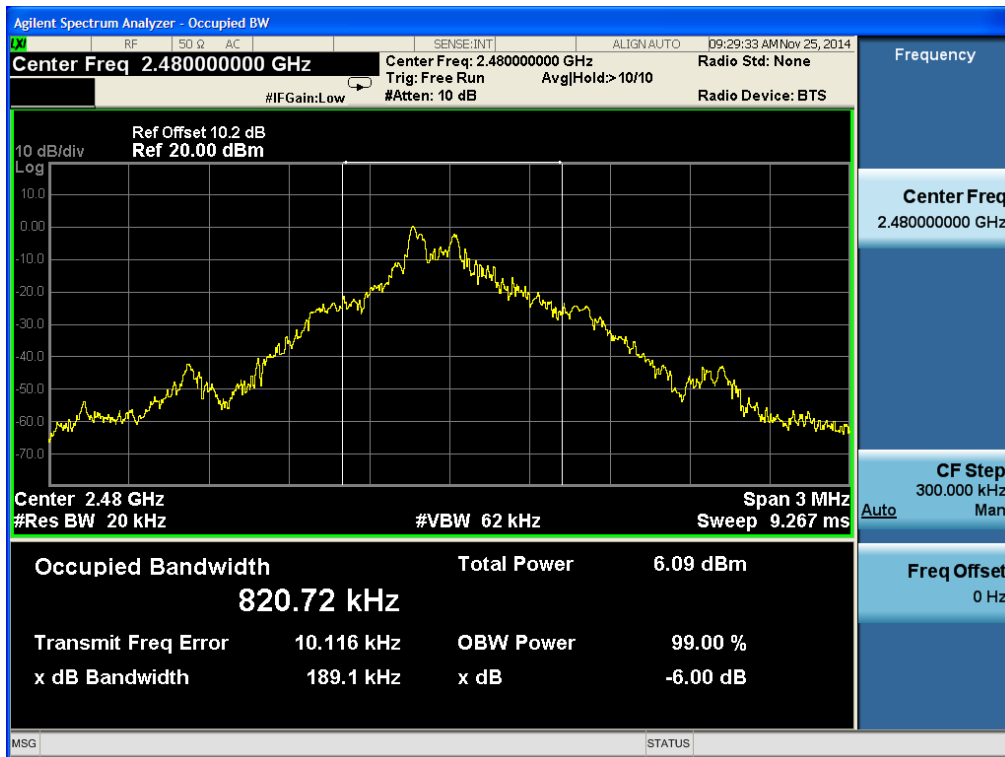

**8.3 RADIATED MEASUREMENT.**

**8.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT**

**Test Requirements and limit, §15.249(a)(e)**

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts meter)	Field strength of harmonics (millivolts meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**The maximum permissible average field strength level is 50 mV/m (93.98 dBuV/m).**

**The maximum permissible peak field strength level is 500 mV/m (113.98 dBuV/m).**

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting

Peak : 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥3\*RBW

■ TEST RESULTS

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2402	57.59	33.87	V	0.00	91.46	113.98	22.52	PK
2402	57.59	33.87	V	-52.00	39.46	93.98	54.52	AV
2402	57.65	33.87	H	0.00	91.52	113.98	22.46	PK
2402	57.65	33.87	H	-52.00	39.52	93.98	54.46	AV
2441	59.28	33.94	V	0.00	93.22	113.98	20.76	PK
2441	59.28	33.94	V	-52.00	41.22	93.98	52.76	AV
2441	59.80	33.94	H	0.00	93.74	113.98	20.24	PK
2441	59.80	33.94	H	-52.00	41.74	93.98	52.24	AV
2480	53.32	34.02	V	0.00	87.34	113.98	26.64	PK
2480	53.32	34.02	V	-52.00	35.34	93.98	58.64	AV
2480	55.17	34.02	H	0.00	89.19	113.98	24.79	PK
2480	55.17	34.02	H	-52.00	37.19	93.98	56.79	AV

Note :

1. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
2. Peak: Total = Reading Value + Antenna Factor + Cable Loss  
Average: Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**8.3.2 RADIATED SPURIOUS EMISSIONS.**

**Test Requirements and limit, §15.205, §15.209, §15.249(d)(e)**


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


### Test Configuration

#### Below 30 MHz

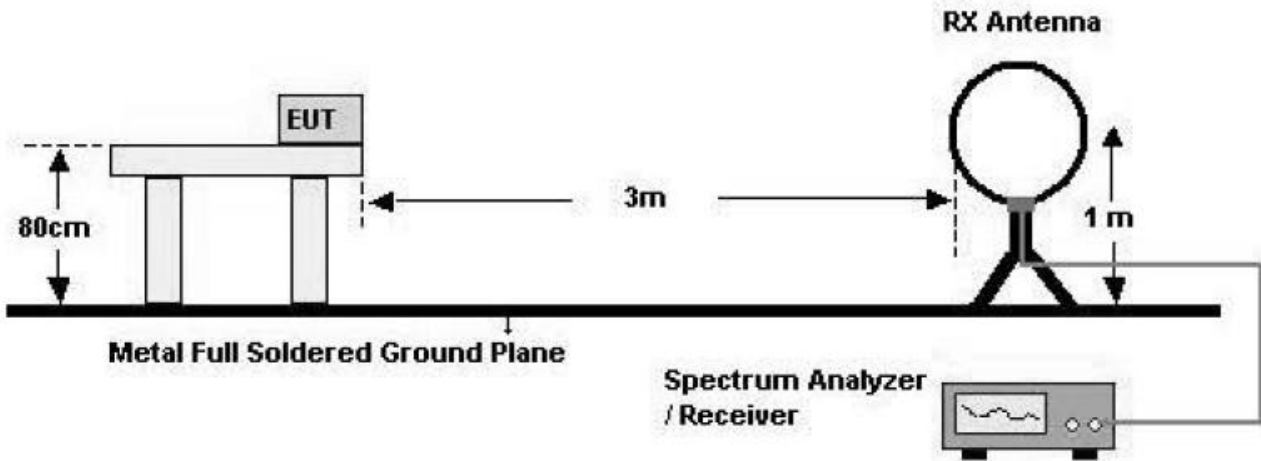

#### 30 MHz - 1 GHz

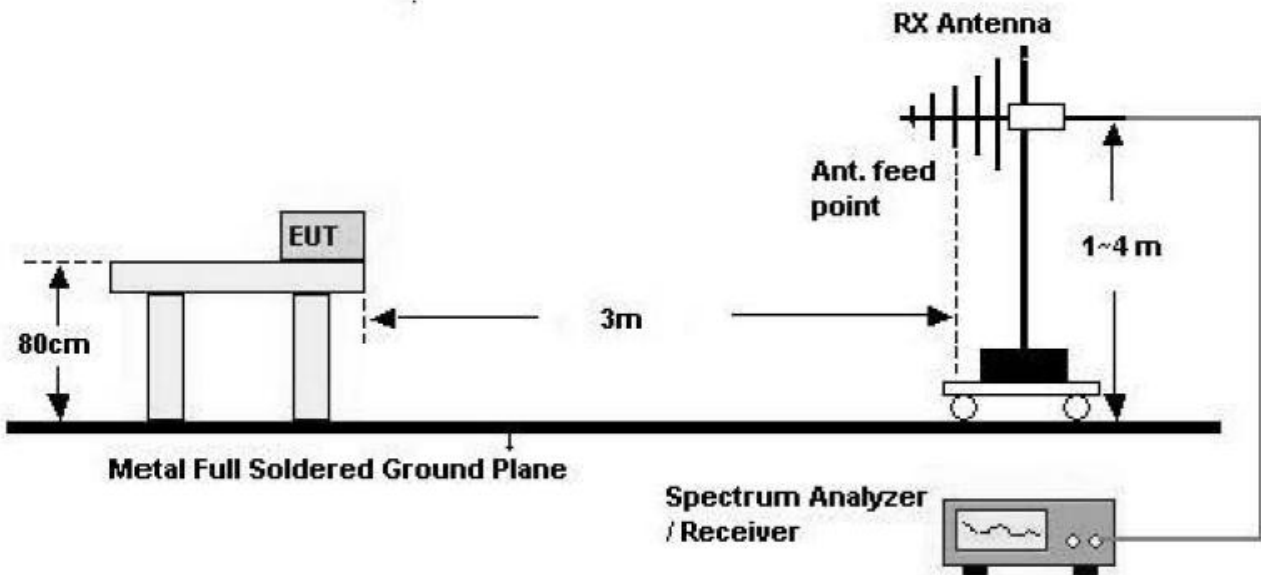

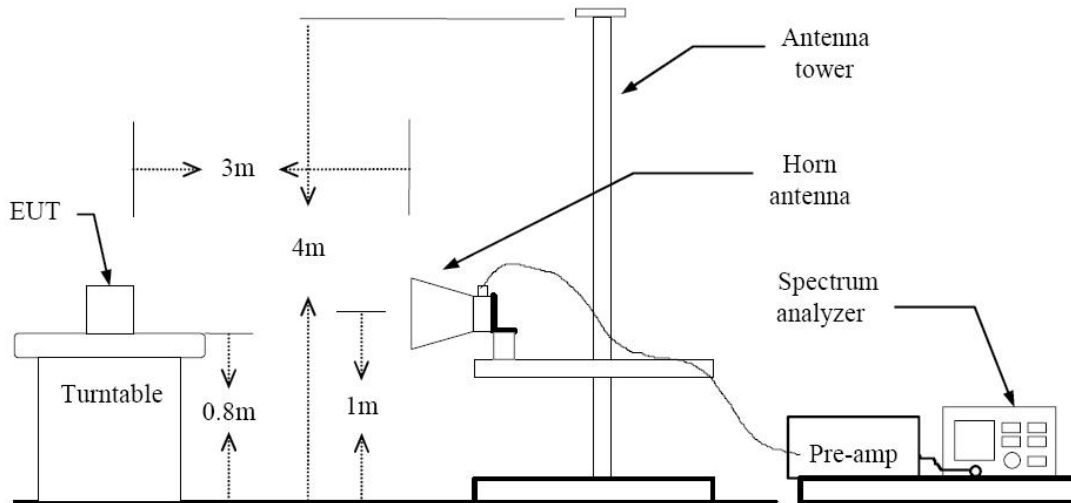**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.

**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dBm /m	dBm	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**TEST RESULTS**

**Below 1 GHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}/\text{m}$	$\text{dBm}/\text{m}$	$\text{dBm}$	(H/V)	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}$
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**Above 1 GHz**

**Operation Mode: CH Low (2402 MHz)**

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	53.57	-2.16	V	51.41	73.98	22.57	PK
4804	39.01	-2.16	V	36.85	53.98	17.13	AV
7206	51.74	7.31	V	59.05	73.98	14.93	PK
7206	38.16	7.31	V	45.47	53.98	8.51	AV
4804	52.77	-2.16	H	50.61	73.98	23.37	PK
4804	38.46	-2.16	H	36.3	53.98	17.68	AV
7206	51.63	7.31	H	58.94	73.98	15.04	PK
7206	37.60	7.31	H	44.91	53.98	9.07	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**Operation Mode: CH Mid (2441 MHz)**

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	52.13	-1.95	V	50.18	73.98	23.80	PK
4882	38.65	-1.95	V	36.7	53.98	17.28	AV
7323	51.22	7.34	V	58.56	73.98	15.42	PK
7323	37.96	7.34	V	45.3	53.98	8.68	AV
4882	51.69	-1.95	H	49.74	73.98	24.24	PK
4882	38.15	-1.95	H	36.2	53.98	17.78	AV
7323	51.18	7.34	H	58.52	73.98	15.46	PK
7323	37.82	7.34	H	45.16	53.98	8.82	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**Operation Mode: CH High (2480 MHz)**

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	51.96	-1.84	V	50.12	73.98	23.86	PK
4960	38.16	-1.84	V	36.32	53.98	17.66	AV
7440	51.38	7.13	V	58.51	73.98	15.47	PK
7440	38.03	7.13	V	45.16	53.98	8.82	AV
4960	51.94	-1.84	H	50.1	73.98	23.88	PK
4960	38.12	-1.84	H	36.28	53.98	17.70	AV
7440	51.18	7.13	H	58.31	73.98	15.67	PK
7440	37.97	7.13	H	45.1	53.98	8.88	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

### 8.3.3 RADIATED BAND EDGES MEASUREMENTS

#### Test Requirements and limit, §15.205, §15.209, §15.249

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or tho the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Operation Mode	ANT+
Operating Frequency	2402 MHz
Channel No	0 Ch

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2400.0	24.82	31.47	H	56.29	73.98	17.69	PK
2400.0	12.49	31.47	H	43.96	53.98	10.02	AV
2400.0	24.15	31.47	V	55.62	73.98	18.36	PK
2400.0	12.43	31.47	V	43.90	53.98	10.08	AV

※ A.F: ANTENNA FACTOR  
C.L: CABLE LOSS

#### Notes:

- 1.. Frequency range of measurement = 2310 ~ 2400 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss
3. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Operation Mode	ANT+
Operating Frequency	2480 MHz
Channel No	78 Ch

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2483.5	24.84	31.46	H	56.30	73.98	17.68	PK
2483.5	12.17	31.46	H	43.63	53.98	10.35	AV
2483.5	24.65	31.46	V	56.11	73.98	17.87	PK
2483.5	12.04	31.46	V	43.50	53.98	10.48	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss – Delta Value + Duty Cycle Correction Factor
3. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. AV Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 10 kHz ≥ 1/τ Hz, where τ = pulse width in seconds.
 We performed using a reduced video BW method was done with the analyzer in linear mode.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 8.4 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for Ch.39 on ANT+ mode.  
Because Ch.39 on ANT+ mode is worst case.

■ **RESULT PLOTS**

**Conducted Emissions (Line 1)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-G720N0  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+ MODE  
 Operator Name: JS LEE

EN55022 CLASS B

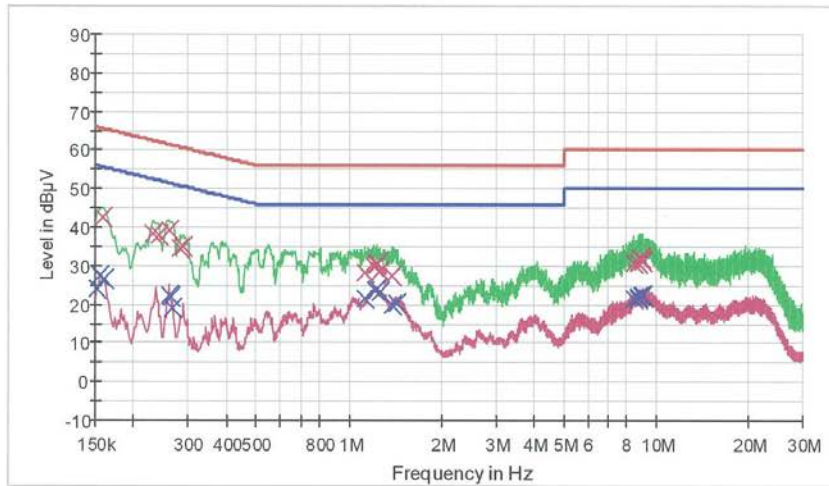

— EN55022 CLASS B\_QP     
 — EN55022 CLASS B\_AV     
 — Preview Result 1-PK+  
— Preview Result 2-AVG     
 x Final Result 1-QPK     
 x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	42.6	9.000	Off	L1	9.6	23.0	65.6
0.230000	38.1	9.000	Off	L1	9.6	24.3	62.4
0.240000	38.1	9.000	Off	L1	9.7	24.0	62.1
0.260000	39.4	9.000	Off	L1	9.7	22.0	61.4
0.284000	34.7	9.000	Off	L1	9.7	26.0	60.7
0.288000	35.1	9.000	Off	L1	9.7	25.5	60.6
1.128000	28.4	9.000	Off	L1	9.7	27.6	56.0
1.204000	30.0	9.000	Off	L1	9.7	26.0	56.0
1.226000	30.2	9.000	Off	L1	9.7	25.8	56.0
1.234000	30.9	9.000	Off	L1	9.7	25.1	56.0
1.262000	28.7	9.000	Off	L1	9.7	27.3	56.0
1.380000	27.2	9.000	Off	L1	9.7	28.8	56.0
8.432000	30.9	9.000	Off	L1	10.0	29.1	60.0
8.740000	30.9	9.000	Off	L1	10.0	29.1	60.0
8.788000	32.0	9.000	Off	L1	10.0	28.0	60.0
8.890000	31.6	9.000	Off	L1	10.0	28.4	60.0

11/24/2014

11:09:17

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
8.924000	31.9	9.000	Off	L1	10.0	28.1	60.0
9.044000	31.3	9.000	Off	L1	10.0	28.7	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	24.0	9.000	Off	L1	9.6	31.9	55.9
0.156000	27.5	9.000	Off	L1	9.6	28.2	55.7
0.160000	26.7	9.000	Off	L1	9.6	28.8	55.5
0.260000	22.2	9.000	Off	L1	9.7	29.2	51.4
0.264000	21.8	9.000	Off	L1	9.7	29.5	51.3
0.268000	18.9	9.000	Off	L1	9.7	32.3	51.2
1.128000	21.3	9.000	Off	L1	9.7	24.7	46.0
1.224000	23.6	9.000	Off	L1	9.7	22.4	46.0
1.238000	24.2	9.000	Off	L1	9.7	21.8	46.0
1.262000	23.3	9.000	Off	L1	9.7	22.7	46.0
1.380000	19.9	9.000	Off	L1	9.7	26.1	46.0
1.428000	20.5	9.000	Off	L1	9.7	25.5	46.0
8.432000	21.4	9.000	Off	L1	10.0	28.6	50.0
8.734000	21.9	9.000	Off	L1	10.0	28.1	50.0
8.740000	21.6	9.000	Off	L1	10.0	28.4	50.0
8.924000	22.3	9.000	Off	L1	10.0	27.7	50.0
8.950000	22.2	9.000	Off	L1	10.0	27.8	50.0
9.044000	22.2	9.000	Off	L1	10.0	27.8	50.0

11/24/2014

11:09:17

**Conducted Emissions (Line 2)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-G720N0  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+ MODE  
 Operator Name: JS LEE

EN55022 CLASS B

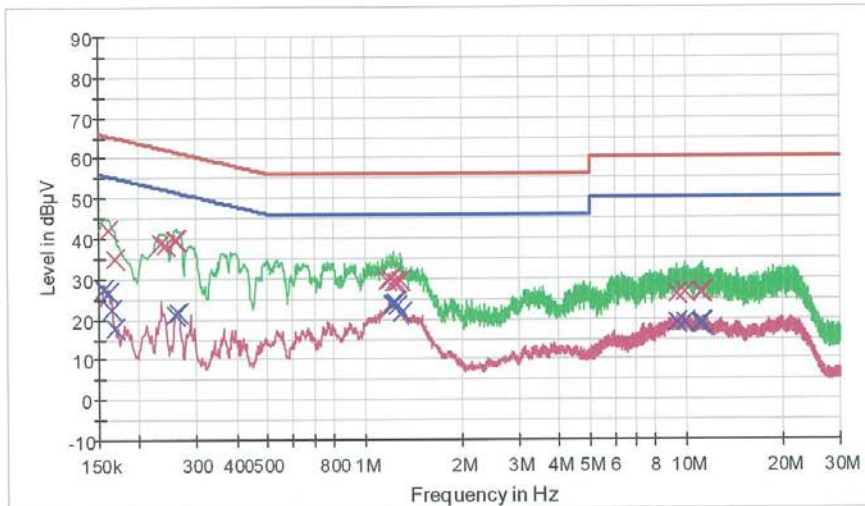

— EN55022 CLASS B\_QP     
 — EN55022 CLASS B\_AV     
 — Preview Result 1-PK+  
— Preview Result 2-AVG     
 x Final Result 1-CPK     
 x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.160000	42.3	9.000	Off	N	9.6	23.2	65.5
0.168000	35.1	9.000	Off	N	9.6	30.0	65.1
0.234000	38.7	9.000	Off	N	9.7	23.6	62.3
0.240000	38.3	9.000	Off	N	9.7	23.8	62.1
0.258000	39.8	9.000	Off	N	9.7	21.7	61.5
0.262000	39.6	9.000	Off	N	9.7	21.8	61.4
1.174000	29.5	9.000	Off	N	9.7	26.5	56.0
1.208000	29.8	9.000	Off	N	9.7	26.2	56.0
1.234000	29.2	9.000	Off	N	9.7	26.8	56.0
1.262000	29.0	9.000	Off	N	9.8	27.0	56.0
1.266000	29.0	9.000	Off	N	9.8	27.0	56.0
1.286000	29.6	9.000	Off	N	9.8	26.4	56.0
9.384000	26.1	9.000	Off	N	10.0	33.9	60.0
9.872000	26.4	9.000	Off	N	10.0	33.6	60.0
9.882000	26.5	9.000	Off	N	10.0	33.5	60.0
11.084000	26.6	9.000	Off	N	10.1	33.4	60.0

11/24/2014

11:02:02

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
11.136000	26.5	9.000	Off	N	10.1	33.5	60.0
11.182000	26.7	9.000	Off	N	10.1	33.3	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.156000	27.5	9.000	Off	N	9.6	28.2	55.7
0.160000	26.6	9.000	Off	N	9.6	28.9	55.5
0.164000	22.5	9.000	Off	N	9.6	32.8	55.3
0.168000	17.6	9.000	Off	N	9.6	37.5	55.1
0.258000	21.3	9.000	Off	N	9.7	30.2	51.5
0.264000	21.5	9.000	Off	N	9.7	29.8	51.3
1.222000	23.5	9.000	Off	N	9.7	22.5	46.0
1.232000	23.7	9.000	Off	N	9.7	22.3	46.0
1.240000	23.9	9.000	Off	N	9.7	22.1	46.0
1.262000	23.3	9.000	Off	N	9.8	22.7	46.0
1.266000	23.1	9.000	Off	N	9.8	22.9	46.0
1.302000	21.7	9.000	Off	N	9.8	24.3	46.0
9.384000	18.8	9.000	Off	N	10.0	31.2	50.0
9.872000	18.8	9.000	Off	N	10.0	31.2	50.0
11.084000	18.8	9.000	Off	N	10.1	31.2	50.0
11.136000	19.0	9.000	Off	N	10.1	31.0	50.0
11.182000	19.2	9.000	Off	N	10.1	30.8	50.0
11.216000	18.9	9.000	Off	N	10.1	31.1	50.0

11/24/2014

11:02:02

## 9.LIST OF TEST EQUIPMENT

### 9.1 LIST OF TEST EQUIPMENT (Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2014	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/18/2013	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	01/27/2014	Annual	10545
ITECH	IT6720 / DC POWER SUPPLY	11/04/2014	Annual	0100021562870011 99
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2014	Annual	76649

## 9.2 LIST OF TEST EQUIPMENT (Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/04/2014	Annual	10094
CERNEX	CBL18265035 / POWER AMP	07/23/2014	Annual	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	07/05/2013	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/17/2014	Annual	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2014	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2014	Annual	22964