


A3LSMG9730

Internal Photographs

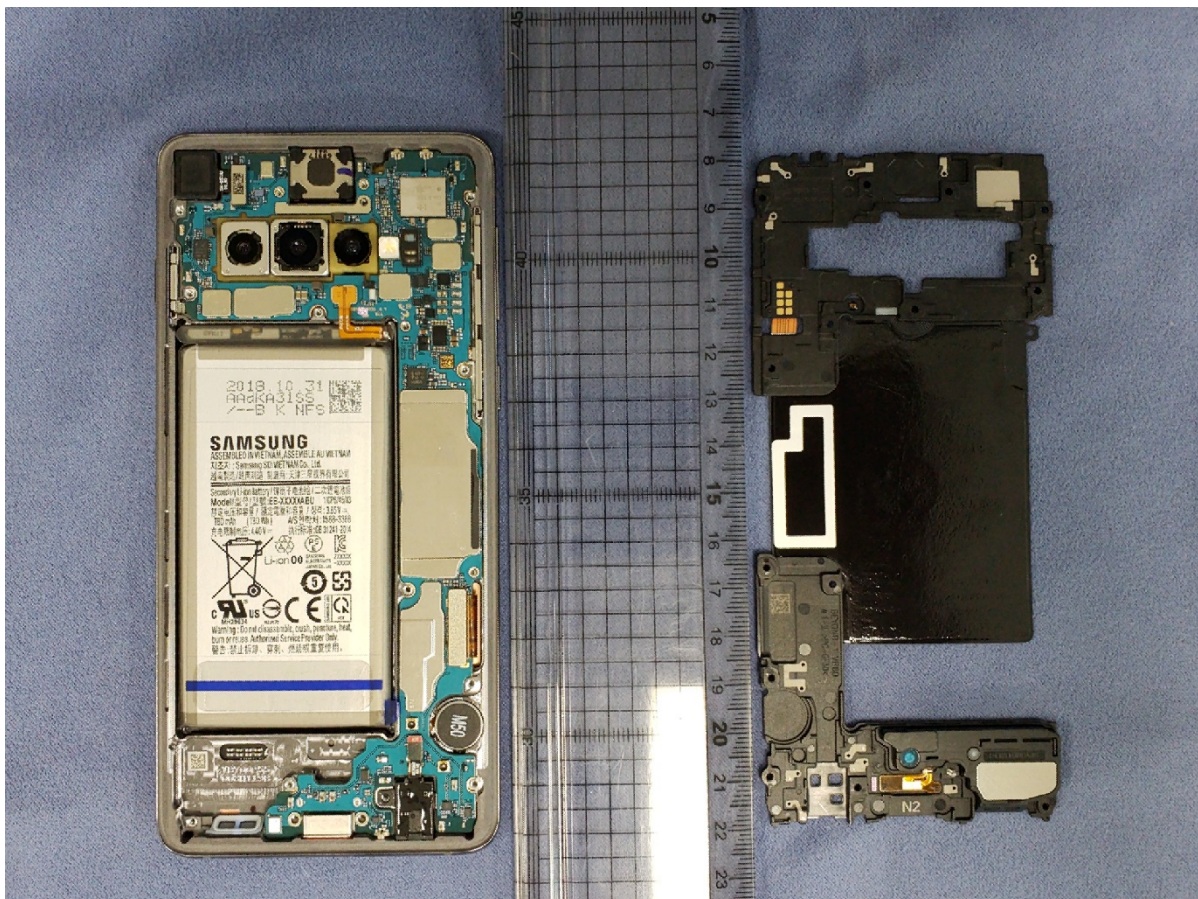

2012 10 31
 AndK931SS
 B K NPS

SAMSUNG
 POLYMER LITHIUM ION BATTERY
 Model No. EB-BN910ABP
 Capacity: 1930mAh (Typical) at 3.8V
 Input: 5V/2A
 Output: 5V/2A
 Charging Time: 2.5 hours (typical)
 Discharge Time: 10 hours (typical)
 Operating Temperature: 0°C to 35°C
 Storage Temperature: -20°C to 60°C
 Weight: 44.0g (typical)


WARRANTY: 12 MONTHS
 Samsung Electronics Co., Ltd.
 Seoul, Korea

UL, CE, RoHS, and other regulatory markings are visible on the battery label.

A photograph of a disassembled smartphone, showing the internal components laid out on a dark surface. A metal frame, likely for the screen or back cover, is positioned at the top. Below it, the main circuit board is visible, featuring a large battery, a camera module, and various electronic components. A ruler is placed vertically to the left of the components for scale, with markings from 0 to 20 cm. The components are arranged in a vertical line, corresponding to the layout in the diagram above.


A3LSMG9730

Internal Photographs

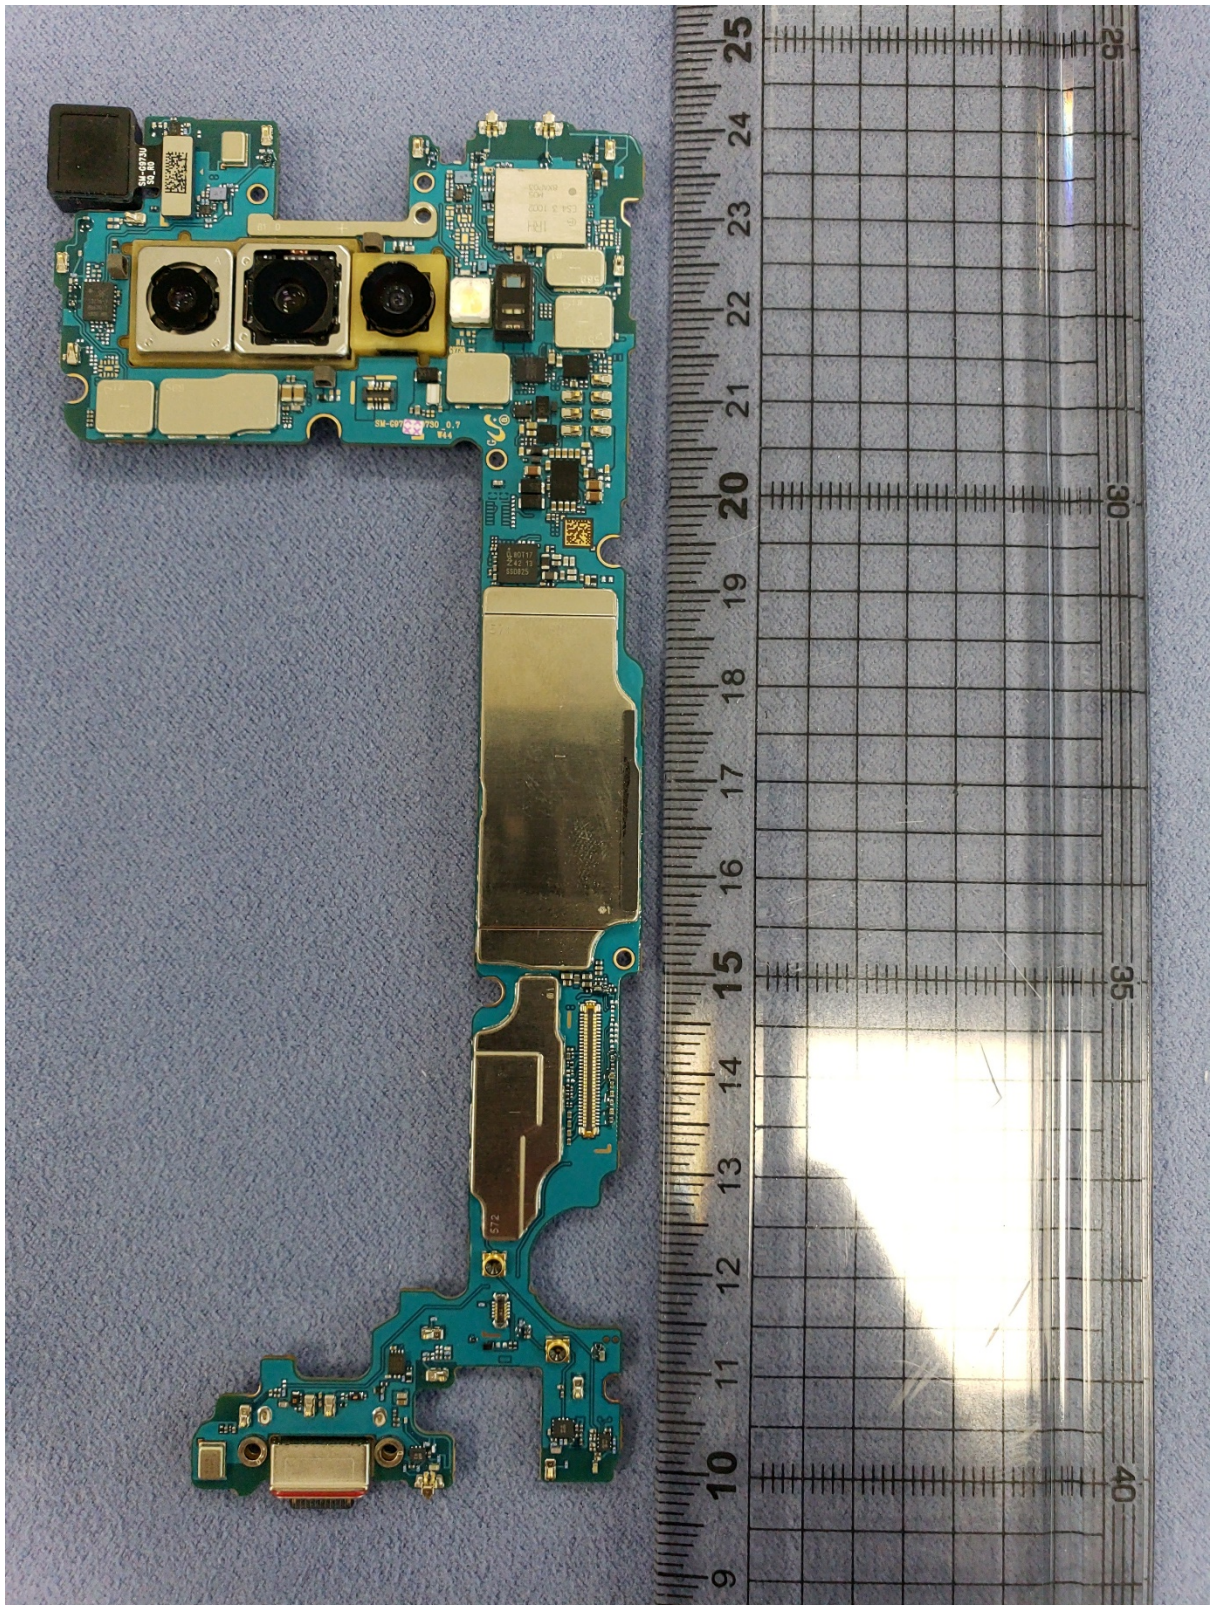

A3LSMG9730

Internal Photographs

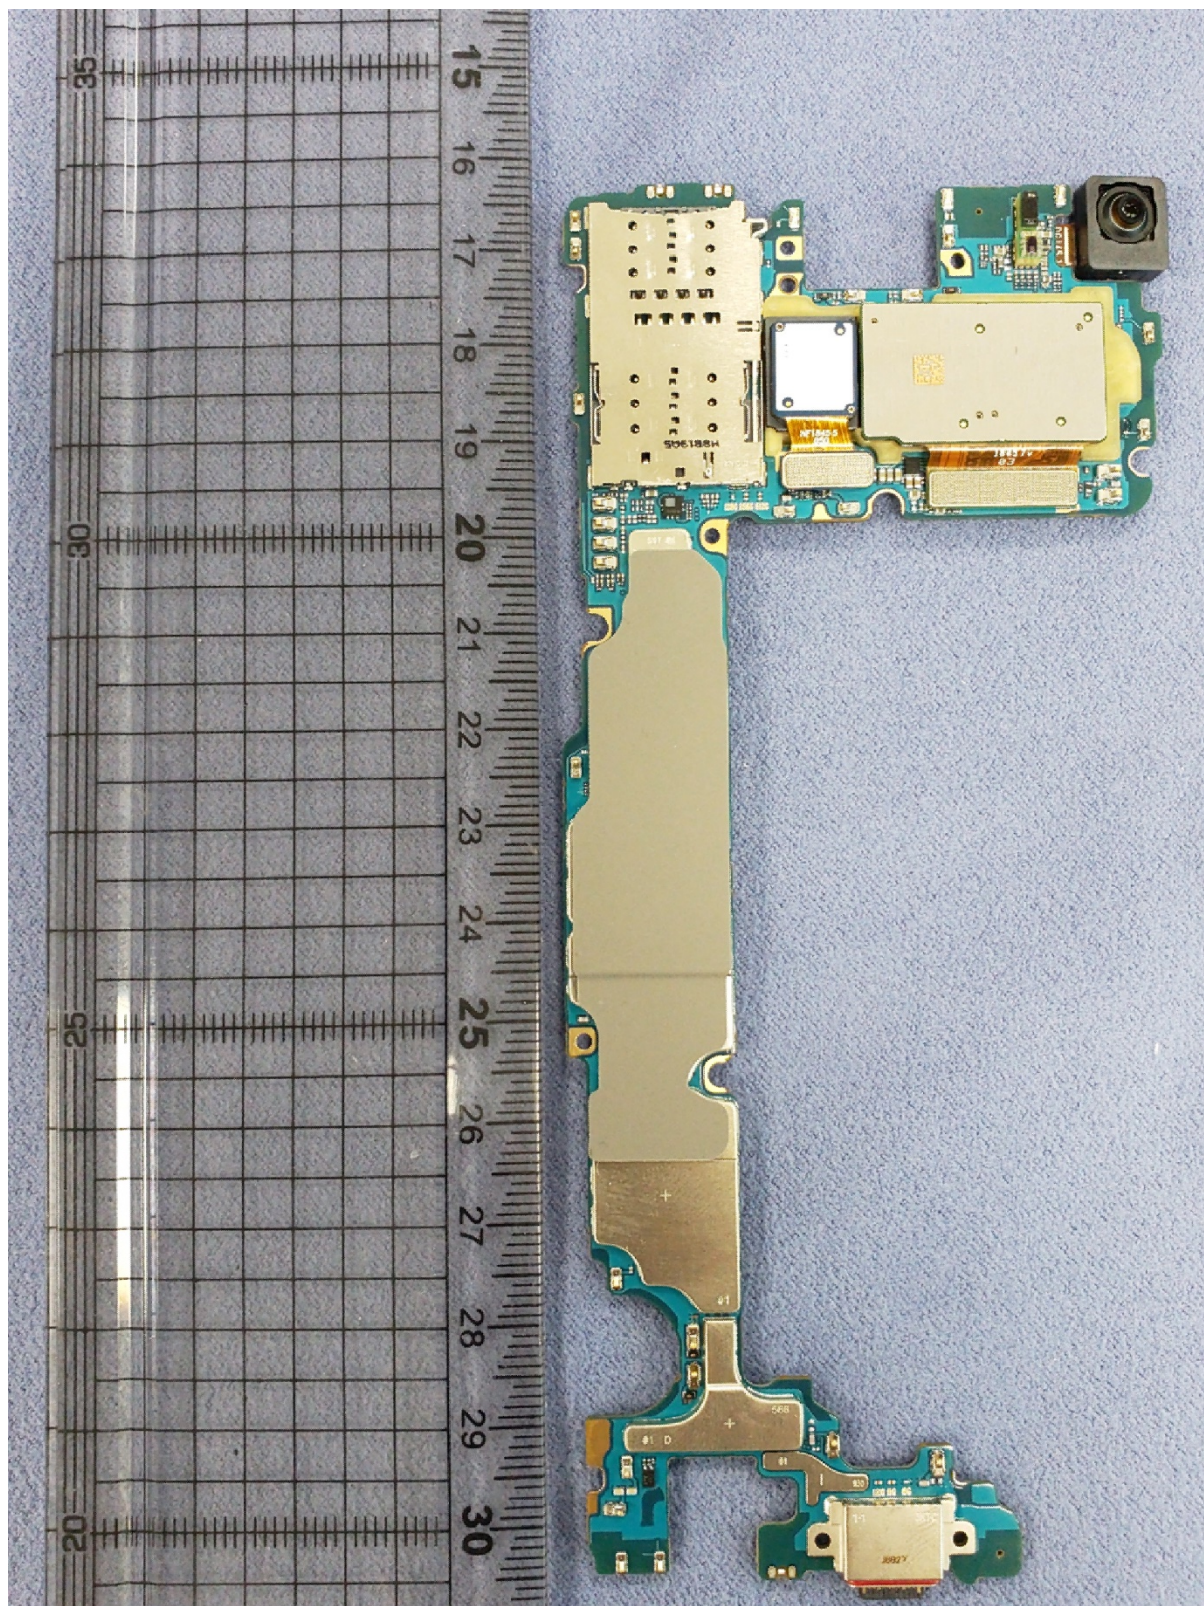

A3LSMG9730

Internal Photographs

