

# FCC NFC REPORT

## FCC Certification

**Applicant Name:**  
SAMSUNG Electronics Co.,Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si,  
Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**  
February 22, 2016  
**Test Site/Location:**  
HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-  
myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-R-1602-F027  
**HCT FRN:** 0005866421  
**IC Recognition No.:** 5944A-5

**FCC ID** :A3LSMJ7108

**APPLICANT** : SAMSUNG Electronics Co.,Ltd.

**FCC Model(s):** SM-J7108

**EUT Type:** Mobile Phone

**RF Output Field Strength:** 9.63 dBuV/m @30 m

**Frequency of Operation:** 13.5605 MHz

**Modulation type:** ASK

**FCC Classification:** Low Power Communication Device – Transmitter

**FCC Rule Part(s):** FCC Part 15.225 Subpart C

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



**Report prepared by**  
**: Seoul Ki Lee**  
**Test Engineer of RF Team**



**Approved by**  
**: Sang Jun Lee**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1602-F027	February 22, 2016	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. EUT DESCRIPTION .....	4
3. TEST METHODOLOGY .....	5
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 DESCRIPTION OF TEST MODES .....	5
3.5 STANDARDS .....	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS .....	7
5.1 FACILITIES .....	7
5.2 EQUIPMENT .....	7
6. ANTENNA REQUIREMENTS .....	7
7. TEST SUMMARY .....	8
8. RADIATED EMISSION MEASUREMENT .....	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz .....	10
8.2. RADIATED EMISSION 30 MHz – 1000 MHz .....	14
9. EMISSION BANDWIDTH PLOT.....	16
10. FREQUENCY TOLERANCE .....	17
11. POWERLINE CONDUCTE EMISSIONS.....	18
12. LIST OF TEST EQUIPMENT .....	27
12.1 LIST OF TEST EQUIPMENT(Conducted Test) .....	27
12.2 LIST OF TEST EQUIPMENT(Radiated Test).....	28

## 1. GENERAL INFORMATION

**Applicant:** SAMSUNG Electronics Co.,Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
**FCC ID:** A3LSMJ7108  
**EUT Type:** Mobile Phone  
**Model name(s):** SM-J7108  
**Date(s) of Tests:** February 01, 2016 ~ February 14, 2016  
**Place of Tests:** HCT Co., Ltd.  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea  
(IC Recognition No. : 5944A-5)

## 2. EUT DESCRIPTION

<b>FCC Model Name</b>	SM-J7108
<b>EUT Type</b>	Mobile Phone
<b>Power Supply</b>	DC 3.85 V
<b>Battery Information</b>	Model: EB-BJ710CBC Type: Li-ion Battery
<b>Frequency of Operation</b>	13.5605 MHz
<b>Transmit Power</b>	9.63 dBuV/m @30 m
<b>Modulation Type</b>	ASK
<b>Antenna Specification</b>	Manufacturer: Exax Antenna type: FPCB Antenna

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2013).

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2013).

#### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With  
FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2013	13.553MHz to 13.567MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2013	outside of the 13.110-14.010 MHz band
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	9kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	30MHz to 1GHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2013	150kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2013	0.01% of nominal
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2013	-

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4 (Version: 2014). Detailed description of test facilities was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

## 7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emission	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

## 8. RADIATED EMISSION MEASUREMENT

### Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

**Minimum Standard: FCC Part 15.225 / 15.209**

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz) uV/m@300 m
	0.490 ~1.705	24000/F(kHz) uV/m@30 m
	1.705 ~ 30	30 uV/m@30 m
	30 ~ 88	100 ** uV/m@3 m
	88 ~ 216	150 ** uV/m@3 m
	216 ~ 960	200 ** uV/m@3 m
	Above 960	500 uV/m@3 m


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

### 15.225 Operation within the band 13.110 – 14.010 MHz.

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- (e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

## 8.1. RADIATED EMISSION 9 kHz – 30 MHz

### Test Set-up

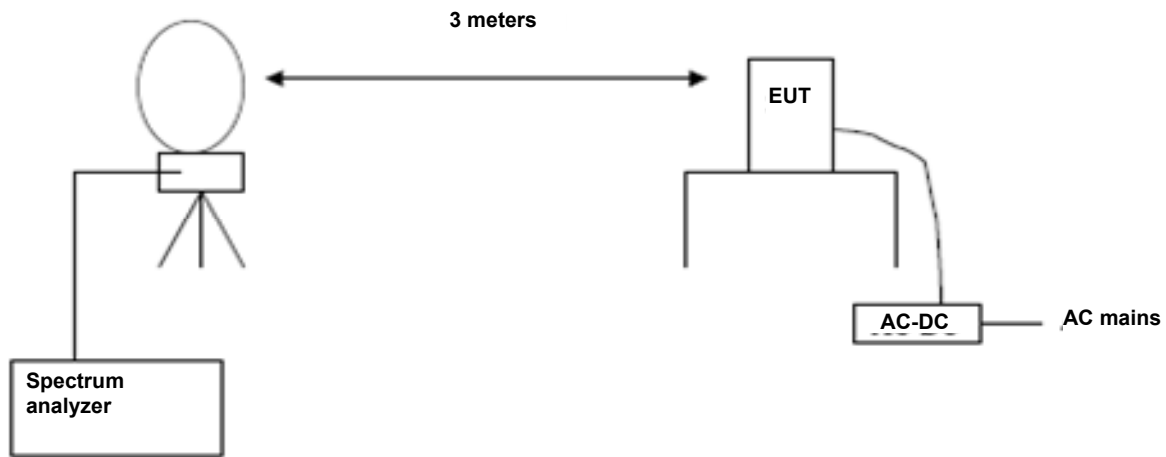

### Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dB $\mu$ V/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1 GHz

RBW = 9 kHz (9 kHz ~ 30 MHz)  
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

■ Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5605(H)	30.14	19.49	-40.00	9.63	84.00	74.37
13.5593(V)	25.87	19.49	-40.00	5.36	84.00	78.64

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.553	17.76	19.49	-40.00	-2.75	50.47	53.22
13.567	18.60	19.49	-40.00	-1.91	50.47	52.38

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.1358	16.72	19.49	-40.00	-3.79	40.51	44.30
13.9842	16.72	19.49	-40.00	-3.79	40.51	44.30


9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
12.2977	12.15	19.98	-40.00	-7.87	29.54	37.41
19.5654	12.27	19.28	-40.00	-8.45	29.54	37.99
27.1268	13.22	18.62	-40.00	-8.16	29.54	37.70
27.1213	12.95	18.62	-40.00	-8.43	29.54	37.97

Note :

1. Distance Correction Below 30MHz =  $40\log(3m/30m) = -40$  dB  
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. We have done x, y, z planes in EUT
6. Antenna rotated about its vertical/horizontal axis for maximum response at each azimuth position around the EUT.
7. Worst case of operating mode is type A, analog mode and 106 kbps.

▣ RESULT PLOTS

**Radiated Emissions (9kHz~30MHz) plot**

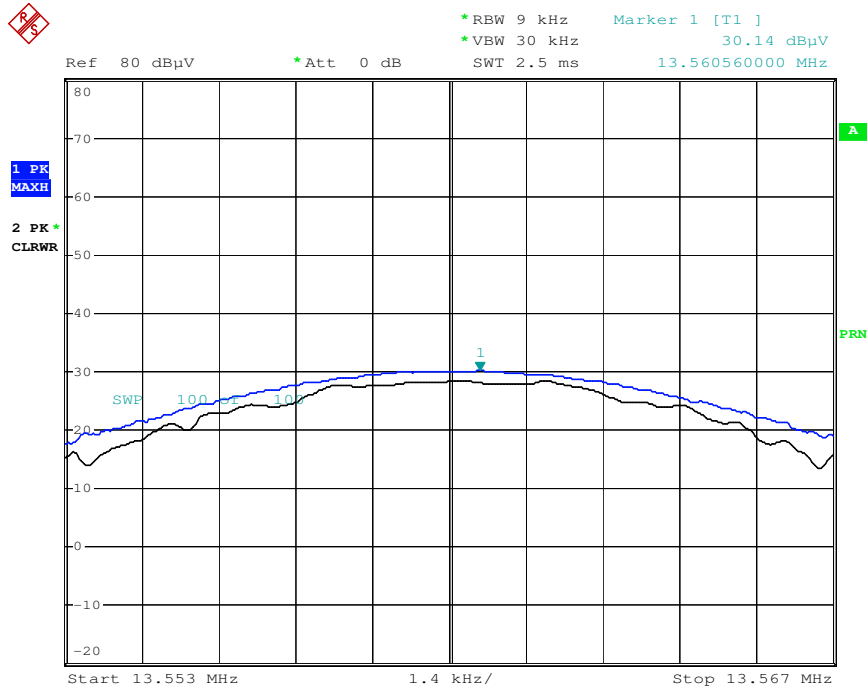

Date: 5.FEB.2016 05:58:17

**Note : Only the worst case plots for Radiated Emissions.**

■ Test Results (Open site)

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5605(H)	36.64	19.49	-40.00	16.13	84.00	67.87
13.5593(V)	32.37	19.49	-40.00	11.86	84.00	72.14


13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.553	23.76	19.49	-40.00	3.25	50.47	47.22
13.567	24.6	19.49	-40.00	4.09	50.47	46.38

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.1358	16.72	19.49	-40.00	-3.79	40.51	44.30
13.9842	16.72	19.49	-40.00	-3.79	40.51	44.30

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
12.2977	12.15	19.98	-40.00	-7.87	29.54	37.41
19.5654	12.27	19.28	-40.00	-8.45	29.54	37.99
27.1268	13.22	18.62	-40.00	-8.16	29.54	37.70
27.1213	12.95	18.62	-40.00	-8.43	29.54	37.97

**8.2. RADIATED EMISSION 30 MHz – 1000 MHz**

Test Set-up

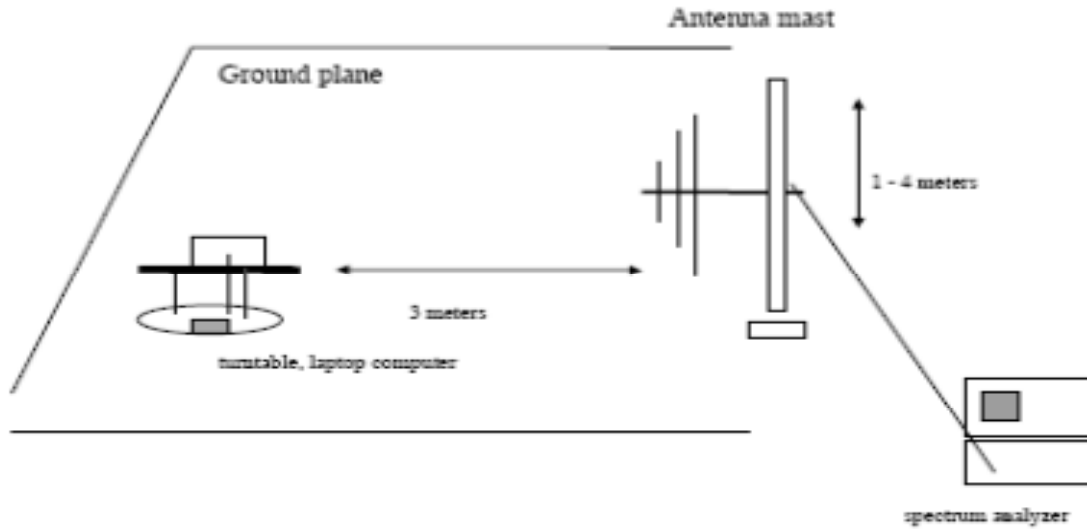

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

**■ Test Results**


Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
Mhz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
34.92	15.87	11.49	0.62	H	27.98	40.00	12.02
45.19	14.29	12.30	0.68	H	27.27	40.00	12.73
81.33	15.26	8.19	0.78	V	24.23	40.00	15.77
*125.89	15.44	11.95	0.98	H	28.37	43.50	15.13
140.69	14.98	12.84	1.03	H	28.85	43.50	14.65
159.77	16.11	13.41	1.12	V	30.64	43.50	12.86

Remark

1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level
3. '\*' is the result for restricted band.

■ RESULT PLOTS

**Radiated Emissions (30MHz~1000MHz) plot**

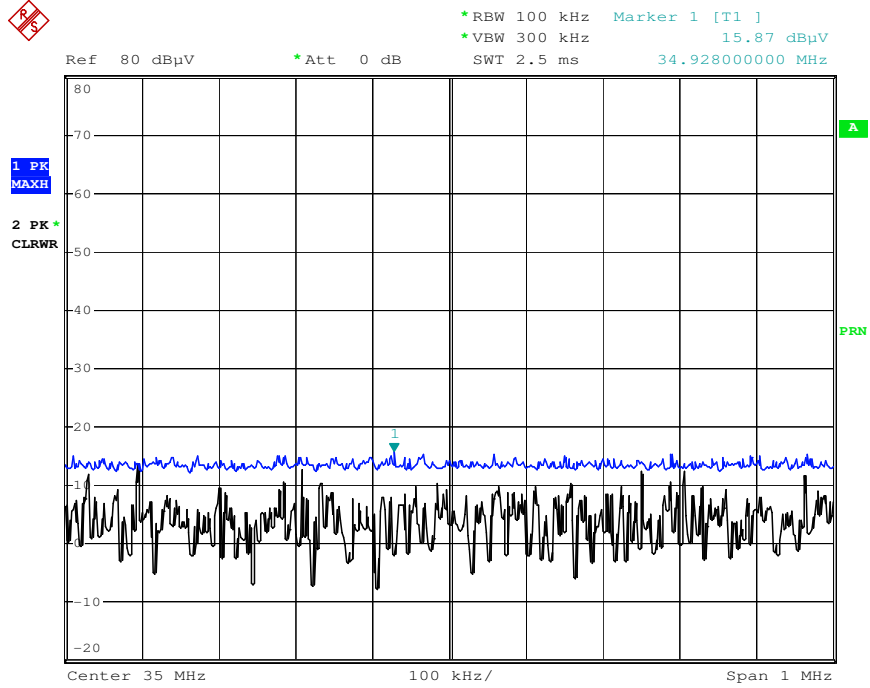

Date: 5.FEB.2016 06:17:58

**Note : Only the worst case plots for Radiated Emissions.**



## 10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

OPERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560187	187	0.0013791
100%		-10	13.560191	191	0.0014086
100%		0	13.560198	198	0.0014602
100%		+10	13.560206	206	0.0015192
100%		+20(Ref.)	13.560214	214	0.0015782
100%		+30	13.560216	216	0.0015929
100%		+40	13.560224	224	0.0016519
100%		+50	13.560239	239	0.0017625
115%	4.2	+20	13.560208	208	0.0015339
85%	3.6	+20	13.560211	211	0.0015560

## 11. POWERLINE CONDUCTE EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

**Test Plots**

**Untermine the Antenna**

**Conducted Emissions (Line 1)**

EMI Auto Test(15)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J7108  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE\_ UNTERMINATION  
 Operator Name: SK LEE

FCC CLASS B

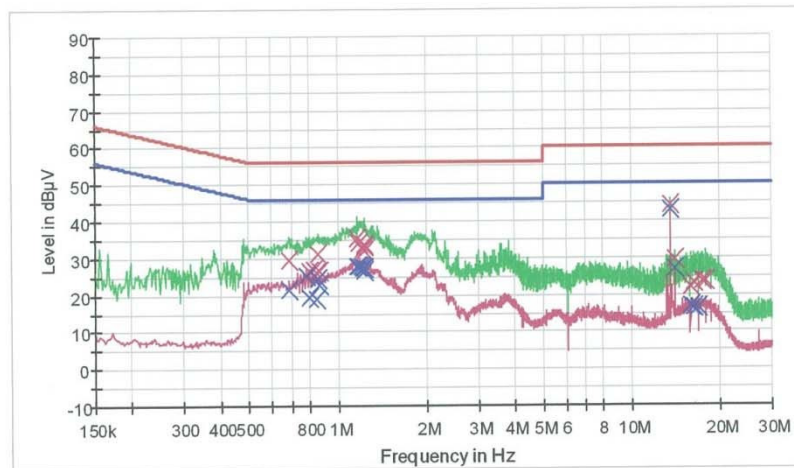

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      X Final Result 1-CPK      X Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.682000	29.5	9.000	Off	N	9.6	26.5	56.0
0.800000	26.4	9.000	Off	N	9.7	29.6	56.0
0.826000	26.9	9.000	Off	N	9.7	29.1	56.0
0.850000	26.0	9.000	Off	N	9.7	30.0	56.0
0.862000	31.1	9.000	Off	N	9.7	24.9	56.0
0.872000	26.6	9.000	Off	N	9.7	29.4	56.0
1.164000	35.4	9.000	Off	N	9.7	20.6	56.0
1.180000	34.1	9.000	Off	N	9.7	21.9	56.0
1.222000	32.6	9.000	Off	N	9.7	23.4	56.0
1.226000	33.4	9.000	Off	N	9.7	22.6	56.0
1.230000	33.9	9.000	Off	N	9.7	22.1	56.0
1.236000	32.0	9.000	Off	N	9.7	24.0	56.0
13.560000	44.3	9.000	Off	N	10.1	15.7	60.0
13.984000	29.4	9.000	Off	N	10.1	30.6	60.0
15.910000	22.0	9.000	Off	N	10.2	38.0	60.0
16.252000	23.4	9.000	Off	N	10.2	36.6	60.0

2/5/2016

10:50:57

EMI Auto Test(15)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
17.440000	23.6	9.000	Off	N	10.2	36.4	60.0
17.756000	23.8	9.000	Off	N	10.2	36.2	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.682000	21.6	9.000	Off	N	9.6	24.4	46.0
0.784000	25.3	9.000	Off	N	9.7	20.7	46.0
0.800000	19.5	9.000	Off	N	9.7	26.5	46.0
0.850000	19.0	9.000	Off	N	9.7	27.0	46.0
0.862000	24.6	9.000	Off	N	9.7	21.4	46.0
0.866000	22.7	9.000	Off	N	9.7	23.3	46.0
1.166000	27.8	9.000	Off	N	9.7	18.2	46.0
1.174000	27.7	9.000	Off	N	9.7	18.3	46.0
1.202000	27.9	9.000	Off	N	9.7	18.1	46.0
1.222000	27.4	9.000	Off	N	9.7	18.6	46.0
1.226000	27.5	9.000	Off	N	9.7	18.5	46.0
1.236000	26.5	9.000	Off	N	9.7	19.5	46.0
13.560000	43.0	9.000	Off	N	10.1	7.0	50.0
13.984000	27.0	9.000	Off	N	10.1	23.0	50.0
15.910000	16.7	9.000	Off	N	10.2	33.3	50.0
16.252000	16.3	9.000	Off	N	10.2	33.7	50.0
16.790000	16.5	9.000	Off	N	10.2	33.5	50.0
16.902000	16.6	9.000	Off	N	10.2	33.4	50.0

2/5/2016

10:50:57

**Conducted Emissions (Line 2)**

EMI Auto Test(15)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J7108  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE \_ UNTERMINATION  
 Operator Name: SK LEE

FCC CLASS B

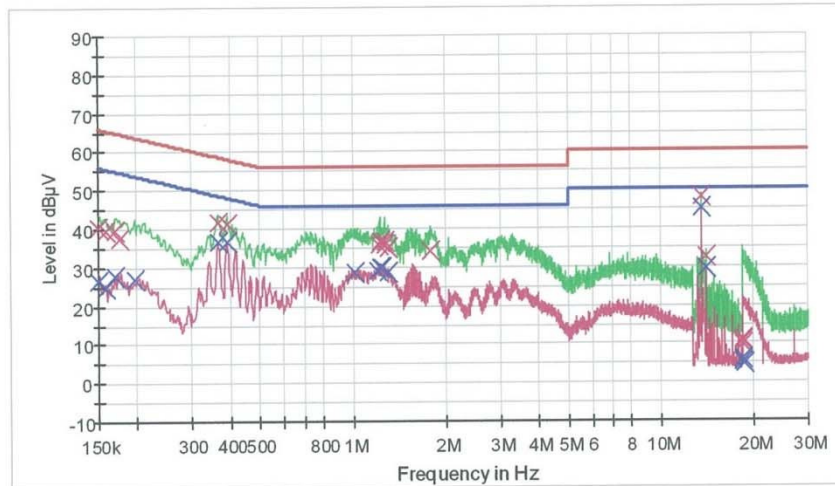

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
— Preview Result 2-AVG      x Final Result 1-CPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.6	9.000	Off	L1	9.7	25.4	66.0
0.158000	39.4	9.000	Off	L1	9.6	26.2	65.6
0.170000	39.5	9.000	Off	L1	9.6	25.5	65.0
0.176000	37.5	9.000	Off	L1	9.6	27.2	64.7
0.366000	41.7	9.000	Off	L1	9.6	16.9	58.6
0.392000	41.4	9.000	Off	L1	9.7	16.6	58.0
1.218000	35.8	9.000	Off	L1	9.7	20.2	56.0
1.226000	36.5	9.000	Off	L1	9.7	19.6	56.0
1.268000	36.6	9.000	Off	L1	9.7	19.4	56.0
1.274000	35.7	9.000	Off	L1	9.7	20.3	56.0
1.304000	35.0	9.000	Off	L1	9.7	21.0	56.0
1.788000	34.1	9.000	Off	L1	9.7	22.0	56.0
13.560000	48.1	9.000	Off	L1	10.1	11.9	60.0
13.984000	32.4	9.000	Off	L1	10.1	27.6	60.0
18.440000	10.7	9.000	Off	L1	10.2	49.3	60.0
18.446000	10.8	9.000	Off	L1	10.2	49.2	60.0

2/5/2016

11:00:27

EMI Auto Test(15)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
18.450000	10.9	9.000	Off	L1	10.2	49.1	60.0
18.536000	9.6	9.000	Off	L1	10.2	50.4	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	26.5	9.000	Off	L1	9.7	29.5	56.0
0.158000	24.7	9.000	Off	L1	9.6	30.9	55.6
0.170000	27.8	9.000	Off	L1	9.6	27.2	55.0
0.196000	27.1	9.000	Off	L1	9.6	26.7	53.8
0.366000	36.7	9.000	Off	L1	9.6	11.9	48.6
0.392000	36.4	9.000	Off	L1	9.7	11.6	48.0
1.018000	28.7	9.000	Off	L1	9.7	17.3	46.0
1.204000	29.1	9.000	Off	L1	9.7	16.9	46.0
1.226000	30.0	9.000	Off	L1	9.7	16.0	46.0
1.248000	29.8	9.000	Off	L1	9.7	16.2	46.0
1.252000	29.8	9.000	Off	L1	9.7	16.2	46.0
1.298000	28.9	9.000	Off	L1	9.7	17.2	46.0
13.560000	45.2	9.000	Off	L1	10.1	4.8	50.0
13.984000	29.4	9.000	Off	L1	10.1	20.6	50.0
18.446000	6.0	9.000	Off	L1	10.2	44.0	50.0
18.450000	5.9	9.000	Off	L1	10.2	44.1	50.0
18.536000	4.9	9.000	Off	L1	10.2	45.1	50.0
18.556000	4.7	9.000	Off	L1	10.2	45.3	50.0

2/5/2016

11:00:27

**Terminate the Antenna  
Conducted Emissions (Line 1)**

EMI Auto Test(15)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J7108  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE \_ TERMINATION  
 Operator Name: SK LEE

FCC CLASS B

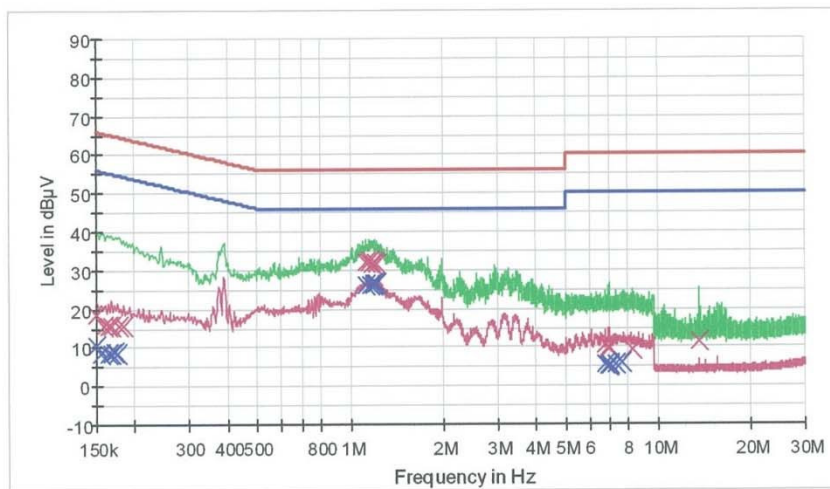

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
— Preview Result 2-AVG      x Final Result 1-CPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	18.5	9.000	Off	N	9.6	47.5	66.0
0.158000	15.4	9.000	Off	N	9.6	50.2	65.6
0.164000	15.5	9.000	Off	N	9.6	49.8	65.3
0.168000	15.4	9.000	Off	N	9.6	49.7	65.1
0.178000	15.7	9.000	Off	N	9.6	48.9	64.6
0.184000	15.7	9.000	Off	N	9.6	48.6	64.3
1.128000	31.9	9.000	Off	N	9.7	24.1	56.0
1.154000	32.1	9.000	Off	N	9.7	23.9	56.0
1.170000	32.4	9.000	Off	N	9.7	23.6	56.0
1.178000	31.6	9.000	Off	N	9.7	24.4	56.0
1.204000	32.1	9.000	Off	N	9.7	23.9	56.0
1.220000	31.6	9.000	Off	N	9.7	24.4	56.0
6.712000	10.4	9.000	Off	N	9.9	49.6	60.0
6.914000	9.9	9.000	Off	N	9.9	50.1	60.0
6.942000	9.9	9.000	Off	N	9.9	50.1	60.0
6.946000	10.0	9.000	Off	N	9.9	50.0	60.0

2/5/2016

11:10:05

EMI Auto Test(15)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
8.212000	9.3	9.000	Off	N	9.9	50.7	60.0
13.544000	11.6	9.000	Off	N	10.1	48.4	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	10.7	9.000	Off	N	9.6	45.3	56.0
0.156000	8.4	9.000	Off	N	9.6	47.3	55.7
0.164000	8.4	9.000	Off	N	9.6	46.9	55.3
0.168000	8.4	9.000	Off	N	9.6	46.7	55.1
0.172000	9.1	9.000	Off	N	9.6	45.8	54.9
0.176000	8.7	9.000	Off	N	9.6	46.0	54.7
1.128000	26.2	9.000	Off	N	9.7	19.8	46.0
1.170000	26.3	9.000	Off	N	9.7	19.7	46.0
1.190000	26.3	9.000	Off	N	9.7	19.7	46.0
1.194000	26.4	9.000	Off	N	9.7	19.6	46.0
1.208000	26.4	9.000	Off	N	9.7	19.6	46.0
1.218000	26.6	9.000	Off	N	9.7	19.4	46.0
6.714000	5.4	9.000	Off	N	9.9	44.6	50.0
6.914000	5.3	9.000	Off	N	9.9	44.7	50.0
6.940000	5.2	9.000	Off	N	9.9	44.8	50.0
6.944000	5.4	9.000	Off	N	9.9	44.6	50.0
7.316000	5.4	9.000	Off	N	9.9	44.6	50.0
7.588000	5.8	9.000	Off	N	9.9	44.2	50.0

2/5/2016

11:10:05

**Conducted Emissions (Line 2)**

EMI Auto Test(15)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J7108  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE \_ TERMINATION  
 Operator Name: SK LEE

FCC CLASS B

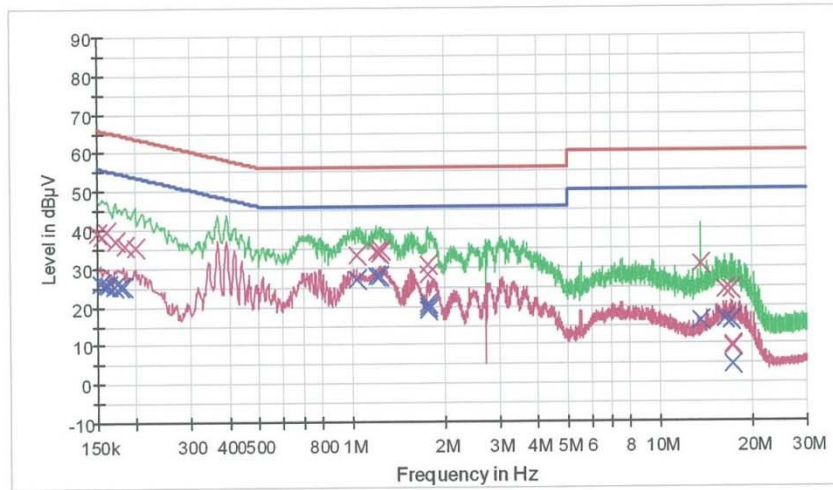

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-CPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.2	9.000	Off	L1	9.7	26.8	66.0
0.156000	38.5	9.000	Off	L1	9.6	27.2	65.7
0.160000	39.6	9.000	Off	L1	9.6	25.9	65.5
0.172000	37.0	9.000	Off	L1	9.6	27.9	64.9
0.184000	35.7	9.000	Off	L1	9.6	28.6	64.3
0.198000	35.5	9.000	Off	L1	9.6	28.2	63.7
1.034000	33.1	9.000	Off	L1	9.7	22.9	56.0
1.202000	34.0	9.000	Off	L1	9.7	22.0	56.0
1.232000	33.7	9.000	Off	L1	9.7	22.3	56.0
1.250000	34.5	9.000	Off	L1	9.7	21.5	56.0
1.760000	30.8	9.000	Off	L1	9.7	25.2	56.0
1.768000	28.4	9.000	Off	L1	9.7	27.6	56.0
13.566000	30.8	9.000	Off	L1	10.1	29.2	60.0
16.226000	23.9	9.000	Off	L1	10.2	36.1	60.0
16.972000	23.9	9.000	Off	L1	10.2	36.1	60.0
17.190000	9.7	9.000	Off	L1	10.2	50.3	60.0

2/5/2016

11:19:21

EMI Auto Test(15)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
17.198000	9.4	9.000	Off	L1	10.2	50.6	60.0
17.202000	9.3	9.000	Off	L1	10.2	50.7	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154000	26.0	9.000	Off	L1	9.6	29.8	55.8
0.158000	25.5	9.000	Off	L1	9.6	30.1	55.6
0.162000	25.7	9.000	Off	L1	9.6	29.7	55.4
0.170000	25.4	9.000	Off	L1	9.6	29.6	55.0
0.178000	25.3	9.000	Off	L1	9.6	29.3	54.6
0.182000	25.1	9.000	Off	L1	9.6	29.3	54.4
1.034000	27.1	9.000	Off	L1	9.7	18.9	46.0
1.202000	27.7	9.000	Off	L1	9.7	18.3	46.0
1.238000	27.9	9.000	Off	L1	9.7	18.1	46.0
1.760000	19.0	9.000	Off	L1	9.7	27.0	46.0
1.764000	20.5	9.000	Off	L1	9.7	25.5	46.0
1.768000	19.7	9.000	Off	L1	9.7	26.3	46.0
13.566000	16.0	9.000	Off	L1	10.1	34.0	50.0
16.228000	16.6	9.000	Off	L1	10.2	33.4	50.0
16.972000	15.9	9.000	Off	L1	10.2	34.1	50.0
17.190000	4.6	9.000	Off	L1	10.2	45.4	50.0
17.198000	4.6	9.000	Off	L1	10.2	45.4	50.0
17.204000	4.6	9.000	Off	L1	10.2	45.4	50.0

2/5/2016

11:19:21

## 12. LIST OF TEST EQUIPMENT

### 12.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/11/2015	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560

**12.2 LIST OF TEST EQUIPMENT(Radiated Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/15/2016	Annual	839117/011
Rohde & Schwarz	LOOP ANTENNA	02/18/2014	Biennial	100179
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964