

## ANNEX B\_EMI TEST RESULT

### REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 14, 2019	Initial Release

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

## CONTENTS

1. GENERAL INFORMATION	3
1.1 Details of Support Equipment	3
1.2 Cable Description	3
1.3 Noise Suppression Parts on Cable (I/O Cable)	3
1.4 Test Facility	4
1.5 Calibration of Measuring Instrument	4
1.6 Measurement Uncertainty	5
2. DESCRIPTION OF TEST	6
2.1 Measurement of Conducted Emission	6
2.2 Measurement of Radiated Emission	7
2.3 Configuration of Tested System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission	9
3.2 Radiated Emission	9
4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission	10
4.2 Radiated Emission Below 1 GHz	17
4.3 Radiated Emission Above 1 GHz	20
5. EMI TEST SETUP PHOTO	24

## 1. GENERAL INFORMATION

### 1.1 Details of Support Equipment

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	Tech. Information
EUT	SM-M307FN/DS	SAMSUNG	-
TA	EP-TA200	DONGYANG E&P	Input: AC 100~240 V, 50~60 Hz, 0.5 A Output: DC 9.0 V, 1.67 A or DC 5.0 V, 2.0 A
Data Cable	EP-DR140ABE	RF TECH	-
Earphone	EHS64AVFBE	ALMUS	-
Micro SD Card	-	SAMSUNG	-

### 1.2 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C	Y	N/A	(P) 1.0
	Earphone	N/A	N	(D) 1.2

NOTE. The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.3 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB Type C	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End

### 1.4 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Designation No.
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	KR0032
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #1	
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #2	

### 1.5 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

## 1.6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty

values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Conducted Emission (0.15 MHz to 30 MHz)	1.8 dB
Radiated Emissions (30 MHz to 1 GHz)	4.8 dB
Radiated Emissions (1 GHz to 18 GHz)	5.4 dB
Radiated Emissions (18 GHz to 40 GHz)	5.7 dB

## 2. DESCRIPTION OF TEST

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dBµV)	Average (dBµV)	Quasi-Peak (dBµV)	Average (dBµV)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. (1 GHz to 40 GHz)

### Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength (μV/m)	Quasi-Peak (dBμV/m)	Antenna Distance (m)	Field Strength (μV/m)	Quasi-Peak (dBμV/m)
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak (dBμV/m)	Average (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)	
Above 1 000	3	80	60	74	54	

### 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 2.3 Configuration of Tested System

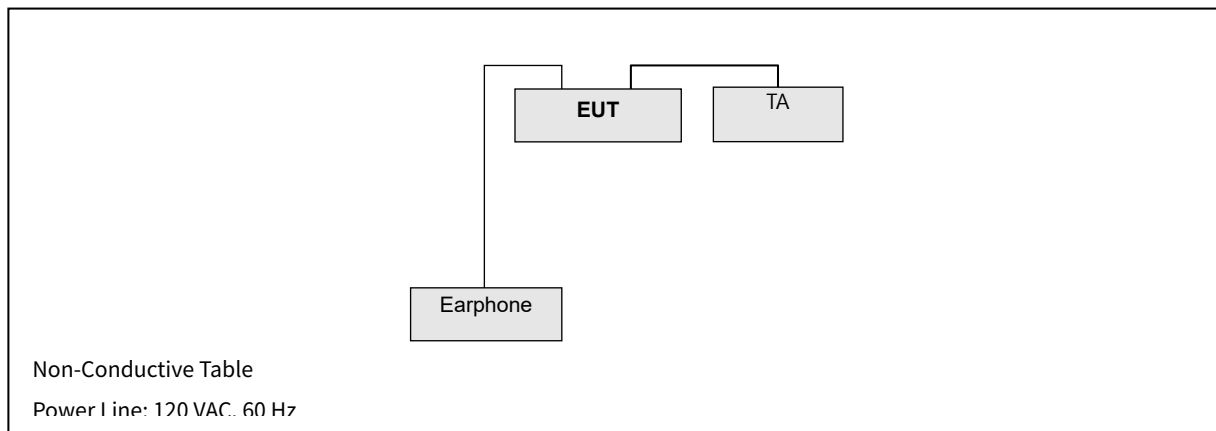

### 3. PRELIMINARY TEST

During preliminary tests, the following operating mode was investigated.

GSM 850 Idle (Low/Middle/High CH)

WCDMA 850 (Low/Middle/High CH)

LTE B5 Idle (Low/Middle/High CH)

NOTE. The worst band is tested.

#### 3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

Receiver mode (LTE B5 High CH Idle)

#### 3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

Receiver mode (LTE B5 Low CH Idle)

Receiver mode (LTE B5 Middle CH Idle)

Receiver mode (LTE B5 High CH Idle)

NOTE.

1. Three orientations have been investigated and the worst case orientation is reported.

2. The worst case of operating mode is reported.

## 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission

#### 4.1.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	06.18.2019
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	102245	1 year	12.12.2018
<input checked="" type="checkbox"/>	Radio Communication Analyzer	ANRITSU	MT8820C	6201138643	1 year	08.21.2018
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:


<b>Test Standard Used</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Detector</b>	Quasi-Peak, CISPR-Average
<b>Bandwidth</b>	9 kHz (6 dB)
<b>Operating Mode</b>	Receiver mode (LTE B5 High CH Idle)
<b>Kind of Test Site</b>	Shielded Room
<b>Temperature</b>	22.5 °C
<b>Relative Humidity</b>	43.7 %
<b>Test Date</b>	August 06, 2019

-Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

### 4.1.3 Measuring Data

Figure 1: Conducted Emission, Receiver mode (LTE B5 High ch Idle), Line (L1)

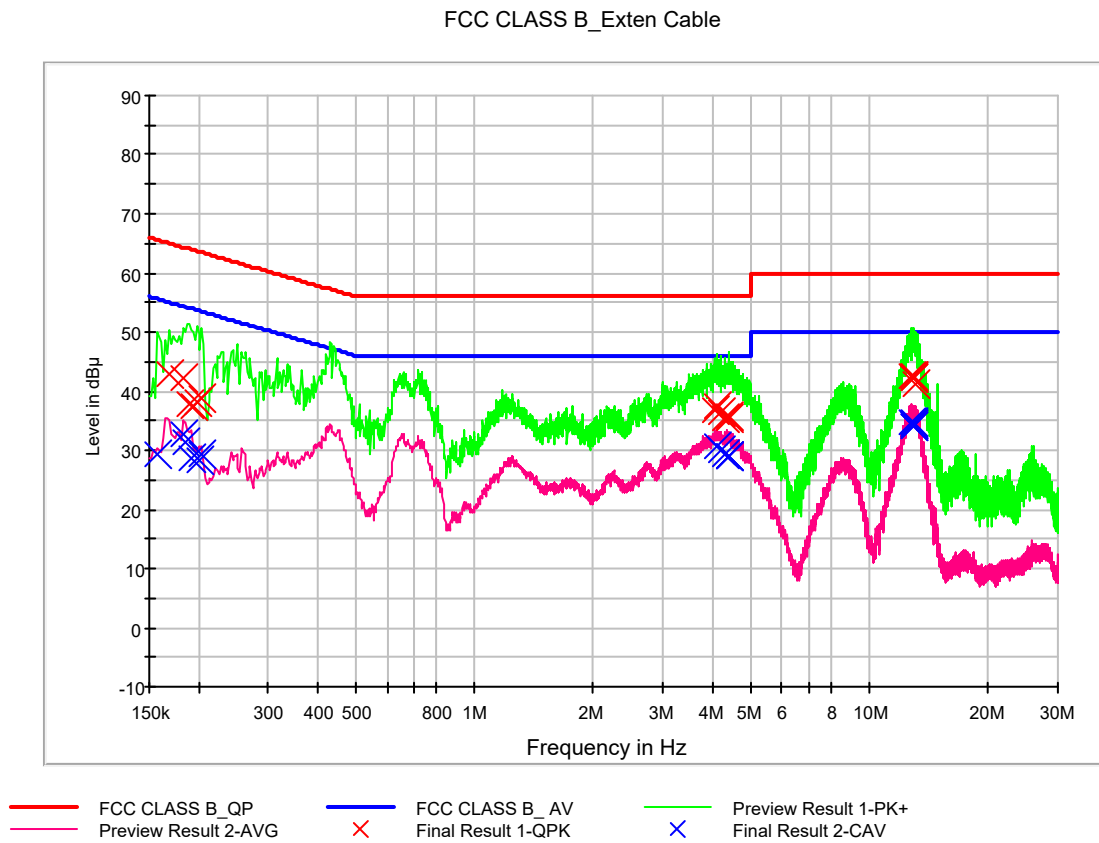


## QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.168000	43.0	9.000	L1	9.8	22.1	65.1
0.184000	42.3	9.000	L1	9.8	22.0	64.3
0.190000	38.0	9.000	L1	9.8	26.1	64.0
0.194000	37.4	9.000	L1	9.8	26.5	63.9
0.198000	38.0	9.000	L1	9.8	25.7	63.7
0.204000	39.0	9.000	L1	9.8	24.5	63.4
4.038000	36.9	9.000	L1	10.0	19.1	56.0
4.116000	37.4	9.000	L1	10.0	18.6	56.0
4.210000	36.6	9.000	L1	10.0	19.4	56.0
4.292000	35.6	9.000	L1	10.0	20.4	56.0
4.384000	35.4	9.000	L1	10.0	20.6	56.0
4.418000	35.8	9.000	L1	10.0	20.2	56.0
12.826000	42.6	9.000	L1	10.4	17.4	60.0
12.854000	42.7	9.000	L1	10.4	17.3	60.0
12.858000	42.7	9.000	L1	10.4	17.3	60.0
12.908000	42.2	9.000	L1	10.4	17.8	60.0
12.946000	42.1	9.000	L1	10.4	17.9	60.0
13.058000	41.1	9.000	L1	10.4	18.9	60.0

## CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.158000	29.3	9.000	L1	9.8	26.3	55.6
0.182000	32.7	9.000	L1	9.8	21.7	54.4
0.186000	31.3	9.000	L1	9.8	23.0	54.2
0.192000	28.7	9.000	L1	9.8	25.3	53.9
0.200000	28.4	9.000	L1	9.8	25.2	53.6
0.204000	29.4	9.000	L1	9.8	24.1	53.4
4.116000	30.6	9.000	L1	10.0	15.4	46.0
4.210000	30.1	9.000	L1	10.0	15.9	46.0
4.292000	29.2	9.000	L1	10.0	16.8	46.0
4.384000	28.9	9.000	L1	10.0	17.1	46.0
4.418000	29.0	9.000	L1	10.0	17.0	46.0
4.424000	28.9	9.000	L1	10.0	17.1	46.0
12.780000	34.8	9.000	L1	10.4	15.2	50.0
12.858000	34.7	9.000	L1	10.4	15.3	50.0
12.876000	34.5	9.000	L1	10.4	15.5	50.0
12.888000	34.3	9.000	L1	10.4	15.7	50.0
12.908000	34.1	9.000	L1	10.4	15.9	50.0
12.946000	34.1	9.000	L1	10.4	15.9	50.0

Figure 2: Conducted Emission, Receiver mode (LTE B5 High ch Idle), Line (N)

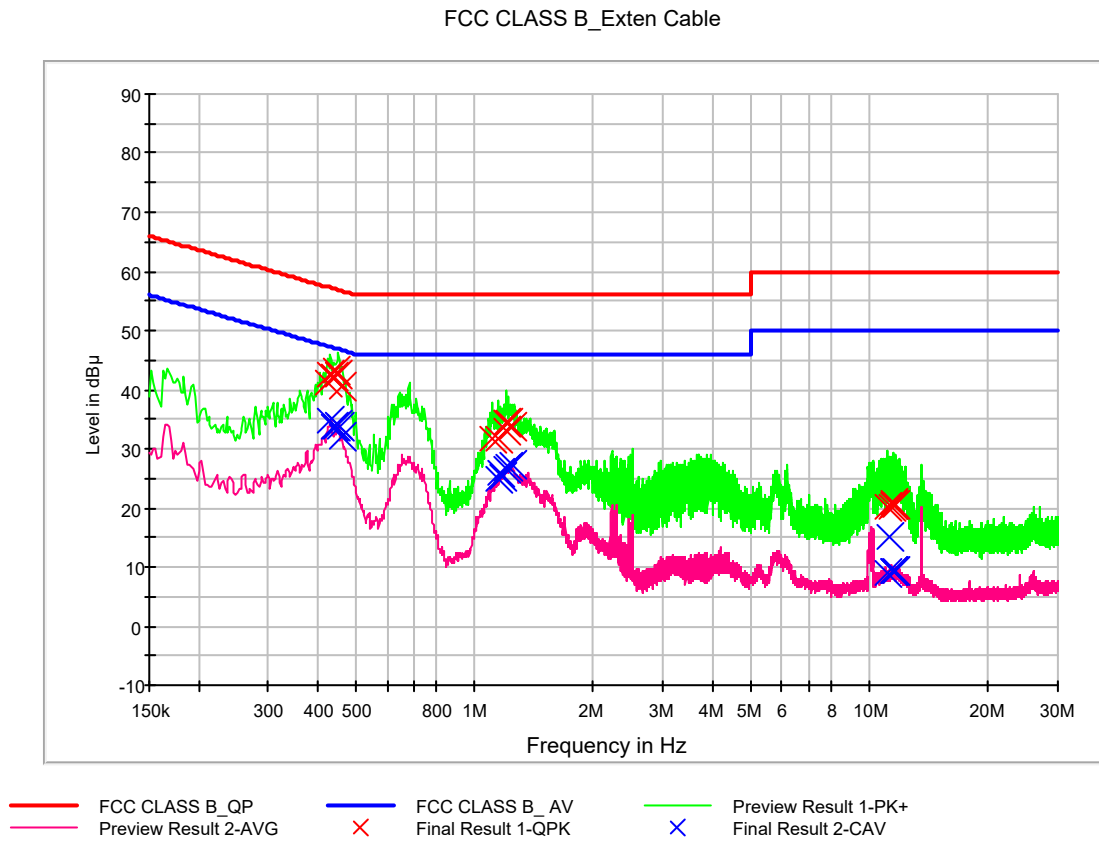

## QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.426000	41.3	9.000	N	9.9	16.0	57.3
0.432000	42.5	9.000	N	9.9	14.7	57.2
0.440000	42.1	9.000	N	10.0	15.0	57.1
0.444000	43.2	9.000	N	10.0	13.8	57.0
0.452000	42.5	9.000	N	10.0	14.3	56.8
0.462000	40.7	9.000	N	10.0	16.0	56.7
1.112000	31.6	9.000	N	10.1	24.4	56.0
1.146000	31.7	9.000	N	10.1	24.3	56.0
1.198000	33.2	9.000	N	10.1	22.8	56.0
1.206000	34.3	9.000	N	10.1	21.7	56.0
1.214000	34.5	9.000	N	10.1	21.5	56.0
1.240000	33.6	9.000	N	10.1	22.4	56.0
11.072000	20.3	9.000	N	10.6	39.7	60.0
11.430000	20.3	9.000	N	10.6	39.7	60.0
11.438000	20.5	9.000	N	10.6	39.5	60.0
11.464000	20.9	9.000	N	10.6	39.1	60.0
11.482000	20.5	9.000	N	10.6	39.5	60.0
11.664000	20.6	9.000	N	10.6	39.4	60.0

CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.432000	34.8	9.000	N	9.9	12.4	47.2
0.440000	33.8	9.000	N	10.0	13.2	47.1
0.444000	33.9	9.000	N	10.0	13.1	47.0
0.450000	34.2	9.000	N	10.0	12.7	46.9
0.454000	33.7	9.000	N	10.0	13.1	46.8
0.462000	32.0	9.000	N	10.0	14.6	46.7
1.152000	24.8	9.000	N	10.1	21.2	46.0
1.162000	25.8	9.000	N	10.1	20.2	46.0
1.178000	25.4	9.000	N	10.1	20.6	46.0
1.206000	26.6	9.000	N	10.1	19.4	46.0
1.214000	27.0	9.000	N	10.1	19.0	46.0
1.240000	27.4	9.000	N	10.1	18.6	46.0
11.072000	9.0	9.000	N	10.6	41.0	50.0
11.180000	15.2	9.000	N	10.6	34.8	50.0
11.438000	9.5	9.000	N	10.6	40.5	50.0
11.464000	9.5	9.000	N	10.6	40.5	50.0
11.482000	9.4	9.000	N	10.6	40.6	50.0
11.664000	9.3	9.000	N	10.6	40.7	50.0

## 4.2 Radiated Emission Below 1 GHz

### 4.2.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/>	Trilog antenna	Schwarzbeck	VULB 9168	760	2 year	03.22.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO 3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn Table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Radio Communication Analyzer	ANRITSU	MT8820C	6201138643	1 year	08.21.2018
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.2.2 Operating Condition

The test results of radiated emission provide the following information:


<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Detector</b>	Quasi-Peak
<b>Bandwidth</b>	120 kHz (6 dB)
<b>Worst Case of Operating Mode</b>	Receiver mode (LTE B5 High CH Idle)
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	21.8 °C
<b>Relative Humidity</b>	43.6 %
<b>Test Date</b>	August 06, 2019

**- Calculation Formula:**

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

### 4.2.3 Measuring Data

Figure 3: Radiated Emission (30 MHz to 1 000 MHz), Receiver mode (LTE B5 High ch Idle)

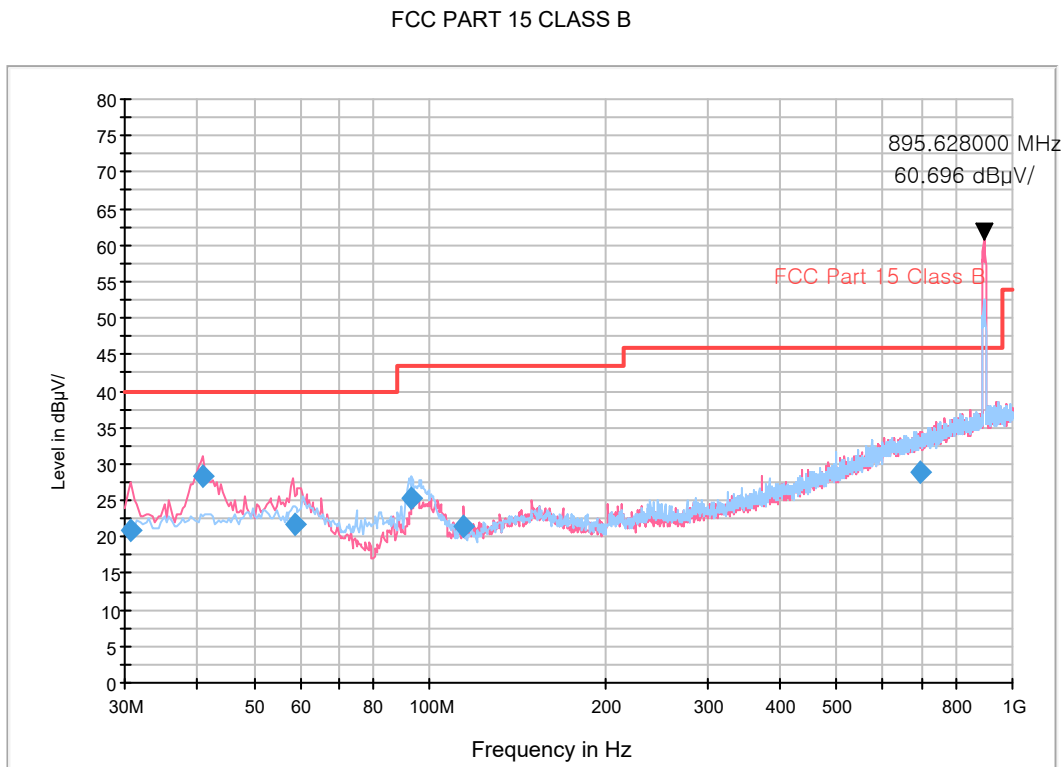

- NOTE. 1. LTE B5 High CH RX Frequency: 895.628 MHz  
 2. These are signals for fundamental frequency from the base station

Frequency (MHz)	Quasi Peak (dBµV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
30.620179	21.0	100.0	V	345.0	18.8	19.0	40.0
40.737600	28.3	100.0	V	74.0	19.6	11.7	40.0
59.020000	21.8	100.0	V	68.0	19.8	18.2	40.0
92.704800	25.2	225.3	H	120.0	14.7	18.3	43.5
114.558400	21.4	225.0	V	125.0	17.0	22.1	43.5
692.947200	28.9	100.0	V	140.0	28.9	17.1	46.0

### 4.3 Radiated Emission Above 1 GHz

#### 4.3.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9120D	01836	1 year	07.19.2019
<input checked="" type="checkbox"/>	Low Noise amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.04.2019
<input checked="" type="checkbox"/>	Power Amplifier	TESTEK	TK-PA1840H	170030-L	1 year	12.17.2019
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170 #786	2 year	12.05.2017
<input checked="" type="checkbox"/>	Radio Communication Analyzer	ANRITSU	MT8820C	6201138643	1 year	08.21.2018
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.3.2 Operating Condition

The test results of radiated emission provide the following information:



<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Detector</b>	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
<b>Highest Frequency</b>	5 825 MHz
<b>Tested Frequency Range</b>	1 GHz to 30 GHz
<b>Operation Mode</b>	Receiver mode (LTE B5 High CH Idle)
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	21.8 / 22.7 °C
<b>Relative Humidity</b>	43.6 / 45.4 %
<b>Test Date</b>	August 06 / August 07 2019

**- Calculation Formula:**

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss – Amplifier Gain
4. Margin = Limit - Peak or CAverage

### 4.3.3 Measuring Data

Figure 4: Radiated Emission ( 1 GHz to 30 GHz), Receiver mode (LTE B5 High ch Idle)

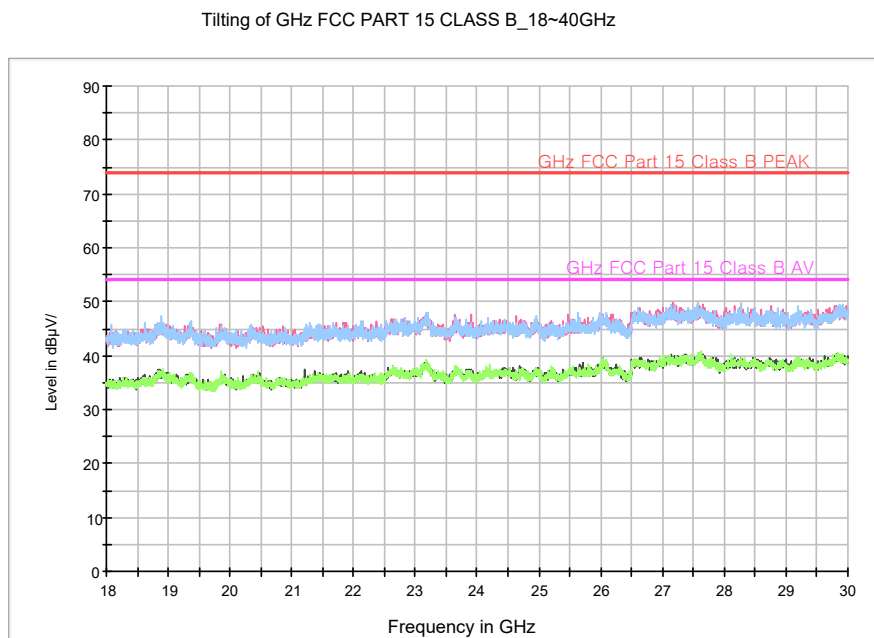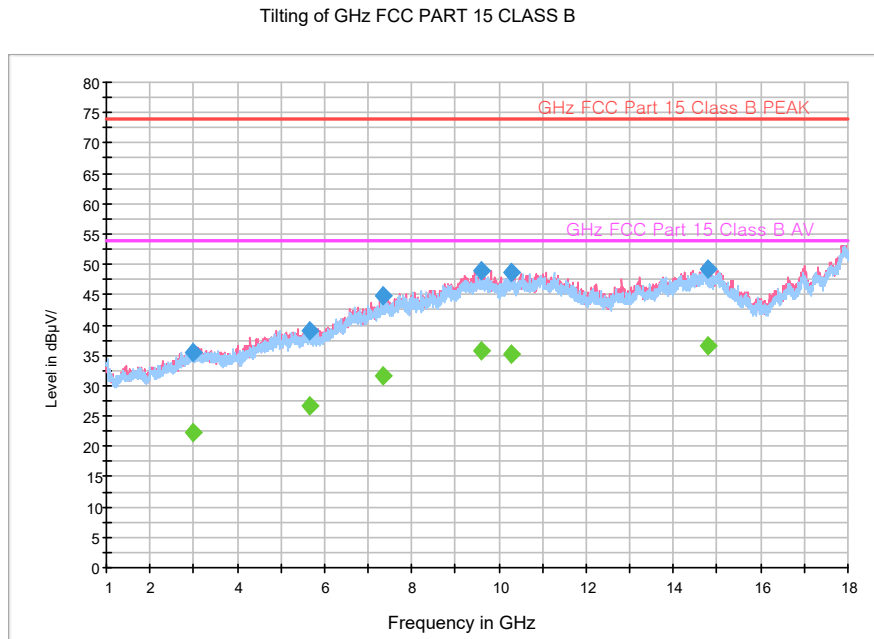

Frequency (MHz)	Peak (dB $\mu$ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
2983.890000	35.6	160.7	V	64.0	-21.1	38.4	74.0
5643.915000	39.1	350.0	H	11.0	-15.0	34.9	74.0
7356.750000	44.8	125.8	H	172.0	-9.6	29.2	74.0
9586.115000	48.9	205.4	V	142.0	-5.1	25.1	74.0
10273.160000	48.6	150.0	V	12.0	-4.2	25.4	74.0
14775.960000	49.2	100.0	V	172.0	1.1	24.8	74.0

Frequency (MHz)	CAverage (dB $\mu$ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
2983.890000	22.2	160.7	V	64.0	-21.1	31.8	54.0
5643.915000	26.6	350.0	H	11.0	-15.0	27.4	54.0
7356.750000	31.6	125.8	H	172.0	-9.6	22.4	54.0
9586.115000	35.7	205.4	V	142.0	-5.1	18.3	54.0
10273.160000	35.3	150.0	V	12.0	-4.2	18.7	54.0
14775.960000	36.5	100.0	V	172.0	1.1	17.5	54.0

## 5. EMI TEST SETUP PHOTO

Please refer to EMI TEST SETUP PHOTO and test setup photo file no. as follows;

Revision No.	Date of Issue	File No.
0	August 14, 2019	HCT-RF-1908-FC020-P

End of report