

20220221_SystemPerformanceCheck-D1750V2_SN1180

Frequency: 1750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 40.827$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(8.34, 8.34, 8.34) @ 1750 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/1750 MHz, Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.40 W/kg


Head/1750 MHz, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.97 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 3.54 W/kg; SAR(10 g) = 1.93 W/kg

Maximum value of SAR (measured) = 5.39 W/kg

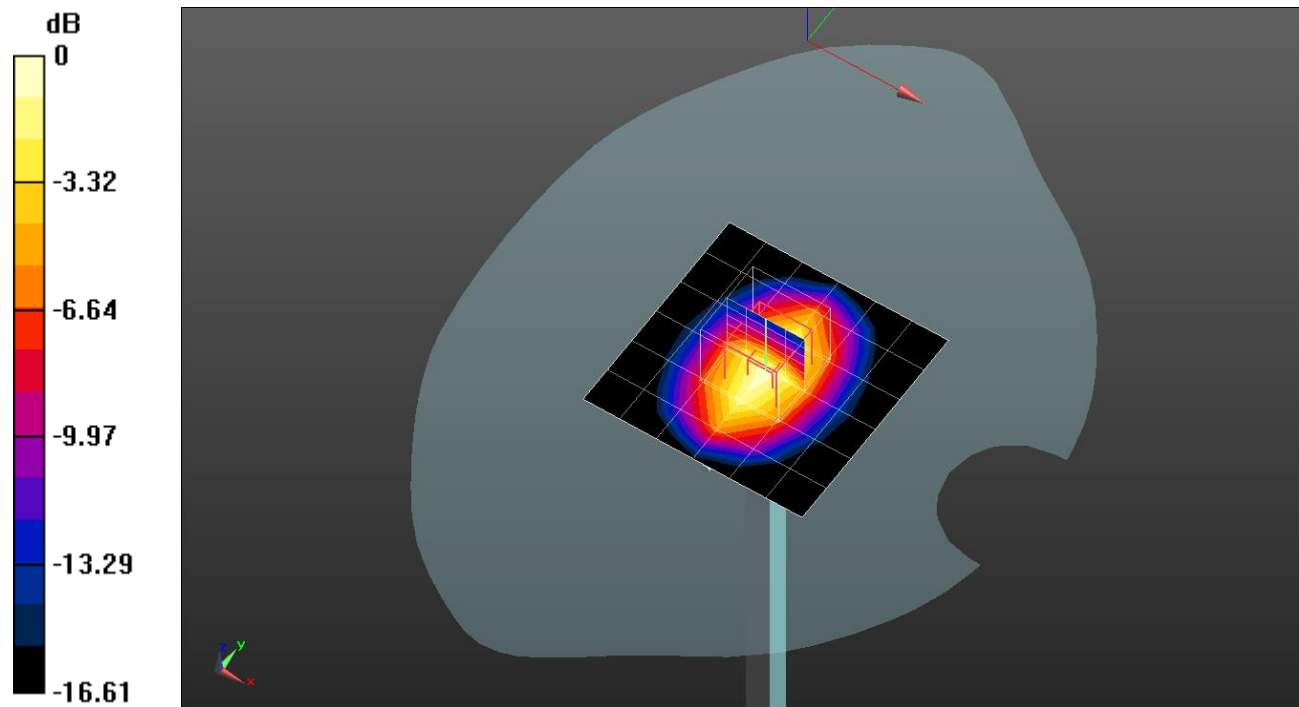


0 dB = 5.39 W/kg = 7.32 dBW/kg

20220221_SystemPerformanceCheck-D1750V2_SN1180

Frequency: 1750 MHz; Duty Cycle: 1:1

Head/1750 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 4.64 W/kg

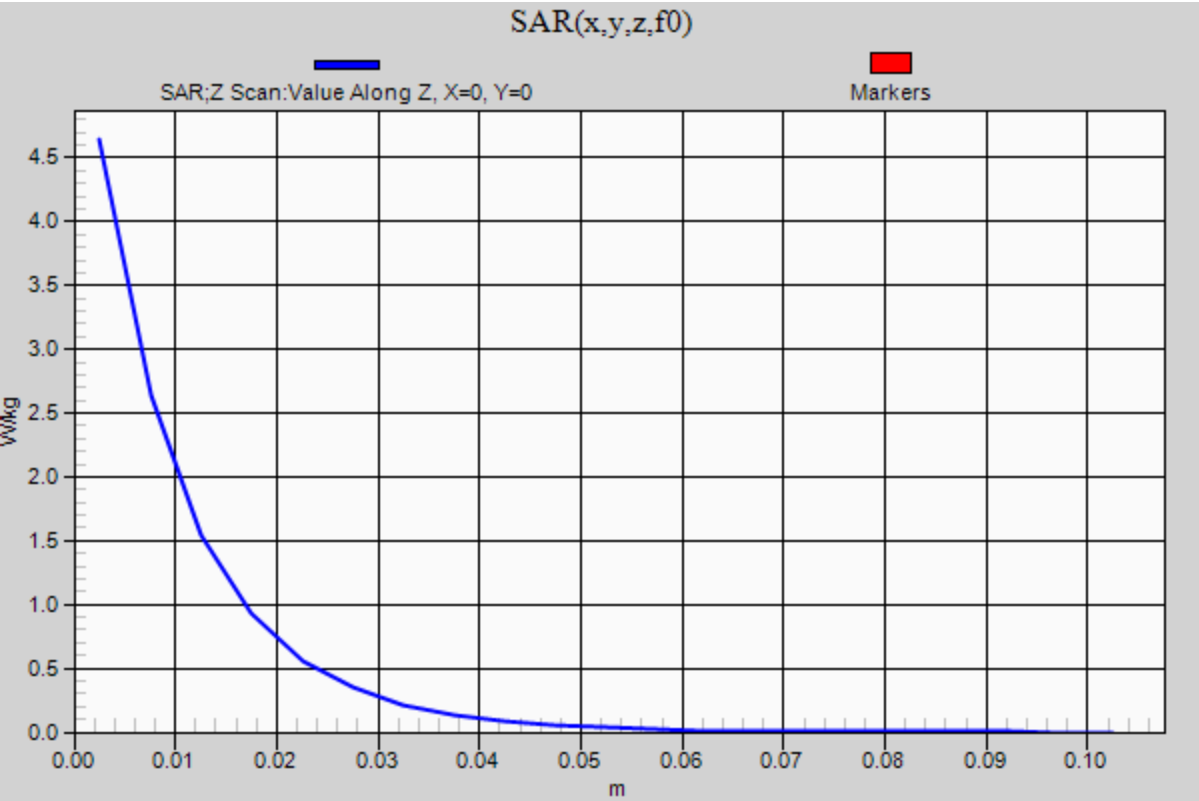

20220221_SystemPerformancecheck-D2450V2_SN960

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.854$ S/m; $\epsilon_r = 39.702$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(7.47, 7.47, 7.47) @ 2450 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/2450 MHz, Pin=100mW/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 7.14 W/kg


Head/2450 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.92 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.62 W/kg; SAR(10 g) = 2.65 W/kg

Maximum value of SAR (measured) = 9.38 W/kg

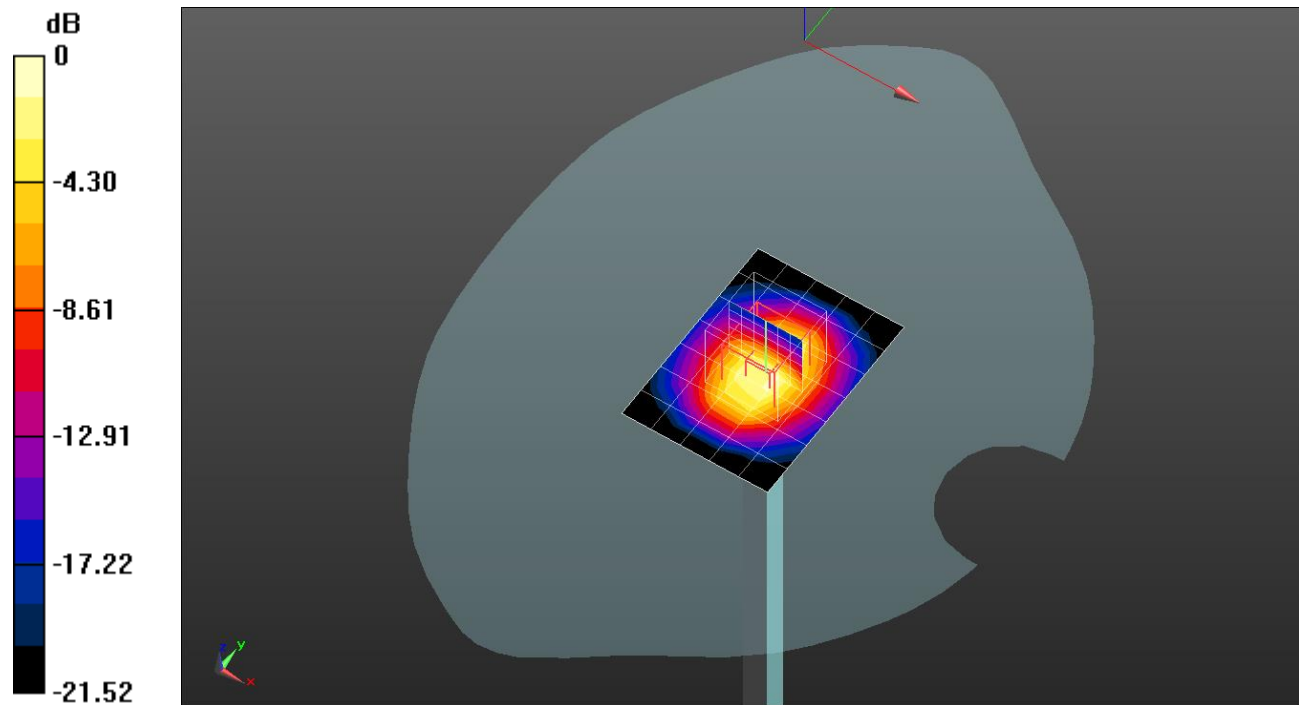


0 dB = 9.38 W/kg = 9.72 dBW/kg

20220221_SystemPerformancecheck-D2450V2_SN960

Frequency: 2450 MHz; Duty Cycle: 1:1

Head/2450 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.35 W/kg

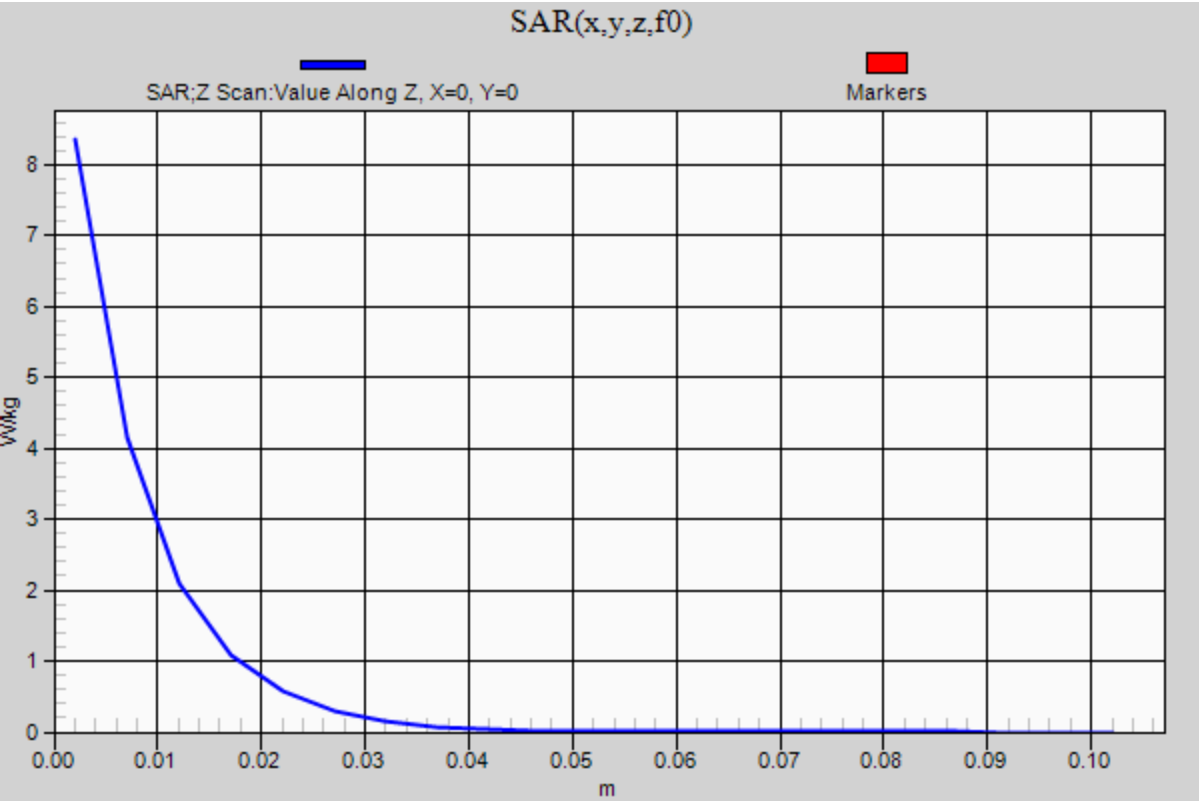

20220221_SystemPerformancecheck-D2600V2_SN1178

Frequency: 2600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.519$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/2600 MHz, Pin=100mW/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 7.41 W/kg


Head/2600 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.27 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.97 W/kg; SAR(10 g) = 2.74 W/kg

Maximum value of SAR (measured) = 10.1 W/kg

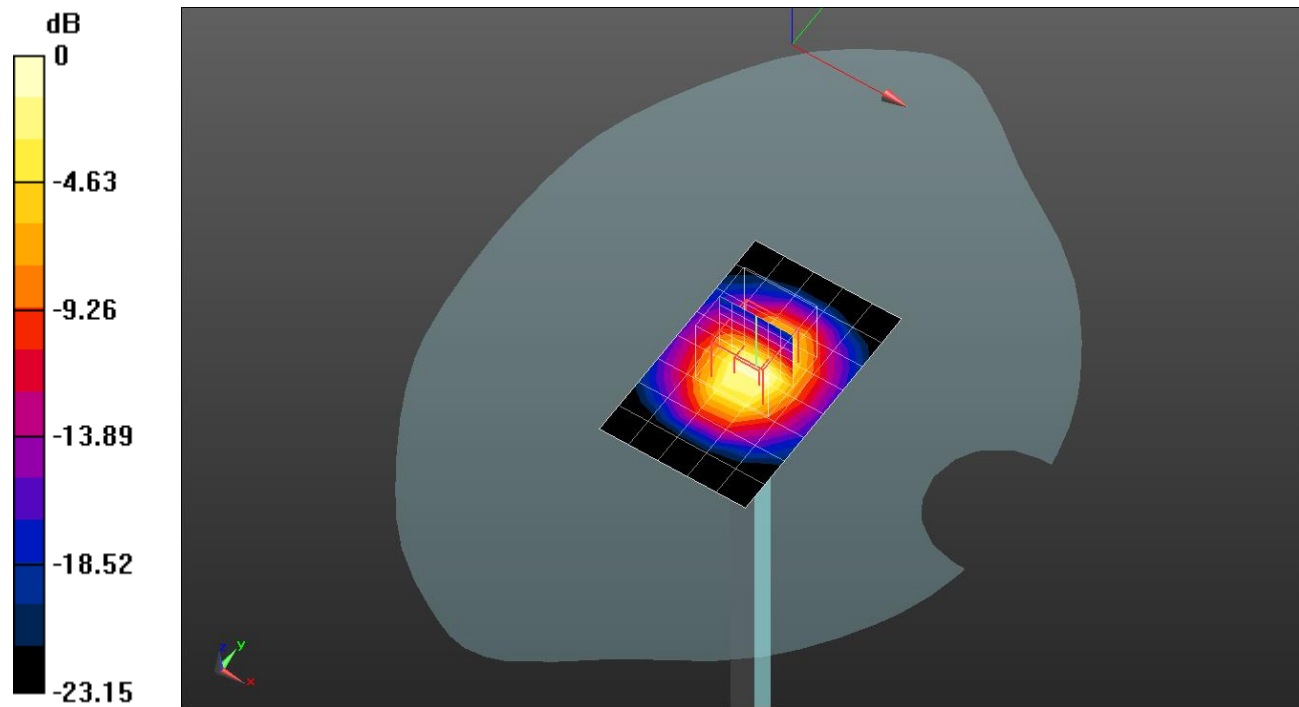


0 dB = 10.1 W/kg = 10.04 dBW/kg

20220221_SystemPerformancecheck-D2600V2_SN1178

Frequency: 2600 MHz; Duty Cycle: 1:1

Head/2600 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 9.11 W/kg

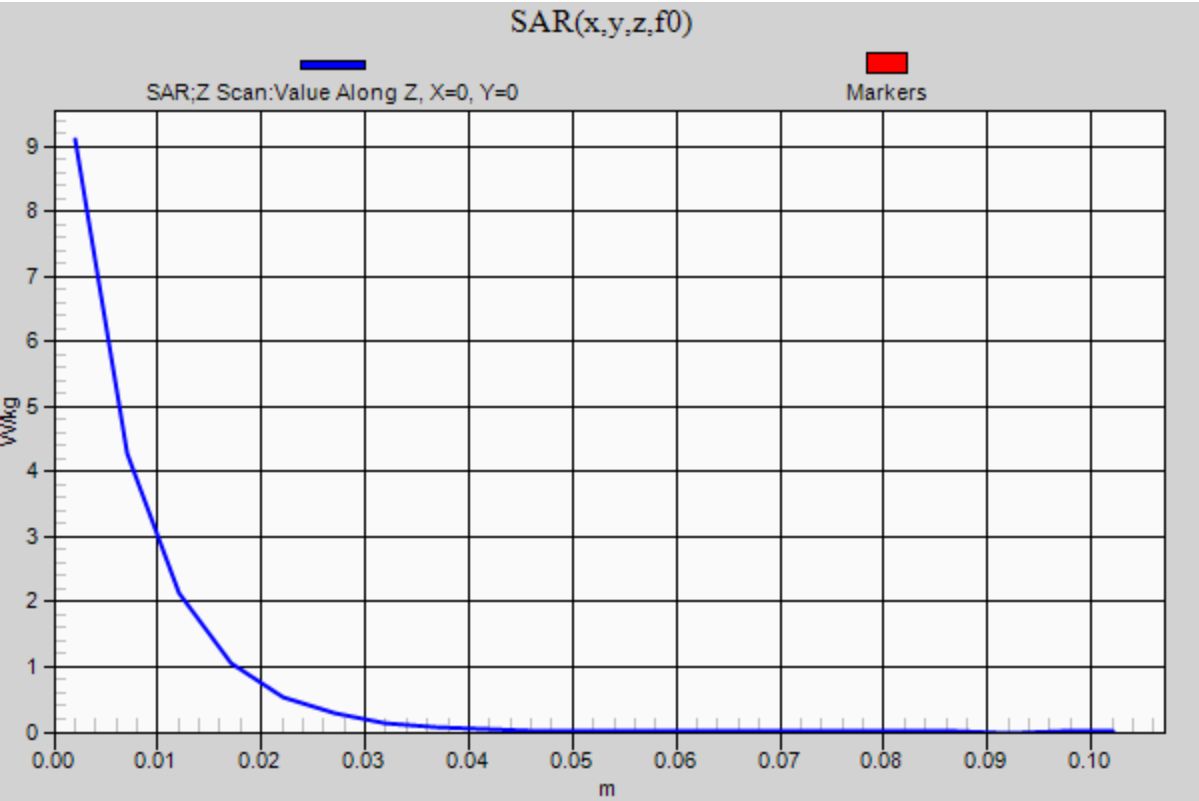

20220221_SystemPerformanceCheck-D5GHzV2 _SN1184

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 37.157$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(5.4, 5.4, 5.4) @ 5250 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/5.25 GHz, Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 20.1 W/kg


Head/5.25 GHz, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.24 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

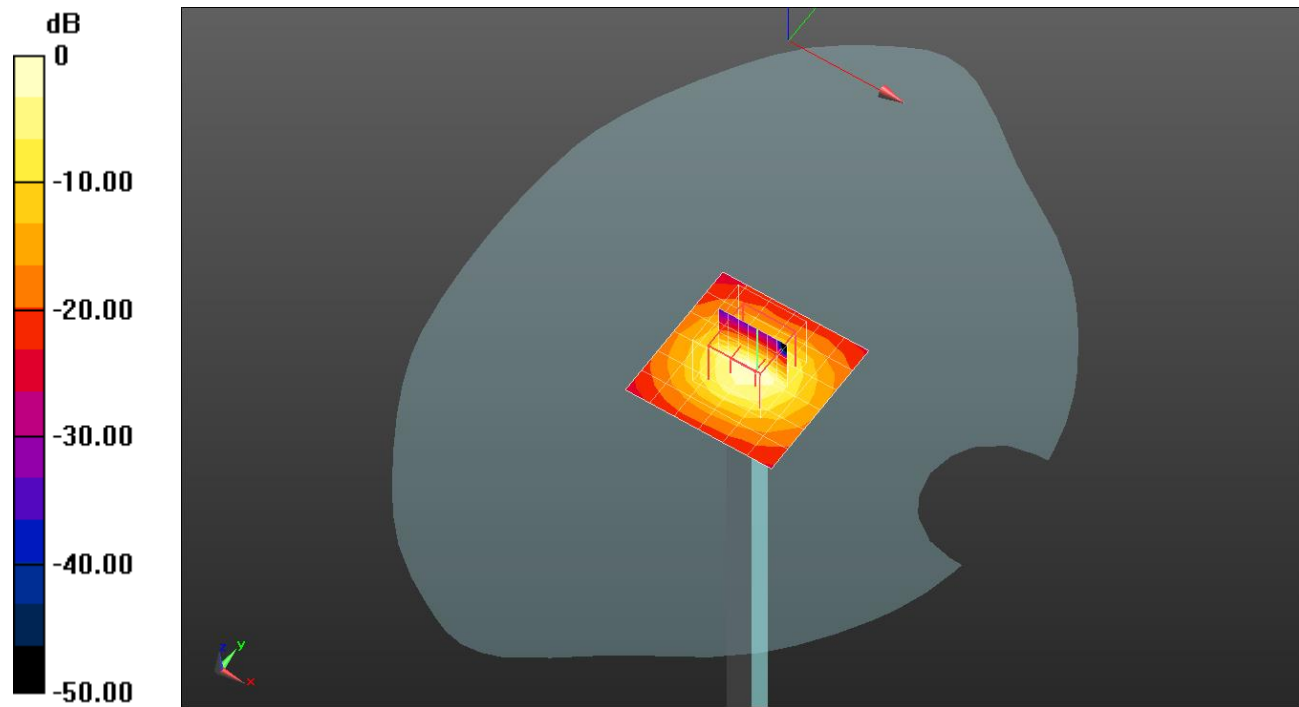


0 dB = 18.5 W/kg = 12.67 dBW/kg

20220221_SystemPerformanceCheck-D5GHzV2_SN1184

Frequency: 5250 MHz; Duty Cycle: 1:1

Head/5.25 GHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 18.9 W/kg

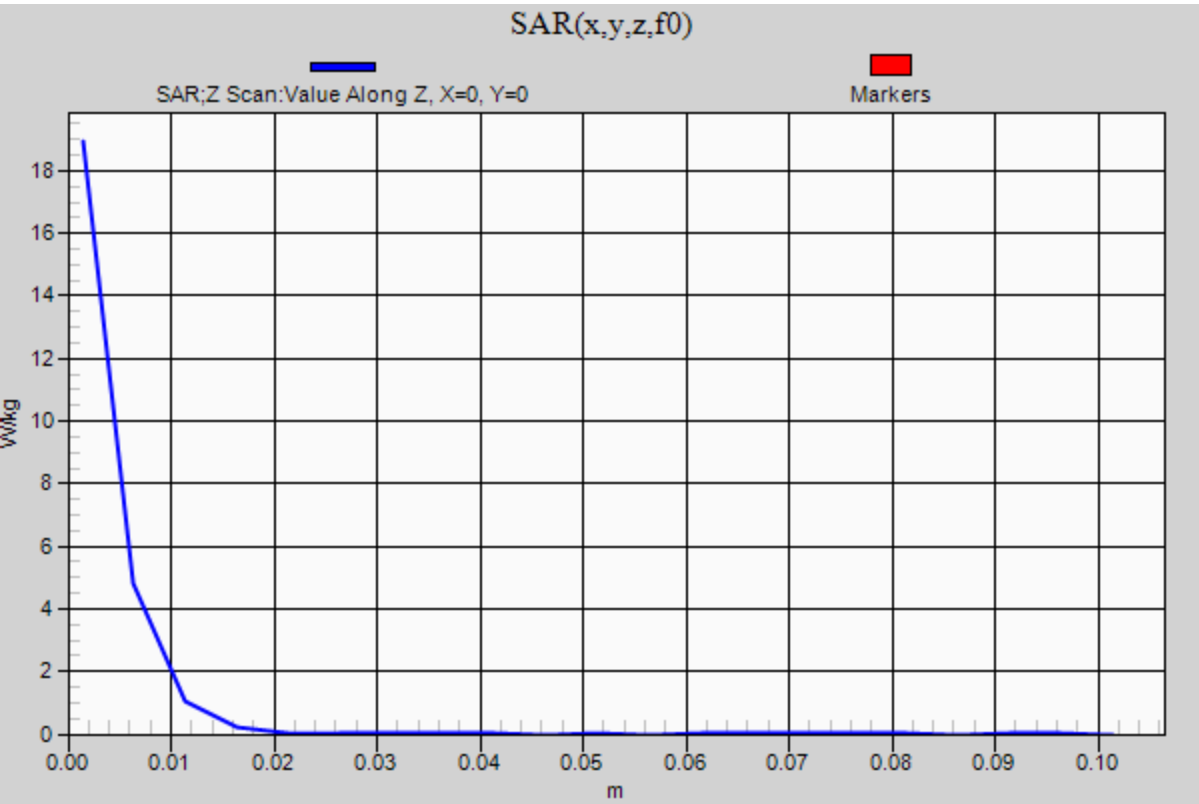

20220222_SystemPerformanceCheck-D750V2_SN1205

Frequency: 750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 750$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 41.497$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(9.6, 9.6, 9.6) @ 750 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/750 MHz, Pin=100mW/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.17 W/kg


Head/750 MHz, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.06 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.587 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

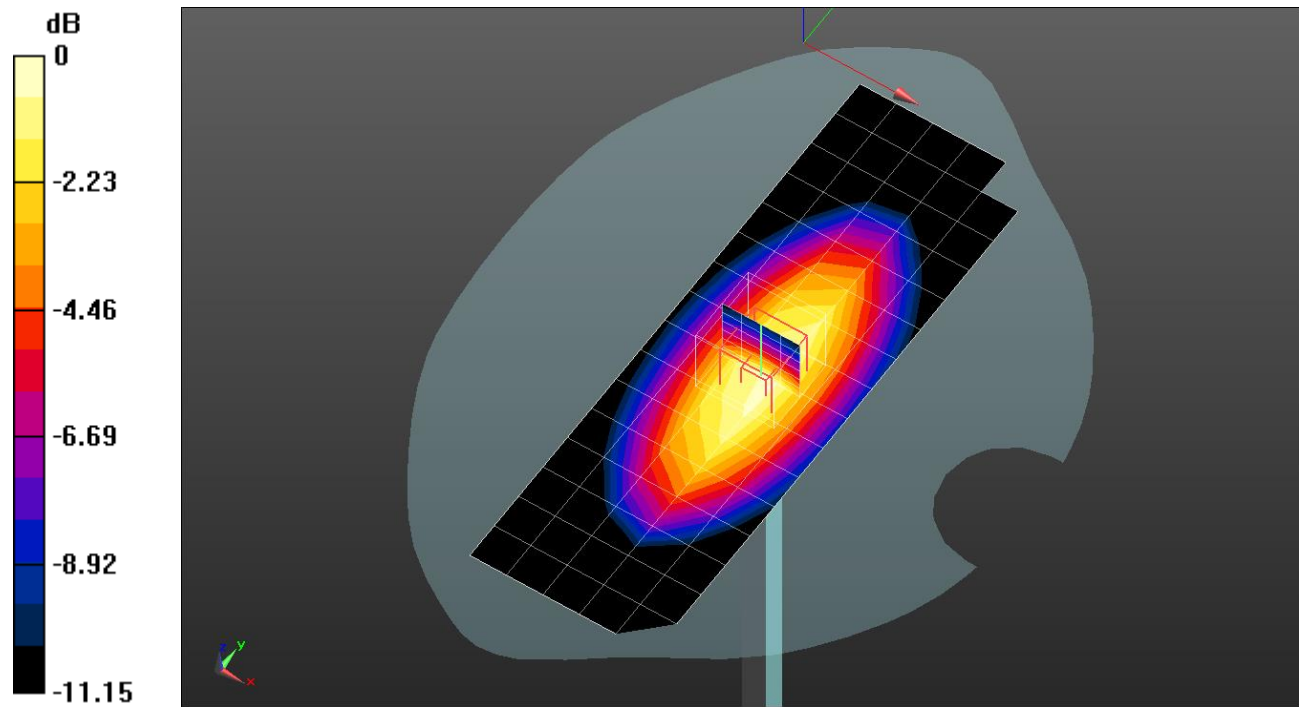


0 dB = 1.25 W/kg = 0.97 dBW/kg

20220222_SystemPerformanceCheck-D750V2_SN1205

Frequency: 750 MHz; Duty Cycle: 1:1

Head/750 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.11 W/kg

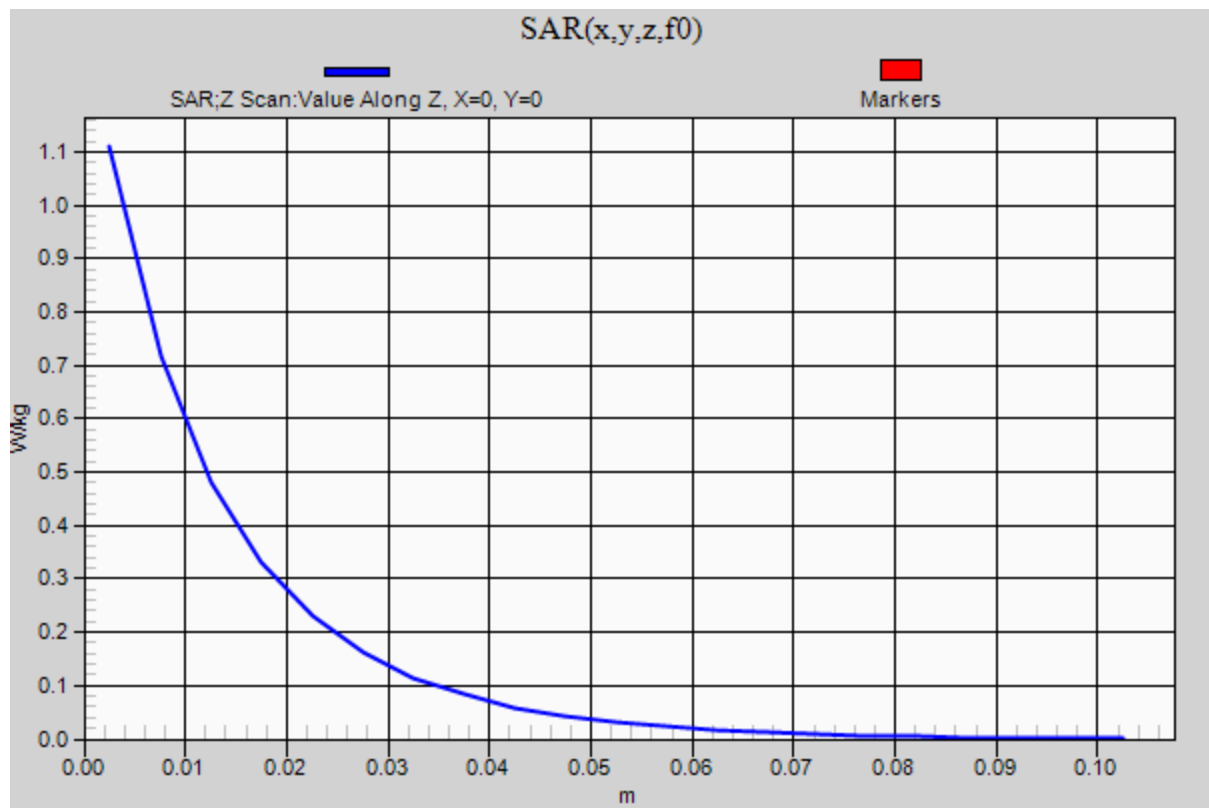

20220222_SystemPerformanceCheck-D1900V2_SN5d199

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 39.197$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7314; ConvF(8.06, 8.06, 8.06) @ 1900 MHz; Calibrated: 2021-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/1900 MHz, Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 6.67 W/kg


Head/1900 MHz, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 63.62 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 8.11 W/kg

SAR(1 g) = 4.21 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 6.70 W/kg

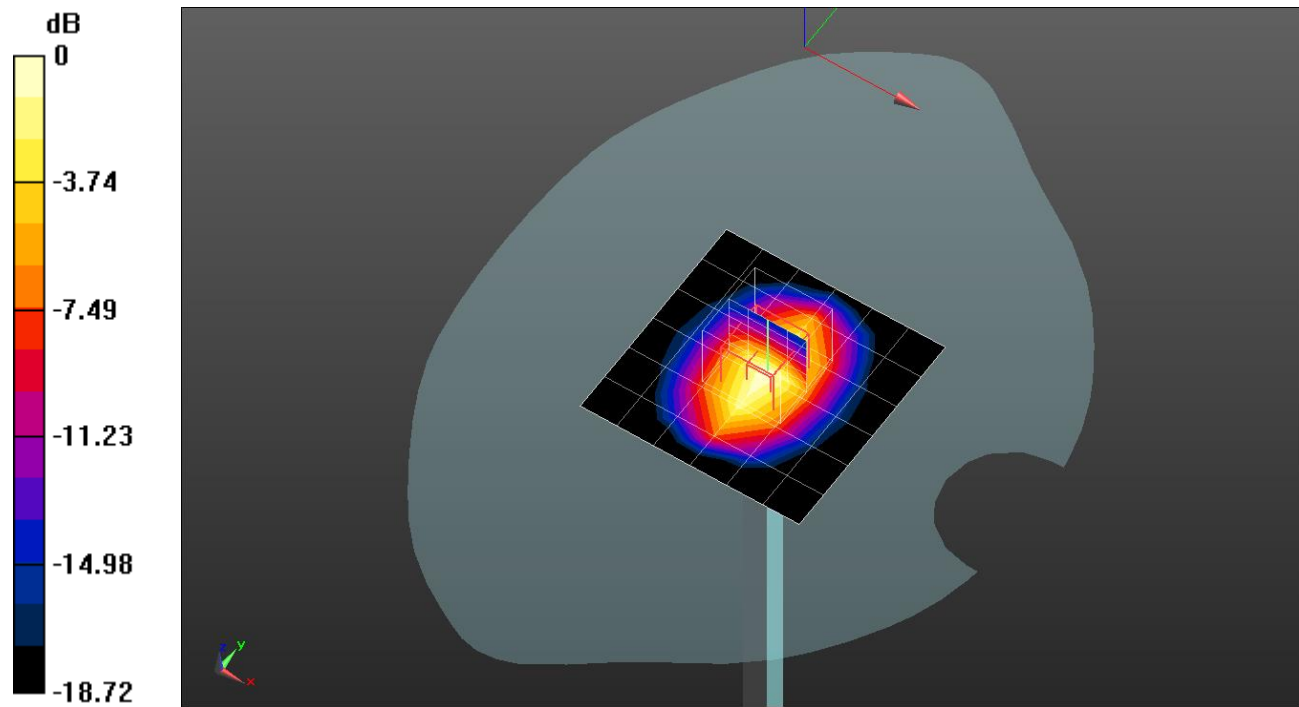


0 dB = 6.70 W/kg = 8.26 dBW/kg

20220222_SystemPerformanceCheck-D1900V2_SN5d199

Frequency: 1900 MHz; Duty Cycle: 1:1

Head/1900 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 5.67 W/kg

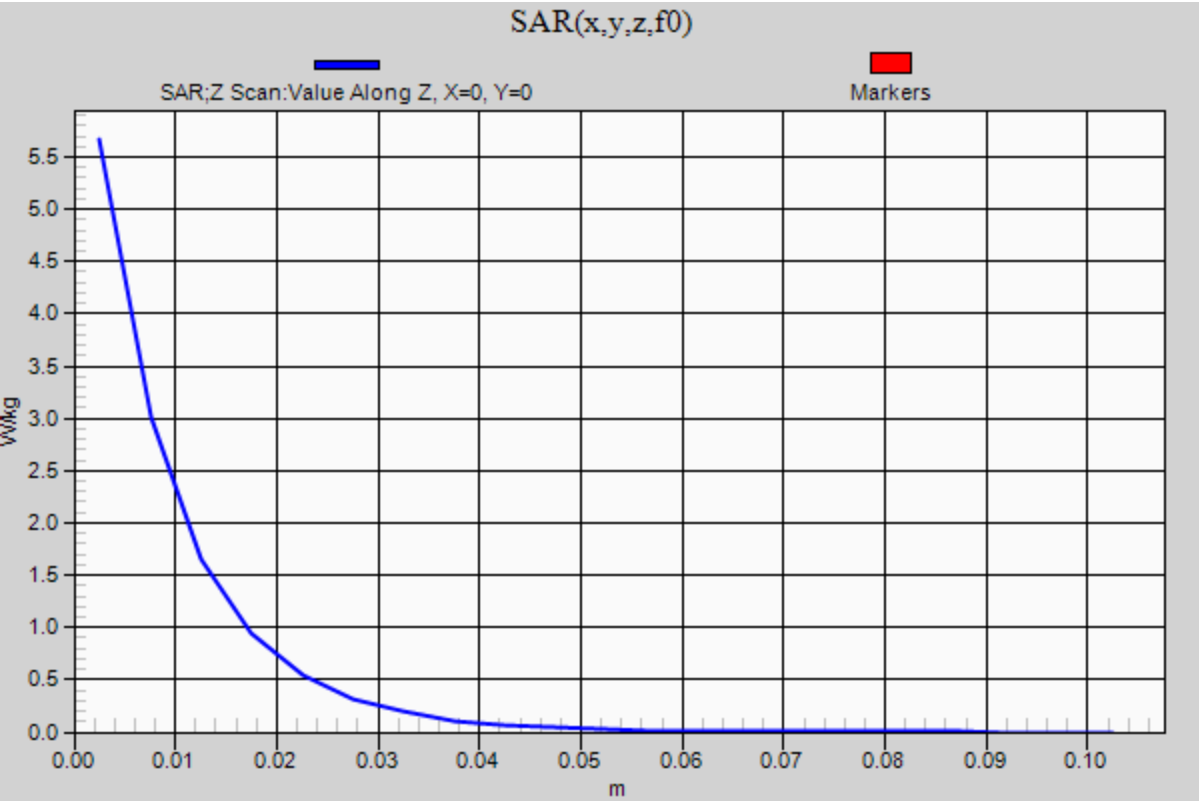

20220228_SystemPerformanceCheck-D835V2_SN4d194

Frequency: 835 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.891 \text{ S/m}$; $\epsilon_r = 41.913$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 2021-08-23
- Probe: EX3DV4 - SN7645; ConvF(10.56, 10.56, 10.56) @ 835 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/835 MHz, Pin=100mW/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.33 W/kg


Head/835 MHz, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.38 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.987 W/kg; SAR(10 g) = 0.641 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

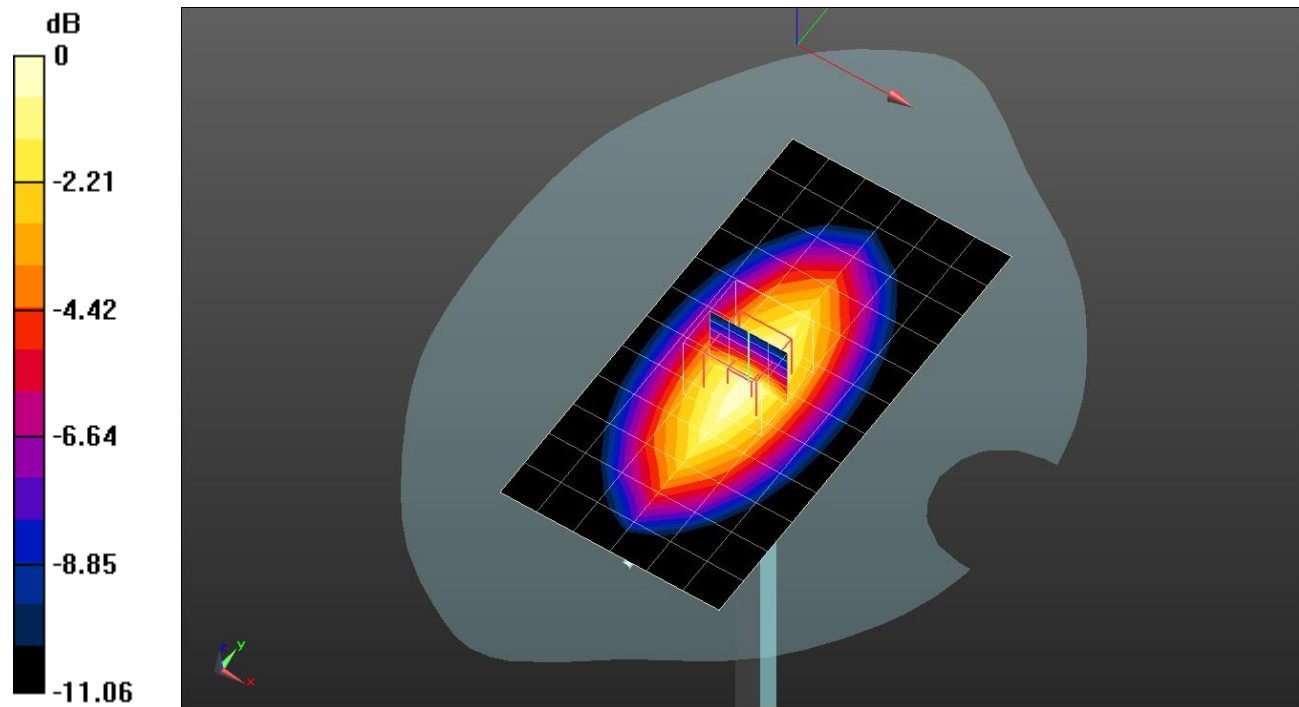


0 dB = 1.34 W/kg = 1.27 dBW/kg

20220228_SystemPerformanceCheck-D835V2_SN4d194

Frequency: 835 MHz; Duty Cycle: 1:1

Head/835 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.25 W/kg

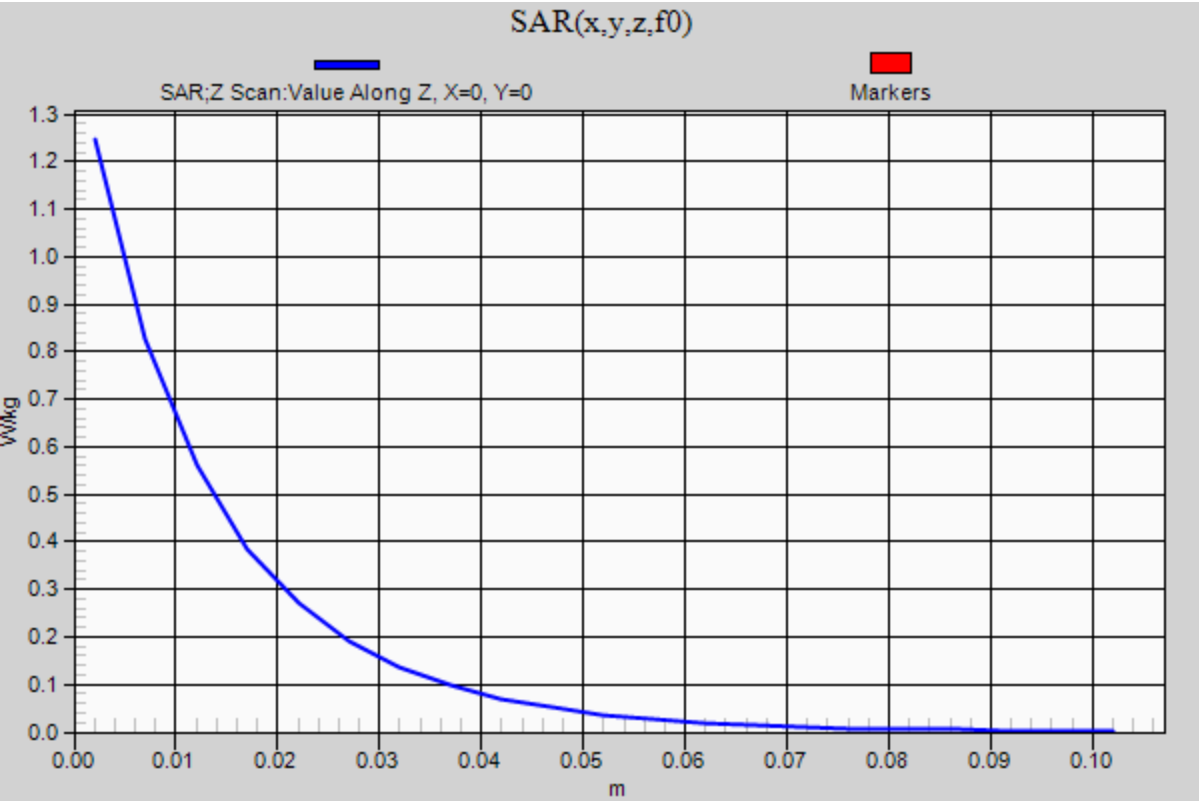

20220228_SystemPerformancecheck-D2450V2_SN939

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.007$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1343; Calibrated: 8/23/2021
- Probe: EX3DV4 - SN7645; ConvF(8.26, 8.26, 8.26) @ 2450 MHz; Calibrated: 4/15/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0_Front; Type: QD000P40CD; Serial: TP:1877

Head/2450 MHz, Pin=100mW/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 6.73 W/kg



Head/2450 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.76 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.38 W/kg; SAR(10 g) = 2.53 W/kg


Maximum value of SAR (measured) = 9.05 W/kg

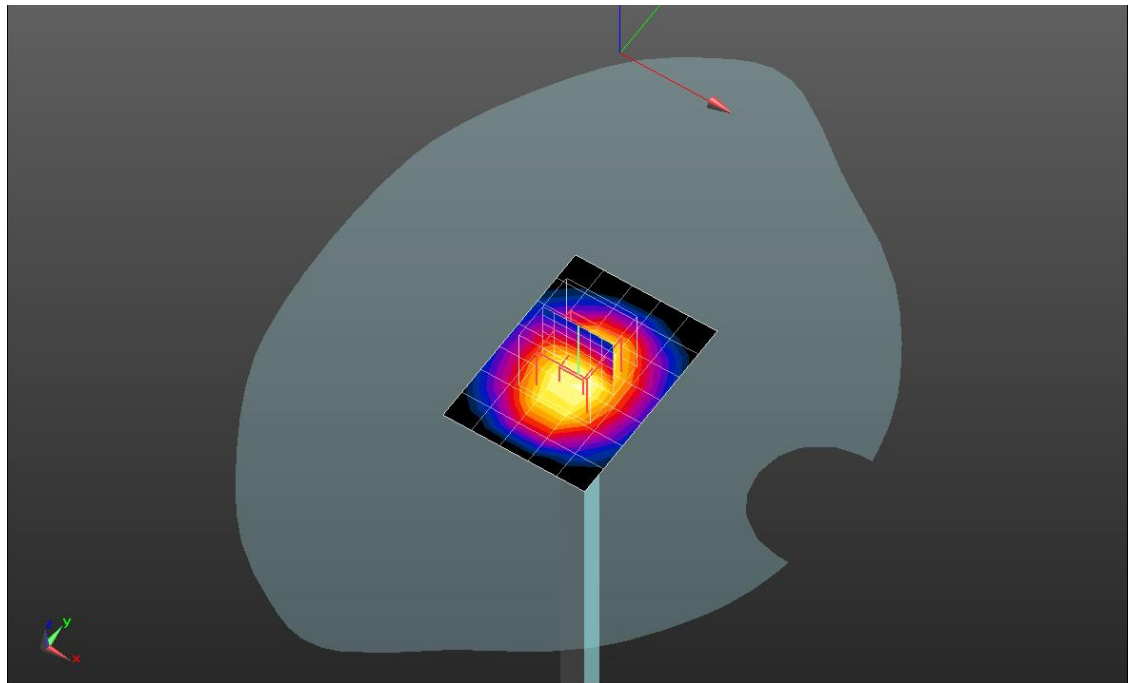

0 dB = 9.05 W/kg = 9.57 dBW/kg

20220228_SystemPerformancecheck-D2450V2_SN939

Frequency: 2450 MHz; Duty Cycle: 1:1

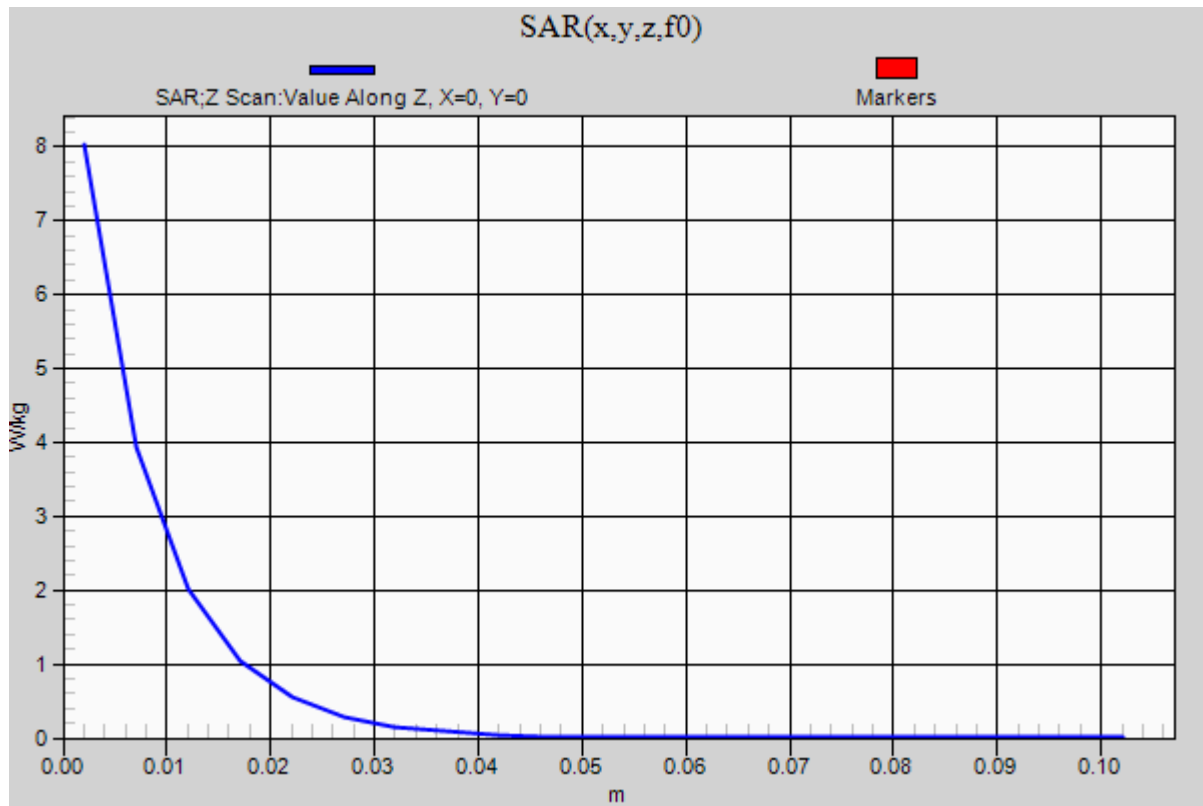Head/2450 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.03 W/kg

20220215_SystemPerformanceCheck-D3900V2_SN1069

Frequency: 3900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 3900$ MHz; $\sigma = 3.258$ S/m; $\epsilon_r = 37.903$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1468; Calibrated: 2021-09-27
- Probe: EX3DV4 - SN7645; ConvF(7.05, 7.05, 7.05) @ 3900 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Head/3900 MHz, Pin=100mW/Area Scan (5x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 9.19 W/kg


Head/3900 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 62.44 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 6.46 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

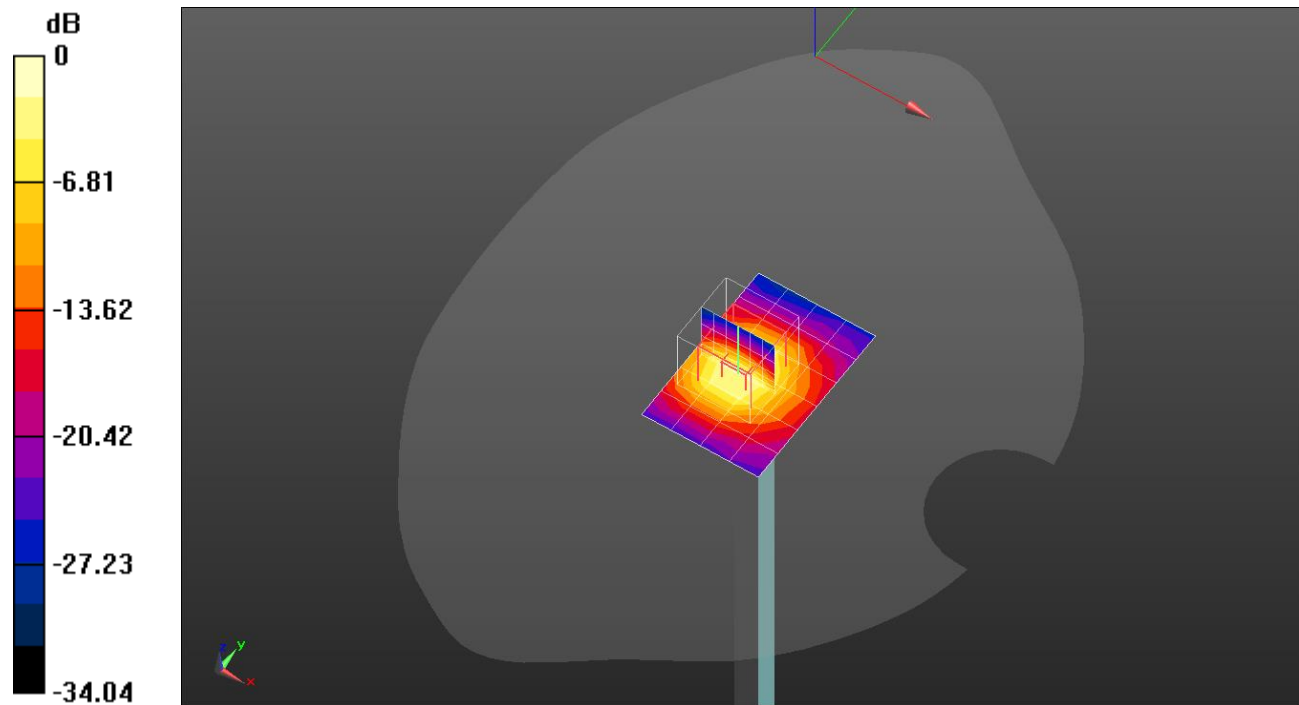


0 dB = 13.2 W/kg = 11.21 dBW/kg

20220215_SystemPerformanceCheck-D3900V2_SN1069

Frequency: 3900 MHz; Duty Cycle: 1:1

Head/3900 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.86 W/kg

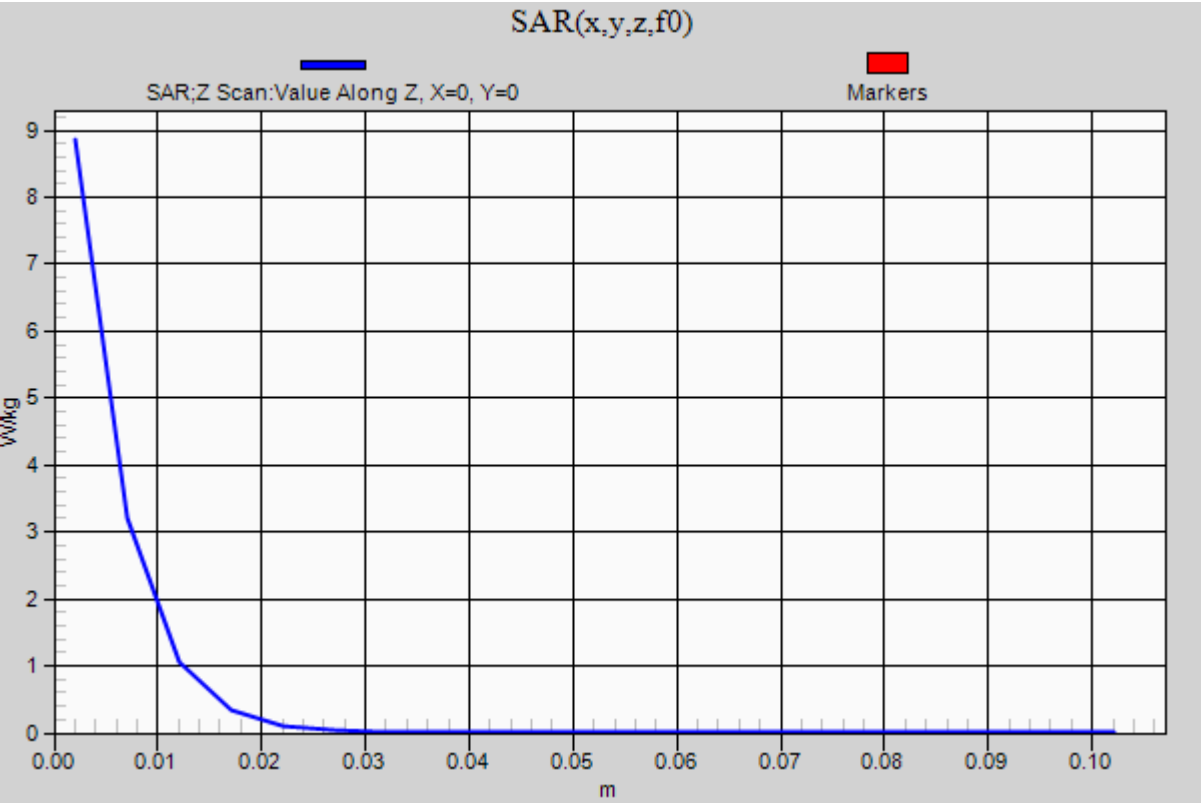

20220218_SystemPerformanceCheck-D3700V2_SN1036

Frequency: 3700 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 3700$ MHz; $\sigma = 3.085$ S/m; $\epsilon_r = 37.602$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1591; Calibrated: 2021-03-26
- Probe: EX3DV4 - SN7376; ConvF(7.01, 7.01, 7.01) @ 3700 MHz; Calibrated: 2021-07-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Left); Type: QD000P40CD; Serial: TP:1991

Head/3700 MHz, Pin=100mW/Area Scan (5x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 12.3 W/kg


Head/3700 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.67 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 6.45 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

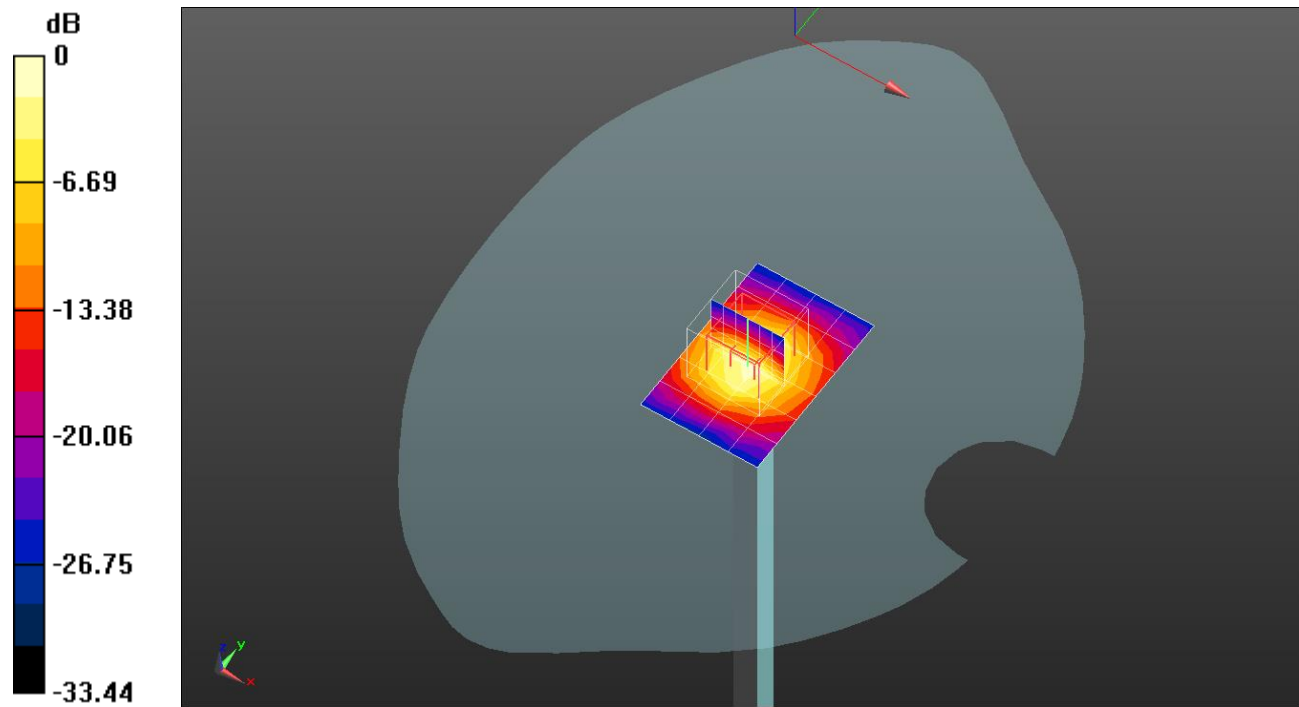


0 dB = 12.6 W/kg = 11.00 dBW/kg

20220218_SystemPerformanceCheck-D3700V2_SN1036

Frequency: 3700 MHz; Duty Cycle: 1:1

Head/3700 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 11.0 W/kg

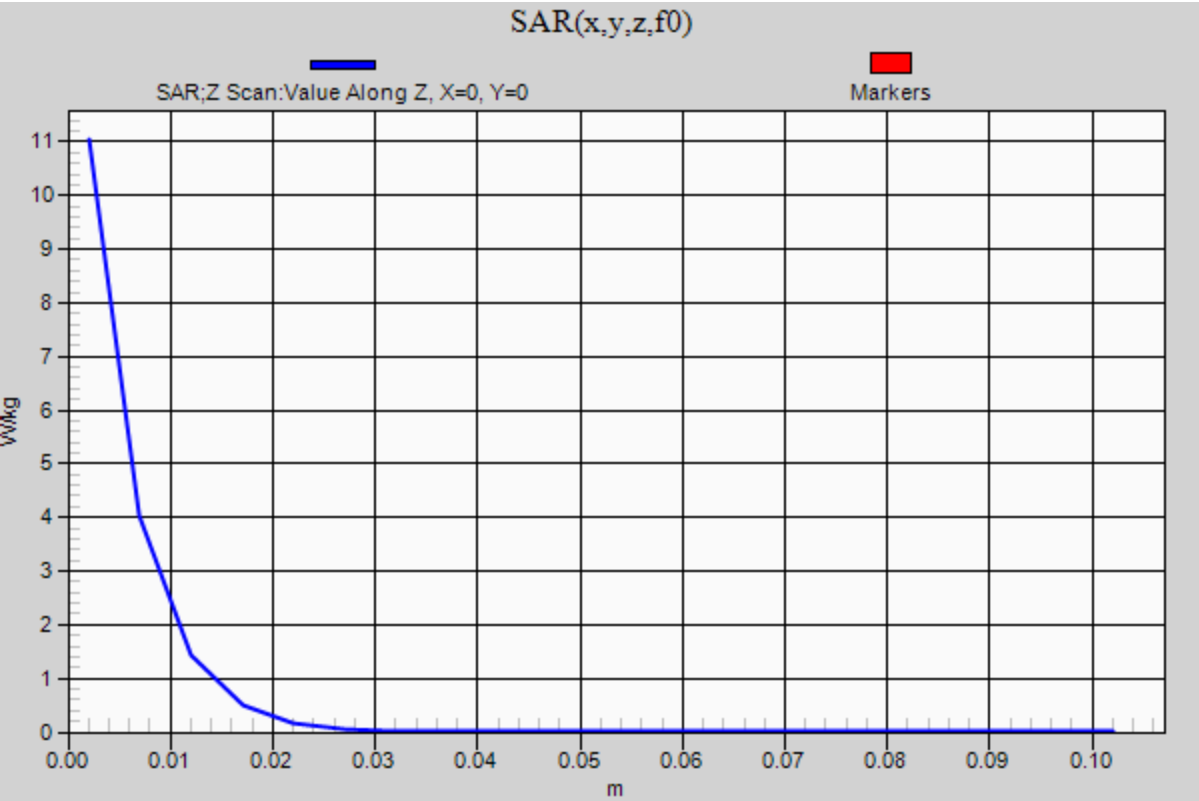

20220224_SystemPerformanceCheck-D3500V2_SN1121

Frequency: 3500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 3500$ MHz; $\sigma = 2.907$ S/m; $\epsilon_r = 38.737$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1591; Calibrated: 2021-03-26
- Probe: EX3DV4 - SN7376; ConvF(7.15, 7.15, 7.15) @ 3500 MHz; Calibrated: 2021-07-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Left); Type: QD000P40CD; Serial: TP:1991

Head/3500 MHz, Pin=100mW/Area Scan (5x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 11.8 W/kg


Head/3500 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 67.96 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 6.09 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

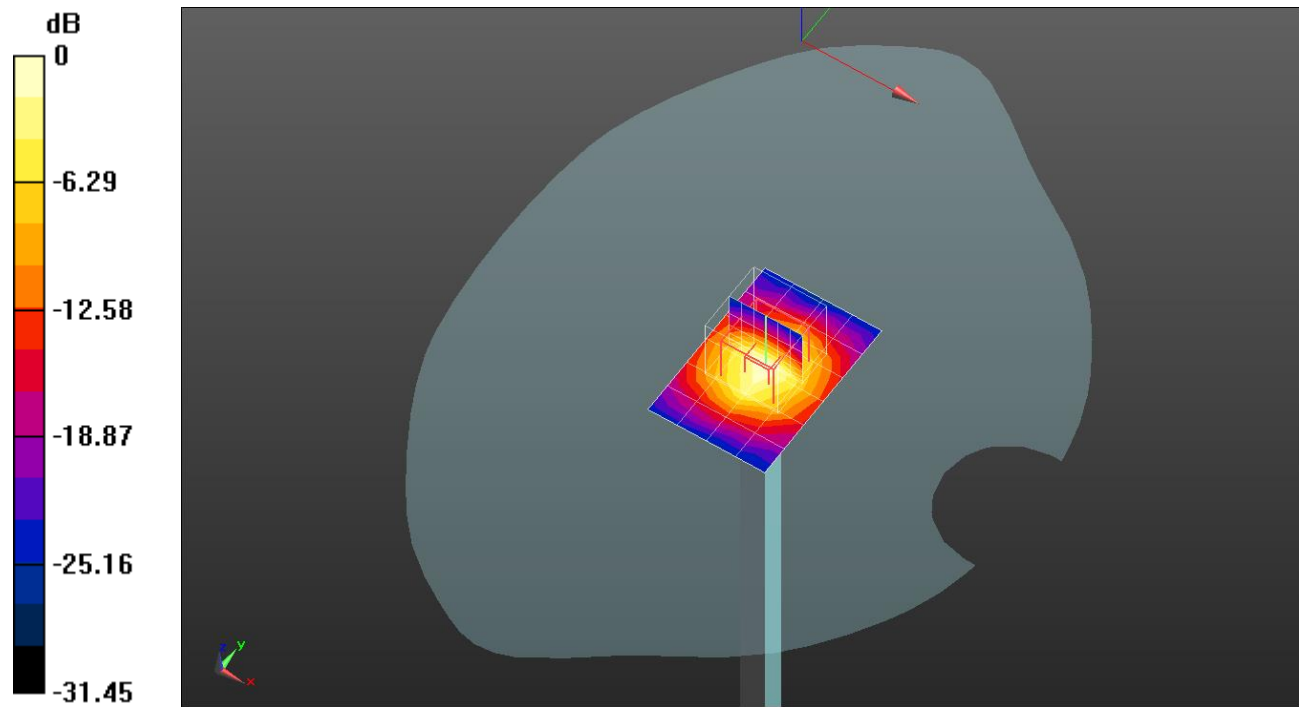


0 dB = 11.8 W/kg = 10.72 dBW/kg

20220224_SystemPerformanceCheck-D3500V2_SN1121

Frequency: 3500 MHz; Duty Cycle: 1:1

Head/3500 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 10.3 W/kg

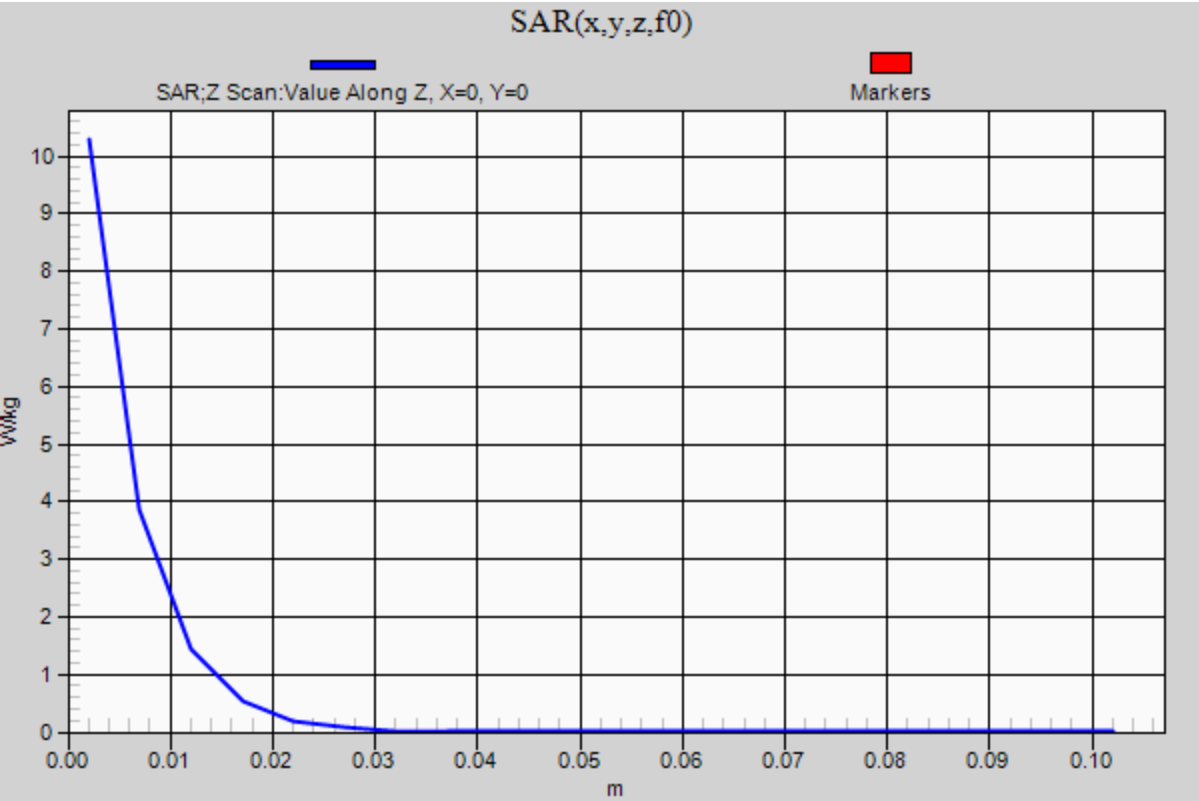

20220224_SystemPerformancecheck-D2600V2_SN1178

Frequency: 2600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.122$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2021-07-27
- Probe: EX3DV4 - SN7330; ConvF(7.85, 7.85, 7.85) @ 2600 MHz; Calibrated: 2022-01-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Head/2600 MHz, Pin=100mW/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 8.75 W/kg


Head/2600 MHz, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.68 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 5.42 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 9.28 W/kg

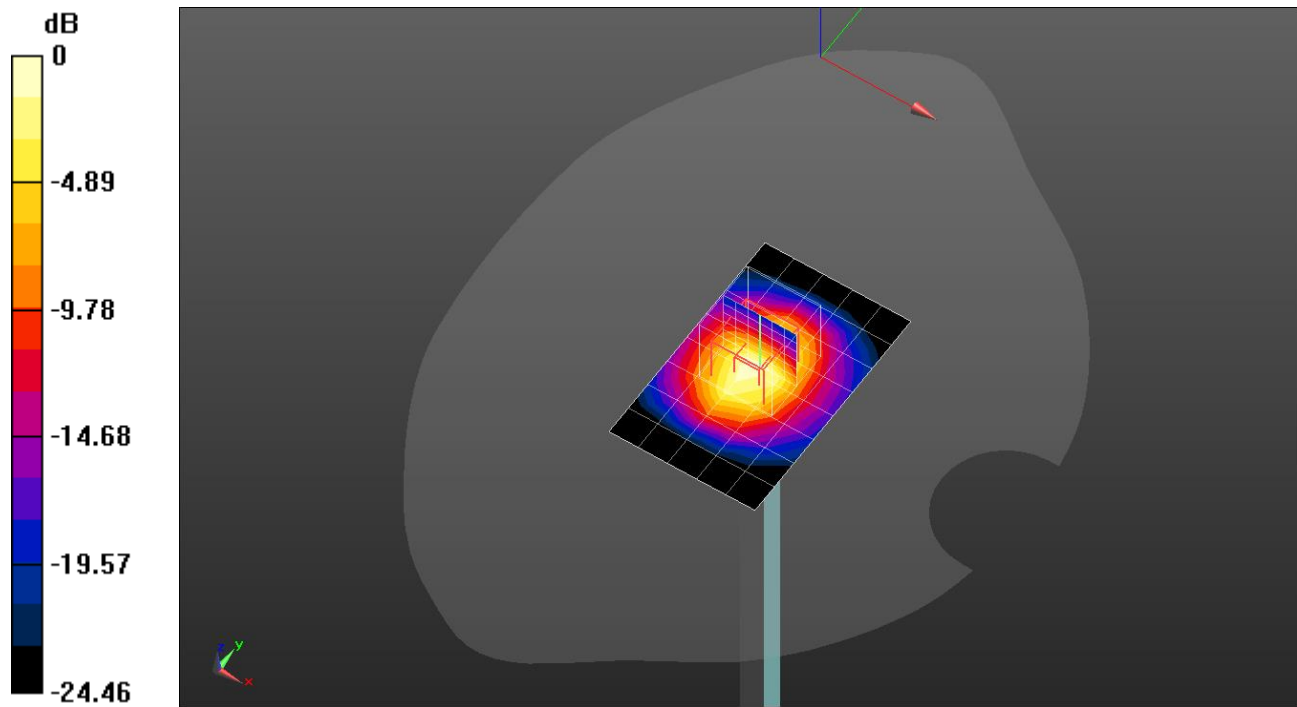

0 dB = 9.28 W/kg = 9.68 dBW/kg

20220224_SystemPerformancecheck-D2600V2_SN1178

Frequency: 2600 MHz; Duty Cycle: 1:1

Head/2600 MHz, Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 7.59 W/kg

