



CERTIFICATION TEST REPORT

Report Number. : 4790541052-E10V3

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-S918B/DS, SM-S918B

FCC ID : A3LSMS918B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
NFC, WPT and UWB

Test Standard(s) : FCC 47 CFR PART 15 SUBPART F

Date Of Issue:
2022-11-10

Prepared by:
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-10-28	Initial issue	SunGeun Lee
V2	2022-11-09	Updated to address TCB's question	SunGeun Lee
V3	2022-11-10	Updated to address TCB's question	SunGeun Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. SUMMARY TABLE	5
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. CALIBRATION AND UNCERTAINTY	6
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
5.2. <i>SAMPLE CALCULATION.....</i>	6
5.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5.4. <i>DECISION RULE</i>	6
6. EQUIPMENT UNDER TEST	7
6.1. <i>EUT DESCRIPTION.....</i>	7
6.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
6.3. <i>WORST-CASE CONFIGURATION AND MODE</i>	8
6.4. <i>DESCRIPTION OF TEST SETUP</i>	9
7. MEASUREMENT METHOD.....	10
8. TEST AND MEASUREMENT EQUIPMENT	11
9. ANTENNA PORT TEST RESULTS	12
9.1. <i>10 dB BANDWIDTH</i>	12
9.1.1. <i>10dB BANDWIDTH MEASUREMENT</i>	13
9.1.2. <i>10dB BANDWIDTH PLOT</i>	14
9.2. <i>PEAK POWER AND MAXIMUM AVERAGE EMISSIONS.....</i>	16
9.2.1. <i>MAXIMUM PEAK AND AVERAGE POWER</i>	17
9.3. <i>CESSATION TIME.....</i>	20
10. RADIATED TEST RESULTS	23
10.1. <i>LIMITS AND PROCEDURE</i>	23
10.2. <i>TRANSMITTER ABOVE 1 GHz</i>	26
10.2.1. <i>SPURIOUS EMISSION 1 GHz – 6 GHz</i>	26
10.2.2. <i>SPURIOUS EMISSION 9 GHz – 18 GHz.....</i>	30
10.2.3. <i>SPURIOUS EMISSION 18 GHz – 40 GHz.....</i>	34
10.2.4. <i>SPURIOUS EMISSION 1164 MHz – 1240 MHz</i>	38
10.2.5. <i>SPURIOUS EMISSION 1559 MHz – 1610 MHz</i>	42
10.3. <i>WORST CASE BELOW 1 GHZ.....</i>	46
11. AC POWER LINE CONDUCTED EMISSIONS	47
11.1.1. <i>AC Power Line.....</i>	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB
MODEL: SM-S918B/DS, SM-S918B
SERIAL NUMBER: R3CT90EYVXZ, 583236314a523198 (RADIATED)
DATE TESTED: 2022-09-19 ~ 2022-10-28

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart F	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Sungeun Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.503(a)	10dB Bandwidth	≥ 500 MHz	Radiated	Pass
15.519(e) 15.521(g)	Maximum Peak Power Spectral Density	< 0dBm EIRP in 50 MHz BW		Pass
15.519(c)	Radiated Emissions Above 960 MHz	See table in 15.519(c) for details		Pass
15.519(d)	Radiated Emissions in the 1164 - 1240 MHz and 1559 - 1610 MHz GPS Bands	See table in 15.519(d) for details		Pass
15.209	Radiated Emissions Below 960 MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass
15.207,15.251(j)	AC Line Conducted Emissions 150 kHz - 30 MHz	< FCC 15.207 limits	Power Line conducted	Pass
15.519(a)(1)	Shutdown Timing Requirements	< 10s	Radiated	Pass

3. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 393764 D01 UWB FAQ v02

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP (dBm)
= Measured Voltage (dBuV) – 107 dB + Conversion Factor (dB) + Antenna Factor (dB/m)
+ Total Loss [Cable Loss (dB) – Preamp Gain (dB)]

EIRP (dBm)
= -1.92 dBm = 87.13 dBuV – 107 dB + 11.80 dB + 35.40 dB/m – 29.25 dB

Conversion Factor:

$P \text{ (dBm EIRP)} = E \text{ (dBuV/m)} - 95.2 \text{ dB}$

$P \text{ (dBm EIRP)} = E \text{ (dBuV)} - 107 \text{ dB}$

$E \text{ (dBuV)} - E \text{ (dBuV/m)} = 11.80 \text{ dB}$

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.72 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, Above 18 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB. This test report addresses the UWB operational mode.

The EUT is a UWB transceiver with 2 TX antennas (Ant1 & 2) installed in a smart phone host and operates on 6.5 GHz (Channel 5) and 8 GHz (Channel 9). Three signal configurations (CONFIG SP0, SP1, SP3) are available for each ANT/CH setting. CONFIG 2 is not supported.

Worst Case Preamble ID (BPRF: 9 – 24 / HPRF: 25 – 32): BPRF: 9 / HPRF: 25

ANT	Channel	CONFIG	PRF Mode	Packet Length
Ant1	5	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
	9	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
Ant2	5	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
	9	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127

6.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with Antenna 1's maximum gain of

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]
CH5 6500	-4.90	-4.17
CH9 8000	-4.60	-4.94

“METAL ANTENNA” and “PATCH ANTENNA” as indicated in antenna specification are written as ANT 1 and ANT 2 in this report.

6.3. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For ANT 1 (Metal) CH5, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

For ANT 1 (Metal) CH9, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

For ANT 2 (Patch) CH5, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

For ANT 2 (Patch) CH9, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

MIMO does not support.

Note: All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

6.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37R38J4A28SE3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02111ABBE	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software in hidden menu exercised the EUT to enable UWB mode.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) 50cm for Spurious, 3m for EIRP.

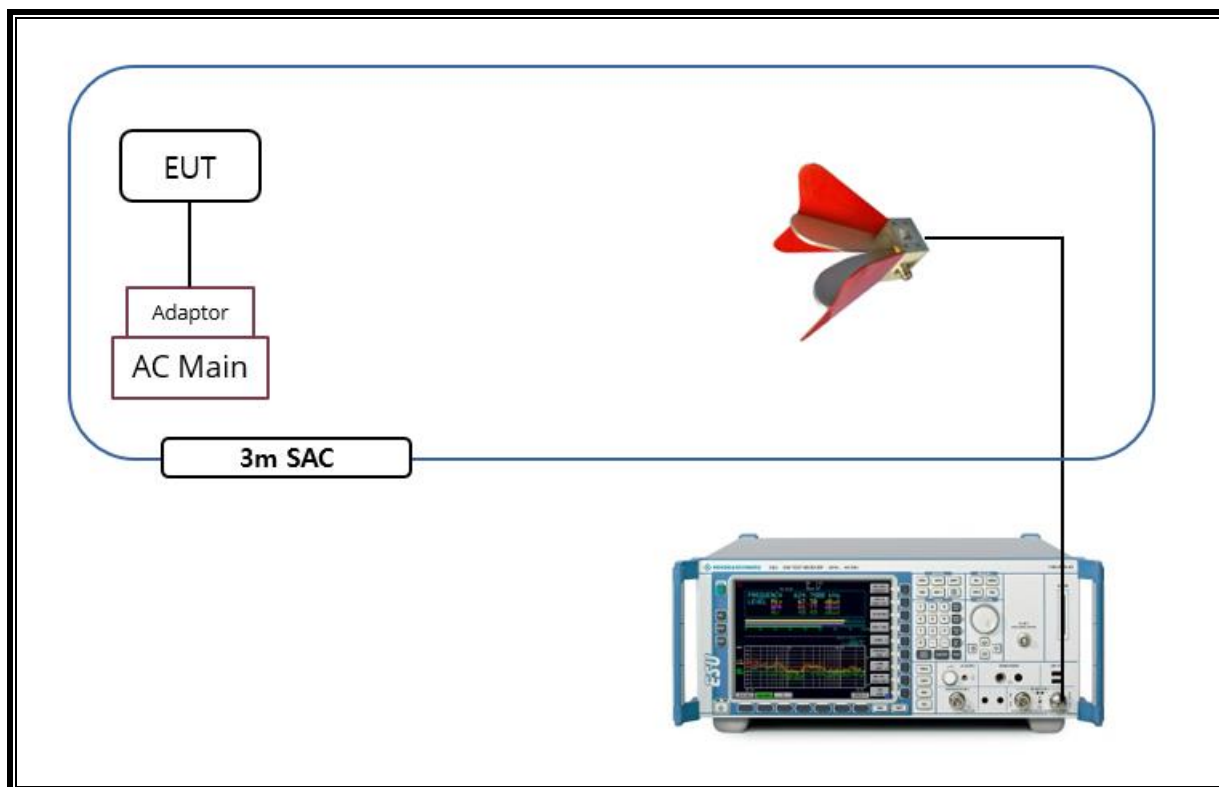

7. MEASUREMENT METHOD

10 dB BW : ANSI C63.10-2013, Section 10.1 / FCC Part §15.503(a)

Peak power and maximum average emissions: ANSI C63.10-2013 Section 10.3, 15.519(c)(e)

Cessation time: 15.519(a)(1)

Radiated measurement procedure: ANSI C63.10-2013, Section 10.3

AC Power Line Conducted Emission: ANSI C63.10-2013, Section 6.2

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024/08/15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024/08/15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024/08/15
Antenna, Horn, 18 GHz	ETS	3115	00167211	2024/08/04
Antenna, Horn, 18 GHz	ETS	3115	00161451	2024/08/21
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024/08/04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024/08/21
Antenna, Horn, 18 GHz	ETS	3117	00218957	2023/01/15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024/08/02
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2023/10/13
Preamplifier	ETS	3116C-PA	00168841	2023/08/04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2023/08/02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2023/08/02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2023/08/02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2023/08/01
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2023/08/01
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2023/08/03
Spectrum Analyzer, 50 GHz	R&S	FSW 50	101538	2023/01/18
Attenuator	PASTERNAK	PE7087-10	A001	2023/08/03
Attenuator	PASTERNAK	PE7087-10	A008	2023/08/03
Attenuator	PASTERNAK	PE7004-10	2	2023/08/01
Attenuator	PASTERNAK	PE7087-10	A009	2023/08/03
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2023/08/02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2023/07/29
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2023/08/01
High Pass Filter	Wainwright Instruments GmbH	WHW2-8165-11500-21000-40CD	11	2023/01/11
High Pass Filter	Wainwright Instruments GmbH	WHW2-7100-10000-18000-40CD	2	2023/01/07
Low Pass Filter	Wainwright Instruments GmbH	WLKX12-5400-5940-18000-60ST	1	2023/01/07
Low Pass Filter	Wainwright Instruments GmbH	WLKX10-6400-7424-18000-60ST	1	2023/01/07
LISN	R&S	ENV-216	101837	2023/08/04
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

9. ANTENNA PORT TEST RESULTS

9.1. 10 dB BANDWIDTH

LIMITS

FCC §15.503

(a) UWB bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

(b) Center frequency. The center frequency, f_c , equals $(f_H + f_L)/2$.

(c) Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L) / (f_H + f_L)$.

(d) Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC §15.519

(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

Test Procedure

ANSI C63.10-2013 – Section 10.1

Test settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span was set wide enough to capture the 10dB points of the signal
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. The trace was allowed to stabilize

RESULTS


Worst cases were tested and reported.

9.1.1. 10dB BANDWIDTH MEASUREMENT


ANT	Channel	CONFIG	PRF Mode	Packet Length	fM (MHz)	fL (MHz)	fH (MHz)	fc (MHz)	BW (MHz)
Ant1 Metal	CH5	SP0	BPRF9	4	6645.43	6240.13	6772.36	6506.25	532.23
		SP1	BPRF9	4	6645.43	6238.13	6772.86	6505.50	534.73
		SP3	BPRF9	4	6727.39	6227.64	6780.36	6504.00	552.72
	CH9	SP0	BPRF9	4	8142.93	7730.13	8266.37	7998.25	536.24
		SP1	BPRF9	4	8142.93	7715.64	8271.36	7993.50	555.72
		SP3	BPRF9	4	8224.89	7709.15	8278.86	7994.01	569.71
Ant2 Patch	CH5	SP0	BPRF9	4	6454.52	6237.13	6745.88	6491.51	508.75
		SP1	BPRF9	4	6404.55	6235.63	6751.87	6493.75	516.24
		SP3	BPRF9	4	6428.54	6236.13	6751.37	6493.75	515.24
	CH9	SP0	BPRF9	4	8072.46	7734.13	8239.88	7987.01	505.75
		SP1	BPRF9	4	8071.96	7733.13	8239.88	7986.51	506.75
		SP3	BPRF9	4	8047.98	7724.64	8238.88	7981.76	514.24

9.1.2. 10dB BANDWIDTH PLOT

- ANT1

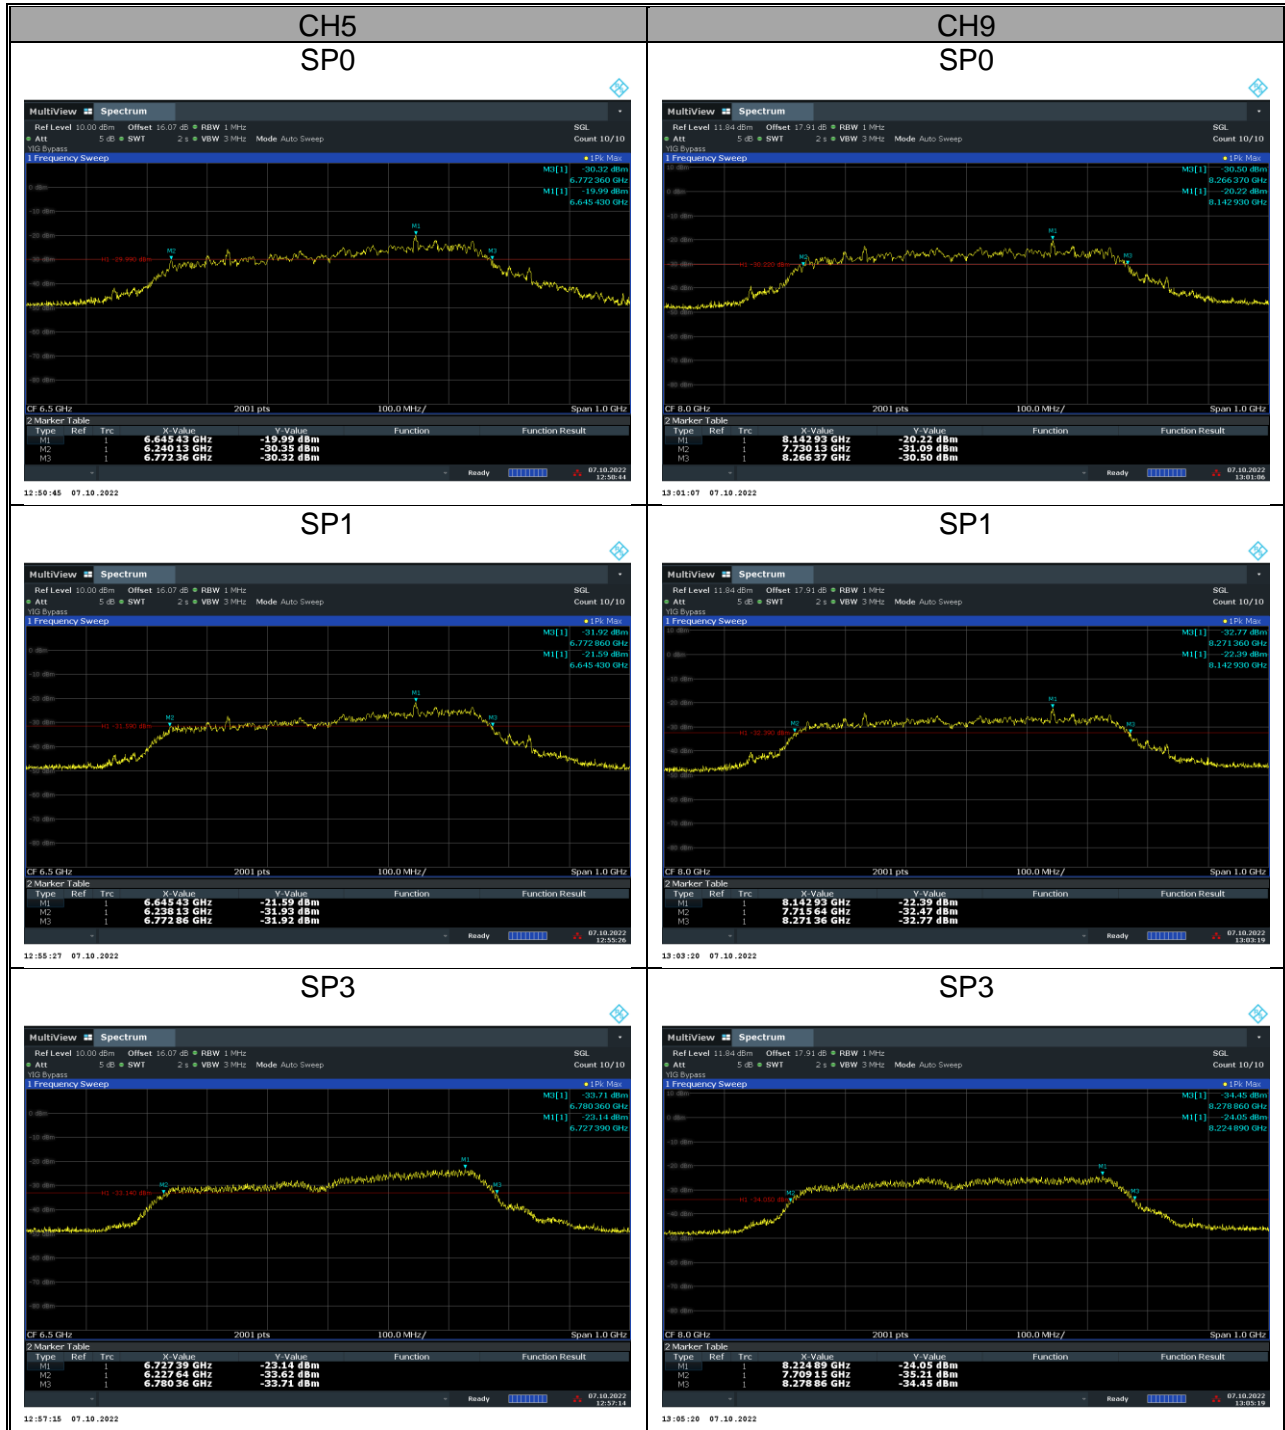

- ANT2

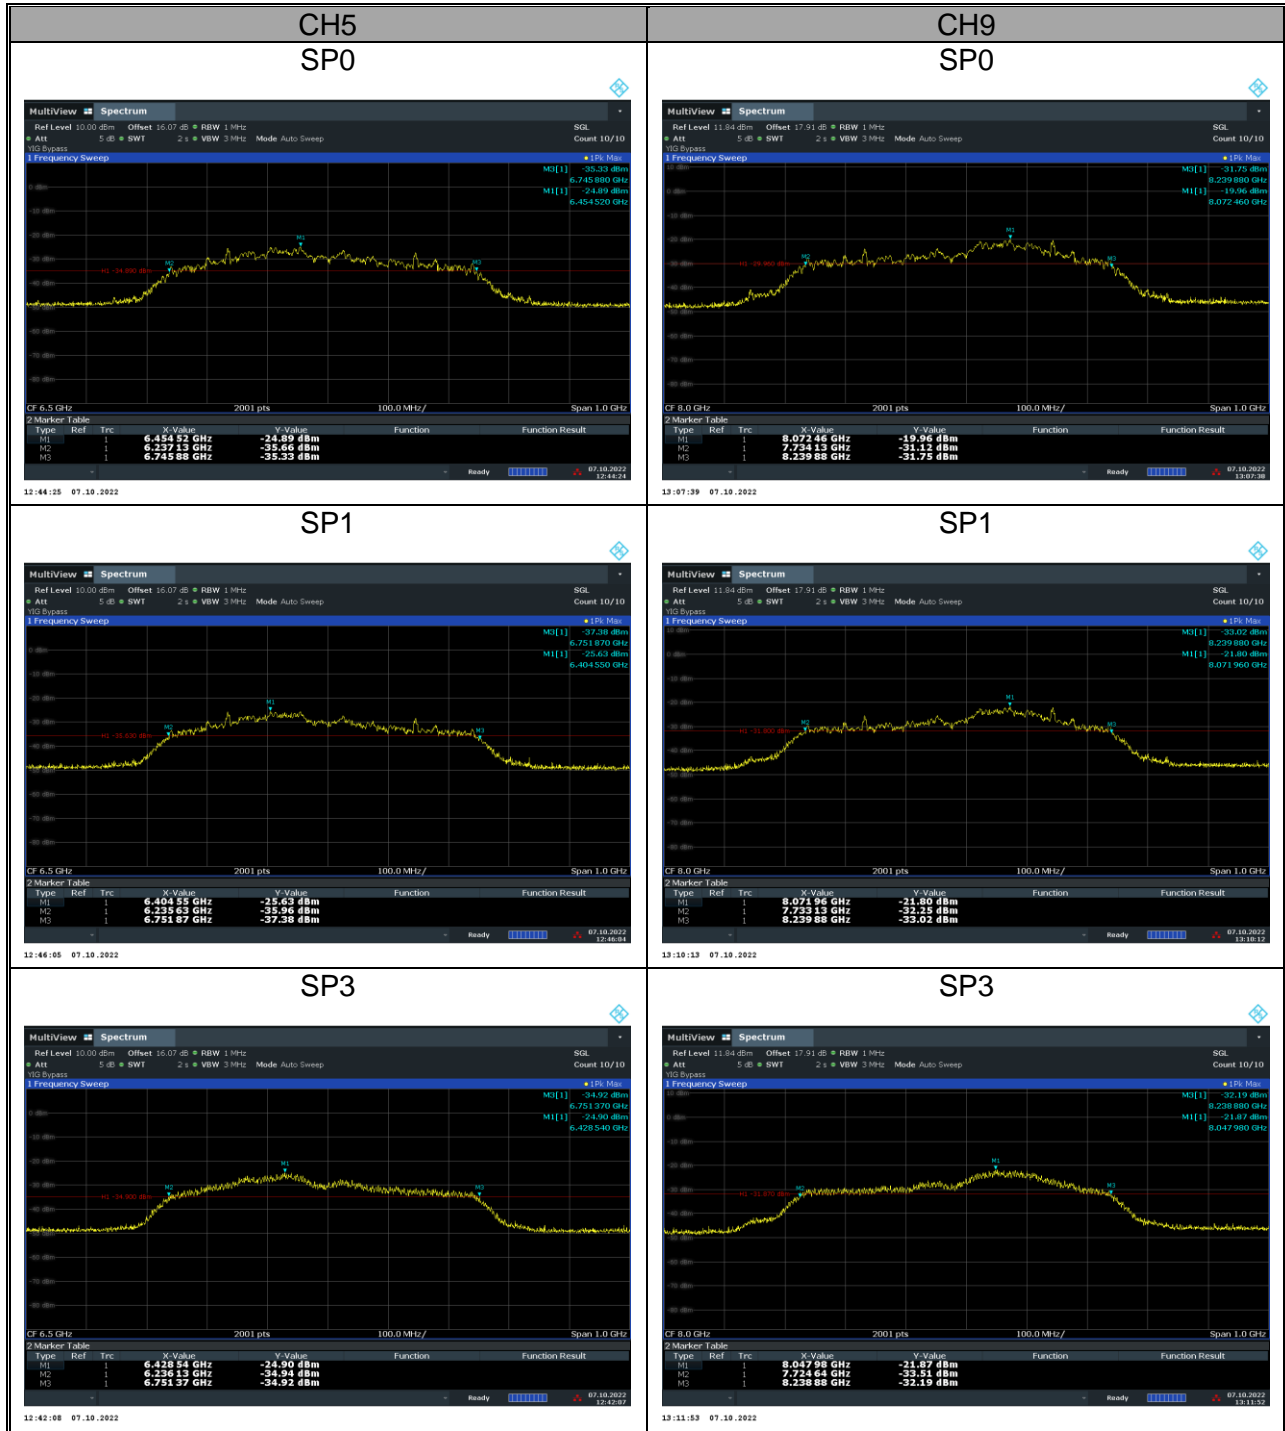

9.2. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

LIMITS

FCC §15.519

(c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100-10600	-41.3

(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fm. That limit is 0 dBm EIRP.

TEST PROCEDURE

ANSI C63.10 Clause 10.3.

Peak EIRP power is measured using RBW of 50 MHz.

The radiated emissions of 6 – 9 GHz frequency band are performed at 3 meter test distance.

Test Notes

The EIRP in dBm was calculated from the measurement Field Strength in dBuV/m by applying a -95.2dB correction factor to the Field Strength level.

RESULTS


Plots: worst cases were reported.

9.2.1. MAXIMUM PEAK AND AVERAGE POWER


ANT	Channel	CONFIG	PRF Mode	Packet Length	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin	AV Power (dBm/MHz)	AV Limit (dBm/MHz)	Margin
Ant1 Metal	CH5	SP0	BPRF9	4	-1.61	0	1.61	-44.33	-41.3	3.03
			BPRF9	127	-3.63	0	3.63	-43.23	-41.3	1.93
			HPRF25	127	-9.81	0	9.81	-42.88	-41.3	1.58
		SP1	BPRF9	4	-2.17	0	2.17	-43.25	-41.3	1.95
			BPRF9	127	-4.47	0	4.47	-43.24	-41.3	1.94
			HPRF25	127	-10.74	0	10.74	-42.87	-41.3	1.57
		SP3	BPRF9	4	-10.25	0	10.25	-42.85	-41.3	1.55
			BPRF9	127	-10.05	0	10.05	-42.82	-41.3	1.52
			HPRF25	127	-11.84	0	11.84	-43.09	-41.3	1.79
	CH9	SP0	BPRF9	4	-1.51	0	1.51	-44.50	-41.3	3.20
			BPRF9	127	-3.40	0	3.40	-43.21	-41.3	1.91
			HPRF25	127	-9.67	0	9.67	-43.52	-41.3	2.22
		SP1	BPRF9	4	-2.39	0	2.39	-43.28	-41.3	1.98
			BPRF9	127	-5.91	0	5.91	-43.55	-41.3	2.25
			HPRF25	127	-11.28	0	11.28	-43.79	-41.3	2.49
		SP3	BPRF9	4	-11.16	0	11.16	-43.20	-41.3	1.90
			BPRF9	127	-10.20	0	10.20	-43.53	-41.3	2.23
			HPRF25	127	-11.80	0	11.80	-43.30	-41.3	2.00
Ant2 Patch	CH5	SP0	BPRF9	4	-1.59	0	1.59	-44.18	-41.3	2.88
			BPRF9	127	-3.66	0	3.66	-42.99	-41.3	1.69
			HPRF25	127	-10.57	0	10.57	-42.83	-41.3	1.53
		SP1	BPRF9	4	-2.54	0	2.54	-42.88	-41.3	1.58
			BPRF9	127	-5.63	0	5.63	-43.46	-41.3	2.16
			HPRF25	127	-12.12	0	12.12	-43.13	-41.3	1.83
		SP3	BPRF9	4	-9.72	0	9.72	-42.83	-41.3	1.53
			BPRF9	127	-10.02	0	10.02	-43.15	-41.3	1.85
			HPRF25	127	-11.78	0	11.78	-43.01	-41.3	1.71
	CH9	SP0	BPRF9	4	-1.61	0	1.61	-44.23	-41.3	2.93
			BPRF9	127	-4.78	0	4.78	-43.07	-41.3	1.77
			HPRF25	127	-10.21	0	10.21	-43.10	-41.3	1.80
		SP1	BPRF9	4	-3.24	0	3.24	-43.13	-41.3	1.83
			BPRF9	127	-5.77	0	5.77	-43.15	-41.3	1.85
			HPRF25	127	-11.26	0	11.26	-42.98	-41.3	1.68
		SP3	BPRF9	4	-10.35	0	10.35	-43.52	-41.3	2.22
			BPRF9	127	-9.75	0	9.75	-43.07	-41.3	1.77
			HPRF25	127	-11.72	0	11.72	-43.18	-41.3	1.88

MAXIMUM PEAK AND AVERAGE POWER PLOTS


- PEAK POWER
- ANT1

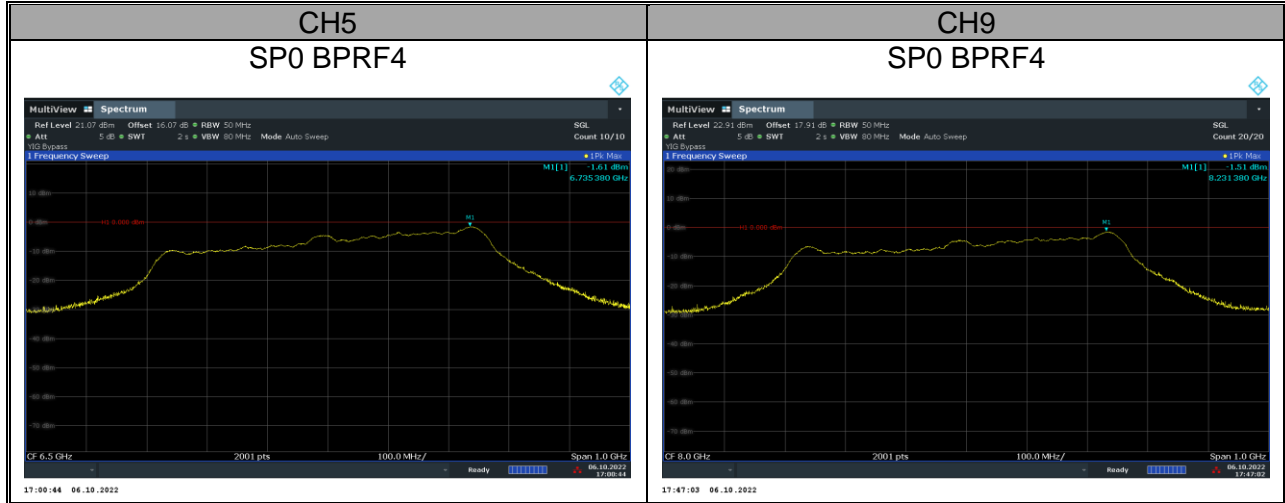


- ANT2

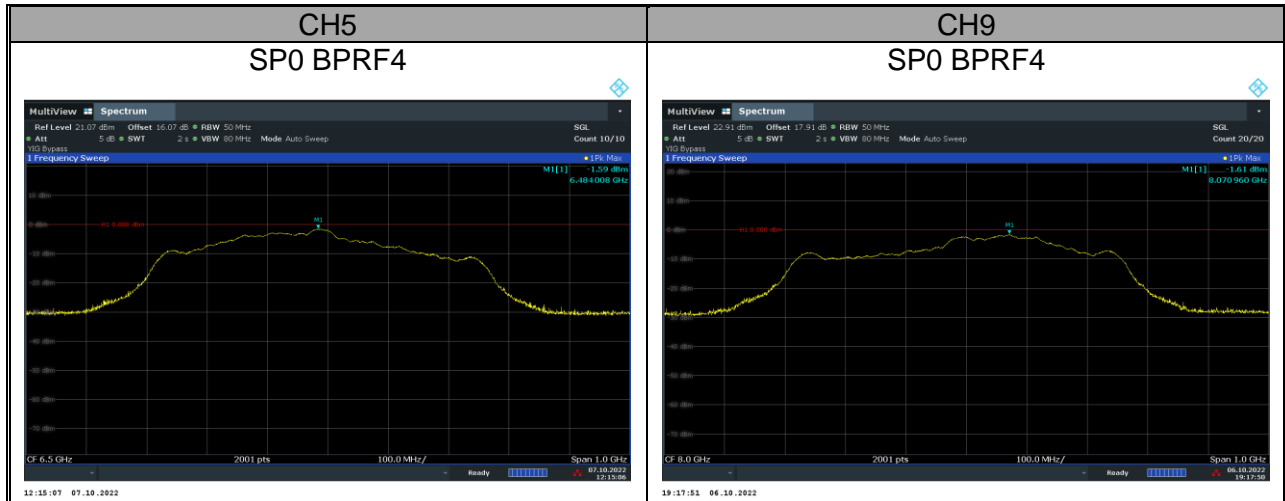

- AVERAGE POWER
- ANT1

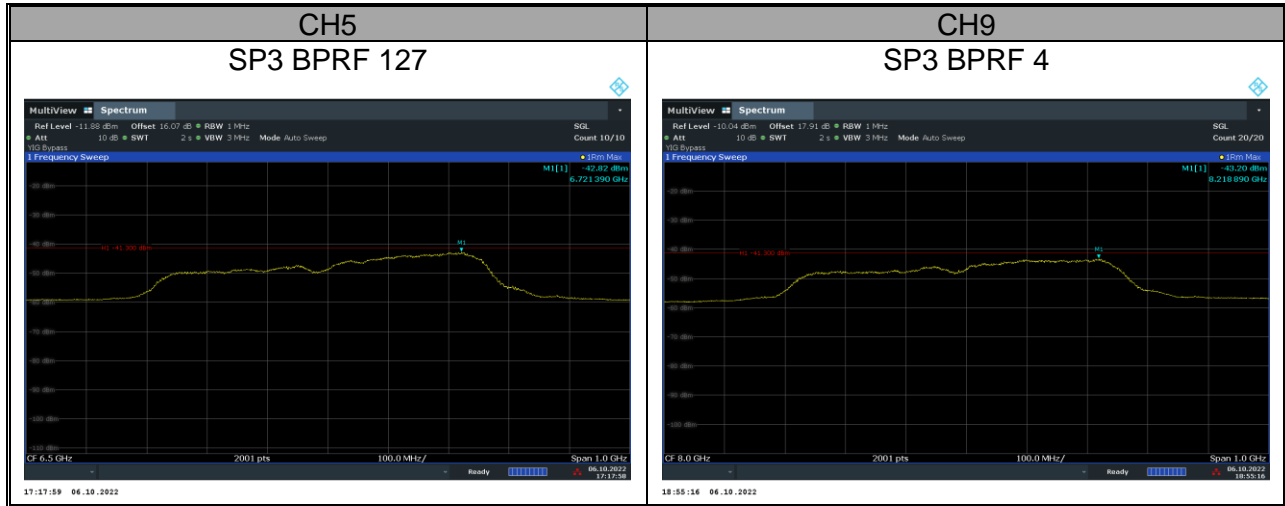

- ANT2

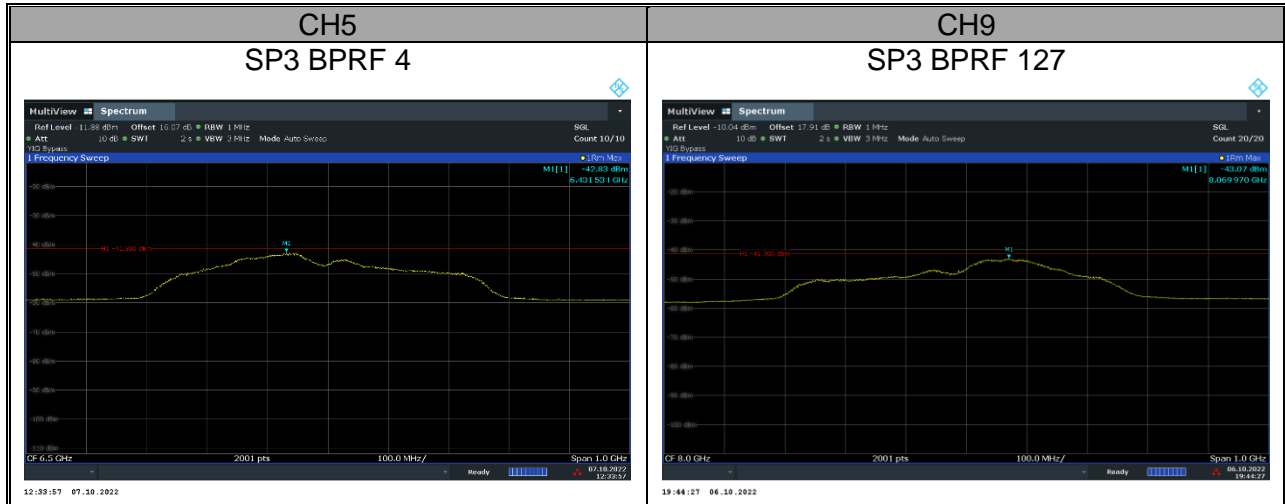

9.3. CESSATION TIME

LIMITS

FCC §15.519(a)(1)

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

TEST PROCEDURES


Transmissions are monitored for two cases:

1. The smart phone ends the UWB link.
2. The EUT ends the UWB link.

RESULTS

Please see the next page

Case 1: Smart Phone ends the UWB link

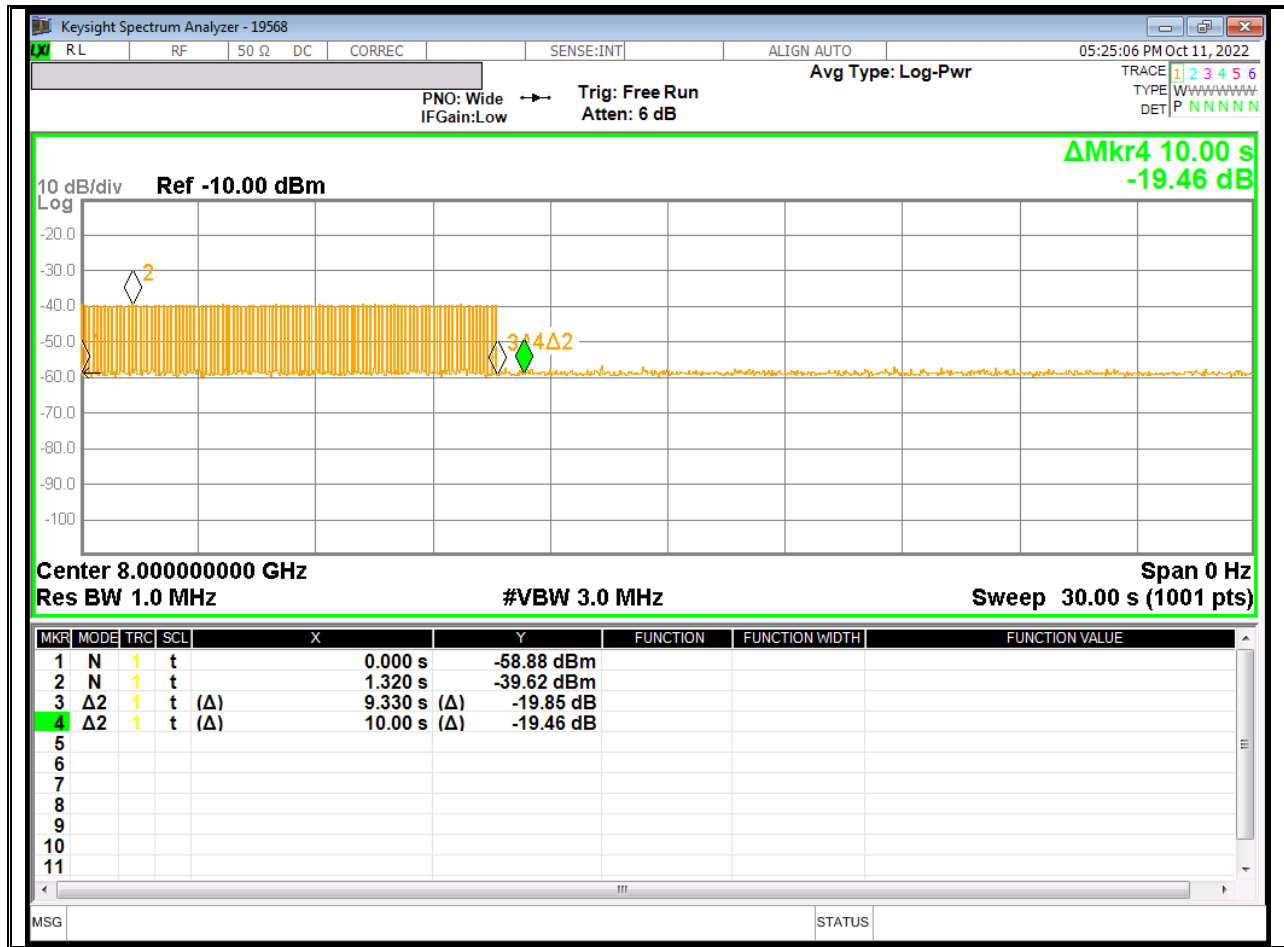

Marker 1: EUT and smart phone are linked.
 Marker 3: Smart phone ends UWB link.
 Marker 2Δ3: “10s” after EUT ends UWB link.

EUT detects “Smart Phone ends UWB link” and ceases transmitting within 10 seconds.

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ FCC Part 15.519 (c): The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency range (MHz)	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

▪ FCC Part 15.519 (d): In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency range (MHz)	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 0.5 or 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz (120kHz for emissions in the GPS), then the video bandwidth is set to 3 MHz (500kHz for emissions in the GPS)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

Radiated test was performed worst case as below table. (Highest Power)


	ANT1	ANT2
CH5	SP0 / BPRF9 / Packet Length 4	SP0 / BPRF9 / Packet Length 4
CH9	SP0 / BPRF9 / Packet Length 4	SP0 / BPRF9 / Packet Length 4

10.2. TRANSMITTER ABOVE 1 GHz


10.2.1. SPURIOUS EMISSION 1 GHz – 6 GHz TX Antenna 1

CHANNEL, CH 5

HORIZONTAL RESULT

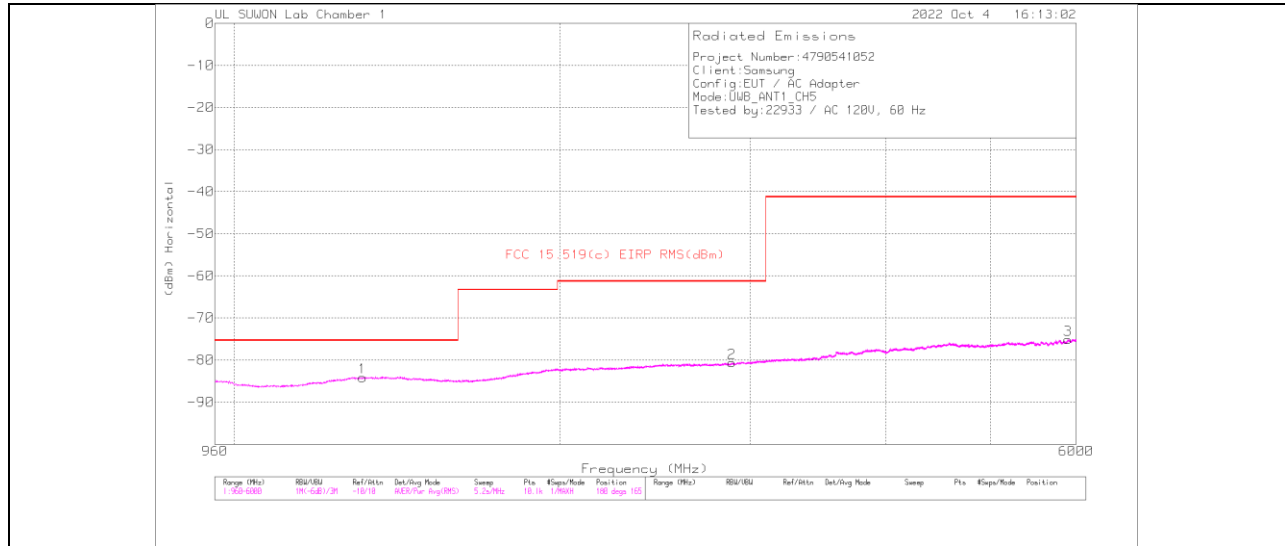

VERTICAL RESULT

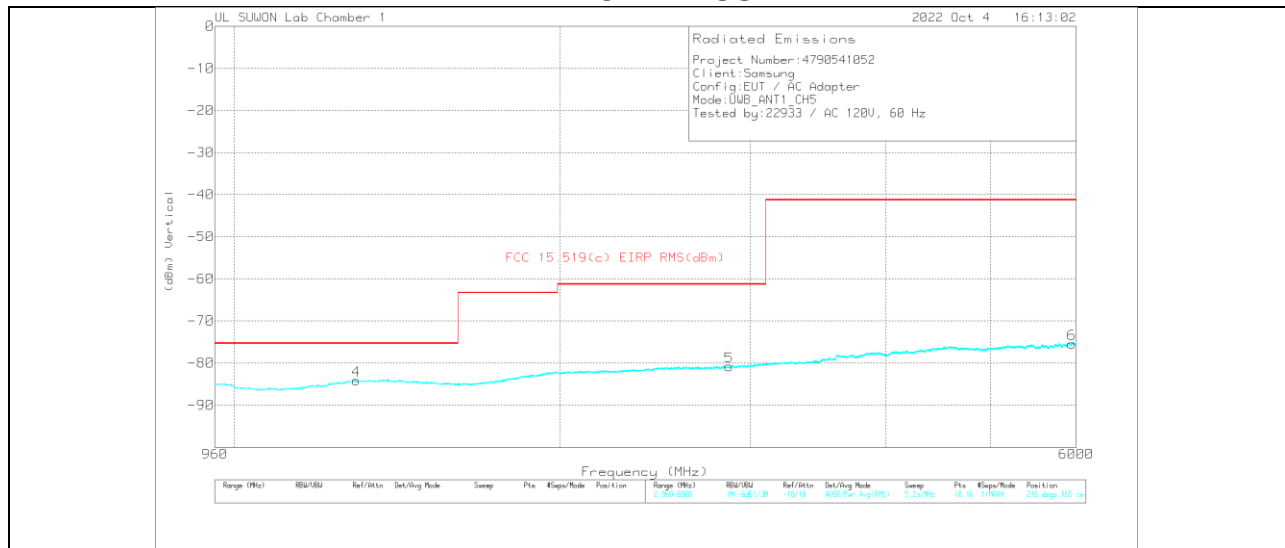


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Corv. Fact. (dB)	UWB_CH0_LPF	Corrected Reading (dBm)	FCC 15.519(c) EIRP RMS(dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1314.7961	-71	RMS	29.5	-39.4	-15.6	11.8	.6	-84.1	-75.3	-8.8	252	165	H
2	2884.6816	-72.44	RMS	32.4	-37.5	-15.6	11.8	.7	-80.64	-61.3	-19.34	360	165	H
3	5897.2049	-75.63	RMS	35	-31.9	-15.6	11.8	1.2	-75.13	-41.3	-33.83	252	165	H
4	1296.6318	-71.03	RMS	29.5	-39.4	-15.6	11.8	.6	-84.13	-75.3	-8.83	179	165	V
5	2866.7172	-72.39	RMS	32.4	-37.7	-15.6	11.8	.7	-80.79	-61.3	-19.49	144	165	V
6	5944.6109	-76.04	RMS	35	-31.8	-15.6	11.8	1.2	-75.44	-41.3	-34.14	323	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

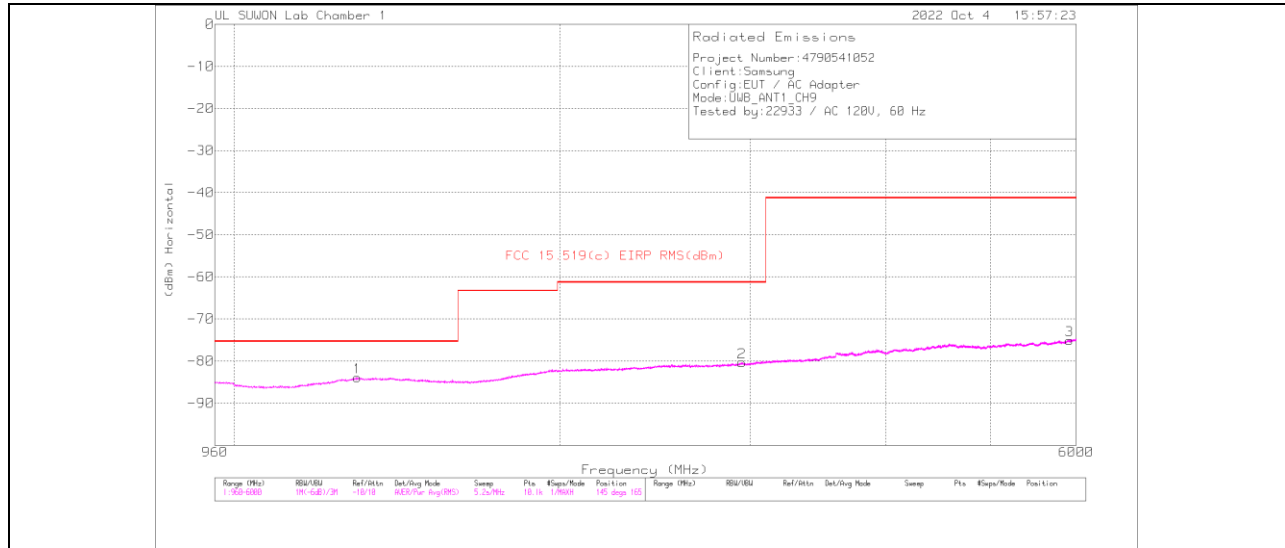

VERTICAL RESULT

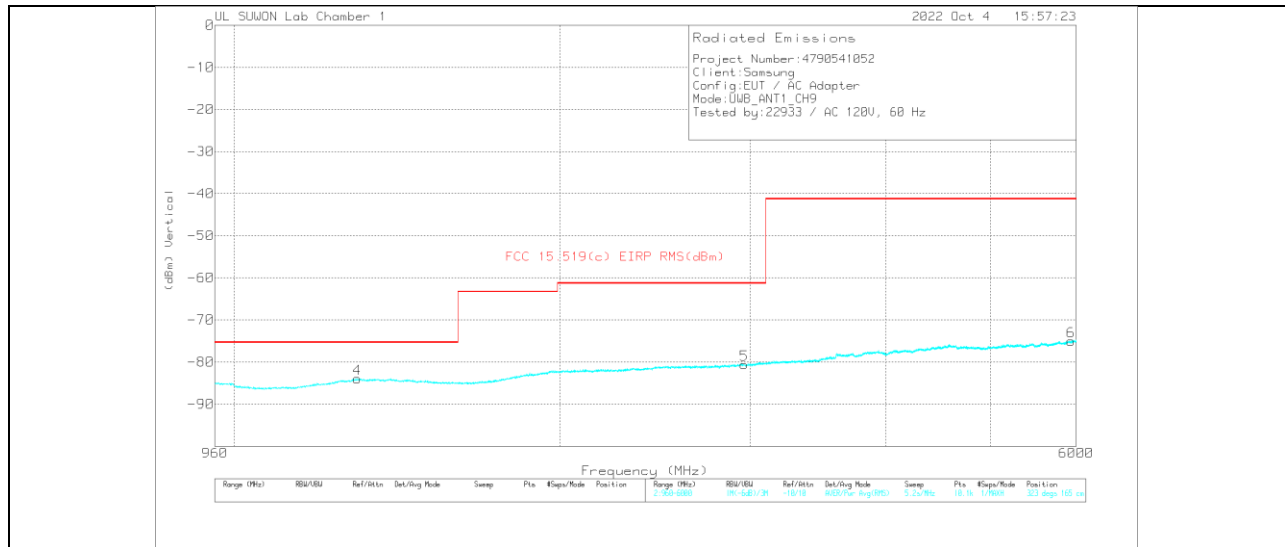

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	FCC 15.519(c) EIRP RMS(dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1299.8258	-70.86	RMS	29.5	-39.5	-15.6	11.8	.6	-83.86	-75.3	-8.56	36	165	H
2	2946.0598	-72.61	RMS	32.6	-37.2	-15.6	11.8	.7	-80.31	-61.3	-19.01	252	165	H
3	5913.1733	-75.57	RMS	35	-31.9	-15.6	11.8	1.2	-75.07	-41.3	-33.77	73	165	H
4	1299.8258	-70.77	RMS	29.5	-39.5	-15.6	11.8	.6	-83.97	-75.3	-8.67	252	165	V
5	2961.5291	-72.79	RMS	32.6	-37.3	-15.6	11.8	.7	-80.59	-61.3	-19.29	36	165	V
6	5936.1277	-75.64	RMS	35	-31.8	-15.6	11.8	1.2	-75.04	-41.3	-33.74	252	165	V

RMS - RMS detection


TX Antenna 2

CHANNEL, CH 5

HORIZONTAL RESULT

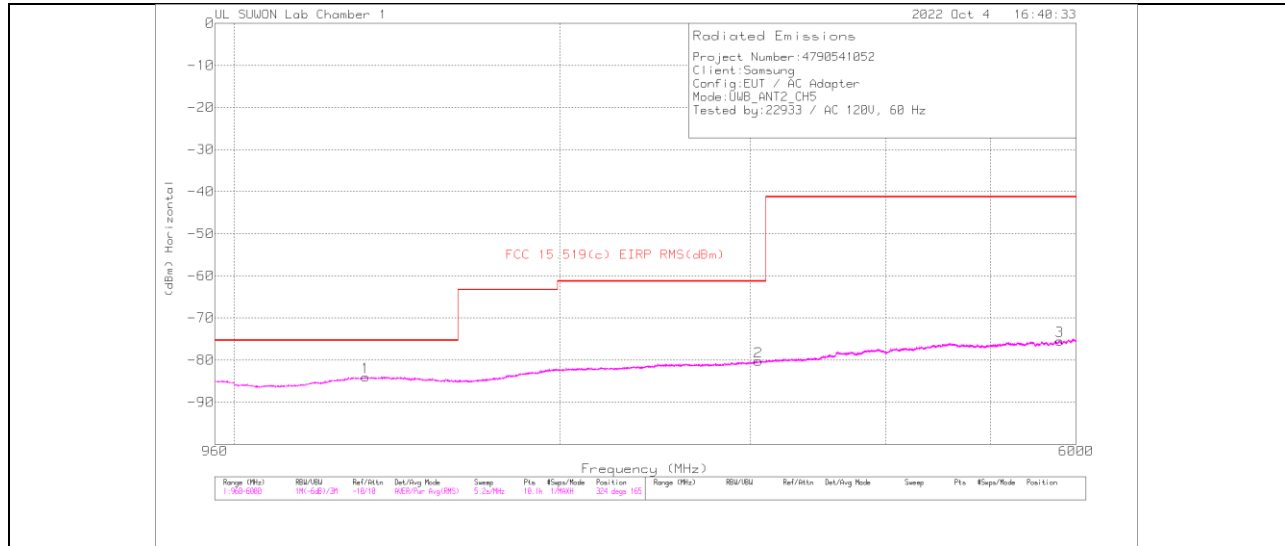

VERTICAL RESULT

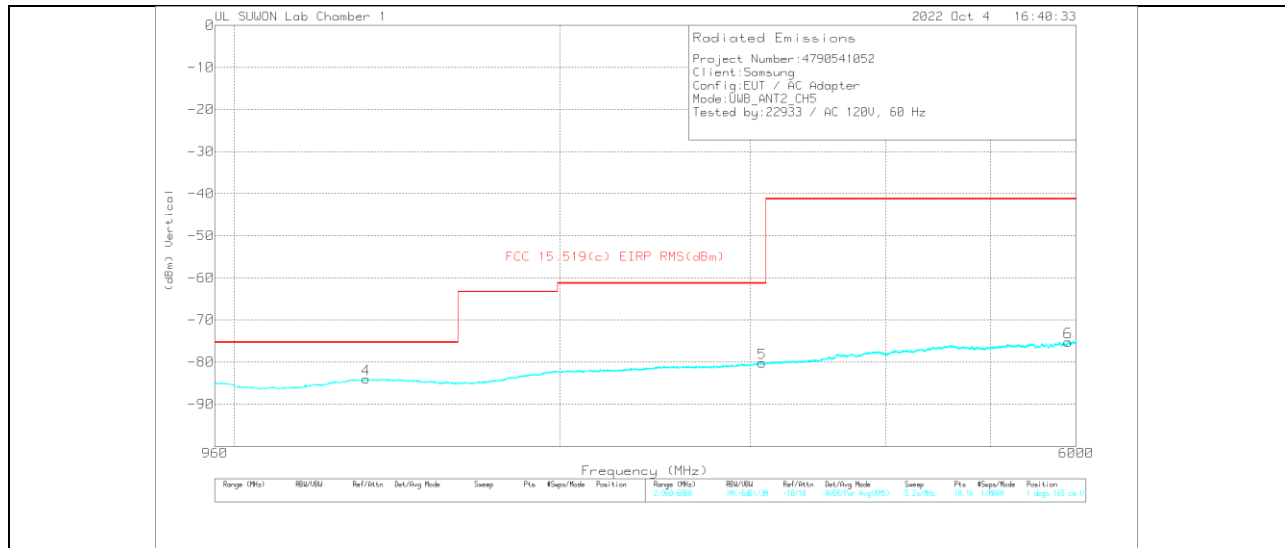


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00188717	0.96-18GHz(dB)	Dist. Corr. (dB)	Corrv. Fact. (dB)	UWB_CH2_LPF	Corrected Reading (dBm)	FCC 15.519(c) EIRP RMS(dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1323.2793	-70.9	RMS	29.5	-39.4	-15.6	11.8	.6	-84	-75.3	-8.7	216	165	H
2	3050.8519	-72.97	RMS	32.8	-37	-15.6	11.8	.7	-80.27	-61.3	-18.97	360	165	H
3	5794.4089	-75.54	RMS	34.9	-32.1	-15.6	11.8	1.1	-75.44	-41.3	-34.14	324	165	H
4	1324.7763	-70.93	RMS	29.5	-39.4	-15.6	11.8	.6	-84.03	-75.3	-8.73	36	165	V
5	3075.8024	-72.87	RMS	32.9	-37.1	-15.6	11.9	.7	-80.17	-61.3	-18.87	179	165	V
6	5898.702	-75.74	RMS	35	-31.9	-15.6	11.8	1.2	-75.24	-41.3	-33.94	216	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

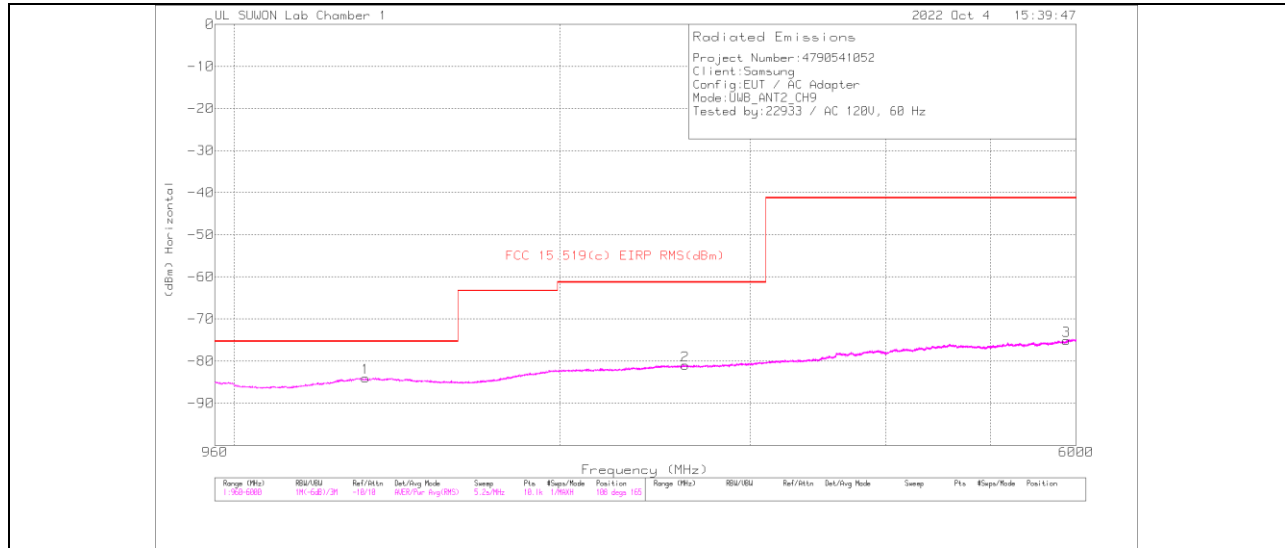

VERTICAL RESULT

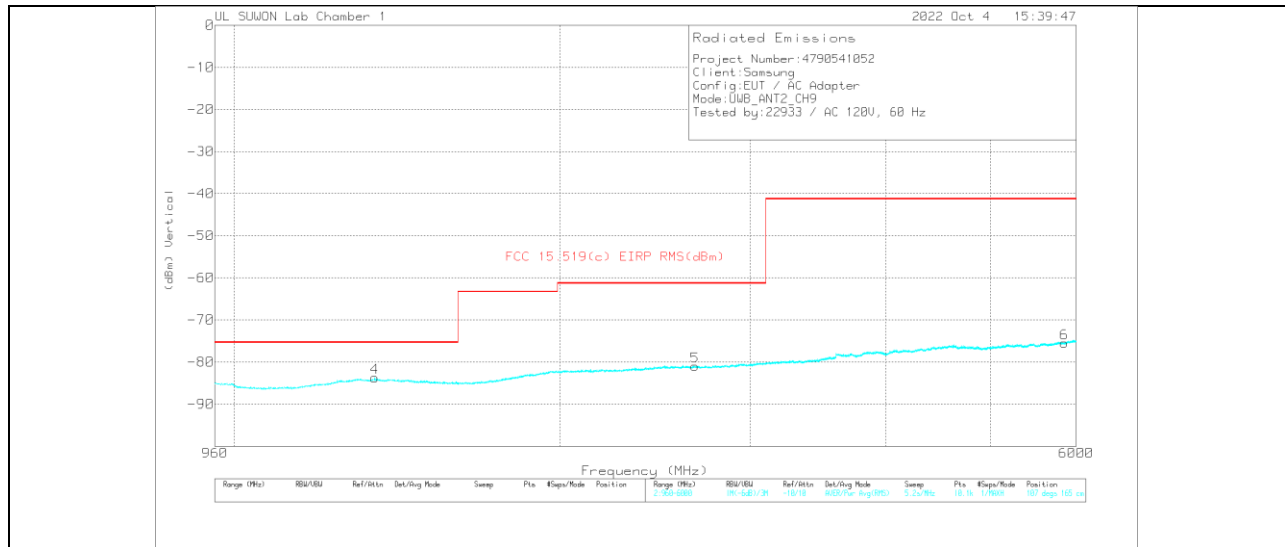

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_30168717	0.96-16GHz(dB)	Dist. Cor. (dB)	Corr. Fact. (dB)	UWB_CH5_LPF(dB)	Corrected Reading (dBm)	FCC 15.519(c) EIRP RMS (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1358.21	-74.79	RMS	29.5	-36.4	-15.6	11.8	.2	-85.29	-75.3	-9.99	180	165	H
2	1983.4695	-75.74	RMS	31.3	-35.1	-15.6	11.8	.3	-83.04	-63.3	-19.74	288	165	H
3	5990.5198	-76.05	RMS	35.2	-29.9	-15.6	11.8	2.1	-72.45	-41.3	-31.15	108	165	H
4	1356.2139	-75.04	RMS	29.5	-36.3	-15.6	11.8	.2	-85.44	-75.3	-10.14	252	165	V
5	1980.9745	-75.85	RMS	31.3	-35.1	-15.6	11.8	.3	-83.15	-63.3	-19.85	216	165	V
6	5975.0505	-78.21	RMS	35.2	-29.9	-15.6	11.8	2.1	-74.61	-41.3	-33.31	324	165	V

RMS - RMS detection

10.2.2. SPURIOUS EMISSION 9 GHz – 18 GHz


TX Antenna 1

CHANNEL, CH 5

HORIZONTAL RESULT



VERTICAL RESULT

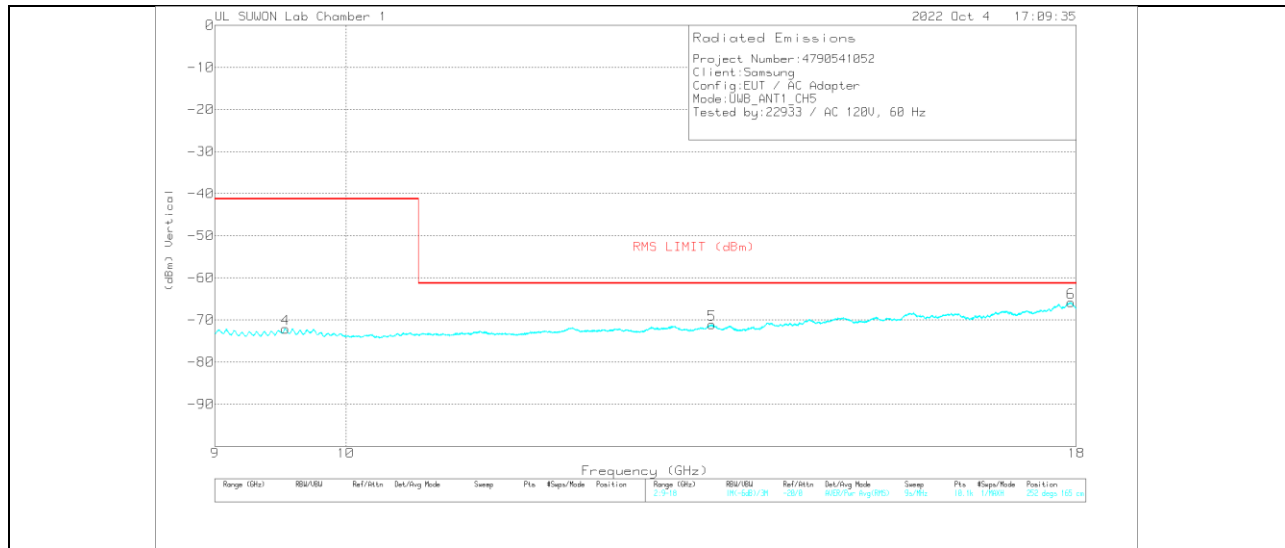


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	9.58188	-80.13	RMS	37.1	-27.3	-15.6	11.8	2	-72.13	-41.3	-30.83	72	165	H
2	13.40911	-81.24	RMS	38.5	-24.8	-15.6	11.8	1	-71.24	-61.3	-9.94	72	165	H
3	17.93049	-86.14	RMS	41.3	-17.5	-15.6	11.8	2	-65.94	-61.3	-4.64	288	165	H
4	9.52574	-80.12	RMS	37	-27.2	-15.6	11.8	2	-72.12	-41.3	-30.82	144	165	V
5	13.42604	-81.09	RMS	38.5	-24.9	-15.6	11.8	1	-71.09	-61.3	-9.79	288	165	V
6	17.92604	-86.03	RMS	41.3	-17.5	-15.6	11.8	2	-65.83	-61.3	-4.53	324	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

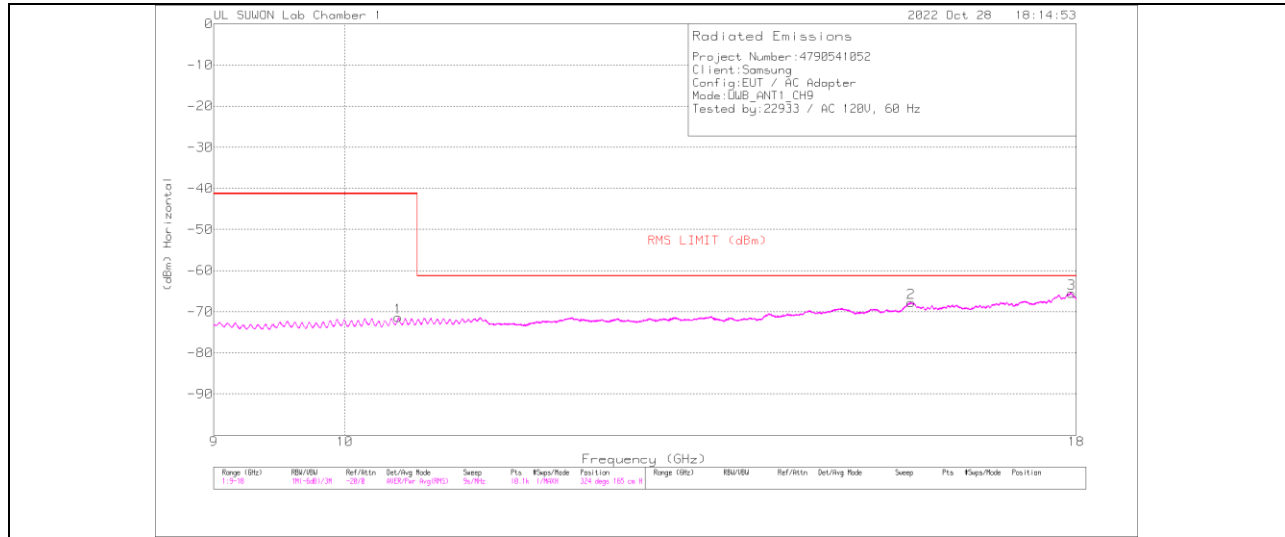

VERTICAL RESULT

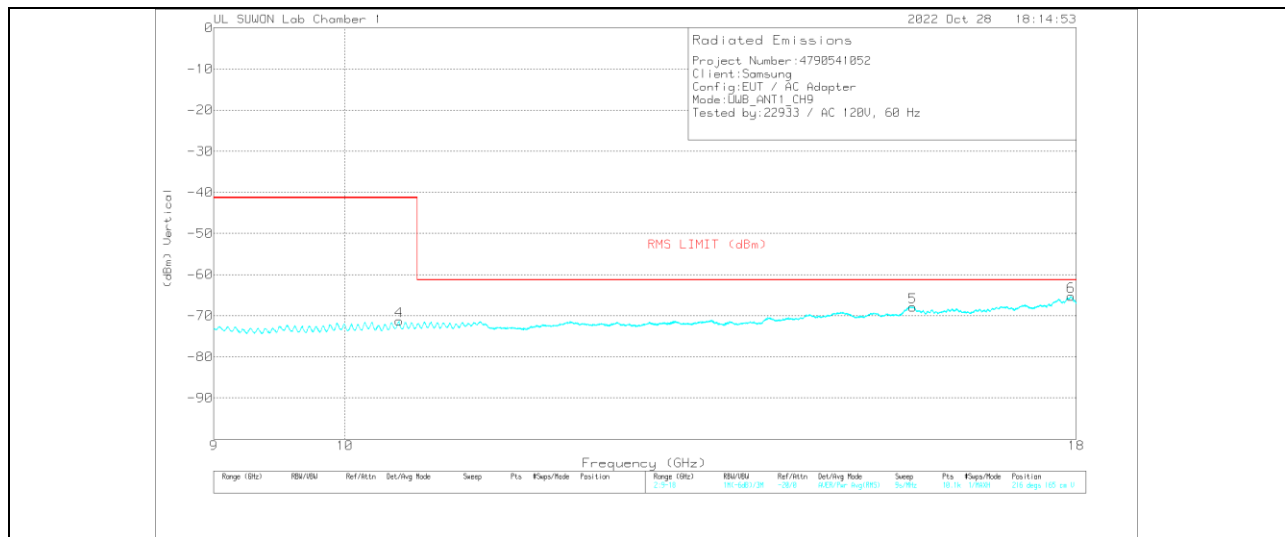

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.44	-79.6	RMS	37.7	-26.9	-15.6	11.8	1.4	-71.4	-41.3	-30.1	252	165	H
2	15.76158	-82.15	RMS	40.4	-22.8	-15.6	11.8	.6	-67.75	-61.3	-6.45	252	165	H
3	17.93139	-85.79	RMS	41.3	-17.5	-15.6	11.8	.3	-65.49	-61.3	-4.19	0	165	H
4	10.44535	-79.62	RMS	37.7	-26.9	-15.6	11.8	1.4	-71.22	-41.3	-29.92	180	165	V
5	15.78119	-82.45	RMS	40.5	-22.6	-15.6	11.8	.5	-67.85	-61.3	-6.55	360	165	V
6	17.92247	-85.62	RMS	41.3	-17.5	-15.6	11.8	.3	-65.32	-61.3	-4.02	325	165	V

RMS - RMS detection

TX Antenna 2

CHANNEL, CH 5

HORIZONTAL RESULT

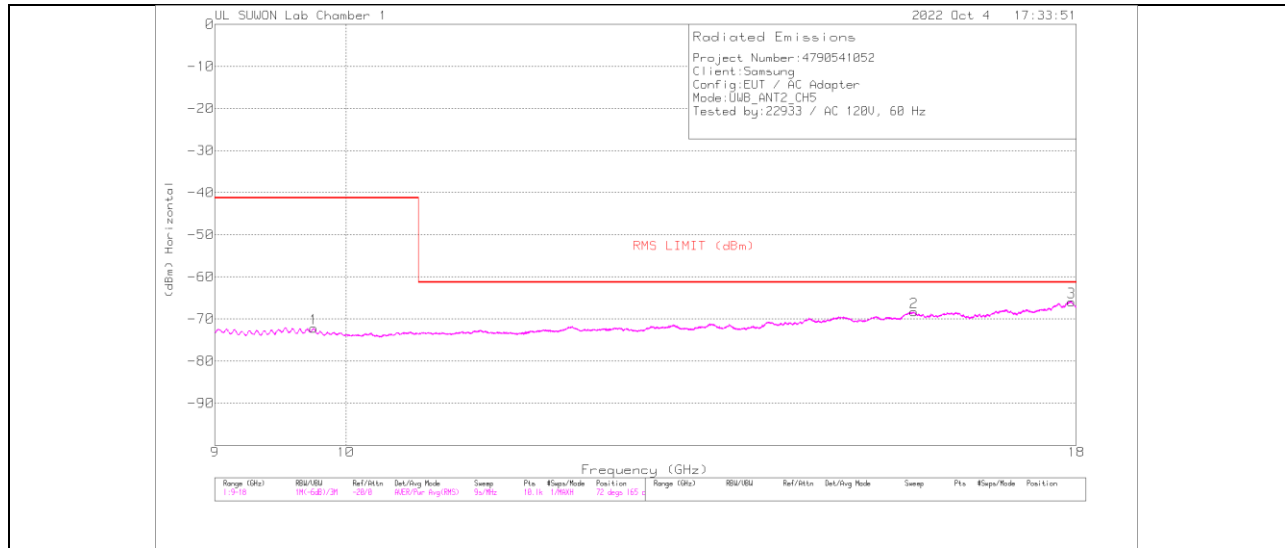

VERTICAL RESULT




Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	ULB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	9.74495	-73.73	RMS	37.3	-27.9	-15.6	11.8	2	-72.19	-41.3	-30.89	108	165	H
2	15.79723	-82.51	RMS	40.5	-22.7	-15.6	11.8	2	-68.31	-61.3	-7.01	324	165	H
3	17.93139	-86.15	RMS	41.3	-17.5	-15.6	11.8	2	-65.95	-61.3	-4.65	72	165	H
4	9.73426	-80	RMS	37.3	-27.9	-15.6	11.8	2	-72.4	-41.3	-31.1	36	165	V
5	15.7598	-82.39	RMS	40.4	-22.9	-15.6	11.8	2	-68.49	-61.3	-7.19	252	165	V
6	17.93317	-85.9	RMS	41.3	-17.6	-15.6	11.8	2	-65.8	-61.3	-4.5	36	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

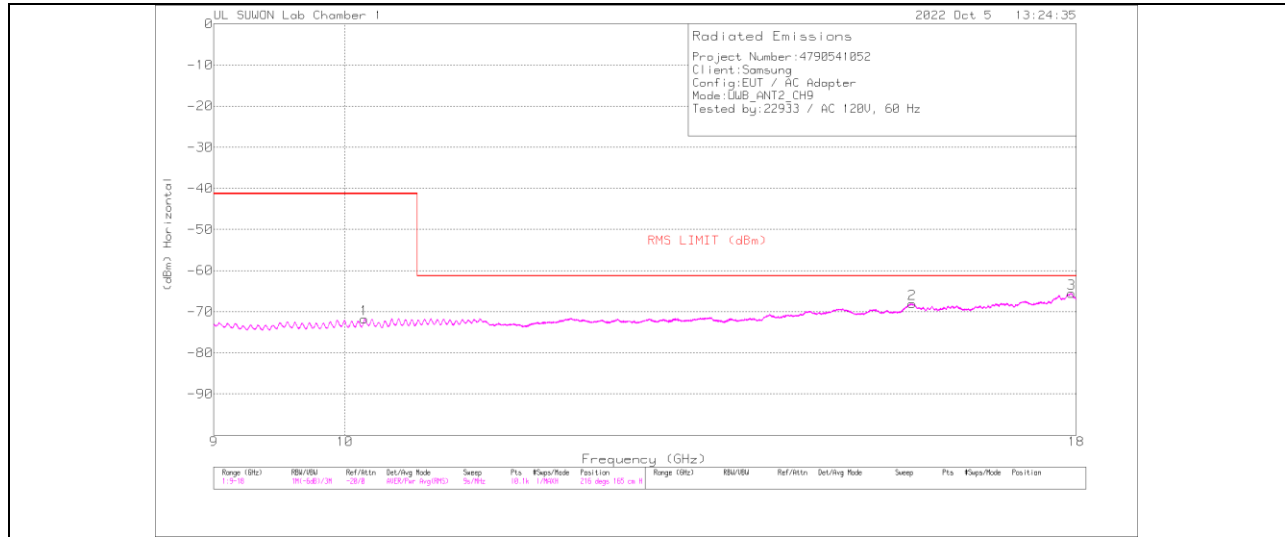

VERTICAL RESULT

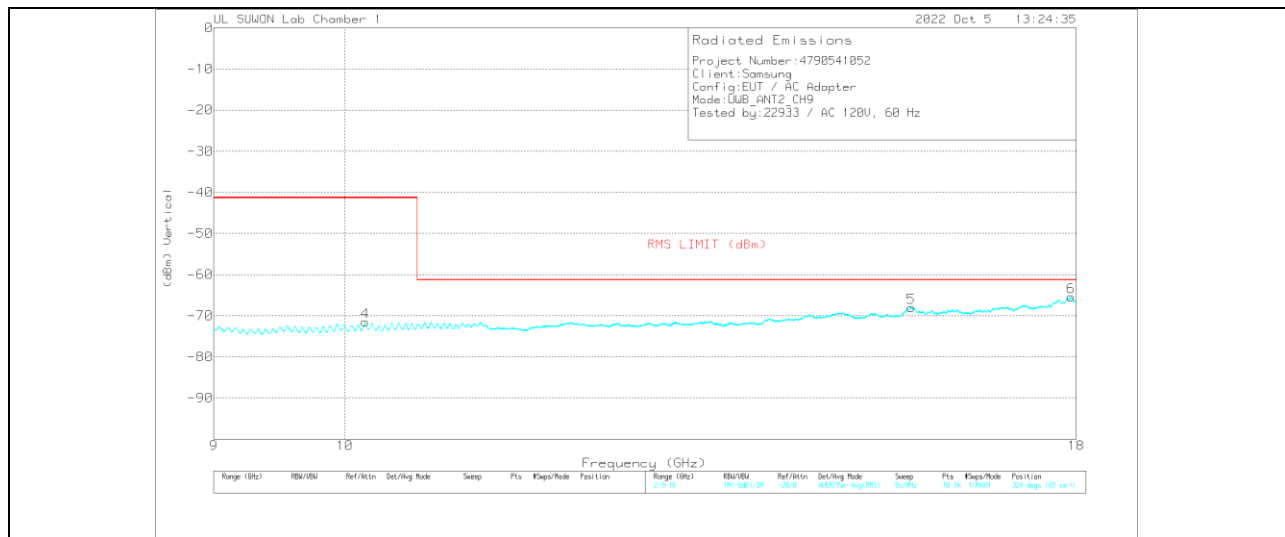

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.15931	-79.8	RMS	37.6	-27.2	-15.6	11.8	1.4	-71.8	-41.3	-30.5	216	165	H
2	15.77584	-82.54	RMS	40.5	-22.7	-15.6	11.8	.5	-68.04	-61.3	-6.74	216	165	H
3	17.93228	-85.75	RMS	41.3	-17.6	-15.6	11.8	.3	-65.55	-61.3	-4.25	144	165	H
4	10.16465	-79.49	RMS	37.6	-27.2	-15.6	11.8	1.4	-71.49	-41.3	-30.19	144	165	V
5	15.76158	-82.37	RMS	40.4	-22.8	-15.6	11.8	.6	-67.97	-61.3	-6.67	324	165	V
6	17.92247	-85.7	RMS	41.3	-17.5	-15.6	11.8	.3	-65.4	-61.3	-4.1	36	165	V


RMS - RMS detection

10.2.3. SPURIOUS EMISSION 18 GHz – 40 GHz


TX Antenna 1

CHANNEL, CH 5

HORIZONTAL RESULT

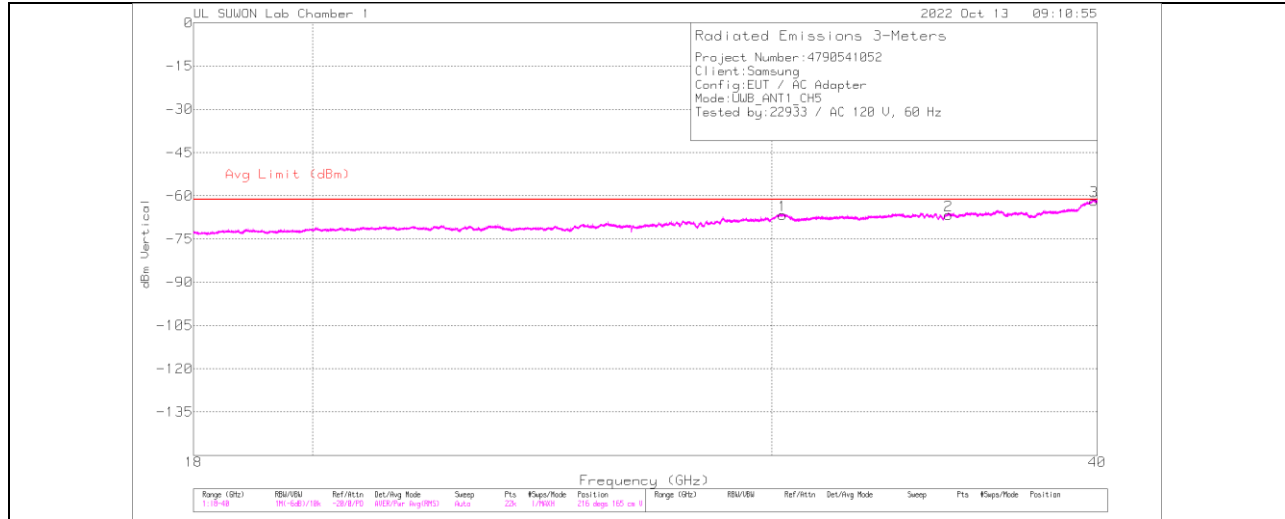

VERTICAL RESULT

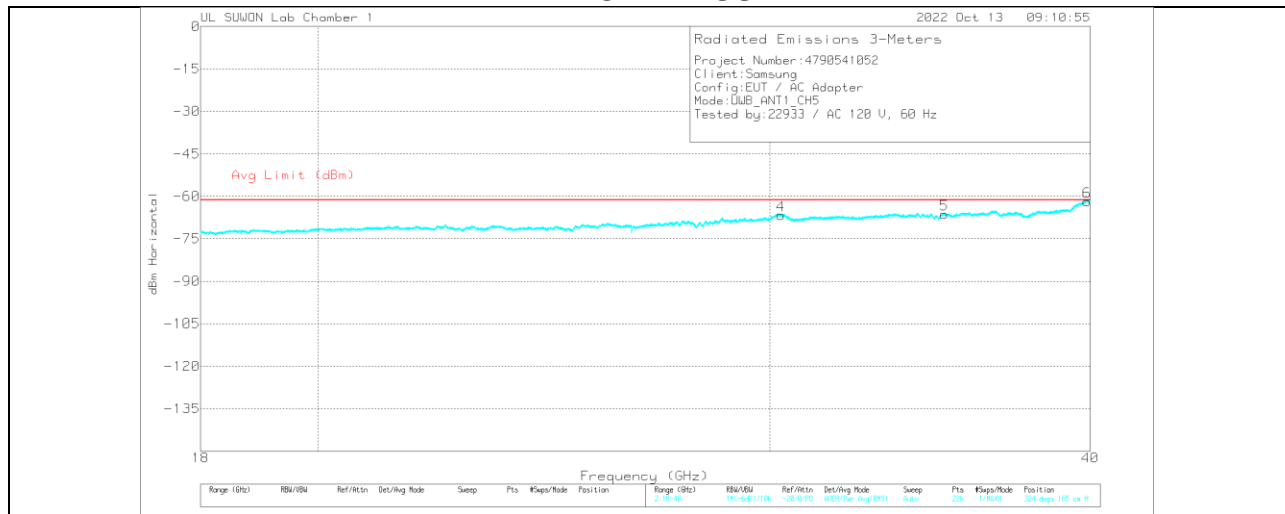

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.29045	-96.03	RMS	13.4	19.8	11.8	-15.6	-66.63	-61.3	-5.33	216	165	H
2	35.07323	-96.06	RMS	11.4	21.7	11.8	-15.6	-66.76	-61.3	-5.46	324	165	H
3	39.88502	-93.84	RMS	12.6	23.3	11.8	-15.6	-61.74	-61.3	-.44	288	165	H
4	30.30445	-96.01	RMS	13.4	19.8	11.8	-15.6	-66.61	-61.3	-5.31	360	165	V
5	35.08923	-95.58	RMS	11.4	21.7	11.8	-15.6	-66.28	-61.3	-4.98	180	165	V
6	39.88502	-93.99	RMS	12.6	23.3	11.8	-15.6	-61.89	-61.3	-.59	324	165	V

RMS - RMS detection


Radiated Emissions

Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
39.88502	-94.6	RMS	12.6	23.3	11.8	-15.6	-62.5	-61.3	-1.2	0	165	H
39.88502	-94.41	RMS	12.6	23.3	11.8	-15.6	-62.31	-61.3	-1.01	0	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

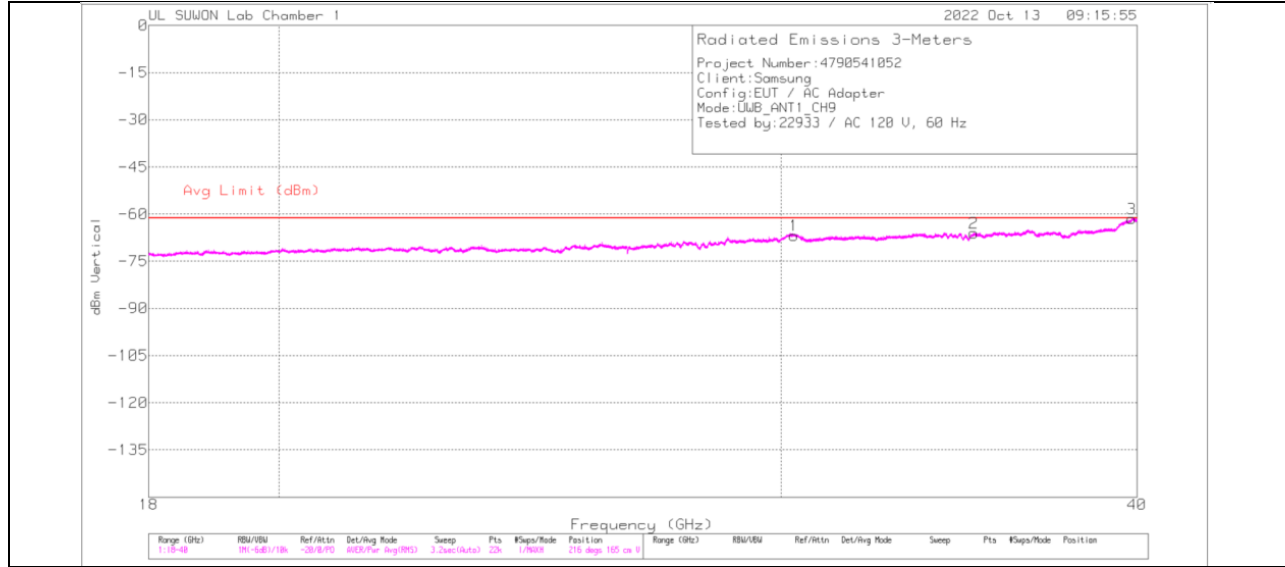

VERTICAL RESULT

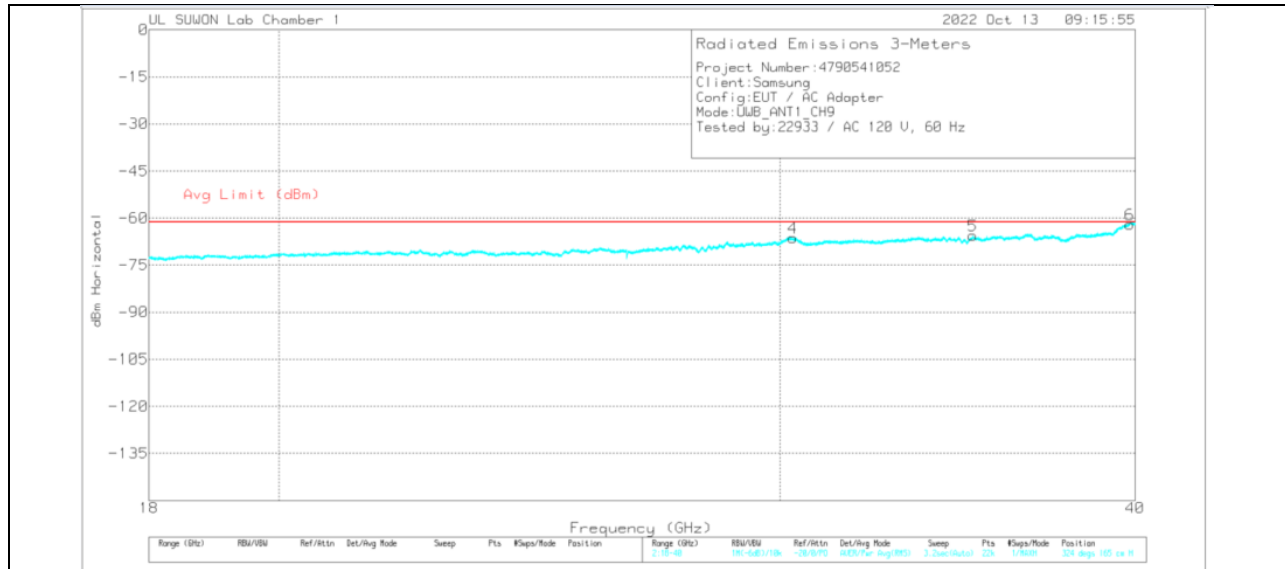

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.24045	-95.35	RMS	13.5	19.8	11.8	-15.6	-65.85	-61.3	-4.55	144	165	H
2	33.5703	-96.05	RMS	12.6	21.1	11.8	-15.6	-66.15	-61.3	-4.85	180	165	H
3	39.75002	-93.73	RMS	12.4	23.2	11.8	-15.6	-61.93	-61.3	-.63	216	165	H
4	30.26045	-95.51	RMS	13.5	19.8	11.8	-15.6	-66.01	-61.3	-4.71	324	165	V
5	33.6223	-95.82	RMS	12.5	21	11.8	-15.6	-66.12	-61.3	-4.82	180	165	V
6	39.71502	-93.65	RMS	12.4	23.1	11.8	-15.6	-61.95	-61.3	-.65	288	165	V

RMS - RMS detection

Radiated Emissions


Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
39.75002	-96.65	RMS	12.4	23.2	11.8	-15.6	-64.85	-61.3	-3.55	0	165	H
39.71502	-94.81	RMS	12.4	23.1	11.8	-15.6	-63.11	-61.3	-1.81	0	165	V

RMS - RMS detection


TX Antenna 2

CHANNEL, CH 5

HORIZONTAL RESULT

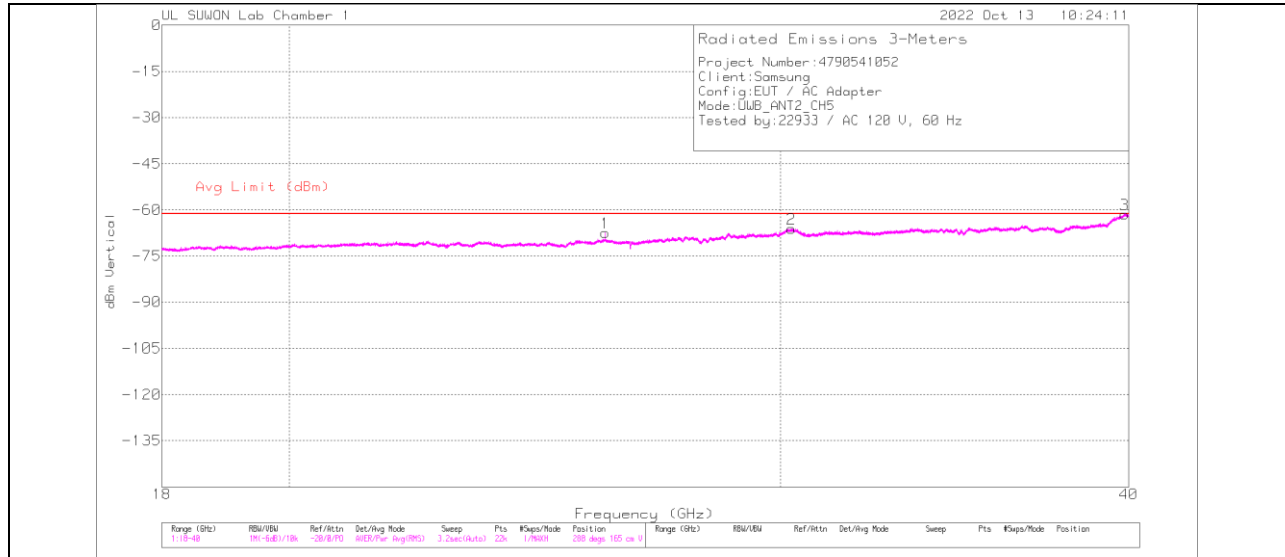

VERTICAL RESULT

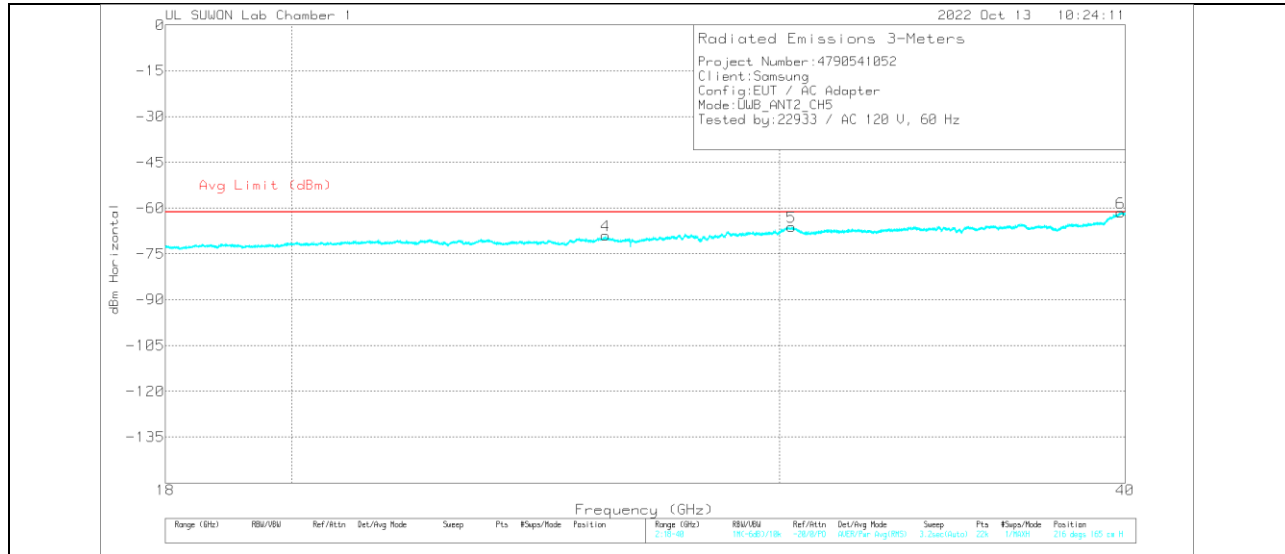

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	25.95864	-89.16	RMS	7.4	18.2	11.8	-15.6	-67.36	-61.3	-6.06	180	165	H
2	30.27445	-95.58	RMS	13.4	19.8	11.8	-15.6	-66.18	-61.3	-4.88	252	165	H
3	39.86602	-93.58	RMS	12.6	23.4	11.8	-15.6	-61.38	-61.3	-.08	288	165	H
4	25.95864	-90.76	RMS	7.4	18.2	11.8	-15.6	-68.96	-61.3	-7.66	216	165	V
5	30.29945	-95.48	RMS	13.4	19.8	11.8	-15.6	-66.08	-61.3	-4.78	360	165	V
6	39.85002	-93.51	RMS	12.5	23.3	11.8	-15.6	-61.51	-61.3	-.21	216	165	V

RMS - RMS detection


Radiated Emissions

Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
39.85002	-95.05	RMS	12.5	23.3	11.8	-15.6	-63.05	-61.3	-1.75	0	165	H
39.85002	-94.5	RMS	12.5	23.3	11.8	-15.6	-62.5	-61.3	-1.2	0	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

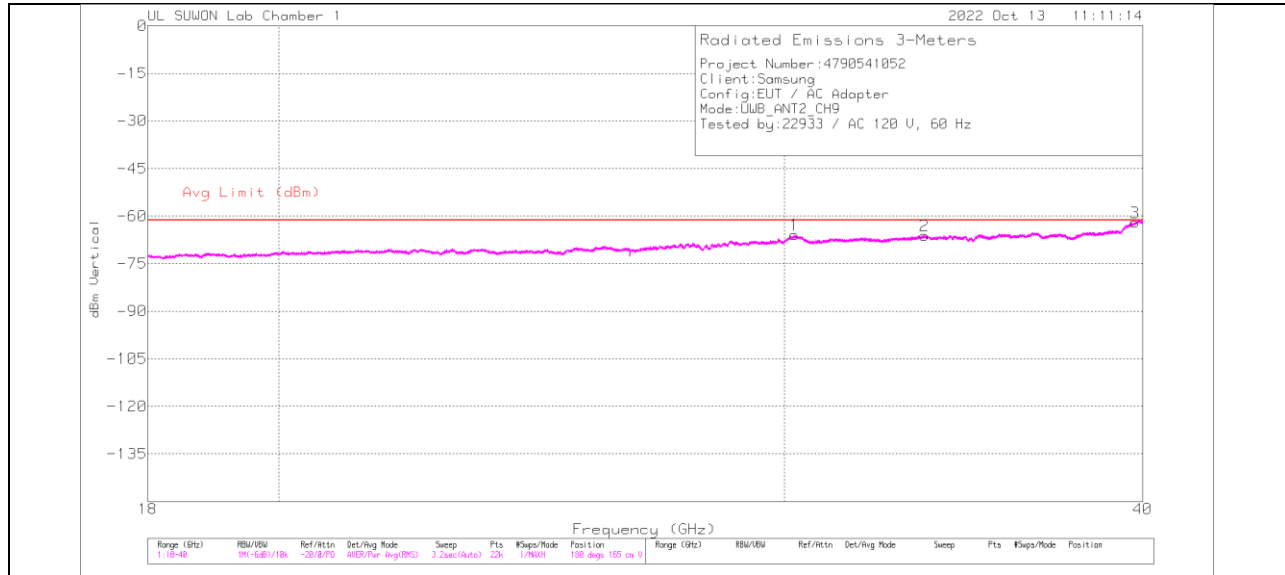

VERTICAL RESULT

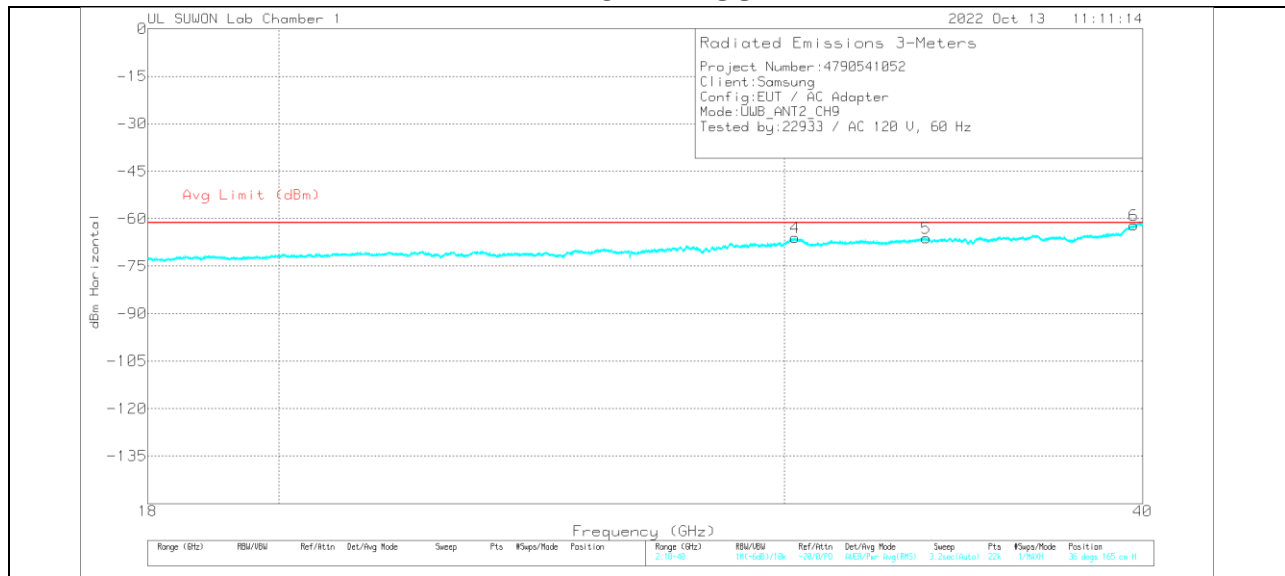

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.24045	-95.35	RMS	13.5	19.8	11.8	-15.6	-65.85	-61.3	-4.55	144	165	V
2	33.5703	-96.05	RMS	12.6	21.1	11.8	-15.6	-66.15	-61.3	-4.85	180	165	V
3	39.75002	-93.73	RMS	12.4	23.2	11.8	-15.6	-61.93	-61.3	-0.63	216	165	V
4	30.26045	-95.51	RMS	13.5	19.8	11.8	-15.6	-66.01	-61.3	-4.71	324	165	H
5	33.6223	-95.82	RMS	12.5	21	11.8	-15.6	-66.12	-61.3	-4.82	180	165	H
6	39.71502	-93.65	RMS	12.4	23.1	11.8	-15.6	-61.95	-61.3	-0.65	288	165	H

RMS - RMS detection

Radiated Emissions

Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
39.75002	-96.65	RMS	12.4	23.2	11.8	-15.6	-64.85	-61.3	-3.55	0	165	V
39.71502	-94.81	RMS	12.4	23.1	11.8	-15.6	-63.11	-61.3	-1.81	0	165	H


RMS - RMS detection

10.2.4. SPURIOUS EMISSION 1164 MHz – 1240 MHz


TX Antenna 1

CHANNEL, CH 5

HORIZONTAL RESULT

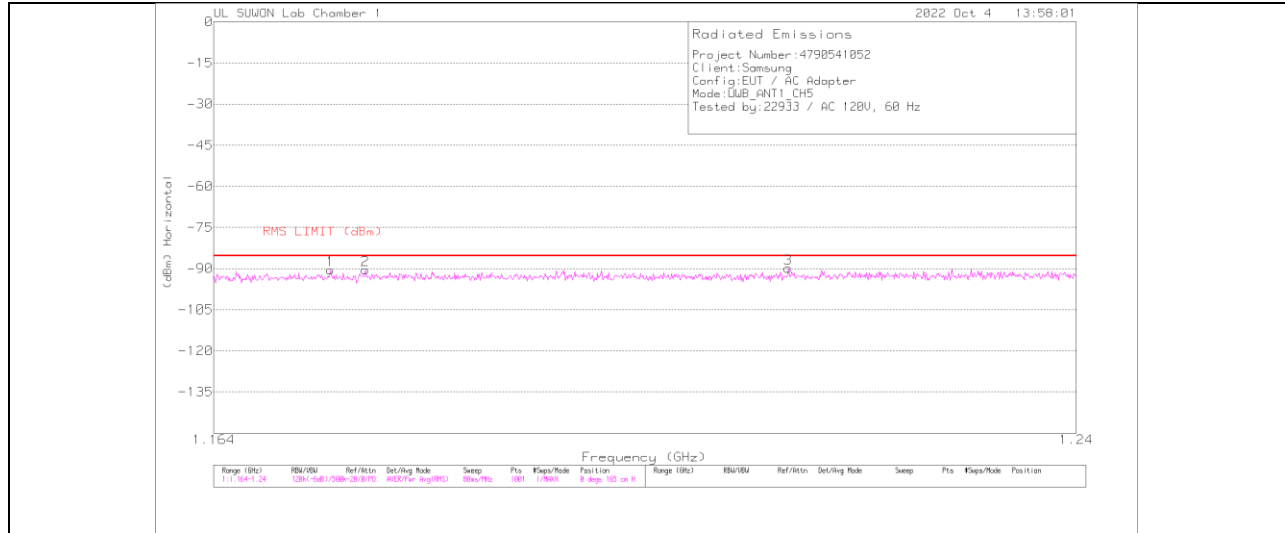

VERTICAL RESULT

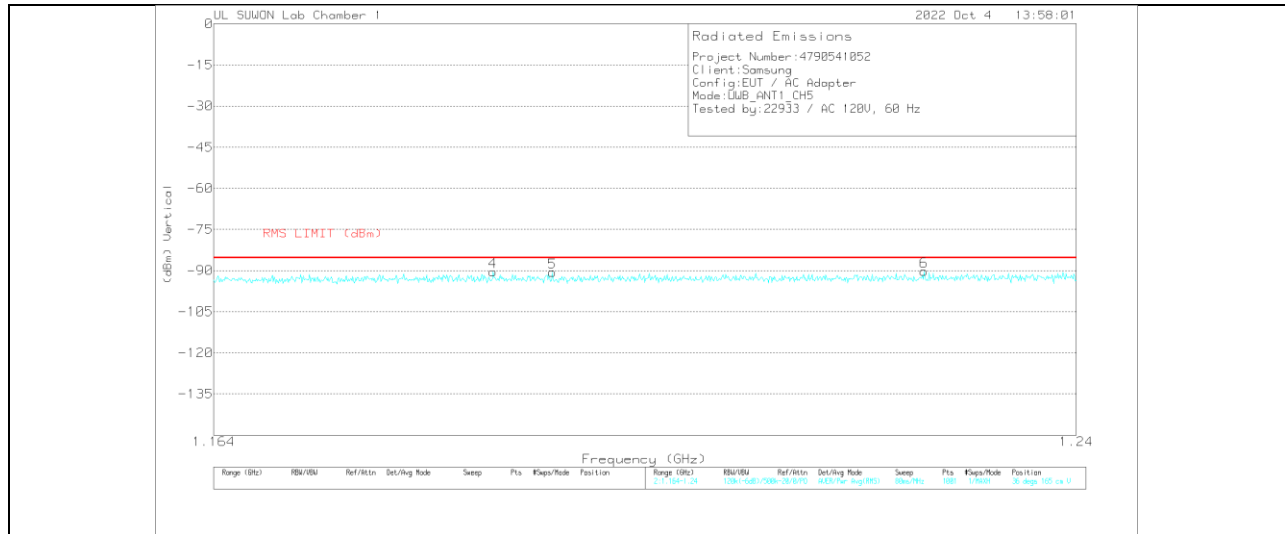


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	LWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17403	-75.73	RMS	28.1	-39.6	-15.6	11.8	.6	-90.43	-85.3	-5.13	143	165	H
2	1.177	-75.8	RMS	28.2	-39.6	-15.6	11.8	.6	-90.4	-85.3	-5.1	252	165	H
3	1.21408	-75.68	RMS	28.6	-39.6	-15.6	11.8	.6	-89.88	-85.3	-4.58	288	165	H
4	1.18809	-75.94	RMS	28.3	-39.6	-15.6	11.8	.6	-90.44	-85.3	-5.14	36	165	V
5	1.19326	-76.1	RMS	28.3	-39.6	-15.6	11.8	.6	-90.6	-85.3	-5.3	180	165	V
6	1.22624	-76.3	RMS	28.8	-39.6	-15.6	11.8	.6	-90.3	-85.3	-5	360	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

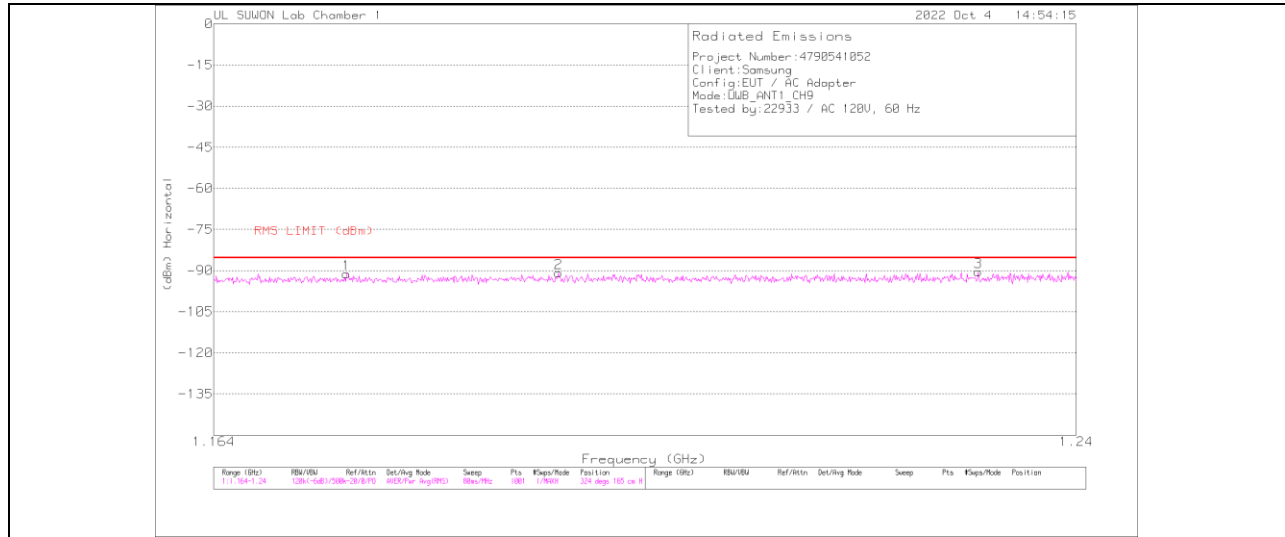

VERTICAL RESULT

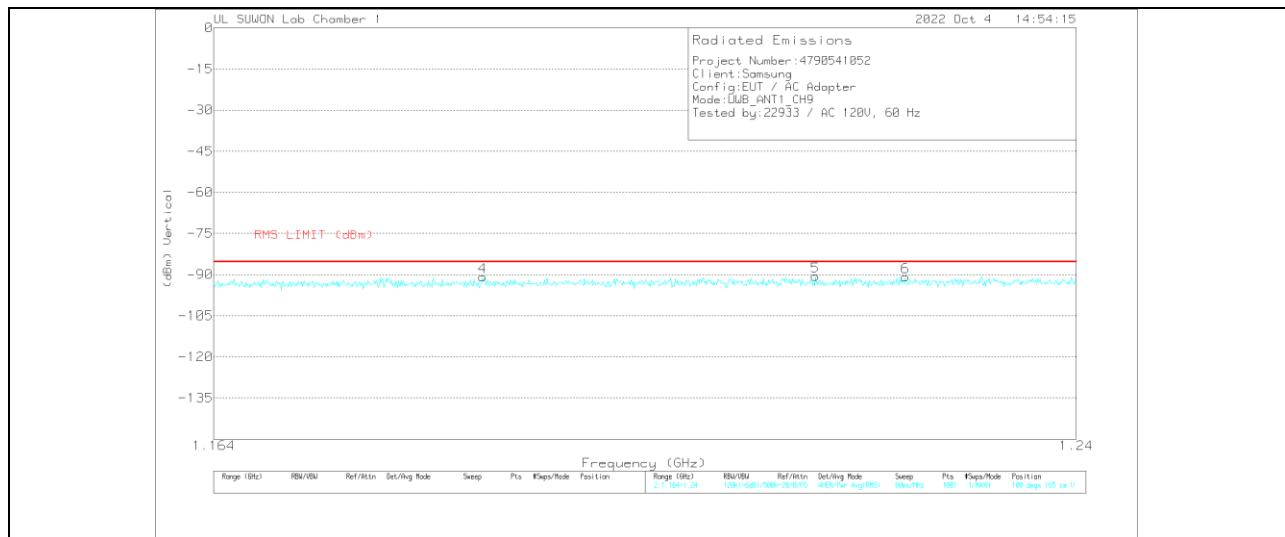

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.1754	-76.4	RMS	28.2	-39.6	-15.6	11.8	.5	-91.1	-85.3	-5.8	108	165	H
2	1.19379	-76.37	RMS	28.4	-39.6	-15.6	11.8	.5	-90.87	-85.3	-5.57	288	165	H
3	1.23111	-76.39	RMS	28.8	-39.5	-15.6	11.8	.5	-90.39	-85.3	-5.09	108	165	H
4	1.18718	-76.27	RMS	28.3	-39.6	-15.6	11.8	.5	-90.87	-85.3	-5.57	72	165	V
5	1.21652	-76.31	RMS	28.6	-39.6	-15.6	11.8	.5	-90.61	-85.3	-5.31	215	165	V
6	1.22457	-76.58	RMS	28.7	-39.6	-15.6	11.8	.5	-90.78	-85.3	-5.48	144	165	V

RMS - RMS detection


TX Antenna 2

CHANNEL, CH 5

HORIZONTAL RESULT

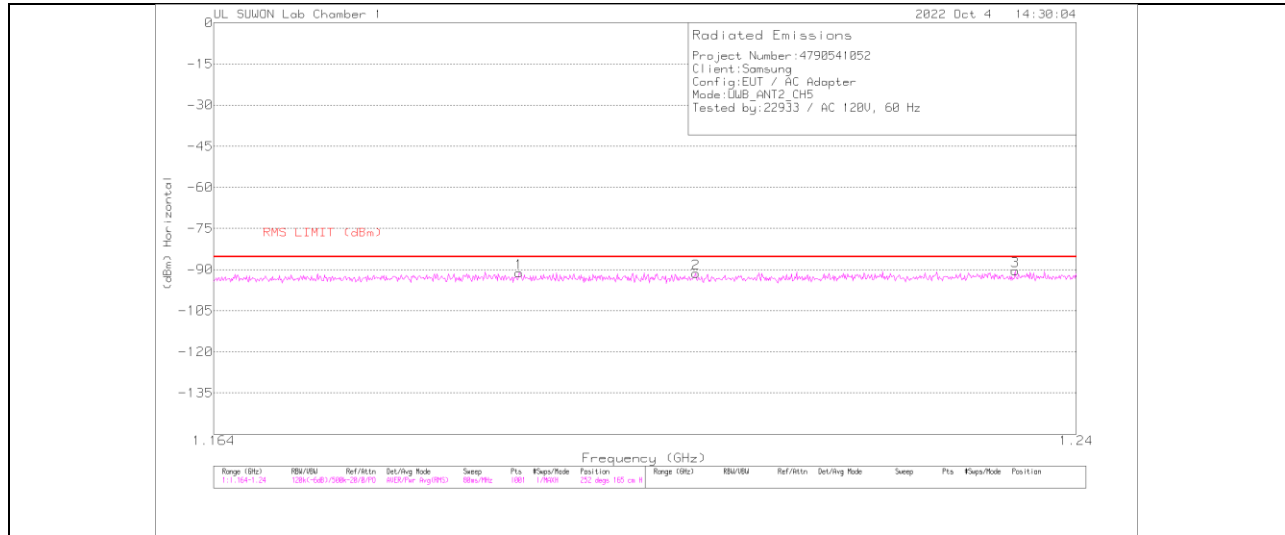

VERTICAL RESULT

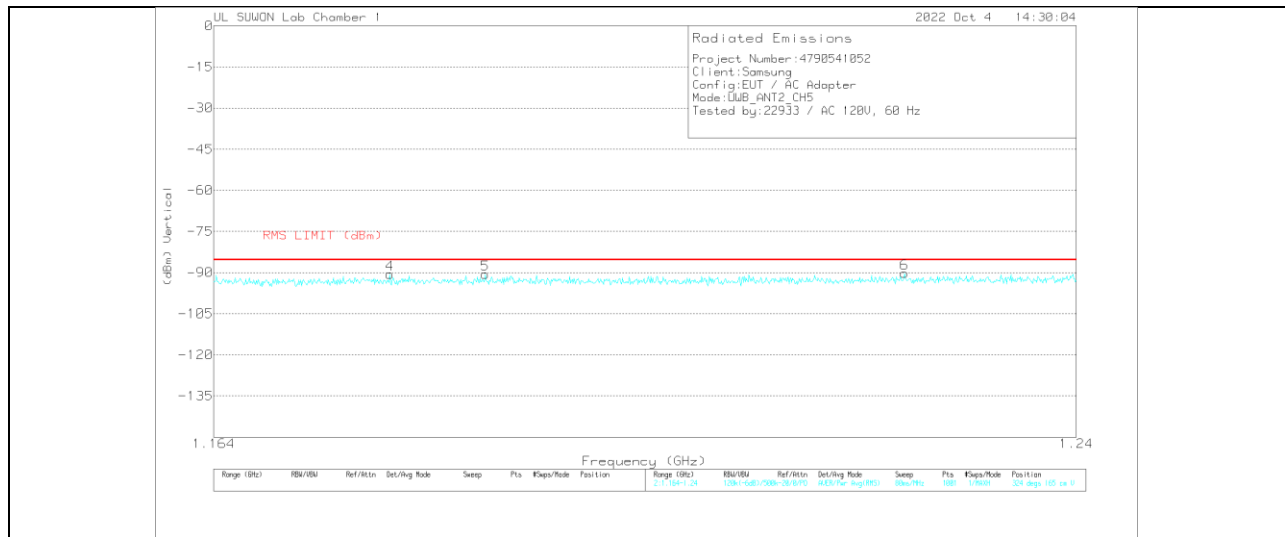


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.19037	-76.67	RMS	28.3	-39.6	-15.6	11.8	.6	-91.17	-85.3	-5.87	144	165	H
2	1.20588	-77.11	RMS	28.5	-39.6	-15.6	11.8	.6	-91.41	-85.3	-6.11	252	165	H
3	1.23445	-76.49	RMS	28.9	-39.6	-15.6	11.8	.6	-90.39	-85.3	-5.09	72	165	H
4	1.17912	-76.1	RMS	28.2	-39.6	-15.6	11.8	.6	-90.7	-85.3	-5.4	180	165	V
5	1.18741	-76.05	RMS	28.3	-39.6	-15.6	11.8	.6	-90.55	-85.3	-5.25	72	165	V
6	1.2245	-76.2	RMS	28.7	-39.6	-15.6	11.8	.6	-90.3	-85.3	-5	180	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

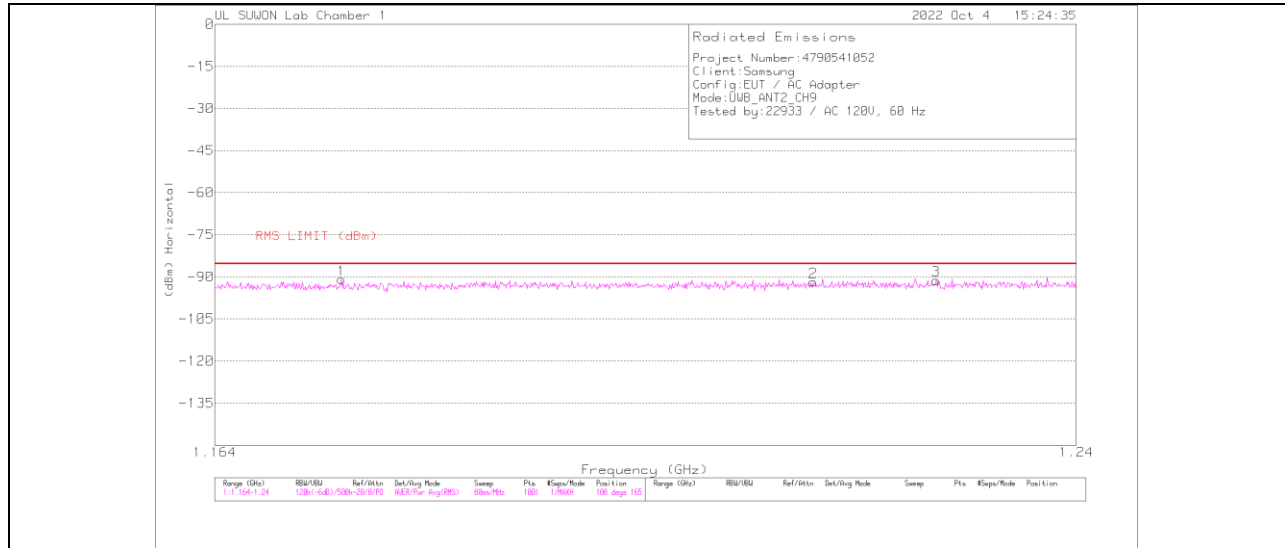

VERTICAL RESULT

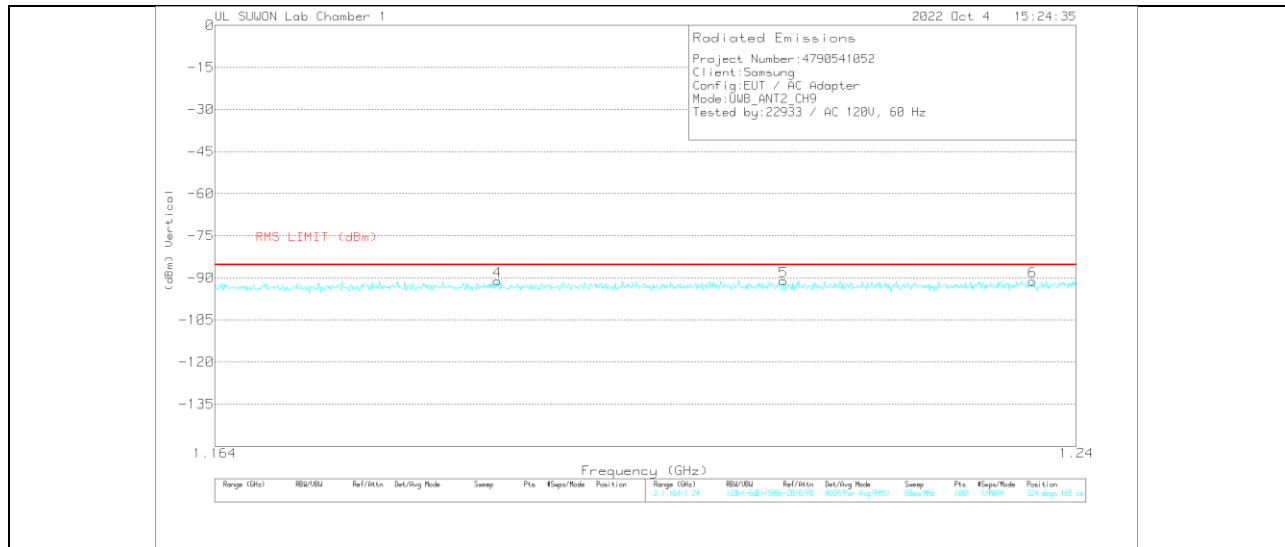

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_90168717	0.9618GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	ULB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17487	-76.2	RMS	28.2	-39.6	-15.6	11.8	.5	-90.9	-85.3	-5.6	324	165	H
2	1.21629	-77.49	RMS	28.6	-39.6	-15.6	11.8	.5	-91.79	-85.3	-6.49	216	165	H
3	1.22731	-77.08	RMS	28.9	-39.6	-15.6	11.8	.5	-91.18	-85.3	-5.88	288	165	H
4	1.1884	-76.48	RMS	28.3	-39.6	-15.6	11.8	.5	-91.08	-85.3	-5.78	0	165	V
5	1.21363	-76.78	RMS	28.6	-39.6	-15.6	11.8	.5	-91.08	-85.3	-5.78	144	165	V
6	1.23605	-77.17	RMS	28.9	-39.6	-15.6	11.8	.5	-91.17	-85.3	-5.87	144	165	V


RMS - RMS detection

10.2.5. SPURIOUS EMISSION 1559 MHz – 1610 MHz


TX Antenna 1

CHANNEL, CH 5

HORIZONTAL RESULT

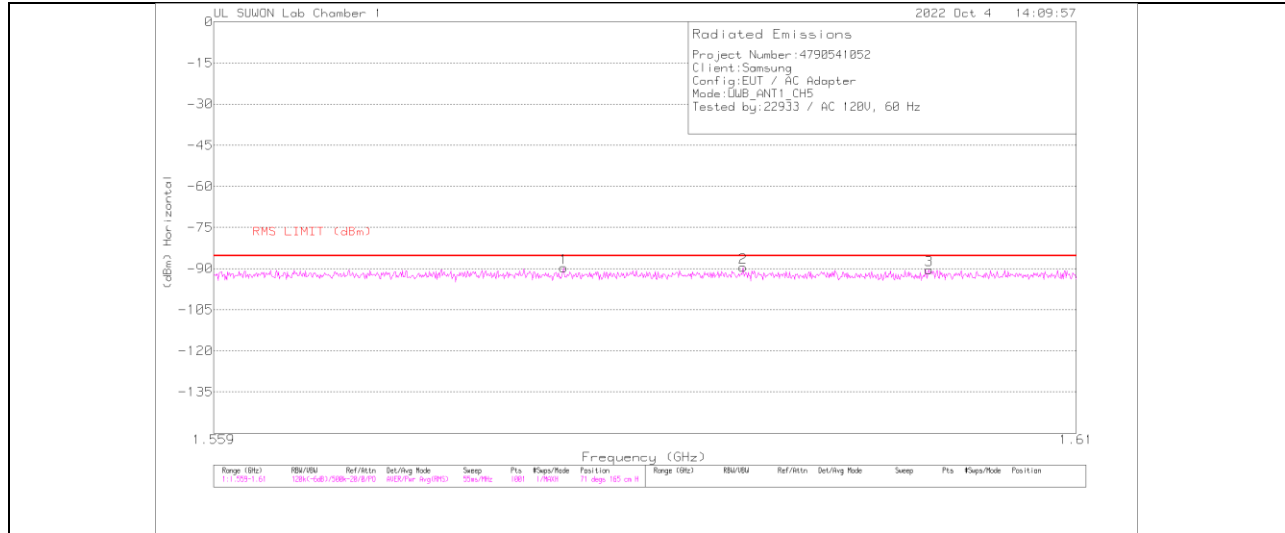

VERTICAL RESULT

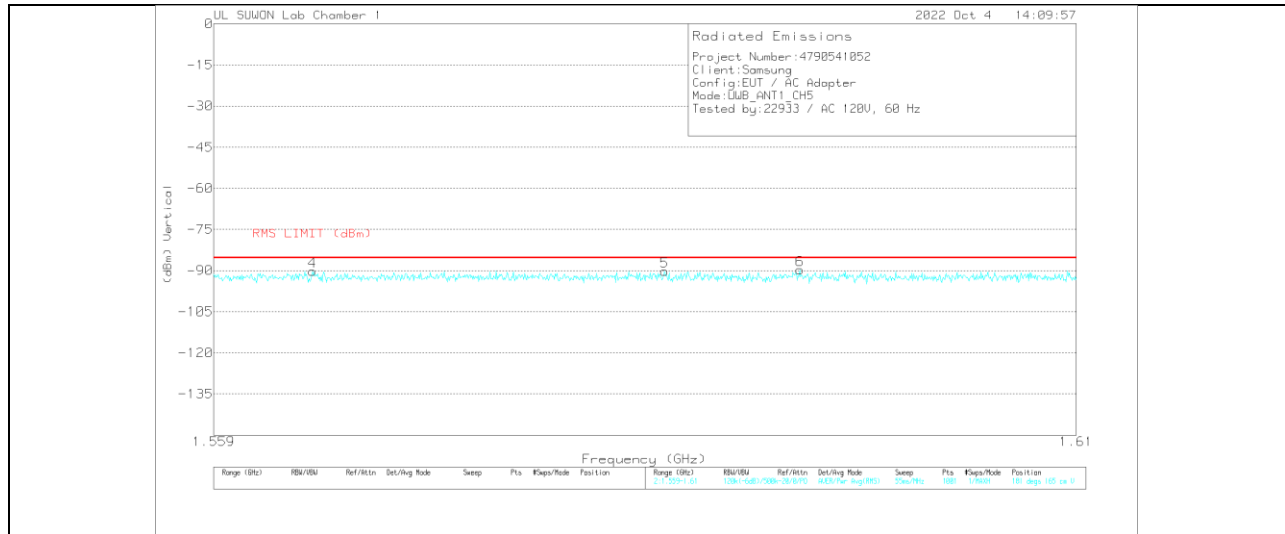


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117.00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	LWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.5795	-76.03	RMS	28.5	-39.1	-15.6	11.8	.7	-89.73	-85.3	-4.43	323	165	H
2	1.59011	-75.05	RMS	28.5	-39	-15.6	11.8	.7	-89.45	-85.3	-4.15	216	165	H
3	1.60118	-76.68	RMS	28.5	-39.1	-15.6	11.8	.7	-90.38	-85.3	-5.08	288	165	H
4	1.56476	-76.49	RMS	28.5	-39.1	-15.6	11.8	.6	-90.29	-85.3	-4.99	36	165	V
5	1.59547	-76.61	RMS	28.5	-39	-15.6	11.8	.7	-90.21	-85.3	-4.91	36	165	V
6	1.59348	-76.05	RMS	28.5	-39.1	-15.6	11.8	.7	-89.75	-85.3	-4.45	73	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

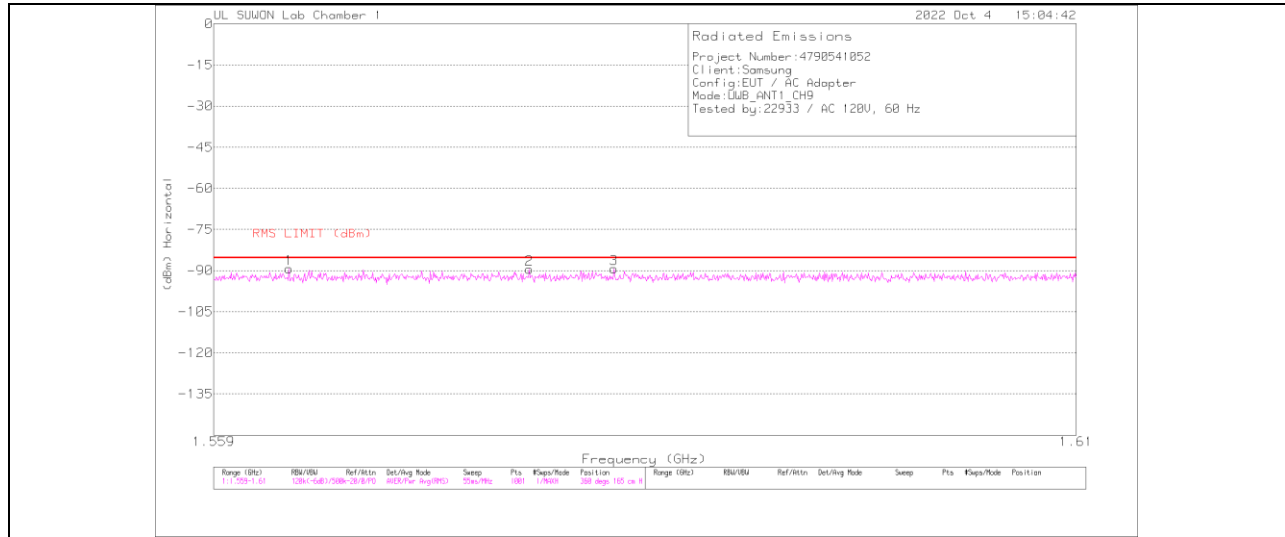

VERTICAL RESULT

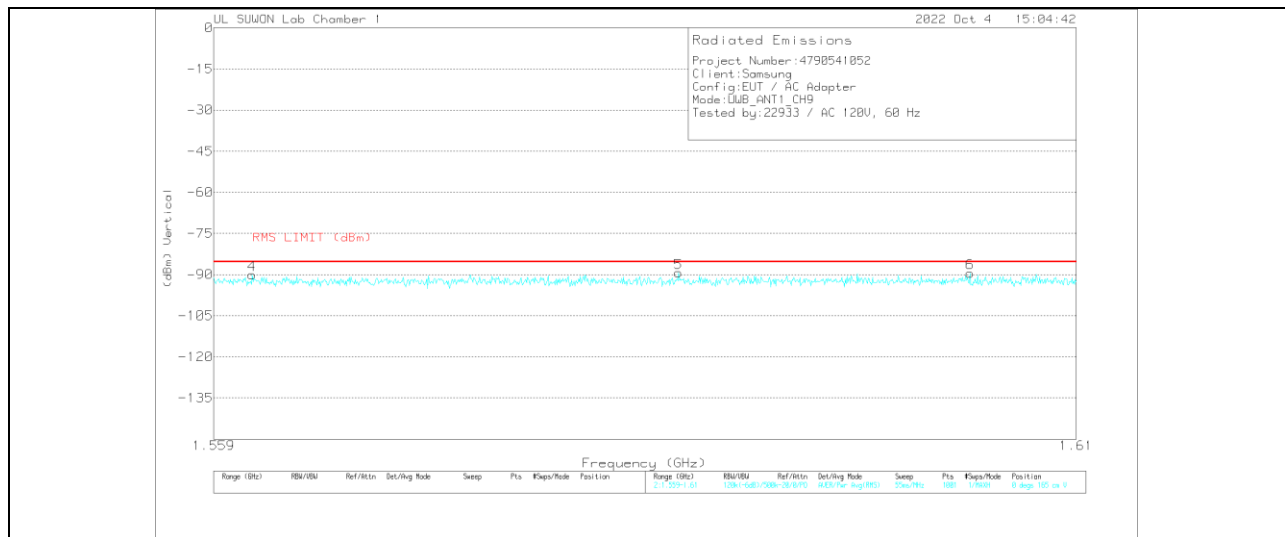

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHzz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.56339	-75.56	RMS	28.5	-39.1	-15.6	11.8	.6	-89.36	-85.3	-4.06	145	165	H
2	1.57746	-75.87	RMS	28.5	-39	-15.6	11.8	.7	-89.47	-85.3	-4.17	217	165	H
3	1.58246	-75.7	RMS	28.5	-39	-15.6	11.8	.7	-89.3	-85.3	-4	324	165	H
4	1.56124	-76.32	RMS	28.5	-39.1	-15.6	11.8	.6	-90.12	-85.3	-4.82	71	165	V
5	1.58629	-75.75	RMS	28.5	-39	-15.6	11.8	.7	-89.35	-85.3	-4.05	179	165	V
6	1.60363	-75.7	RMS	28.5	-39.1	-15.6	11.8	.7	-89.4	-85.3	-4.1	0	165	V

RMS - RMS detection


TX Antenna 2

CHANNEL, CH 5

HORIZONTAL RESULT

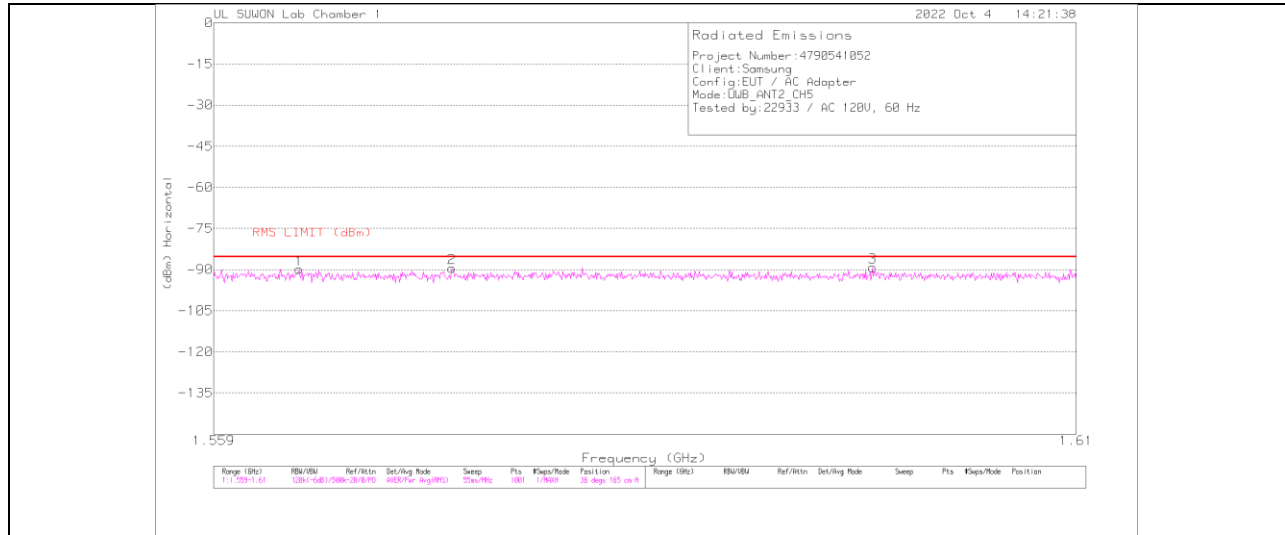

VERTICAL RESULT

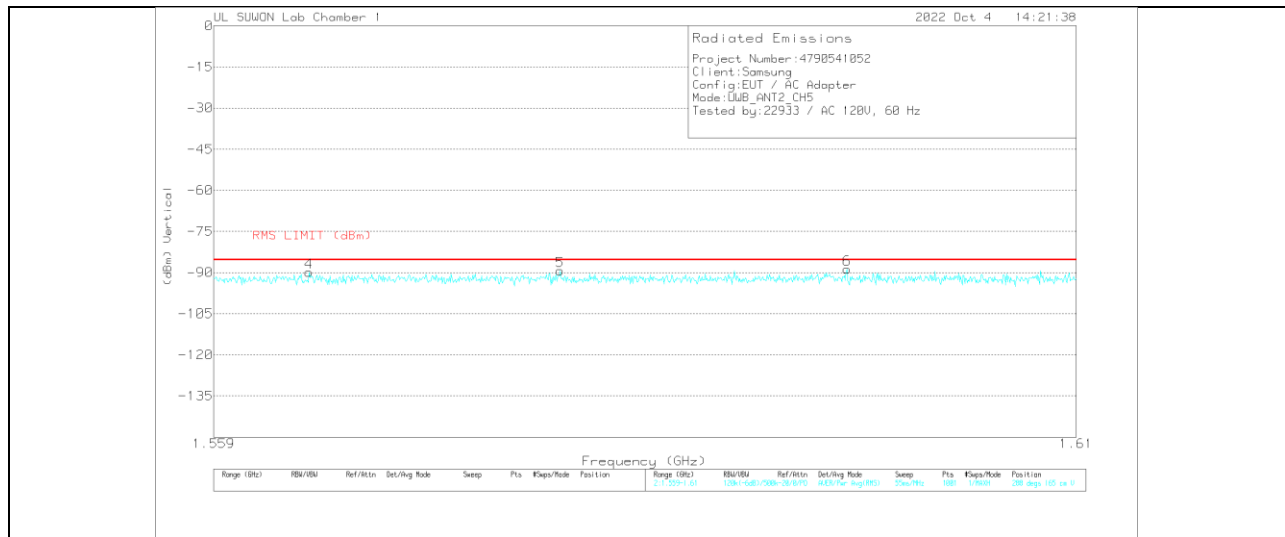


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.9618GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1.564	-76.14	RMS	28.5	-39.1	-15.6	11.8	.6	-89.94	-85.3	-4.64	215	165	H
2	1.57292	-75.6	RMS	28.5	-39.1	-15.6	11.8	.6	-89.4	-85.3	-4.1	324	165	H
3	1.59781	-75.51	RMS	28.5	-39.1	-15.6	11.8	.7	-89.21	-85.3	-3.91	0	165	H
4	1.56456	-76.09	RMS	28.5	-39.1	-15.6	11.8	.6	-89.89	-85.3	-4.59	73	165	V
5	1.5793	-75.66	RMS	28.5	-39.1	-15.6	11.8	.7	-89.36	-85.3	-4.06	108	165	V
6	1.53628	-75.09	RMS	28.5	-39.1	-15.6	11.8	.7	-89.79	-85.3	-3.49	180	165	V


RMS - RMS detection

CHANNEL, CH 9

HORIZONTAL RESULT

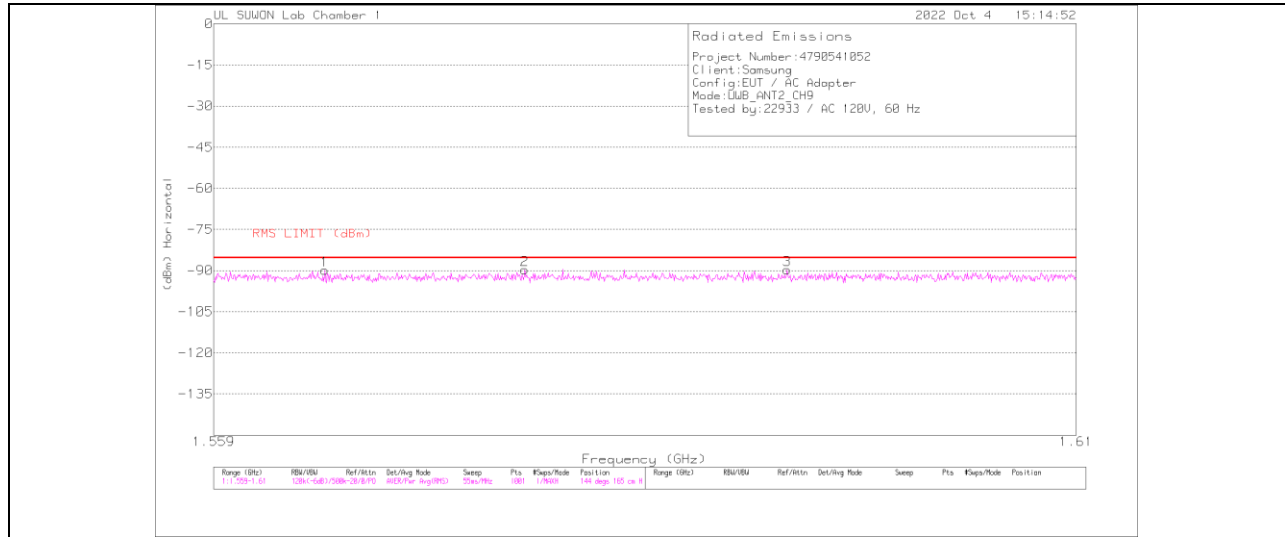

VERTICAL RESULT

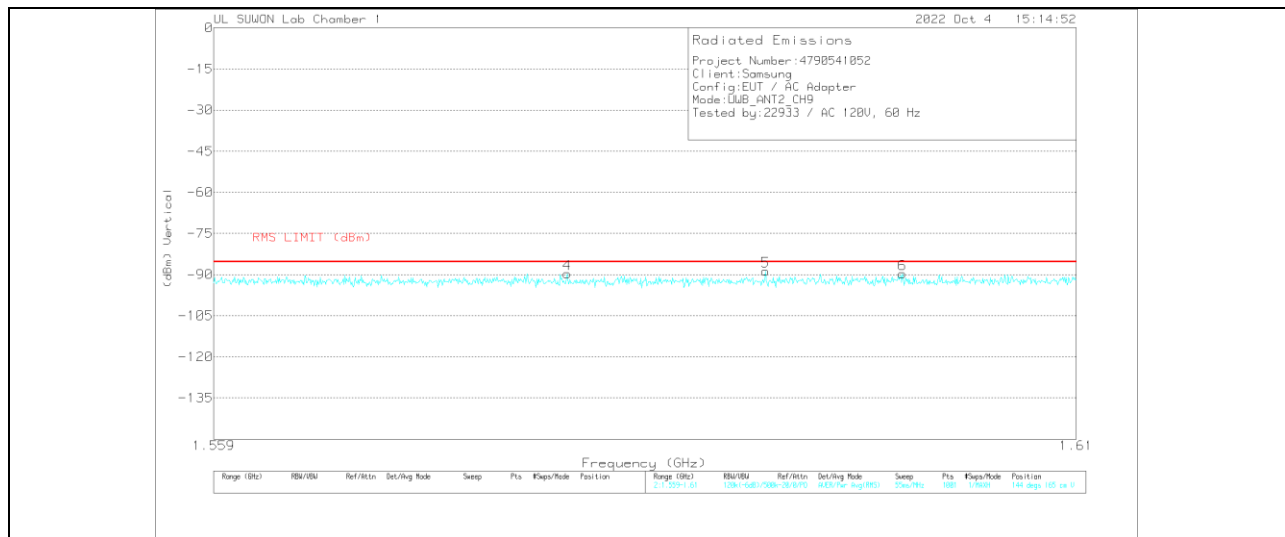


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.56548	-76.07	RMS	28.5	-39.1	-15.6	11.8	.6	-89.87	-85.3	-4.57	73	165	H
2	1.57721	-75.97	RMS	28.5	-39.1	-15.6	11.8	.7	-89.67	-85.3	-4.37	108	165	H
3	1.59271	-75.97	RMS	28.5	-39.1	-15.6	11.8	.7	-89.67	-85.3	-4.37	360	165	H
4	1.57971	-76.01	RMS	28.5	-39.1	-15.6	11.8	.7	-89.71	-85.3	-4.41	144	165	V
5	1.59144	-74.96	RMS	28.5	-39.1	-15.6	11.8	.7	-88.66	-85.3	-3.36	108	165	V
6	1.5996	-75.9	RMS	28.5	-39.1	-15.6	11.8	.7	-89.6	-85.3	-4.3	108	165	V

RMS - RMS detection

10.3. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz

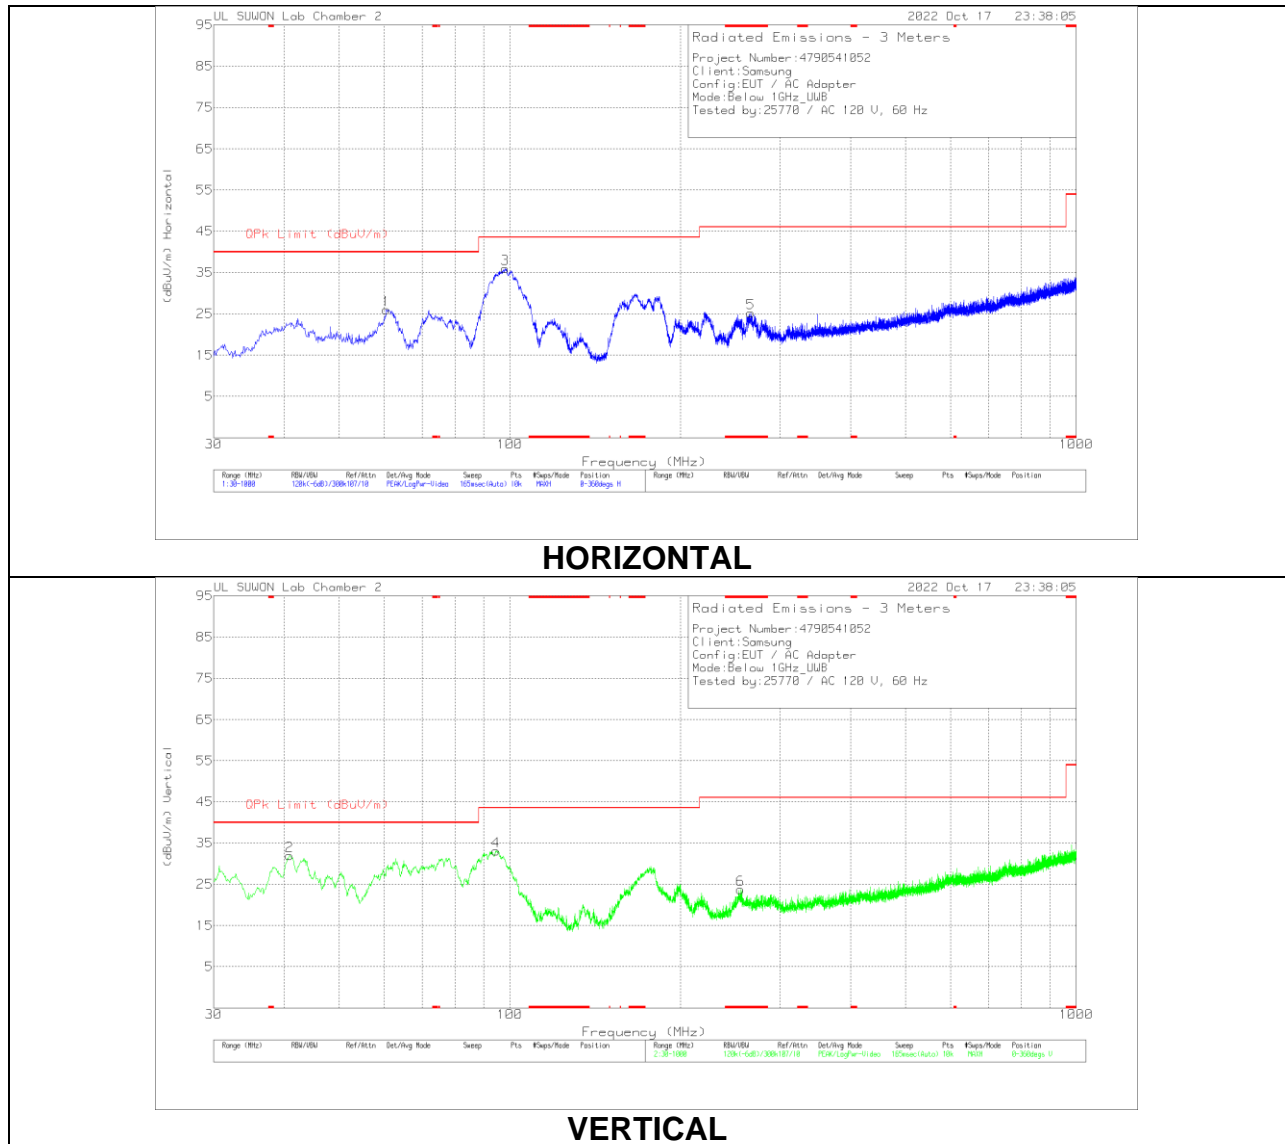

Below 1GHz Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	OPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	60.555	38.74	Pk	18.5	-31.2	0	26.04	40	-13.96	0-360	300	H
3	98.191	49.36	Pk	17.2	-30.6	0	35.96	43.52	-7.56	0-360	200	H
5	* 266.195	36.23	Pk	18.3	-29.3	0	25.23	46.02	-20.79	0-360	100	H
2	40.864	44.24	Pk	19	-31.3	0	31.94	40	-8.06	0-360	100	V
4	94.505	47.33	Pk	16.5	-30.7	0	33.13	43.52	-10.39	0-360	100	V
6	* 255.428	34.36	Pk	18.7	-29.3	0	23.76	46.02	-22.26	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.

RESULTS

AC Line test was performed worst case. (Highest Power)
ANT1 / CH9 / SP0 / BPRF9 / Packet Length 4

11.1.1. AC Power Line

LINE 1 RESULTS

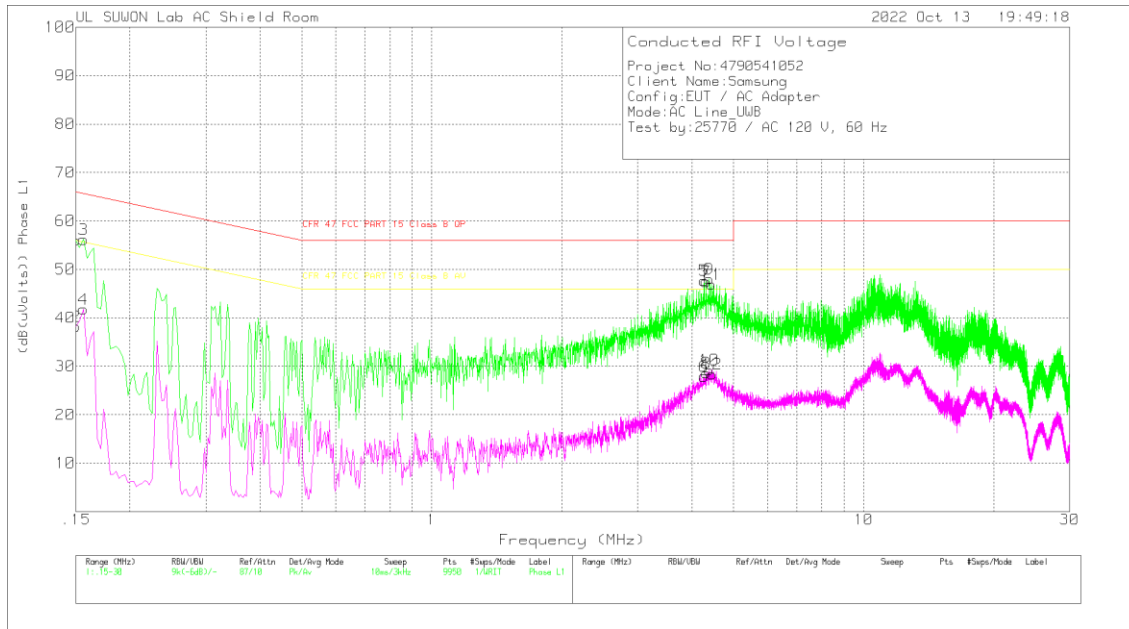

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.15	46.14	Pk	9.7	.1	55.94	66	-10.06	-	-
2	.15	28.41	Av	9.7	.1	38.21	-	-	56	-17.79
3	.156	46.27	Pk	9.8	.1	56.17	65.67	-9.5	-	-
4	.156	31.88	Av	9.8	.1	41.78	-	-	55.67	-13.89
5	4.272	37.72	Pk	9.7	.3	47.72	56	-8.28	-	-
6	4.263	17.93	Av	9.7	.3	27.93	-	-	46	-18.07
7	4.314	37.49	Pk	9.7	.3	47.49	56	-8.51	-	-
8	4.317	18.6	Av	9.7	.3	28.6	-	-	46	-17.4
9	4.389	38.01	Pk	9.7	.3	48.01	56	-7.99	-	-
10	4.389	19.26	Av	9.7	.3	29.26	-	-	46	-16.74
11	4.44	36.93	Pk	9.7	.3	46.93	56	-9.07	-	-
12	4.455	18.4	Av	9.7	.3	28.4	-	-	46	-17.6

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15525	36.91	Qp	9.8	.1	46.81	65.71	-18.9	-	-
4.27125	28.94	Qp	9.7	.3	38.94	56	-17.06	-	-
4.31415	29.02	Qp	9.7	.3	39.02	56	-16.98	-	-
4.31775	29.49	Qp	9.7	.3	39.49	56	-16.51	-	-
4.38825	29.76	Qp	9.7	.3	39.76	56	-16.24	-	-
4.43925	29.82	Qp	9.7	.3	39.82	56	-16.18	-	-

Qp - Quasi-Peak detector

LINE 2 RESULTS

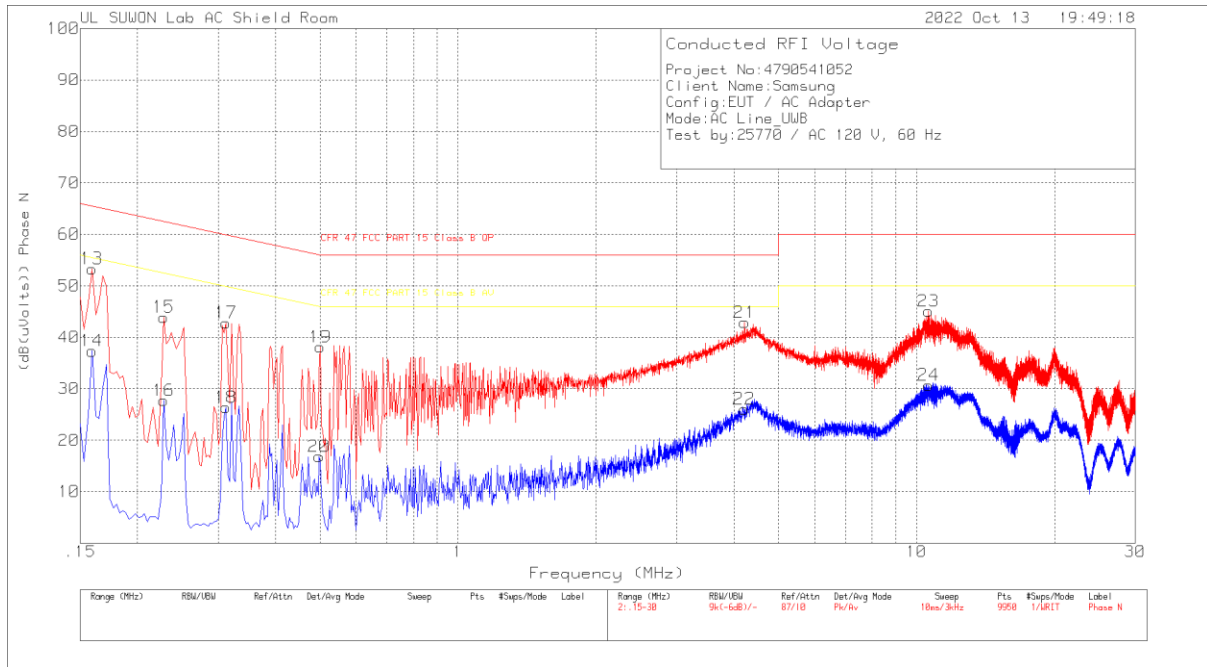

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.159	43.42	Pk	9.8	.1	53.32	65.52	-12.2	-	-
14	.159	27.45	Av	9.8	.1	37.35	-	-	55.52	-18.17
15	.228	33.99	Pk	9.7	.2	43.89	62.52	-18.63	-	-
16	.228	17.81	Av	9.7	.2	27.71	-	-	52.52	-24.81
17	.312	32.89	Pk	9.7	.2	42.79	59.92	-17.13	-	-
18	.312	16.47	Av	9.7	.2	26.37	-	-	49.92	-23.55
19	.501	28.01	Pk	9.9	.2	38.11	56	-17.89	-	-
20	.498	6.74	Av	9.9	.2	16.84	-	-	46.03	-29.19
21	4.218	32.87	Pk	9.7	.3	42.87	56	-13.13	-	-
22	4.209	16.03	Av	9.7	.3	26.03	-	-	46	-19.97
23	10.62	34.77	Pk	9.9	.4	45.07	60	-14.93	-	-
24	10.626	20.39	Av	9.9	.4	30.69	-	-	50	-19.31

Pk - Peak detector
 Av - Average detection

END OF TEST REPORT