

FCC/IC BT LE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.**Date of Issue:**
23 December 2019**Address:**
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea**Test Site/Location:**
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA**Report No.:** HCT-RF-1911-FI021-R1

FCC ID:	A3LSMT307U
IC:	649E-SMT307U
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model:	SM-T307U
EUT Type:	Tablet
Average Output Power:	3.30 dBm (2.136 mW)
Frequency Range:	2402 MHz -2480 MHz
Modulation type	GFSK
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247
ISED Rule Part(s):	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5_Amendment 1 (March 2019)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC/IC Rules under normal use and maintenance.



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication testing center

Approved by : Jong Seok Lee
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1911-FI021	11 December 2019	- First Approval Report
HCT-RF-1911-FI021-R1	23 December 2019	- RSS-GEN issue Date updated. - Section 9.7(Page 69-72) : for final duty factor updated & test result revised.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES	5
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT	6
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS.....	8
8. SUMMARY TEST OF RESULTS	27
9. TEST RESULT	29
9.1 DUTY CYCLE.....	29
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	32
9.3 OUTPUT POWER	40
9.4 POWER SPECTRAL DENSITY	42
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	45
9.6 RADIATED SPURIOUS EMISSIONS	62
9.7 RADIATED RESTRICTED BAND EDGES	69
9.8 RECEIVER SPURIOUS EMISSIONS	80
9.9 POWERLINE CONDUCTED EMISSIONS	81
10. LIST OF TEST EQUIPMENT	89
11. ANNEX A_ TEST SETUP PHOTO	91

1. EUT DESCRIPTION

Model	SM-T307U	
EUT Type	Tablet	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BT307ABY Type: Li-ion Battery	
Travel Adapter Information	Model : EP-TA50JWE Manufacture: DONGYANG E&P	
Data Cable Information	Model : EP-DR140AWZ Manufacture: KSD	
Ear-jack Information	Model : EHS64AVFWE Manufacture: ALMUS	
Frequency Range	2402 MHz ~ 2480 MHz	
Max. RF Output Power	Peak (For information only)	1M Bit/s : 3.797 dBm (2.397 mW) 2M Bit/s : 4.162 dBm (2.607 mW)
	Average	1M Bit/s : 3.30 dBm (2.136 mW) 2M Bit/s : 3.29 dBm (2.132 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: LDS Peak Gain : -0.1 dBi	
Date(s) of Tests	October 22, 2019 ~ November 29, 2019	
PMN (Product Marketing Number)	Galaxy Tab A4S	
HVIN (Hardware Version Identification Number)	SM-T307U	
FVIN (Firmware Version Identification Number)	N/A	
HMN (Host Marketing Name)	N/A	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203 / RSS-Gen(Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

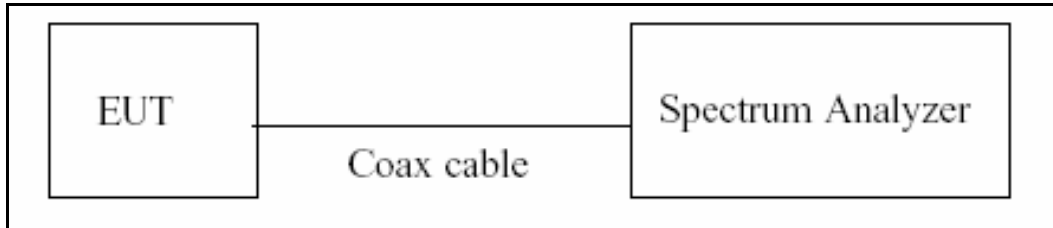

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW = $3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.45
100	20.50
200	20.53
300	20.58
400	20.61
500	20.63
600	20.63
700	20.65
800	20.66
900	20.68
1000	20.69
2000	20.82
2400	20.87
2480	20.87
2500	20.87
3000	20.92
4000	21.00
5000	21.08
5150	21.09
5850	21.13
6000	21.13
7000	21.21
8000	21.28
9000	21.34
10000	21.42
11000	21.45
12000	21.53
13000	21.63
14000	21.60
15000	21.65
16000	21.69
17000	21.73
18000	21.80
19000	21.84
20000	21.88
21000	22.05
22000	22.04
23000	22.07
24000	22.11
25000	22.15
26000	22.24

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)

7.6. Radiated Test

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

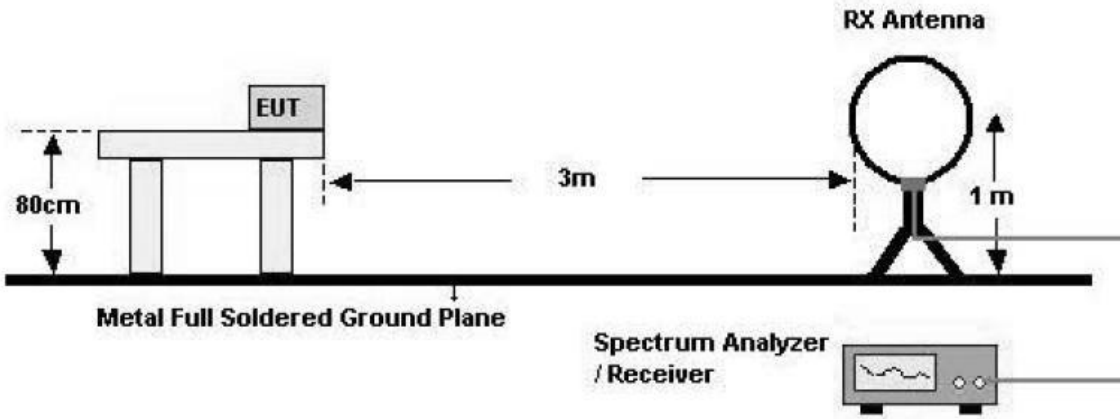

30 MHz - 1 GHz

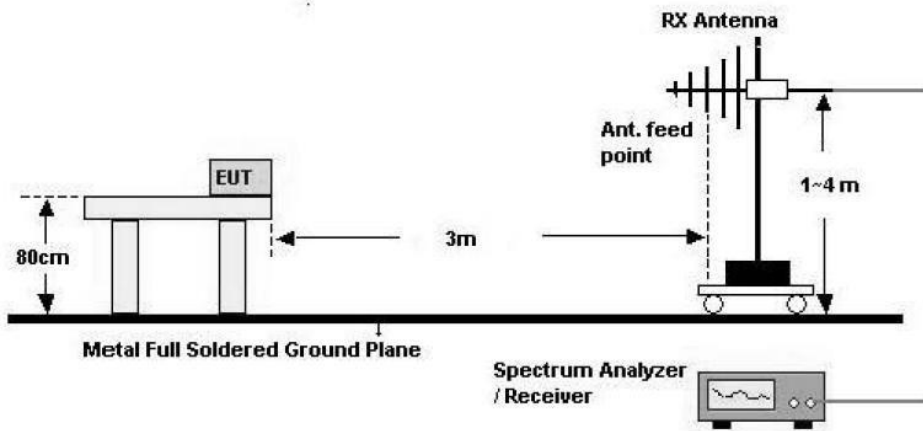

Above 1 GHz

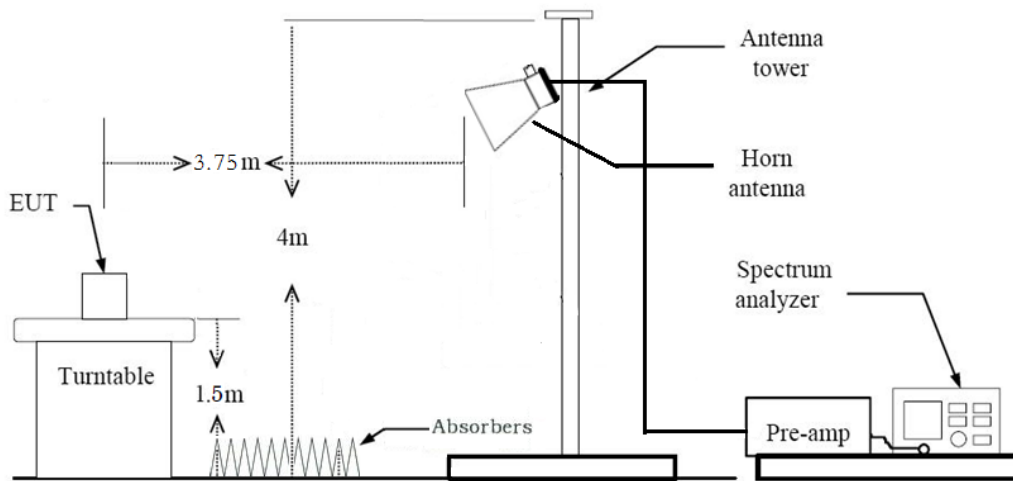**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

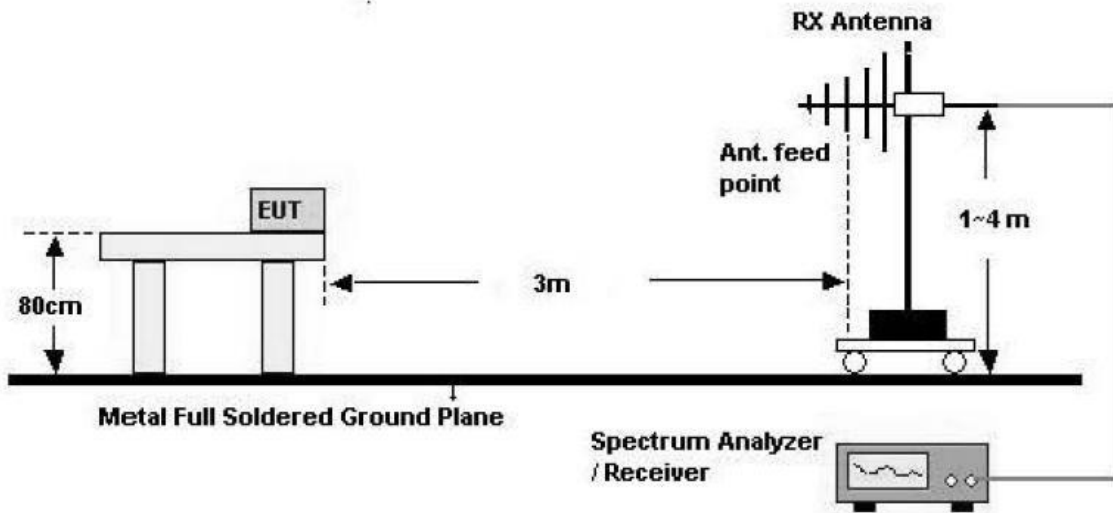

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

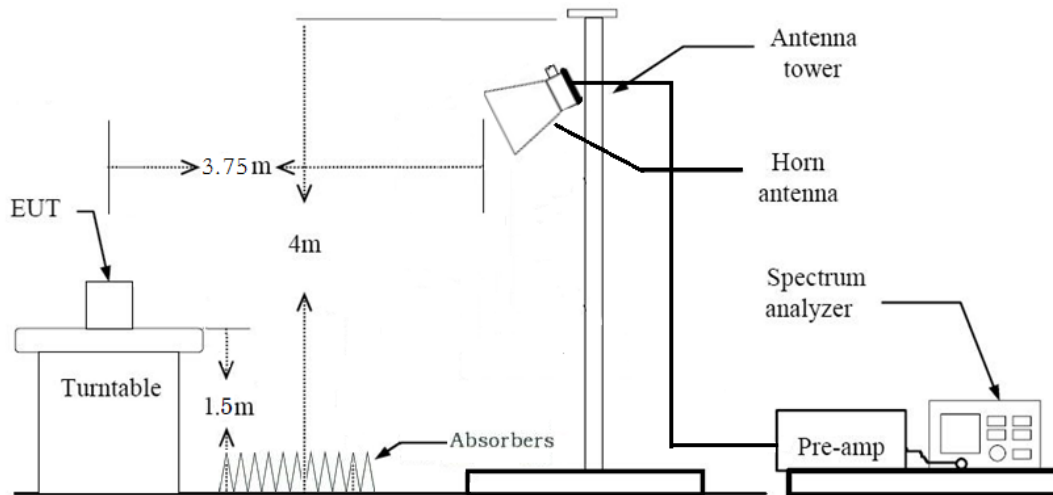**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).

◆ Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Y
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case : 37 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter(Normal),
Stand alone + Travel Adapter(Normal),
Stand alone + External accessories(Earphone, etc)+Travel Adapter(Fast charging),
Stand alone + Travel Adapter(Fast charging)
 - Worstcase : Stand alone + Travel Adapter(Normal and FastCharging)

Conducted test

1. The EUT was configured with packet length of highest power.
(Worst case : 255 Byte)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

IC Part


Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	NA		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.4	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

9. TEST RESULT**9.1 DUTY CYCLE**

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.3901	0.6257	0.6235	2.05
	255	2.1350	2.5000	0.8540	0.69
2M	37	0.2039	0.6245	0.3266	4.86
	255	1.0733	1.8733	0.5730	2.42


1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

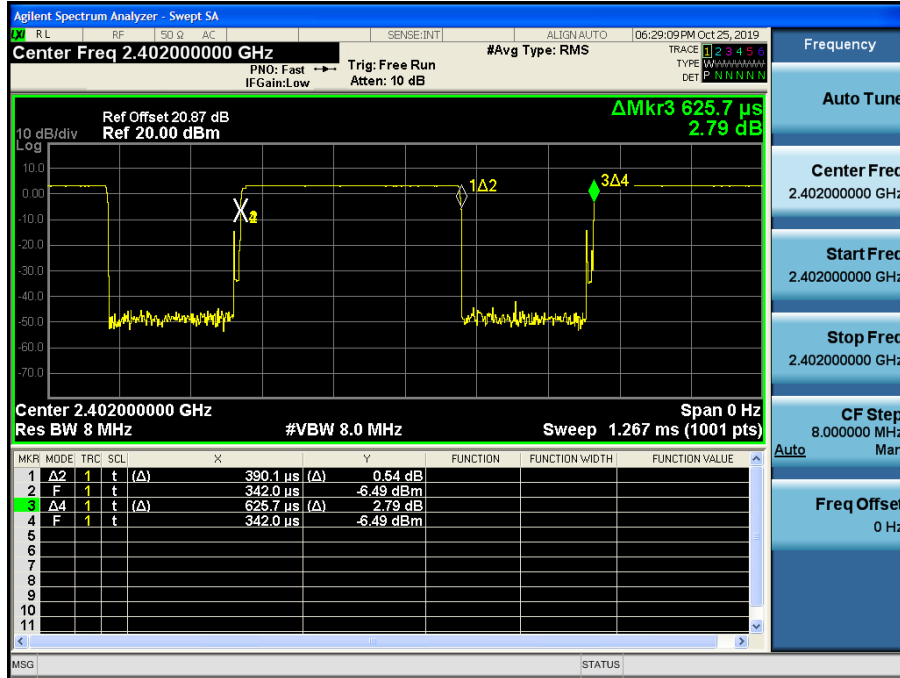


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

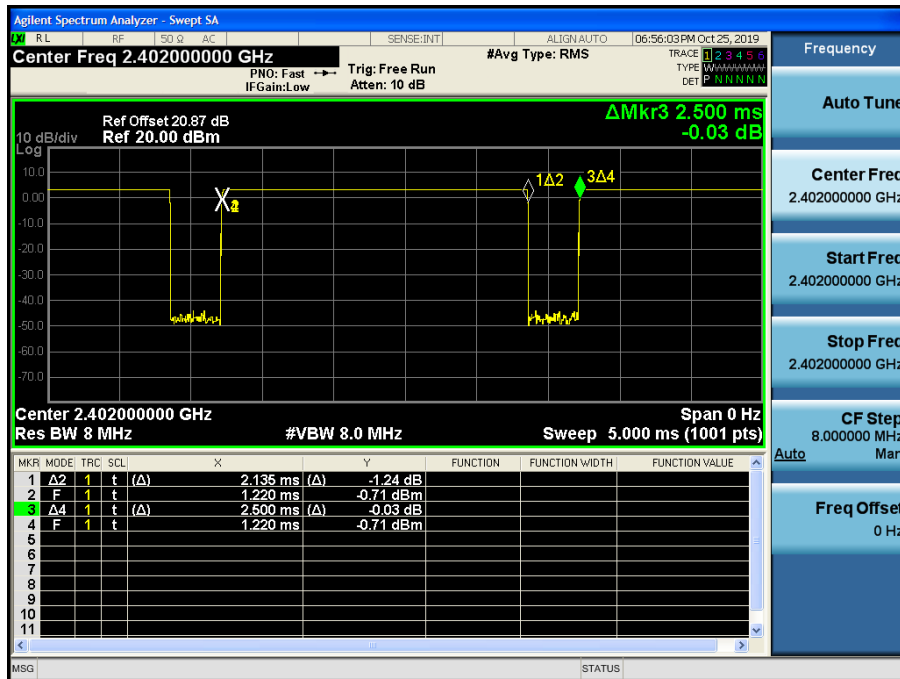


2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

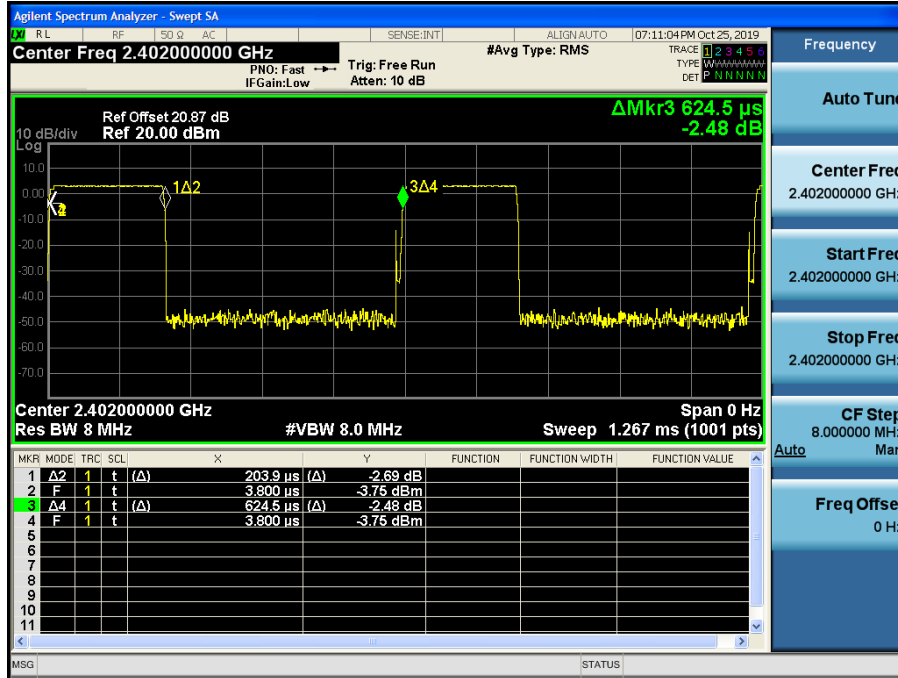

2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

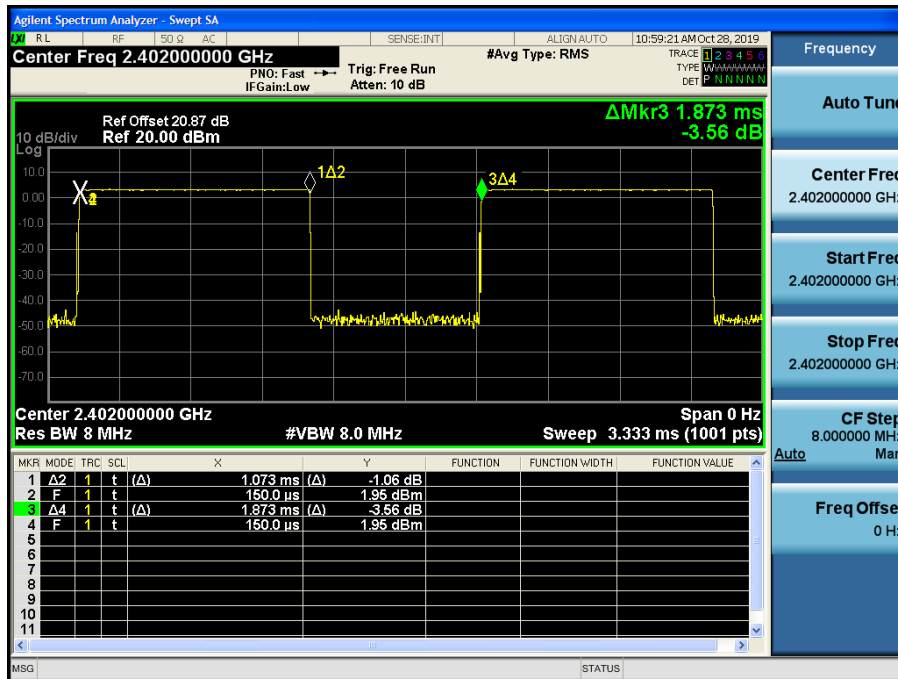


9.2 6dB BANDWIDTH & 99 % BANDWIDTH

FCC


Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	99 % Measured Bandwidth [MHz]	Limit (kHz)
1M	0	724.7	1.1258	> 500
	19	708.2	1.1230	
	39	710.5	1.1198	
2M	0	1278.2	2.0777	> 500
	19	1276.2	2.0786	
	39	1264.0	2.0787	

1M Bit/s (255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

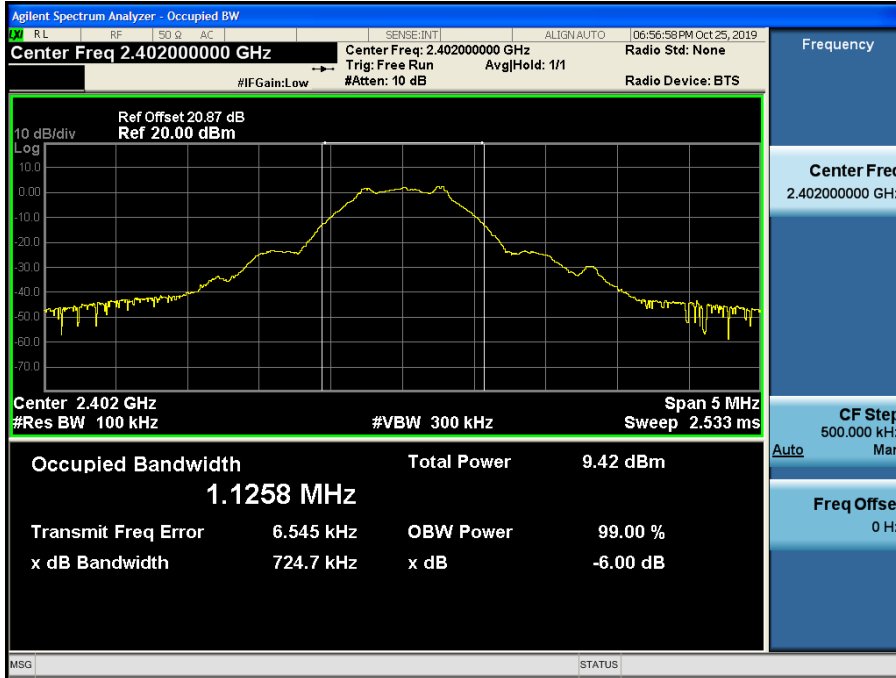

6 dB Bandwidth plot (Mid-CH 19)

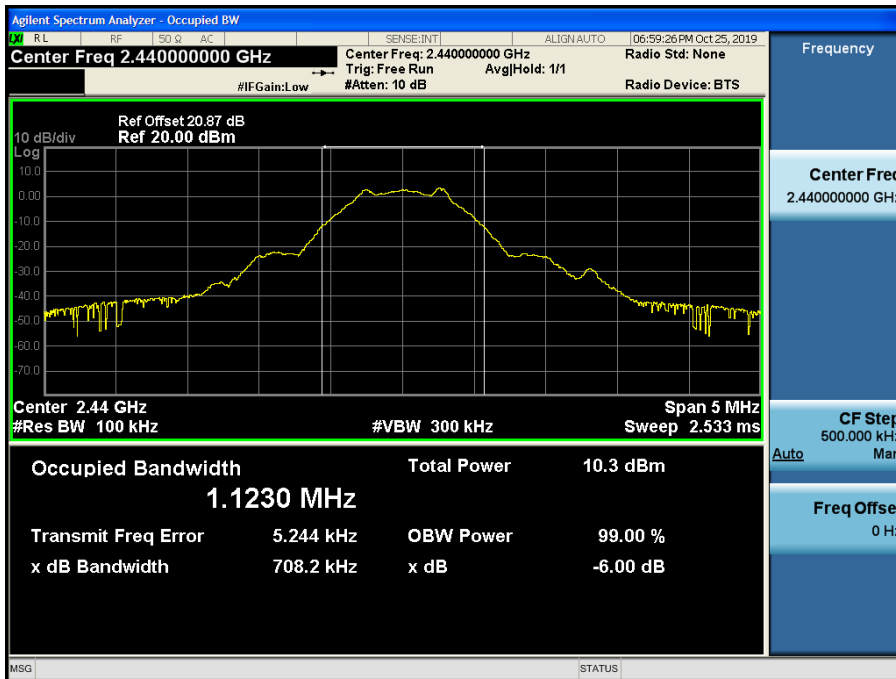


6 dB Bandwidth plot (High-CH 39)

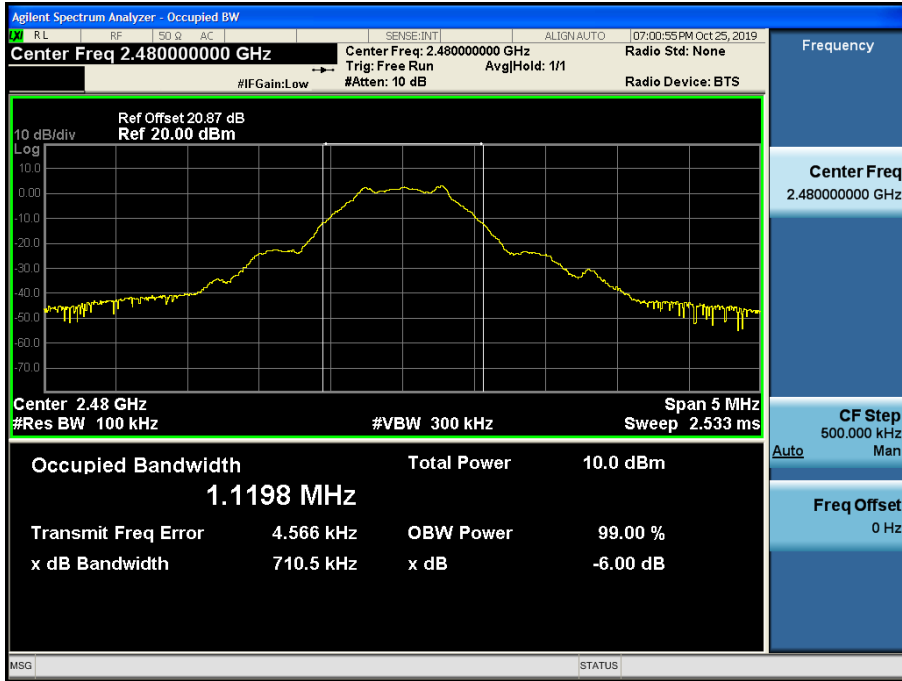

2M Bit/s (37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

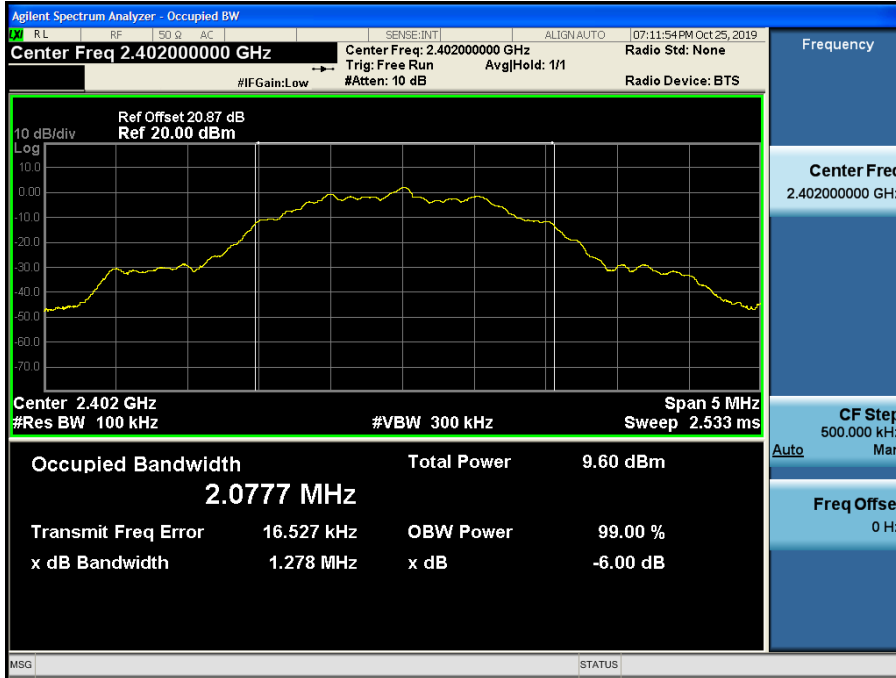

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)

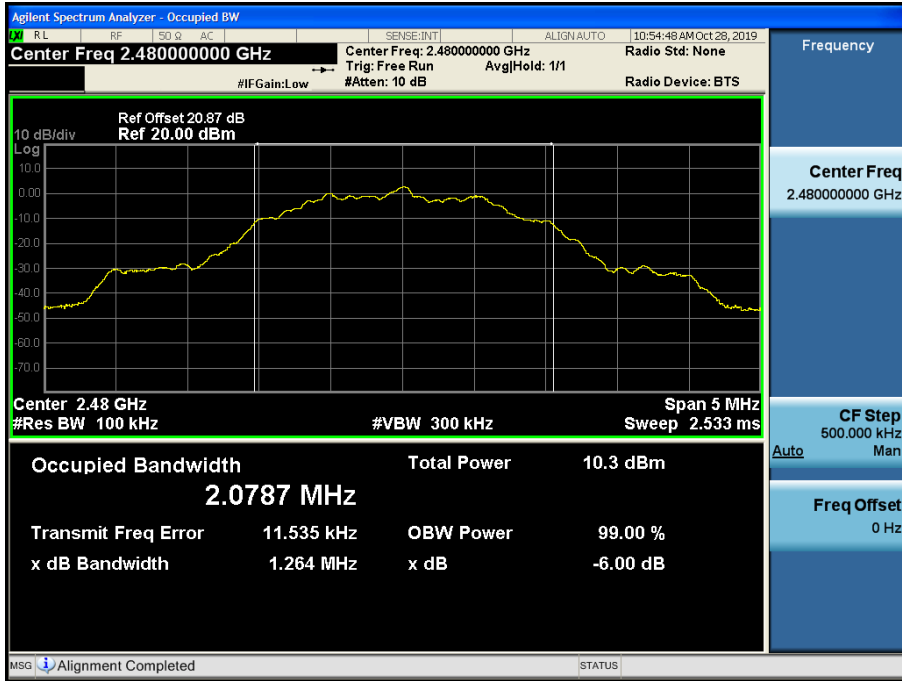


IC

Mode (Bit/s)	Channel	99 % Measured Bandwidth [MHz]
1M	0	1.0949
	19	1.0921
	39	1.0876
2M	0	2.0840
	19	2.0851
	39	2.0868

■ 2M Bit/s (37 Byte) Test Plots


99 % Bandwidth plot (Low-CH 0)

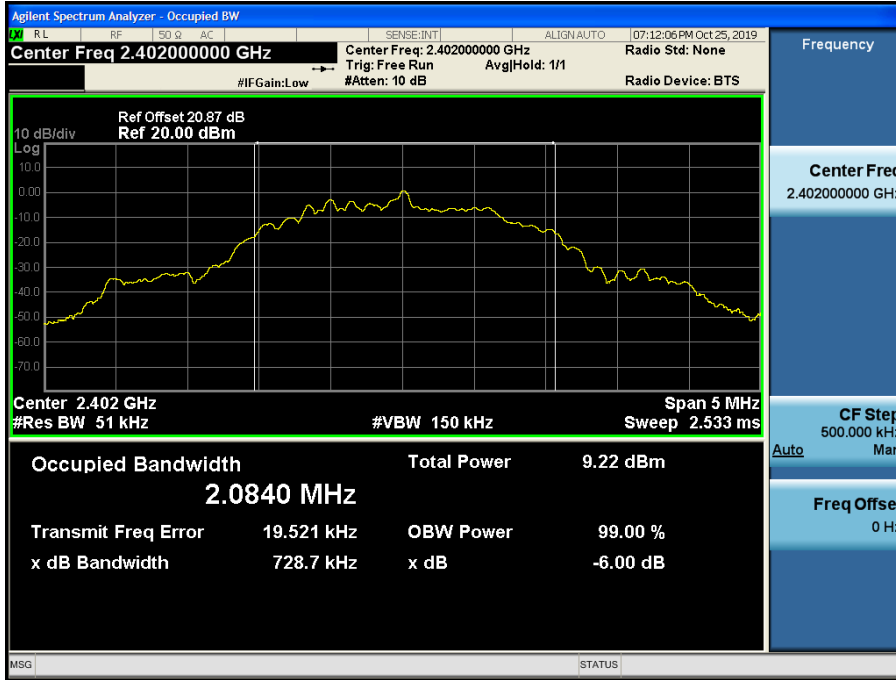

99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)

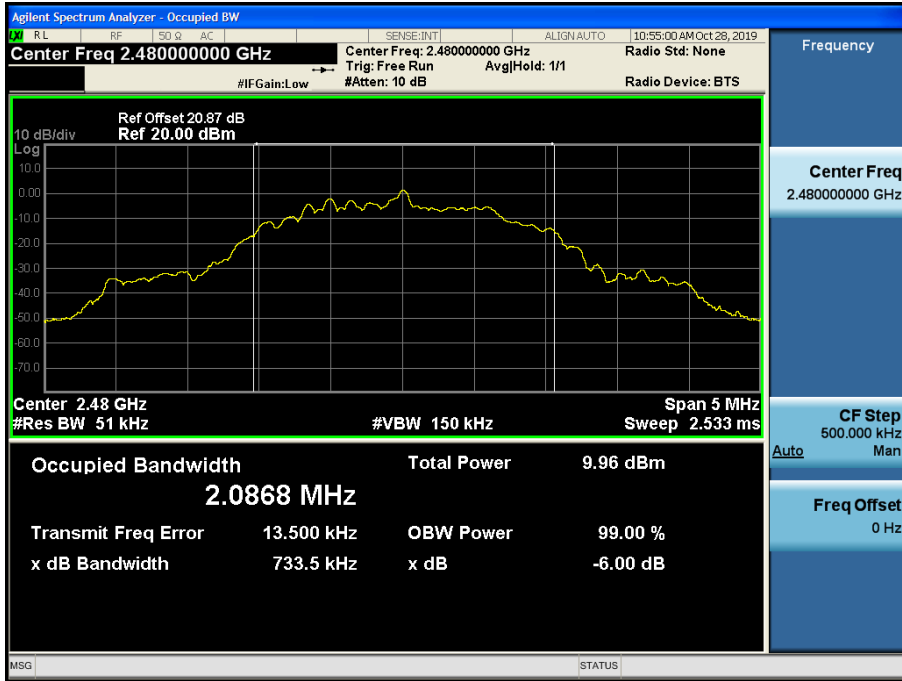

Note:

In order to simplify the report, attached plots were only the most wide Mode.
(Mode : 1M Bit/s, 2M Bit/s)

9.3 OUTPUT POWER

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	3.025	30
		2440	19	3.784	
		2480	39	3.568	
	255	2402	0	2.989	
		2440	19	3.797	
		2480	39	3.566	
2M	37	2402	0	3.258	
		2440	19	4.162	
		2480	39	3.965	
	255	2402	0	3.268	
		2440	19	4.065	
		2480	39	3.873	

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	0.48	2.05	2.53	30
		2440	19	1.22	2.05	3.27	
		2480	39	0.97	2.05	3.02	
	255	2402	0	1.83	0.69	2.52	
		2440	19	2.61	0.69	3.30	
		2480	39	2.30	0.69	2.99	
2M	37	2402	0	-2.16	4.86	2.70	
		2440	19	-1.57	4.86	3.29	
		2480	39	-1.95	4.86	2.91	
	255	2402	0	0.49	2.42	2.91	
		2440	19	0.86	2.42	3.28	
		2480	39	0.80	2.42	3.22	

Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.87 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY


Frequency (MHz)	Channel No.	Mode	Test Result			Limit (dBm)
			Measured Power(dBm)	Duty Cycle Factor(dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	
2402	0	1M 37 Byte	-5.958	2.050	-3.908	8.000
2440	19		-4.736	2.050	-2.686	
2480	39		-5.095	2.050	-3.045	
2402	0	1M 255 Byte	-4.851	0.690	-4.161	
2440	19		-4.281	0.690	-3.591	
2480	39		-4.200	0.690	-3.510	
2402	0	2M 37 Byte	-10.075	4.860	-5.215	
2440	19		-9.285	4.860	-4.425	
2480	39		-9.454	4.860	-4.594	
2402	0	2M 255 Byte	-8.982	2.420	-6.562	
2440	19		-8.109	2.420	-5.689	
2480	39		-8.091	2.420	-5.671	

Note :


- Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- Spectrum offset = Attenuator loss + Cable loss
- We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.87 dB is offset for 2.4 GHz Band.
- Worst case test Plot Only : 1M Bit/s (37 Byte)

▣ 1M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)

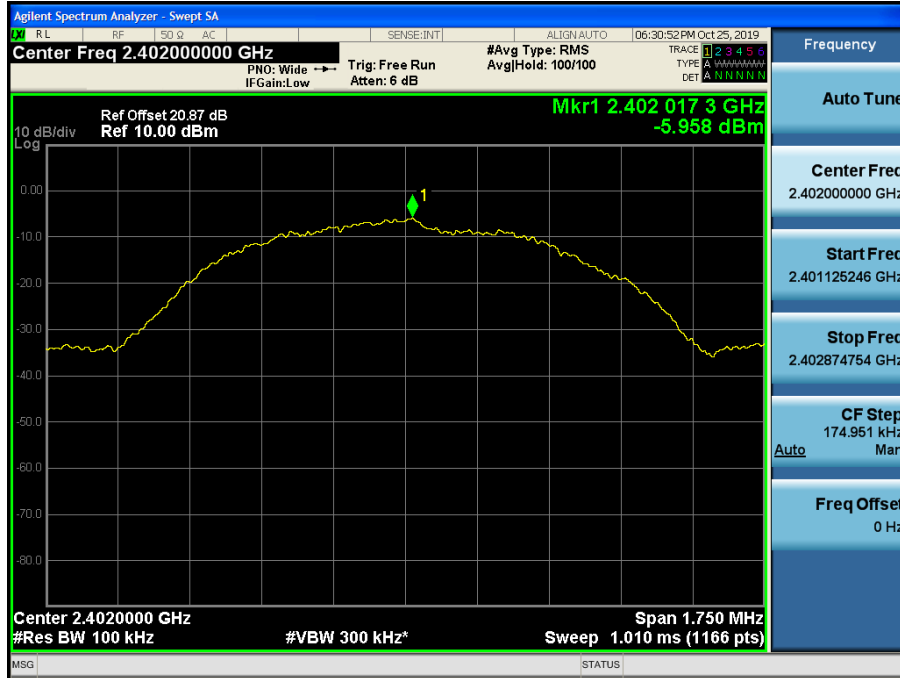

Power Spectral Density (Mid-CH 19)

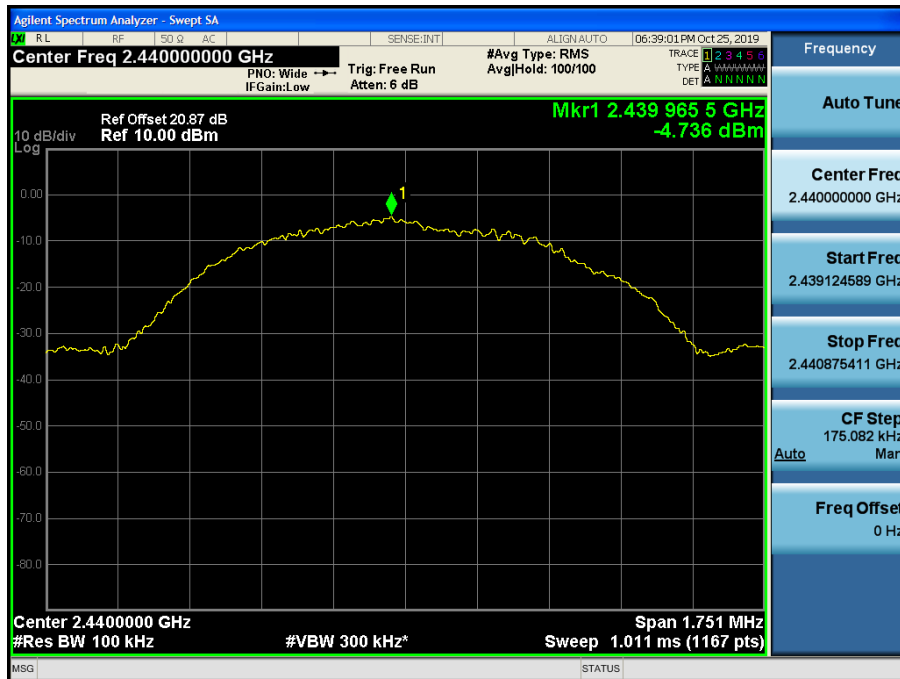

Power Spectral Density (High-CH 39)



9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

1M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

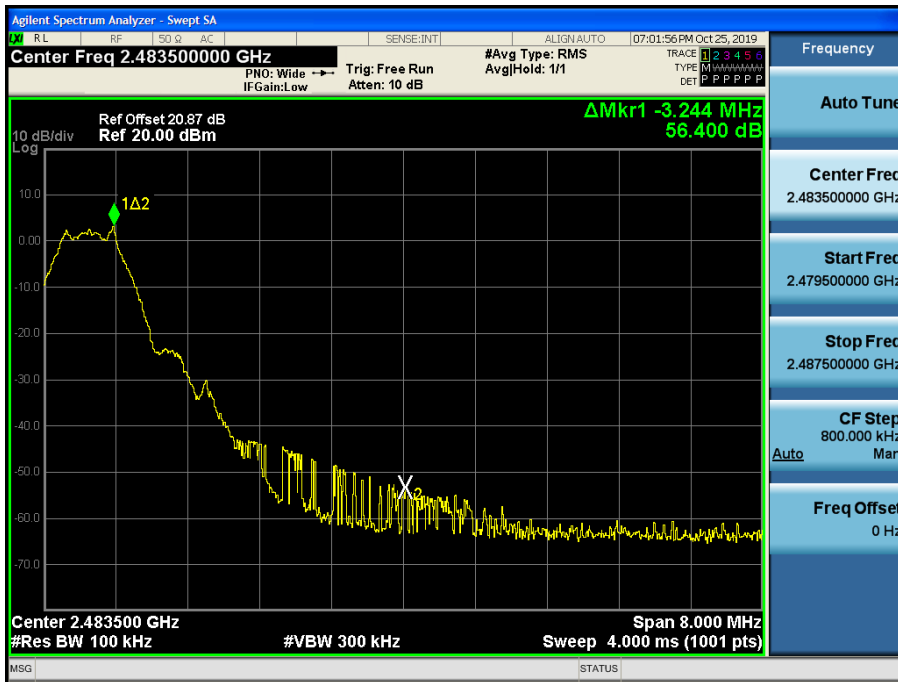

1M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Middle-CH 19)

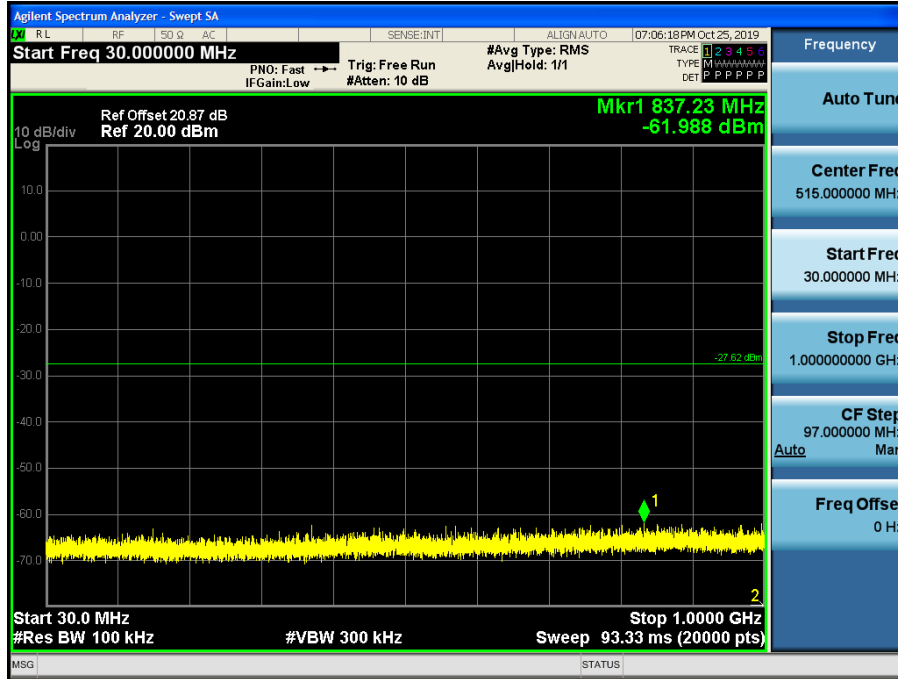


1 GHz ~ 3 GHz

Conducted Spurious Emission (Middle-CH 19)

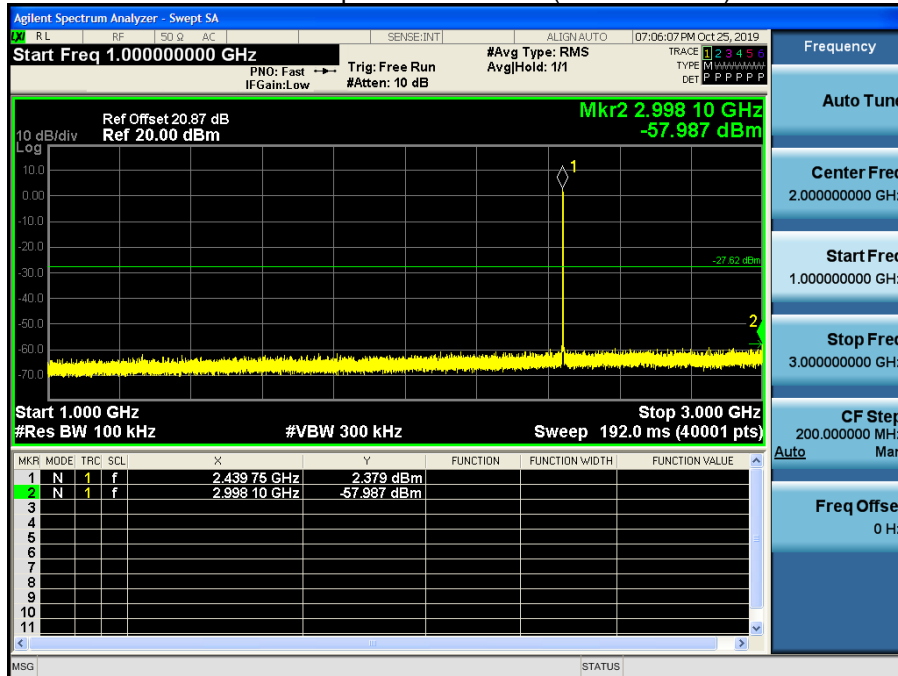


3 GHz ~ 5 GHz

Conducted Spurious Emission (Middle-CH 19)

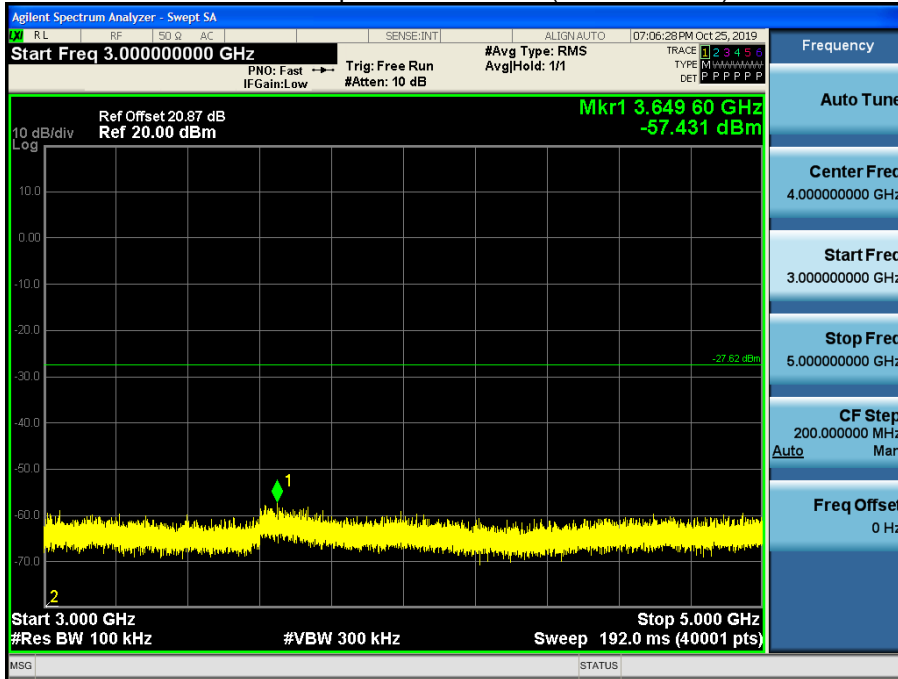


5 GHz ~ 7 GHz

Conducted Spurious Emission (Middle-CH 19)

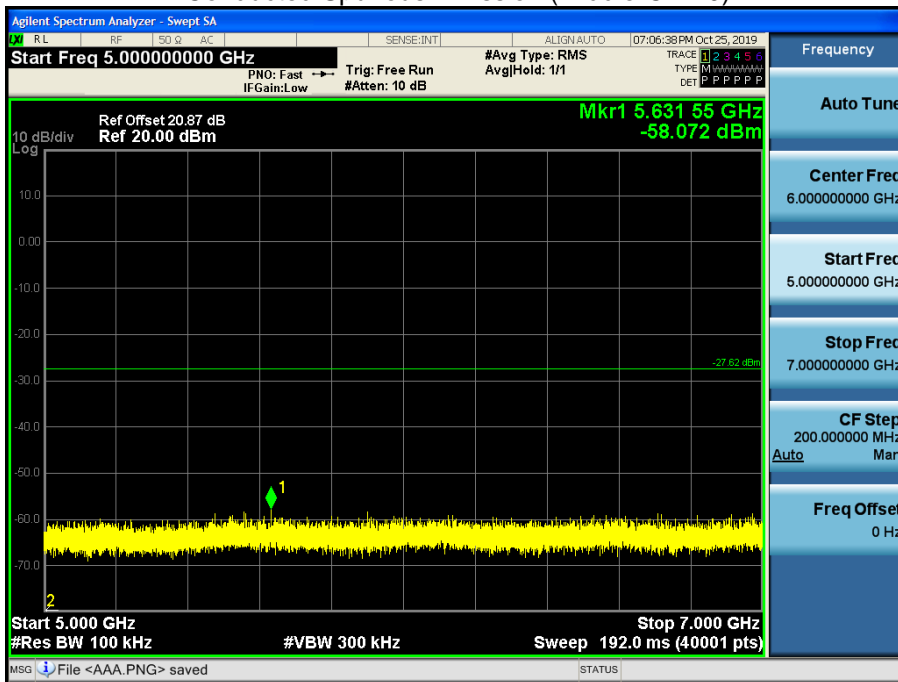


7 GHz ~ 9 GHz

Conducted Spurious Emission (Middle-CH 19)

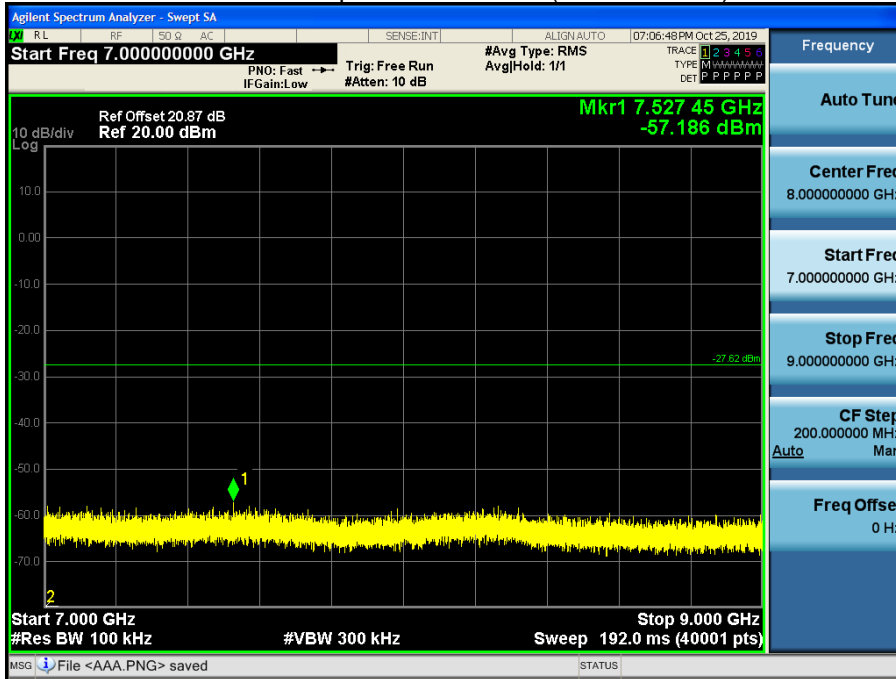


9 GHz ~ 11 GHz

Conducted Spurious Emission (Middle-CH 19)

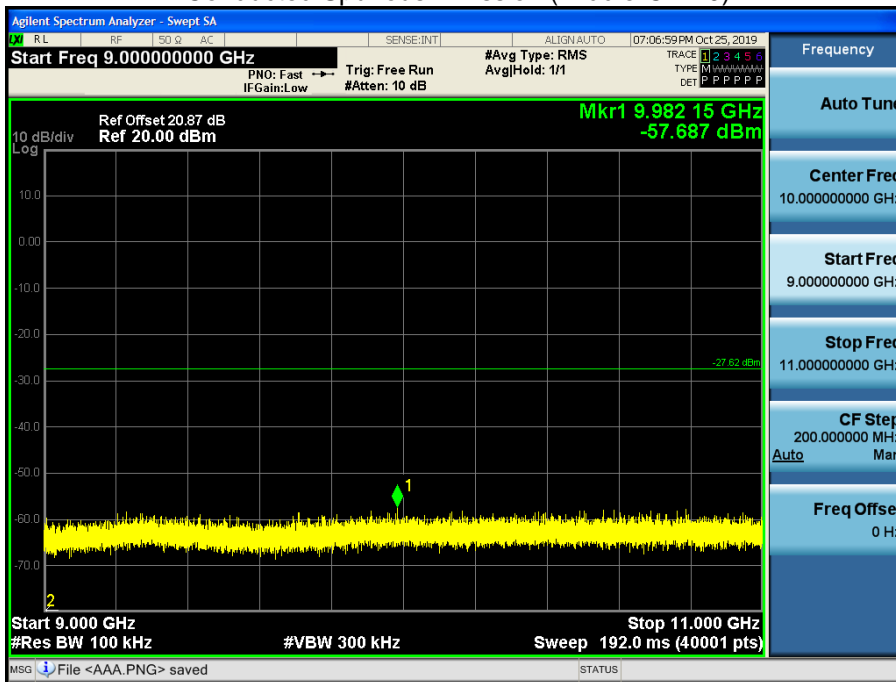


11 GHz ~ 13 GHz

Conducted Spurious Emission (Middle-CH 19)

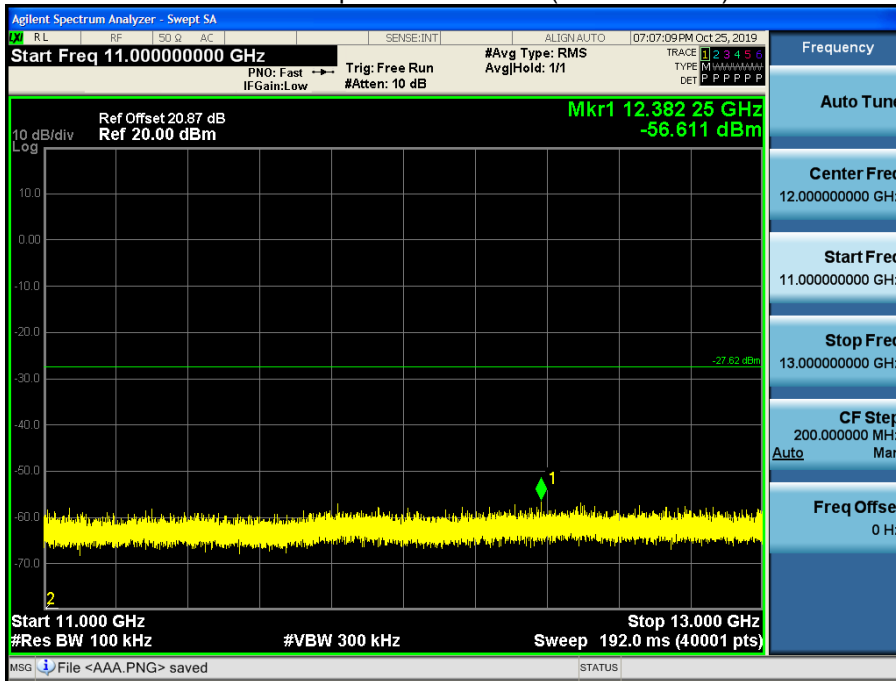


13 GHz ~ 15 GHz

Conducted Spurious Emission (Middle-CH 19)

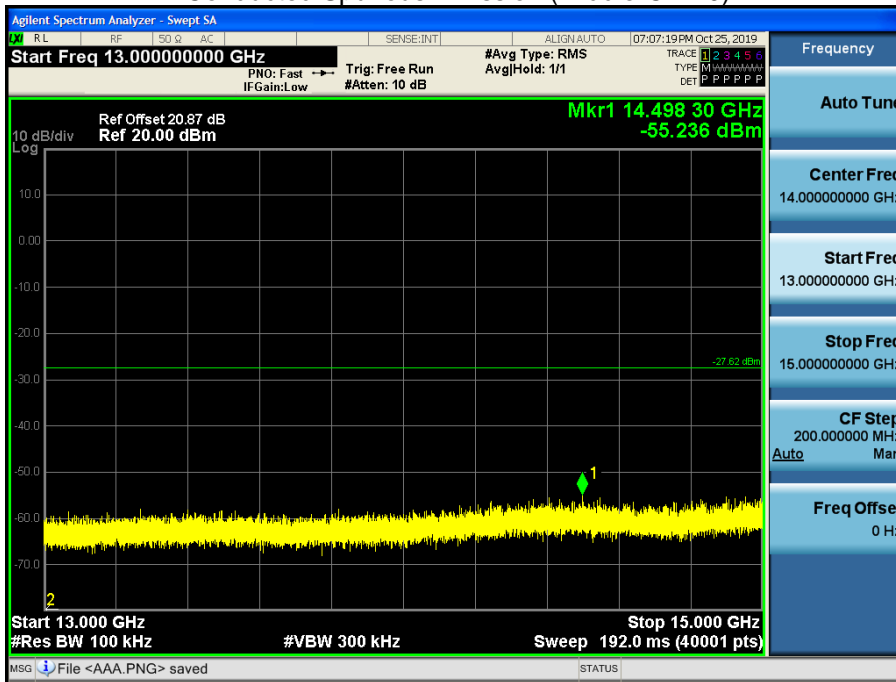


15 GHz ~ 17 GHz

Conducted Spurious Emission (Middle-CH 19)

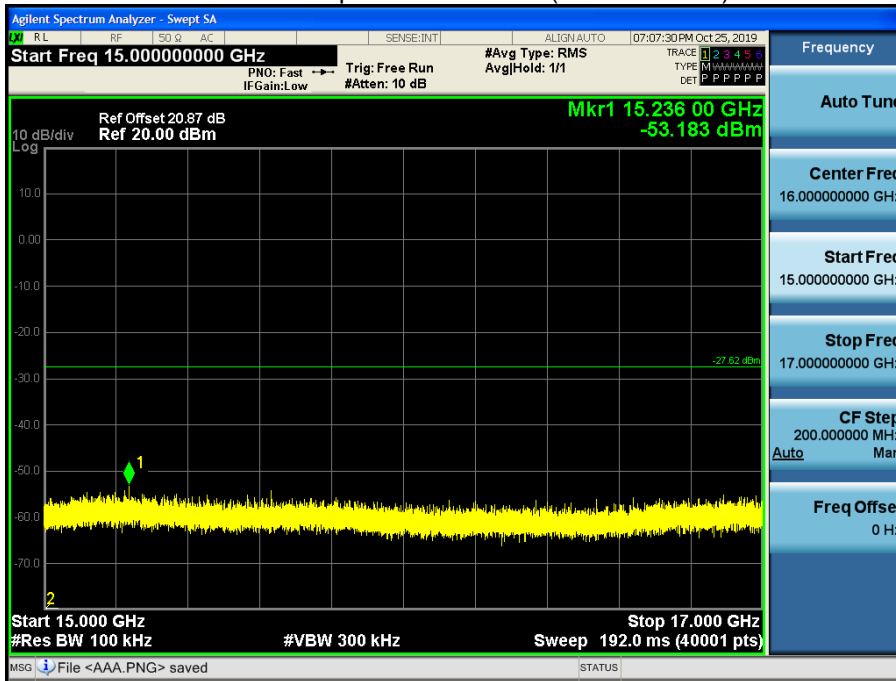


17 GHz ~ 19 GHz

Conducted Spurious Emission (Middle-CH 19)

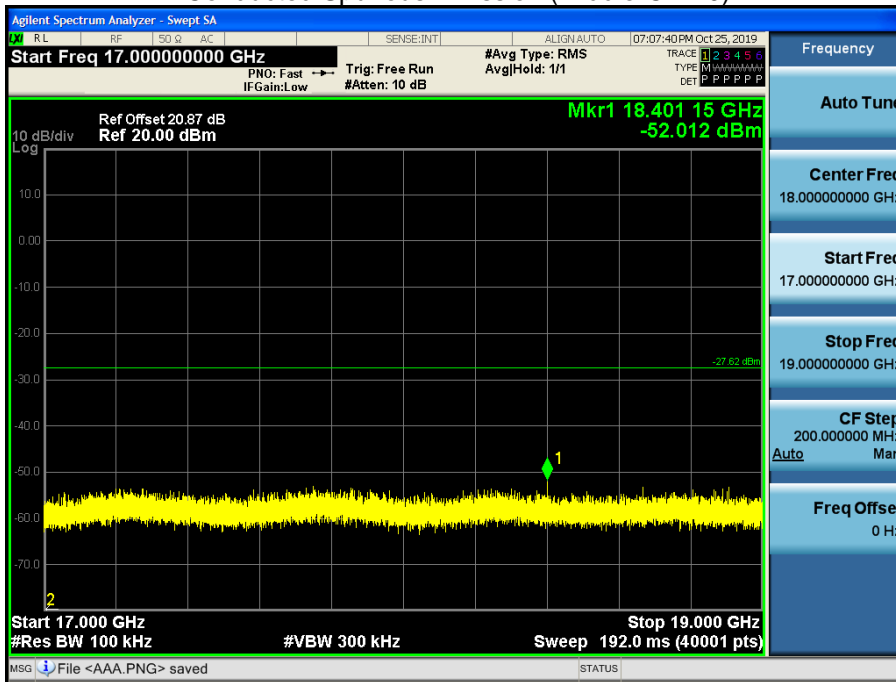


19 GHz ~ 21 GHz

Conducted Spurious Emission (Middle-CH 19)

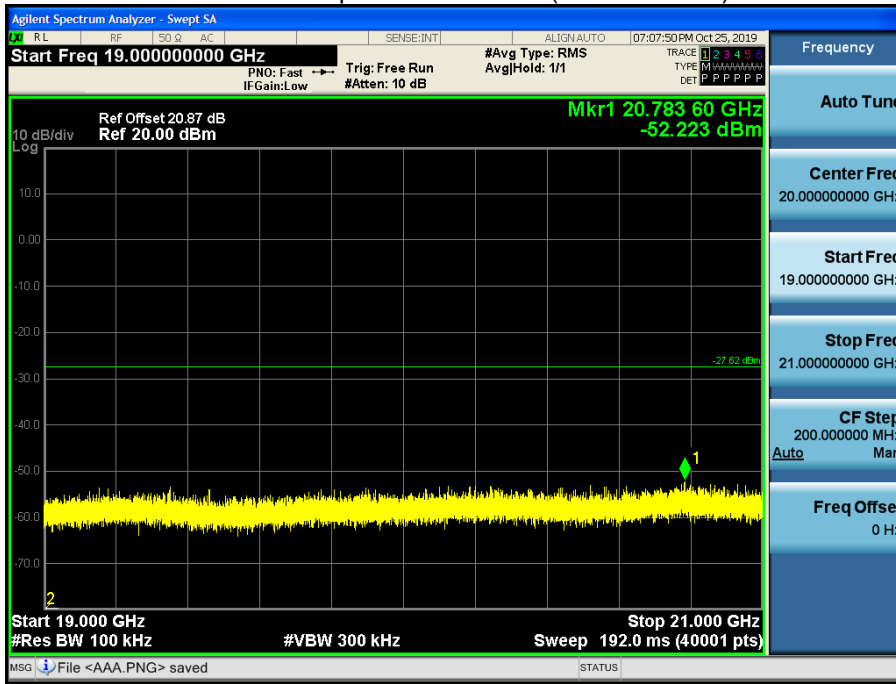


21 GHz ~ 23 GHz

Conducted Spurious Emission (Middle-CH 19)

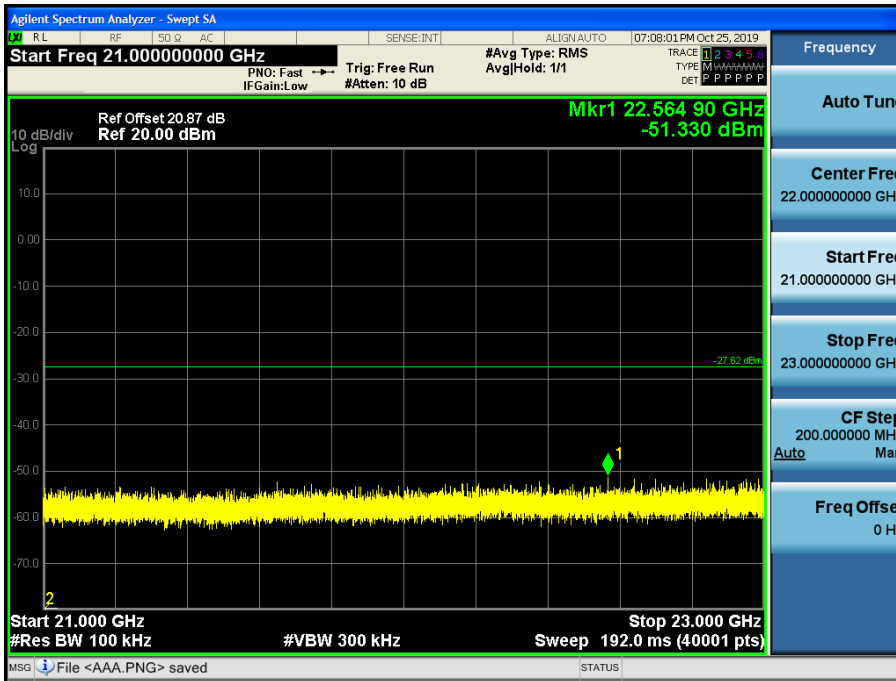

23 GHz ~ 25 GHz

Conducted Spurious Emission (Middle-CH 19)

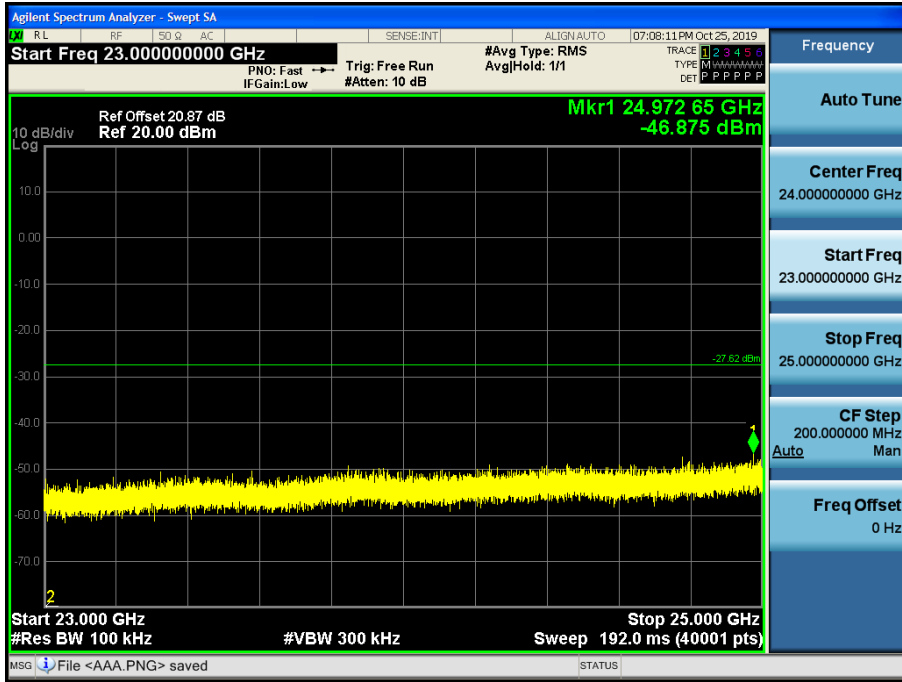


2M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

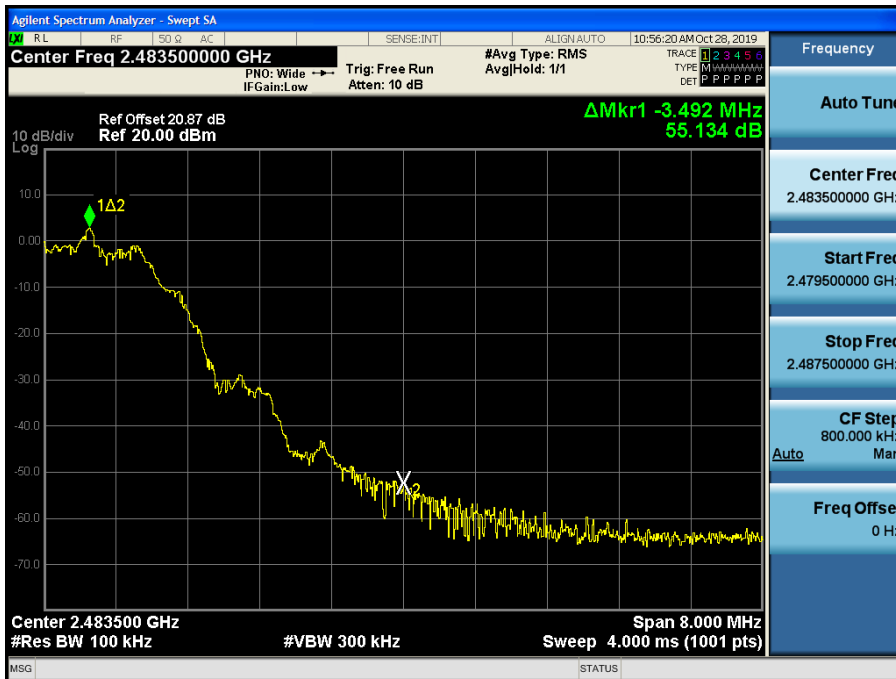

2M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Middle-CH 19)

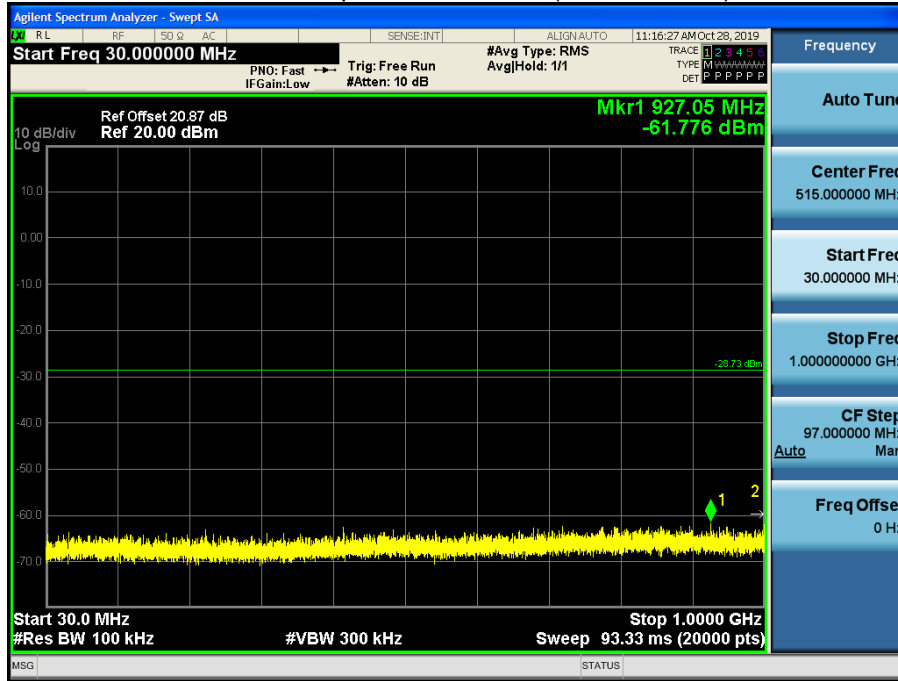


1 GHz ~ 3 GHz

Conducted Spurious Emission (Middle-CH 19)

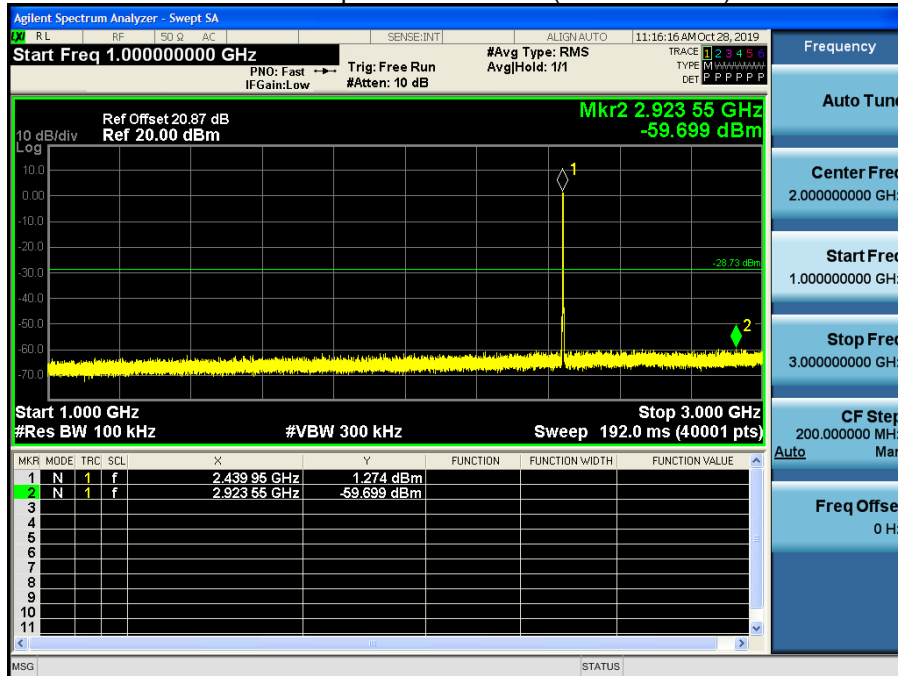


3 GHz ~ 5 GHz

Conducted Spurious Emission (Middle-CH 19)

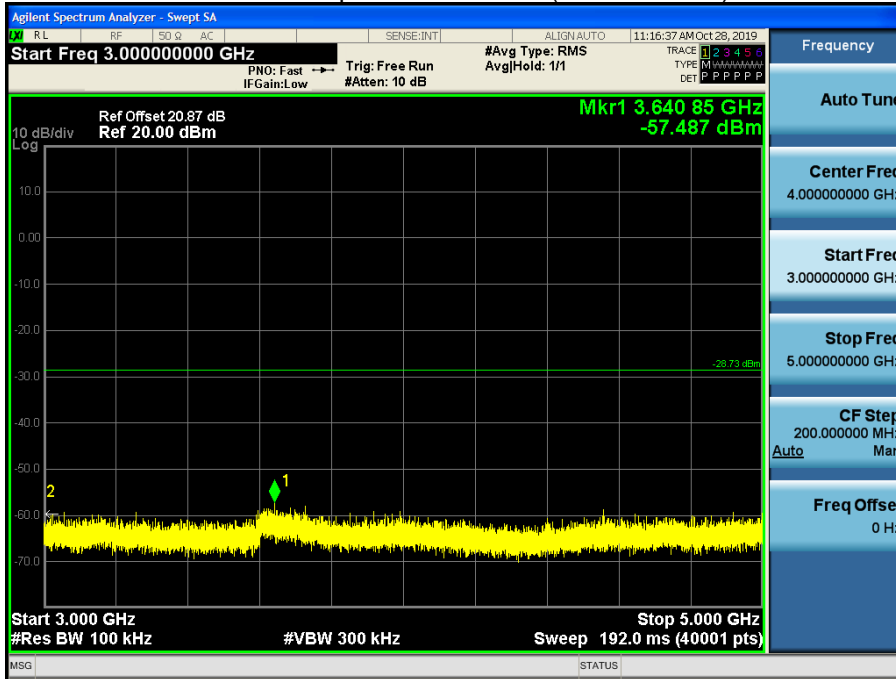


5 GHz ~ 7 GHz

Conducted Spurious Emission (Middle-CH 19)

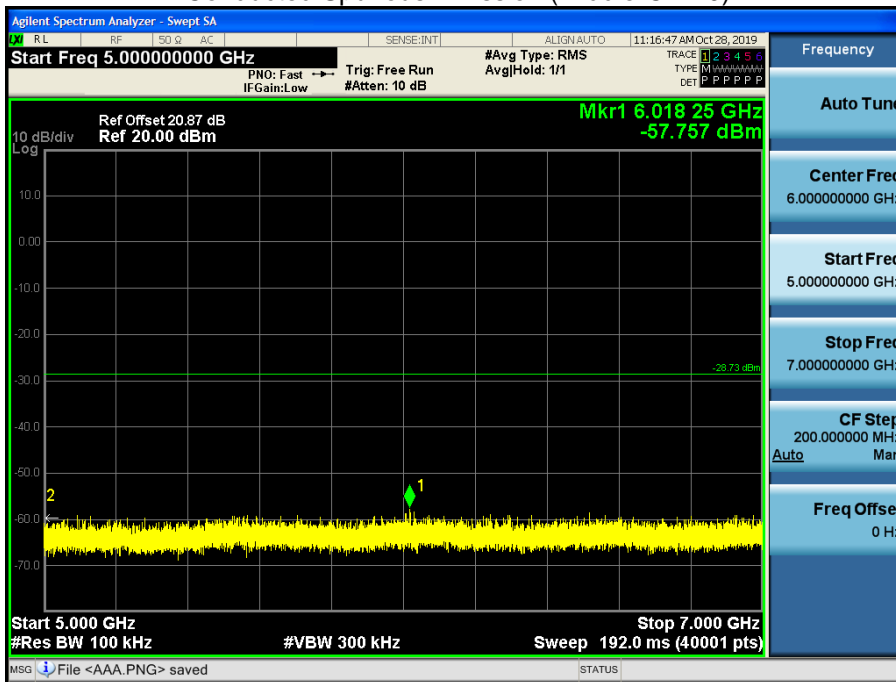


7 GHz ~ 9 GHz

Conducted Spurious Emission (Middle-CH 19)

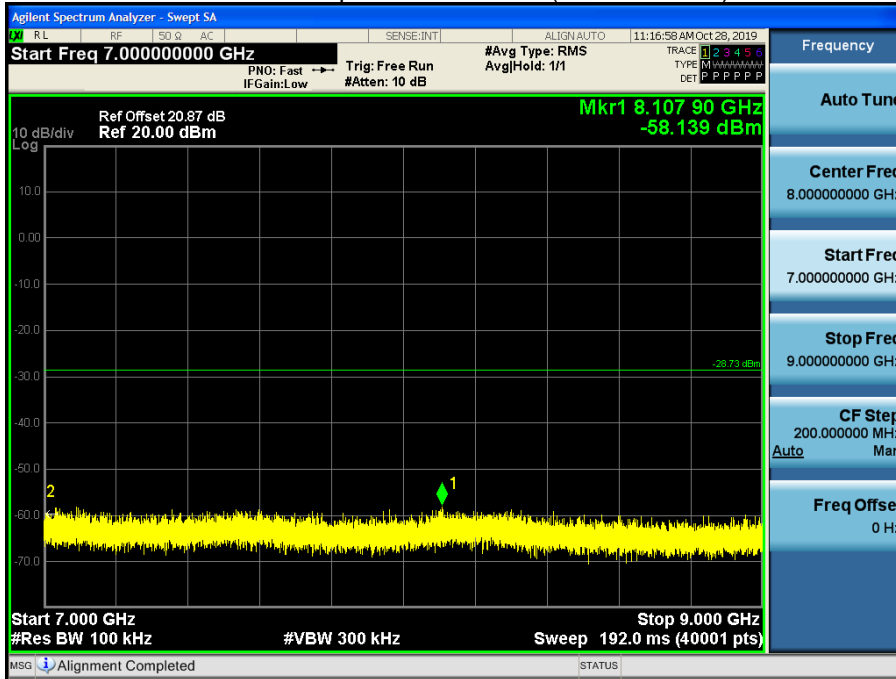


9 GHz ~ 11 GHz

Conducted Spurious Emission (Middle-CH 19)

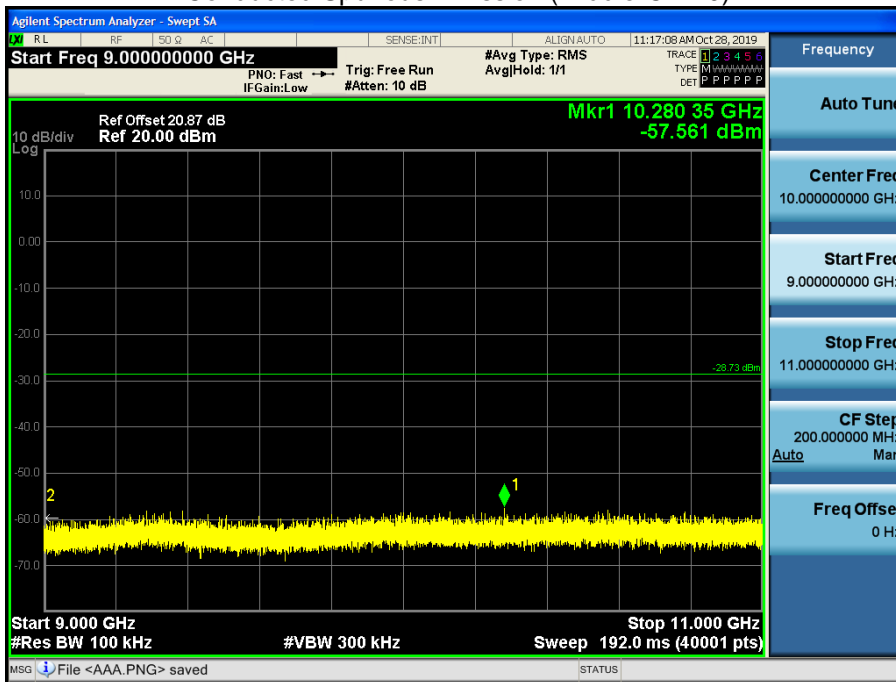


11 GHz ~ 13 GHz

Conducted Spurious Emission (Middle-CH 19)

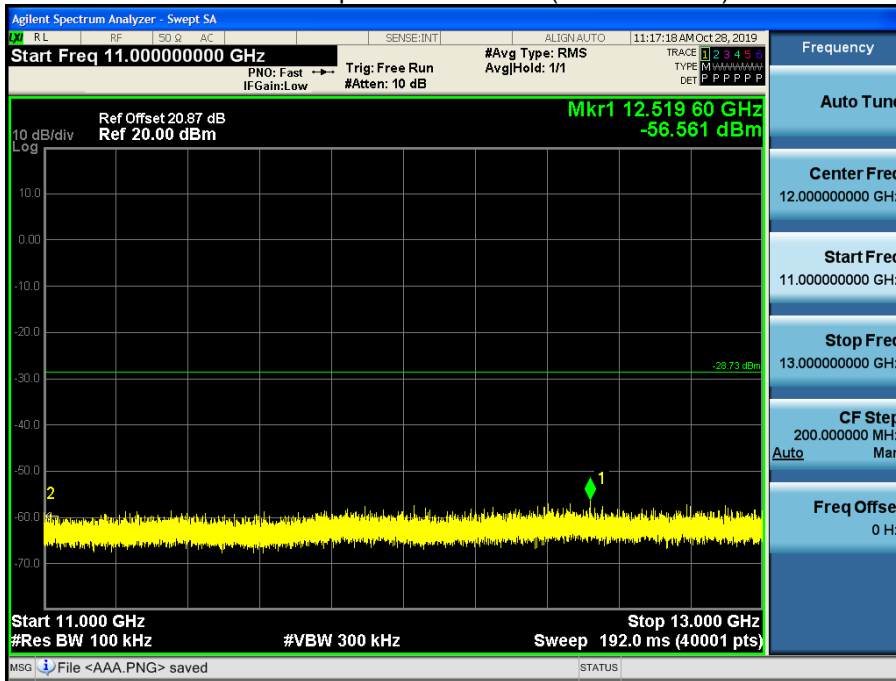


13 GHz ~ 15 GHz

Conducted Spurious Emission (Middle-CH 19)

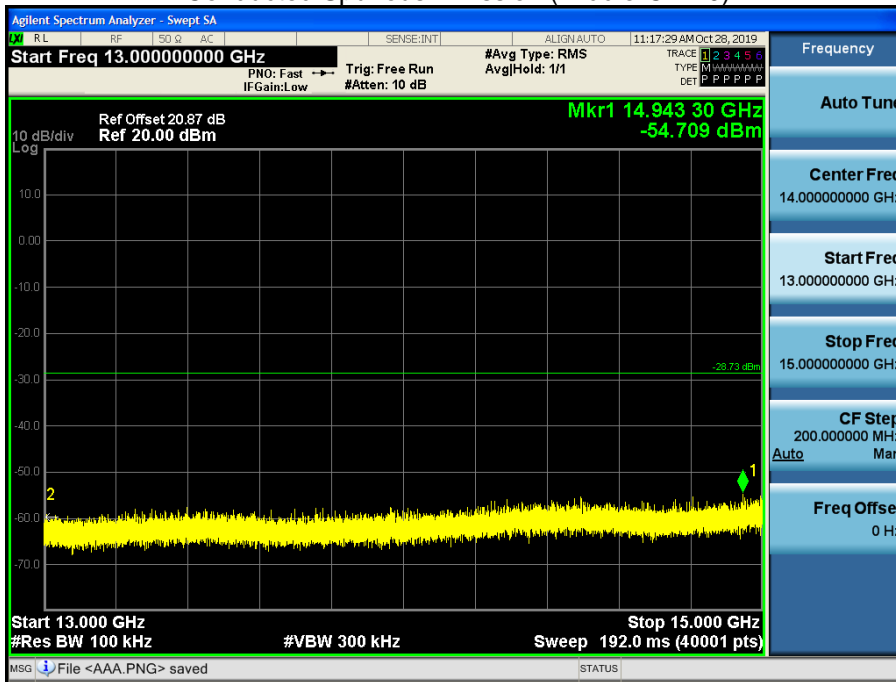


15 GHz ~ 17 GHz

Conducted Spurious Emission (Middle-CH 19)

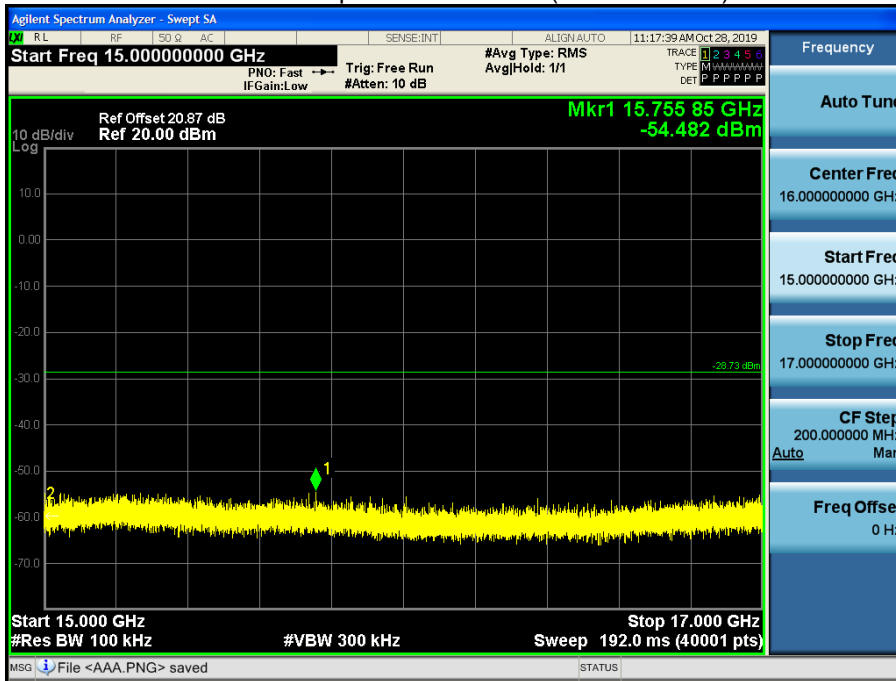


17 GHz ~ 19 GHz

Conducted Spurious Emission (Middle-CH 19)

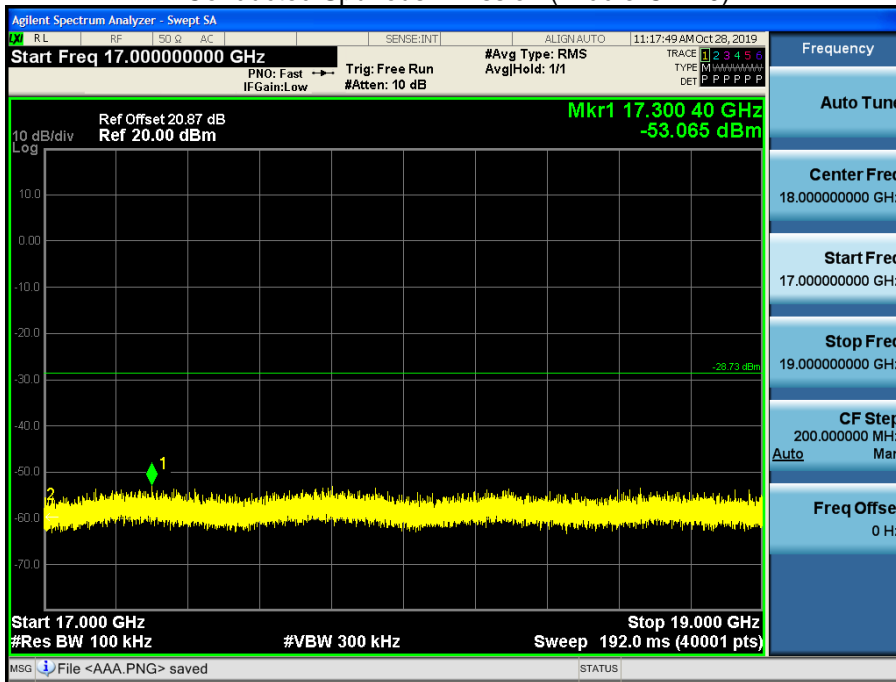


19 GHz ~ 21 GHz

Conducted Spurious Emission (Middle-CH 19)

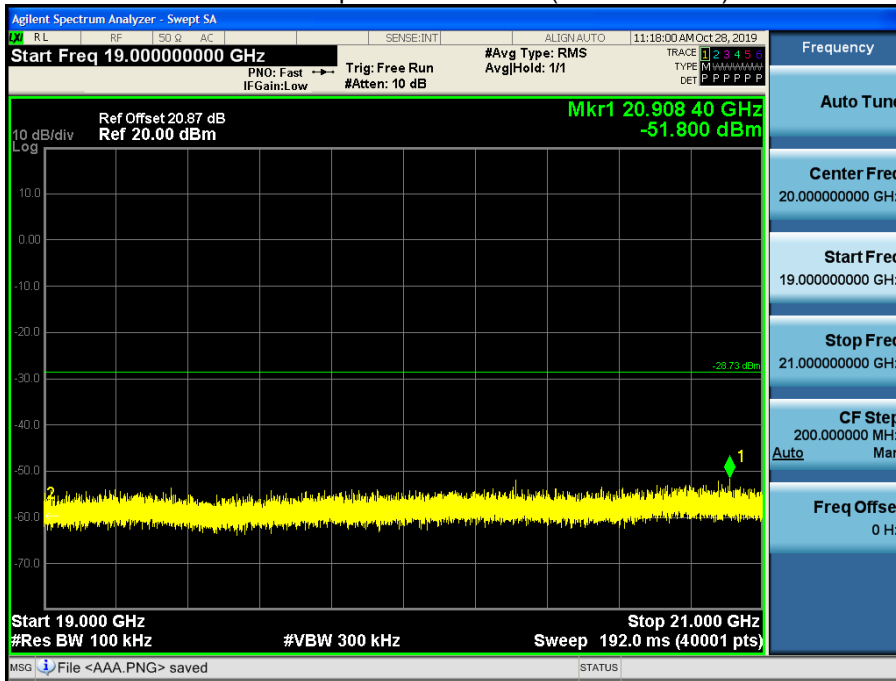

21 GHz ~ 23 GHz

Conducted Spurious Emission (Middle-CH 19)

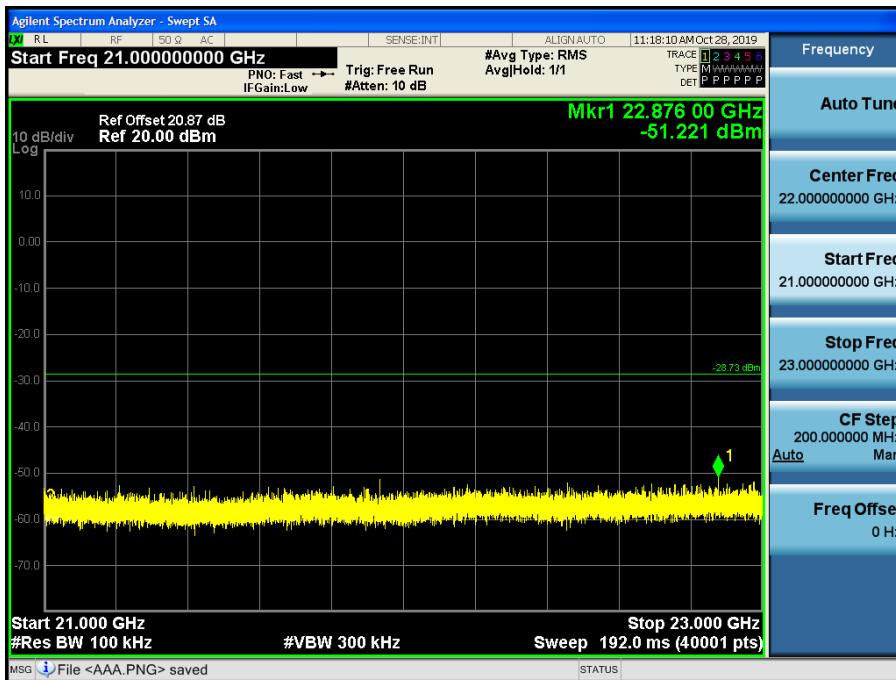

23 GHz ~ 25 GHz

Conducted Spurious Emission (Middle-CH 19)



9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.16	0.00	1.83	V	51.99	73.98	21.99	PK
4804	37.39	0.00	1.83	V	39.22	53.98	14.76	AV
7206	48.95	0.00	9.65	V	58.6	73.98	15.38	PK
7206	37.12	0.00	9.65	V	46.77	53.98	7.21	AV
4804	50.72	0.00	1.83	H	52.55	73.98	21.43	PK
4804	38.43	0.00	1.83	H	40.26	53.98	13.72	AV
7206	49.60	0.00	9.65	H	59.25	73.98	14.73	PK
7206	37.83	0.00	9.65	H	47.48	53.98	6.50	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	50.45	0.00	2.34	V	52.79	73.98	21.19	PK
4880	38.26	0.00	2.34	V	40.6	53.98	13.38	AV
7320	50.08	0.00	9.98	V	60.06	73.98	13.92	PK
7320	36.93	0.00	9.98	V	46.91	53.98	7.07	AV
4880	51.80	0.00	2.34	H	54.14	73.98	19.84	PK
4880	38.73	0.00	2.34	H	41.07	53.98	12.91	AV
7320	50.34	0.00	9.98	H	60.32	73.98	13.66	PK
7320	37.94	0.00	9.98	H	47.92	53.98	6.06	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.37	0.00	2.26	V	52.63	73.98	21.35	PK
4960	38.40	0.00	2.26	V	40.66	53.98	13.32	AV
7440	50.22	0.00	9.78	V	60	73.98	13.98	PK
7440	37.22	0.00	9.78	V	47	53.98	6.98	AV
4960	51.00	0.00	2.26	H	53.26	73.98	20.72	PK
4960	38.73	0.00	2.26	H	40.99	53.98	12.99	AV
7440	50.42	0.00	9.78	H	60.2	73.98	13.78	PK
7440	37.77	0.00	9.78	H	47.55	53.98	6.43	AV

Note:

1. Reading value is ambient level measurement, this reason not add the duty cycle factor for final result.

Mode : 2M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.11	0.00	1.83	V	51.94	73.98	22.04	PK
4804	37.59	0.00	1.83	V	39.42	53.98	14.56	AV
7206	49.25	0.00	9.65	V	58.9	73.98	15.08	PK
7206	37.15	0.00	9.65	V	46.8	53.98	7.18	AV
4804	50.42	0.00	1.83	H	52.25	73.98	21.73	PK
4804	38.62	0.00	1.83	H	40.45	53.98	13.53	AV
7206	50.75	0.00	9.65	H	60.4	73.98	13.58	PK
7206	37.87	0.00	9.65	H	47.52	53.98	6.46	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	50.01	0.00	2.34	V	52.35	73.98	21.63	PK
4880	38.20	0.00	2.34	V	40.54	53.98	13.44	AV
7320	50.37	0.00	9.98	V	60.35	73.98	13.63	PK
7320	37.41	0.00	9.98	V	47.39	53.98	6.59	AV
4880	50.96	0.00	2.34	H	53.3	73.98	20.68	PK
4880	38.69	0.00	2.34	H	41.03	53.98	12.95	AV
7320	50.56	0.00	9.98	H	60.54	73.98	13.44	PK
7320	37.96	0.00	9.98	H	47.94	53.98	6.04	AV

Operation Mode: CH High


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.08	0.00	2.26	V	52.34	73.98	21.64	PK
4960	38.11	0.00	2.26	V	40.37	53.98	13.61	AV
7440	50.37	0.00	9.78	V	60.15	73.98	13.83	PK
7440	37.14	0.00	9.78	V	46.92	53.98	7.06	AV
4960	51.06	0.00	2.26	H	53.32	73.98	20.66	PK
4960	38.72	0.00	2.26	H	40.98	53.98	13.00	AV
7440	50.60	0.00	9.78	H	60.38	73.98	13.60	PK
7440	37.73	0.00	9.78	H	47.51	53.98	6.47	AV

Note:

1. Reading value is ambient level measurement, this reason not add the duty cycle factor for final result.


▣ 1M Bit/s 37 Byte Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

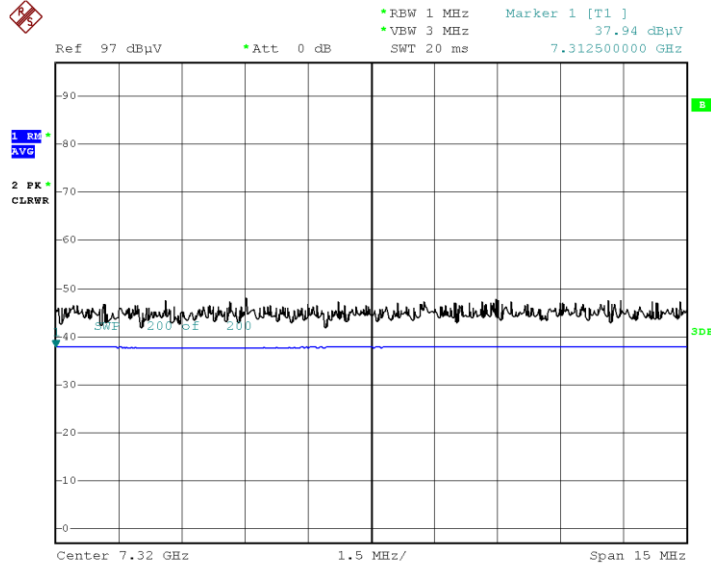

Date: 14.NOV.2019 10:53:40


Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

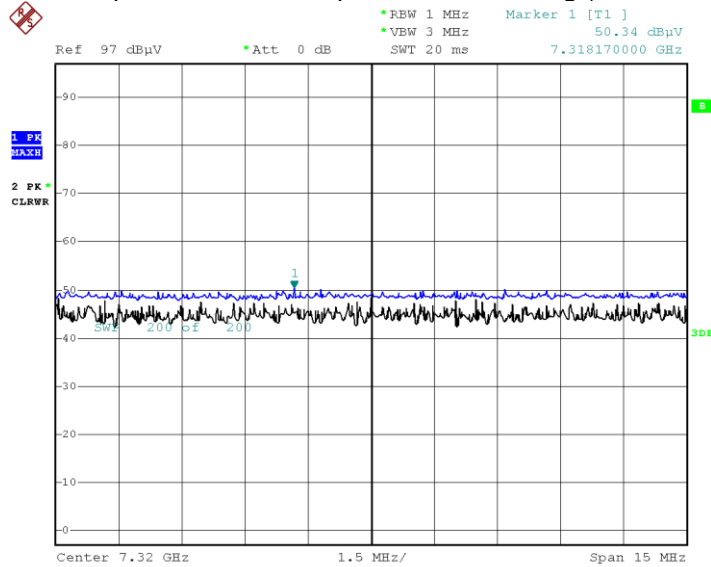

Date: 14.NOV.2019 10:55:09


▣ 2M Bit/s 37 Byte Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

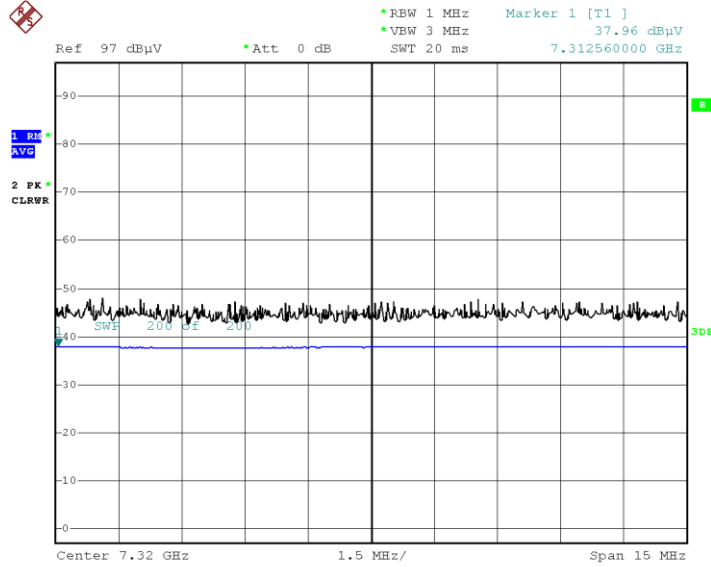

Date: 14.NOV.2019 10:56:06

Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

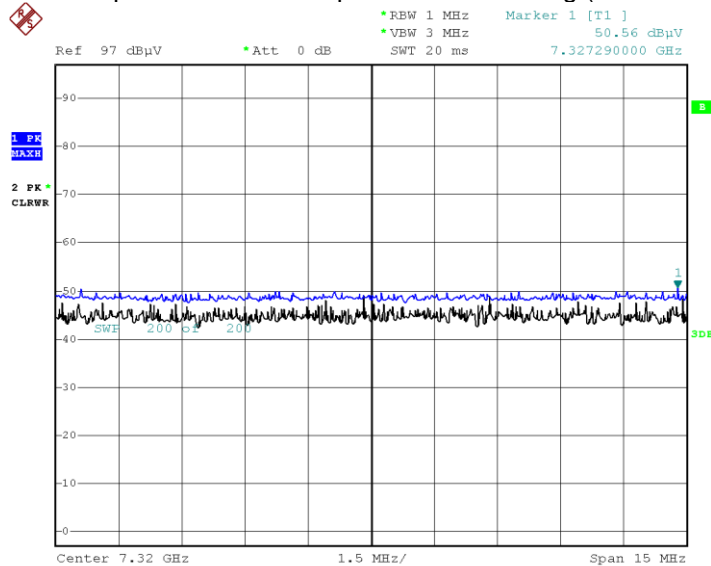

Date: 14.NOV.2019 10:55:43

Note:

Plot of worst case are only reported.

Mode : 1M Bit/s (255 Byte)

Operating Frequency 2402 MHz
Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.88	0.00	35.09	H	53.97	73.98	20.01	PK
2390.0	7.15	0.69	35.09	H	42.93	53.98	11.05	AV
2390.0	18.26	0.00	35.09	V	53.35	73.98	20.63	PK
2390.0	7.09	0.69	35.09	V	42.87	53.98	11.11	AV

Operating Frequency 2480 MHz
Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.28	0.00	35.11	H	54.39	73.98	19.59	PK
2483.5	8.41	0.69	35.11	H	44.21	53.98	9.77	AV
2483.5	18.75	0.00	35.11	V	53.86	73.98	20.12	PK
2483.5	7.95	0.69	35.11	V	43.75	53.98	10.23	AV

Mode : 2M Bit/s (37 Byte)

Operating Frequency 2402 MHz
Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.25	0.00	35.09	H	53.34	73.98	20.64	PK
2390.0	7.37	4.86	35.09	H	47.32	53.98	6.66	AV
2390.0	17.52	0.00	35.09	V	52.61	73.98	21.37	PK
2390.0	7.20	4.86	35.09	V	47.15	53.98	6.83	AV

Operating Frequency 2480 MHz
Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5 [*] (2484)	21.16	0.00	35.09	V	56.25	73.98	17.73	PK
2483.5 [*] (2484)	8.57	4.86	35.09	V	48.52	53.98	5.46	AV
2483.5 [*] (2485)	17.12	0.00	35.11	H	52.23	73.98	21.75	PK
2483.5 [*] (2485)	6.96	4.86	35.11	H	46.93	53.98	7.05	AV
2485.5~2500	18.14	0.00	35.11	V	53.25	73.98	20.73	PK
2485.5~2500	7.55	4.86	35.11	V	47.52	53.98	6.46	AV

*Note : *integration method Used (ANSI C63.10 Section11.13.3)

Mode : 2M Bit/s (255 Byte)

Operating Frequency 2402 MHz
Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.63	0.00	35.09	H	53.72	73.98	20.26	PK
2390.0	7.10	2.42	35.09	H	44.61	53.98	9.37	AV
2390.0	18.16	0.00	35.09	V	53.25	73.98	20.73	PK
2390.0	6.87	2.42	35.09	V	44.38	53.98	9.61	AV


Operating Frequency 2480 MHz
Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5 [*] (2484)	22.92	0.00	35.09	V	58.01	73.98	15.97	PK
2483.5 [*] (2484)	10.59	2.42	35.09	V	48.10	53.98	5.88	AV
2483.5 [*] (2485)	19.00	0.00	35.11	H	54.11	73.98	19.87	PK
2483.5 [*] (2485)	7.24	2.42	35.11	H	44.77	53.98	9.21	AV
2485.5~2500	18.68	0.00	35.11	V	53.79	73.98	20.19	PK
2485.5~2500	7.58	2.42	35.11	V	45.11	53.98	8.87	AV


*Note : *integration method Used (ANSI C63.10 Section11.13.3)

☐ Mode : 1M Bit/s (37 Byte) Test Plots (Worst case : Y-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

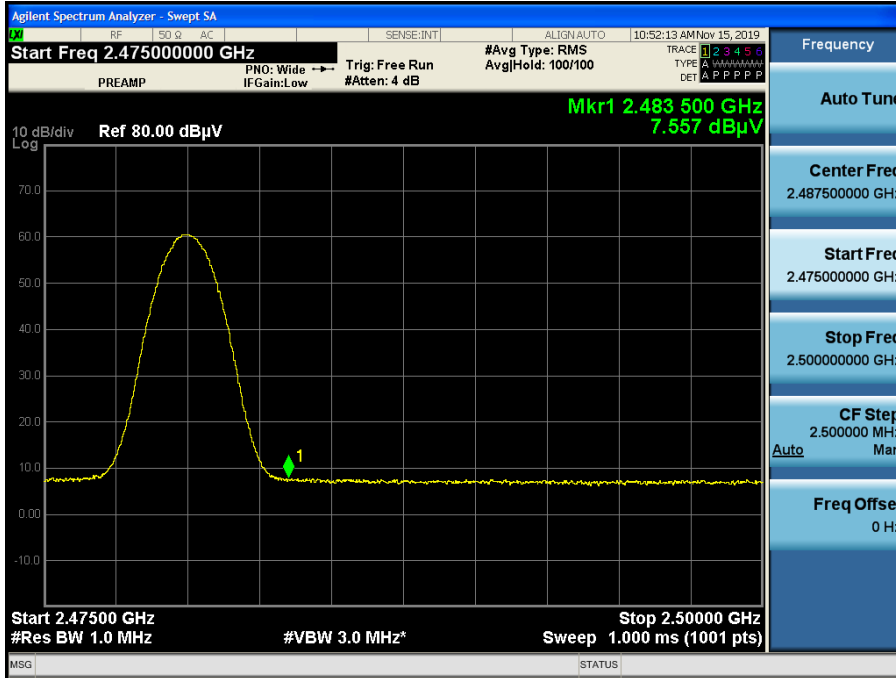


Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

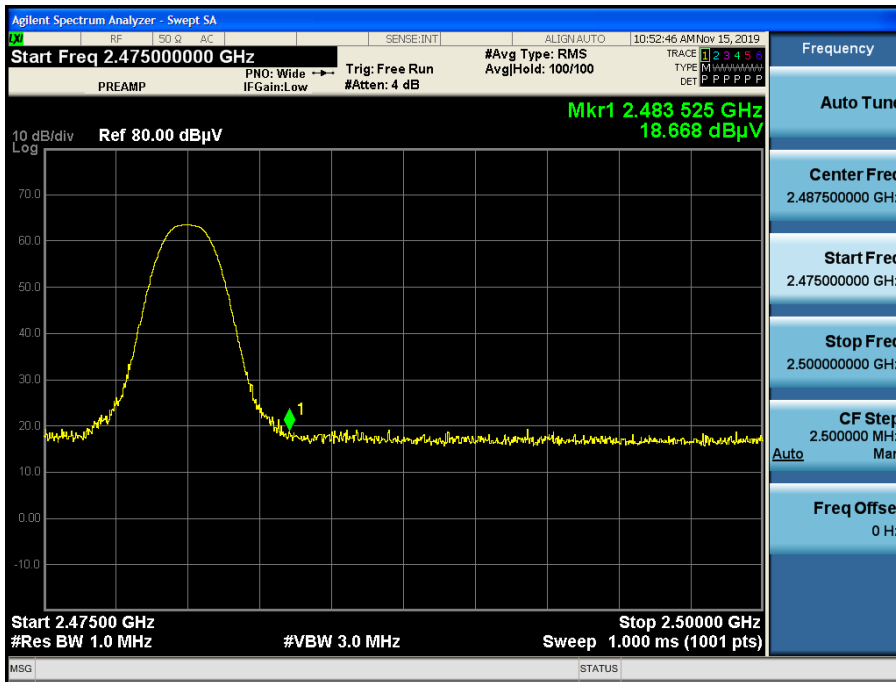


Mode : 2M Bit/s (37 Byte) Test Plots (Worst case : Y-H)


Radiated Restricted Band Edges plot – Average Reading (Ch.39) – 2 484 MHz

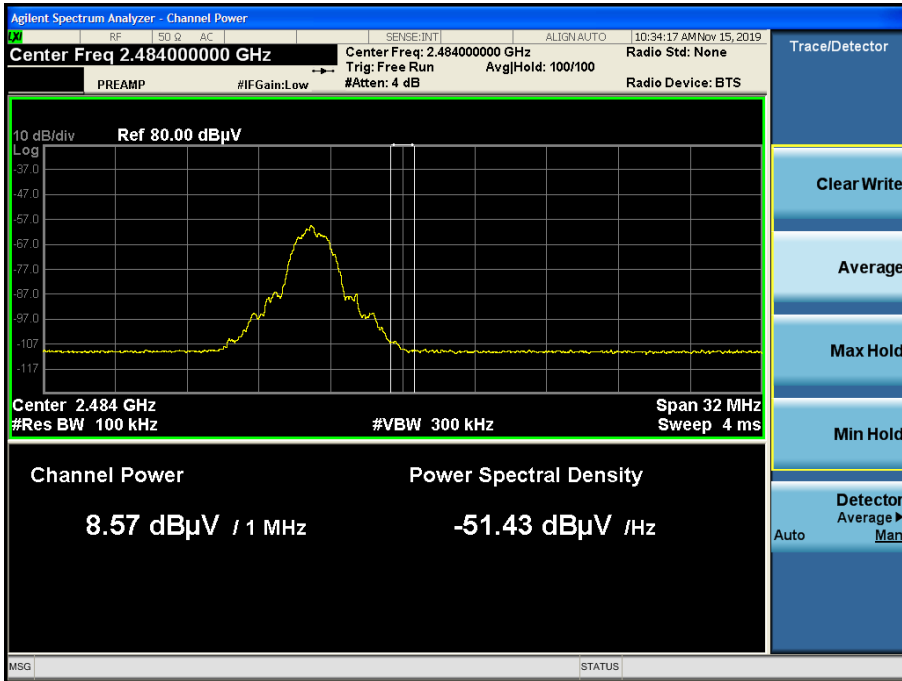


Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2 484 MHz

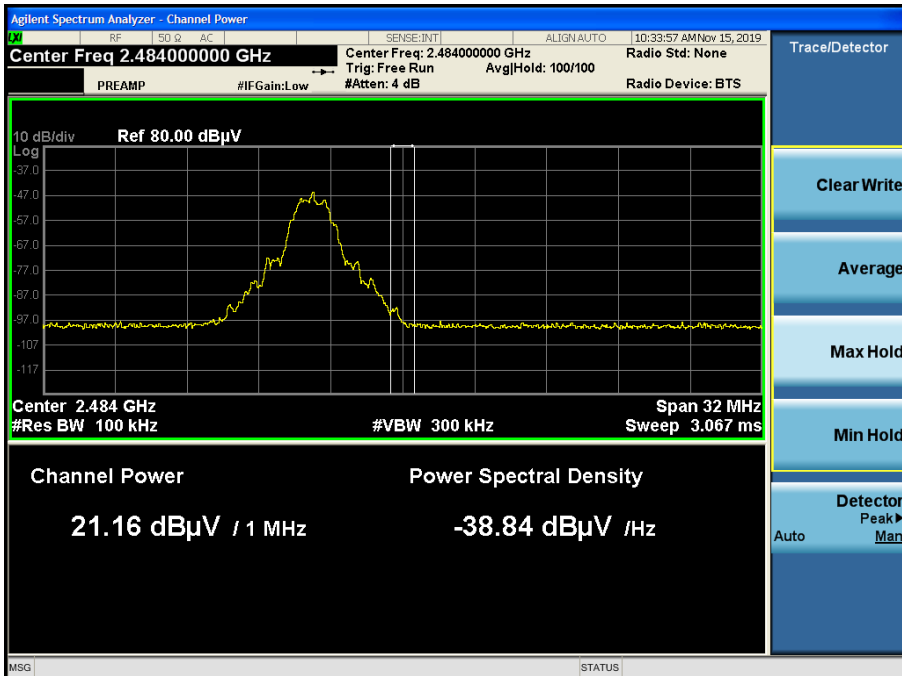


Radiated Restricted Band Edges plot – Average Reading (Ch.39) - 2 485 MHz

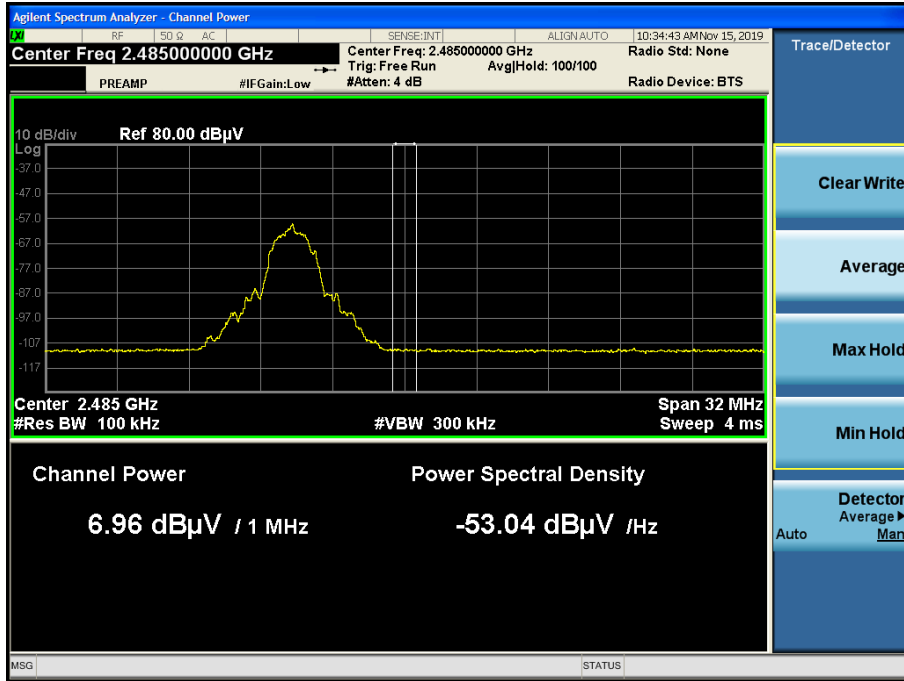


Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2 485 MHz

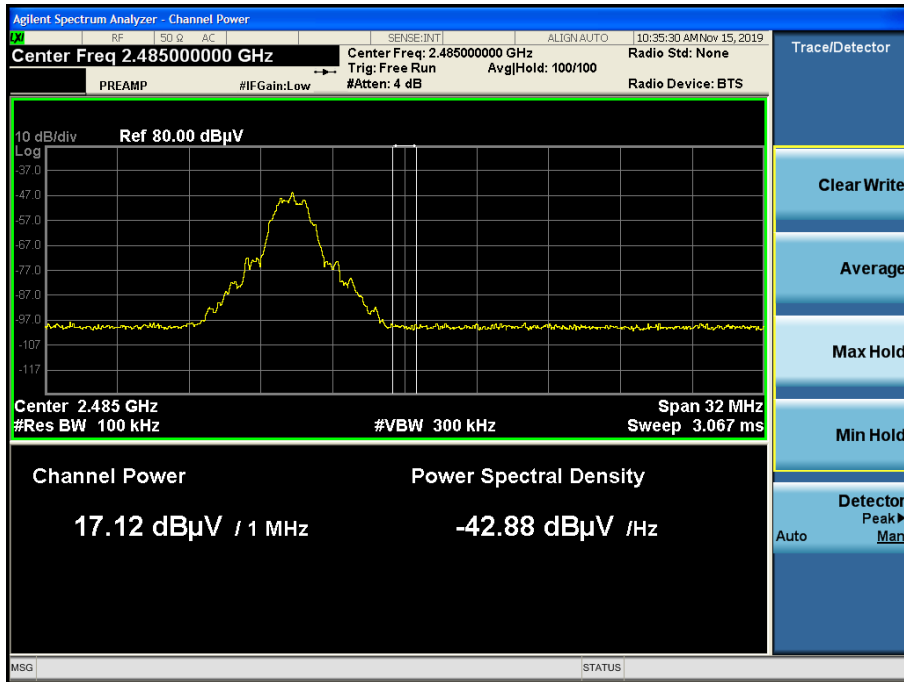

Radiated Restricted Band Edges plot – Average Reading (Ch.39) - 2485.5 MHz ~ 2 500 MHz

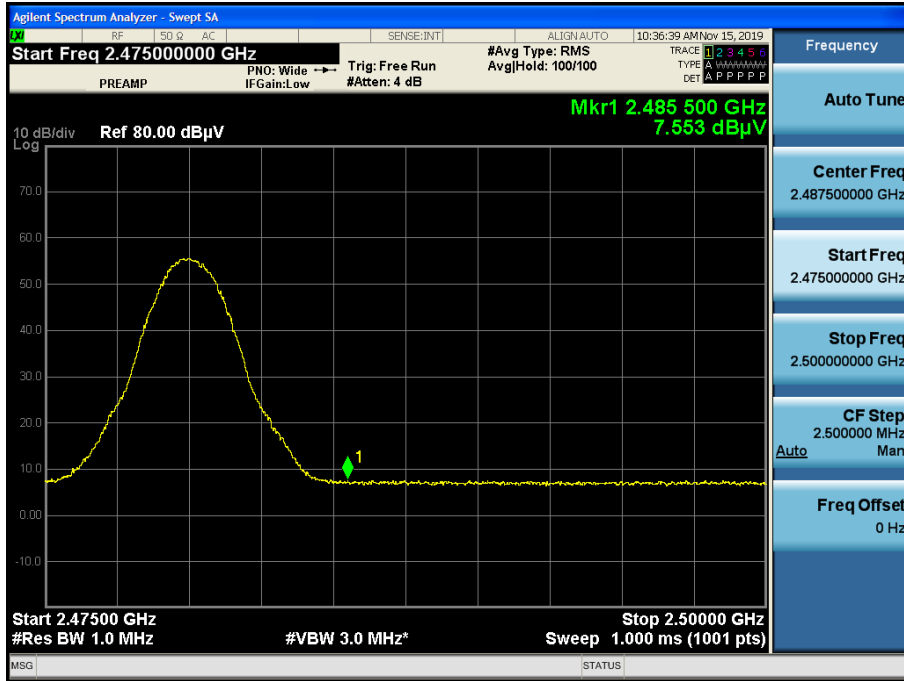


Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2485.5 MHz ~ 2 500 MHz

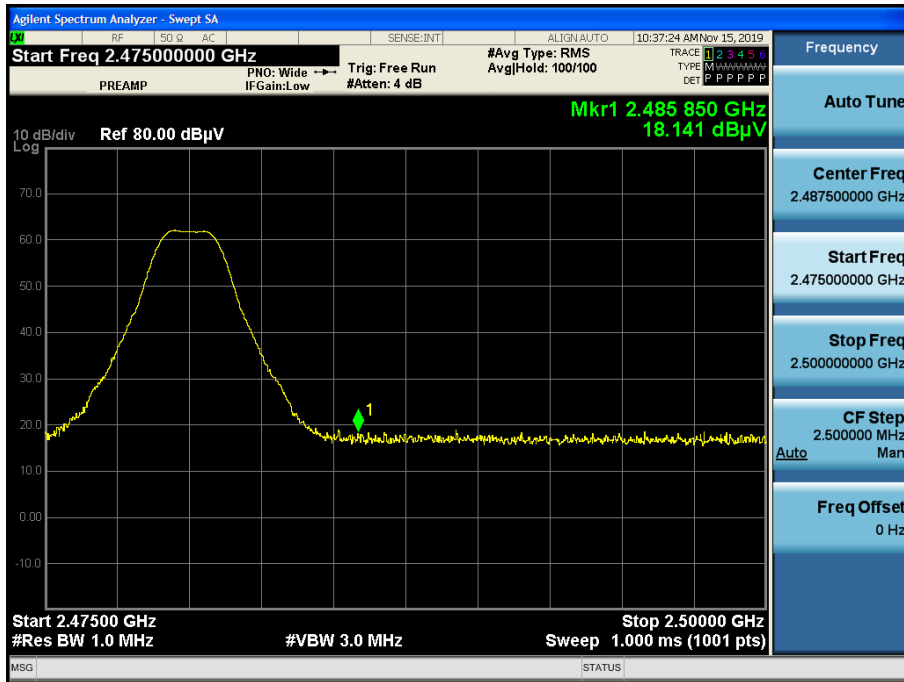


Mode : 2M Bit/s (255 Byte) Test Plots (Worst case : Y-H)


Radiated Restricted Band Edges plot – Average Reading (Ch.39) – 2 484 MHz

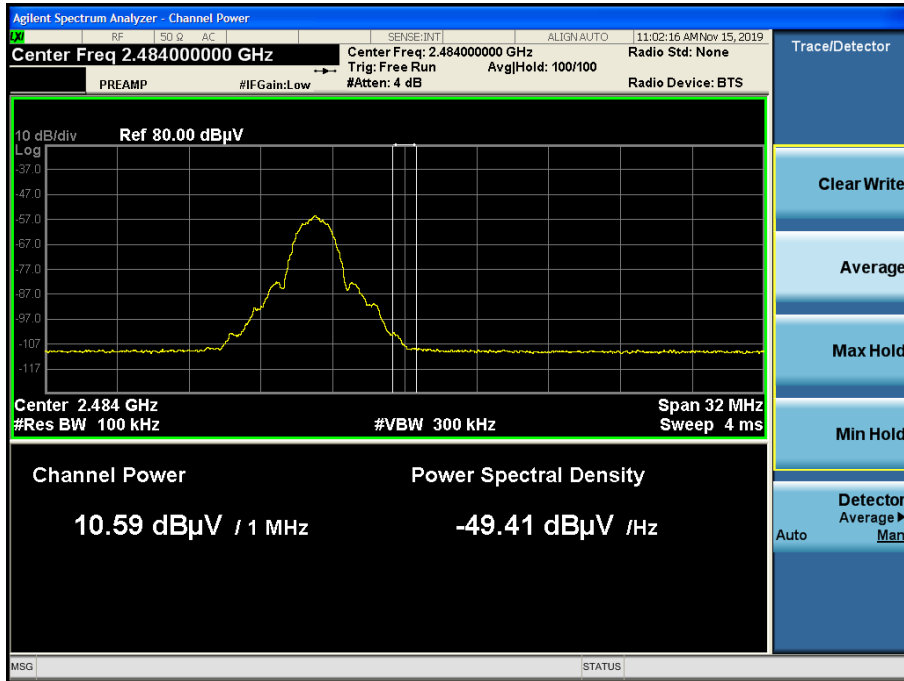


Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2 484 MHz

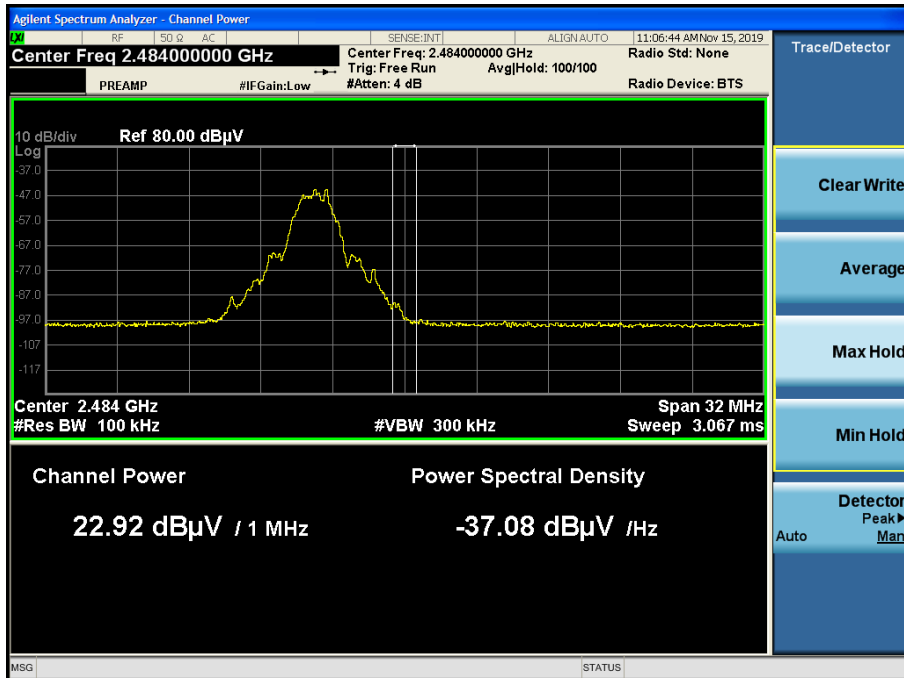


Radiated Restricted Band Edges plot – Average Reading (Ch.39) - 2 485 MHz

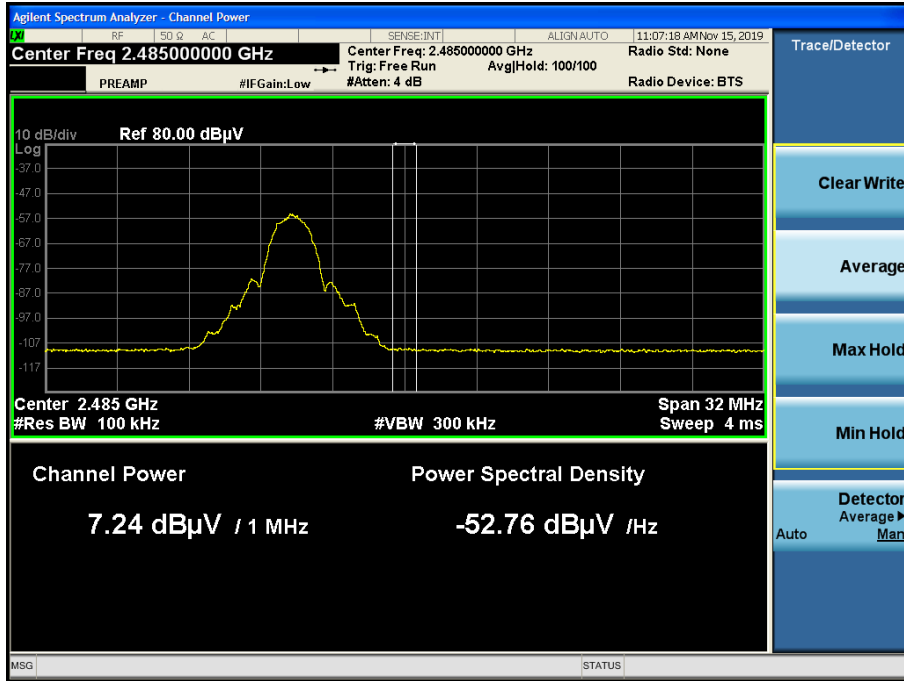


Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2 485 MHz

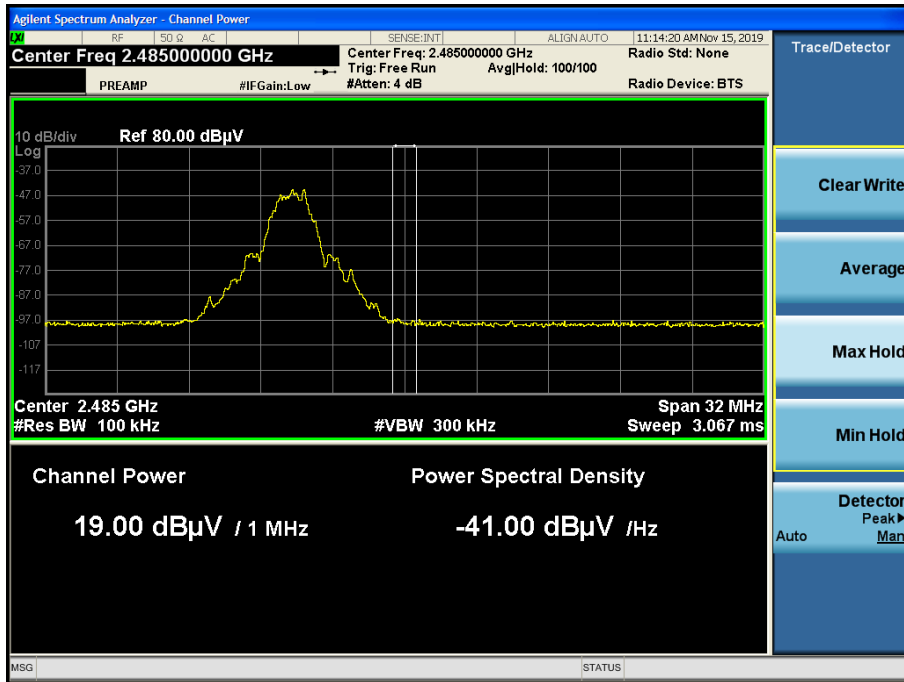

Radiated Restricted Band Edges plot – Average Reading (Ch.39) - 2485.5 MHz ~ 2 500 MHz

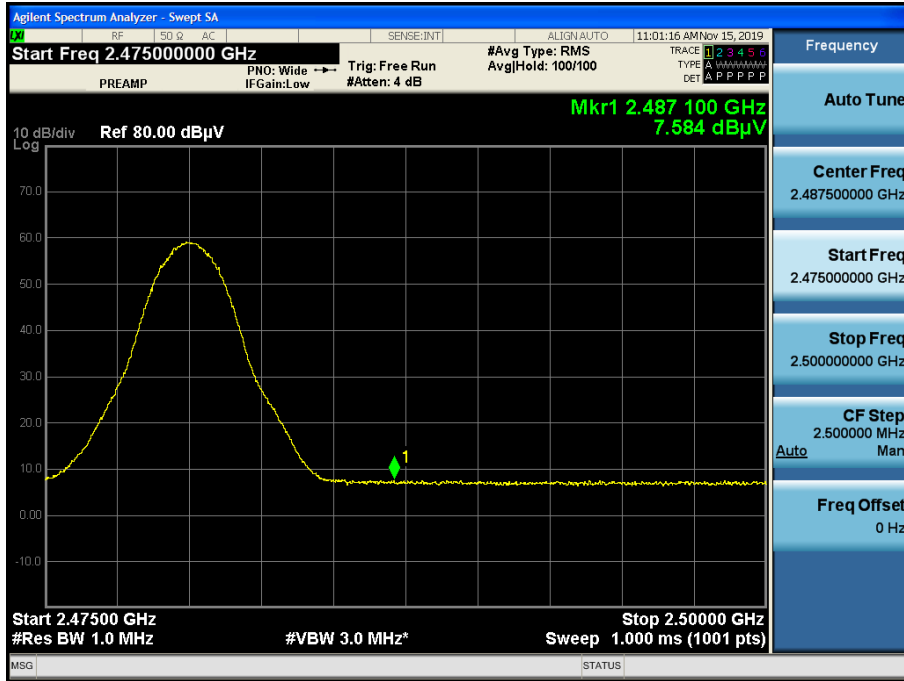

Radiated Restricted Band Edges plot – Peak Reading (Ch.39) - 2485.5 MHz ~ 2 500 MHz

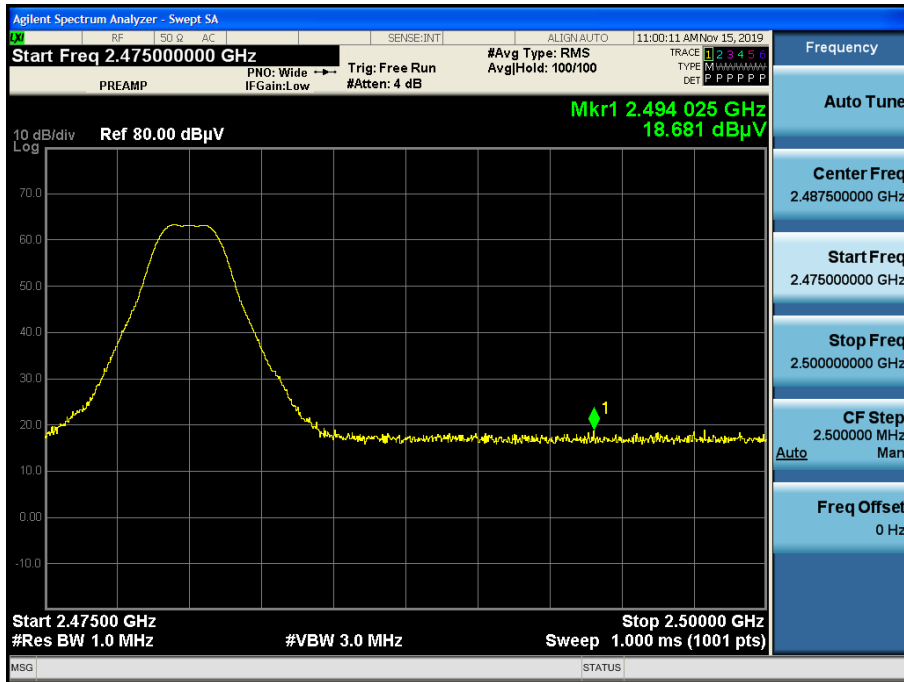

Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-T307U
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_L1

FCC CLASS B_Exten Cable

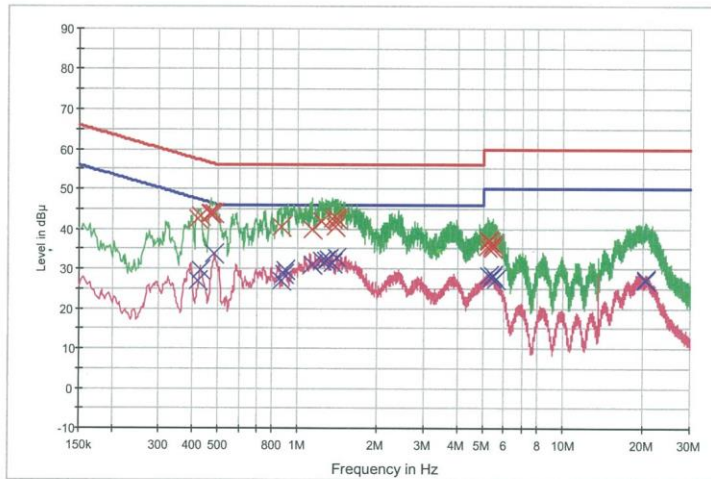

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.420000	42.6	9.000	Off	L1	9.8	14.8	57.4
0.428000	43.2	9.000	Off	L1	9.8	14.1	57.3
0.468000	43.8	9.000	Off	L1	9.8	12.7	56.5
0.472000	44.0	9.000	Off	L1	9.8	12.4	56.5
0.484000	43.8	9.000	Off	L1	9.8	12.5	56.3
0.862000	40.7	9.000	Off	L1	9.9	15.3	56.0
1.134000	39.9	9.000	Off	L1	9.9	16.1	56.0
1.236000	41.8	9.000	Off	L1	9.9	14.2	56.0
1.346000	42.6	9.000	Off	L1	9.9	13.4	56.0
1.388000	40.6	9.000	Off	L1	9.9	15.4	56.0
1.406000	42.5	9.000	Off	L1	9.9	13.5	56.0
1.412000	42.1	9.000	Off	L1	9.9	13.9	56.0
5.204000	35.4	9.000	Off	L1	10.1	24.6	60.0
5.248000	36.9	9.000	Off	L1	10.1	23.1	60.0
5.252000	37.1	9.000	Off	L1	10.1	22.9	60.0
5.346000	35.5	9.000	Off	L1	10.1	24.5	60.0
5.412000	36.2	9.000	Off	L1	10.1	23.8	60.0
5.420000	35.2	9.000	Off	L1	10.1	24.8	60.0

2019-10-24

오후 2:29:30

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.420000	26.9	9.000	Off	L1	9.8	20.5	47.4
0.428000	29.7	9.000	Off	L1	9.8	17.6	47.3
0.484000	33.6	9.000	Off	L1	9.8	12.7	46.3
0.864000	26.9	9.000	Off	L1	9.9	19.1	46.0
0.892000	28.5	9.000	Off	L1	9.9	17.5	46.0
0.900000	29.6	9.000	Off	L1	9.9	16.4	46.0
1.134000	30.8	9.000	Off	L1	9.9	15.2	46.0
1.236000	32.2	9.000	Off	L1	9.9	13.8	46.0
1.272000	32.0	9.000	Off	L1	9.9	14.0	46.0
1.302000	32.2	9.000	Off	L1	9.9	13.8	46.0
1.346000	31.3	9.000	Off	L1	9.9	14.7	46.0
1.406000	32.8	9.000	Off	L1	9.9	13.2	46.0
5.250000	28.4	9.000	Off	L1	10.1	21.6	50.0
5.346000	27.7	9.000	Off	L1	10.1	22.3	50.0
5.462000	28.1	9.000	Off	L1	10.1	21.9	50.0
5.566000	27.3	9.000	Off	L1	10.1	22.7	50.0
20.346000	27.0	9.000	Off	L1	10.7	23.0	50.0
20.490000	27.2	9.000	Off	L1	10.7	22.8	50.0

2019-10-24

오후 2:29:30

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-T307U
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_N

FCC CLASS B_Exten Cable

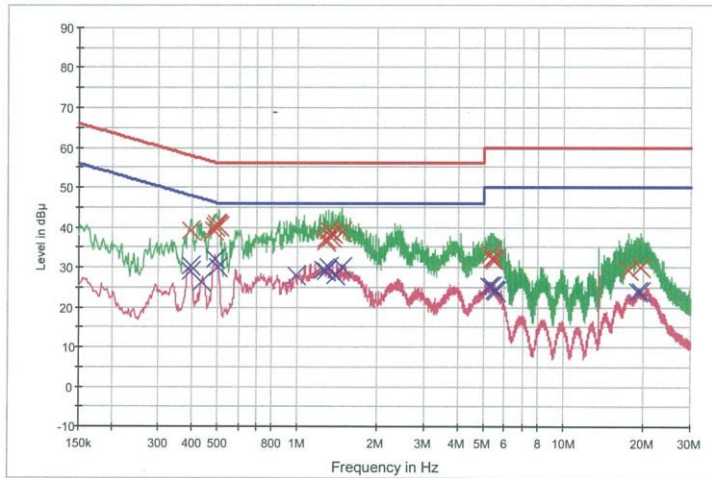

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.398000	39.1	9.000	Off	N	9.8	18.8	57.9
0.482000	39.1	9.000	Off	N	9.8	17.2	56.3
0.488000	40.0	9.000	Off	N	9.8	16.2	56.2
0.492000	40.9	9.000	Off	N	9.8	15.2	56.1
0.502000	40.4	9.000	Off	N	9.8	15.6	56.0
0.506000	40.2	9.000	Off	N	9.8	15.8	56.0
1.274000	36.6	9.000	Off	N	9.9	19.4	56.0
1.280000	37.0	9.000	Off	N	9.9	19.0	56.0
1.302000	39.1	9.000	Off	N	9.9	16.9	56.0
1.332000	37.5	9.000	Off	N	9.9	18.5	56.0
1.352000	38.5	9.000	Off	N	9.9	17.5	56.0
1.460000	39.0	9.000	Off	N	9.9	17.0	56.0
5.304000	33.5	9.000	Off	N	10.1	26.5	60.0
5.362000	32.2	9.000	Off	N	10.1	27.8	60.0
5.464000	32.2	9.000	Off	N	10.1	27.8	60.0
5.508000	31.7	9.000	Off	N	10.1	28.3	60.0
17.450000	29.3	9.000	Off	N	10.7	30.7	60.0
19.514000	30.0	9.000	Off	N	10.8	30.0	60.0

2019-10-24

오후 2:20:28

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.394000	30.4	9.000	Off	N	9.8	17.6	48.0
0.398000	28.8	9.000	Off	N	9.8	19.1	47.9
0.434000	26.3	9.000	Off	N	9.8	20.9	47.2
0.488000	32.1	9.000	Off	N	9.8	14.1	46.2
0.500000	30.2	9.000	Off	N	9.8	15.8	46.0
0.502000	30.1	9.000	Off	N	9.8	15.9	46.0
0.984000	27.8	9.000	Off	N	9.9	18.2	46.0
1.252000	29.2	9.000	Off	N	9.9	16.8	46.0
1.274000	29.1	9.000	Off	N	9.9	16.9	46.0
1.302000	29.9	9.000	Off	N	9.9	16.1	46.0
1.382000	27.9	9.000	Off	N	9.9	18.1	46.0
1.460000	30.1	9.000	Off	N	9.9	15.9	46.0
5.254000	25.2	9.000	Off	N	10.1	24.8	50.0
5.406000	25.3	9.000	Off	N	10.1	24.7	50.0
5.508000	24.3	9.000	Off	N	10.1	25.7	50.0
5.556000	24.0	9.000	Off	N	10.1	26.0	50.0
18.998000	23.7	9.000	Off	N	10.8	26.3	50.0
19.370000	24.0	9.000	Off	N	10.8	26.0	50.0

2019-10-24

오후 2:20:28

Conducted Emissions (Line 3)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-T307U
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_L1_Fast Charge

FCC CLASS B_Exten Cable

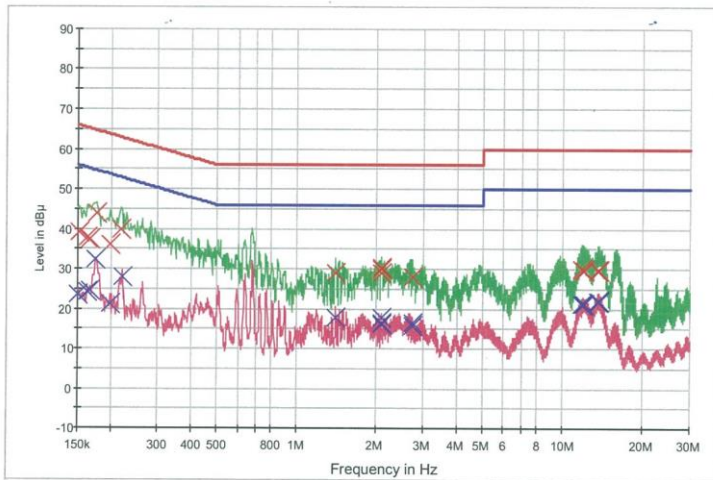

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	39.3	9.000	Off	L1	9.8	26.6	65.9
0.162000	37.9	9.000	Off	L1	9.8	27.4	65.4
0.166000	37.4	9.000	Off	L1	9.8	27.8	65.2
0.176000	44.0	9.000	Off	L1	9.8	20.6	64.7
0.198000	36.3	9.000	Off	L1	9.8	27.4	63.7
0.218000	39.9	9.000	Off	L1	9.8	23.0	62.9
1.400000	29.1	9.000	Off	L1	9.9	26.9	56.0
2.076000	30.3	9.000	Off	L1	9.9	25.7	56.0
2.082000	30.2	9.000	Off	L1	9.9	25.8	56.0
2.088000	30.0	9.000	Off	L1	9.9	26.0	56.0
2.094000	29.0	9.000	Off	L1	9.9	27.0	56.0
2.728000	27.9	9.000	Off	L1	9.9	28.1	56.0
11.838000	29.9	9.000	Off	L1	10.4	30.1	60.0
11.902000	29.8	9.000	Off	L1	10.4	30.2	60.0
11.956000	29.8	9.000	Off	L1	10.4	30.2	60.0
12.112000	29.7	9.000	Off	L1	10.4	30.3	60.0
13.612000	29.6	9.000	Off	L1	10.4	30.4	60.0
13.634000	29.5	9.000	Off	L1	10.4	30.5	60.0

2019-11-20

오후 2:23:40

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	23.6	9.000	Off	L1	9.8	32.4	56.0
0.162000	24.1	9.000	Off	L1	9.8	31.3	55.4
0.166000	24.7	9.000	Off	L1	9.8	30.4	55.2
0.174000	32.3	9.000	Off	L1	9.8	22.5	54.8
0.198000	21.3	9.000	Off	L1	9.8	32.4	53.7
0.220000	27.8	9.000	Off	L1	9.8	25.0	52.8
1.400000	18.0	9.000	Off	L1	9.9	28.0	46.0
2.076000	16.1	9.000	Off	L1	9.9	30.0	46.0
2.082000	17.7	9.000	Off	L1	9.9	28.3	46.0
2.094000	16.4	9.000	Off	L1	9.9	29.6	46.0
2.718000	16.3	9.000	Off	L1	9.9	29.7	46.0
2.728000	15.6	9.000	Off	L1	9.9	30.4	46.0
11.838000	21.2	9.000	Off	L1	10.4	28.8	50.0
11.956000	21.3	9.000	Off	L1	10.4	28.7	50.0
12.086000	21.2	9.000	Off	L1	10.4	28.8	50.0
12.112000	21.2	9.000	Off	L1	10.4	28.8	50.0
13.612000	21.9	9.000	Off	L1	10.4	28.1	50.0
13.634000	21.9	9.000	Off	L1	10.4	28.1	50.0

2019-11-20

오후 2:23:40

Conducted Emissions (Line 4)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-T307U
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_N_Fast Charge

FCC CLASS B_Exten Cable

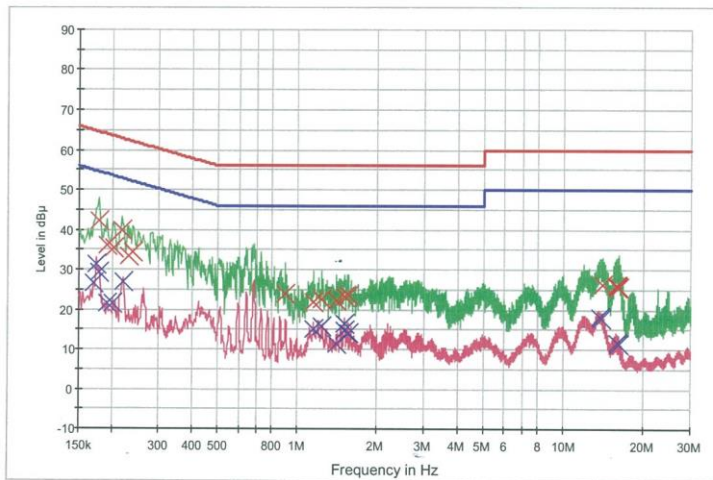

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.178000	42.3	9.000	Off	N	9.8	22.3	64.6
0.192000	36.2	9.000	Off	N	9.8	27.8	63.9
0.204000	35.3	9.000	Off	N	9.8	28.1	63.4
0.218000	40.0	9.000	Off	N	9.8	22.9	62.9
0.230000	33.5	9.000	Off	N	9.8	28.9	62.4
0.240000	34.2	9.000	Off	N	9.8	27.9	62.1
0.900000	23.7	9.000	Off	N	9.9	32.3	56.0
1.146000	22.0	9.000	Off	N	9.9	34.0	56.0
1.236000	22.5	9.000	Off	N	9.9	33.5	56.0
1.398000	22.2	9.000	Off	N	9.9	33.8	56.0
1.510000	23.2	9.000	Off	N	9.9	32.8	56.0
1.554000	23.6	9.000	Off	N	9.9	32.4	56.0
13.958000	26.2	9.000	Off	N	10.5	33.8	60.0
15.846000	25.8	9.000	Off	N	10.6	34.2	60.0
15.908000	25.8	9.000	Off	N	10.6	34.2	60.0
15.920000	25.8	9.000	Off	N	10.6	34.2	60.0
15.928000	25.7	9.000	Off	N	10.6	34.3	60.0
16.082000	25.7	9.000	Off	N	10.6	34.3	60.0

2019-11-20

오후 2:13:46

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.170000	26.7	9.000	Off	N	9.8	28.2	55.0
0.174000	31.2	9.000	Off	N	9.8	23.5	54.8
0.178000	29.2	9.000	Off	N	9.8	25.4	54.6
0.192000	21.5	9.000	Off	N	9.8	32.5	53.9
0.202000	21.5	9.000	Off	N	9.8	32.0	53.5
0.220000	27.0	9.000	Off	N	9.8	25.8	52.8
1.146000	14.9	9.000	Off	N	9.9	31.1	46.0
1.236000	15.7	9.000	Off	N	9.9	30.3	46.0
1.398000	11.4	9.000	Off	N	9.9	34.6	46.0
1.504000	16.5	9.000	Off	N	9.9	29.5	46.0
1.510000	14.6	9.000	Off	N	9.9	31.4	46.0
1.554000	14.1	9.000	Off	N	9.9	31.9	46.0
13.752000	18.3	9.000	Off	N	10.5	31.7	50.0
13.938000	17.8	9.000	Off	N	10.5	32.2	50.0
15.920000	11.8	9.000	Off	N	10.6	38.2	50.0
15.928000	11.6	9.000	Off	N	10.6	38.4	50.0
16.070000	11.2	9.000	Off	N	10.6	38.8	50.0
16.082000	11.2	9.000	Off	N	10.6	38.8	50.0

2019-11-20

오후 2:13:46

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPACE	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	05/09/2019	Annual	MY49432108
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/31/2018	Biennial	00895
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/16/2019	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	01/03/2019	Annual	F6
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/08/2019	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	10/29/2019	Annual	None
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/26/2019	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1911-FI021-P