

# FCC/IC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
December 23, 2019

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-1912-FI006-R1

<b>FCC ID:</b>	<b>A3LSMT307U</b>
<b>IC:</b>	<b>649E-SMT307U</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

Model(s): SM-T307U  
 EUT Type: Tablet  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §22, §2  
 IC Rule(s): RSS-Gen Issue5, RSS-132 Issue3

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5/ 26 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.158	21.99
		1M10W7D	16QAM	0.122	20.86
		1M09W7D	64QAM	0.098	19.91
LTE – Band5/ 26 (3)	825.5 – 847.5	2M73G7D	QPSK	0.159	22.01
		2M71W7D	16QAM	0.124	20.94
		2M71W7D	64QAM	0.100	20.01
LTE – Band5/ 26 (5)	826.5 – 846.5	4M52G7D	QPSK	0.162	22.09
		4M52W7D	16QAM	0.127	21.03
		4M53W7D	64QAM	0.103	20.14
LTE – Band5/ 26 (10)	829.0 – 844.0	9M00G7D	QPSK	0.166	22.20
		9M01W7D	16QAM	0.128	21.06
		8M99W7D	64QAM	0.104	20.16
LTE – BAND26 (15)	831.5 – 841.5	13M5G7D	QPSK	0.165	22.17
		13M5W7D	16QAM	0.126	21.01
		13M5W7D	64QAM	0.102	20.10

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by : Jae Ryang Do**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1912-FI006	December 11, 2019	- First Approval Report
HCT-RF-1912-FI006-R1	December 23, 2019	- Added EIRP result to Section 8.2.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

---

## Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT.....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 OCCUPIED BANDWIDTH. ....	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	10
3.6 BAND EDGE .....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	12
3.8 WORST CASE(RADIATED TEST) .....	13
3.9 WORST CASE(CONDUCTED TEST) .....	14
4. LIST OF TEST EQUIPMENT .....	15
5. MEASUREMENT UNCERTAINTY .....	16
6. SUMMARY OF TEST RESULTS .....	17
7. SAMPLE CALCULATION.....	18
8. TEST DATA .....	20
8.1 EFFECTIVE RADIATED POWER.....	20
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	23
8.3 RADIATED SPURIOUS EMISSIONS .....	26
8.4 OCCUPIED BANDWIDTH .....	31
8.5 CONDUCTED SPURIOUS EMISSIONS .....	32
8.6 BAND EDGE .....	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	33
8.8 RECEIVER SPURIOUS EMISSIONS .....	38
9. TEST PLOTS.....	39
10. ANNEX A_ TEST SETUP PHOTO.....	100

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMT307U
<b>IC</b>	649E-SMT307U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§22, §2
<b>IC Rule(s):</b>	RSS-Gen Issue5, RSS-132 Issue3
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-T307U
<b>Tx Frequency:</b>	824.7 MHz – 848.3 MHz (LTE – Band5 / 26 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band5 / 26 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band5 / 26 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band5 / 26 (10 MHz)) 831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	October 22, 2019 ~ November 25, 2019

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Tablet with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, ANT+.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 OCCUPIED BANDWIDTH.

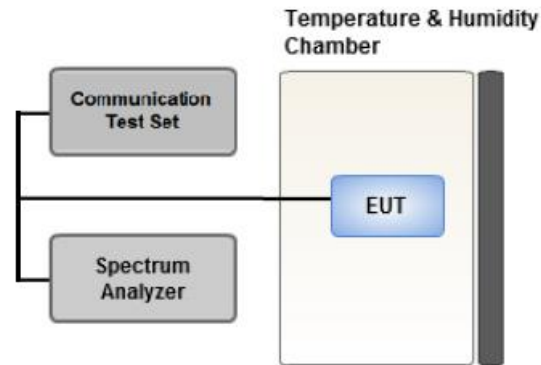

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

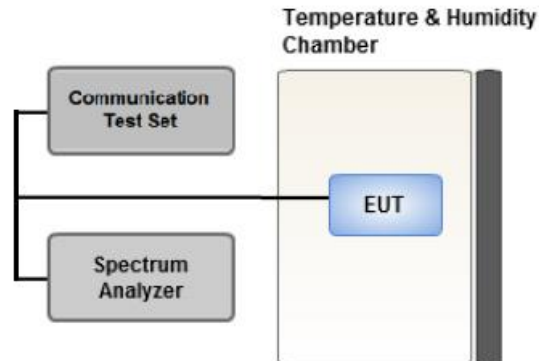

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.6 BAND EDGE

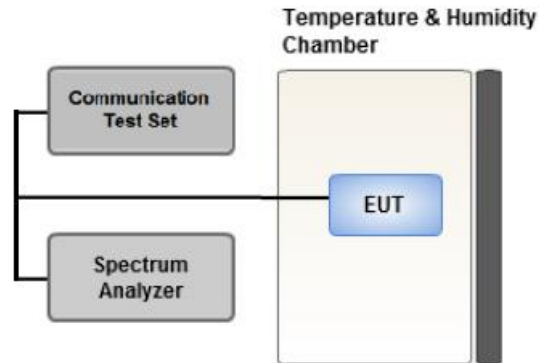

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

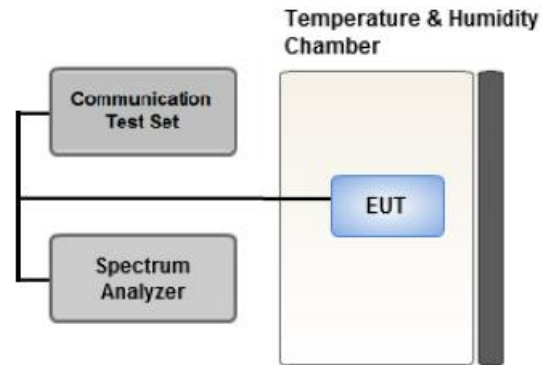

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- LTE Band 26(1.4M/3M/5M/10M) overlaps the entire frequency range of LTE Band 5(1.4M/3M/5M/10M) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 5 as well as Band 26.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

**3.9 WORST CASE(CONDUCTED TEST)**

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

- LTE Band 26(1.4M/3M/5M/10M) overlaps the entire frequency range of LTE Band 5(1.4M/3M/5M/10M) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 5 as well as Band 26.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
<b>Band Edge</b>	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		1.4, 3, 5, 10, 15	Low, High	Full RB	0
<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	1.4, 3, 5, 10, 15	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	RSS 132(5.5)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	-	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §22.355	RSS 132(5.3)	< 2.5 ppm	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	RSS 132(5.4)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	RSS 132(5.5)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.8	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
824.7	LTE B5/ 26 (1.4 MHz)	QPSK	-30.71	32.90	-10.24	1.28	H	< 7.00	0.137	21.38
		16-QAM	-31.82	31.79	-10.24	1.28	H		0.106	20.27
		64-QAM	-32.75	30.86	-10.24	1.28	H		0.086	19.34
836.5		QPSK	-30.71	33.47	-10.19	1.29	H		0.158	21.99
		16-QAM	-31.84	32.34	-10.19	1.29	H		0.122	20.86
		64-QAM	-32.79	31.39	-10.19	1.29	H		0.098	19.91
848.3		QPSK	-31.44	32.55	-10.14	1.30	H		0.129	21.11
		16-QAM	-32.49	31.50	-10.14	1.30	H		0.101	20.06
		64-QAM	-33.45	30.54	-10.14	1.30	H		0.081	19.10

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
825.5	LTE B5/ 26 (3 MHz)	QPSK	-30.60	33.04	-10.24	1.28	H	< 7.00	0.142	21.52
		16-QAM	-31.80	31.84	-10.24	1.28	H		0.108	20.32
		64-QAM	-32.66	30.98	-10.24	1.28	H		0.088	19.46
836.5		QPSK	-30.69	33.49	-10.19	1.29	H		0.159	22.01
		16-QAM	-31.76	32.42	-10.19	1.29	H		0.124	20.94
		64-QAM	-32.69	31.49	-10.19	1.29	H		0.100	20.01
847.5		QPSK	-31.43	32.60	-10.15	1.30	H		0.130	21.15
		16-QAM	-32.48	31.55	-10.15	1.30	H		0.102	20.10
		64-QAM	-33.44	30.59	-10.15	1.30	H		0.082	19.14

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
826.5	LTE B5/ 26 (5 MHz)	QPSK	-30.58	33.13	-10.24	1.28	H	< 7.00	0.145	21.62
		16-QAM	-31.71	32.00	-10.24	1.28	H		0.112	20.49
		64-QAM	-32.60	31.11	-10.24	1.28	H		0.091	19.60
836.5		QPSK	-30.61	33.57	-10.19	1.29	H		0.162	22.09
		16-QAM	-31.67	32.51	-10.19	1.29	H		0.127	21.03
		64-QAM	-32.56	31.62	-10.19	1.29	H		0.103	20.14
846.5		QPSK	-31.25	32.98	-10.15	1.30	H		0.142	21.53
		16-QAM	-32.31	31.92	-10.15	1.30	H		0.112	20.47
		64-QAM	-33.18	31.05	-10.15	1.30	H		0.091	19.60

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
829.0	LTE B5/ 26 (10 MHz)	QPSK	-30.62	33.19	-10.22	1.28	H	< 7.00	0.147	21.69
		16-QAM	-31.80	32.01	-10.22	1.28	H		0.112	20.51
		64-QAM	-32.66	31.15	-10.22	1.28	H		0.092	19.65
836.5		QPSK	-30.50	33.68	-10.19	1.29	H		0.166	22.20
		16-QAM	-31.64	32.54	-10.19	1.29	H		0.128	21.06
		64-QAM	-32.54	31.64	-10.19	1.29	H		0.104	20.16
844.0		QPSK	-30.84	33.30	-10.16	1.30	H		0.153	21.84
		16-QAM	-31.90	32.24	-10.16	1.30	H		0.120	20.78
		64-QAM	-32.84	31.30	-10.16	1.30	H		0.096	19.84

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
831.5	LTE B26 (15 MHz)	QPSK	-30.56	33.44	-10.21	1.29	H	< 7.00	0.156	21.94
		16-QAM	-31.65	32.35	-10.21	1.29	H		0.122	20.85
		64-QAM	-32.55	31.45	-10.21	1.29	H		0.099	19.95
836.5		QPSK	-30.53	33.65	-10.19	1.29	H		0.165	22.17
		16-QAM	-31.69	32.49	-10.19	1.29	H		0.126	21.01
		64-QAM	-32.60	31.58	-10.19	1.29	H		0.102	20.10
841.5		QPSK	-30.63	33.53	-10.17	1.30	H		0.161	22.06
		16-QAM	-31.97	32.19	-10.17	1.30	H		0.118	20.72
		64-QAM	-32.78	31.38	-10.17	1.30	H		0.098	19.91

**8.2 EQUIVALENT ISOTROPIC RADIATED POWER**

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	EIRP	
									W	W
824.7	LTE B5/ 26 (1.4 MHz)	QPSK	-30.71	32.90	-10.24	1.28	H	< 7.00	0.226	23.53
		16-QAM	-31.82	31.79	-10.24	1.28	H		0.175	22.42
		64-QAM	-32.75	30.86	-10.24	1.28	H		0.141	21.49
836.5		QPSK	-30.71	33.47	-10.19	1.29	H		0.260	24.14
		16-QAM	-31.84	32.34	-10.19	1.29	H		0.200	23.01
		64-QAM	-32.79	31.39	-10.19	1.29	H		0.161	22.06
848.3		QPSK	-31.44	32.55	-10.14	1.30	H		0.212	23.26
		16-QAM	-32.49	31.50	-10.14	1.30	H		0.166	22.21
		64-QAM	-33.45	30.54	-10.14	1.30	H		0.133	21.25

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	EIRP	
									W	W
825.5	LTE B5/ 26 (3 MHz)	QPSK	-30.60	33.04	-10.24	1.28	H	< 7.00	0.233	23.67
		16-QAM	-31.80	31.84	-10.24	1.28	H		0.177	22.47
		64-QAM	-32.66	30.98	-10.24	1.28	H		0.145	21.61
836.5		QPSK	-30.69	33.49	-10.19	1.29	H		0.261	24.16
		16-QAM	-31.76	32.42	-10.19	1.29	H		0.204	23.09
		64-QAM	-32.69	31.49	-10.19	1.29	H		0.165	22.16
847.5		QPSK	-31.43	32.60	-10.15	1.30	H		0.214	23.30
		16-QAM	-32.48	31.55	-10.15	1.30	H		0.168	22.25
		64-QAM	-33.44	30.59	-10.15	1.30	H		0.135	21.29

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	EIRP	
									W	W
826.5	LTE B5/ 26 (5 MHz)	QPSK	-30.58	33.13	-10.24	1.28	H	< 7.00	0.238	23.77
		16-QAM	-31.71	32.00	-10.24	1.28	H		0.183	22.64
		64-QAM	-32.60	31.11	-10.24	1.28	H		0.149	21.75
836.5		QPSK	-30.61	33.57	-10.19	1.29	H		0.266	24.24
		16-QAM	-31.67	32.51	-10.19	1.29	H		0.208	23.18
		64-QAM	-32.56	31.62	-10.19	1.29	H		0.170	22.29
846.5		QPSK	-31.25	32.98	-10.15	1.30	H		0.234	23.68
		16-QAM	-32.31	31.92	-10.15	1.30	H		0.183	22.62
		64-QAM	-33.18	31.05	-10.15	1.30	H		0.150	21.75

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	EIRP	
									W	W
829.0	LTE B5/ 26 (10 MHz)	QPSK	-30.62	33.19	-10.22	1.28	H	< 7.00	0.242	23.84
		16-QAM	-31.80	32.01	-10.22	1.28	H		0.184	22.66
		64-QAM	-32.66	31.15	-10.22	1.28	H		0.151	21.80
836.5		QPSK	-30.50	33.68	-10.19	1.29	H		0.273	24.35
		16-QAM	-31.64	32.54	-10.19	1.29	H		0.210	23.21
		64-QAM	-32.54	31.64	-10.19	1.29	H		0.170	22.31
844.0		QPSK	-30.84	33.30	-10.16	1.30	H		0.251	23.99
		16-QAM	-31.90	32.24	-10.16	1.30	H		0.196	22.93
		64-QAM	-32.84	31.30	-10.16	1.30	H		0.158	21.99

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	EIRP	
								W	W	dBm
831.5	LTE B26 (15 MHz)	QPSK	-30.56	33.44	-10.21	1.29	H	< 7.00	0.256	24.09
		16-QAM	-31.65	32.35	-10.21	1.29	H		0.200	23.00
		64-QAM	-32.55	31.45	-10.21	1.29	H		0.162	22.10
836.5		QPSK	-30.53	33.65	-10.19	1.29	H		0.271	24.32
		16-QAM	-31.69	32.49	-10.19	1.29	H		0.207	23.16
		64-QAM	-32.60	31.58	-10.19	1.29	H		0.168	22.25
841.5		QPSK	-30.63	33.53	-10.17	1.30	H		0.264	24.21
		16-QAM	-31.97	32.19	-10.17	1.30	H		0.194	22.87
		64-QAM	-32.78	31.38	-10.17	1.30	H		0.161	22.06

Note:

1. EIRP = ERP + 2.15

### 8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 836.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.14 dBm = 0.260 W
- ▣ MODE: LTE B5/ 26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.14 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26797 (824.7)	1,649.40	-53.05	9.50	-63.81	1.84	V	-56.15	80.30
	2,474.10	-55.60	10.60	-60.53	2.29	V	-52.22	76.36
	3,298.80	-57.24	12.30	-59.18	2.69	H	-49.57	73.71
26915 (836.5)	1,673.00	-51.38	9.65	-62.14	1.86	H	-54.35	78.49
	2,509.50	-54.89	10.75	-60.00	2.32	H	-51.57	75.72
	3,346.00	-58.10	12.48	-59.75	2.70	H	-49.98	74.12
27033 (848.3)	1,696.60	-51.23	9.77	-61.66	1.87	V	-53.77	77.91
	2,544.90	-55.49	10.88	-59.60	2.32	H	-51.04	75.19
	3,393.20	-58.55	12.65	-60.50	2.71	H	-50.56	74.71

- ▣ OPERATING FREQUENCY: 836.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.16 dBm = 0.261 W
- ▣ MODE: LTE B5/ 26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.16 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26805 (825.5)	1,651.00	-53.49	9.50	-64.25	1.84	H	-56.59	80.76
	2,476.50	-54.87	10.60	-59.80	2.29	H	-51.49	75.65
	3,302.00	-57.92	12.30	-59.86	2.69	V	-50.25	74.41
26915 (836.5)	1,673.00	-51.78	9.65	-62.54	1.86	V	-54.75	78.91
	2,509.50	-55.35	10.75	-60.46	2.32	H	-52.03	76.20
	3,346.00	-58.41	12.48	-60.06	2.70	H	-50.29	74.45
27025 (847.5)	1,695.00	-52.53	9.77	-62.97	1.87	V	-55.07	79.23
	2,542.50	-55.04	10.85	-58.90	2.32	V	-50.37	74.54
	3,390.00	-58.76	12.65	-60.71	2.71	H	-50.77	74.94

- ▣ OPERATING FREQUENCY: 836.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.24 dBm = 0.266 W
- ▣ MODE: LTE B5/ 26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.24 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26815 (826.5)	1,653.00	-53.27	9.54	-64.07	1.85	V	-56.38	80.62
	2,479.50	-56.28	10.60	-61.09	2.30	V	-52.79	77.03
	3,306.00	-58.56	12.33	-60.55	2.69	V	-50.91	75.16
26915 (836.5)	1,673.00	-52.42	9.65	-63.18	1.86	V	-55.39	79.63
	2,509.50	-55.26	10.75	-60.37	2.32	H	-51.94	76.19
	3,346.00	-58.92	12.48	-60.57	2.70	H	-50.80	75.04
27015 (846.5)	1,693.00	-50.89	9.73	-61.51	1.87	V	-53.65	77.90
	2,539.50	-56.10	10.85	-59.96	2.32	V	-51.43	75.68
	3,386.00	-58.34	12.63	-60.34	2.72	V	-50.43	74.67

- ▣ OPERATING FREQUENCY: 836.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.35 dBm = 0.273 W
- ▣ MODE: LTE B5/ 26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10} (W) =$  37.35 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26840 (829.0)	1658.00	-54.28	9.58	-65.12	1.85	V	-57.39	81.75
	2487.00	-55.68	10.65	-60.82	2.30	V	-52.47	76.83
	3316.00	-57.39	12.38	-59.24	2.68	V	-49.54	73.90
26915 (836.5)	1673.00	-52.40	9.65	-63.16	1.86	V	-55.37	79.72
	2509.50	-55.42	10.75	-60.53	2.32	V	-52.10	76.46
	3346.00	-58.18	12.48	-59.83	2.70	H	-50.06	74.41
26990 (844.0)	1688.00	-53.38	9.73	-64.00	1.87	V	-56.14	80.50
	2532.00	-53.90	10.80	-58.64	2.33	V	-50.17	74.53
	3376.00	-58.99	12.60	-61.00	2.72	V	-51.12	75.47

- ▣ OPERATING FREQUENCY: 836.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.32 dBm = 0.271 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.32 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26865 (831.5)	1663.00	-53.66	9.58	-64.50	1.85	V	-56.77	81.13
	2494.50	-54.71	10.68	-59.82	2.31	V	-51.45	75.81
	3326.00	-56.93	12.40	-58.80	2.69	H	-49.08	73.44
26915 (836.5)	1673.00	-53.61	9.65	-64.37	1.86	V	-56.58	80.93
	2509.50	-56.22	10.75	-61.33	2.32	H	-52.90	77.26
	3346.00	-57.79	12.48	-59.44	2.70	V	-49.67	74.02
26965 (841.5)	1683.00	-52.81	9.65	-63.49	1.86	V	-55.70	80.05
	2524.50	-55.63	10.80	-60.30	2.33	V	-51.82	76.17
	3366.00	-58.10	12.58	-59.91	2.72	H	-50.06	74.41

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
5/ 26	1.4 MHz	836.5	QPSK	6	0	1.0987
			16-QAM			1.0976
			64-QAM			1.0934
	3 MHz		QPSK	15		2.7322
			16-QAM			2.7099
			64-QAM			2.7091
	5 MHz		QPSK	25		4.5237
			16-QAM			4.5145
			64-QAM			4.5272
	10 MHz		QPSK	50		9.0008
			16-QAM			9.0047
			64-QAM			8.9887
26	15 MHz	QPSK	75	13.482		
		16-QAM		13.481		
		64-QAM		13.489		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 40 ~ 54.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5/ 26	1.4	824.7	3.7114	27.976	-67.433	-39.457	-13.00
		836.5	3.6800	27.976	-67.543	-39.567	
		848.3	3.6795	27.976	-67.437	-39.461	
	3	825.5	3.7079	27.976	-67.446	-39.470	
		836.5	3.6715	27.976	-67.071	-39.095	
		847.5	3.7005	27.976	-67.484	-39.508	
	5	826.5	3.7084	27.976	-67.317	-39.341	
		836.5	3.6970	27.976	-67.319	-39.343	
		846.5	3.7044	27.976	-67.335	-39.359	
	10	829.0	3.6785	27.976	-66.904	-38.928	
		836.5	3.6810	27.976	-66.883	-38.907	
		844.0	3.6830	27.976	-67.021	-39.045	
26	15	831.5	3.6875	27.976	-67.109	-39.133	
		836.5	3.6720	27.976	-66.980	-39.004	
		841.5	3.6905	27.976	-66.845	-38.869	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 99.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 55 ~ 84.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100%		-30	836 500 006	3.0	0.000 000	0.004
100%		-20	836 500 005	2.9	0.000 000	0.003
100%		-10	836 500 005	2.5	0.000 000	0.003
100%		0	836 500 006	3.2	0.000 000	0.004
100%		+10	836 500 005	2.6	0.000 000	0.003
100%		+30	836 500 005	2.6	0.000 000	0.003
100%		+40	836 500 004	1.8	0.000 000	0.002
100%		+50	836 500 005	2.1	0.000 000	0.003
Batt. Endpoint		7.300	+20	836 500 004	1.9	0.000 000

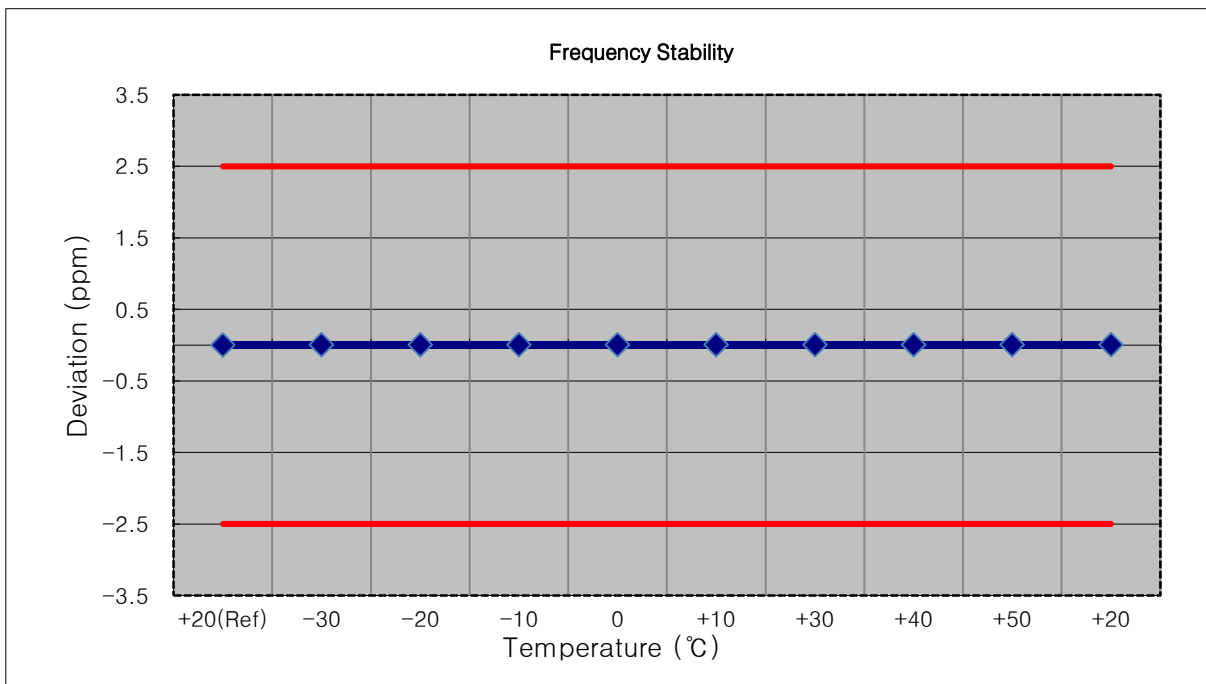


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (3 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100%		-30	836 500 001	-2.0	0.000 000	-0.002
100%		-20	836 500 006	2.8	0.000 000	0.003
100%		-10	836 500 006	2.8	0.000 000	0.003
100%		0	836 500 006	3.2	0.000 000	0.004
100%		+10	836 500 007	4.5	0.000 001	0.005
100%		+30	836 500 007	3.6	0.000 000	0.004
100%		+40	836 500 005	2.3	0.000 000	0.003
100%		+50	836 500 006	3.5	0.000 000	0.004
Batt. Endpoint		7.300	+20	836 499 999	-3.7	0.000 000

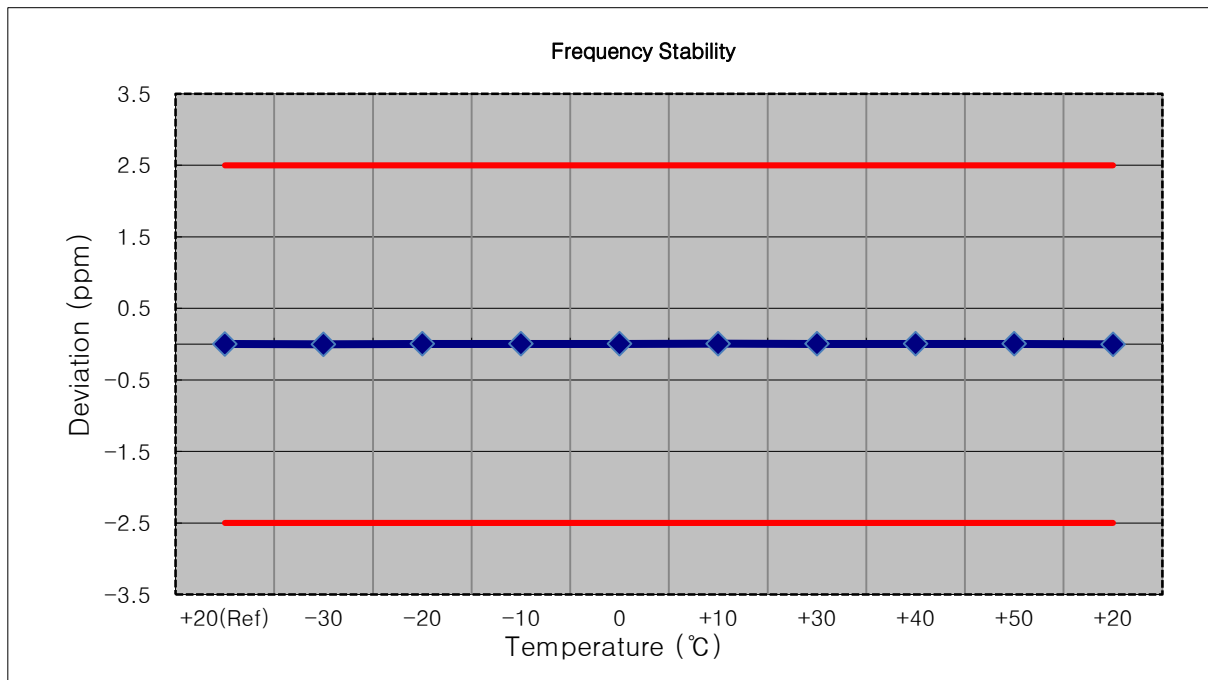


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	836 499 997	0.0	0.000 000	0.000
100%		-30	836 500 000	2.6	0.000 000	0.003
100%		-20	836 500 001	3.9	0.000 000	0.005
100%		-10	836 500 001	4.0	0.000 000	0.005
100%		0	836 499 994	-3.0	0.000 000	-0.004
100%		+10	836 500 002	4.6	0.000 001	0.005
100%		+30	836 500 000	3.1	0.000 000	0.004
100%		+40	836 500 000	2.4	0.000 000	0.003
100%		+50	836 499 994	-2.9	0.000 000	-0.003
Batt. Endpoint		7.300	+20	836 500 000	2.5	0.000 000

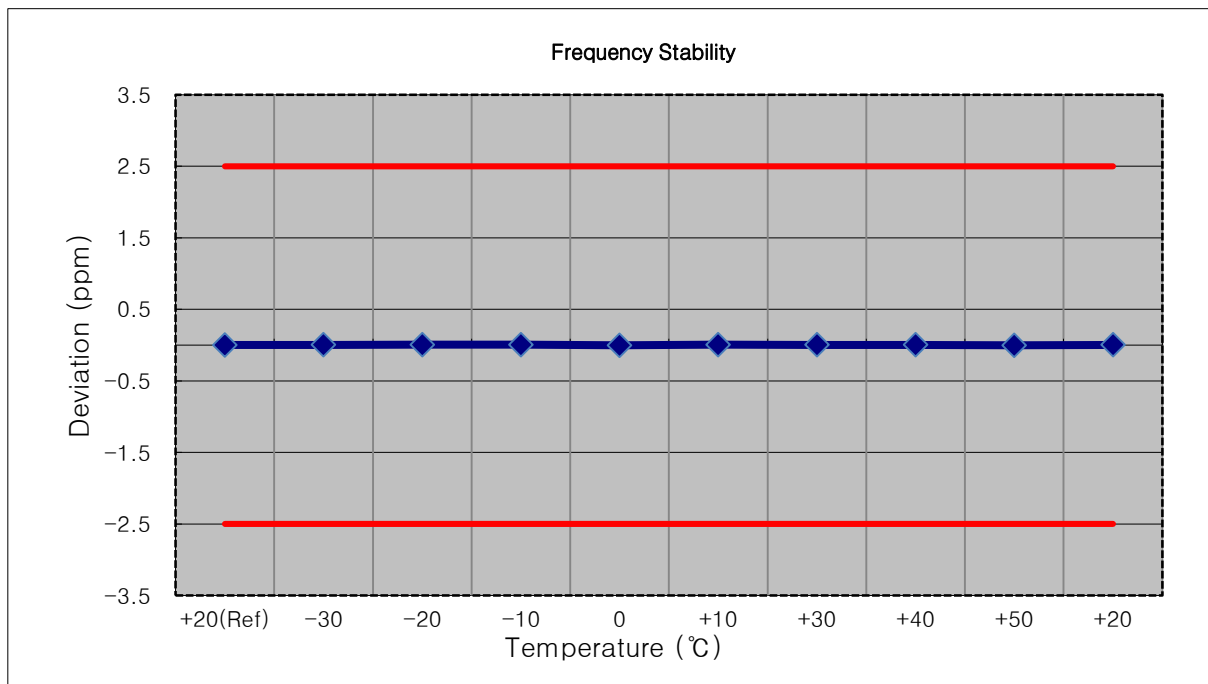


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (10 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	836 500 002	0.0	0.000 000	0.000
100%		-30	836 500 001	-1.6	0.000 000	-0.002
100%		-20	836 500 004	1.9	0.000 000	0.002
100%		-10	836 500 005	2.3	0.000 000	0.003
100%		0	836 500 001	-1.8	0.000 000	-0.002
100%		+10	836 500 005	2.2	0.000 000	0.003
100%		+30	836 500 000	-2.4	0.000 000	-0.003
100%		+40	836 500 000	-2.4	0.000 000	-0.003
100%		+50	836 500 004	1.6	0.000 000	0.002
Batt. Endpoint		7.300	+20	836 500 004	2.0	0.000 000

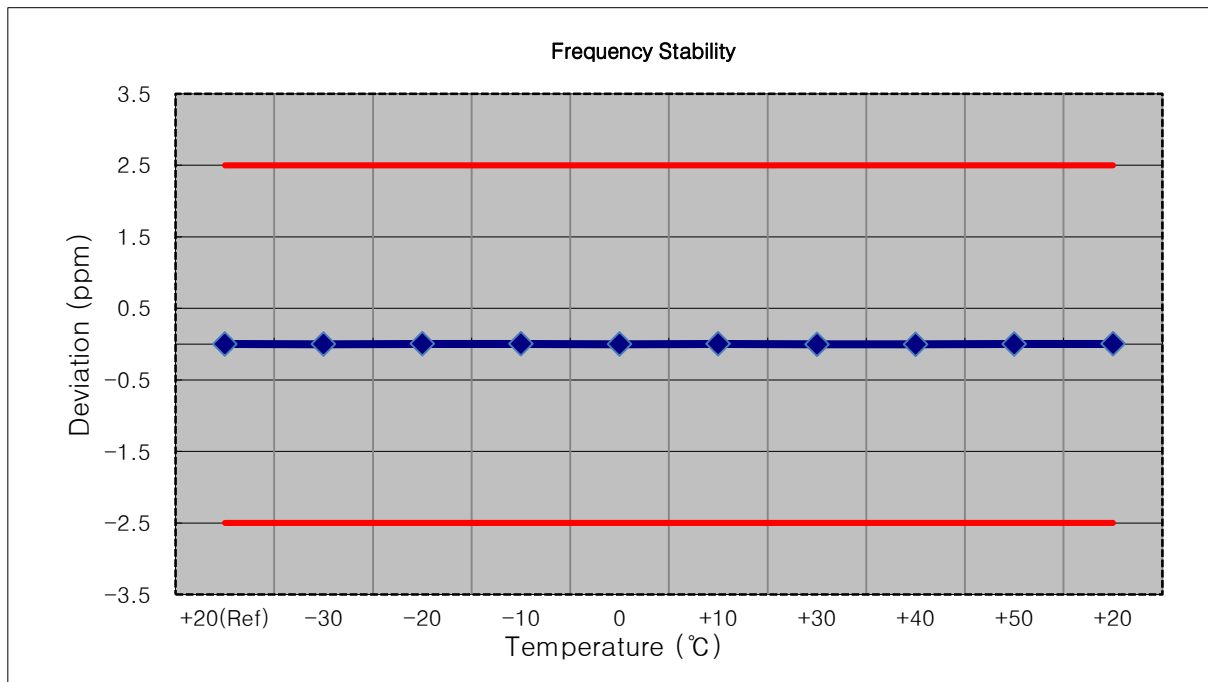

- ▣ MODE: LTE B26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (15 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	836 500 002	0.0	0.000 000	0.000
100%		-30	836 500 000	-2.4	0.000 000	-0.003
100%		-20	836 500 005	2.2	0.000 000	0.003
100%		-10	836 499 999	-3.2	0.000 000	-0.004
100%		0	836 500 000	-2.1	0.000 000	-0.003
100%		+10	836 500 005	2.8	0.000 000	0.003
100%		+30	836 500 000	-2.6	0.000 000	-0.003
100%		+40	836 500 000	-2.0	0.000 000	-0.002
100%		+50	836 500 004	1.1	0.000 000	0.001
Batt. Endpoint		7.300	+20	836 500 005	2.1	0.000 000

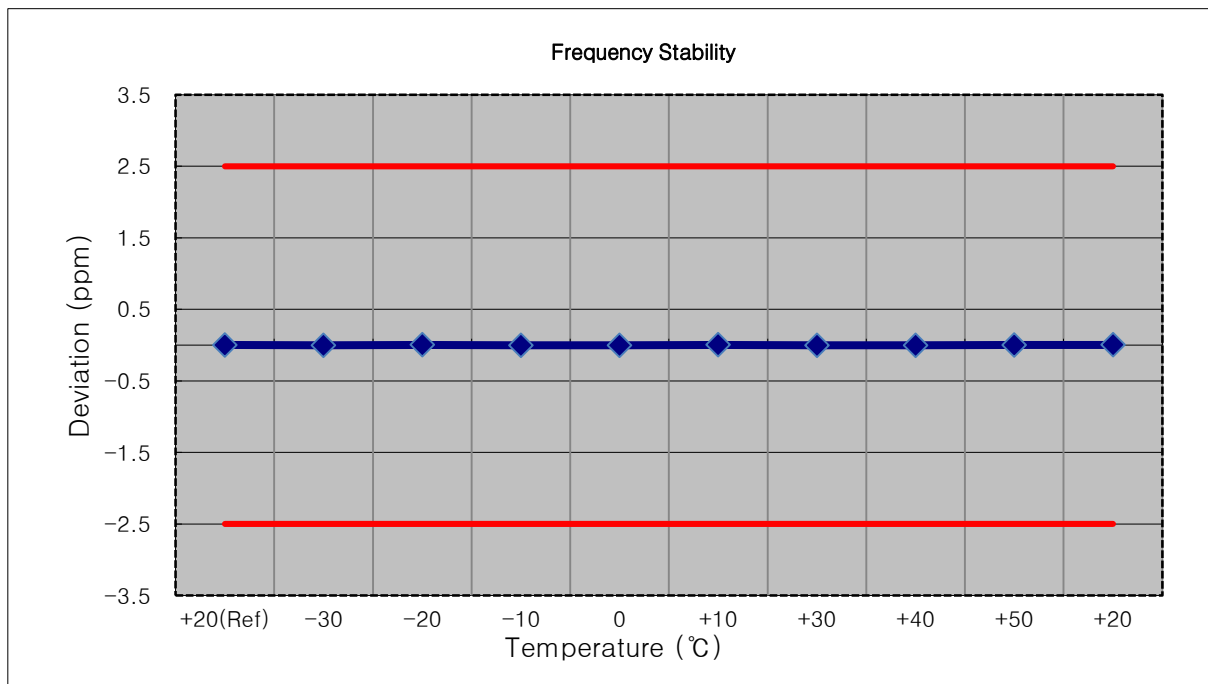

**8.8 RECEIVER SPURIOUS EMISSIONS**

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

**Limit**


Frequency (MHz)	Field Strength ( $\mu$ v/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

## 9. TEST PLOTS


BAND5/ 26. Occupied Bandwidth Plot (1.4M BW Ch.26915 QPSK\_RB6\_0)

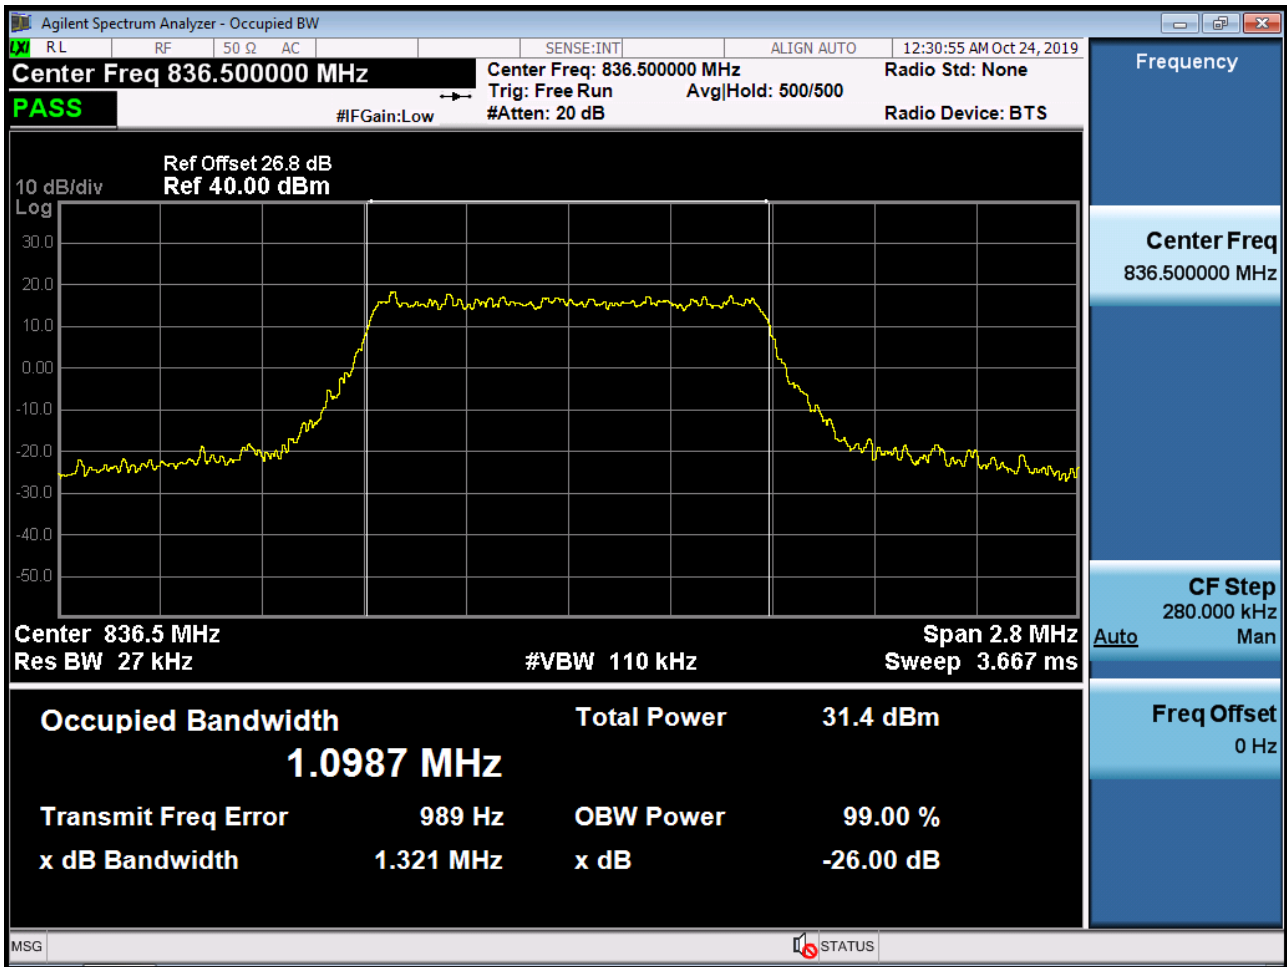


BAND5/ 26. Occupied Bandwidth Plot (1.4M BW Ch.26915 16QAM\_RB6\_0)

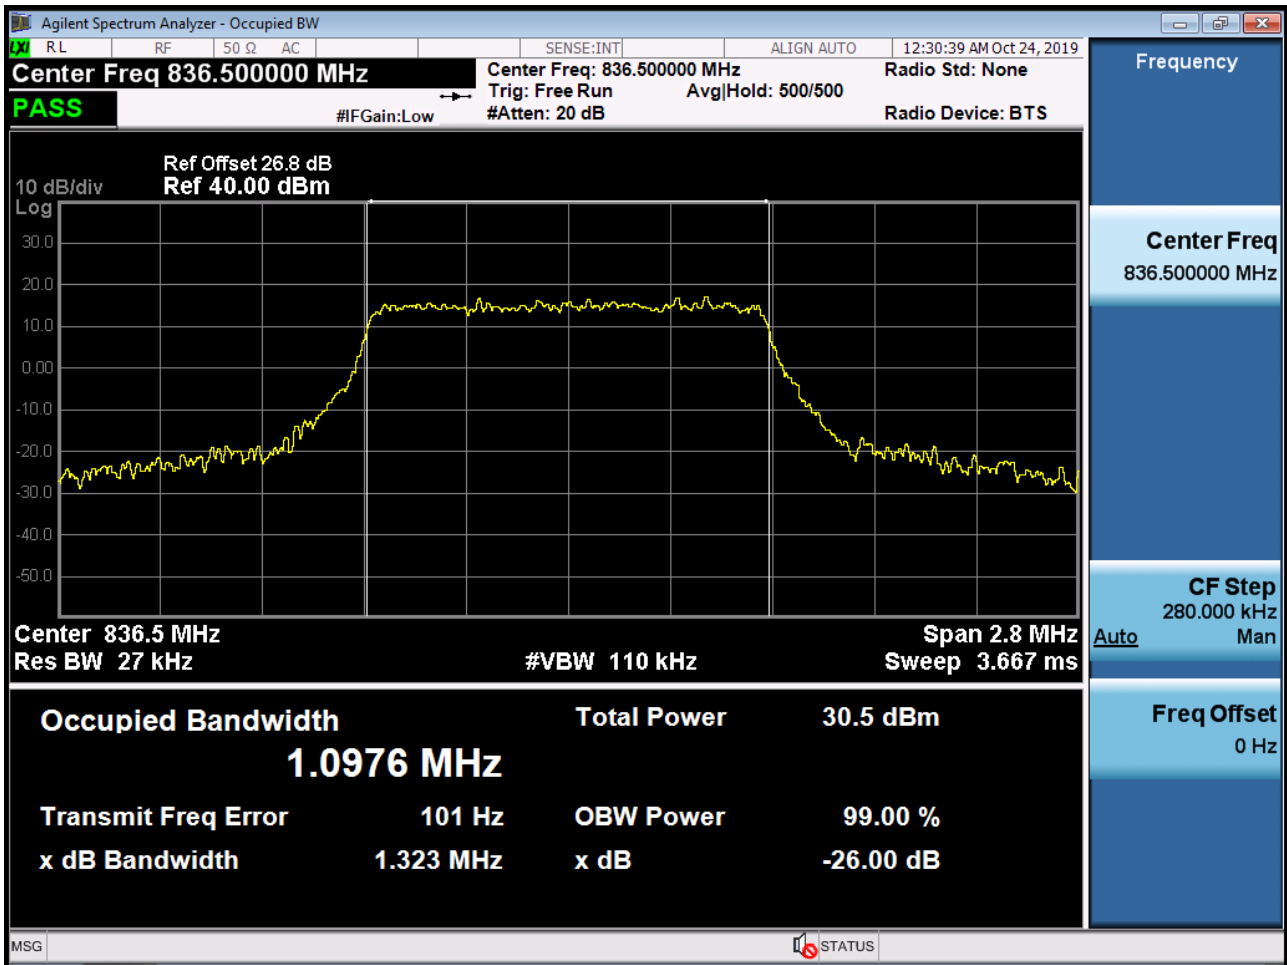


BAND5/ 26. Occupied Bandwidth Plot (1.4M BW Ch.26915 64QAM\_RB6\_0)

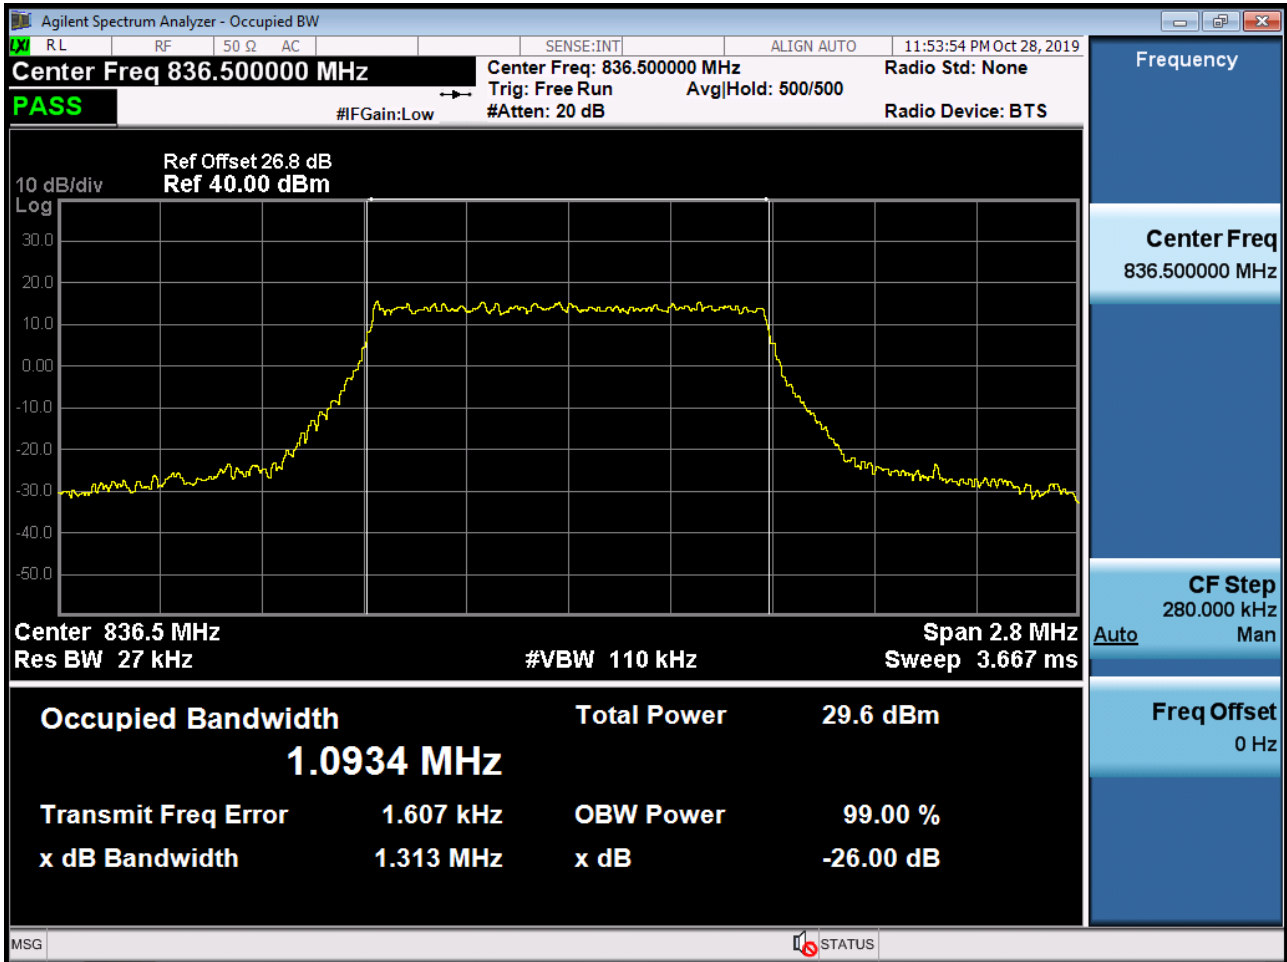


BAND5/ 26. Occupied Bandwidth Plot (3M BW Ch.26915 QPSK\_RB15\_0)

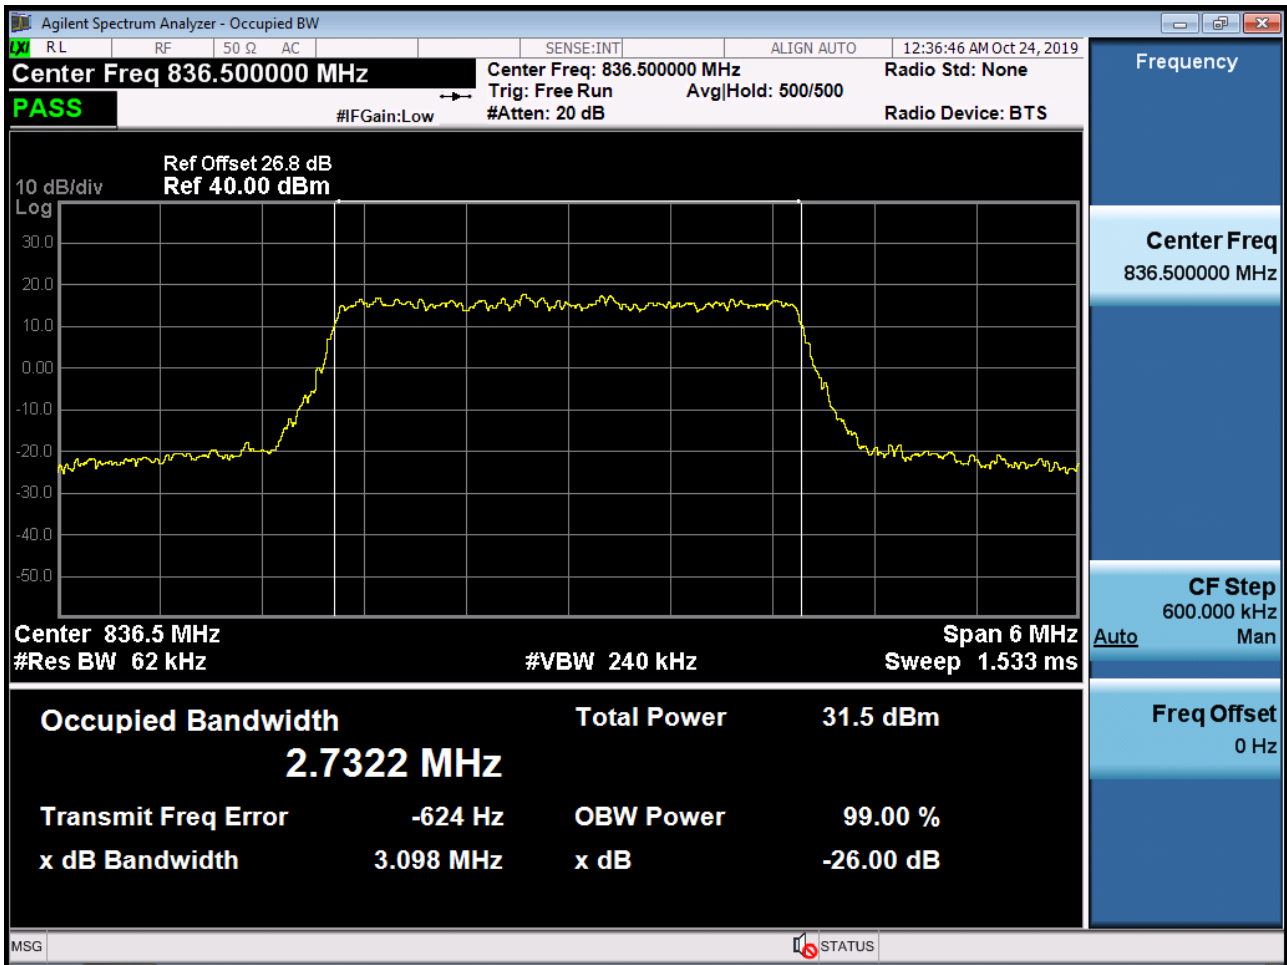


BAND5/ 26. Occupied Bandwidth Plot (3M BW Ch.26915 16QAM\_RB15\_0)

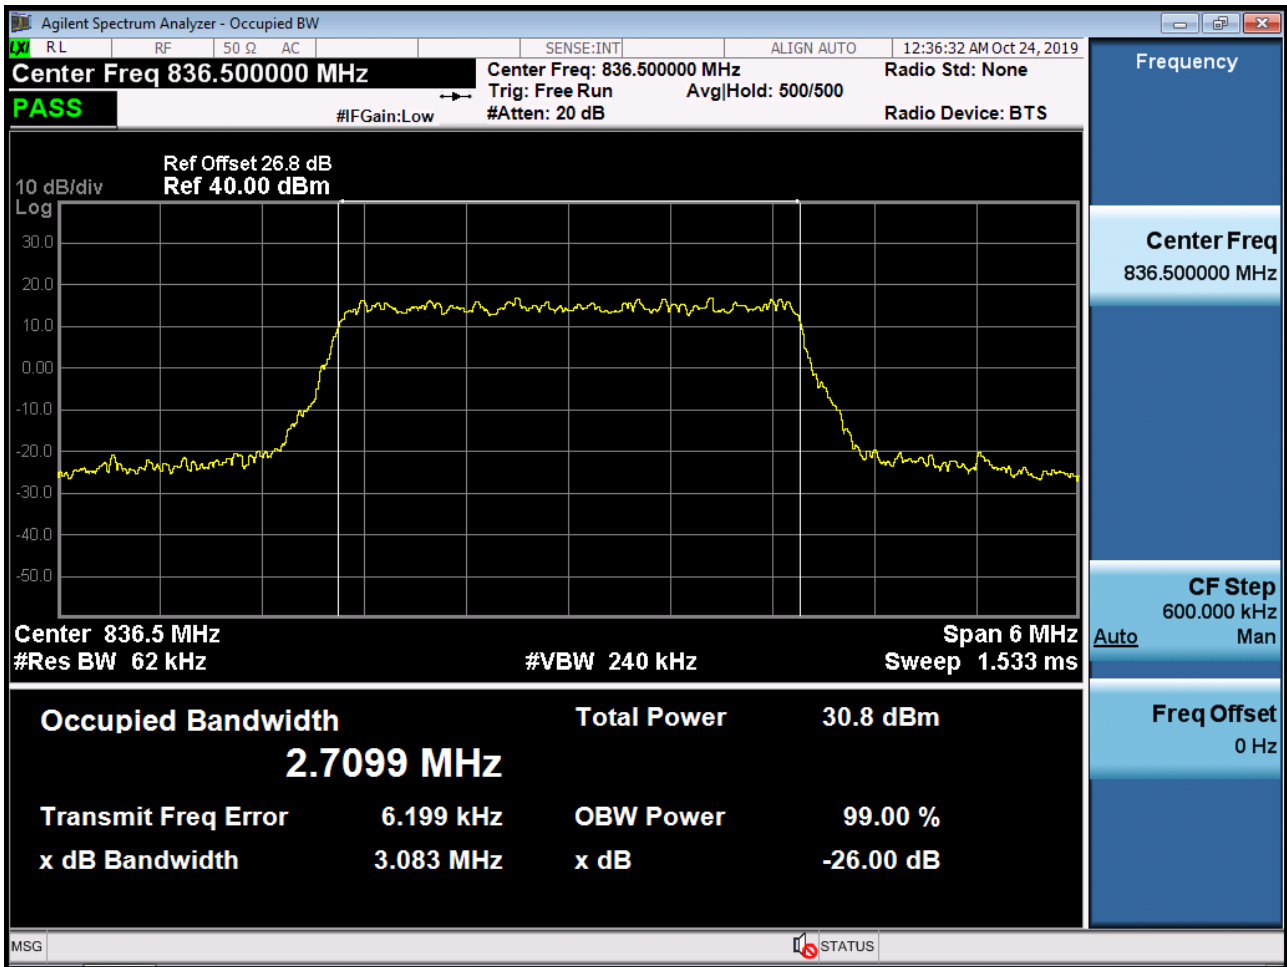


BAND5/ 26. Occupied Bandwidth Plot (3M BW Ch.26915 64QAM\_RB15\_0)

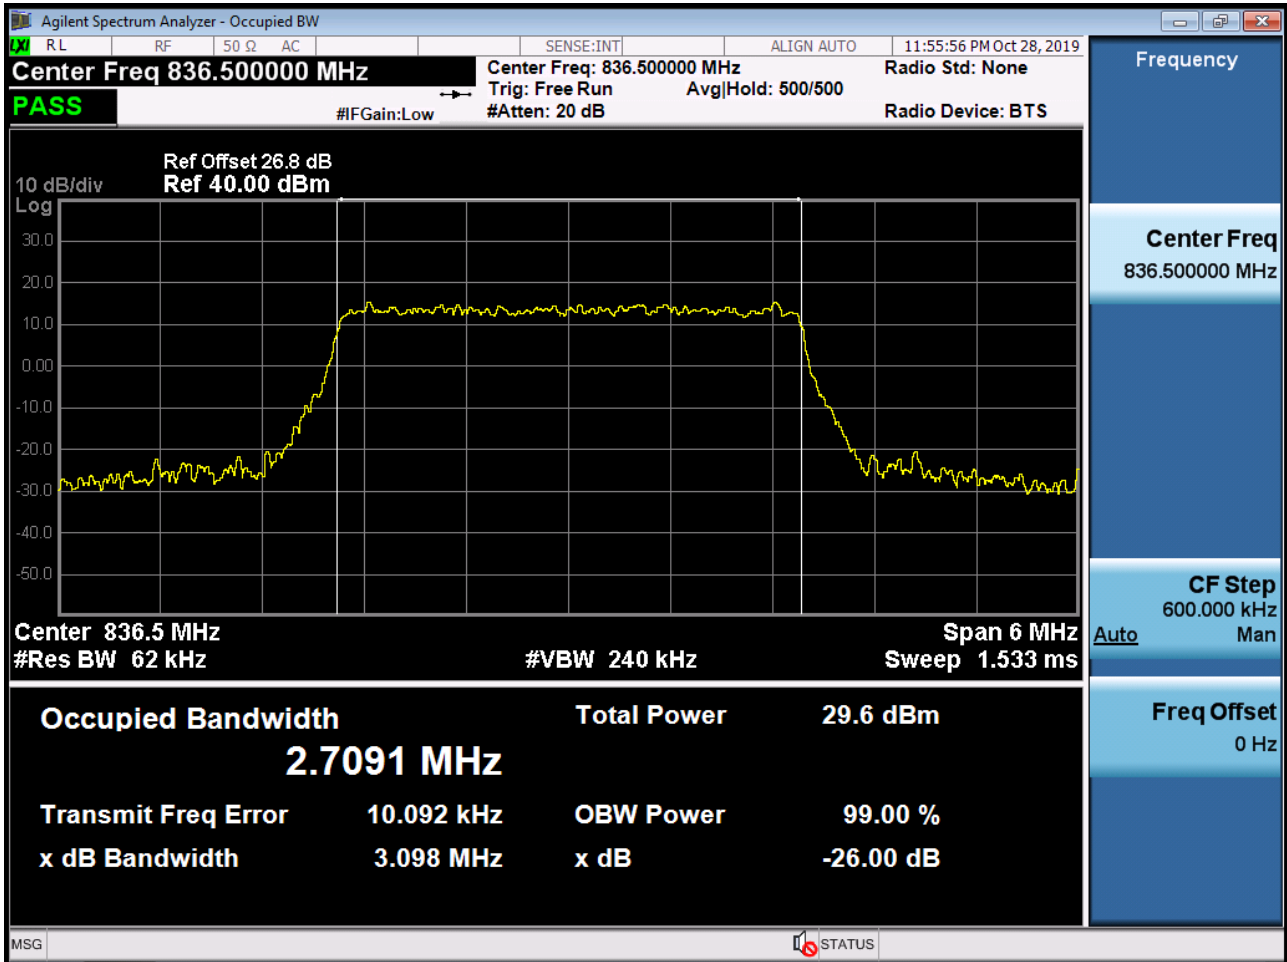


BAND5/ 26. Occupied Bandwidth Plot (5M BW Ch.26915 QPSK\_RB25\_0)

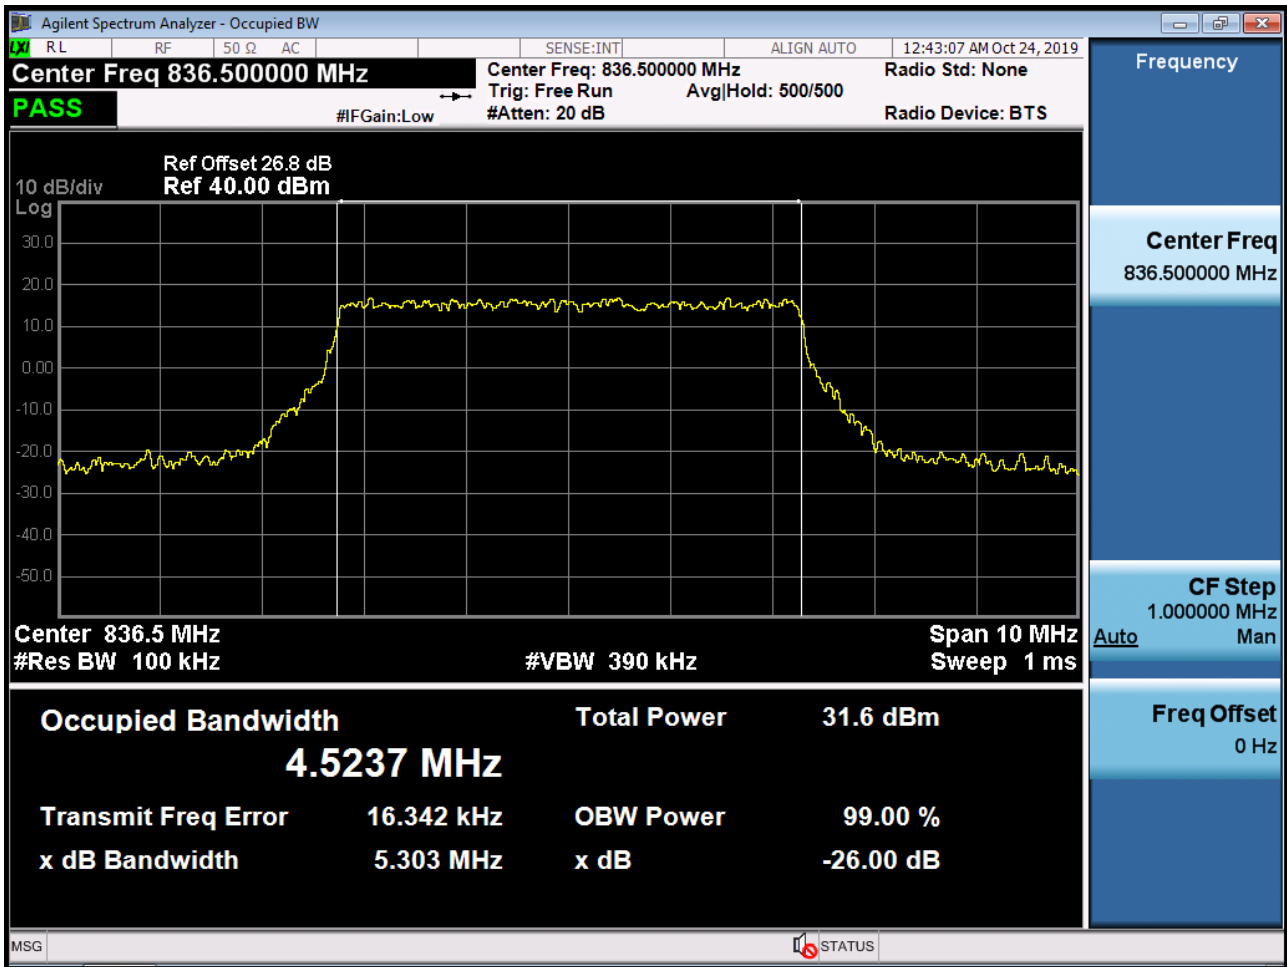


BAND5/ 26. Occupied Bandwidth Plot (5M BW Ch.26915 16QAM\_RB25\_0)

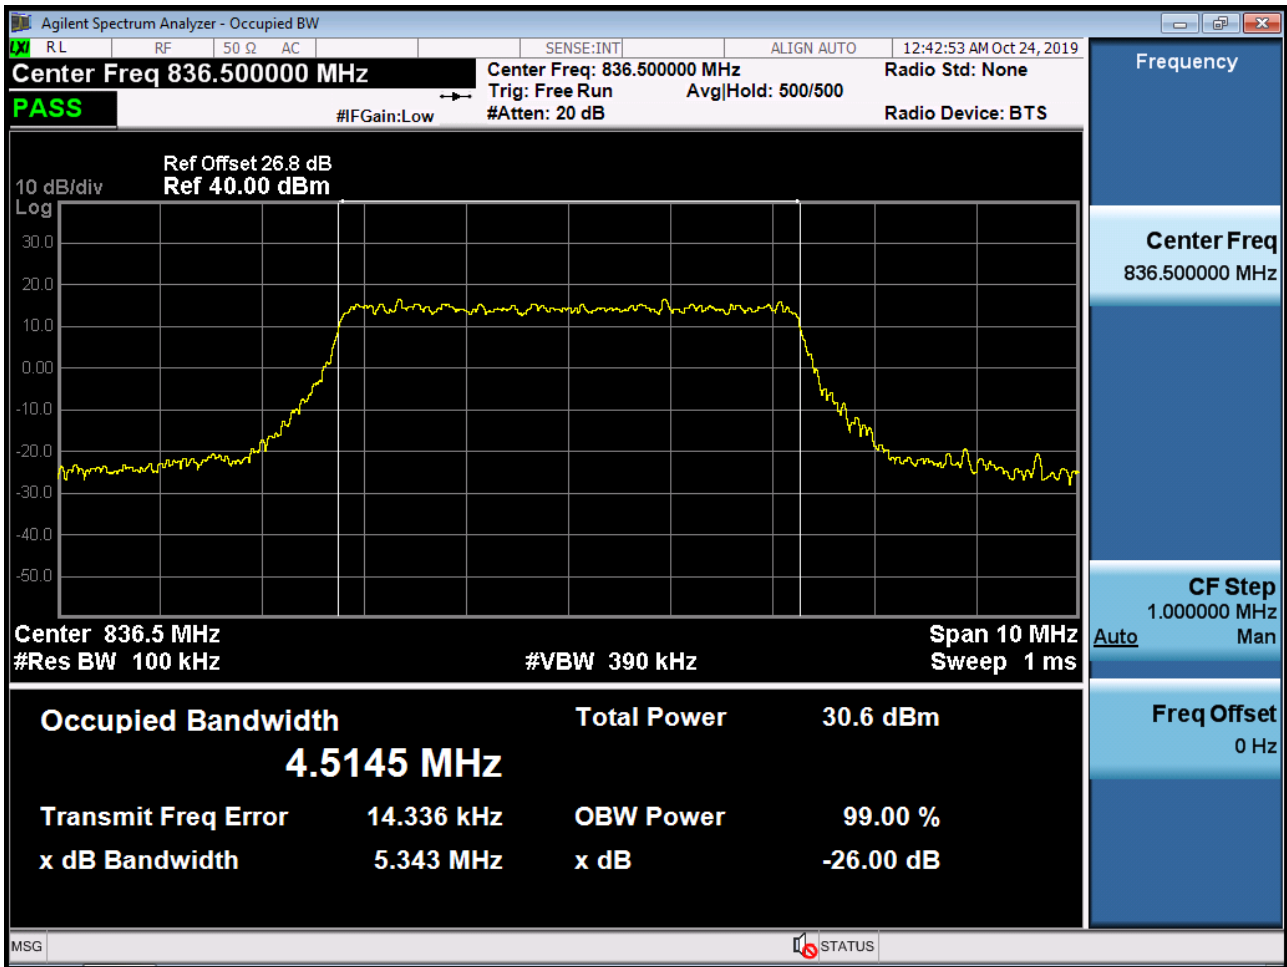


BAND5/ 26. Occupied Bandwidth Plot (5M BW Ch.26915 64QAM\_RB25\_0)

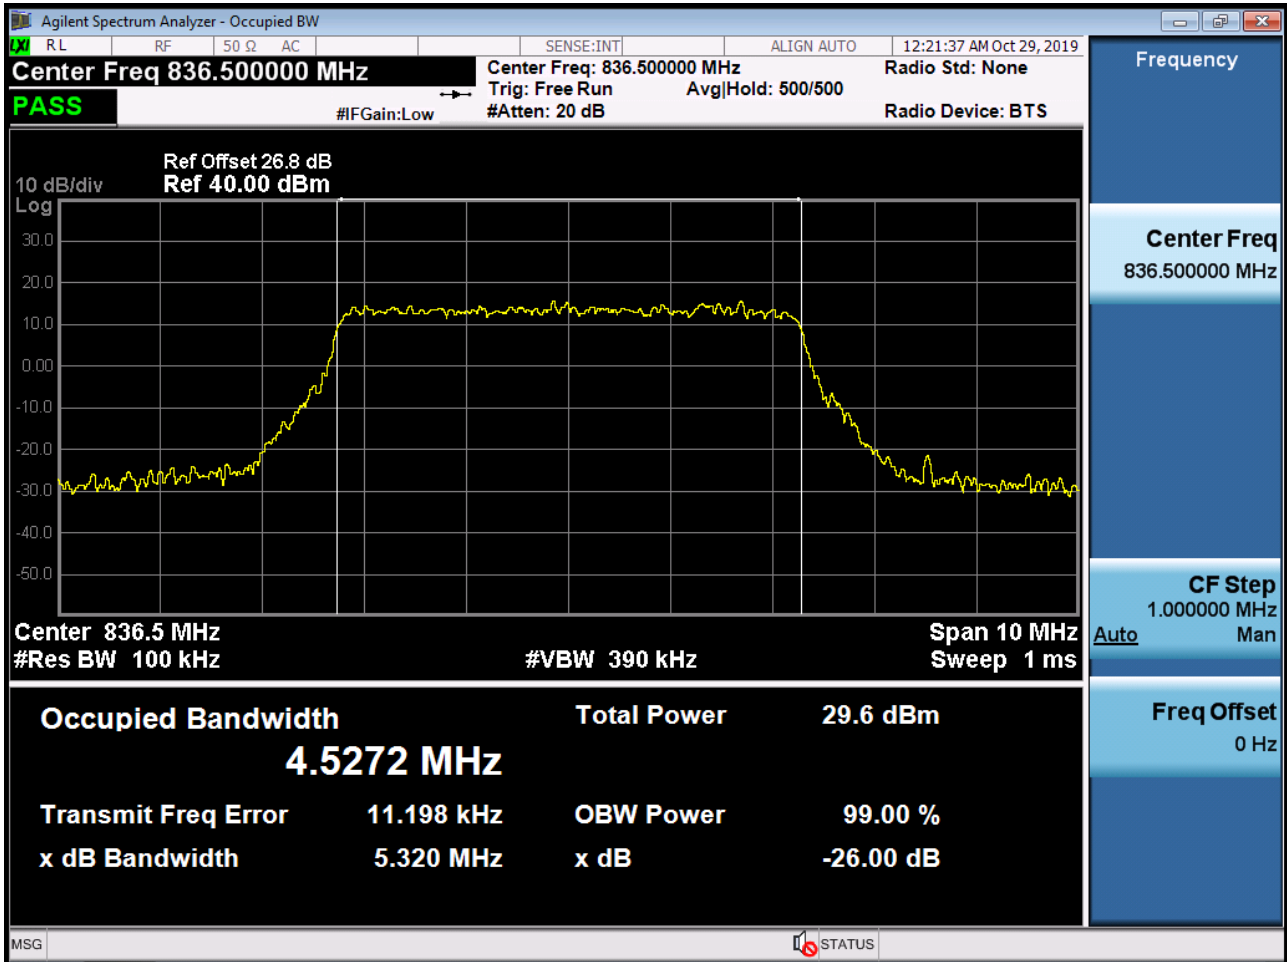


BAND5/ 26. Occupied Bandwidth Plot (10M BW Ch.26915 QPSK\_RB50\_0)

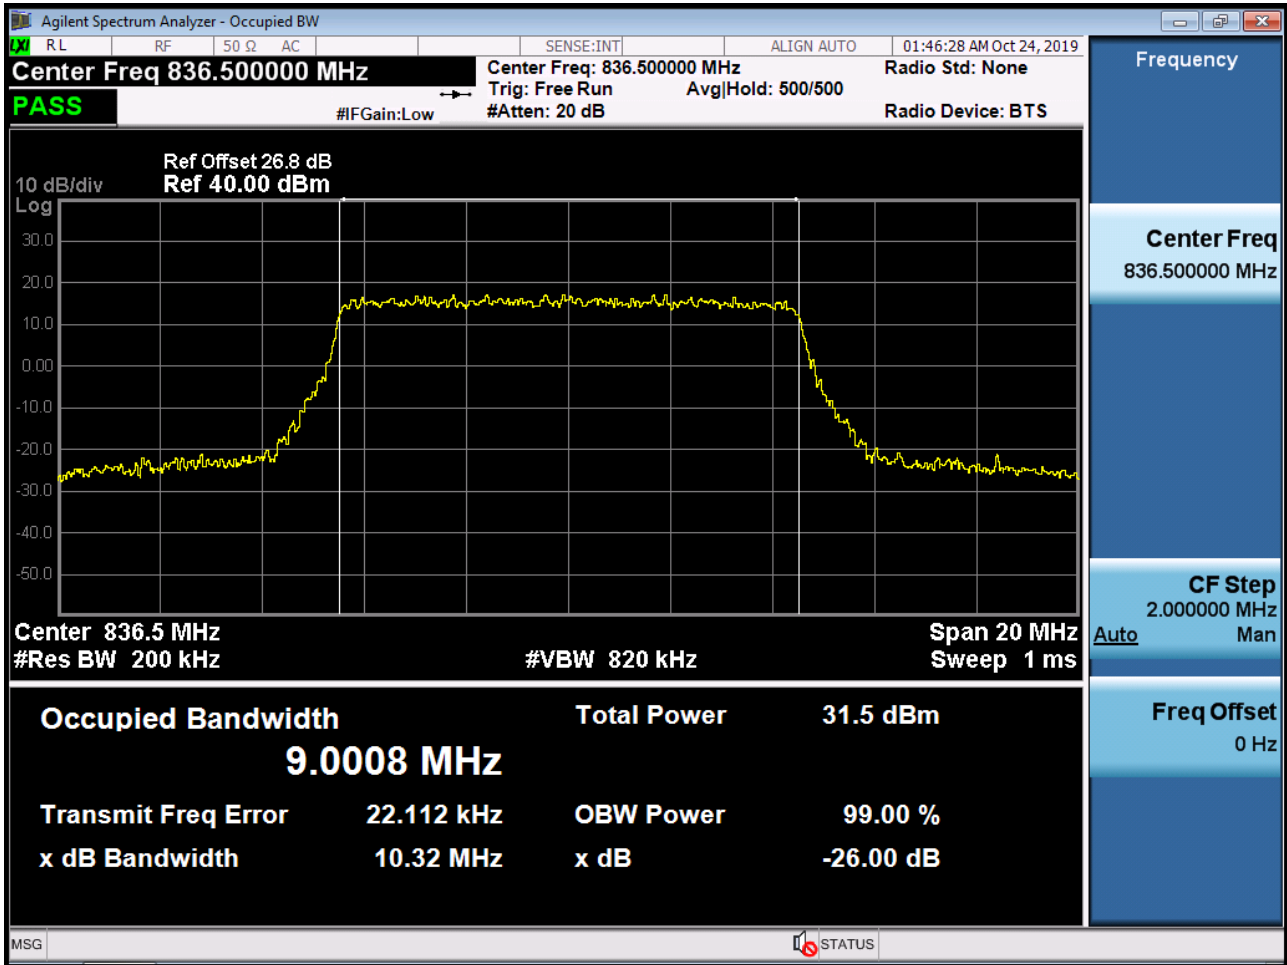


BAND5/ 26. Occupied Bandwidth Plot (10M BW Ch.26915 16QAM\_RB50\_0)

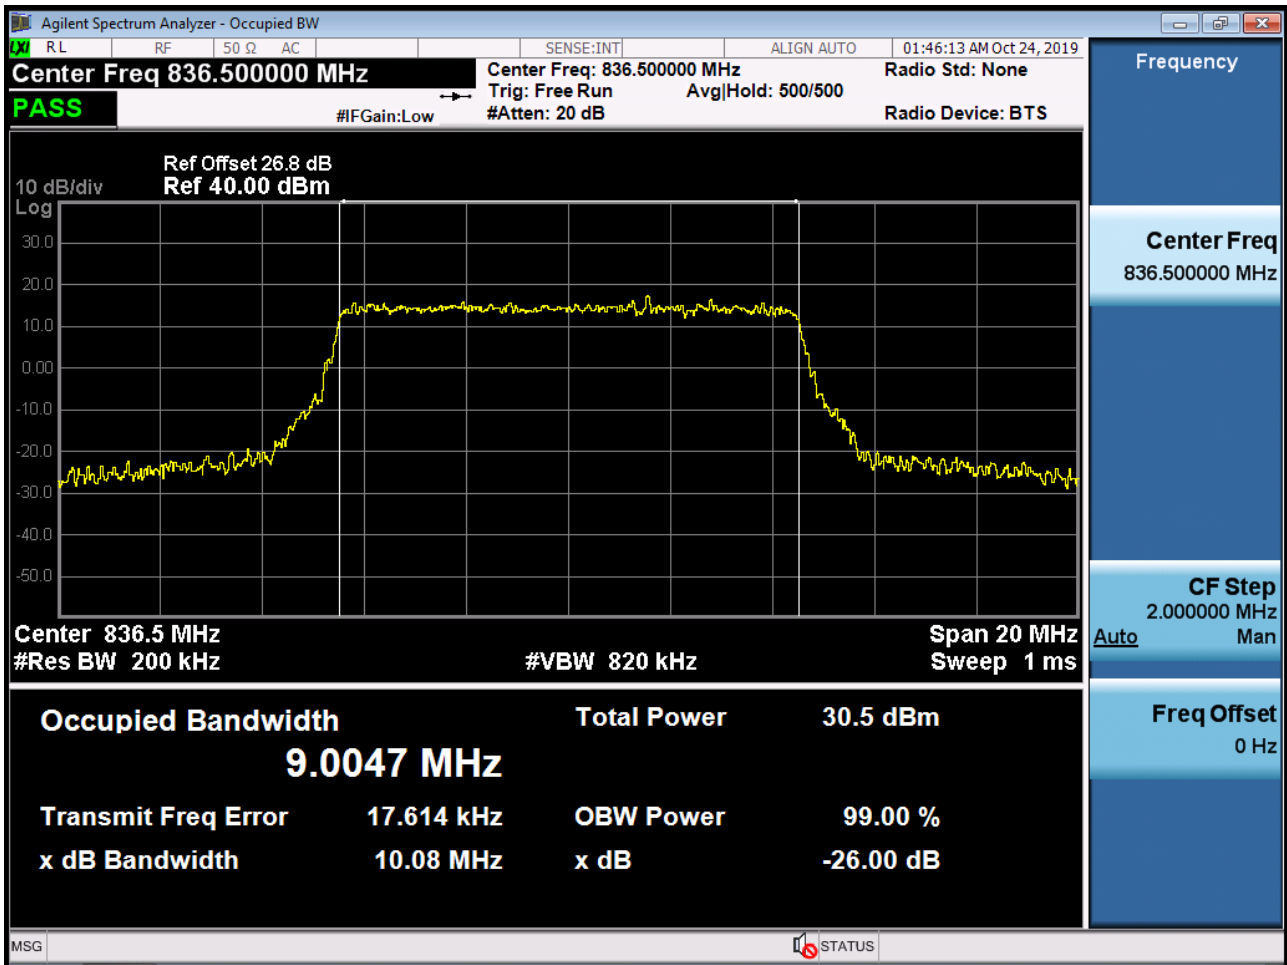


BAND5/ 26. Occupied Bandwidth Plot (10M BW Ch.26915 64QAM\_RB50\_0)

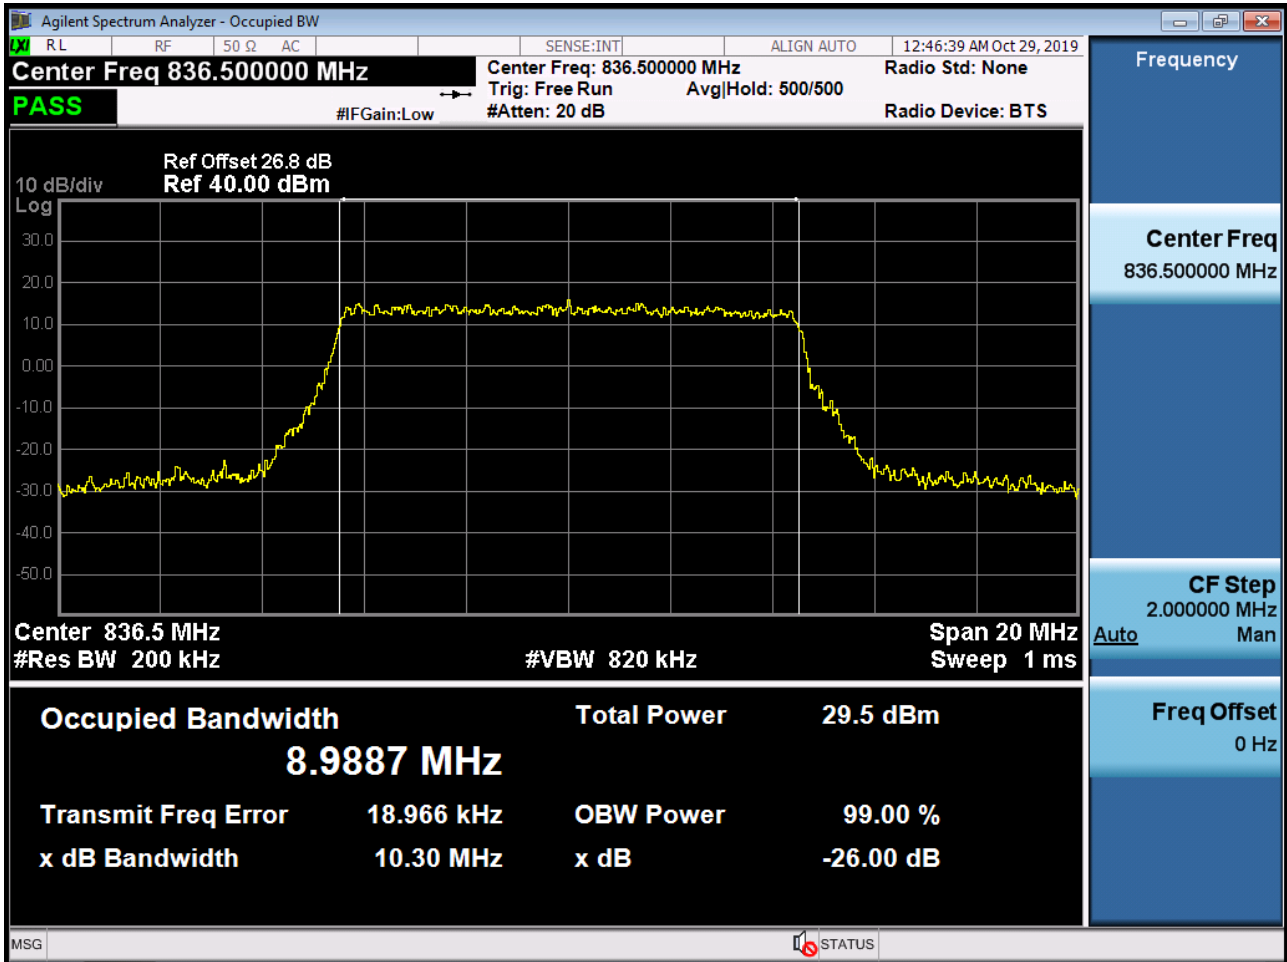


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 QPSK RB 75\_0)

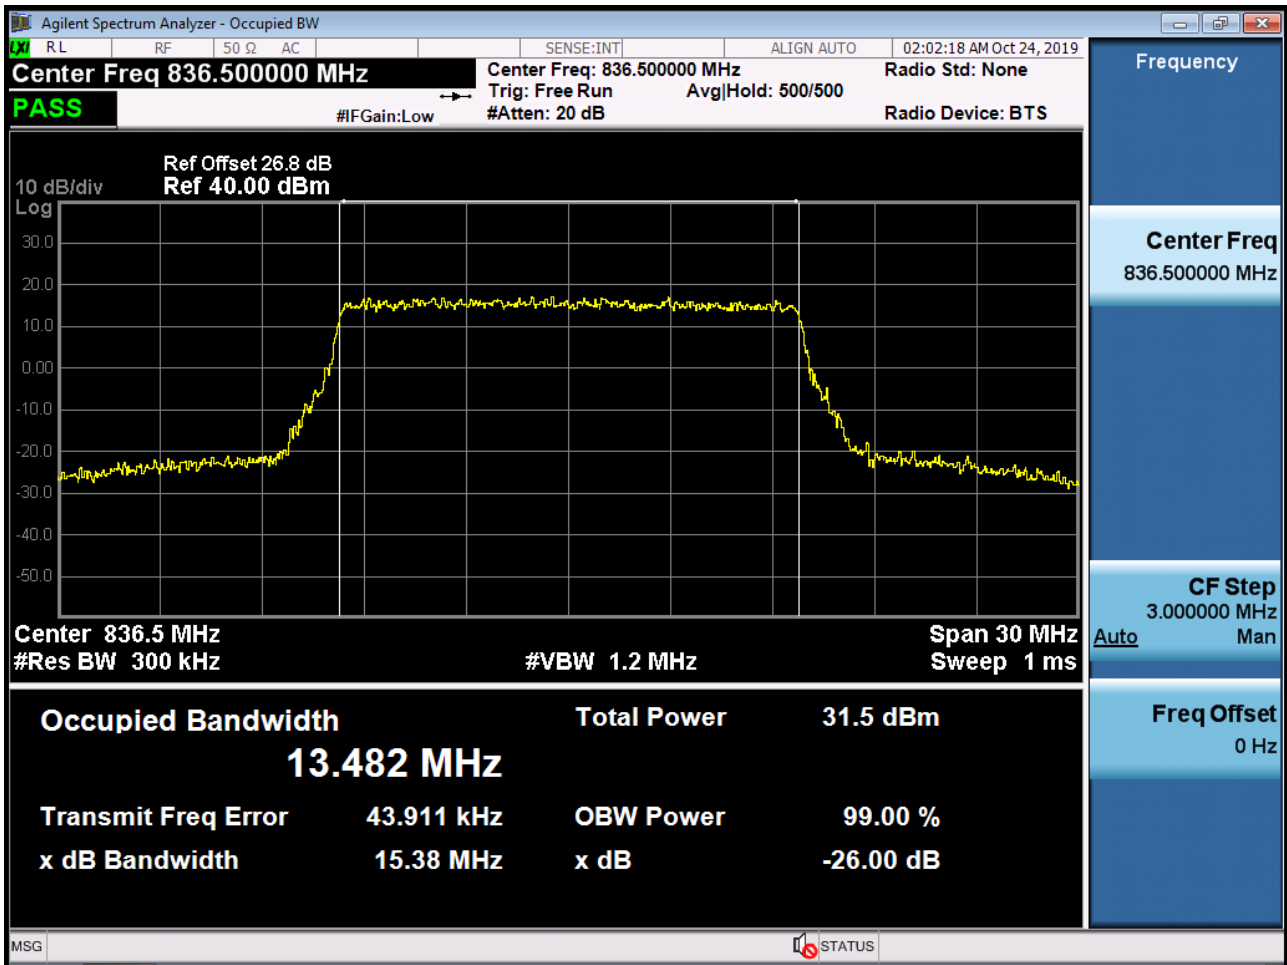

BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 16QAM RB 75\_0)

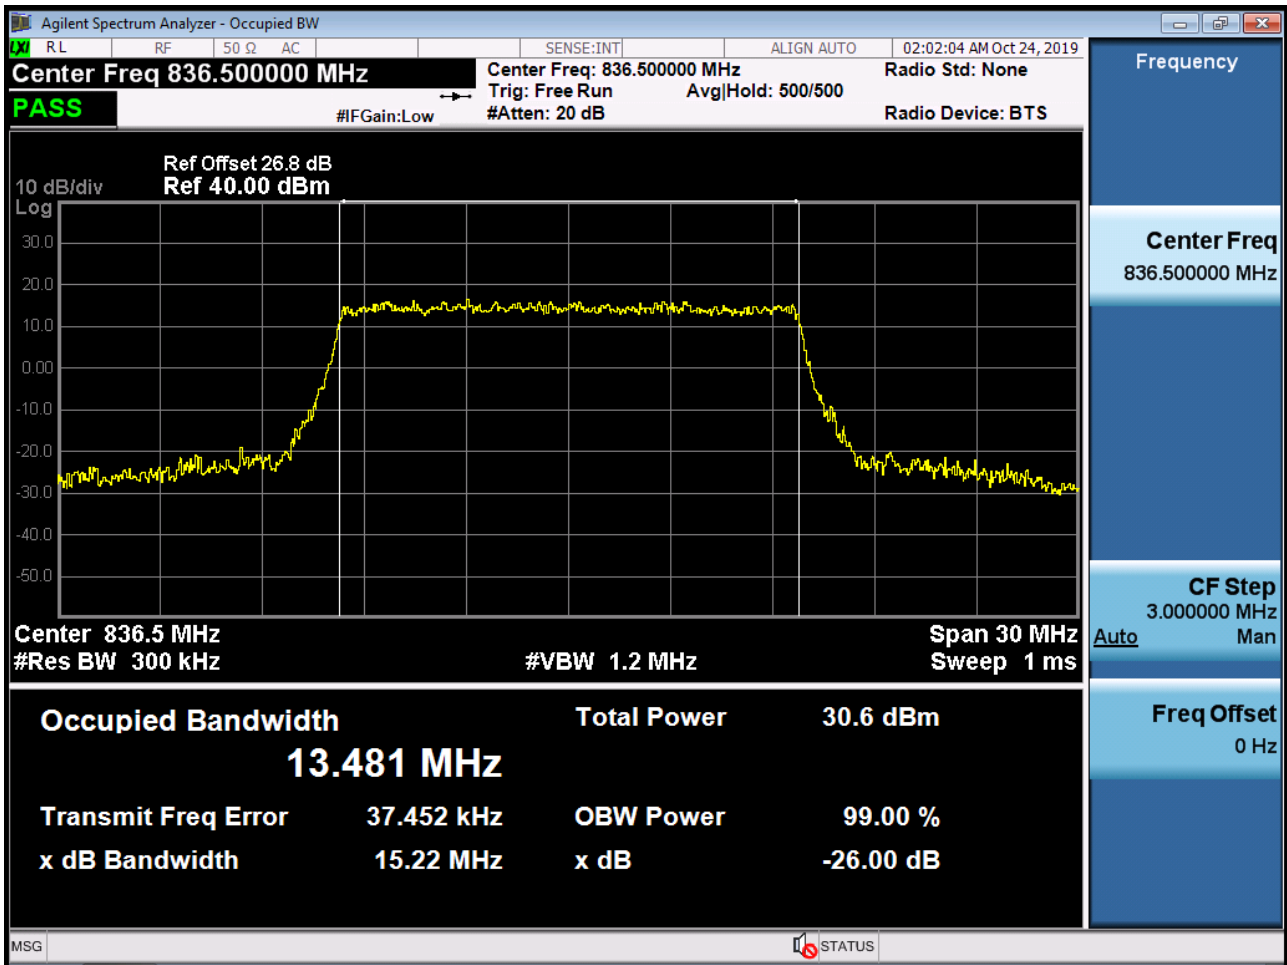


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 64QAM RB 75\_0)

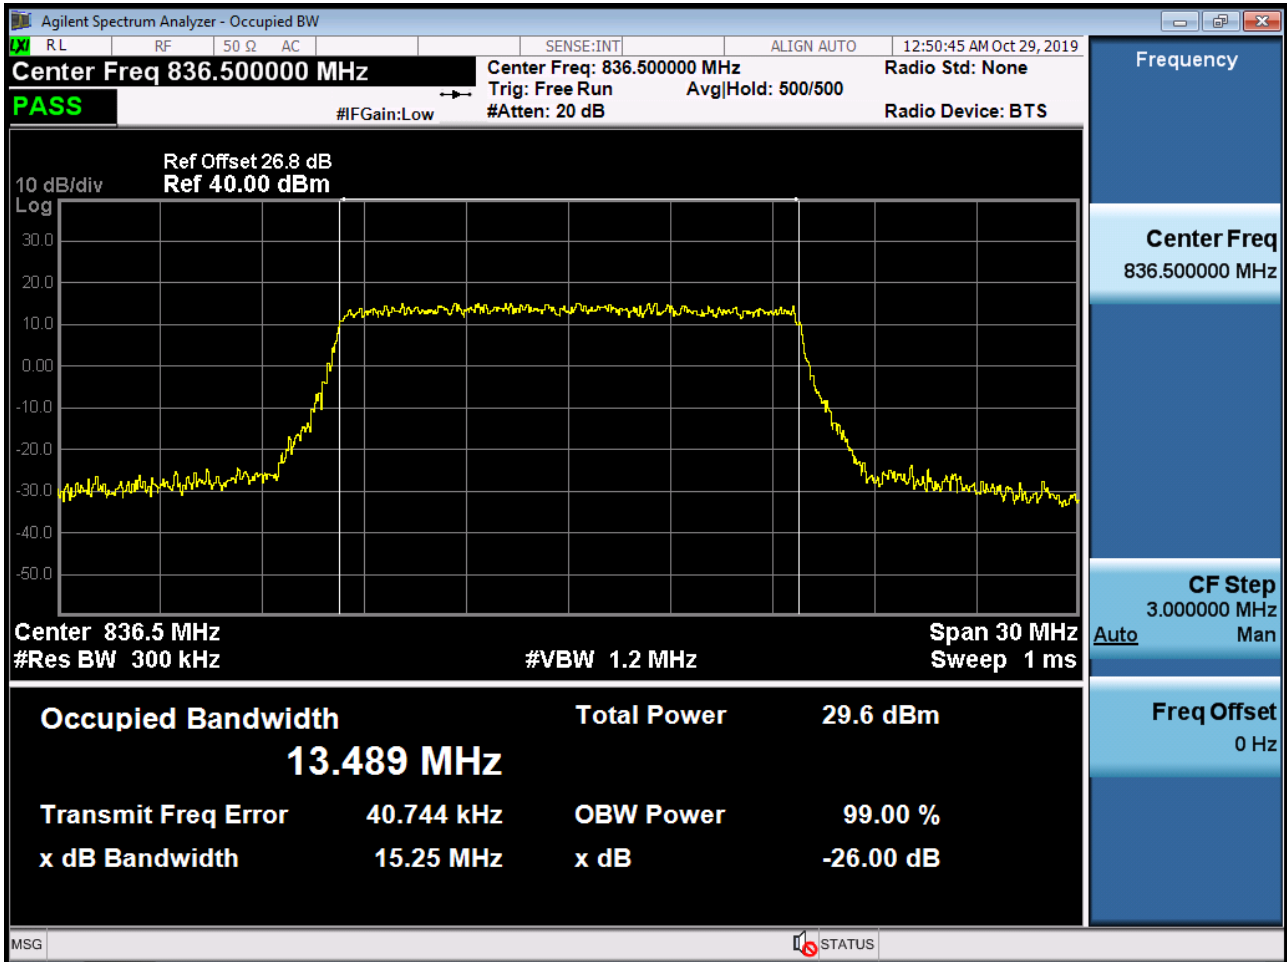

BAND5/ 26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB1\_Offset 0)



BAND5/ 26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB6\_Offset 0)

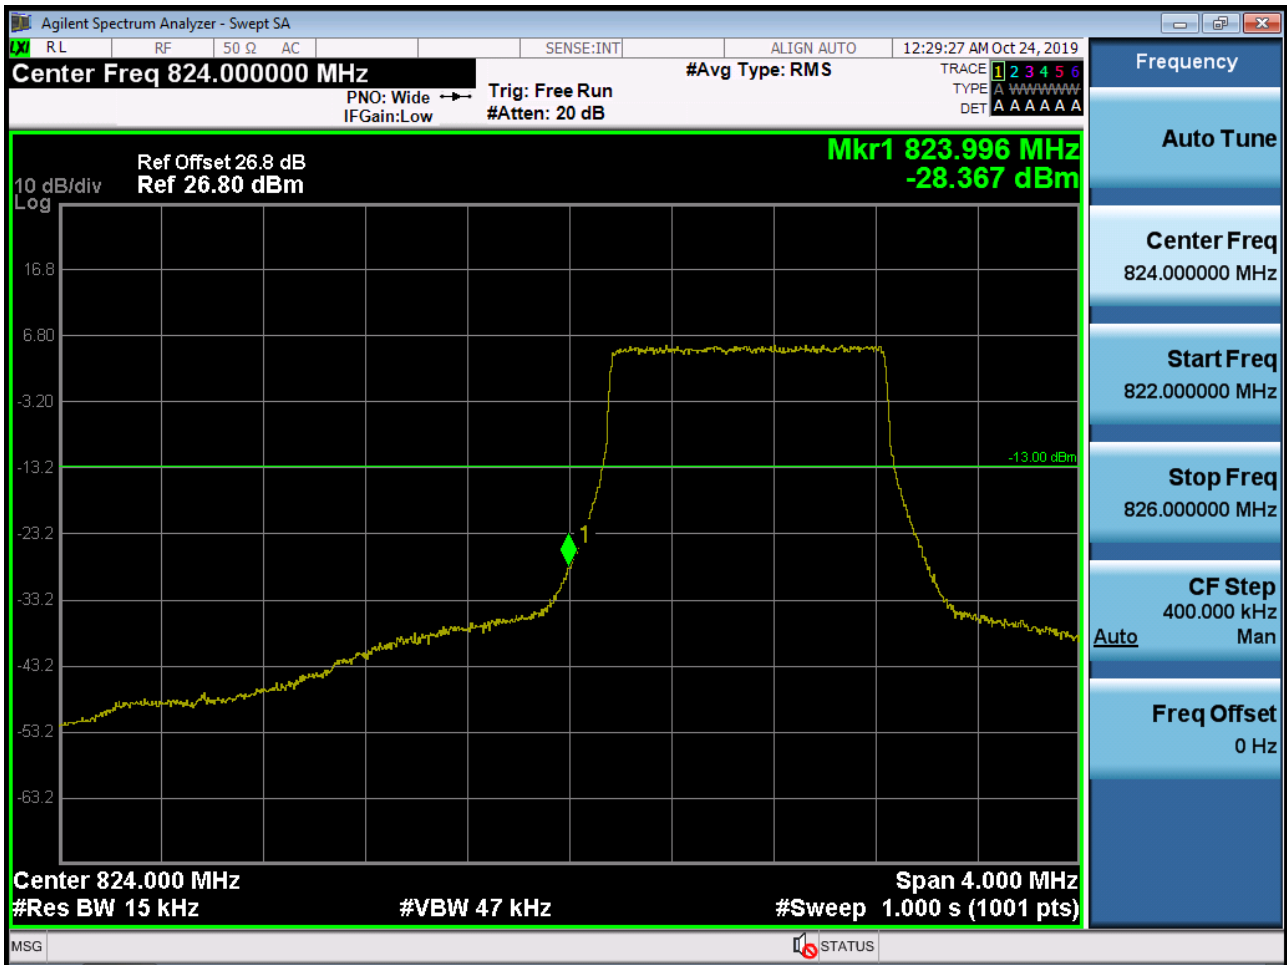

BAND5/ 26. Lower Extended Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB6\_0)




BAND5/ 26. Lower Band Edge Plot (3M BW Ch.26805 QPSK\_RB1\_Offset 0)




BAND5/ 26. Lower Band Edge Plot (3M BW Ch.26805 QPSK\_RB15\_Offset 0)



BAND5/ 26. Lower Extended Band Edge Plot (3M BW Ch.26805 QPSK\_RB15\_0)

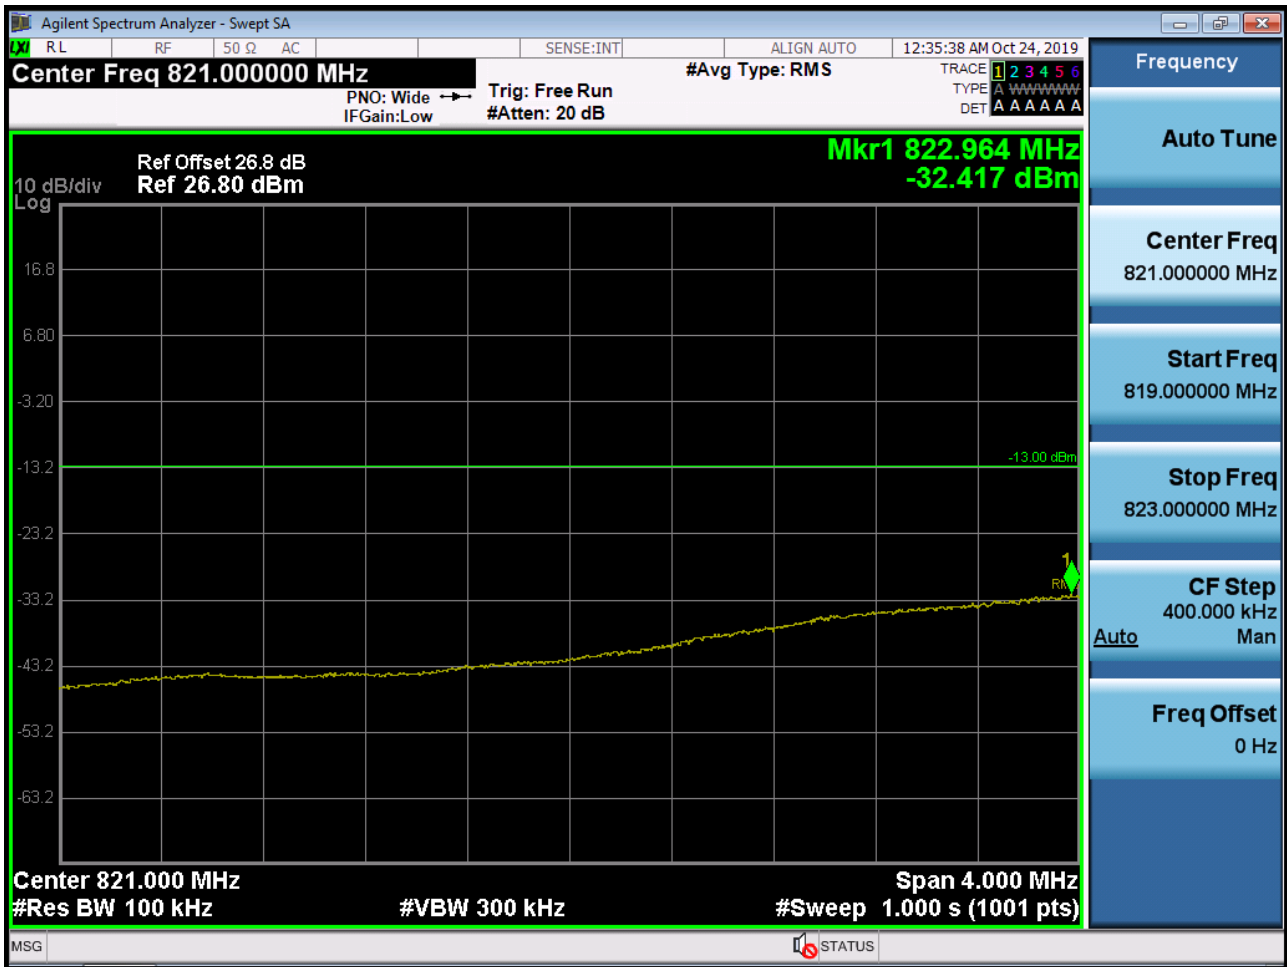

BAND5/ 26. Lower Band Edge Plot (5M BW Ch.26815 QPSK\_RB1\_Offset 0)

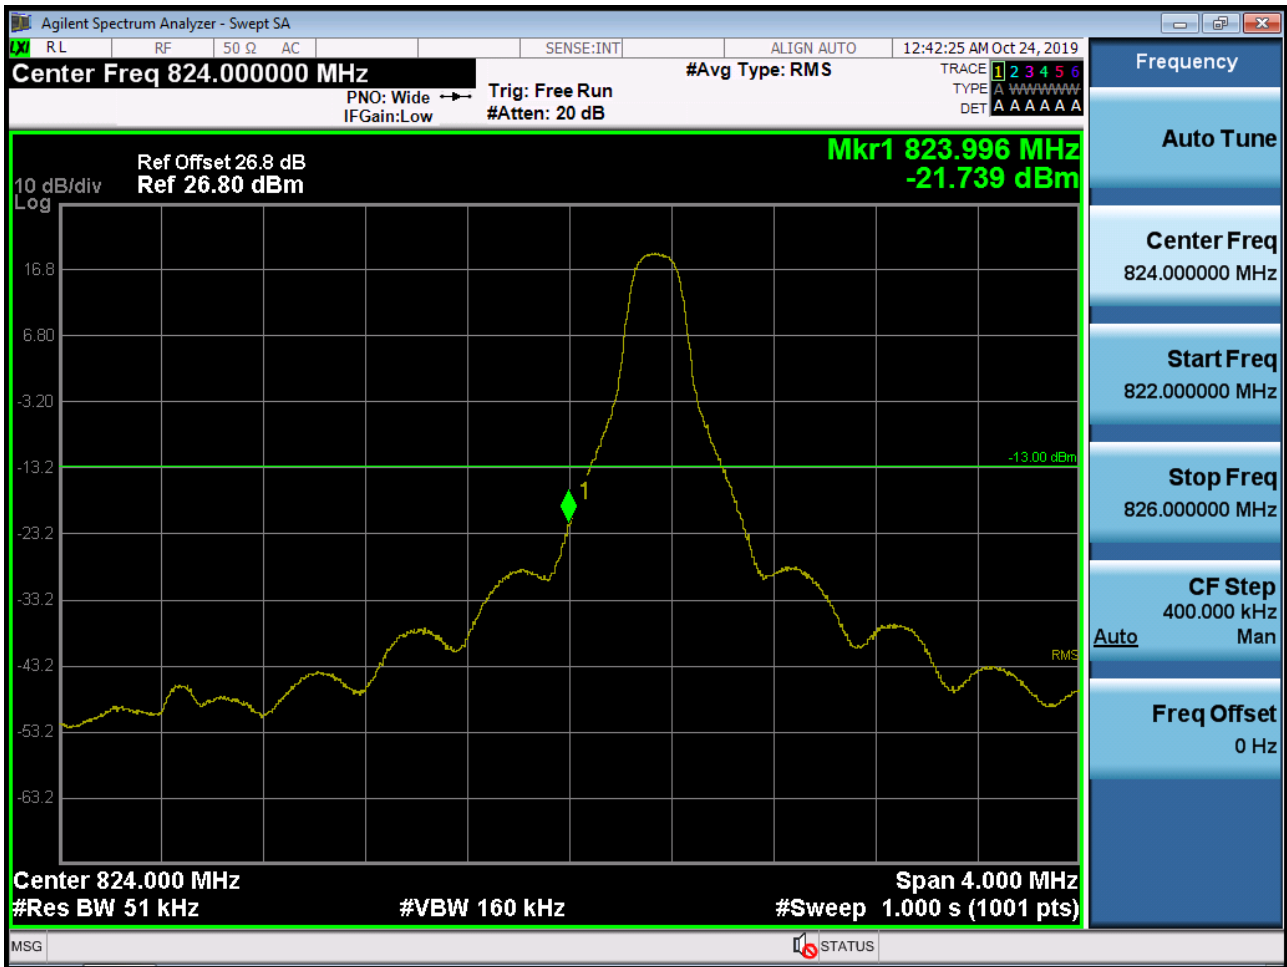

BAND5/ 26. Lower Band Edge Plot (5M BW Ch.26815 QPSK\_RB25\_Offset 0)





BAND5/ 26. Lower Band Edge Plot (10M BW Ch.26840 QPSK\_RB1\_Offset 0)



BAND5/ 26. Lower Band Edge Plot (10M BW Ch.26840 QPSK\_RB50\_Offset 0)



BAND5/ 26. Lower Extended Band Edge Plot (10M BW Ch.26840 QPSK\_RB50\_0)



BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK\_RB75\_Offset 0) -1




BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK\_RB75\_Offset 0) -2




BAND 26. Lower Extended Band Edge Plot (15M BW Ch.26865 QPSK\_RB75\_0) -3



BAND5/ 26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB1\_Offset 5)

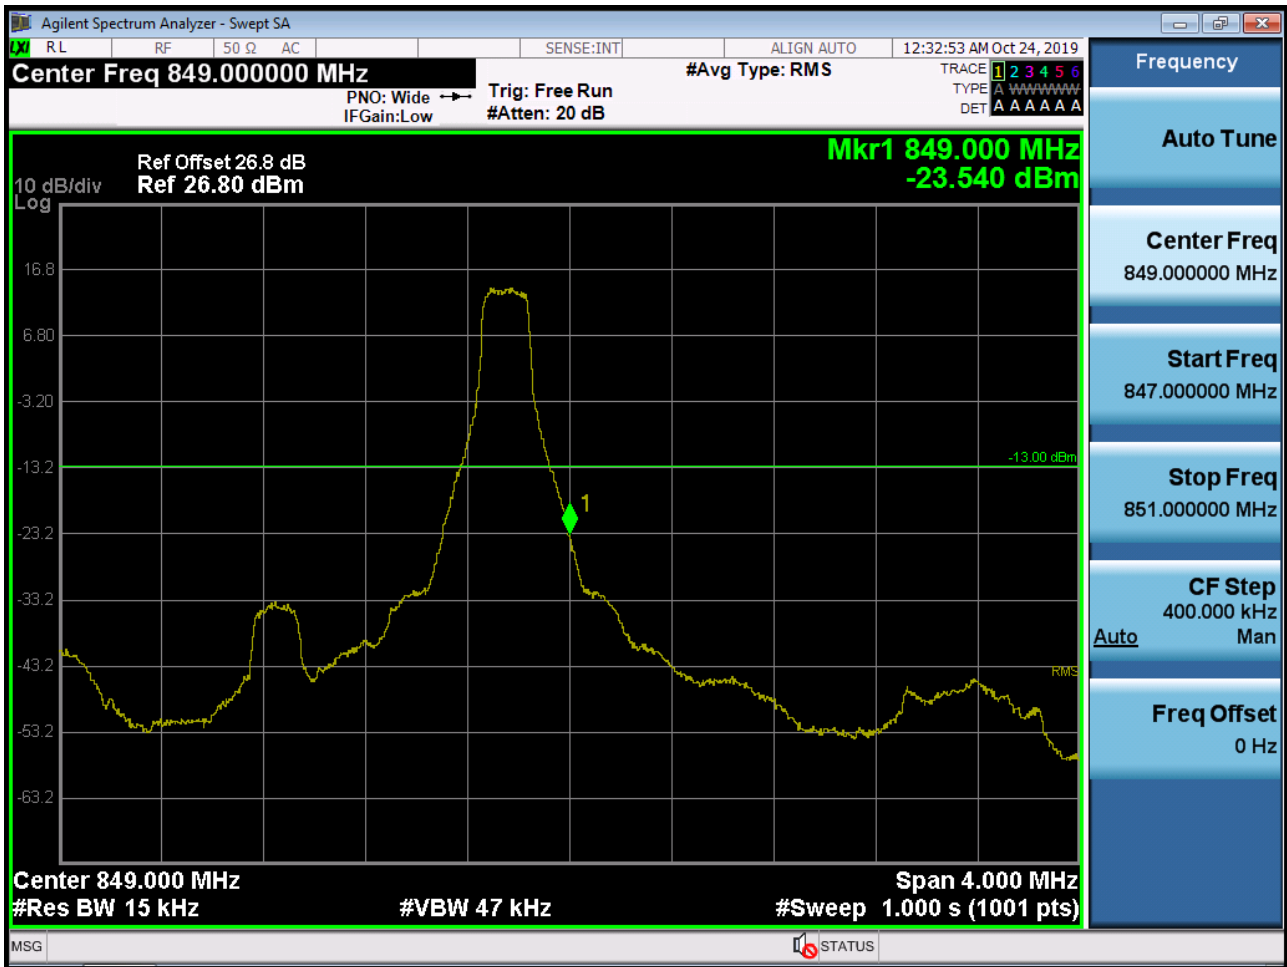

BAND5/ 26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB6\_Offset 0)

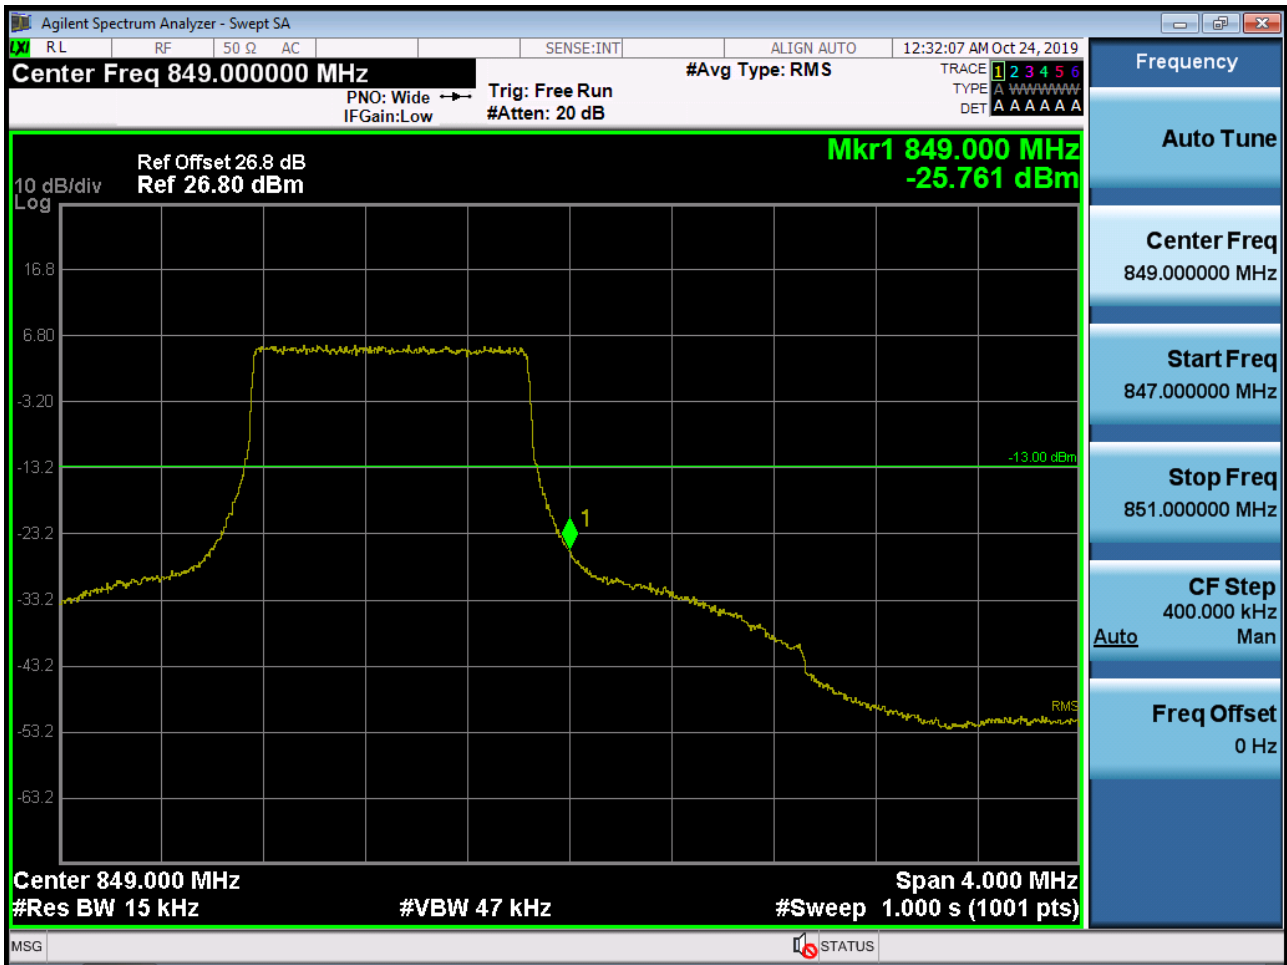

BAND5/ 26. Upper Extended Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB6\_0)



BAND5/ 26. Upper Band Edge Plot (3M BW Ch.27025 QPSK\_RB1\_Offset 14)



BAND5/ 26. Upper Band Edge Plot (3M BW Ch.27025 QPSK\_RB15\_Offset 0)



BAND5/ 26. Upper Extended Band Edge Plot (3M BW Ch.27025 QPSK\_RB15\_0)





BAND5/ 26. Upper Band Edge Plot (5M BW Ch.27015 QPSK\_RB25\_Offset 0)



BAND5/ 26. Upper Extended Band Edge Plot (5M BW Ch.27015 QPSK\_RB25\_0)





BAND5/ 26. Upper Band Edge Plot (10M BW Ch.26990 QPSK\_RB50\_Offset 0)




BAND5/ 26. Upper Extended Band Edge Plot (10M BW Ch.26990 QPSK\_RB50\_0)









BAND 26. Upper Extended Band Edge Plot (15M BW Ch.26965 QPSK\_RB75\_0) -3

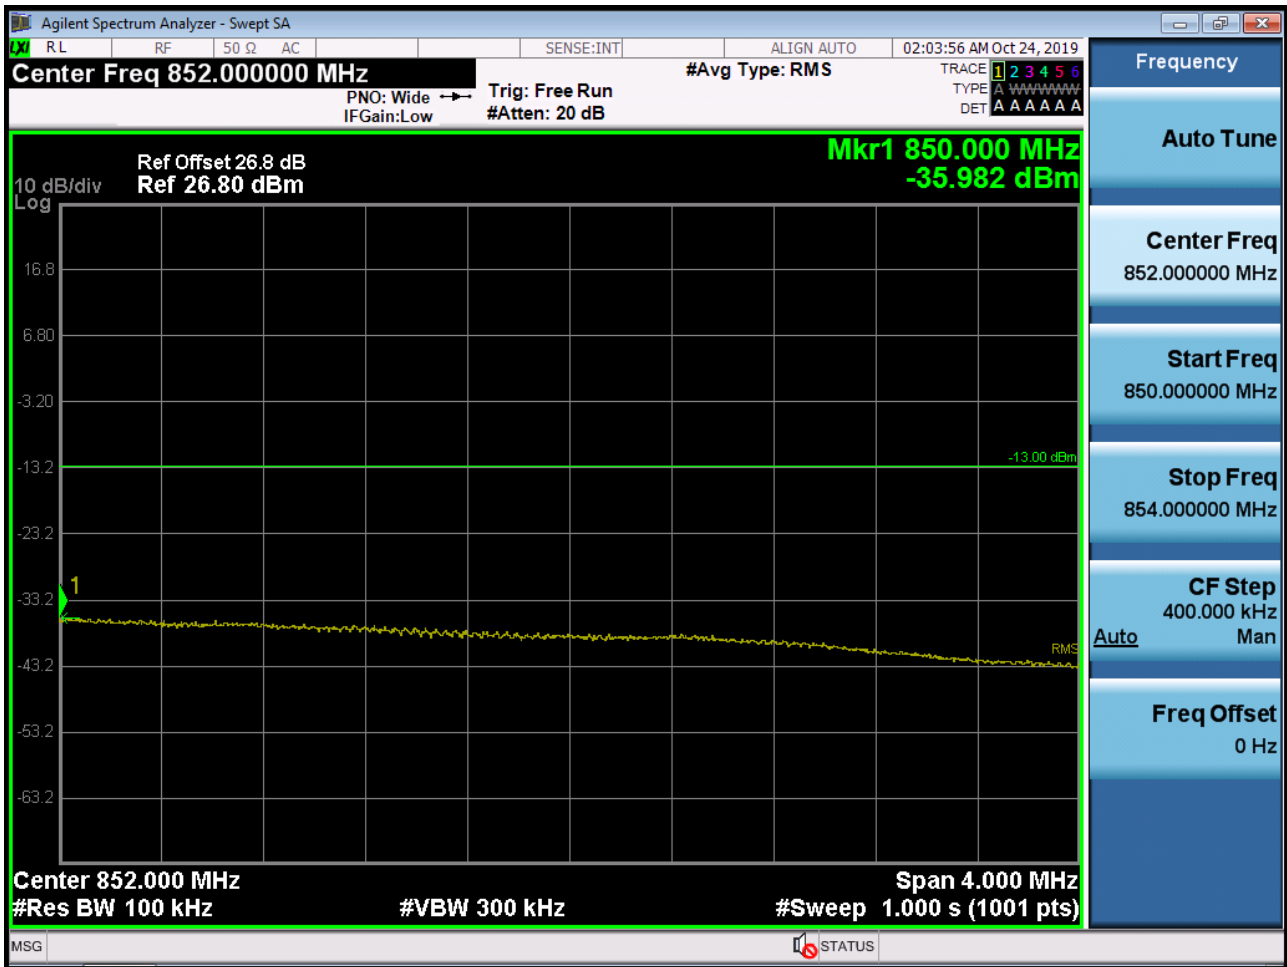


BAND5/ 26. Conducted Spurious Plot (26797ch\_1.4MHz\_QPSK\_RB 1\_0)

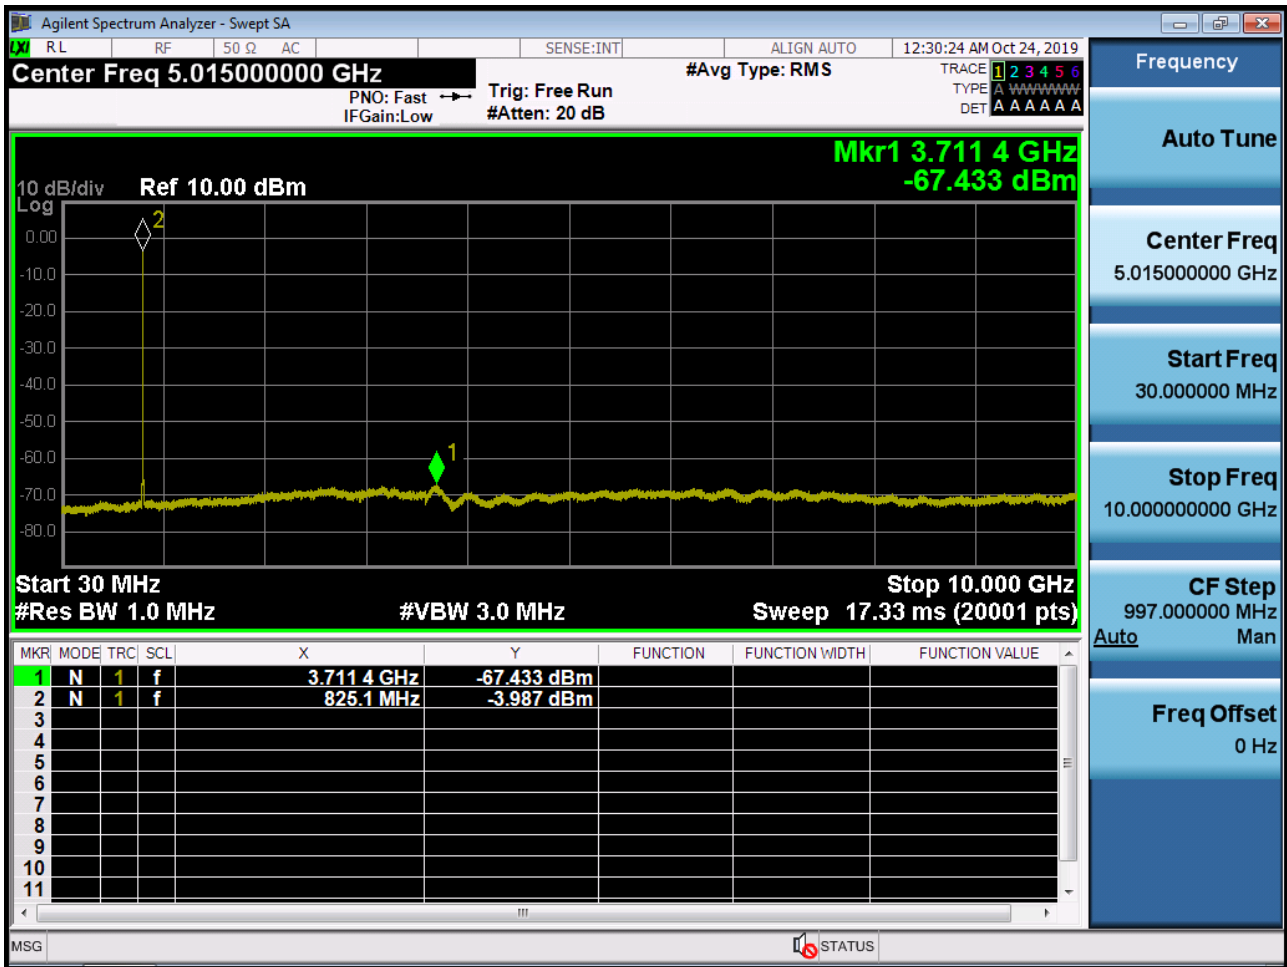


BAND5/ 26. Conducted Spurious Plot (26915ch\_1.4MHz\_QPSK\_RB 1\_0)

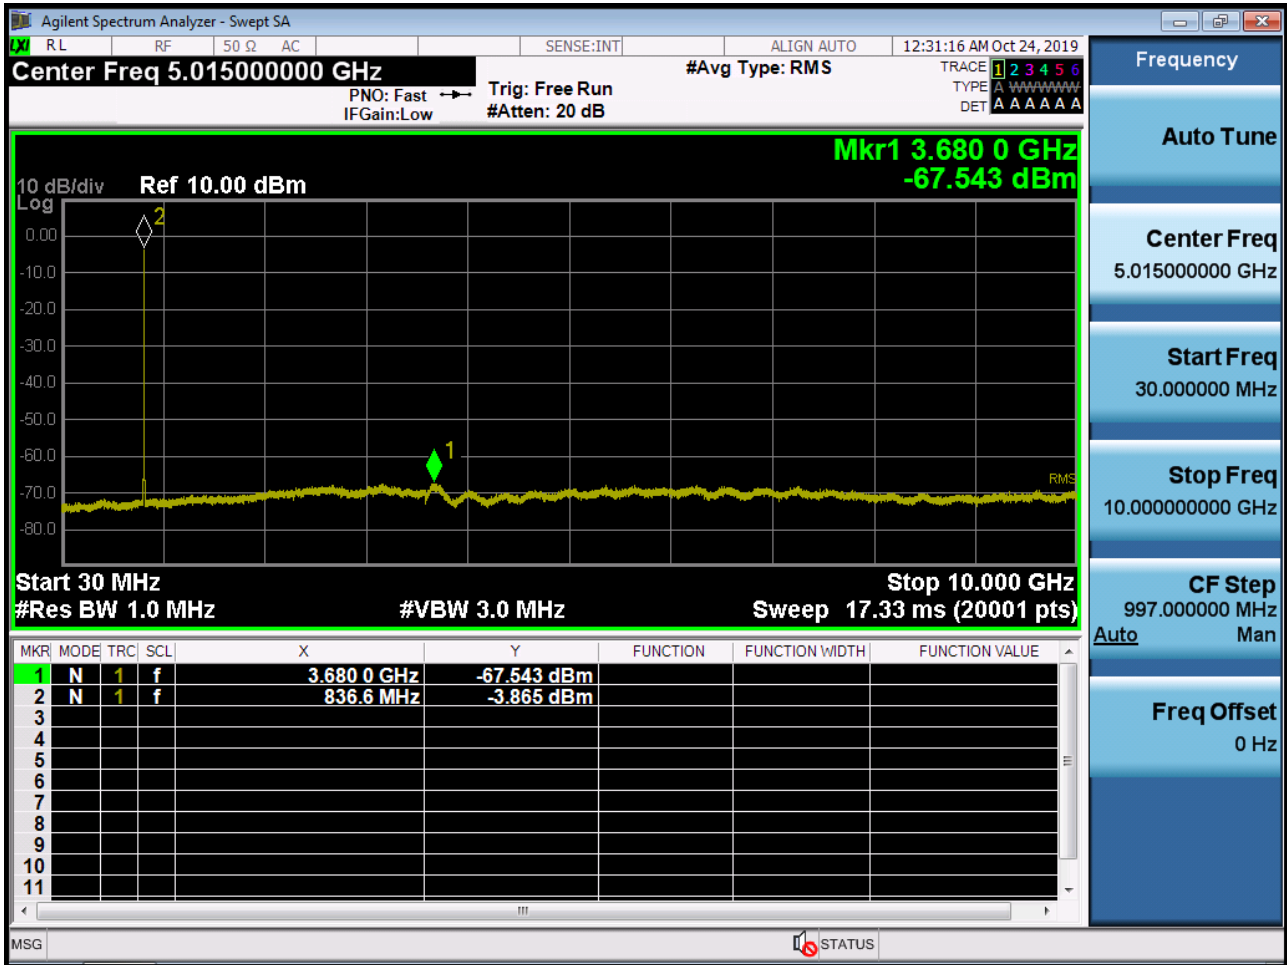


BAND5/ 26. Conducted Spurious Plot (27033ch\_1.4MHz\_QPSK\_RB 1\_0)

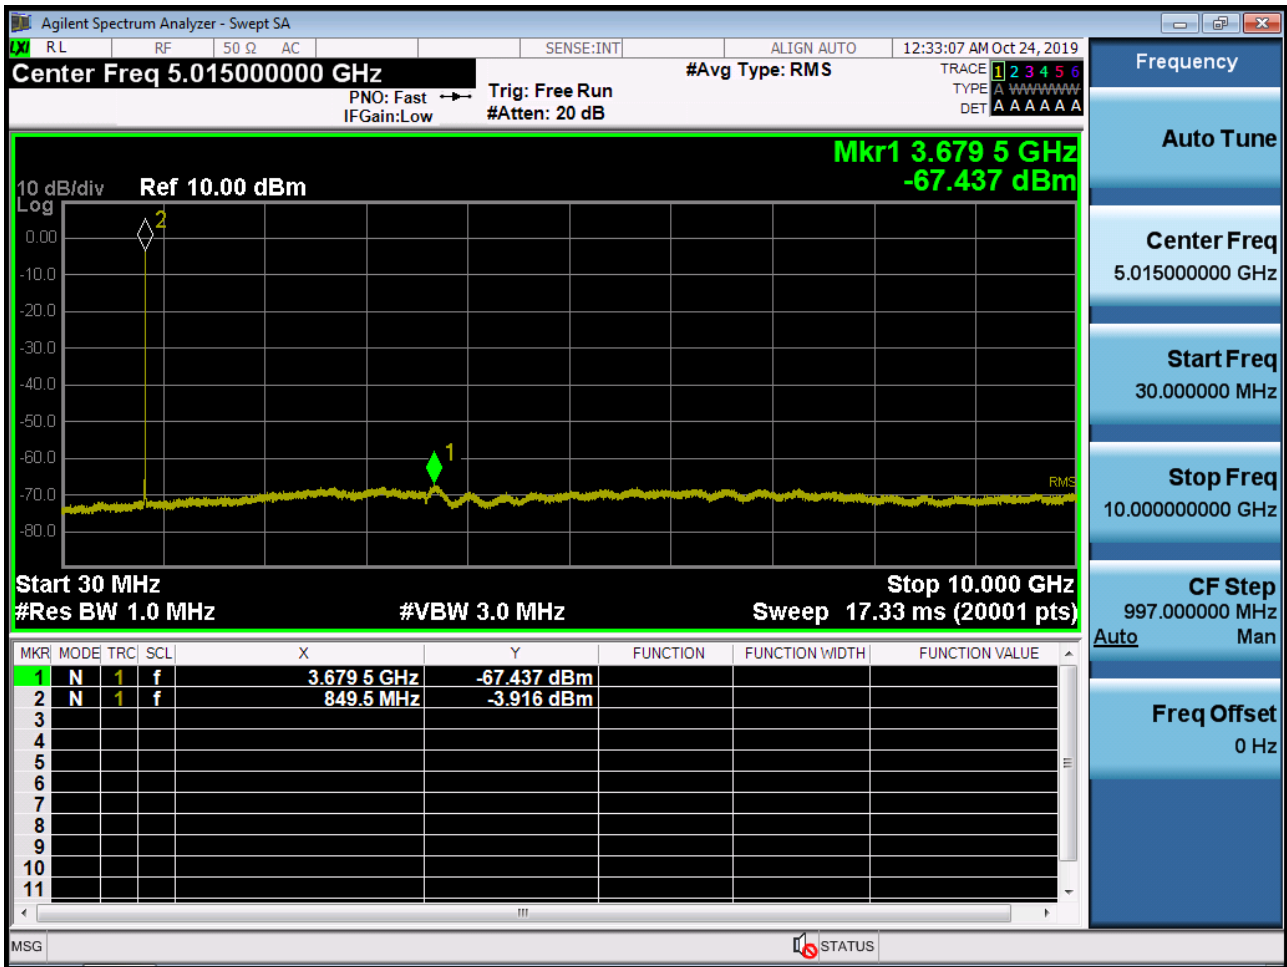


BAND5/ 26. Conducted Spurious Plot (26805ch\_3MHz\_QPSK\_RB 1\_0)

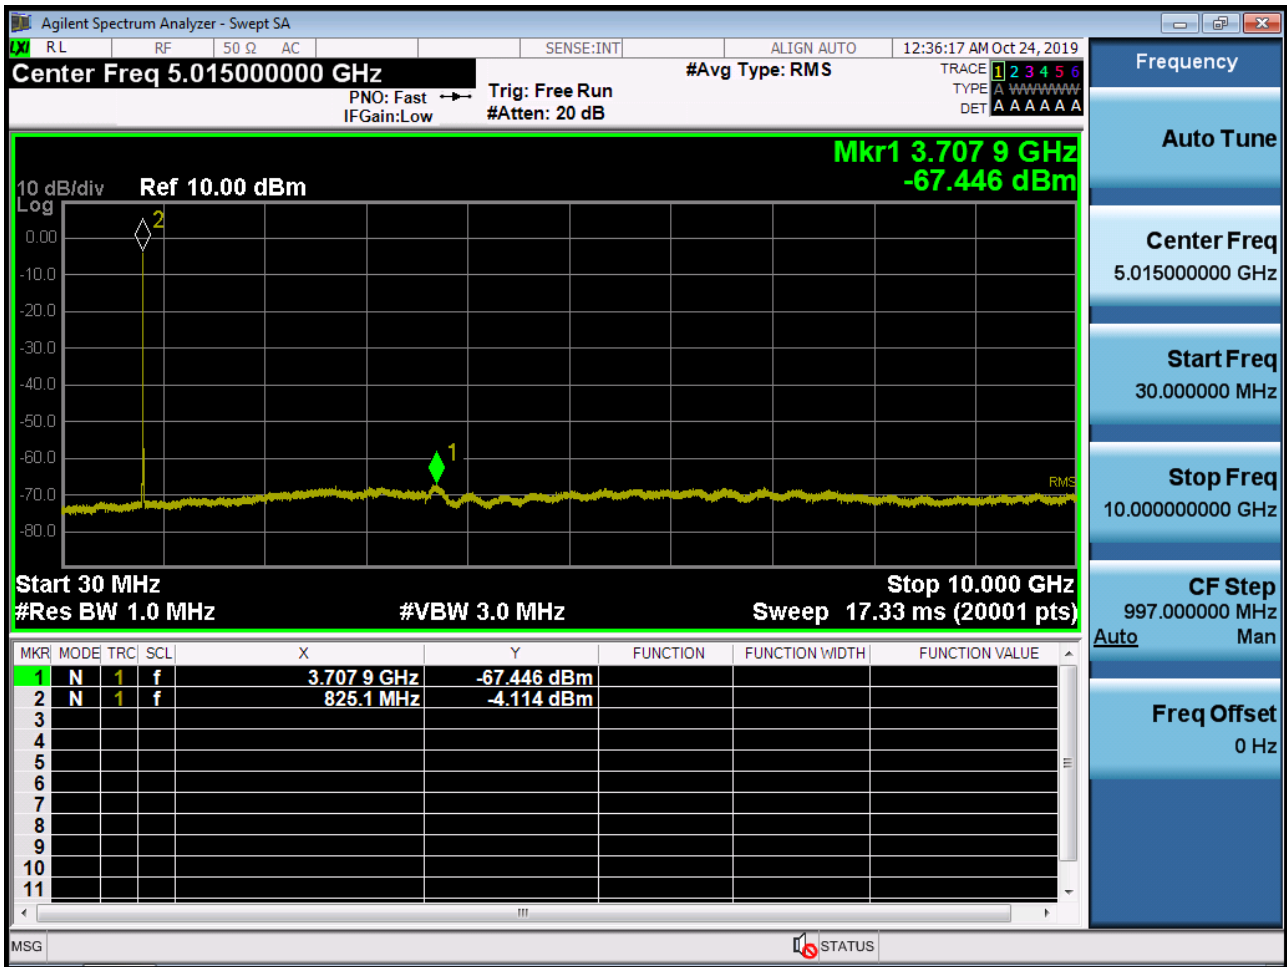

BAND5/ 26. Conducted Spurious Plot (26915ch\_3MHz\_QPSK\_RB 1\_0)

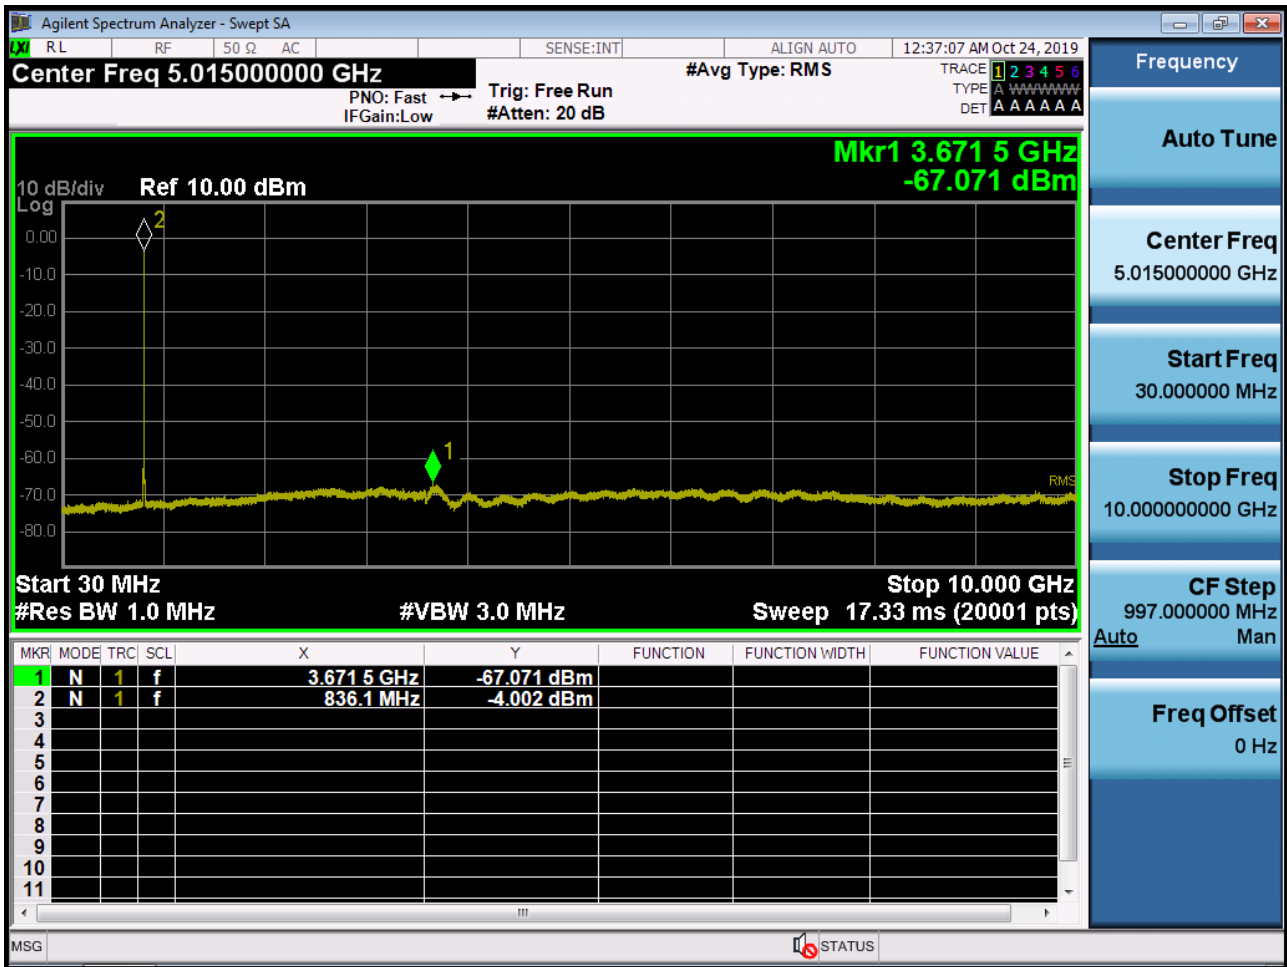


BAND5/ 26. Conducted Spurious Plot (27025ch\_3MHz\_QPSK\_RB 1\_0)

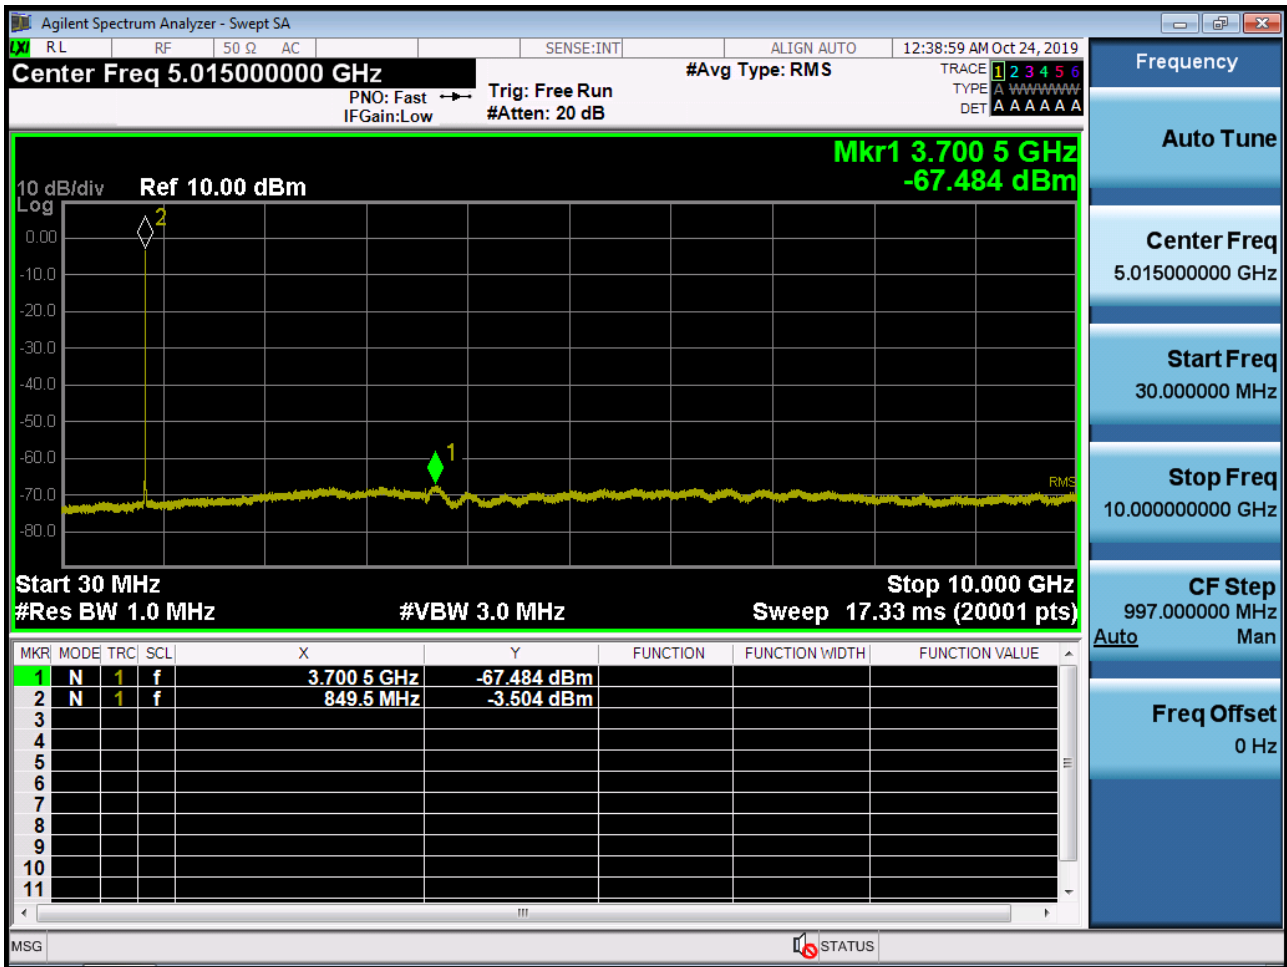





BAND5/ 26. Conducted Spurious Plot (26915ch\_5MHz\_QPSK\_RB 1\_0)

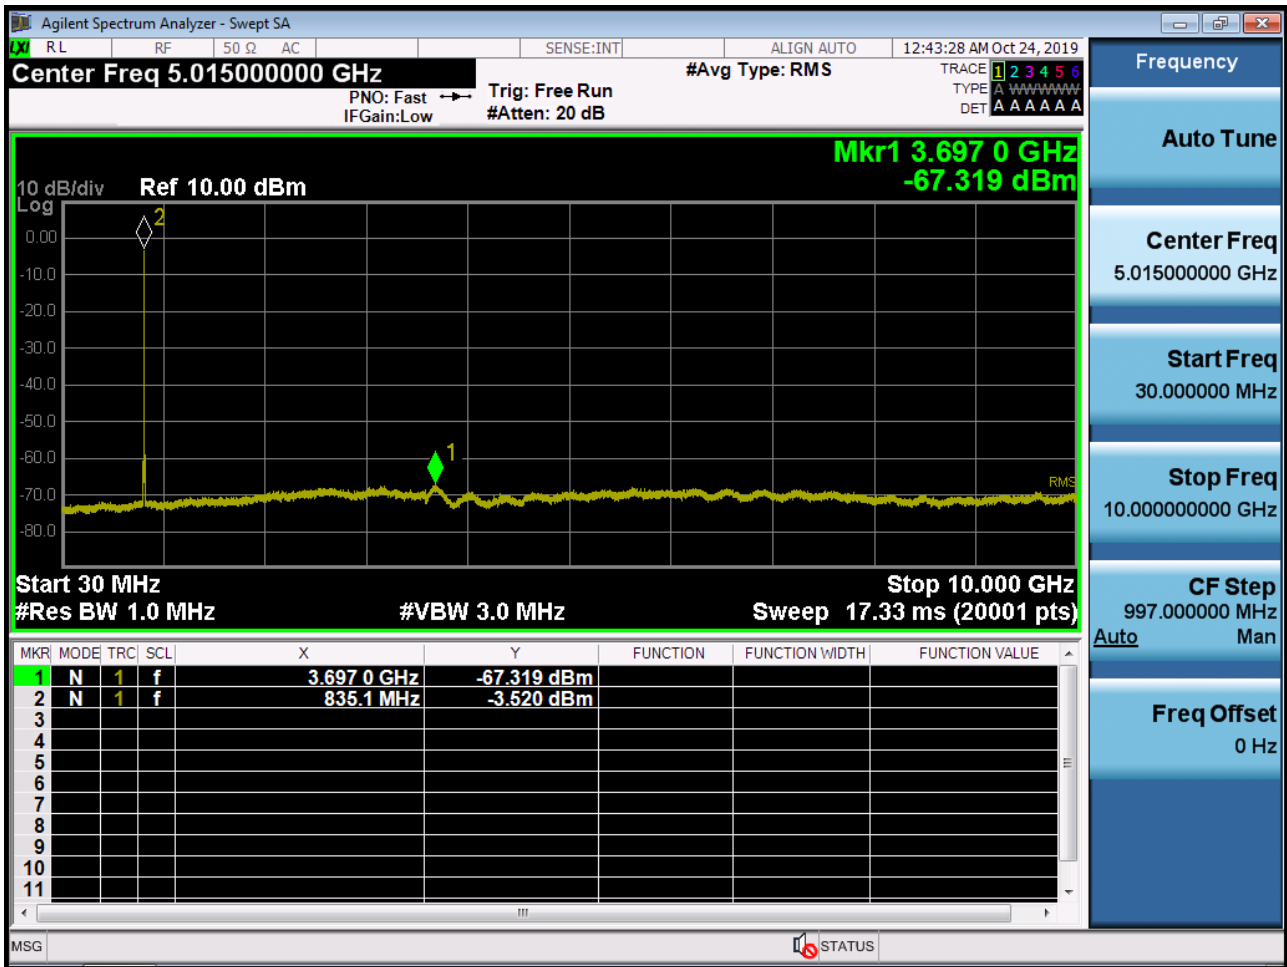


BAND5/ 26. Conducted Spurious Plot (27015ch\_5MHz\_QPSK\_RB 1\_0)

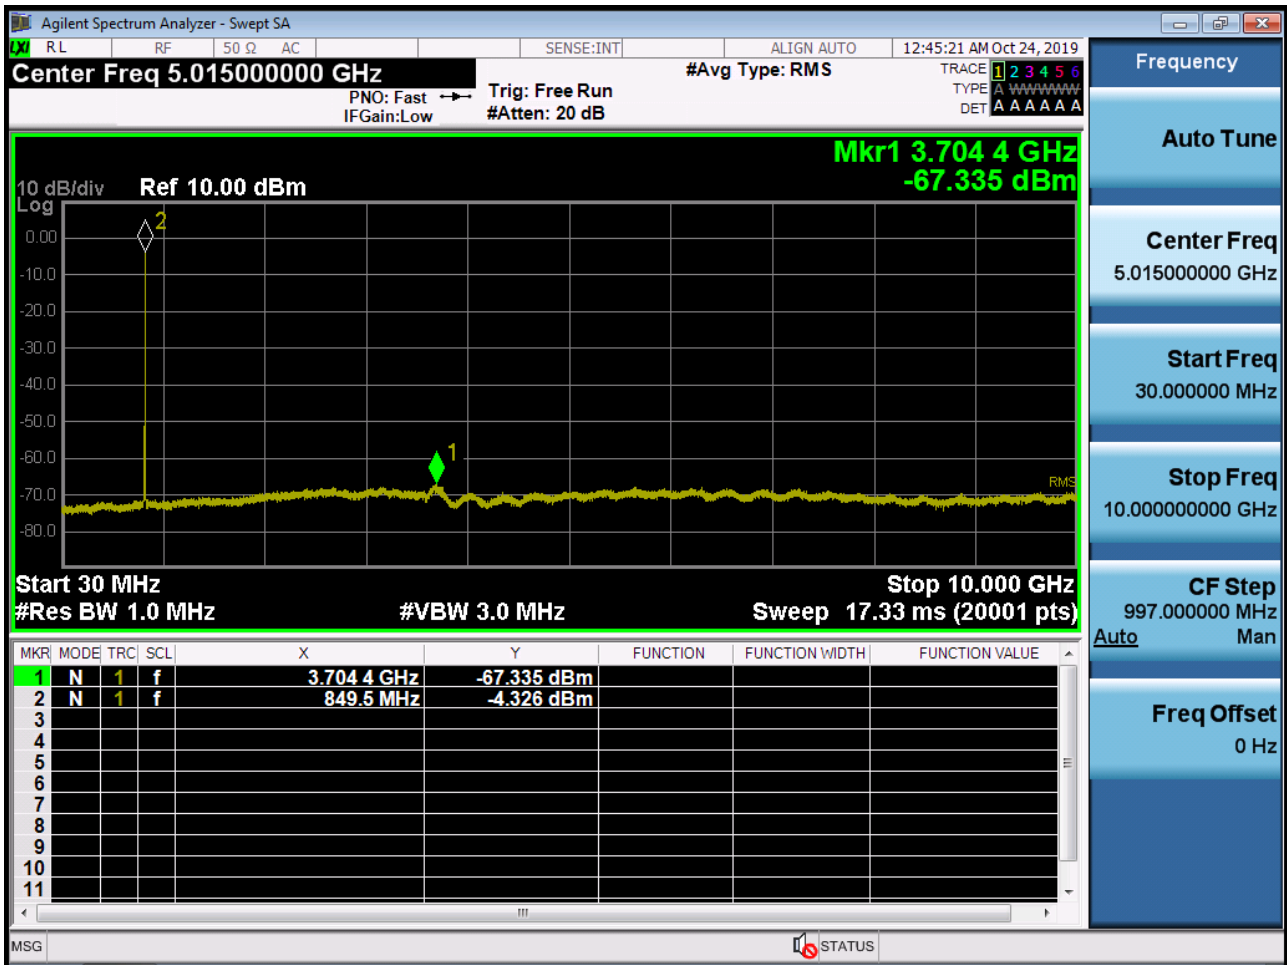


BAND5/ 26. Conducted Spurious Plot (26840ch\_10MHz\_QPSK\_RB 1\_0)

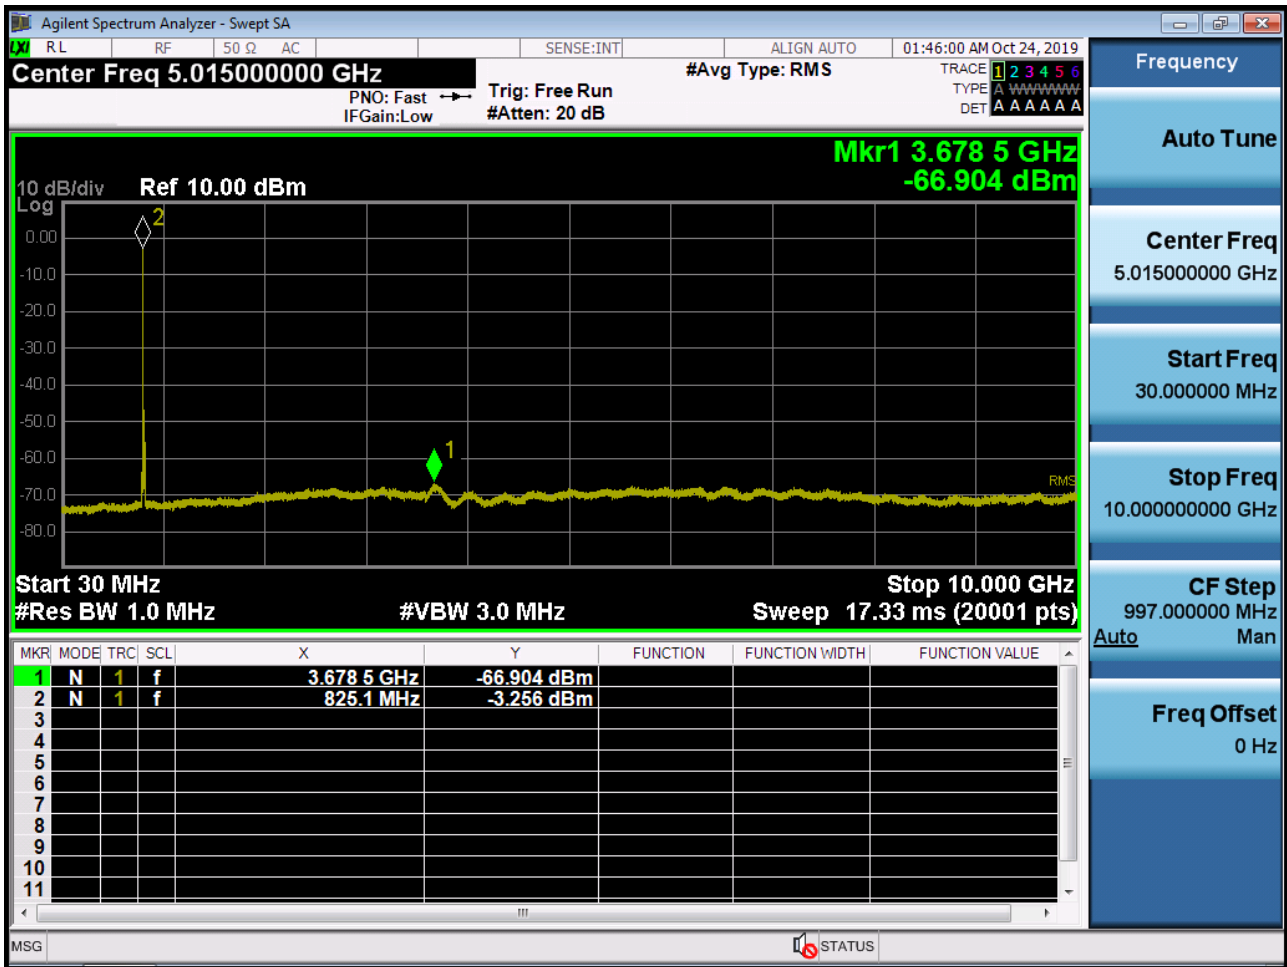


BAND5/ 26. Conducted Spurious Plot (26915ch\_10MHz\_QPSK\_RB 1\_0)

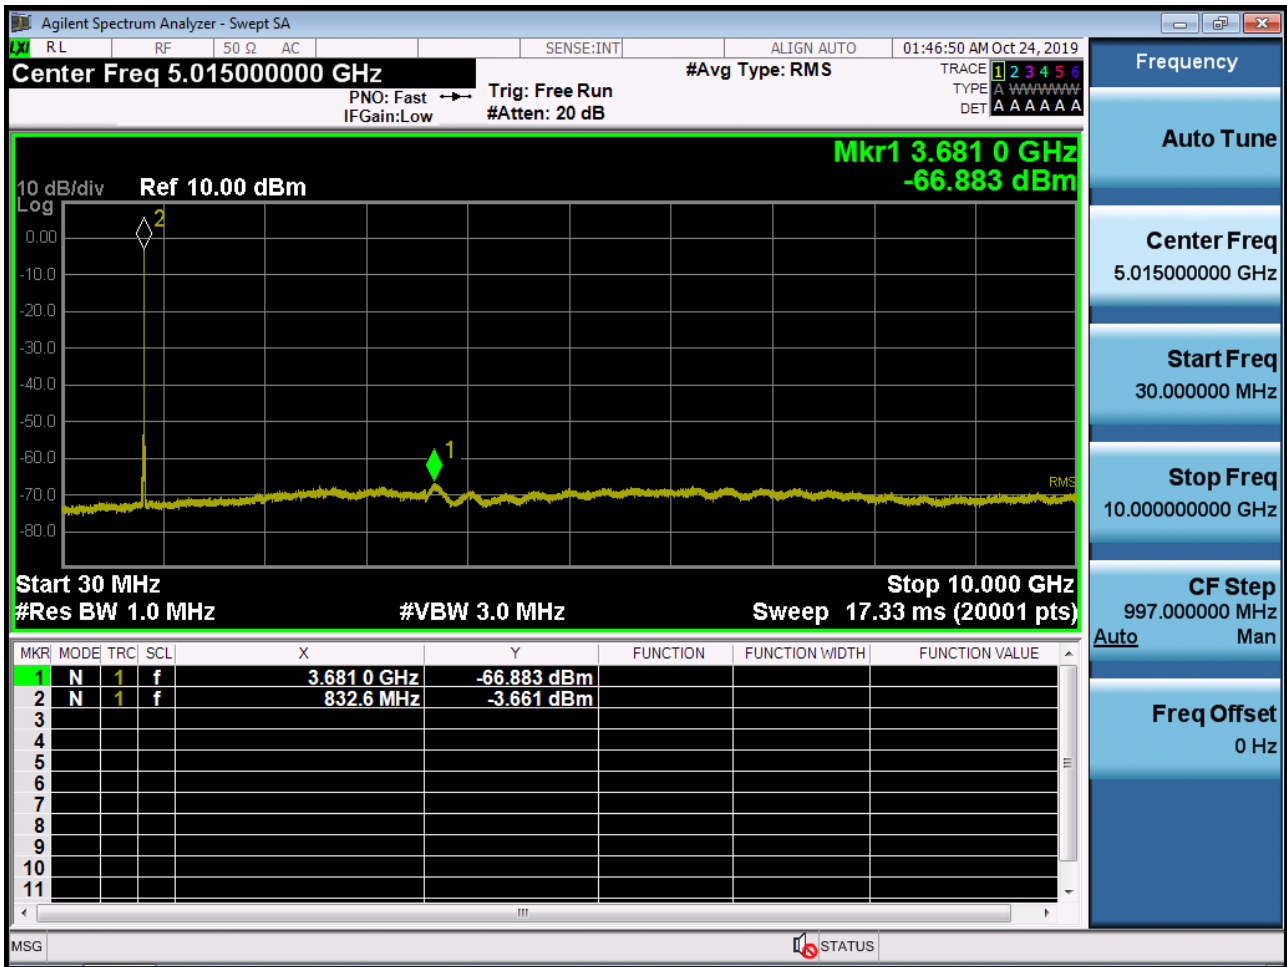


BAND5/ 26. Conducted Spurious Plot (26990ch\_10MHz\_QPSK\_RB 1\_0)

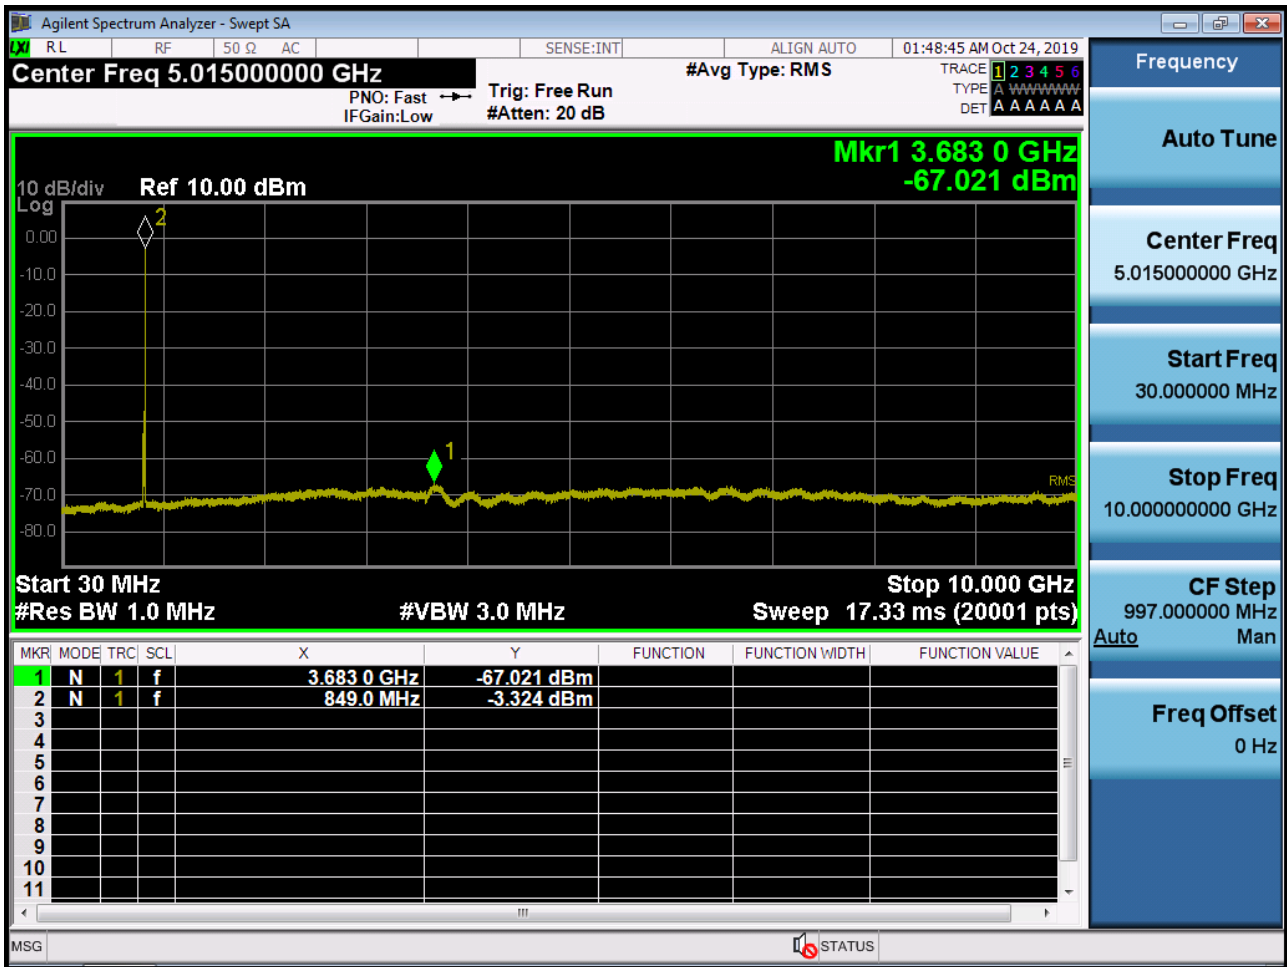


BAND 26. Conducted Spurious (26865ch\_15MHz\_QPSK\_RB 1\_0)

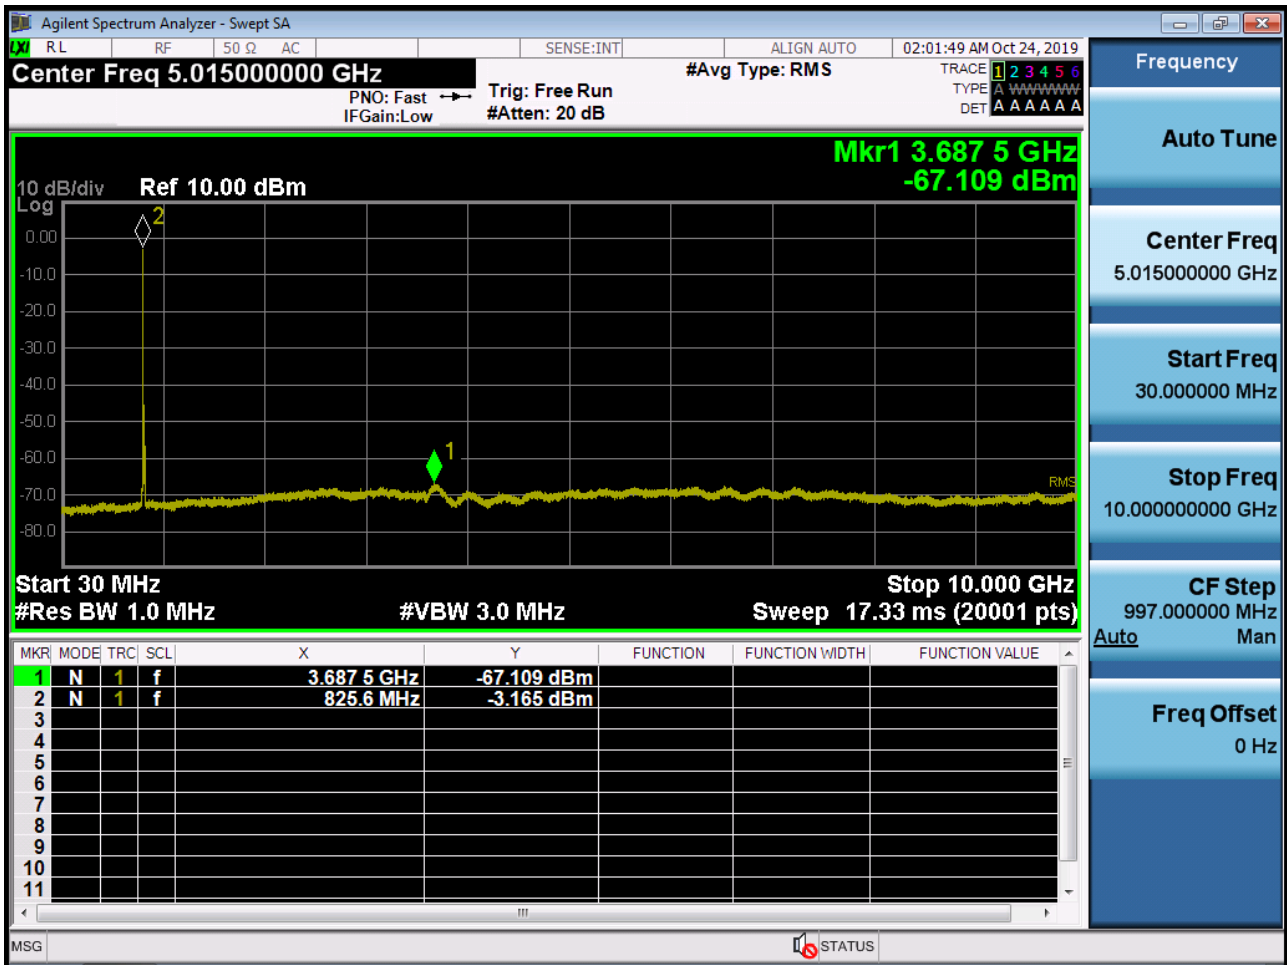

BAND 26. Conducted Spurious (26915ch\_15MHz\_QPSK\_RB 1\_0)

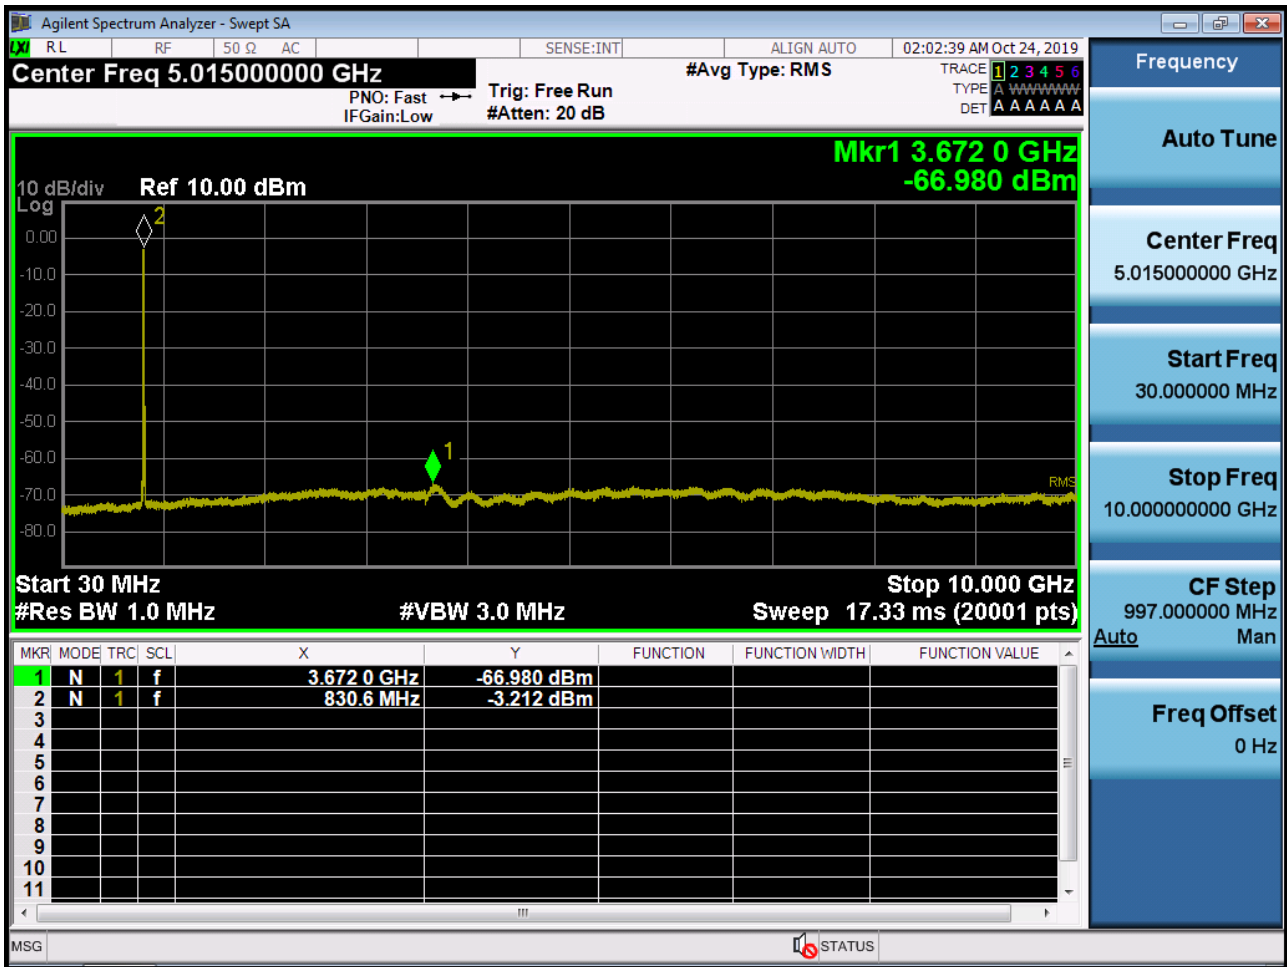

BAND 26. Conducted Spurious (26965ch\_15MHz\_QPSK\_RB 1\_0)

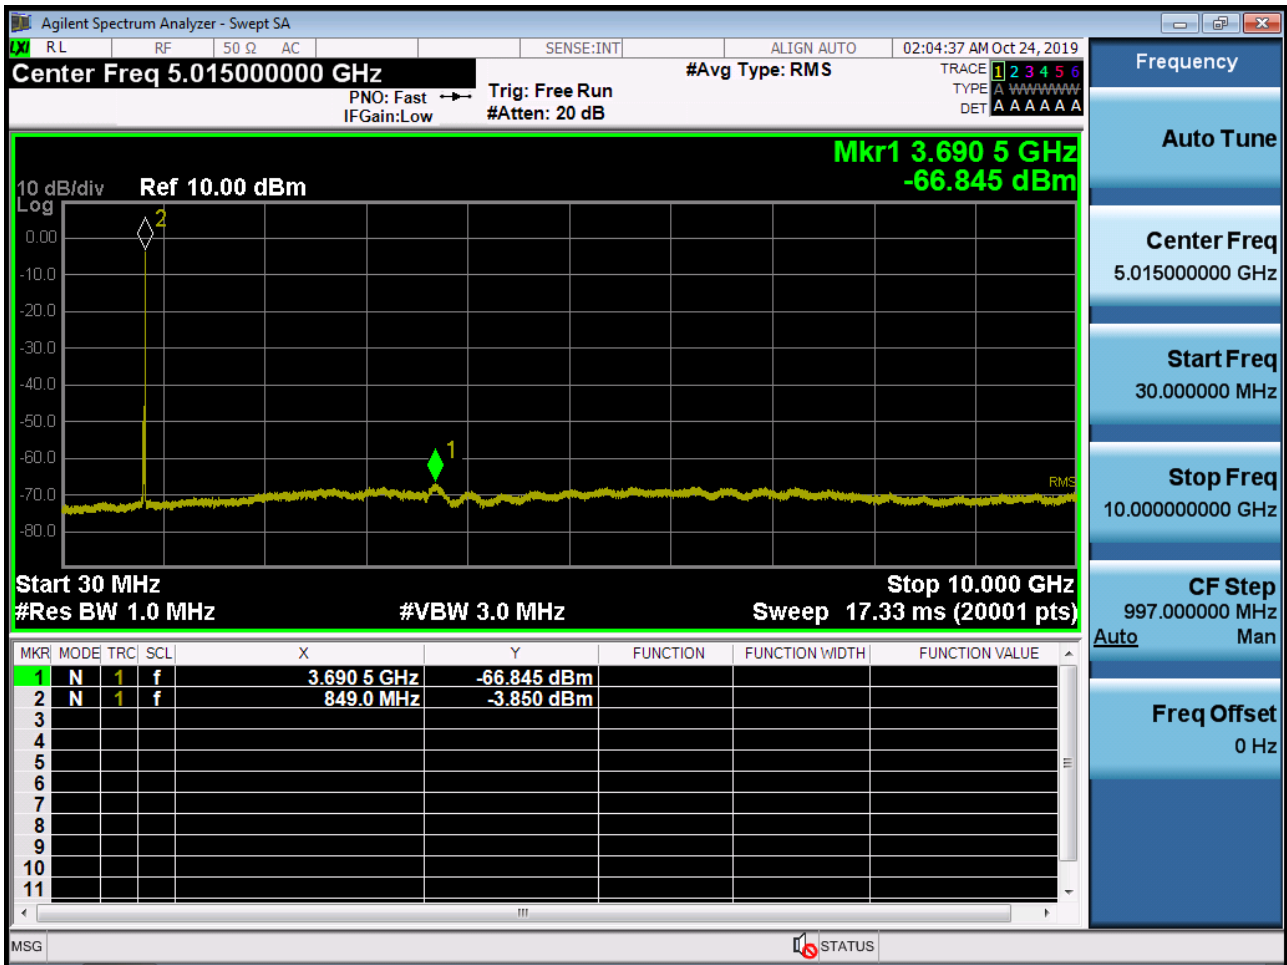

## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1912-FI006-P