

# FCC BT LE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Address:**

129, Samsung-ro, Yeongtong-gu,

Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**

February 28, 2019

**Location:**

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,

Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-1902-FC039-R1**FCC ID:****A3LSMT515****APPLICANT:****SAMSUNG Electronics Co., Ltd.****Model:**

SM-T515

**Additional Model:**

SM-T515N, SM-T517

**EUT Type:**

Tablet

**Average Output Power:**

4.88 dBm (3.076 mW)

**Frequency Range:**

2402 MHz -2480 MHz

**Modulation type**

GFSK

**FCC Classification:**

Digital Transmission System(DTS)

**FCC Rule Part(s):**

Part 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

**Report prepared by : Jung Ki Lim****Engineer of Telecommunication testing center****Approved by : Jong Seok Lee****Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

| TEST REPORT NO.      | DATE              | DESCRIPTION                       |
|----------------------|-------------------|-----------------------------------|
| HCT-RF-1902-FC039    | February 22, 2019 | - First Approval Report           |
| HCT-RF-1902-FC039-R1 | February 28, 2019 | - Revised 5 page and antenna gain |
|                      |                   |                                   |

# Table of Contents

|                                                  |    |
|--------------------------------------------------|----|
| 1. EUT DESCRIPTION .....                         | 4  |
| 2. TEST METHODOLOGY .....                        | 5  |
| EUT CONFIGURATION .....                          | 5  |
| EUT EXERCISE .....                               | 5  |
| GENERAL TEST PROCEDURES .....                    | 5  |
| DESCRIPTION OF TEST MODES .....                  | 5  |
| 3. INSTRUMENT CALIBRATION.....                   | 6  |
| 4. FACILITIES AND ACCREDITATIONS .....           | 6  |
| FACILITIES .....                                 | 6  |
| EQUIPMENT .....                                  | 6  |
| 5. ANTENNA REQUIREMENTS .....                    | 6  |
| 6. MEASUREMENT UNCERTAINTY .....                 | 7  |
| 7. DESCRIPTION OF TESTS .....                    | 8  |
| 8. SUMMARY TEST OF RESULTS .....                 | 24 |
| 9. TEST RESULT .....                             | 25 |
| 9.1 DUTY CYCLE.....                              | 25 |
| 9.2 6dB BANDWIDTH.....                           | 28 |
| 9.3 OUTPUT POWER .....                           | 33 |
| 9.4 POWER SPECTRAL DENSITY .....                 | 41 |
| 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS..... | 46 |
| 9.6 RADIATED SPURIOUS EMISSIONS .....            | 63 |
| 9.7 RADIATED RESTRICTED BAND EDGES .....         | 70 |
| 9.8 POWERLINE CONDUCTED EMISSIONS .....          | 74 |
| 10. LIST OF TEST EQUIPMENT .....                 | 78 |
| 11. ANNEX A_ TEST SETUP PHOTO .....              | 80 |

## 1. EUT DESCRIPTION

|                            |                                             |                                                                    |
|----------------------------|---------------------------------------------|--------------------------------------------------------------------|
| Model                      | SM-T515                                     |                                                                    |
| Additional Model           | SM-T515N, SM-T517                           |                                                                    |
| EUT Type                   | Tablet                                      |                                                                    |
| Power Supply               | DC 3.85 V                                   |                                                                    |
| Battery Information        | Model: EB-0BT515ABU<br>Type: Li-ion battery |                                                                    |
| Travel Adapter Information | Model : EP-TA50EWE<br>Manufacture: DONGYANG |                                                                    |
| Frequency Range            | 2402 MHz - 2480 MHz                         |                                                                    |
| Max. RF Output Power       | Peak (For information only)                 | 1M Bit/s : 5.103 dBm (3.238 mW)<br>2M Bit/s : 5.455 dBm (3.512 mW) |
|                            | Average                                     | 1M Bit/s : 4.88 dBm (3.076 mW)<br>2M Bit/s : 4.81 dBm (3.027 mW)   |
| Modulation Type            | GFSK                                        |                                                                    |
| Bluetooth Version          | 5.0                                         |                                                                    |
| Number of Channels         | 40 Channels                                 |                                                                    |
| Antenna Specification      | Antenna type: LDS<br>Peak Gain : 0.02 dBi   |                                                                    |
| Date(s) of Tests           | January 17, 2019 ~ February 21, 2019        |                                                                    |

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r01 dated February 11, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

### **Conducted Antenna Terminal**

See Section from 8.3.(KDB 558074 v05r01)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032 ).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5. ANTENNA REQUIREMENTS

#### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB) |
|------------------------------------------|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82                             |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.40                             |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.80                             |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.70                             |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.71                             |

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

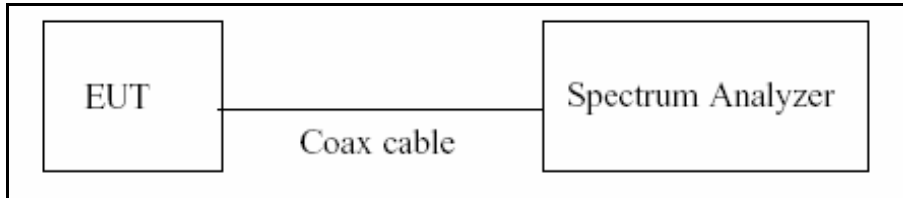

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r01.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$




## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r01, Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 8.3.1.1 in KDB 558074 v05r01, Procedure 11.9.1.1 in ANSI 63.10-2013)
  - 1) RBW  $\geq$  DTS Bandwidth
  - 2) VBW  $\geq$  3 x RBW
  - 3) SPAN  $\geq$  3 x RBW
  - 4) Detector Mode = Peak
  - 5) Sweep = auto couple
  - 6) trace Mode = max hold
  - 7) Allow trace to fully stabilize.
  - 8) Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 8.3.2.2 in KDB 558074 v05r01, Procedure 11.9.2.2 in ANSI 63.10-2013)
  - 1) We use the spectrum analyzer's integrated band power measurement function.
  - 2) Measure the duty cycle
  - 3) Set span to at least 1.5 times the OBW
  - 4) RBW = 1-5 % of the OBW, not to exceed 1 MHz.
  - 5) VBW  $\geq 3 \times$  RBW.
  - 6) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
  - 7) Sweep time = auto.
  - 8) Detector = RMS(i.e., power averaging)
  - 9) Do not use sweep triggering. Allow the sweep to "free run".
  - 10) Trace average at least 100 traces in power averaging(RMS) mode.
  - 11) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
  - 12) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Sample Calculation**


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

##### Test Configuration



##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r01, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r01, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times \text{Span} / \text{RBW}$
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

### Factors for frequency

| Freq(MHz) | Factor(dB) |
|-----------|------------|
| 30        | 21.88      |
| 100       | 20.41      |
| 200       | 20.77      |
| 300       | 20.71      |
| 400       | 20.81      |
| 500       | 20.83      |
| 600       | 20.90      |
| 700       | 20.93      |
| 800       | 20.93      |
| 900       | 20.92      |
| 1000      | 20.97      |
| 2000      | 21.22      |
| 2400*     | 21.21      |
| 2500*     | 21.23      |
| 3000      | 21.26      |
| 4000      | 21.47      |
| 5000      | 21.41      |
| 6000      | 21.44      |
| 7000      | 21.93      |
| 8000      | 21.90      |
| 9000      | 22.06      |
| 10000     | 22.14      |
| 11000     | 22.14      |
| 12000     | 22.26      |
| 13000     | 22.41      |
| 14000     | 22.48      |
| 15000     | 22.56      |
| 16000     | 22.62      |
| 17000     | 22.60      |
| 18000     | 22.66      |
| 19000     | 22.65      |
| 20000     | 22.72      |
| 21000     | 22.75      |
| 22000     | 22.89      |
| 23000     | 23.18      |
| 24000     | 22.92      |
| 25000     | 23.11      |
| 26000     | 22.60      |

Note : 1. '\*' is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


### 7.6. Radiated Test

**Limit**


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$  | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$ | 30                       |
| 1.705 – 30      | 30                    | 30                       |
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

**Test Configuration**


Below 30 MHz

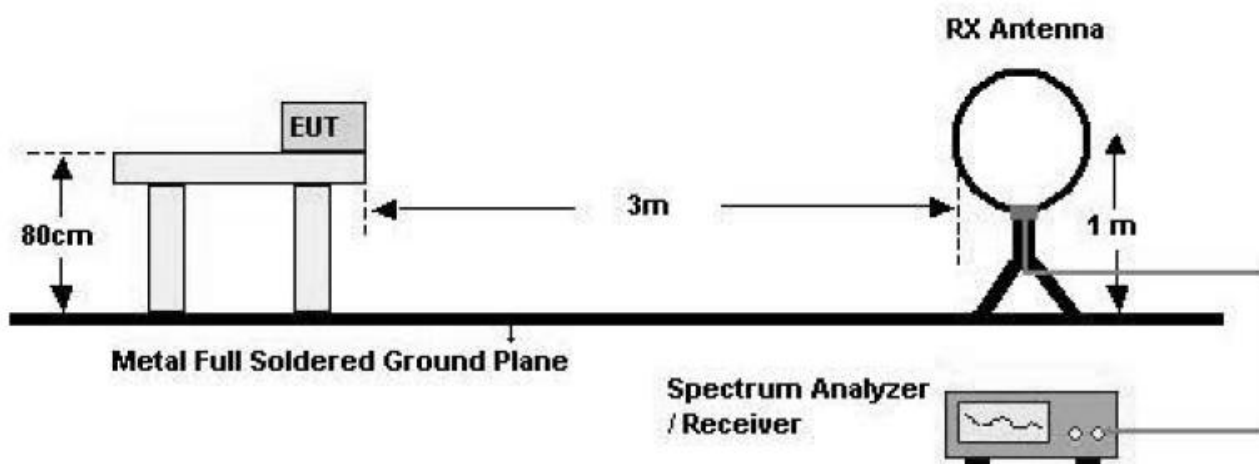

30 MHz - 1 GHz

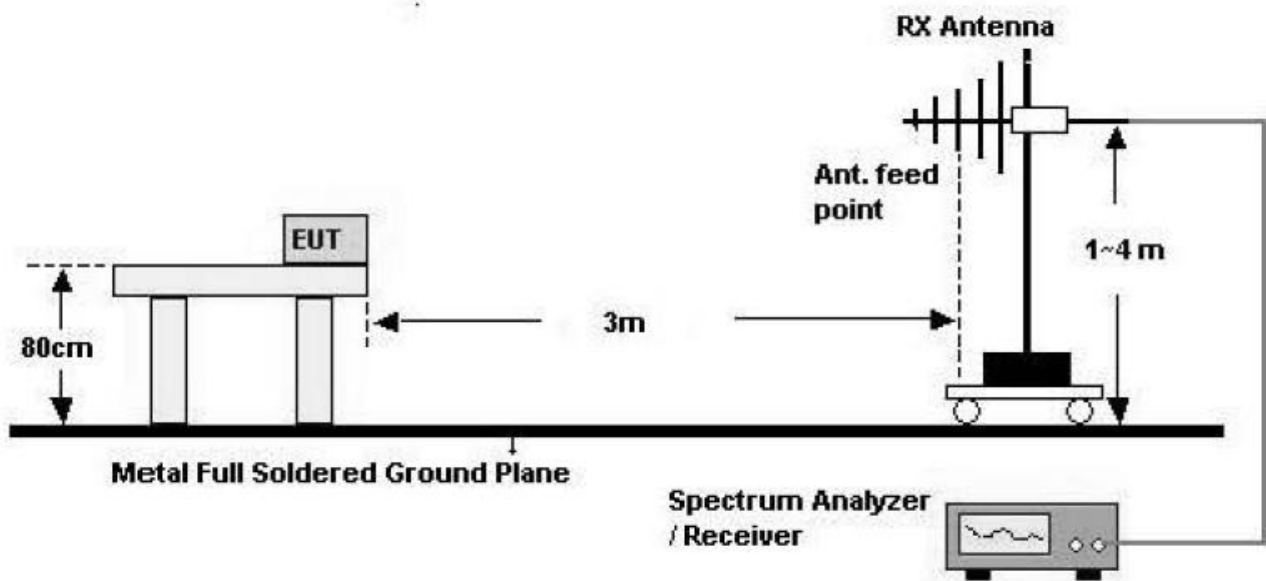

Above 1 GHz

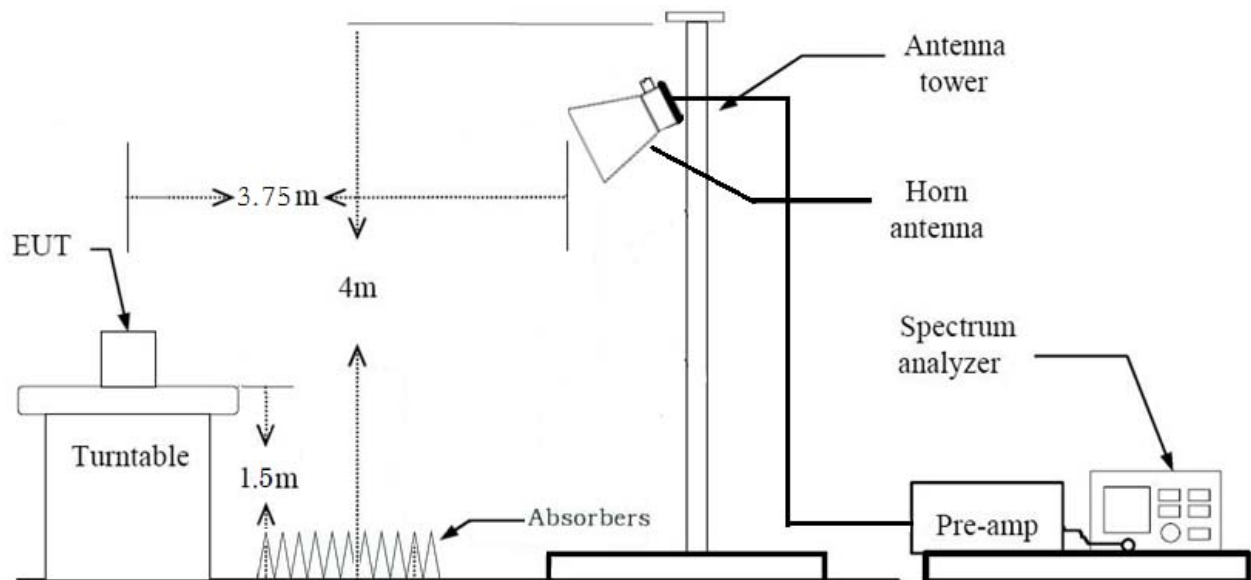



**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

\*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log (\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r01, Procedure 11.12 in ANSI 63.10-2013)

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \cdot \text{RBW}$

**(2) Measurement Type(Average):**

- Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log (\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \cdot \text{RBW}$

**(2) Measurement Type(Average):**

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V) |           |
|-----------------------|---------------------|-----------|
|                       | Quasi-peak          | Average   |
| 0.15 to 0.50          | 66 to 56*           | 56 to 46* |
| 0.50 to 5             | 56                  | 46        |
| 5 to 30               | 60                  | 50        |

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## **7.8. Worst case configuration and mode**

### **Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
  - \*Worst case :
    - LE 5.0(1M Bit/s) : 255 Byte
    - LE 5.0(2M Bit/s) : 37 Byte

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.

### **Conducted test**

The EUT was configured with packet length of highest power.

- \* Packet length of highest power :
  - LE 5.0(1M Bit/s) : 255 Byte
  - LE 5.0(2M Bit/s) : 37 Byte

## 8. SUMMARY TEST OF RESULTS

| Test Description                     | FCC Part Section(s)              | Test Limit           | Test Condition | Test Result |
|--------------------------------------|----------------------------------|----------------------|----------------|-------------|
| 6 dB Bandwidth                       | §15.247(a)(2)                    | > 500 kHz            | Conducted      | PASS        |
| Conducted Maximum Peak Output Power  | §15.247(b)(3)                    | < 1 Watt             |                | PASS        |
| Power Spectral Density               | §15.247(e)                       | < 8 dBm / 3 kHz Band |                | PASS        |
| Band Edge<br>(Out of Band Emissions) | §15.247(d)                       | Conducted > 30 dBc   |                | PASS        |
| AC Power line Conducted Emissions    | §15.207                          | cf. Section 7.7      |                | PASS        |
| Radiated Spurious Emissions          | §15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      | Radiated       | PASS        |
| Radiated Restricted Band Edge        | §15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      |                | PASS        |




9. TEST RESULT


9.1 DUTY CYCLE

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | T <sub>on</sub><br>(ms) | T <sub>total</sub><br>(ms) | Duty Cycle | Duty Cycle<br>Factor<br>(dB) |
|----------------------|-------------------------|-------------------------|----------------------------|------------|------------------------------|
| 1M                   | 37                      | 0.3889                  | 0.6245                     | 0.6227     | 2.06                         |
|                      | 255                     | 2.1350                  | 2.5000                     | 0.8540     | 0.69                         |
| 2M                   | 37                      | 0.2027                  | 0.6245                     | 0.3246     | 4.89                         |
|                      | 255                     | 1.0750                  | 1.8750                     | 0.5733     | 2.42                         |

### 1M Bit/s (37 Byte) Test Plots

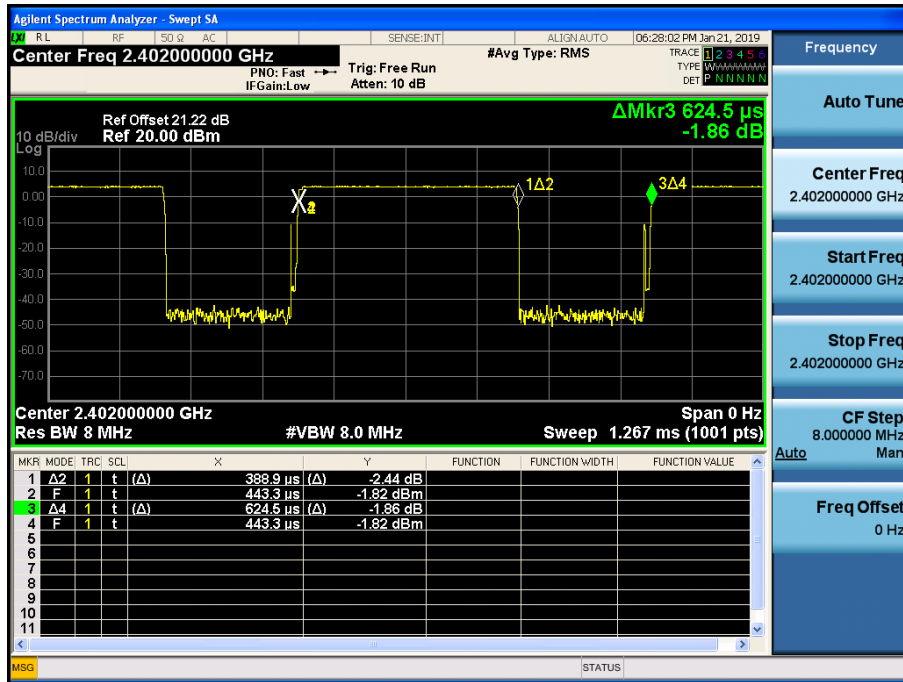


### 1M Bit/s (255 Byte) Test Plots

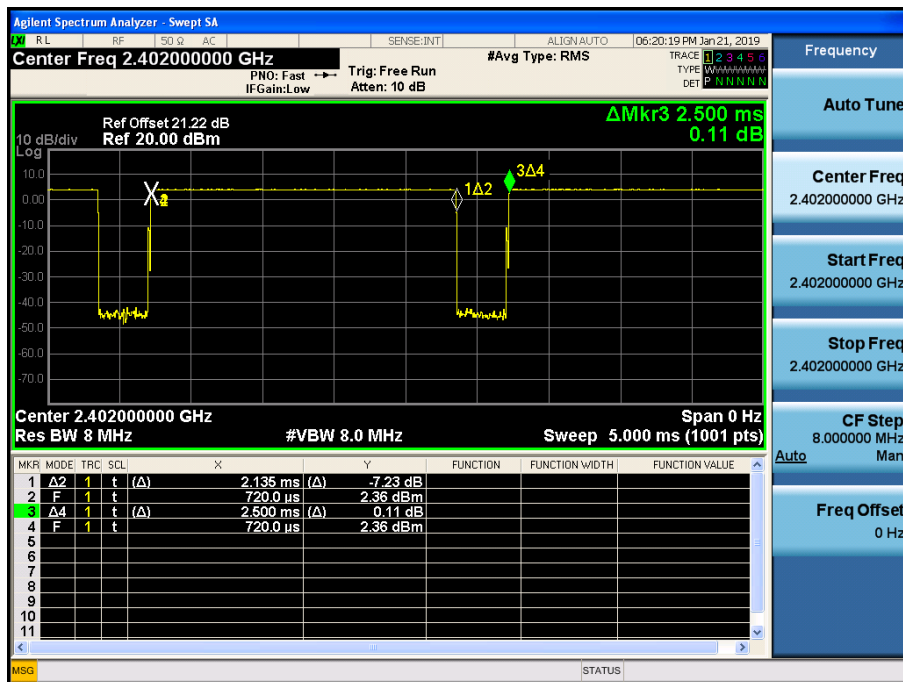


■ 2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

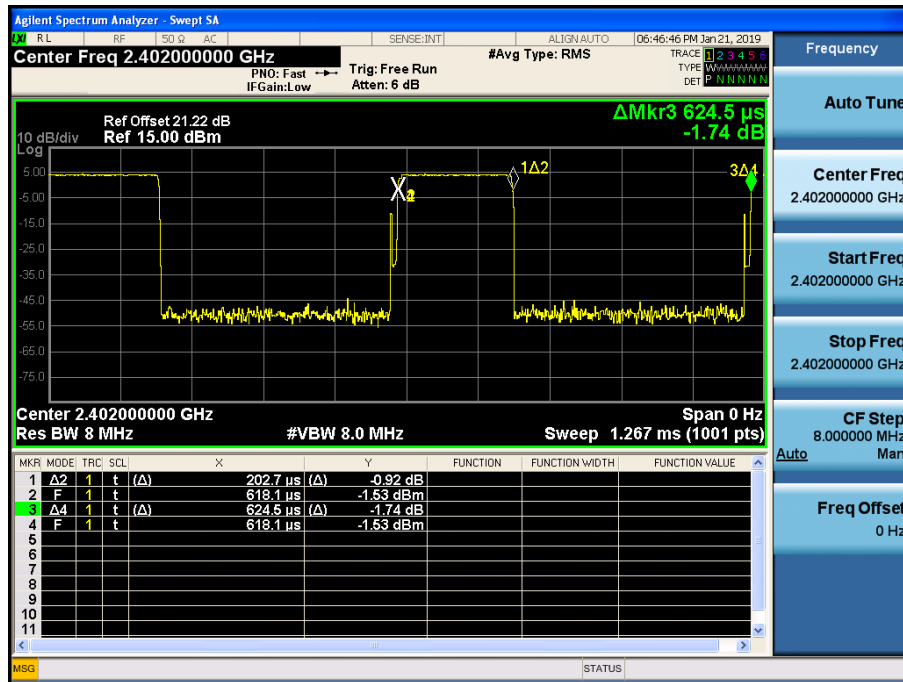

■ 2M Bit/s (255 Byte) Test Plots

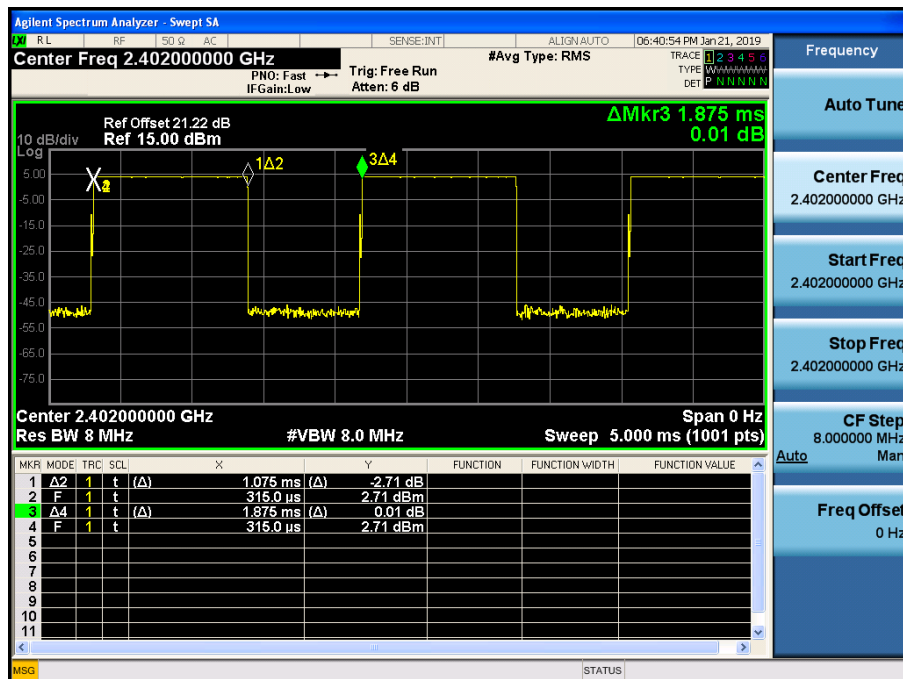


## 9.2 6dB BANDWIDTH


| Mode<br>(Bit/s) | Channel | 6 dB Bandwidth<br>(kHz) | 99 %<br>Measured<br>Bandwidth [MHz] | Limit<br>(kHz) |
|-----------------|---------|-------------------------|-------------------------------------|----------------|
| 1M              | 0       | 728.9                   | 1.1278                              | > 500          |
|                 | 19      | 726.2                   | 1.1263                              |                |
|                 | 39      | 737.5                   | 1.1195                              |                |
| 2M              | 0       | 1287.4                  | 2.0809                              | > 500          |
|                 | 19      | 1290.3                  | 2.0837                              |                |
|                 | 39      | 1288.9                  | 2.0773                              |                |

## 1M Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

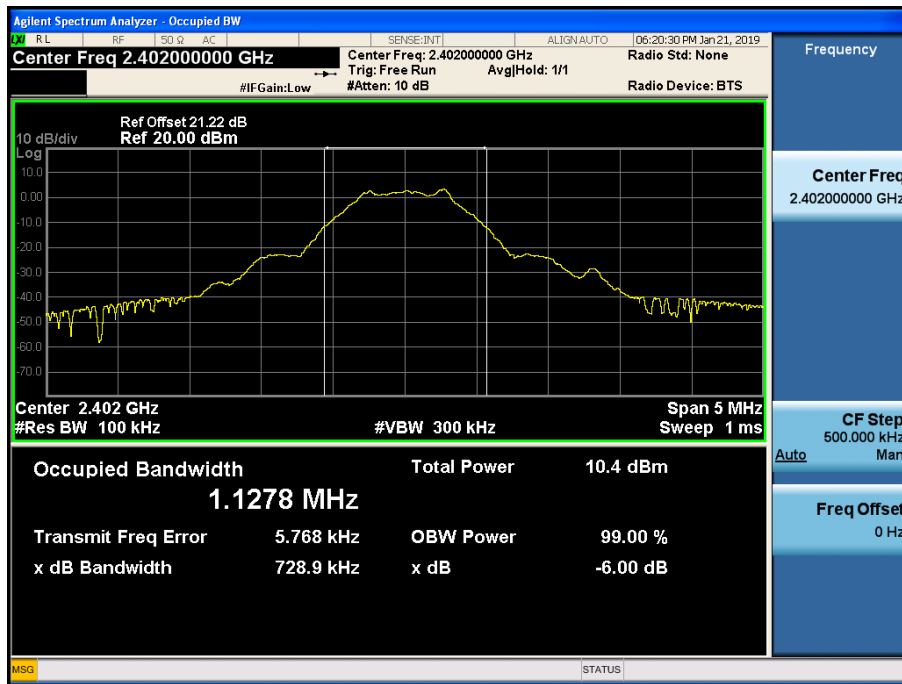

6 dB Bandwidth plot (Mid-CH 19)

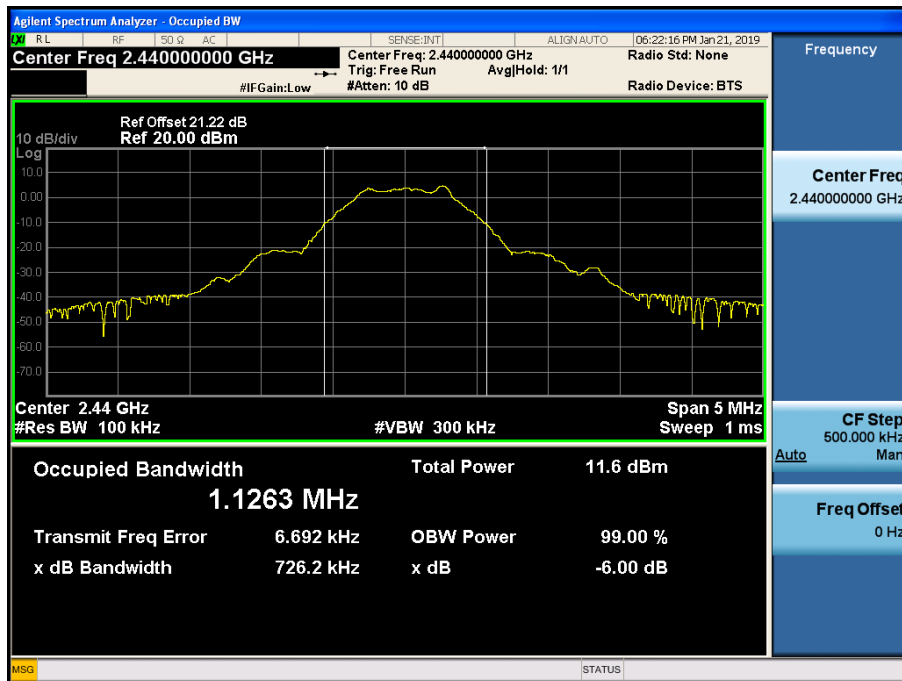


6 dB Bandwidth plot (High-CH 39)

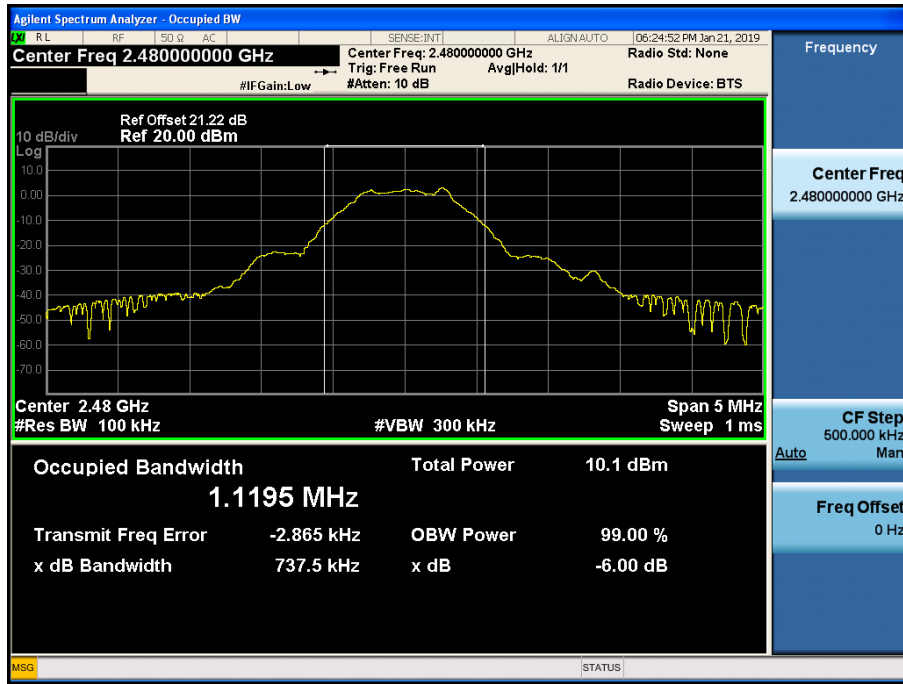


## 2M Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

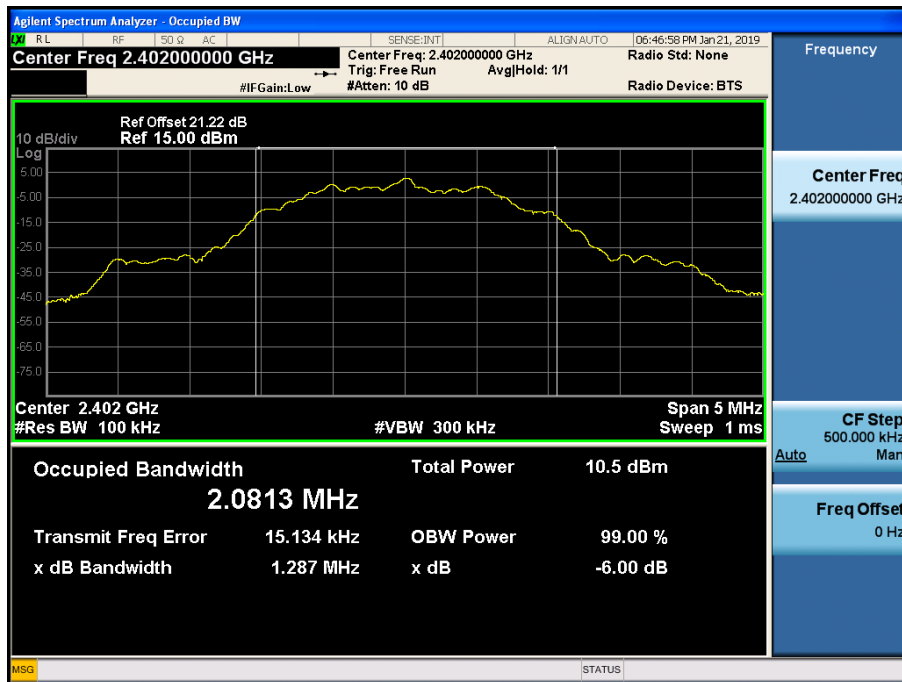

6 dB Bandwidth plot (Mid-CH 19)

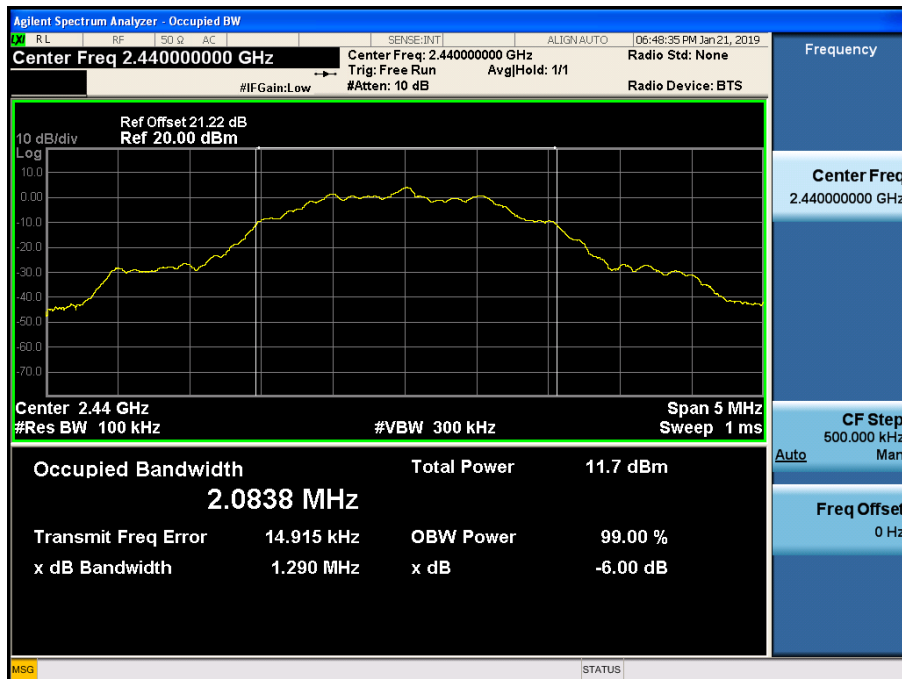

6 dB Bandwidth plot (High-CH 39)

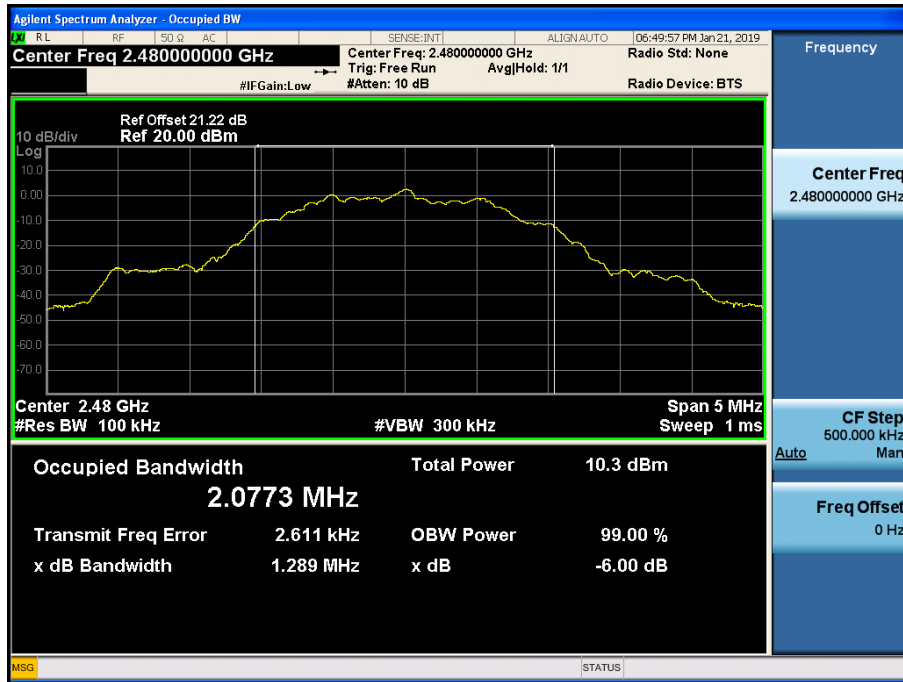



### 9.3 OUTPUT POWER

**Peak Power**

| LE Mode        |             | Data rate<br>(Bit/s) | Packet length<br>(Byte) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------------|-------------------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                      |                         |                        |                |
| 2402           | 0           | 1M                   | 37                      | 3.861                  | 30             |
|                |             |                      | 255                     | 3.822                  |                |
|                |             | 2M                   | 37                      | 4.184                  |                |
|                |             |                      | 255                     | 4.145                  |                |
| 2440           | 19          | 1M                   | 37                      | 5.103                  |                |
|                |             |                      | 255                     | 5.064                  |                |
|                |             | 2M                   | 37                      | 5.455                  |                |
|                |             |                      | 255                     | 5.406                  |                |
| 2480           | 39          | 1M                   | 37                      | 3.571                  |                |
|                |             |                      | 255                     | 3.529                  |                |
|                |             | 2M                   | 37                      | 4.024                  |                |
|                |             |                      | 255                     | 3.984                  |                |

### Average Power

| LE Mode        |             | Data rate | Packet length | Measured   | Duty Cycle  | Result | Limit |
|----------------|-------------|-----------|---------------|------------|-------------|--------|-------|
| Frequency[MHz] | Channel No. | (Bit/s)   | (Byte)        | Power(dBm) | Factor (dB) | (dBm)  | (dBm) |
| 2402           | 0           | 1M        | 37            | 1.36       | 2.06        | 3.42   | 30    |
|                |             |           | 255           | 2.80       | 0.69        | 3.49   |       |
|                |             | 2M        | 37            | -1.24      | 4.89        | 3.65   |       |
|                |             |           | 255           | 0.74       | 2.42        | 3.16   |       |
| 2440           | 19          | 1M        | 37            | 2.58       | 2.06        | 4.64   |       |
|                |             |           | 255           | 4.19       | 0.69        | 4.88   |       |
|                |             | 2M        | 37            | -0.08      | 4.89        | 4.81   |       |
|                |             |           | 255           | 2.09       | 2.42        | 4.51   |       |
| 2480           | 39          | 1M        | 37            | 1.29       | 2.06        | 3.35   |       |
|                |             |           | 255           | 2.69       | 0.69        | 3.38   |       |
|                |             | 2M        | 37            | -1.21      | 4.89        | 3.68   |       |
|                |             |           | 255           | 1.12       | 2.42        | 3.54   |       |

### Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss


3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 21.22 dB is offset for 2.4 GHz Band.


## 1M Bit/s(255 Byte) Test Plots

### Peak Power


Conducted Output Power (Low-CH 0)

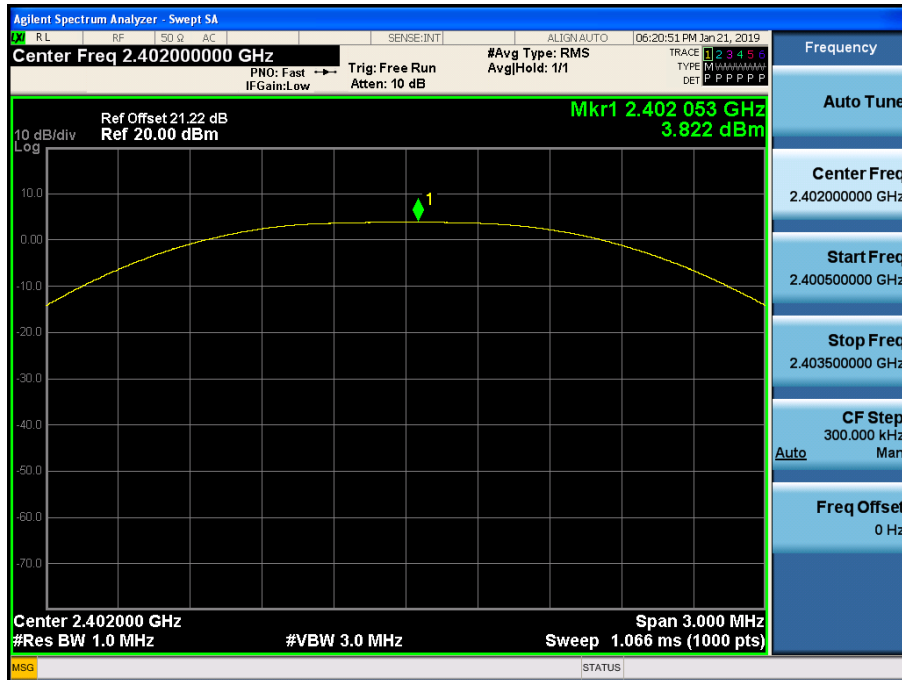

Conducted Output Power (Mid-CH 19)

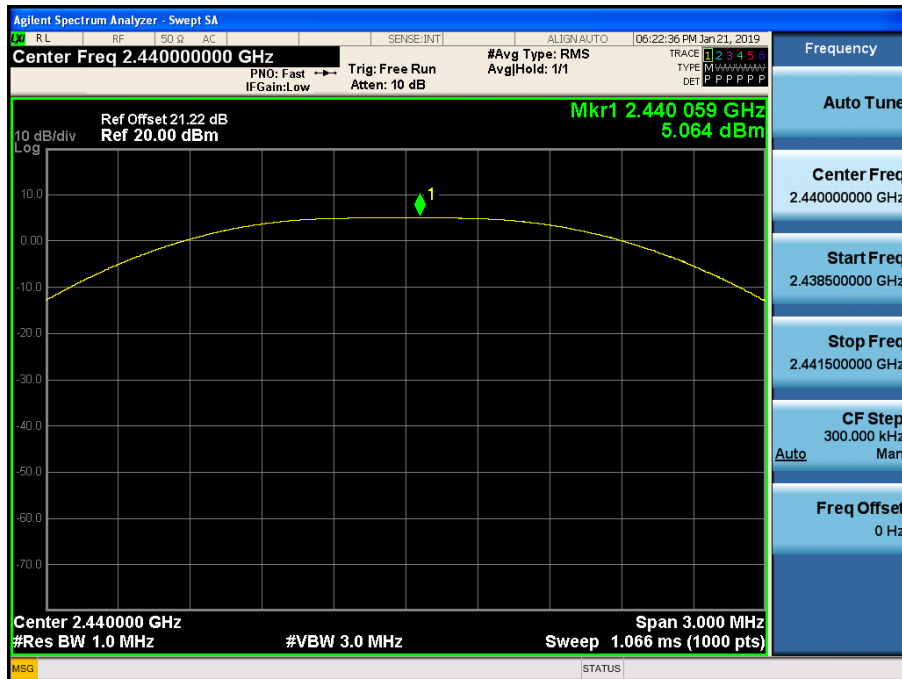


### Conducted Output Power (High-CH 39)

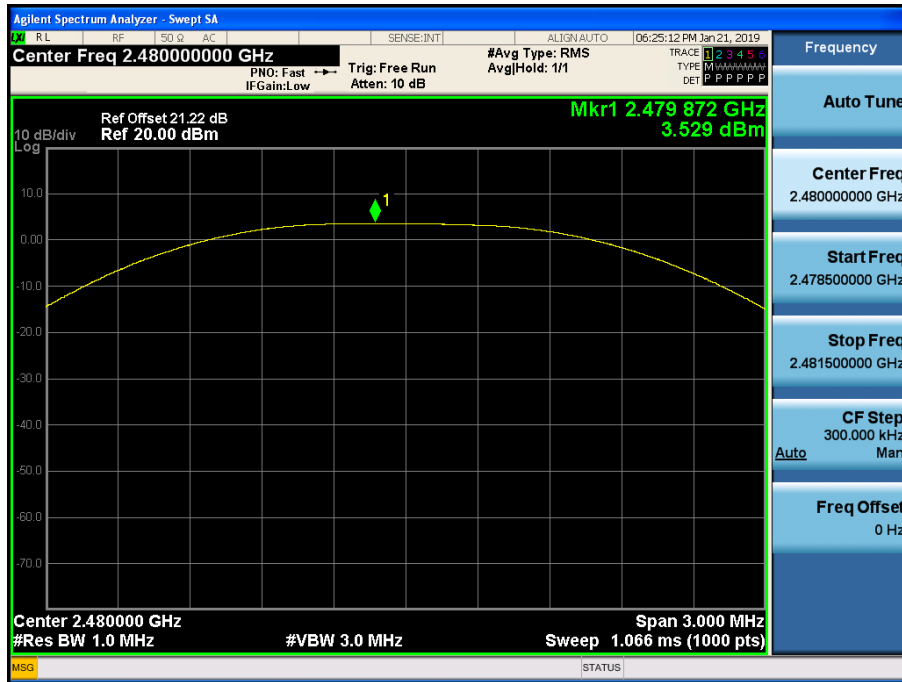


### Average Power


### Conducted Output Power (Low-CH 0)

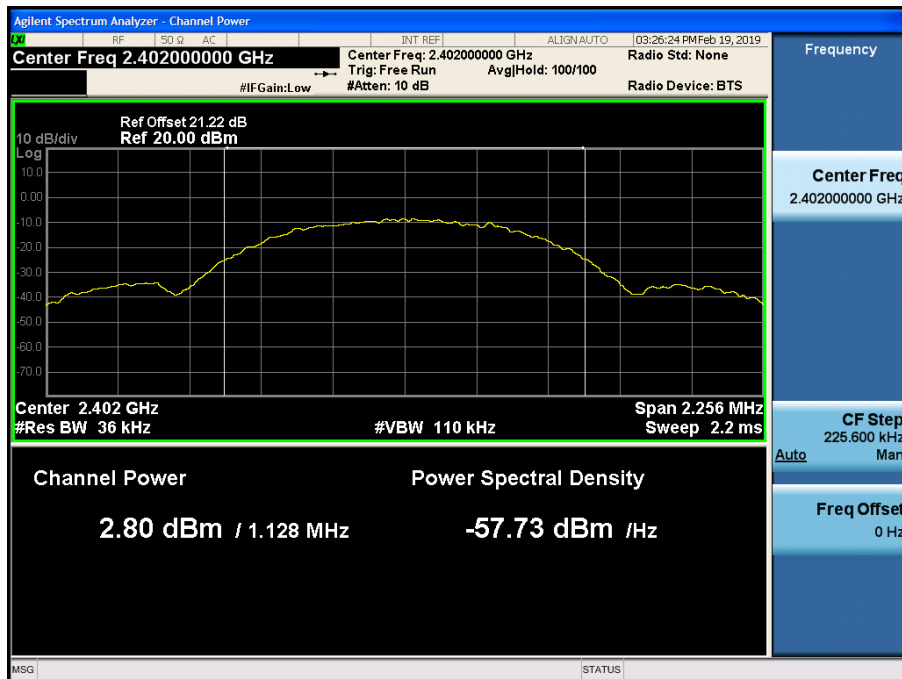

Conducted Output Power (Mid-CH 19)

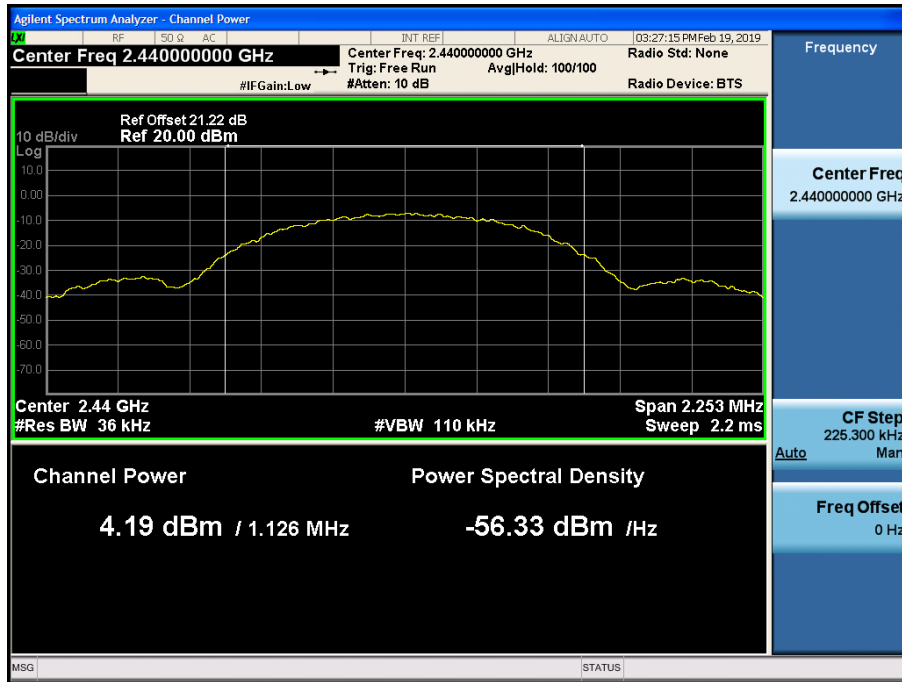


Conducted Output Power (High-CH 39)

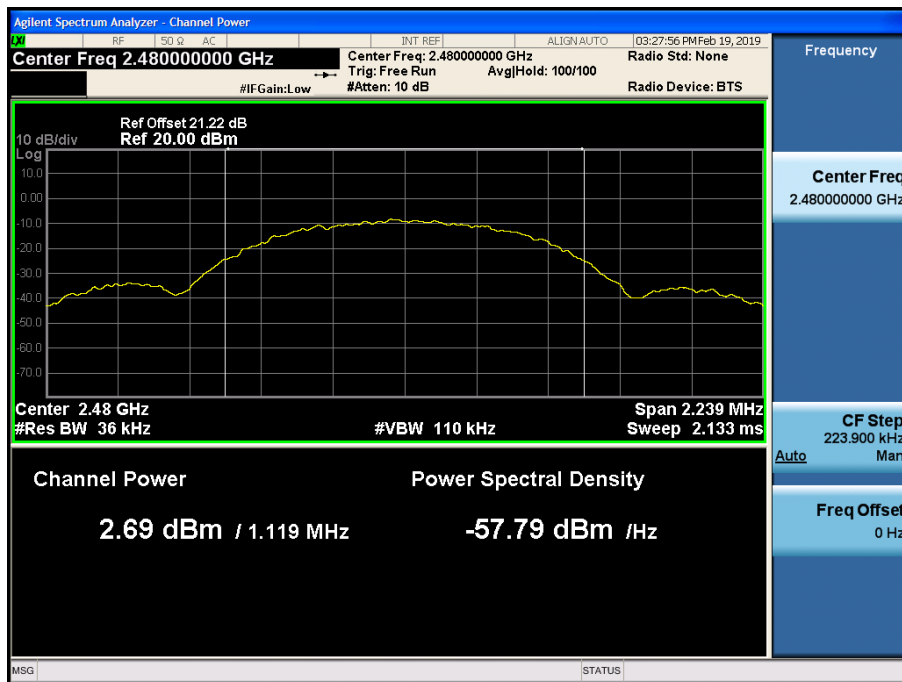


## 2M Bit/s(37 Byte) Test Plots

### Peak Power


Conducted Output Power (Low-CH 0)

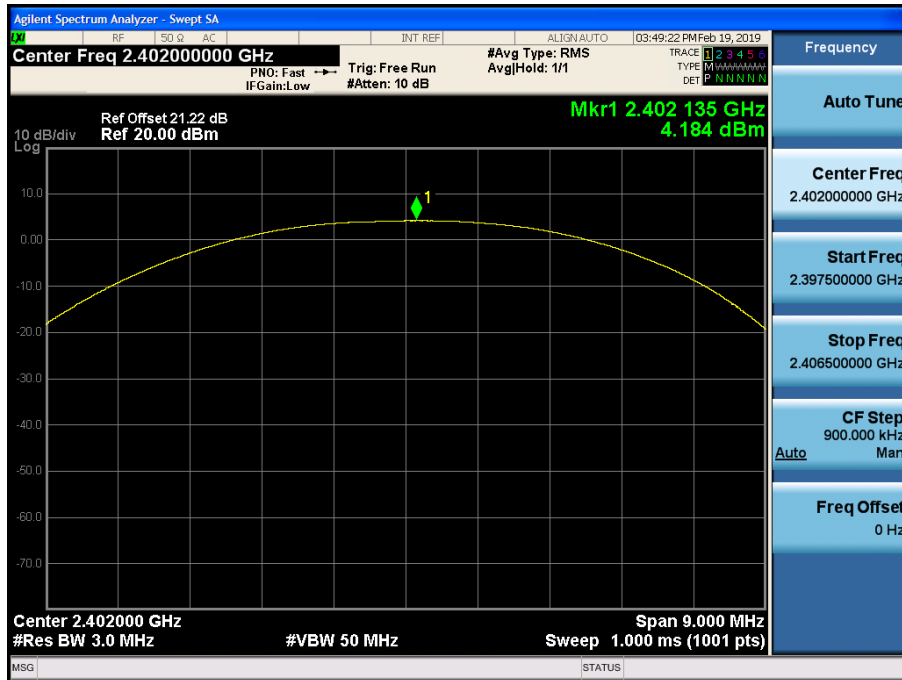

Conducted Output Power (Mid-CH 19)

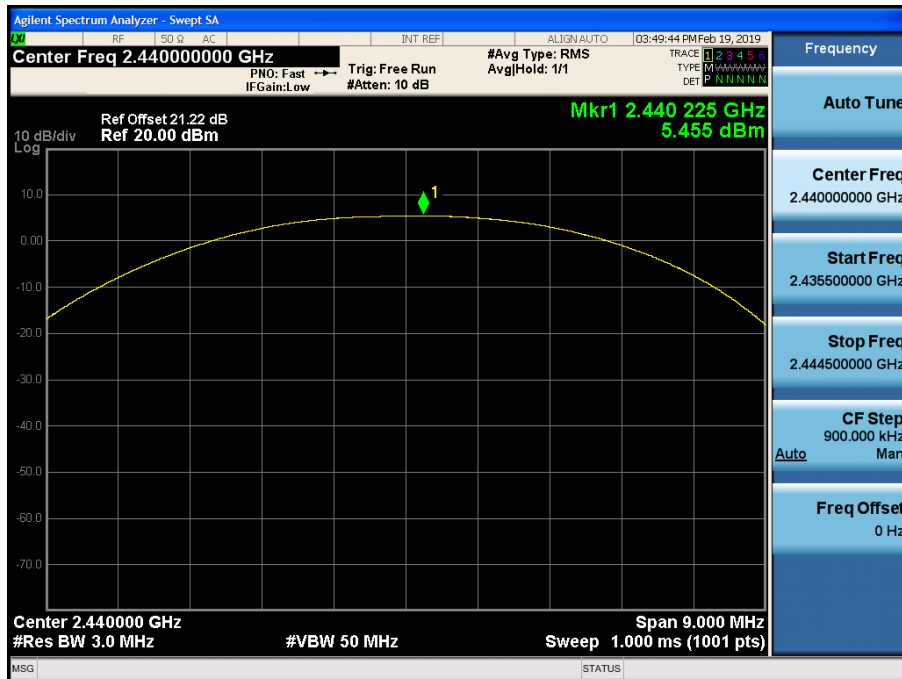


### Conducted Output Power (High-CH 39)

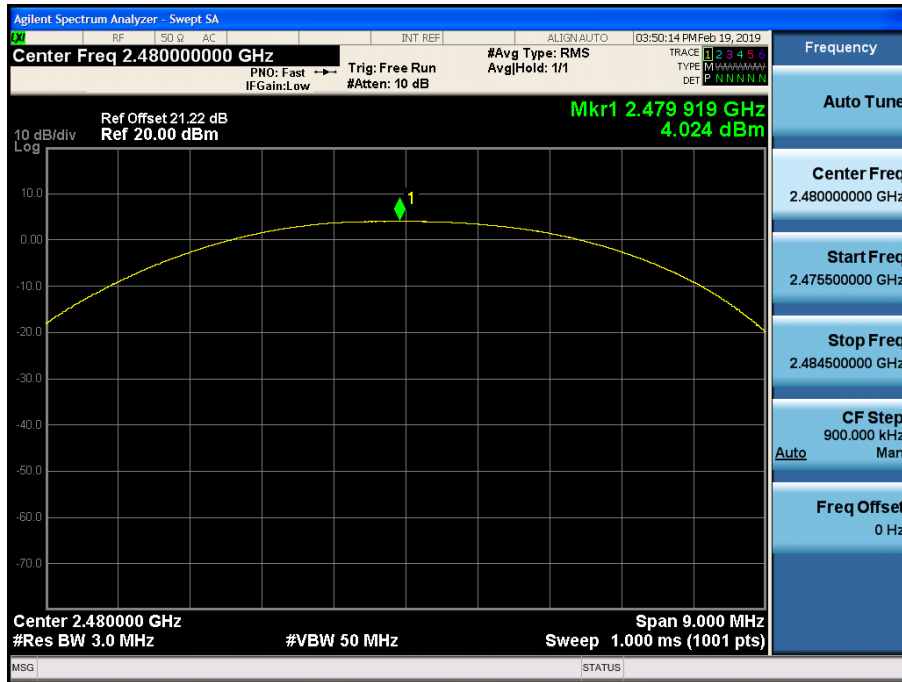


### Average Power


### Conducted Output Power (Low-CH 0)

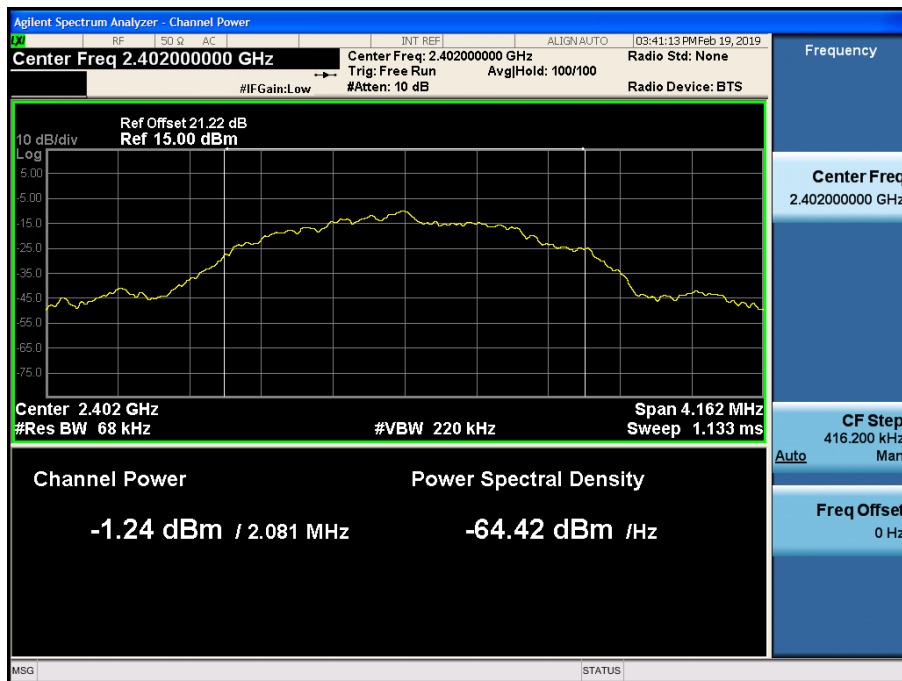

Conducted Output Power (Mid-CH 19)

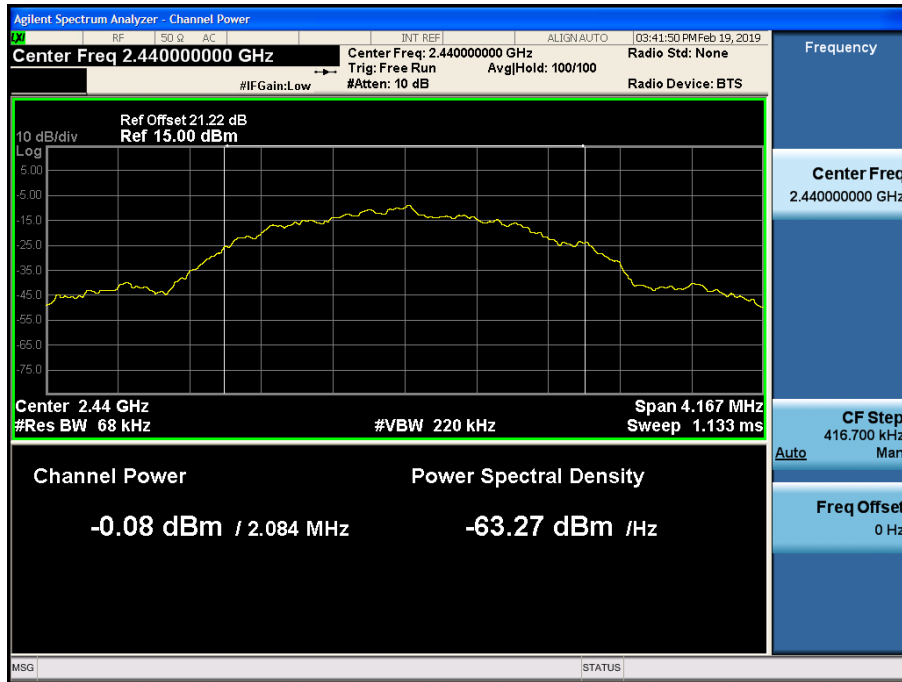

Conducted Output Power (High-CH 39)

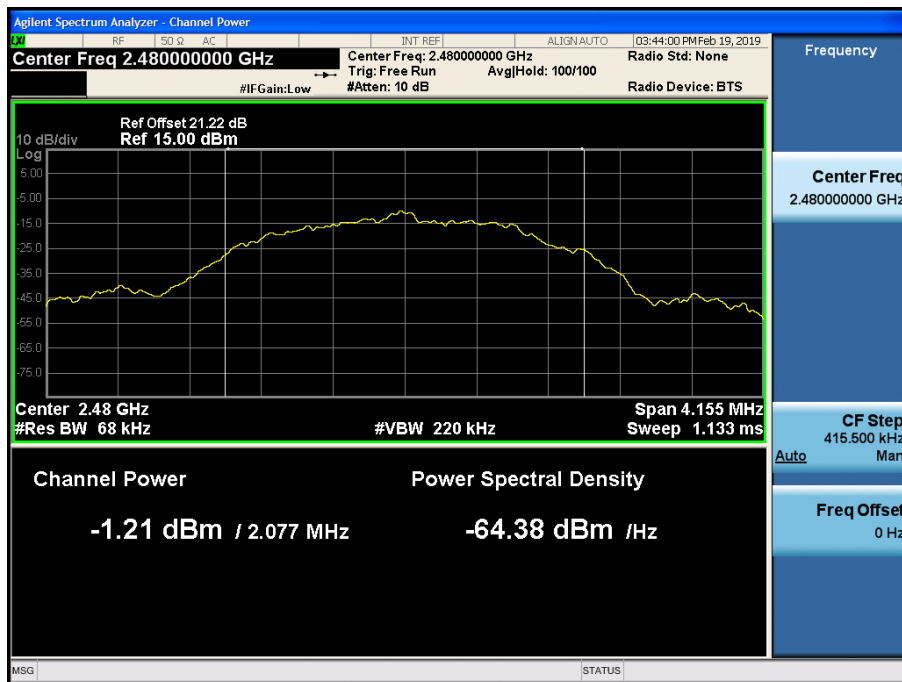



## 9.4 POWER SPECTRAL DENSITY

| Frequency<br>(MHz) | Channel<br>No. | Mode               | Test Result              |                      |                                                   |                |
|--------------------|----------------|--------------------|--------------------------|----------------------|---------------------------------------------------|----------------|
|                    |                |                    | Measured<br>PSD<br>(dBm) | Duty Cycle<br>Factor | Measured<br>PSD(dBm)<br>+<br>Duty Cycle<br>Factor | Limit<br>(dBm) |
| 2402               | 0              | 1M Bit<br>255 Byte | -17.698                  | 0.69                 | -17.008                                           | 8.000          |
| 2440               | 19             |                    | -16.487                  | 0.69                 | -15.797                                           | 8.000          |
| 2480               | 39             |                    | -18.098                  | 0.69                 | -17.408                                           | 8.000          |
| 2402               | 0              | 2M Bit 37<br>Byte  | -20.486                  | 4.89                 | -15.596                                           | 8.000          |
| 2440               | 19             |                    | -19.674                  | 4.89                 | -14.784                                           | 8.000          |
| 2480               | 39             |                    | -20.847                  | 4.89                 | -15.957                                           | 8.000          |

### Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.


So, 21.22 dB is offset for 2.4 GHz Band.

## 1M Bit/s Test Plots


### Power Spectral Density (Low-CH 0)



### Power Spectral Density (Mid-CH 19)

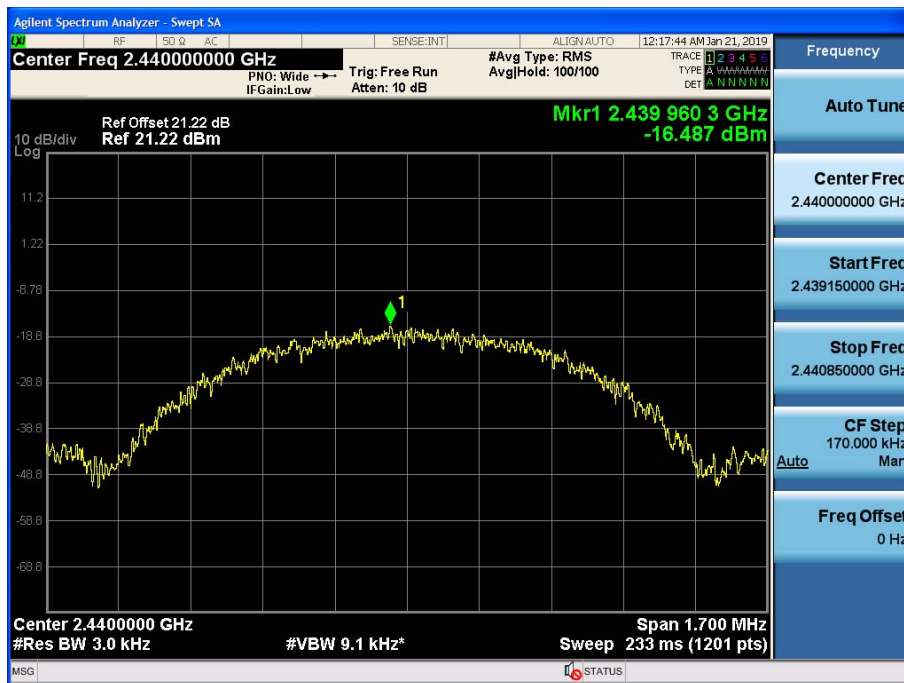


Power Spectral Density (High-CH 39)

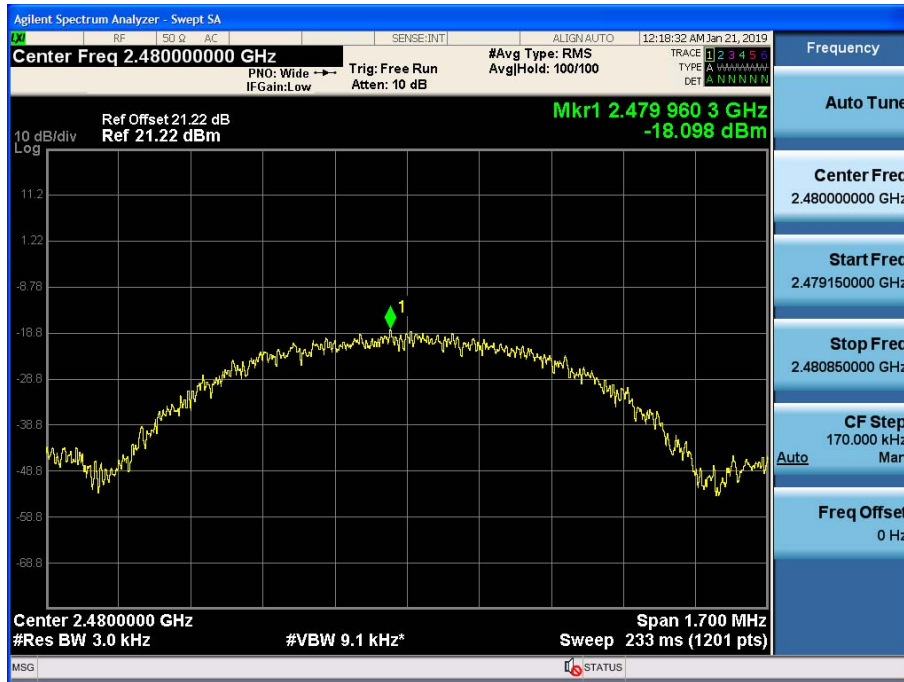


## 2M Bit/s Test Plots


### Power Spectral Density (Low-CH 0)

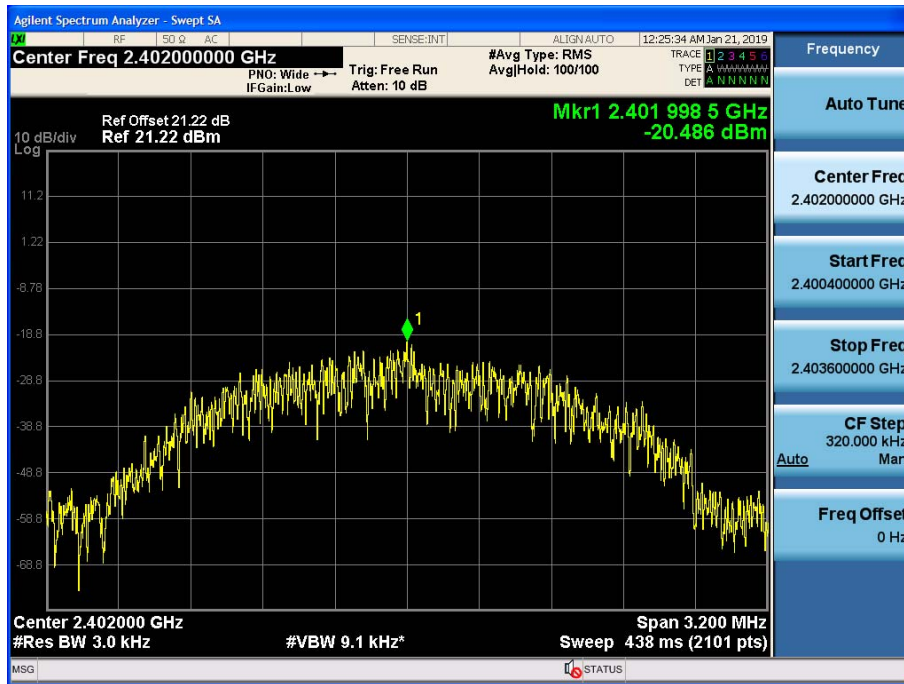

### Power Spectral Density (Mid-CH 19)

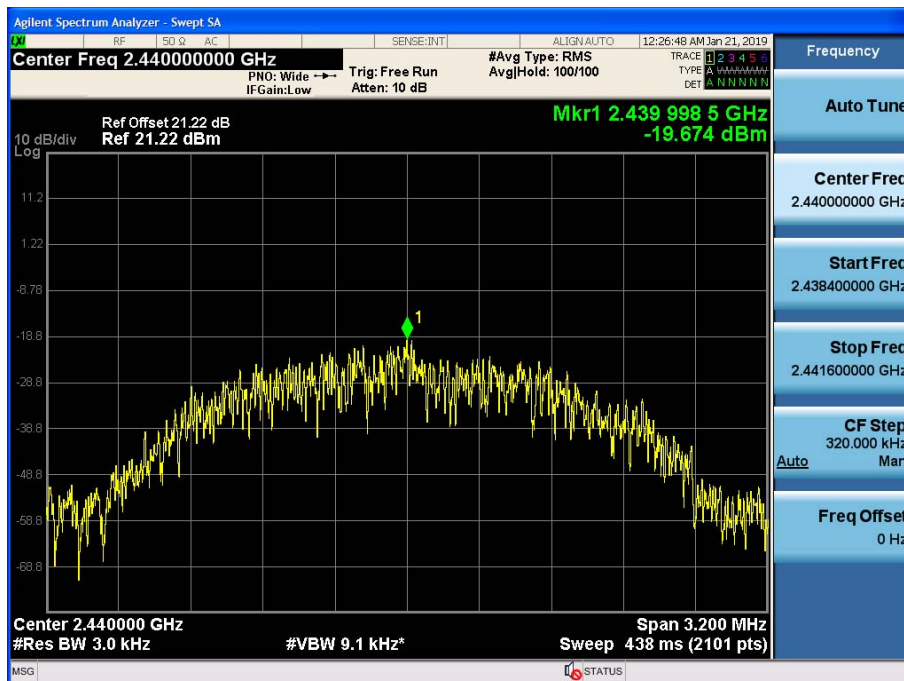

Power Spectral Density (High-CH 39)

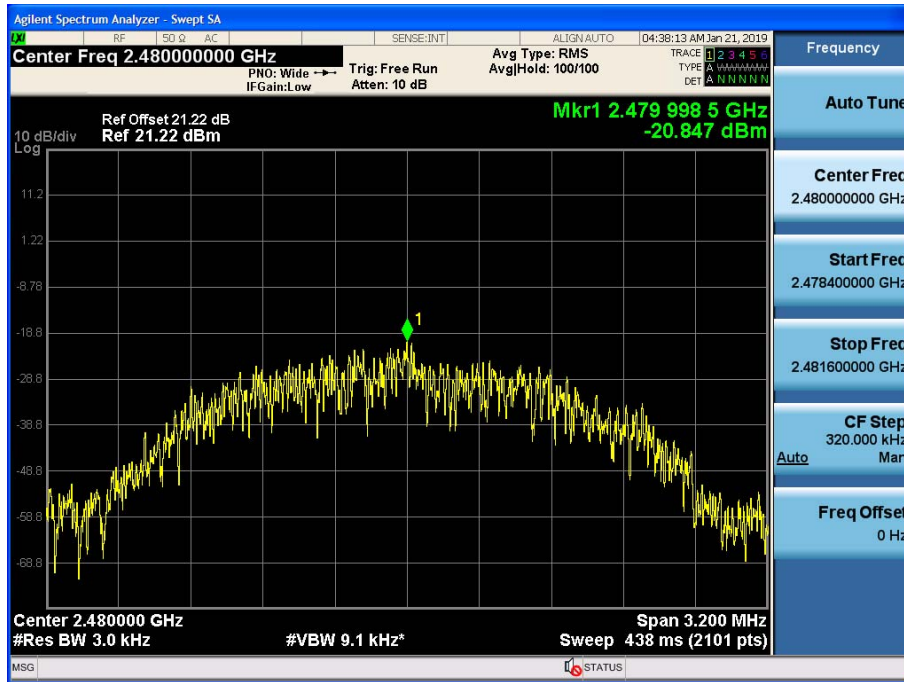

## **9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

# 1M Bit/s Test Plots (BandEdge)

Low-CH 0




High-CH 39



## 1M Bit/s Test Plots (Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (CH 19)

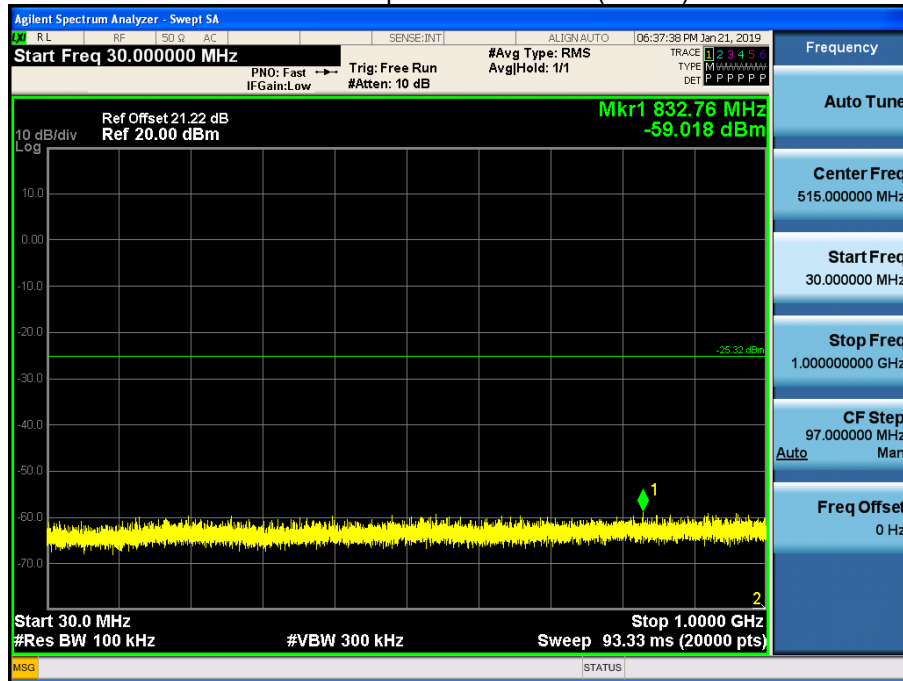

1 GHz ~ 3 GHz


Conducted Spurious Emission (CH 19)

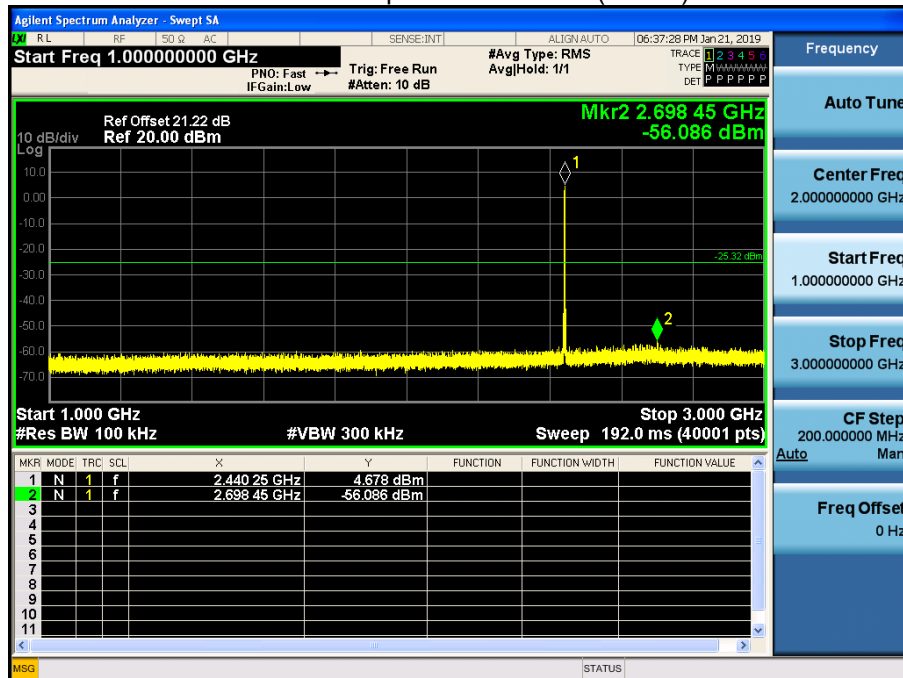




3 GHz ~ 5 GHz

Conducted Spurious Emission (CH 19)

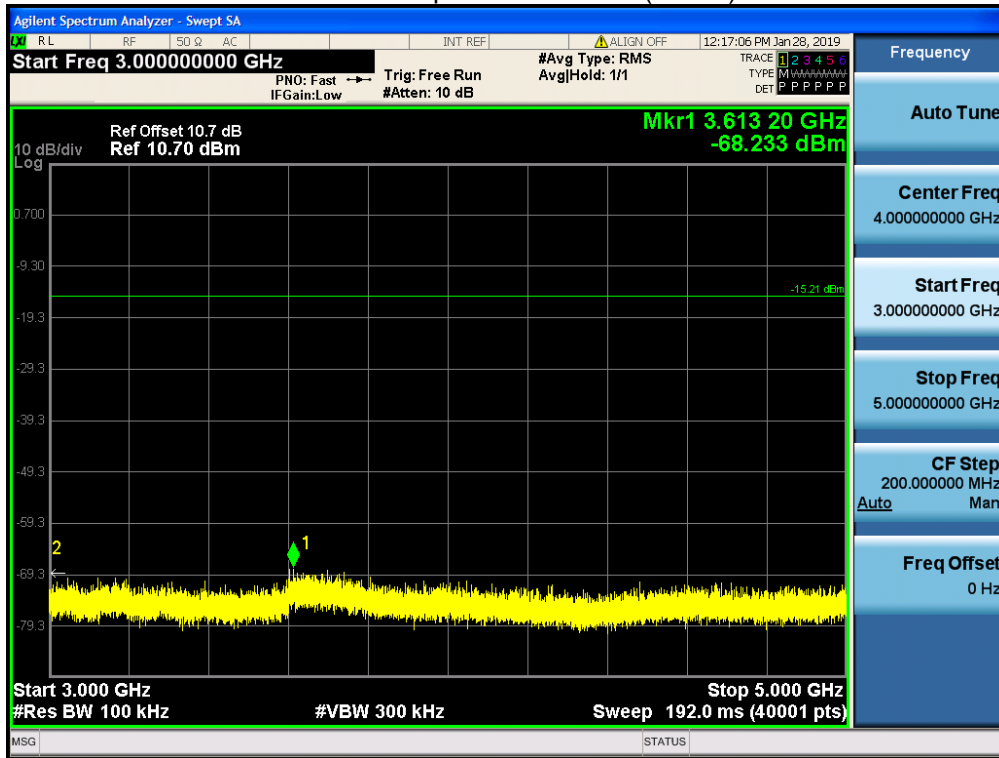


5 GHz ~ 7 GHz

Conducted Spurious Emission (CH 19)

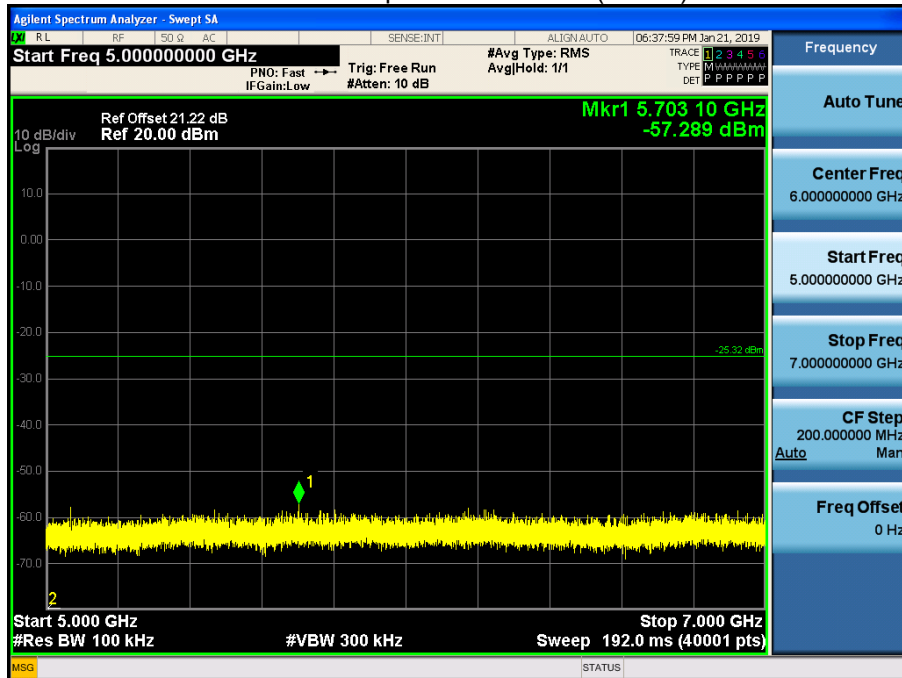


7 GHz ~ 9 GHz

## Conducted Spurious Emission (CH 19)

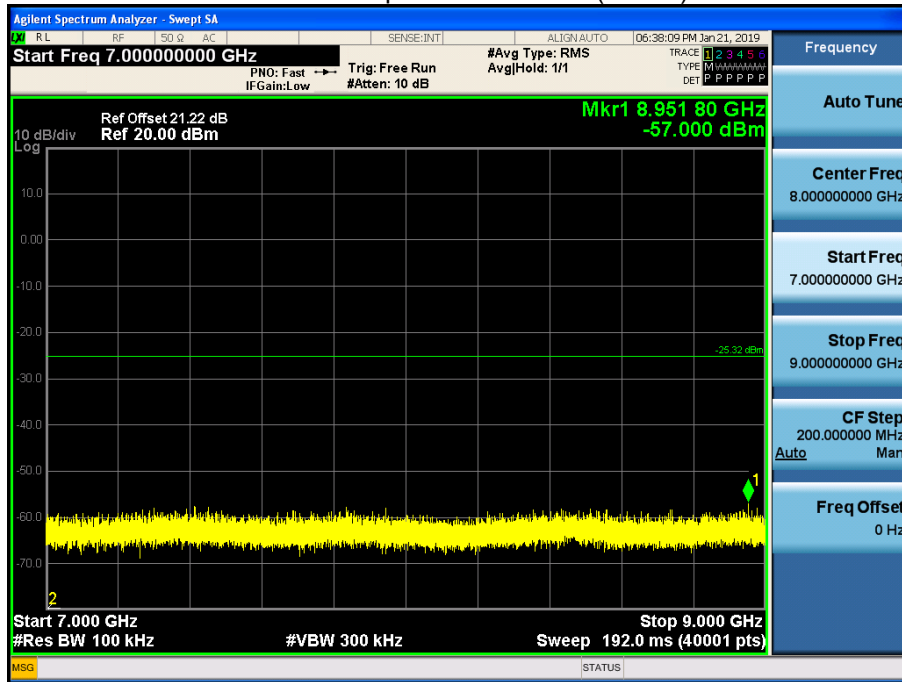


9 GHz ~ 11 GHz

## Conducted Spurious Emission (CH 19)

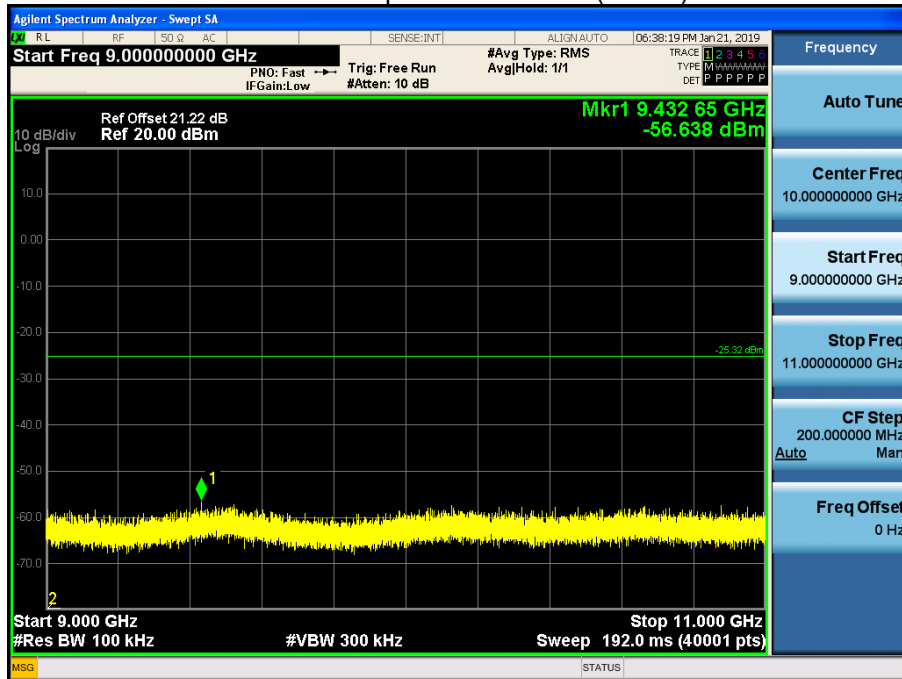


11 GHz ~ 13 GHz

## Conducted Spurious Emission (CH 19)

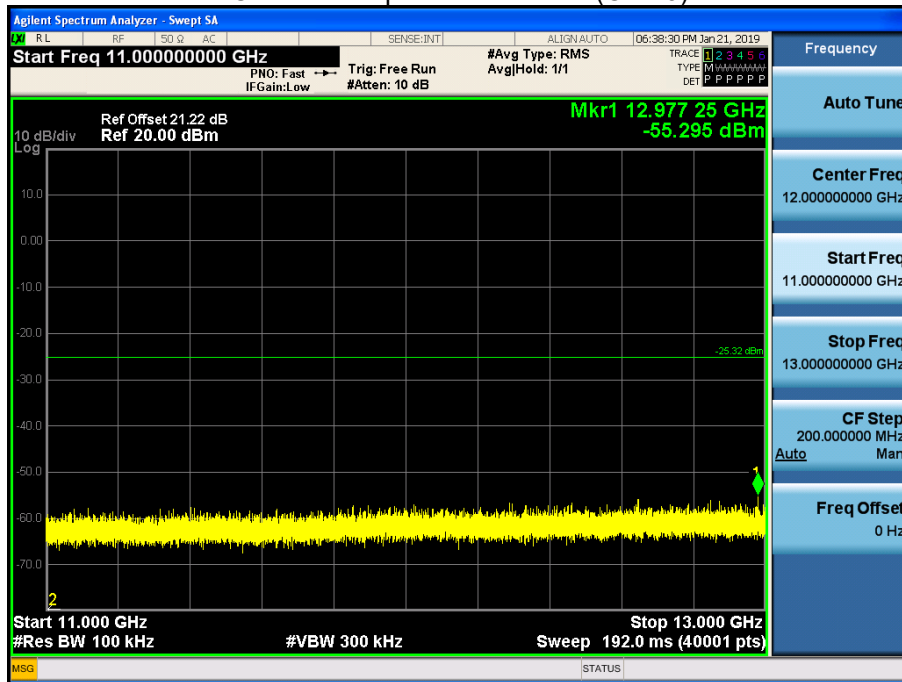


13 GHz ~ 15 GHz

## Conducted Spurious Emission (CH 19)

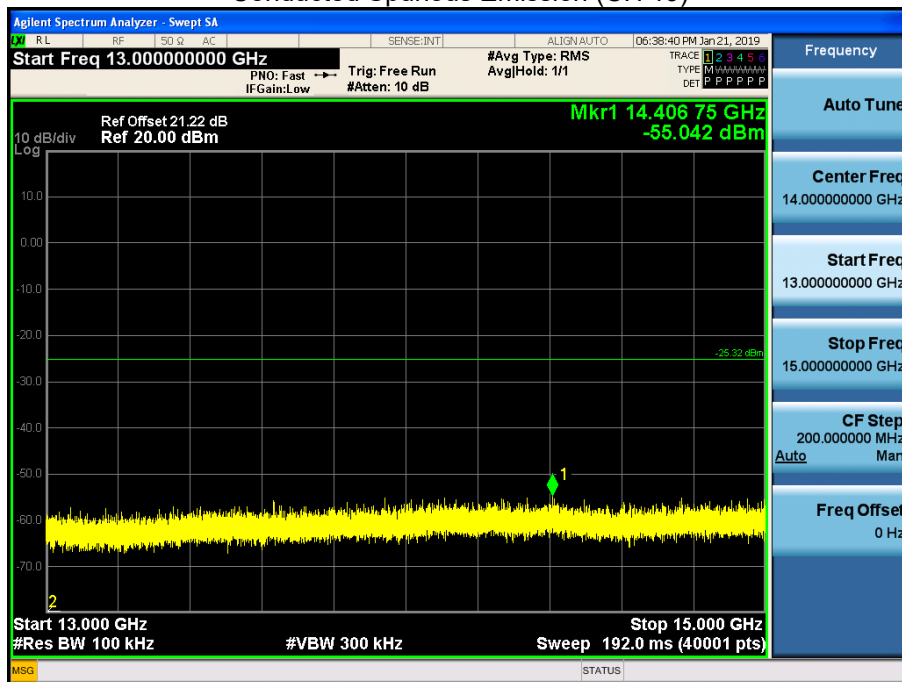


15 GHz ~ 17 GHz

## Conducted Spurious Emission (CH 19)

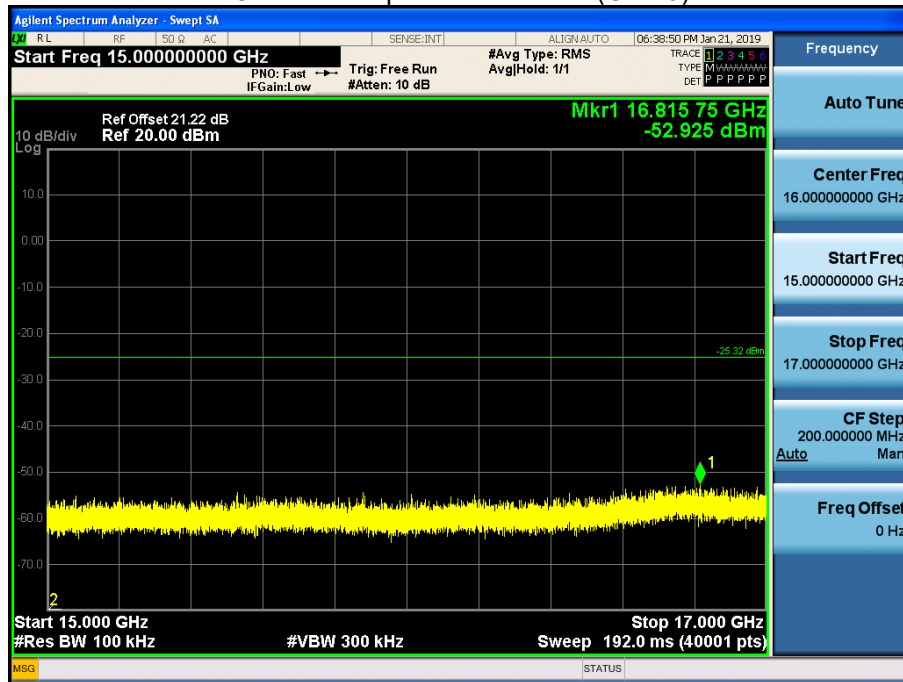


17 GHz ~ 19 GHz

## Conducted Spurious Emission (CH 19)

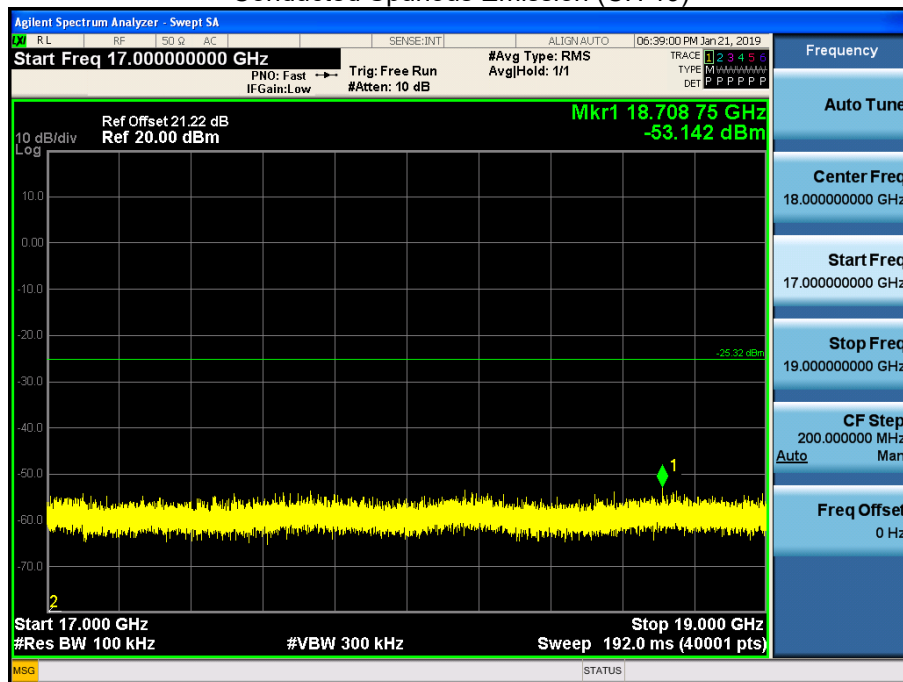


19 GHz ~ 21 GHz

## Conducted Spurious Emission (CH 19)

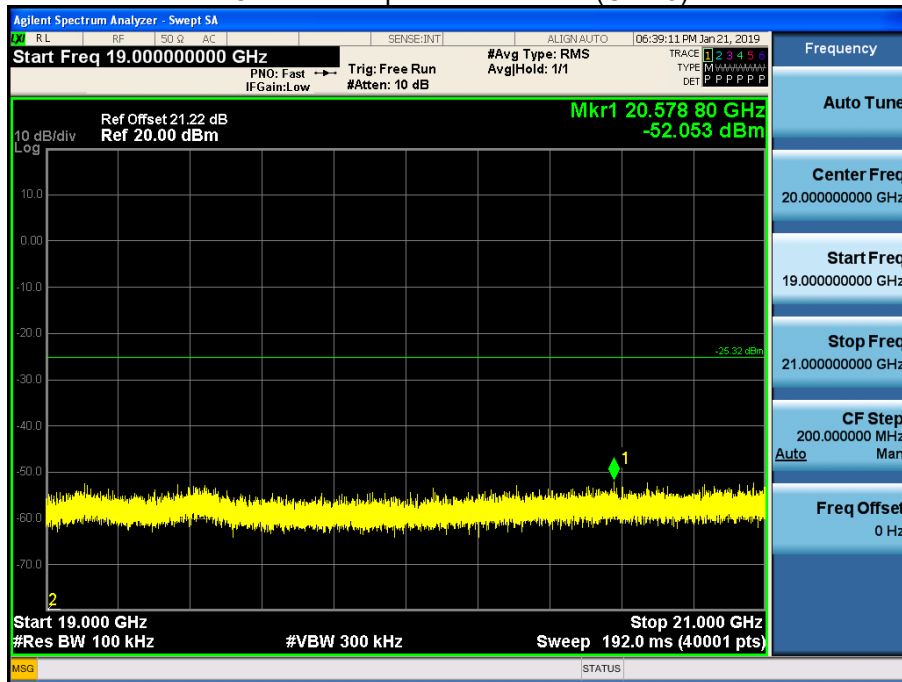


21 GHz ~ 23 GHz

## Conducted Spurious Emission (CH 19)

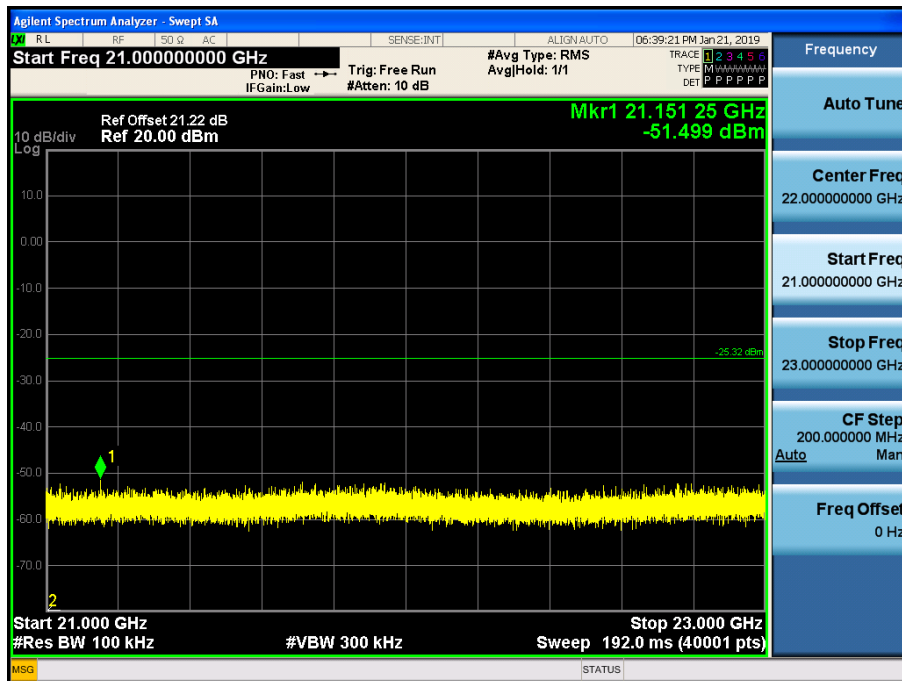

23 GHz ~ 25 GHz

Conducted Spurious Emission (CH 19)

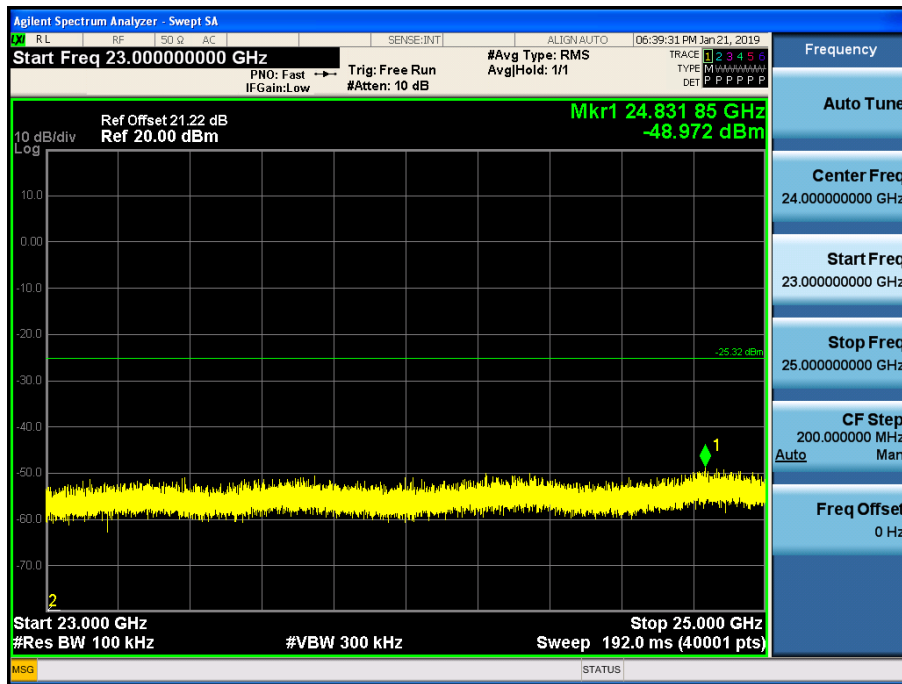

## 2M Bit/s Test Plots (BandEdge)

Low-CH 0




High-CH 39



## 2M Bit/s Test Plots (Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (CH 19)

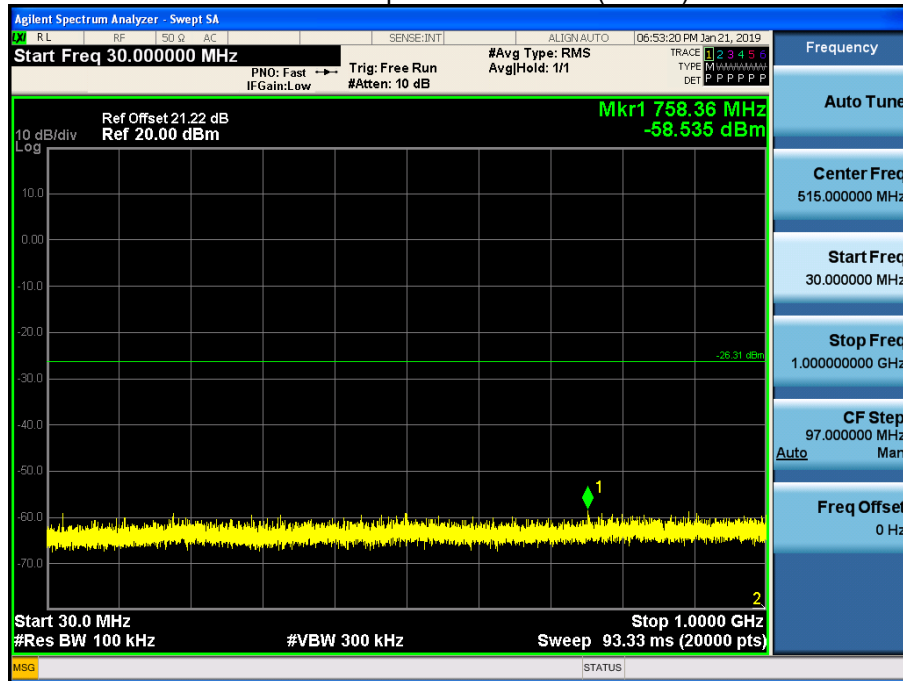

1 GHz ~ 3 GHz


Conducted Spurious Emission (CH 19)

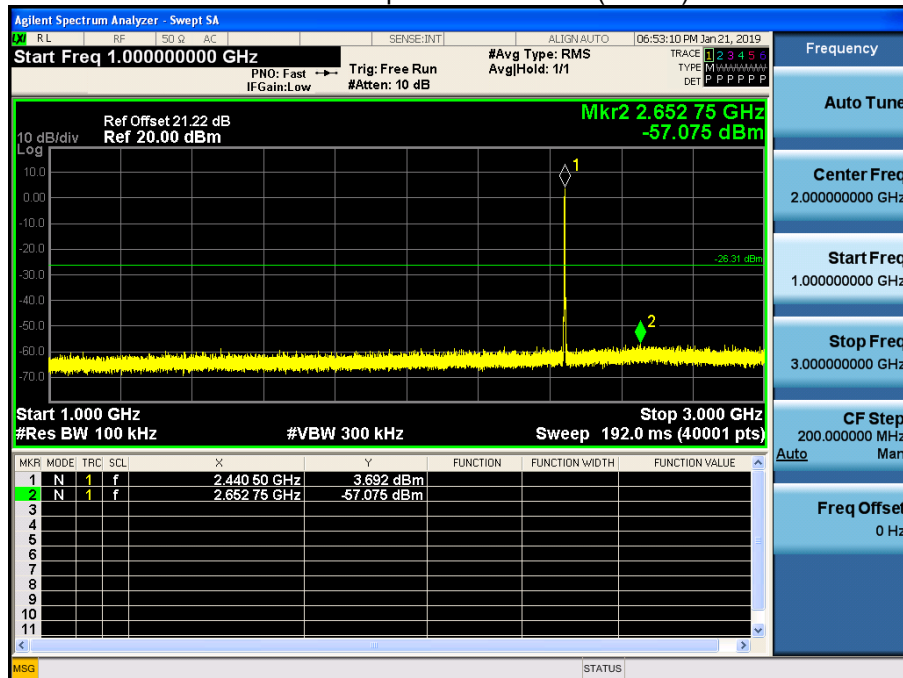




3 GHz ~ 5 GHz

Conducted Spurious Emission (CH 19)

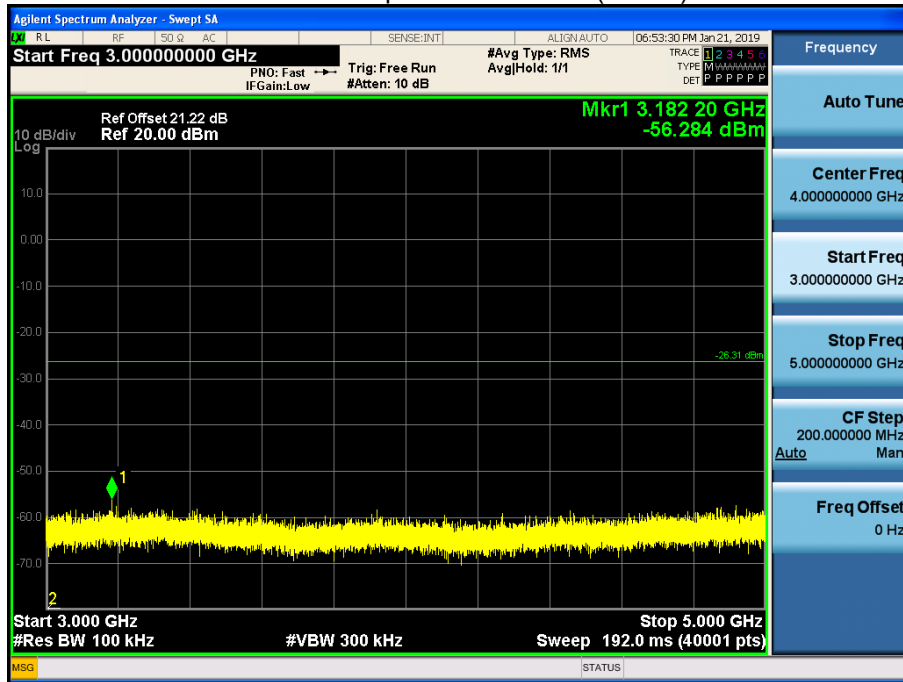


5 GHz ~ 7 GHz

Conducted Spurious Emission (CH 19)

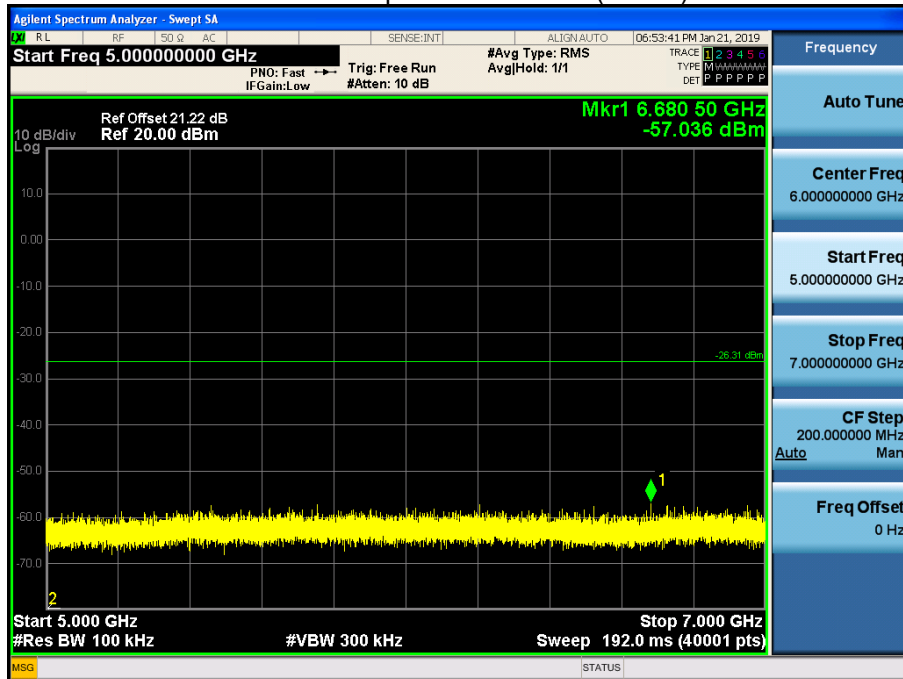


7 GHz ~ 9 GHz

Conducted Spurious Emission (CH 19)

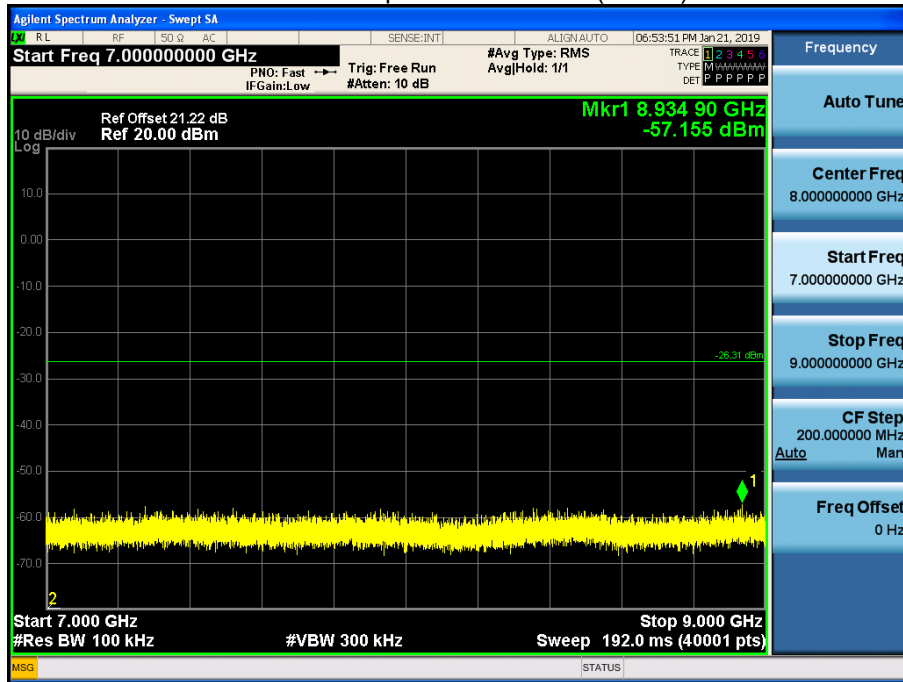


9 GHz ~ 11 GHz

Conducted Spurious Emission (CH 19)

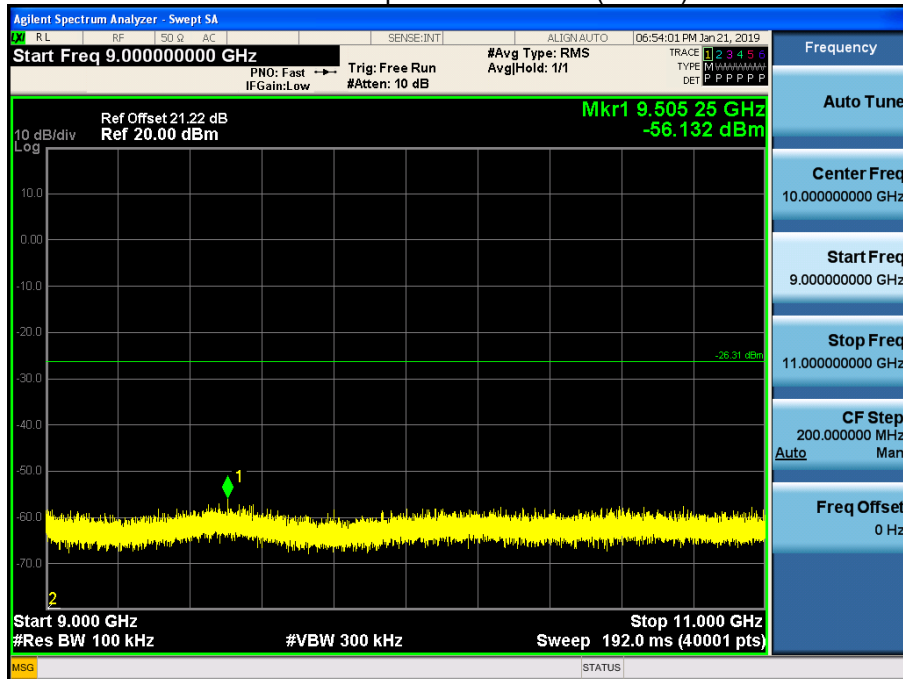


11 GHz ~ 13 GHz

Conducted Spurious Emission (CH 19)

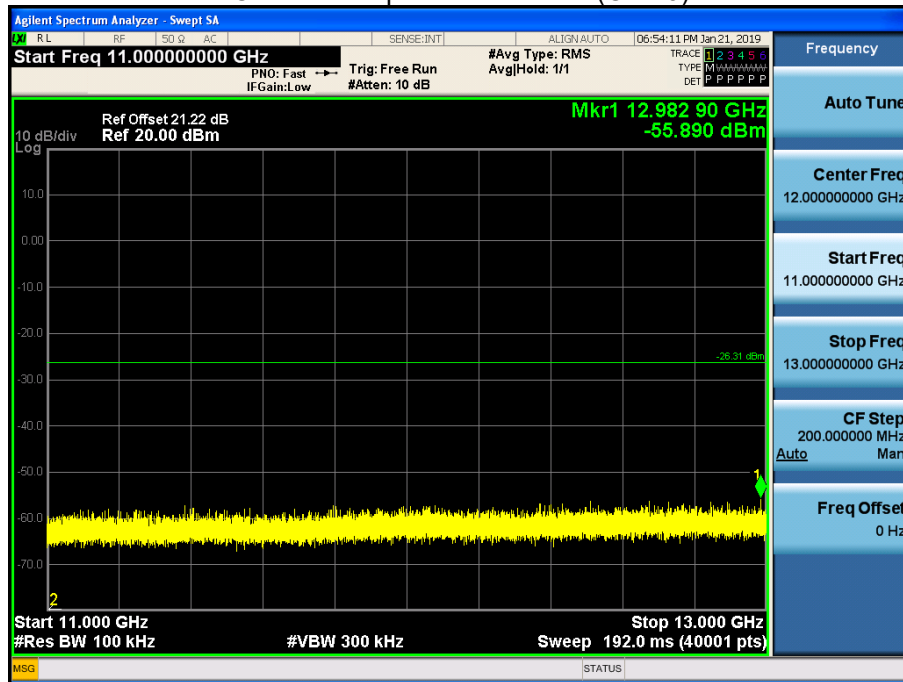


13 GHz ~ 15 GHz

Conducted Spurious Emission (CH 19)

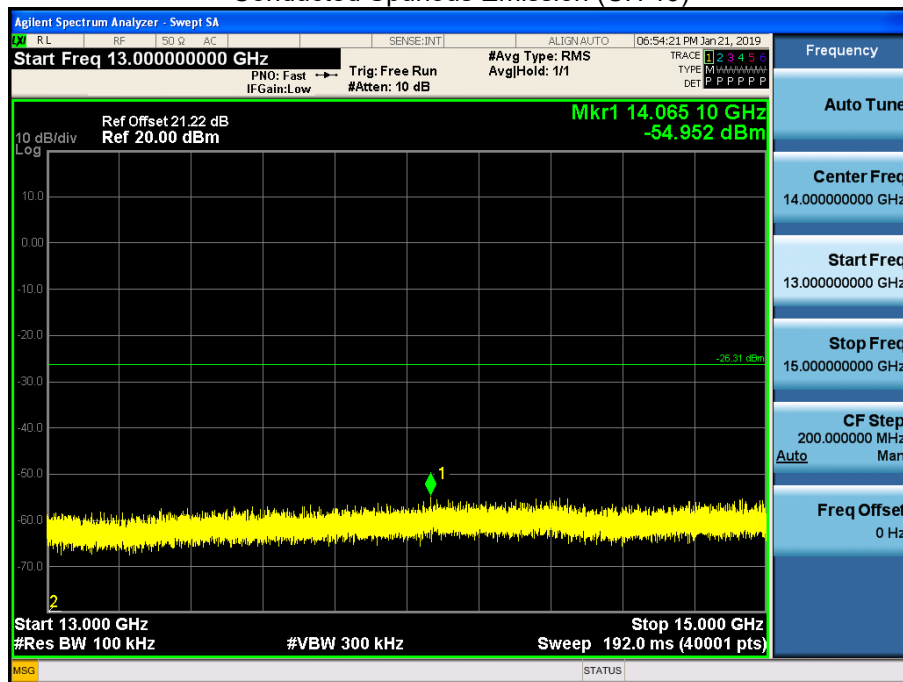


15 GHz ~ 17 GHz

Conducted Spurious Emission (CH 19)

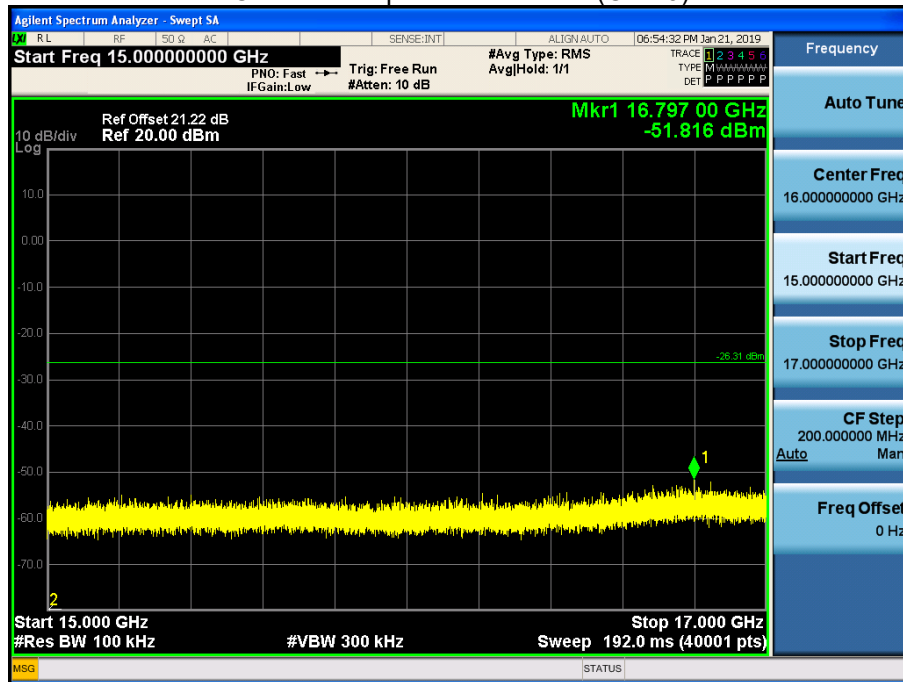


17 GHz ~ 19 GHz

Conducted Spurious Emission (CH 19)

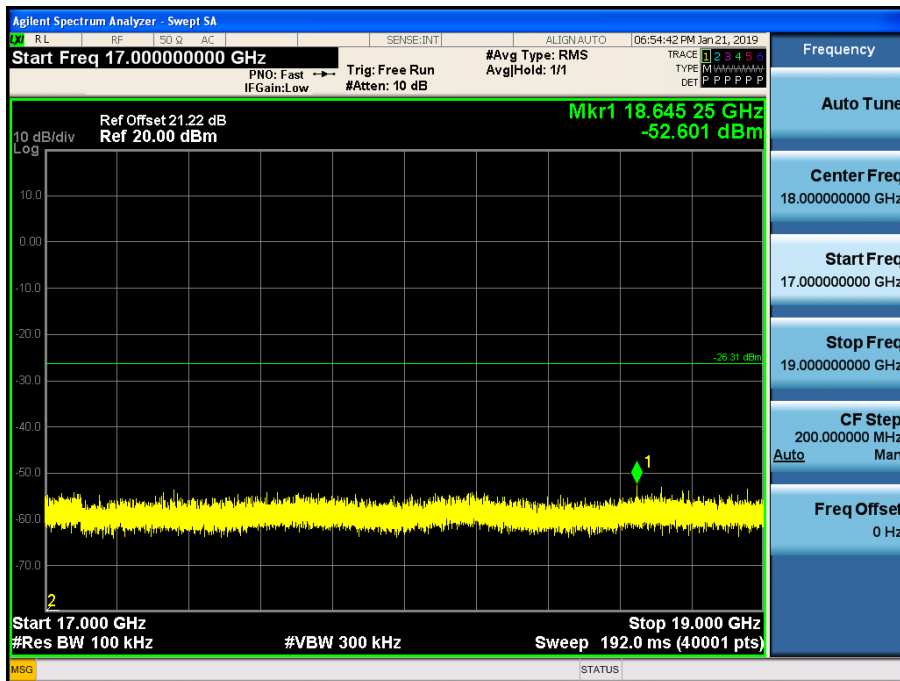


19 GHz ~ 21 GHz

## Conducted Spurious Emission (CH 19)

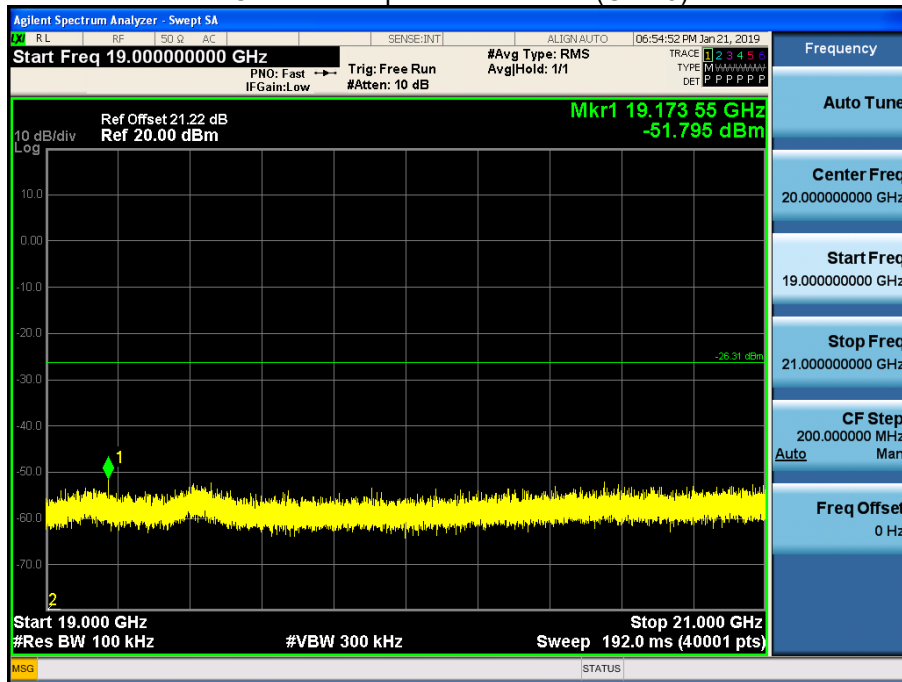


21 GHz ~ 23 GHz

## Conducted Spurious Emission (CH 19)

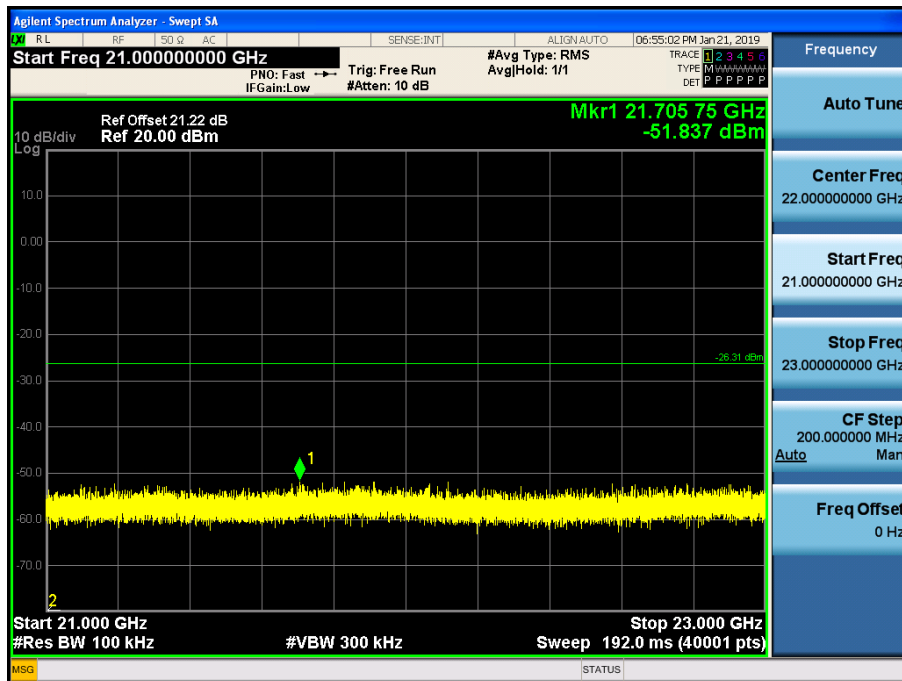

23 GHz ~ 25 GHz

Conducted Spurious Emission (CH 19)

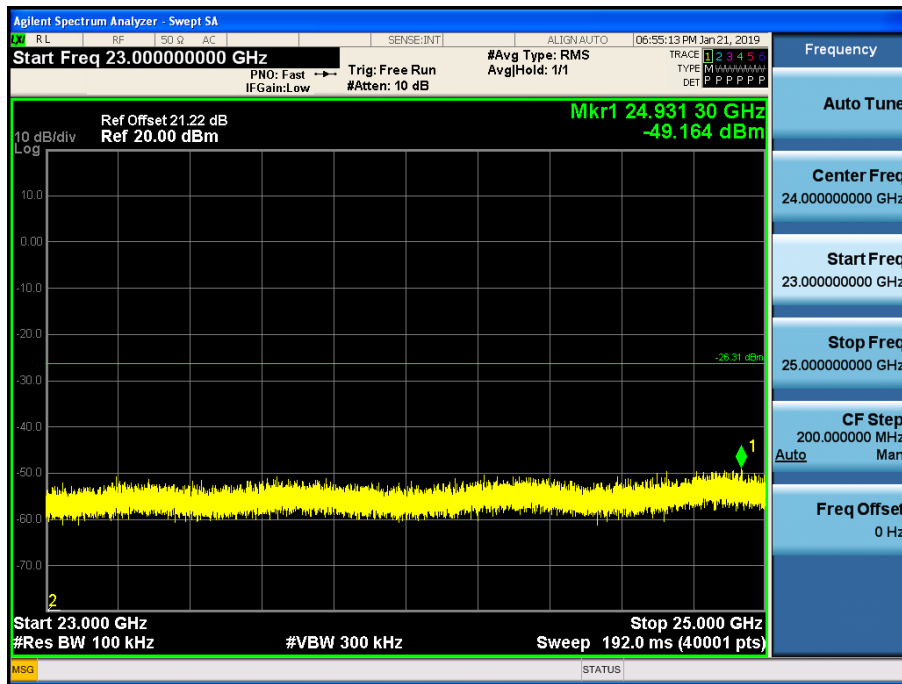

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

| Frequency               | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz                     | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |
| No Critical peaks found |         |             |            |          |        |        |        |

#### Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \cdot \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.
5. The test results for below 30 MHz is correlated to an open site.  
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

### Frequency Range : Below 1 GHz

| Frequency               | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz                     | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |
| No Critical peaks found |         |             |            |          |        |        |        |

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**
**Mode : 1M Bit/s**

Operation Mode: CH Low

| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4804               | 49.00             | 0.00                         | 0.74                          | V             | 49.74             | 73.98             | 24.24          | PK                  |
| 4804               | 37.20             | 0.69                         | 0.74                          | V             | 38.63             | 53.98             | 15.35          | AV                  |
| 7206               | 45.91             | 0.00                         | 9.25                          | V             | 55.16             | 73.98             | 18.83          | PK                  |
| 7206               | 34.05             | 0.69                         | 9.25                          | V             | 43.99             | 53.98             | 10.00          | AV                  |
| 4804               | 48.54             | 0.00                         | 0.74                          | H             | 49.28             | 73.98             | 24.70          | PK                  |
| 4804               | 37.01             | 0.69                         | 0.74                          | H             | 38.44             | 53.98             | 15.54          | AV                  |
| 7206               | 45.72             | 0.00                         | 9.25                          | H             | 54.97             | 73.98             | 19.02          | PK                  |
| 7206               | 34.00             | 0.69                         | 9.25                          | H             | 43.94             | 53.98             | 10.05          | AV                  |

Operation Mode: CH Mid

| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4880               | 49.21             | 0.00                         | 1.16                          | V             | 50.37             | 73.98             | 23.61          | PK                  |
| 4880               | 37.25             | 0.69                         | 1.16                          | V             | 39.10             | 53.98             | 14.88          | AV                  |
| 7320               | 46.13             | 0.00                         | 9.14                          | V             | 55.27             | 73.98             | 18.71          | PK                  |
| 7320               | 33.93             | 0.69                         | 9.14                          | V             | 43.76             | 53.98             | 10.22          | AV                  |
| 4880               | 48.96             | 0.00                         | 1.16                          | H             | 50.12             | 73.98             | 23.86          | PK                  |
| 4880               | 37.20             | 0.69                         | 1.16                          | H             | 39.05             | 53.98             | 14.93          | AV                  |
| 7320               | 45.96             | 0.00                         | 9.14                          | H             | 55.10             | 73.98             | 18.88          | PK                  |
| 7320               | 33.89             | 0.69                         | 9.14                          | H             | 43.72             | 53.98             | 10.26          | AV                  |



Operation Mode: CH High

| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4960               | 50.41             | 0.00                         | 0.76                          | V             | 51.17             | 73.98             | 22.81          | PK                  |
| 4960               | 37.91             | 0.69                         | 0.76                          | V             | 39.36             | 53.98             | 14.62          | AV                  |
| 7440               | 46.58             | 0.00                         | 9.86                          | V             | 56.44             | 73.98             | 17.54          | PK                  |
| 7440               | 33.60             | 0.69                         | 9.86                          | V             | 44.15             | 53.98             | 9.83           | AV                  |
| 4960               | 49.68             | 0.00                         | 0.76                          | H             | 50.44             | 73.98             | 23.54          | PK                  |
| 4960               | 37.83             | 0.69                         | 0.76                          | H             | 39.28             | 53.98             | 14.70          | AV                  |
| 7440               | 46.06             | 0.00                         | 9.86                          | H             | 55.92             | 73.98             | 18.06          | PK                  |
| 7440               | 33.51             | 0.69                         | 9.86                          | H             | 44.06             | 53.98             | 9.92           | AV                  |

**Mode : 2M Bit/s**

Operation Mode: CH Low

| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4804               | 48.70             | 0.00                         | 0.74                          | V             | 49.44             | 73.98             | 24.54          | PK                  |
| 4804               | 37.19             | 4.89                         | 0.74                          | V             | 42.82             | 53.98             | 11.16          | AV                  |
| 7206               | 46.54             | 0.00                         | 9.25                          | V             | 55.79             | 73.98             | 18.20          | PK                  |
| 7206               | 34.08             | 4.89                         | 9.25                          | V             | 48.22             | 53.98             | 5.77           | AV                  |
| 4804               | 47.79             | 0.00                         | 0.74                          | H             | 48.53             | 73.98             | 25.45          | PK                  |
| 4804               | 37.11             | 4.89                         | 0.74                          | H             | 42.74             | 53.98             | 11.24          | AV                  |
| 7206               | 46.12             | 0.00                         | 9.25                          | H             | 55.37             | 73.98             | 18.62          | PK                  |
| 7206               | 33.98             | 4.89                         | 9.25                          | H             | 48.12             | 53.98             | 5.87           | AV                  |

Operation Mode: CH Mid


| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4880               | 49.94             | 0.00                         | 1.16                          | V             | 51.10             | 73.98             | 22.88          | PK                  |
| 4880               | 37.27             | 4.89                         | 1.16                          | V             | 43.32             | 53.98             | 10.66          | AV                  |
| 7320               | 45.99             | 0.00                         | 9.14                          | V             | 55.13             | 73.98             | 18.85          | PK                  |
| 7320               | 33.89             | 4.89                         | 9.14                          | V             | 47.92             | 53.98             | 6.06           | AV                  |
| 4880               | 49.14             | 0.00                         | 1.16                          | H             | 50.30             | 73.98             | 23.68          | PK                  |
| 4880               | 37.18             | 4.89                         | 1.16                          | H             | 43.23             | 53.98             | 10.75          | AV                  |
| 7320               | 45.74             | 0.00                         | 9.14                          | H             | 54.88             | 73.98             | 19.10          | PK                  |
| 7320               | 33.85             | 4.89                         | 9.14                          | H             | 47.88             | 53.98             | 6.10           | AV                  |

Operation Mode: CH High

| Frequency<br>[MHz] | Reading<br>[dBuV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB] | Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|------------------------------|-------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4960               | 49.87             | 0.00                         | 0.76                          | V             | 50.63             | 73.98             | 23.35          | PK                  |
| 4960               | 37.99             | 4.89                         | 0.76                          | V             | 43.64             | 53.98             | 10.34          | AV                  |
| 7440               | 46.30             | 0.00                         | 9.86                          | V             | 56.16             | 73.98             | 17.82          | PK                  |
| 7440               | 33.55             | 4.89                         | 9.86                          | V             | 48.3              | 53.98             | 5.68           | AV                  |
| 4960               | 49.54             | 0.00                         | 0.76                          | H             | 50.3              | 73.98             | 23.68          | PK                  |
| 4960               | 37.91             | 4.89                         | 0.76                          | H             | 43.56             | 53.98             | 10.42          | AV                  |
| 7440               | 45.89             | 0.00                         | 9.86                          | H             | 55.75             | 73.98             | 18.23          | PK                  |
| 7440               | 33.51             | 4.89                         | 9.86                          | H             | 48.26             | 53.98             | 5.72           | AV                  |


■ 1M Bit 255 Byte Test Plots

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic\_X-V)

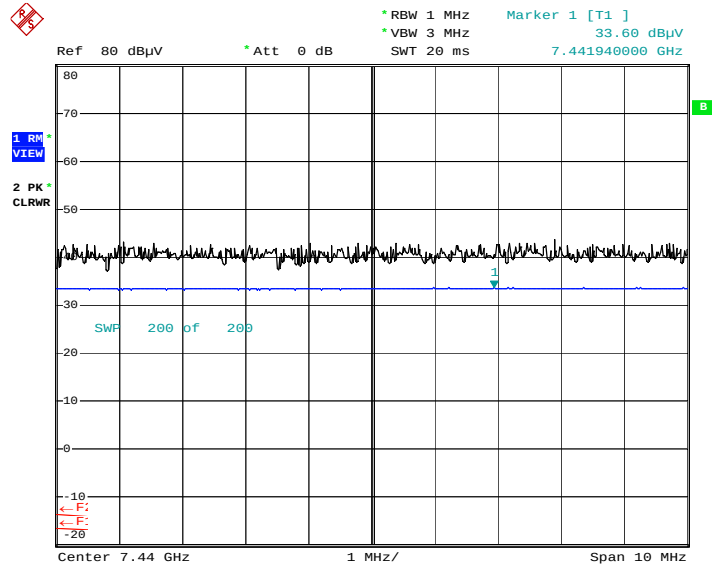

Date: 31.JAN.2019 14:21:18


Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic\_H)

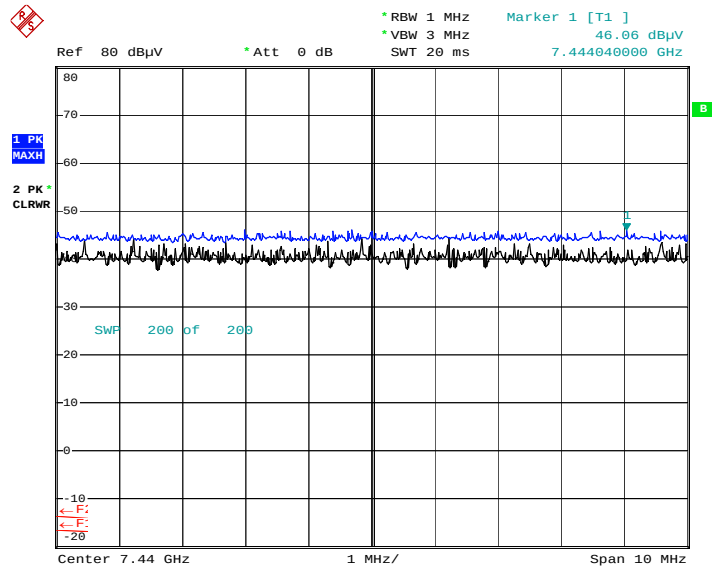

Date: 31.JAN.2019 14:20:32


## 2M Bit 37 Byte Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

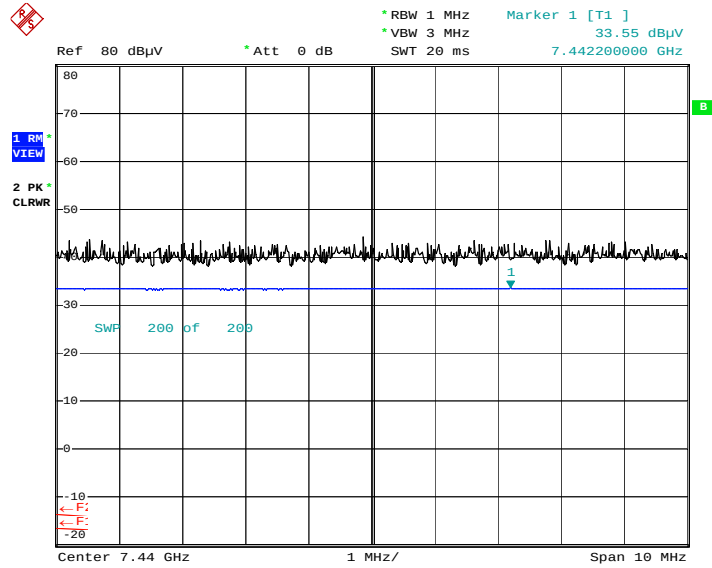

Date: 31.JAN.2019 14:37:42

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

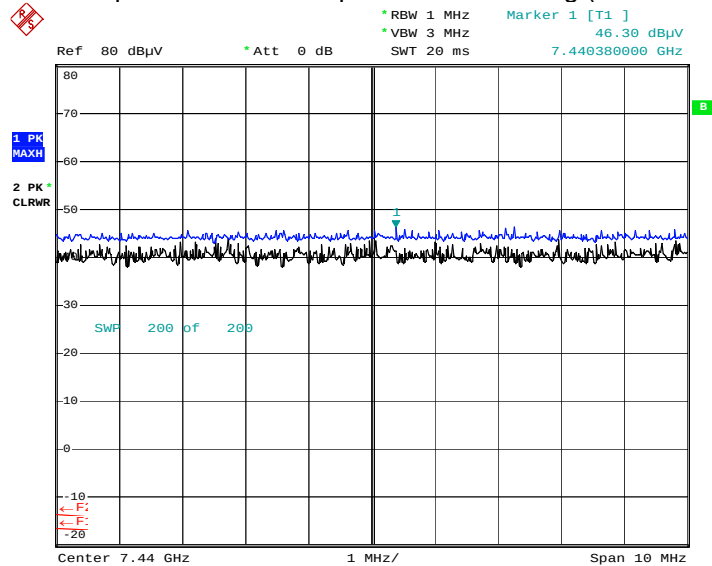

Date: 31.JAN.2019 14:38:13

### Note:

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

Mode : 1M Bit/s

Operating Frequency 2402 MHz  
Channel No. 0

| Frequency<br>[MHz] | Reading<br>[dBuV/m] | Duty Cycle<br>Factor<br>[dB] | A.F.+C.L.+D.F.<br>[dB] | Ant. Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|---------------------|------------------------------|------------------------|--------------------|-------------------|-------------------|----------------|---------------------|
| 2390.0             | 18.61               | 0.00                         | 33.29                  | H                  | 51.90             | 73.98             | 22.08          | PK                  |
| 2390.0             | 7.45                | 0.69                         | 33.29                  | H                  | 41.43             | 53.98             | 12.55          | AV                  |
| 2390.0             | 18.41               | 0.00                         | 33.29                  | V                  | 51.70             | 73.98             | 22.28          | PK                  |
| 2390.0             | 7.33                | 0.69                         | 33.29                  | V                  | 41.31             | 53.98             | 12.67          | AV                  |

Operating Frequency 2480 MHz  
Channel No. 39

| Frequency<br>[MHz] | Reading<br>[dBuV/m] | Duty Cycle<br>Factor<br>[dB] | A.F.+C.L.+D.F.<br>[dB] | Ant. Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|---------------------|------------------------------|------------------------|--------------------|-------------------|-------------------|----------------|---------------------|
| 2483.5             | 31.83               | 0.00                         | 33.39                  | H                  | 65.22             | 73.98             | 8.76           | PK                  |
| 2483.5             | 8.19                | 0.69                         | 33.39                  | H                  | 42.27             | 53.98             | 11.71          | AV                  |
| 2483.5             | 31.54               | 0.00                         | 33.39                  | V                  | 64.93             | 73.98             | 9.05           | PK                  |
| 2483.5             | 8.11                | 0.69                         | 33.39                  | V                  | 42.19             | 53.98             | 11.79          | AV                  |

**Mode : 2M Bit/s**

Operating Frequency 2402 MHz  
Channel No. 0


| Frequency<br>[MHz] | Reading<br>[dBuV/m] | Duty Cycle<br>Factor<br>[dB] | A.F.+C.L.+D.F.<br>[dB] | Ant. Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|---------------------|------------------------------|------------------------|--------------------|-------------------|-------------------|----------------|---------------------|
| 2390.0             | 18.82               | 0.00                         | 33.29                  | H                  | 52.11             | 73.98             | 21.88          | PK                  |
| 2390.0             | 7.41                | 4.89                         | 33.29                  | H                  | 45.59             | 53.98             | 8.39           | AV                  |
| 2390.0             | 18.10               | 0.00                         | 33.29                  | V                  | 51.39             | 73.98             | 22.60          | PK                  |
| 2390.0             | 7.33                | 4.89                         | 33.29                  | V                  | 45.51             | 53.98             | 8.47           | AV                  |

Operating Frequency 2480 MHz  
Channel No. 39


| Frequency<br>[MHz] | Reading<br>[dBuV/m] | Duty Cycle<br>Factor<br>[dB] | A.F.+C.L.+D.F.<br>[dB] | Ant. Pol.<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|---------------------|------------------------------|------------------------|--------------------|-------------------|-------------------|----------------|---------------------|
| 2483.5             | 32.45               | 0.00                         | 33.39                  | H                  | 65.84             | 73.98             | 8.14           | PK                  |
| 2483.5             | 10.36               | 4.89                         | 33.39                  | H                  | 48.64             | 53.98             | 5.34           | AV                  |
| 2483.5             | 31.47               | 0.00                         | 33.39                  | V                  | 64.86             | 73.98             | 9.12           | PK                  |
| 2483.5             | 9.85                | 4.89                         | 33.39                  | V                  | 48.13             | 53.98             | 5.85           | AV                  |

Mode : 1M Bit/s Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

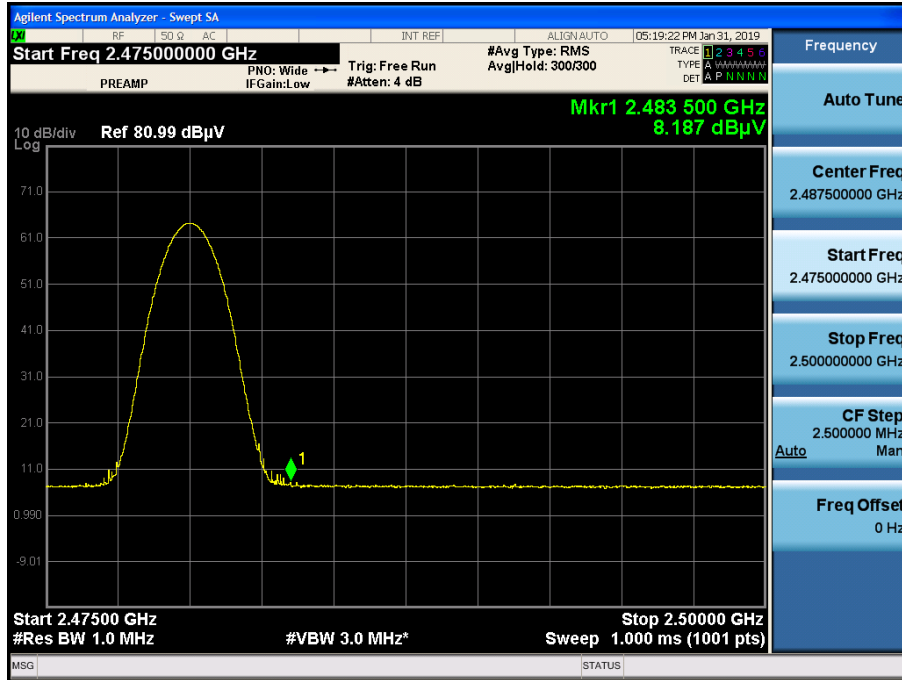


Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

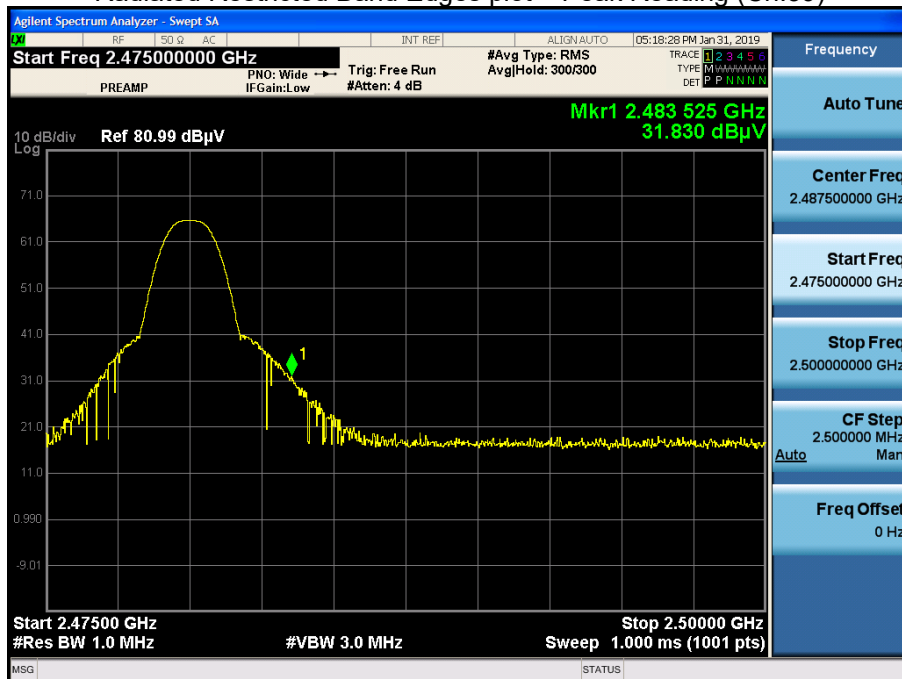




Mode : 2M Bit/s Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

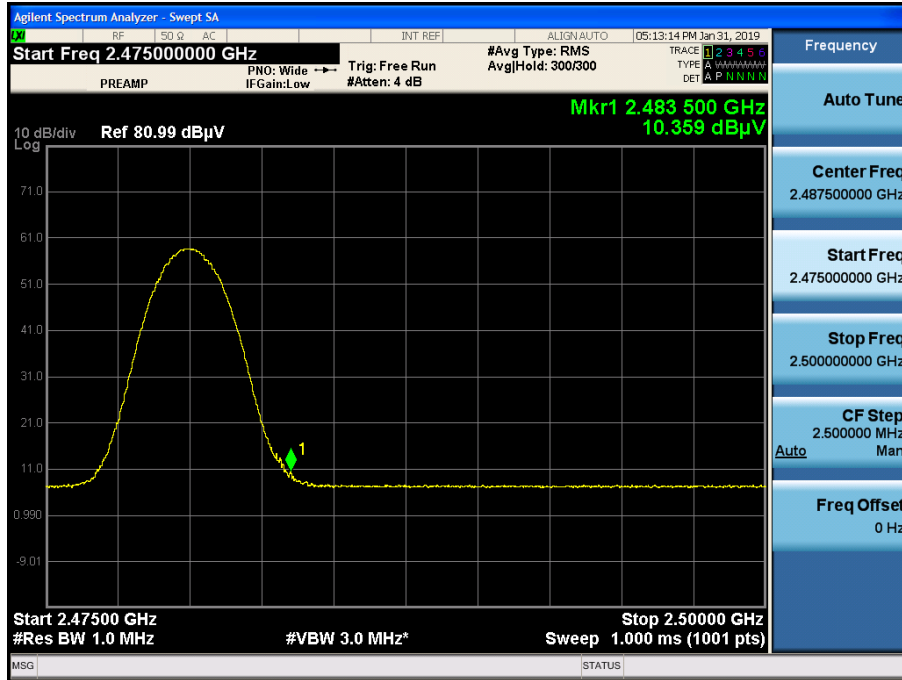

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

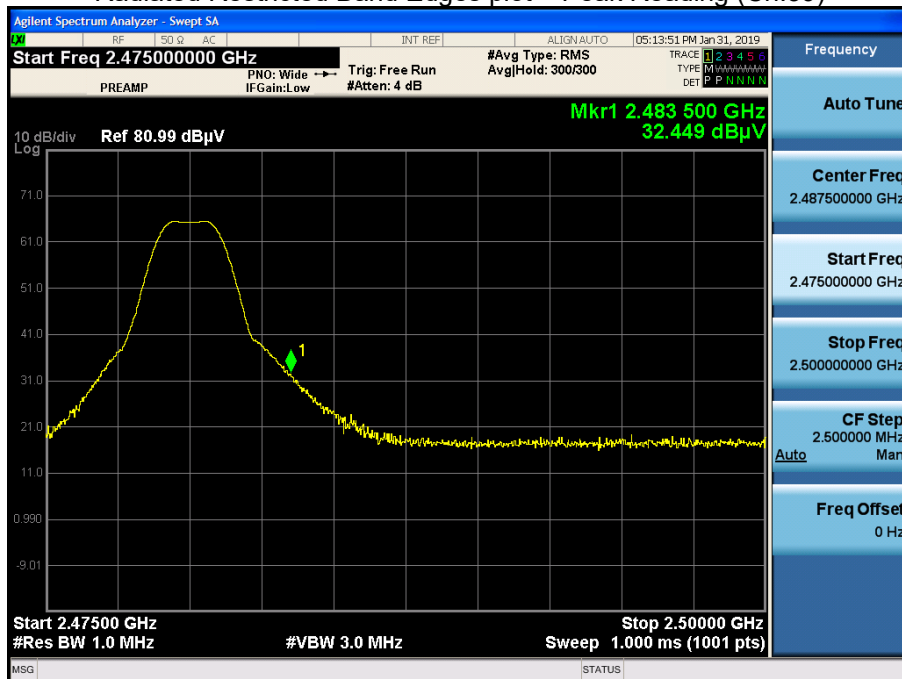

### Note:

Plot of worst case are only reported.

## 9.8 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-T515  
Manufacturer: SAMSUNG  
Test Site: SHIELD ROOM  
Operating Conditions: BT LE L1

FCC CLASS B\_Exten Cable

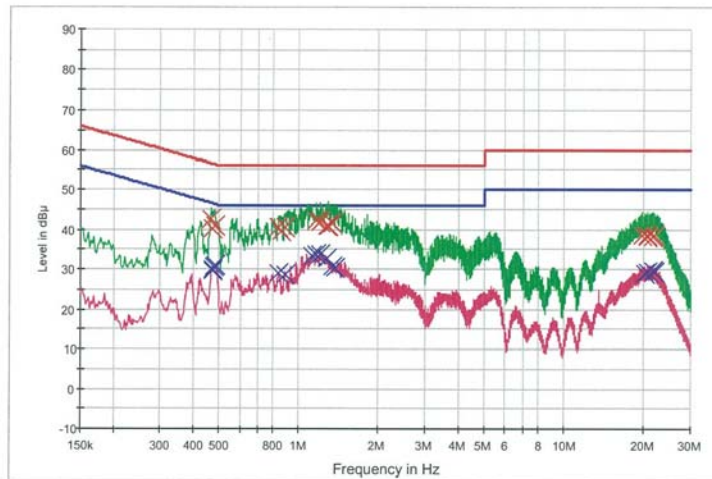

— FCC CLASS B\_QP — FCC CLASS B\_AV — Preview Result 1-PK+  
— Preview Result 2-AVG — Final Result 1-QPK — Final Result 2-CAV

### Final Result 1

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|--------|------|------------|-------------|--------------|
| 0.468000        | 42.6             | 9.000           | Off    | L1   | 9.8        | 14.0        | 56.5         |
| 0.472000        | 40.0             | 9.000           | Off    | L1   | 9.8        | 16.5        | 56.5         |
| 0.482000        | 40.8             | 9.000           | Off    | L1   | 9.8        | 15.5        | 56.3         |
| 0.840000        | 40.5             | 9.000           | Off    | L1   | 9.8        | 15.5        | 56.0         |
| 0.858000        | 39.5             | 9.000           | Off    | L1   | 9.8        | 16.5        | 56.0         |
| 0.884000        | 40.7             | 9.000           | Off    | L1   | 9.8        | 15.3        | 56.0         |
| 1.166000        | 42.3             | 9.000           | Off    | L1   | 9.8        | 13.7        | 56.0         |
| 1.210000        | 42.0             | 9.000           | Off    | L1   | 9.8        | 14.0        | 56.0         |
| 1.274000        | 40.8             | 9.000           | Off    | L1   | 9.9        | 15.2        | 56.0         |
| 1.292000        | 40.8             | 9.000           | Off    | L1   | 9.9        | 15.2        | 56.0         |
| 1.340000        | 41.5             | 9.000           | Off    | L1   | 9.9        | 14.5        | 56.0         |
| 1.344000        | 41.4             | 9.000           | Off    | L1   | 9.9        | 14.6        | 56.0         |
| 19.580000       | 38.4             | 9.000           | Off    | L1   | 10.6       | 21.6        | 60.0         |
| 20.564000       | 38.6             | 9.000           | Off    | L1   | 10.6       | 21.4        | 60.0         |
| 20.614000       | 38.6             | 9.000           | Off    | L1   | 10.6       | 21.4        | 60.0         |
| 20.652000       | 38.2             | 9.000           | Off    | L1   | 10.6       | 21.8        | 60.0         |
| 21.624000       | 38.2             | 9.000           | Off    | L1   | 10.6       | 21.8        | 60.0         |
| 21.914000       | 38.4             | 9.000           | Off    | L1   | 10.7       | 21.6        | 60.0         |

2019-02-13

오후 8:50:46

Test

2 / 2

### Final Result 2

| Frequency<br>(MHz) | CAverage<br>(dBuV) | Bandwidth<br>(kHz) | Filter | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBuV) |
|--------------------|--------------------|--------------------|--------|------|---------------|----------------|-----------------|
| 0.470000           | 29.6               | 9.000              | Off    | L1   | 9.8           | 16.9           | 46.5            |
| 0.474000           | 30.0               | 9.000              | Off    | L1   | 9.8           | 16.4           | 46.4            |
| 0.478000           | 30.6               | 9.000              | Off    | L1   | 9.8           | 15.7           | 46.4            |
| 0.482000           | 30.9               | 9.000              | Off    | L1   | 9.8           | 15.4           | 46.3            |
| 0.840000           | 29.0               | 9.000              | Off    | L1   | 9.8           | 17.0           | 46.0            |
| 0.884000           | 28.5               | 9.000              | Off    | L1   | 9.8           | 17.5           | 46.0            |
| 1.120000           | 33.3               | 9.000              | Off    | L1   | 9.8           | 12.7           | 46.0            |
| 1.166000           | 33.6               | 9.000              | Off    | L1   | 9.8           | 12.4           | 46.0            |
| 1.210000           | 33.6               | 9.000              | Off    | L1   | 9.8           | 12.4           | 46.0            |
| 1.274000           | 32.6               | 9.000              | Off    | L1   | 9.9           | 13.4           | 46.0            |
| 1.340000           | 30.6               | 9.000              | Off    | L1   | 9.9           | 15.4           | 46.0            |
| 1.374000           | 30.2               | 9.000              | Off    | L1   | 9.9           | 15.8           | 46.0            |
| 20.240000          | 28.9               | 9.000              | Off    | L1   | 10.6          | 21.1           | 50.0            |
| 20.564000          | 29.3               | 9.000              | Off    | L1   | 10.6          | 20.7           | 50.0            |
| 20.616000          | 29.5               | 9.000              | Off    | L1   | 10.6          | 20.5           | 50.0            |
| 20.652000          | 29.4               | 9.000              | Off    | L1   | 10.6          | 20.6           | 50.0            |
| 21.730000          | 29.5               | 9.000              | Off    | L1   | 10.6          | 20.5           | 50.0            |
| 21.770000          | 29.3               | 9.000              | Off    | L1   | 10.6          | 20.7           | 50.0            |

2019-02-13

오후 8:50:46

**Conducted Emissions (Line 2)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-T515  
Manufacturer: SAMSUNG  
Test Site: SHIELD ROOM  
Operating Conditions: BT LE N

FCC CLASS B\_Exten Cable

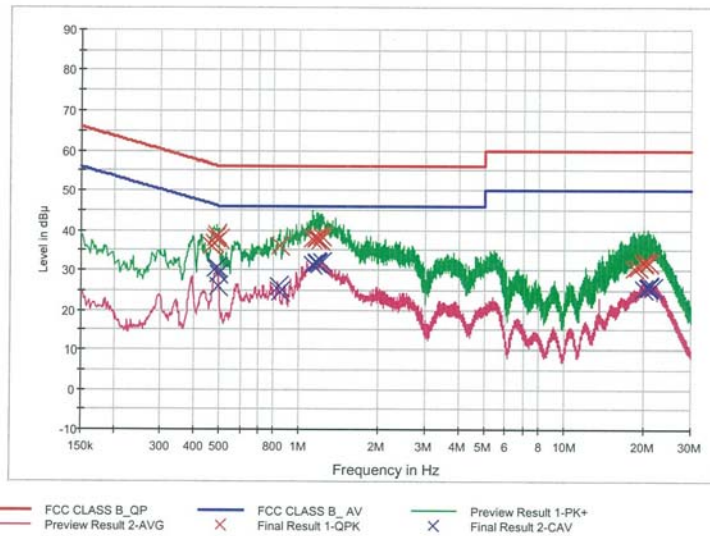

**Final Result 1**

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|--------|------|------------|-------------|--------------|
| 0.466000        | 36.1             | 9.000           | Off    | N    | 9.9        | 20.5        | 56.6         |
| 0.476000        | 36.9             | 9.000           | Off    | N    | 9.9        | 19.5        | 56.4         |
| 0.484000        | 38.1             | 9.000           | Off    | N    | 9.9        | 18.2        | 56.3         |
| 0.488000        | 38.7             | 9.000           | Off    | N    | 9.9        | 17.5        | 56.2         |
| 0.498000        | 37.7             | 9.000           | Off    | N    | 9.9        | 18.3        | 56.0         |
| 0.848000        | 36.0             | 9.000           | Off    | N    | 10.0       | 20.0        | 56.0         |
| 1.122000        | 37.7             | 9.000           | Off    | N    | 10.0       | 18.3        | 56.0         |
| 1.160000        | 37.8             | 9.000           | Off    | N    | 10.0       | 18.2        | 56.0         |
| 1.166000        | 38.1             | 9.000           | Off    | N    | 10.0       | 17.9        | 56.0         |
| 1.174000        | 38.3             | 9.000           | Off    | N    | 10.0       | 17.7        | 56.0         |
| 1.206000        | 37.4             | 9.000           | Off    | N    | 10.0       | 18.6        | 56.0         |
| 1.214000        | 38.5             | 9.000           | Off    | N    | 10.0       | 17.5        | 56.0         |
| 18.300000       | 30.3             | 9.000           | Off    | N    | 10.8       | 29.7        | 60.0         |
| 19.058000       | 30.6             | 9.000           | Off    | N    | 10.8       | 29.4        | 60.0         |
| 19.864000       | 31.7             | 9.000           | Off    | N    | 10.9       | 28.3        | 60.0         |
| 19.988000       | 31.9             | 9.000           | Off    | N    | 10.9       | 28.1        | 60.0         |
| 20.690000       | 32.0             | 9.000           | Off    | N    | 10.9       | 28.0        | 60.0         |
| 20.864000       | 31.8             | 9.000           | Off    | N    | 10.9       | 28.2        | 60.0         |

2019-02-13

오후 8:41:50

Test

2 / 2

### Final Result 2

| Frequency<br>(MHz) | CAverage<br>(dBuV) | Bandwidth<br>(kHz) | Filter | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBuV) |
|--------------------|--------------------|--------------------|--------|------|---------------|----------------|-----------------|
| 0.484000           | 30.5               | 9.000              | Off    | N    | 9.9           | 15.8           | 46.3            |
| 0.488000           | 30.6               | 9.000              | Off    | N    | 9.9           | 15.6           | 46.2            |
| 0.492000           | 28.8               | 9.000              | Off    | N    | 9.9           | 17.3           | 46.1            |
| 0.496000           | 26.0               | 9.000              | Off    | N    | 9.9           | 20.0           | 46.1            |
| 0.836000           | 25.9               | 9.000              | Off    | N    | 10.0          | 20.1           | 46.0            |
| 0.846000           | 24.5               | 9.000              | Off    | N    | 10.0          | 21.5           | 46.0            |
| 1.122000           | 31.5               | 9.000              | Off    | N    | 10.0          | 14.5           | 46.0            |
| 1.160000           | 31.7               | 9.000              | Off    | N    | 10.0          | 14.3           | 46.0            |
| 1.164000           | 31.9               | 9.000              | Off    | N    | 10.0          | 14.1           | 46.0            |
| 1.178000           | 31.8               | 9.000              | Off    | N    | 10.0          | 14.2           | 46.0            |
| 1.188000           | 31.3               | 9.000              | Off    | N    | 10.0          | 14.8           | 46.0            |
| 1.214000           | 31.9               | 9.000              | Off    | N    | 10.0          | 14.1           | 46.0            |
| 19.864000          | 25.2               | 9.000              | Off    | N    | 10.9          | 24.8           | 50.0            |
| 19.988000          | 25.4               | 9.000              | Off    | N    | 10.9          | 24.6           | 50.0            |
| 20.690000          | 25.6               | 9.000              | Off    | N    | 10.9          | 24.4           | 50.0            |
| 20.864000          | 25.8               | 9.000              | Off    | N    | 10.9          | 24.2           | 50.0            |
| 20.956000          | 25.6               | 9.000              | Off    | N    | 10.9          | 24.4           | 50.0            |
| 21.510000          | 25.5               | 9.000              | Off    | N    | 10.9          | 24.6           | 50.0            |

2019-02-13

오후 8:41:50

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

| Manufacturer    | Model / Equipment                            | Calibration Date | Calibration Interval | Serial No. |
|-----------------|----------------------------------------------|------------------|----------------------|------------|
| Rohde & Schwarz | ENV216 / LISN                                | 12/12/2018       | Annual               | 102245     |
| Rohde & Schwarz | ESCI / Test Receiver                         | 06/27/2018       | Annual               | 100033     |
| ESPACE          | SU-642 / Temperature Chamber                 | 03/30/2018       | Annual               | 0093008124 |
| Agilent         | N9020A / Signal Analyzer                     | 06/08/2018       | Annual               | MY51110085 |
| Agilent         | N9020A / Signal Analyzer                     | 06/08/2018       | Annual               | MY52090906 |
| Agilent         | N9030A / Signal Analyzer                     | 01/10/2019       | Annual               | MY49431210 |
| Rohde & Schwarz | OSP 120 / Power Measurement Set              | 07/26/2018       | Annual               | 101231     |
| Agilent         | N1911A / Power Meter                         | 04/16/2018       | Annual               | MY45100523 |
| Agilent         | N1921A / Power Sensor                        | 04/16/2018       | Annual               | MY52260025 |
| Agilent         | 87300B / Directional Coupler                 | 11/20/2018       | Annual               | 3116A03621 |
| Hewlett Packard | 11667B / Power Splitter                      | 06/07/2018       | Annual               | 05001      |
| Hewlett Packard | E3632A / DC Power Supply                     | 06/26/2018       | Annual               | KR75303960 |
| Agilent         | 8493C / Attenuator(10 dB)                    | 07/10/2018       | Annual               | 07560      |
| Chang Woo Inc.  | 18N-20dB / Attenuator(20 dB)                 | 05/09/2018       | Annual               | 8          |
| Rohde & Schwarz | EMC32 / Software                             | N/A              | N/A                  | N/A        |
| HCT CO., LTD.   | FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A              | N/A                  | N/A        |

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## **Radiated Test**

| Manufacturer           | Model / Equipment                                          | Calibration Date | Calibration Interval | Serial No.  |
|------------------------|------------------------------------------------------------|------------------|----------------------|-------------|
| Innco system           | CO3000 / Controller(Antenna mast)                          | N/A              | N/A                  | CO3000-4p   |
| Innco system           | MA4640/800-XP-EP / Antenna Position Tower                  | N/A              | N/A                  | N/A         |
| Audix                  | EM1000 / Controller                                        | N/A              | N/A                  | 060520      |
| Audix                  | Turn Table                                                 | N/A              | N/A                  | N/A         |
| Rohde & Schwarz        | Loop Antenna                                               | 08/23/2018       | Biennial             | 1513-175    |
| Schwarzbeck            | VULB 9168 / Hybrid Antenna                                 | 04/06/2017       | Biennial             | 760         |
| Schwarzbeck            | VULB 9160 / TRILOG Antenna                                 | 08/09/2018       | Biennial             | 9160-3368   |
| Schwarzbeck            | BBHA 9120D / Horn Antenna                                  | 05/02/2017       | Biennial             | 9120D-937   |
| Schwarzbeck            | BBHA9170 /<br>Horn Antenna(15 GHz ~ 40 GHz)                | 12/04/2017       | Biennial             | BBHA9170541 |
| Rohde & Schwarz        | FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer                    | 09/03/2018       | Annual               | 100688      |
| Rohde & Schwarz        | FSV40-N / Spectrum Analyzer                                | 09/28/2018       | Annual               | 101068-SZ   |
| Agilent                | N9020A / Signal Analyzer                                   | 06/08/2018       | Annual               | MY51110085  |
| Wainwright Instruments | WHK3.0/18G-10EF / High Pass Filter                         | 06/07/2018       | Annual               | 8           |
| Wainwright Instruments | WHKX7.0/18G-8SS / High Pass Filter                         | 05/09/2018       | Annual               | 29          |
| Wainwright Instruments | WRCJV2400/2483.5-2370/2520-60/12SS /<br>Band Reject Filter | 06/29/2018       | Annual               | 2           |
| Wainwright Instruments | WRCJV5100/5850-40/50-8EEK /<br>Band Reject Filter          | 01/03/2019       | Annual               | 2           |
| Api tech.              | 18B-03 / Attenuator (3 dB)                                 | 06/07/2018       | Annual               | 1           |
| Agilent                | 8493C-10 / Attenuator(10 dB)                               | 07/17/2018       | Annual               | 08285       |
| CERNEX                 | CBLU1183540 / Power Amplifier                              | 07/10/2018       | Annual               | 22964       |
| CERNEX                 | CBL06185030 / Power Amplifier                              | 07/10/2018       | Annual               | 22965       |
| CERNEX                 | CBL18265035 / Power Amplifier                              | 01/03/2019       | Annual               | 22966       |
| CERNEX                 | CBL26405040 / Power Amplifier                              | 06/29/2018       | Annual               | 25956       |

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-1902-FC037-P |
| 2   | HCT-RF-1902-FC038-P |
| 3   | HCT-RF-1902-FC039-P |
| 4   | HCT-RF-1902-FC040-P |
| 5   | HCT-RF-1902-FC041-P |
| 6   | HCT-RF-1902-FC042-P |