



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1**

Bluetooth Low Energy

CERTIFICATION TEST REPORT

FOR

Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet

MODEL NUMBER : SM-T670

FCC ID: A3LSMT670

IC ID: 649E-SMT670

REPORT NUMBER: 15K21654-E2

ISSUE DATE: SEP 14, 2015

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea**

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	09/08/15	Initial issue	Junwhan Lee
--	09/14/15	Revised TEST METHODOLOGY of page 5	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST.....	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. MEASUREMENT METHODS	11
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	11
8.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>11</i>
9. SUMMARY TABLE	12
10. ANTENNA PORT TEST RESULTS	13
10.1. <i>6 dB BANDWIDTH</i>	<i>13</i>
10.2. <i>99% BANDWIDTH</i>	<i>15</i>
10.3. <i>OUTPUT POWER.....</i>	<i>17</i>
10.4. <i>AVERAGE POWER</i>	<i>19</i>
10.5. <i>PSD.....</i>	<i>20</i>
10.6. <i>CONDUCTED SPURIOUS EMISSIONS</i>	<i>22</i>
11. RADIATED TEST RESULTS	26
11.1. <i>LIMITS AND PROCEDURE.....</i>	<i>26</i>
11.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>27</i>
11.3. <i>WORST-CASE BELOW 1 GHz</i>	<i>37</i>
12. AC POWER LINE CONDUCTED EMISSIONS	39

13. SETUP PHOTOS44

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet
MODEL NUMBER: SM-T670
SERIAL NUMBER: R32G8008T9F (RADIATED); R32G800900V (CONDUCTED)
DATE TESTED: AUG 21, 2015 - SEP 07, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, and KDB 558074 D01 v03r03, ANSI C63.10-2009 for FCC and ANSI C63.10-2013 for IC, RSS-GEN Issue 4, and RSS-247 Issue 1.

ANSI C63.10-2009 Deviation

Radiated spurious emission above 1GHz EUT height is 1.5m not 0.8m.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet.

This test report addresses the DTS (BLE) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	BLE	Peak	6.90	4.89
		Average	6.59	4.56

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 2.94 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	KSAS0501900200HU	R37G819A01R0KT3	N/A
Data Cable	SAMSUNG	EP-DG925UWE	N/A	N/A
Earphone	SAMSUNG	GH59-13967A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

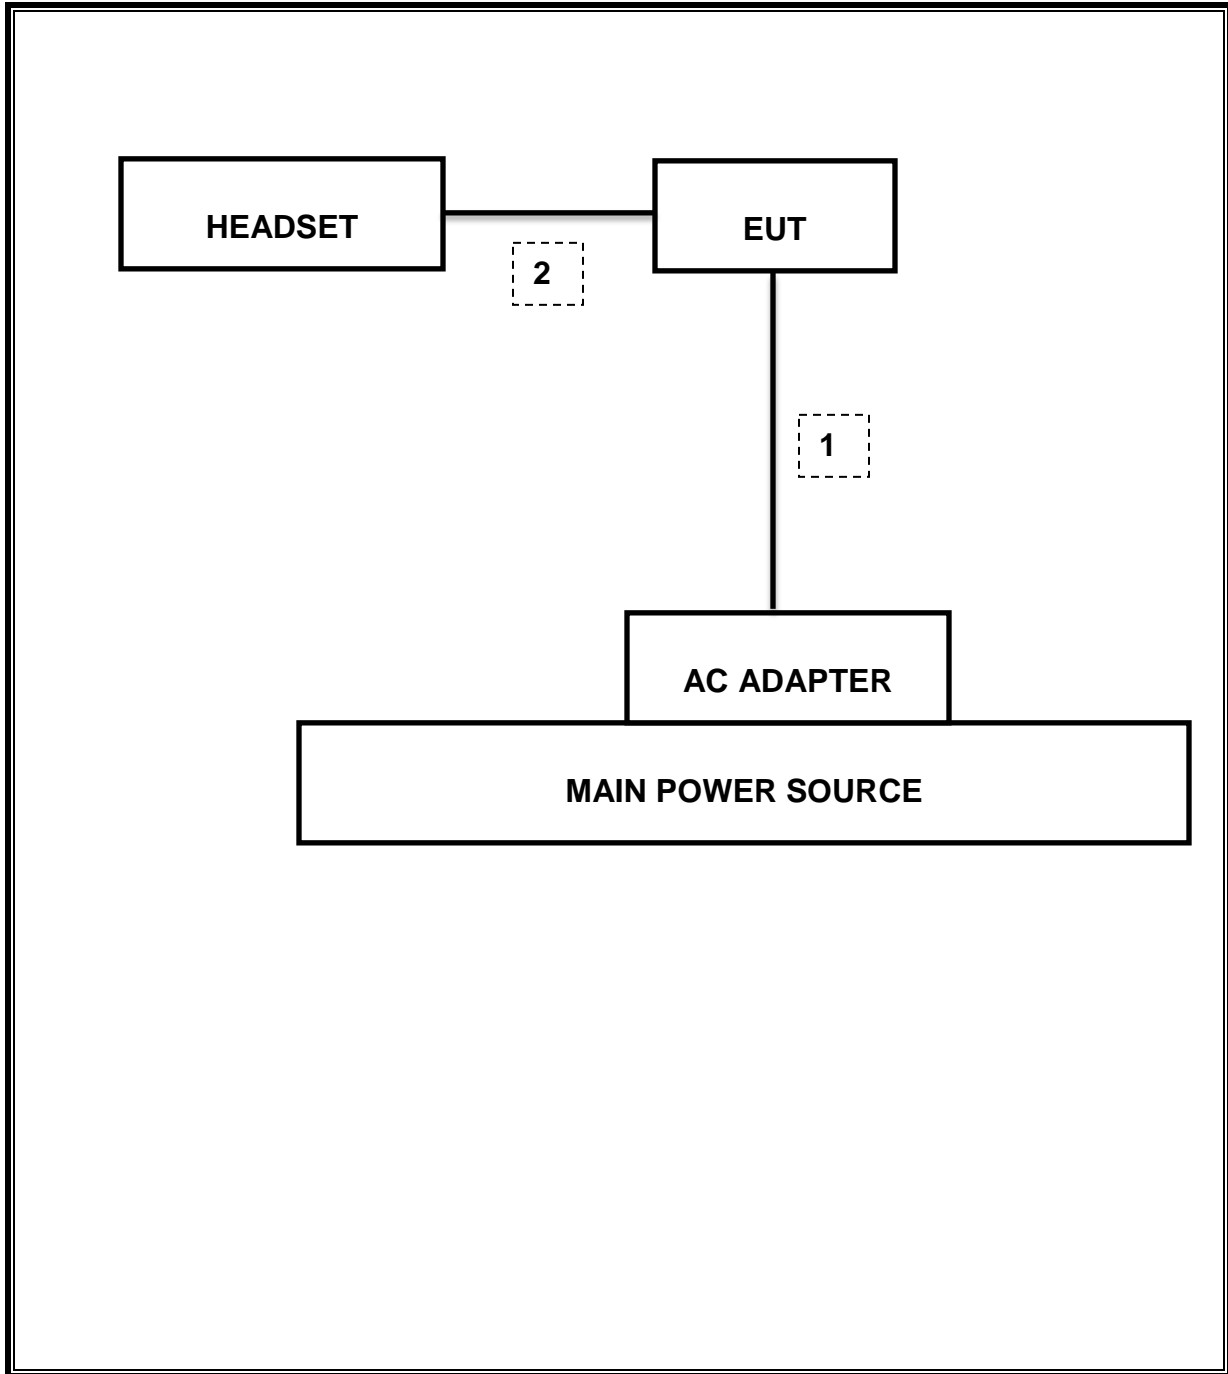

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-16
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-16
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r03: Measurement Procedure §9.1.1 is used for peak power and §10.2 PKPSD is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None: for reporting purposes only.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
BLE	0.3893	0.6249	0.623	62.3%	2.06	2.569

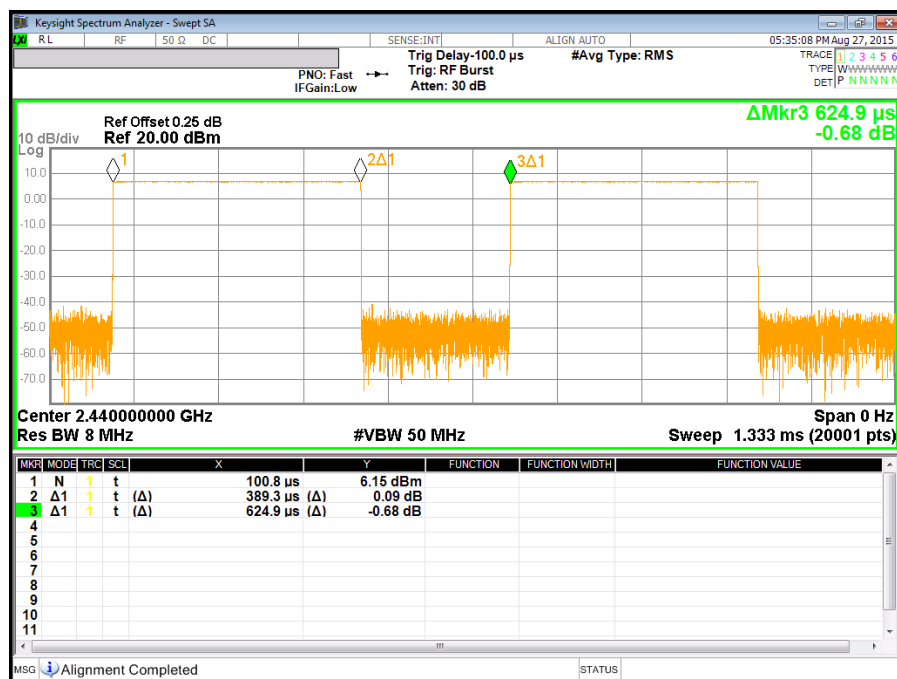

9. SUMMARY TABLE

FCC Part Section	IC Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-247 5.2(1)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	716.2kHz
2.1051, 15.247 (d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-51.12 dBm
15.247	RSS-247 5.4(4)	TX conducted output power	<30dBm		Pass	6.896 dBm (Peak)
15.247	RSS-247 5.2(2)	PSD	<8dBm		Pass	-7.48 dBm (Peak)
15.207 (a)	RSS-GEN Clause 8.8	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	53.44 dBuV (QP)
15.205, 15.209	RSS-GEN Clause 7 & 8.9	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	33.98 dBuV/m (QP)

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)
IC RSS-247 §5.2 (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2402	717.5	500.0
Mid	2440	716.3	500.0
High	2480	716.2	500.0
Worst		716.2	500.0

6 dB BANDWIDTH PLOTS

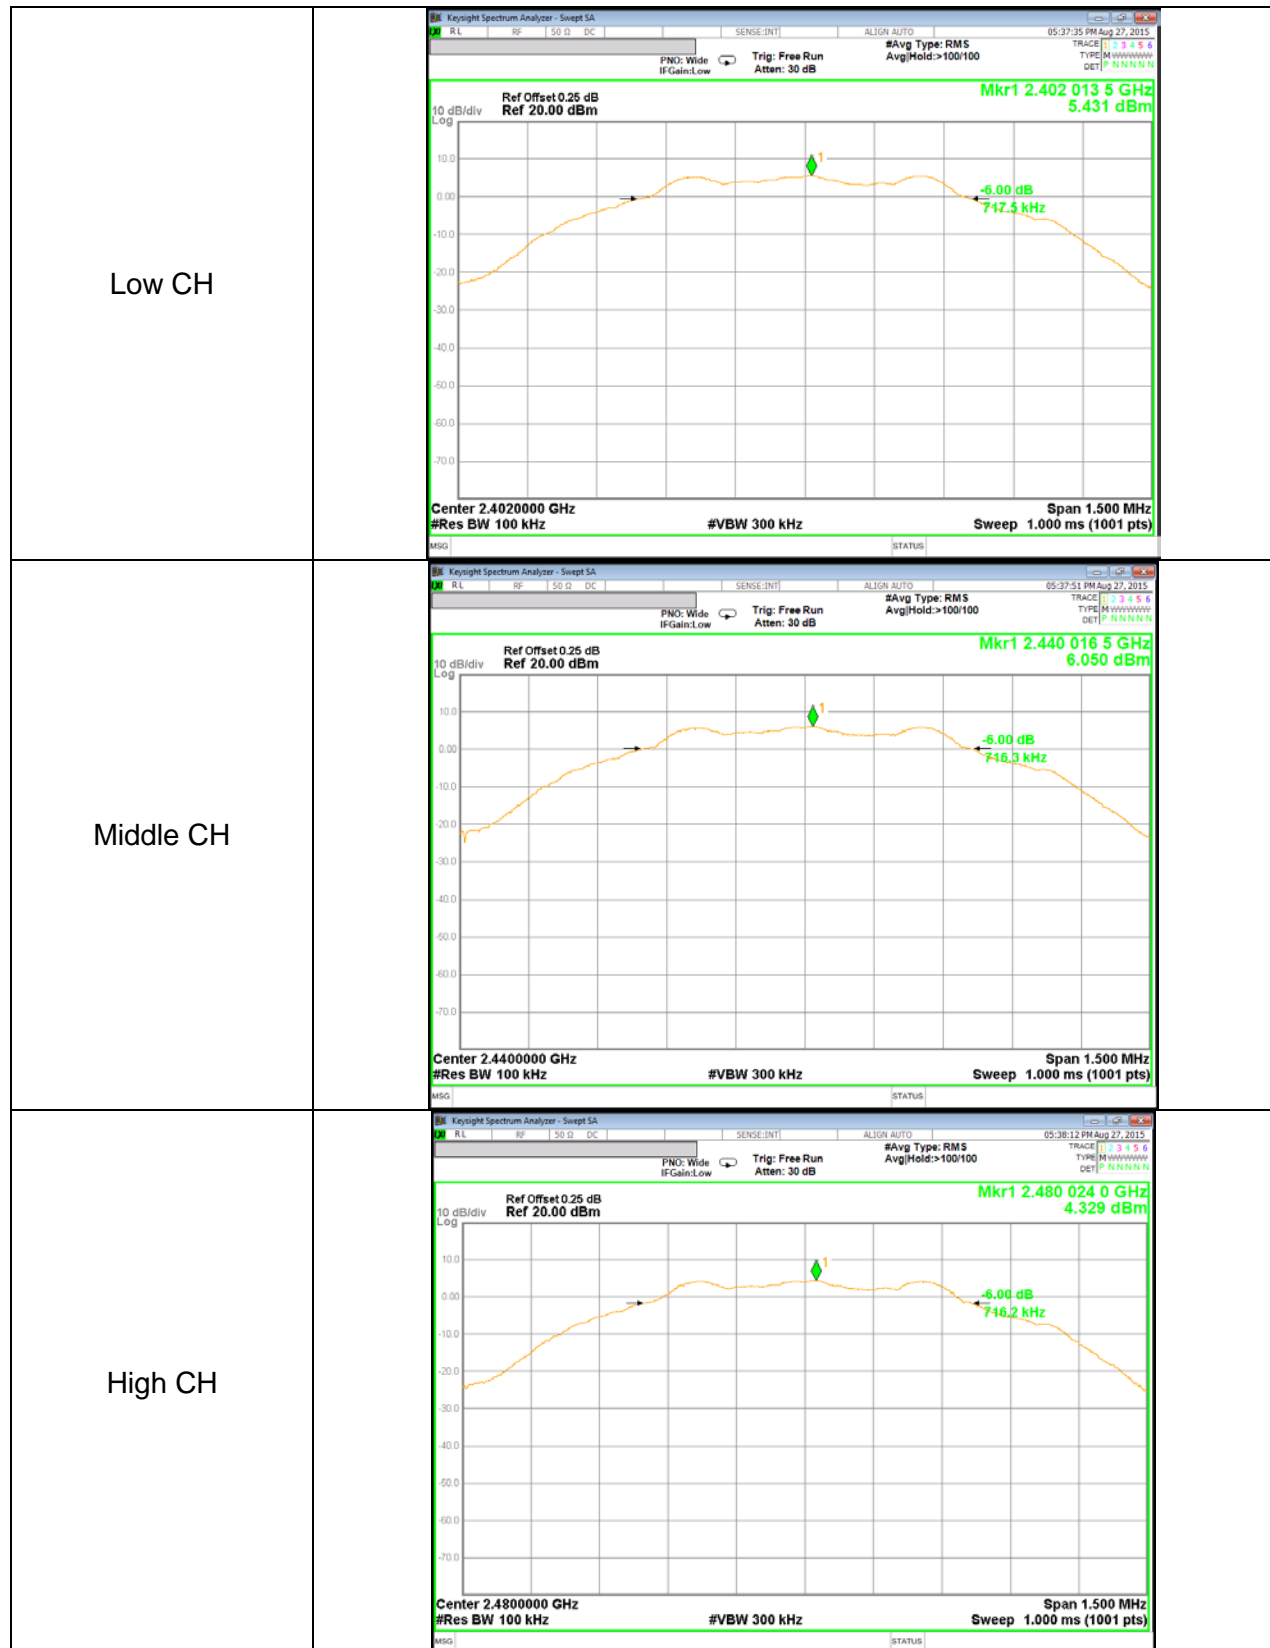

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2402	1.066
Mid	2440	1.065
High	2480	1.059
Worst		1.066

99% BANDWIDTH PLOTS

<p>Low CH</p>	<p>Keysight Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm Log</p> <p>Center 2.402 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>3.99 dBm</td> </tr> <tr> <td>1.0662 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>10.469 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.102 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	3.99 dBm	1.0662 MHz			Transmit Freq Error	OBW Power	99.00 %	10.469 kHz	x dB	-20.00 dB	x dB Bandwidth			1.102 MHz		
Occupied Bandwidth	Total Power	3.99 dBm																	
1.0662 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
10.469 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.102 MHz																			
<p>Middle CH</p>	<p>Keysight Spectrum Analyzer - Occupied BW Center Freq: 2.44000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm Log</p> <p>Center 2.44 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.57 dBm</td> </tr> <tr> <td>1.0648 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>15.211 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.109 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.57 dBm	1.0648 MHz			Transmit Freq Error	OBW Power	99.00 %	15.211 kHz	x dB	-20.00 dB	x dB Bandwidth			1.109 MHz		
Occupied Bandwidth	Total Power	4.57 dBm																	
1.0648 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
15.211 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.109 MHz																			
<p>High CH</p>	<p>Keysight Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm Log</p> <p>Center 2.48 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.88 dBm</td> </tr> <tr> <td>1.0592 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>20.715 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.102 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	2.88 dBm	1.0592 MHz			Transmit Freq Error	OBW Power	99.00 %	20.715 kHz	x dB	-20.00 dB	x dB Bandwidth			1.102 MHz		
Occupied Bandwidth	Total Power	2.88 dBm																	
1.0592 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
20.715 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.102 MHz																			

10.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)
IC RSS-247 §5.4 (4)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r03 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

Channel	Frequency [MHz]	Peak Power Reading [dBm]	Limit [dBm]	Margin [dB]
Low	2402	6.324	30.000	-23.676
Mid	2440	6.896	30.000	-23.104
High	2480	5.223	30.000	-24.777
Worst		6.896		-23.104

OUTPUT POWER PLOTS

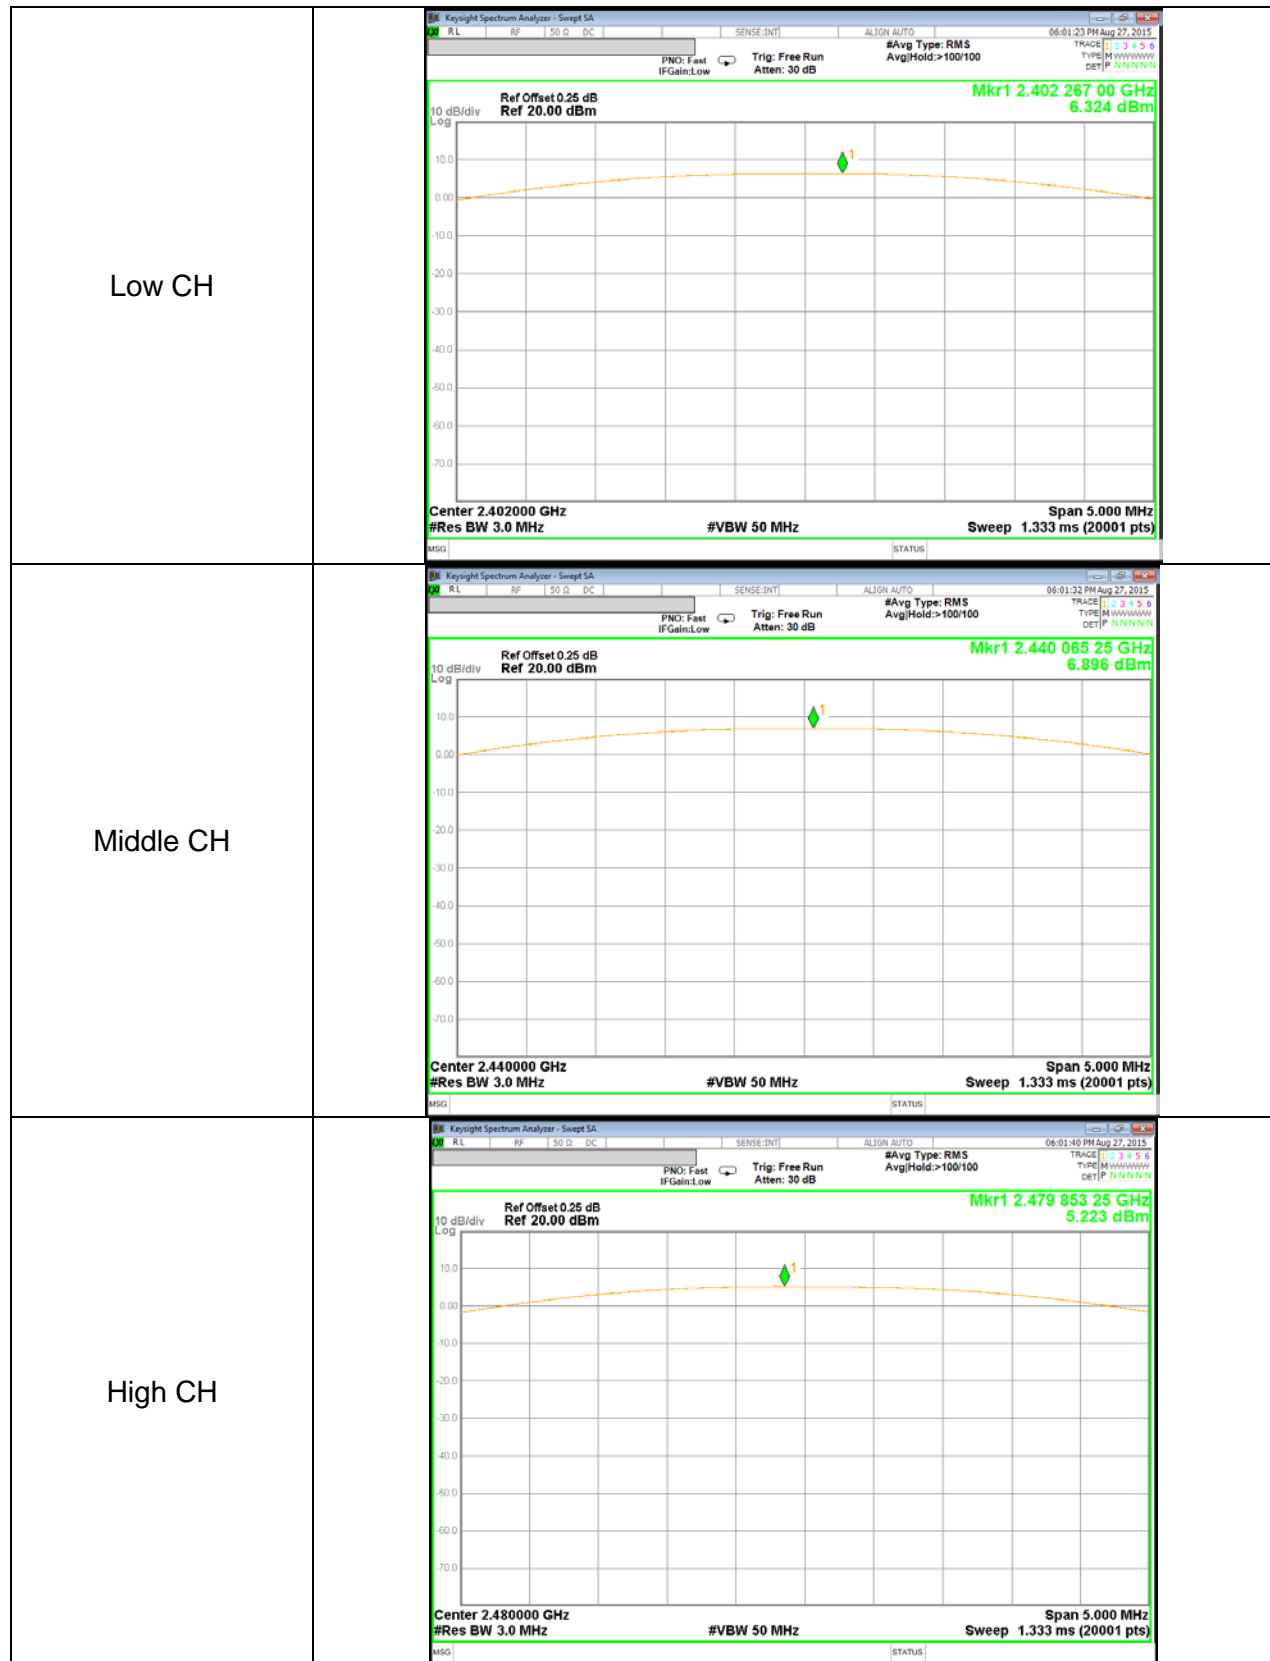

10.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	6.01	3.99
Middle	2440	6.59	4.56
High	2480	4.98	3.15

10.5. PSD

LIMITS

FCC §15.247
IC RSS-247 §5.2 (2)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE

Power Spectral Density was performed utilizing the “Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v03r03

RESULTS

Channel	Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2402	-7.97	8.00	-15.97
Mid	2440	-7.48	8.00	-15.48
High	2480	-9.31	8.00	-17.31

POWER SPECTRAL DENSITY PLOTS

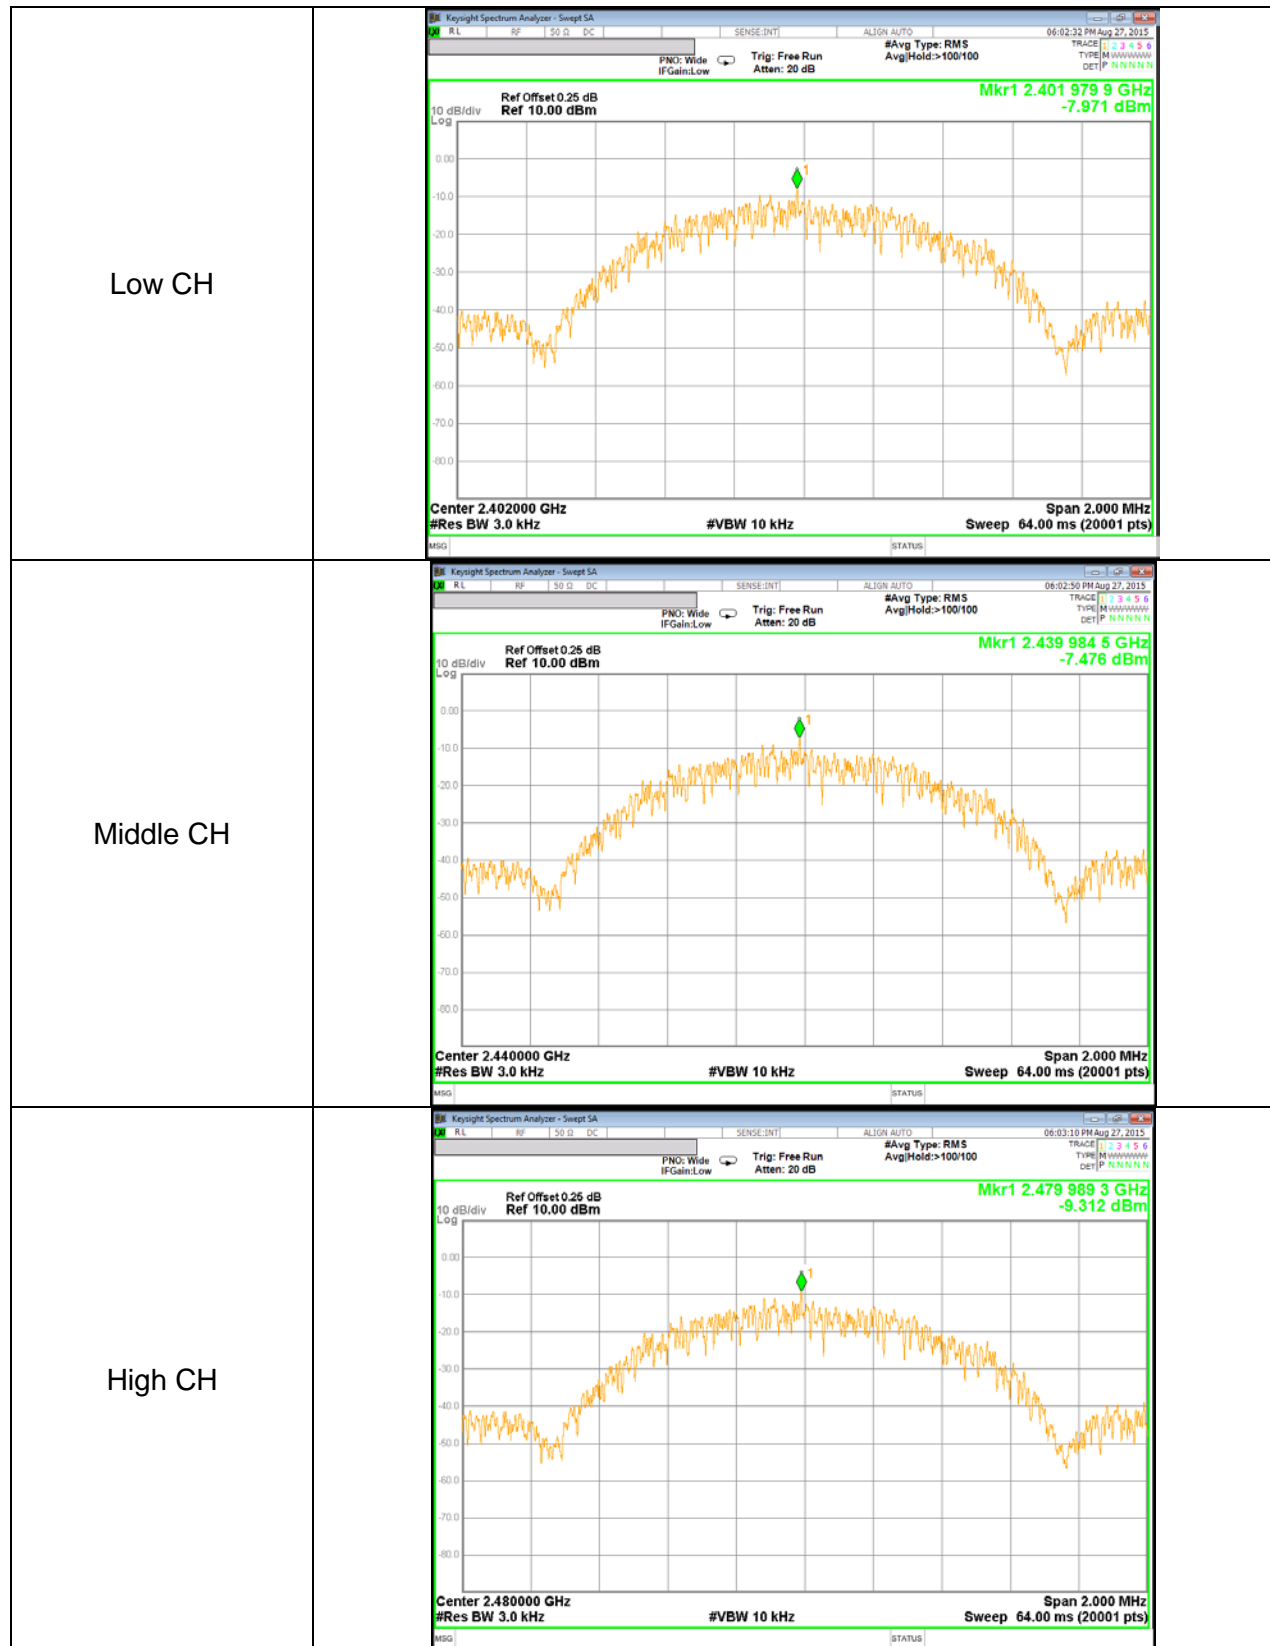

10.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)
IC RSS-247 §5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

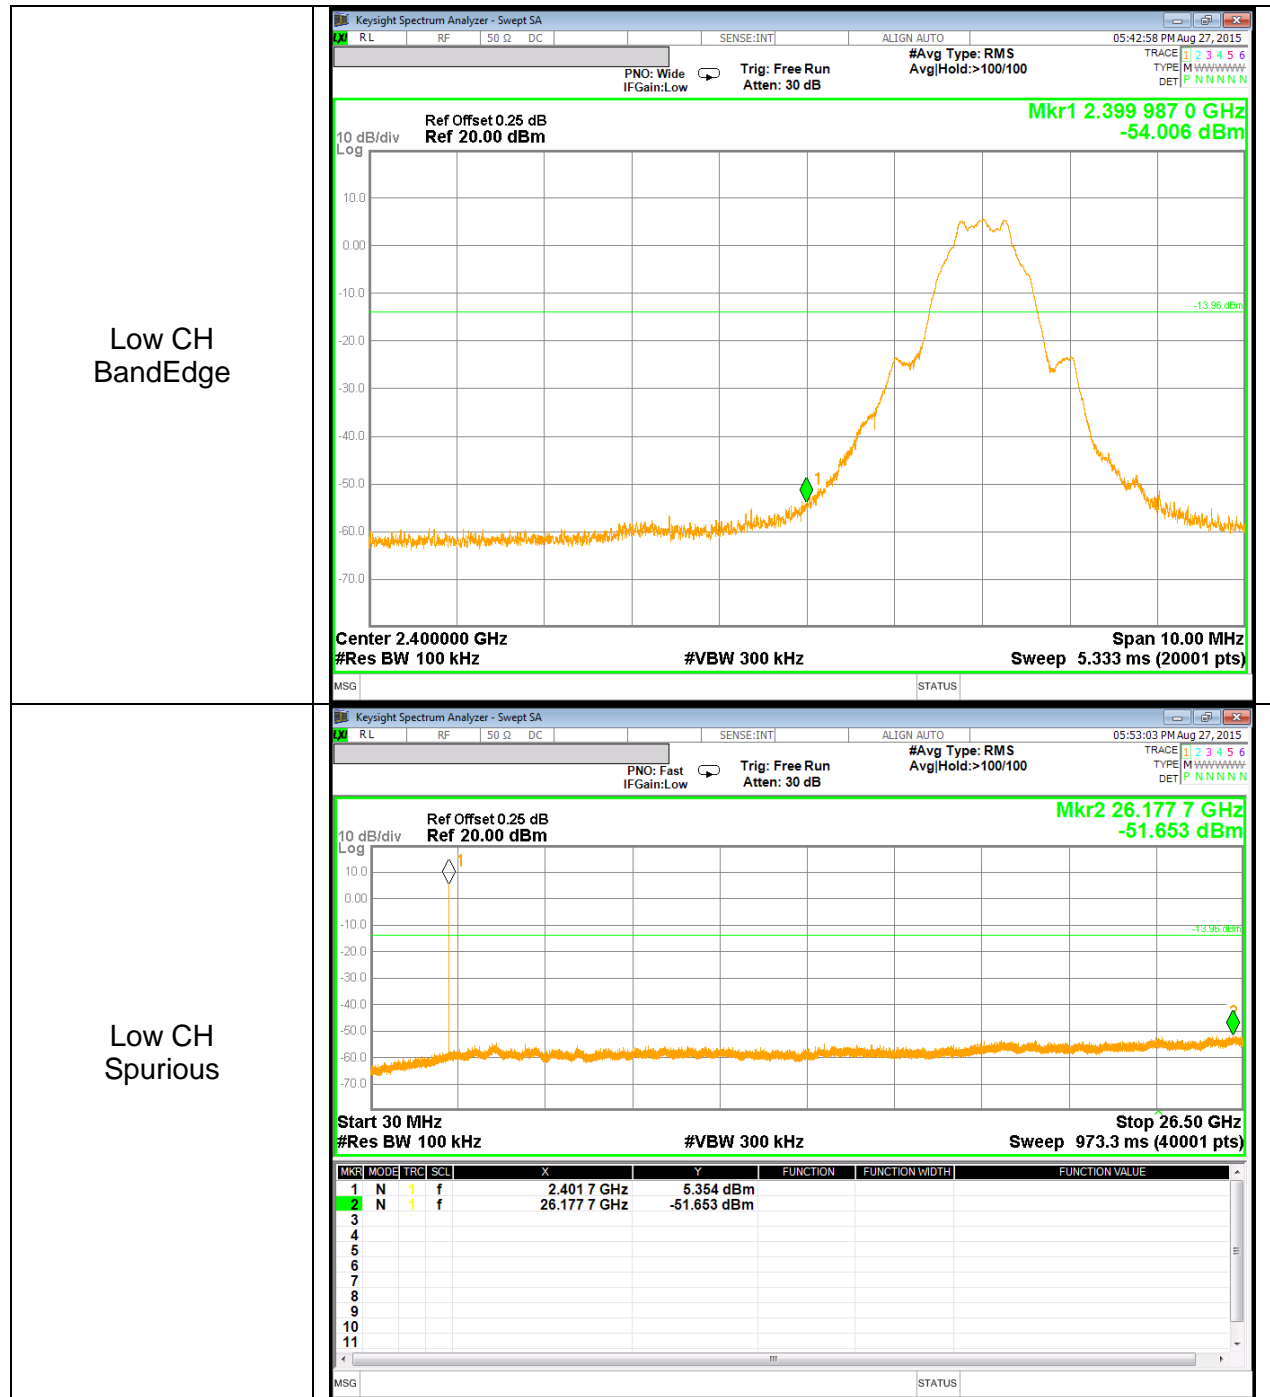

SPURIOUS EMISSIONS, MID CHANNEL

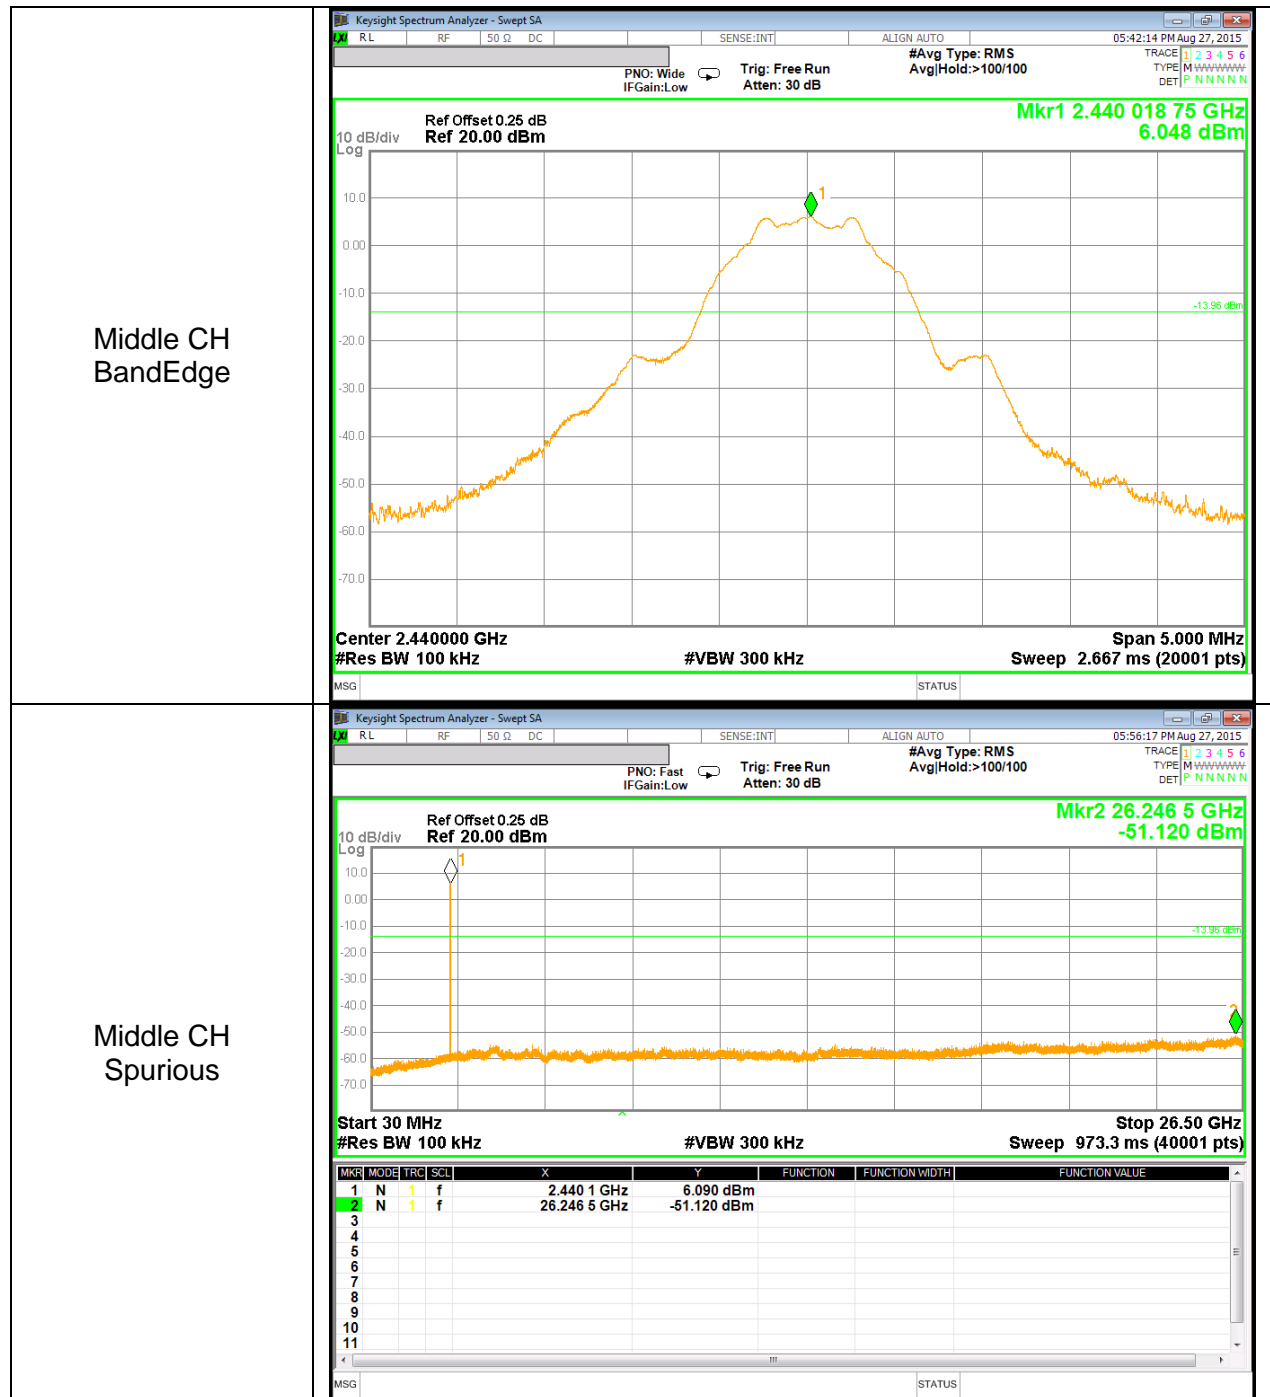

SPURIOUS EMISSIONS, HIGH CHANNEL

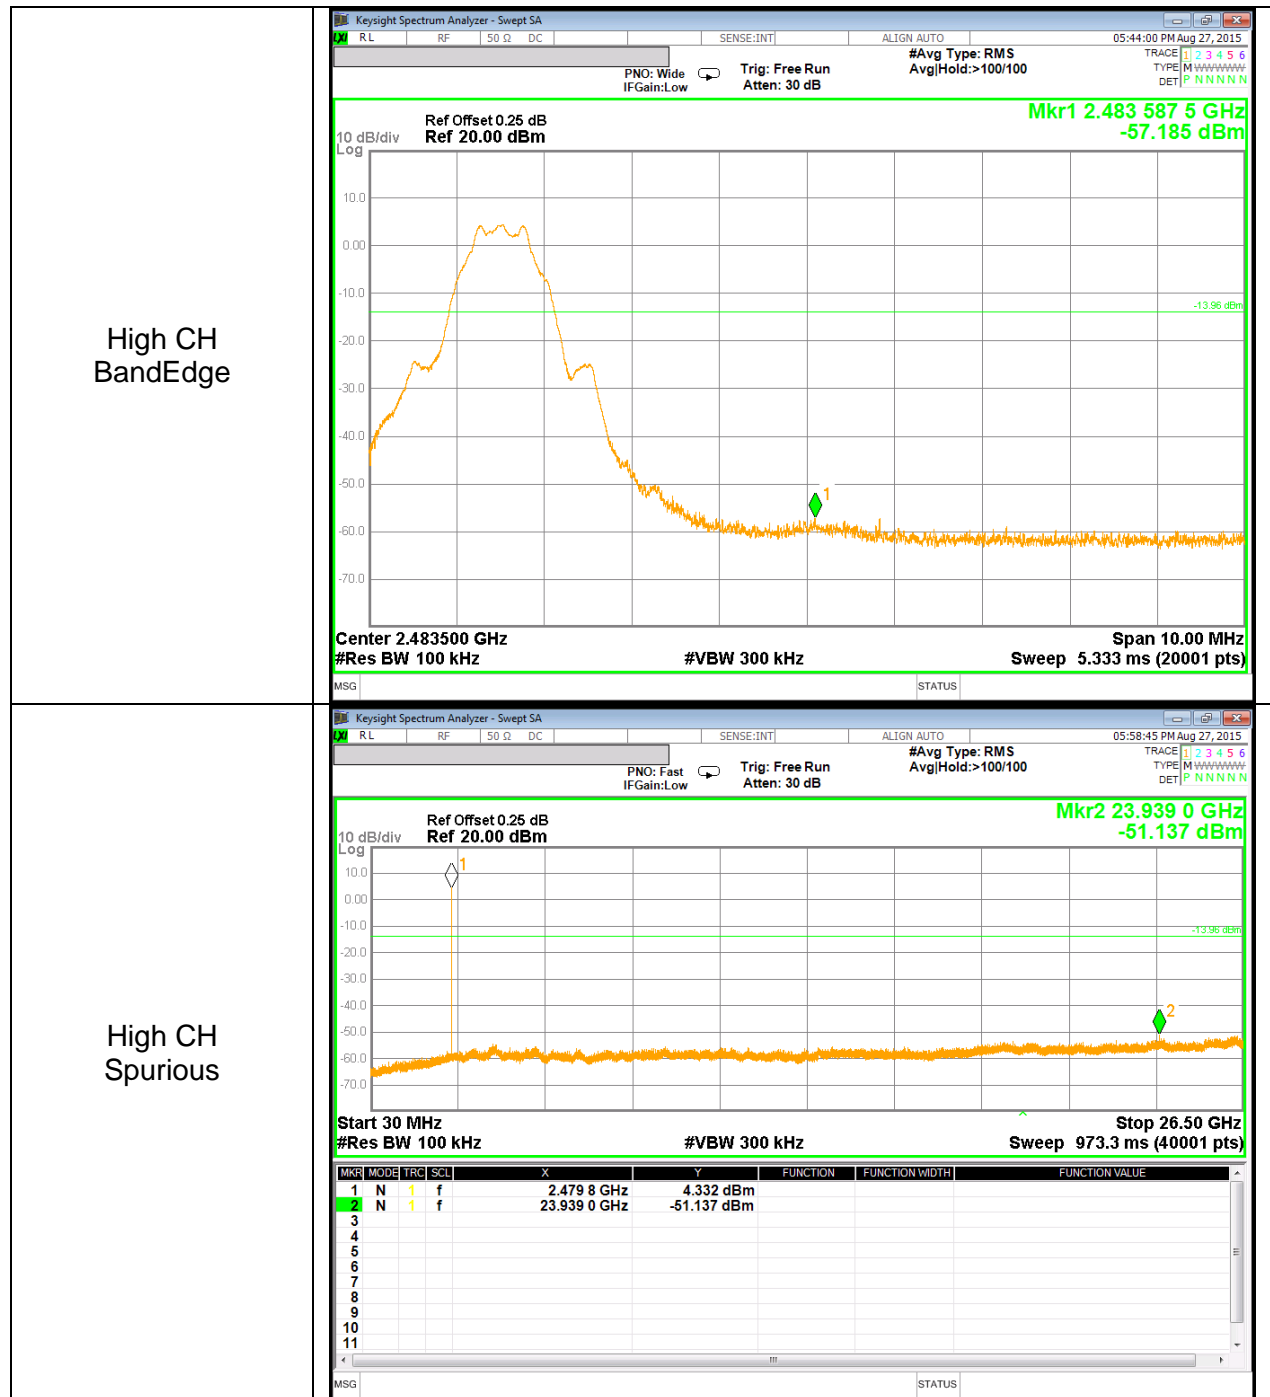

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209
IC RSS-GEN Clause 8.9 (Transmitter)
IC RSS-GEN Clause 7 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log(1/x)$. For this sample: $DCF = 10\log(1/0.622)=2.06\text{dB}$ (Spectrum Analyzer round it up to 2.06dB)

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

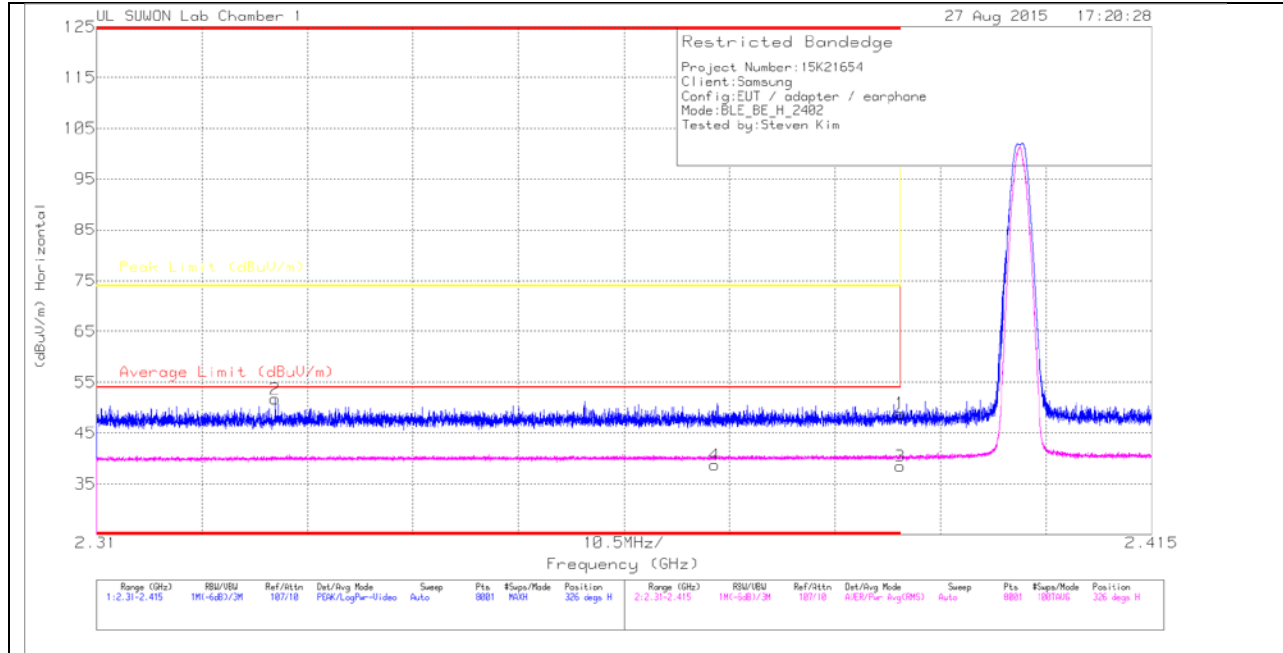

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168717)_150619	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.84	Pk	31.8	-22.8	0	48.84	-	-	74	-25.16	326	100	H
2	* 2.328	42.85	Pk	31.7	-22.9	0	51.65	-	-	74	-22.35	326	100	H
3	* 2.39	29.47	RMS	31.8	-22.8	2.06	40.53	54	-13.47	-	-	326	100	H
4	* 2.372	29.74	RMS	31.8	-22.8	2.06	40.8	54	-13.2	-	-	326	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

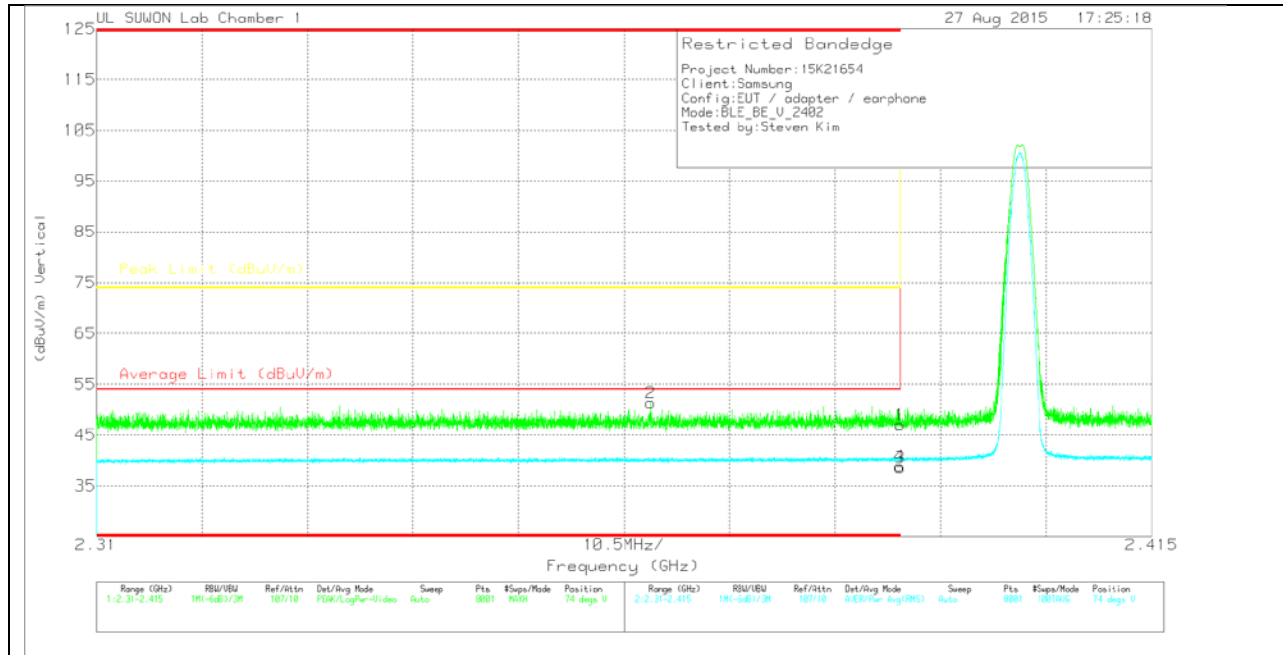

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.97	Pk	31.8	-22.8	0	46.97	-	-	74	-27.03	74	247	V
2	* 2.365	42.26	Pk	31.8	-22.8	0	51.26	-	-	74	-22.74	74	247	V
3	* 2.39	29.59	RMS	31.8	-22.8	2.06	40.65	54	-13.35	-	-	74	247	V
4	* 2.39	29.77	RMS	31.8	-22.8	2.06	40.83	54	-13.17	-	-	74	247	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

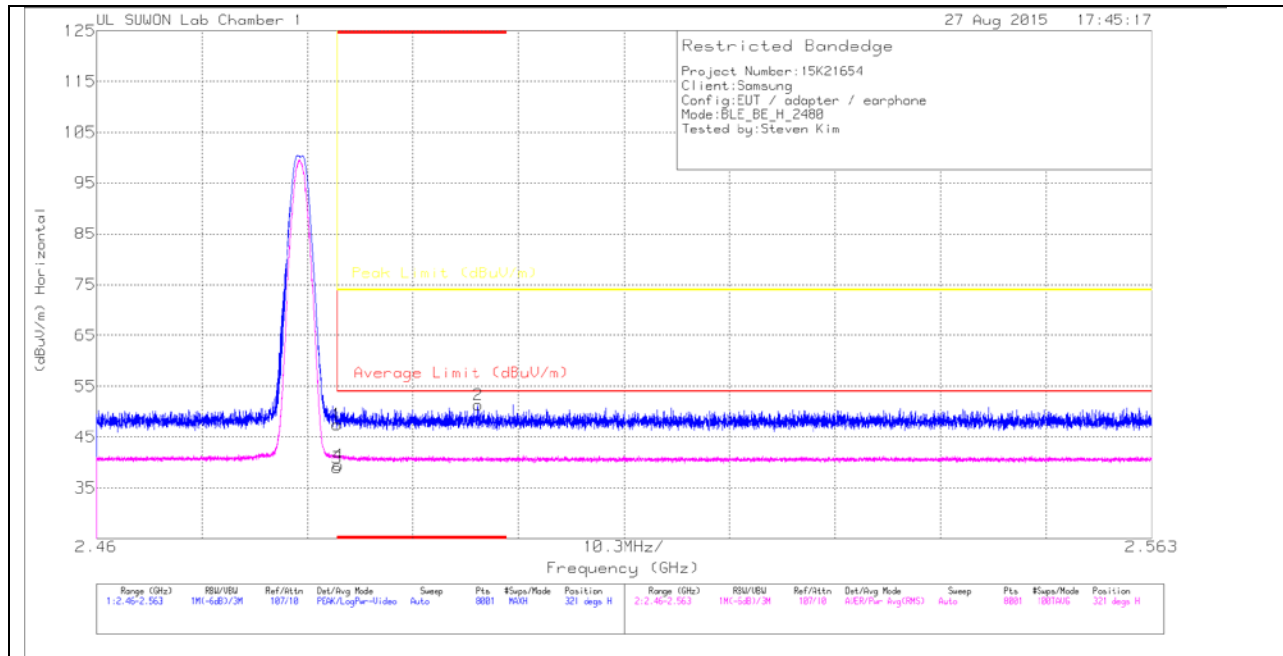

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.05	Pk	32	-22.6	0	47.45	-	-	74	-26.55	321	102	H
2	* 2.497	41.97	Pk	32	-22.6	0	51.37	-	-	74	-22.63	321	102	H
3	* 2.484	29.6	RMS	32	-22.6	2.06	41.06	54	-12.94	-	-	321	102	H
4	* 2.484	29.99	RMS	32	-22.6	2.06	41.45	54	-12.55	-	-	321	102	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

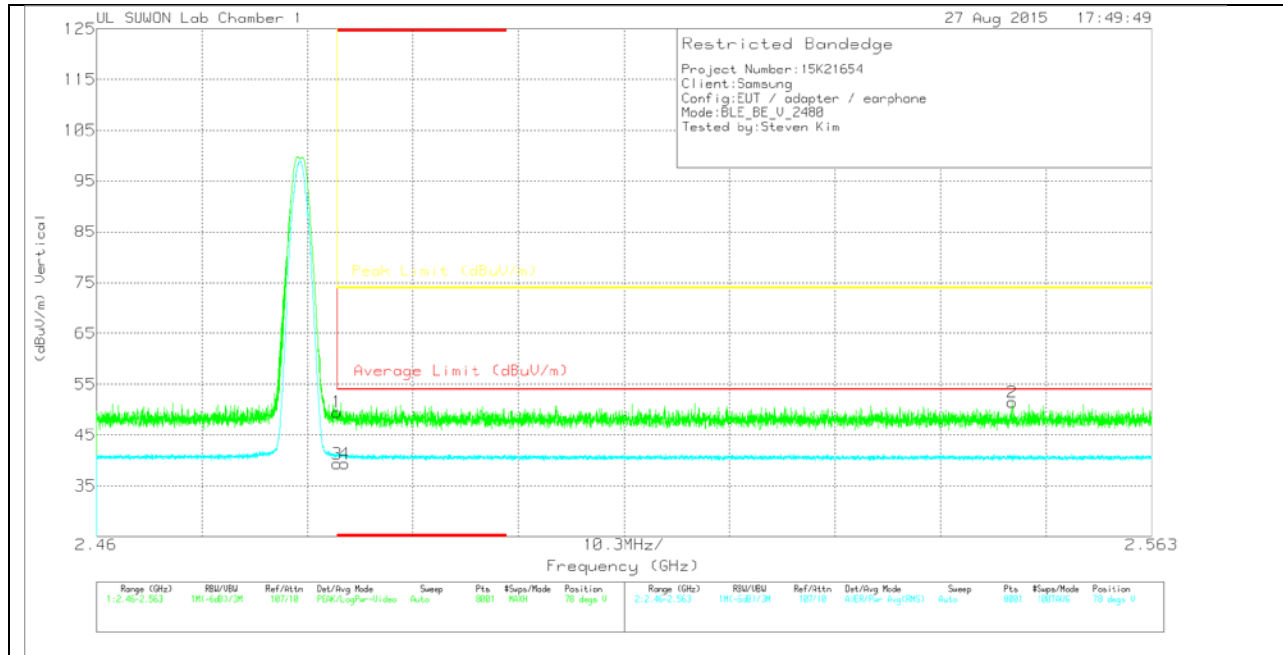

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.12	Pk	32	-22.6	0	49.52	-	-	74	-24.48	78	289	V
2	2.549	42.02	Pk	32	-22.6	0	51.42	-	-	74	-22.58	78	289	V
3	* 2.484	29.92	RMS	32	-22.6	2.06	41.38	54	-12.62	-	-	78	289	V
4	* 2.484	29.96	RMS	32	-22.6	2.06	41.42	54	-12.58	-	-	78	289	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

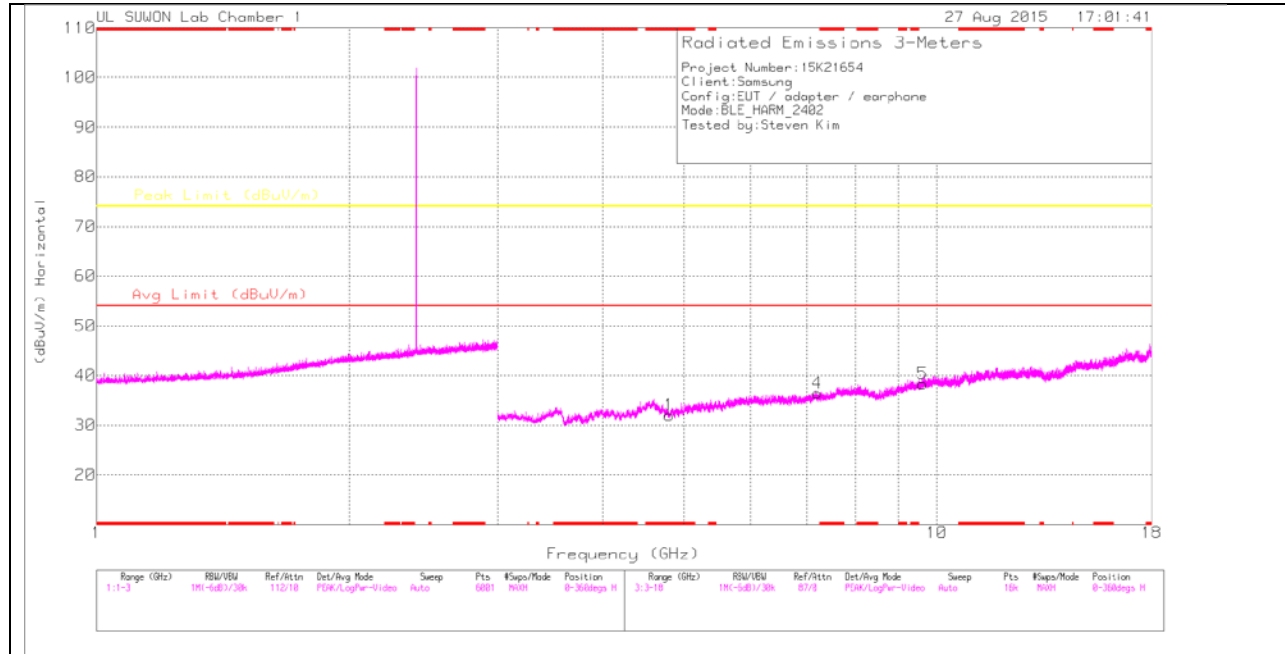

LOW CHANNEL VERTICAL

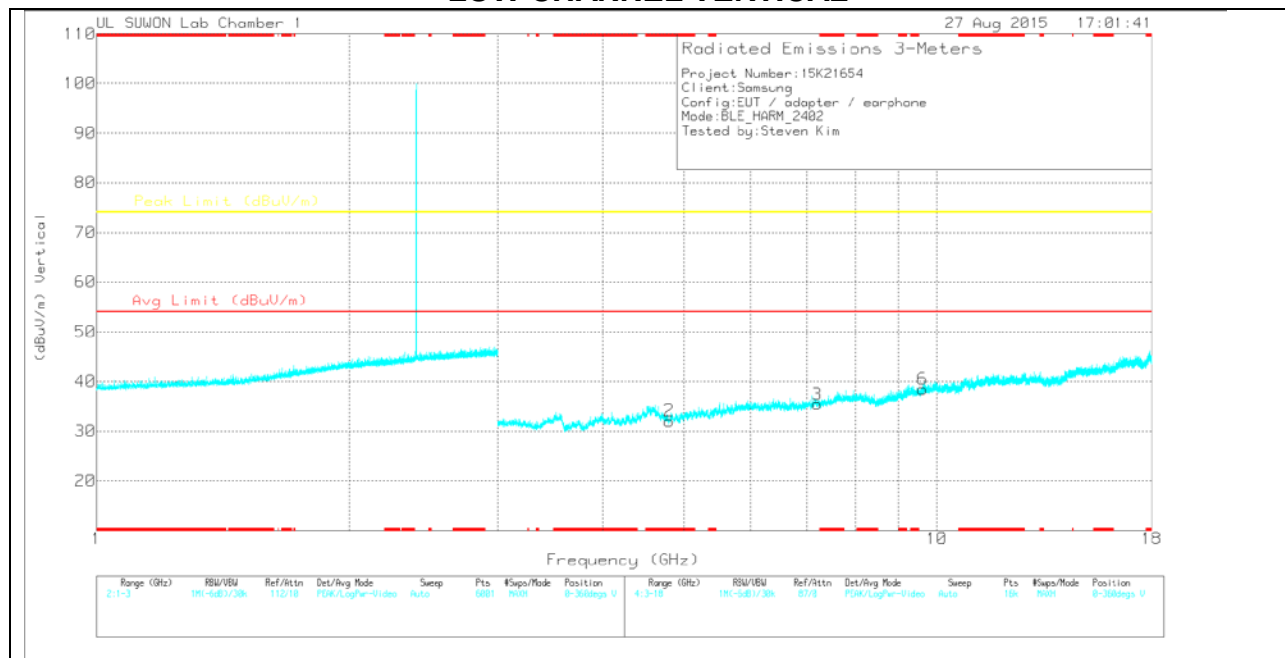

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_3_3GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	27.86	PK	34	-29.8	0	32.06	-	-	74	-41.94	0-360	100	H
4	7.204	26.11	PK	35.7	-25.4	0	36.41	-	-	74	-37.59	0-360	200	H
5	9.609	22.37	PK	37	-21	0	38.37	-	-	74	-35.63	0-360	200	H
2	* 4.808	27.88	PK	34	-29.8	0	32.08	-	-	74	-41.92	0-360	200	V
3	7.206	25.17	PK	35.7	-25.4	0	35.47	-	-	74	-38.53	0-360	200	V
6	9.612	22.51	PK	37	-21	0	38.51	-	-	74	-35.49	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

NOTE : Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

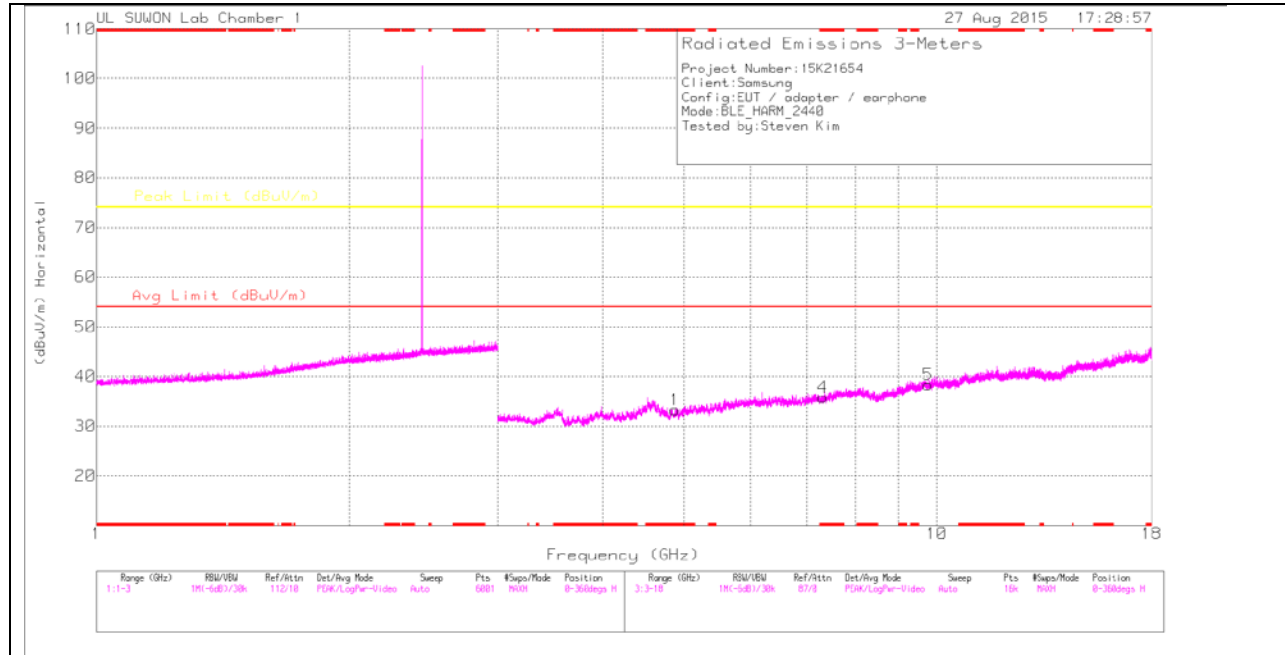

MID CHANNEL VERTICAL

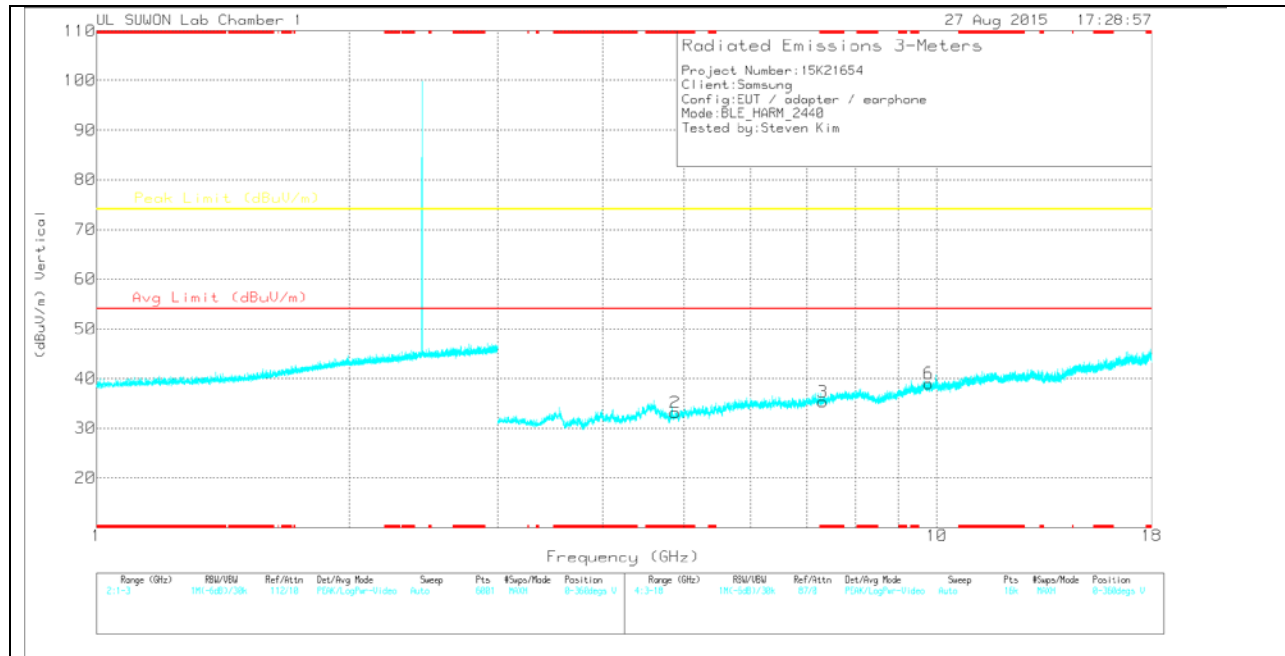

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_3_3GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.879	28.37	PK	34	-29.1	0	33.27	-	-	74	-40.73	0-360	200	H
4	* 7.32	25.6	PK	35.8	-25.6	0	35.8	-	-	74	-38.2	0-360	100	H
5	9.76	23.13	PK	37.2	-22	0	38.33	-	-	74	-35.67	0-360	200	H
2	* 4.884	28.31	PK	34	-29.1	0	33.21	-	-	74	-40.79	0-360	200	V
3	* 7.32	25.07	PK	35.8	-25.6	0	35.27	-	-	74	-38.73	0-360	200	V
6	9.766	23.84	PK	37.2	-22.1	0	38.94	-	-	74	-35.06	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

NOTE : Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

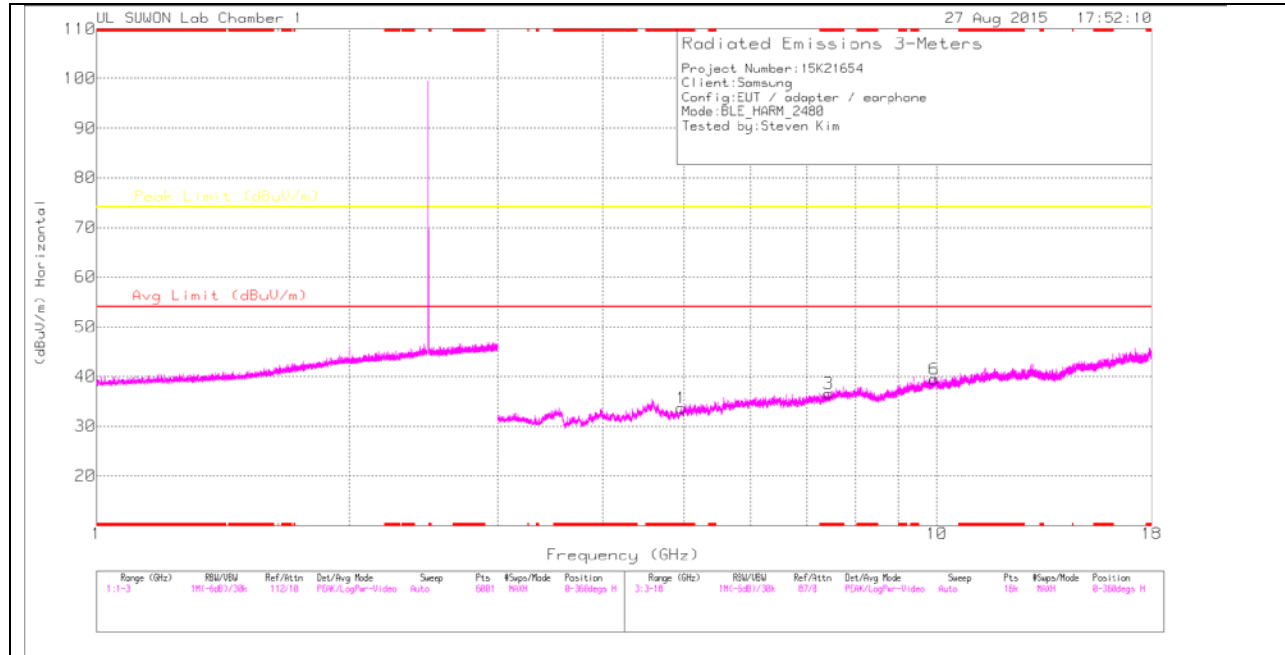

HIGH CHANNEL VERTICAL

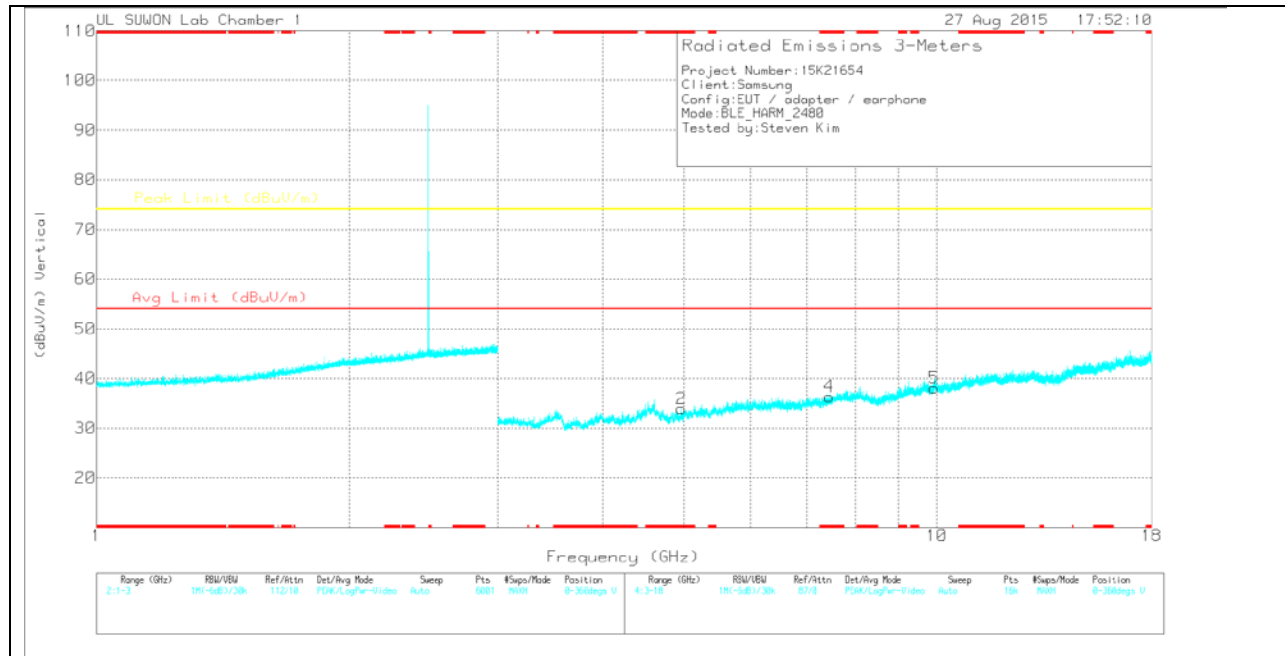

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_3_3GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.966	28.36	PK	34.1	-28.8	0	33.66	-	-	74	-40.34	0-360	100	H
3	* 7.437	25.52	PK	35.8	-24.8	0	36.52	-	-	74	-37.48	0-360	100	H
6	9.918	22.5	PK	37.4	-20.4	0	39.5	-	-	74	-34.5	0-360	100	H
2	* 4.961	28.87	PK	34	-28.9	0	33.97	-	-	74	-40.03	0-360	200	V
4	* 7.448	25.38	PK	35.8	-24.8	0	36.38	-	-	74	-37.62	0-360	200	V
5	9.919	21.11	PK	37.4	-20.4	0	38.11	-	-	74	-35.89	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

NOTE : Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

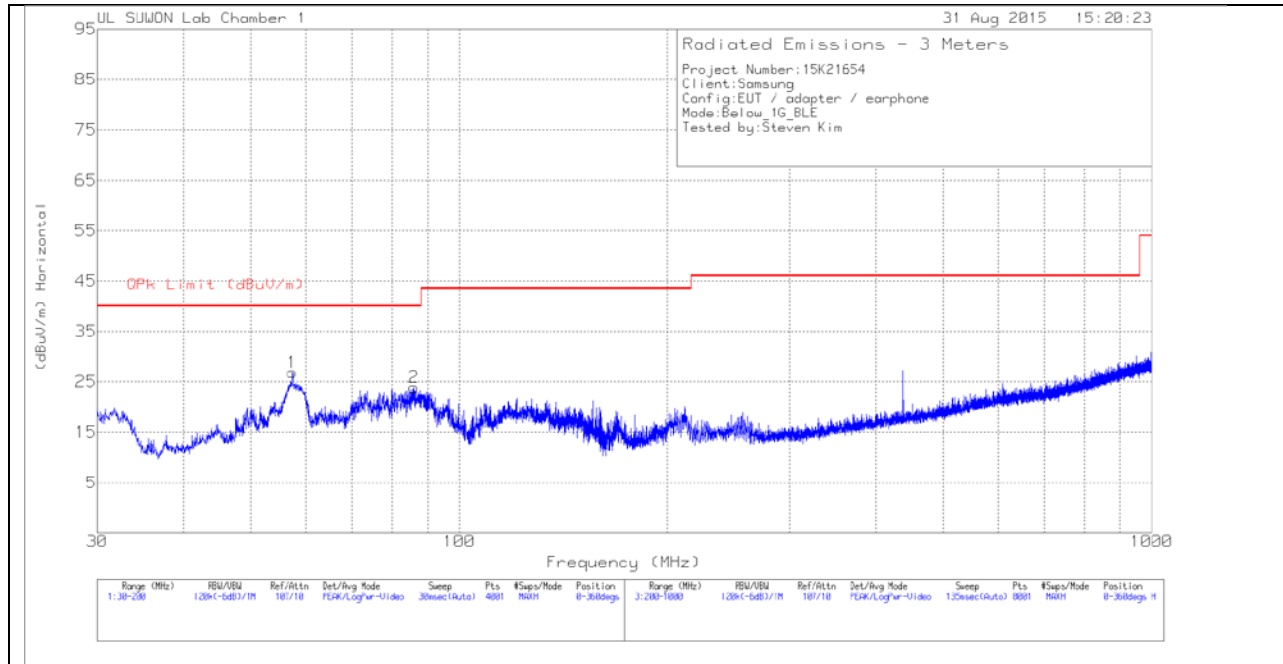

VERTICAL PLOT

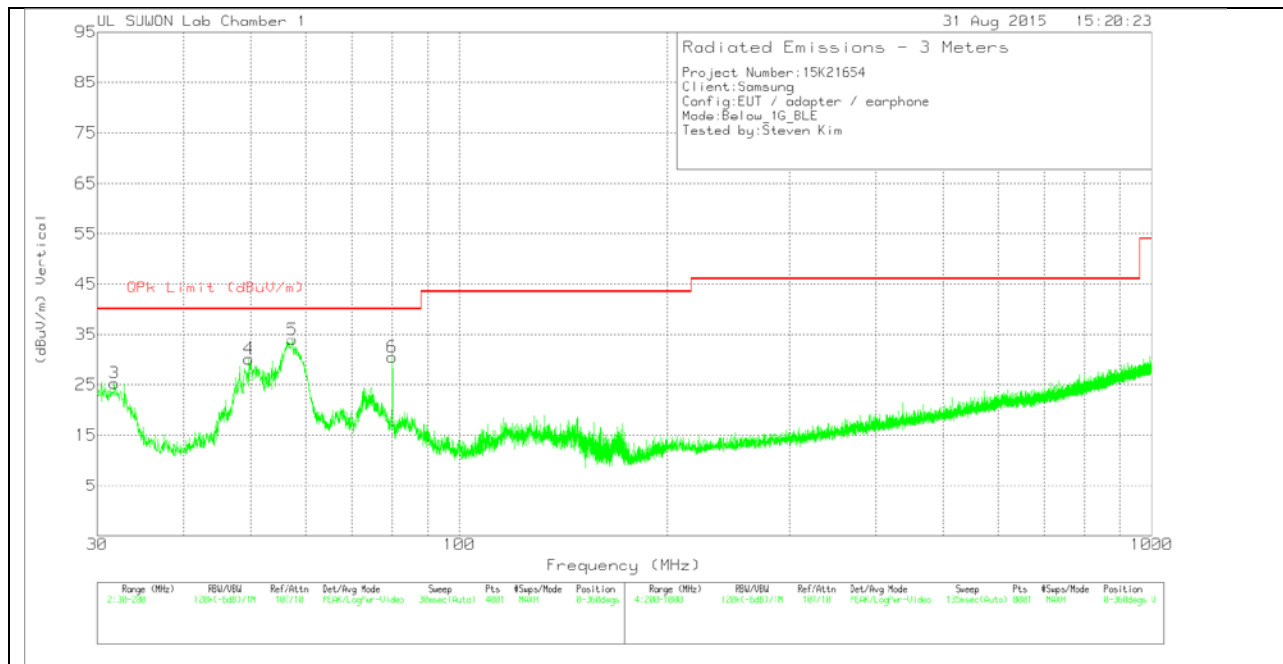

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	57.4975	43.87	Pk	13	-30	26.87	40	-13.13	0-360	400	H
2	86.015	44.9	Pk	8.5	-29.5	23.9	40	-16.1	0-360	200	H
3	31.785	45.51	Pk	10.3	-30.5	25.31	40	-14.69	0-360	101	V
4	49.6775	46.55	Pk	13.8	-30.2	30.15	40	-9.85	0-360	101	V
5	57.4975	50.98	Pk	13	-30	33.98	40	-6.02	0-360	200	V
6	79.98	53.18	Pk	6.9	-29.6	30.48	40	-9.52	0-360	101	V

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
IC RSS-GEN Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.10 - 2009

RESULTS

WORST EMISSIONS

LINE 1 PLOT

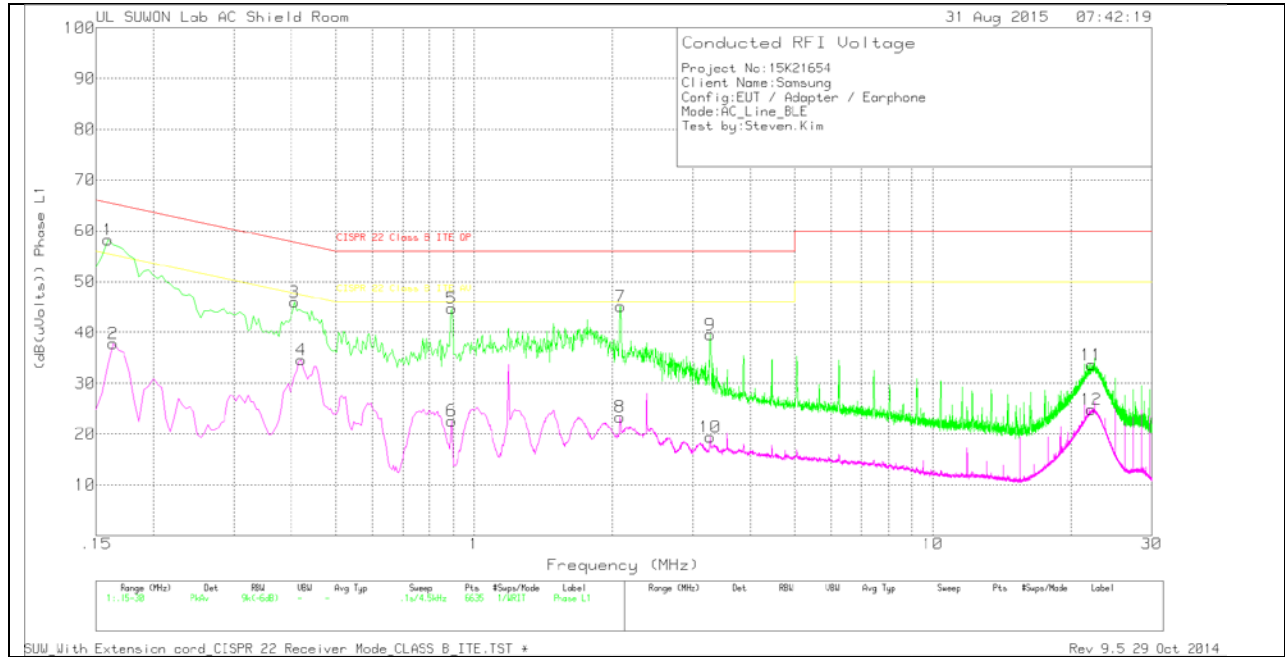

LINE 1 RESULTS

Trace Markers

Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.159	48.2	Pk	10	0	58.2	65.52	-7.32	-	-
2	.1635	27.73	Av	10.1	0	37.83	-	-	55.28	-17.45
3	.4065	35.87	Pk	10.1	0	45.97	57.72	-11.75	-	-
4	.42	24.55	Av	10.1	0	34.65	-	-	47.45	-12.8
5	.8925	34.86	Pk	9.9	0	44.76	56	-11.24	-	-
6	.8925	12.76	Av	9.9	0	22.66	-	-	46	-23.34
7	2.085	35.18	Pk	9.8	.1	45.08	56	-10.92	-	-
8	2.076	13.48	Av	9.8	.1	23.38	-	-	46	-22.62
9	3.273	29.63	Pk	9.8	.1	39.53	56	-16.47	-	-
10	3.2685	9.44	Av	9.8	.1	19.34	-	-	46	-26.66
11	22.1505	23.06	Pk	10.4	.2	33.66	60	-26.34	-	-
12	22.173	14.19	Av	10.4	.2	24.79	-	-	50	-25.21

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.1599	43.44	Qp	10	0	53.44	65.47	-12.03	-	-
.1599	43.41	Qp	10	0	53.41	65.47	-12.06	-	-

Qp – Quasi-Peak detector

LINE 2 PLOT

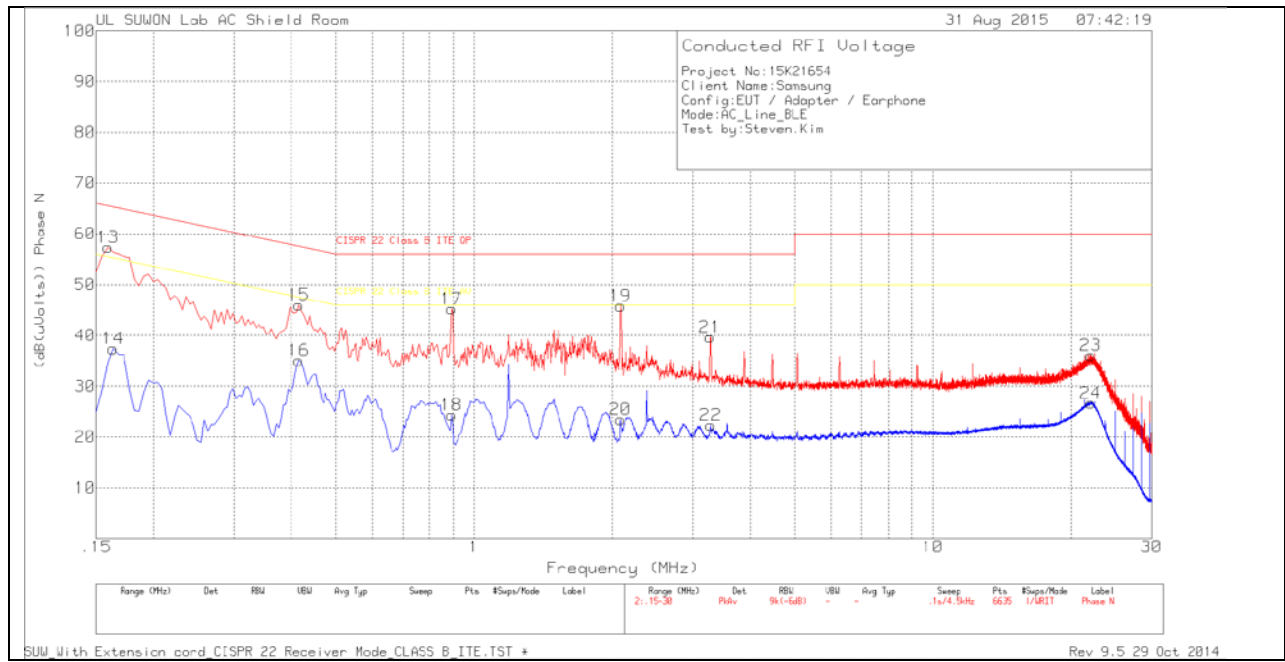

LINE 2 RESULTS

Trace Markers

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_N	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.159	47.37	Pk	10	0	57.37	65.52	-8.15	-	-
14	.1635	27.29	Av	10.1	0	37.39	-	-	55.28	-17.89
15	.4155	35.94	Pk	10.1	0	46.04	57.54	-11.5	-	-
16	.4155	24.98	Av	10.1	0	35.08	-	-	47.54	-12.46
17	.8925	35.38	Pk	9.9	0	45.28	56	-10.72	-	-
18	.8925	14.42	Av	9.9	0	24.32	-	-	46	-21.68
19	2.085	35.9	Pk	9.8	.1	45.8	56	-10.2	-	-
20	2.085	13.56	Av	9.8	.1	23.46	-	-	46	-22.54
21	3.273	29.74	Pk	9.8	.1	39.64	56	-16.36	-	-
22	3.2775	12.51	Av	9.8	.1	22.41	-	-	46	-23.59
23	22.0875	25.21	Pk	10.7	.2	36.11	60	-23.89	-	-
24	22.101	15.8	Av	10.7	.2	26.7	-	-	50	-23.3

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_N	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.1599	43.35	Qp	10	0	53.35	65.47	-12.12	-	-

Qp – Quasi-Peak detector